

承認書

SPECIFICATION FOR APPROVAL

客 戶: CUSTOMER:	KOWIN
客 戶 料 號: CUST P/N:	
音 澤 料 號: FINE P/N:	G43.5*0.8-20.5-0.08*48P-10TS*6.5UH-L15MM+BJ
產 品 型 號: DESC:	Φ43.5MMX0.8MM
日 期: DATE:	2023/09/01
版 本: Version:	A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
He Lixing	Mari	Dan keqing	

DongGuan YinZe Electronic Technology CO., LTD

Factory Address:3/F, Building D, No. 40, Fulong Education Road, Shipai Town, Dongguan City, Guangdong Province, China


Version Change History

[illegible]

SPECIFICATION

產品型號: DESC	G43.5*0.8-20.5-0.08*48P-10T S-6.5UH-L15MM+BJ	版本 Rev: A.0	客戶 CUST: 客戶料号 CUST P/N:	KOWIN
---------------	---	----------------	----------------------------	--------------

一、尺寸 DIMENSION:(mm)

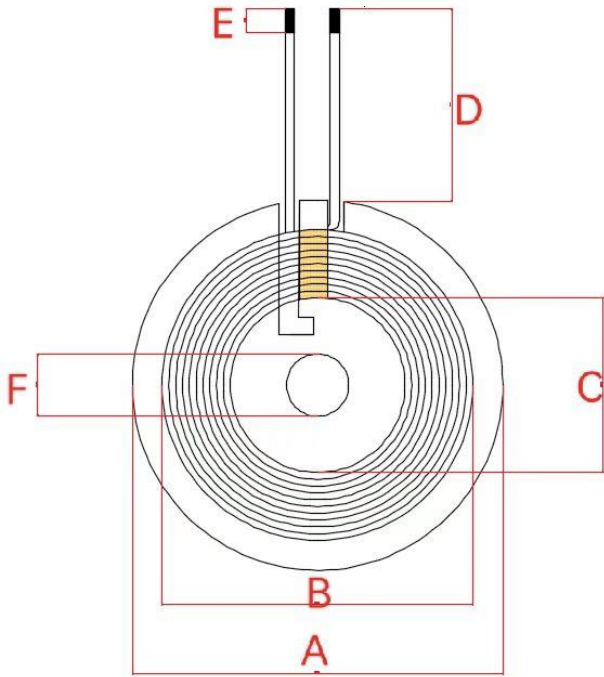

A	43.5±0.3
B	38.3±0.5
C	20.5±0.5
D	15 ±2
E	3±2
F	5.3±0.2
G	
H	
I	
K	

- 注 Notes:
- 交叉出线 Crossing out of the line;
 - 线圈贴双槽磁片，磁片尺寸
Coil affixed double slot magnetic sheet, magnetic sheet size 43.5±0.5mm,, 厚度为 thicknesses 0.8±0.05mm.
 - 磁片背面贴背胶 Adhesive backing on the back of the magnet

二、原理图 SCHEMATIC DIAGRAM:

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S F	Enameled wire 0.08*48P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.7uH ±10% Solenoid	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.5H ±10% Magnetizing sheet	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤100m Ω		LCZ METER 502B

擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE
He Lixing 2023.08.01	