




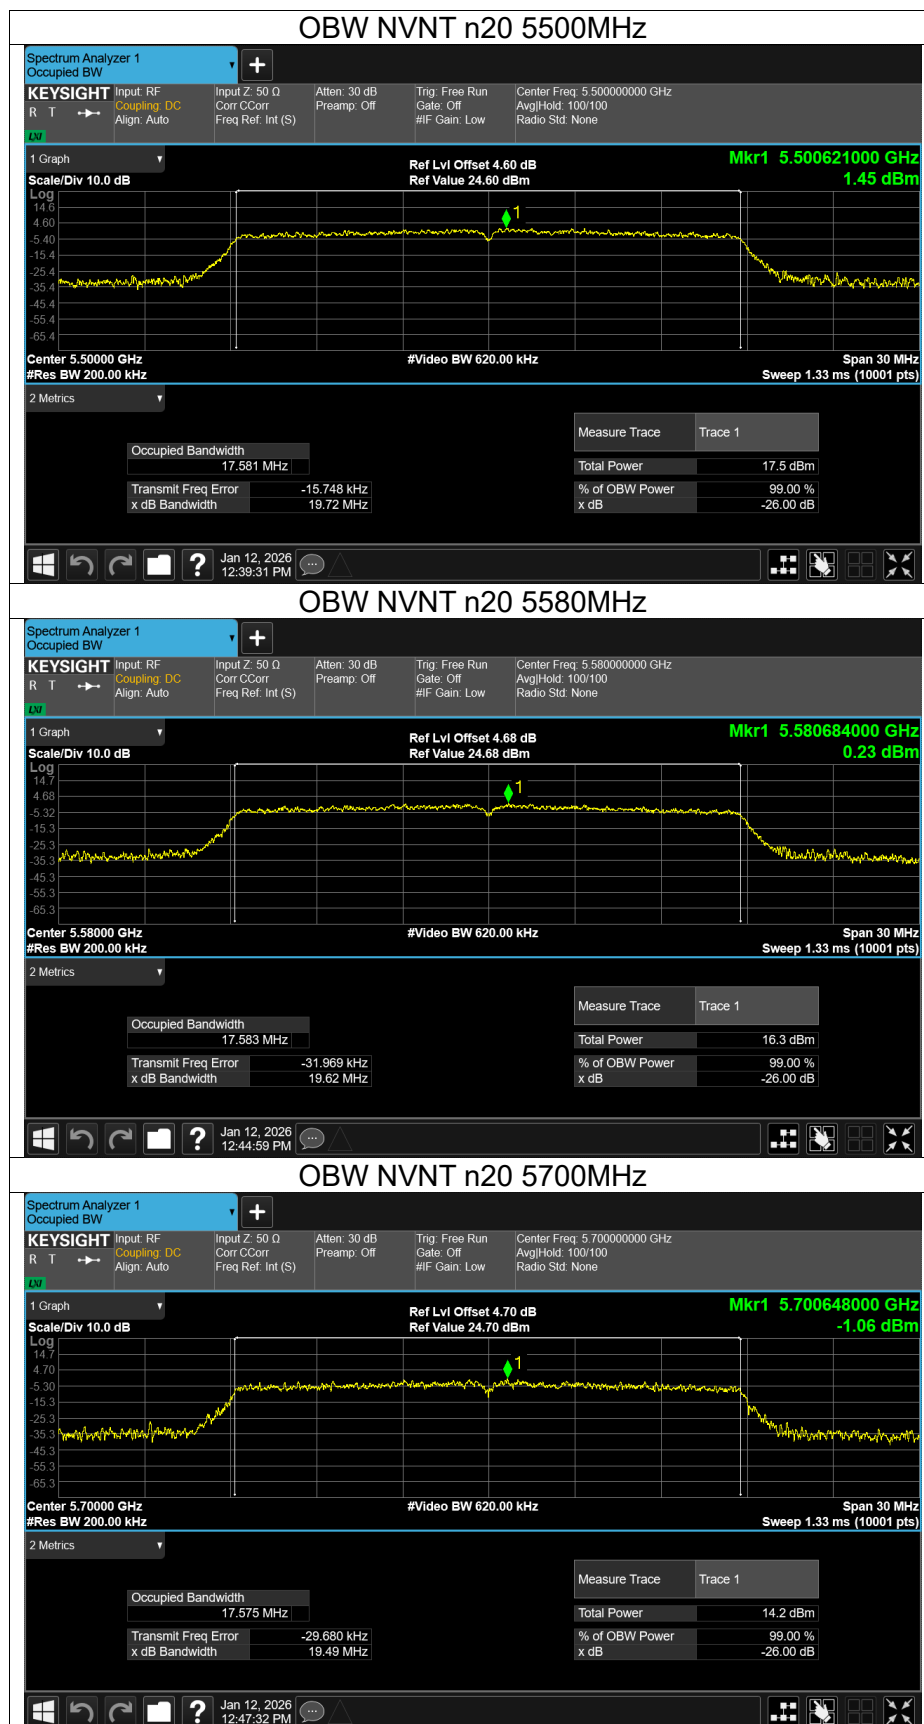
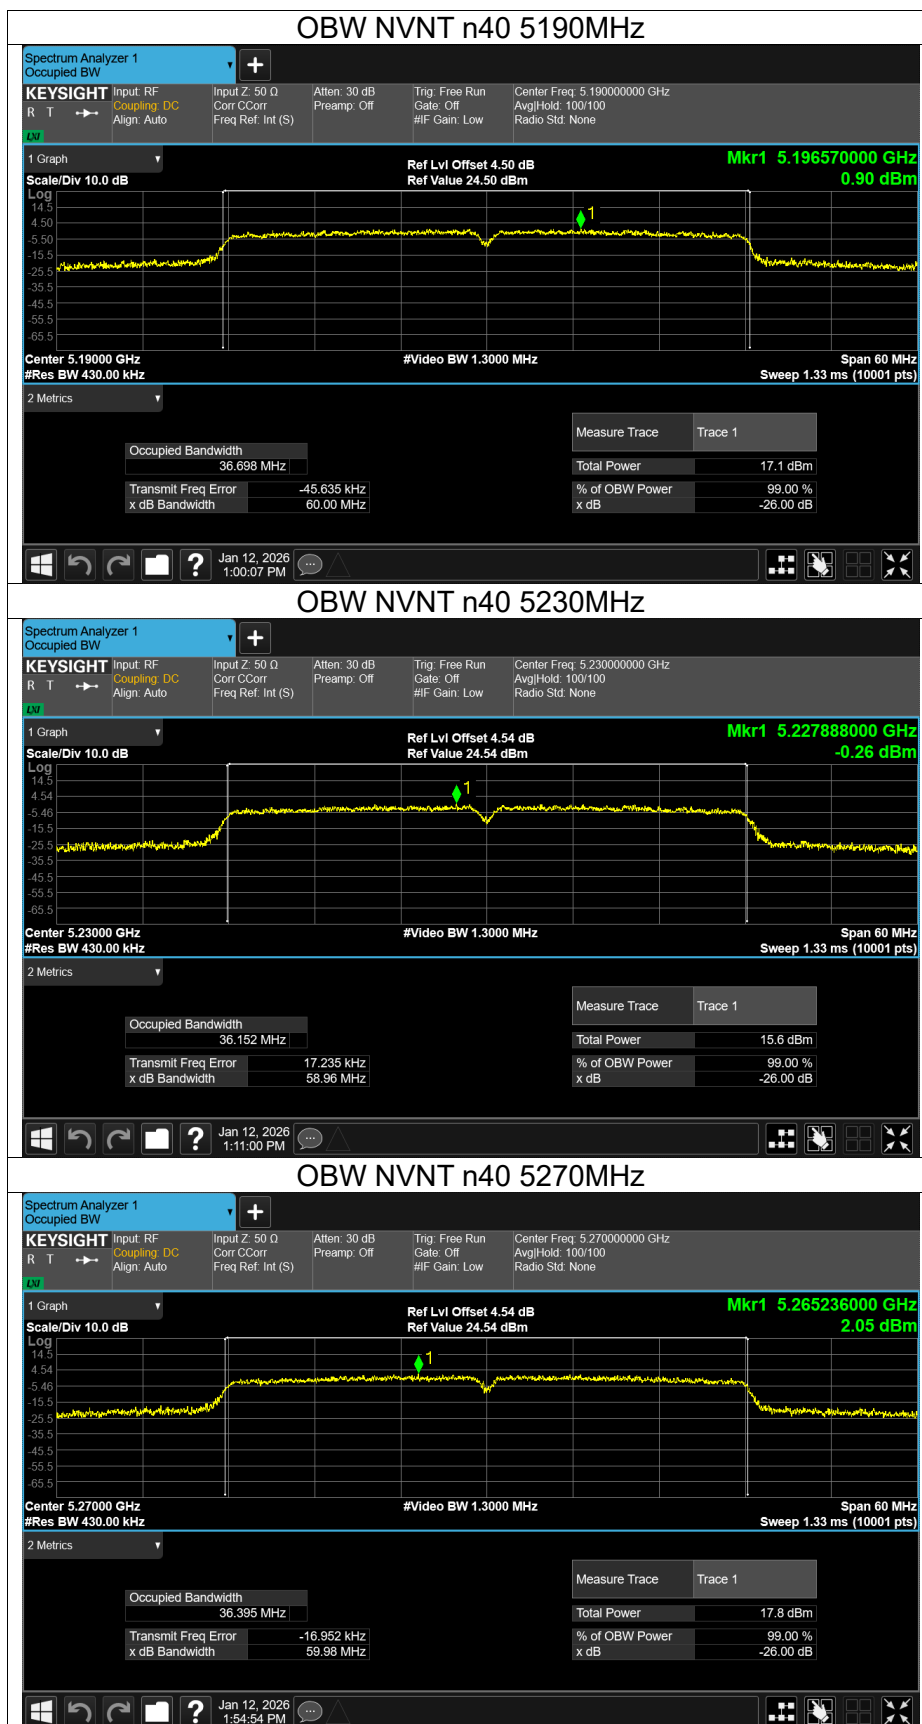


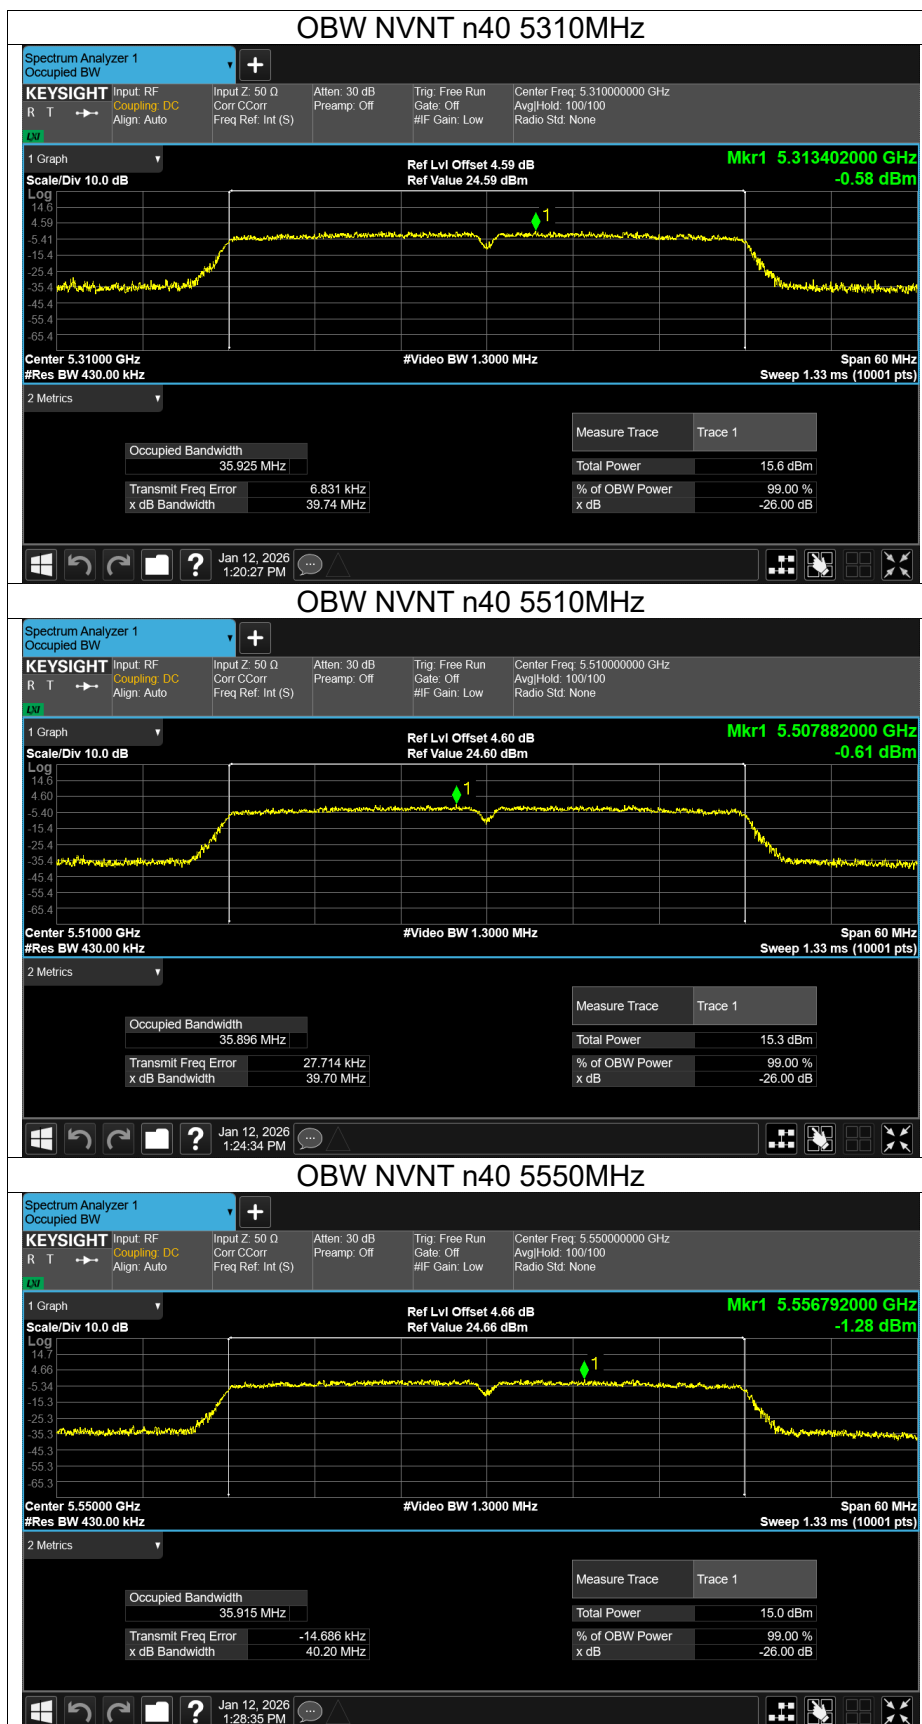



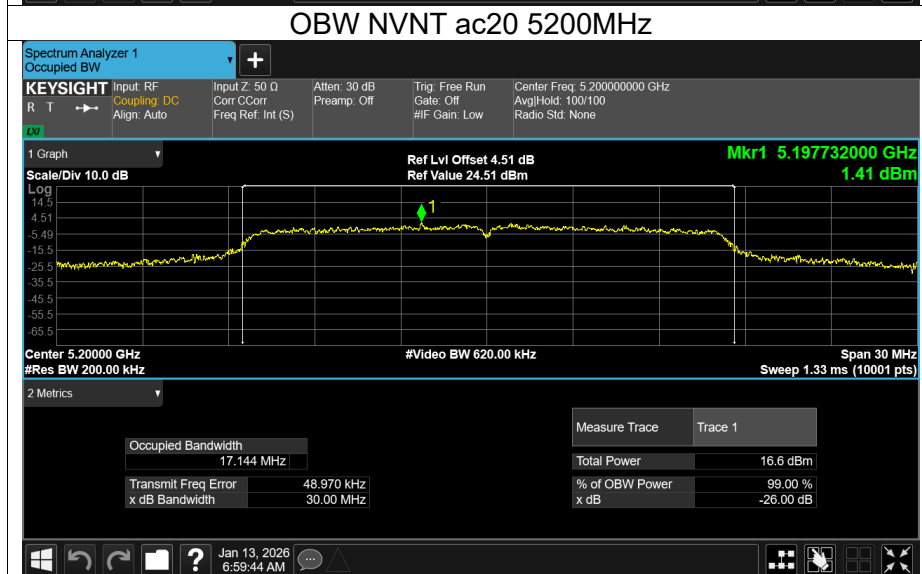


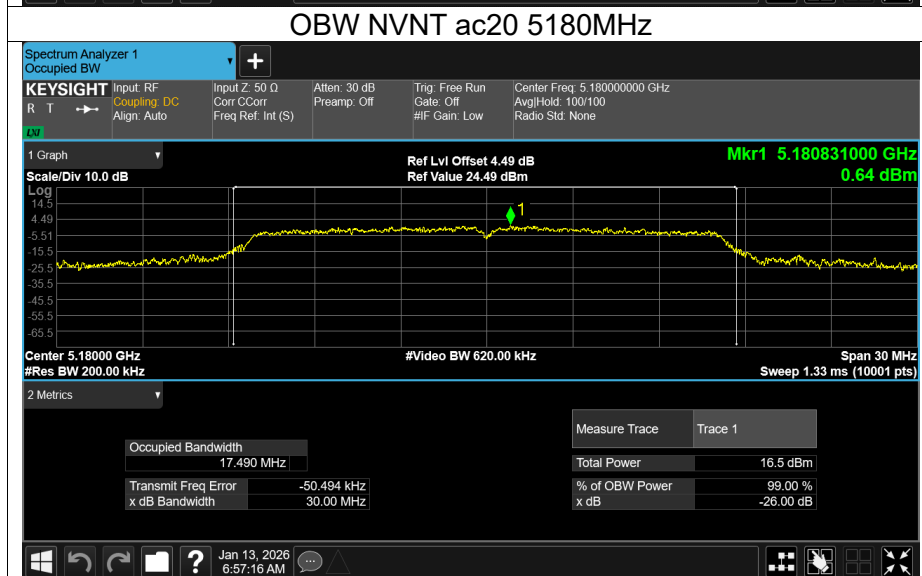


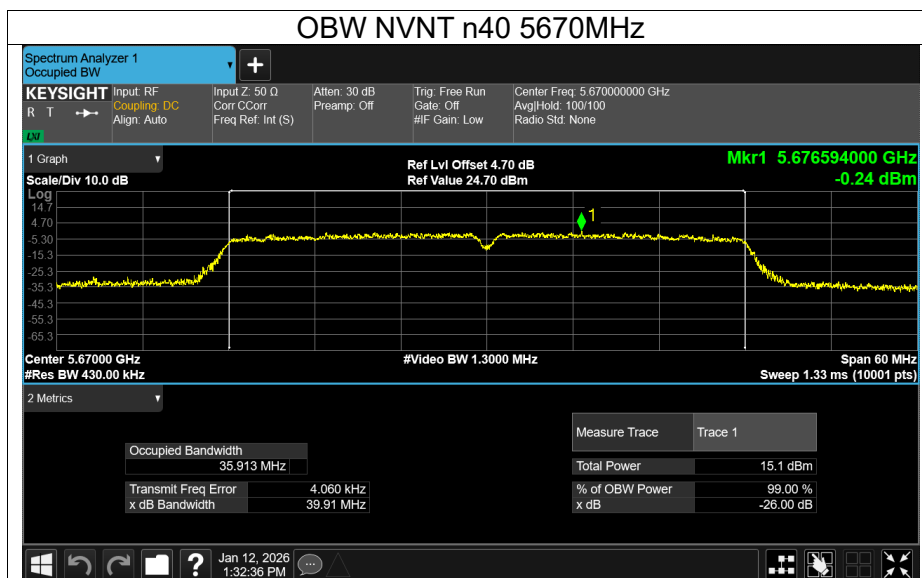


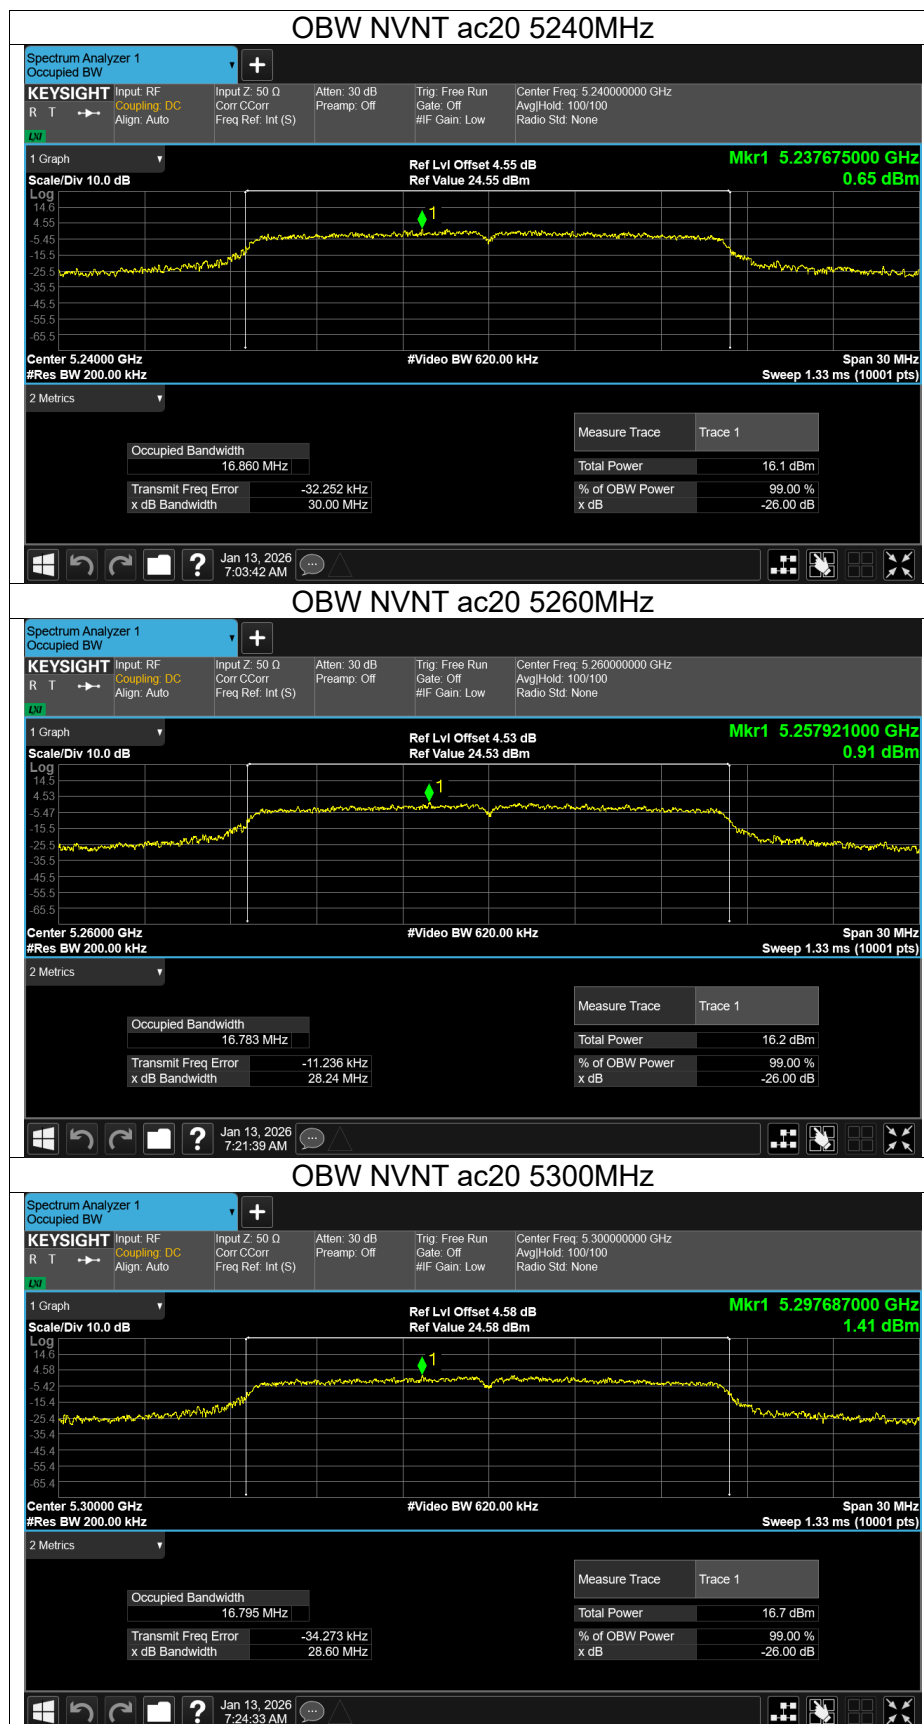



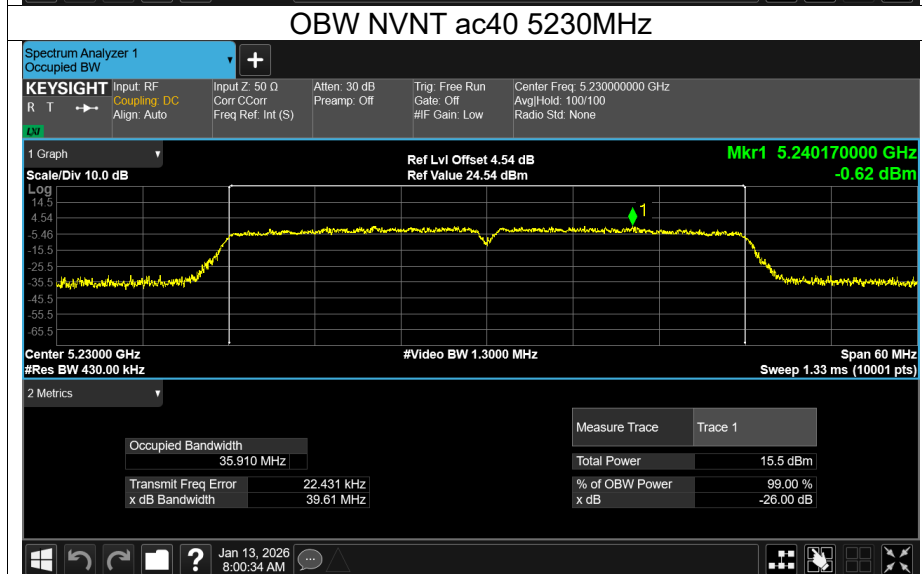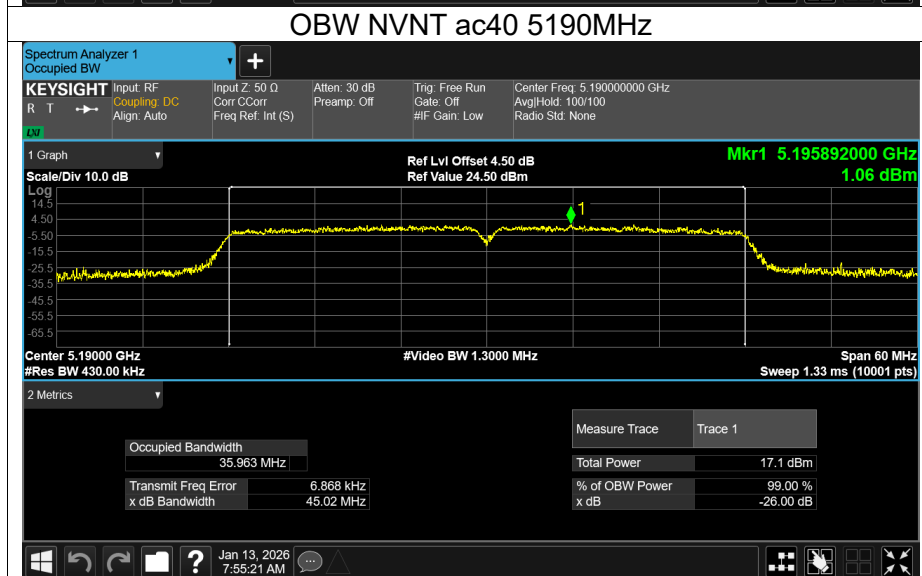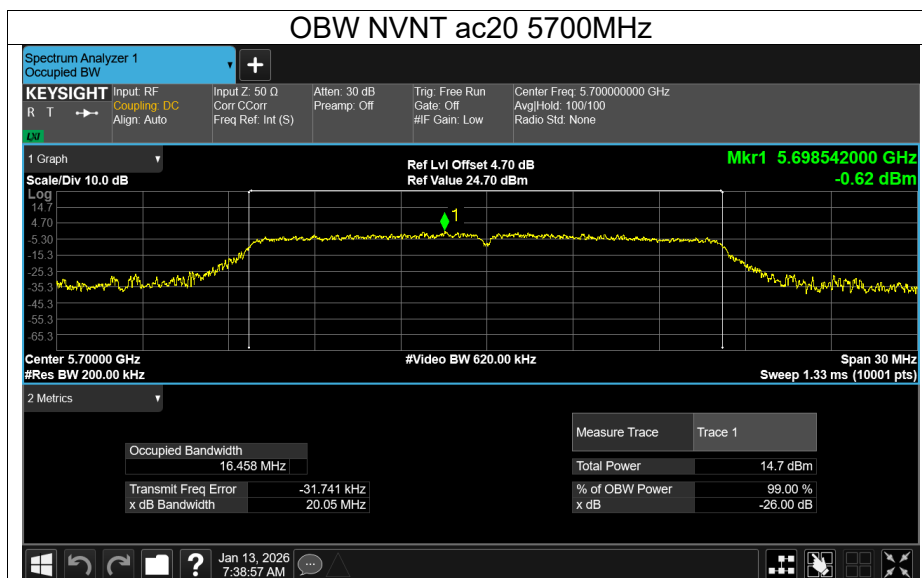

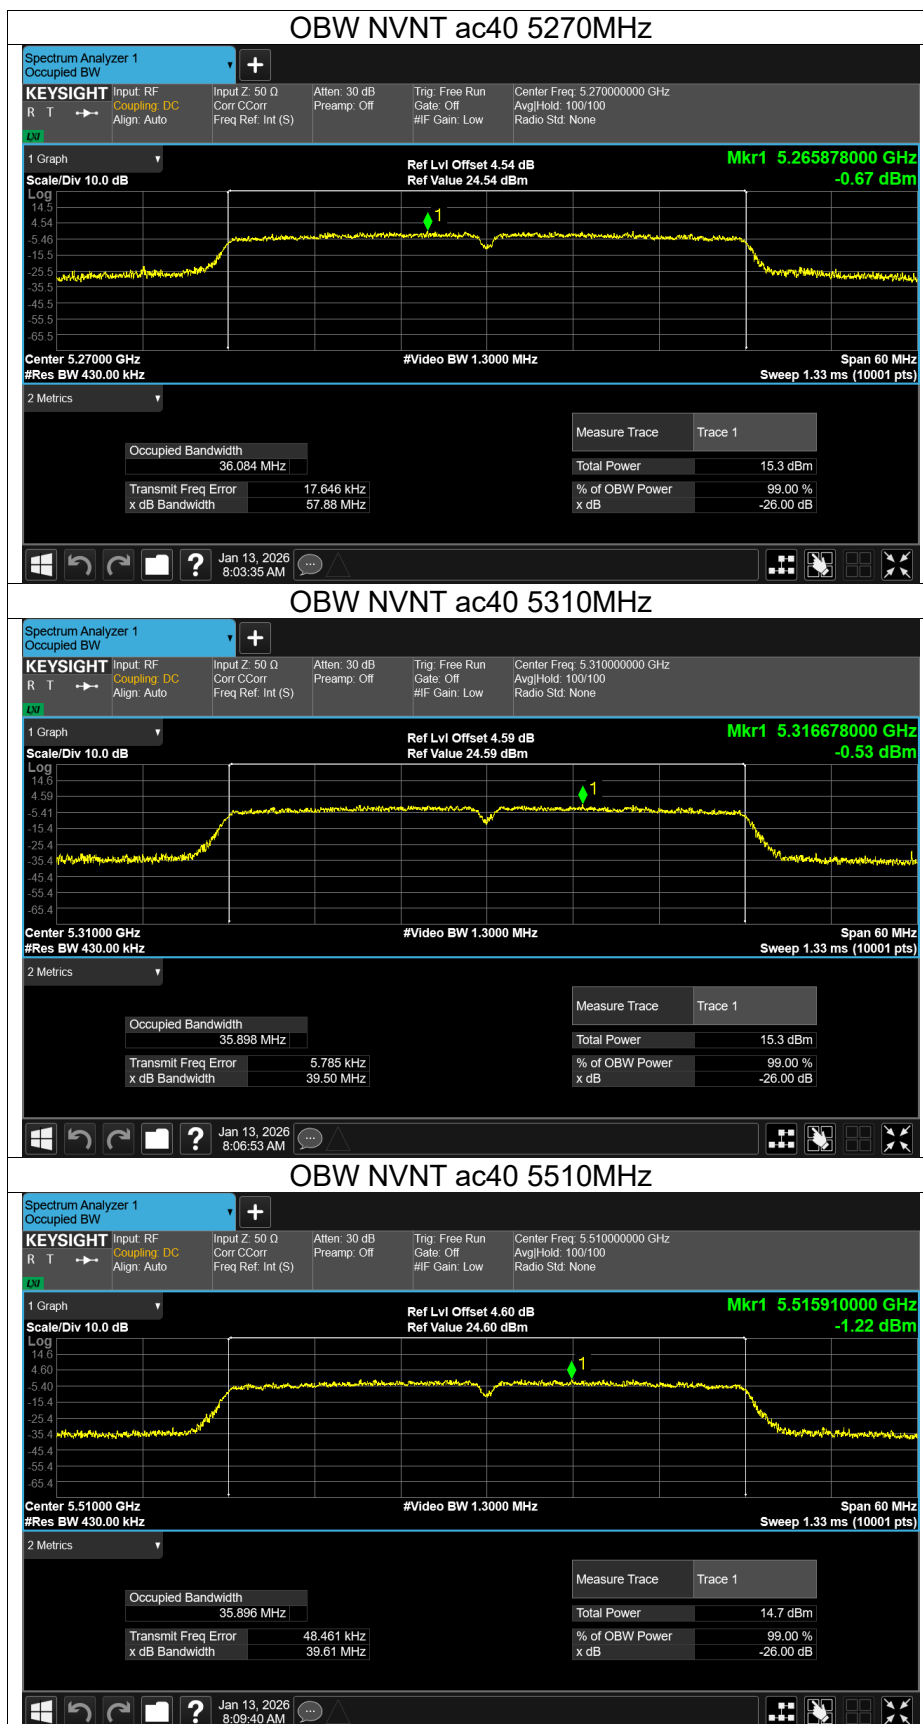


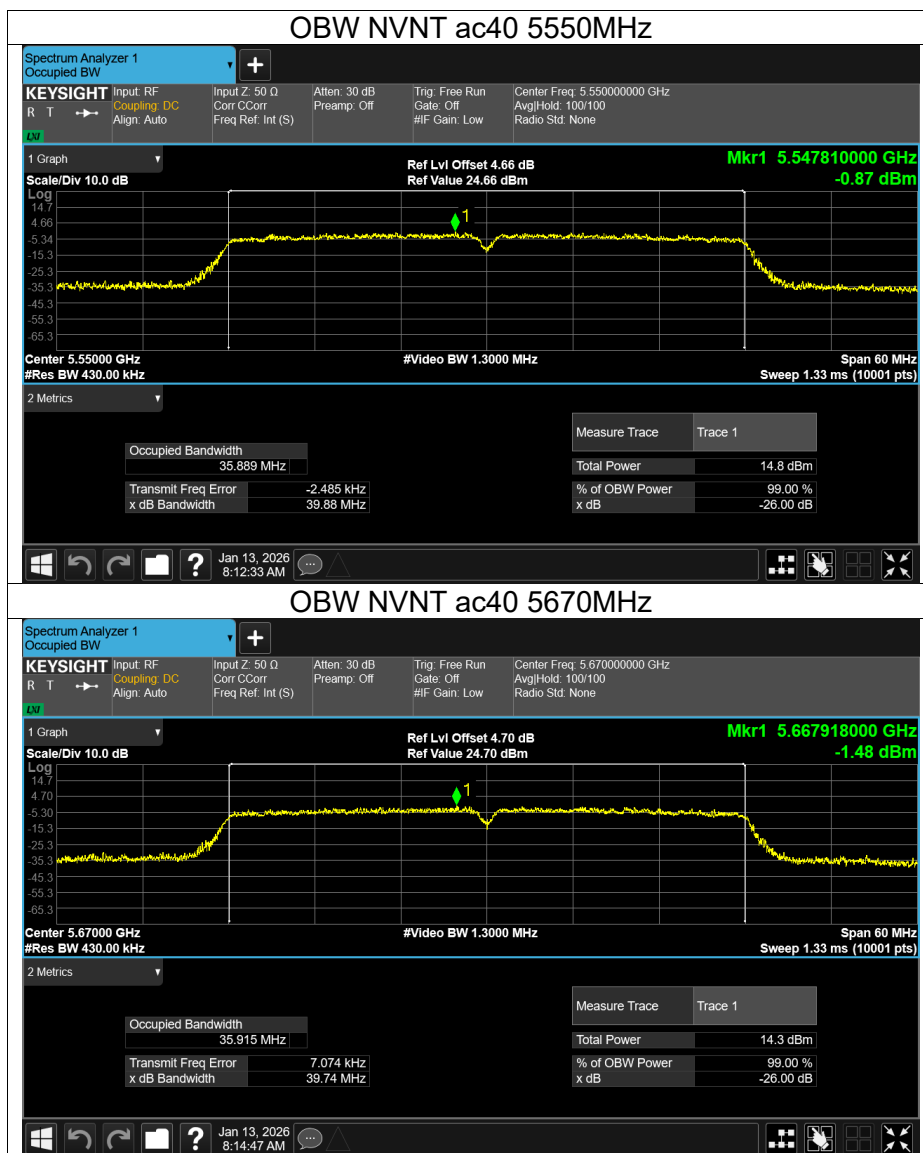






Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	1.99	0	1.99	11	Pass
NVNT	a	5200	2.3	0	2.3	11	Pass
NVNT	a	5240	3.12	0	3.12	11	Pass
NVNT	a	5260	2.46	0	2.46	11	Pass
NVNT	a	5300	3.22	0	3.22	11	Pass
NVNT	a	5320	2.92	0	2.92	11	Pass
NVNT	a	5500	3.45	0	3.45	11	Pass
NVNT	a	5580	2.66	0	2.66	11	Pass
NVNT	a	5700	1.76	0	1.76	11	Pass
NVNT	n20	5180	0.69	0	0.69	11	Pass
NVNT	n20	5200	1.19	0	1.19	11	Pass
NVNT	n20	5240	2.04	0	2.04	11	Pass
NVNT	n20	5260	1.19	0	1.19	11	Pass
NVNT	n20	5300	2.03	0	2.03	11	Pass
NVNT	n20	5320	1.81	0	1.81	11	Pass
NVNT	n20	5500	2.56	0	2.56	11	Pass
NVNT	n20	5580	1.45	0	1.45	11	Pass
NVNT	n20	5700	-0.28	0	-0.28	11	Pass
NVNT	n40	5190	-2.45	0	-2.45	11	Pass
NVNT	n40	5230	-3.73	0	-3.73	11	Pass
NVNT	n40	5270	-4.63	0	-4.63	11	Pass
NVNT	n40	5310	-3.25	0	-3.25	11	Pass
NVNT	n40	5510	-2.93	0	-2.93	11	Pass
NVNT	n40	5550	-4.61	0	-4.61	11	Pass
NVNT	n40	5670	-3.84	0	-3.84	11	Pass
NVNT	ac20	5180	0.17	0	0.17	11	Pass
NVNT	ac20	5200	1.3	0	1.3	11	Pass
NVNT	ac20	5240	0.46	0	0.46	11	Pass
NVNT	ac20	5260	0.03	0	0.03	11	Pass
NVNT	ac20	5300	0.94	0	0.94	11	Pass
NVNT	ac20	5320	1.91	0	1.91	11	Pass
NVNT	ac20	5500	1.41	0	1.41	11	Pass
NVNT	ac20	5580	0.88	0	0.88	11	Pass
NVNT	ac20	5700	-0.38	0	-0.38	11	Pass
NVNT	ac40	5190	-5.48	0	-5.48	11	Pass
NVNT	ac40	5230	-3.66	0	-3.66	11	Pass
NVNT	ac40	5270	-4.26	0	-4.26	11	Pass
NVNT	ac40	5310	-3.75	0	-3.75	11	Pass
NVNT	ac40	5510	-4.18	0	-4.18	11	Pass
NVNT	ac40	5550	-3.92	0	-3.92	11	Pass
NVNT	ac40	5670	-4.47	0	-4.47	11	Pass

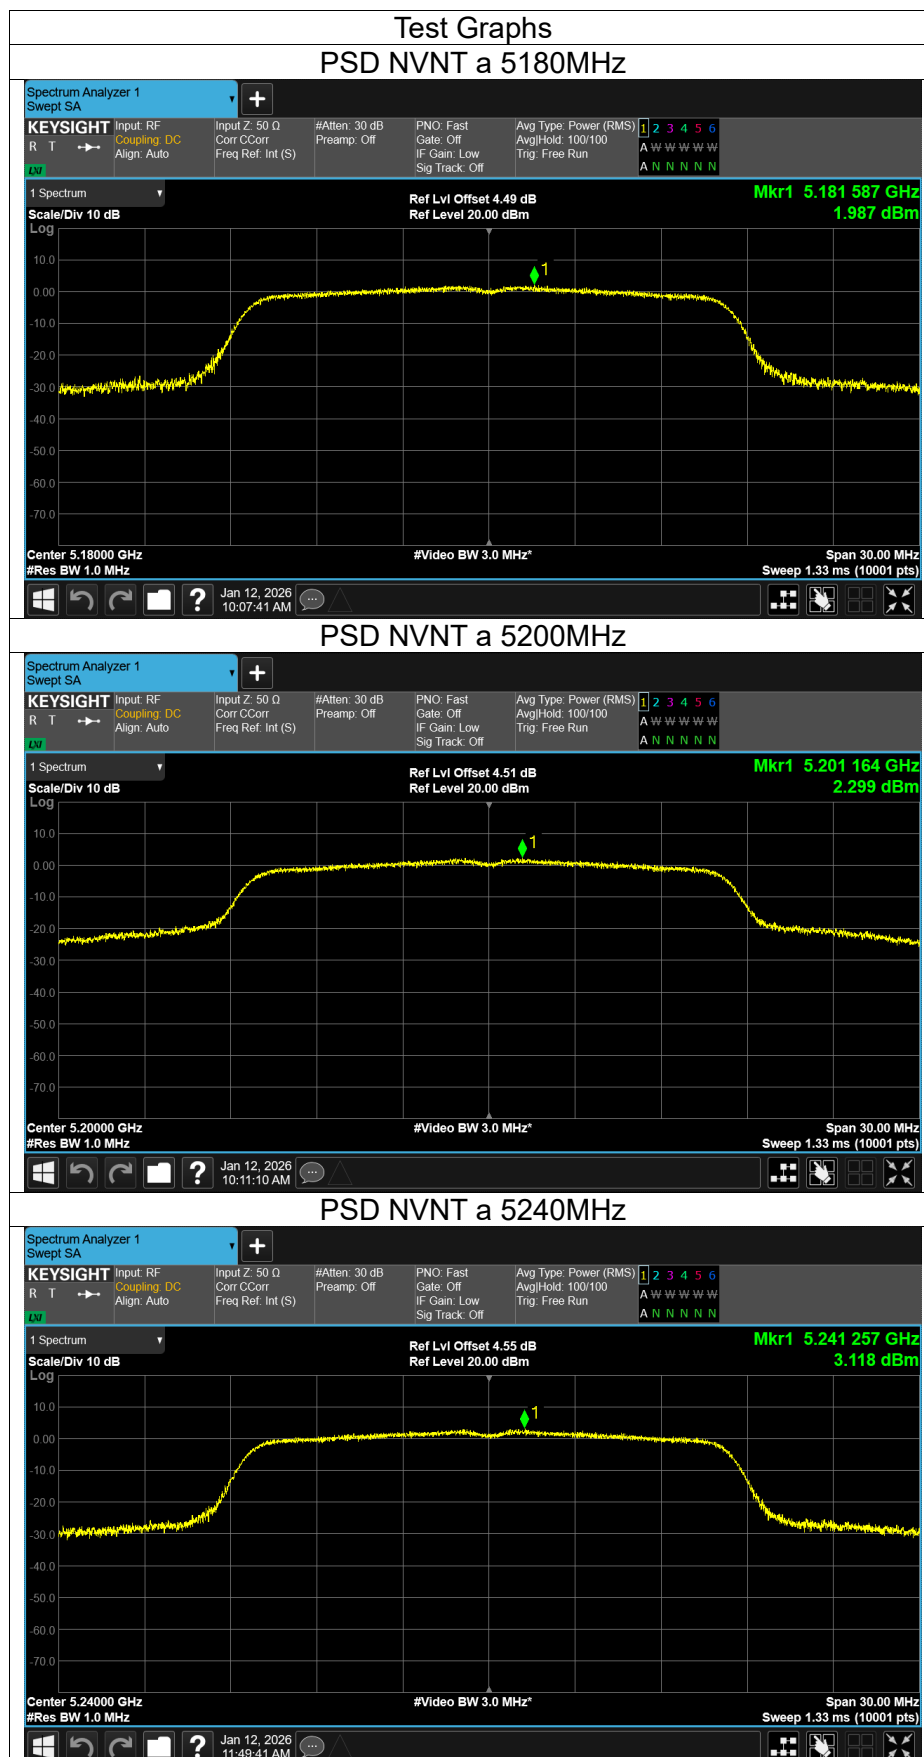


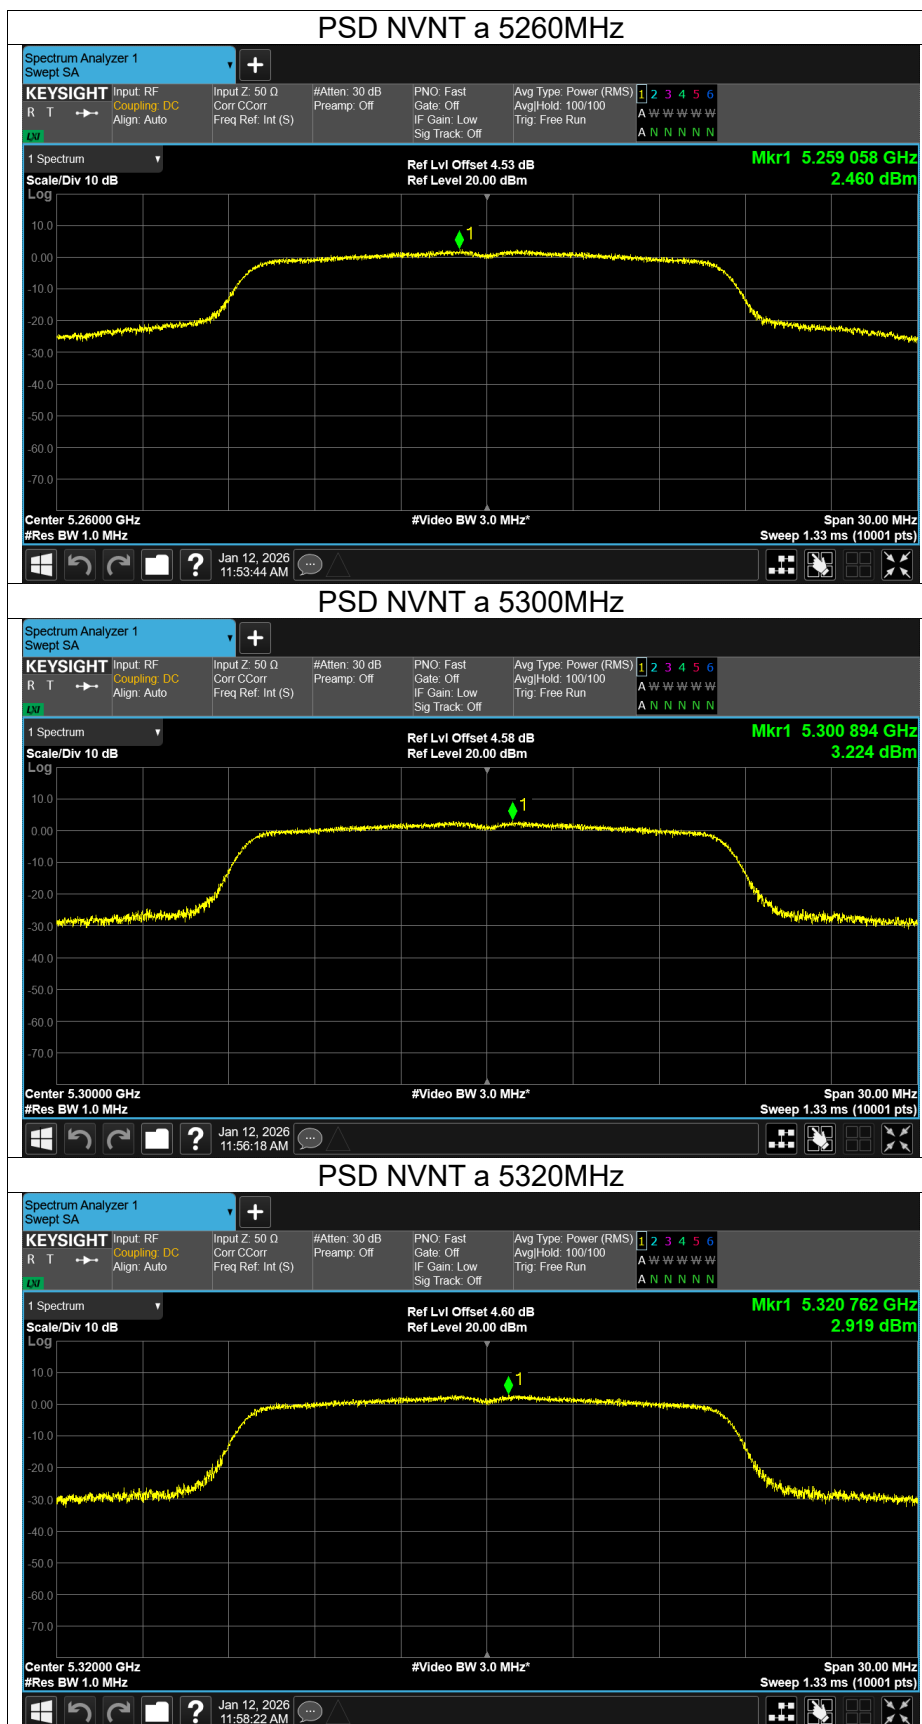


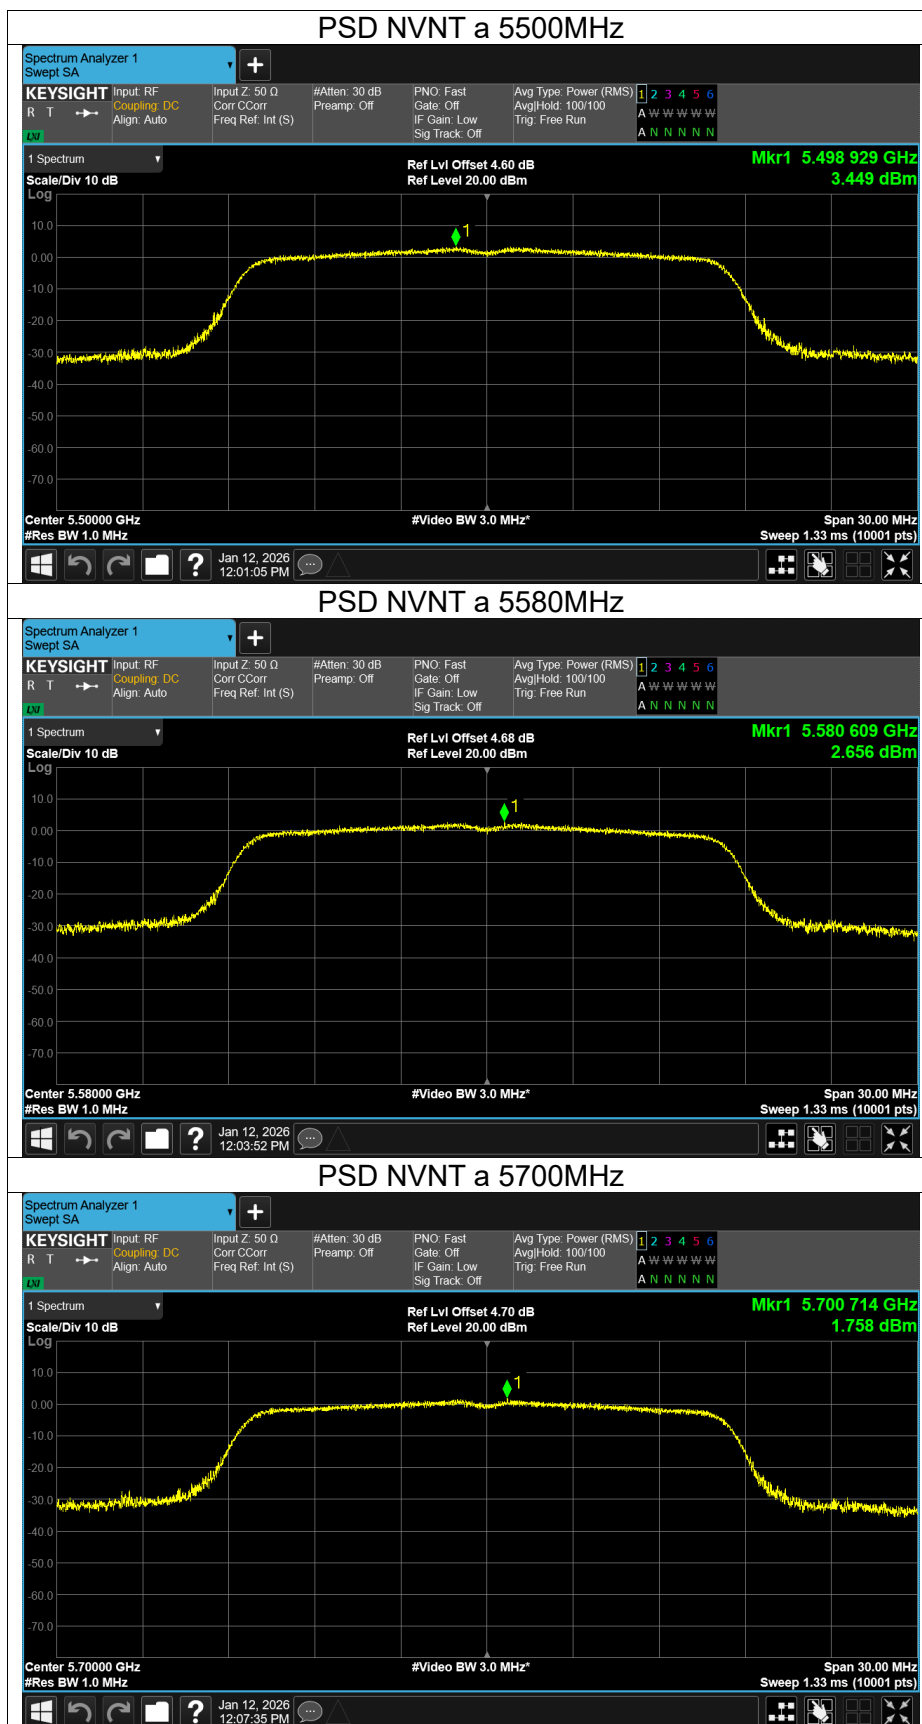


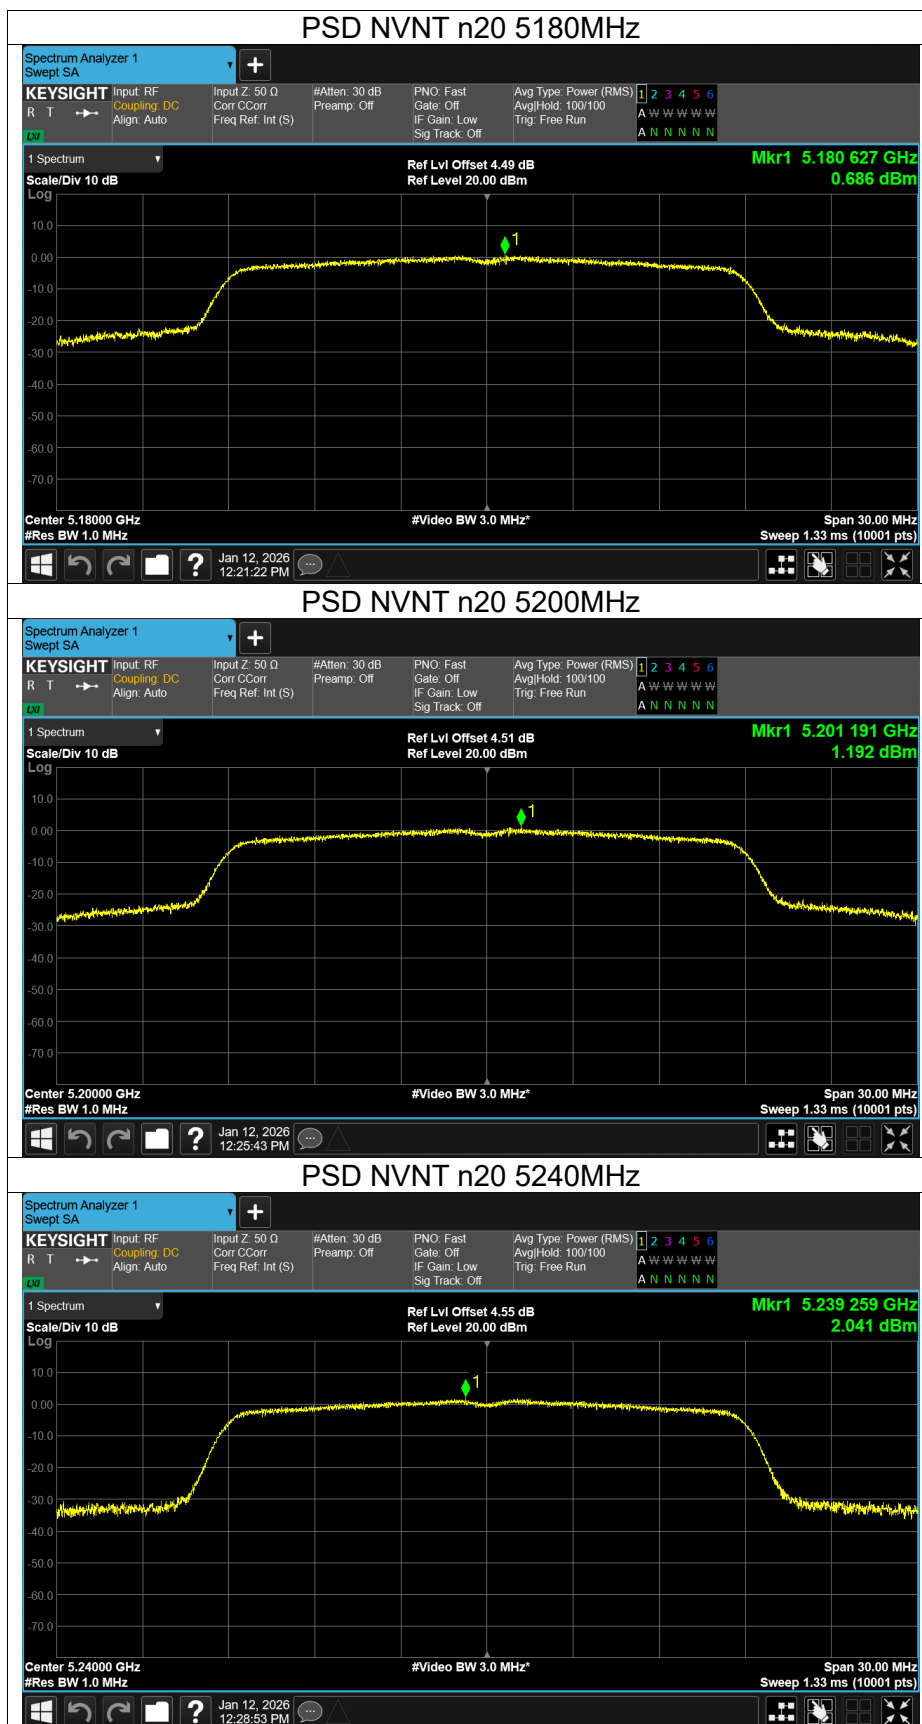


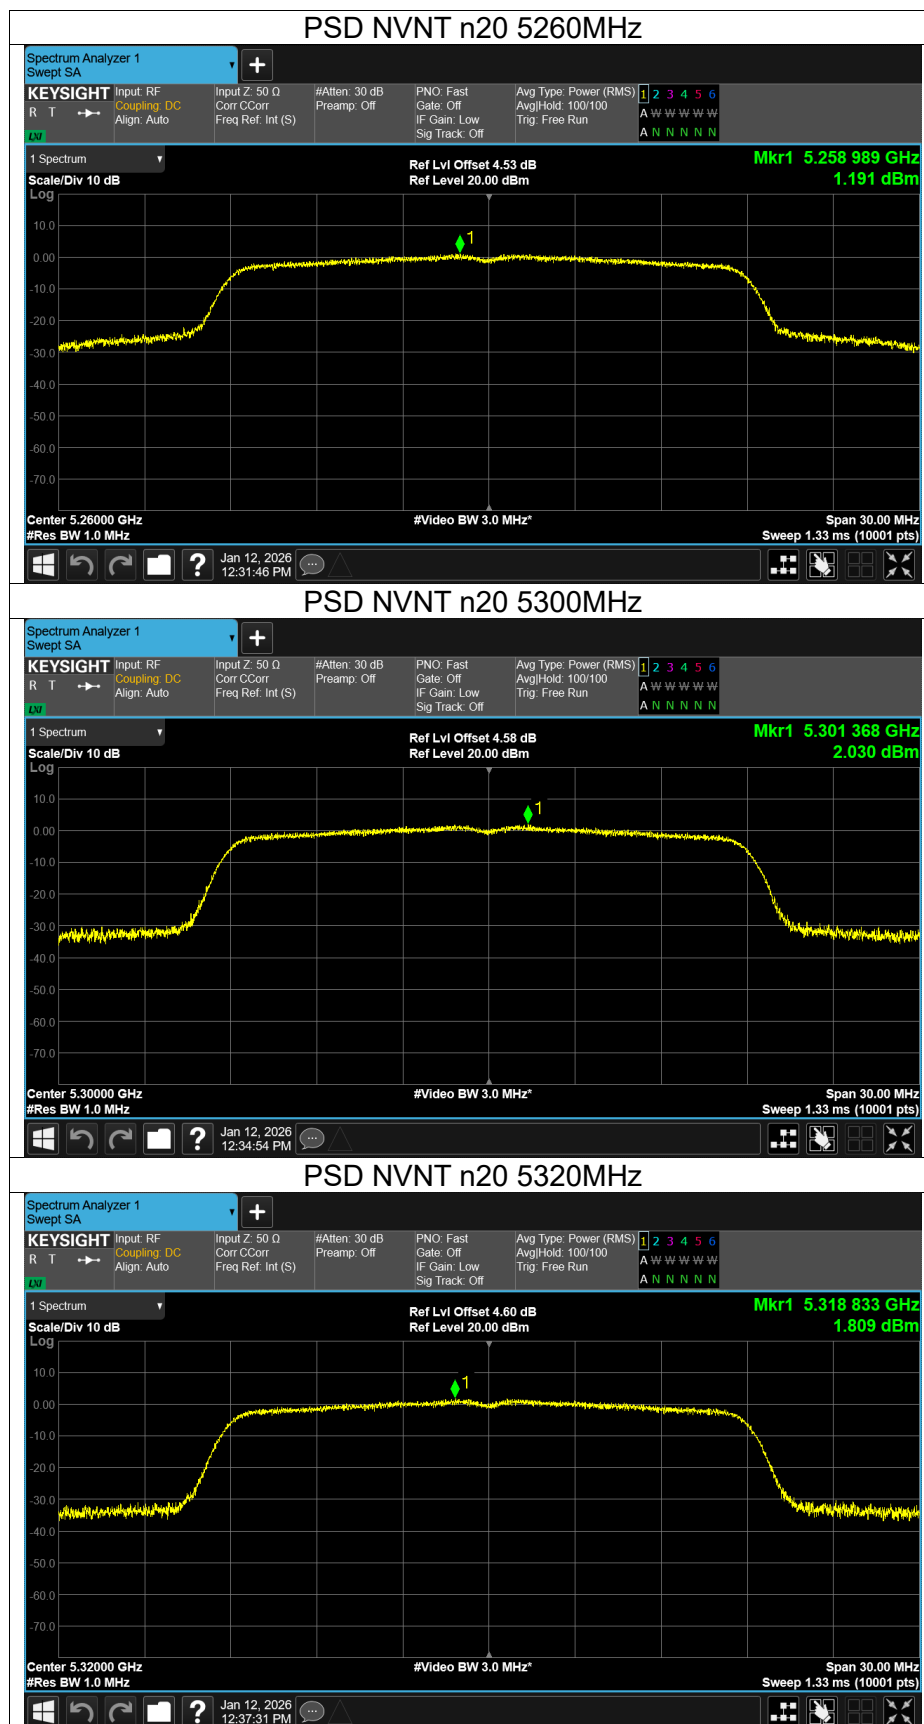


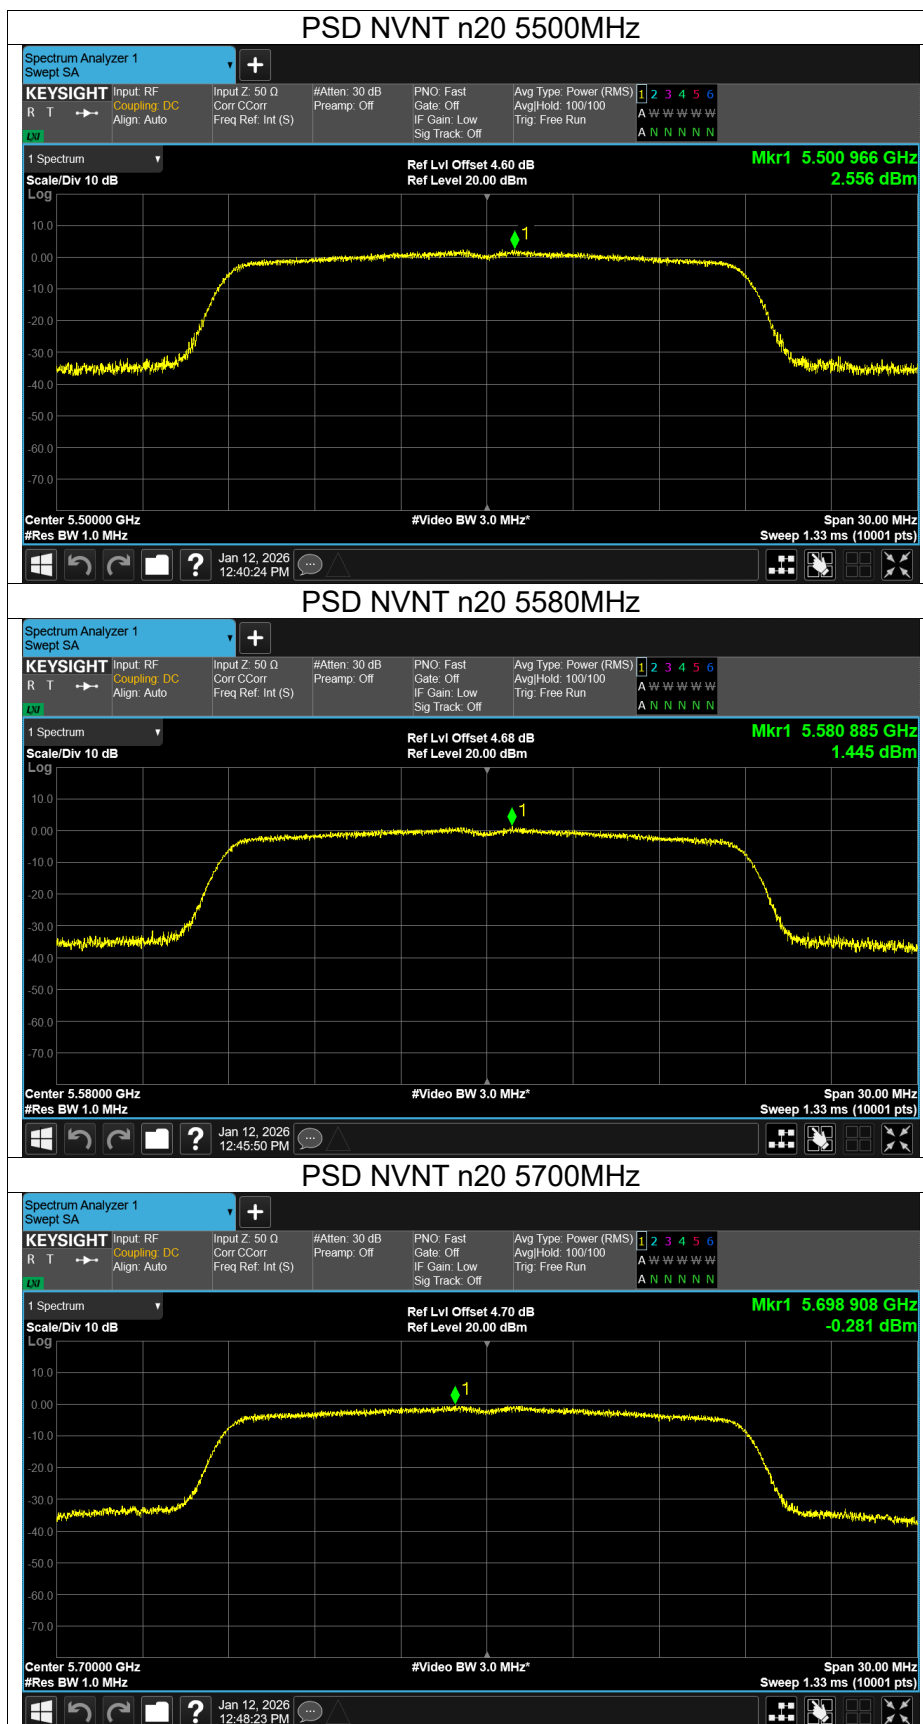


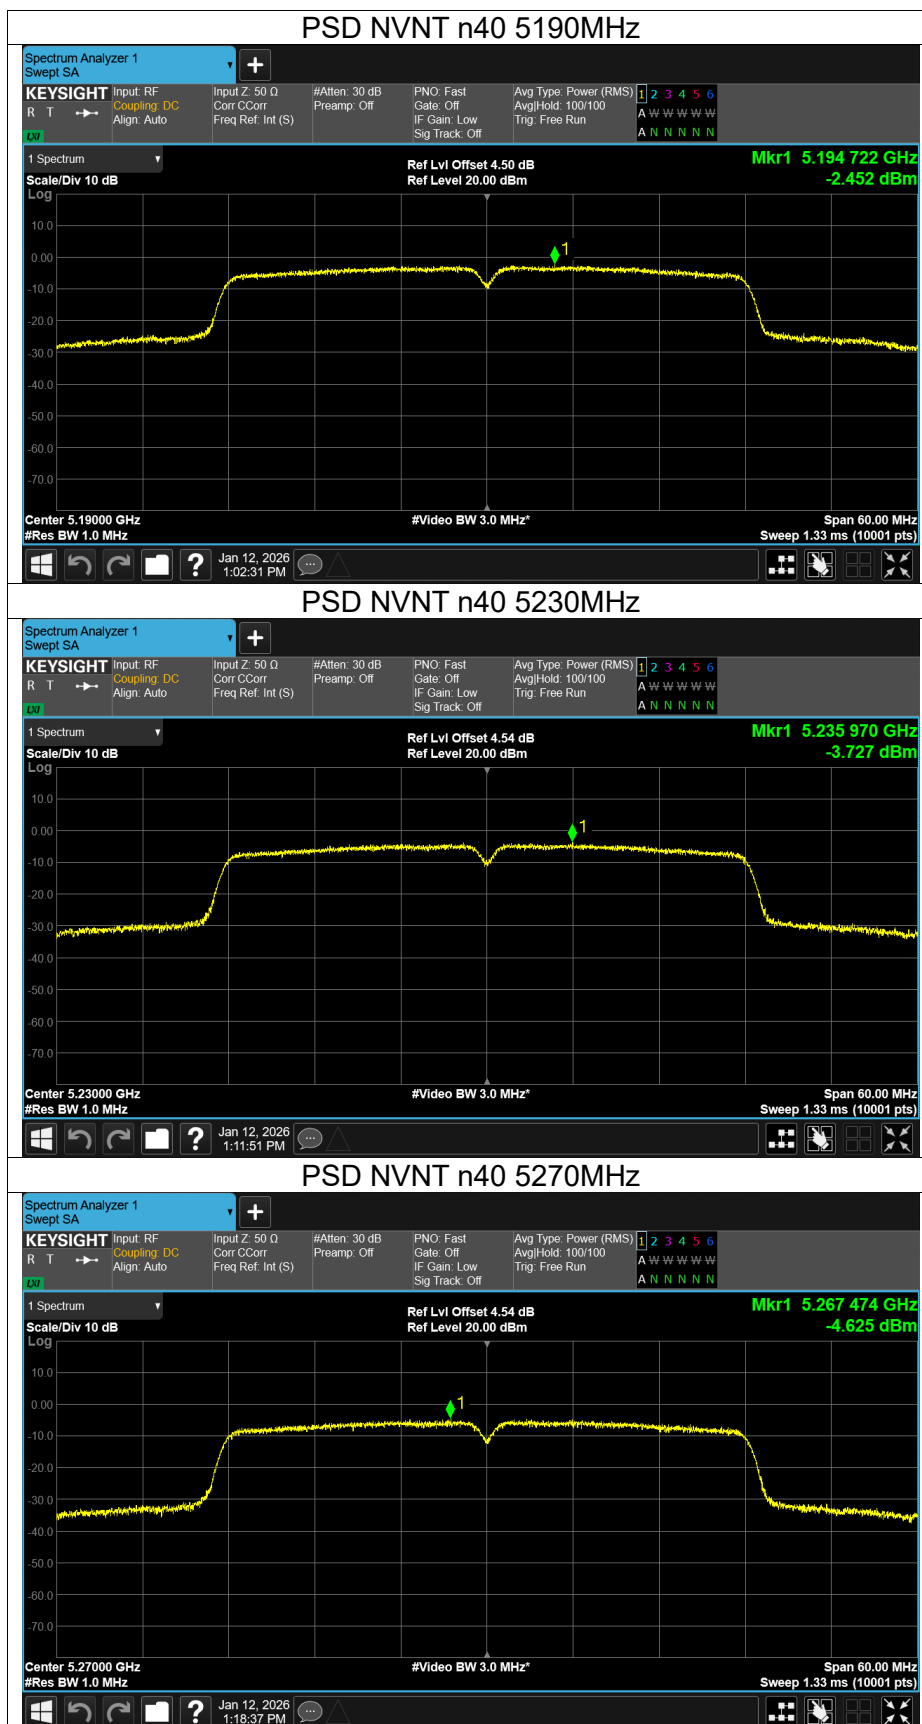


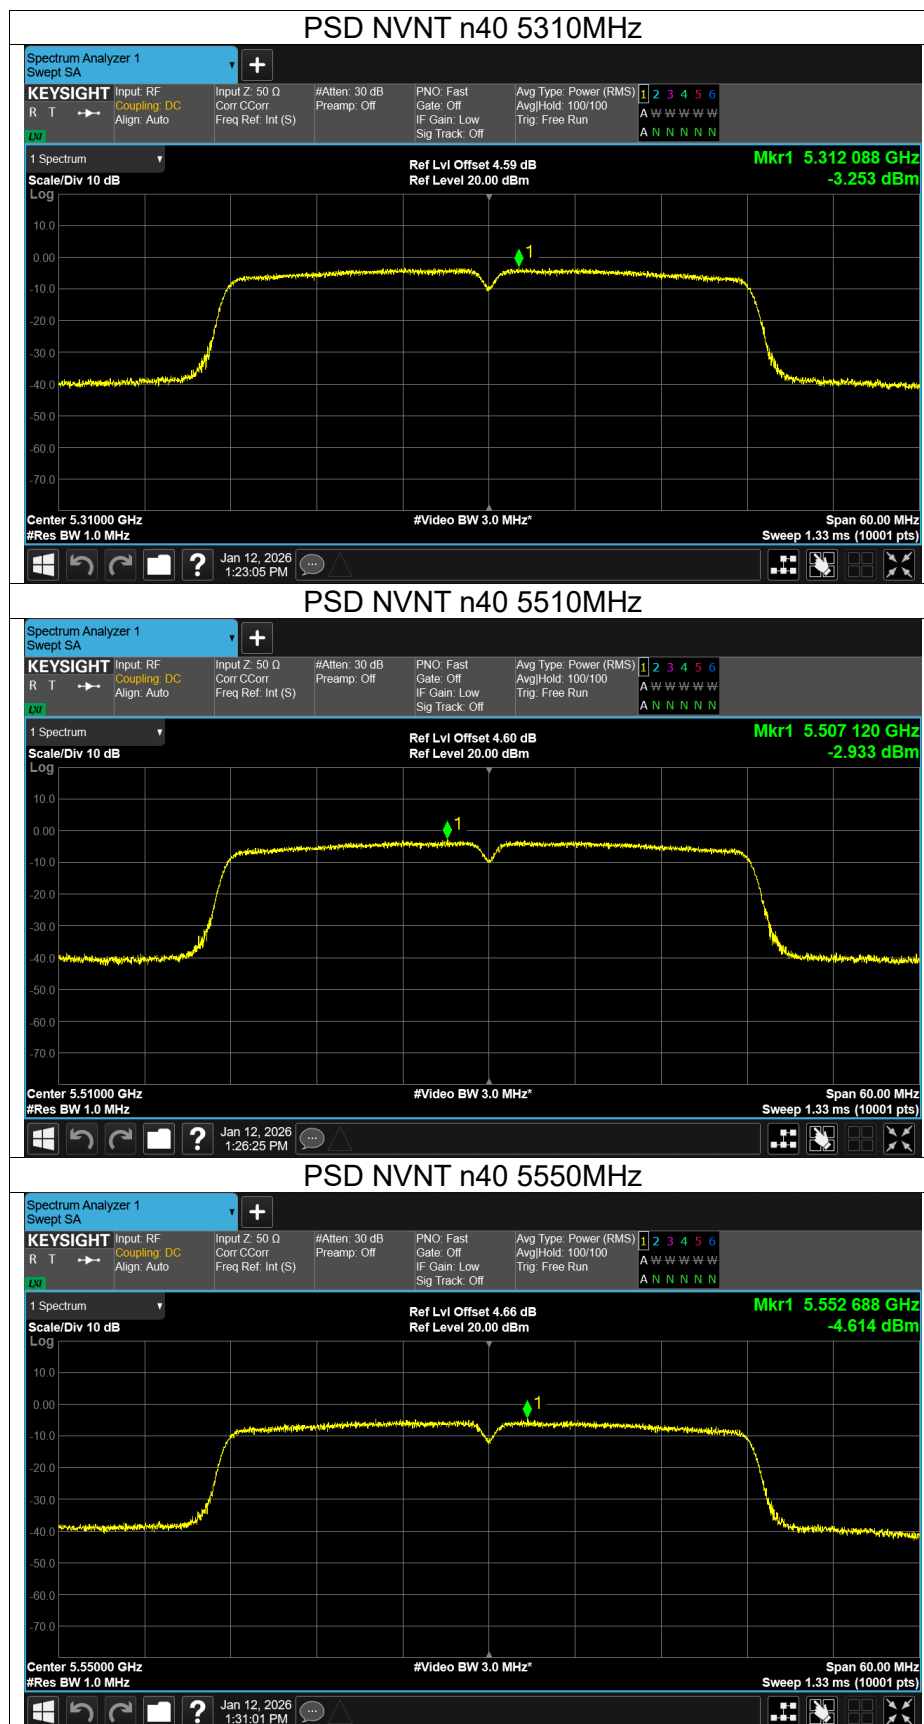


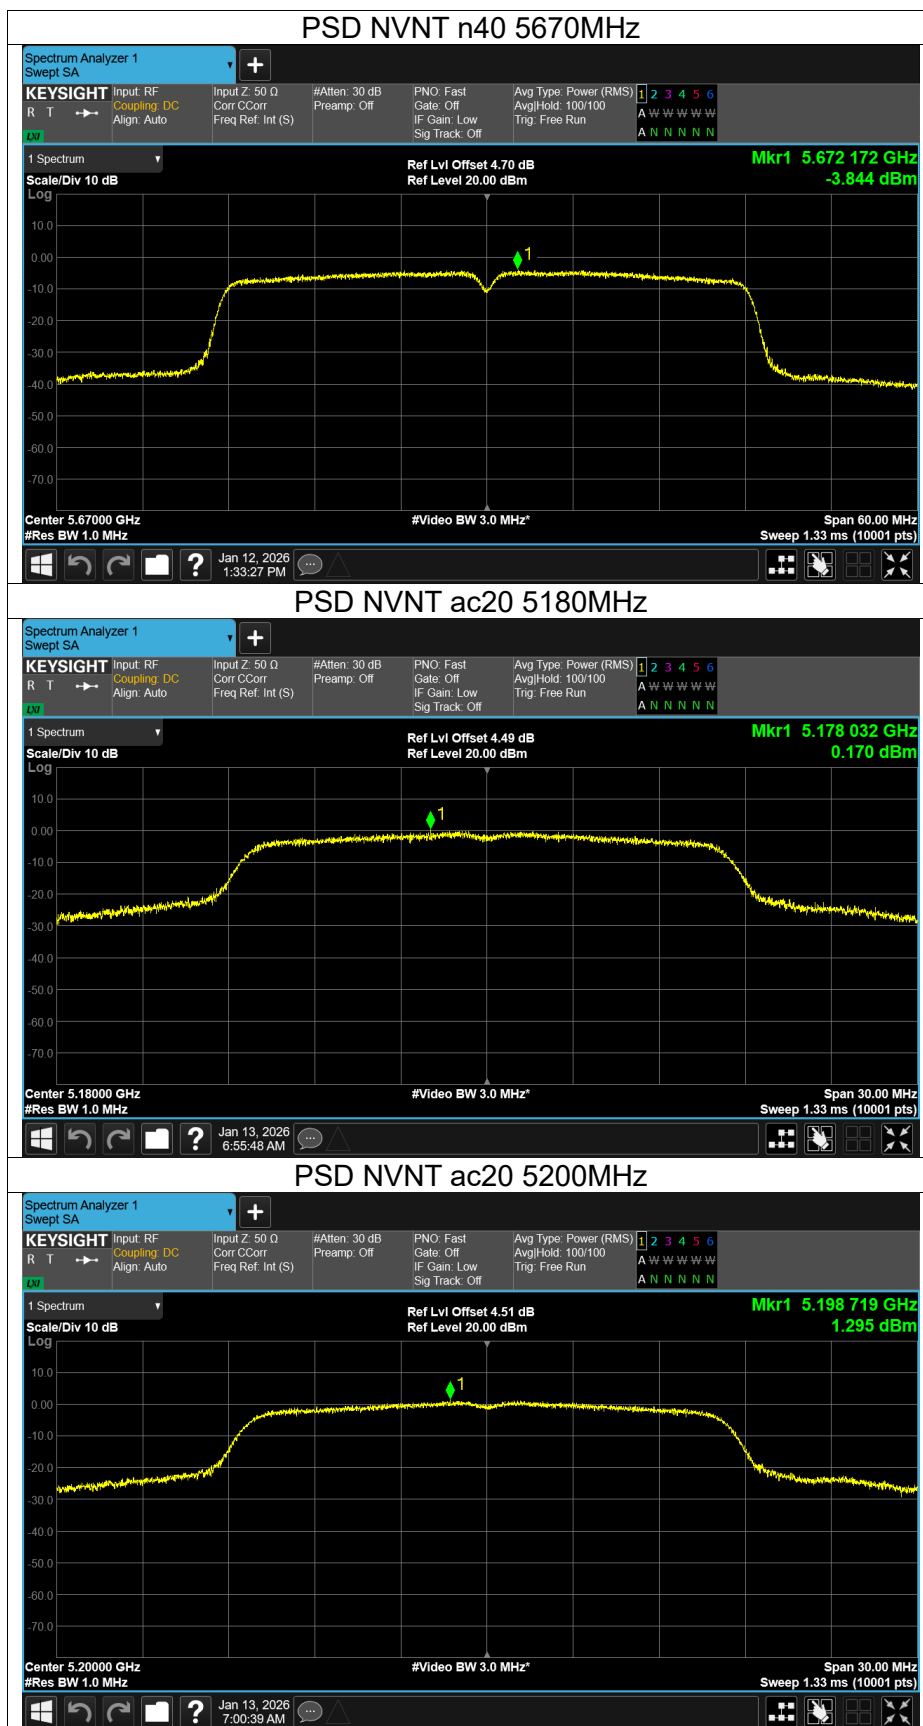

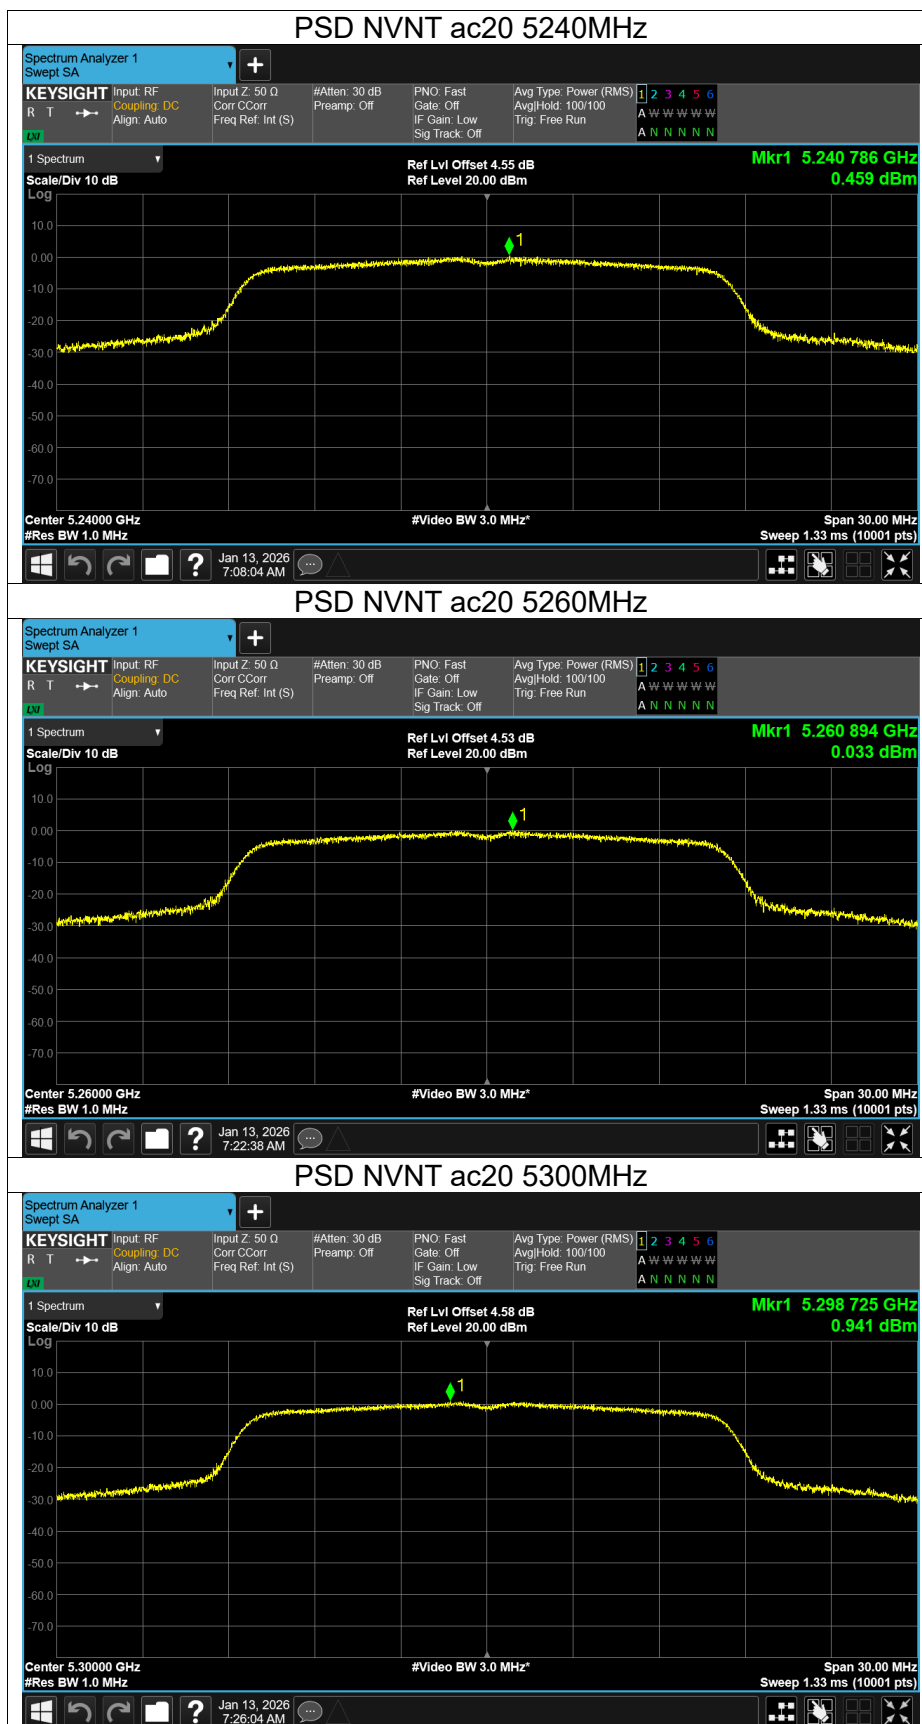

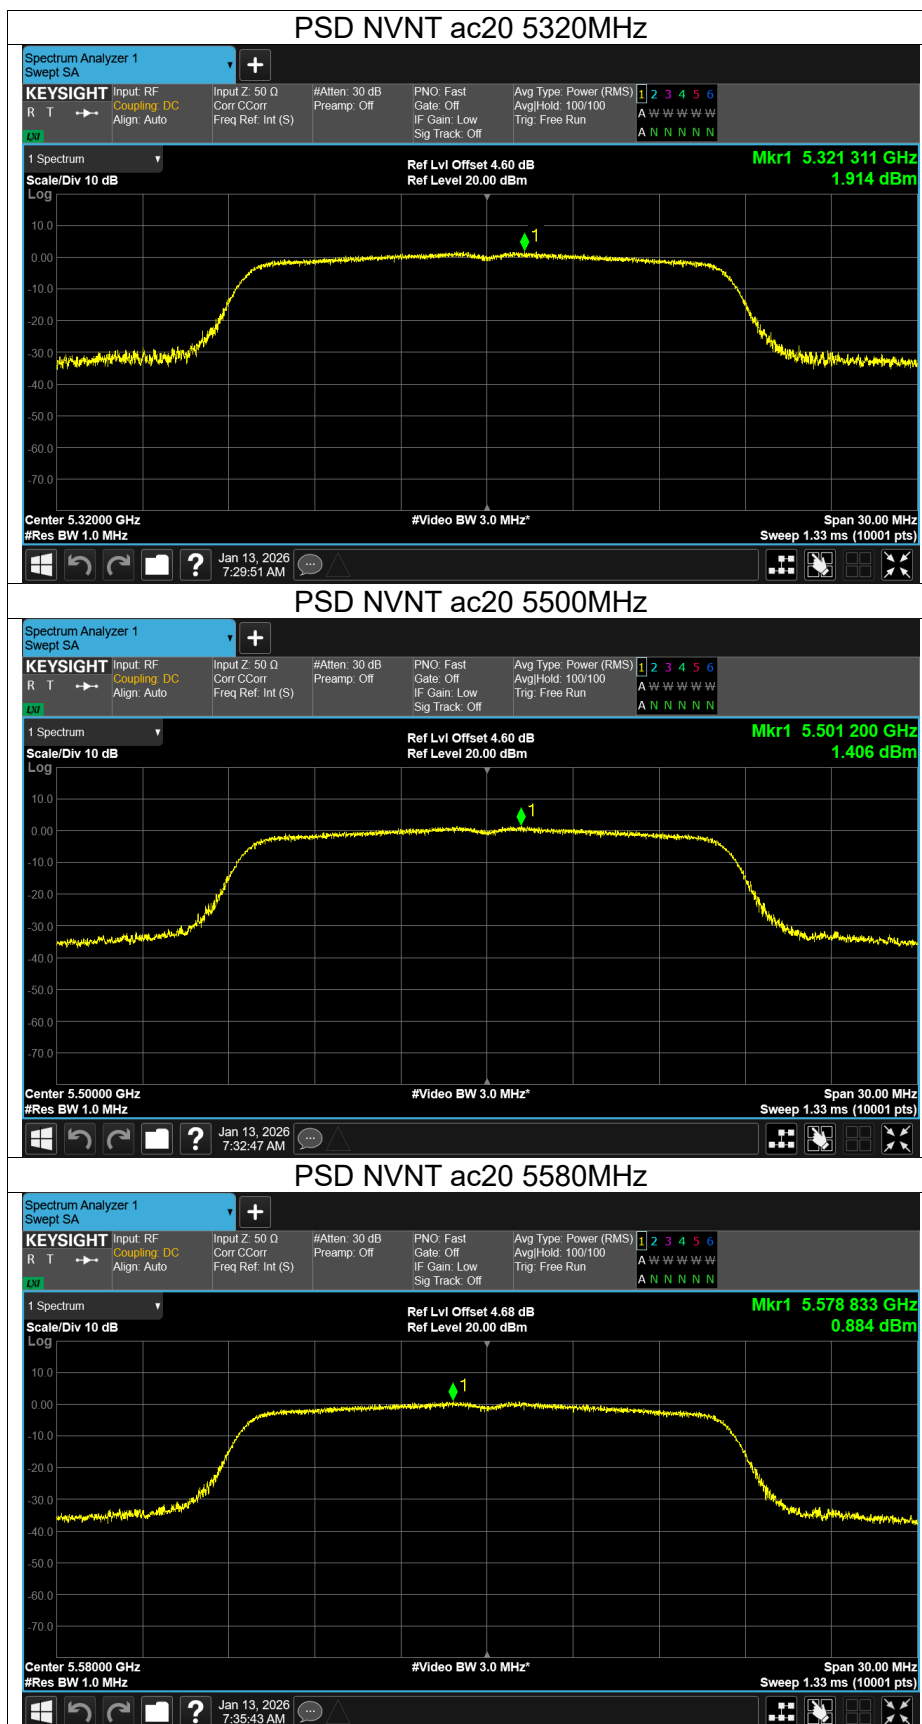

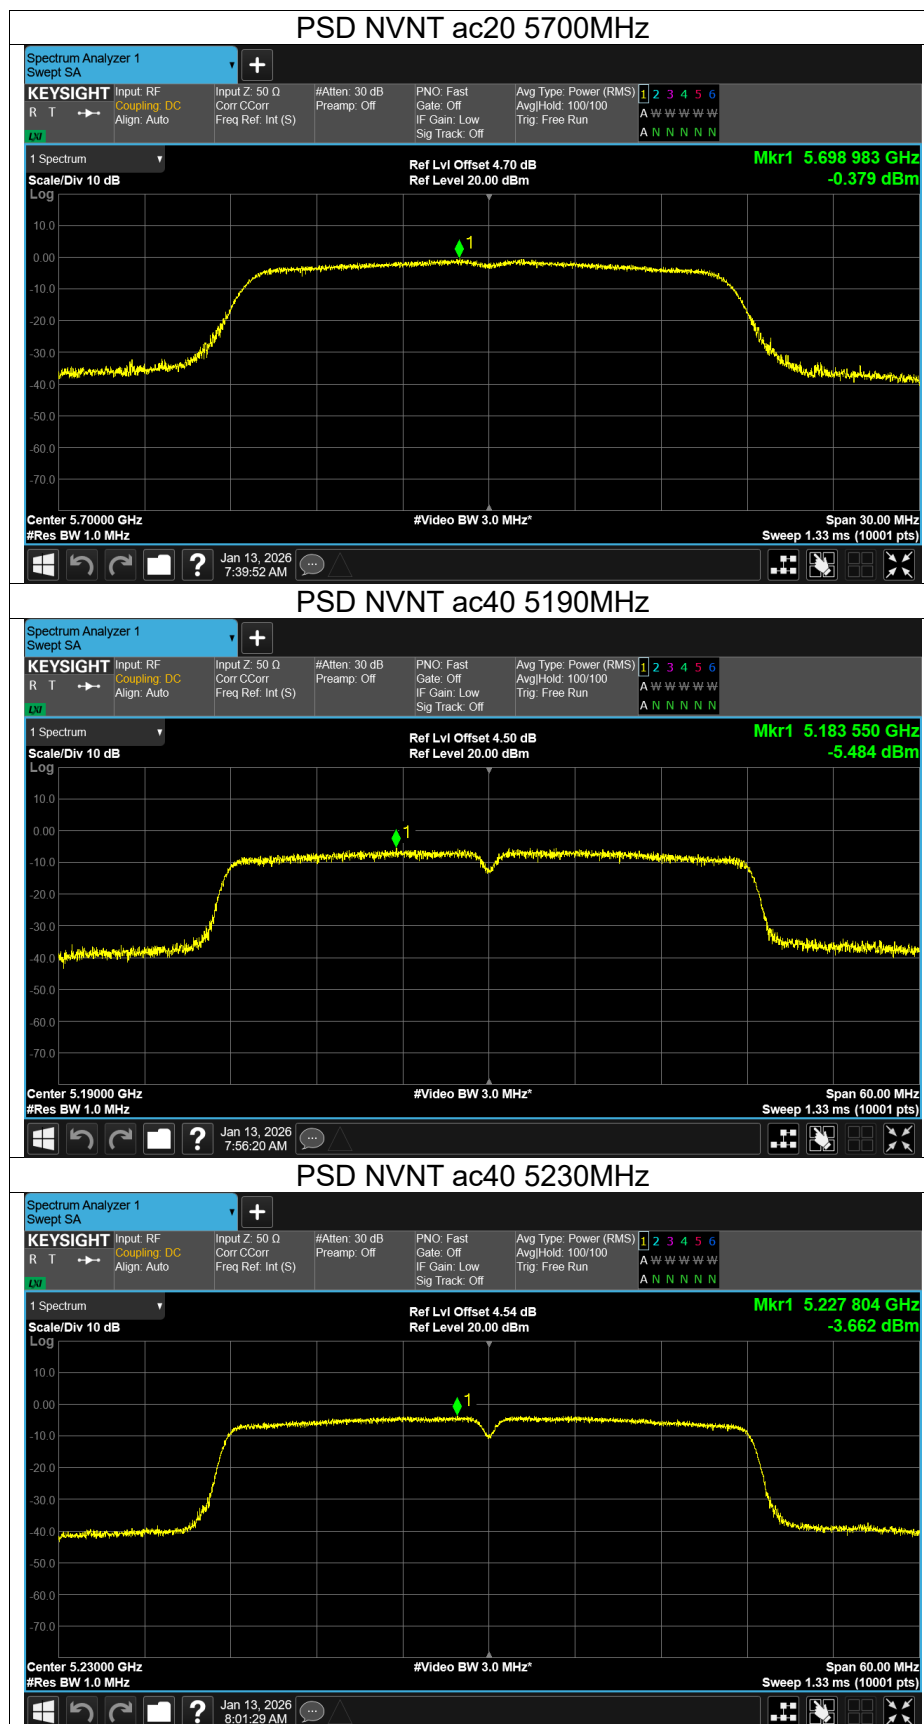

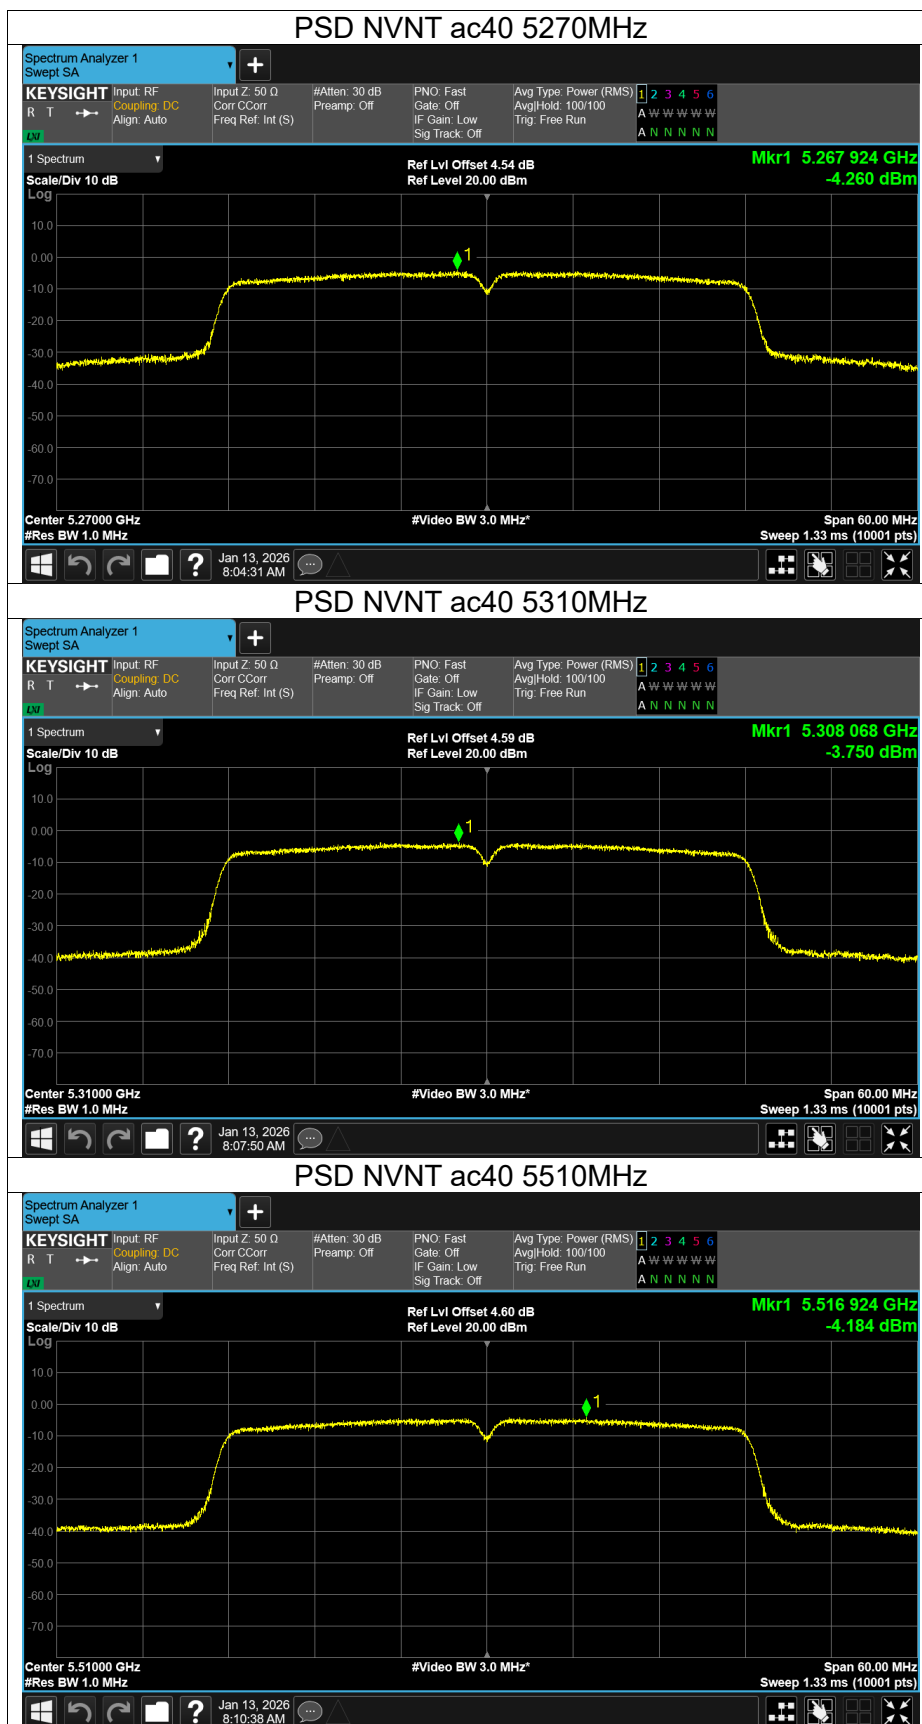





Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	-30.65	-27	Pass
NVNT	a	5240	-42.82	-27	Pass
NVNT	a	5260	-39.5	-27	Pass
NVNT	a	5320	-32.93	-27	Pass
NVNT	a	5500	-37.1	-27	Pass
NVNT	a	5700	-32.6	-27	Pass
NVNT	n20	5180	-33.38	-27	Pass
NVNT	n20	5240	-43.23	-27	Pass
NVNT	n20	5260	-40.42	-27	Pass
NVNT	n20	5320	-34.4	-27	Pass
NVNT	n20	5500	-36.77	-27	Pass
NVNT	n20	5700	-32.69	-27	Pass
NVNT	n40	5190	-28.35	-27	Pass
NVNT	n40	5230	-44.28	-27	Pass
NVNT	n40	5270	-41.46	-27	Pass
NVNT	n40	5310	-31.16	-27	Pass
NVNT	n40	5510	-29.93	-27	Pass
NVNT	n40	5670	-39.79	-27	Pass
NVNT	ac20	5180	-38.03	-27	Pass
NVNT	ac20	5240	-43.05	-27	Pass
NVNT	ac20	5260	-41.03	-27	Pass
NVNT	ac20	5320	-34.58	-27	Pass
NVNT	ac20	5500	-38.56	-27	Pass
NVNT	ac20	5700	-36.24	-27	Pass
NVNT	ac40	5190	-29.78	-27	Pass
NVNT	ac40	5230	-43.65	-27	Pass
NVNT	ac40	5270	-41.74	-27	Pass
NVNT	ac40	5310	-27.27	-27	Pass
NVNT	ac40	5510	-32.82	-27	Pass
NVNT	ac40	5670	-40.11	-27	Pass

