

# TEST REPORT

Report No.: BCTC2505534942-2E

---

Applicant: REOLINK TECHNOLOGY PTE. LTD.

---

Product Name: WiFi module

---

Test Model: WXP42R2101T

---

Tested Date: 2025-05-09 to 2025-05-15

---

Issued Date: 2025-05-16

---

Shenzhen **BCTC** Testing Co., Ltd.



**FCC ID: 2BN5S-2503J**

Product Name: WiFi module

Trademark: 

Model/Type reference: WXP42R2101T

Prepared For: REOLINK TECHNOLOGY PTE. LTD.

Address: 31 KAKI BUKIT ROAD 3, #06-02, TECHLINK, SINGAPORE 417818

Manufacturer: REOLINK TECHNOLOGY PTE. LTD.

Address: 31 KAKI BUKIT ROAD 3, #06-02, TECHLINK, SINGAPORE 417818

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2025-05-09

Sample tested Date: 2025-05-09 to 2025-05-15


Issue Date: 2025-05-16

Report No.: BCTC2505534942-2E

Test Standards: FCC Part15 15.407  
ANSI C63.10-2013  
KDB 662911 D01 v02r01  
KDB 789033 D02 v02r01

Test Results: PASS

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## Table Of Content

| Test Report Declaration                                | Page |
|--------------------------------------------------------|------|
| 1. Version .....                                       | 5    |
| 2. Test Summary .....                                  | 6    |
| 3. Measurement Uncertainty .....                       | 7    |
| 4. Product Information And Test Setup .....            | 8    |
| 4.1 Product Information .....                          | 8    |
| 4.2 Test Setup Configuration .....                     | 9    |
| 4.3 Support Equipment .....                            | 9    |
| 4.4 Channel List .....                                 | 10   |
| 4.5 Test Mode .....                                    | 11   |
| 4.6 Table Of Parameters Of Text Software Setting ..... | 11   |
| 4.7 Antenna .....                                      | 11   |
| 5. Test Facility And Test Instrument Used .....        | 12   |
| 5.1 Test Facility .....                                | 12   |
| 5.2 Test Instrument Used .....                         | 12   |
| 6. Conducted Emissions .....                           | 14   |
| 6.1 Block Diagram Of Test Setup .....                  | 14   |
| 6.2 Limit .....                                        | 14   |
| 6.3 Test Procedure .....                               | 14   |
| 6.4 EUT Operating Conditions .....                     | 14   |
| 6.5 Test Result .....                                  | 15   |
| 7. Radiated Emissions .....                            | 19   |
| 7.1 Block Diagram Of Test Setup .....                  | 19   |
| 7.2 Limit .....                                        | 20   |
| 7.3 Test Procedure .....                               | 21   |
| 7.4 EUT Operating Conditions .....                     | 22   |
| 7.5 Test Result .....                                  | 22   |
| 8. Power Spectral Density Test .....                   | 100  |
| 8.1 Block Diagram Of Test Setup .....                  | 100  |
| 8.2 Limit .....                                        | 100  |
| 8.3 Test Procedure .....                               | 101  |
| 8.4 EUT Operating Conditions .....                     | 101  |
| 8.5 Test Result .....                                  | 102  |
| 9. 26dB & 6dB & 99% Emission Bandwidth .....           | 148  |
| 9.1 Block Diagram Of Test Setup .....                  | 148  |
| 9.2 Limit .....                                        | 148  |
| 9.3 Test Procedure .....                               | 148  |
| 9.4 EUT Operating Conditions .....                     | 149  |
| 9.5 Test Result .....                                  | 150  |
| 10. Maximum Conducted Output Power .....               | 238  |
| 10.1 Block Diagram Of Test Setup .....                 | 238  |
| 10.2 Limit .....                                       | 238  |
| 10.3 Test Procedure .....                              | 238  |
| 10.4 EUT Operating Conditions .....                    | 239  |


|      |                                       |     |
|------|---------------------------------------|-----|
| 10.5 | Test Result.....                      | 240 |
| 11.  | Out Of Band Emissions .....           | 244 |
| 11.1 | Block Diagram Of Test Setup.....      | 244 |
| 11.2 | Limit .....                           | 244 |
| 11.3 | Test Procedure .....                  | 244 |
| 11.4 | EUT Operating Conditions .....        | 244 |
| 11.5 | Test Result.....                      | 245 |
| 12.  | Spurious RF Conducted Emissions.....  | 281 |
| 12.1 | Block Diagram Of Test Setup.....      | 281 |
| 12.2 | Limit .....                           | 281 |
| 12.3 | Test Procedure .....                  | 281 |
| 12.4 | Test Result.....                      | 281 |
| 13.  | Frequency Stability Measurement ..... | 324 |
| 13.1 | Block Diagram Of Test Setup.....      | 324 |
| 13.2 | Limit .....                           | 324 |
| 13.3 | Test Procedure .....                  | 324 |
| 13.4 | Test Result.....                      | 325 |
| 14.  | Duty Cycle Of Test Signal .....       | 337 |
| 14.1 | Standard Requirement .....            | 337 |
| 14.2 | Formula.....                          | 337 |
| 14.3 | Test Procedure .....                  | 337 |
| 14.4 | Test Result.....                      | 337 |
| 15.  | Antenna Requirement .....             | 385 |
| 15.1 | Limit .....                           | 385 |
| 15.2 | Test Result.....                      | 385 |
| 16.  | EUT Photographs.....                  | 386 |
| 17.  | EUT Test Setup Photographs.....       | 387 |

(Note: N/A Means Not Applicable)

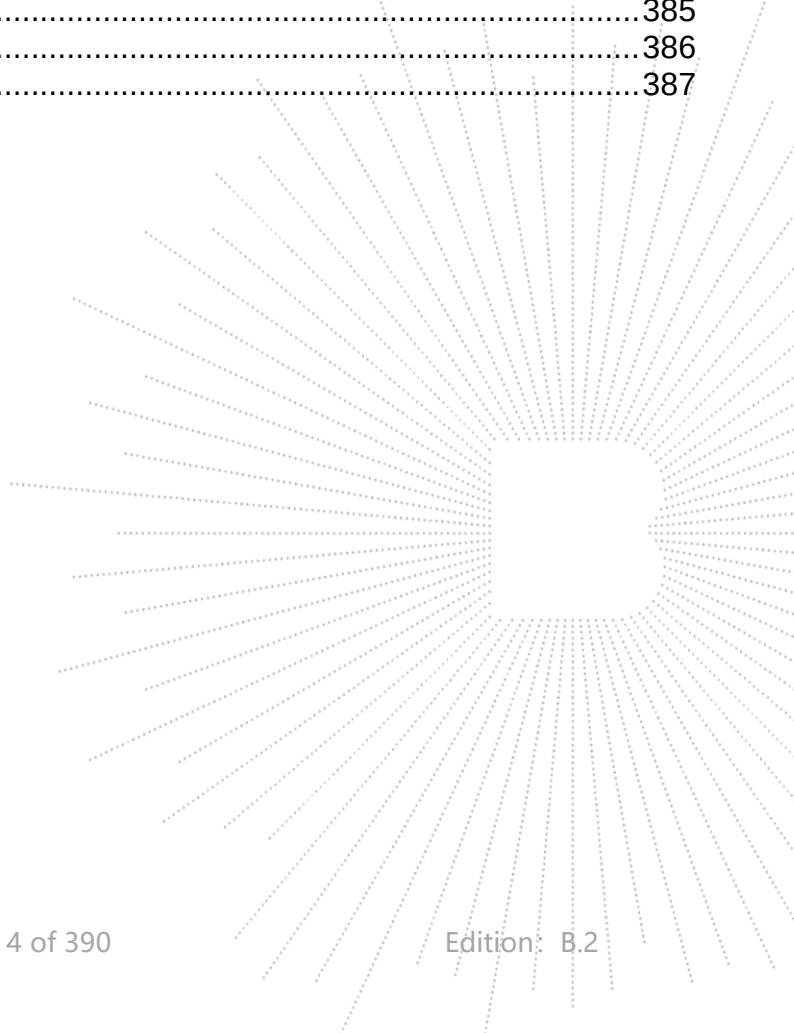

**1. Version**

| Report No.        | Issue Date | Description | Approved |
|-------------------|------------|-------------|----------|
| BCTC2505534942-2E | 2025-05-16 | Original    | Valid    |
|                   |            |             |          |

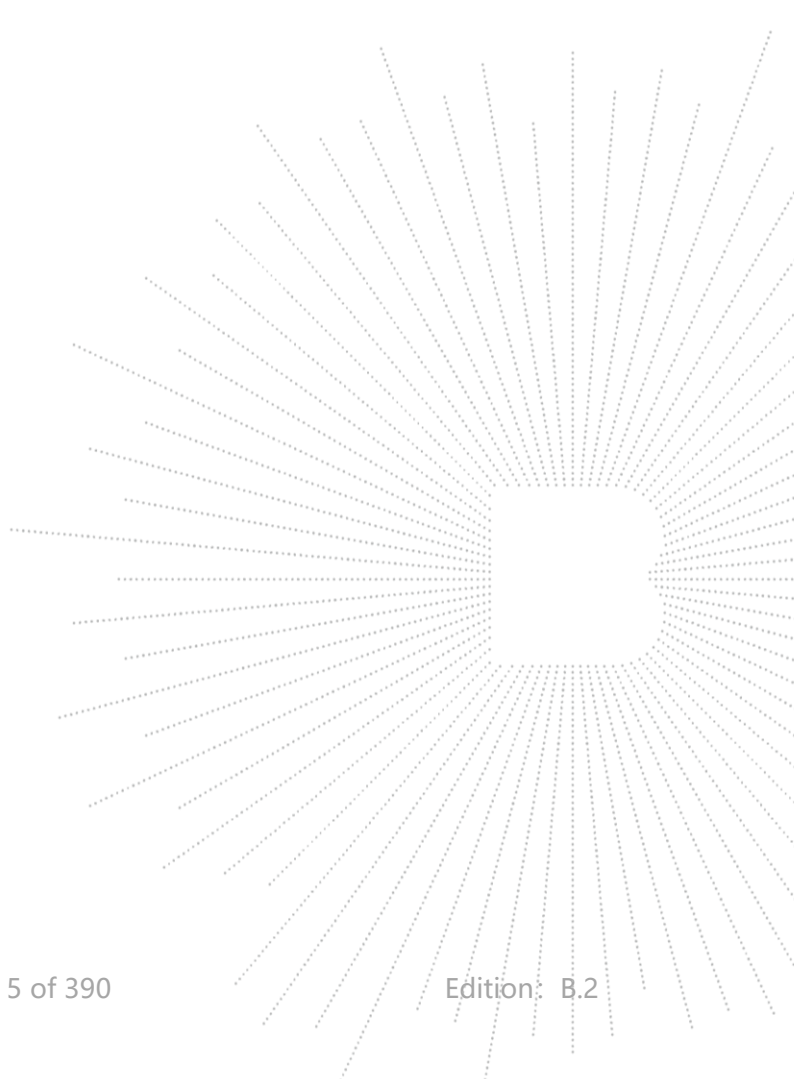


## 2. Test Summary

The Product has been tested according to the following specifications:

| No. | Test Parameter                          | Clause No.              | Results |
|-----|-----------------------------------------|-------------------------|---------|
| 1   | Spurious Radiated Emissions             | 15.209(a)<br>15.407 (b) | PASS    |
| 2   | Conducted Emission                      | 15.207                  | PASS    |
| 3   | 26 dB and 99% Emission Bandwidth        | 15.407 a<br>15.1049     | PASS    |
| 4   | Minimum 6 dB bandwidth                  | 15.407(e)               | PASS    |
| 5   | Maximum Conducted Output Power          | 15.407 a                | PASS    |
| 6   | Band Edge                               | 15.407 b                | PASS    |
| 7   | Power Spectral Density                  | 15.407 a                | PASS    |
| 8   | Spurious Emissions at Antenna Terminals | 15.407 b                | PASS    |
| 9   | Antenna Requirement                     | 15.203                  | PASS    |

Note: The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure.

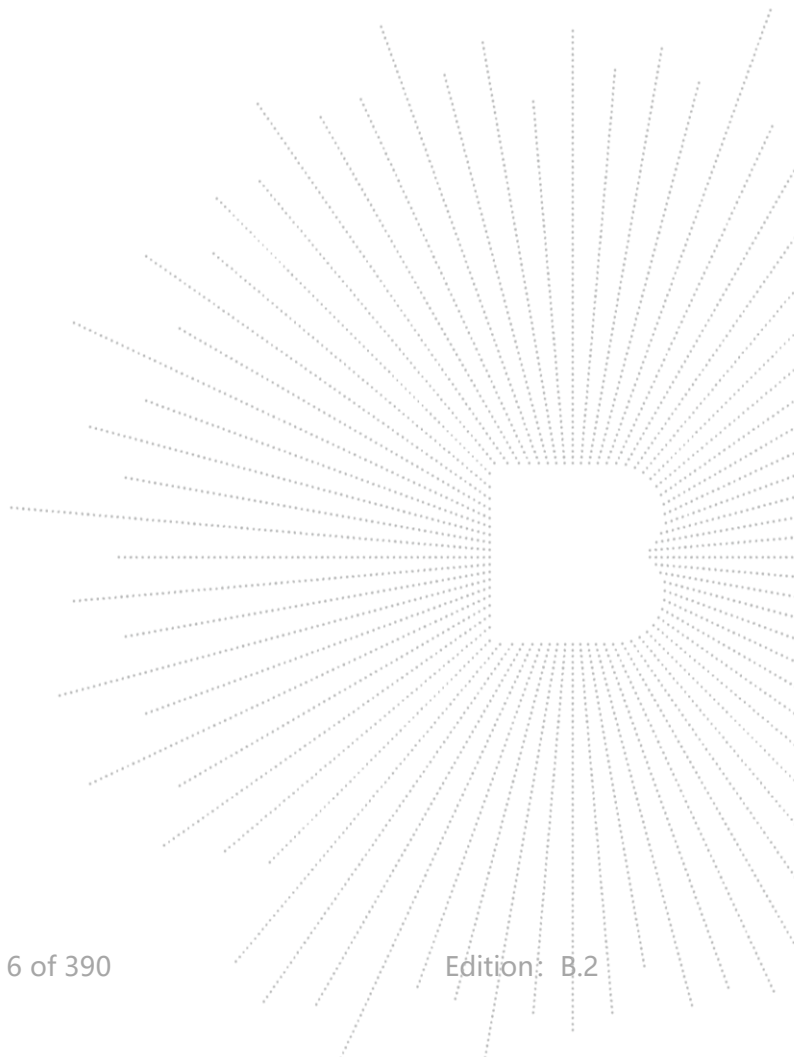

### 3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| No. | Item                                               | Uncertainty |
|-----|----------------------------------------------------|-------------|
| 1   | 3m chamber Radiated spurious emission(9kHz-30MHz)  | U=3.7dB     |
| 2   | 3m chamber Radiated spurious emission(30MHz-1GHz)  | U=4.3dB     |
| 3   | 3m chamber Radiated spurious emission(1GHz-18GHz)  | U=4.5dB     |
| 4   | 3m chamber Radiated spurious emission(18GHz-40GHz) | U=3.34dB    |
| 5   | Conducted Emission(150kHz-30MHz)                   | U=3.20dB    |
| 6   | Conducted Adjacent channel power                   | U=1.38dB    |
| 7   | Conducted output power uncertainty Above 1G        | U=1.576dB   |
| 8   | Conducted output power uncertainty below 1G        | U=1.28dB    |
| 9   | humidity uncertainty                               | U=5.3%      |
| 10  | Temperature uncertainty                            | U=0.59°C    |

## 4. Product Information And Test Setup

### 4.1 Product Information

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model/Type reference:           | WXP42R2101T                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Model differences:              | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Hardware Version:               | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Software Version:               | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| IEEE 802.11 WLAN Mode Supported | 802.11a/n/ac/ax(20MHz channel bandwidth)<br>802.11n/ac/ax(40MHz channel bandwidth)<br>802.11ac/ax(80MHz channel bandwidth)<br>5180-5240MHz for 802.11a/n(HT20)/ac(HT20)/ax(HT20);<br>5190-5230MHz for 802.11n(HT40)/ac(HT40) /ax(HT40);<br>5210MHz for 802.11 ac(HT80) /ax(HT80);<br>5260-5320MHz for 802.11a/n(HT20)/ac(HT20)/ax(HT20);<br>5270-5310MHz for 802.11n (HT40)/ac(HT40) /ax(HT40);<br>5290MHz for 802.11 ac(HT80) /ax(HT80); |
| Operation Frequency:            | 5500-5700MHz for 802.11a/n(HT20)/ac(HT20)/ax(HT20);<br>5510-5670MHz for 802.11n (HT40)/ac(HT40) /ax(HT40);<br>5530MHz for 802.11 ac(HT80) /ax(HT80);<br>5745-5825 MHz for 802.11a/n(HT20)/ac(HT20)/ax(HT20);<br>5755-5795 MHz for 802.11n(HT40)/ac(HT40)/ax(HT40);<br>5775MHz for 802.11 ac(HT80) /ax(HT80);                                                                                                                              |
| Data Rate                       | 802.11a: 6,9,12,18,24,36,48,54Mbps;<br>802.11n(HT20/HT40):MCS0-MCS15;<br>802.11ac/ax(VHT20): NSS1, MCS0-MCS8<br>802.11ac/ax(VHT40/VHT80):NSS1, MCS0-MCS                                                                                                                                                                                                                                                                                   |
| Type of Modulation:             | OFDM/OFDMA                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Antenna installation:           | External antenna*2<br>Antenna 1: 6.98 dBi,<br>Antenna 2: 5.05 dBi                                                                                                                                                                                                                                                                                                                                                                         |
| Antenna Gain:                   | Remark:<br><input checked="" type="checkbox"/> The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information.<br><input type="checkbox"/> The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.                                                                                     |
| Ratings:                        | DC 3.3V                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Module type:                    | Client Without Tpc.                                                                                                                                                                                                                                                                                                                                                                                                                       |

## 4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

## 4.3 Support Equipment

| No. | Device Type | Brand          | Model                | Series No. | Note      |
|-----|-------------|----------------|----------------------|------------|-----------|
| E-1 | WiFi module | <b>Reolink</b> | WXP42R210<br>1T      | N/A        | EUT       |
| E-2 | Adapter     | Lenovo         | ADLX65YLC<br>3D      | N/A        | Auxiliary |
| E-3 | PC          | Lenovo         | ThinkPad<br>E15 Gen2 | N/A        | Auxiliary |

| Item | Shielded Type | Ferrite Core | Length | Note                |
|------|---------------|--------------|--------|---------------------|
| C-1  | NO            | NO           | 0M     | DC cable unshielded |

### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

| (U-NII-1) 5180MHz-5240MHz  |         |                 |         |           |
|----------------------------|---------|-----------------|---------|-----------|
| Bandwidth                  | Channel | Frequency (MHz) | Channel | Frequency |
| 20MHz                      | 36      | 5180            | 40      | 5200      |
|                            | 44      | 5220            | 48      | 5240      |
| 40MHz                      | 38      | 5190            | 46      | 5230      |
| 80MHz                      | 42      | 5210            |         |           |
| (U-NII-2A) 5260MHz-5320MHz |         |                 |         |           |
| Bandwidth                  | Channel | Frequency (MHz) | Channel | Frequency |
| 20MHz                      | 52      | 5260            | 56      | 5280      |
|                            | 60      | 5300            | 64      | 5320      |
| 40MHz                      | 54      | 5270            | 62      | 5310      |
| 80MHz                      | 58      | 5290            |         |           |
| (U-NII-2C) 5500MHz-5700MHz |         |                 |         |           |
| Bandwidth                  | Channel | Frequency (MHz) | Channel | Frequency |
| 20MHz                      | 100     | 5500            | 105     | 5520      |
|                            | 108     | 5540            | 112     | 5560      |
|                            | 116     | 5580            | 132     | 5660      |
|                            | 136     | 5680            | 140     | 5700      |
| 40MHz                      | 102     | 5510            | 110     | 5550      |
|                            | 134     | 5670            |         |           |
| 80MHz                      | 106     | 5530            |         |           |
| (U-NII-3) 5745MHz-5825MHz  |         |                 |         |           |
| Bandwidth                  | Channel | Frequency (MHz) | Channel | Frequency |
| 20MHz                      | 149     | 5745            | 153     | 5765      |
|                            | 157     | 5785            | 161     | 5805      |
|                            | 165     | 5825            |         |           |
| 40MHz                      | 151     | 5775            | 159     | 5795      |
| 80MHz                      | 155     | 5775            |         |           |

#### 4.5 Test Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description                                                                                                                                                                             |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mode 1       | 802.11a / n/ ac 20 /ax20 CH36/ CH40/ CH 48<br>802.11a / n/ ac 20/ax20 CH52/ CH56/ CH 64<br>802.11a / n/ ac 20/ax20 CH100/ CH116/ CH 140<br>802.11a / n/ ac 20/ax20 CH149/ CH157/ CH 165 |
| Mode 2       | 802.11n/ ac40/ax40 CH38/ CH 46<br>802.11n/ ac40/ax40 CH54/ CH 62<br>802.11n/ ac40/ax40 CH102/ CH 110/CH134<br>802.11n/ ac40/ax40 CH 151 / CH 159                                        |
| Mode 3       | 802.11 ac80/ax80 CH 42/ CH 58/ CH 106/ CH 155                                                                                                                                           |
| Mode 4       | WIFI Link                                                                                                                                                                               |

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) This product does not support RU mode.

#### 4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

| Test software Version | CMD |     |     |
|-----------------------|-----|-----|-----|
| Parameters            | DEF | DEF | DEF |

#### 4.7 Antenna

5G

| Ant. | Brand | Model Name     | Antenna Type       | Gain (dBi) | NOTE |
|------|-------|----------------|--------------------|------------|------|
| 1    | N/A   | 54.07.001.0124 | External antenna*2 | 6.98       | N/A  |
| 2    | N/A   | 54.07.001.0137 | External antenna*2 | 5.05       | N/A  |

EUT has 2 External antenna with The maximum gain GANT of Antenna is 6.98 dBi, CDD device with one spatial streams, also can operate with one spatial streams according to KDB662911 D01 v02r01, Directional gain= GANT + Array Gain, where Array Gain is as follows.

1)For power spectral density(PSD) measurements,  
 $\text{Array Gain} = 10\log(\text{NANT}/\text{NSS})\text{dB} = 10\log(2/1) = 3.01\text{ dBi}$ ,  
 So the directional gain for PSD is 9.99 dBi

2)For power measurements,  
 The Array gain=0 for  $\text{NANT} \leq 4$  ,  
 So the directional gain for Power measurements is 6.98 dBi

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain.

## 5. Test Facility And Test Instrument Used

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583


ISED CAB identifier: CN0017

### 5.2 Test Instrument Used

| Conducted Emissions Test |              |            |             |              |              |
|--------------------------|--------------|------------|-------------|--------------|--------------|
| Equipment                | Manufacturer | Model#     | Serial#     | Last Cal.    | Next Cal.    |
| Receiver                 | R&S          | ESR        | 102075      | May 16, 2024 | May 15, 2025 |
| LISN                     | R&S          | ENV216     | 101375      | May 16, 2024 | May 15, 2025 |
| Software                 | Frad         | EZ-EMC     | EMC-CON 3A1 | \            | \            |
| Pulse limiter            | Schwarzbeck  | VTSD9561-F | 01323       | May 16, 2024 | May 15, 2025 |


| RF Conducted Test            |              |             |            |              |              |
|------------------------------|--------------|-------------|------------|--------------|--------------|
| Equipment                    | Manufacturer | Model#      | Serial#    | Last Cal.    | Next Cal.    |
| Power metter                 | Keysight     | E4419       | \          | May 16, 2024 | May 15, 2025 |
| Power Sensor (AV)            | Keysight     | E9300A      | \          | May 16, 2024 | May 15, 2025 |
| Signal Analyzer20kHz-26.5GHz | Keysight     | N9020A      | MY49100060 | May 16, 2024 | May 15, 2025 |
| Spectrum Analyzer9kHz-40GHz  | R&S          | FSP40       | 100363     | May 16, 2024 | May 15, 2025 |
| Radio frequency control box  | MAIWEI       | MW100-RFC B | \          | \            | \            |
| Software                     | MAIWEI       | MTS 8310    | \          | \            | \            |

| Radiated Emissions Test (966 Chamber01) |              |                   |              |              |              |
|-----------------------------------------|--------------|-------------------|--------------|--------------|--------------|
| Equipment                               | Manufacturer | Model#            | Serial#      | Last Cal.    | Next Cal.    |
| 966 chamber                             | ChengYu      | 966 Room          | 966          | May 16, 2024 | May 15, 2025 |
| Receiver                                | R&S          | ESR               | 102075       | May 16, 2024 | May 15, 2025 |
| Receiver                                | R&S          | ESRP              | 101154       | May 16, 2024 | May 15, 2025 |
| Amplifier                               | Schwarzbeck  | BBV9744           | 9744-0037    | May 16, 2024 | May 15, 2025 |
| TRILOG Broadband Antenna                | Schwarzbeck  | VULB9163          | 942          | May 21, 2024 | May 20, 2025 |
| Loop Antenna(9KHz -30MHz)               | Schwarzbeck  | FMZB1519B         | 00014        | May 21, 2024 | May 20, 2025 |
| Amplifier                               | SKET         | LAPA_01G18 G-45dB | SK2021040901 | May 16, 2024 | May 15, 2025 |
| Horn Antenna                            | Schwarzbeck  | BBHA9120D         | 1541         | May 21, 2024 | May 20, 2025 |
| Amplifier(18G Hz-40GHz)                 | MITEQ        | TTA1840-35-HG     | 2034381      | May 16, 2024 | May 15, 2025 |
| Horn Antenna(18G Hz-40GHz)              | Schwarzbeck  | BBHA9170          | 00822        | May 21, 2024 | May 20, 2025 |
| Spectrum Analyzer9kHz-40GHz             | R&S          | FSP40             | 100363       | May 16, 2024 | May 15, 2025 |
| Software                                | Frad         | EZ-EMC            | FA-03A2 RE   | \            | \            |

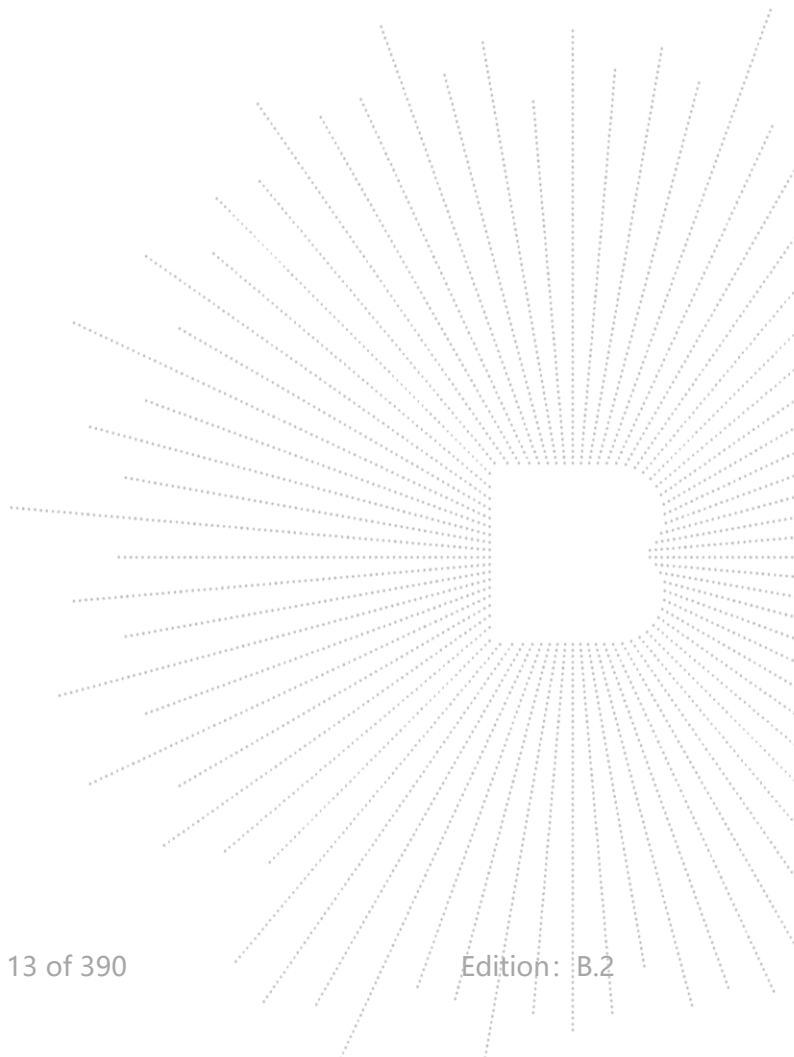

## 6. Conducted Emissions

### 6.1 Block Diagram Of Test Setup

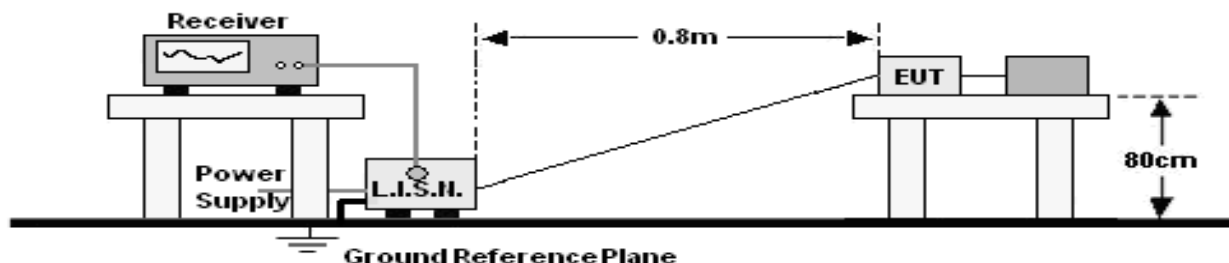

### 6.2 Limit

| Frequency (MHz) | Limit (dBuV) |           |
|-----------------|--------------|-----------|
|                 | Quas-peak    | Average   |
| 0.15 -0.5       | 66 - 56 *    | 56 - 46 * |
| 0.50 -5.0       | 56.00        | 46.00     |
| 5.0 -30.0       | 60.00        | 50.00     |

Notes:

- \*Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

### 6.3 Test Procedure

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

### 6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 6.5 Test Result

|              |                   |                    |         |
|--------------|-------------------|--------------------|---------|
| Temperature: | 26 °C             | Relative Humidity: | 54%     |
| Pressure:    | 101KPa            | Phase :            | L       |
| Test Mode:   | Mode 4(Antenna 1) | Test Voltage :     | DC 3.3V |

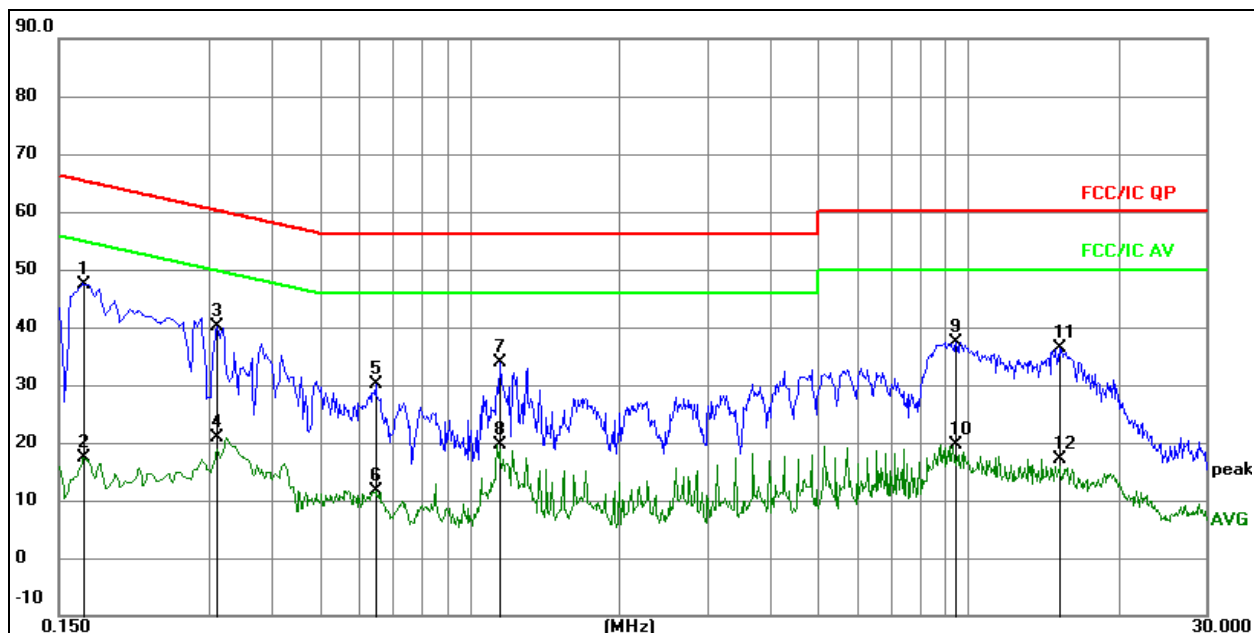


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|
|     |     | MHz     |               | dB             | dBuV        | dBuV  | dB     |          |
| 1   | *   | 0.1677  | 27.43         | 20.07          | 47.50       | 65.07 | -17.57 | QP       |
| 2   |     | 0.1677  | -2.69         | 20.07          | 17.38       | 55.07 | -37.69 | AVG      |
| 3   |     | 0.3116  | 20.00         | 20.07          | 40.07       | 59.93 | -19.86 | QP       |
| 4   |     | 0.3116  | 0.86          | 20.07          | 20.93       | 49.93 | -29.00 | AVG      |
| 5   |     | 0.6474  | 10.14         | 20.09          | 30.23       | 56.00 | -25.77 | QP       |
| 6   |     | 0.6474  | -8.37         | 20.09          | 11.72       | 46.00 | -34.28 | AVG      |
| 7   |     | 1.1473  | 13.69         | 20.09          | 33.78       | 56.00 | -22.22 | QP       |
| 8   |     | 1.1473  | -0.36         | 20.09          | 19.73       | 46.00 | -26.27 | AVG      |
| 9   |     | 9.4514  | 17.16         | 20.17          | 37.33       | 60.00 | -22.67 | QP       |
| 10  |     | 9.4514  | -0.60         | 20.17          | 19.57       | 50.00 | -30.43 | AVG      |
| 11  |     | 15.2261 | 15.99         | 20.31          | 36.30       | 60.00 | -23.70 | QP       |
| 12  |     | 15.2261 | -3.12         | 20.31          | 17.19       | 50.00 | -32.81 | AVG      |

|              |                    |                    |         |
|--------------|--------------------|--------------------|---------|
| Temperature: | 26 °C              | Relative Humidity: | 54%     |
| Pressure:    | 101KPa             | Phase :            | N       |
| Test Mode:   | Mode 4 (Antenna 1) | Test Voltage :     | DC 3.3V |

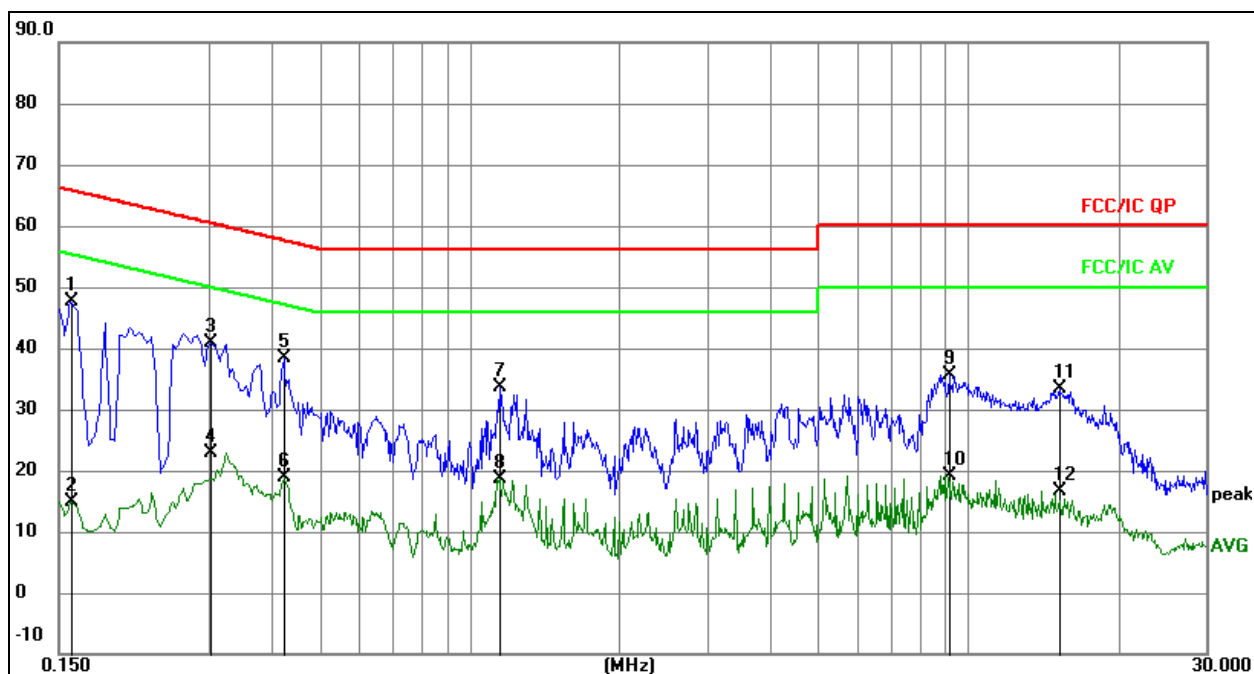


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|
|     |     | MHz     |               | dB             | dBuV        | dBuV  | dB     |          |
| 1   | *   | 0.1590  | 27.58         | 20.07          | 47.65       | 65.52 | -17.87 | QP       |
| 2   |     | 0.1590  | -5.17         | 20.07          | 14.90       | 55.52 | -40.62 | AVG      |
| 3   |     | 0.3030  | 20.88         | 20.07          | 40.95       | 60.16 | -19.21 | QP       |
| 4   |     | 0.3030  | 2.83          | 20.07          | 22.90       | 50.16 | -27.26 | AVG      |
| 5   |     | 0.4245  | 18.26         | 20.08          | 38.34       | 57.36 | -19.02 | QP       |
| 6   |     | 0.4245  | -1.29         | 20.08          | 18.79       | 47.36 | -28.57 | AVG      |
| 7   |     | 1.1490  | 13.64         | 20.09          | 33.73       | 56.00 | -22.27 | QP       |
| 8   |     | 1.1490  | -1.55         | 20.09          | 18.54       | 46.00 | -27.46 | AVG      |
| 9   |     | 9.1860  | 15.45         | 20.17          | 35.62       | 60.00 | -24.38 | QP       |
| 10  |     | 9.1860  | -1.06         | 20.17          | 19.11       | 50.00 | -30.89 | AVG      |
| 11  |     | 15.2475 | 13.03         | 20.31          | 33.34       | 60.00 | -26.66 | QP       |
| 12  |     | 15.2475 | -3.70         | 20.31          | 16.61       | 50.00 | -33.39 | AVG      |

|              |                   |                    |         |
|--------------|-------------------|--------------------|---------|
| Temperature: | 26 °C             | Relative Humidity: | 54%     |
| Pressure:    | 101KPa            | Phase :            | L       |
| Test Mode:   | Mode 4(Antenna 2) | Test Voltage :     | DC 3.3V |

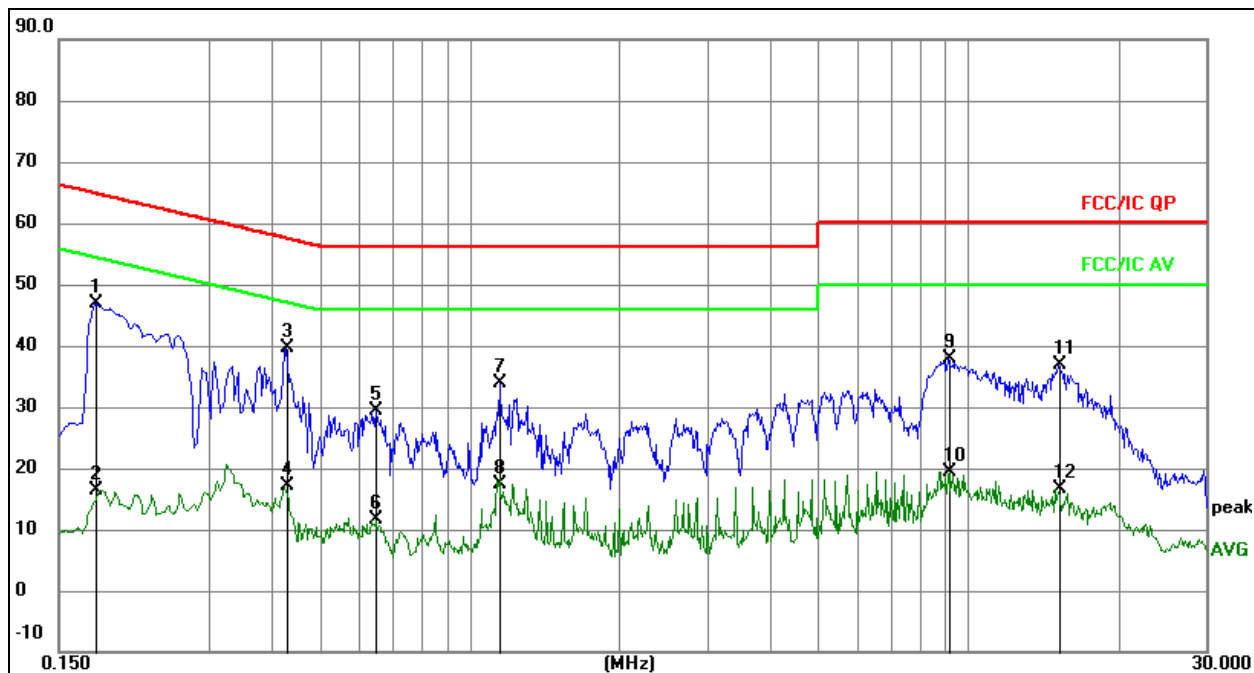


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|
|     |     | MHz     |               | dB             | dBuV        | dBuV  | dB     |          |
| 1   |     | 0.1770  | 26.76         | 20.07          | 46.83       | 64.63 | -17.80 | QP       |
| 2   |     | 0.1770  | -3.59         | 20.07          | 16.48       | 54.63 | -38.15 | AVG      |
| 3   | *   | 0.4290  | 19.45         | 20.08          | 39.53       | 57.27 | -17.74 | QP       |
| 4   |     | 0.4290  | -2.93         | 20.08          | 17.15       | 47.27 | -30.12 | AVG      |
| 5   |     | 0.6495  | 9.22          | 20.09          | 29.31       | 56.00 | -26.69 | QP       |
| 6   |     | 0.6495  | -8.51         | 20.09          | 11.58       | 46.00 | -34.42 | AVG      |
| 7   |     | 1.1490  | 13.82         | 20.09          | 33.91       | 56.00 | -22.09 | QP       |
| 8   |     | 1.1490  | -2.78         | 20.09          | 17.31       | 46.00 | -28.69 | AVG      |
| 9   |     | 9.1455  | 17.64         | 20.17          | 37.81       | 60.00 | -22.19 | QP       |
| 10  |     | 9.1455  | -0.85         | 20.17          | 19.32       | 50.00 | -30.68 | AVG      |
| 11  |     | 15.2070 | 16.59         | 20.31          | 36.90       | 60.00 | -23.10 | QP       |
| 12  |     | 15.2070 | -3.75         | 20.31          | 16.56       | 50.00 | -33.44 | AVG      |

|              |                   |                    |         |
|--------------|-------------------|--------------------|---------|
| Temperature: | 26 °C             | Relative Humidity: | 54%     |
| Pressure:    | 101KPa            | Phase :            | N       |
| Test Mode:   | Mode 4(Antenna 2) | Test Voltage :     | DC 3.3V |

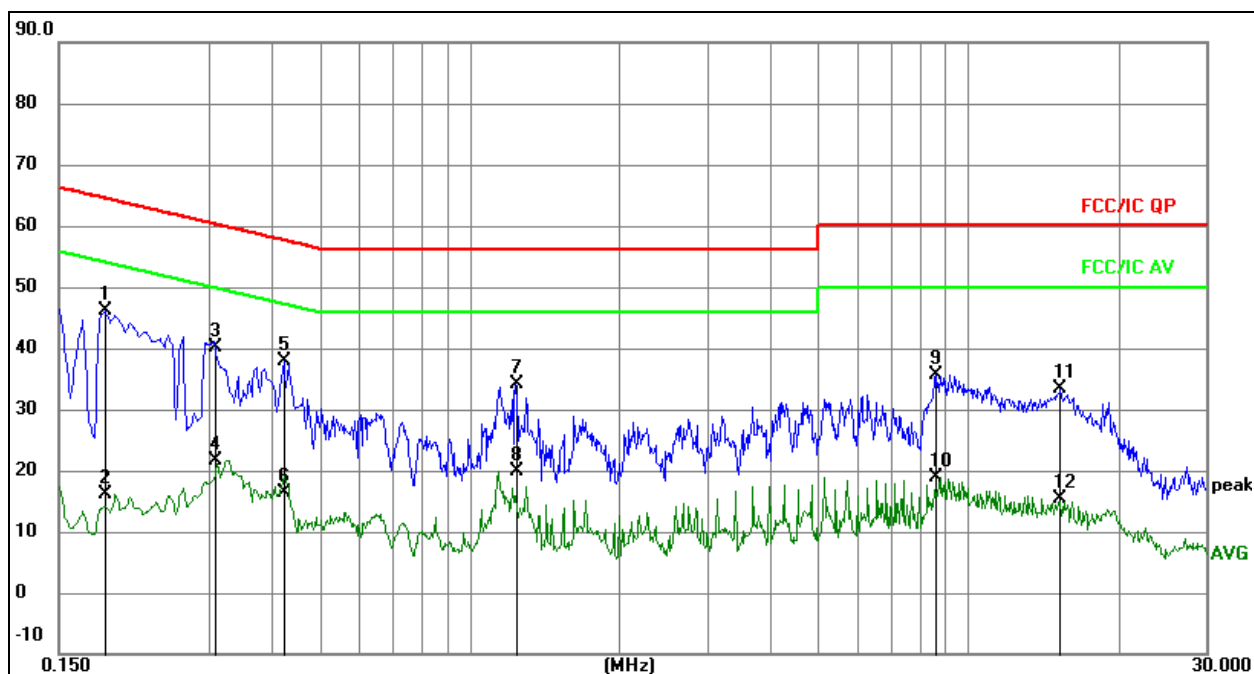
**Remark:**


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|
|     |     | MHz     |               | dB             | dBuV        | dBuV  | dB     |          |
| 1   | *   | 0.1853  | 26.17         | 20.07          | 46.24       | 64.24 | -18.00 | QP       |
| 2   |     | 0.1853  | -3.95         | 20.07          | 16.12       | 54.24 | -38.12 | AVG      |
| 3   |     | 0.3082  | 20.15         | 20.07          | 40.22       | 60.02 | -19.80 | QP       |
| 4   |     | 0.3082  | 1.53          | 20.07          | 21.60       | 50.02 | -28.42 | AVG      |
| 5   |     | 0.4237  | 17.82         | 20.08          | 37.90       | 57.38 | -19.48 | QP       |
| 6   |     | 0.4237  | -3.68         | 20.08          | 16.40       | 47.38 | -30.98 | AVG      |
| 7   |     | 1.2357  | 13.95         | 20.09          | 34.04       | 56.00 | -21.96 | QP       |
| 8   |     | 1.2357  | -0.32         | 20.09          | 19.77       | 46.00 | -26.23 | AVG      |
| 9   |     | 8.5917  | 15.57         | 20.17          | 35.74       | 60.00 | -24.26 | QP       |
| 10  |     | 8.5917  | -1.25         | 20.17          | 18.92       | 50.00 | -31.08 | AVG      |
| 11  |     | 15.3070 | 12.95         | 20.31          | 33.26       | 60.00 | -26.74 | QP       |
| 12  |     | 15.3070 | -5.03         | 20.31          | 15.28       | 50.00 | -34.72 | AVG      |


## 7. Radiated Emissions

### 7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

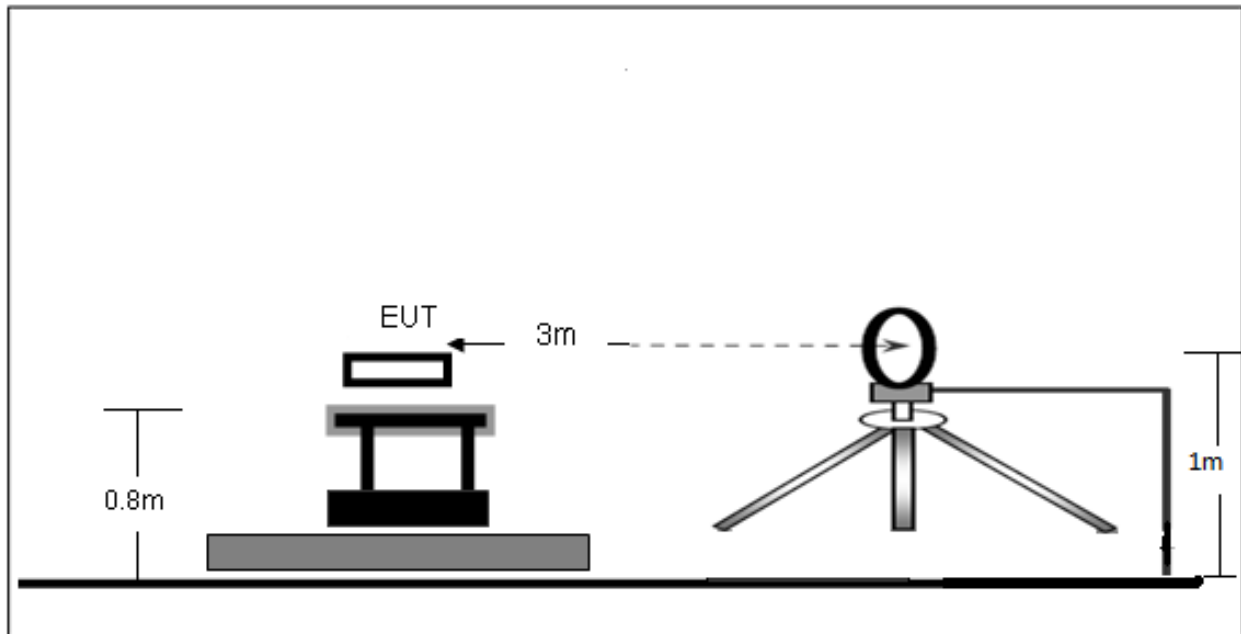

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

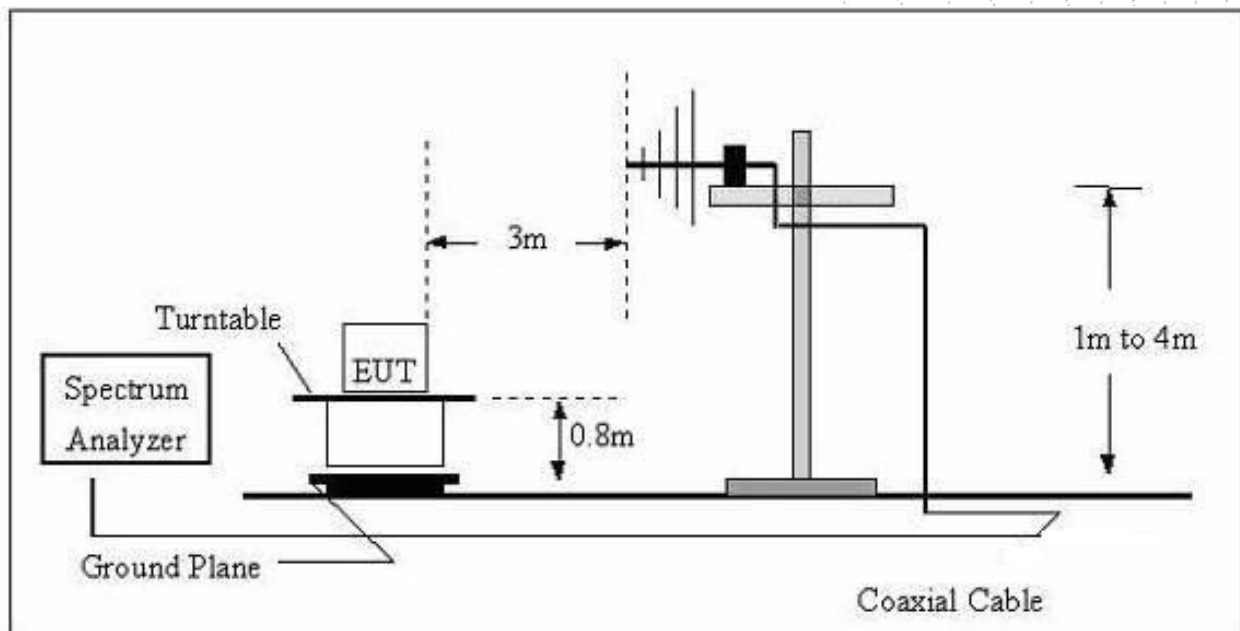

(C) Radiated Emission Test-Up Frequency Above 1GHz

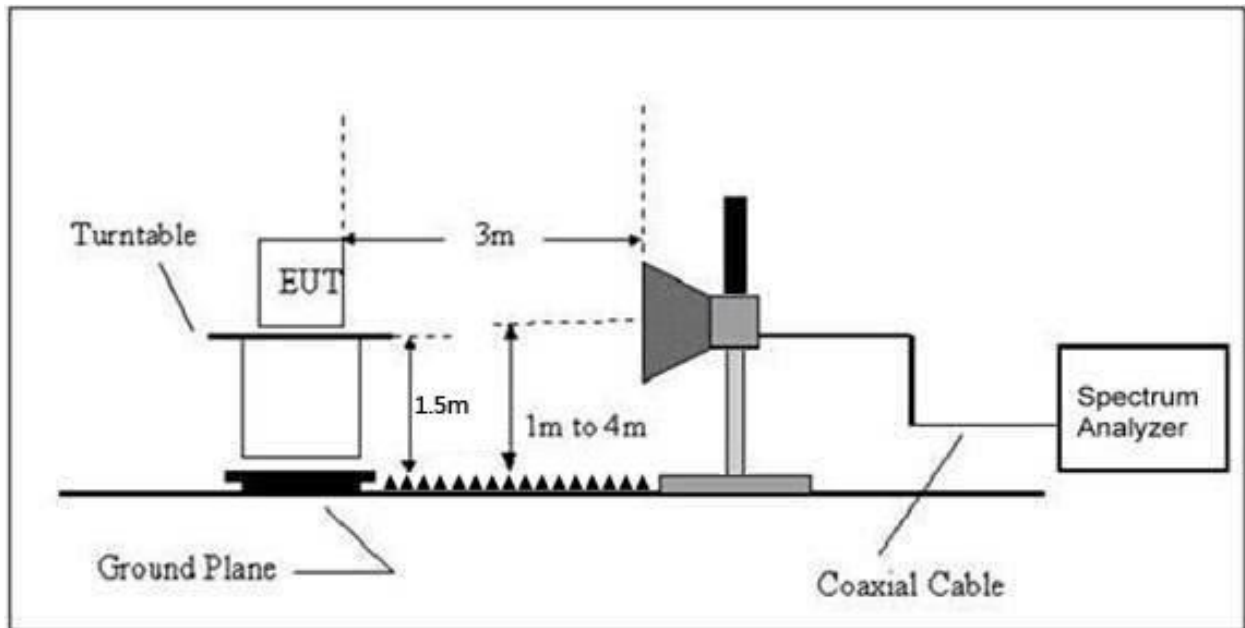

## 7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequency<br>(MHz) | Field Strength<br>uV/m | Distance<br>(m) | Field Strength Limit at 3m Distance |                                    |
|--------------------|------------------------|-----------------|-------------------------------------|------------------------------------|
|                    |                        |                 | uV/m                                | dBuV/m                             |
| 0.009 ~ 0.490      | $2400/F(\text{kHz})$   | 300             | $10000 * 2400/F(\text{kHz})$        | $20\log(2400/F(\text{kHz})) + 80$  |
| 0.490 ~ 1.705      | $24000/F(\text{kHz})$  | 30              | $100 * 24000/F(\text{kHz})$         | $20\log(24000/F(\text{kHz})) + 40$ |
| 1.705 ~ 30         | 30                     | 30              | $100 * 30$                          | $20\log^{(30)} + 40$               |
| 30 ~ 88            | 100                    | 3               | 100                                 | $20\log^{(100)}$                   |
| 88 ~ 216           | 150                    | 3               | 150                                 | $20\log^{(150)}$                   |
| 216 ~ 960          | 200                    | 3               | 200                                 | $20\log^{(200)}$                   |
| Above 960          | 500                    | 3               | 500                                 | $20\log^{(500)}$                   |

### Limits Of Radiated Emission Measurement (Above 1000MHz)

| Frequency (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | Peak                   | Average |
| Above 1000      | 74                     | 54      |

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### 7.3 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 1000 MHz                                         |
| Stop Frequency                        | 10th carrier harmonic                            |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

| Frequency Band (MHz) | Function | Resolution bandwidth | Video Bandwidth |
|----------------------|----------|----------------------|-----------------|
| 30 to 1000           | QP       | 120 kHz              | 300 kHz         |
| Above 1000           | Peak     | 1 MHz                | 1 MHz           |
|                      | Average  | 1 MHz                | 10 Hz           |

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

## 7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 7.5 Test Result

Below 30MHz

|              |         |                    |         |
|--------------|---------|--------------------|---------|
| Temperature: | 26°C    | Relative Humidity: | 24%     |
| Pressure:    | 101 kPa | Test Voltage:      | DC 3.3V |
| Test Mode:   | Mode 4  | Polarization:      | --      |

| Freq.<br>(MHz) | Reading<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | State<br>P/F |
|----------------|---------------------|-------------------|----------------|--------------|
| --             | --                  | --                | --             | PASS         |
| --             | --                  | --                | --             | PASS         |

### Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Between 30MHz – 1GHz

|              |                   |                    |            |
|--------------|-------------------|--------------------|------------|
| Temperature: | 26°C              | Relative Humidity: | 54%        |
| Pressure:    | 101KPa            | Phase :            | Horizontal |
| Test Mode:   | Mode 4(Antenna 1) | Test Voltage :     | DC 3.3V    |

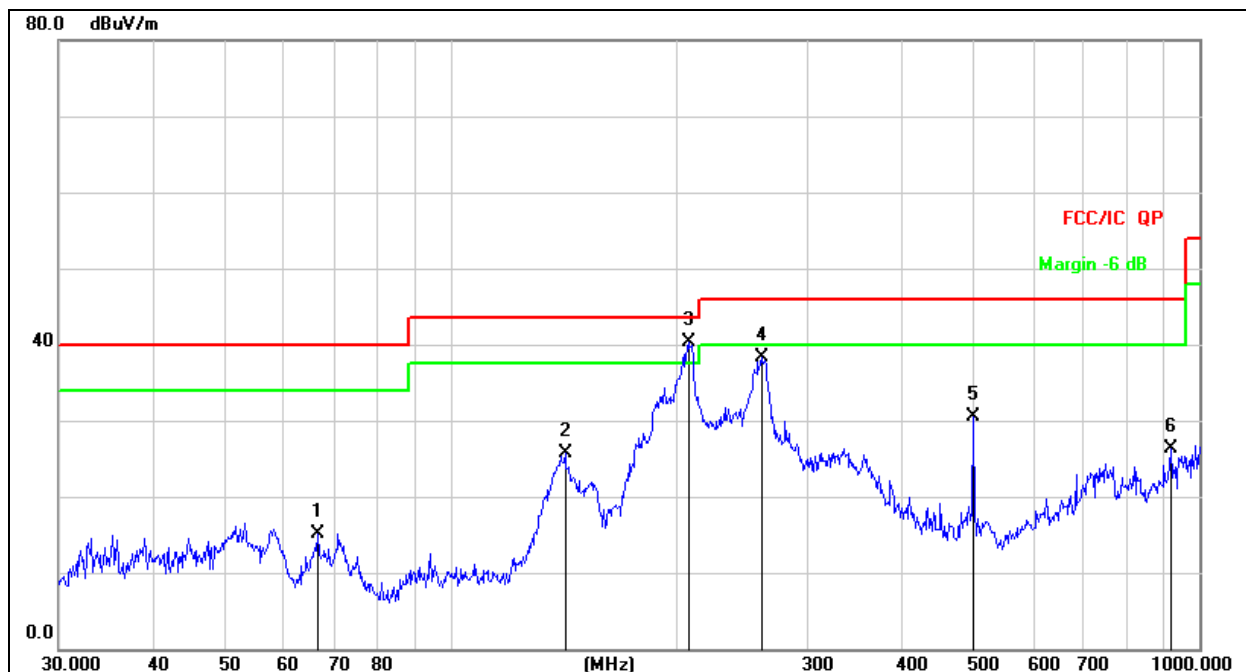


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|-------|--------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dB/m  | dB     | Detector |
| 1   |     | 66.4989  | 32.14         | -17.04         | 15.10        | 40.00 | -24.90 | QP       |
| 2   |     | 142.3243 | 44.69         | -18.89         | 25.80        | 43.50 | -17.70 | QP       |
| 3   | *   | 207.8499 | 55.74         | -15.50         | 40.24        | 43.50 | -3.26  | QP       |
| 4   |     | 260.1444 | 52.36         | -14.08         | 38.28        | 46.00 | -7.72  | QP       |
| 5   |     | 499.4247 | 39.22         | -8.62          | 30.60        | 46.00 | -15.40 | QP       |
| 6   |     | 916.0687 | 29.32         | -3.06          | 26.26        | 46.00 | -19.74 | QP       |

|              |                   |                    |          |
|--------------|-------------------|--------------------|----------|
| Temperature: | 26°C              | Relative Humidity: | 54%      |
| Pressure:    | 101KPa            | Phase :            | Vertical |
| Test Mode:   | Mode 4(Antenna 1) | Test Voltage :     | DC 3.3V  |

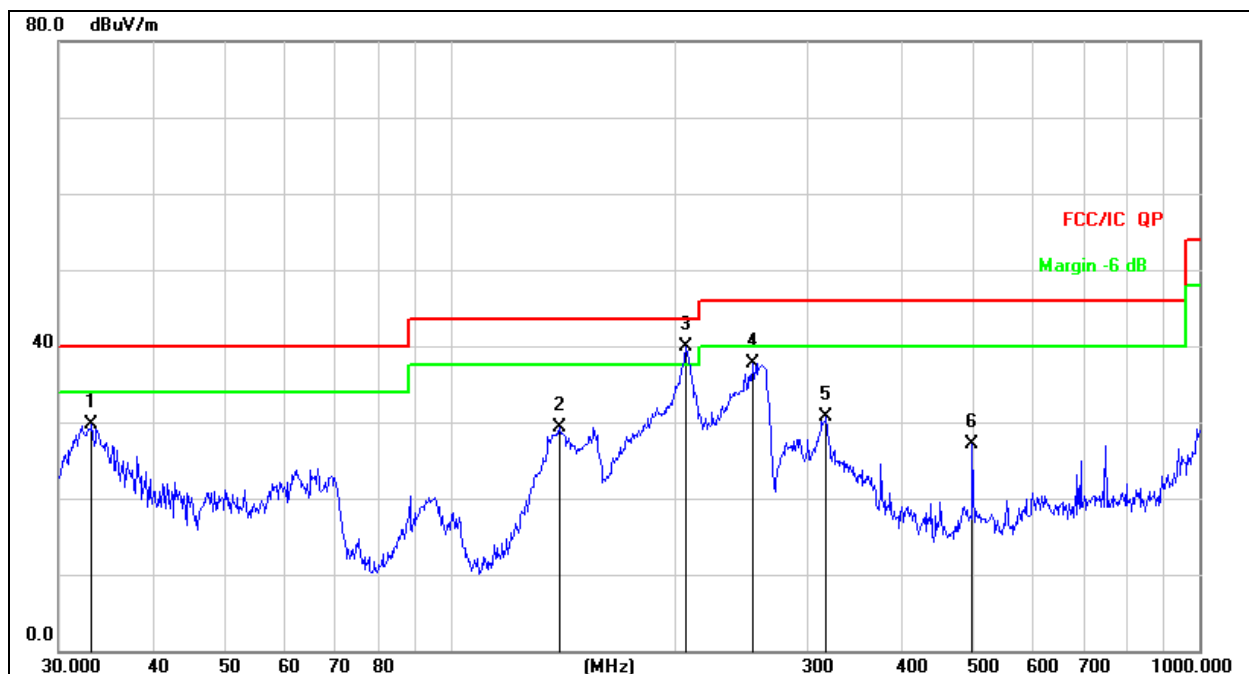


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dB/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1   |     | 33.2111      | 45.78                    | -16.03                  | 29.75                      | 40.00         | -10.25     | QP       |
| 2   |     | 139.8508     | 47.95                    | -18.72                  | 29.23                      | 43.50         | -14.27     | QP       |
| 3   | *   | 206.3976     | 55.54                    | -15.54                  | 40.00                      | 43.50         | -3.50      | QP       |
| 4   |     | 253.8367     | 52.01                    | -14.21                  | 37.80                      | 46.00         | -8.20      | QP       |
| 5   |     | 317.7011     | 43.34                    | -12.62                  | 30.72                      | 46.00         | -15.28     | QP       |
| 6   |     | 497.6764     | 35.71                    | -8.67                   | 27.04                      | 46.00         | -18.96     | QP       |

Between 30MHz – 1GHz

|              |                   |                    |            |
|--------------|-------------------|--------------------|------------|
| Temperature: | 26°C              | Relative Humidity: | 54%        |
| Pressure:    | 101KPa            | Phase :            | Horizontal |
| Test Mode:   | Mode 4(Antenna 2) | Test Voltage :     | DC 3.3V    |

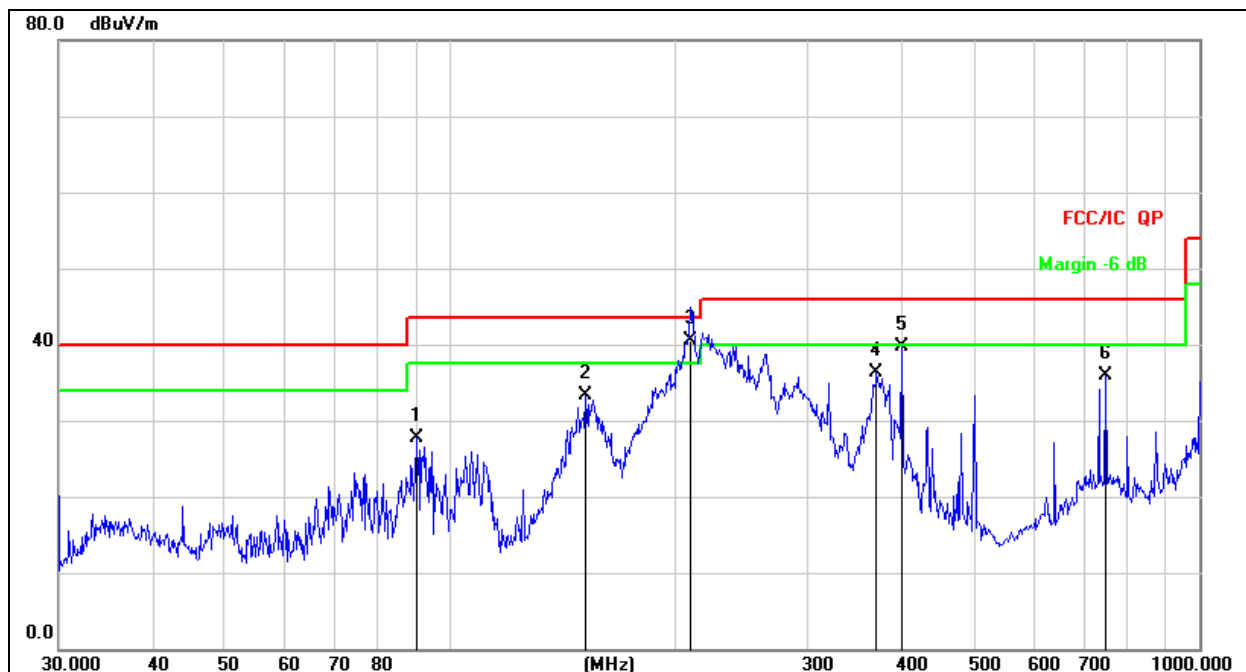


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dB/m  | dB     | Detector |
| 1   |     | 90.2205  | 45.01         | -17.37         | 27.64       | 43.50 | -15.86 | QP       |
| 2   |     | 151.5971 | 52.65         | -19.31         | 33.34       | 43.50 | -10.16 | QP       |
| 3   | *   | 209.3129 | 55.87         | -15.45         | 40.42       | 43.50 | -3.08  | QP       |
| 4   |     | 370.7023 | 47.56         | -11.21         | 36.35       | 46.00 | -9.65  | QP       |
| 5   |     | 400.4319 | 50.47         | -10.83         | 39.64       | 46.00 | -6.36  | QP       |
| 6   |     | 750.1082 | 40.95         | -4.99          | 35.96       | 46.00 | -10.04 | QP       |

|              |                   |                    |          |
|--------------|-------------------|--------------------|----------|
| Temperature: | 26°C              | Relative Humidity: | 54%      |
| Pressure:    | 101KPa            | Phase :            | Vertical |
| Test Mode:   | Mode 4(Antenna 2) | Test Voltage :     | DC 3.3V  |

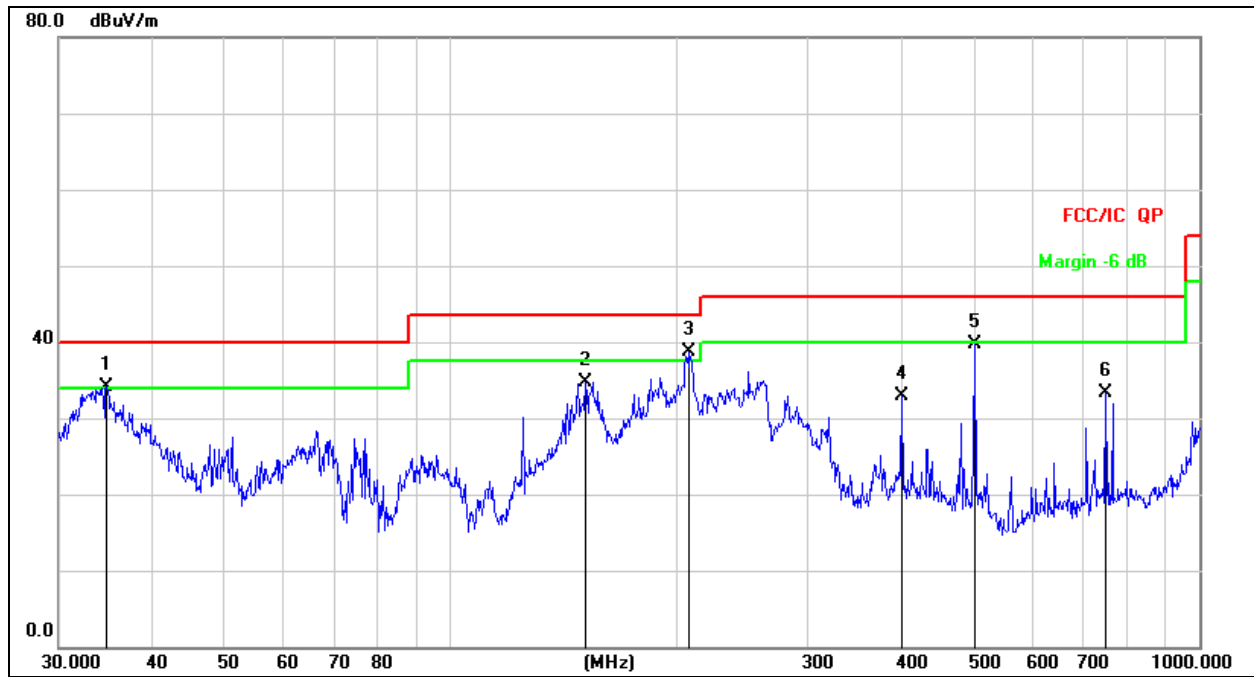

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit | Over   | Detector |
|-----|-----|----------|---------------|----------------|--------------|-------|--------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dB/m  | dB     |          |
| 1   | !   | 34.7602  | 49.75         | -15.73         | 34.02        | 40.00 | -5.98  | QP       |
| 2   |     | 151.5972 | 54.03         | -19.31         | 34.72        | 43.50 | -8.78  | QP       |
| 3   | *   | 208.5803 | 54.12         | -15.47         | 38.65        | 43.50 | -4.85  | QP       |
| 4   |     | 400.4319 | 43.66         | -10.83         | 32.83        | 46.00 | -13.17 | QP       |
| 5   |     | 501.1790 | 48.35         | -8.65          | 39.70        | 46.00 | -6.30  | QP       |
| 6   |     | 750.1082 | 38.21         | -4.99          | 33.22        | 46.00 | -12.78 | QP       |

Antenna 1  
Between 1GHz – 40GHz

|            |                    |
|------------|--------------------|
| Test Mode: | TX(5.1G) - 802.11a |
|------------|--------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5180 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.012  | 73.53         | -20.73         | 52.80       | 68.2     | -15.40 | PK            |
| Vertical                           | 4434.012  | 59.47         | -20.73         | 38.73       | 54       | -15.27 | AV            |
| Vertical                           | 10360.115 | 64.20         | -9.36          | 54.84       | 68.2     | -13.36 | PK            |
| Vertical                           | 10360.115 | 49.84         | -9.36          | 40.48       | 54       | -13.52 | AV            |
| Vertical                           | 15540.092 | 63.01         | -7.84          | 55.17       | 74       | -18.83 | PK            |
| Vertical                           | 15540.092 | 49.78         | -7.84          | 41.94       | 54       | -12.06 | AV            |
| Horizontal                         | 4434.054  | 74.17         | -20.73         | 53.44       | 68.2     | -14.76 | PK            |
| Horizontal                         | 4434.054  | 59.23         | -20.73         | 38.50       | 54       | -15.50 | AV            |
| Horizontal                         | 10360.081 | 60.08         | -9.36          | 50.72       | 68.2     | -17.48 | PK            |
| Horizontal                         | 10360.081 | 49.72         | -9.36          | 40.36       | 54       | -13.64 | AV            |
| Horizontal                         | 15540.044 | 60.10         | -7.84          | 52.26       | 74       | -21.74 | PK            |
| Horizontal                         | 15540.044 | 49.17         | -7.84          | 41.33       | 54       | -12.67 | AV            |
| Middle Channel (5200 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.025  | 74.50         | -20.42         | 54.09       | 74       | -19.91 | PK            |
| Vertical                           | 4592.025  | 59.10         | -20.42         | 38.69       | 54       | -15.31 | AV            |
| Vertical                           | 10400.045 | 61.00         | -9.30          | 51.70       | 68.2     | -16.50 | PK            |
| Vertical                           | 10400.045 | 49.06         | -9.30          | 39.76       | 54       | -14.24 | AV            |
| Vertical                           | 15600.041 | 63.92         | -7.82          | 56.10       | 74       | -17.90 | PK            |
| Vertical                           | 15600.041 | 49.19         | -7.82          | 41.37       | 54       | -12.63 | AV            |
| Horizontal                         | 4592.053  | 71.14         | -20.42         | 50.72       | 74       | -23.28 | PK            |
| Horizontal                         | 4592.053  | 59.84         | -20.42         | 39.43       | 54       | -14.57 | AV            |
| Horizontal                         | 10400.062 | 62.61         | -9.30          | 53.31       | 68.2     | -14.89 | PK            |
| Horizontal                         | 10400.062 | 49.98         | -9.30          | 40.68       | 54       | -13.32 | AV            |
| Horizontal                         | 15600.165 | 61.33         | -7.82          | 53.51       | 74       | -20.49 | PK            |
| Horizontal                         | 15600.165 | 49.38         | -7.82          | 41.56       | 54       | -12.44 | AV            |
| High Channel (5240 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 4739.110  | 74.13         | -20.12         | 54.01       | 74       | -19.99 | PK            |
| Vertical                           | 4739.110  | 59.50         | -20.12         | 39.38       | 54       | -14.62 | AV            |
| Vertical                           | 10480.080 | 64.59         | -9.18          | 55.41       | 68.2     | -12.79 | PK            |
| Vertical                           | 10480.080 | 49.37         | -9.18          | 40.19       | 54       | -13.81 | AV            |
| Vertical                           | 15720.124 | 63.67         | -7.78          | 55.89       | 74       | -18.11 | PK            |
| Vertical                           | 15720.124 | 49.68         | -7.78          | 41.90       | 54       | -12.10 | AV            |
| Horizontal                         | 4739.068  | 73.25         | -20.12         | 53.13       | 74       | -20.87 | PK            |
| Horizontal                         | 4739.068  | 59.62         | -20.12         | 39.50       | 54       | -14.50 | AV            |
| Horizontal                         | 10480.177 | 60.21         | -9.18          | 51.03       | 68.2     | -17.17 | PK            |
| Horizontal                         | 10480.177 | 49.11         | -9.18          | 39.93       | 54       | -14.07 | AV            |
| Horizontal                         | 15720.175 | 63.18         | -7.78          | 55.40       | 74       | -18.60 | PK            |
| Horizontal                         | 15720.175 | 49.65         | -7.78          | 41.87       | 54       | -12.13 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The worst case is Antenna A.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX(5.1G) - 802.11n-HT20 |
|------------|-------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5180 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.037  | 74.06         | -20.73         | 53.33       | 68.2     | -14.87 | PK            |
| Vertical                           | 4434.037  | 59.78         | -20.73         | 39.04       | 54       | -14.96 | AV            |
| Vertical                           | 10360.108 | 64.65         | -9.36          | 55.29       | 68.2     | -12.91 | PK            |
| Vertical                           | 10360.108 | 49.38         | -9.36          | 40.02       | 54       | -13.98 | AV            |
| Vertical                           | 15540.075 | 61.90         | -7.84          | 54.06       | 74       | -19.94 | PK            |
| Vertical                           | 15540.075 | 49.86         | -7.84          | 42.02       | 54       | -11.98 | AV            |
| Horizontal                         | 4434.162  | 73.84         | -20.73         | 53.10       | 68.2     | -15.10 | PK            |
| Horizontal                         | 4434.162  | 59.03         | -20.73         | 38.30       | 54       | -15.70 | AV            |
| Horizontal                         | 10360.050 | 60.46         | -9.36          | 51.10       | 68.2     | -17.10 | PK            |
| Horizontal                         | 10360.050 | 49.95         | -9.36          | 40.59       | 54       | -13.41 | AV            |
| Horizontal                         | 15540.184 | 63.23         | -7.84          | 55.39       | 74       | -18.61 | PK            |
| Horizontal                         | 15540.184 | 49.62         | -7.84          | 41.78       | 54       | -12.22 | AV            |
| Middle Channel (5200 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.187  | 74.14         | -20.42         | 53.72       | 74       | -20.28 | PK            |
| Vertical                           | 4592.187  | 59.67         | -20.42         | 39.25       | 54       | -14.75 | AV            |
| Vertical                           | 10400.144 | 62.89         | -9.30          | 53.59       | 68.2     | -14.61 | PK            |
| Vertical                           | 10400.144 | 49.67         | -9.30          | 40.37       | 54       | -13.63 | AV            |
| Vertical                           | 15600.182 | 64.05         | -7.82          | 56.23       | 74       | -17.77 | PK            |
| Vertical                           | 15600.182 | 49.13         | -7.82          | 41.31       | 54       | -12.69 | AV            |
| Horizontal                         | 4592.003  | 73.07         | -20.42         | 52.65       | 74       | -21.35 | PK            |
| Horizontal                         | 4592.003  | 59.10         | -20.42         | 38.69       | 54       | -15.31 | AV            |
| Horizontal                         | 10400.032 | 60.65         | -9.30          | 51.35       | 68.2     | -16.85 | PK            |
| Horizontal                         | 10400.032 | 49.03         | -9.30          | 39.73       | 54       | -14.27 | AV            |
| Horizontal                         | 15600.195 | 61.67         | -7.82          | 53.85       | 74       | -20.15 | PK            |
| Horizontal                         | 15600.195 | 49.94         | -7.82          | 42.12       | 54       | -11.88 | AV            |
| High Channel (5240 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 4739.143  | 74.60         | -20.12         | 54.48       | 74       | -19.52 | PK            |
| Vertical                           | 4739.143  | 59.56         | -20.12         | 39.44       | 54       | -14.56 | AV            |
| Vertical                           | 10480.143 | 62.77         | -9.18          | 53.59       | 68.2     | -14.61 | PK            |
| Vertical                           | 10480.143 | 49.02         | -9.18          | 39.84       | 54       | -14.16 | AV            |
| Vertical                           | 15720.197 | 61.39         | -7.78          | 53.61       | 74       | -20.39 | PK            |
| Vertical                           | 15720.197 | 49.88         | -7.78          | 42.10       | 54       | -11.90 | AV            |
| Horizontal                         | 4739.152  | 74.18         | -20.12         | 54.06       | 74       | -19.94 | PK            |
| Horizontal                         | 4739.152  | 59.65         | -20.12         | 39.53       | 54       | -14.47 | AV            |
| Horizontal                         | 10480.072 | 64.20         | -9.18          | 55.02       | 68.2     | -13.18 | PK            |
| Horizontal                         | 10480.072 | 49.49         | -9.18          | 40.31       | 54       | -13.69 | AV            |
| Horizontal                         | 15720.137 | 60.58         | -7.78          | 52.80       | 74       | -21.20 | PK            |
| Horizontal                         | 15720.137 | 49.52         | -7.78          | 41.74       | 54       | -12.26 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX(5.1G) - 802.11n-HT40 |
|------------|-------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5190 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.178  | 72.95         | -20.73         | 52.22       | 68.2     | -15.98 | PK            |
| Vertical                           | 4434.178  | 59.80         | -20.73         | 39.07       | 54       | -14.93 | AV            |
| Vertical                           | 10380.019 | 64.81         | -9.33          | 55.48       | 68.2     | -12.72 | PK            |
| Vertical                           | 10380.019 | 49.98         | -9.33          | 40.65       | 54       | -13.35 | AV            |
| Vertical                           | 15570.091 | 60.85         | -7.83          | 53.02       | 74       | -20.98 | PK            |
| Vertical                           | 15570.091 | 49.61         | -7.83          | 41.78       | 54       | -12.22 | AV            |
| Horizontal                         | 4434.101  | 74.16         | -20.73         | 53.43       | 74       | -20.57 | PK            |
| Horizontal                         | 4434.101  | 59.88         | -20.73         | 39.14       | 54       | -14.86 | AV            |
| Horizontal                         | 10380.056 | 60.87         | -9.33          | 51.54       | 68.2     | -16.66 | PK            |
| Horizontal                         | 10380.056 | 49.17         | -9.33          | 39.84       | 54       | -14.16 | AV            |
| Horizontal                         | 15570.086 | 60.83         | -7.83          | 53.00       | 74       | -21.00 | PK            |
| Horizontal                         | 15570.086 | 49.01         | -7.83          | 41.18       | 54       | -12.82 | AV            |
| Middle Channel (5230 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4739.123  | 71.64         | -20.12         | 51.52       | 68.2     | -16.68 | PK            |
| Vertical                           | 4739.123  | 59.57         | -20.12         | 39.45       | 54       | -14.55 | AV            |
| Vertical                           | 10460.049 | 60.20         | -9.21          | 50.99       | 68.2     | -17.21 | PK            |
| Vertical                           | 10460.049 | 49.18         | -9.21          | 39.97       | 54       | -14.03 | AV            |
| Vertical                           | 15690.041 | 60.83         | -7.79          | 53.04       | 74       | -20.96 | PK            |
| Vertical                           | 15690.041 | 49.31         | -7.79          | 41.52       | 54       | -12.48 | AV            |
| Horizontal                         | 4739.031  | 71.66         | -20.12         | 51.54       | 68.2     | -16.66 | PK            |
| Horizontal                         | 4739.031  | 59.56         | -20.12         | 39.44       | 54       | -14.56 | AV            |
| Horizontal                         | 10460.142 | 61.43         | -9.21          | 52.22       | 68.2     | -15.98 | PK            |
| Horizontal                         | 10460.142 | 49.66         | -9.21          | 40.45       | 54       | -13.55 | AV            |
| Horizontal                         | 15690.119 | 61.73         | -7.79          | 53.94       | 74       | -20.06 | PK            |
| Horizontal                         | 15690.119 | 49.69         | -7.79          | 41.90       | 54       | -12.10 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.1G) - 802.11ac-HT20 |
|------------|--------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5180 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.076  | 71.54         | -20.73         | 50.81       | 68.2     | -17.39 | PK            |
| Vertical                           | 4434.076  | 59.94         | -20.73         | 39.21       | 54       | -14.79 | AV            |
| Vertical                           | 10360.181 | 64.21         | -9.36          | 54.85       | 68.2     | -13.35 | PK            |
| Vertical                           | 10360.181 | 49.63         | -9.36          | 40.27       | 54       | -13.73 | AV            |
| Vertical                           | 15540.192 | 63.10         | -7.84          | 55.26       | 74       | -18.74 | PK            |
| Vertical                           | 15540.192 | 49.05         | -7.84          | 41.21       | 54       | -12.79 | AV            |
| Horizontal                         | 4434.066  | 74.73         | -20.73         | 54.00       | 68.2     | -14.20 | PK            |
| Horizontal                         | 4434.066  | 59.37         | -20.73         | 38.64       | 54       | -15.36 | AV            |
| Horizontal                         | 10360.090 | 62.46         | -9.36          | 53.10       | 68.2     | -15.10 | PK            |
| Horizontal                         | 10360.090 | 49.44         | -9.36          | 40.08       | 54       | -13.92 | AV            |
| Horizontal                         | 15540.155 | 64.69         | -7.84          | 56.85       | 74       | -17.15 | PK            |
| Horizontal                         | 15540.155 | 49.79         | -7.84          | 41.95       | 54       | -12.05 | AV            |
| Middle Channel (5200 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.061  | 72.35         | -20.42         | 51.93       | 74       | -22.07 | PK            |
| Vertical                           | 4592.061  | 59.25         | -20.42         | 38.83       | 54       | -15.17 | AV            |
| Vertical                           | 10400.156 | 63.84         | -9.30          | 54.54       | 68.2     | -13.66 | PK            |
| Vertical                           | 10400.156 | 49.52         | -9.30          | 40.22       | 54       | -13.78 | AV            |
| Vertical                           | 15600.052 | 60.20         | -7.82          | 52.38       | 74       | -21.62 | PK            |
| Vertical                           | 15600.052 | 49.59         | -7.82          | 41.77       | 54       | -12.23 | AV            |
| Horizontal                         | 4592.065  | 72.32         | -20.42         | 51.91       | 74       | -22.09 | PK            |
| Horizontal                         | 4592.065  | 59.15         | -20.42         | 38.73       | 54       | -15.27 | AV            |
| Horizontal                         | 10400.073 | 64.08         | -9.30          | 54.78       | 68.2     | -13.42 | PK            |
| Horizontal                         | 10400.073 | 49.28         | -9.30          | 39.98       | 54       | -14.02 | AV            |
| Horizontal                         | 15600.038 | 64.93         | -7.82          | 57.11       | 74       | -16.89 | PK            |
| Horizontal                         | 15600.038 | 49.74         | -7.82          | 41.92       | 54       | -12.08 | AV            |
| High Channel (5240 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 4739.129  | 71.11         | -20.12         | 50.98       | 74       | -23.02 | PK            |
| Vertical                           | 4739.129  | 59.90         | -20.12         | 39.78       | 54       | -14.22 | AV            |
| Vertical                           | 10480.016 | 63.60         | -9.18          | 54.42       | 68.2     | -13.78 | PK            |
| Vertical                           | 10480.016 | 49.74         | -9.18          | 40.56       | 54       | -13.44 | AV            |
| Vertical                           | 15720.079 | 63.54         | -7.78          | 55.76       | 74       | -18.24 | PK            |
| Vertical                           | 15720.079 | 49.31         | -7.78          | 41.53       | 54       | -12.47 | AV            |
| Horizontal                         | 4739.062  | 74.24         | -20.12         | 54.12       | 74       | -19.88 | PK            |
| Horizontal                         | 4739.062  | 59.97         | -20.12         | 39.84       | 54       | -14.16 | AV            |
| Horizontal                         | 10480.017 | 62.75         | -9.18          | 53.57       | 68.2     | -14.63 | PK            |
| Horizontal                         | 10480.017 | 49.53         | -9.18          | 40.35       | 54       | -13.65 | AV            |
| Horizontal                         | 15720.171 | 63.48         | -7.78          | 55.70       | 74       | -18.30 | PK            |
| Horizontal                         | 15720.171 | 49.01         | -7.78          | 41.23       | 54       | -12.77 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.1G) - 802.11ac-HT40 |
|------------|--------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5190 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.038  | 71.20         | -20.73         | 50.47       | 68.2     | -17.73 | PK            |
| Vertical                           | 4434.038  | 59.67         | -20.73         | 38.94       | 54       | -15.06 | AV            |
| Vertical                           | 10380.109 | 63.25         | -9.33          | 53.92       | 68.2     | -14.28 | PK            |
| Vertical                           | 10380.109 | 49.44         | -9.33          | 40.11       | 54       | -13.89 | AV            |
| Vertical                           | 15570.092 | 62.82         | -7.83          | 54.99       | 74       | -19.01 | PK            |
| Vertical                           | 15570.092 | 50.00         | -7.83          | 42.17       | 54       | -11.83 | AV            |
| Horizontal                         | 4434.082  | 73.94         | -20.73         | 53.21       | 74       | -20.79 | PK            |
| Horizontal                         | 4434.082  | 59.37         | -20.73         | 38.64       | 54       | -15.36 | AV            |
| Horizontal                         | 10380.080 | 60.96         | -9.33          | 51.63       | 68.2     | -16.57 | PK            |
| Horizontal                         | 10380.080 | 49.84         | -9.33          | 40.51       | 54       | -13.49 | AV            |
| Horizontal                         | 15570.028 | 60.88         | -7.83          | 53.05       | 74       | -20.95 | PK            |
| Horizontal                         | 15570.028 | 49.58         | -7.83          | 41.75       | 54       | -12.25 | AV            |
| Middle Channel (5230 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4739.091  | 70.01         | -20.12         | 49.89       | 68.2     | -18.31 | PK            |
| Vertical                           | 4739.091  | 59.07         | -20.12         | 38.95       | 54       | -15.05 | AV            |
| Vertical                           | 10460.097 | 63.10         | -9.21          | 53.89       | 68.2     | -14.31 | PK            |
| Vertical                           | 10460.097 | 49.04         | -9.21          | 39.83       | 54       | -14.17 | AV            |
| Vertical                           | 15690.090 | 62.26         | -7.79          | 54.47       | 74       | -19.53 | PK            |
| Vertical                           | 15690.090 | 49.51         | -7.79          | 41.72       | 54       | -12.28 | AV            |
| Horizontal                         | 4739.139  | 70.26         | -20.12         | 50.14       | 68.2     | -18.06 | PK            |
| Horizontal                         | 4739.139  | 59.44         | -20.12         | 39.32       | 54       | -14.68 | AV            |
| Horizontal                         | 10460.049 | 62.30         | -9.21          | 53.09       | 68.2     | -15.11 | PK            |
| Horizontal                         | 10460.049 | 49.22         | -9.21          | 40.01       | 54       | -13.99 | AV            |
| Horizontal                         | 15690.024 | 61.59         | -7.79          | 53.80       | 74       | -20.20 | PK            |
| Horizontal                         | 15690.024 | 49.89         | -7.79          | 42.10       | 54       | -11.90 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.1G) - 802.11ac-HT80 |
|------------|--------------------------|

| Polar               | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|---------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)               | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| (5210 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical            | 4434.048  | 74.73         | -20.73         | 54.00       | 68.2     | -14.20 | PK            |
| Vertical            | 4434.048  | 59.97         | -20.73         | 39.24       | 54       | -14.76 | AV            |
| Vertical            | 10420.082 | 64.20         | -9.27          | 54.93       | 68.2     | -13.27 | PK            |
| Vertical            | 10420.082 | 49.71         | -9.27          | 40.44       | 54       | -13.56 | AV            |
| Vertical            | 15630.197 | 61.75         | -7.81          | 53.94       | 74       | -20.06 | PK            |
| Vertical            | 15630.197 | 49.44         | -7.81          | 41.63       | 54       | -12.37 | AV            |
| Horizontal          | 4434.077  | 74.76         | -20.73         | 54.03       | 68.2     | -14.17 | PK            |
| Horizontal          | 4434.077  | 59.03         | -20.73         | 38.30       | 54       | -15.70 | AV            |
| Horizontal          | 10420.039 | 44.12         | 9.27           | 53.39       | 68.2     | -14.81 | PK            |
| Horizontal          | 10420.039 | 29.60         | 9.27           | 38.87       | 54       | -15.13 | AV            |
| Horizontal          | 15630.079 | 63.98         | -7.81          | 56.17       | 74       | -17.83 | PK            |
| Horizontal          | 15630.079 | 49.73         | -7.81          | 41.92       | 54       | -12.08 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.1G) - 802.11ax-HT20 |
|------------|--------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5180 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.167  | 72.23         | -20.73         | 51.50       | 68.2     | -16.70 | PK            |
| Vertical                           | 4434.167  | 59.83         | -20.73         | 39.09       | 54       | -14.91 | AV            |
| Vertical                           | 10360.063 | 63.98         | -9.36          | 54.62       | 68.2     | -13.58 | PK            |
| Vertical                           | 10360.063 | 49.77         | -9.36          | 40.41       | 54       | -13.59 | AV            |
| Vertical                           | 15540.062 | 61.75         | -7.84          | 53.91       | 74       | -20.09 | PK            |
| Vertical                           | 15540.062 | 49.51         | -7.84          | 41.67       | 54       | -12.33 | AV            |
| Horizontal                         | 4434.185  | 73.19         | -20.73         | 52.46       | 68.2     | -15.74 | PK            |
| Horizontal                         | 4434.185  | 59.87         | -20.73         | 39.14       | 54       | -14.86 | AV            |
| Horizontal                         | 10360.040 | 62.76         | -9.36          | 53.40       | 68.2     | -14.80 | PK            |
| Horizontal                         | 10360.040 | 49.29         | -9.36          | 39.93       | 54       | -14.07 | AV            |
| Horizontal                         | 15540.171 | 60.60         | -7.84          | 52.76       | 74       | -21.24 | PK            |
| Horizontal                         | 15540.171 | 49.22         | -7.84          | 41.38       | 54       | -12.62 | AV            |
| Middle Channel (5200 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.028  | 73.81         | -20.42         | 53.39       | 74       | -20.61 | PK            |
| Vertical                           | 4592.028  | 59.54         | -20.42         | 39.12       | 54       | -14.88 | AV            |
| Vertical                           | 10400.175 | 64.43         | -9.30          | 55.13       | 68.2     | -13.07 | PK            |
| Vertical                           | 10400.175 | 49.67         | -9.30          | 40.37       | 54       | -13.63 | AV            |
| Vertical                           | 15600.027 | 63.27         | -7.82          | 55.45       | 74       | -18.55 | PK            |
| Vertical                           | 15600.027 | 49.09         | -7.82          | 41.27       | 54       | -12.73 | AV            |
| Horizontal                         | 4592.005  | 71.21         | -20.42         | 50.79       | 74       | -23.21 | PK            |
| Horizontal                         | 4592.005  | 59.01         | -20.42         | 38.59       | 54       | -15.41 | AV            |
| Horizontal                         | 10400.179 | 60.75         | -9.30          | 51.45       | 68.2     | -16.75 | PK            |
| Horizontal                         | 10400.179 | 49.82         | -9.30          | 40.52       | 54       | -13.48 | AV            |
| Horizontal                         | 15600.077 | 60.57         | -7.82          | 52.75       | 74       | -21.25 | PK            |
| Horizontal                         | 15600.077 | 49.47         | -7.82          | 41.65       | 54       | -12.35 | AV            |
| High Channel (5240 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 4739.051  | 70.26         | -20.12         | 50.14       | 74       | -23.86 | PK            |
| Vertical                           | 4739.051  | 59.49         | -20.12         | 39.37       | 54       | -14.63 | AV            |
| Vertical                           | 10480.189 | 61.03         | -9.18          | 51.85       | 68.2     | -16.35 | PK            |
| Vertical                           | 10480.189 | 49.93         | -9.18          | 40.75       | 54       | -13.25 | AV            |
| Vertical                           | 15720.118 | 60.06         | -7.78          | 52.28       | 74       | -21.72 | PK            |
| Vertical                           | 15720.118 | 49.45         | -7.78          | 41.67       | 54       | -12.33 | AV            |
| Horizontal                         | 4739.191  | 72.33         | -20.12         | 52.20       | 74       | -21.80 | PK            |
| Horizontal                         | 4739.191  | 59.62         | -20.12         | 39.50       | 54       | -14.50 | AV            |
| Horizontal                         | 10480.056 | 60.81         | -9.18          | 51.63       | 68.2     | -16.57 | PK            |
| Horizontal                         | 10480.056 | 49.10         | -9.18          | 39.92       | 54       | -14.08 | AV            |
| Horizontal                         | 15720.036 | 62.44         | -7.78          | 54.66       | 74       | -19.34 | PK            |
| Horizontal                         | 15720.036 | 50.00         | -7.78          | 42.22       | 54       | -11.78 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.1G) - 802.11ax-HT40 |
|------------|--------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5190 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.104  | 71.80         | -20.73         | 51.07       | 68.2     | -17.13 | PK            |
| Vertical                           | 4434.104  | 59.45         | -20.73         | 38.72       | 54       | -15.28 | AV            |
| Vertical                           | 10380.091 | 61.09         | -9.33          | 51.76       | 68.2     | -16.44 | PK            |
| Vertical                           | 10380.091 | 49.39         | -9.33          | 40.06       | 54       | -13.94 | AV            |
| Vertical                           | 15570.118 | 60.02         | -7.83          | 52.19       | 74       | -21.81 | PK            |
| Vertical                           | 15570.118 | 49.67         | -7.83          | 41.84       | 54       | -12.16 | AV            |
| Horizontal                         | 4434.181  | 72.47         | -20.73         | 51.74       | 74       | -22.26 | PK            |
| Horizontal                         | 4434.181  | 59.19         | -20.73         | 38.46       | 54       | -15.54 | AV            |
| Horizontal                         | 10380.085 | 64.45         | -9.33          | 55.12       | 68.2     | -13.08 | PK            |
| Horizontal                         | 10380.085 | 49.22         | -9.33          | 39.89       | 54       | -14.11 | AV            |
| Horizontal                         | 15570.125 | 61.90         | -7.83          | 54.07       | 74       | -19.93 | PK            |
| Horizontal                         | 15570.125 | 49.16         | -7.83          | 41.33       | 54       | -12.67 | AV            |
| Middle Channel (5230 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4739.186  | 74.42         | -20.12         | 54.30       | 68.2     | -13.90 | PK            |
| Vertical                           | 4739.186  | 59.13         | -20.12         | 39.01       | 54       | -14.99 | AV            |
| Vertical                           | 10460.138 | 63.75         | -9.21          | 54.54       | 68.2     | -13.66 | PK            |
| Vertical                           | 10460.138 | 49.60         | -9.21          | 40.39       | 54       | -13.61 | AV            |
| Vertical                           | 15690.086 | 62.02         | -7.79          | 54.23       | 74       | -19.77 | PK            |
| Vertical                           | 15690.086 | 49.49         | -7.79          | 41.70       | 54       | -12.30 | AV            |
| Horizontal                         | 4739.166  | 73.56         | -20.12         | 53.44       | 68.2     | -14.76 | PK            |
| Horizontal                         | 4739.166  | 59.75         | -20.12         | 39.63       | 54       | -14.37 | AV            |
| Horizontal                         | 10460.165 | 62.97         | -9.21          | 53.76       | 68.2     | -14.44 | PK            |
| Horizontal                         | 10460.165 | 49.77         | -9.21          | 40.56       | 54       | -13.44 | AV            |
| Horizontal                         | 15690.042 | 60.31         | -7.79          | 52.52       | 74       | -21.48 | PK            |
| Horizontal                         | 15690.042 | 49.43         | -7.79          | 41.64       | 54       | -12.36 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.1G) - 802.11ax-HT80 |
|------------|--------------------------|

| Polar               | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|---------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)               | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| (5210 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical            | 4434.131  | 72.96         | -20.73         | 52.23       | 68.2     | -15.97 | PK            |
| Vertical            | 4434.131  | 59.30         | -20.73         | 38.57       | 54       | -15.43 | AV            |
| Vertical            | 10420.053 | 60.41         | -9.27          | 51.14       | 68.2     | -17.06 | PK            |
| Vertical            | 10420.053 | 49.56         | -9.27          | 40.29       | 54       | -13.71 | AV            |
| Vertical            | 15630.094 | 61.24         | -7.81          | 53.43       | 74       | -20.57 | PK            |
| Vertical            | 15630.094 | 49.83         | -7.81          | 42.02       | 54       | -11.98 | AV            |
| Horizontal          | 4434.179  | 73.01         | -20.73         | 52.28       | 68.2     | -15.92 | PK            |
| Horizontal          | 4434.179  | 59.22         | -20.73         | 38.49       | 54       | -15.51 | AV            |
| Horizontal          | 10420.130 | 42.24         | 9.27           | 51.51       | 68.2     | -16.69 | PK            |
| Horizontal          | 10420.130 | 29.40         | 9.27           | 38.67       | 54       | -15.33 | AV            |
| Horizontal          | 15630.065 | 63.33         | -7.81          | 55.52       | 74       | -18.48 | PK            |
| Horizontal          | 15630.065 | 49.65         | -7.81          | 41.84       | 54       | -12.16 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                    |
|------------|--------------------|
| Test Mode: | TX(5.3G) - 802.11a |
|------------|--------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5260 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.034  | 74.02         | -20.73         | 53.28       | 68.2     | -14.92 | PK            |
| Vertical                           | 4434.034  | 59.17         | -20.73         | 38.43       | 54       | -15.57 | AV            |
| Vertical                           | 10520.042 | 63.09         | -9.12          | 53.97       | 68.2     | -14.23 | PK            |
| Vertical                           | 10520.042 | 49.93         | -9.12          | 40.81       | 54       | -13.19 | AV            |
| Vertical                           | 15780.142 | 60.82         | -7.77          | 53.05       | 74       | -20.95 | PK            |
| Vertical                           | 15780.142 | 49.66         | -7.77          | 41.89       | 54       | -12.11 | AV            |
| Horizontal                         | 4434.185  | 70.61         | -20.73         | 49.88       | 68.2     | -18.32 | PK            |
| Horizontal                         | 4434.185  | 59.72         | -20.73         | 38.99       | 54       | -15.01 | AV            |
| Horizontal                         | 10520.140 | 62.99         | -9.12          | 53.87       | 68.2     | -14.33 | PK            |
| Horizontal                         | 10520.140 | 49.10         | -9.12          | 39.98       | 54       | -14.02 | AV            |
| Horizontal                         | 15780.183 | 64.63         | -7.77          | 56.86       | 74       | -17.14 | PK            |
| Horizontal                         | 15780.183 | 49.43         | -7.77          | 41.66       | 54       | -12.34 | AV            |
| Middle Channel (5280 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.068  | 71.32         | -20.42         | 50.90       | 74       | -23.10 | PK            |
| Vertical                           | 4592.068  | 59.77         | -20.42         | 39.36       | 54       | -14.64 | AV            |
| Vertical                           | 10560.137 | 64.09         | -9.06          | 55.03       | 68.2     | -13.17 | PK            |
| Vertical                           | 10560.137 | 49.53         | -9.06          | 40.47       | 54       | -13.53 | AV            |
| Vertical                           | 15840.092 | 63.00         | -7.75          | 55.25       | 74       | -18.75 | PK            |
| Vertical                           | 15840.092 | 49.09         | -7.75          | 41.34       | 54       | -12.66 | AV            |
| Horizontal                         | 4592.013  | 70.81         | -20.42         | 50.39       | 74       | -23.61 | PK            |
| Horizontal                         | 4592.013  | 59.36         | -20.42         | 38.94       | 54       | -15.06 | AV            |
| Horizontal                         | 10560.047 | 62.94         | -9.06          | 53.88       | 68.2     | -14.32 | PK            |
| Horizontal                         | 10560.047 | 49.60         | -9.06          | 40.54       | 54       | -13.46 | AV            |
| Horizontal                         | 15840.005 | 64.65         | -7.75          | 56.90       | 74       | -17.10 | PK            |
| Horizontal                         | 15840.005 | 49.39         | -7.75          | 41.64       | 54       | -12.36 | AV            |
| High Channel (5320 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 4739.168  | 72.11         | -20.12         | 51.99       | 74       | -22.01 | PK            |
| Vertical                           | 4739.168  | 59.58         | -20.12         | 39.46       | 54       | -14.54 | AV            |
| Vertical                           | 10640.135 | 60.54         | -8.94          | 51.60       | 68.2     | -16.60 | PK            |
| Vertical                           | 10640.135 | 49.59         | -8.94          | 40.65       | 54       | -13.35 | AV            |
| Vertical                           | 15960.043 | 61.78         | -7.71          | 54.07       | 74       | -19.93 | PK            |
| Vertical                           | 15960.043 | 49.18         | -7.71          | 41.47       | 54       | -12.53 | AV            |
| Horizontal                         | 4739.002  | 72.70         | -20.12         | 52.58       | 74       | -21.42 | PK            |
| Horizontal                         | 4739.002  | 59.03         | -20.12         | 38.91       | 54       | -15.09 | AV            |
| Horizontal                         | 10640.075 | 63.94         | -8.94          | 55.00       | 68.2     | -13.20 | PK            |
| Horizontal                         | 10640.075 | 49.41         | -8.94          | 40.47       | 54       | -13.53 | AV            |
| Horizontal                         | 15960.189 | 60.03         | -7.71          | 52.32       | 74       | -21.68 | PK            |
| Horizontal                         | 15960.189 | 49.34         | -7.71          | 41.63       | 54       | -12.37 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The worst case is Antenna A.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX(5.3G) - 802.11n-HT20 |
|------------|-------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5260 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.176  | 72.29         | -20.73         | 51.56       | 68.2     | -16.64 | PK            |
| Vertical                           | 4434.176  | 59.54         | -20.73         | 38.80       | 54       | -15.20 | AV            |
| Vertical                           | 10520.195 | 63.65         | -9.12          | 54.53       | 68.2     | -13.67 | PK            |
| Vertical                           | 10520.195 | 49.34         | -9.12          | 40.22       | 54       | -13.78 | AV            |
| Vertical                           | 15780.061 | 63.13         | -7.77          | 55.36       | 74       | -18.64 | PK            |
| Vertical                           | 15780.061 | 49.68         | -7.77          | 41.91       | 54       | -12.09 | AV            |
| Horizontal                         | 4434.175  | 72.06         | -20.73         | 51.33       | 68.2     | -16.87 | PK            |
| Horizontal                         | 4434.175  | 59.34         | -20.73         | 38.60       | 54       | -15.40 | AV            |
| Horizontal                         | 10520.185 | 61.62         | -9.12          | 52.50       | 68.2     | -15.70 | PK            |
| Horizontal                         | 10520.185 | 49.71         | -9.12          | 40.59       | 54       | -13.41 | AV            |
| Horizontal                         | 15780.176 | 60.49         | -7.77          | 52.72       | 74       | -21.28 | PK            |
| Horizontal                         | 15780.176 | 49.34         | -7.77          | 41.57       | 54       | -12.43 | AV            |
| Middle Channel (5280 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.095  | 70.43         | -20.42         | 50.01       | 74       | -23.99 | PK            |
| Vertical                           | 4592.095  | 59.91         | -20.42         | 39.49       | 54       | -14.51 | AV            |
| Vertical                           | 10560.011 | 61.28         | -9.06          | 52.22       | 68.2     | -15.98 | PK            |
| Vertical                           | 10560.011 | 49.06         | -9.06          | 40.00       | 54       | -14.00 | AV            |
| Vertical                           | 15840.015 | 63.18         | -7.75          | 55.43       | 74       | -18.57 | PK            |
| Vertical                           | 15840.015 | 49.90         | -7.75          | 42.15       | 54       | -11.85 | AV            |
| Horizontal                         | 4592.082  | 71.66         | -20.42         | 51.24       | 74       | -22.76 | PK            |
| Horizontal                         | 4592.082  | 59.16         | -20.42         | 38.74       | 54       | -15.26 | AV            |
| Horizontal                         | 10560.025 | 63.04         | -9.06          | 53.98       | 68.2     | -14.22 | PK            |
| Horizontal                         | 10560.025 | 49.06         | -9.06          | 40.00       | 54       | -14.00 | AV            |
| Horizontal                         | 15840.088 | 60.54         | -7.75          | 52.79       | 74       | -21.21 | PK            |
| Horizontal                         | 15840.088 | 49.27         | -7.75          | 41.52       | 54       | -12.48 | AV            |
| High Channel (5320 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 4739.139  | 71.56         | -20.12         | 51.44       | 74       | -22.56 | PK            |
| Vertical                           | 4739.139  | 59.54         | -20.12         | 39.42       | 54       | -14.58 | AV            |
| Vertical                           | 10640.150 | 62.62         | -8.94          | 53.68       | 68.2     | -14.52 | PK            |
| Vertical                           | 10640.150 | 49.76         | -8.94          | 40.82       | 54       | -13.18 | AV            |
| Vertical                           | 15960.086 | 62.49         | -7.71          | 54.78       | 74       | -19.22 | PK            |
| Vertical                           | 15960.086 | 49.46         | -7.71          | 41.75       | 54       | -12.25 | AV            |
| Horizontal                         | 4739.056  | 71.95         | -20.12         | 51.83       | 74       | -22.17 | PK            |
| Horizontal                         | 4739.056  | 59.92         | -20.12         | 39.80       | 54       | -14.20 | AV            |
| Horizontal                         | 10640.145 | 63.37         | -8.94          | 54.43       | 68.2     | -13.77 | PK            |
| Horizontal                         | 10640.145 | 49.43         | -8.94          | 40.49       | 54       | -13.51 | AV            |
| Horizontal                         | 15960.117 | 64.91         | -7.71          | 57.20       | 74       | -16.80 | PK            |
| Horizontal                         | 15960.117 | 49.29         | -7.71          | 41.58       | 54       | -12.42 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX(5.3G) - 802.11n-HT40 |
|------------|-------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5270 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.057  | 72.35         | -20.73         | 51.61       | 68.2     | -16.59 | PK            |
| Vertical                           | 4434.057  | 59.99         | -20.73         | 39.26       | 54       | -14.74 | AV            |
| Vertical                           | 10540.125 | 61.00         | -9.09          | 51.91       | 68.2     | -16.29 | PK            |
| Vertical                           | 10540.125 | 49.91         | -9.09          | 40.82       | 54       | -13.18 | AV            |
| Vertical                           | 15810.163 | 62.37         | -7.76          | 54.61       | 74       | -19.39 | PK            |
| Vertical                           | 15810.163 | 49.95         | -7.76          | 42.19       | 54       | -11.81 | AV            |
| Horizontal                         | 4434.129  | 71.02         | -20.73         | 50.29       | 74       | -23.71 | PK            |
| Horizontal                         | 4434.129  | 59.56         | -20.73         | 38.83       | 54       | -15.17 | AV            |
| Horizontal                         | 10540.001 | 60.05         | -9.09          | 50.96       | 68.2     | -17.24 | PK            |
| Horizontal                         | 10540.001 | 50.00         | -9.09          | 40.91       | 54       | -13.09 | AV            |
| Horizontal                         | 15810.162 | 60.29         | -7.76          | 52.53       | 74       | -21.47 | PK            |
| Horizontal                         | 15810.162 | 49.83         | -7.76          | 42.07       | 54       | -11.93 | AV            |
| Middle Channel (5310 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4739.001  | 72.65         | -20.12         | 52.53       | 68.2     | -15.67 | PK            |
| Vertical                           | 4739.001  | 59.23         | -20.12         | 39.11       | 54       | -14.89 | AV            |
| Vertical                           | 10620.138 | 60.08         | -8.97          | 51.11       | 68.2     | -17.09 | PK            |
| Vertical                           | 10620.138 | 49.67         | -8.97          | 40.70       | 54       | -13.30 | AV            |
| Vertical                           | 15930.175 | 60.79         | -7.72          | 53.07       | 74       | -20.93 | PK            |
| Vertical                           | 15930.175 | 49.64         | -7.72          | 41.92       | 54       | -12.08 | AV            |
| Horizontal                         | 4739.043  | 73.28         | -20.12         | 53.16       | 68.2     | -15.04 | PK            |
| Horizontal                         | 4739.043  | 59.35         | -20.12         | 39.23       | 54       | -14.77 | AV            |
| Horizontal                         | 10620.132 | 60.73         | -8.97          | 51.76       | 68.2     | -16.44 | PK            |
| Horizontal                         | 10620.132 | 49.65         | -8.97          | 40.68       | 54       | -13.32 | AV            |
| Horizontal                         | 15930.117 | 60.21         | -7.72          | 52.49       | 74       | -21.51 | PK            |
| Horizontal                         | 15930.117 | 49.60         | -7.72          | 41.88       | 54       | -12.12 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.3G) - 802.11ac-HT20 |
|------------|--------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5260 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.161  | 72.24         | -20.73         | 51.51       | 68.2     | -16.69 | PK            |
| Vertical                           | 4434.161  | 59.98         | -20.73         | 39.25       | 54       | -14.75 | AV            |
| Vertical                           | 10520.191 | 61.07         | -9.12          | 51.95       | 68.2     | -16.25 | PK            |
| Vertical                           | 10520.191 | 49.86         | -9.12          | 40.74       | 54       | -13.26 | AV            |
| Vertical                           | 15780.046 | 62.99         | -7.77          | 55.22       | 74       | -18.78 | PK            |
| Vertical                           | 15780.046 | 49.05         | -7.77          | 41.28       | 54       | -12.72 | AV            |
| Horizontal                         | 4434.142  | 73.35         | -20.73         | 52.62       | 68.2     | -15.58 | PK            |
| Horizontal                         | 4434.142  | 59.65         | -20.73         | 38.92       | 54       | -15.08 | AV            |
| Horizontal                         | 10520.144 | 61.22         | -9.12          | 52.10       | 68.2     | -16.10 | PK            |
| Horizontal                         | 10520.144 | 49.85         | -9.12          | 40.73       | 54       | -13.27 | AV            |
| Horizontal                         | 15780.153 | 60.74         | -7.77          | 52.97       | 74       | -21.03 | PK            |
| Horizontal                         | 15780.153 | 49.53         | -7.77          | 41.76       | 54       | -12.24 | AV            |
| Middle Channel (5280 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.089  | 72.23         | -20.42         | 51.81       | 74       | -22.19 | PK            |
| Vertical                           | 4592.089  | 59.56         | -20.42         | 39.14       | 54       | -14.86 | AV            |
| Vertical                           | 10560.011 | 64.66         | -9.06          | 55.60       | 68.2     | -12.60 | PK            |
| Vertical                           | 10560.011 | 49.29         | -9.06          | 40.23       | 54       | -13.77 | AV            |
| Vertical                           | 15840.073 | 62.49         | -7.75          | 54.74       | 74       | -19.26 | PK            |
| Vertical                           | 15840.073 | 49.83         | -7.75          | 42.08       | 54       | -11.92 | AV            |
| Horizontal                         | 4592.181  | 72.18         | -20.42         | 51.77       | 74       | -22.23 | PK            |
| Horizontal                         | 4592.181  | 59.62         | -20.42         | 39.20       | 54       | -14.80 | AV            |
| Horizontal                         | 10560.134 | 63.34         | -9.06          | 54.28       | 68.2     | -13.92 | PK            |
| Horizontal                         | 10560.134 | 49.26         | -9.06          | 40.20       | 54       | -13.80 | AV            |
| Horizontal                         | 15840.051 | 64.54         | -7.75          | 56.79       | 74       | -17.21 | PK            |
| Horizontal                         | 15840.051 | 49.01         | -7.75          | 41.26       | 54       | -12.74 | AV            |
| High Channel (5320 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 4739.029  | 73.59         | -20.12         | 53.47       | 74       | -20.53 | PK            |
| Vertical                           | 4739.029  | 59.74         | -20.12         | 39.61       | 54       | -14.39 | AV            |
| Vertical                           | 10640.054 | 61.75         | -8.94          | 52.81       | 68.2     | -15.39 | PK            |
| Vertical                           | 10640.054 | 49.03         | -8.94          | 40.09       | 54       | -13.91 | AV            |
| Vertical                           | 15960.155 | 63.12         | -7.71          | 55.41       | 74       | -18.59 | PK            |
| Vertical                           | 15960.155 | 49.27         | -7.71          | 41.56       | 54       | -12.44 | AV            |
| Horizontal                         | 4739.186  | 72.03         | -20.12         | 51.91       | 74       | -22.09 | PK            |
| Horizontal                         | 4739.186  | 59.29         | -20.12         | 39.17       | 54       | -14.83 | AV            |
| Horizontal                         | 10640.050 | 64.74         | -8.94          | 55.80       | 68.2     | -12.40 | PK            |
| Horizontal                         | 10640.050 | 49.41         | -8.94          | 40.47       | 54       | -13.53 | AV            |
| Horizontal                         | 15960.186 | 63.04         | -7.71          | 55.33       | 74       | -18.67 | PK            |
| Horizontal                         | 15960.186 | 49.46         | -7.71          | 41.75       | 54       | -12.25 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.3G) - 802.11ac-HT40 |
|------------|--------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5270 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.110  | 73.70         | -20.73         | 52.97       | 68.2     | -15.23 | PK            |
| Vertical                           | 4434.110  | 59.51         | -20.73         | 38.78       | 54       | -15.22 | AV            |
| Vertical                           | 10540.069 | 64.31         | -9.09          | 55.22       | 68.2     | -12.98 | PK            |
| Vertical                           | 10540.069 | 49.43         | -9.09          | 40.34       | 54       | -13.66 | AV            |
| Vertical                           | 15810.160 | 60.60         | -7.76          | 52.84       | 74       | -21.16 | PK            |
| Vertical                           | 15810.160 | 49.11         | -7.76          | 41.35       | 54       | -12.65 | AV            |
| Horizontal                         | 4434.129  | 70.51         | -20.73         | 49.78       | 74       | -24.22 | PK            |
| Horizontal                         | 4434.129  | 59.18         | -20.73         | 38.45       | 54       | -15.55 | AV            |
| Horizontal                         | 10540.033 | 63.86         | -9.09          | 54.77       | 68.2     | -13.43 | PK            |
| Horizontal                         | 10540.033 | 49.71         | -9.09          | 40.62       | 54       | -13.38 | AV            |
| Horizontal                         | 15810.157 | 62.56         | -7.76          | 54.80       | 74       | -19.20 | PK            |
| Horizontal                         | 15810.157 | 49.49         | -7.76          | 41.73       | 54       | -12.27 | AV            |
| Middle Channel (5310 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4739.159  | 74.33         | -20.12         | 54.21       | 68.2     | -13.99 | PK            |
| Vertical                           | 4739.159  | 59.98         | -20.12         | 39.86       | 54       | -14.14 | AV            |
| Vertical                           | 10620.028 | 62.45         | -8.97          | 53.48       | 68.2     | -14.72 | PK            |
| Vertical                           | 10620.028 | 49.75         | -8.97          | 40.78       | 54       | -13.22 | AV            |
| Vertical                           | 15930.156 | 60.41         | -7.72          | 52.69       | 74       | -21.31 | PK            |
| Vertical                           | 15930.156 | 49.46         | -7.72          | 41.74       | 54       | -12.26 | AV            |
| Horizontal                         | 4739.040  | 74.09         | -20.12         | 53.97       | 68.2     | -14.23 | PK            |
| Horizontal                         | 4739.040  | 59.69         | -20.12         | 39.57       | 54       | -14.43 | AV            |
| Horizontal                         | 10620.176 | 63.08         | -8.97          | 54.11       | 68.2     | -14.09 | PK            |
| Horizontal                         | 10620.176 | 49.35         | -8.97          | 40.38       | 54       | -13.62 | AV            |
| Horizontal                         | 15930.147 | 63.91         | -7.72          | 56.19       | 74       | -17.81 | PK            |
| Horizontal                         | 15930.147 | 49.29         | -7.72          | 41.57       | 54       | -12.43 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.3G) - 802.11ac-HT80 |
|------------|--------------------------|

| Polar               | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|---------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)               | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| (5290 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical            | 4434.056  | 71.54         | -20.73         | 50.80       | 68.2     | -17.40 | PK            |
| Vertical            | 4434.056  | 59.12         | -20.73         | 38.39       | 54       | -15.61 | AV            |
| Vertical            | 10580.069 | 60.18         | -9.03          | 51.15       | 68.2     | -17.05 | PK            |
| Vertical            | 10580.069 | 49.49         | -9.03          | 40.46       | 54       | -13.54 | AV            |
| Vertical            | 15870.084 | 60.69         | -7.74          | 52.95       | 74       | -21.05 | PK            |
| Vertical            | 15870.084 | 49.51         | -7.74          | 41.77       | 54       | -12.23 | AV            |
| Horizontal          | 4434.087  | 70.22         | -20.73         | 49.49       | 68.2     | -18.71 | PK            |
| Horizontal          | 4434.087  | 59.95         | -20.73         | 39.22       | 54       | -14.78 | AV            |
| Horizontal          | 10580.114 | 62.85         | -9.03          | 53.82       | 68.2     | -14.38 | PK            |
| Horizontal          | 10580.114 | 49.88         | -9.03          | 40.85       | 54       | -13.15 | AV            |
| Horizontal          | 15870.194 | 63.80         | -7.74          | 56.06       | 74       | -17.94 | PK            |
| Horizontal          | 15870.194 | 49.12         | -7.74          | 41.38       | 54       | -12.62 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.3G) - 802.11ax-HT20 |
|------------|--------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5260 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.008  | 74.73         | -20.73         | 54.00       | 68.2     | -14.20 | PK            |
| Vertical                           | 4434.008  | 59.08         | -20.73         | 38.35       | 54       | -15.65 | AV            |
| Vertical                           | 10520.048 | 63.87         | -9.12          | 54.75       | 68.2     | -13.45 | PK            |
| Vertical                           | 10520.048 | 49.29         | -9.12          | 40.17       | 54       | -13.83 | AV            |
| Vertical                           | 15780.082 | 60.11         | -7.77          | 52.34       | 74       | -21.66 | PK            |
| Vertical                           | 15780.082 | 49.03         | -7.77          | 41.26       | 54       | -12.74 | AV            |
| Horizontal                         | 4434.052  | 70.68         | -20.73         | 49.95       | 68.2     | -18.25 | PK            |
| Horizontal                         | 4434.052  | 59.23         | -20.73         | 38.50       | 54       | -15.50 | AV            |
| Horizontal                         | 10520.064 | 62.92         | -9.12          | 53.80       | 68.2     | -14.40 | PK            |
| Horizontal                         | 10520.064 | 49.68         | -9.12          | 40.56       | 54       | -13.44 | AV            |
| Horizontal                         | 15780.091 | 63.89         | -7.77          | 56.12       | 74       | -17.88 | PK            |
| Horizontal                         | 15780.091 | 49.65         | -7.77          | 41.88       | 54       | -12.12 | AV            |
| Middle Channel (5280 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.121  | 72.62         | -20.42         | 52.21       | 74       | -21.79 | PK            |
| Vertical                           | 4592.121  | 59.03         | -20.42         | 38.61       | 54       | -15.39 | AV            |
| Vertical                           | 10560.063 | 62.80         | -9.06          | 53.74       | 68.2     | -14.46 | PK            |
| Vertical                           | 10560.063 | 49.07         | -9.06          | 40.01       | 54       | -13.99 | AV            |
| Vertical                           | 15840.039 | 61.15         | -7.75          | 53.40       | 74       | -20.60 | PK            |
| Vertical                           | 15840.039 | 49.45         | -7.75          | 41.70       | 54       | -12.30 | AV            |
| Horizontal                         | 4592.093  | 71.18         | -20.42         | 50.76       | 74       | -23.24 | PK            |
| Horizontal                         | 4592.093  | 59.92         | -20.42         | 39.51       | 54       | -14.49 | AV            |
| Horizontal                         | 10560.065 | 61.06         | -9.06          | 52.00       | 68.2     | -16.20 | PK            |
| Horizontal                         | 10560.065 | 49.56         | -9.06          | 40.50       | 54       | -13.50 | AV            |
| Horizontal                         | 15840.091 | 60.12         | -7.75          | 52.37       | 74       | -21.63 | PK            |
| Horizontal                         | 15840.091 | 49.89         | -7.75          | 42.14       | 54       | -11.86 | AV            |
| High Channel (5320 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 4739.006  | 70.08         | -20.12         | 49.96       | 74       | -24.04 | PK            |
| Vertical                           | 4739.006  | 59.09         | -20.12         | 38.97       | 54       | -15.03 | AV            |
| Vertical                           | 10640.156 | 64.24         | -8.94          | 55.30       | 68.2     | -12.90 | PK            |
| Vertical                           | 10640.156 | 49.33         | -8.94          | 40.39       | 54       | -13.61 | AV            |
| Vertical                           | 15960.180 | 61.15         | -7.71          | 53.44       | 74       | -20.56 | PK            |
| Vertical                           | 15960.180 | 49.56         | -7.71          | 41.85       | 54       | -12.15 | AV            |
| Horizontal                         | 4739.077  | 71.58         | -20.12         | 51.46       | 74       | -22.54 | PK            |
| Horizontal                         | 4739.077  | 59.45         | -20.12         | 39.33       | 54       | -14.67 | AV            |
| Horizontal                         | 10640.191 | 64.39         | -8.94          | 55.45       | 68.2     | -12.75 | PK            |
| Horizontal                         | 10640.191 | 49.54         | -8.94          | 40.60       | 54       | -13.40 | AV            |
| Horizontal                         | 15960.044 | 64.65         | -7.71          | 56.94       | 74       | -17.06 | PK            |
| Horizontal                         | 15960.044 | 49.34         | -7.71          | 41.63       | 54       | -12.37 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.3G) - 802.11ax-HT40 |
|------------|--------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5270 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.065  | 74.48         | -20.73         | 53.75       | 68.2     | -14.45 | PK            |
| Vertical                           | 4434.065  | 59.13         | -20.73         | 38.39       | 54       | -15.61 | AV            |
| Vertical                           | 10540.045 | 62.81         | -9.09          | 53.72       | 68.2     | -14.48 | PK            |
| Vertical                           | 10540.045 | 49.39         | -9.09          | 40.30       | 54       | -13.70 | AV            |
| Vertical                           | 15810.106 | 61.14         | -7.76          | 53.38       | 74       | -20.62 | PK            |
| Vertical                           | 15810.106 | 49.52         | -7.76          | 41.76       | 54       | -12.24 | AV            |
| Horizontal                         | 4434.030  | 74.03         | -20.73         | 53.30       | 74       | -20.70 | PK            |
| Horizontal                         | 4434.030  | 59.45         | -20.73         | 38.72       | 54       | -15.28 | AV            |
| Horizontal                         | 10540.134 | 63.56         | -9.09          | 54.47       | 68.2     | -13.73 | PK            |
| Horizontal                         | 10540.134 | 49.47         | -9.09          | 40.38       | 54       | -13.62 | AV            |
| Horizontal                         | 15810.118 | 61.23         | -7.76          | 53.47       | 74       | -20.53 | PK            |
| Horizontal                         | 15810.118 | 49.85         | -7.76          | 42.09       | 54       | -11.91 | AV            |
| Middle Channel (5310 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4739.193  | 70.66         | -20.12         | 50.54       | 68.2     | -17.66 | PK            |
| Vertical                           | 4739.193  | 59.87         | -20.12         | 39.75       | 54       | -14.25 | AV            |
| Vertical                           | 10620.103 | 63.15         | -8.97          | 54.18       | 68.2     | -14.02 | PK            |
| Vertical                           | 10620.103 | 49.96         | -8.97          | 40.99       | 54       | -13.01 | AV            |
| Vertical                           | 15930.105 | 60.12         | -7.72          | 52.40       | 74       | -21.60 | PK            |
| Vertical                           | 15930.105 | 49.09         | -7.72          | 41.37       | 54       | -12.63 | AV            |
| Horizontal                         | 4739.072  | 74.51         | -20.12         | 54.39       | 68.2     | -13.81 | PK            |
| Horizontal                         | 4739.072  | 59.79         | -20.12         | 39.67       | 54       | -14.33 | AV            |
| Horizontal                         | 10620.185 | 61.27         | -8.97          | 52.30       | 68.2     | -15.90 | PK            |
| Horizontal                         | 10620.185 | 49.74         | -8.97          | 40.77       | 54       | -13.23 | AV            |
| Horizontal                         | 15930.046 | 64.48         | -7.72          | 56.76       | 74       | -17.24 | PK            |
| Horizontal                         | 15930.046 | 49.04         | -7.72          | 41.32       | 54       | -12.68 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.3G) - 802.11ax-HT80 |
|------------|--------------------------|

| Polar               | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|---------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)               | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| (5290 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical            | 4434.130  | 74.78         | -20.73         | 54.05       | 68.2     | -14.15 | PK            |
| Vertical            | 4434.130  | 59.73         | -20.73         | 39.00       | 54       | -15.00 | AV            |
| Vertical            | 10580.133 | 63.95         | -9.03          | 54.92       | 68.2     | -13.28 | PK            |
| Vertical            | 10580.133 | 49.98         | -9.03          | 40.95       | 54       | -13.05 | AV            |
| Vertical            | 15870.063 | 61.52         | -7.74          | 53.78       | 74       | -20.22 | PK            |
| Vertical            | 15870.063 | 49.79         | -7.74          | 42.05       | 54       | -11.95 | AV            |
| Horizontal          | 4434.048  | 71.15         | -20.73         | 50.42       | 68.2     | -17.78 | PK            |
| Horizontal          | 4434.048  | 59.35         | -20.73         | 38.61       | 54       | -15.39 | AV            |
| Horizontal          | 10580.064 | 64.22         | -9.03          | 55.19       | 68.2     | -13.01 | PK            |
| Horizontal          | 10580.064 | 49.71         | -9.03          | 40.68       | 54       | -13.32 | AV            |
| Horizontal          | 15870.017 | 63.12         | -7.74          | 55.38       | 74       | -18.62 | PK            |
| Horizontal          | 15870.017 | 49.26         | -7.74          | 41.52       | 54       | -12.48 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                    |
|------------|--------------------|
| Test Mode: | TX(5.6G) - 802.11a |
|------------|--------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5500 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.144       | 73.86            | -20.73            | 53.13            | 68.2     | -15.07 | PK               |
| Vertical                           | 4434.144       | 59.60            | -20.73            | 38.87            | 54       | -15.13 | AV               |
| Vertical                           | 11000.152      | 61.80            | -8.40             | 53.40            | 68.2     | -14.80 | PK               |
| Vertical                           | 11000.152      | 49.74            | -8.40             | 41.34            | 54       | -12.66 | AV               |
| Vertical                           | 16500.090      | 60.51            | -6.09             | 54.42            | 74       | -19.58 | PK               |
| Vertical                           | 16500.090      | 49.11            | -6.09             | 43.02            | 54       | -10.98 | AV               |
| Horizontal                         | 4434.194       | 74.20            | -20.73            | 53.47            | 68.2     | -14.73 | PK               |
| Horizontal                         | 4434.194       | 59.45            | -20.73            | 38.72            | 54       | -15.28 | AV               |
| Horizontal                         | 11000.012      | 64.70            | -8.40             | 56.30            | 68.2     | -11.90 | PK               |
| Horizontal                         | 11000.012      | 49.56            | -8.40             | 41.16            | 54       | -12.84 | AV               |
| Horizontal                         | 16500.181      | 61.88            | -6.09             | 55.79            | 74       | -18.21 | PK               |
| Horizontal                         | 16500.181      | 49.59            | -6.09             | 43.50            | 54       | -10.50 | AV               |
| middle Channel (5580 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.050       | 70.21            | -20.42            | 49.80            | 74       | -24.20 | PK               |
| Vertical                           | 4592.050       | 59.27            | -20.42            | 38.85            | 54       | -15.15 | AV               |
| Vertical                           | 11160.004      | 61.56            | -8.53             | 53.03            | 68.2     | -15.17 | PK               |
| Vertical                           | 11160.004      | 49.55            | -8.53             | 41.02            | 54       | -12.98 | AV               |
| Vertical                           | 16740.008      | 62.81            | -5.31             | 57.50            | 74       | -16.50 | PK               |
| Vertical                           | 16740.008      | 49.05            | -5.31             | 43.74            | 54       | -10.26 | AV               |
| Horizontal                         | 4592.049       | 72.76            | -20.42            | 52.34            | 74       | -21.66 | PK               |
| Horizontal                         | 4592.049       | 59.13            | -20.42            | 38.72            | 54       | -15.28 | AV               |
| Horizontal                         | 11160.034      | 64.81            | -8.53             | 56.28            | 68.2     | -11.92 | PK               |
| Horizontal                         | 11160.034      | 49.55            | -8.53             | 41.02            | 54       | -12.98 | AV               |
| Horizontal                         | 16740.025      | 63.33            | -5.31             | 58.02            | 74       | -15.98 | PK               |
| Horizontal                         | 16740.025      | 49.19            | -5.31             | 43.88            | 54       | -10.12 | AV               |
| High Channel (5700 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.167       | 73.13            | -20.12            | 53.01            | 74       | -20.99 | PK               |
| Vertical                           | 4739.167       | 59.85            | -20.12            | 39.73            | 54       | -14.27 | AV               |
| Vertical                           | 11400.161      | 61.93            | -8.72             | 53.21            | 68.2     | -14.99 | PK               |
| Vertical                           | 11400.161      | 49.48            | -8.72             | 40.76            | 54       | -13.24 | AV               |
| Vertical                           | 17100.032      | 61.79            | -3.92             | 57.87            | 74       | -16.13 | PK               |
| Vertical                           | 17100.032      | 49.74            | -3.92             | 45.82            | 54       | -8.18  | AV               |
| Horizontal                         | 4739.045       | 71.00            | -20.12            | 50.88            | 74       | -23.12 | PK               |
| Horizontal                         | 4739.045       | 59.20            | -20.12            | 39.08            | 54       | -14.92 | AV               |
| Horizontal                         | 11400.134      | 63.28            | -8.72             | 54.56            | 68.2     | -13.64 | PK               |
| Horizontal                         | 11400.134      | 49.52            | -8.72             | 40.80            | 54       | -13.20 | AV               |
| Horizontal                         | 17100.195      | 62.72            | -3.92             | 58.80            | 74       | -15.20 | PK               |
| Horizontal                         | 17100.195      | 49.39            | -3.92             | 45.47            | 54       | -8.53  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The worst case is Antenna A.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX(5.6G) - 802.11n-HT20 |
|------------|-------------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5500 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.058       | 71.93            | -20.73            | 51.20            | 68.2     | -17.00 | PK               |
| Vertical                           | 4434.058       | 59.60            | -20.73            | 38.87            | 54       | -15.13 | AV               |
| Vertical                           | 11000.112      | 63.31            | -8.40             | 54.91            | 68.2     | -13.29 | PK               |
| Vertical                           | 11000.112      | 49.43            | -8.40             | 41.03            | 54       | -12.97 | AV               |
| Vertical                           | 16500.091      | 60.56            | -6.09             | 54.47            | 74       | -19.53 | PK               |
| Vertical                           | 16500.091      | 49.37            | -6.09             | 43.28            | 54       | -10.72 | AV               |
| Horizontal                         | 4434.088       | 71.47            | -20.73            | 50.74            | 68.2     | -17.46 | PK               |
| Horizontal                         | 4434.088       | 59.75            | -20.73            | 39.02            | 54       | -14.98 | AV               |
| Horizontal                         | 11000.144      | 64.11            | -8.40             | 55.71            | 68.2     | -12.49 | PK               |
| Horizontal                         | 11000.144      | 49.08            | -8.40             | 40.68            | 54       | -13.32 | AV               |
| Horizontal                         | 16500.050      | 63.76            | -6.09             | 57.67            | 74       | -16.33 | PK               |
| Horizontal                         | 16500.050      | 49.24            | -6.09             | 43.15            | 54       | -10.85 | AV               |
| middle Channel (5580 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.167       | 71.64            | -20.42            | 51.23            | 74       | -22.77 | PK               |
| Vertical                           | 4592.167       | 59.14            | -20.42            | 38.72            | 54       | -15.28 | AV               |
| Vertical                           | 11160.163      | 62.76            | -8.53             | 54.23            | 68.2     | -13.97 | PK               |
| Vertical                           | 11160.163      | 49.27            | -8.53             | 40.74            | 54       | -13.26 | AV               |
| Vertical                           | 16740.058      | 60.94            | -5.31             | 55.63            | 74       | -18.37 | PK               |
| Vertical                           | 16740.058      | 49.23            | -5.31             | 43.92            | 54       | -10.08 | AV               |
| Horizontal                         | 4592.076       | 71.30            | -20.42            | 50.88            | 74       | -23.12 | PK               |
| Horizontal                         | 4592.076       | 59.89            | -20.42            | 39.47            | 54       | -14.53 | AV               |
| Horizontal                         | 11160.080      | 63.23            | -8.53             | 54.70            | 68.2     | -13.50 | PK               |
| Horizontal                         | 11160.080      | 49.12            | -8.53             | 40.59            | 54       | -13.41 | AV               |
| Horizontal                         | 16740.127      | 61.30            | -5.31             | 55.99            | 74       | -18.01 | PK               |
| Horizontal                         | 16740.127      | 49.62            | -5.31             | 44.31            | 54       | -9.69  | AV               |
| High Channel (5700 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.053       | 70.45            | -20.12            | 50.33            | 74       | -23.67 | PK               |
| Vertical                           | 4739.053       | 59.73            | -20.12            | 39.61            | 54       | -14.39 | AV               |
| Vertical                           | 11400.157      | 62.74            | -8.72             | 54.02            | 68.2     | -14.18 | PK               |
| Vertical                           | 11400.157      | 49.44            | -8.72             | 40.72            | 54       | -13.28 | AV               |
| Vertical                           | 17100.042      | 61.00            | -3.92             | 57.08            | 74       | -16.92 | PK               |
| Vertical                           | 17100.042      | 49.48            | -3.92             | 45.56            | 54       | -8.44  | AV               |
| Horizontal                         | 4739.122       | 73.29            | -20.12            | 53.16            | 74       | -20.84 | PK               |
| Horizontal                         | 4739.122       | 59.29            | -20.12            | 39.17            | 54       | -14.83 | AV               |
| Horizontal                         | 11400.015      | 61.07            | -8.72             | 52.35            | 68.2     | -15.85 | PK               |
| Horizontal                         | 11400.015      | 49.41            | -8.72             | 40.69            | 54       | -13.31 | AV               |
| Horizontal                         | 17100.105      | 62.70            | -3.92             | 58.78            | 74       | -15.22 | PK               |
| Horizontal                         | 17100.105      | 49.95            | -3.92             | 46.03            | 54       | -7.97  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.  
Test Mode is MIMO Mode.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX(5.6G) - 802.11n-HT40 |
|------------|-------------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5510 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.178       | 64.28            | -20.73            | 43.55            | 68.2     | -24.65 | PK               |
| Vertical                           | 4434.178       | 43.74            | -20.73            | 23.01            | 54       | -30.99 | AV               |
| Vertical                           | 11020.128      | 63.59            | -8.42             | 55.17            | 68.2     | -13.03 | PK               |
| Vertical                           | 11020.128      | 43.10            | -8.42             | 34.68            | 54       | -19.32 | AV               |
| Vertical                           | 16530.182      | 64.53            | -5.99             | 58.54            | 74       | -15.46 | PK               |
| Vertical                           | 16530.182      | 43.37            | -5.99             | 37.38            | 54       | -16.62 | AV               |
| Horizontal                         | 4434.085       | 64.94            | -20.73            | 44.21            | 74       | -29.79 | PK               |
| Horizontal                         | 4434.085       | 43.09            | -20.73            | 22.36            | 54       | -31.64 | AV               |
| Horizontal                         | 11020.065      | 54.80            | -8.42             | 46.38            | 68.2     | -21.82 | PK               |
| Horizontal                         | 11020.065      | 43.10            | -8.42             | 34.68            | 54       | -19.32 | AV               |
| Horizontal                         | 16530.039      | 50.29            | -5.99             | 44.30            | 74       | -29.70 | PK               |
| Horizontal                         | 16530.039      | 40.04            | -5.99             | 34.05            | 54       | -19.95 | AV               |
| middle Channel (5550 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.077       | 63.83            | -20.42            | 43.41            | 74       | -30.59 | PK               |
| Vertical                           | 4592.077       | 43.65            | -20.42            | 23.24            | 54       | -30.76 | AV               |
| Vertical                           | 11100.062      | 62.24            | -8.40             | 53.84            | 68.2     | -14.36 | PK               |
| Vertical                           | 11100.062      | 43.93            | -8.40             | 35.53            | 54       | -18.47 | AV               |
| Vertical                           | 16650.198      | 64.26            | -5.60             | 58.66            | 74       | -15.34 | PK               |
| Vertical                           | 16650.198      | 43.26            | -5.60             | 37.66            | 54       | -16.34 | AV               |
| Horizontal                         | 4592.058       | 61.61            | -20.42            | 41.20            | 74       | -32.80 | PK               |
| Horizontal                         | 4592.058       | 43.08            | -20.42            | 22.66            | 54       | -31.34 | AV               |
| Horizontal                         | 11100.154      | 52.54            | -8.40             | 44.14            | 68.2     | -24.06 | PK               |
| Horizontal                         | 11100.154      | 43.49            | -8.40             | 35.09            | 54       | -18.91 | AV               |
| Horizontal                         | 16650.068      | 52.98            | -5.60             | 47.38            | 74       | -26.62 | PK               |
| Horizontal                         | 16650.068      | 41.02            | -5.60             | 35.42            | 54       | -18.58 | AV               |
| High Channel (5670 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.024       | 64.62            | -20.12            | 44.49            | 68.2     | -23.71 | PK               |
| Vertical                           | 4739.024       | 43.50            | -20.12            | 23.38            | 54       | -30.62 | AV               |
| Vertical                           | 11340.125      | 62.74            | -8.67             | 54.07            | 68.2     | -14.13 | PK               |
| Vertical                           | 11340.125      | 43.70            | -8.67             | 35.03            | 54       | -18.97 | AV               |
| Vertical                           | 17010.173      | 62.76            | -4.41             | 58.35            | 74       | -15.65 | PK               |
| Vertical                           | 17010.173      | 43.13            | -4.41             | 38.72            | 54       | -15.28 | AV               |
| Horizontal                         | 4739.109       | 63.69            | -20.12            | 43.57            | 68.2     | -24.63 | PK               |
| Horizontal                         | 4739.109       | 43.66            | -20.12            | 23.54            | 54       | -30.46 | AV               |
| Horizontal                         | 11340.150      | 50.41            | -8.67             | 41.74            | 68.2     | -26.46 | PK               |
| Horizontal                         | 11340.150      | 41.69            | -8.67             | 33.02            | 54       | -20.98 | AV               |
| Horizontal                         | 17010.070      | 52.34            | -4.41             | 47.93            | 74       | -26.07 | PK               |
| Horizontal                         | 17010.070      | 40.51            | -4.41             | 36.10            | 54       | -17.90 | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.  
Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.6G) - 802.11ac-HT20 |
|------------|--------------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5500 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.030       | 72.50            | -20.73            | 51.77            | 68.2     | -16.43 | PK               |
| Vertical                           | 4434.030       | 59.39            | -20.73            | 38.65            | 54       | -15.35 | AV               |
| Vertical                           | 11000.006      | 63.29            | -8.40             | 54.89            | 68.2     | -13.31 | PK               |
| Vertical                           | 11000.006      | 49.68            | -8.40             | 41.28            | 54       | -12.72 | AV               |
| Vertical                           | 16500.194      | 60.94            | -6.09             | 54.85            | 74       | -19.15 | PK               |
| Vertical                           | 16500.194      | 49.12            | -6.09             | 43.03            | 54       | -10.97 | AV               |
| Horizontal                         | 4434.101       | 71.84            | -20.73            | 51.10            | 68.2     | -17.10 | PK               |
| Horizontal                         | 4434.101       | 59.87            | -20.73            | 39.13            | 54       | -14.87 | AV               |
| Horizontal                         | 11000.103      | 61.40            | -8.40             | 53.00            | 68.2     | -15.20 | PK               |
| Horizontal                         | 11000.103      | 49.94            | -8.40             | 41.54            | 54       | -12.46 | AV               |
| Horizontal                         | 16500.072      | 61.18            | -6.09             | 55.09            | 74       | -18.91 | PK               |
| Horizontal                         | 16500.072      | 49.45            | -6.09             | 43.36            | 54       | -10.64 | AV               |
| middle Channel (5580 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.172       | 70.28            | -20.42            | 49.87            | 74       | -24.13 | PK               |
| Vertical                           | 4592.172       | 59.93            | -20.42            | 39.51            | 54       | -14.49 | AV               |
| Vertical                           | 11160.010      | 64.75            | -8.53             | 56.22            | 68.2     | -11.98 | PK               |
| Vertical                           | 11160.010      | 49.68            | -8.53             | 41.15            | 54       | -12.85 | AV               |
| Vertical                           | 16740.084      | 61.06            | -5.31             | 55.75            | 74       | -18.25 | PK               |
| Vertical                           | 16740.084      | 49.28            | -5.31             | 43.97            | 54       | -10.03 | AV               |
| Horizontal                         | 4592.127       | 73.74            | -20.42            | 53.33            | 74       | -20.67 | PK               |
| Horizontal                         | 4592.127       | 59.11            | -20.42            | 38.69            | 54       | -15.31 | AV               |
| Horizontal                         | 11160.188      | 63.70            | -8.53             | 55.17            | 68.2     | -13.03 | PK               |
| Horizontal                         | 11160.188      | 49.39            | -8.53             | 40.86            | 54       | -13.14 | AV               |
| Horizontal                         | 16740.051      | 62.85            | -5.31             | 57.54            | 74       | -16.46 | PK               |
| Horizontal                         | 16740.051      | 49.54            | -5.31             | 44.23            | 54       | -9.77  | AV               |
| High Channel (5700 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.082       | 73.54            | -20.12            | 53.42            | 74       | -20.58 | PK               |
| Vertical                           | 4739.082       | 59.02            | -20.12            | 38.90            | 54       | -15.10 | AV               |
| Vertical                           | 11400.004      | 60.35            | -8.72             | 51.63            | 68.2     | -16.57 | PK               |
| Vertical                           | 11400.004      | 49.76            | -8.72             | 41.04            | 54       | -12.96 | AV               |
| Vertical                           | 17100.028      | 63.55            | -3.92             | 59.63            | 74       | -14.37 | PK               |
| Vertical                           | 17100.028      | 49.63            | -3.92             | 45.71            | 54       | -8.29  | AV               |
| Horizontal                         | 4739.049       | 71.40            | -20.12            | 51.28            | 74       | -22.72 | PK               |
| Horizontal                         | 4739.049       | 59.29            | -20.12            | 39.16            | 54       | -14.84 | AV               |
| Horizontal                         | 11400.105      | 60.17            | -8.72             | 51.45            | 68.2     | -16.75 | PK               |
| Horizontal                         | 11400.105      | 49.16            | -8.72             | 40.44            | 54       | -13.56 | AV               |
| Horizontal                         | 17100.040      | 62.09            | -3.92             | 58.17            | 74       | -15.83 | PK               |
| Horizontal                         | 17100.040      | 49.50            | -3.92             | 45.58            | 54       | -8.42  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.  
Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.6G) - 802.11ac-HT40 |
|------------|--------------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5510 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.038       | 62.62            | -20.73            | 41.89            | 68.2     | -26.31 | PK               |
| Vertical                           | 4434.038       | 43.14            | -20.73            | 22.41            | 54       | -31.59 | AV               |
| Vertical                           | 11020.143      | 63.39            | -8.42             | 54.97            | 68.2     | -13.23 | PK               |
| Vertical                           | 11020.143      | 43.85            | -8.42             | 35.43            | 54       | -18.57 | AV               |
| Vertical                           | 16530.118      | 64.21            | -5.99             | 58.22            | 74       | -15.78 | PK               |
| Vertical                           | 16530.118      | 43.09            | -5.99             | 37.10            | 54       | -16.90 | AV               |
| Horizontal                         | 4434.012       | 63.16            | -20.73            | 42.43            | 74       | -31.57 | PK               |
| Horizontal                         | 4434.012       | 43.12            | -20.73            | 22.39            | 54       | -31.61 | AV               |
| Horizontal                         | 11020.066      | 52.19            | -8.42             | 43.77            | 68.2     | -24.43 | PK               |
| Horizontal                         | 11020.066      | 40.52            | -8.42             | 32.10            | 54       | -21.90 | AV               |
| Horizontal                         | 16530.088      | 54.24            | -5.99             | 48.25            | 74       | -25.75 | PK               |
| Horizontal                         | 16530.088      | 42.82            | -5.99             | 36.83            | 54       | -17.17 | AV               |
| middle Channel (5550 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.181       | 61.81            | -20.42            | 41.39            | 74       | -32.61 | PK               |
| Vertical                           | 4592.181       | 43.68            | -20.42            | 23.27            | 54       | -30.73 | AV               |
| Vertical                           | 11100.165      | 60.99            | -8.40             | 52.59            | 68.2     | -15.61 | PK               |
| Vertical                           | 11100.165      | 43.21            | -8.40             | 34.81            | 54       | -19.19 | AV               |
| Vertical                           | 16650.106      | 60.87            | -5.60             | 55.27            | 74       | -18.73 | PK               |
| Vertical                           | 16650.106      | 43.40            | -5.60             | 37.80            | 54       | -16.20 | AV               |
| Horizontal                         | 4592.131       | 61.19            | -20.42            | 40.77            | 74       | -33.23 | PK               |
| Horizontal                         | 4592.131       | 43.61            | -20.42            | 23.20            | 54       | -30.80 | AV               |
| Horizontal                         | 11100.143      | 52.08            | -8.40             | 43.68            | 68.2     | -24.52 | PK               |
| Horizontal                         | 11100.143      | 44.95            | -8.40             | 36.55            | 54       | -17.45 | AV               |
| Horizontal                         | 16650.104      | 54.42            | -5.60             | 48.82            | 74       | -25.18 | PK               |
| Horizontal                         | 16650.104      | 41.22            | -5.60             | 35.62            | 54       | -18.38 | AV               |
| High Channel (5670 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.080       | 64.84            | -20.12            | 44.72            | 68.2     | -23.48 | PK               |
| Vertical                           | 4739.080       | 43.80            | -20.12            | 23.68            | 54       | -30.32 | AV               |
| Vertical                           | 11340.021      | 61.22            | -8.67             | 52.55            | 68.2     | -15.65 | PK               |
| Vertical                           | 11340.021      | 43.59            | -8.67             | 34.92            | 54       | -19.08 | AV               |
| Vertical                           | 17010.126      | 63.80            | -4.41             | 59.39            | 74       | -14.61 | PK               |
| Vertical                           | 17010.126      | 43.47            | -4.41             | 39.06            | 54       | -14.94 | AV               |
| Horizontal                         | 4739.068       | 65.00            | -20.12            | 44.88            | 68.2     | -23.32 | PK               |
| Horizontal                         | 4739.068       | 43.40            | -20.12            | 23.28            | 54       | -30.72 | AV               |
| Horizontal                         | 11340.094      | 51.91            | -8.67             | 43.24            | 68.2     | -24.96 | PK               |
| Horizontal                         | 11340.094      | 44.97            | -8.67             | 36.30            | 54       | -17.70 | AV               |
| Horizontal                         | 17010.196      | 53.74            | -4.41             | 49.33            | 74       | -24.67 | PK               |
| Horizontal                         | 17010.196      | 41.62            | -4.41             | 37.21            | 54       | -16.79 | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.  
Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.6G) - 802.11ac-HT80 |
|------------|--------------------------|

| Polar<br>(H/V)      | Fre-<br>quency<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Correct<br>Factor<br>(dB) | Measure-<br>ment<br>(dBuV/m) | Limits<br>(dBuV/m) | Over<br>(dB) | Detector<br>Type |
|---------------------|-------------------------|------------------------------|---------------------------|------------------------------|--------------------|--------------|------------------|
| (5530 MHz)-Above 1G |                         |                              |                           |                              |                    |              |                  |
| Vertical            | 4434.111                | 61.27                        | -20.73                    | 40.54                        | 68.2               | -27.66       | PK               |
| Vertical            | 4434.111                | 43.66                        | -20.73                    | 22.93                        | 54                 | -31.07       | AV               |
| Vertical            | 11060.033               | 62.52                        | -8.45                     | 54.07                        | 68.2               | -14.13       | PK               |
| Vertical            | 11060.033               | 43.54                        | -8.45                     | 35.09                        | 54                 | -18.91       | AV               |
| Vertical            | 16590.135               | 62.27                        | -5.79                     | 56.48                        | 74                 | -17.52       | PK               |
| Vertical            | 16590.135               | 43.22                        | -5.79                     | 37.43                        | 54                 | -16.57       | AV               |
| Horizontal          | 4434.065                | 60.52                        | -20.73                    | 39.79                        | 68.2               | -28.41       | PK               |
| Horizontal          | 4434.065                | 43.24                        | -20.73                    | 22.51                        | 54                 | -31.49       | AV               |
| Horizontal          | 11060.138               | 50.85                        | -8.45                     | 42.40                        | 68.2               | -25.80       | PK               |
| Horizontal          | 11060.138               | 42.48                        | -8.45                     | 34.03                        | 54                 | -19.97       | AV               |
| Horizontal          | 16590.175               | 53.37                        | -5.79                     | 47.58                        | 74                 | -26.42       | PK               |
| Horizontal          | 16590.175               | 40.79                        | -5.79                     | 35.00                        | 54                 | -19.00       | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.6G) - 802.11ax-HT20 |
|------------|--------------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5500 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.146       | 73.72            | -20.73            | 52.99            | 68.2     | -15.21 | PK               |
| Vertical                           | 4434.146       | 59.73            | -20.73            | 39.00            | 54       | -15.00 | AV               |
| Vertical                           | 11000.031      | 62.96            | -8.40             | 54.56            | 68.2     | -13.64 | PK               |
| Vertical                           | 11000.031      | 49.38            | -8.40             | 40.98            | 54       | -13.02 | AV               |
| Vertical                           | 16500.062      | 63.17            | -6.09             | 57.08            | 74       | -16.92 | PK               |
| Vertical                           | 16500.062      | 49.03            | -6.09             | 42.94            | 54       | -11.06 | AV               |
| Horizontal                         | 4434.074       | 73.43            | -20.73            | 52.70            | 68.2     | -15.50 | PK               |
| Horizontal                         | 4434.074       | 59.59            | -20.73            | 38.86            | 54       | -15.14 | AV               |
| Horizontal                         | 11000.006      | 63.28            | -8.40             | 54.88            | 68.2     | -13.32 | PK               |
| Horizontal                         | 11000.006      | 49.72            | -8.40             | 41.32            | 54       | -12.68 | AV               |
| Horizontal                         | 16500.098      | 63.86            | -6.09             | 57.77            | 74       | -16.23 | PK               |
| Horizontal                         | 16500.098      | 49.10            | -6.09             | 43.01            | 54       | -10.99 | AV               |
| middle Channel (5580 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.111       | 73.00            | -20.42            | 52.58            | 74       | -21.42 | PK               |
| Vertical                           | 4592.111       | 59.92            | -20.42            | 39.50            | 54       | -14.50 | AV               |
| Vertical                           | 11160.163      | 61.16            | -8.53             | 52.63            | 68.2     | -15.57 | PK               |
| Vertical                           | 11160.163      | 49.07            | -8.53             | 40.54            | 54       | -13.46 | AV               |
| Vertical                           | 16740.094      | 60.69            | -5.31             | 55.38            | 74       | -18.62 | PK               |
| Vertical                           | 16740.094      | 49.29            | -5.31             | 43.98            | 54       | -10.02 | AV               |
| Horizontal                         | 4592.098       | 70.26            | -20.42            | 49.85            | 74       | -24.15 | PK               |
| Horizontal                         | 4592.098       | 59.92            | -20.42            | 39.50            | 54       | -14.50 | AV               |
| Horizontal                         | 11160.041      | 64.50            | -8.53             | 55.97            | 68.2     | -12.23 | PK               |
| Horizontal                         | 11160.041      | 49.47            | -8.53             | 40.94            | 54       | -13.06 | AV               |
| Horizontal                         | 16740.071      | 61.41            | -5.31             | 56.10            | 74       | -17.90 | PK               |
| Horizontal                         | 16740.071      | 49.14            | -5.31             | 43.83            | 54       | -10.17 | AV               |
| High Channel (5700 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.122       | 73.64            | -20.12            | 53.52            | 74       | -20.48 | PK               |
| Vertical                           | 4739.122       | 59.34            | -20.12            | 39.21            | 54       | -14.79 | AV               |
| Vertical                           | 11400.005      | 61.81            | -8.72             | 53.09            | 68.2     | -15.11 | PK               |
| Vertical                           | 11400.005      | 49.06            | -8.72             | 40.34            | 54       | -13.66 | AV               |
| Vertical                           | 17100.112      | 61.03            | -3.92             | 57.11            | 74       | -16.89 | PK               |
| Vertical                           | 17100.112      | 49.15            | -3.92             | 45.23            | 54       | -8.77  | AV               |
| Horizontal                         | 4739.154       | 74.35            | -20.12            | 54.23            | 74       | -19.77 | PK               |
| Horizontal                         | 4739.154       | 59.34            | -20.12            | 39.22            | 54       | -14.78 | AV               |
| Horizontal                         | 11400.106      | 63.42            | -8.72             | 54.70            | 68.2     | -13.50 | PK               |
| Horizontal                         | 11400.106      | 49.63            | -8.72             | 40.91            | 54       | -13.09 | AV               |
| Horizontal                         | 17100.158      | 60.59            | -3.92             | 56.67            | 74       | -17.33 | PK               |
| Horizontal                         | 17100.158      | 49.97            | -3.92             | 46.05            | 54       | -7.95  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.  
Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.6G) - 802.11ax-HT40 |
|------------|--------------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5510 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.104       | 62.76            | -20.73            | 42.03            | 68.2     | -26.17 | PK               |
| Vertical                           | 4434.104       | 43.44            | -20.73            | 22.71            | 54       | -31.29 | AV               |
| Vertical                           | 11020.165      | 62.81            | -8.42             | 54.39            | 68.2     | -13.81 | PK               |
| Vertical                           | 11020.165      | 43.88            | -8.42             | 35.46            | 54       | -18.54 | AV               |
| Vertical                           | 16530.066      | 63.08            | -5.99             | 57.09            | 74       | -16.91 | PK               |
| Vertical                           | 16530.066      | 43.24            | -5.99             | 37.25            | 54       | -16.75 | AV               |
| Horizontal                         | 4434.050       | 62.59            | -20.73            | 41.86            | 74       | -32.14 | PK               |
| Horizontal                         | 4434.050       | 43.88            | -20.73            | 23.15            | 54       | -30.85 | AV               |
| Horizontal                         | 11020.097      | 50.67            | -8.42             | 42.25            | 68.2     | -25.95 | PK               |
| Horizontal                         | 11020.097      | 42.83            | -8.42             | 34.41            | 54       | -19.59 | AV               |
| Horizontal                         | 16530.050      | 52.64            | -5.99             | 46.65            | 74       | -27.35 | PK               |
| Horizontal                         | 16530.050      | 42.70            | -5.99             | 36.71            | 54       | -17.29 | AV               |
| middle Channel (5550 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.136       | 60.37            | -20.42            | 39.95            | 74       | -34.05 | PK               |
| Vertical                           | 4592.136       | 43.47            | -20.42            | 23.05            | 54       | -30.95 | AV               |
| Vertical                           | 11100.128      | 64.90            | -8.40             | 56.50            | 68.2     | -11.70 | PK               |
| Vertical                           | 11100.128      | 43.81            | -8.40             | 35.41            | 54       | -18.59 | AV               |
| Vertical                           | 16650.077      | 61.85            | -5.60             | 56.25            | 74       | -17.75 | PK               |
| Vertical                           | 16650.077      | 43.55            | -5.60             | 37.95            | 54       | -16.05 | AV               |
| Horizontal                         | 4592.097       | 64.01            | -20.42            | 43.59            | 74       | -30.41 | PK               |
| Horizontal                         | 4592.097       | 43.38            | -20.42            | 22.97            | 54       | -31.03 | AV               |
| Horizontal                         | 11100.009      | 51.75            | -8.40             | 43.35            | 68.2     | -24.85 | PK               |
| Horizontal                         | 11100.009      | 40.28            | -8.40             | 31.88            | 54       | -22.12 | AV               |
| Horizontal                         | 16650.083      | 54.35            | -5.60             | 48.75            | 74       | -25.25 | PK               |
| Horizontal                         | 16650.083      | 43.73            | -5.60             | 38.13            | 54       | -15.87 | AV               |
| High Channel (5670 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.008       | 61.16            | -20.12            | 41.04            | 68.2     | -27.16 | PK               |
| Vertical                           | 4739.008       | 43.04            | -20.12            | 22.92            | 54       | -31.08 | AV               |
| Vertical                           | 11340.132      | 63.48            | -8.67             | 54.81            | 68.2     | -13.39 | PK               |
| Vertical                           | 11340.132      | 43.07            | -8.67             | 34.40            | 54       | -19.60 | AV               |
| Vertical                           | 17010.179      | 61.41            | -4.41             | 57.00            | 74       | -17.00 | PK               |
| Vertical                           | 17010.179      | 43.97            | -4.41             | 39.56            | 54       | -14.44 | AV               |
| Horizontal                         | 4739.056       | 61.88            | -20.12            | 41.76            | 68.2     | -26.44 | PK               |
| Horizontal                         | 4739.056       | 43.84            | -20.12            | 23.72            | 54       | -30.28 | AV               |
| Horizontal                         | 11340.035      | 52.30            | -8.67             | 43.63            | 68.2     | -24.57 | PK               |
| Horizontal                         | 11340.035      | 41.15            | -8.67             | 32.48            | 54       | -21.52 | AV               |
| Horizontal                         | 17010.039      | 52.65            | -4.41             | 48.24            | 74       | -25.76 | PK               |
| Horizontal                         | 17010.039      | 44.03            | -4.41             | 39.62            | 54       | -14.38 | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.  
Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.6G) - 802.11ax-HT80 |
|------------|--------------------------|

| Polar<br>(H/V)      | Fre-<br>quency<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Correct<br>Factor<br>(dB) | Measure-<br>ment<br>(dBuV/m) | Limits<br>(dBuV/m) | Over<br>(dB) | Detector<br>Type |
|---------------------|-------------------------|------------------------------|---------------------------|------------------------------|--------------------|--------------|------------------|
| (5530 MHz)-Above 1G |                         |                              |                           |                              |                    |              |                  |
| Vertical            | 4434.058                | 64.77                        | -20.73                    | 44.04                        | 68.2               | -24.16       | PK               |
| Vertical            | 4434.058                | 43.75                        | -20.73                    | 23.02                        | 54                 | -30.98       | AV               |
| Vertical            | 11060.027               | 61.43                        | -8.45                     | 52.98                        | 68.2               | -15.22       | PK               |
| Vertical            | 11060.027               | 43.08                        | -8.45                     | 34.63                        | 54                 | -19.37       | AV               |
| Vertical            | 16590.126               | 63.44                        | -5.79                     | 57.65                        | 74                 | -16.35       | PK               |
| Vertical            | 16590.126               | 43.72                        | -5.79                     | 37.93                        | 54                 | -16.07       | AV               |
| Horizontal          | 4434.096                | 63.92                        | -20.73                    | 43.19                        | 68.2               | -25.01       | PK               |
| Horizontal          | 4434.096                | 43.20                        | -20.73                    | 22.47                        | 54                 | -31.53       | AV               |
| Horizontal          | 11060.196               | 51.37                        | -8.45                     | 42.92                        | 68.2               | -25.28       | PK               |
| Horizontal          | 11060.196               | 42.74                        | -8.45                     | 34.29                        | 54                 | -19.71       | AV               |
| Horizontal          | 16590.091               | 50.69                        | -5.79                     | 44.90                        | 74                 | -29.10       | PK               |
| Horizontal          | 16590.091               | 42.19                        | -5.79                     | 36.40                        | 54                 | -17.60       | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                      |
|------------|----------------------|
| Test Mode: | TX (5.8G) -- 802.11a |
|------------|----------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5745 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4679.119  | 70.30         | -20.24         | 50.06       | 74       | -23.94 | PK            |
| Vertical                           | 4679.119  | 59.82         | -20.24         | 39.58       | 54       | -14.42 | AV            |
| Vertical                           | 11490.065 | 62.47         | -8.79          | 53.68       | 68.2     | -14.52 | PK            |
| Vertical                           | 11490.065 | 49.23         | -8.79          | 40.44       | 54       | -13.56 | AV            |
| Vertical                           | 17235.183 | 58.02         | -3.18          | 54.84       | 68.2     | -13.36 | PK            |
| Vertical                           | 17235.183 | 44.92         | -3.18          | 41.74       | 54       | -12.26 | AV            |
| Horizontal                         | 4679.104  | 74.67         | -20.73         | 53.94       | 74       | -20.06 | PK            |
| Horizontal                         | 4679.104  | 59.71         | -20.73         | 38.98       | 54       | -15.02 | AV            |
| Horizontal                         | 11490.102 | 60.96         | -8.79          | 52.17       | 68.2     | -16.03 | PK            |
| Horizontal                         | 11490.102 | 49.86         | -8.79          | 41.07       | 54       | -12.93 | AV            |
| Horizontal                         | 17235.072 | 55.11         | -3.18          | 51.93       | 68.2     | -16.27 | PK            |
| Horizontal                         | 17235.072 | 44.97         | -3.18          | 41.79       | 54       | -12.21 | AV            |
| Middle Channel (5785 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.038  | 71.03         | -20.42         | 50.62       | 74       | -23.38 | PK            |
| Vertical                           | 4592.038  | 59.45         | -20.42         | 39.03       | 54       | -14.97 | AV            |
| Vertical                           | 11570.022 | 60.87         | -8.86          | 52.01       | 68.2     | -16.19 | PK            |
| Vertical                           | 11570.022 | 49.63         | -8.86          | 40.77       | 54       | -13.23 | AV            |
| Vertical                           | 17355.003 | 59.99         | -2.52          | 57.47       | 68.2     | -10.73 | PK            |
| Vertical                           | 17355.003 | 44.33         | -2.52          | 41.81       | 54       | -12.19 | AV            |
| Horizontal                         | 4592.135  | 70.63         | -20.42         | 50.22       | 74       | -23.78 | PK            |
| Horizontal                         | 4592.135  | 59.09         | -20.42         | 38.67       | 54       | -15.33 | AV            |
| Horizontal                         | 11570.102 | 64.88         | -8.86          | 56.02       | 68.2     | -12.18 | PK            |
| Horizontal                         | 11570.102 | 49.67         | -8.86          | 40.81       | 54       | -13.19 | AV            |
| Horizontal                         | 17355.093 | 56.98         | -2.52          | 54.46       | 68.2     | -13.74 | PK            |
| Horizontal                         | 17355.093 | 44.97         | -2.52          | 42.45       | 54       | -11.55 | AV            |
| High Channel (5825 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 6039.093  | 73.61         | -18.93         | 54.67       | 68.2     | -13.53 | PK            |
| Vertical                           | 6039.093  | 59.07         | -18.93         | 40.14       | 54       | -13.86 | AV            |
| Vertical                           | 11650.096 | 62.26         | -8.92          | 53.34       | 74       | -20.66 | PK            |
| Vertical                           | 11650.096 | 49.51         | -8.92          | 40.59       | 54       | -13.41 | AV            |
| Vertical                           | 17475.129 | 56.22         | -1.86          | 54.36       | 68.2     | -13.84 | PK            |
| Vertical                           | 17475.129 | 44.94         | -1.86          | 43.08       | 54       | -10.92 | AV            |
| Horizontal                         | 6039.056  | 73.90         | -18.93         | 54.96       | 68.2     | -13.24 | PK            |
| Horizontal                         | 6039.056  | 59.67         | -18.93         | 40.73       | 54       | -13.27 | AV            |
| Horizontal                         | 11650.168 | 61.84         | -8.92          | 52.92       | 74       | -21.08 | PK            |
| Horizontal                         | 11650.168 | 49.26         | -8.92          | 40.34       | 54       | -13.66 | AV            |
| Horizontal                         | 17475.092 | 56.24         | -1.86          | 54.38       | 68.2     | -13.82 | PK            |
| Horizontal                         | 17475.092 | 44.11         | -1.86          | 42.25       | 54       | -11.75 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The worst case is Antenna A.

Test Mode: TX (5.8G) --802.11n-HT20

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5745 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4679.014  | 70.32         | -20.24         | 50.08       | 74       | -23.92 | PK            |
| Vertical                           | 4679.014  | 59.56         | -20.24         | 39.31       | 54       | -14.69 | AV            |
| Vertical                           | 11490.187 | 64.95         | -8.79          | 56.16       | 68.2     | -12.04 | PK            |
| Vertical                           | 11490.187 | 49.98         | -8.79          | 41.19       | 54       | -12.81 | AV            |
| Vertical                           | 17235.004 | 56.59         | -3.18          | 53.41       | 68.2     | -14.79 | PK            |
| Vertical                           | 17235.004 | 44.05         | -3.18          | 40.87       | 54       | -13.13 | AV            |
| Horizontal                         | 4679.035  | 74.06         | -20.24         | 53.82       | 74       | -20.18 | PK            |
| Horizontal                         | 4679.035  | 59.43         | -20.24         | 39.19       | 54       | -14.81 | AV            |
| Horizontal                         | 11490.110 | 60.80         | -8.79          | 52.01       | 68.2     | -16.19 | PK            |
| Horizontal                         | 11490.110 | 49.19         | -8.79          | 40.40       | 54       | -13.60 | AV            |
| Horizontal                         | 17235.187 | 56.83         | -3.18          | 53.65       | 68.2     | -14.55 | PK            |
| Horizontal                         | 17235.187 | 44.89         | -3.18          | 41.71       | 54       | -12.29 | AV            |
| Middle Channel (5785 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.054  | 70.38         | -20.42         | 49.96       | 74       | -24.04 | PK            |
| Vertical                           | 4592.054  | 59.94         | -20.42         | 39.53       | 54       | -14.47 | AV            |
| Vertical                           | 11570.150 | 62.85         | -8.86          | 53.99       | 68.2     | -14.21 | PK            |
| Vertical                           | 11570.150 | 49.56         | -8.86          | 40.70       | 54       | -13.30 | AV            |
| Vertical                           | 17355.153 | 59.16         | -2.52          | 56.64       | 68.2     | -11.56 | PK            |
| Vertical                           | 17355.153 | 44.85         | -2.52          | 42.33       | 54       | -11.67 | AV            |
| Horizontal                         | 4592.190  | 73.50         | -20.42         | 53.08       | 74       | -20.92 | PK            |
| Horizontal                         | 4592.190  | 59.66         | -20.42         | 39.25       | 54       | -14.75 | AV            |
| Horizontal                         | 11570.060 | 62.75         | -8.86          | 53.89       | 68.2     | -14.31 | PK            |
| Horizontal                         | 11570.060 | 49.58         | -8.86          | 40.72       | 54       | -13.28 | AV            |
| Horizontal                         | 17355.115 | 58.74         | -2.52          | 56.22       | 68.2     | -11.98 | PK            |
| Horizontal                         | 17355.115 | 44.50         | -2.52          | 41.98       | 54       | -12.02 | AV            |
| High Channel (5825 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 6039.054  | 73.31         | -18.93         | 54.38       | 68.2     | -13.82 | PK            |
| Vertical                           | 6039.054  | 59.24         | -18.93         | 40.31       | 54       | -13.69 | AV            |
| Vertical                           | 11650.148 | 60.24         | -8.92          | 51.32       | 74       | -22.68 | PK            |
| Vertical                           | 11650.148 | 49.81         | -8.92          | 40.89       | 54       | -13.11 | AV            |
| Vertical                           | 17475.125 | 59.76         | -1.86          | 57.90       | 68.2     | -10.30 | PK            |
| Vertical                           | 17475.125 | 44.32         | -1.86          | 42.46       | 54       | -11.54 | AV            |
| Horizontal                         | 6039.076  | 74.73         | -18.93         | 55.80       | 68.2     | -12.40 | PK            |
| Horizontal                         | 6039.076  | 59.83         | -18.93         | 40.90       | 54       | -13.10 | AV            |
| Horizontal                         | 11650.002 | 62.61         | -8.92          | 53.69       | 74       | -20.31 | PK            |
| Horizontal                         | 11650.002 | 49.39         | -8.92          | 40.47       | 54       | -13.53 | AV            |
| Horizontal                         | 17475.057 | 55.86         | -1.86          | 54.00       | 68.2     | -14.20 | PK            |
| Horizontal                         | 17475.057 | 44.46         | -1.86          | 42.60       | 54       | -11.40 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX (5.8G) -- 802.11n-HT40 |
|------------|---------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5755 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4679.029  | 74.78         | -20.24         | 54.53       | 74       | -19.47 | PK            |
| Vertical                           | 4679.029  | 59.09         | -20.24         | 38.85       | 54       | -15.15 | AV            |
| Vertical                           | 11510.076 | 64.64         | -8.81          | 55.83       | 74       | -18.17 | PK            |
| Vertical                           | 11510.076 | 49.98         | -8.81          | 41.17       | 54       | -12.83 | AV            |
| Vertical                           | 17265.036 | 59.77         | -3.01          | 56.76       | 68.2     | -11.44 | PK            |
| Vertical                           | 17265.036 | 44.81         | -3.01          | 41.80       | 54       | -12.20 | AV            |
| Horizontal                         | 4679.054  | 70.24         | -20.24         | 50.00       | 74       | -24.00 | PK            |
| Horizontal                         | 4679.054  | 59.52         | -20.24         | 39.28       | 54       | -14.72 | AV            |
| Horizontal                         | 11510.087 | 63.42         | -8.81          | 54.61       | 74       | -19.39 | PK            |
| Horizontal                         | 11510.087 | 49.57         | -8.81          | 40.76       | 54       | -13.24 | AV            |
| Horizontal                         | 17265.167 | 56.50         | -3.01          | 53.49       | 68.2     | -14.71 | PK            |
| Horizontal                         | 17265.167 | 44.00         | -3.01          | 40.99       | 54       | -13.01 | AV            |
| Middle Channel (5795 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 6039.069  | 73.98         | -18.93         | 55.05       | 68.2     | -13.15 | PK            |
| Vertical                           | 6039.069  | 59.92         | -18.93         | 40.99       | 54       | -13.01 | AV            |
| Vertical                           | 11590.193 | 63.85         | -8.87          | 54.98       | 74       | -19.02 | PK            |
| Vertical                           | 11590.193 | 49.33         | -8.87          | 40.46       | 54       | -13.54 | AV            |
| Vertical                           | 17385.088 | 59.60         | -2.35          | 57.25       | 68.2     | -10.95 | PK            |
| Vertical                           | 17385.088 | 44.46         | -2.35          | 42.11       | 54       | -11.89 | AV            |
| Horizontal                         | 6039.075  | 71.59         | -18.93         | 52.65       | 68.2     | -15.55 | PK            |
| Horizontal                         | 6039.075  | 59.47         | -18.93         | 40.54       | 54       | -13.46 | AV            |
| Horizontal                         | 11590.174 | 63.33         | -8.87          | 54.46       | 74       | -19.54 | PK            |
| Horizontal                         | 11590.174 | 49.19         | -8.87          | 40.32       | 54       | -13.68 | AV            |
| Horizontal                         | 17385.115 | 57.64         | -2.35          | 55.29       | 68.2     | -12.91 | PK            |
| Horizontal                         | 17385.115 | 44.77         | -2.35          | 42.42       | 54       | -11.58 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode: TX (5.8G) --802.11ac-HT20

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5745 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4679.024  | 70.35         | -20.24         | 50.11       | 74       | -23.89 | PK            |
| Vertical                           | 4679.024  | 59.96         | -20.24         | 39.72       | 54       | -14.28 | AV            |
| Vertical                           | 11490.097 | 62.88         | -8.79          | 54.09       | 68.2     | -14.11 | PK            |
| Vertical                           | 11490.097 | 49.54         | -8.79          | 40.75       | 54       | -13.25 | AV            |
| Vertical                           | 17235.036 | 56.36         | -3.18          | 53.18       | 68.2     | -15.02 | PK            |
| Vertical                           | 17235.036 | 44.29         | -3.18          | 41.11       | 54       | -12.89 | AV            |
| Horizontal                         | 4679.059  | 70.30         | -20.24         | 50.06       | 74       | -23.94 | PK            |
| Horizontal                         | 4679.059  | 59.71         | -20.24         | 39.47       | 54       | -14.53 | AV            |
| Horizontal                         | 11490.022 | 64.58         | -8.79          | 55.79       | 68.2     | -12.41 | PK            |
| Horizontal                         | 11490.022 | 49.65         | -8.79          | 40.86       | 54       | -13.14 | AV            |
| Horizontal                         | 17235.006 | 58.33         | -3.18          | 55.15       | 68.2     | -13.05 | PK            |
| Horizontal                         | 17235.006 | 44.52         | -3.18          | 41.34       | 54       | -12.66 | AV            |
| Middle Channel (5785 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.164  | 74.47         | -20.42         | 54.06       | 74       | -19.94 | PK            |
| Vertical                           | 4592.164  | 59.76         | -20.42         | 39.35       | 54       | -14.65 | AV            |
| Vertical                           | 11570.020 | 63.39         | -8.86          | 54.53       | 68.2     | -13.67 | PK            |
| Vertical                           | 11570.020 | 49.23         | -8.86          | 40.37       | 54       | -13.63 | AV            |
| Vertical                           | 17355.086 | 59.52         | -2.52          | 57.00       | 68.2     | -11.20 | PK            |
| Vertical                           | 17355.086 | 44.03         | -2.52          | 41.51       | 54       | -12.49 | AV            |
| Horizontal                         | 4592.192  | 70.81         | -20.42         | 50.40       | 74       | -23.60 | PK            |
| Horizontal                         | 4592.192  | 59.54         | -20.42         | 39.12       | 54       | -14.88 | AV            |
| Horizontal                         | 11570.087 | 63.32         | -8.86          | 54.46       | 68.2     | -13.74 | PK            |
| Horizontal                         | 11570.087 | 49.64         | -8.86          | 40.78       | 54       | -13.22 | AV            |
| Horizontal                         | 17355.164 | 57.82         | -2.52          | 55.30       | 68.2     | -12.90 | PK            |
| Horizontal                         | 17355.164 | 44.86         | -2.52          | 42.34       | 54       | -11.66 | AV            |
| High Channel (5825 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 6039.018  | 74.88         | -18.93         | 55.95       | 68.2     | -12.25 | PK            |
| Vertical                           | 6039.018  | 59.16         | -18.93         | 40.23       | 54       | -13.77 | AV            |
| Vertical                           | 11650.009 | 64.99         | -8.92          | 56.07       | 74       | -17.93 | PK            |
| Vertical                           | 11650.009 | 49.17         | -8.92          | 40.25       | 54       | -13.75 | AV            |
| Vertical                           | 17475.140 | 57.52         | -1.86          | 55.66       | 68.2     | -12.54 | PK            |
| Vertical                           | 17475.140 | 44.41         | -1.86          | 42.55       | 54       | -11.45 | AV            |
| Horizontal                         | 6039.138  | 74.37         | -18.93         | 55.44       | 68.2     | -12.76 | PK            |
| Horizontal                         | 6039.138  | 59.17         | -18.93         | 40.24       | 54       | -13.76 | AV            |
| Horizontal                         | 11650.045 | 60.42         | -8.92          | 51.50       | 74       | -22.50 | PK            |
| Horizontal                         | 11650.045 | 49.43         | -8.92          | 40.51       | 54       | -13.49 | AV            |
| Horizontal                         | 17475.147 | 59.52         | -1.86          | 57.66       | 68.2     | -10.54 | PK            |
| Horizontal                         | 17475.147 | 44.21         | -1.86          | 42.35       | 54       | -11.65 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                            |
|------------|----------------------------|
| Test Mode: | TX (5.8G) -- 802.11ac-HT40 |
|------------|----------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5755 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4679.118  | 71.99         | -20.24         | 51.75       | 74       | -22.25 | PK            |
| Vertical                           | 4679.118  | 59.95         | -20.24         | 39.71       | 54       | -14.29 | AV            |
| Vertical                           | 11510.090 | 64.31         | -8.81          | 55.50       | 74       | -18.50 | PK            |
| Vertical                           | 11510.090 | 49.65         | -8.81          | 40.84       | 54       | -13.16 | AV            |
| Vertical                           | 17265.139 | 57.30         | -3.01          | 54.29       | 68.2     | -13.91 | PK            |
| Vertical                           | 17265.139 | 44.20         | -3.01          | 41.19       | 54       | -12.81 | AV            |
| Horizontal                         | 4679.194  | 74.02         | -20.24         | 53.77       | 74       | -20.23 | PK            |
| Horizontal                         | 4679.194  | 59.73         | -20.24         | 39.49       | 54       | -14.51 | AV            |
| Horizontal                         | 11510.025 | 64.97         | -8.81          | 56.16       | 74       | -17.84 | PK            |
| Horizontal                         | 11510.025 | 49.90         | -8.81          | 41.09       | 54       | -12.91 | AV            |
| Horizontal                         | 17265.182 | 59.98         | -3.01          | 56.97       | 68.2     | -11.23 | PK            |
| Horizontal                         | 17265.182 | 44.18         | -3.01          | 41.17       | 54       | -12.83 | AV            |
| Middle Channel (5795 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 6039.187  | 74.25         | -18.93         | 55.32       | 68.2     | -12.88 | PK            |
| Vertical                           | 6039.187  | 59.84         | -18.93         | 40.91       | 54       | -13.09 | AV            |
| Vertical                           | 11590.024 | 62.17         | -8.87          | 53.30       | 74       | -20.70 | PK            |
| Vertical                           | 11590.024 | 49.45         | -8.87          | 40.58       | 54       | -13.42 | AV            |
| Vertical                           | 17385.055 | 55.61         | -2.35          | 53.26       | 68.2     | -14.94 | PK            |
| Vertical                           | 17385.055 | 44.31         | -2.35          | 41.96       | 54       | -12.04 | AV            |
| Horizontal                         | 6039.029  | 71.20         | -18.93         | 52.26       | 68.2     | -15.94 | PK            |
| Horizontal                         | 6039.029  | 59.80         | -18.93         | 40.86       | 54       | -13.14 | AV            |
| Horizontal                         | 11590.078 | 61.37         | -8.87          | 52.50       | 74       | -21.50 | PK            |
| Horizontal                         | 11590.078 | 49.50         | -8.87          | 40.63       | 54       | -13.37 | AV            |
| Horizontal                         | 17385.074 | 57.16         | -2.35          | 54.81       | 68.2     | -13.39 | PK            |
| Horizontal                         | 17385.074 | 44.19         | -2.35          | 41.84       | 54       | -12.16 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                            |
|------------|----------------------------|
| Test Mode: | TX (5.8G) -- 802.11ac-HT80 |
|------------|----------------------------|

| Polar<br>(H/V)      | Frequency<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Correct<br>Factor<br>(dB) | Measure-<br>ment<br>(dBuV/m) | Limits<br>(dBuV/m) | Over<br>(dB) | Detector<br>Type |
|---------------------|--------------------|------------------------------|---------------------------|------------------------------|--------------------|--------------|------------------|
| (5775 MHz)-Above 1G |                    |                              |                           |                              |                    |              |                  |
| Vertical            | 4679.101           | 71.50                        | -20.24                    | 51.25                        | 74                 | -22.75       | PK               |
| Vertical            | 4679.101           | 59.83                        | -20.24                    | 39.59                        | 54                 | -14.41       | AV               |
| Vertical            | 11550.080          | 60.14                        | -8.84                     | 51.30                        | 74                 | -22.70       | PK               |
| Vertical            | 11550.080          | 49.26                        | -8.84                     | 40.42                        | 54                 | -13.58       | AV               |
| Vertical            | 17325.034          | 56.56                        | -2.68                     | 53.88                        | 68.2               | -14.32       | PK               |
| Vertical            | 17325.034          | 44.20                        | -2.68                     | 41.52                        | 54                 | -12.48       | AV               |
| Horizontal          | 4679.123           | 72.78                        | -20.24                    | 52.54                        | 74                 | -21.46       | PK               |
| Horizontal          | 4679.123           | 59.80                        | -20.24                    | 39.56                        | 54                 | -14.44       | AV               |
| Horizontal          | 11550.014          | 63.22                        | -8.84                     | 54.38                        | 74                 | -19.62       | PK               |
| Horizontal          | 11550.014          | 49.26                        | -8.84                     | 40.42                        | 54                 | -13.58       | AV               |
| Horizontal          | 17325.028          | 56.65                        | -2.68                     | 53.97                        | 68.2               | -14.23       | PK               |
| Horizontal          | 17325.028          | 44.68                        | -2.68                     | 42.00                        | 54                 | -12.00       | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode: TX (5.8G) --802.11ax-HT20

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5745 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4679.184  | 73.83         | -20.24         | 53.59       | 74       | -20.41 | PK            |
| Vertical                           | 4679.184  | 59.20         | -20.24         | 38.96       | 54       | -15.04 | AV            |
| Vertical                           | 11490.058 | 63.77         | -8.79          | 54.98       | 68.2     | -13.22 | PK            |
| Vertical                           | 11490.058 | 49.56         | -8.79          | 40.77       | 54       | -13.23 | AV            |
| Vertical                           | 17235.041 | 56.03         | -3.18          | 52.85       | 68.2     | -15.35 | PK            |
| Vertical                           | 17235.041 | 44.16         | -3.18          | 40.98       | 54       | -13.02 | AV            |
| Horizontal                         | 4679.184  | 72.28         | -20.24         | 52.04       | 74       | -21.96 | PK            |
| Horizontal                         | 4679.184  | 59.99         | -20.24         | 39.75       | 54       | -14.25 | AV            |
| Horizontal                         | 11490.100 | 64.54         | -8.79          | 55.75       | 68.2     | -12.45 | PK            |
| Horizontal                         | 11490.100 | 49.62         | -8.79          | 40.83       | 54       | -13.17 | AV            |
| Horizontal                         | 17235.192 | 59.08         | -3.18          | 55.90       | 68.2     | -12.30 | PK            |
| Horizontal                         | 17235.192 | 44.37         | -3.18          | 41.19       | 54       | -12.81 | AV            |
| Middle Channel (5785 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.070  | 73.01         | -20.42         | 52.60       | 74       | -21.40 | PK            |
| Vertical                           | 4592.070  | 59.09         | -20.42         | 38.68       | 54       | -15.32 | AV            |
| Vertical                           | 11570.111 | 60.27         | -8.86          | 51.41       | 68.2     | -16.79 | PK            |
| Vertical                           | 11570.111 | 49.88         | -8.86          | 41.02       | 54       | -12.98 | AV            |
| Vertical                           | 17355.187 | 57.46         | -2.52          | 54.94       | 68.2     | -13.26 | PK            |
| Vertical                           | 17355.187 | 44.99         | -2.52          | 42.47       | 54       | -11.53 | AV            |
| Horizontal                         | 4592.102  | 72.65         | -20.42         | 52.24       | 74       | -21.76 | PK            |
| Horizontal                         | 4592.102  | 59.41         | -20.42         | 39.00       | 54       | -15.00 | AV            |
| Horizontal                         | 11570.183 | 64.73         | -8.86          | 55.87       | 68.2     | -12.33 | PK            |
| Horizontal                         | 11570.183 | 49.87         | -8.86          | 41.01       | 54       | -12.99 | AV            |
| Horizontal                         | 17355.055 | 58.39         | -2.52          | 55.87       | 68.2     | -12.33 | PK            |
| Horizontal                         | 17355.055 | 44.01         | -2.52          | 41.49       | 54       | -12.51 | AV            |
| High Channel (5825 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 6039.124  | 73.79         | -18.93         | 54.86       | 68.2     | -13.34 | PK            |
| Vertical                           | 6039.124  | 59.86         | -18.93         | 40.93       | 54       | -13.07 | AV            |
| Vertical                           | 11650.145 | 64.09         | -8.92          | 55.17       | 74       | -18.83 | PK            |
| Vertical                           | 11650.145 | 49.34         | -8.92          | 40.42       | 54       | -13.58 | AV            |
| Vertical                           | 17475.095 | 58.64         | -1.86          | 56.78       | 68.2     | -11.42 | PK            |
| Vertical                           | 17475.095 | 44.22         | -1.86          | 42.36       | 54       | -11.64 | AV            |
| Horizontal                         | 6039.129  | 73.67         | -18.93         | 54.74       | 68.2     | -13.46 | PK            |
| Horizontal                         | 6039.129  | 59.75         | -18.93         | 40.82       | 54       | -13.18 | AV            |
| Horizontal                         | 11650.140 | 64.49         | -8.92          | 55.57       | 74       | -18.43 | PK            |
| Horizontal                         | 11650.140 | 49.62         | -8.92          | 40.70       | 54       | -13.30 | AV            |
| Horizontal                         | 17475.048 | 55.19         | -1.86          | 53.33       | 68.2     | -14.87 | PK            |
| Horizontal                         | 17475.048 | 44.57         | -1.86          | 42.71       | 54       | -11.29 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                            |
|------------|----------------------------|
| Test Mode: | TX (5.8G) -- 802.11ax-HT40 |
|------------|----------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5755 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4679.141  | 72.78         | -20.24         | 52.54       | 74       | -21.46 | PK            |
| Vertical                           | 4679.141  | 59.58         | -20.24         | 39.34       | 54       | -14.66 | AV            |
| Vertical                           | 11510.123 | 64.20         | -8.81          | 55.39       | 74       | -18.61 | PK            |
| Vertical                           | 11510.123 | 49.93         | -8.81          | 41.12       | 54       | -12.88 | AV            |
| Vertical                           | 17265.069 | 57.44         | -3.01          | 54.43       | 68.2     | -13.77 | PK            |
| Vertical                           | 17265.069 | 44.85         | -3.01          | 41.84       | 54       | -12.16 | AV            |
| Horizontal                         | 4679.053  | 74.93         | -20.24         | 54.69       | 74       | -19.31 | PK            |
| Horizontal                         | 4679.053  | 59.94         | -20.24         | 39.70       | 54       | -14.30 | AV            |
| Horizontal                         | 11510.036 | 63.14         | -8.81          | 54.33       | 74       | -19.67 | PK            |
| Horizontal                         | 11510.036 | 49.86         | -8.81          | 41.05       | 54       | -12.95 | AV            |
| Horizontal                         | 17265.074 | 58.91         | -3.01          | 55.90       | 68.2     | -12.30 | PK            |
| Horizontal                         | 17265.074 | 44.63         | -3.01          | 41.62       | 54       | -12.38 | AV            |
| Middle Channel (5795 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 6039.094  | 70.12         | -18.93         | 51.19       | 68.2     | -17.01 | PK            |
| Vertical                           | 6039.094  | 59.11         | -18.93         | 40.18       | 54       | -13.82 | AV            |
| Vertical                           | 11590.156 | 62.27         | -8.87          | 53.40       | 74       | -20.60 | PK            |
| Vertical                           | 11590.156 | 49.11         | -8.87          | 40.24       | 54       | -13.76 | AV            |
| Vertical                           | 17385.033 | 55.77         | -2.35          | 53.42       | 68.2     | -14.78 | PK            |
| Vertical                           | 17385.033 | 44.25         | -2.35          | 41.90       | 54       | -12.10 | AV            |
| Horizontal                         | 6039.016  | 72.42         | -18.93         | 53.48       | 68.2     | -14.72 | PK            |
| Horizontal                         | 6039.016  | 59.54         | -18.93         | 40.61       | 54       | -13.39 | AV            |
| Horizontal                         | 11590.137 | 60.13         | -8.87          | 51.26       | 74       | -22.74 | PK            |
| Horizontal                         | 11590.137 | 49.91         | -8.87          | 41.04       | 54       | -12.96 | AV            |
| Horizontal                         | 17385.184 | 57.36         | -2.35          | 55.01       | 68.2     | -13.19 | PK            |
| Horizontal                         | 17385.184 | 44.15         | -2.35          | 41.80       | 54       | -12.20 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

|            |                            |
|------------|----------------------------|
| Test Mode: | TX (5.8G) -- 802.11ax-HT80 |
|------------|----------------------------|

| Polar               | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|---------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)               | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| (5775 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical            | 4679.014  | 70.62         | -20.24         | 50.38       | 74       | -23.62 | PK            |
| Vertical            | 4679.014  | 59.57         | -20.24         | 39.32       | 54       | -14.68 | AV            |
| Vertical            | 11550.157 | 63.09         | -8.84          | 54.25       | 74       | -19.75 | PK            |
| Vertical            | 11550.157 | 49.27         | -8.84          | 40.43       | 54       | -13.57 | AV            |
| Vertical            | 17325.041 | 55.51         | -2.68          | 52.83       | 68.2     | -15.37 | PK            |
| Vertical            | 17325.041 | 44.95         | -2.68          | 42.27       | 54       | -11.73 | AV            |
| Horizontal          | 4679.110  | 74.56         | -20.24         | 54.32       | 74       | -19.68 | PK            |
| Horizontal          | 4679.110  | 59.19         | -20.24         | 38.94       | 54       | -15.06 | AV            |
| Horizontal          | 11550.009 | 64.29         | -8.84          | 55.45       | 74       | -18.55 | PK            |
| Horizontal          | 11550.009 | 49.10         | -8.84          | 40.26       | 54       | -13.74 | AV            |
| Horizontal          | 17325.023 | 59.05         | -2.68          | 56.37       | 68.2     | -11.83 | PK            |
| Horizontal          | 17325.023 | 44.92         | -2.68          | 42.24       | 54       | -11.76 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Antenna 2  
Between 1GHz – 40GHz

|            |                    |
|------------|--------------------|
| Test Mode: | TX(5.1G) - 802.11a |
|------------|--------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5180 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.055  | 74.48         | -20.73         | 53.75       | 68.2     | -14.45 | PK            |
| Vertical                           | 4434.055  | 59.50         | -20.73         | 38.77       | 54       | -15.23 | AV            |
| Vertical                           | 10360.189 | 62.29         | -9.36          | 52.93       | 68.2     | -15.27 | PK            |
| Vertical                           | 10360.189 | 49.33         | -9.36          | 39.97       | 54       | -14.03 | AV            |
| Vertical                           | 15540.160 | 60.26         | -7.84          | 52.42       | 74       | -21.58 | PK            |
| Vertical                           | 15540.160 | 49.16         | -7.84          | 41.32       | 54       | -12.68 | AV            |
| Horizontal                         | 4434.142  | 73.95         | -20.73         | 53.22       | 68.2     | -14.98 | PK            |
| Horizontal                         | 4434.142  | 59.31         | -20.73         | 38.58       | 54       | -15.42 | AV            |
| Horizontal                         | 10360.170 | 62.69         | -9.36          | 53.33       | 68.2     | -14.87 | PK            |
| Horizontal                         | 10360.170 | 49.38         | -9.36          | 40.02       | 54       | -13.98 | AV            |
| Horizontal                         | 15540.058 | 61.49         | -7.84          | 53.65       | 74       | -20.35 | PK            |
| Horizontal                         | 15540.058 | 49.17         | -7.84          | 41.33       | 54       | -12.67 | AV            |
| Middle Channel (5200 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.178  | 70.90         | -20.42         | 50.48       | 74       | -23.52 | PK            |
| Vertical                           | 4592.178  | 59.72         | -20.42         | 39.31       | 54       | -14.69 | AV            |
| Vertical                           | 10400.187 | 63.00         | -9.30          | 53.70       | 68.2     | -14.50 | PK            |
| Vertical                           | 10400.187 | 49.94         | -9.30          | 40.64       | 54       | -13.36 | AV            |
| Vertical                           | 15600.153 | 62.77         | -7.82          | 54.95       | 74       | -19.05 | PK            |
| Vertical                           | 15600.153 | 49.04         | -7.82          | 41.22       | 54       | -12.78 | AV            |
| Horizontal                         | 4592.045  | 73.26         | -20.42         | 52.84       | 74       | -21.16 | PK            |
| Horizontal                         | 4592.045  | 59.57         | -20.42         | 39.15       | 54       | -14.85 | AV            |
| Horizontal                         | 10400.040 | 64.47         | -9.30          | 55.17       | 68.2     | -13.03 | PK            |
| Horizontal                         | 10400.040 | 49.96         | -9.30          | 40.66       | 54       | -13.34 | AV            |
| Horizontal                         | 15600.040 | 64.02         | -7.82          | 56.20       | 74       | -17.80 | PK            |
| Horizontal                         | 15600.040 | 49.97         | -7.82          | 42.15       | 54       | -11.85 | AV            |
| High Channel (5240 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 4739.034  | 70.85         | -20.12         | 50.73       | 74       | -23.27 | PK            |
| Vertical                           | 4739.034  | 59.71         | -20.12         | 39.58       | 54       | -14.42 | AV            |
| Vertical                           | 10480.007 | 60.49         | -9.18          | 51.31       | 68.2     | -16.89 | PK            |
| Vertical                           | 10480.007 | 49.80         | -9.18          | 40.62       | 54       | -13.38 | AV            |
| Vertical                           | 15720.192 | 61.63         | -7.78          | 53.85       | 74       | -20.15 | PK            |
| Vertical                           | 15720.192 | 49.11         | -7.78          | 41.33       | 54       | -12.67 | AV            |
| Horizontal                         | 4739.167  | 72.29         | -20.12         | 52.17       | 74       | -21.83 | PK            |
| Horizontal                         | 4739.167  | 59.10         | -20.12         | 38.98       | 54       | -15.02 | AV            |
| Horizontal                         | 10480.039 | 63.10         | -9.18          | 53.92       | 68.2     | -14.28 | PK            |
| Horizontal                         | 10480.039 | 49.89         | -9.18          | 40.71       | 54       | -13.29 | AV            |
| Horizontal                         | 15720.053 | 61.50         | -7.78          | 53.72       | 74       | -20.28 | PK            |
| Horizontal                         | 15720.053 | 49.66         | -7.78          | 41.88       | 54       | -12.12 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The worst case is Antenna A.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX(5.1G) - 802.11n-HT20 |
|------------|-------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5180 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.006  | 74.64         | -20.73         | 53.91       | 68.2     | -14.29 | PK            |
| Vertical                           | 4434.006  | 59.12         | -20.73         | 38.39       | 54       | -15.61 | AV            |
| Vertical                           | 10360.097 | 60.08         | -9.36          | 50.72       | 68.2     | -17.48 | PK            |
| Vertical                           | 10360.097 | 49.88         | -9.36          | 40.52       | 54       | -13.48 | AV            |
| Vertical                           | 15540.151 | 62.87         | -7.84          | 55.03       | 74       | -18.97 | PK            |
| Vertical                           | 15540.151 | 49.59         | -7.84          | 41.75       | 54       | -12.25 | AV            |
| Horizontal                         | 4434.107  | 71.43         | -20.73         | 50.70       | 68.2     | -17.50 | PK            |
| Horizontal                         | 4434.107  | 59.40         | -20.73         | 38.67       | 54       | -15.33 | AV            |
| Horizontal                         | 10360.129 | 61.76         | -9.36          | 52.40       | 68.2     | -15.80 | PK            |
| Horizontal                         | 10360.129 | 49.97         | -9.36          | 40.61       | 54       | -13.39 | AV            |
| Horizontal                         | 15540.015 | 60.45         | -7.84          | 52.61       | 74       | -21.39 | PK            |
| Horizontal                         | 15540.015 | 49.06         | -7.84          | 41.22       | 54       | -12.78 | AV            |
| Middle Channel (5200 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.151  | 71.54         | -20.42         | 51.12       | 74       | -22.88 | PK            |
| Vertical                           | 4592.151  | 59.72         | -20.42         | 39.31       | 54       | -14.69 | AV            |
| Vertical                           | 10400.126 | 64.03         | -9.30          | 54.73       | 68.2     | -13.47 | PK            |
| Vertical                           | 10400.126 | 49.18         | -9.30          | 39.88       | 54       | -14.12 | AV            |
| Vertical                           | 15600.075 | 61.13         | -7.82          | 53.31       | 74       | -20.69 | PK            |
| Vertical                           | 15600.075 | 49.41         | -7.82          | 41.59       | 54       | -12.41 | AV            |
| Horizontal                         | 4592.175  | 74.25         | -20.42         | 53.83       | 74       | -20.17 | PK            |
| Horizontal                         | 4592.175  | 59.53         | -20.42         | 39.11       | 54       | -14.89 | AV            |
| Horizontal                         | 10400.128 | 60.25         | -9.30          | 50.95       | 68.2     | -17.25 | PK            |
| Horizontal                         | 10400.128 | 49.56         | -9.30          | 40.26       | 54       | -13.74 | AV            |
| Horizontal                         | 15600.019 | 61.28         | -7.82          | 53.46       | 74       | -20.54 | PK            |
| Horizontal                         | 15600.019 | 49.68         | -7.82          | 41.86       | 54       | -12.14 | AV            |
| High Channel (5240 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 4739.175  | 71.83         | -20.12         | 51.70       | 74       | -22.30 | PK            |
| Vertical                           | 4739.175  | 59.77         | -20.12         | 39.65       | 54       | -14.35 | AV            |
| Vertical                           | 10480.165 | 64.45         | -9.18          | 55.27       | 68.2     | -12.93 | PK            |
| Vertical                           | 10480.165 | 49.55         | -9.18          | 40.37       | 54       | -13.63 | AV            |
| Vertical                           | 15720.103 | 62.71         | -7.78          | 54.93       | 74       | -19.07 | PK            |
| Vertical                           | 15720.103 | 49.36         | -7.78          | 41.58       | 54       | -12.42 | AV            |
| Horizontal                         | 4739.023  | 71.27         | -20.12         | 51.14       | 74       | -22.86 | PK            |
| Horizontal                         | 4739.023  | 59.03         | -20.12         | 38.90       | 54       | -15.10 | AV            |
| Horizontal                         | 10480.196 | 60.03         | -9.18          | 50.85       | 68.2     | -17.35 | PK            |
| Horizontal                         | 10480.196 | 49.98         | -9.18          | 40.80       | 54       | -13.20 | AV            |
| Horizontal                         | 15720.115 | 64.27         | -7.78          | 56.49       | 74       | -17.51 | PK            |
| Horizontal                         | 15720.115 | 49.39         | -7.78          | 41.61       | 54       | -12.39 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.