






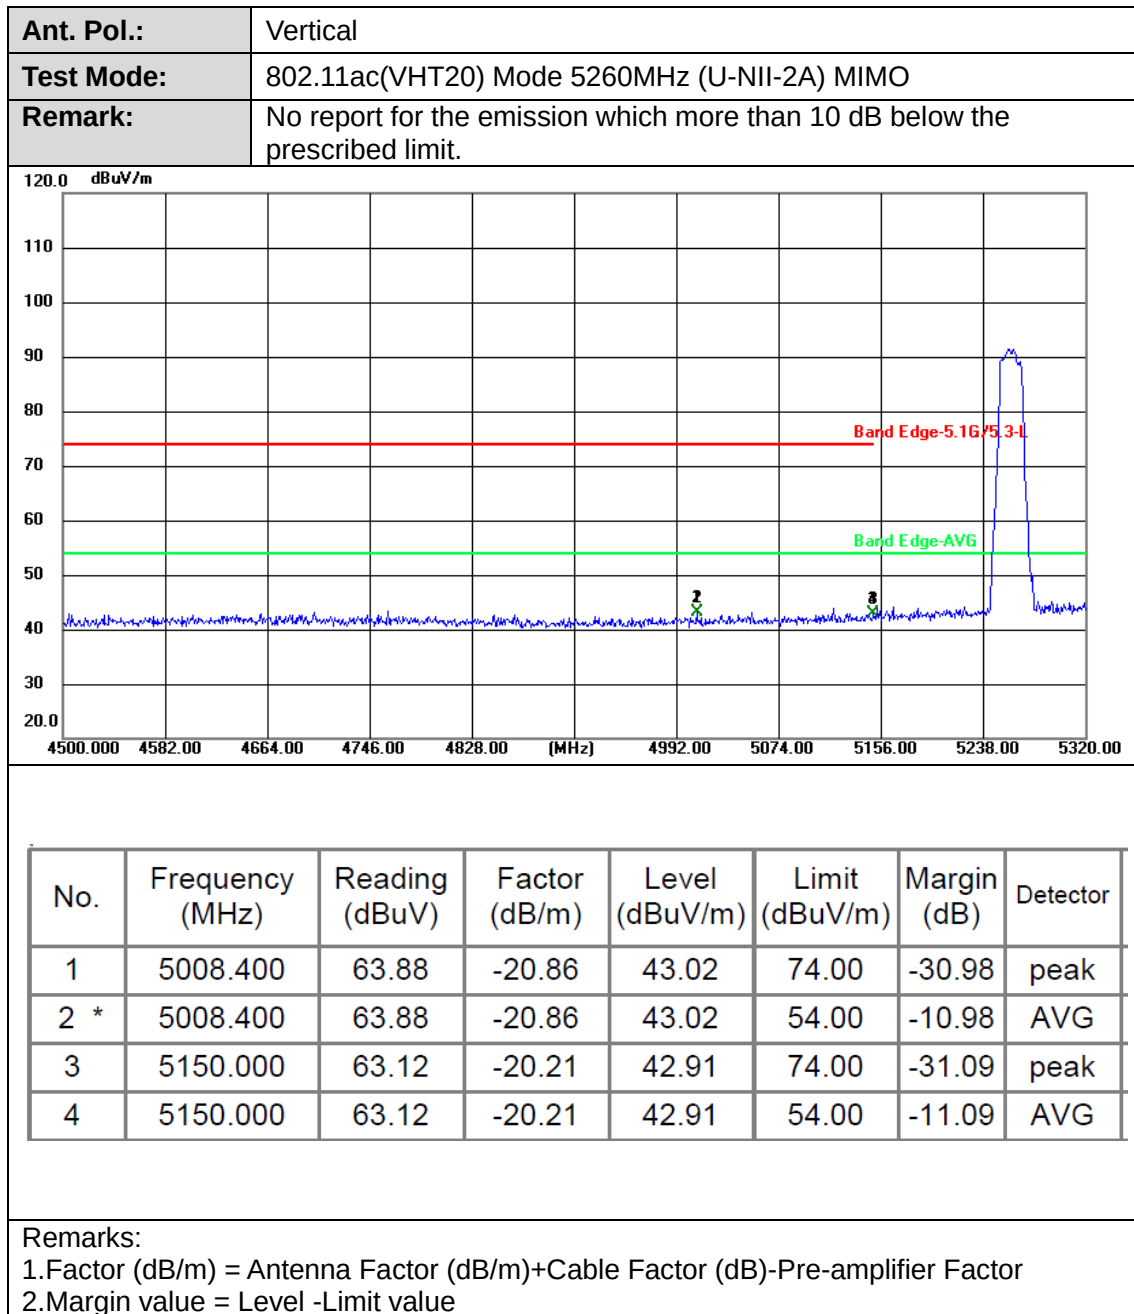


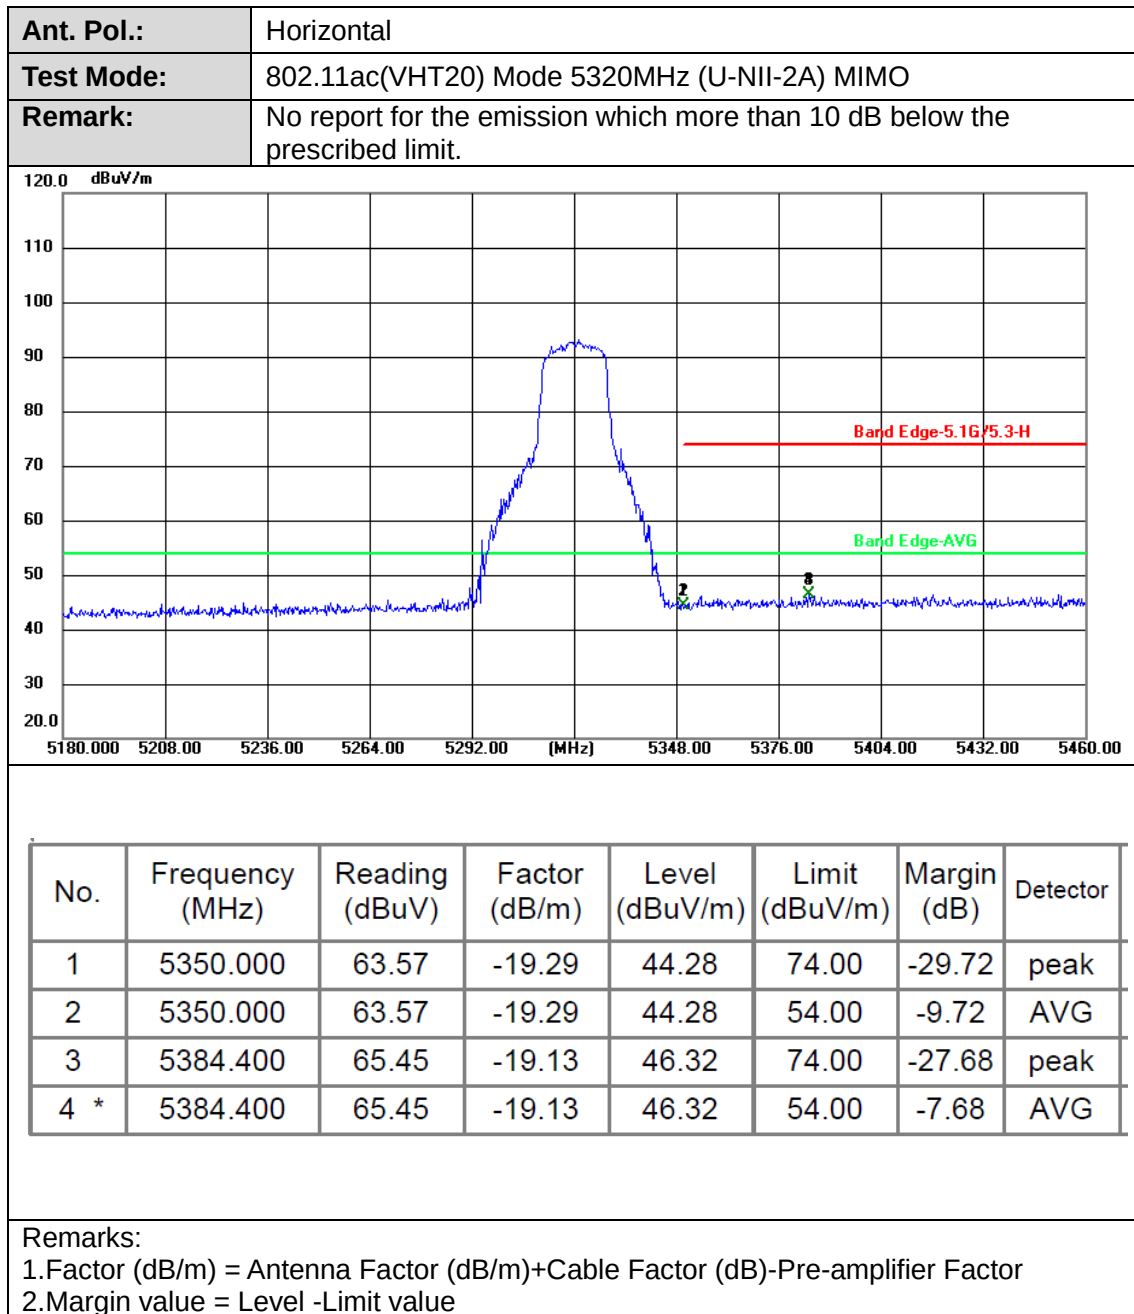


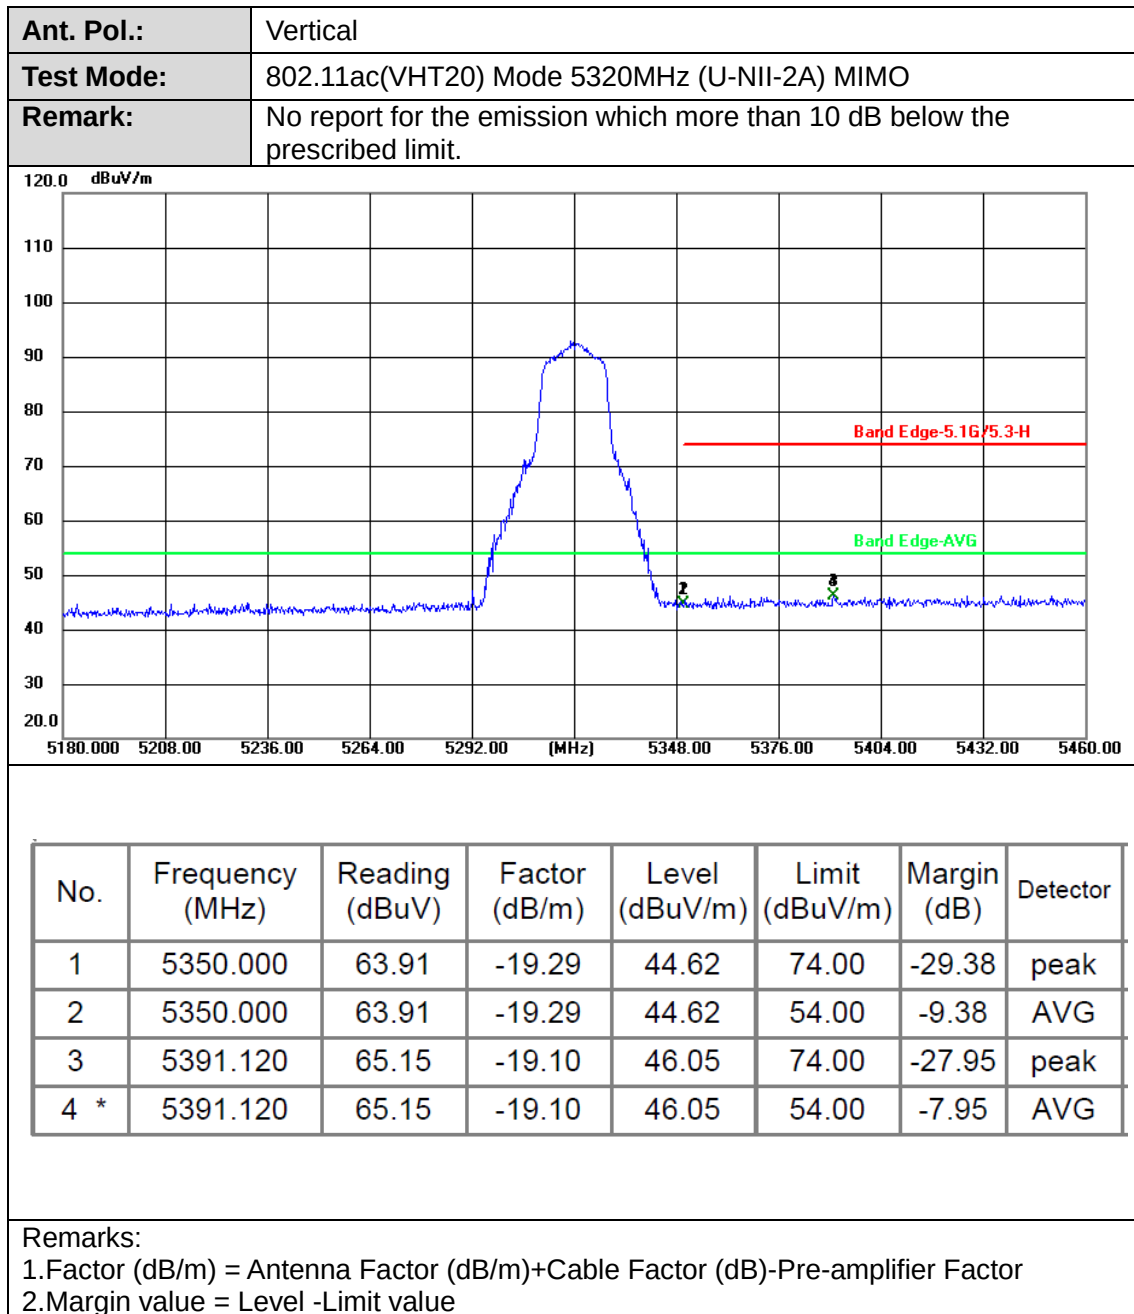


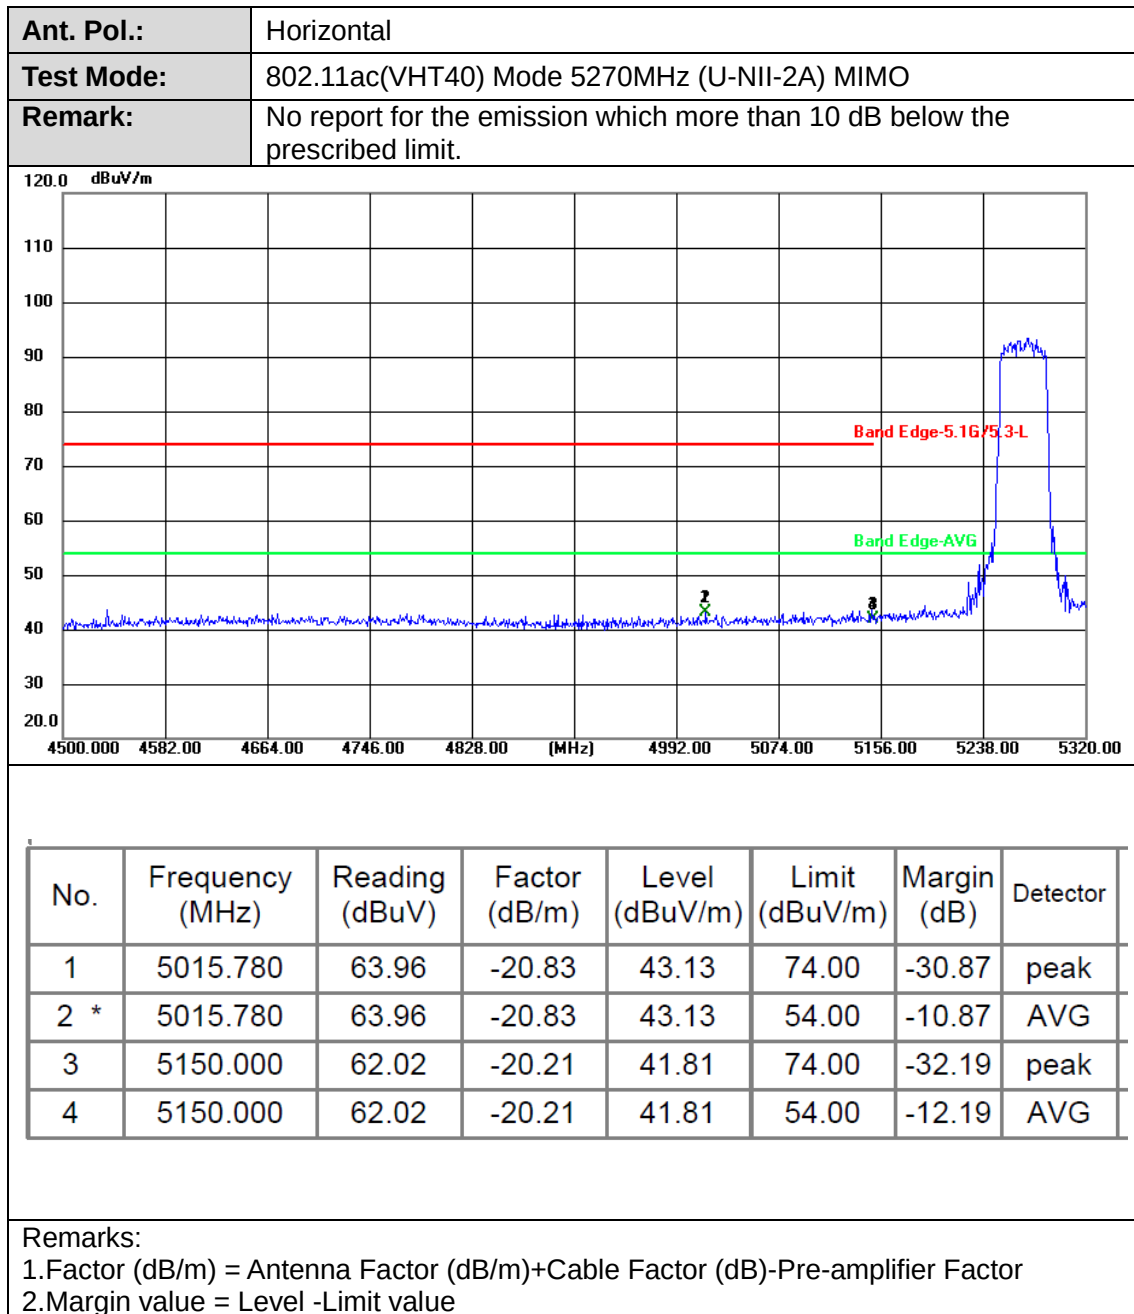


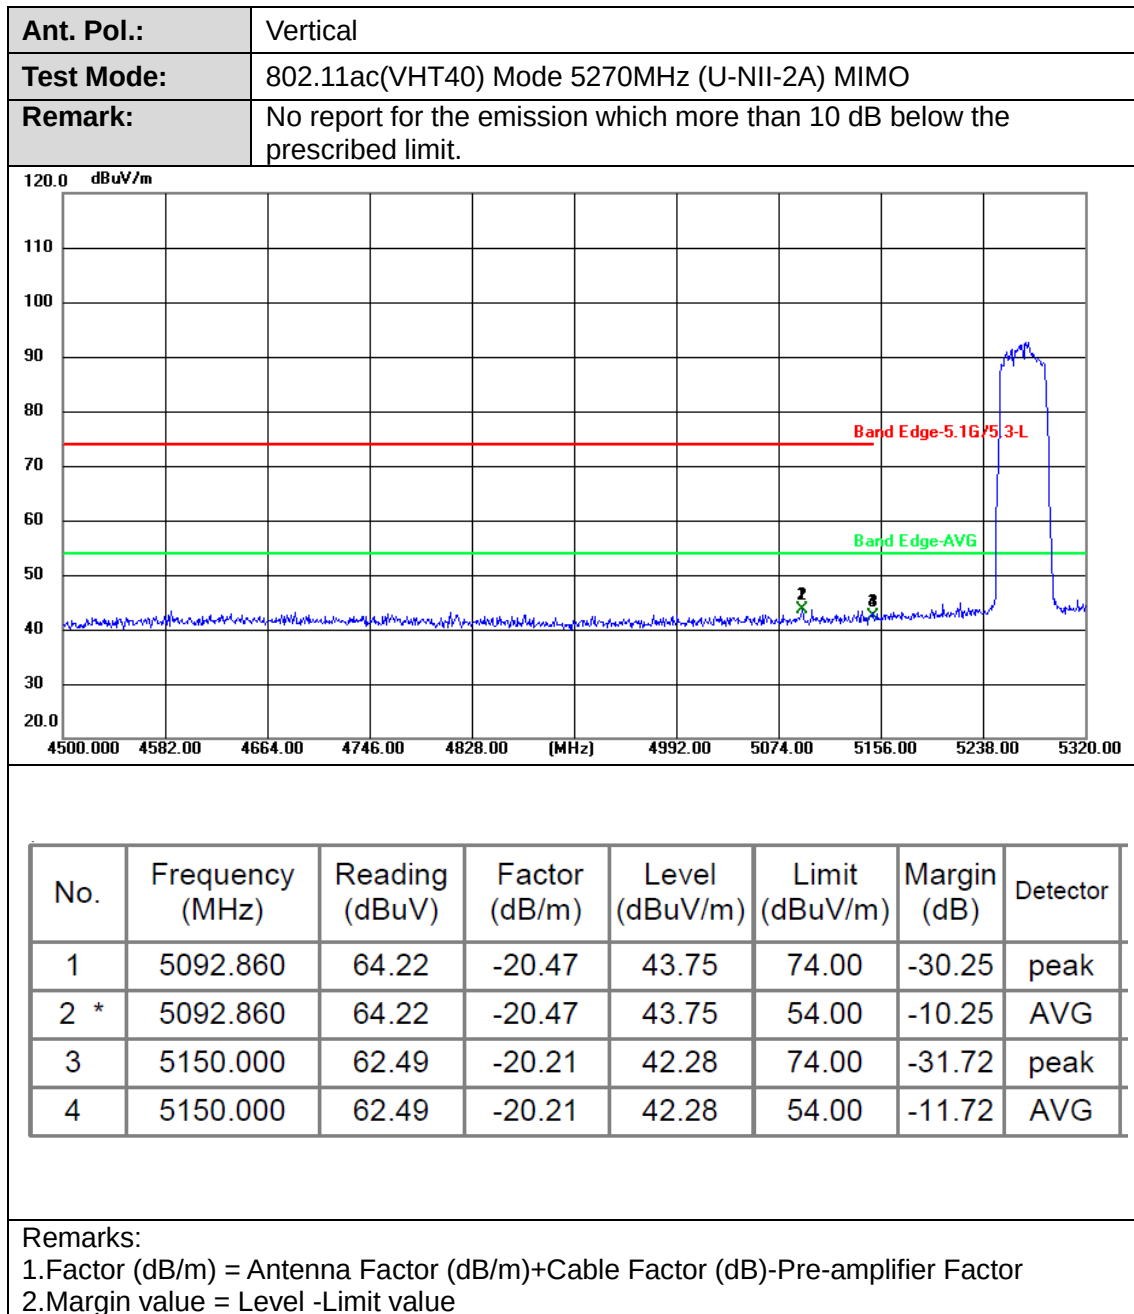


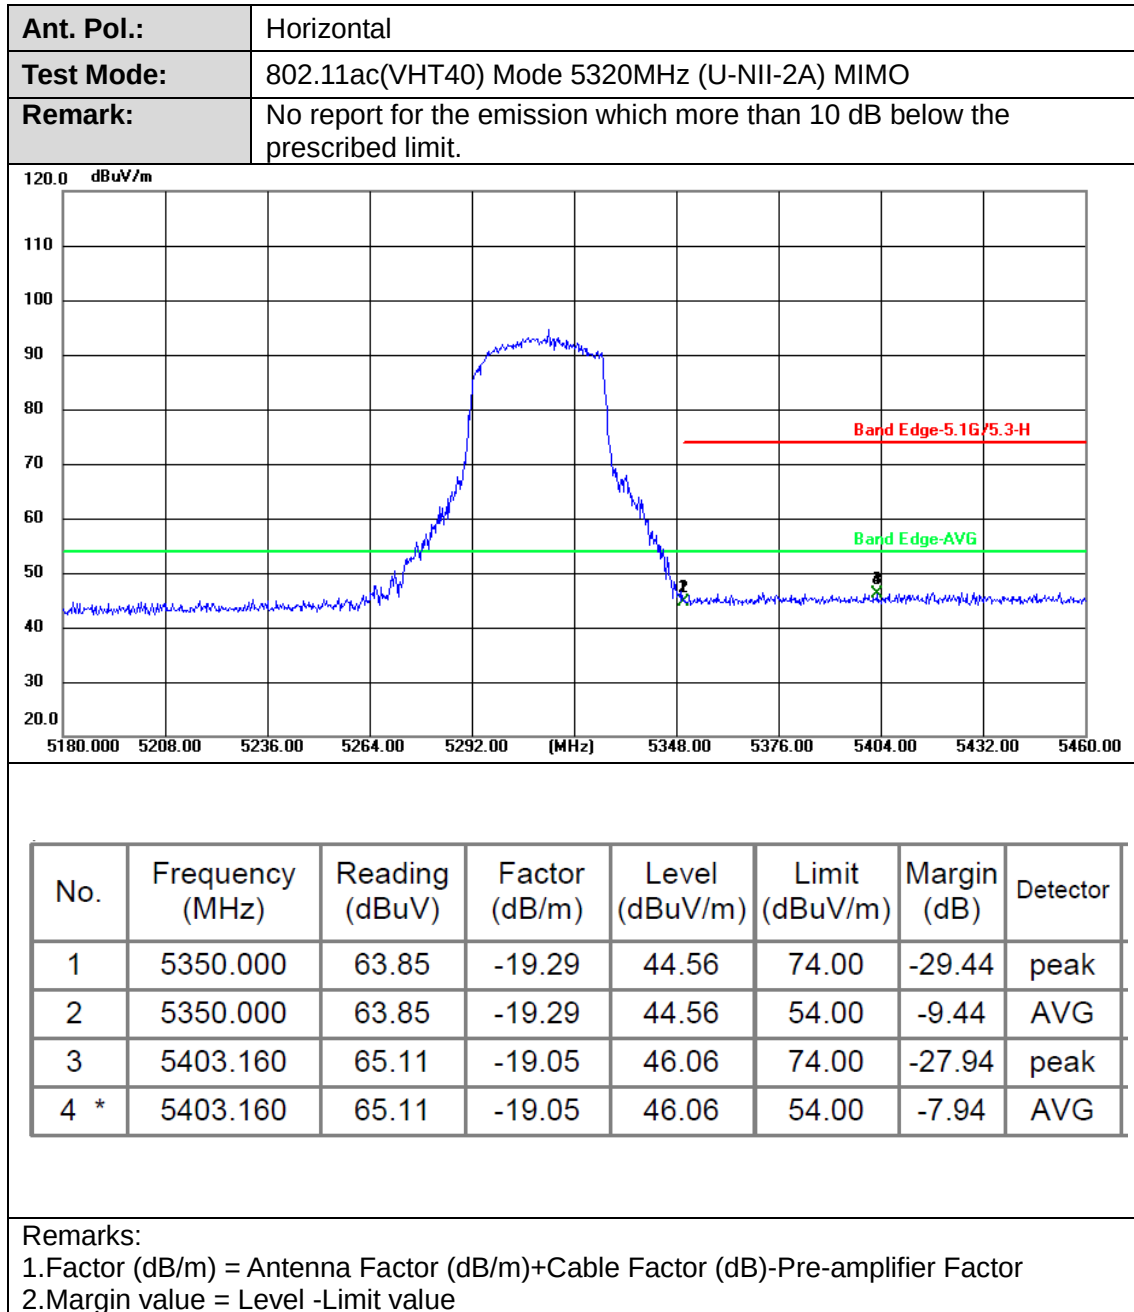


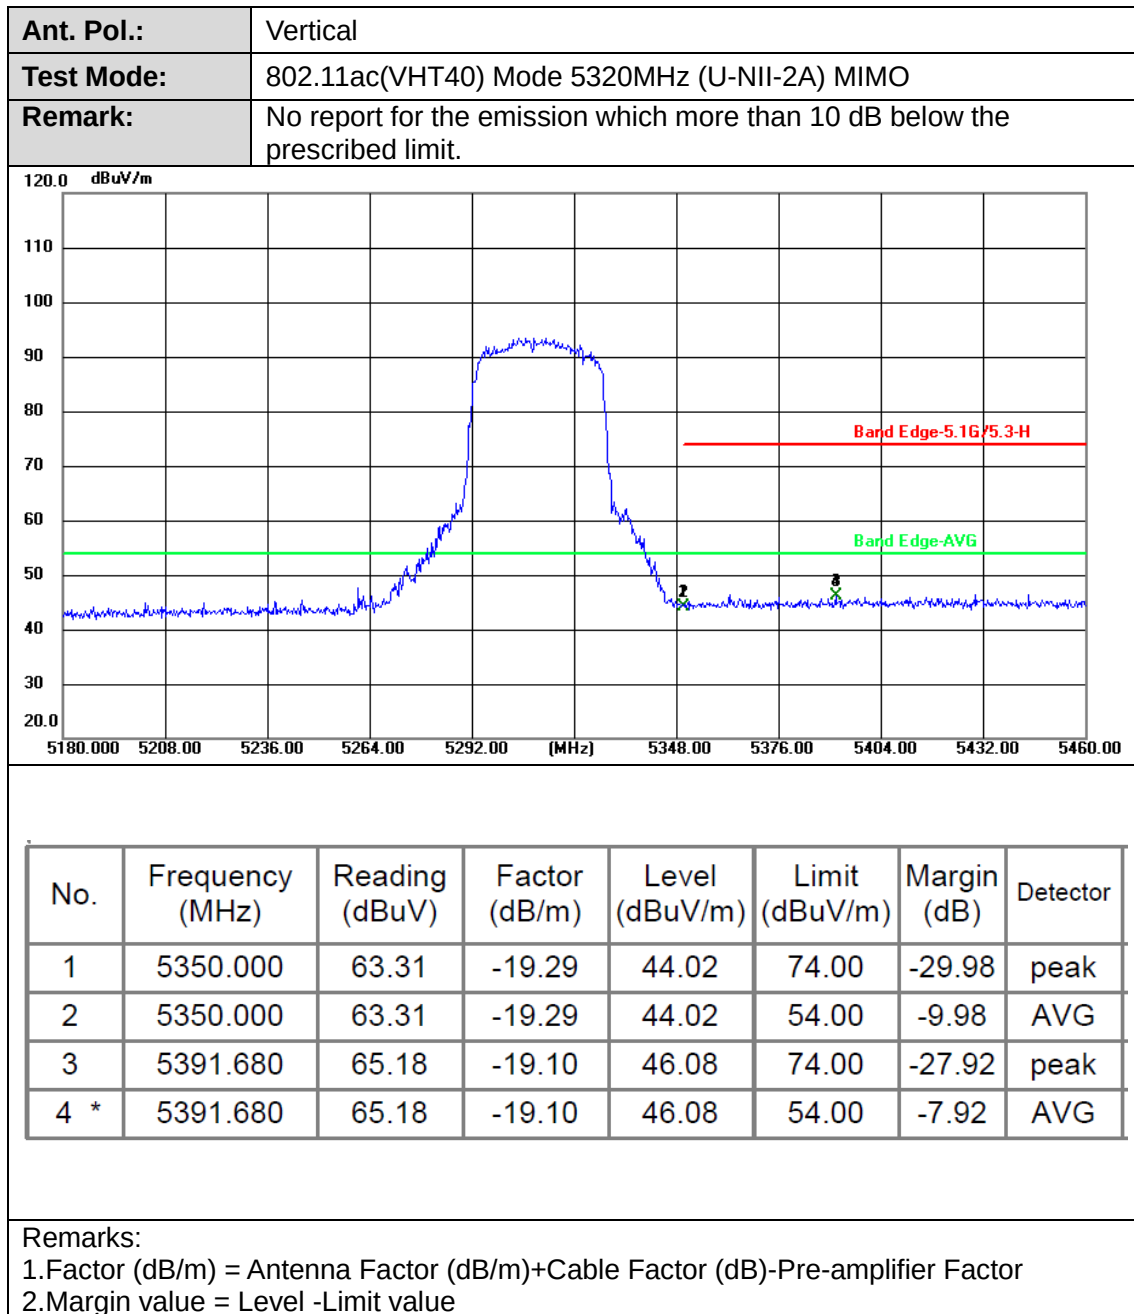


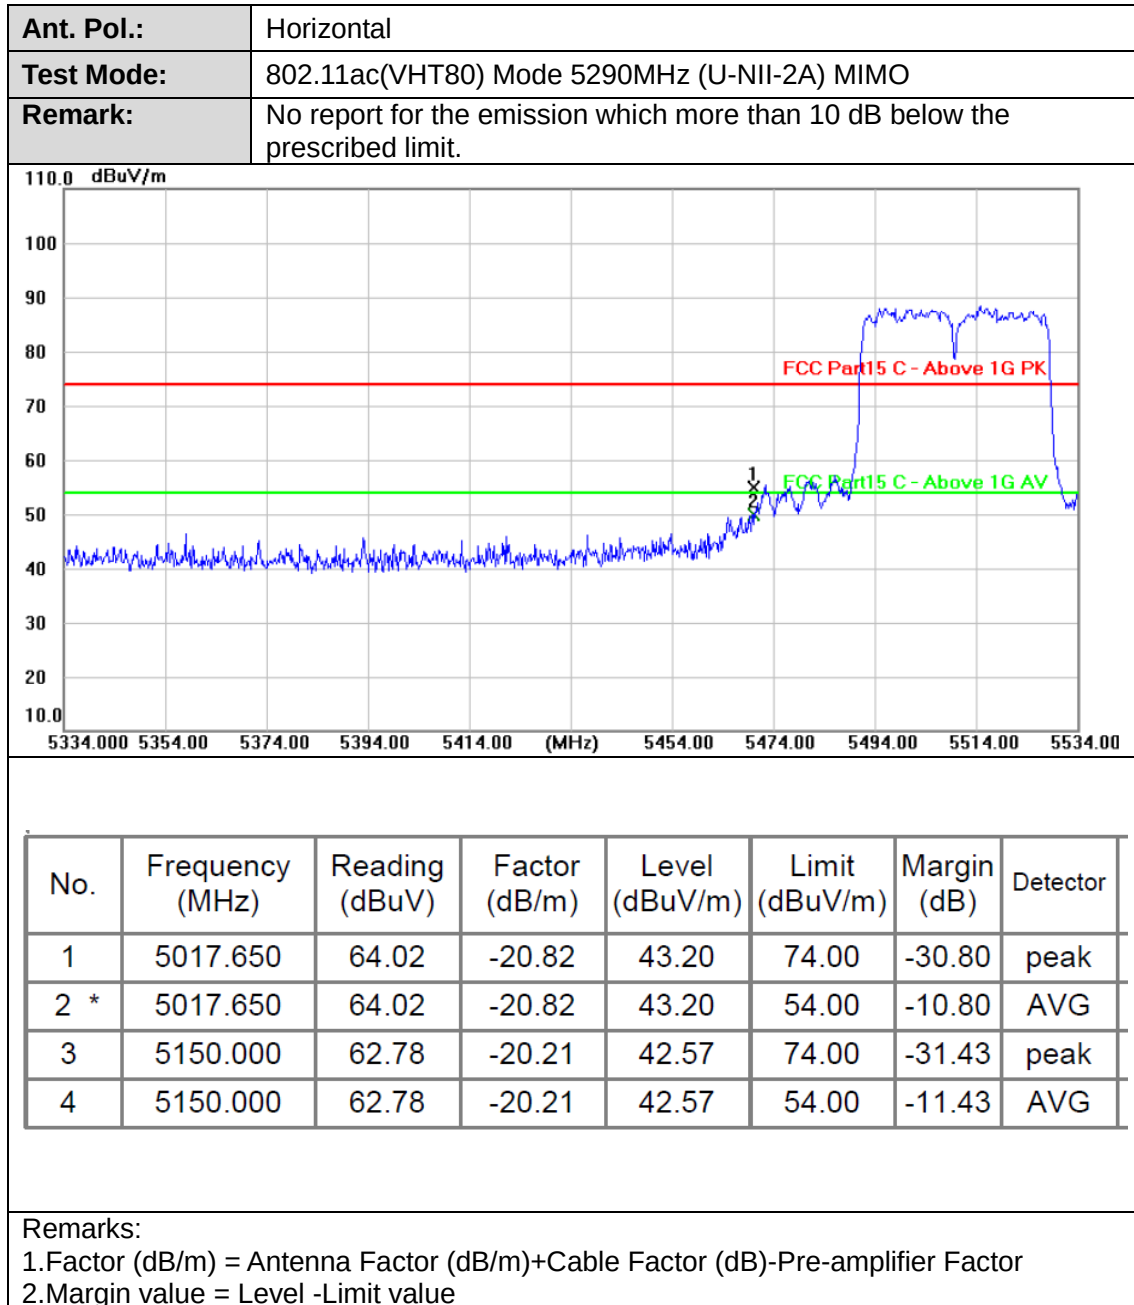


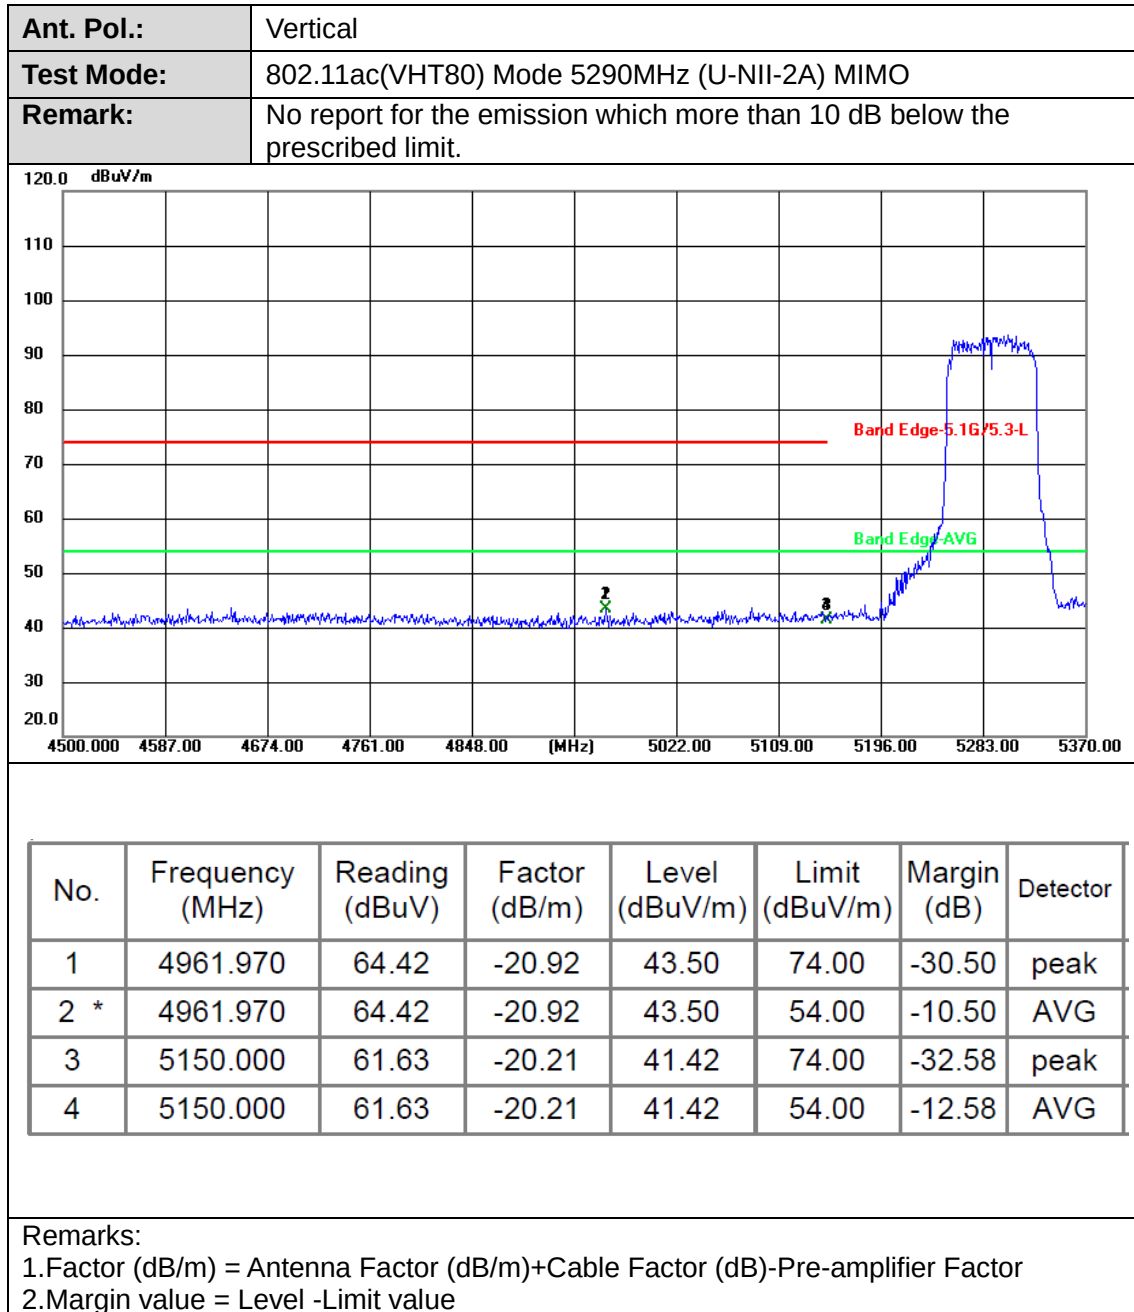


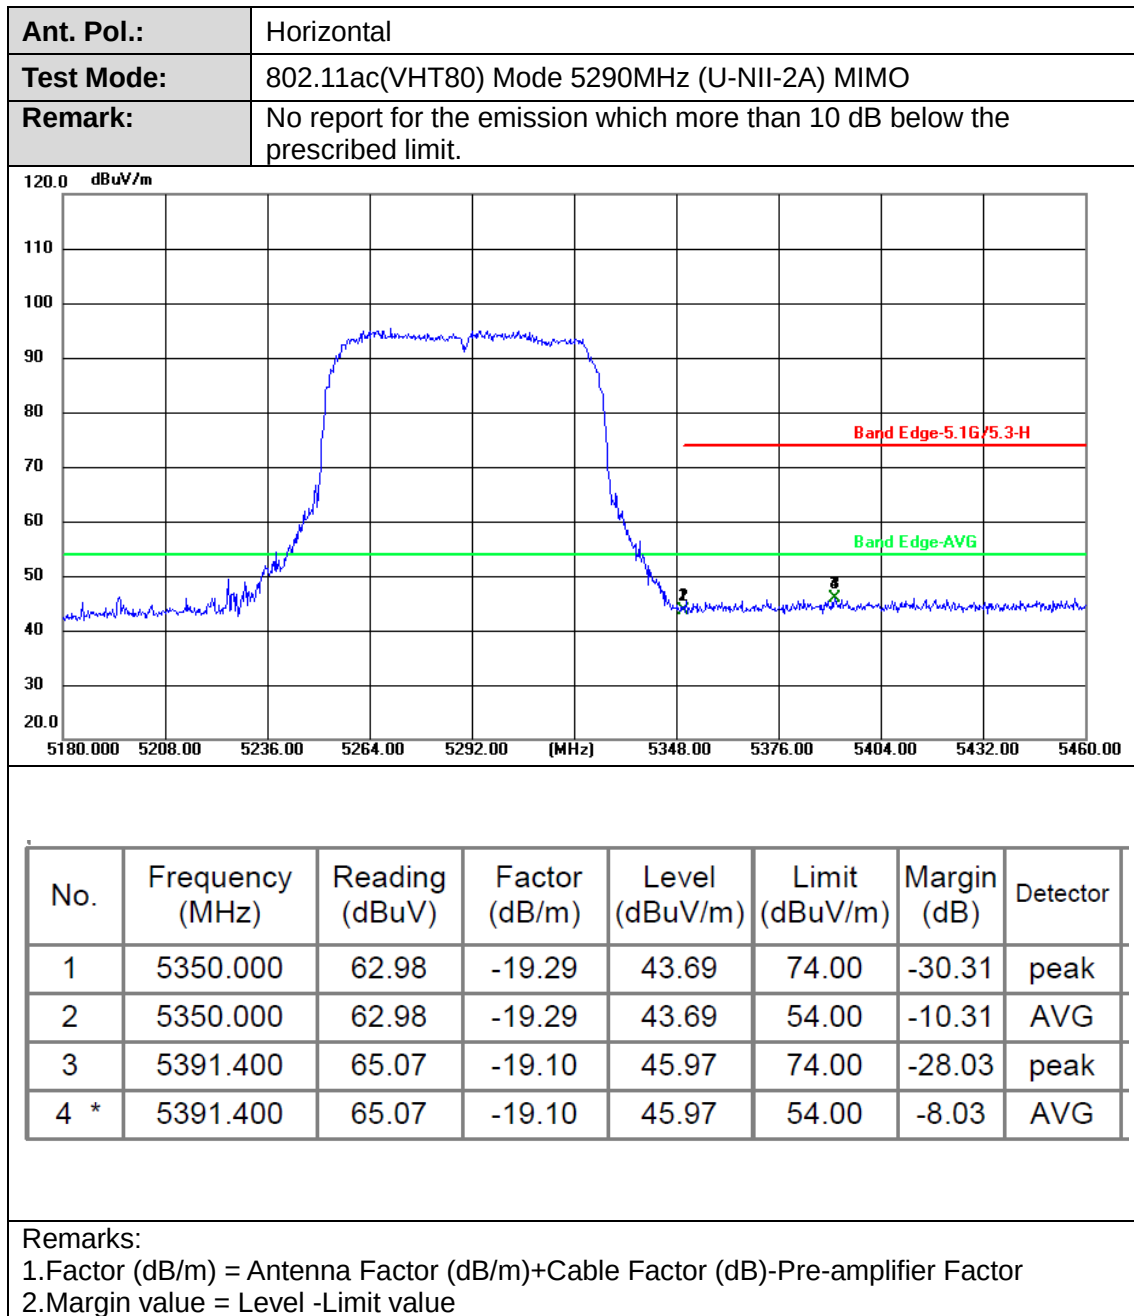


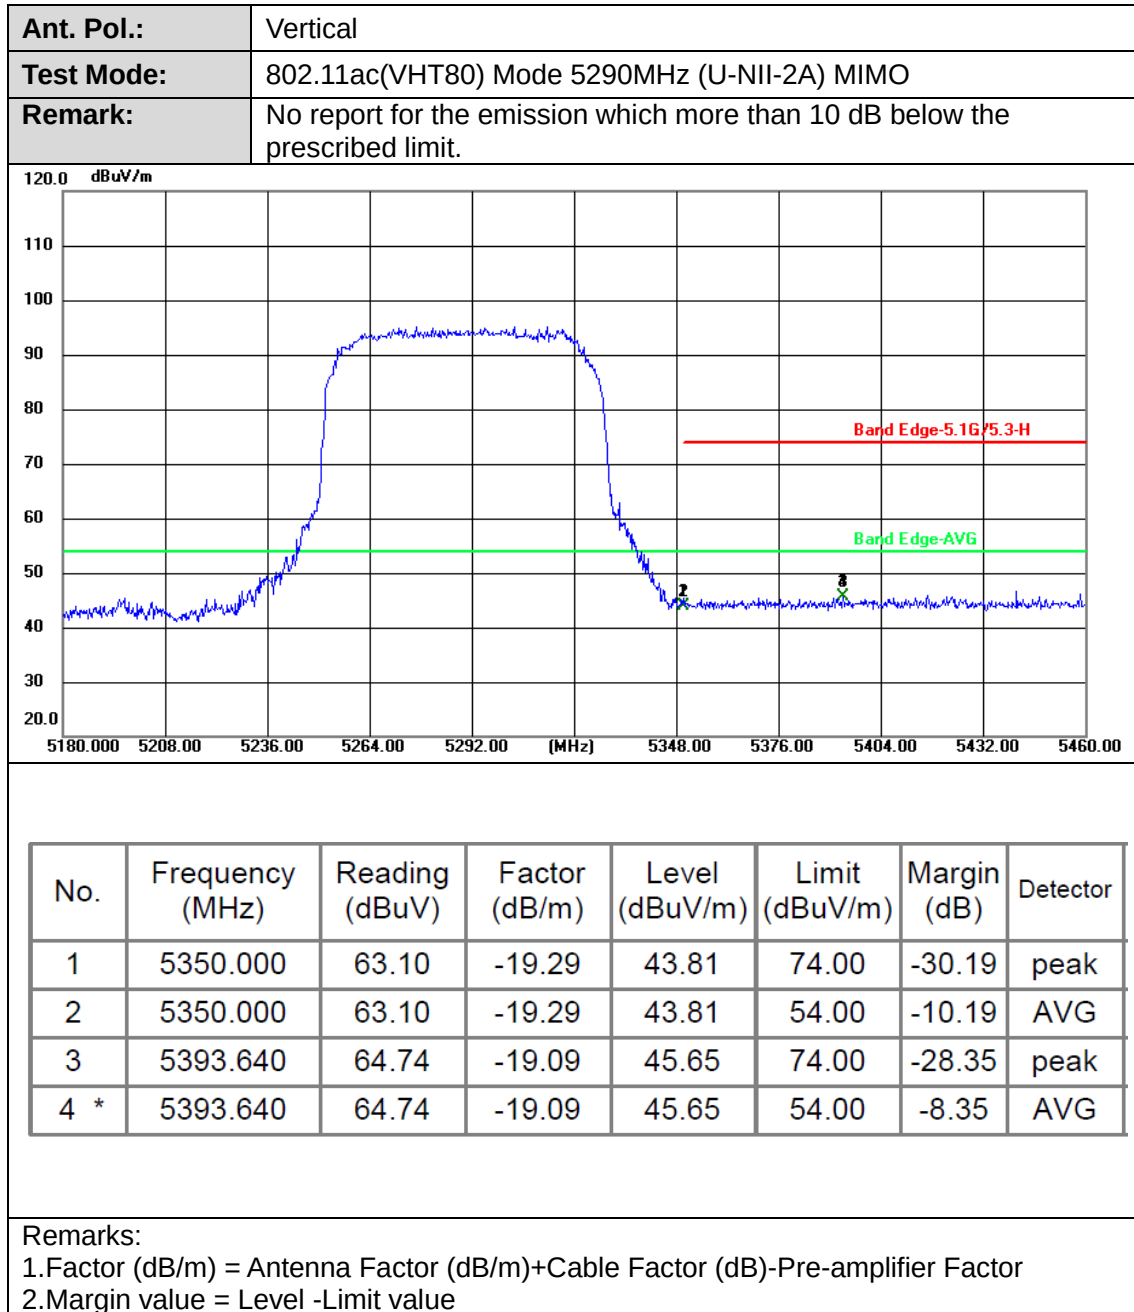


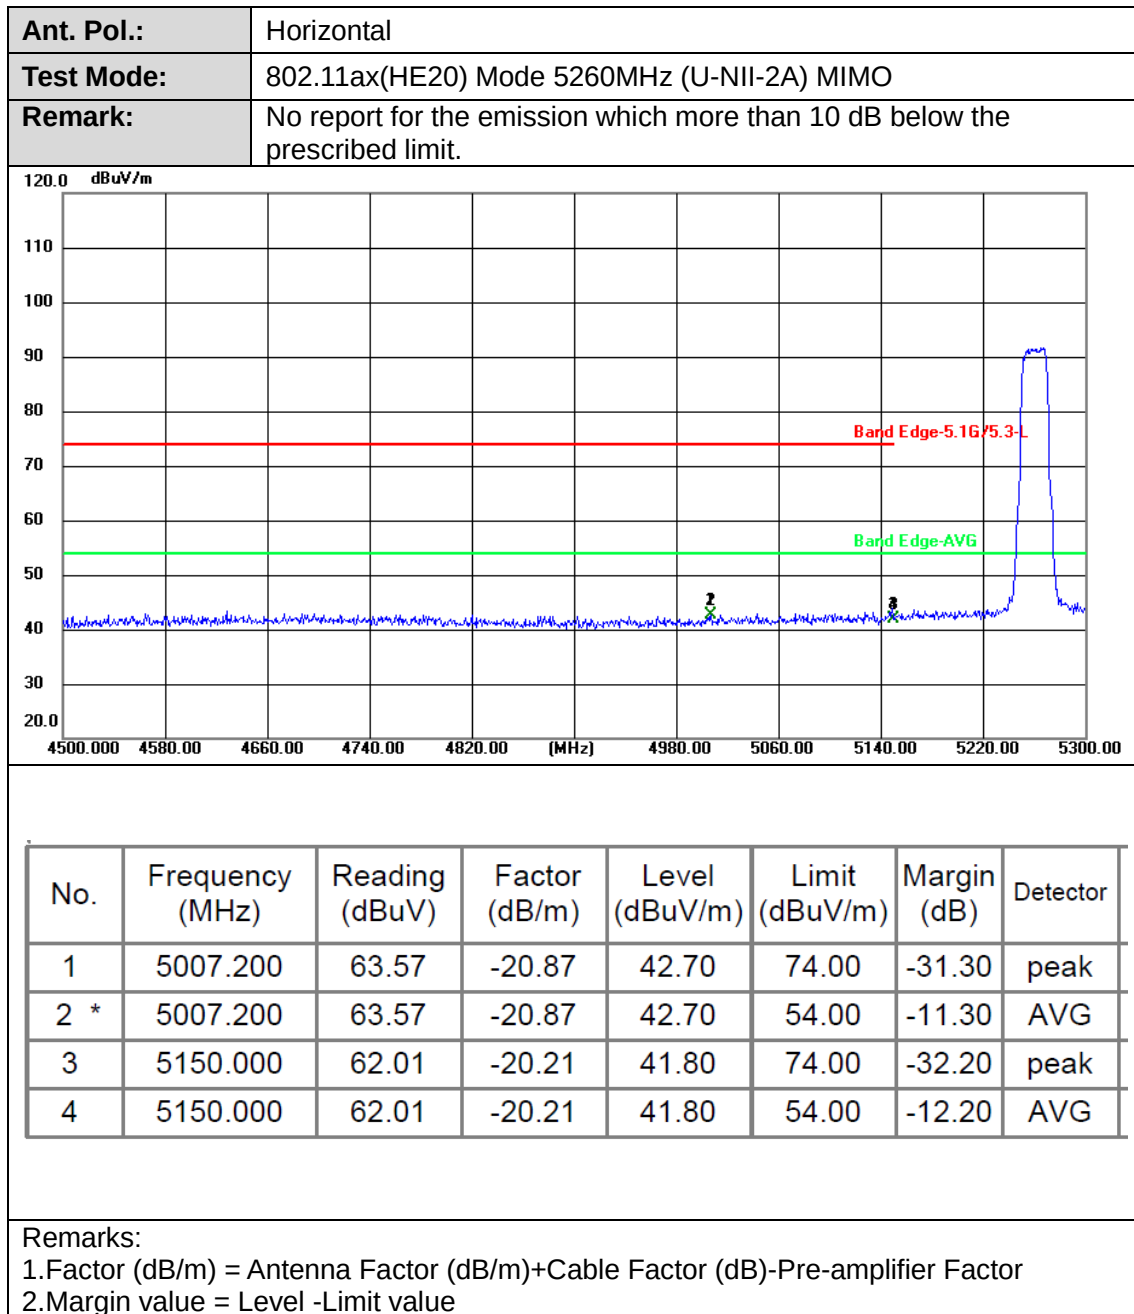


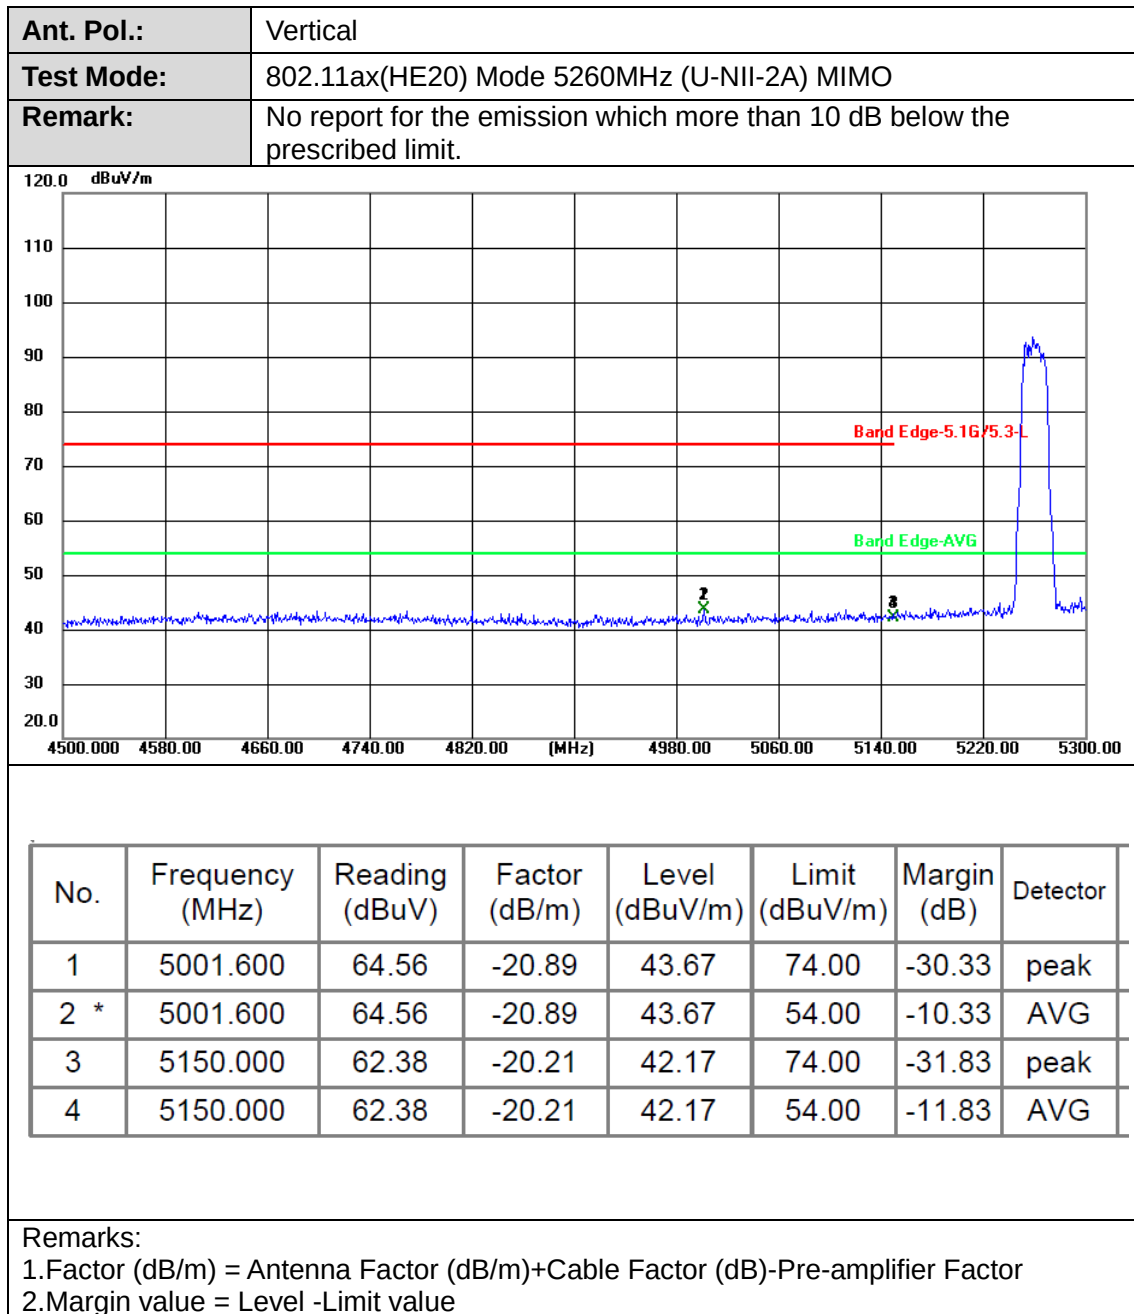

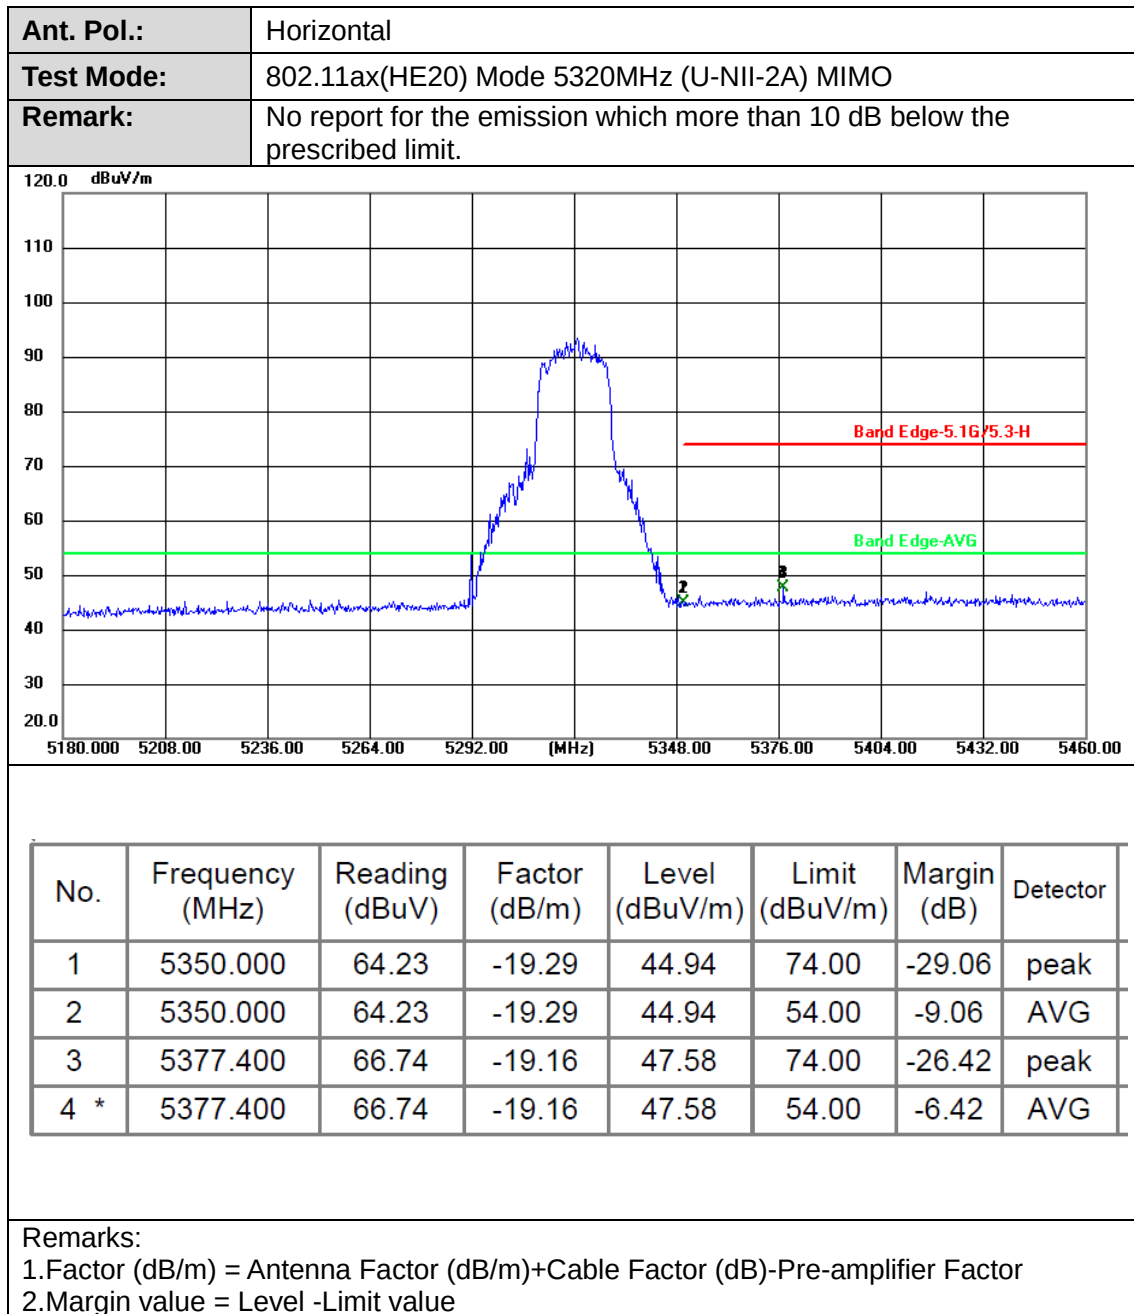

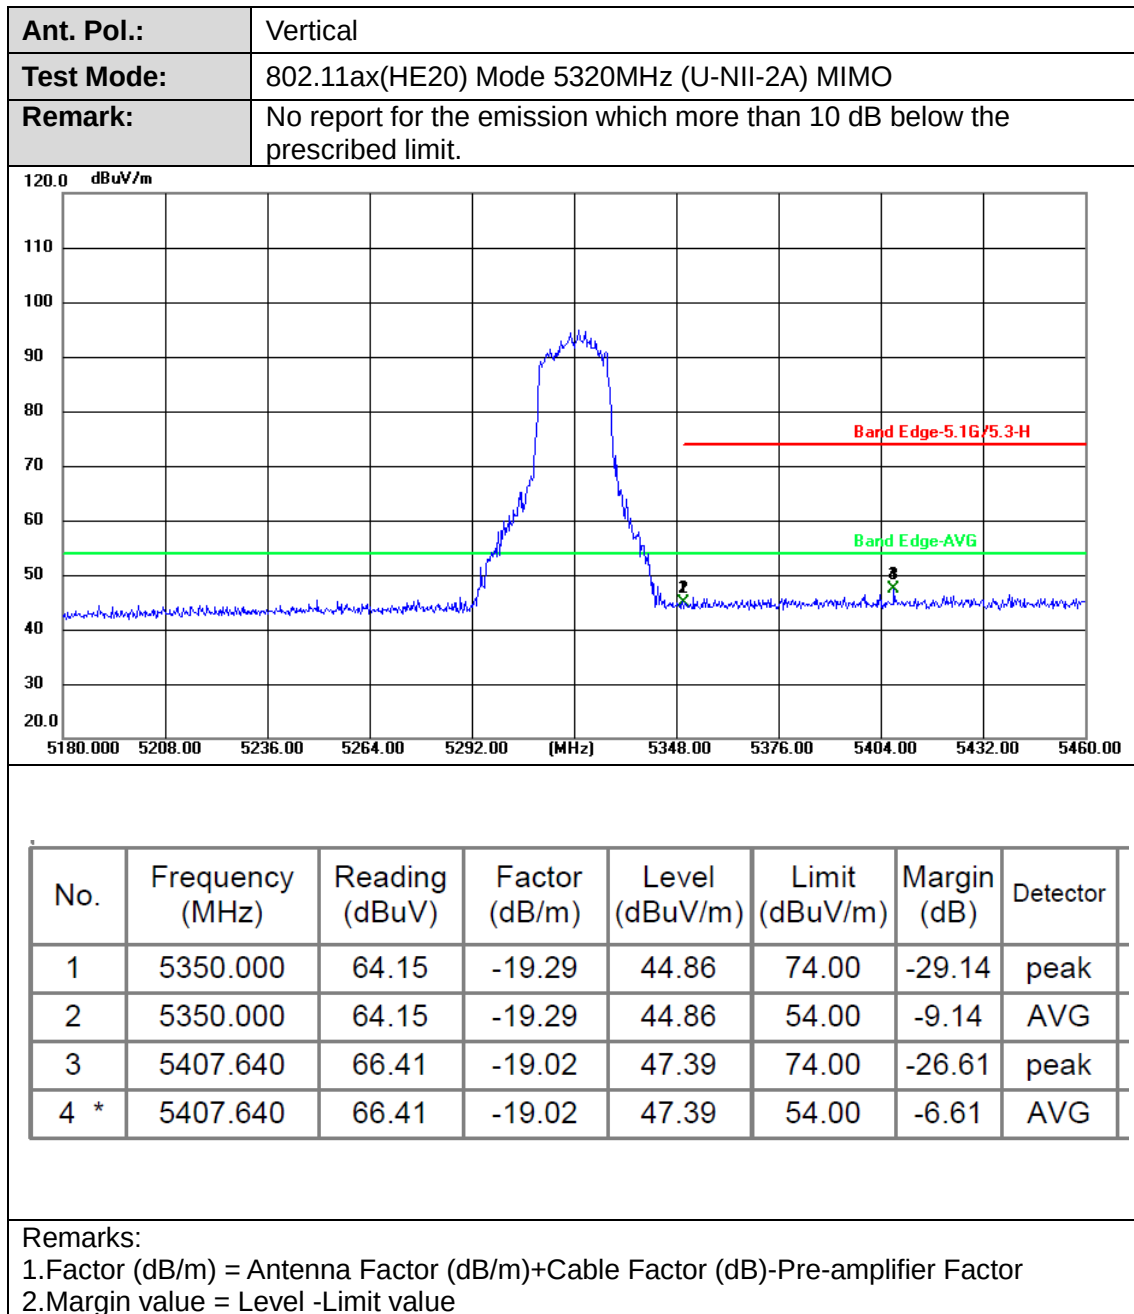


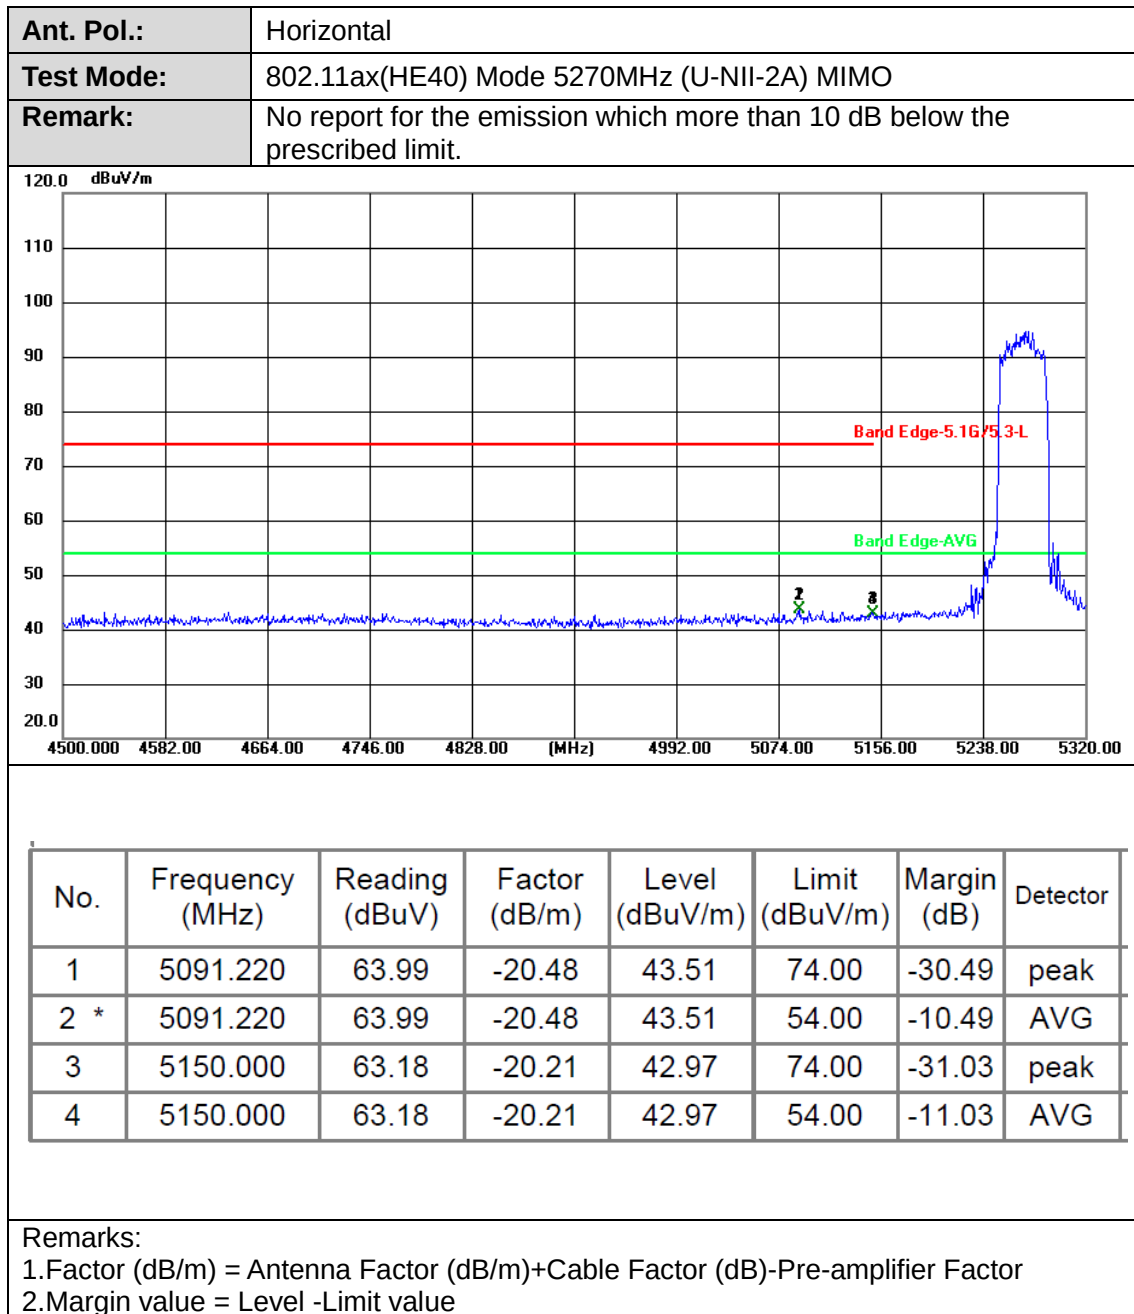

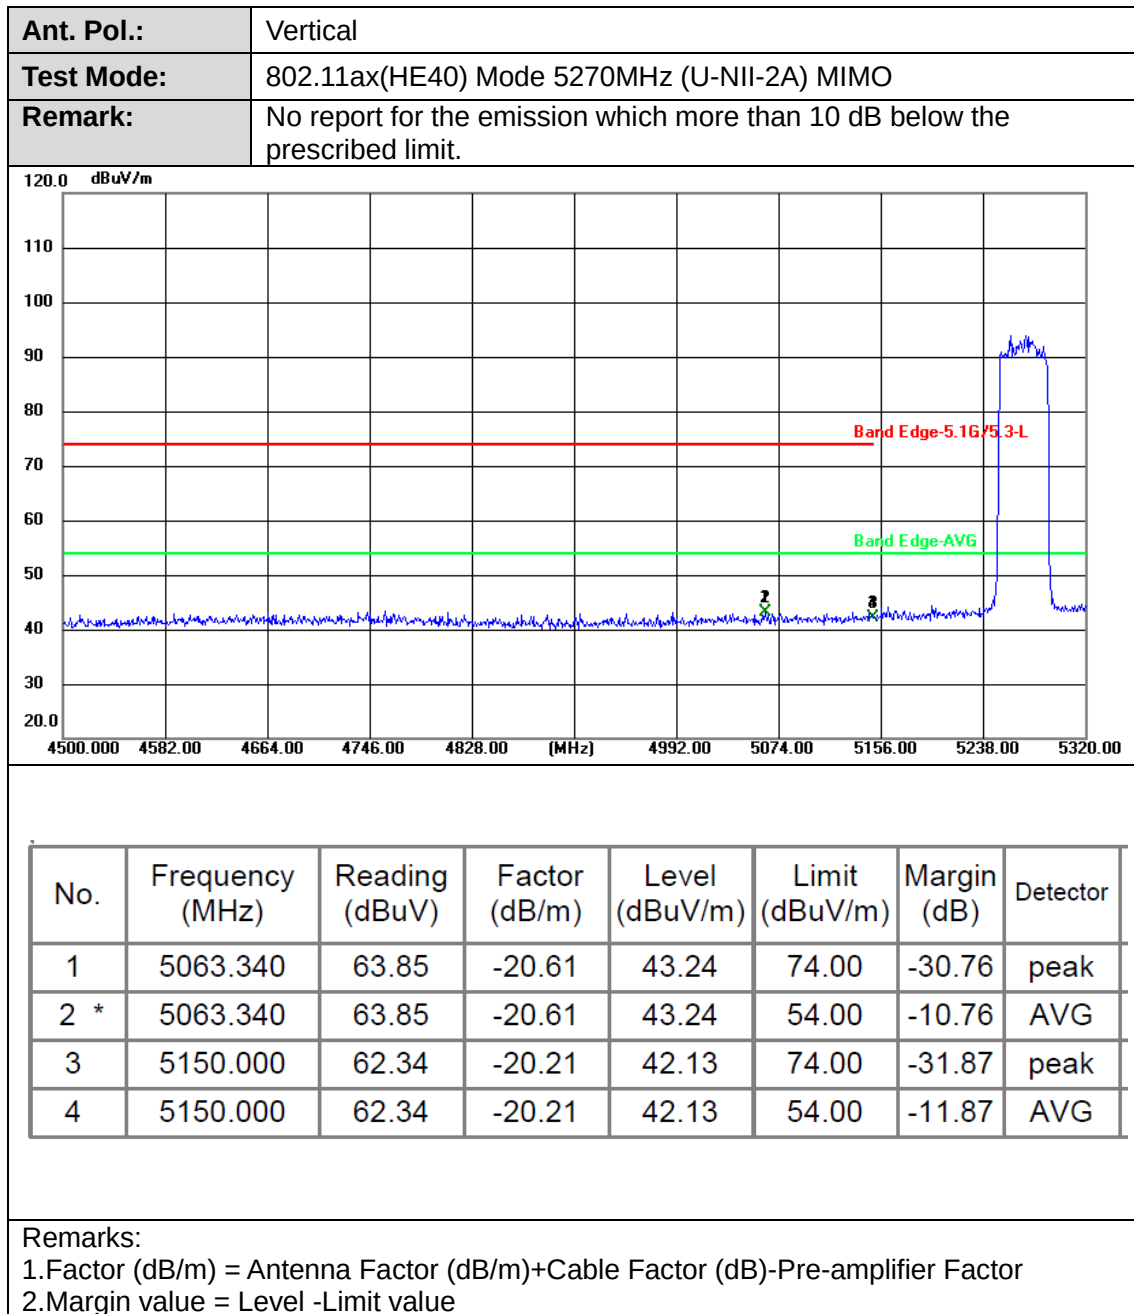




Ant. Pol.:	Horizontal
Test Mode:	802.11ax(HE40) Mode 5310MHz (U-NII-2A) MIMO
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

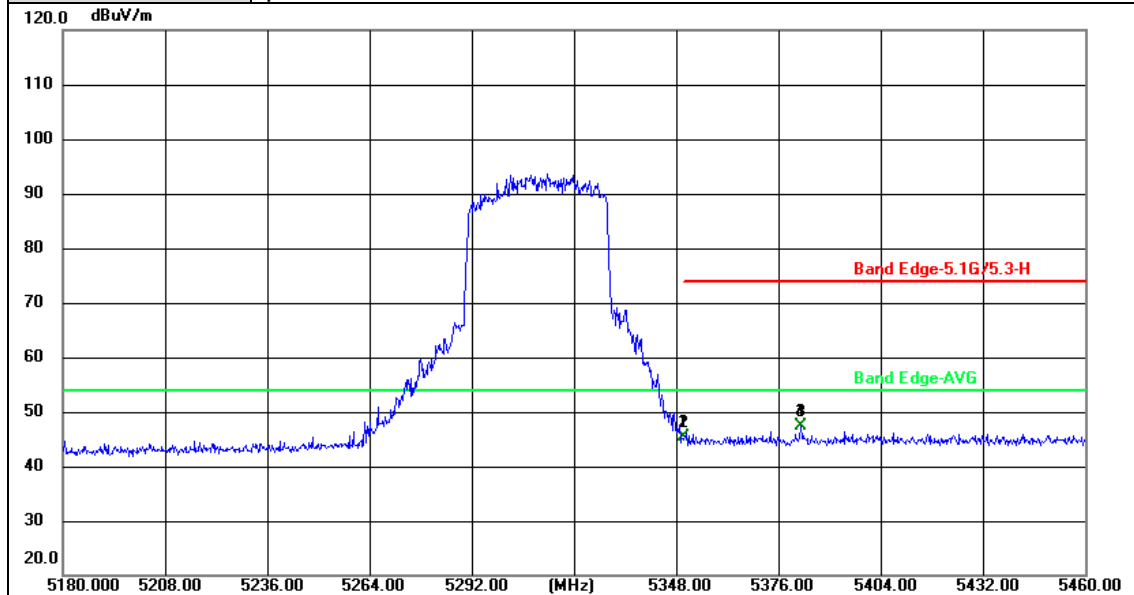



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	64.75	-19.29	45.46	74.00	-28.54	peak
2	5350.000	64.75	-19.29	45.46	54.00	-8.54	AVG
3	5382.160	66.47	-19.14	47.33	74.00	-26.67	peak
4 *	5382.160	66.47	-19.14	47.33	54.00	-6.67	AVG


Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

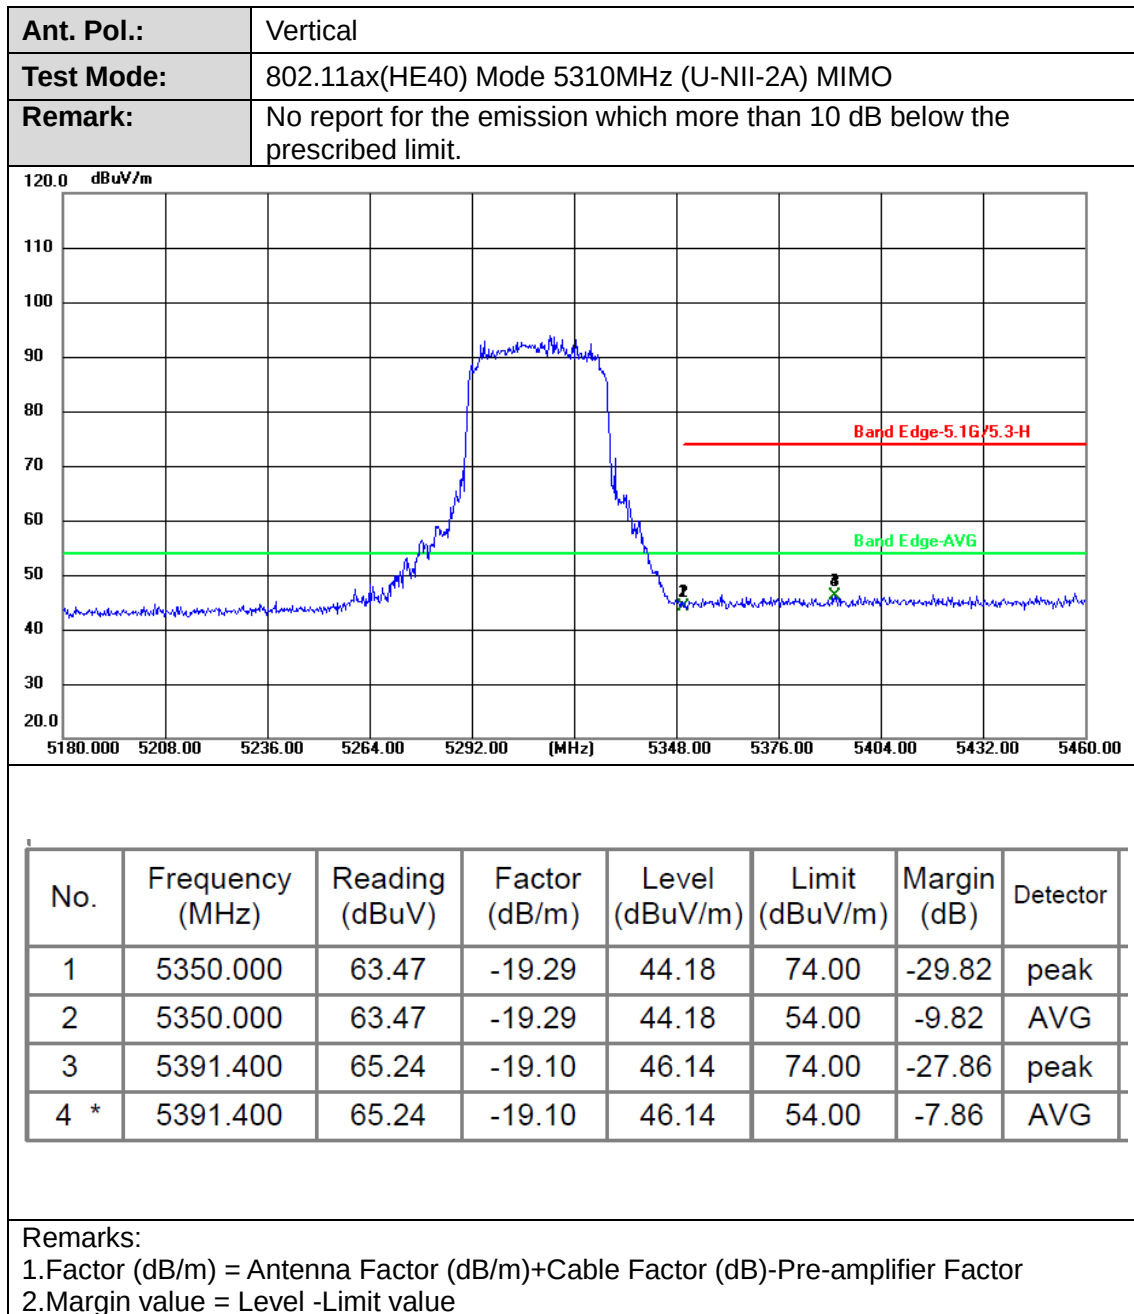

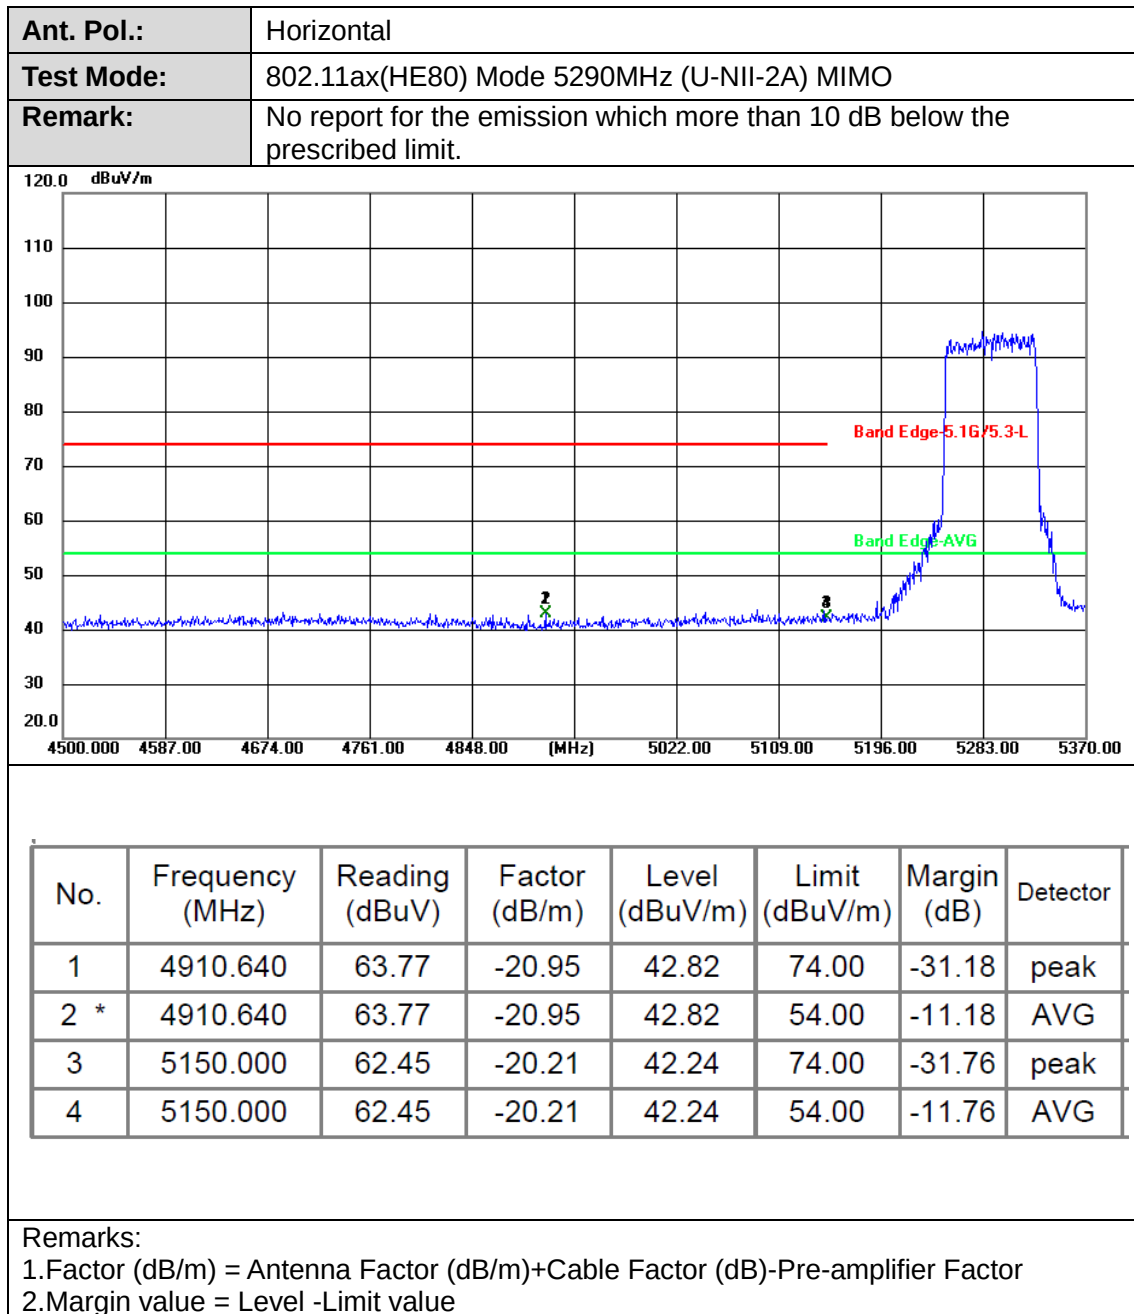

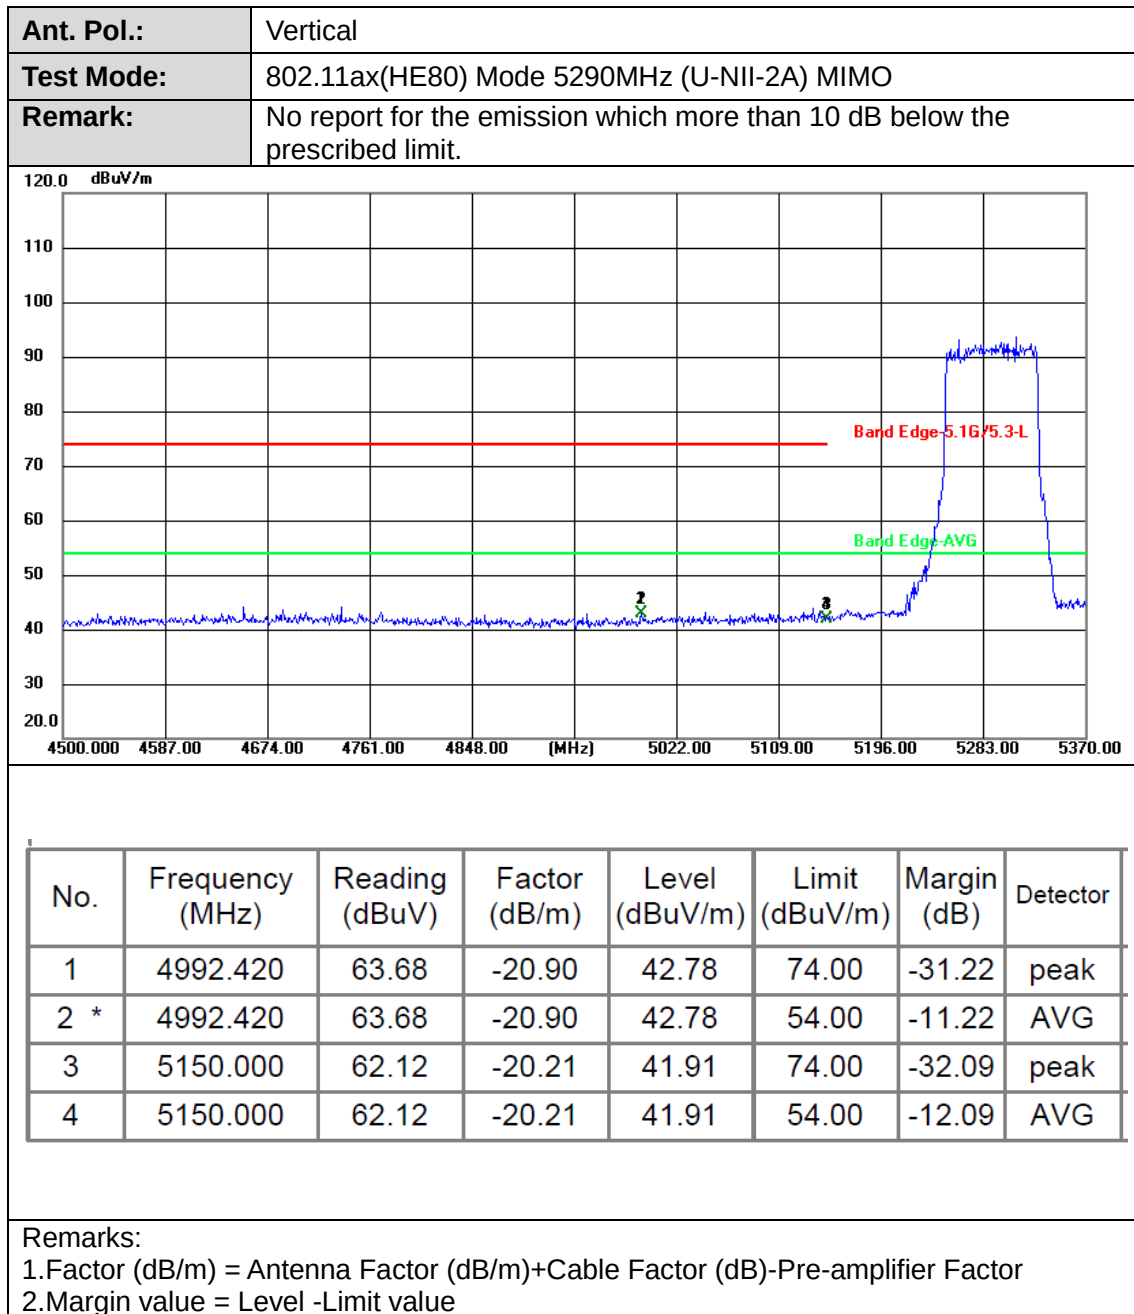


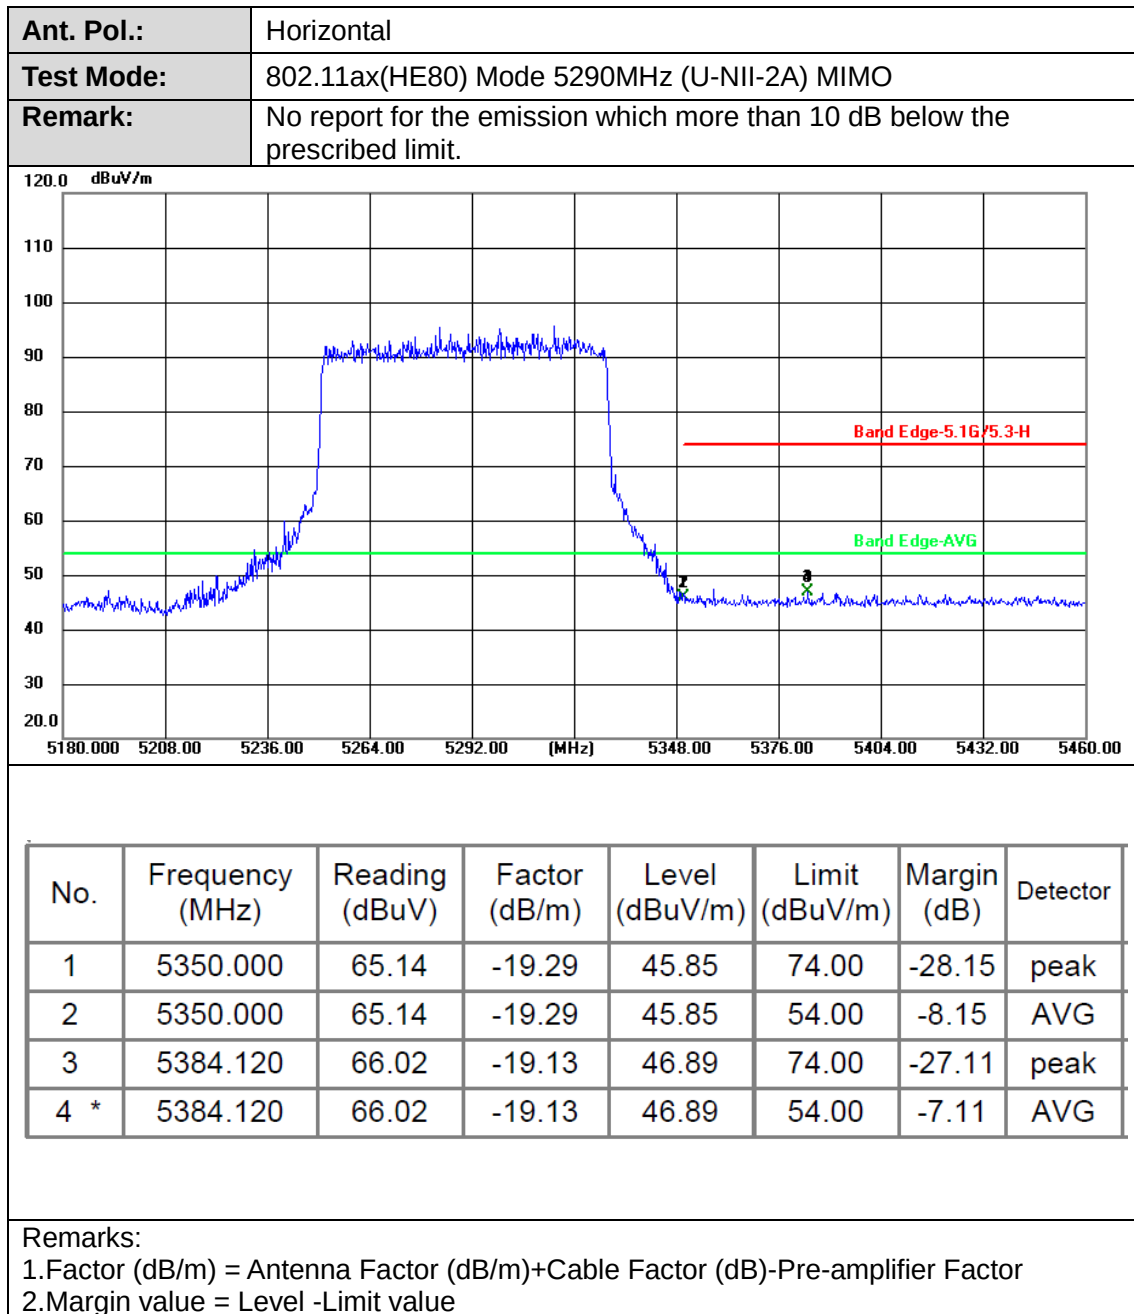

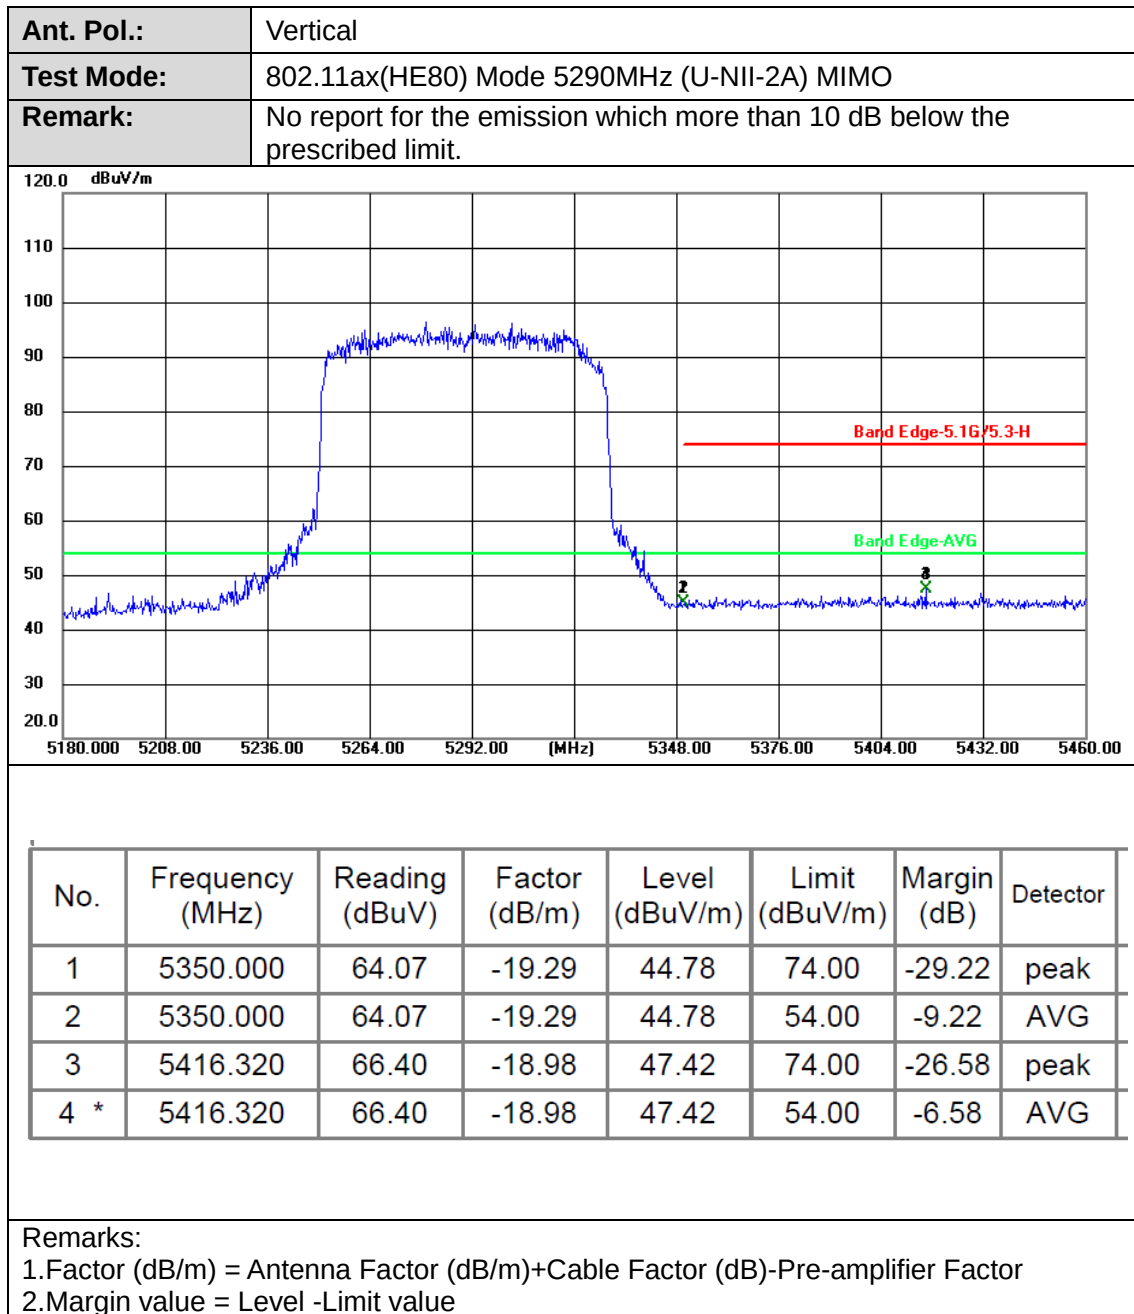



Ant. Pol.:	Horizontal
Test Mode:	802.11a Mode 5500MHz (U-NII-2C) ANT A
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

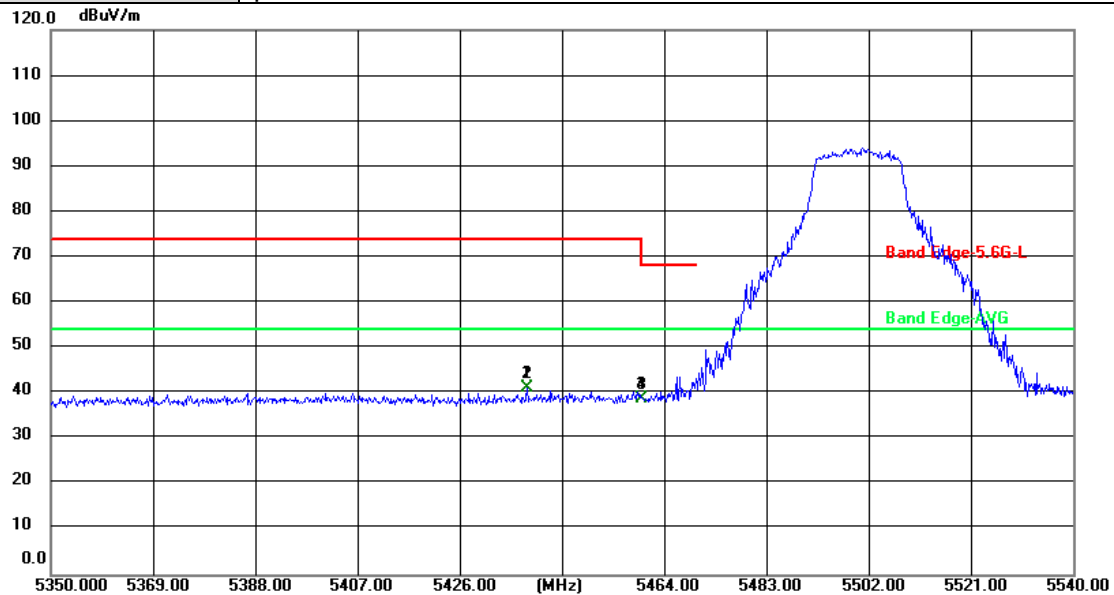


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5438.540	60.07	-18.88	41.19	74.00	-32.81	peak
2 *	5438.540	60.07	-18.88	41.19	54.00	-12.81	AVG
3	5460.000	57.77	-18.78	38.99	68.20	-29.21	peak
4	5460.000	57.77	-18.78	38.99	54.00	-15.01	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant. Pol.:	Vertical
Test Mode:	802.11a Mode 5500MHz (U-NII-2C) ANT A
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

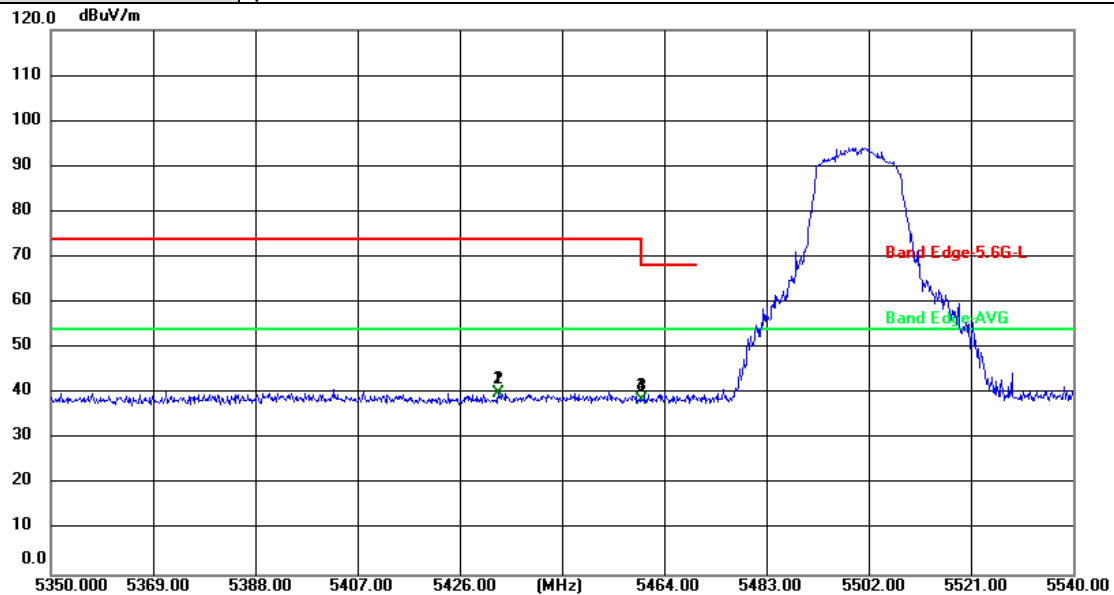


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5433.220	59.04	-18.91	40.13	74.00	-33.87	peak
2 *	5433.220	59.04	-18.91	40.13	54.00	-13.87	AVG
3	5460.000	57.30	-18.78	38.52	68.20	-29.68	peak
4	5460.000	57.30	-18.78	38.52	54.00	-15.48	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value




Ant. Pol.:	Horizontal
Test Mode:	802.11a Mode 5700MHz (U-NII-2C) ANT A
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

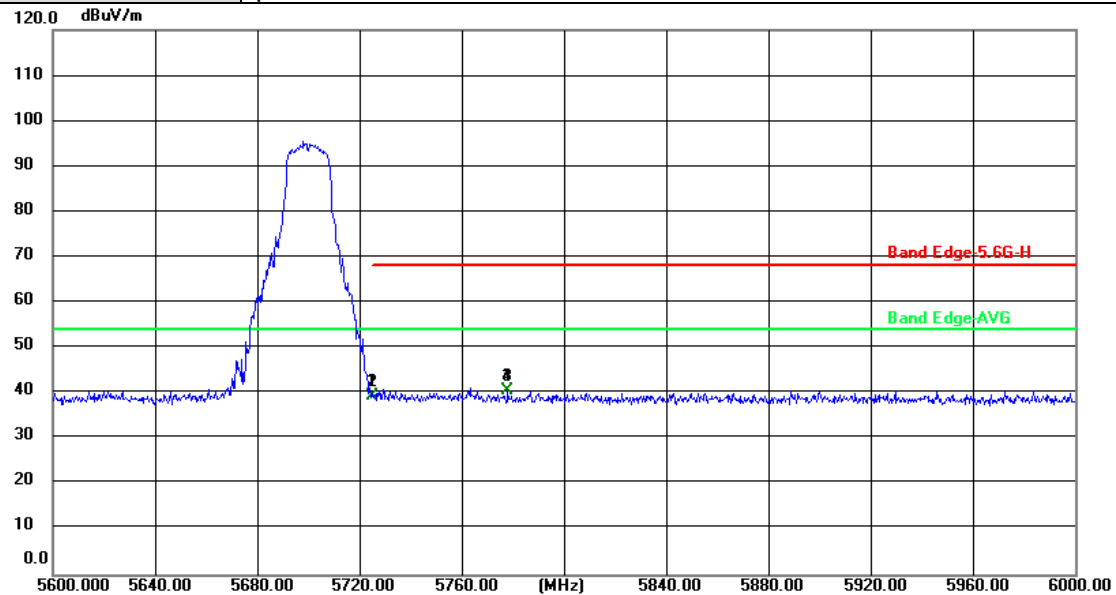


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	57.84	-18.46	39.38	68.20	-28.82	peak
2	5725.000	57.84	-18.46	39.38	54.00	-14.62	AVG
3	5778.000	59.13	-18.43	40.70	68.20	-27.50	peak
4 *	5778.000	59.13	-18.43	40.70	54.00	-13.30	AVG

Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

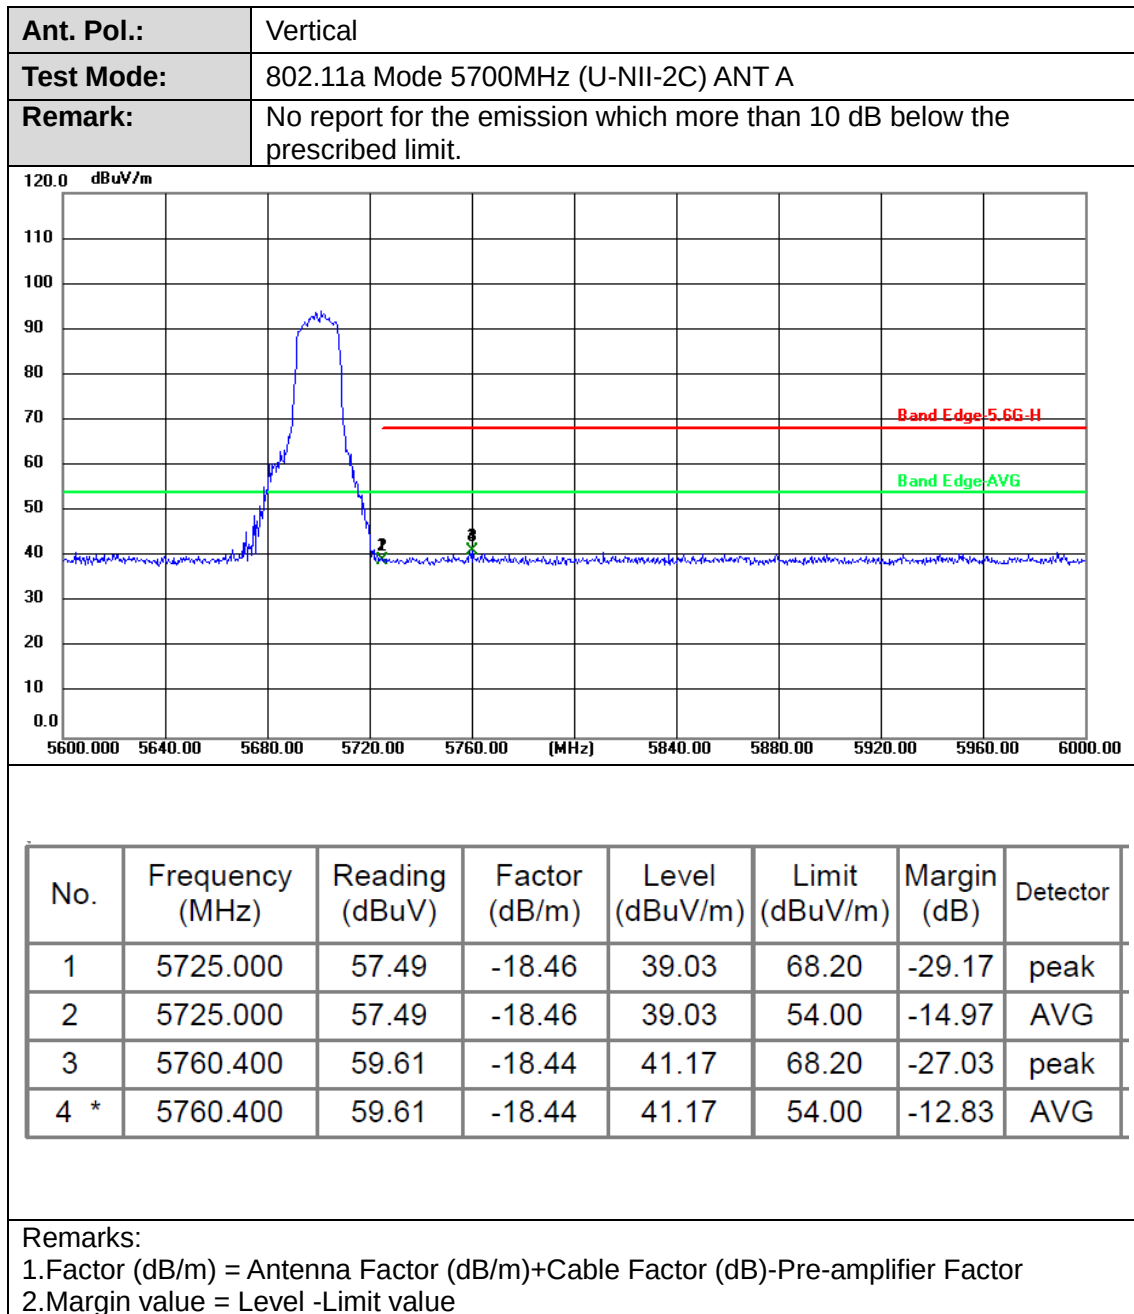

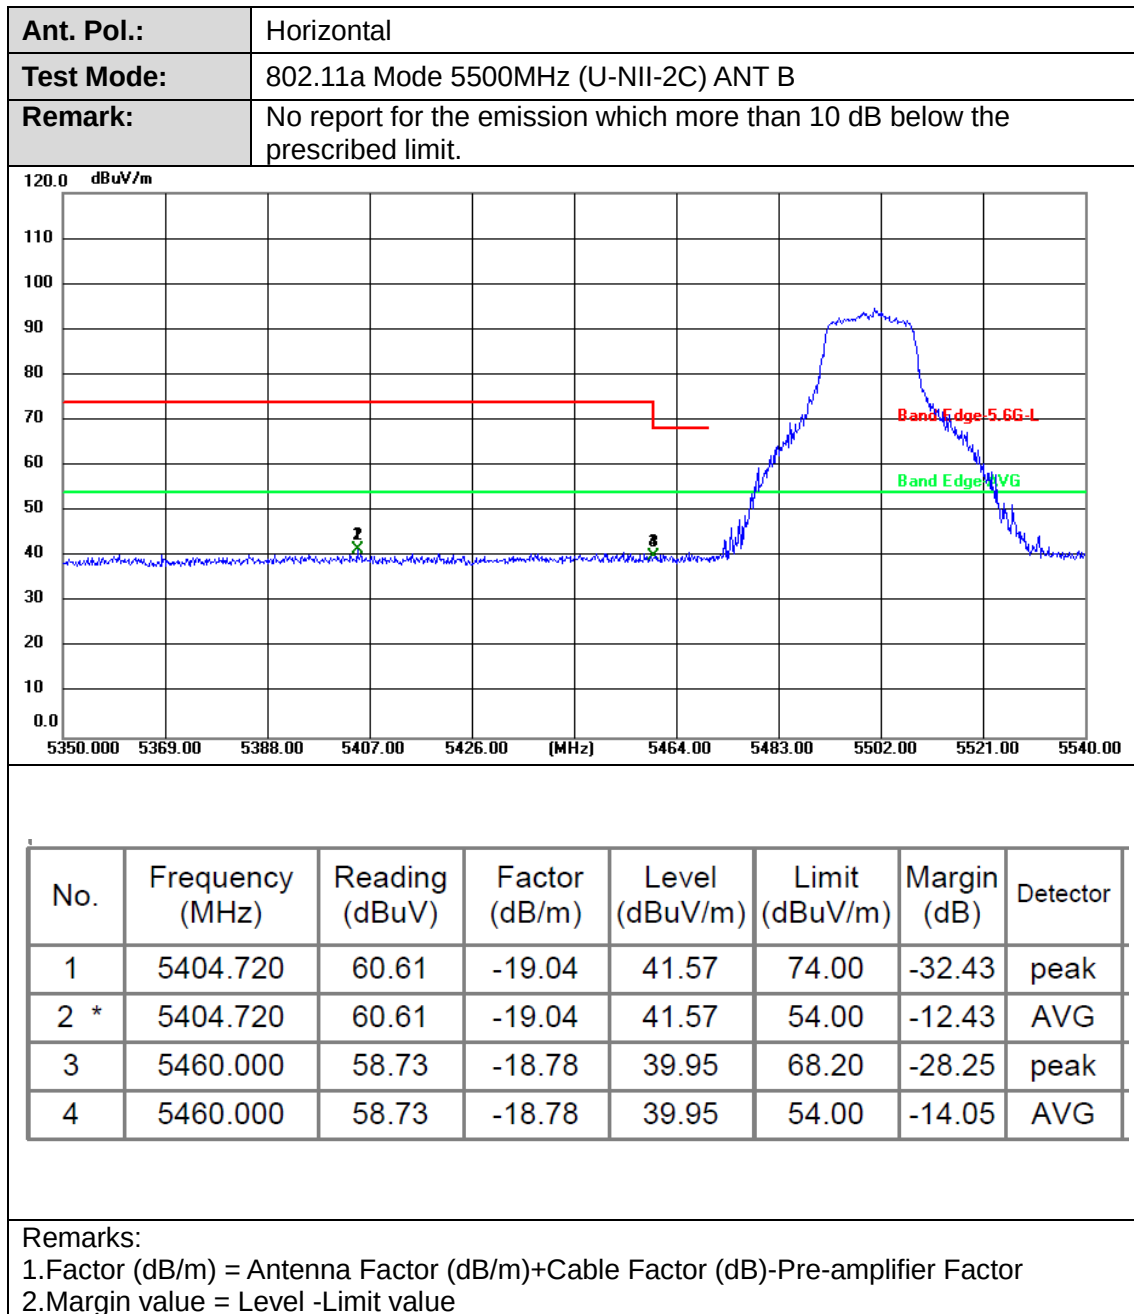




Ant. Pol.:	Vertical
Test Mode:	802.11a Mode 5500MHz (U-NII-2C) ANT B
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

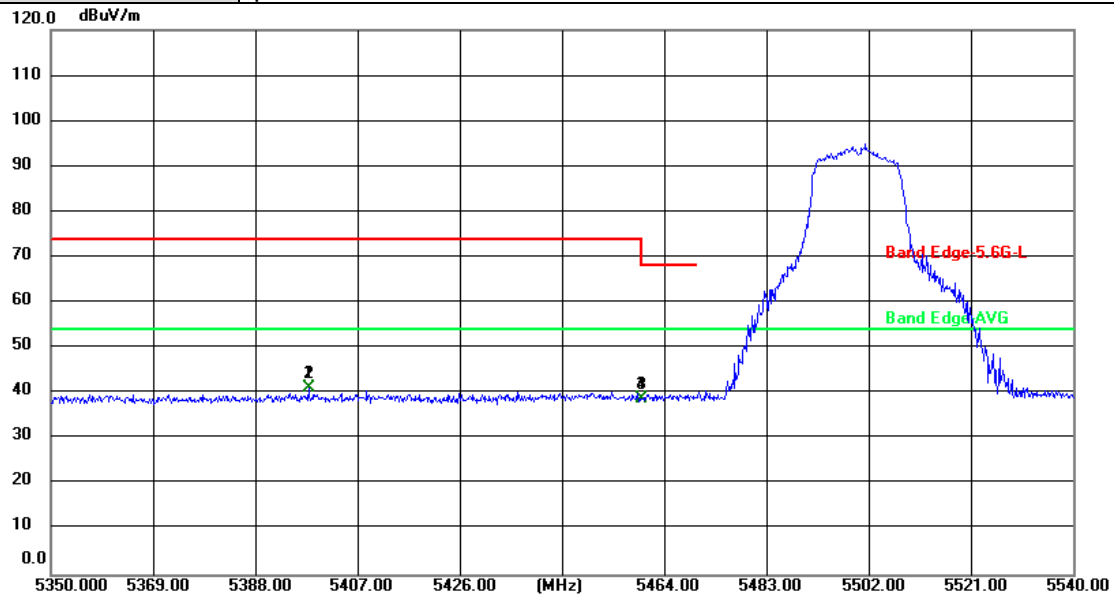


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5397.880	60.19	-19.07	41.12	74.00	-32.88	peak
2 *	5397.880	60.19	-19.07	41.12	54.00	-12.88	AVG
3	5460.000	57.55	-18.78	38.77	68.20	-29.43	peak
4	5460.000	57.55	-18.78	38.77	54.00	-15.23	AVG

Remarks:


- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value

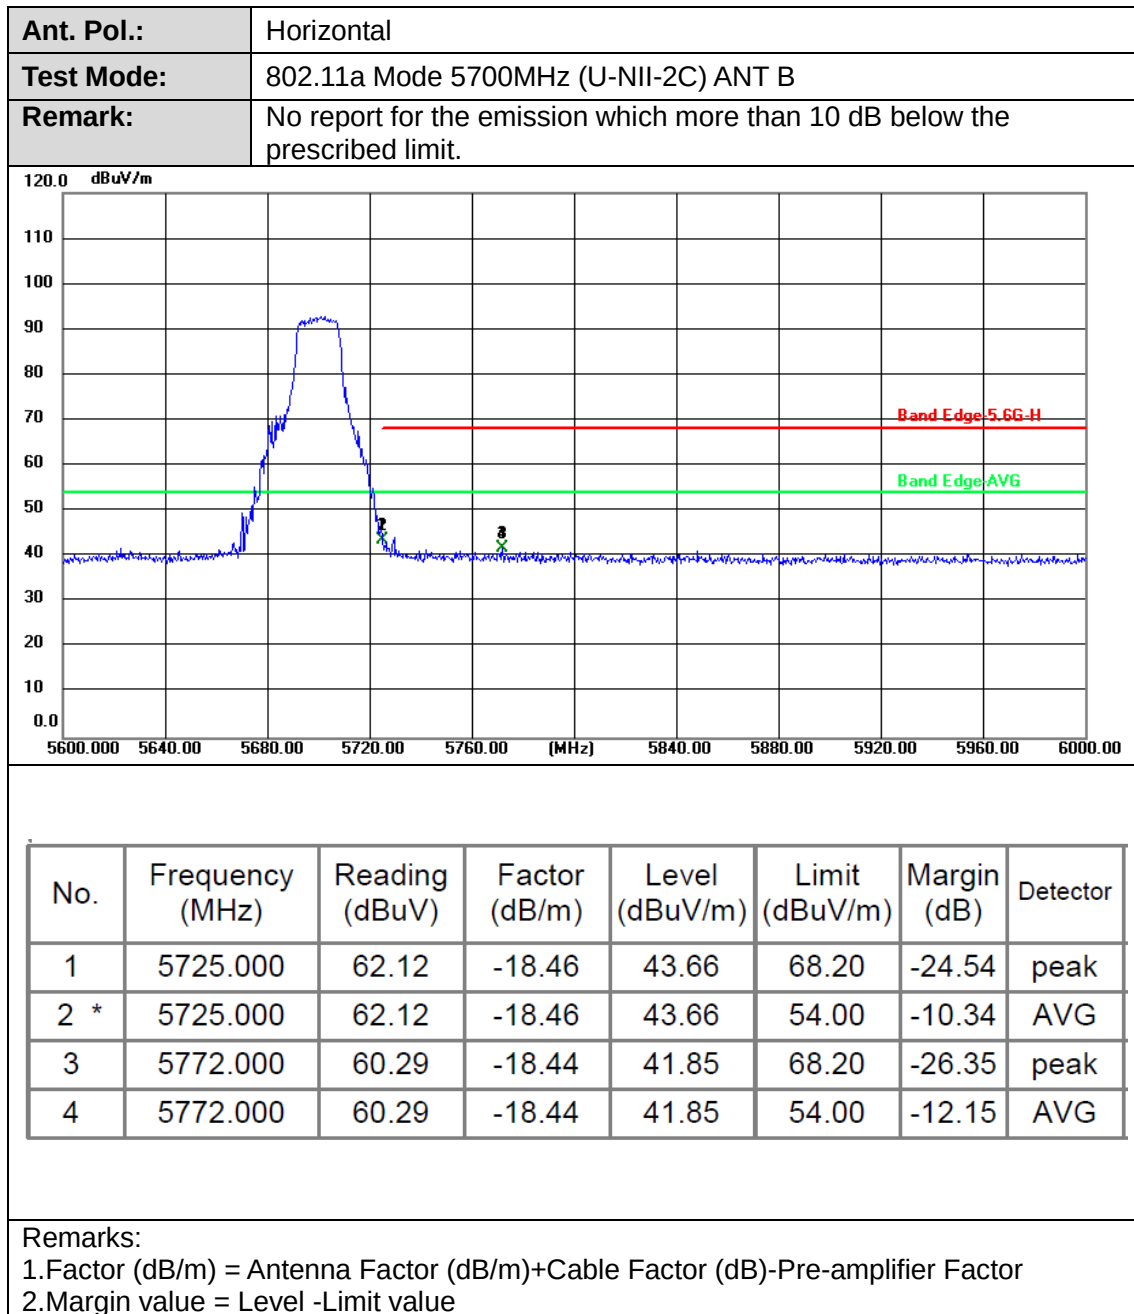

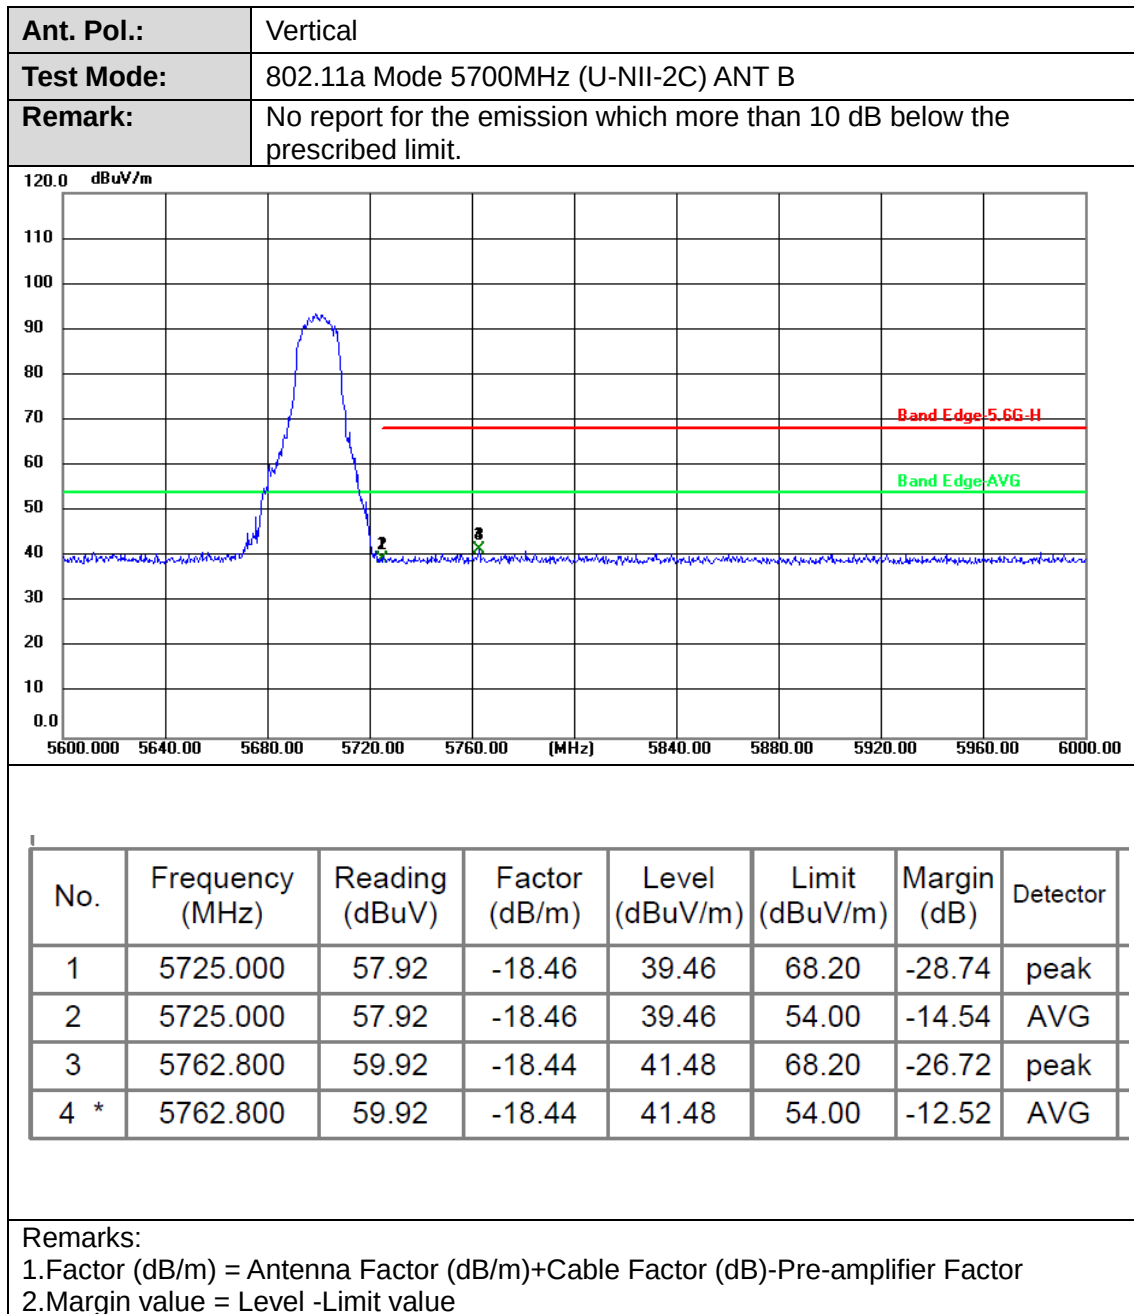




Ant. Pol.:	Horizontal
Test Mode:	802.11n(HT20) Mode 5500MHz (U-NII-2C) MIMO
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

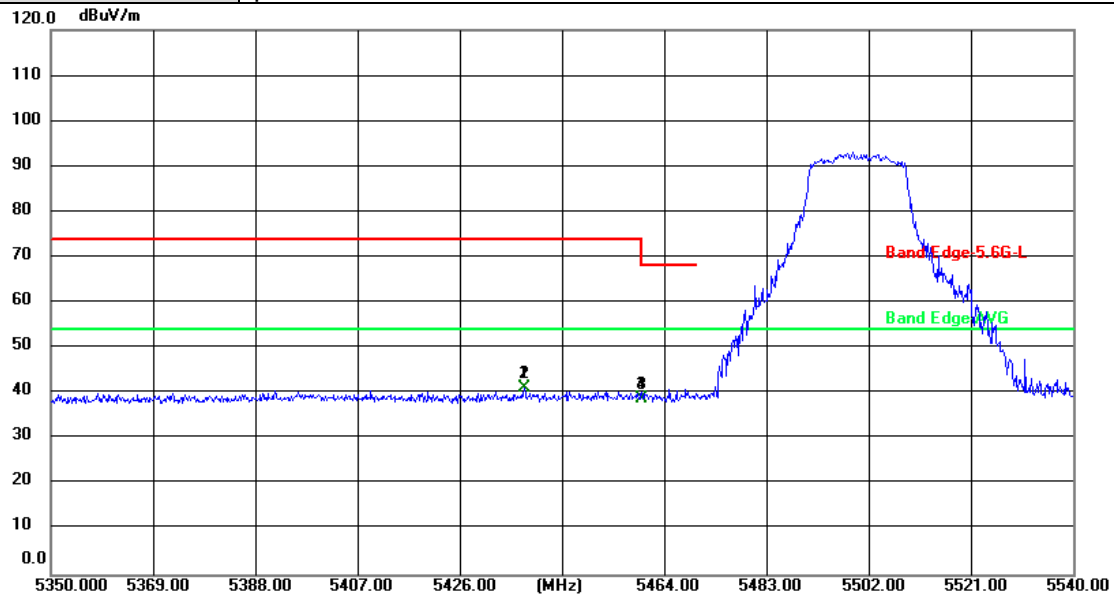

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5437.970	60.01	-18.89	41.12	74.00	-32.88	peak
2 *	5437.970	60.01	-18.89	41.12	54.00	-12.88	AVG
3	5460.000	57.62	-18.78	38.84	68.20	-29.36	peak
4	5460.000	57.62	-18.78	38.84	54.00	-15.16	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

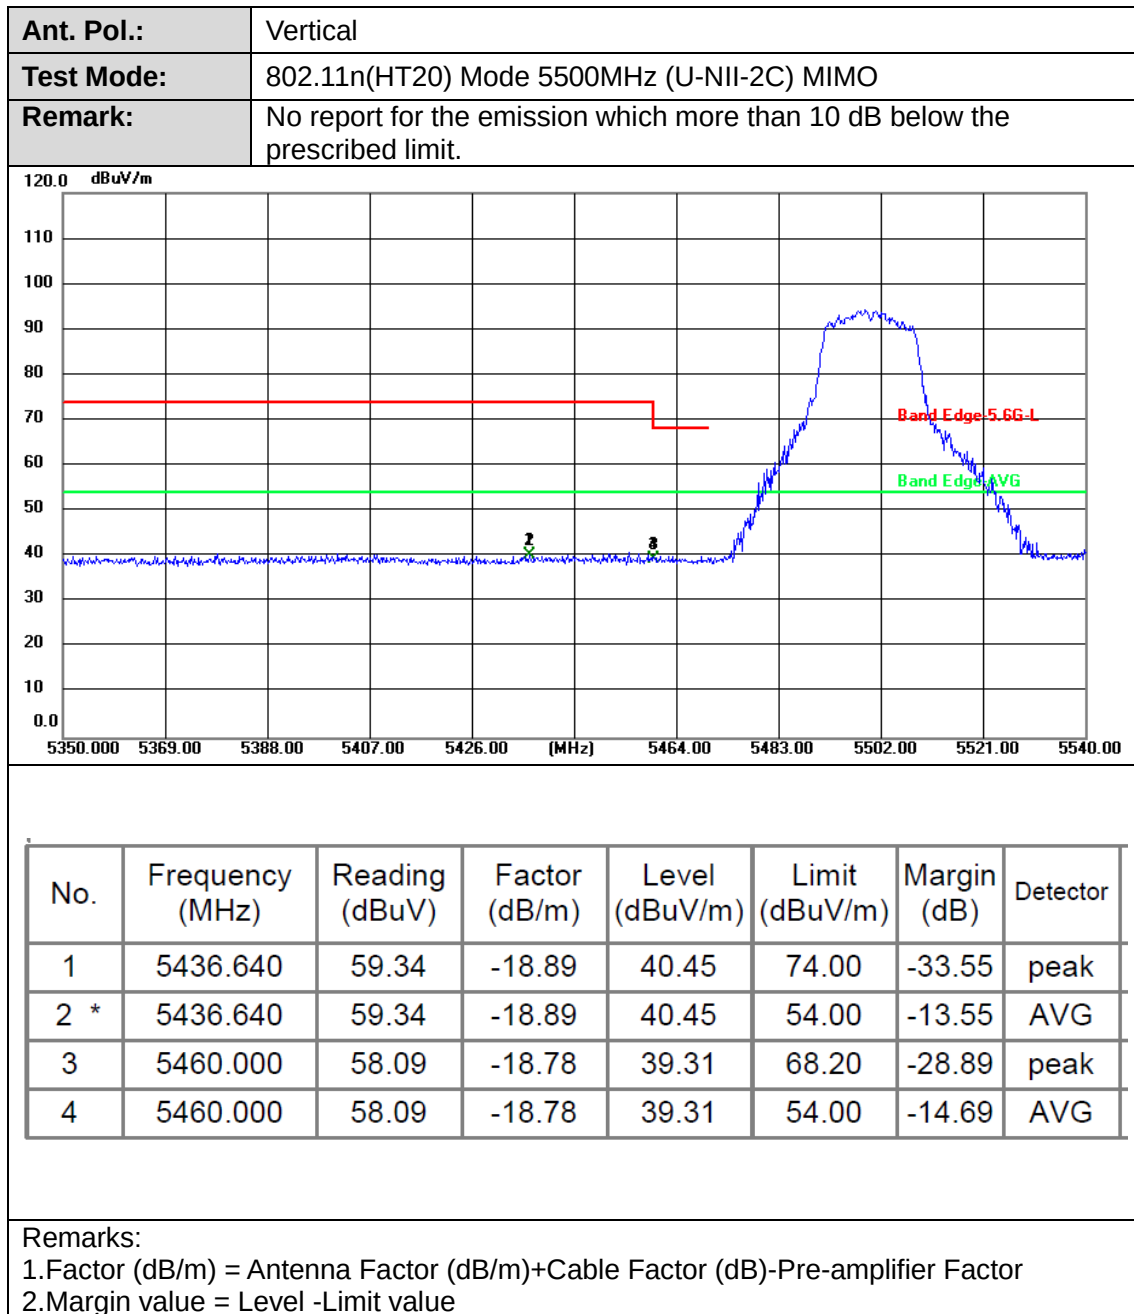




Ant. Pol.:	Horizontal
Test Mode:	802.11n(HT20) Mode 5700MHz (U-NII-2C) MIMO
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

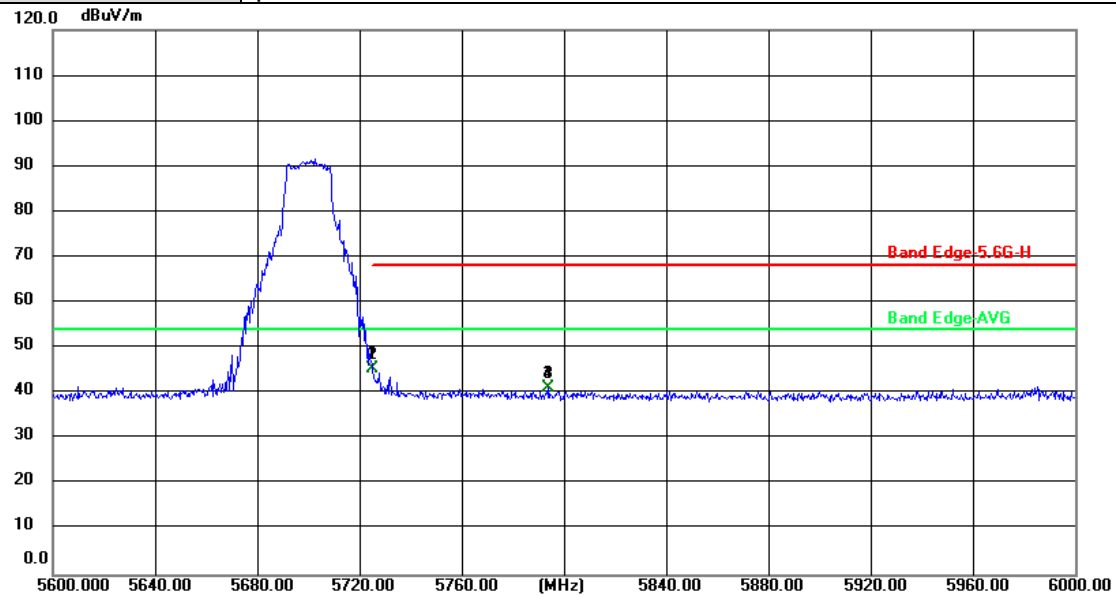



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	63.84	-18.46	45.38	68.20	-22.82	peak
2 *	5725.000	63.84	-18.46	45.38	54.00	-8.62	AVG
3	5794.000	59.55	-18.42	41.13	68.20	-27.07	peak
4	5794.000	59.55	-18.42	41.13	54.00	-12.87	AVG


Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

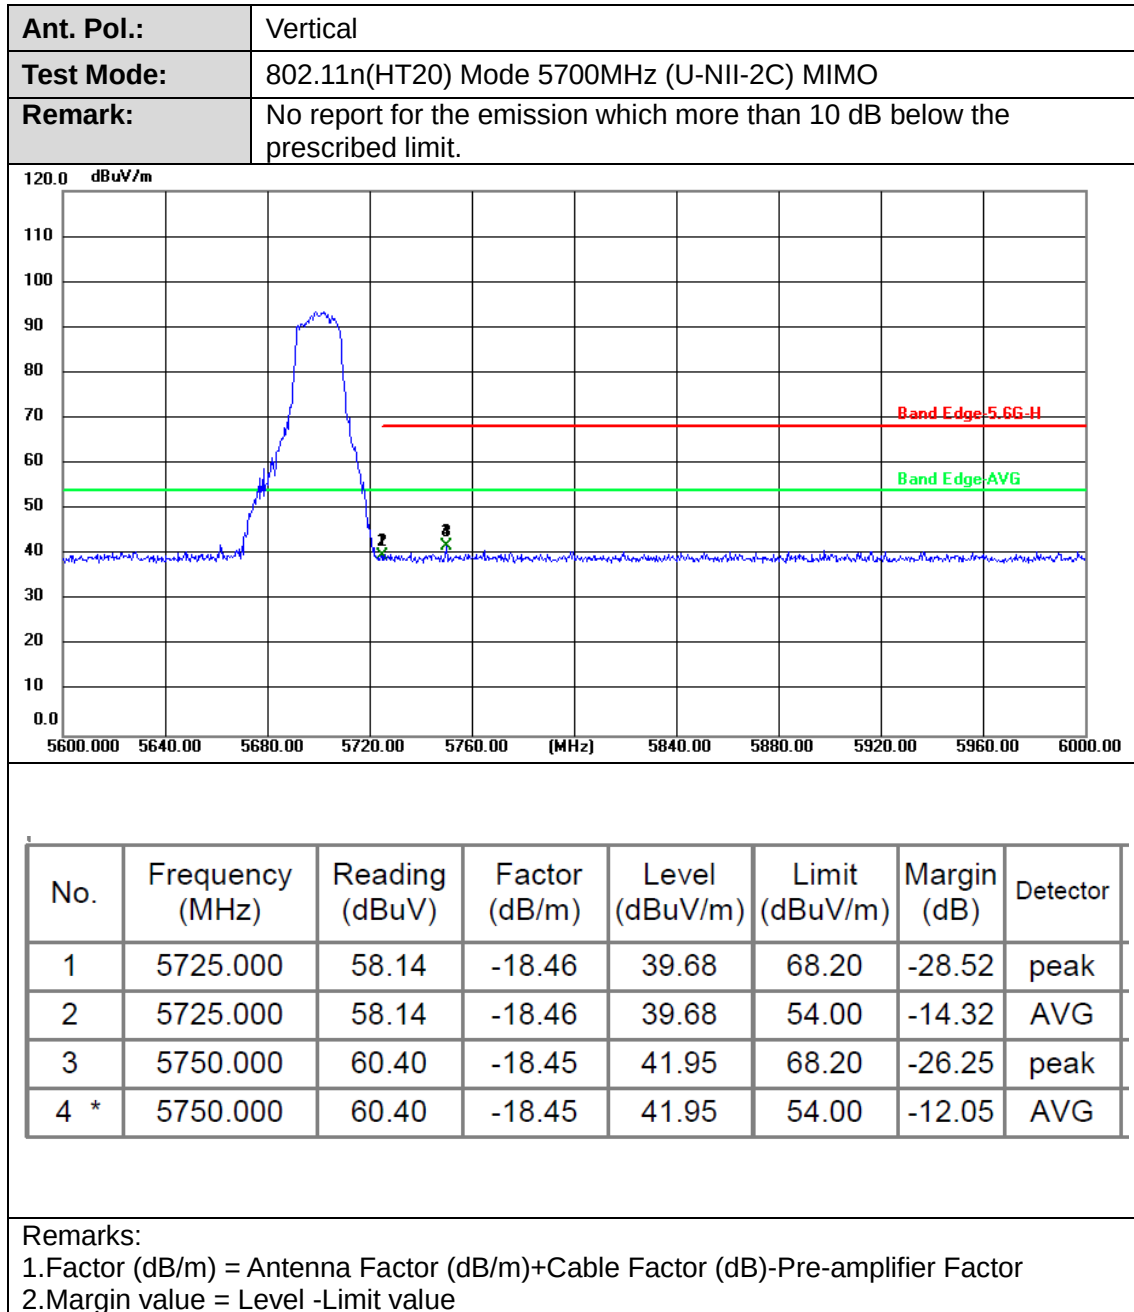


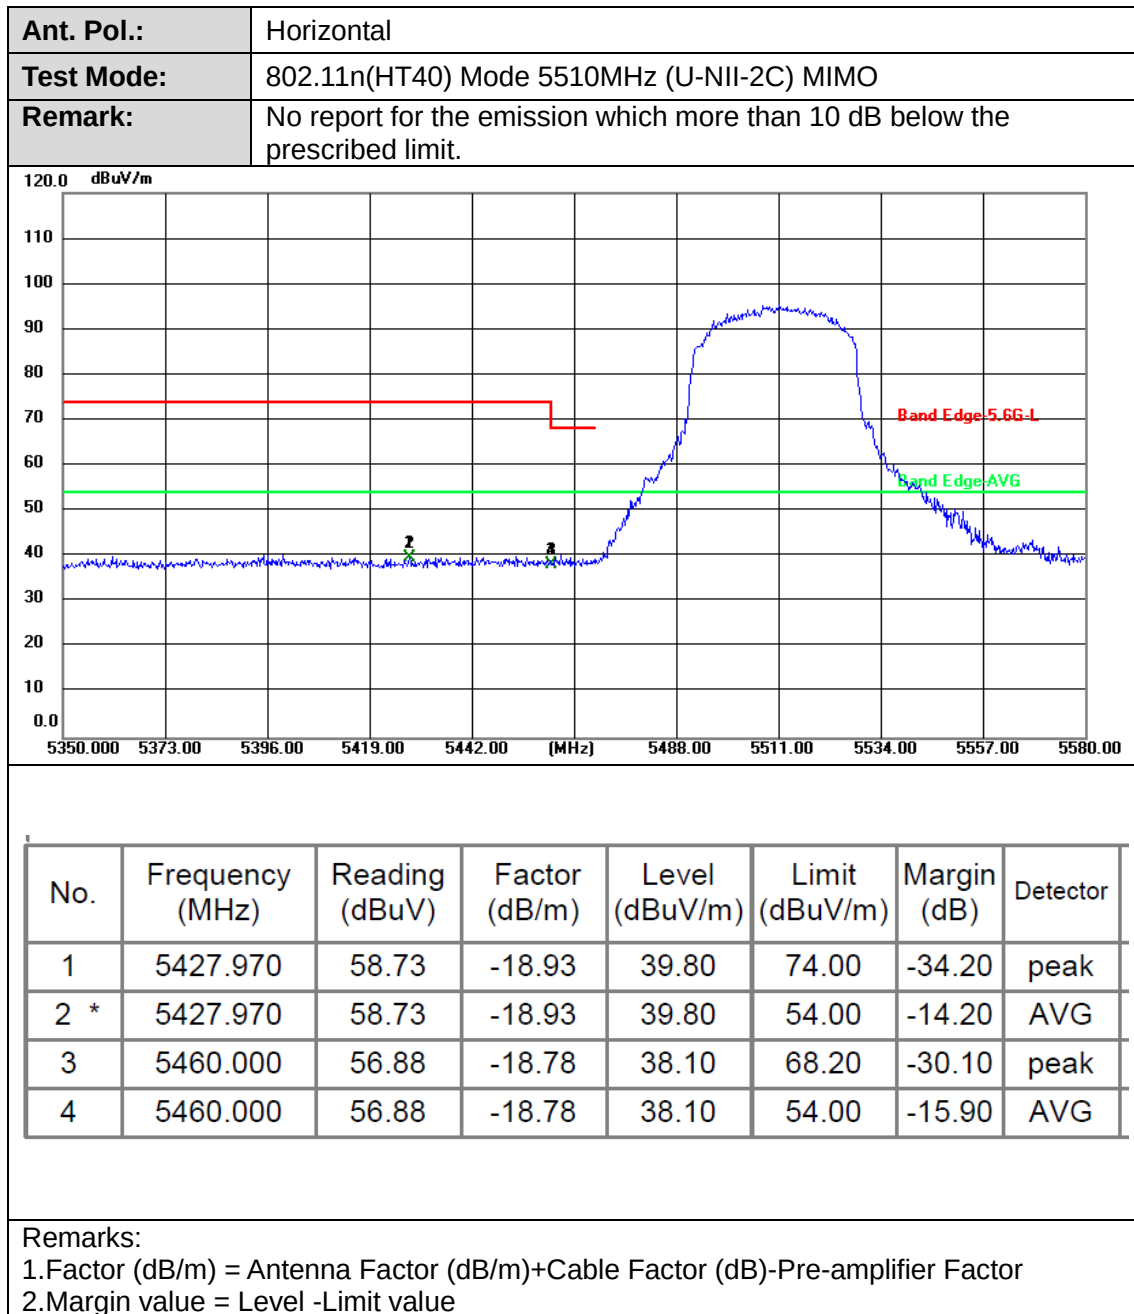

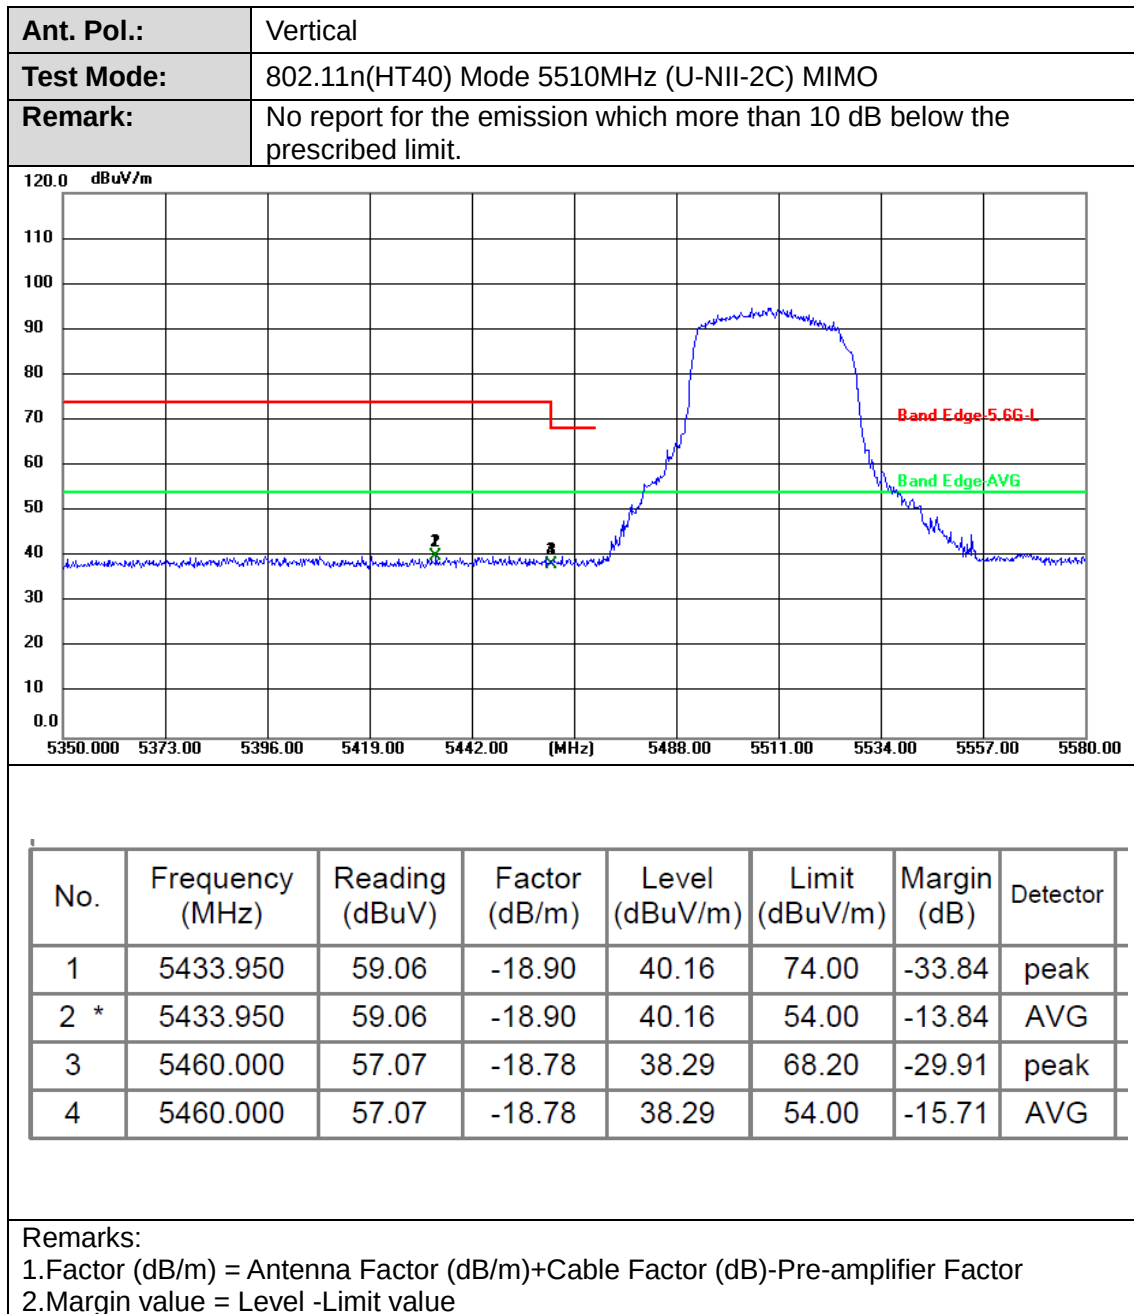

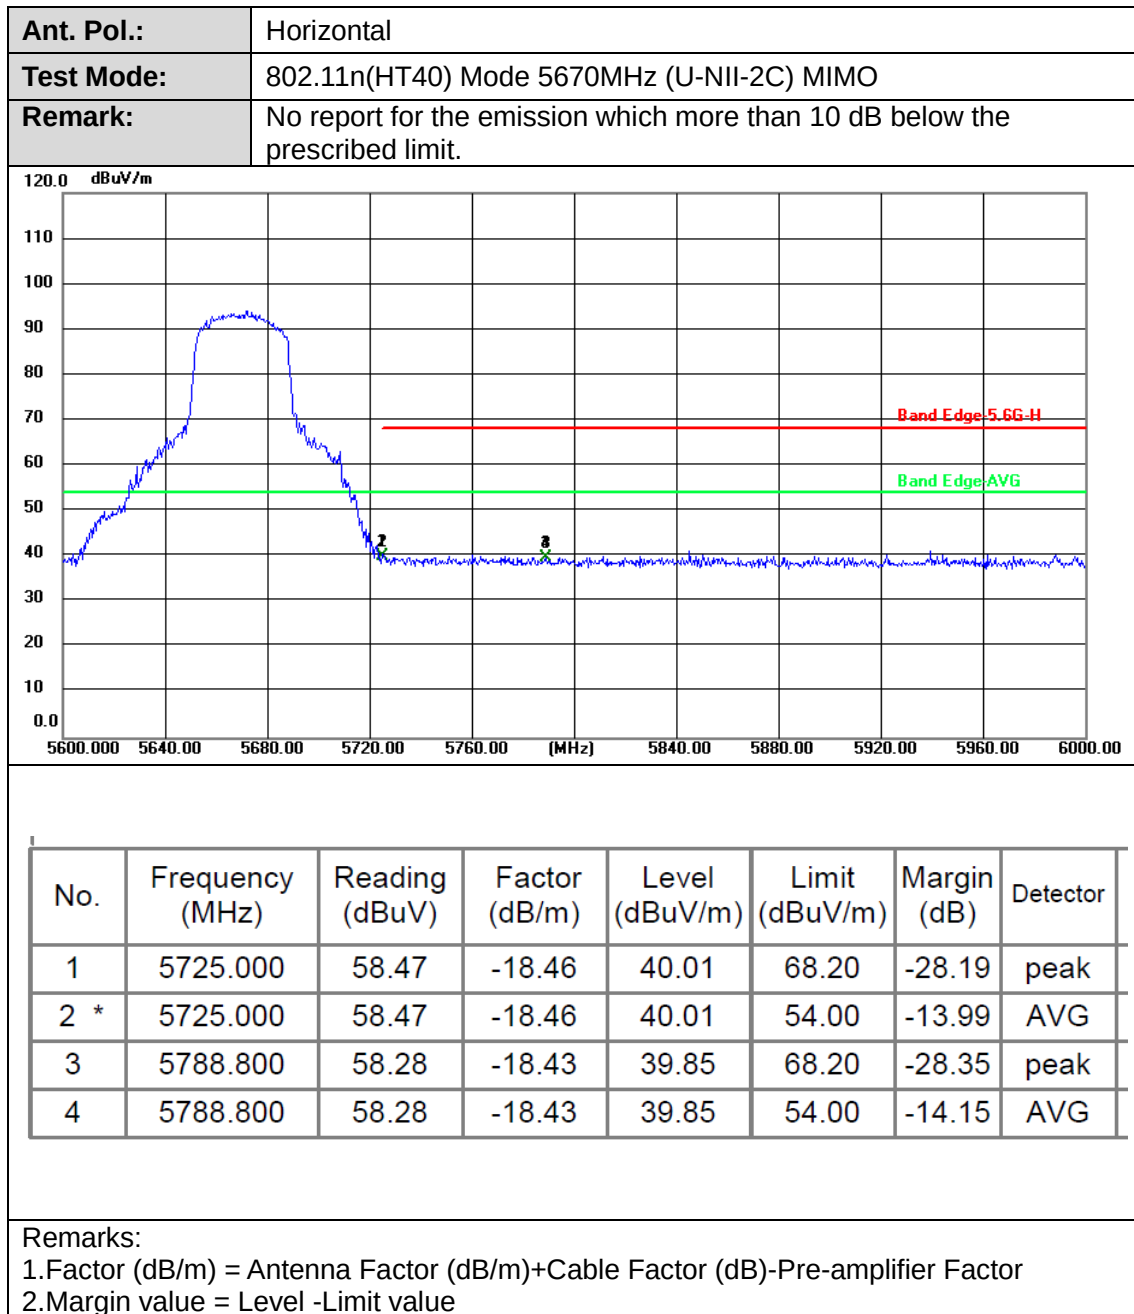


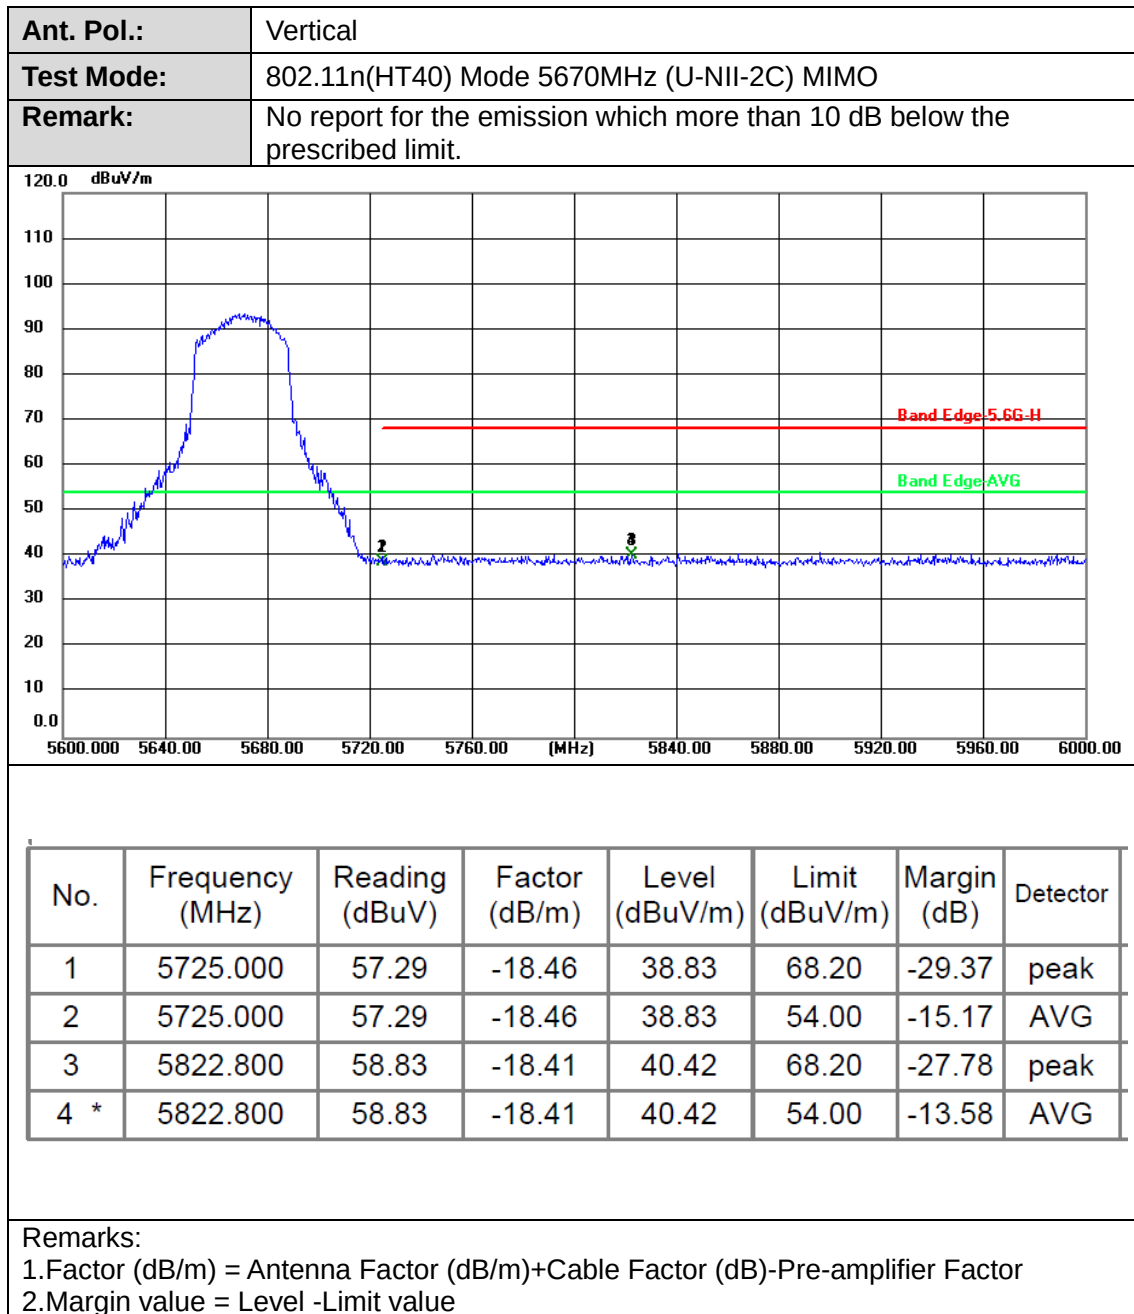

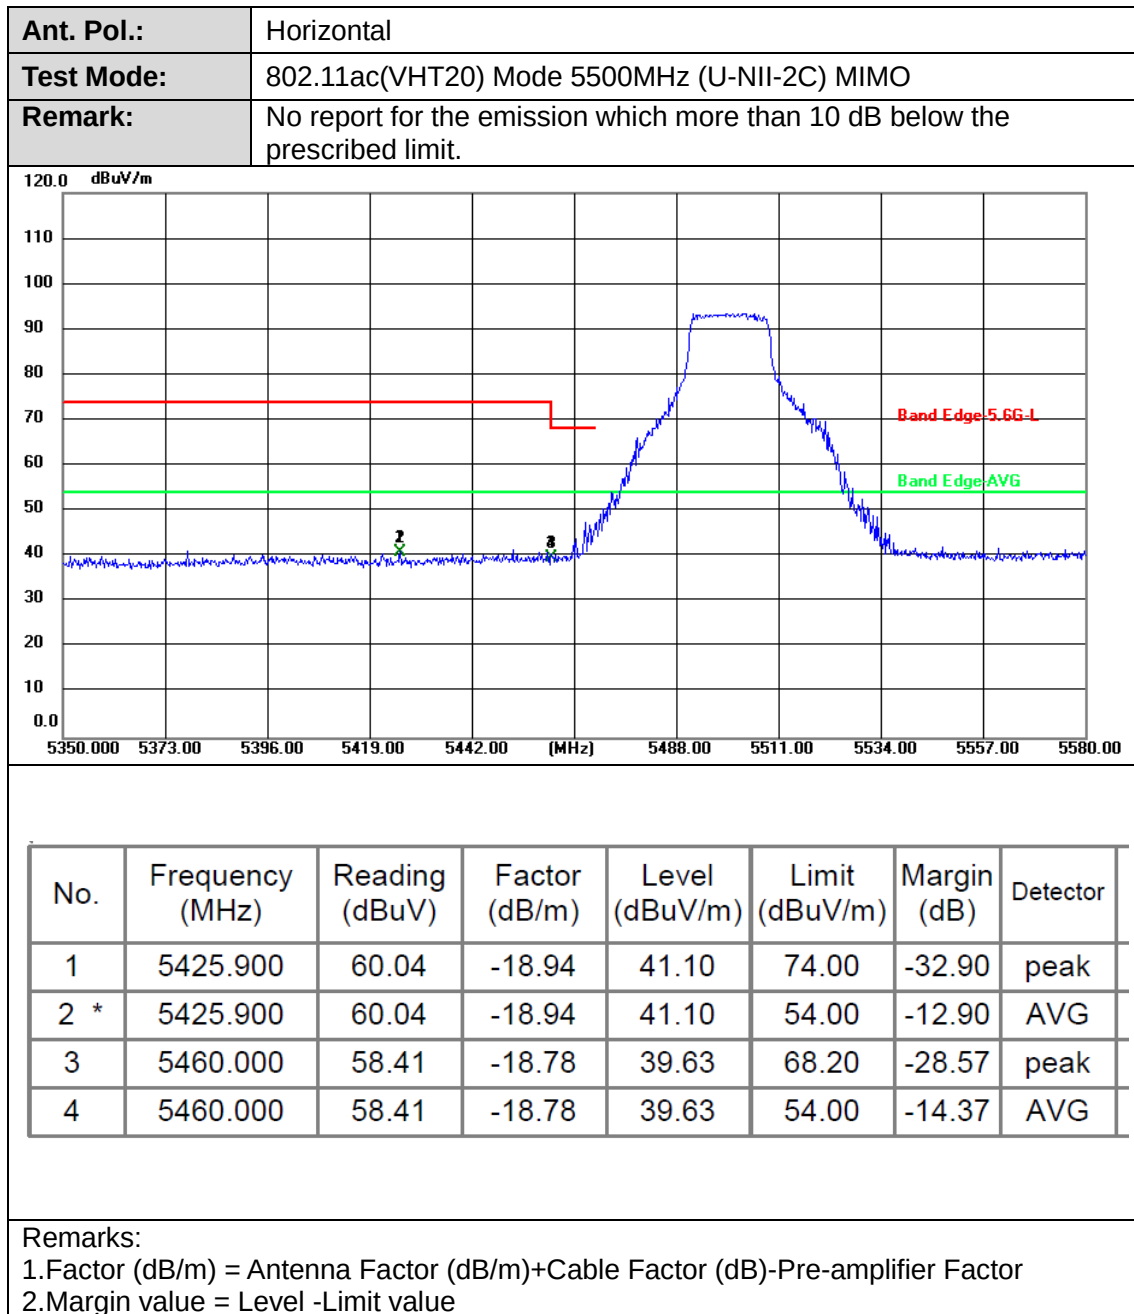



Ant. Pol.:	Vertical
Test Mode:	802.11ac(VHT20) Mode 5500MHz (U-NII-2C) MIMO
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

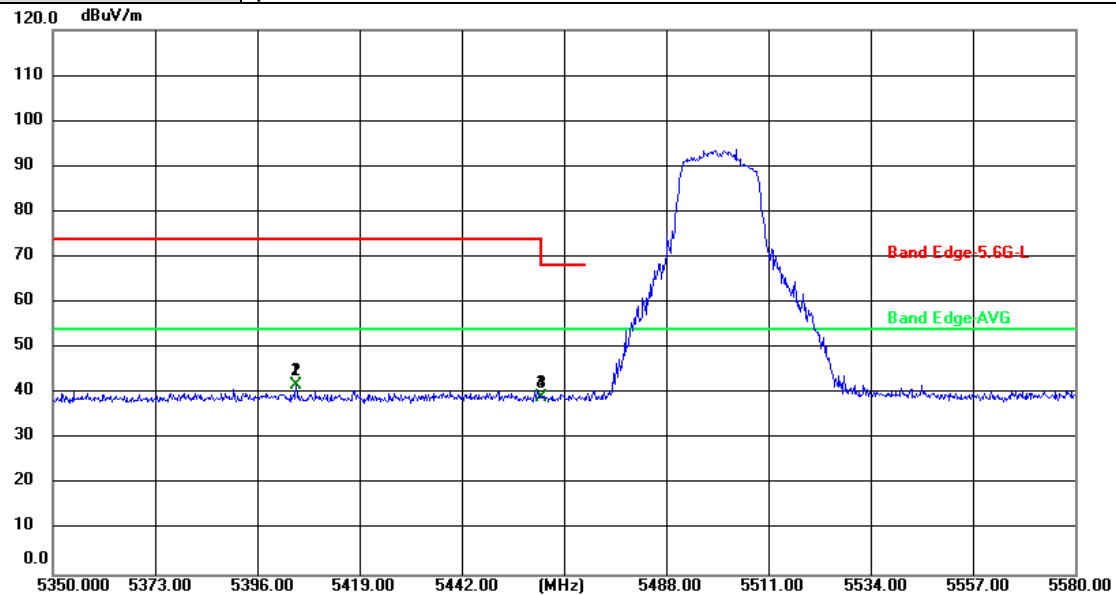


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5404.740	60.74	-19.04	41.70	74.00	-32.30	peak
2 *	5404.740	60.74	-19.04	41.70	54.00	-12.30	AVG
3	5460.000	57.80	-18.78	39.02	68.20	-29.18	peak
4	5460.000	57.80	-18.78	39.02	54.00	-14.98	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value




Ant. Pol.:	Horizontal
Test Mode:	802.11ac(VHT20) Mode 5700MHz (U-NII-2C) MIMO
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

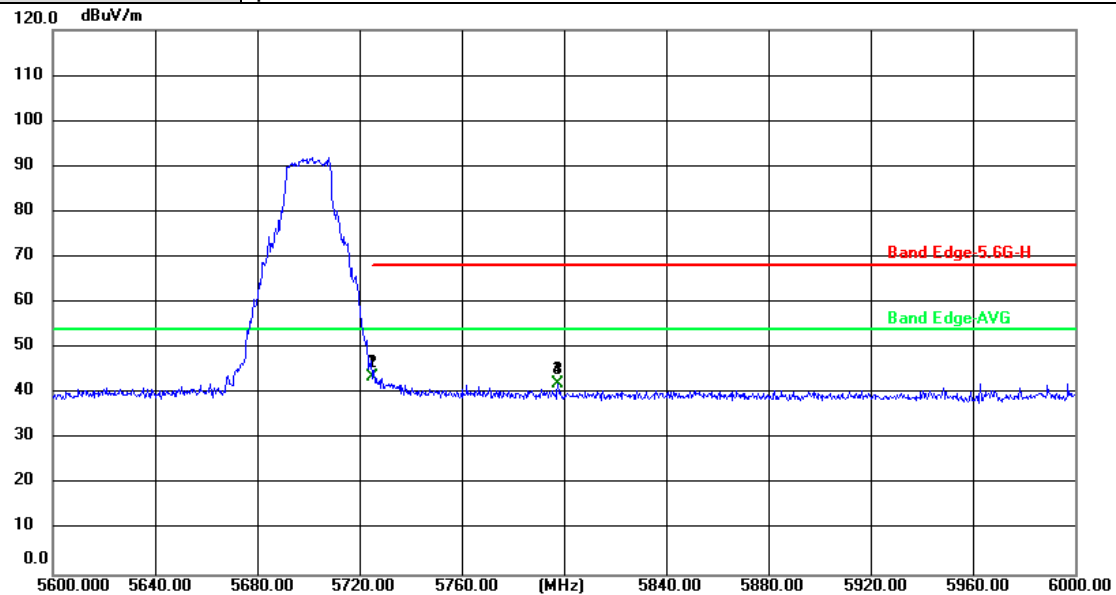

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	62.06	-18.46	43.60	68.20	-24.60	peak
2 *	5725.000	62.06	-18.46	43.60	54.00	-10.40	AVG
3	5797.600	60.44	-18.42	42.02	68.20	-26.18	peak
4	5797.600	60.44	-18.42	42.02	54.00	-11.98	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

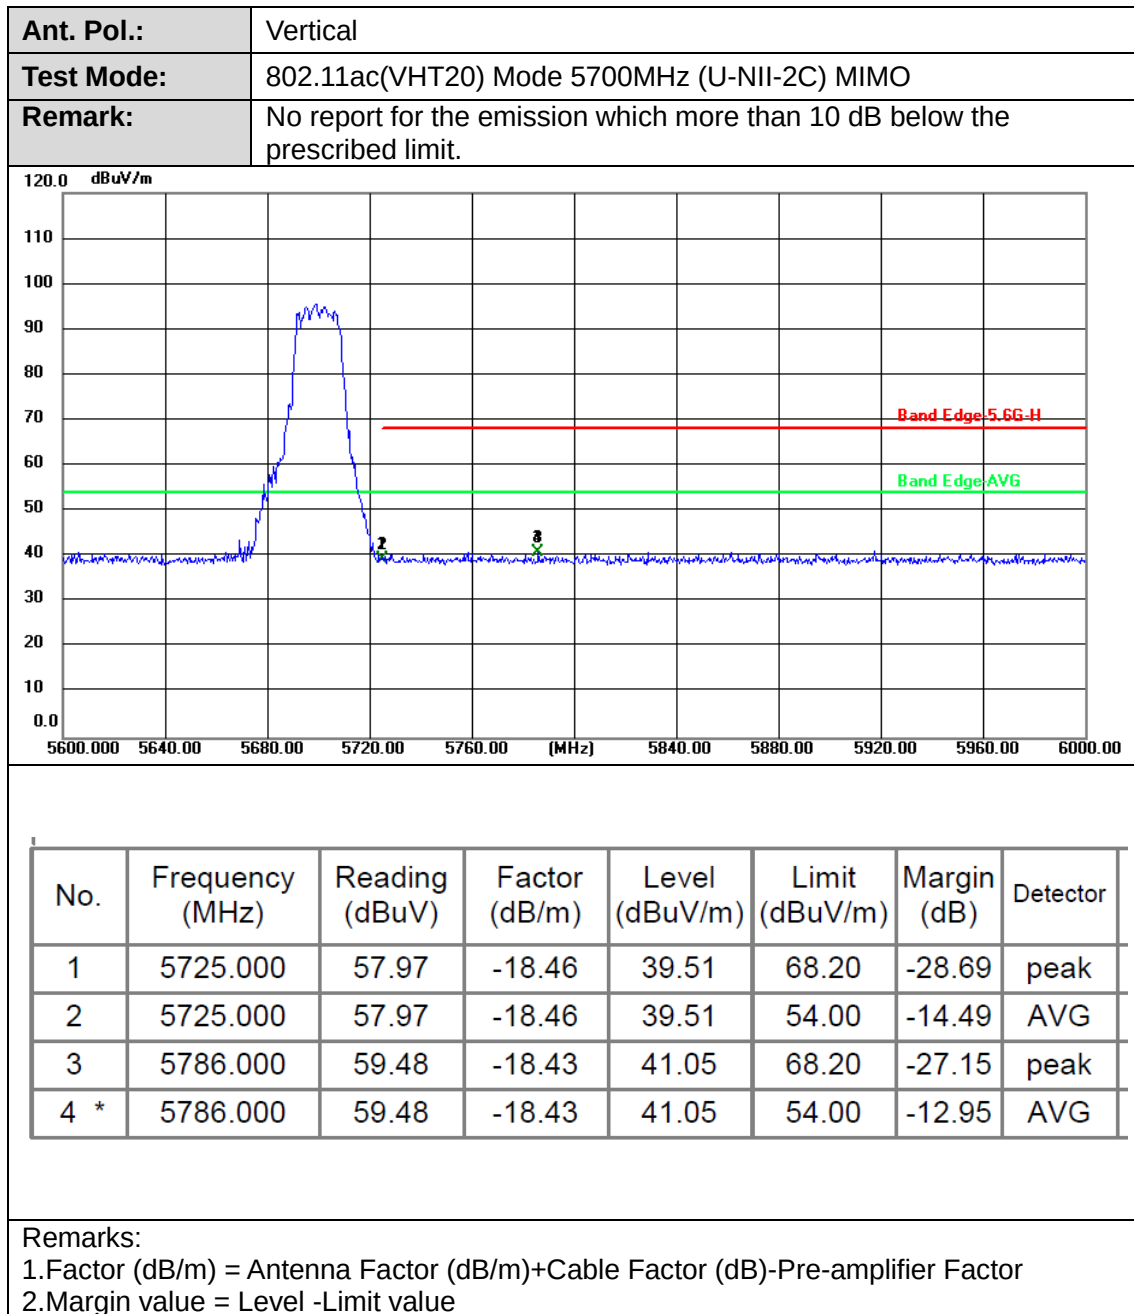




Ant. Pol.:	Horizontal
Test Mode:	802.11ac(VHT40) Mode 5510MHz (U-NII-2C) MIMO
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

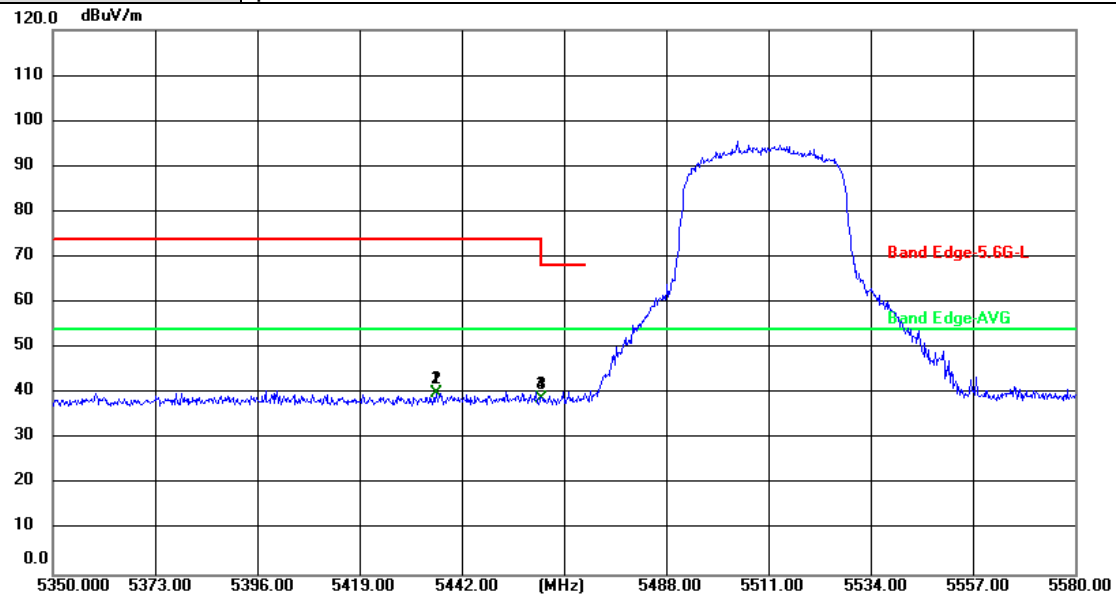


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5436.250	58.87	-18.89	39.98	74.00	-34.02	peak
2 *	5436.250	58.87	-18.89	39.98	54.00	-14.02	AVG
3	5460.000	57.64	-18.78	38.86	68.20	-29.34	peak
4	5460.000	57.64	-18.78	38.86	54.00	-15.14	AVG

Remarks:


- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value

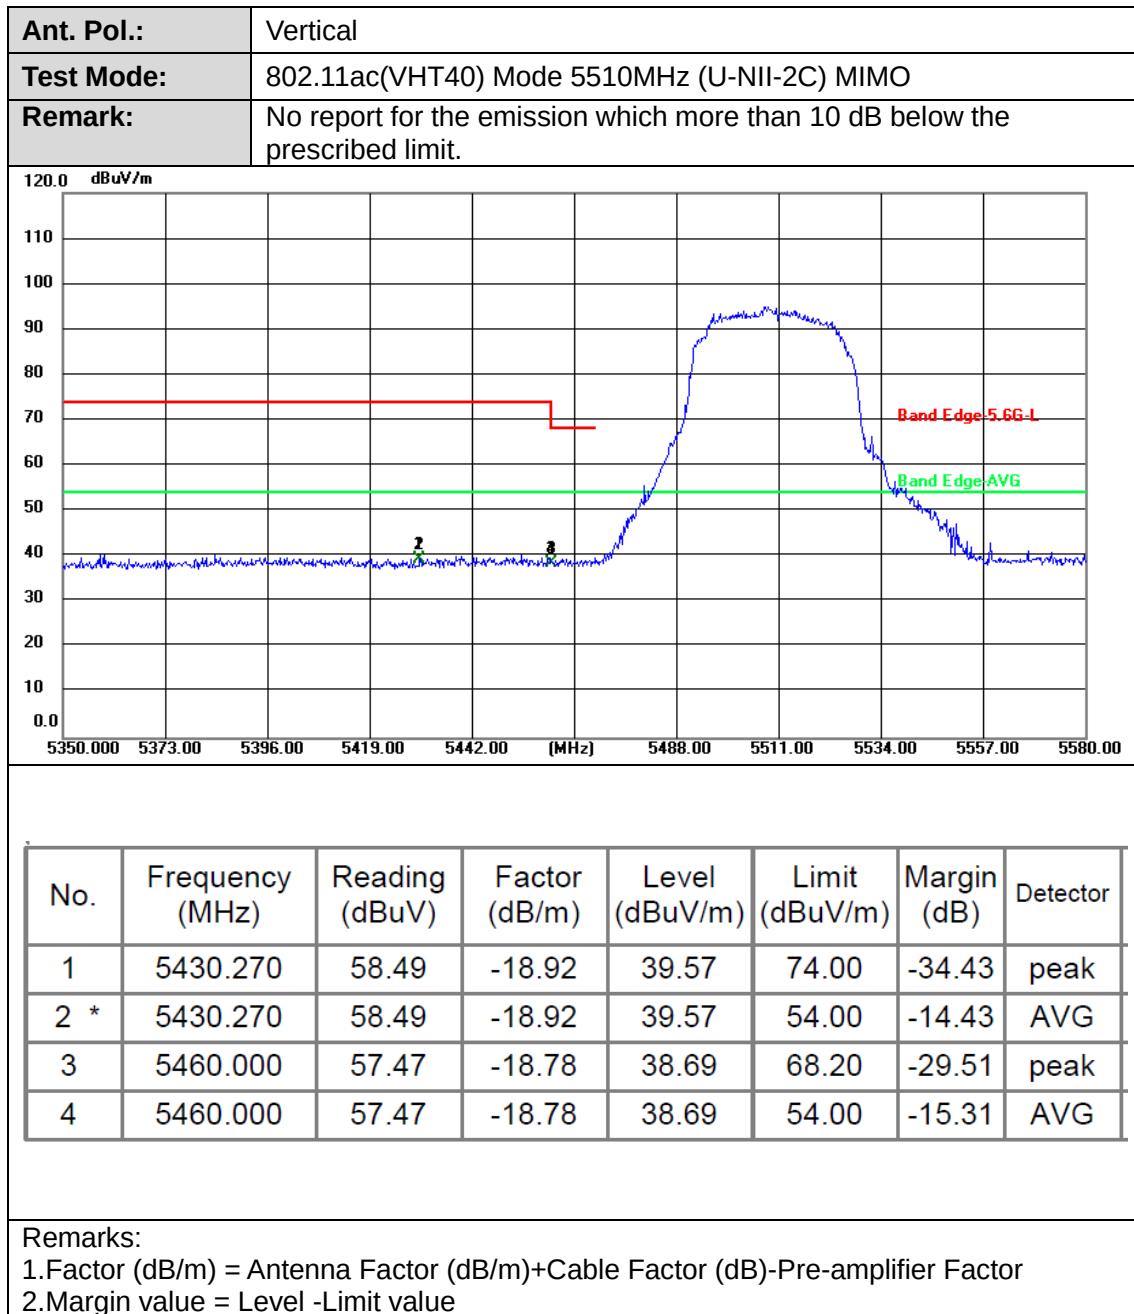

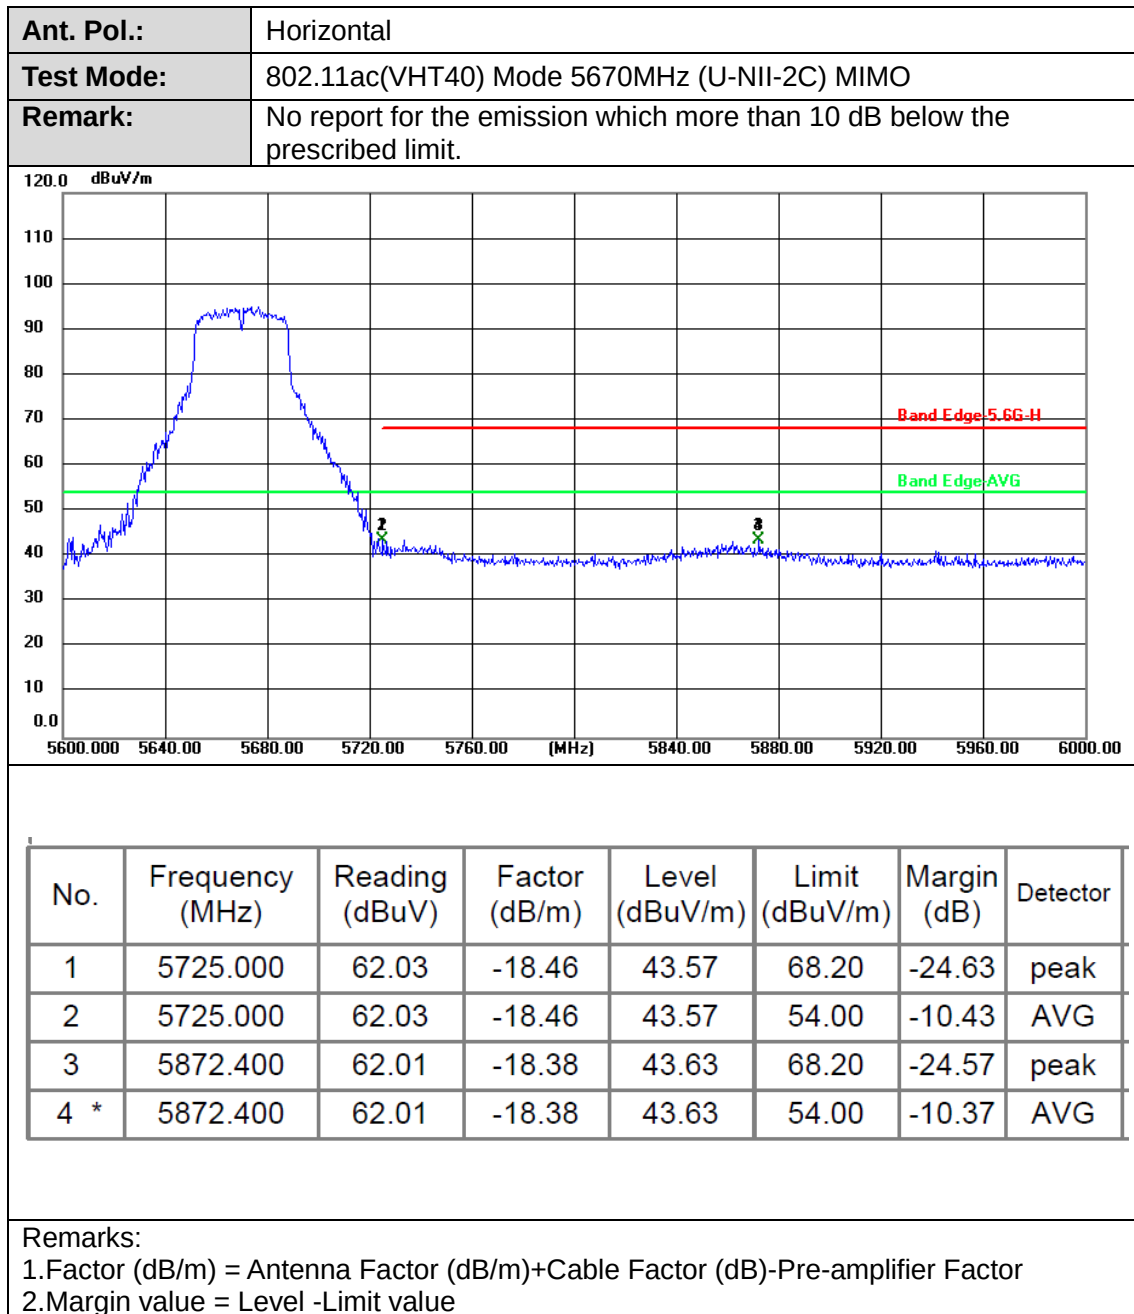




Ant. Pol.:	Vertical
Test Mode:	802.11ac(VHT40) Mode 5670MHz (U-NII-2C) MIMO
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

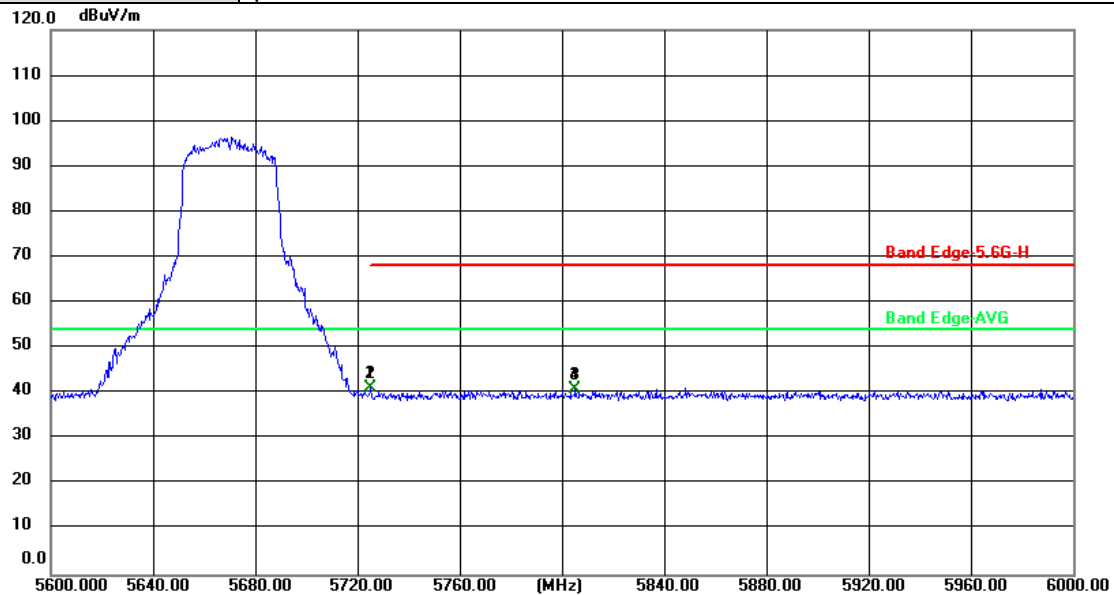



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	59.67	-18.46	41.21	68.20	-26.99	peak
2 *	5725.000	59.67	-18.46	41.21	54.00	-12.79	AVG
3	5805.200	59.48	-18.42	41.06	68.20	-27.14	peak
4	5805.200	59.48	-18.42	41.06	54.00	-12.94	AVG


Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

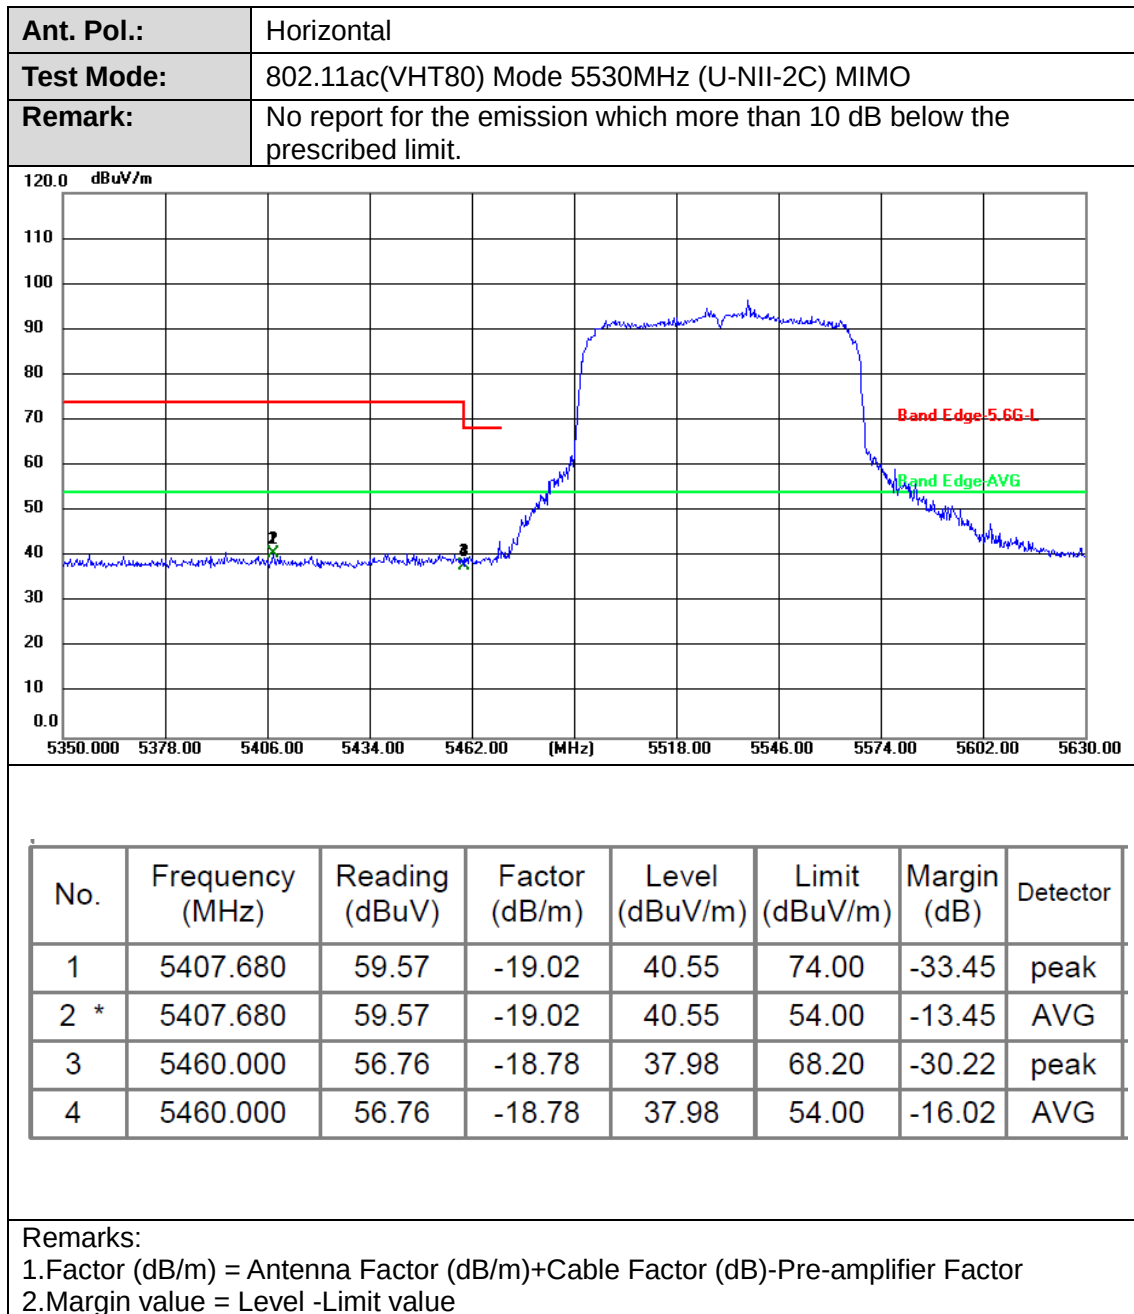

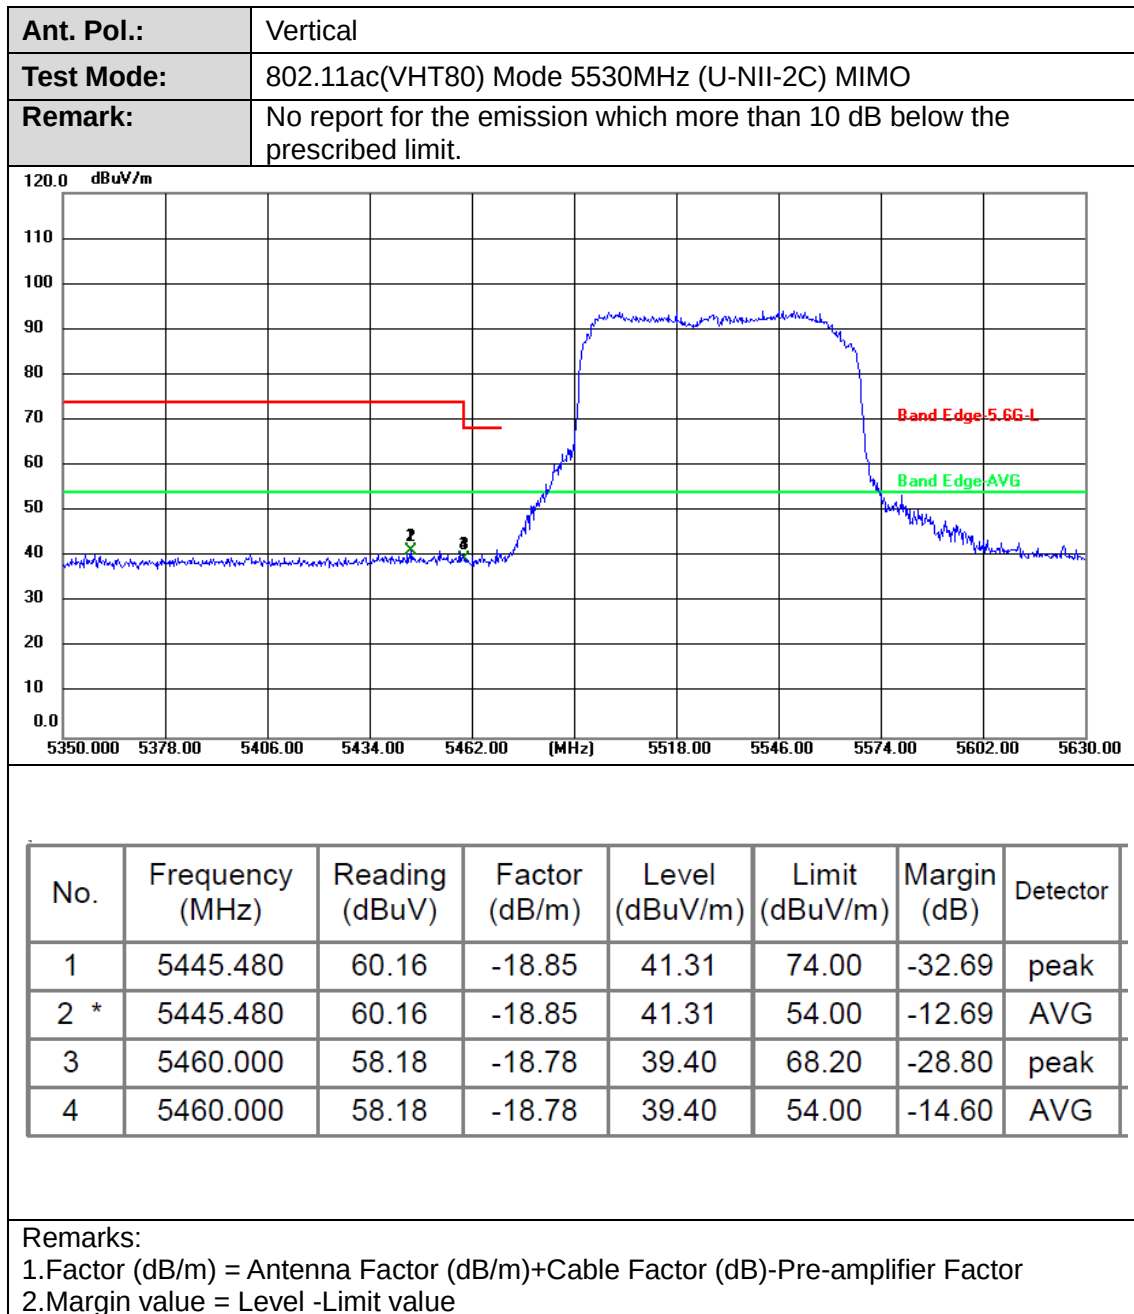

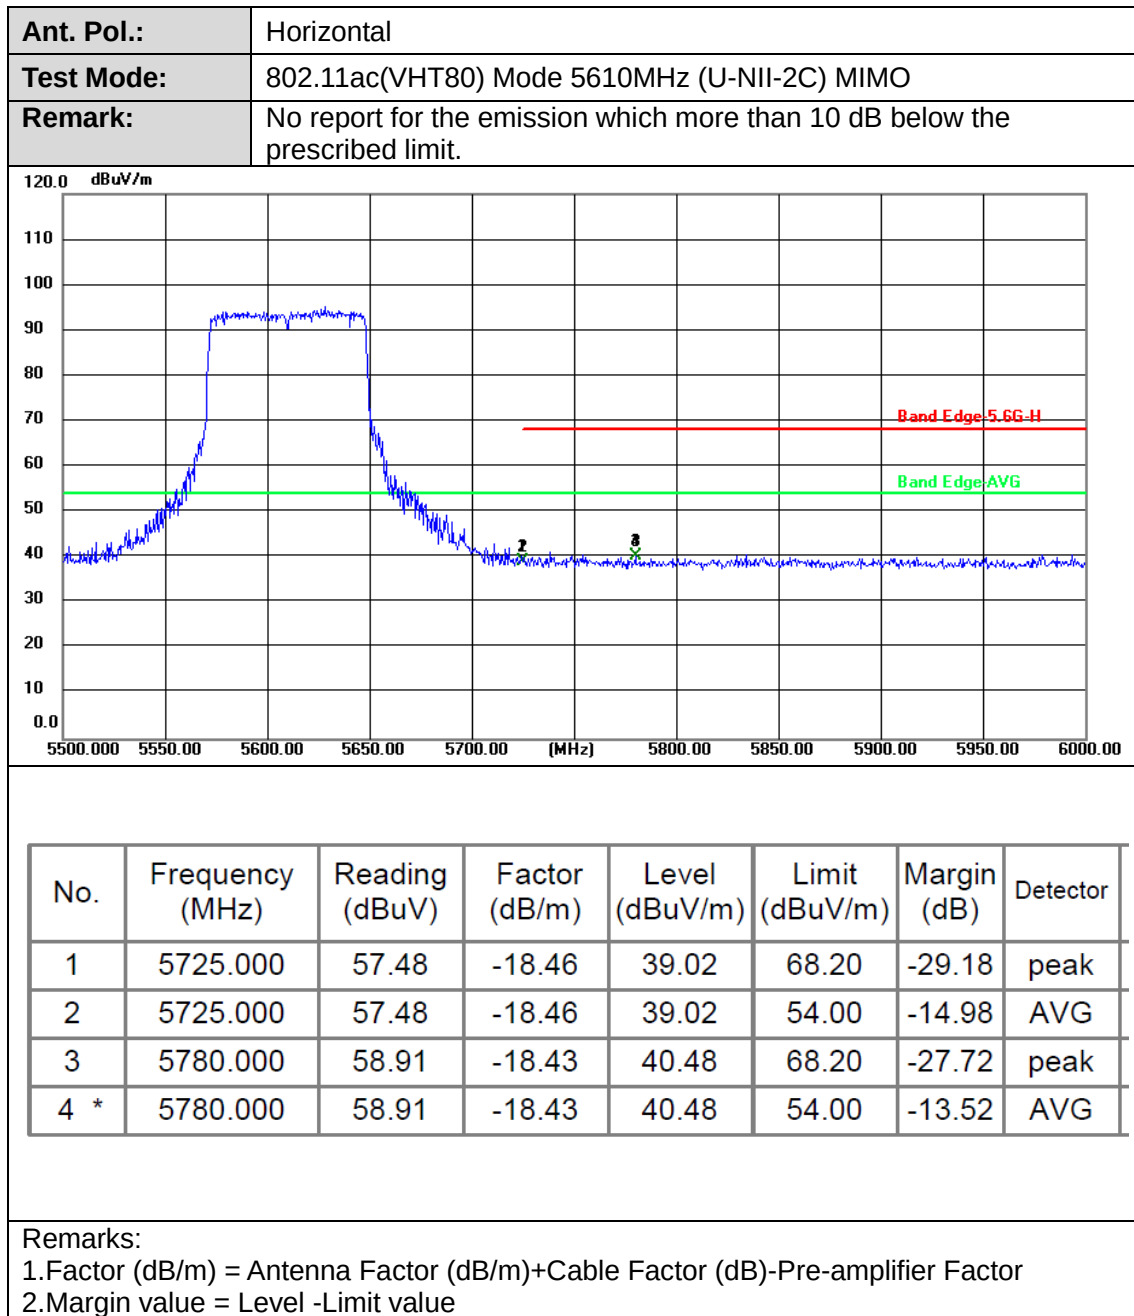


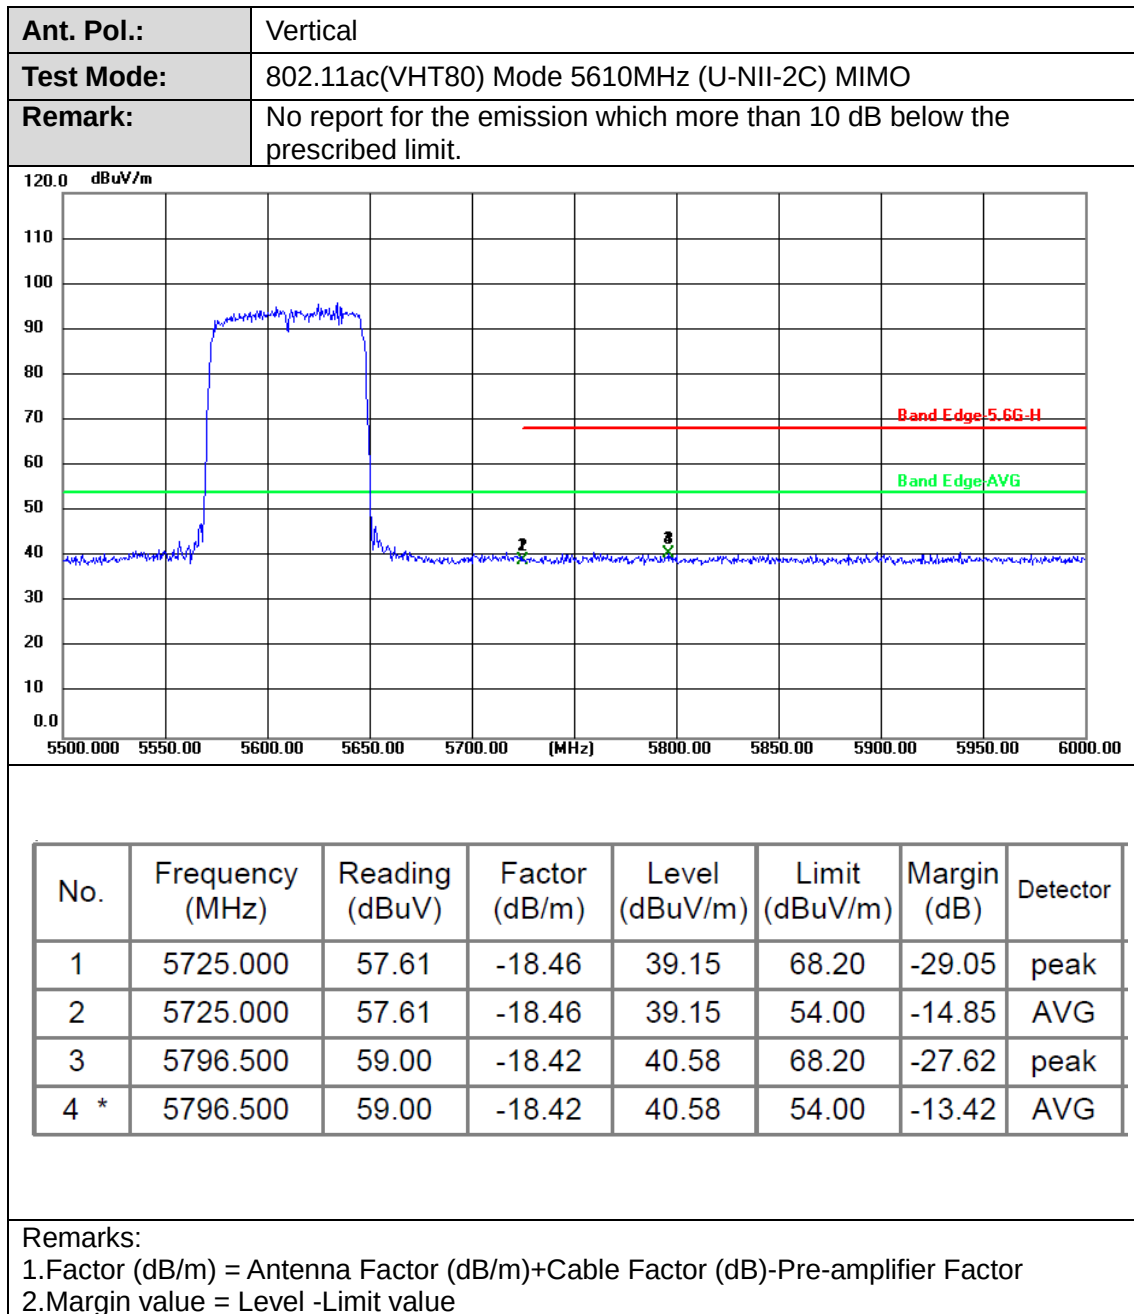

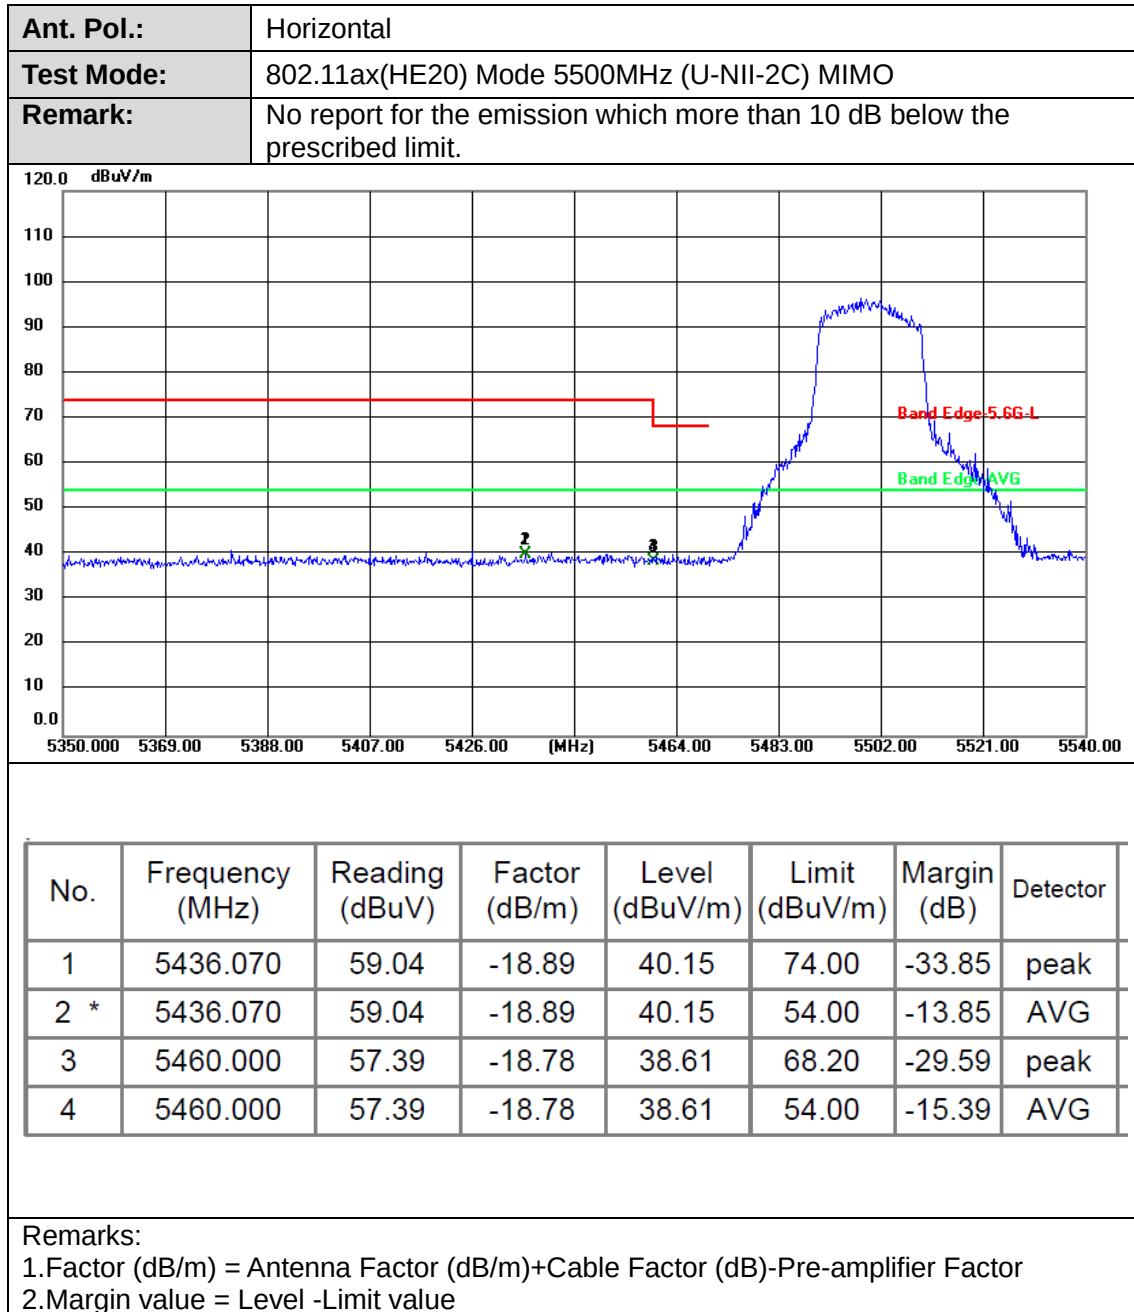




Ant. Pol.:	Vertical
Test Mode:	802.11ax(HE20) Mode 5500MHz (U-NII-2C) MIMO
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

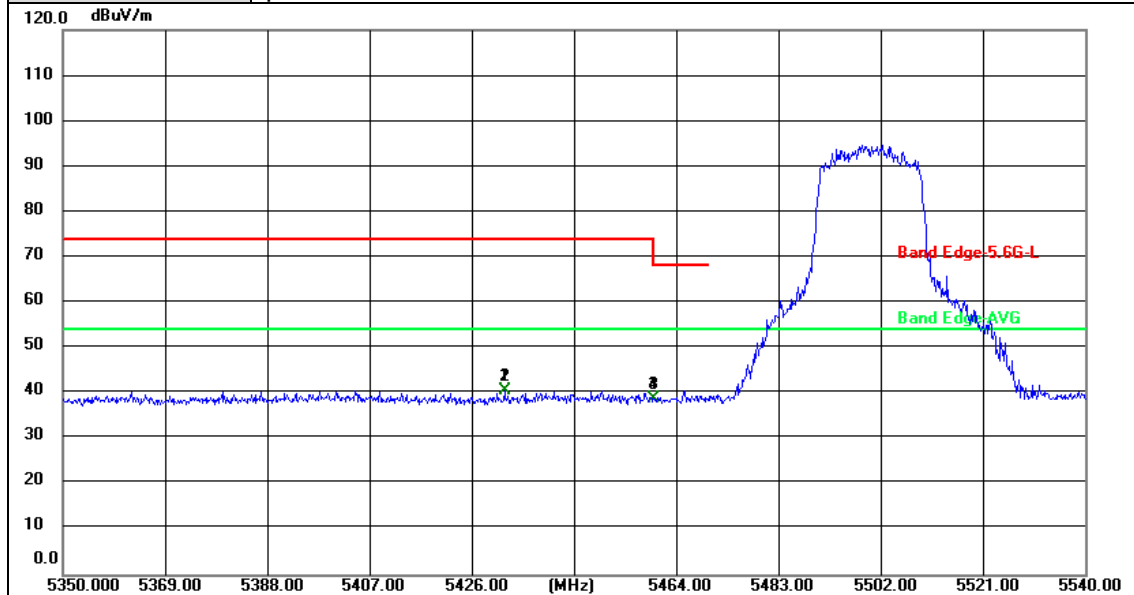



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5432.080	59.42	-18.91	40.51	74.00	-33.49	peak
2 *	5432.080	59.42	-18.91	40.51	54.00	-13.49	AVG
3	5460.000	57.64	-18.78	38.86	68.20	-29.34	peak
4	5460.000	57.64	-18.78	38.86	54.00	-15.14	AVG


Remarks:


- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value

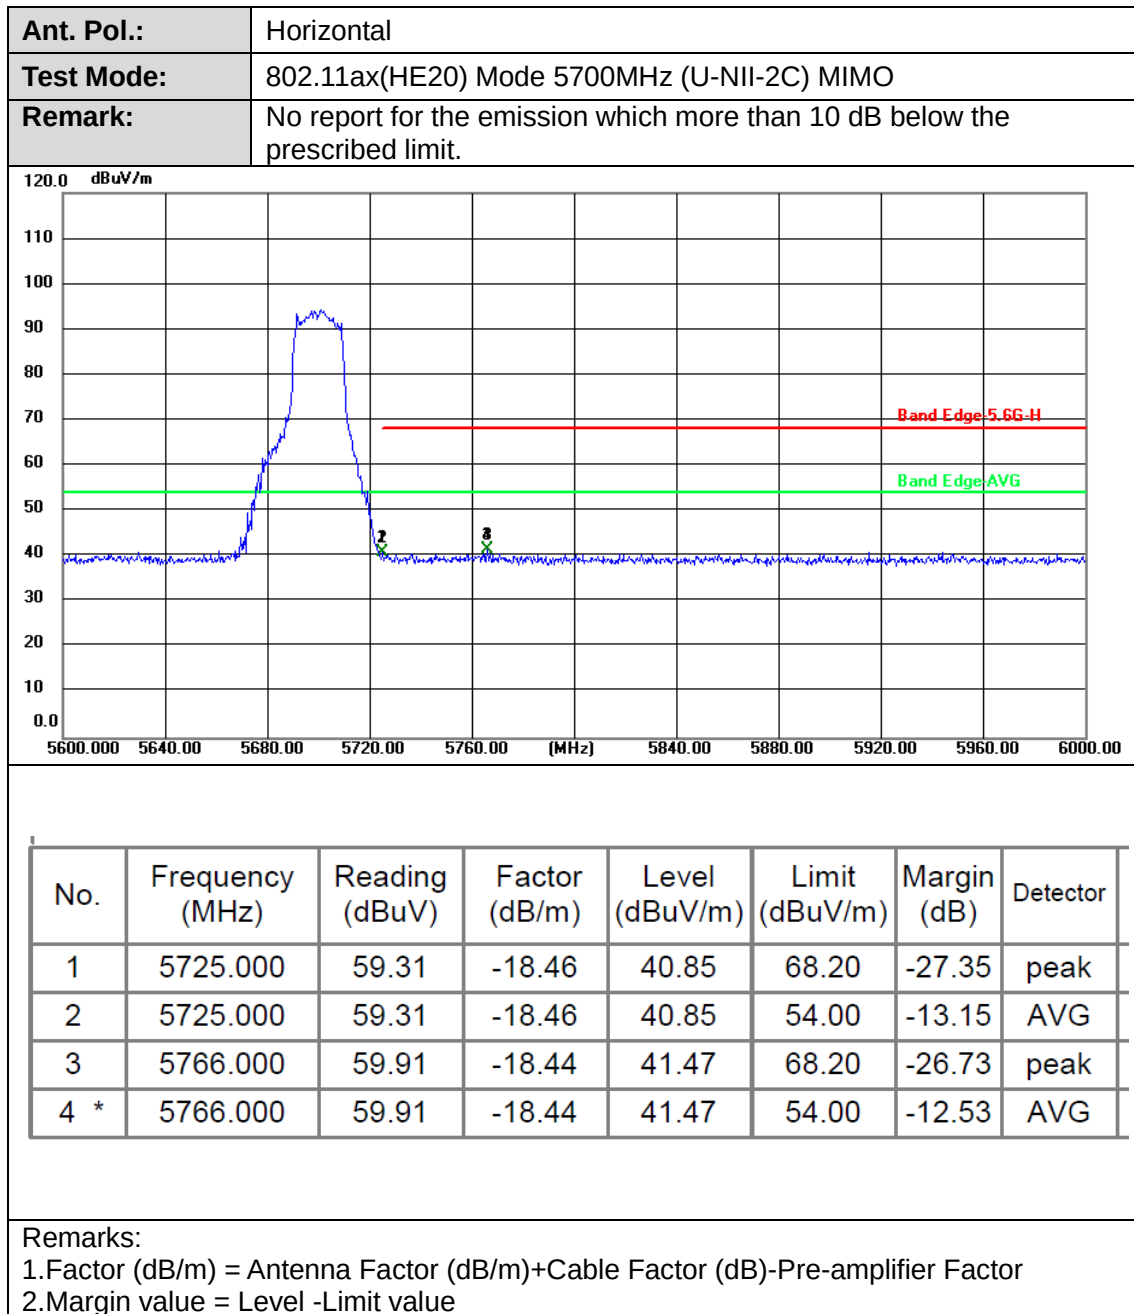


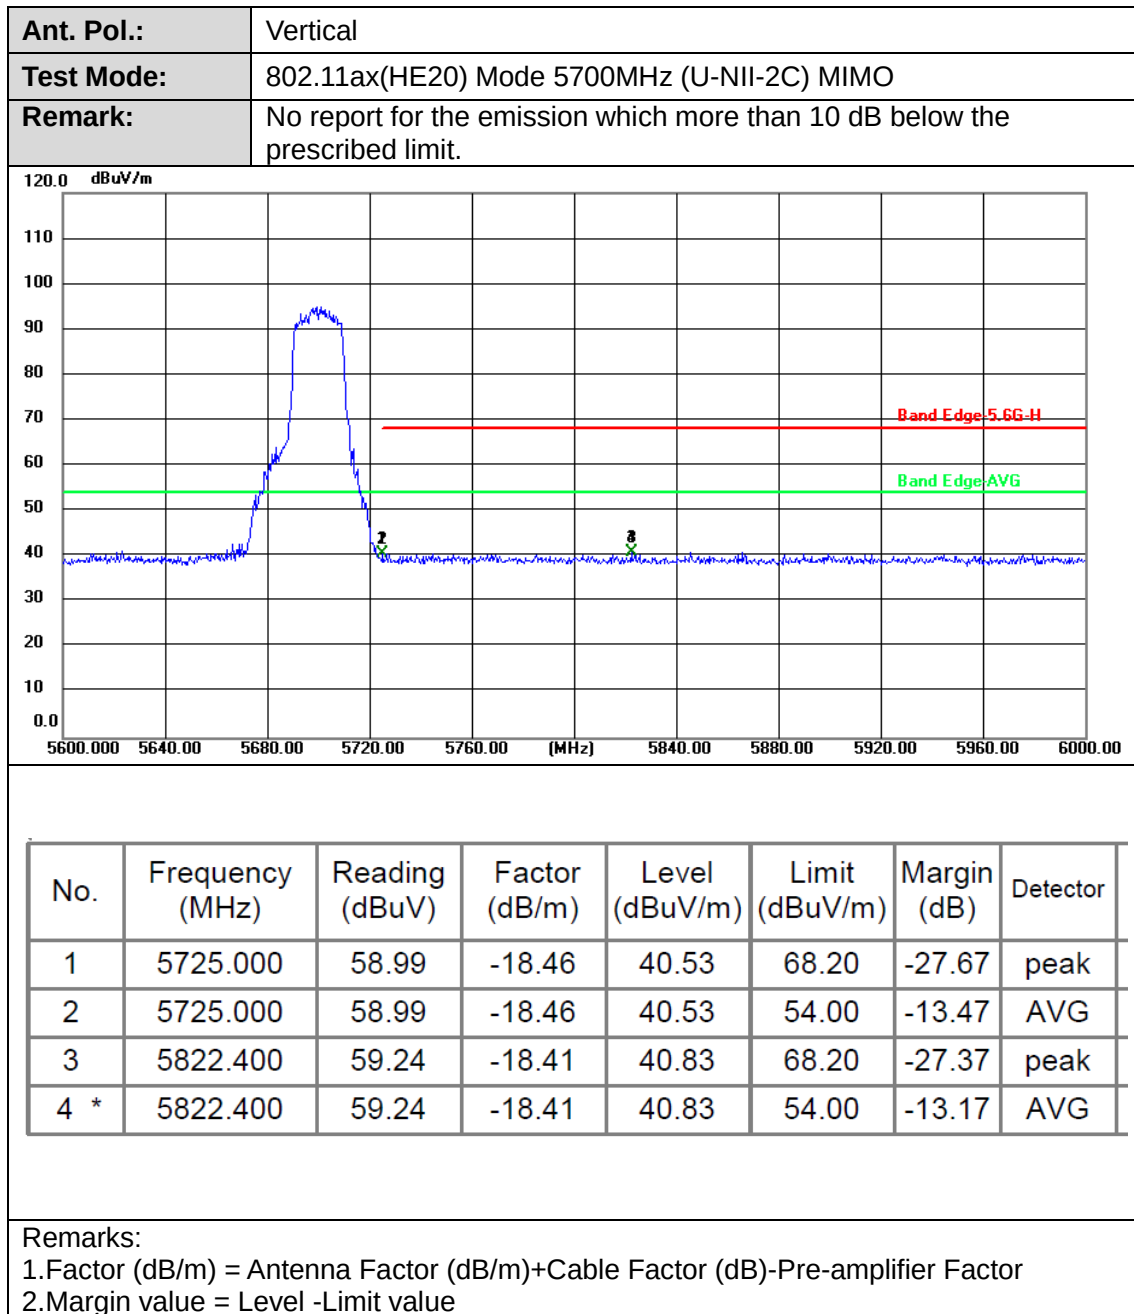


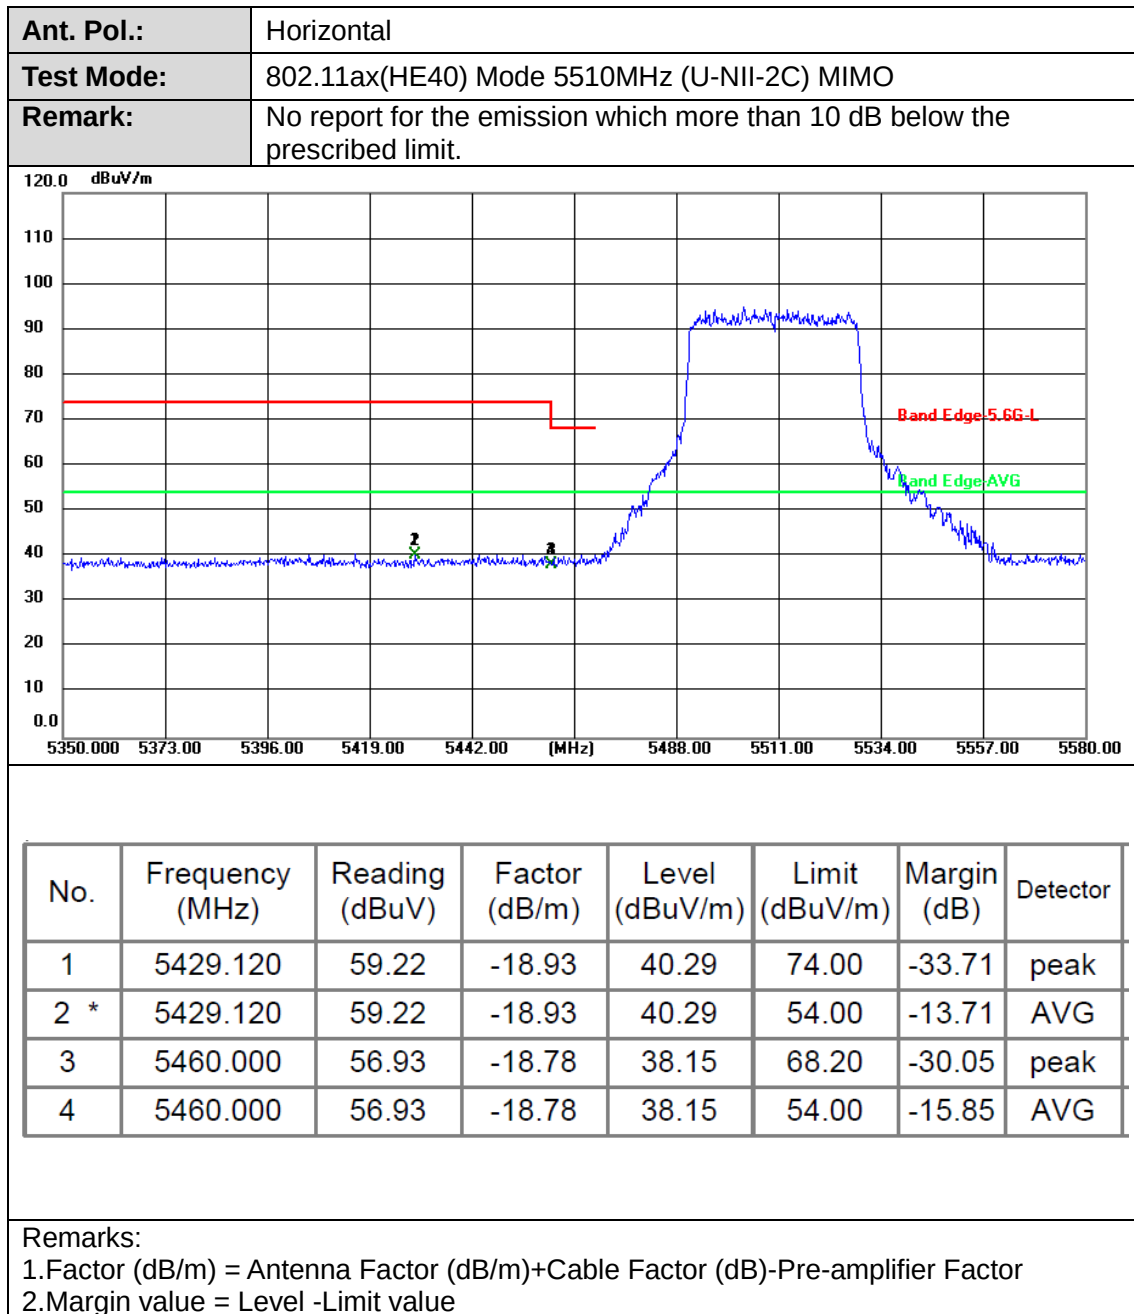

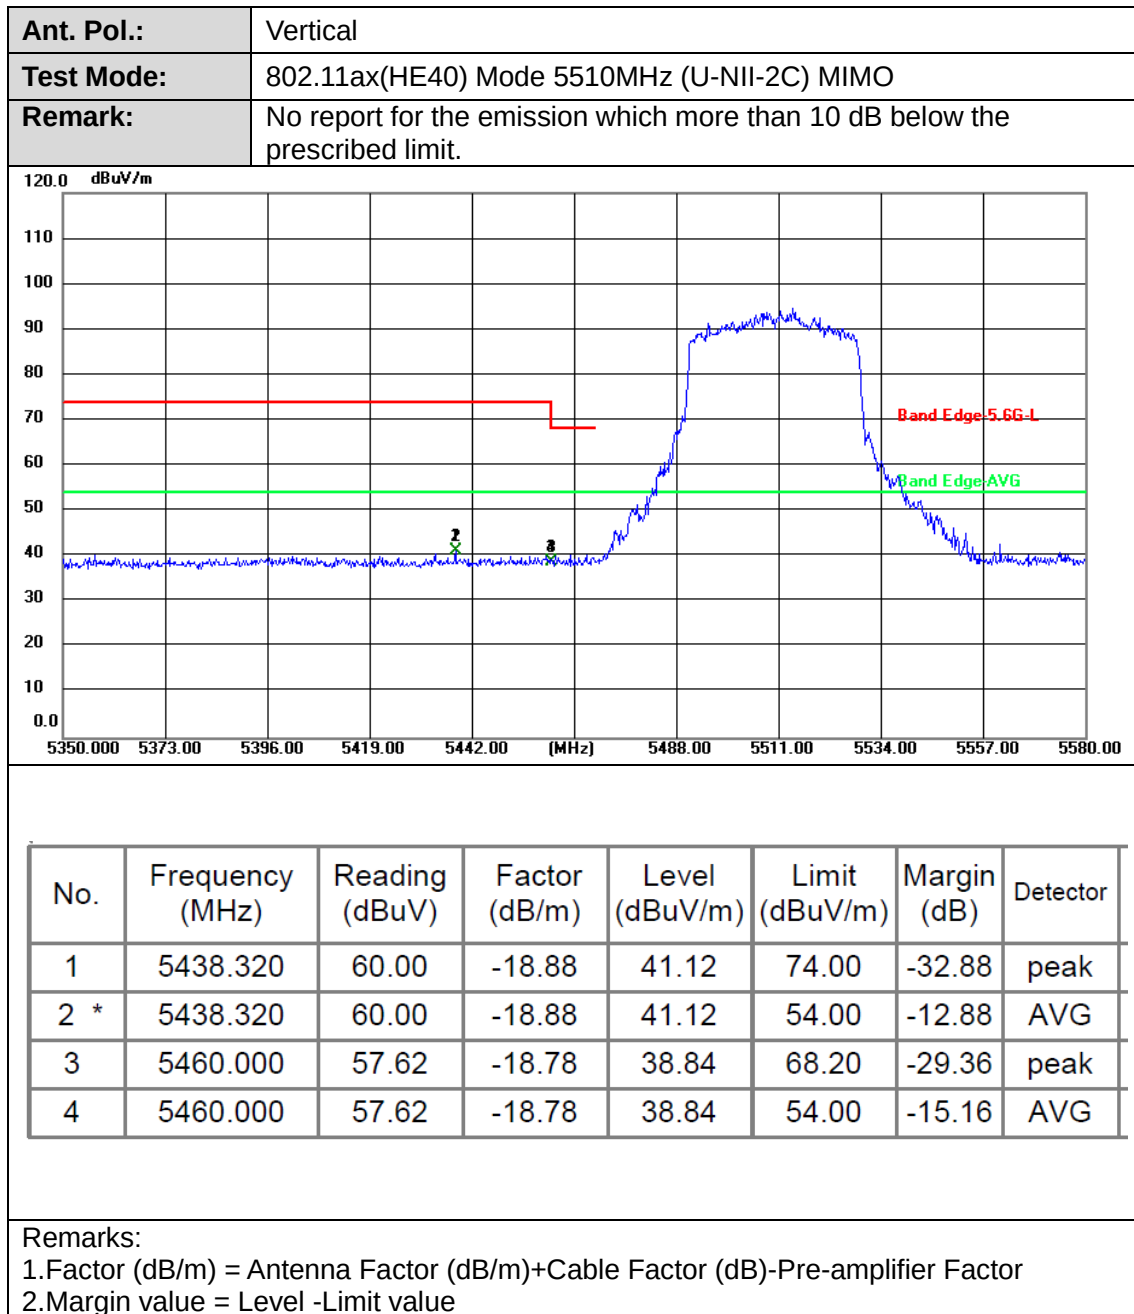

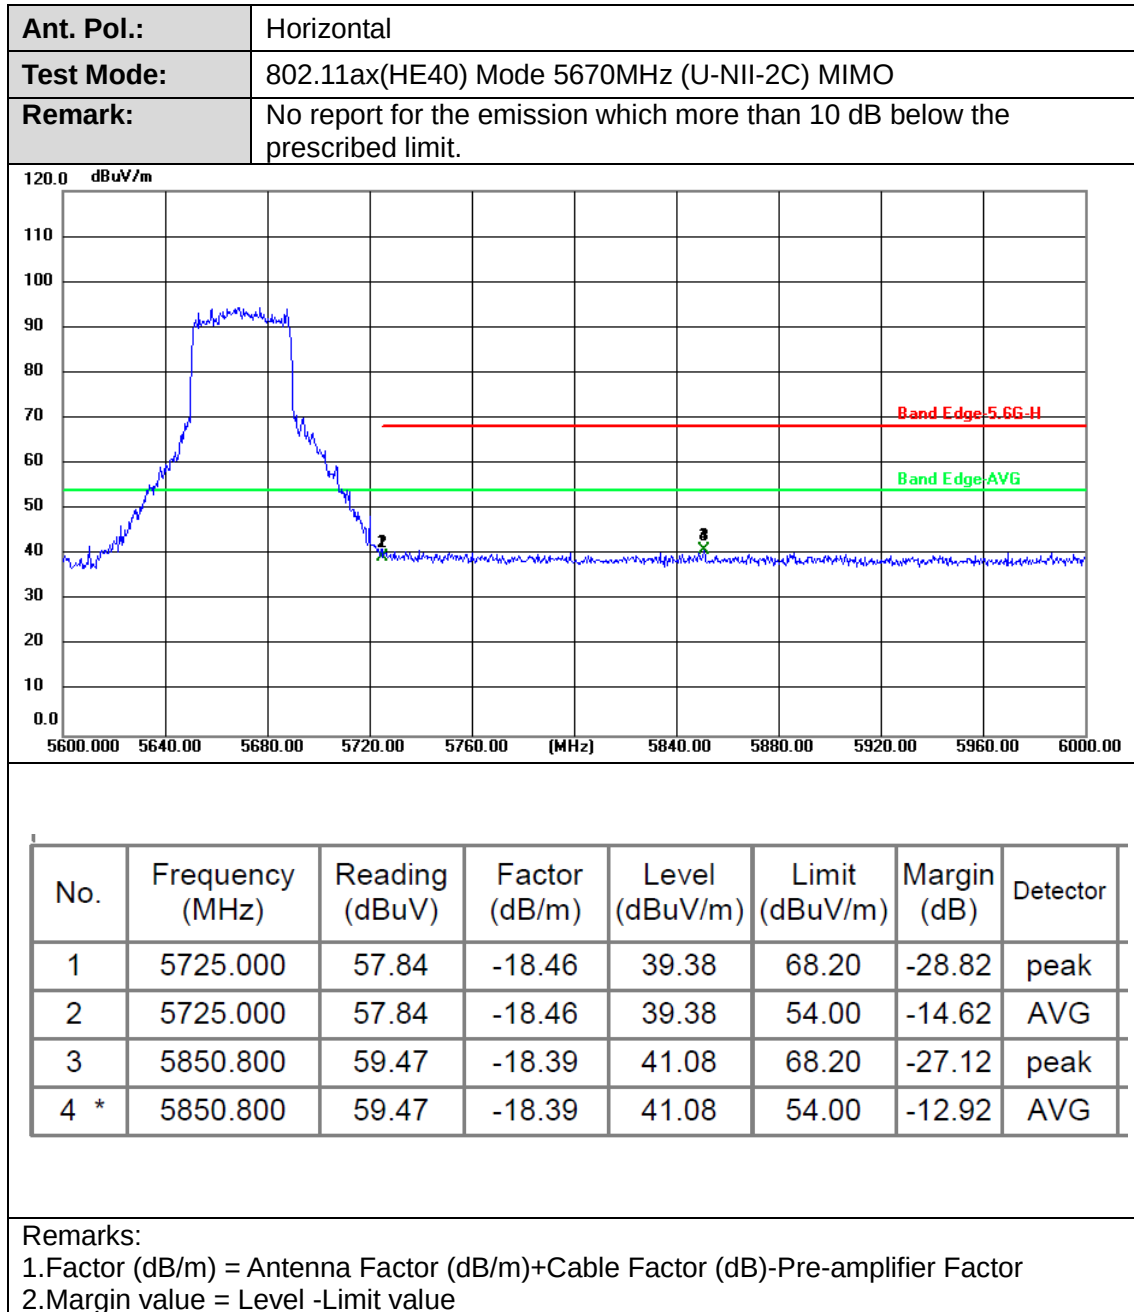


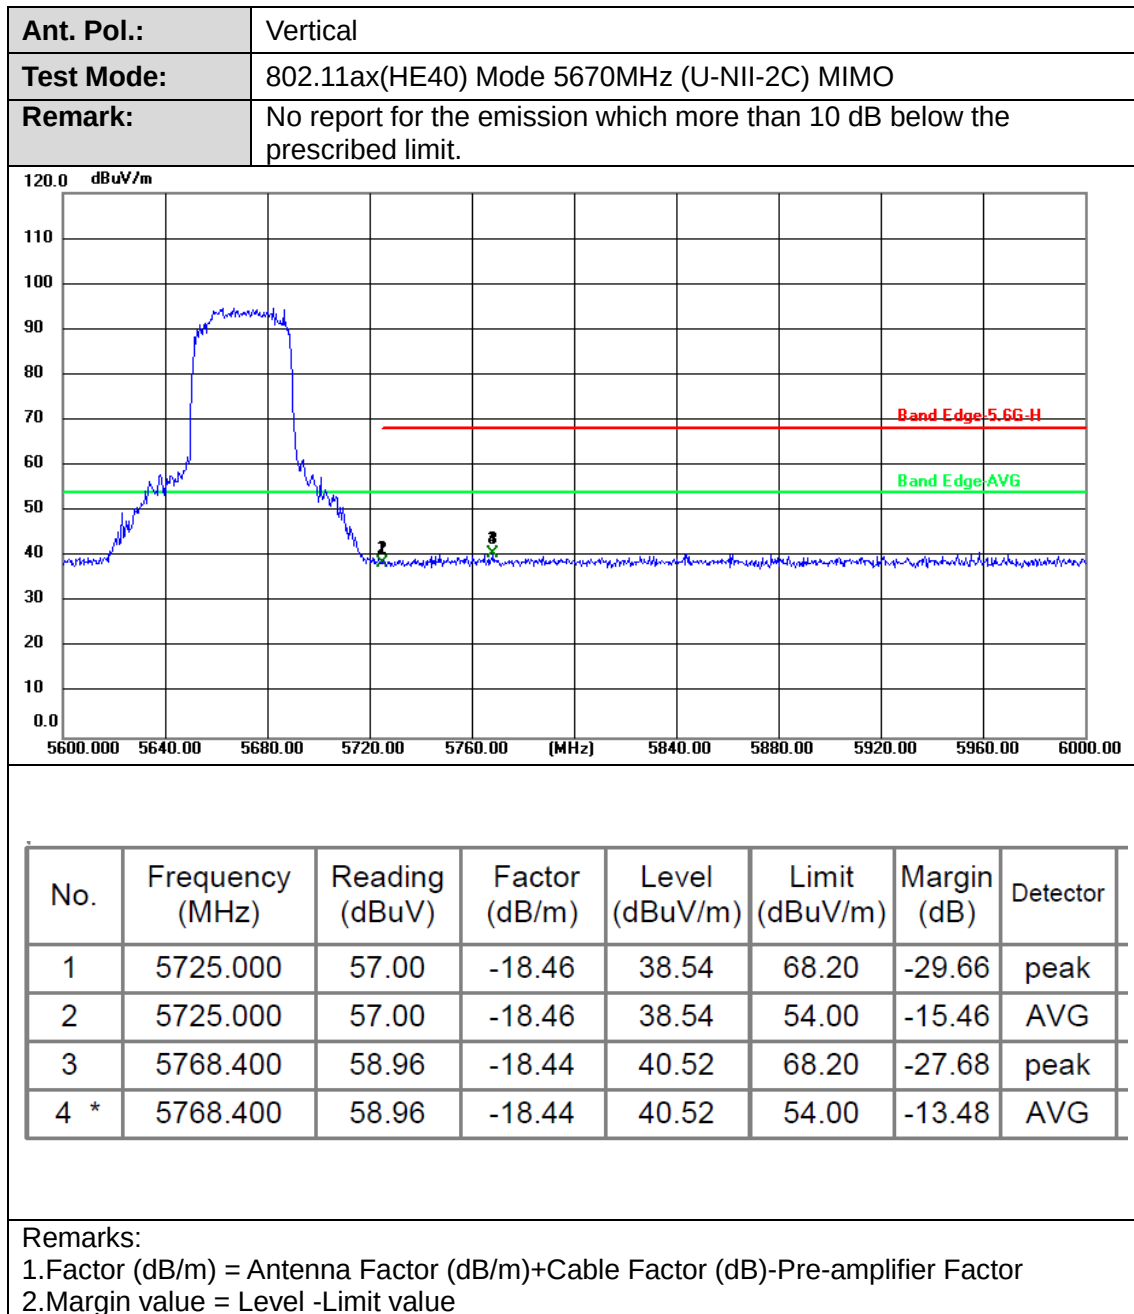

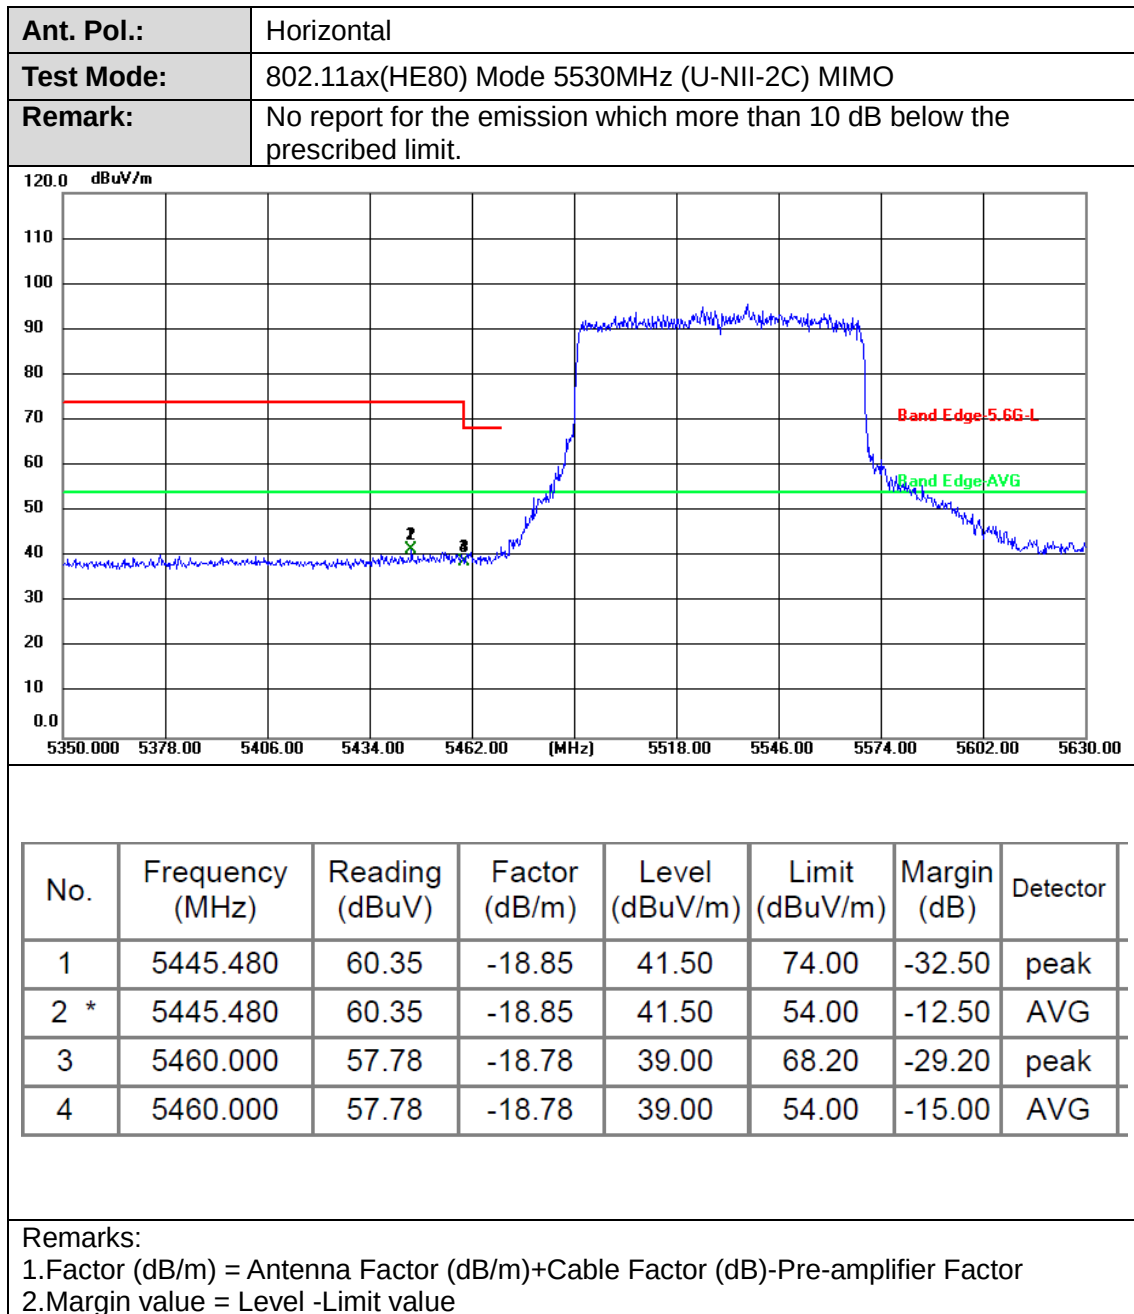



Ant. Pol.:	Vertical
Test Mode:	802.11ax(HE80) Mode 5530MHz (U-NII-2C) MIMO
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

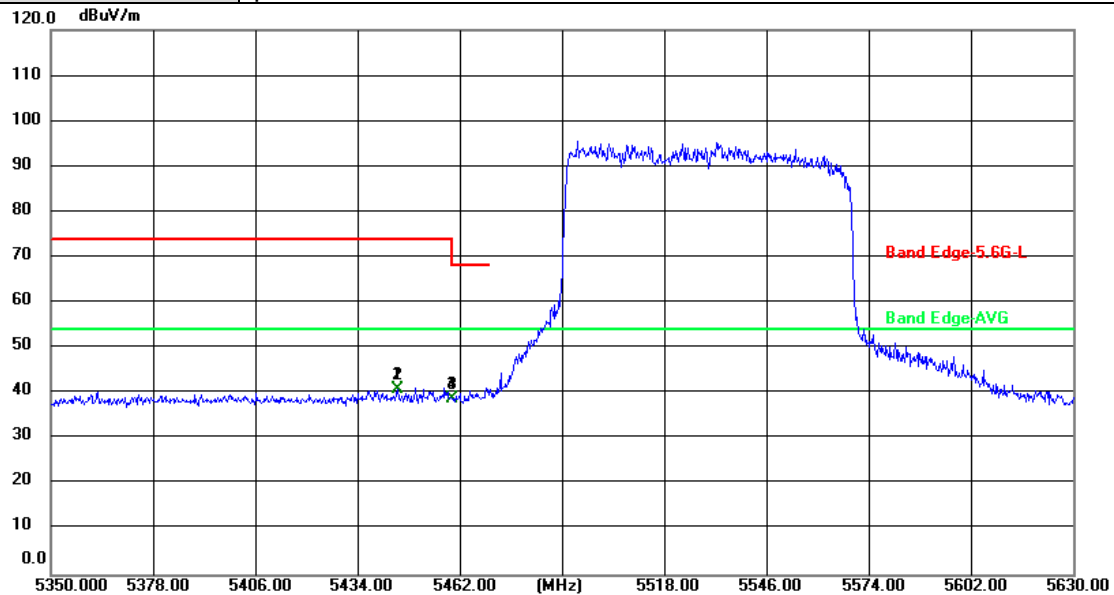


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5444.920	59.90	-18.85	41.05	74.00	-32.95	peak
2 *	5444.920	59.90	-18.85	41.05	54.00	-12.95	AVG
3	5460.000	57.75	-18.78	38.97	68.20	-29.23	peak
4	5460.000	57.75	-18.78	38.97	54.00	-15.03	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant. Pol.:	Horizontal
Test Mode:	802.11ax(HE80) Mode 5610MHz (U-NII-2C) MIMO
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

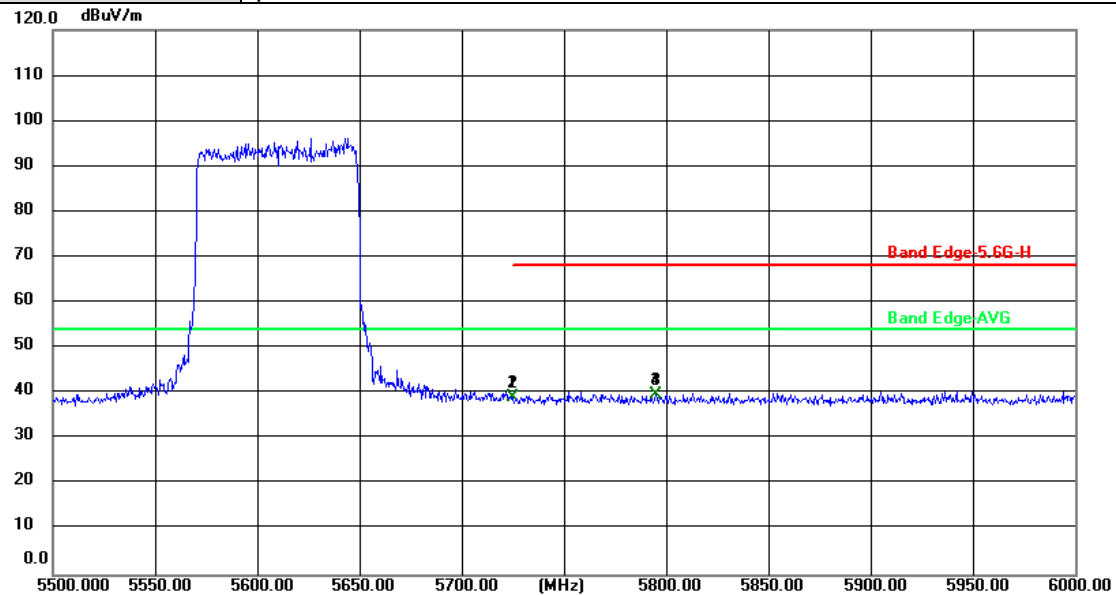


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	57.57	-18.46	39.11	68.20	-29.09	peak
2	5725.000	57.57	-18.46	39.11	54.00	-14.89	AVG
3	5795.000	58.26	-18.42	39.84	68.20	-28.36	peak
4 *	5795.000	58.26	-18.42	39.84	54.00	-14.16	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value




Ant. Pol.:	Vertical
Test Mode:	802.11ax(HE80) Mode 5610MHz (U-NII-2C) MIMO
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

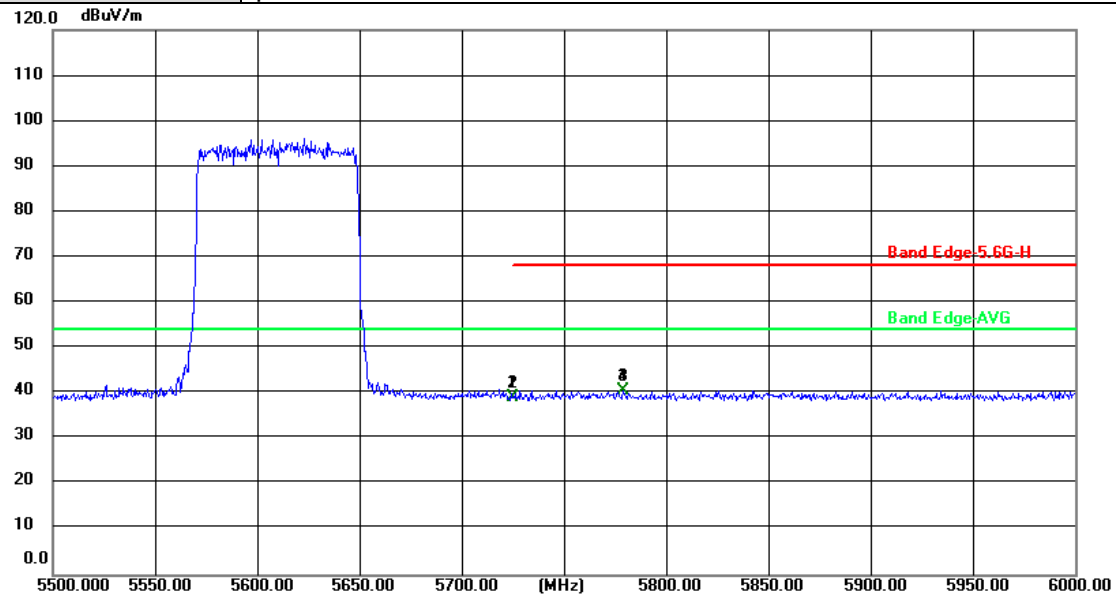

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	57.65	-18.46	39.19	68.20	-29.01	peak
2	5725.000	57.65	-18.46	39.19	54.00	-14.81	AVG
3	5779.000	59.17	-18.43	40.74	68.20	-27.46	peak
4 *	5779.000	59.17	-18.43	40.74	54.00	-13.26	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

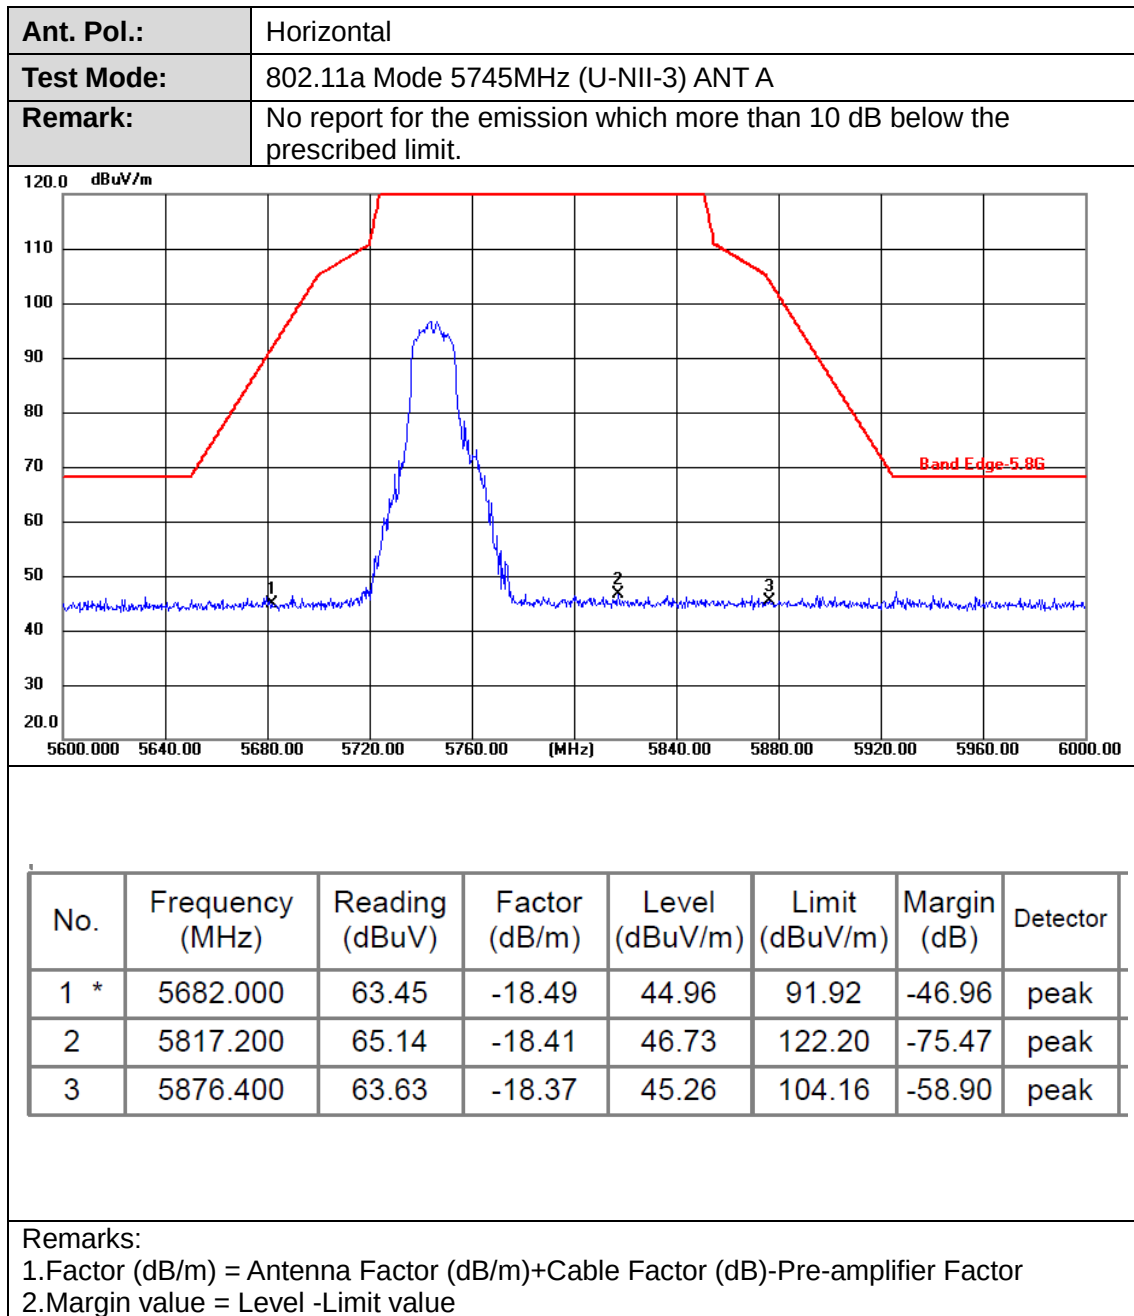



Ant. Pol.:	Vertical
Test Mode:	802.11a Mode 5745MHz (U-NII-3) ANT A
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

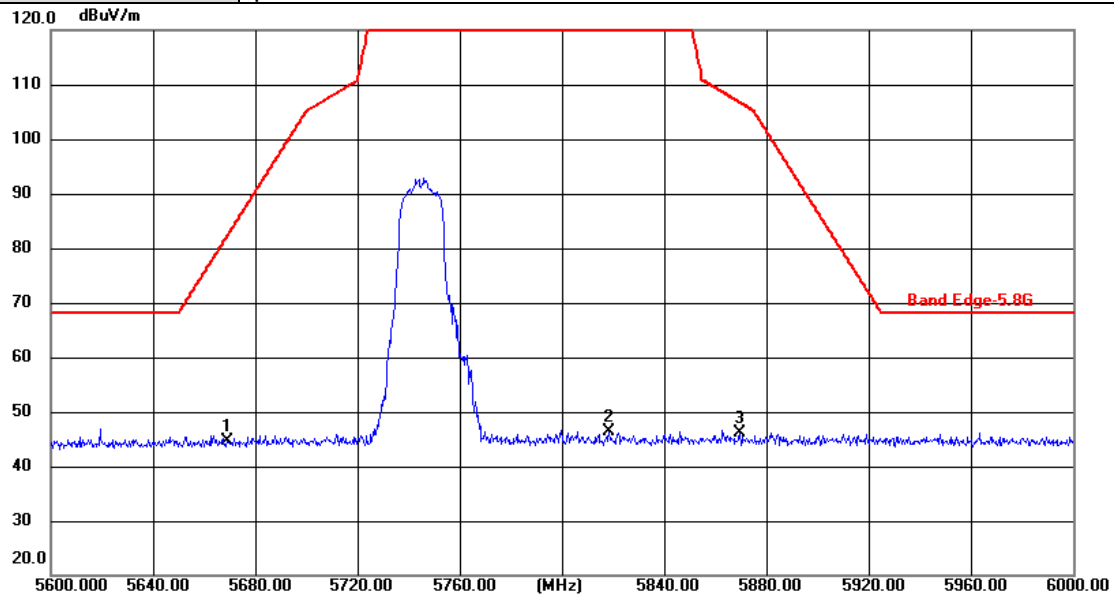


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5668.800	63.10	-18.50	44.60	82.15	-37.55	peak
2	5818.400	64.79	-18.41	46.38	122.20	-75.82	peak
3	5869.600	64.54	-18.38	46.16	106.71	-60.55	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value




Ant. Pol.:	Horizontal
Test Mode:	802.11a Mode 5785MHz (U-NII-3) ANT A
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

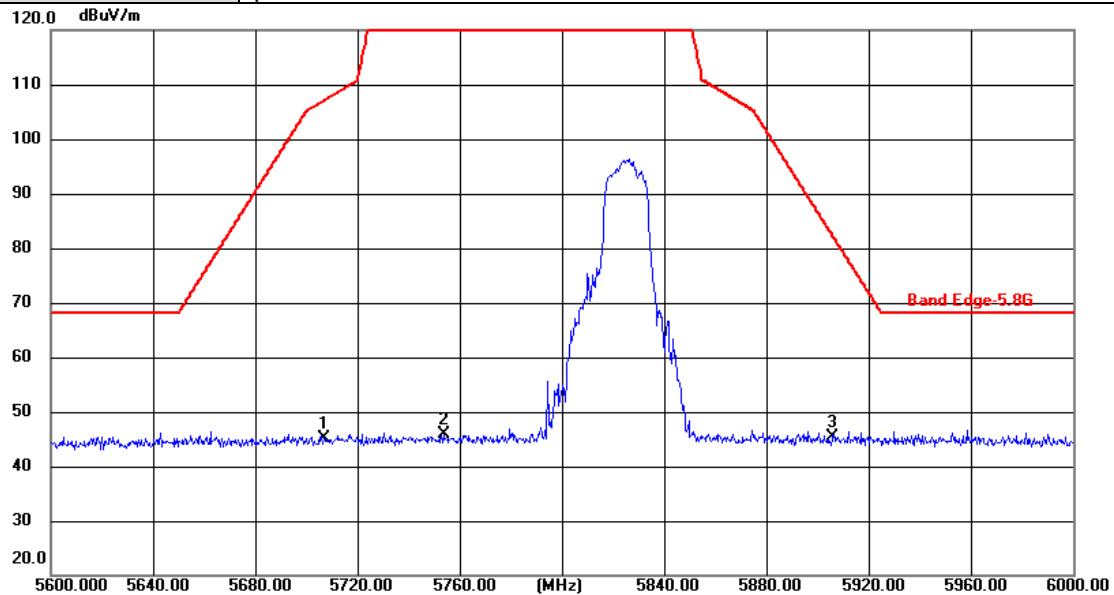



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5706.800	63.56	-18.48	45.08	107.11	-62.03	peak
2	5753.600	64.25	-18.45	45.80	122.20	-76.40	peak
3 *	5906.000	63.63	-18.36	45.27	82.22	-36.95	peak


Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

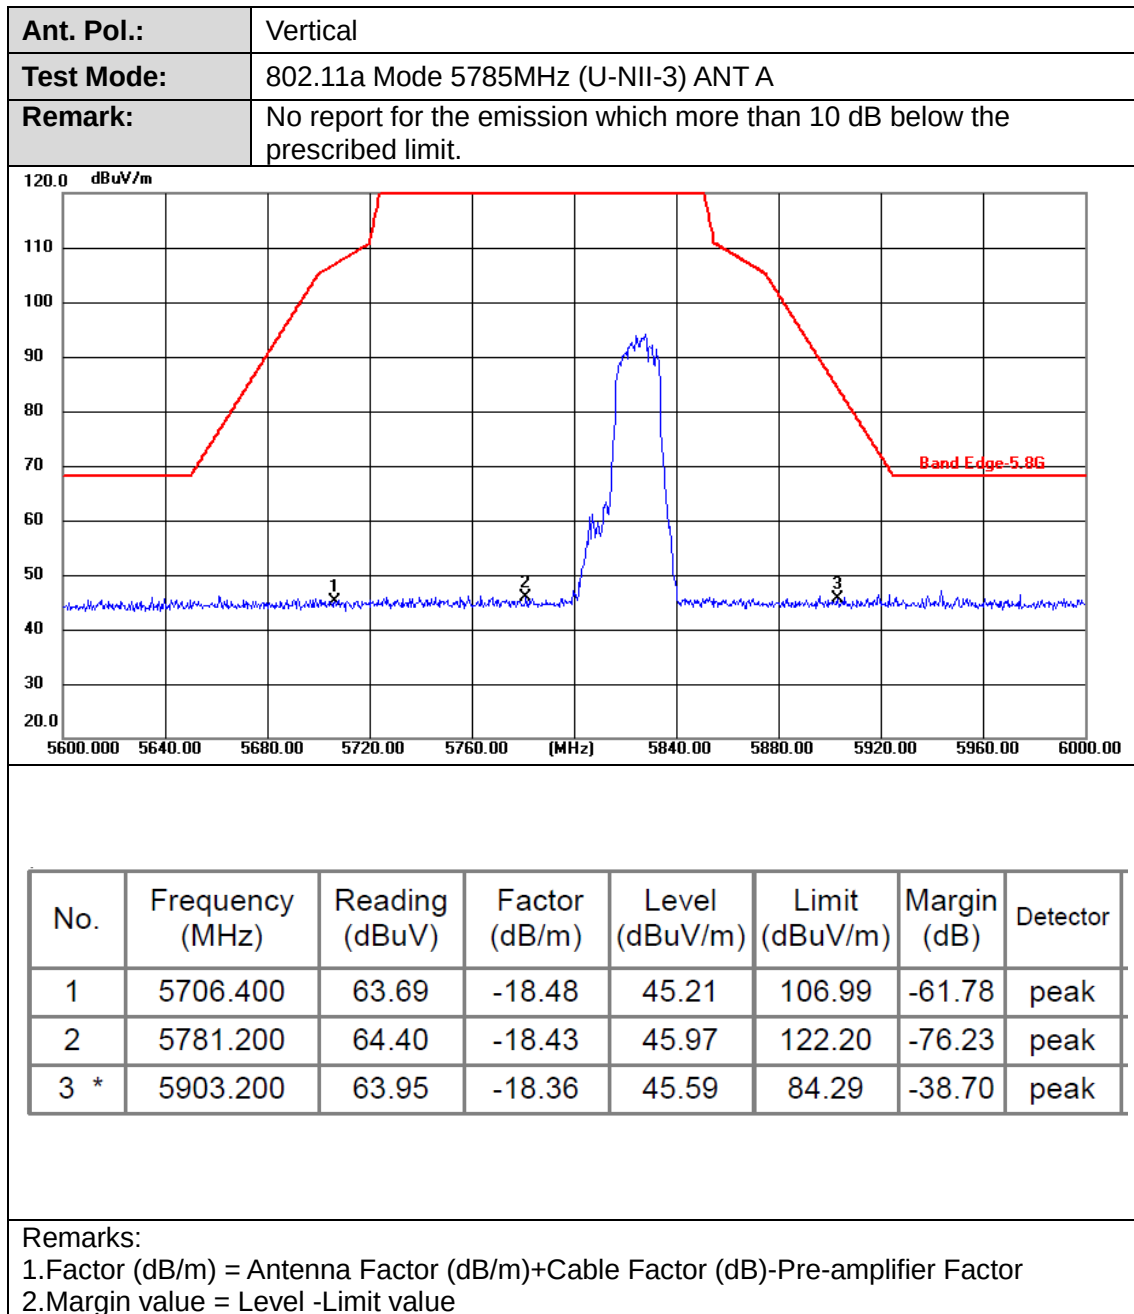


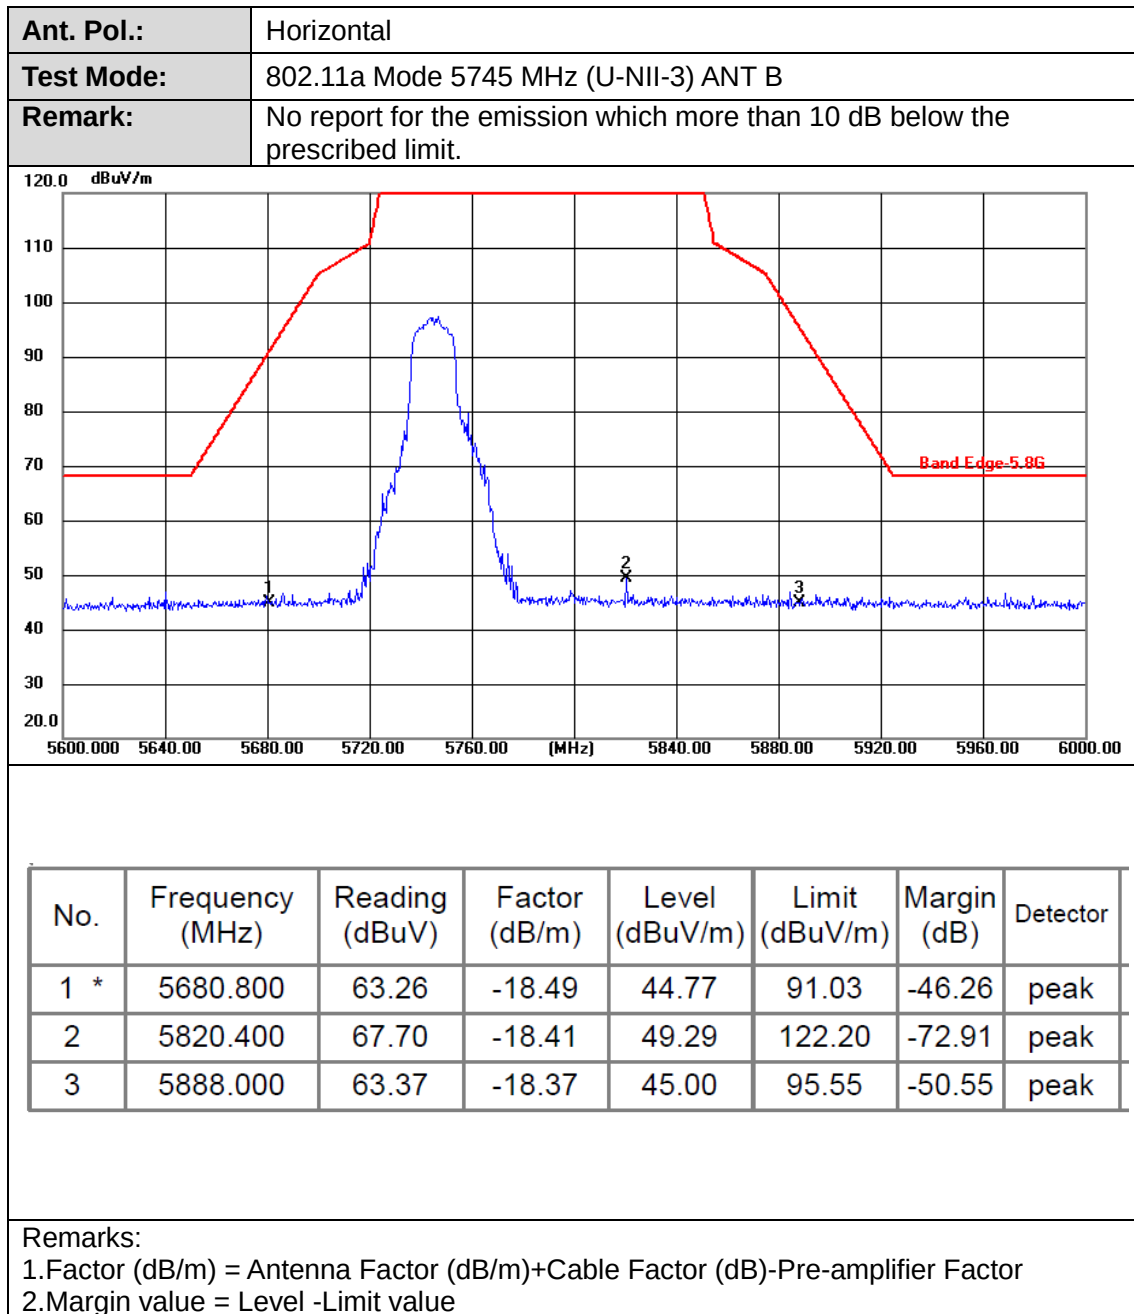

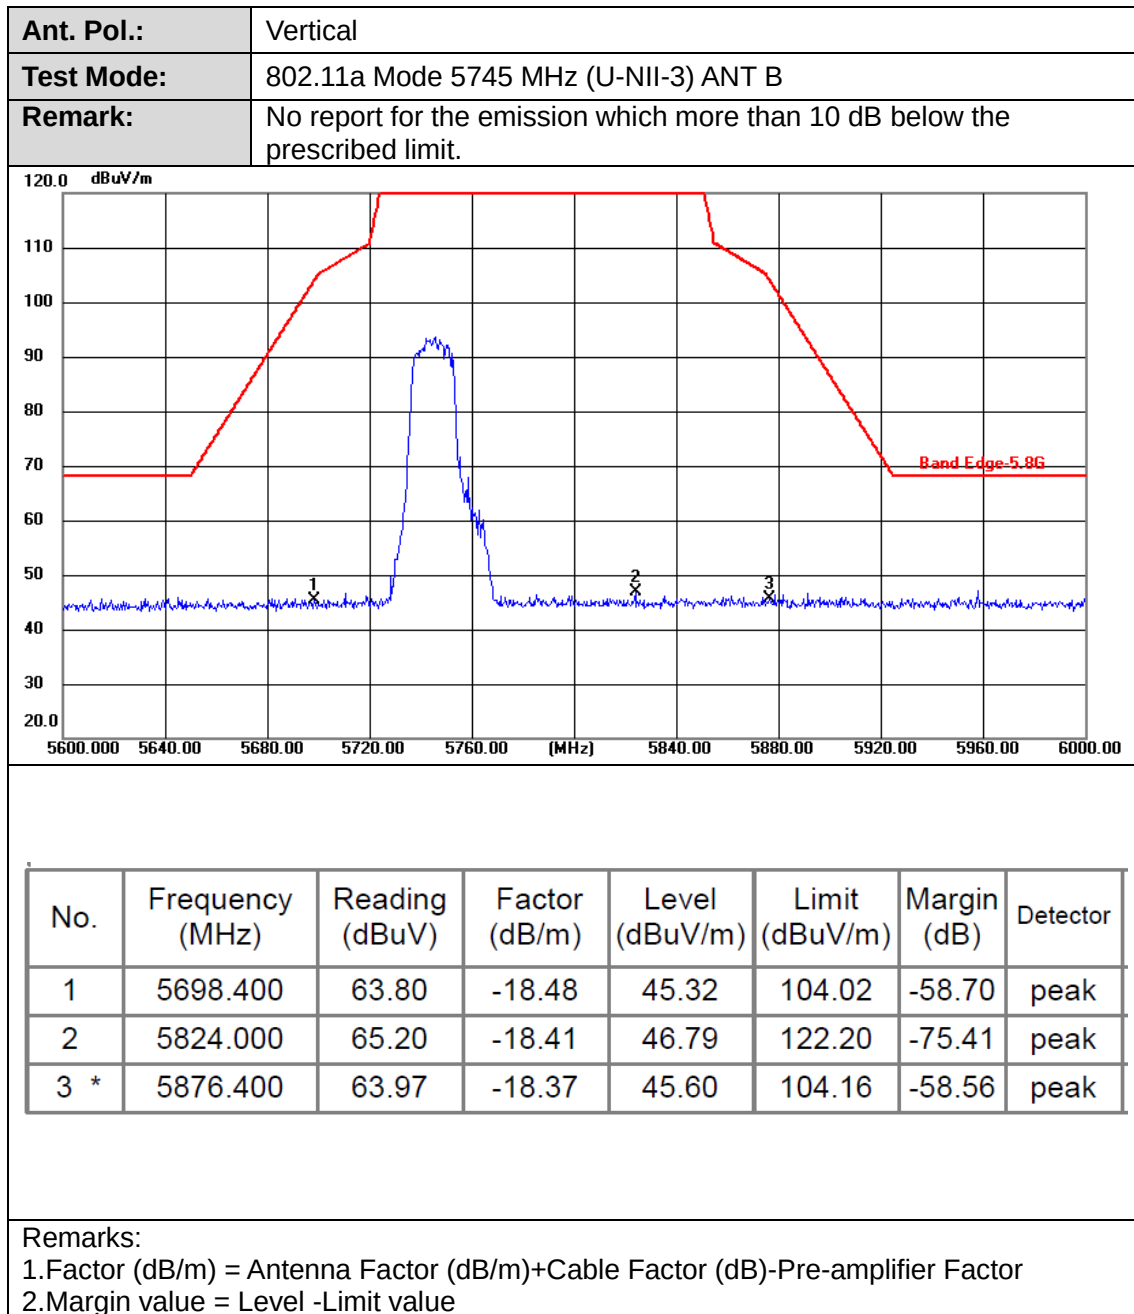

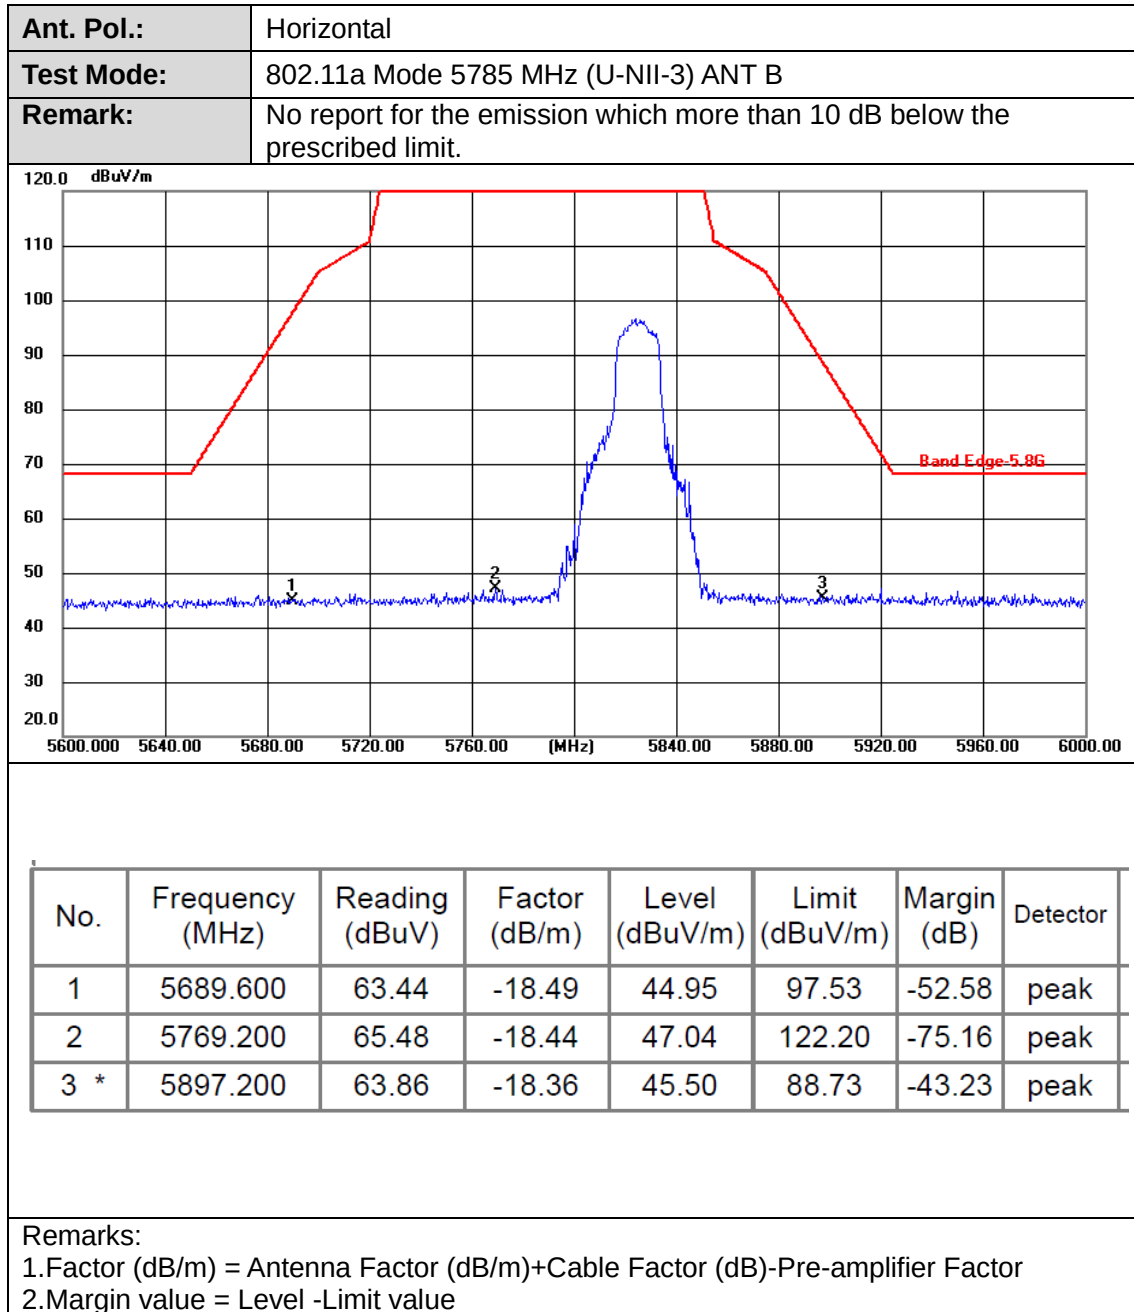


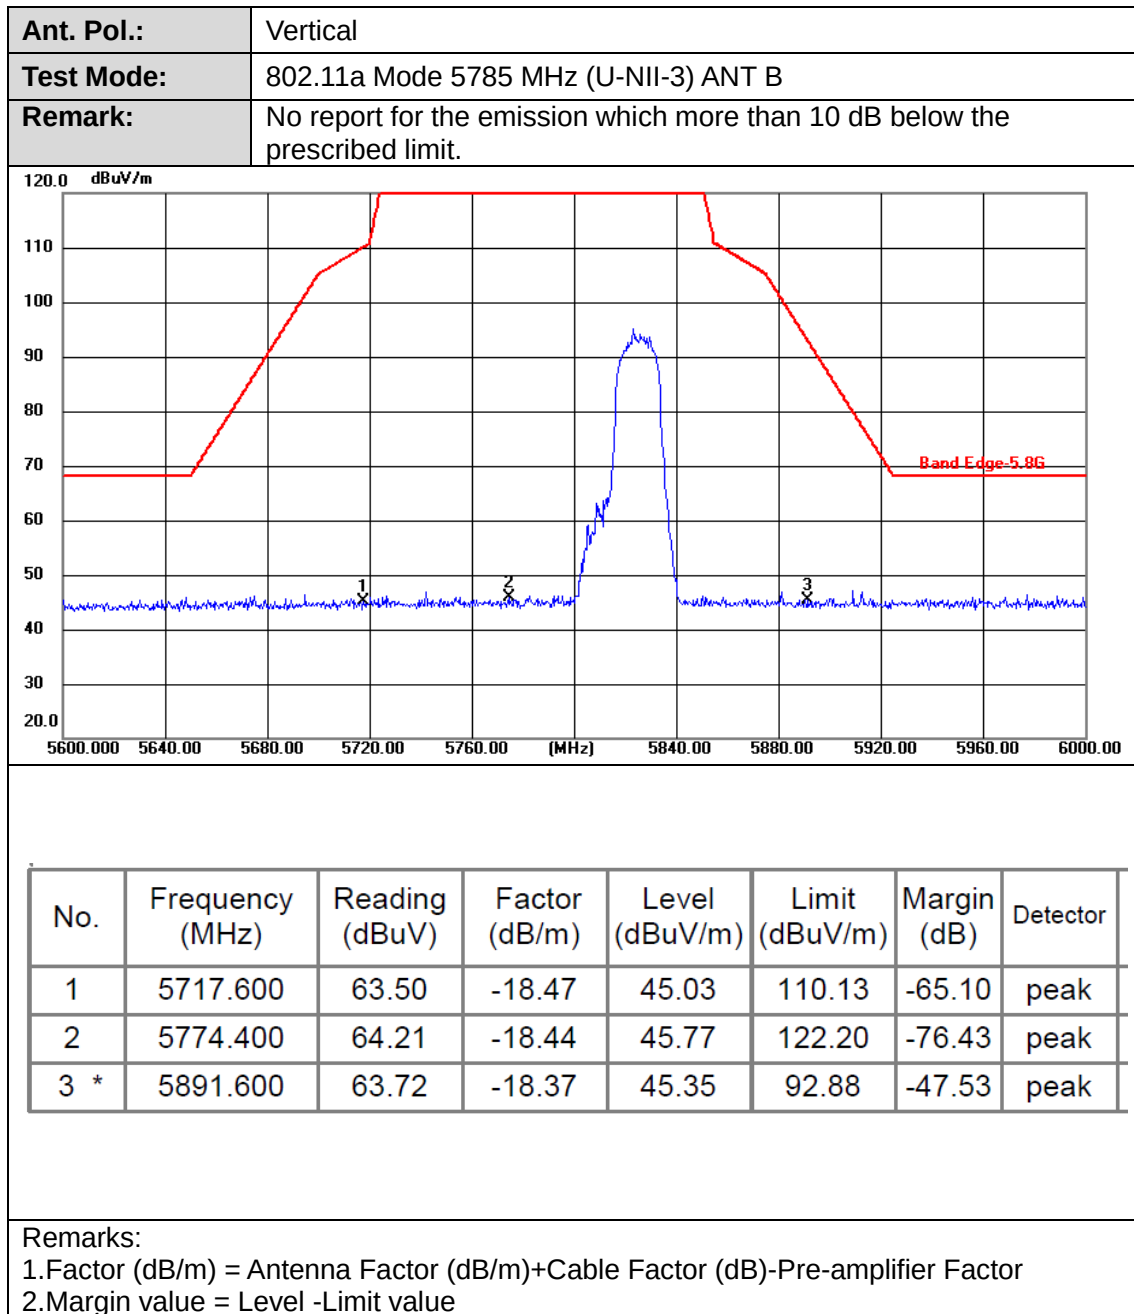

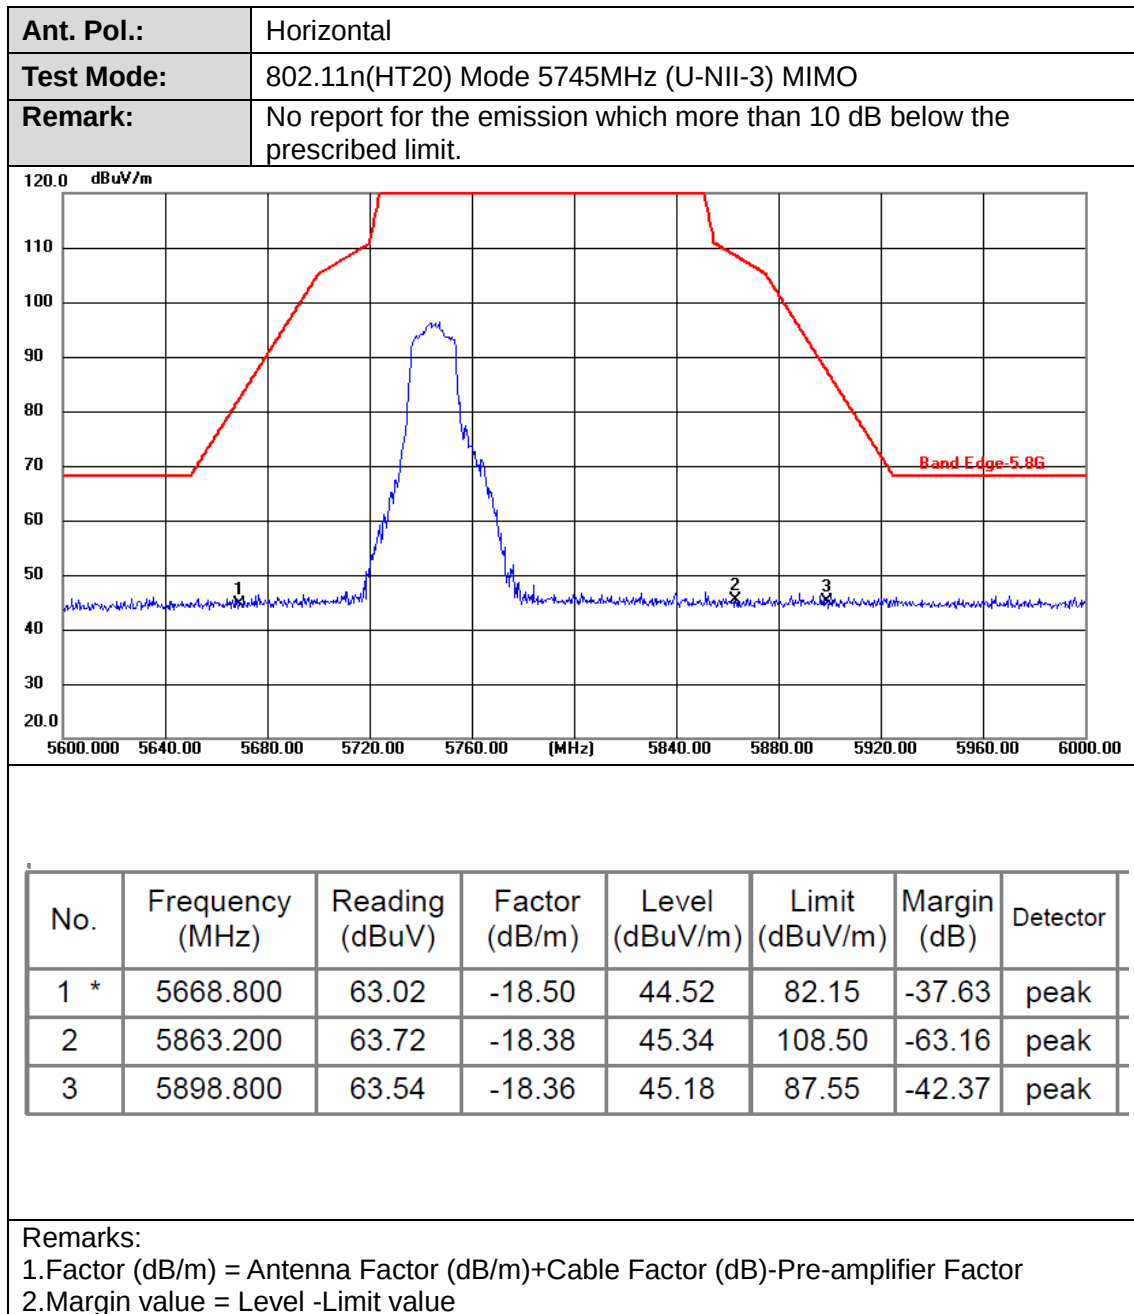




Ant. Pol.:	Vertical
Test Mode:	802.11n(HT20) Mode 5745MHz (U-NII-3) MIMO
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

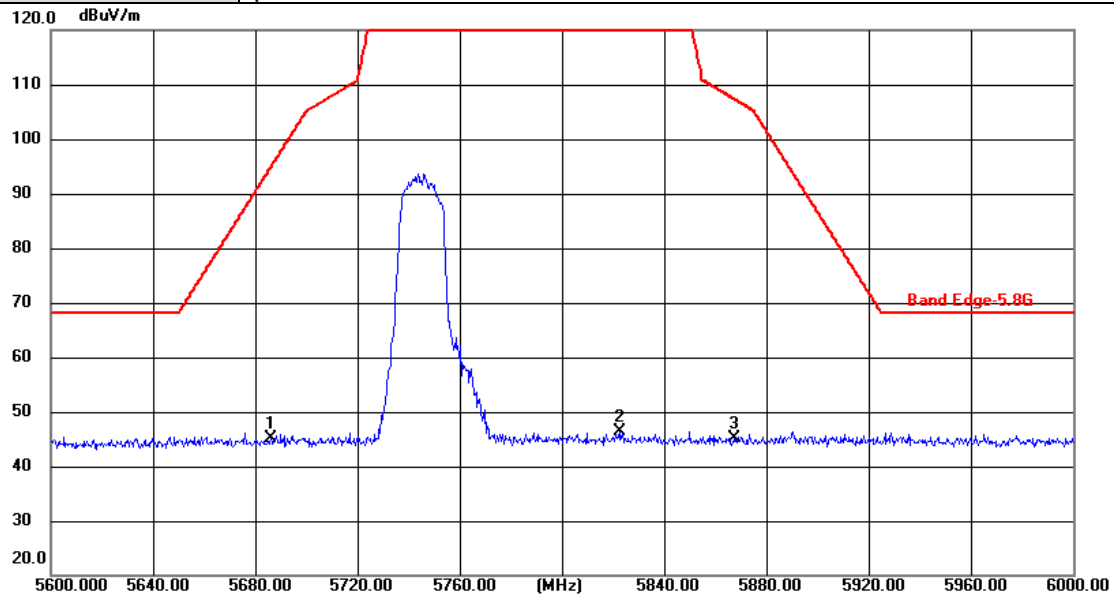



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5686.000	63.55	-18.49	45.06	94.87	-49.81	peak
2	5822.800	64.77	-18.41	46.36	122.20	-75.84	peak
3	5867.600	63.39	-18.38	45.01	107.27	-62.26	peak


Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

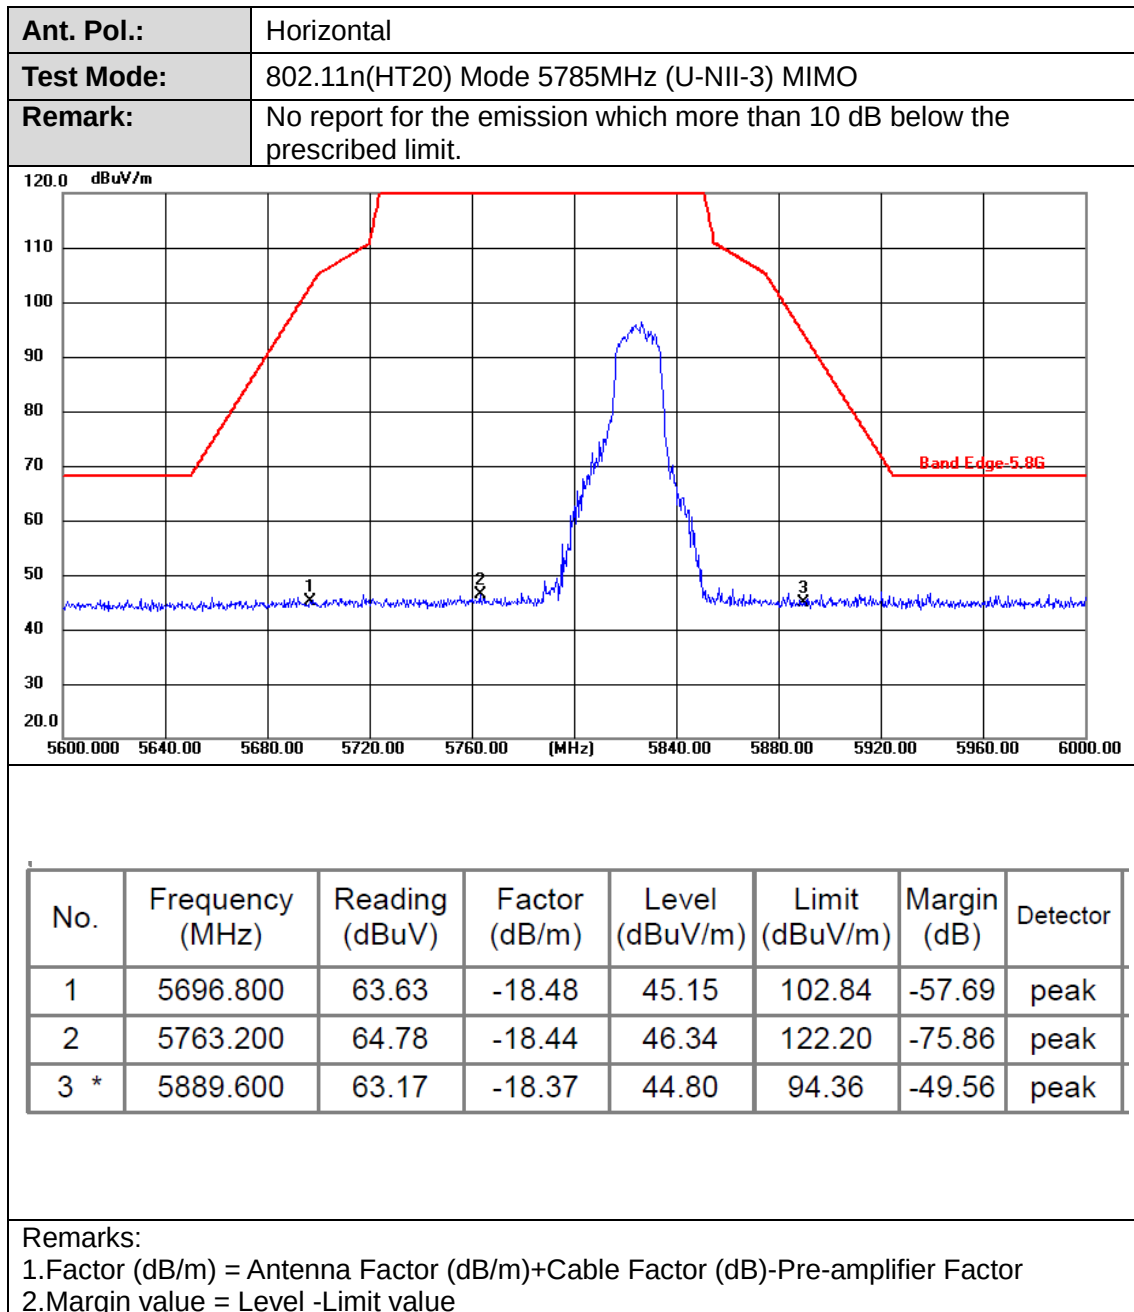

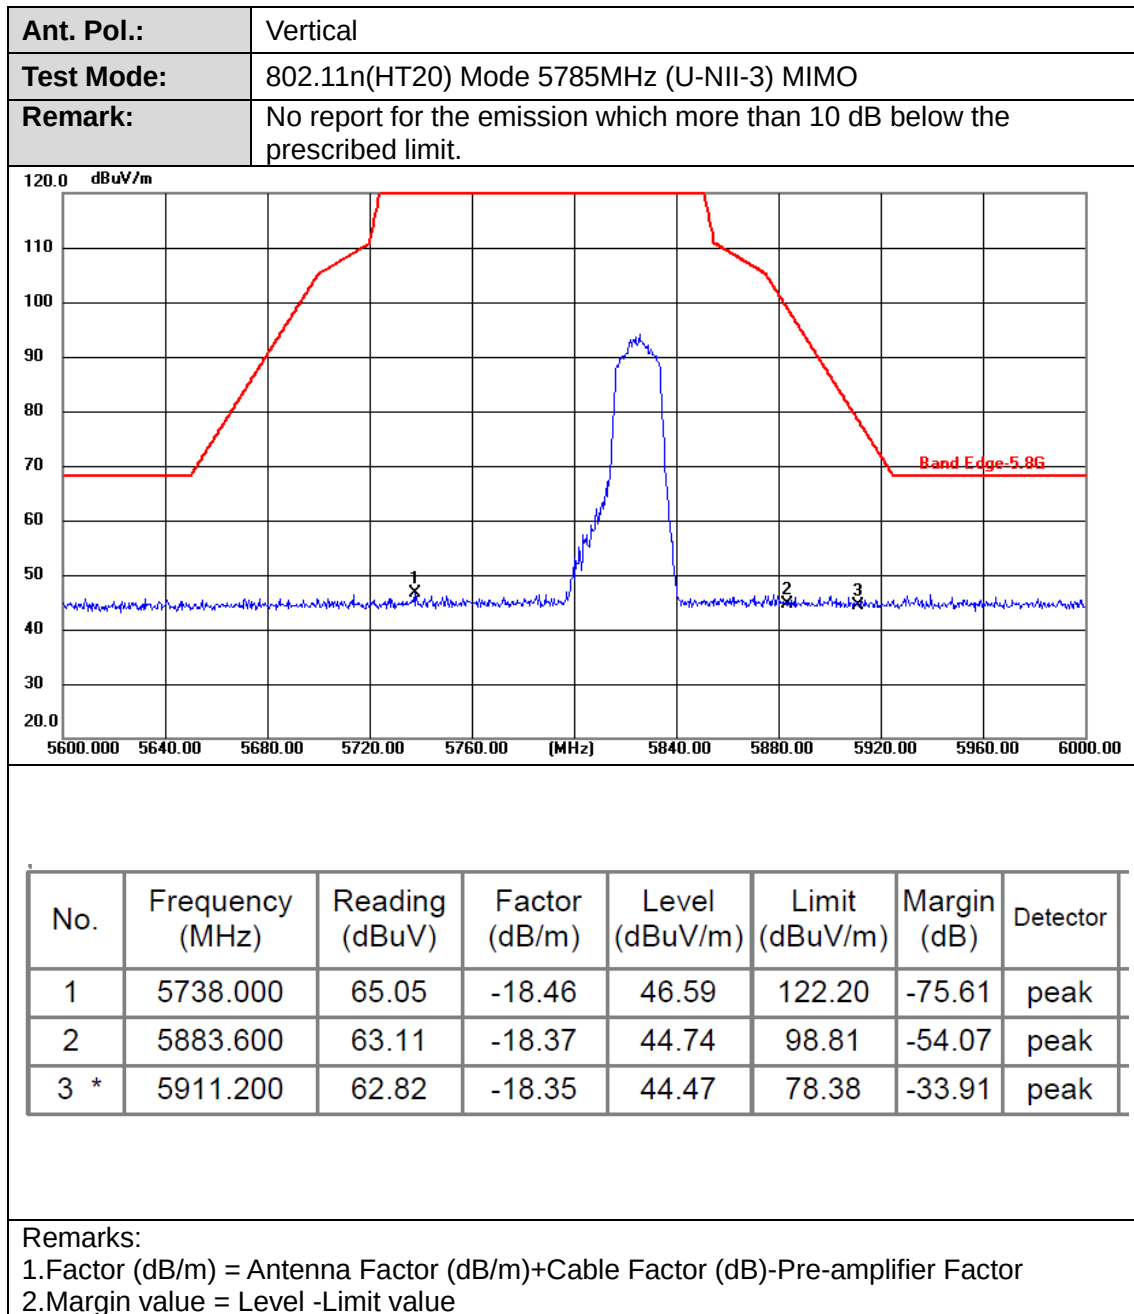

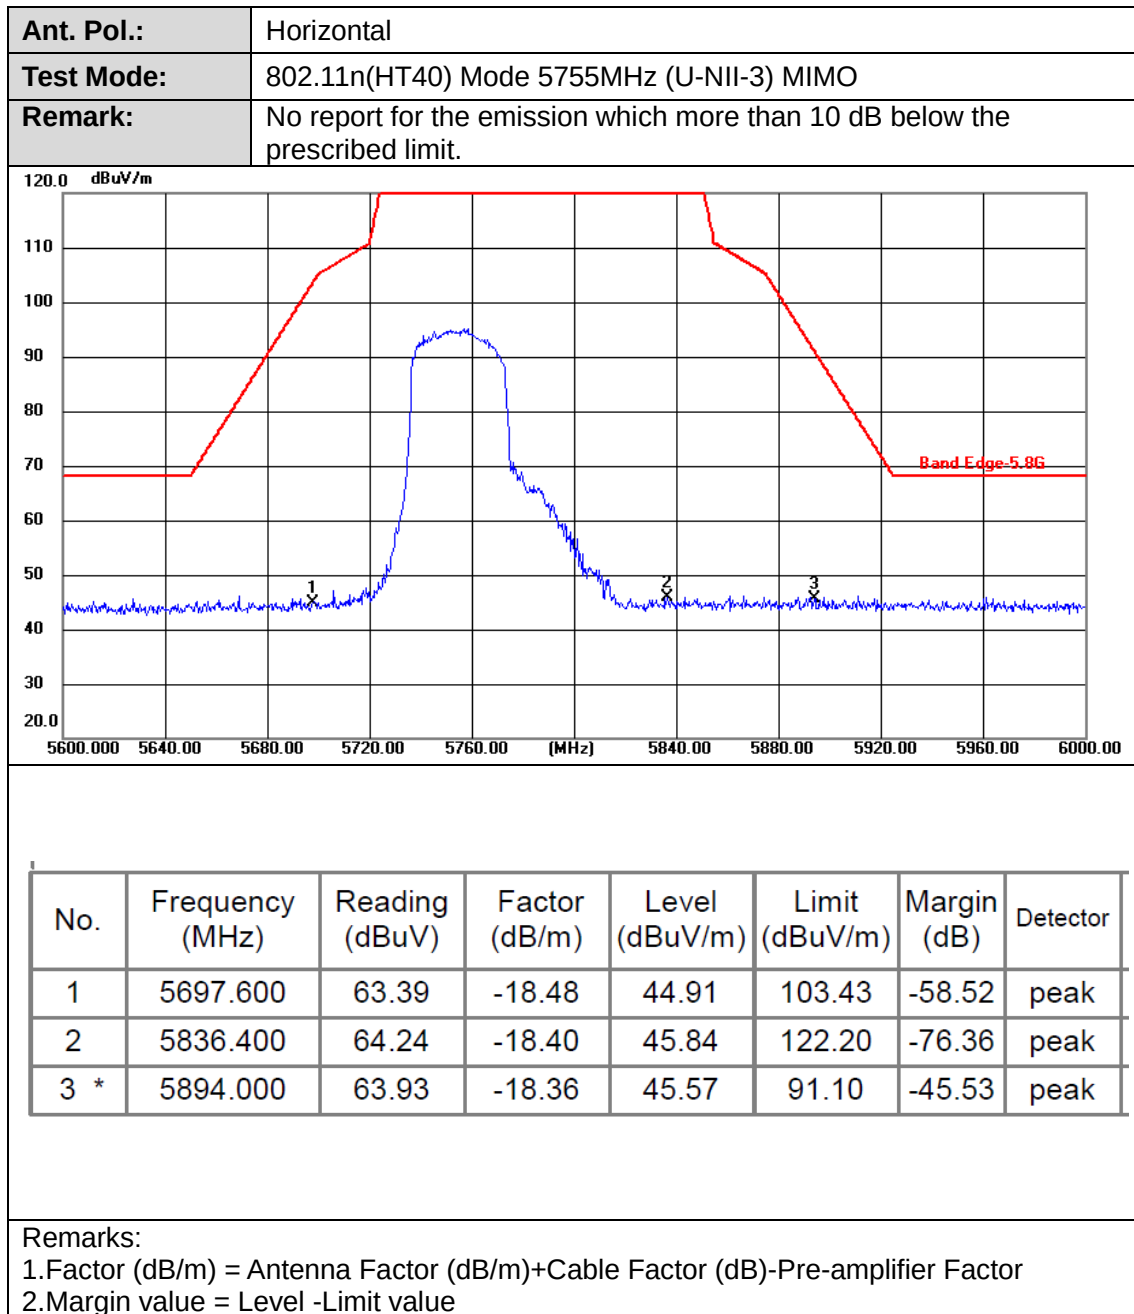


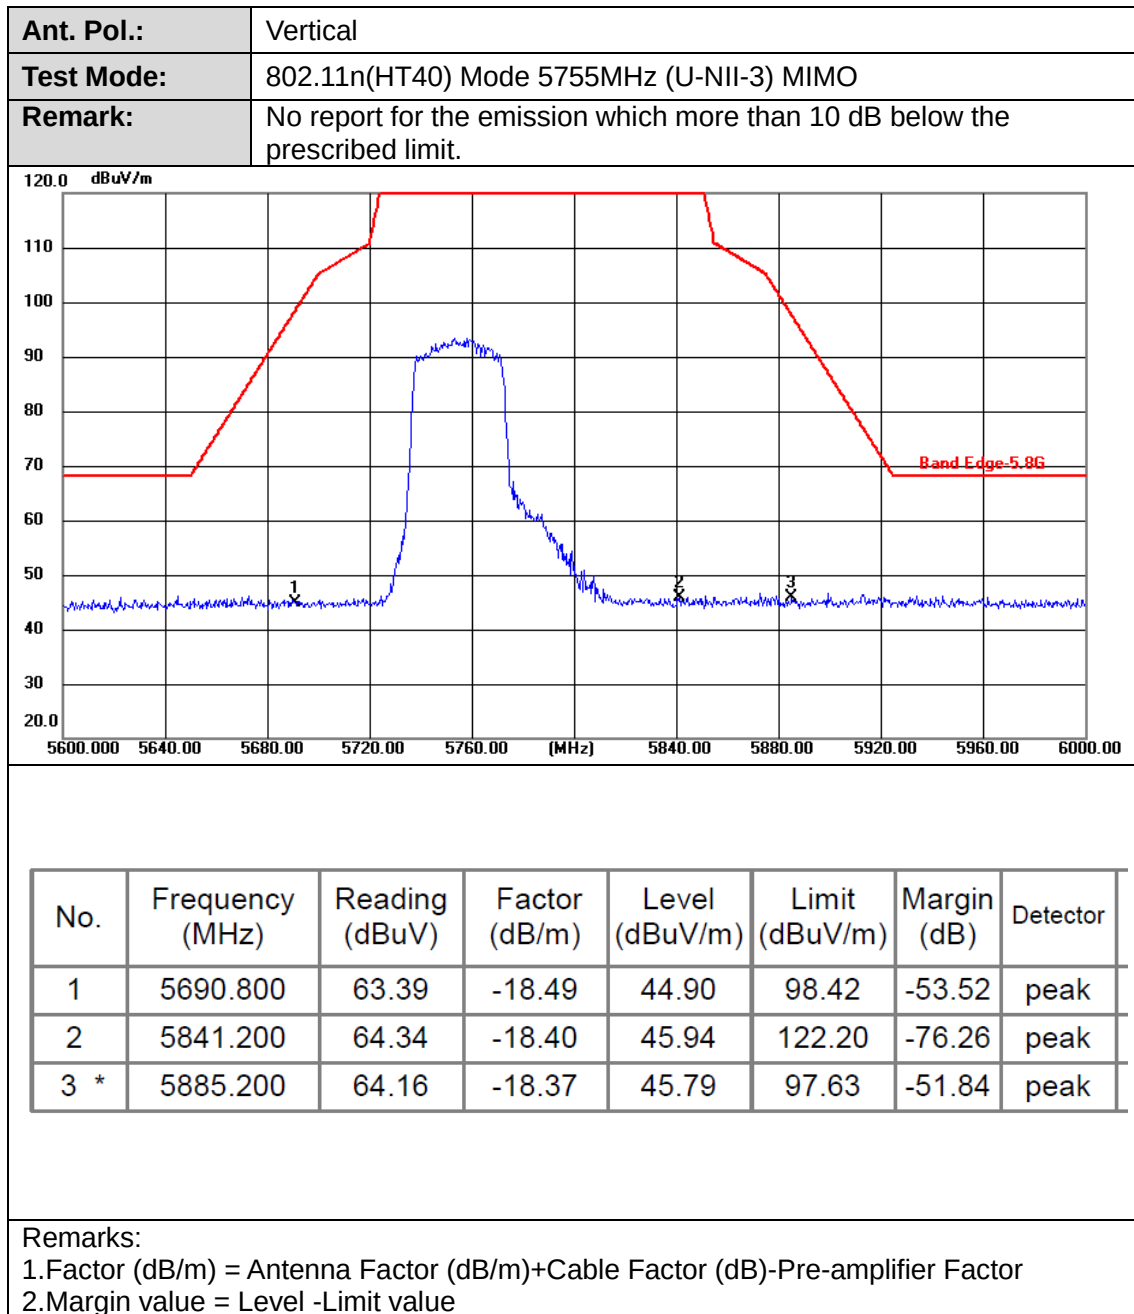

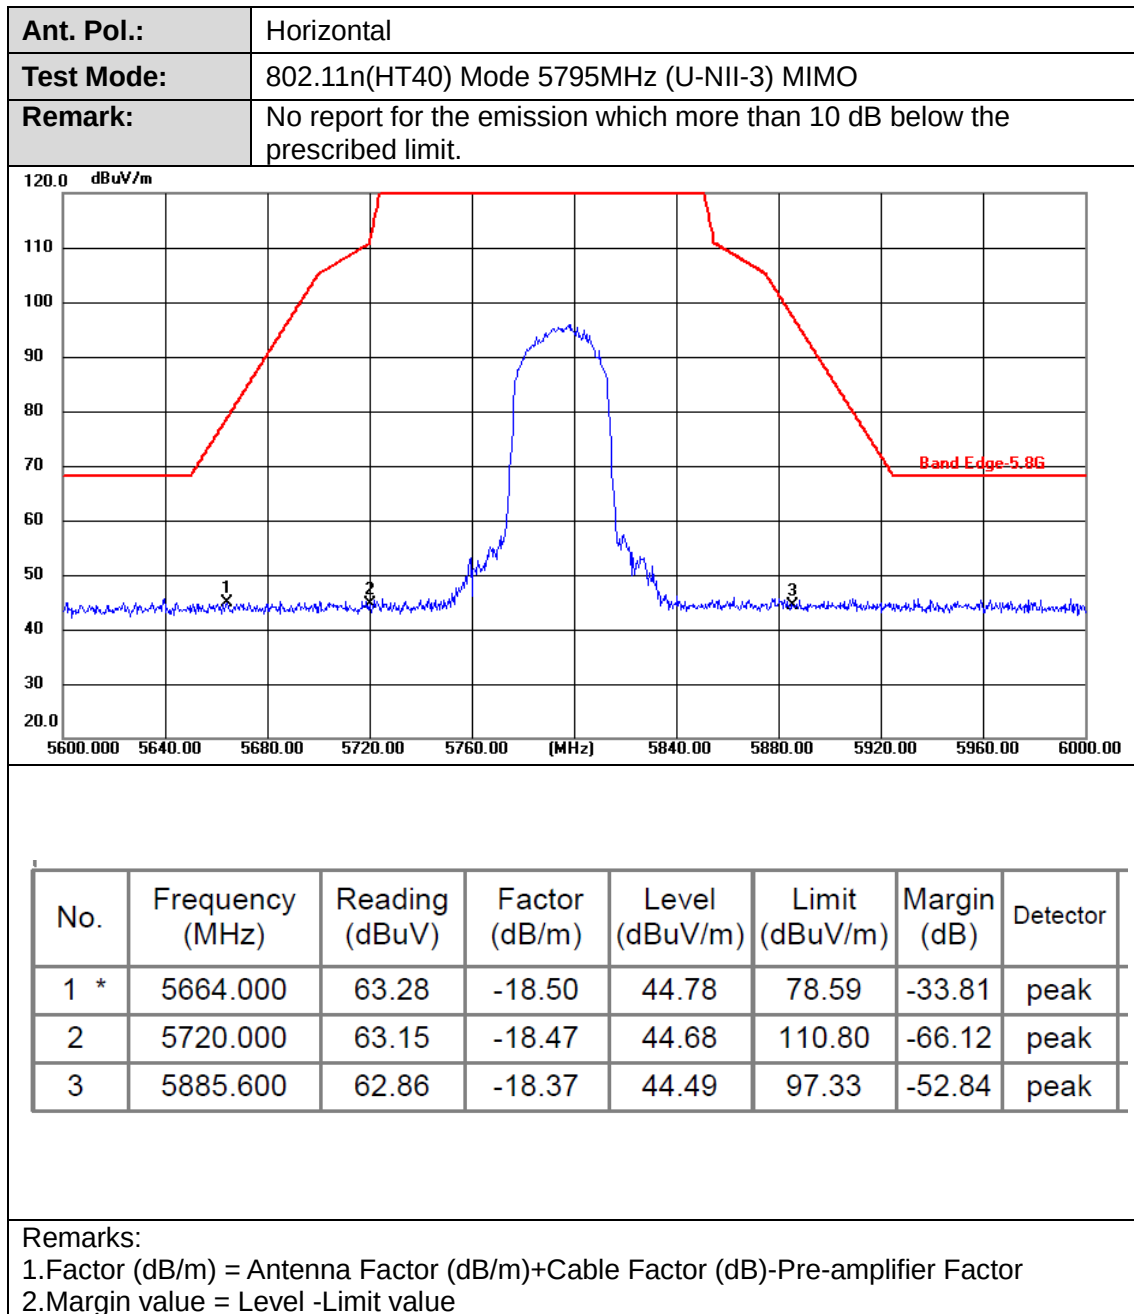




Ant. Pol.:	Vertical
Test Mode:	802.11n(HT40) Mode 5795MHz (U-NII-3) MIMO
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

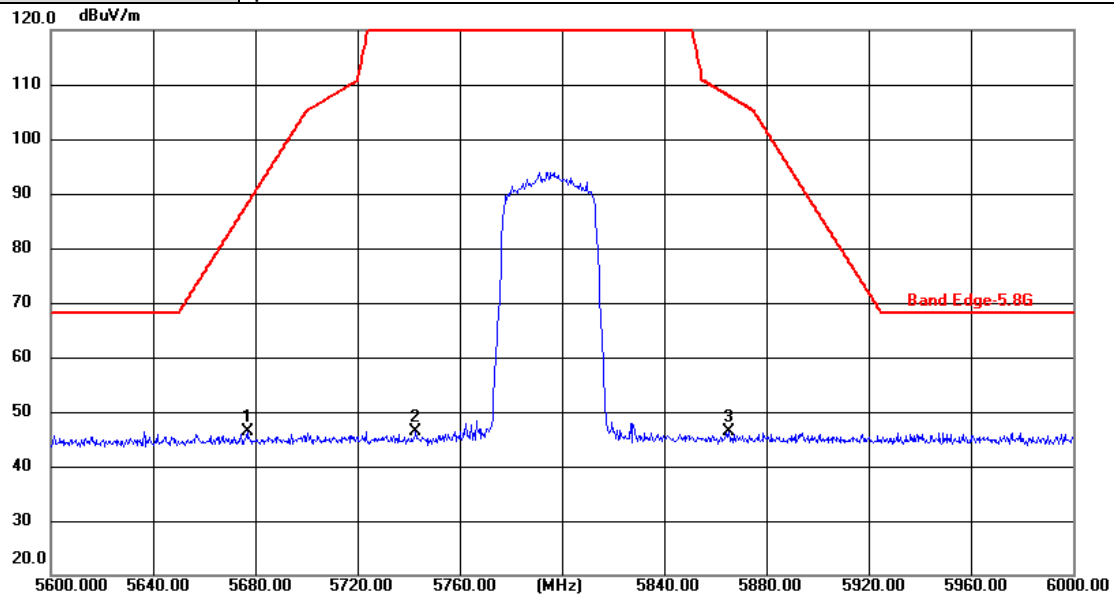



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5676.800	64.85	-18.49	46.36	88.07	-41.71	peak
2	5742.800	64.92	-18.45	46.47	122.20	-75.73	peak
3	5865.200	64.86	-18.38	46.48	107.94	-61.46	peak


Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

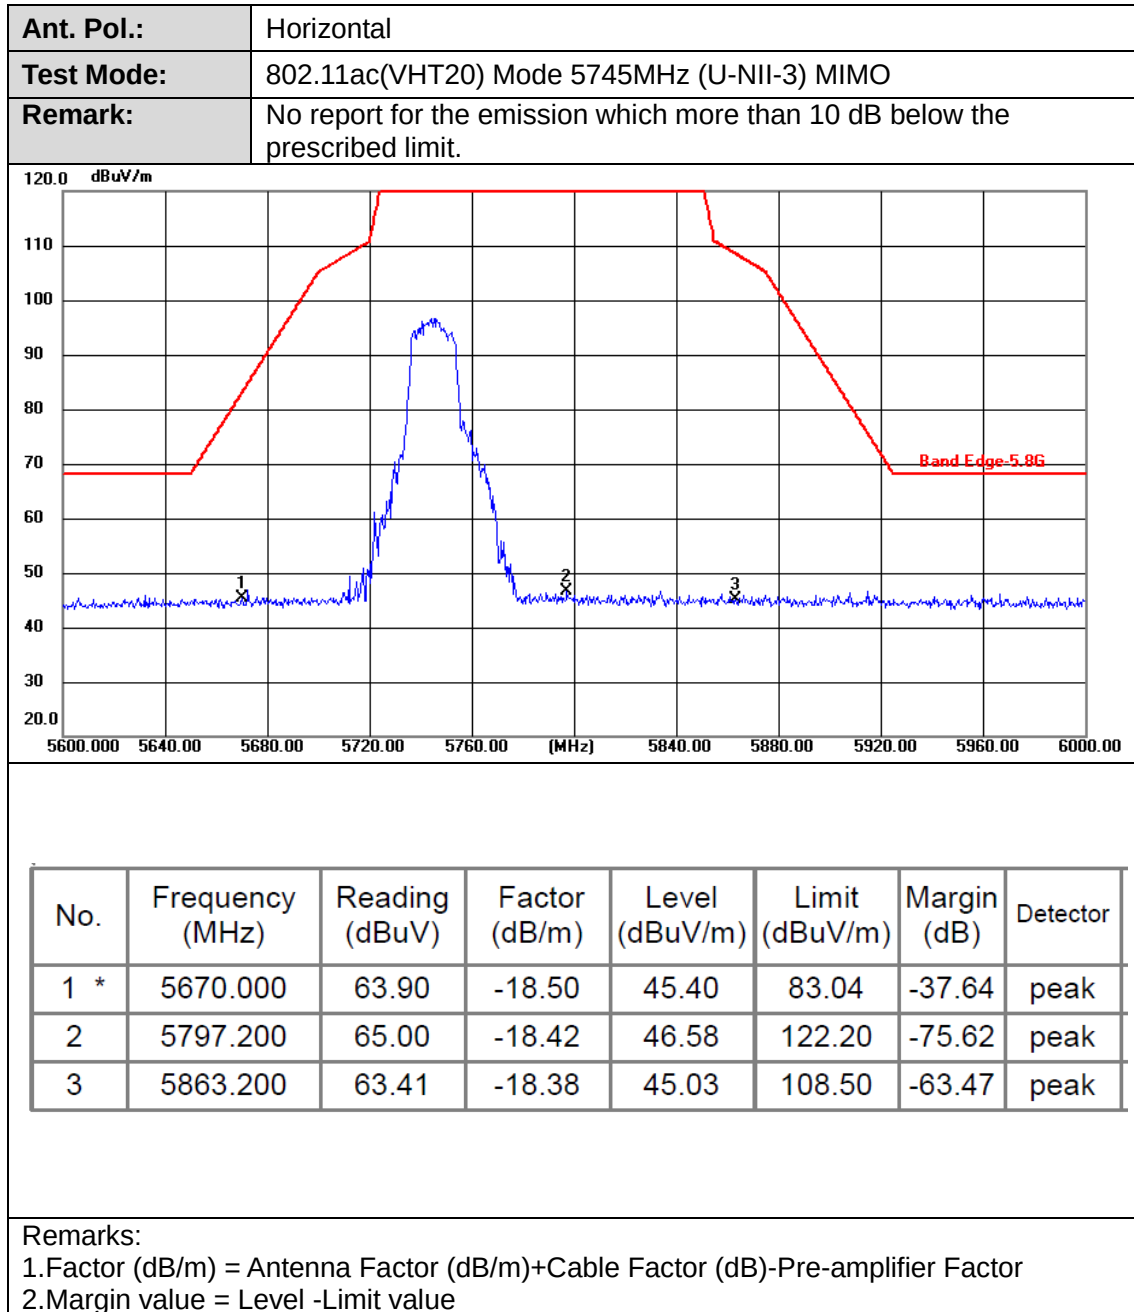


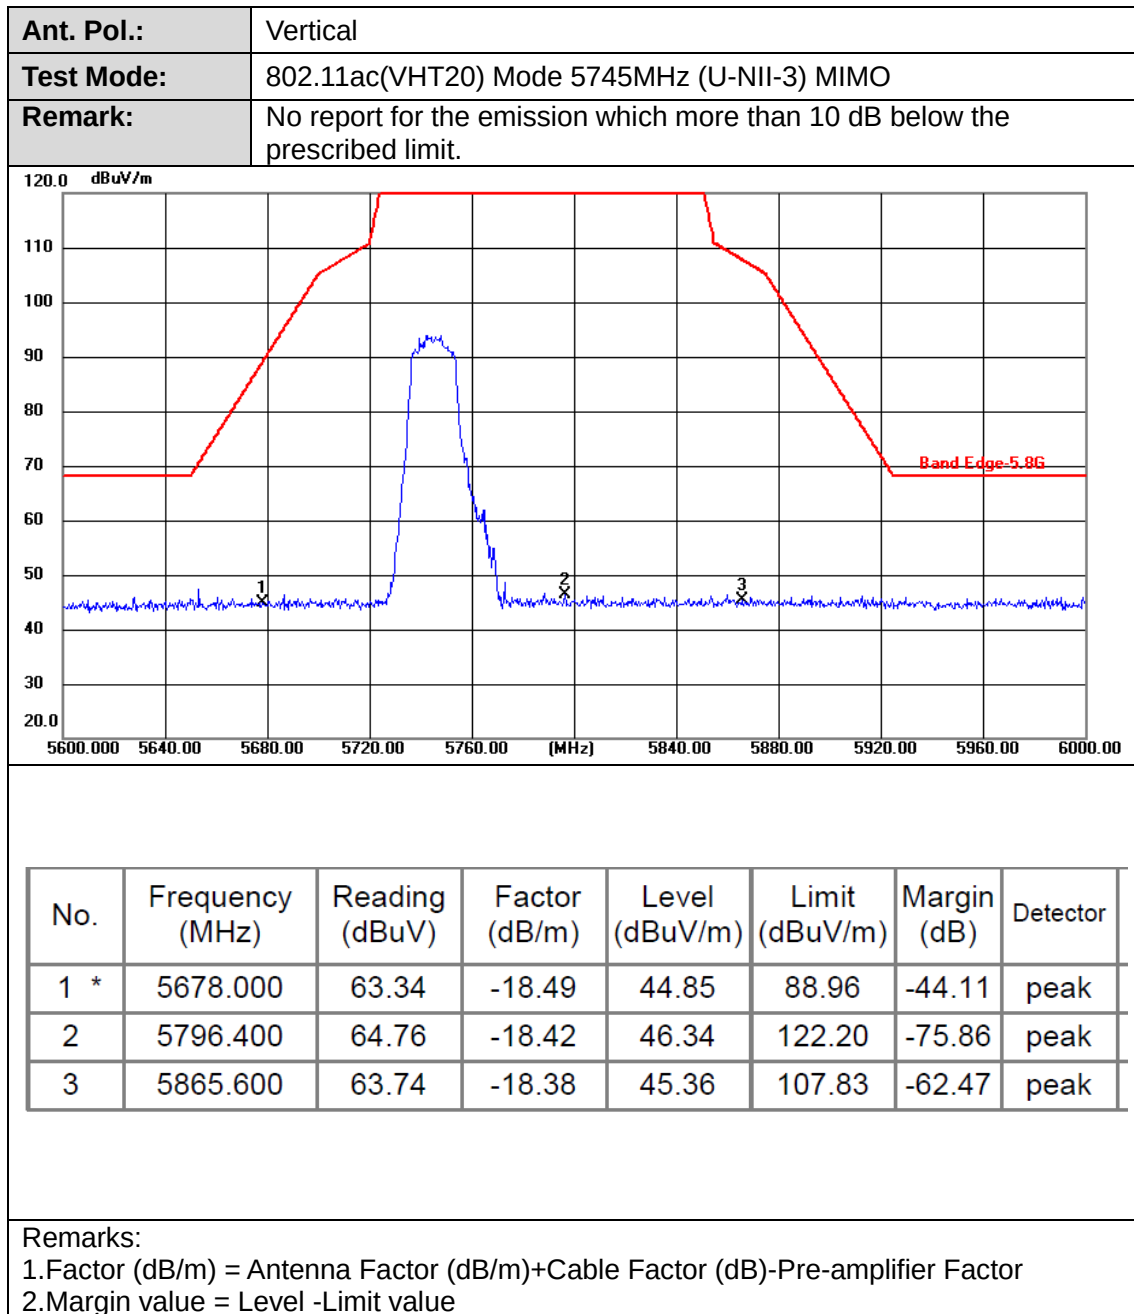


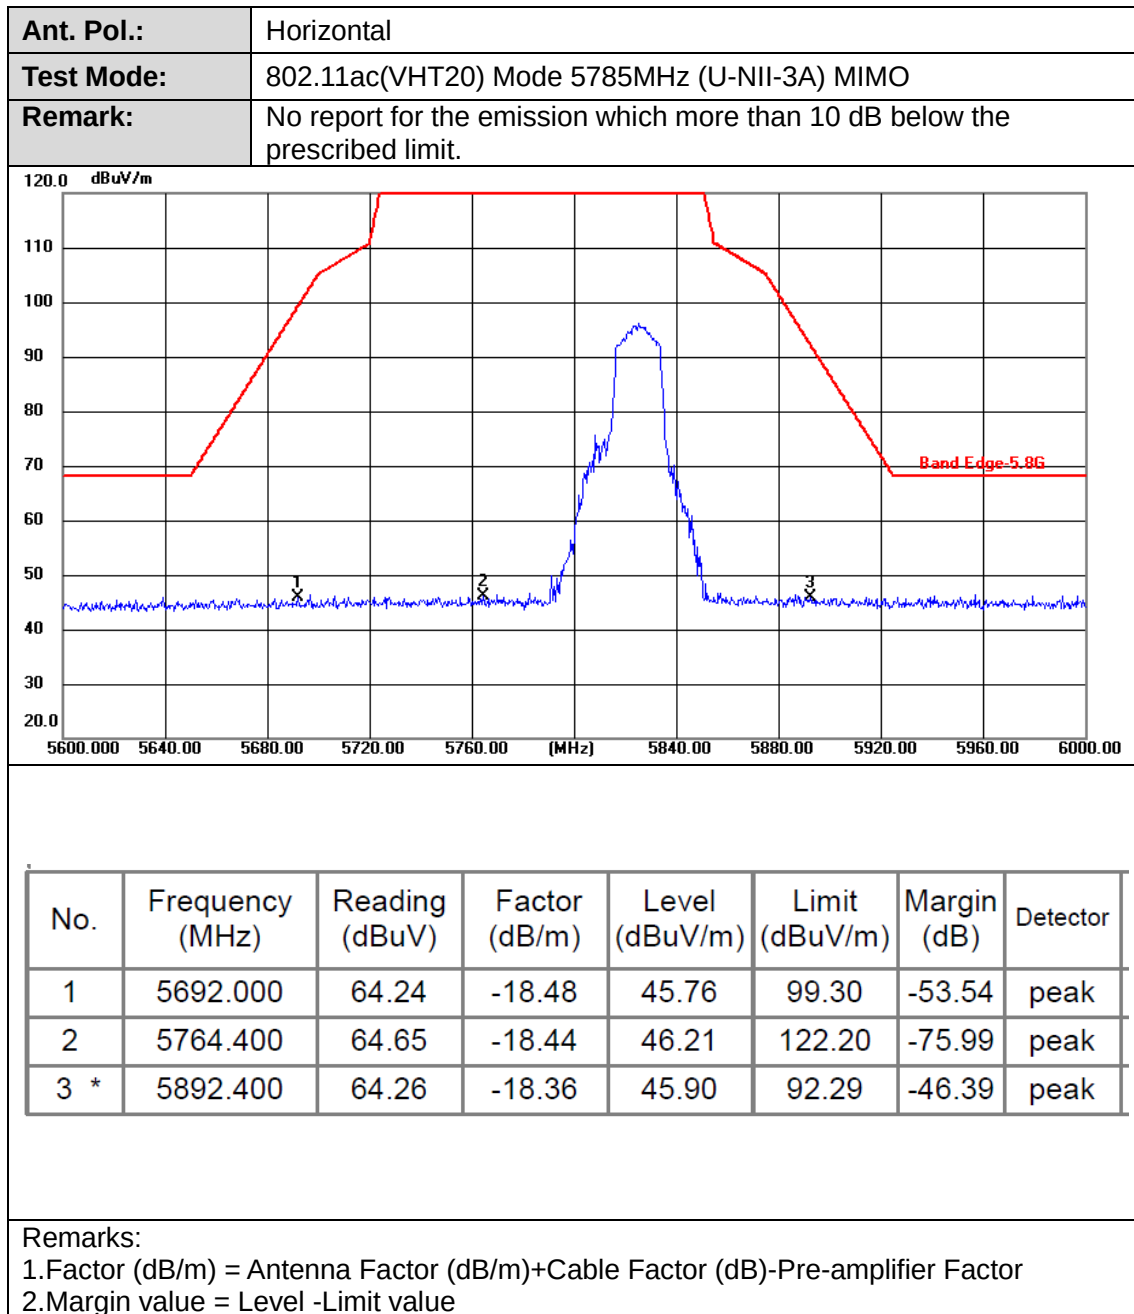


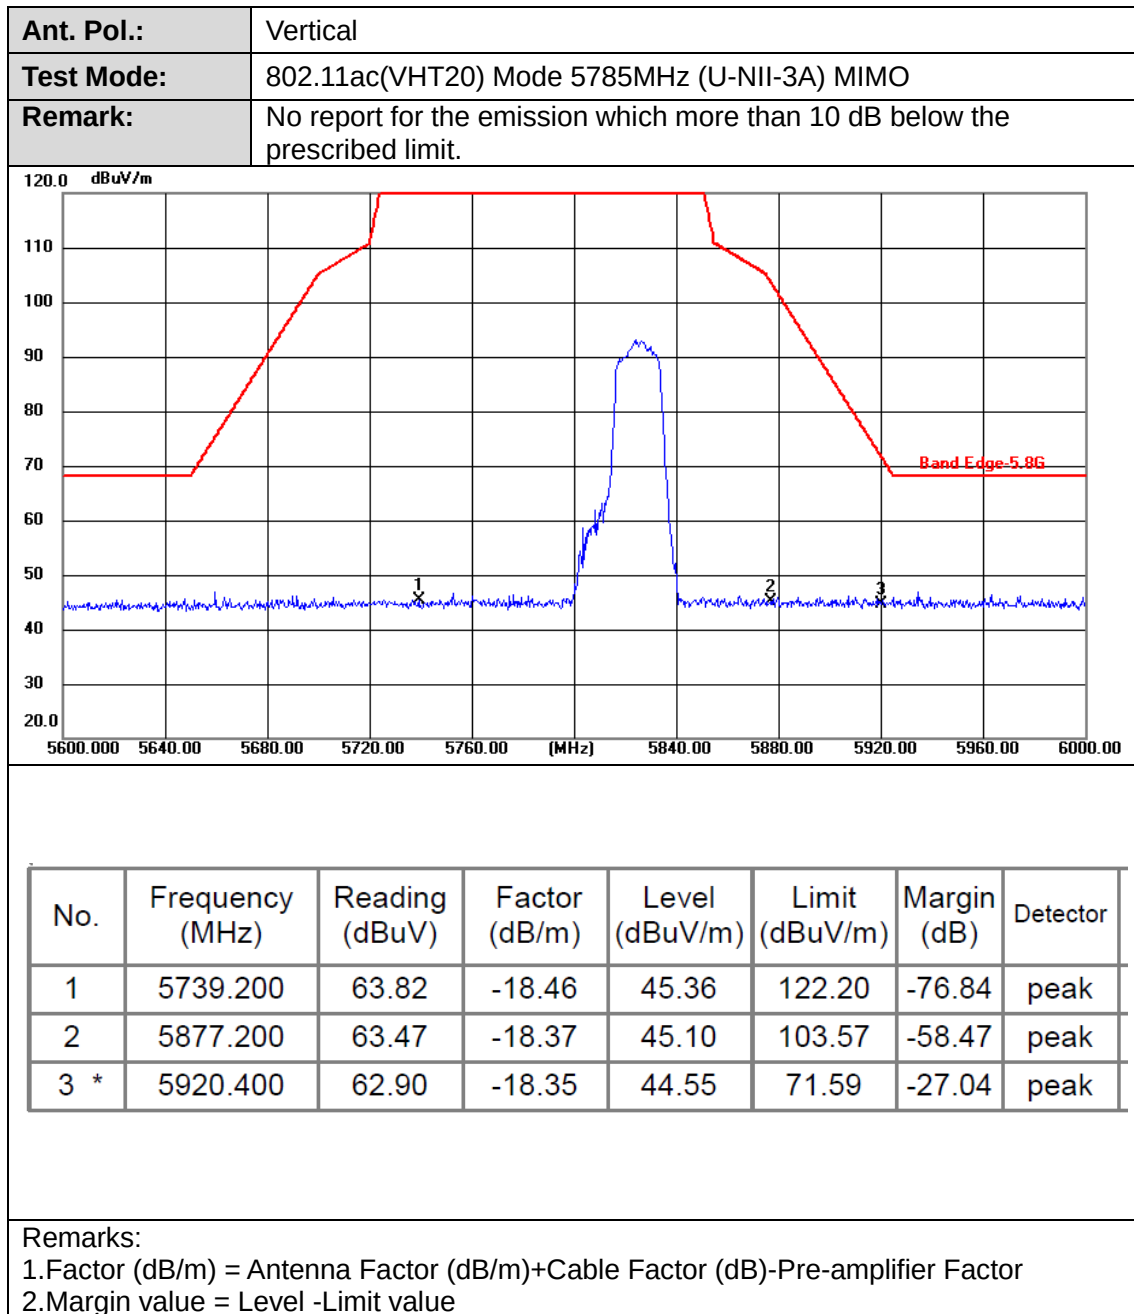


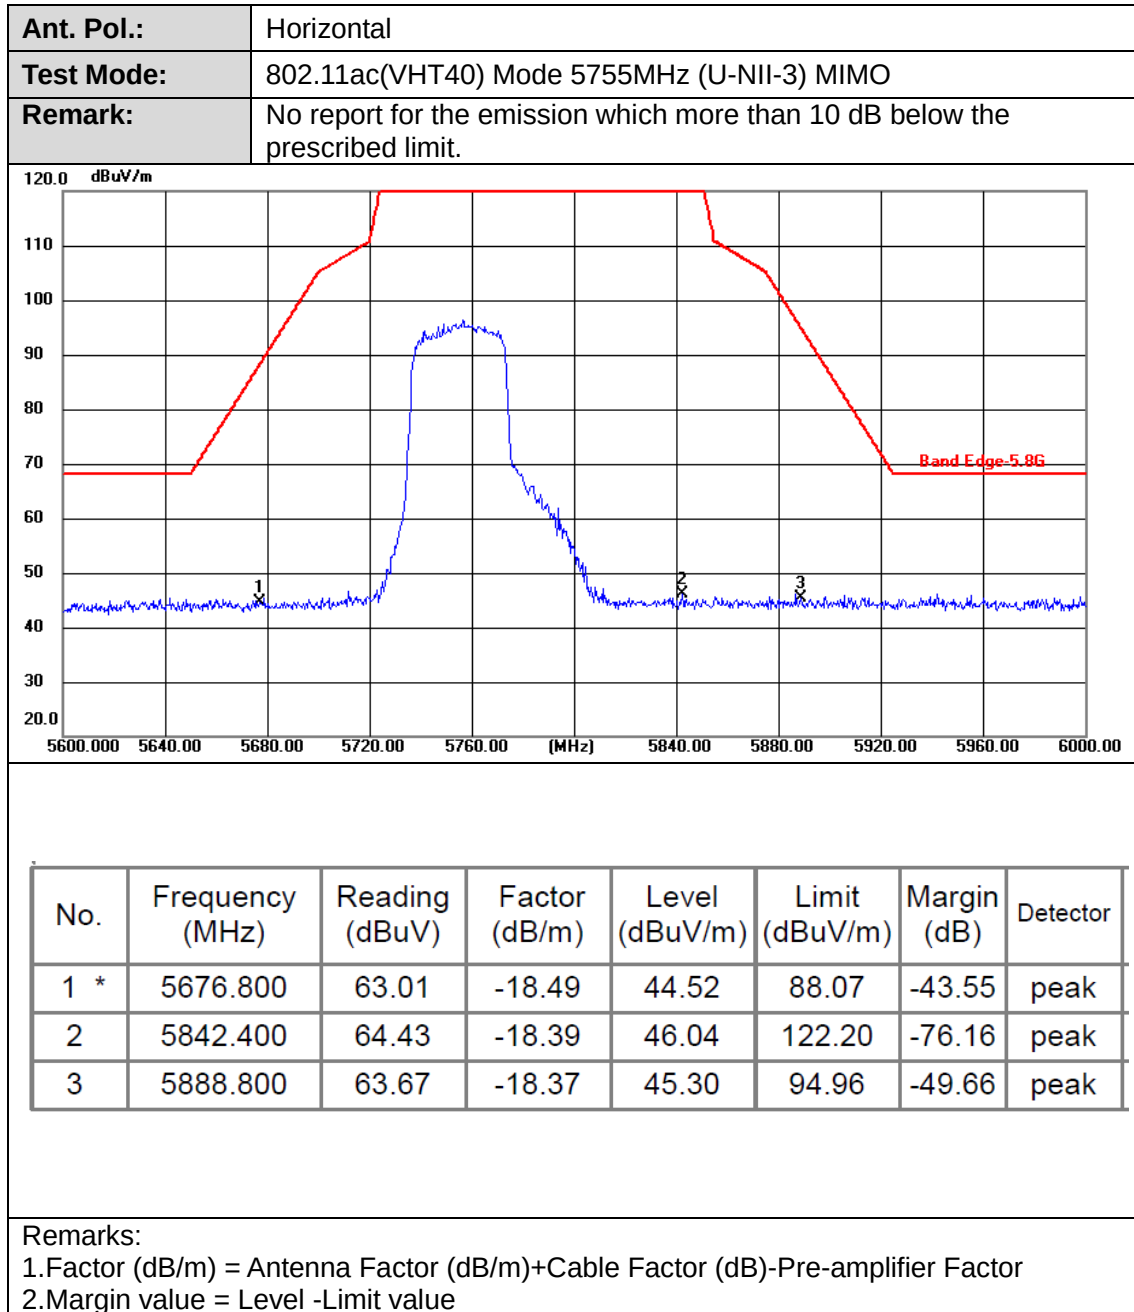


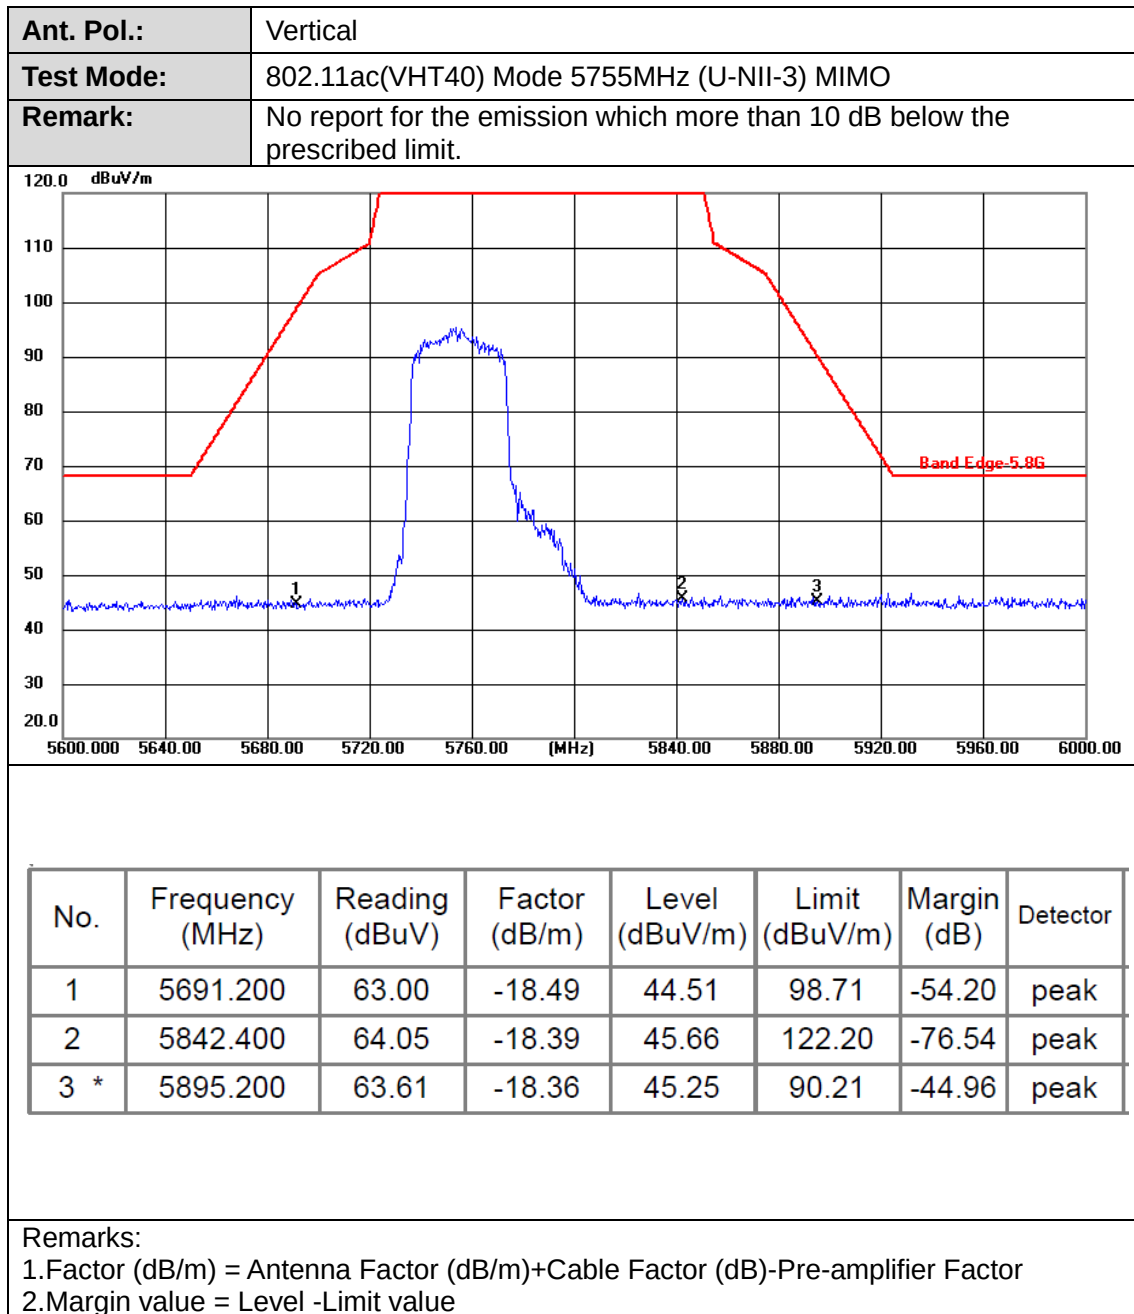


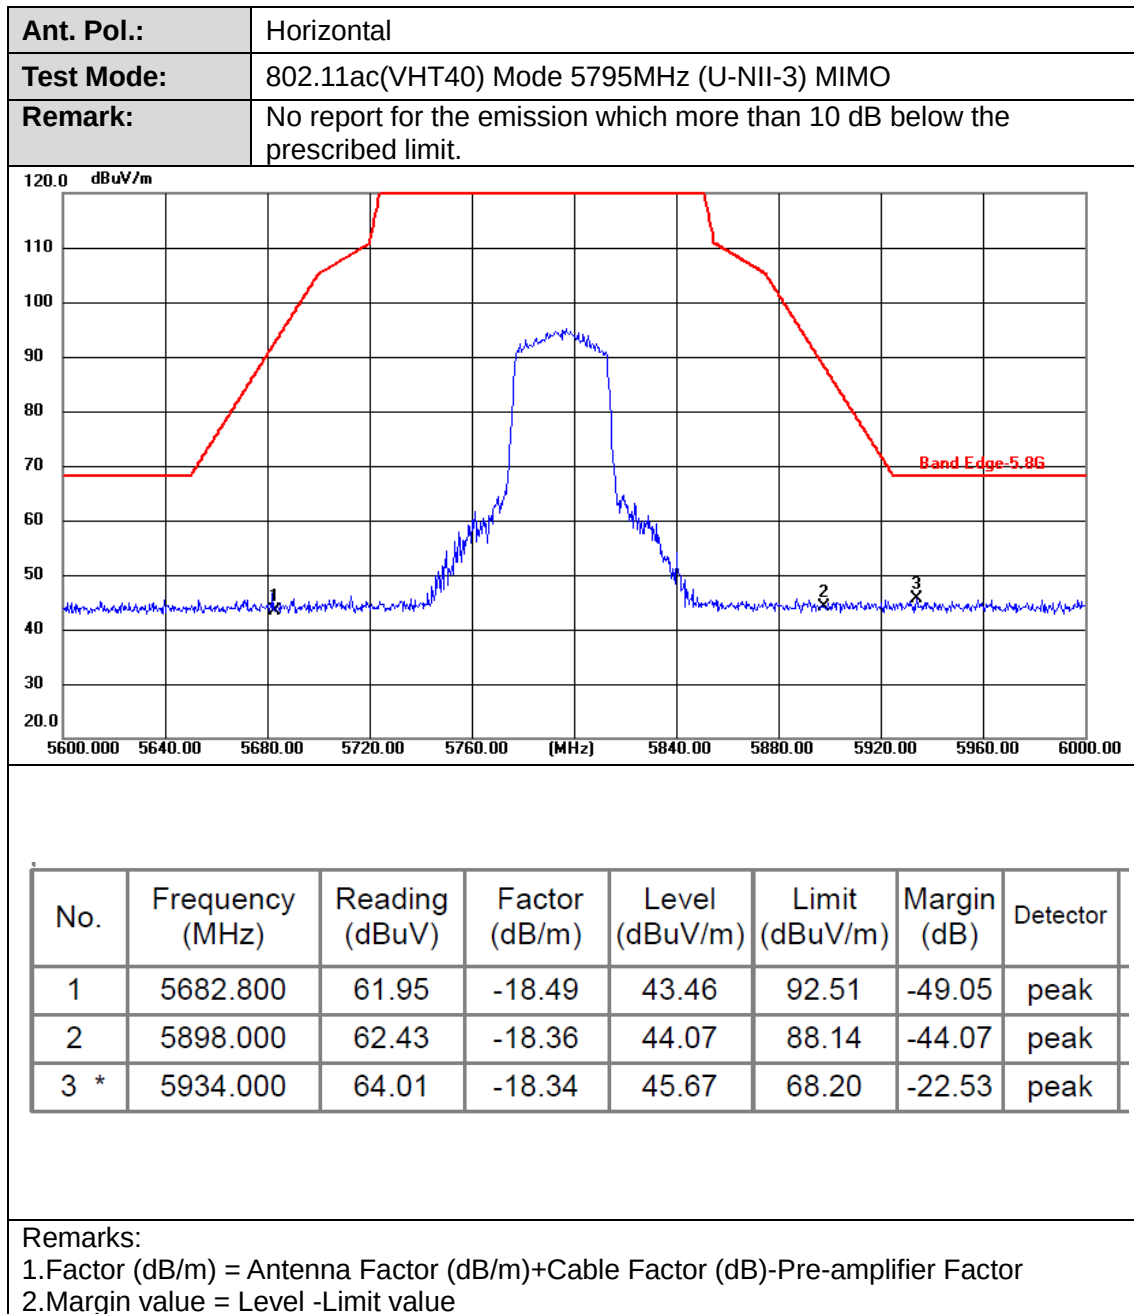

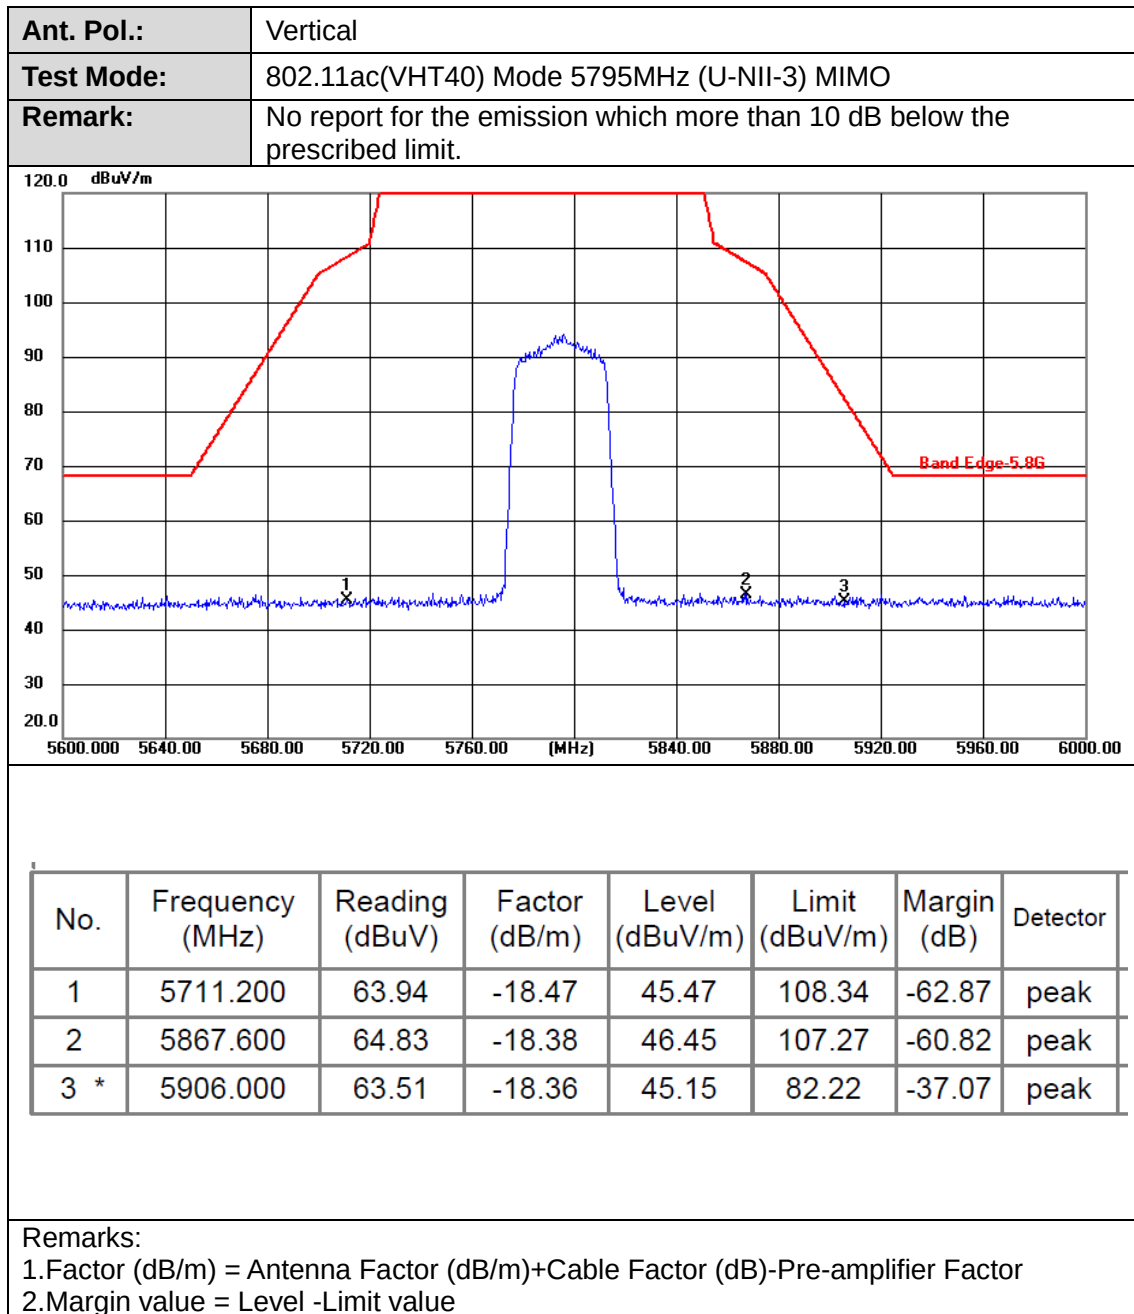

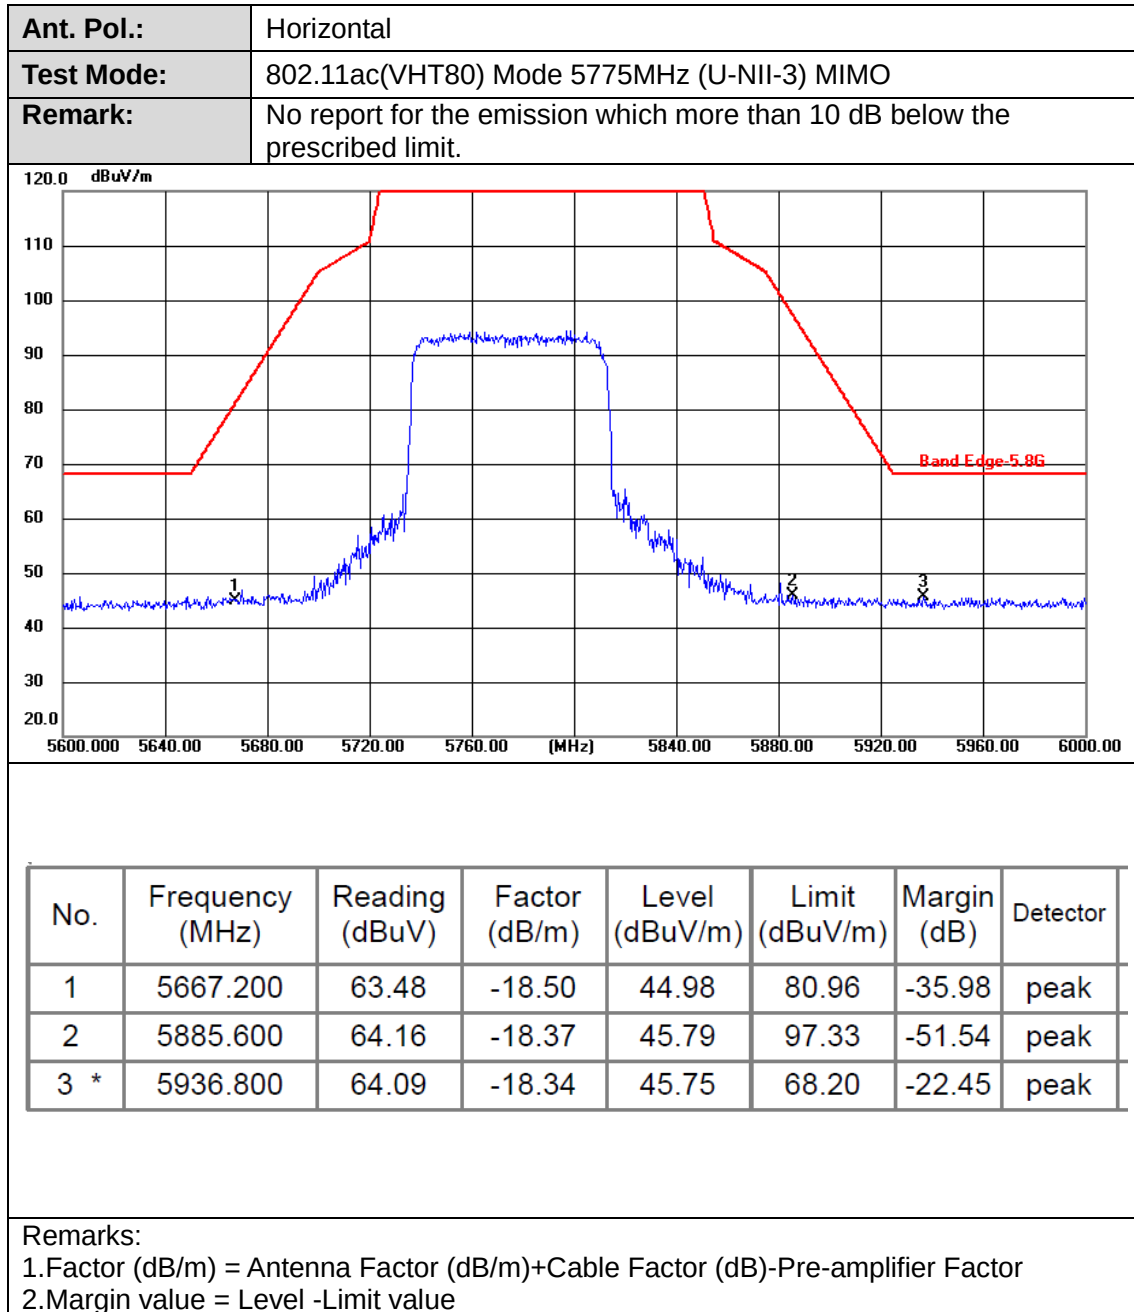


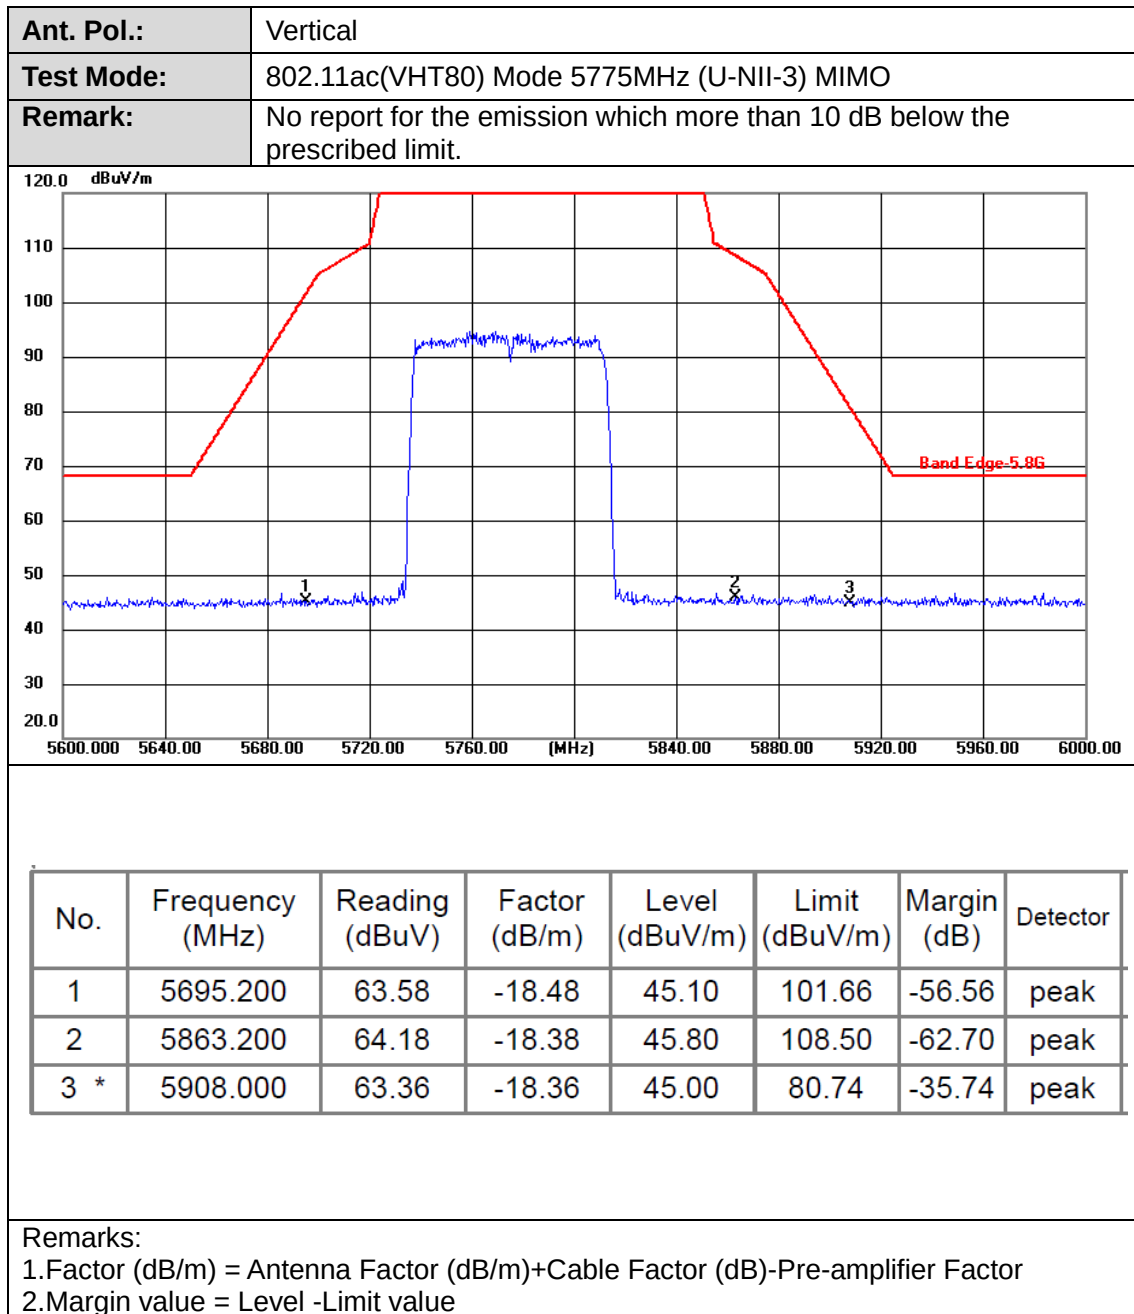

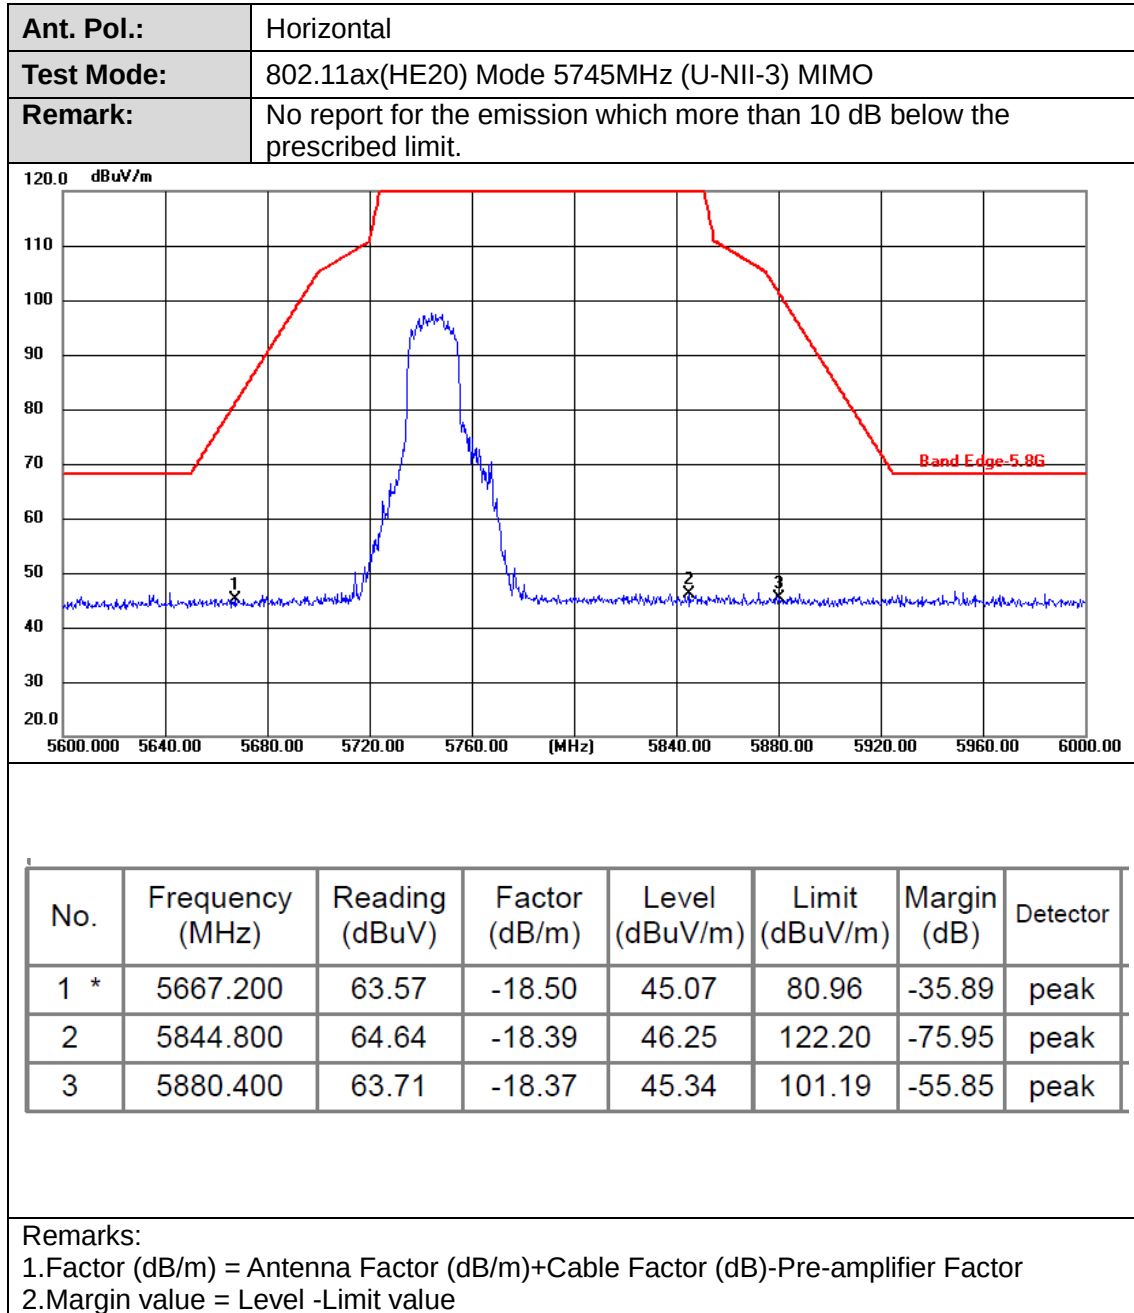




Ant. Pol.:	Vertical
Test Mode:	802.11ax(HE20) Mode 5745MHz (U-NII-3) MIMO
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

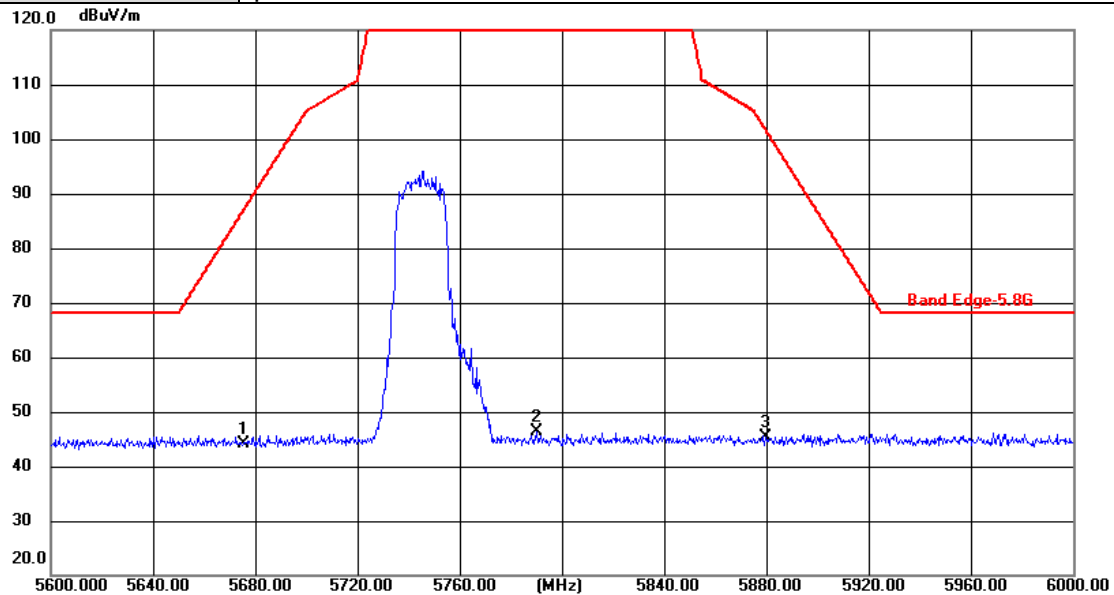


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5675.200	62.68	-18.49	44.19	86.89	-42.70	peak
2	5790.000	64.79	-18.43	46.36	122.20	-75.84	peak
3	5879.600	63.72	-18.37	45.35	101.78	-56.43	peak

Remarks:


- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value

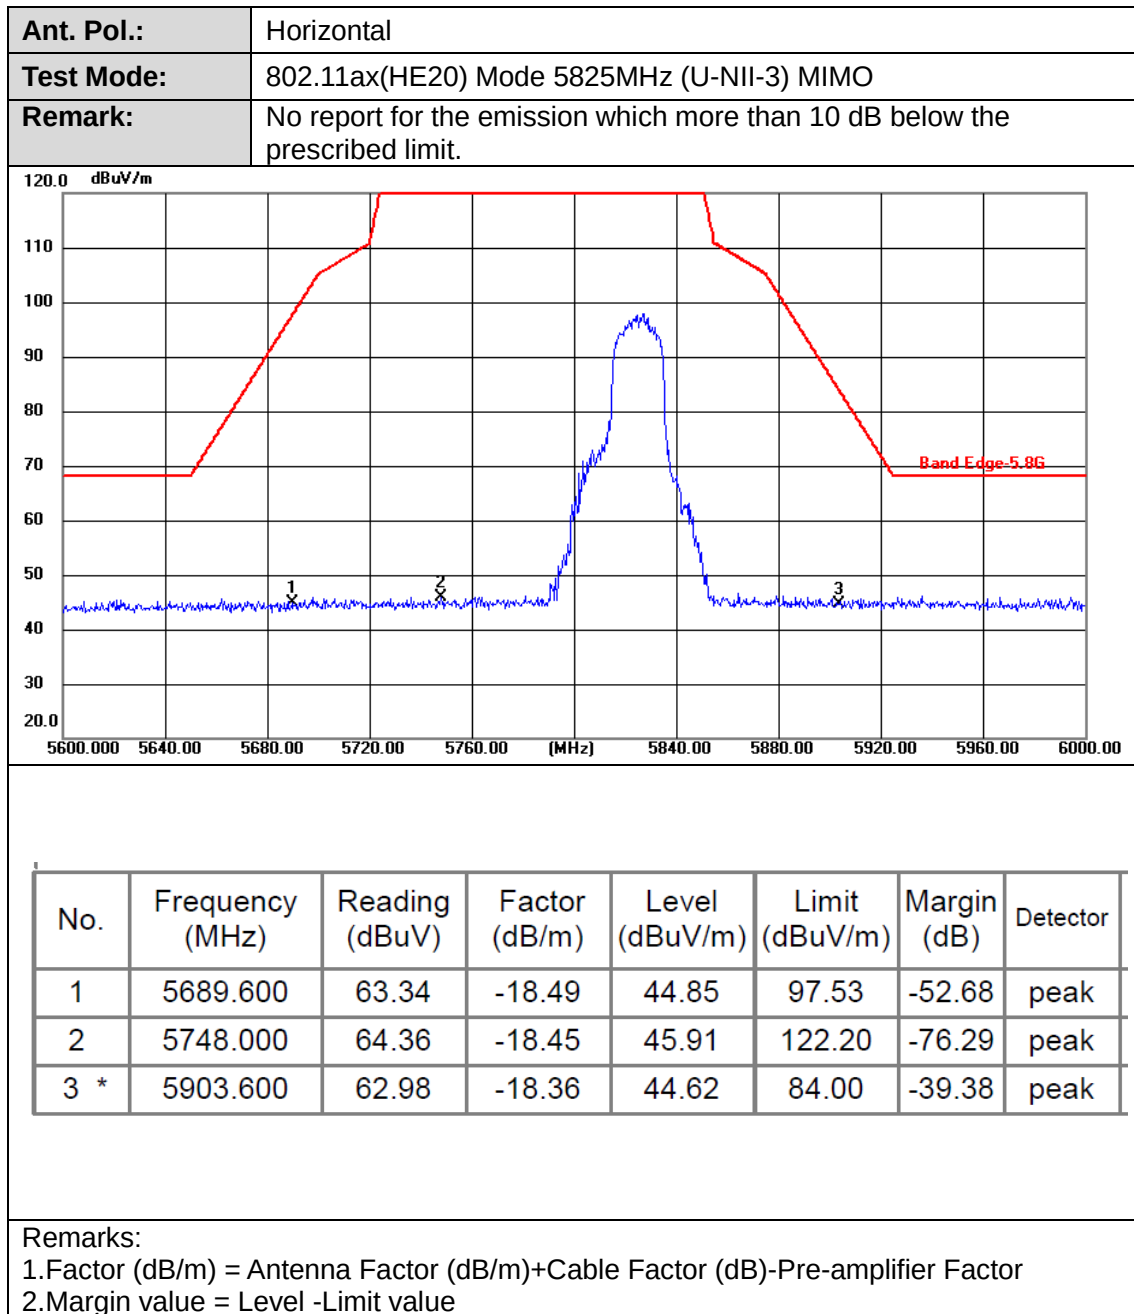

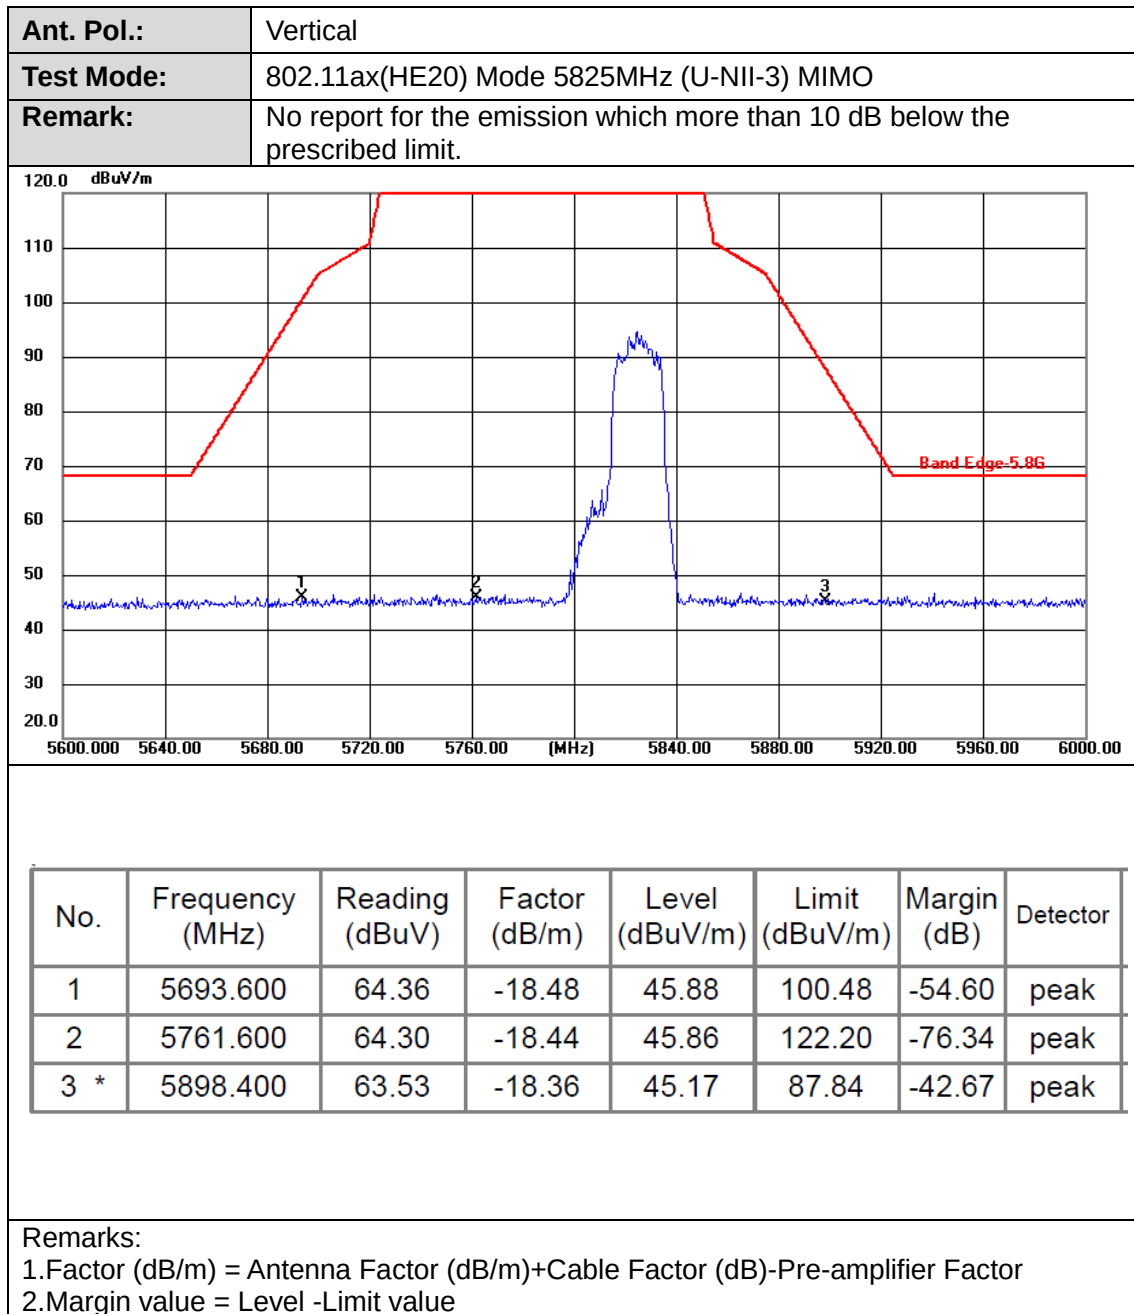



Ant. Pol.:	Horizontal
Test Mode:	802.11ax(HE40) Mode 5755MHz (U-NII-3) MIMO
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

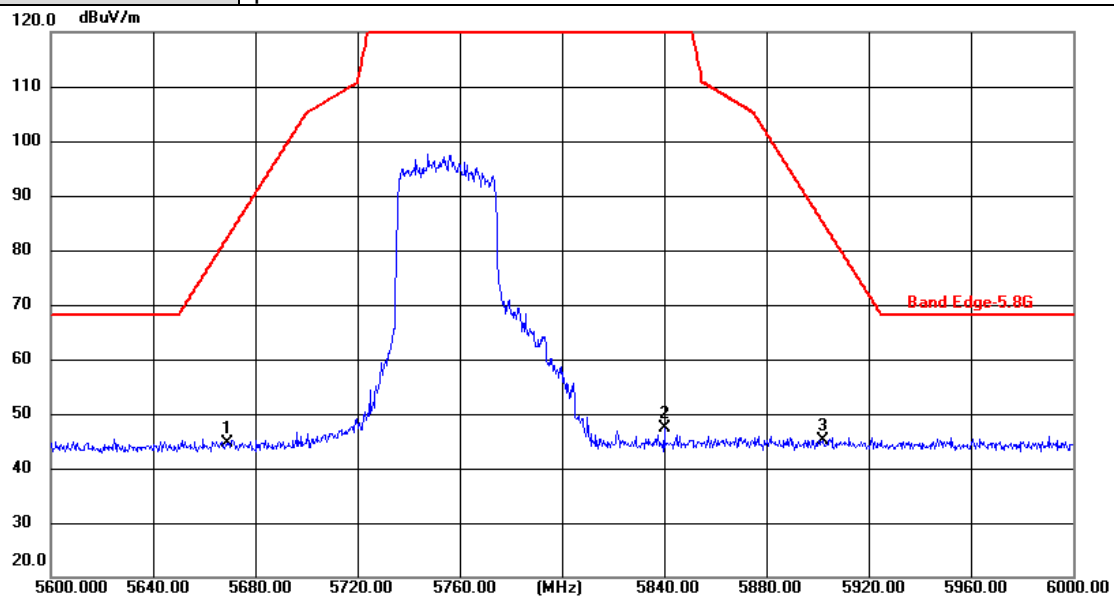

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5668.800	63.04	-18.50	44.54	82.15	-37.61	peak
2	5840.000	65.84	-18.40	47.44	122.20	-74.76	peak
3	5902.000	63.43	-18.36	45.07	85.18	-40.11	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value

