

Date: 2025-07-03

11_WCDMA II_RMC 12.2Kbps_Front_5mm_Ch9262

Communication System: UMTS-FDD (WCDMA); Frequency: 1852.400 MHz; Duty Cycle: 1:1
Medium: HSL_1900_250703 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.58, 8.94, 7.72); Calibrated: 2025-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.674 W/kg; SAR (10g) = 0.385 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.709 W/kg; SAR (10g) = 0.415 W/kg

Smallest distance from peaks to all points 3 dB below = 14.1 mm

Ratio of SAR at M2 to SAR at M1 = 88.3 %

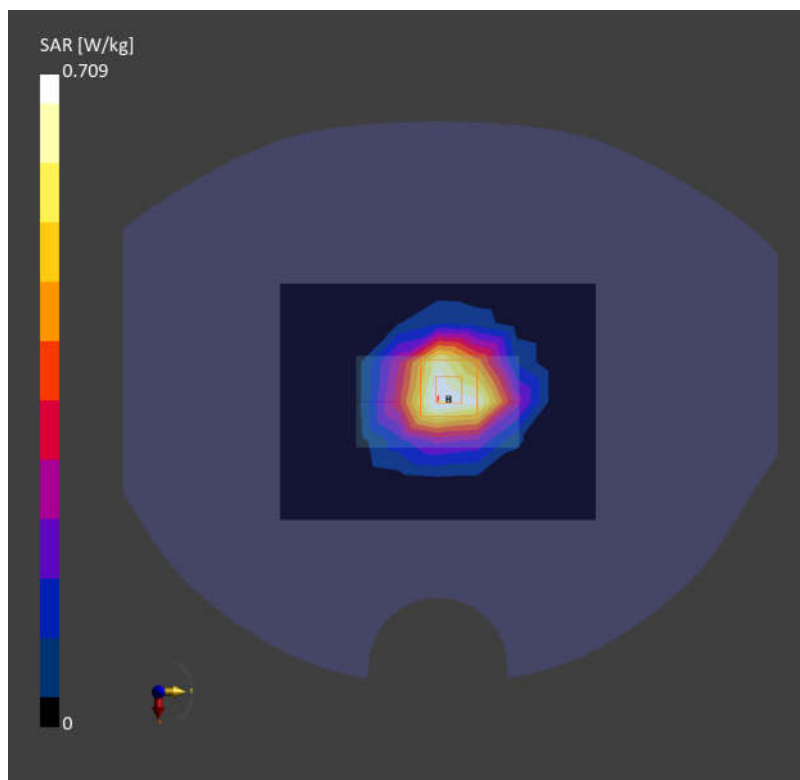

Date: 2025-07-03

12_WCDMA IV_RMC 12.2Kbps_Front_5mm_Ch1513

Communication System: UMTS-FDD (WCDMA); Frequency: 1752.600 MHz; Duty Cycle: 1:1
Medium: HSL_1750_250703 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.83, 9.23, 7.96); Calibrated: 2025-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.847 W/kg; SAR (10g) = 0.487 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.867 W/kg; SAR (10g) = 0.505 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 88.5 %

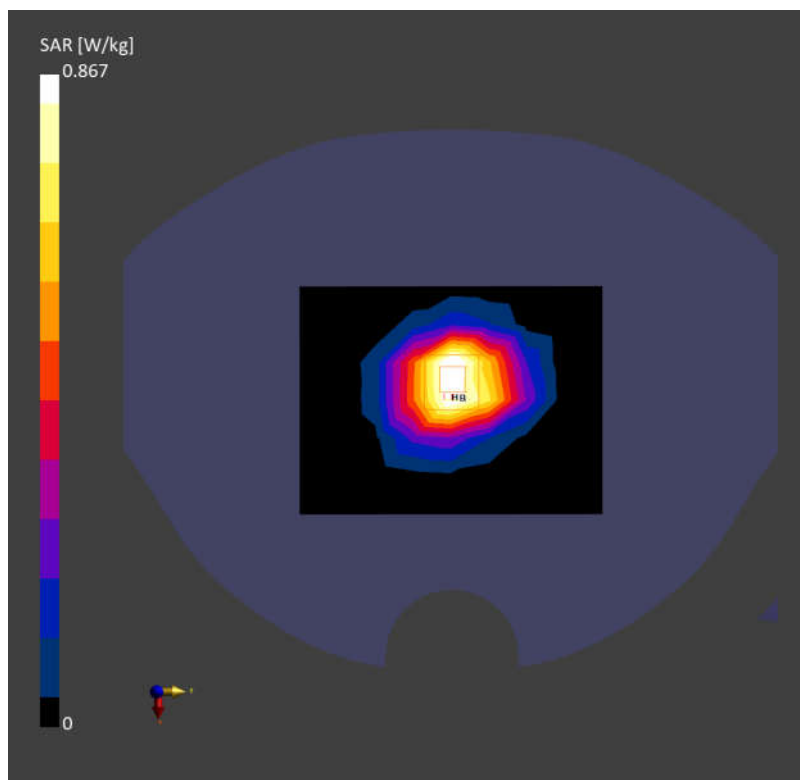

Date: 2025-07-03

13_LTE Band 2_20M_QPSK_1RB_0Offset_Front_5mm_Ch18900

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_250703 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.58, 8.94, 7.72); Calibrated: 2025-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.575 W/kg; SAR (10g) = 0.326 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.559 W/kg; SAR (10g) = 0.330 W/kg

Smallest distance from peaks to all points 3 dB below = 14.9 mm

Ratio of SAR at M2 to SAR at M1 = 88.5 %

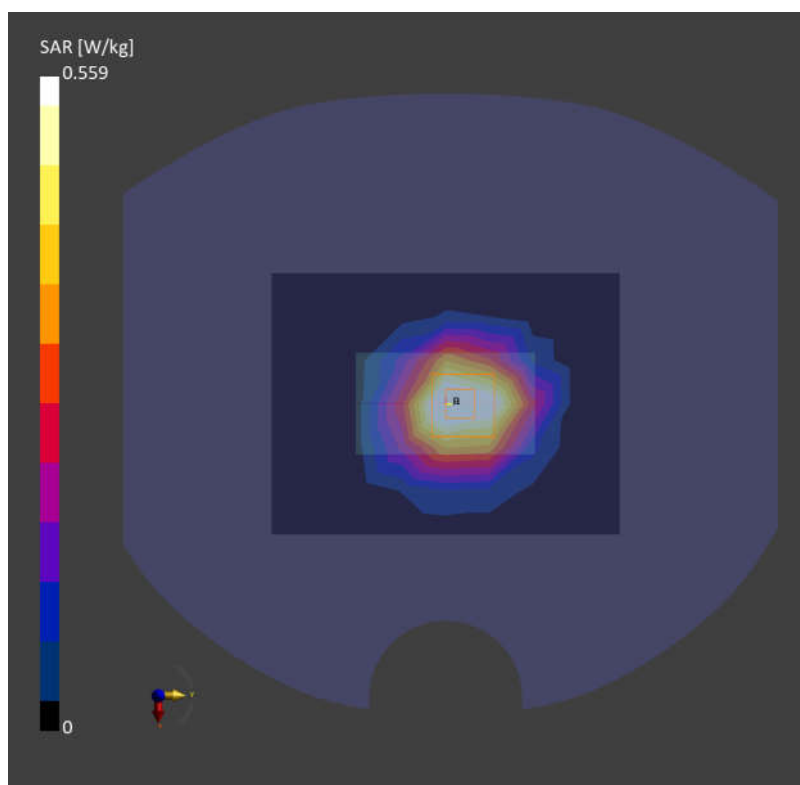

Date: 2025-07-03

14_LTE Band 4_20M_QPSK_1RB_0Offset_Front_5mm_Ch20175

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1732.500 MHz; Duty Cycle: 1:1

Medium: HSL_1750_250703 Medium parameters used: $f = 1732.500$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.83, 9.23, 7.96); Calibrated: 2025-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.528 W/kg; SAR (10g) = 0.315 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.517 W/kg; SAR (10g) = 0.299 W/kg

Smallest distance from peaks to all points 3 dB below = 14.1 mm

Ratio of SAR at M2 to SAR at M1 = 87.7 %

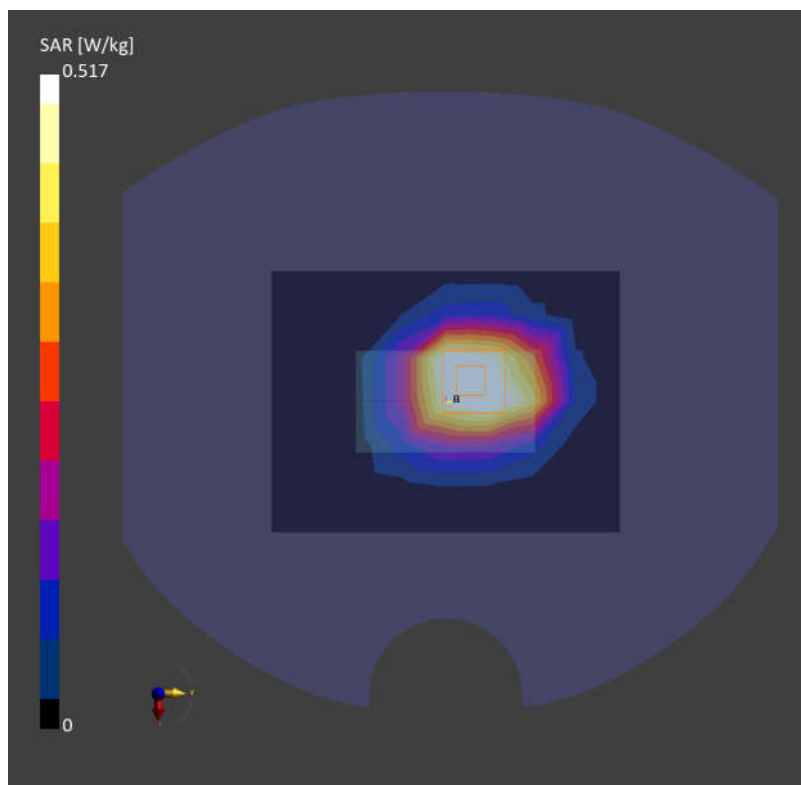

Date: 2025-07-02

15_LTE Band 12_10M_QPSK_1RB_0Offset_Front_5mm_Ch23095

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_250702 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.880$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.71, 11.46, 9.89); Calibrated: 2025-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.200 W/kg; SAR (10g) = 0.133 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.13 dB

SAR (1g) = 0.178 W/kg; SAR (10g) = 0.119 W/kg

Smallest distance from peaks to all points 3 dB below = 19.6 mm

Ratio of SAR at M2 to SAR at M1 = 91.2 %

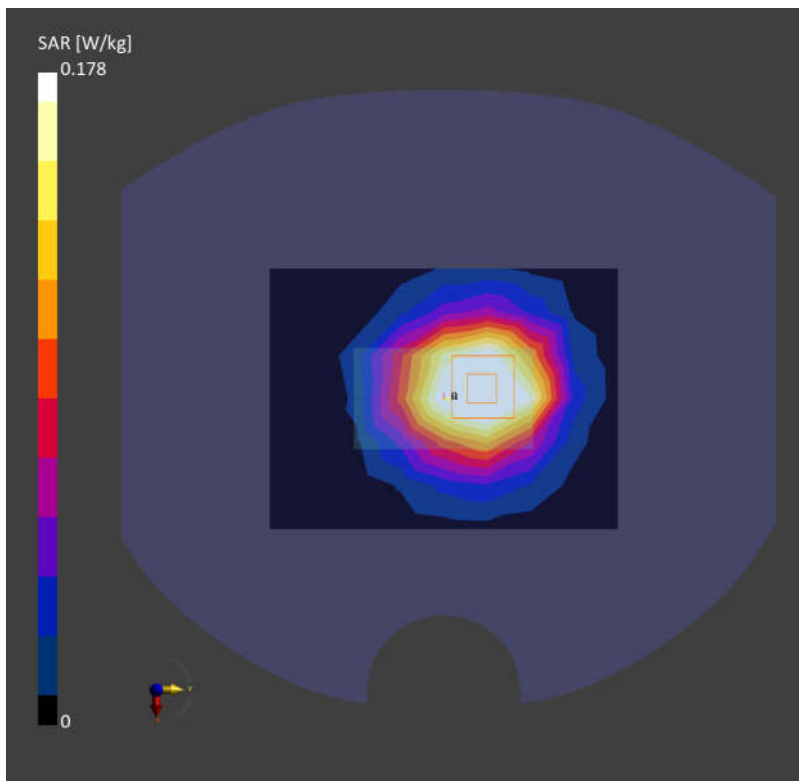

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/8

01_WCDMA II_RMC 12.2Kbps_Front_14mm_Ch9400

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900_250708 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 39.168$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.78, 7.03, 7.63) @ 1880 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2024/10/8
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.17 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.05 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 0.981 W/kg; SAR(10 g) = 0.528 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 63.3%

Maximum value of SAR (measured) = 1.14 W/kg

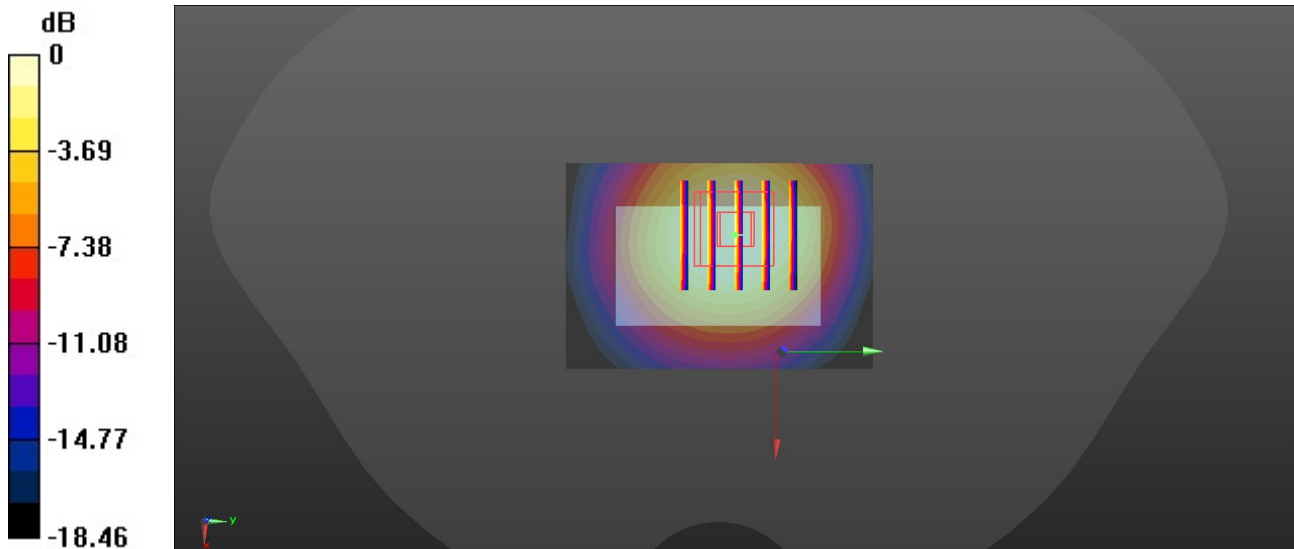

0 dB = 1.14 W/kg = 0.57 dBW/kg

Date: 2025-07-03

02_WCDMA IV_RMC 12.2Kbps_Front_5mm_Ch1513

Communication System: UMTS-FDD (WCDMA); Frequency: 1752.600 MHz; Duty Cycle: 1:1
Medium: HSL_1750_250703 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.83, 9.23, 7.96); Calibrated: 2025-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.847 W/kg; SAR (10g) = 0.487 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.867 W/kg; SAR (10g) = 0.505 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 88.5 %

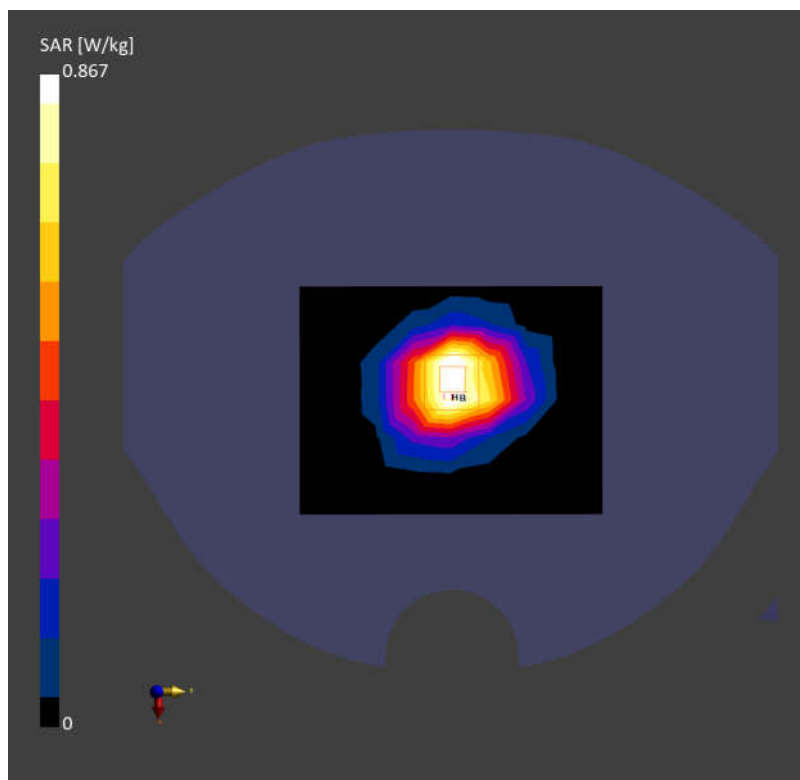

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/8

03_LTE Band 2_20M_QPSK_1RB_0Offset_Front_14mm_Ch18900

Communication System: UID 0, LTE-FDD (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1880_250708 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 39.168$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.78, 7.03, 7.63) @ 1880 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2024/10/8
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.971 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.62 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.868 W/kg

SAR(1 g) = 0.549 W/kg; SAR(10 g) = 0.327 W/kg

Smallest distance from peaks to all points 3 dB below = 17 mm

Ratio of SAR at M2 to SAR at M1 = 63.9%

Maximum value of SAR (measured) = 0.770 W/kg

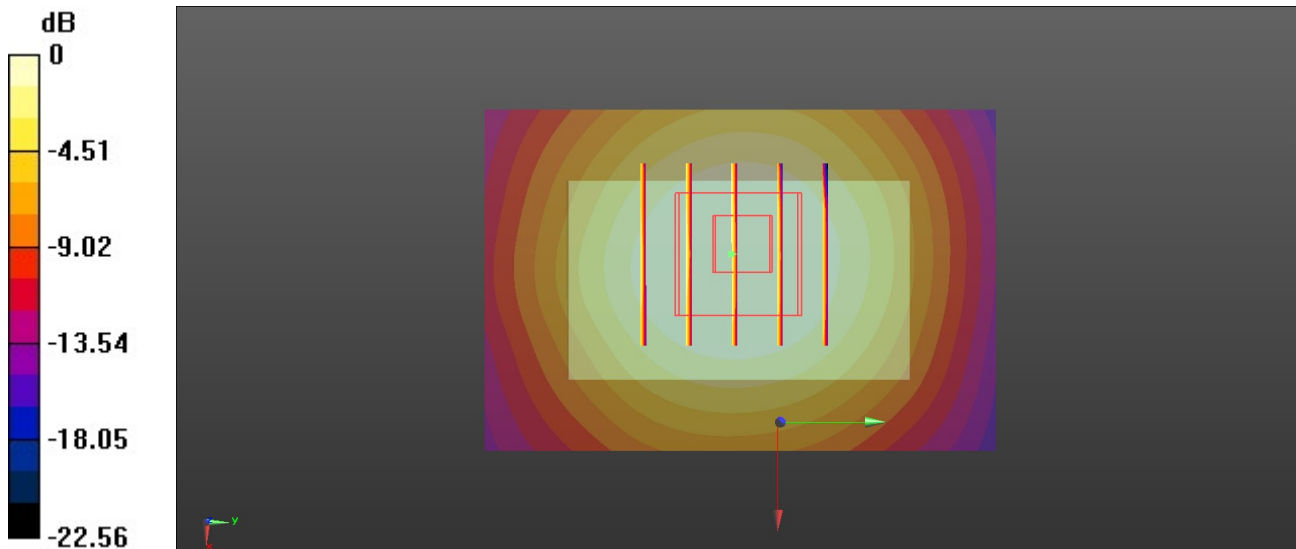

0 dB = 0.770 W/kg = -1.14 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/8

04_LTE Band 4_20M_QPSK_1RB_0Offset_Front_14mm_Ch20175

Communication System: UID 0, LTE-FDD (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL_1750_250708 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 40.765$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.92, 7.17, 7.77) @ 1732.5 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2024/10/8
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.19 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.98 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.722 W/kg; SAR(10 g) = 0.440 W/kg

Smallest distance from peaks to all points 3 dB below = 19.3 mm

Ratio of SAR at M2 to SAR at M1 = 64.6%

Maximum value of SAR (measured) = 0.981 W/kg

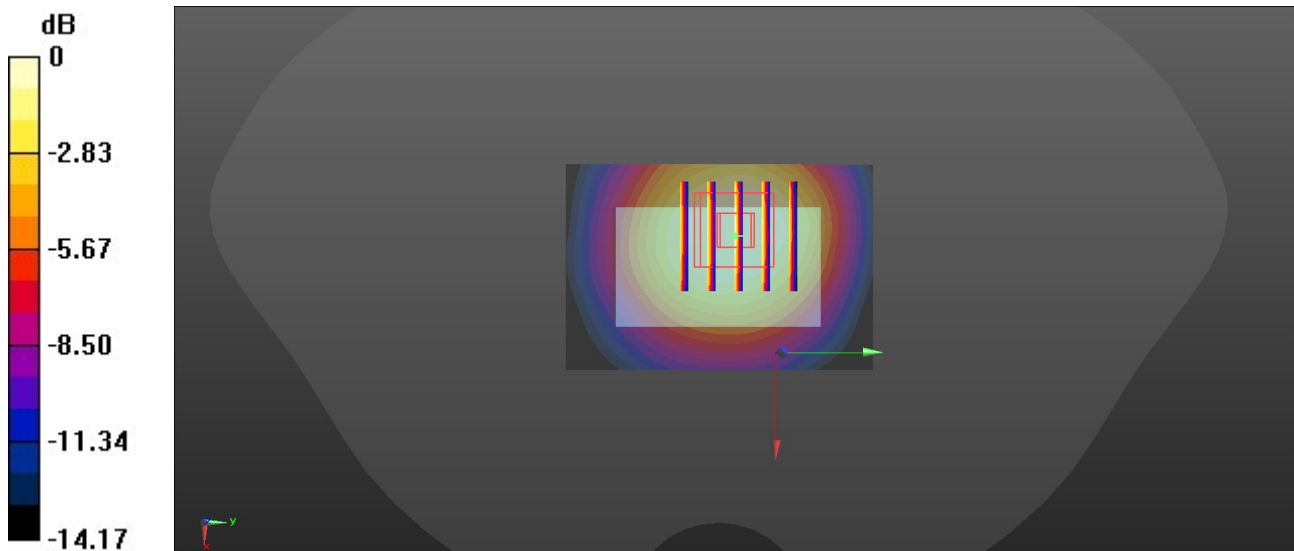

0 dB = 0.981 W/kg = -0.08 dBW/kg

Date: 2025-07-02

05_LTE Band 12_10M_QPSK_1RB_0Offset_Front_5mm_Ch23095

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_250702 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.880$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.71, 11.46, 9.89); Calibrated: 2025-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.200 W/kg; SAR (10g) = 0.133 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.13 dB

SAR (1g) = 0.178 W/kg; SAR (10g) = 0.119 W/kg

Smallest distance from peaks to all points 3 dB below = 19.6 mm

Ratio of SAR at M2 to SAR at M1 = 91.2 %

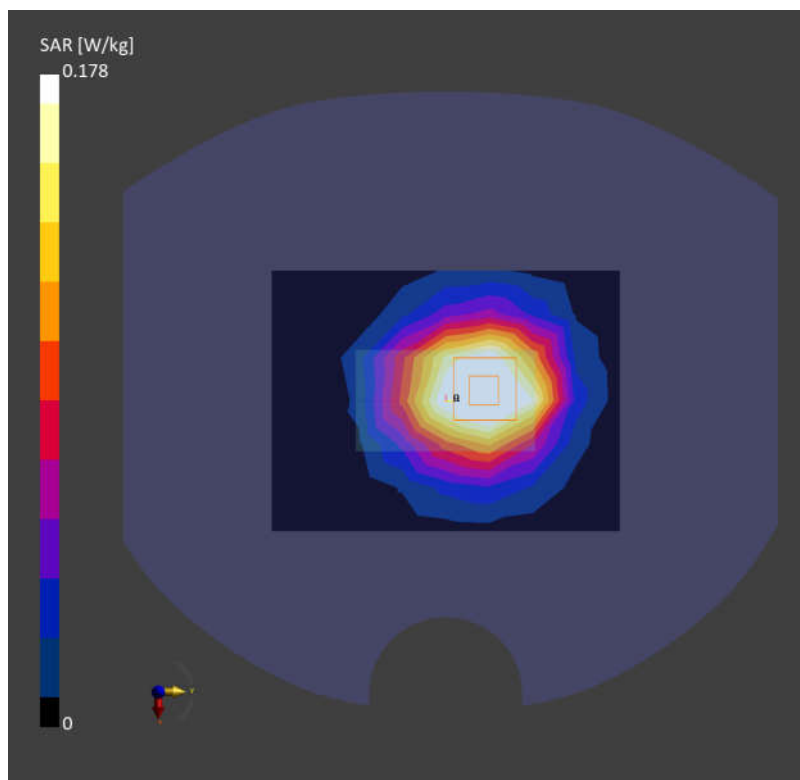

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/8

06_WCDMA II_RMC 12.2Kbps_Front_14mm_Ch9400

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900_250708 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 39.168$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.78, 7.03, 7.63) @ 1880 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2024/10/8
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.17 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.05 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 0.981 W/kg; SAR(10 g) = 0.528 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 63.3%

Maximum value of SAR (measured) = 1.14 W/kg

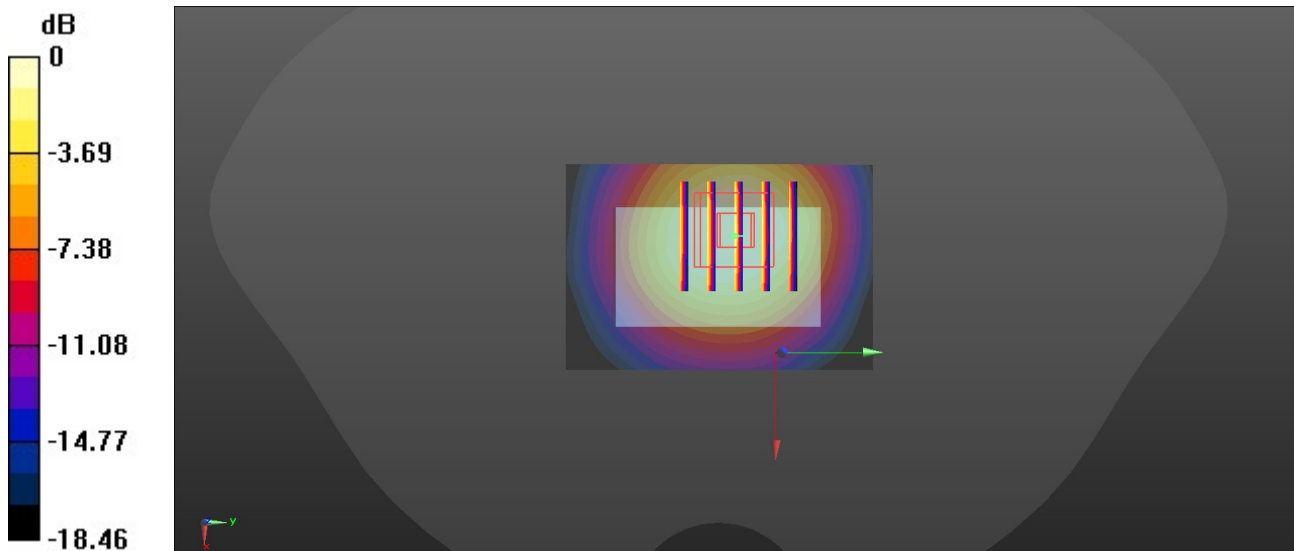

0 dB = 1.14 W/kg = 0.57 dBW/kg

Date: 2025-07-03

07_WCDMA IV_RMC 12.2Kbps_Front_0mm_Ch1413

Communication System: UMTS-FDD (WCDMA); Frequency: 1732.600 MHz; Duty Cycle: 1:1
Medium: HSL_1750_250703 Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.83, 9.23, 7.96); Calibrated: 2025-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.02 W/kg; SAR (10g) = 0.587 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.15 dB

SAR (1g) = 1.05 W/kg; SAR (10g) = 0.597 W/kg

Smallest distance from peaks to all points 3 dB below = 10.9 mm

Ratio of SAR at M2 to SAR at M1 = 85.6 %

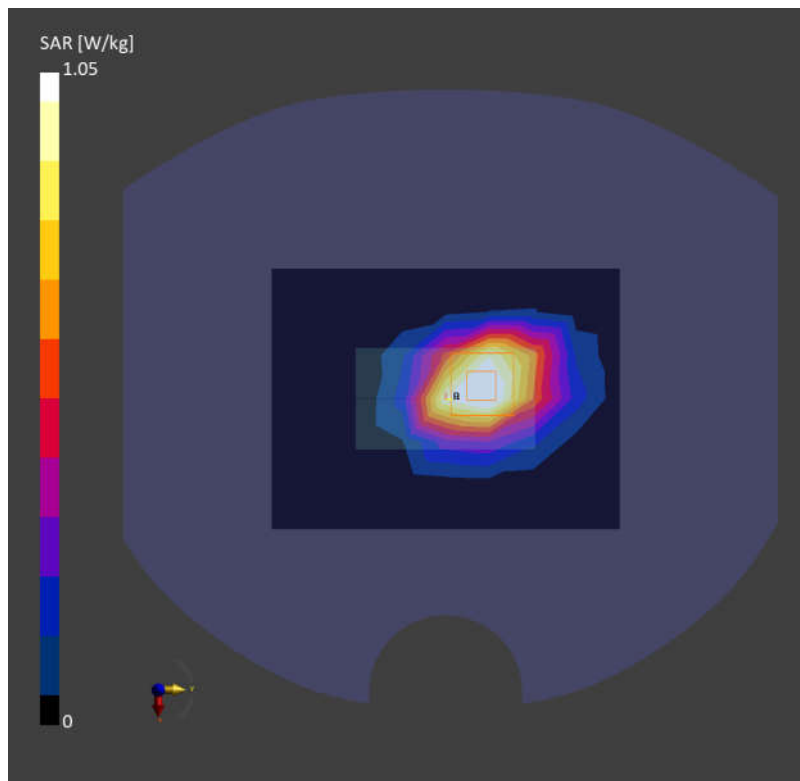

Date: 2025-07-03

08_LTE Band 2_20M_QPSK_1RB_0Offset_Front_0mm_Ch18900

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_250703 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.58, 8.94, 7.72); Calibrated: 2025-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.858 W/kg; SAR (10g) = 0.484 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.784 W/kg; SAR (10g) = 0.364 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 77.2 %

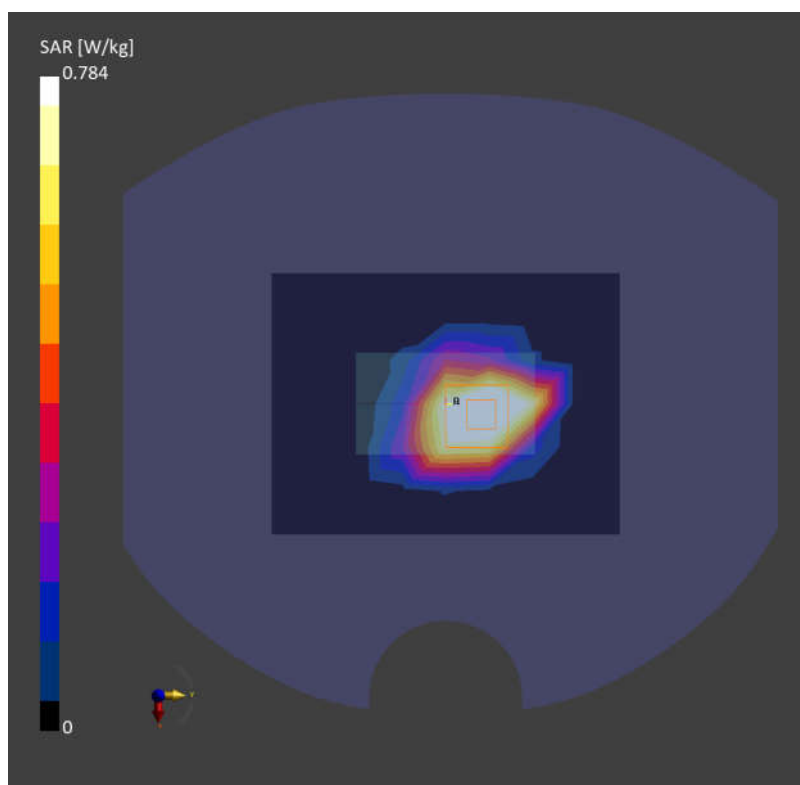

Date: 2025-07-03

09_LTE Band 4_20M_QPSK_1RB_0Offset_Front_0mm_Ch20175

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1732.500 MHz; Duty Cycle: 1:1

Medium: HSL_1750_250703 Medium parameters used: $f = 1732.500$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.83, 9.23, 7.96); Calibrated: 2025-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.558 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.990 W/kg; SAR (10g) = 0.557 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 73.2 %

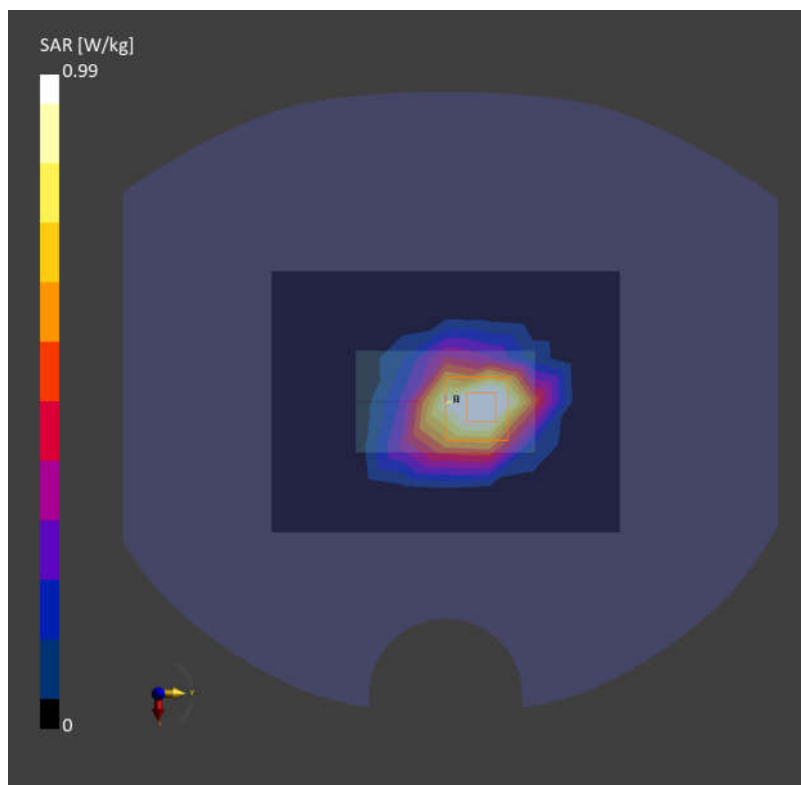

Date: 2025-07-02

10_LTE Band 12_10M_QPSK_1RB_0Offset_Back_0mm_Ch23095

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_250702 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.880$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.71, 11.46, 9.89); Calibrated: 2025-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.334 W/kg; SAR (10g) = 0.220 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.327 W/kg; SAR (10g) = 0.199 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 80.0 %

