
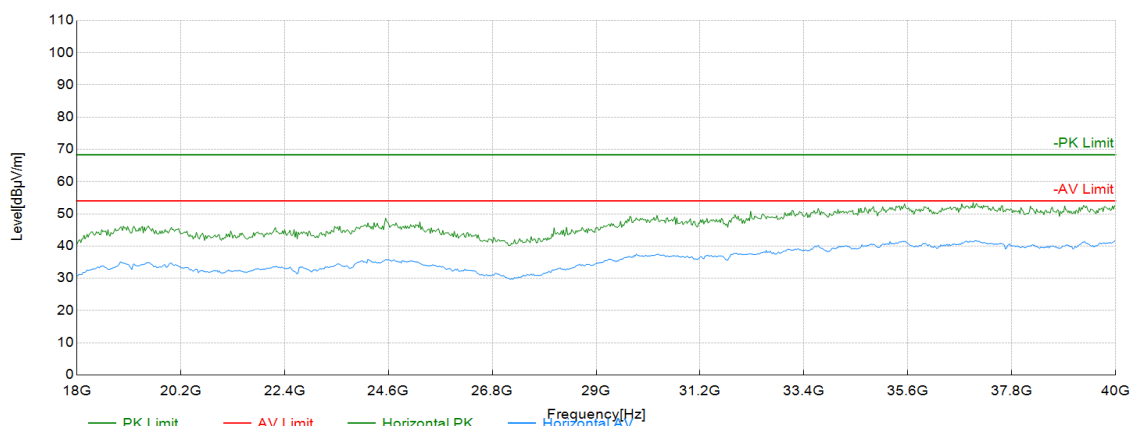


Test Mode:	802.11A 5785MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

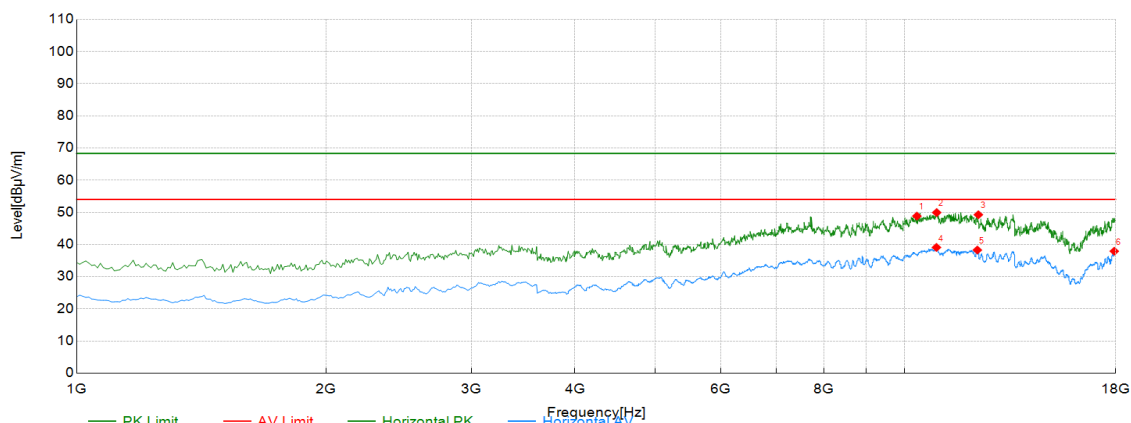

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10354.68	44.90	3.93	48.83	68.30	19.47	PK	Horizontal	PASS
2	10941.47	44.92	5.01	49.93	68.30	18.37	PK	Horizontal	PASS
3	12285.14	42.13	7.13	49.26	68.30	19.04	PK	Horizontal	PASS
4	10932.97	34.08	5.01	39.09	54.00	14.91	AV	Horizontal	PASS
5	12251.13	31.01	7.27	38.28	54.00	15.72	AV	Horizontal	PASS
6	17931.97	27.93	9.98	37.91	54.00	16.09	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11A 5785MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

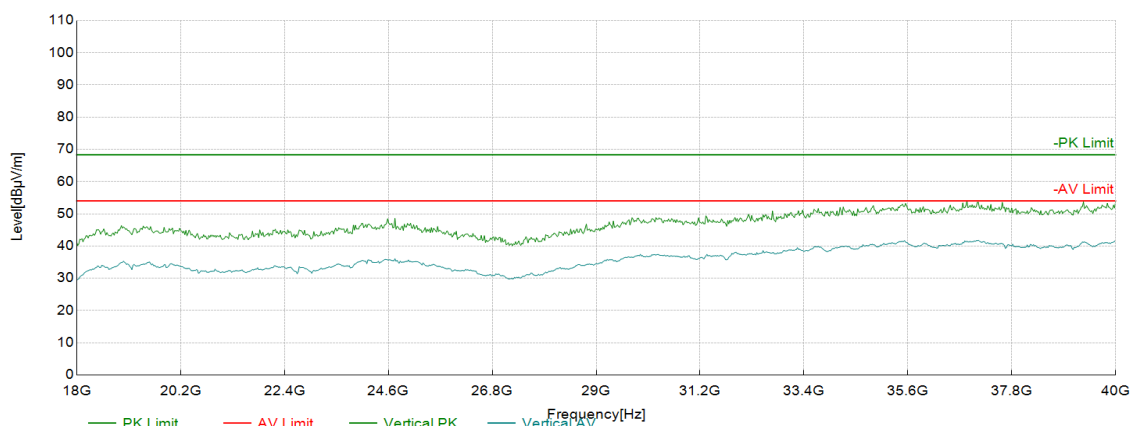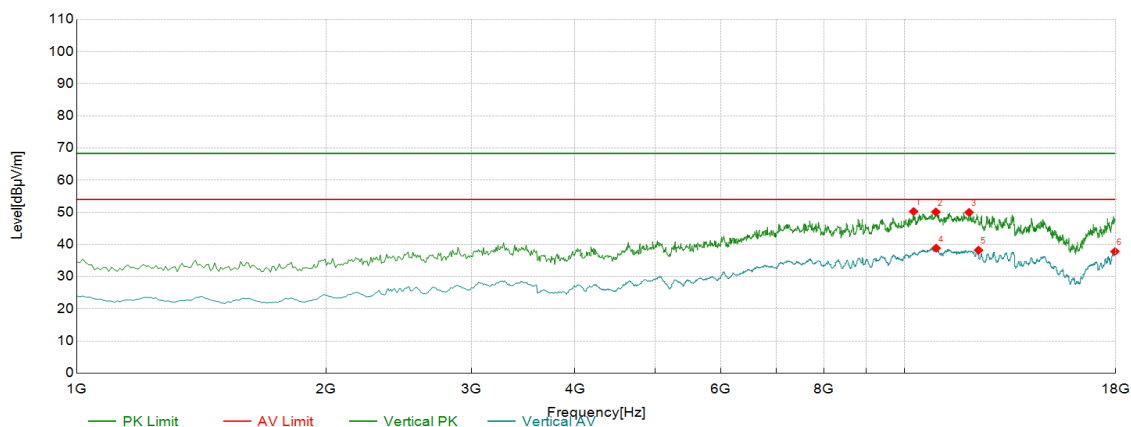

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10261.13	46.60	3.68	50.28	68.30	18.02	PK	Vertical	PASS
2	10915.96	45.11	5.03	50.14	68.30	18.16	PK	Vertical	PASS
3	11970.49	42.39	7.60	49.99	68.30	18.31	PK	Vertical	PASS
4	10924.46	33.86	5.01	38.87	54.00	15.13	AV	Vertical	PASS
5	12293.65	31.15	7.09	38.24	54.00	15.76	AV	Vertical	PASS
6	17965.98	27.57	10.25	37.82	54.00	16.18	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11A 5825MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

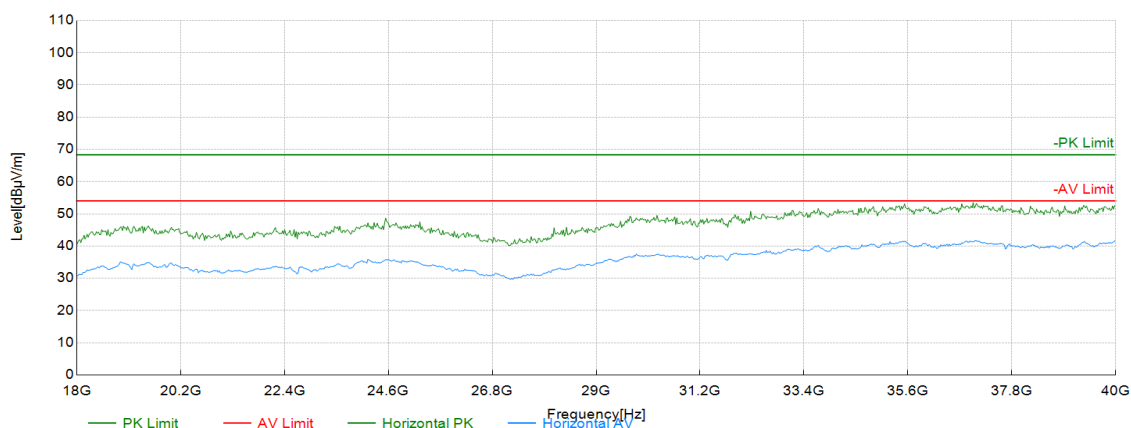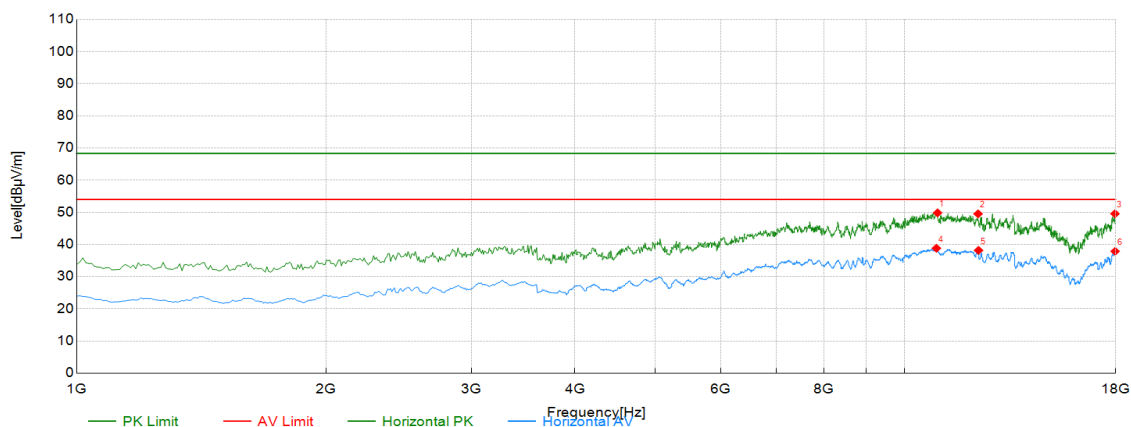

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10966.98	44.85	5.00	49.85	68.30	18.45	PK	Horizontal	PASS
2	12276.64	42.37	7.16	49.53	68.30	18.77	PK	Horizontal	PASS
3	17965.98	39.32	10.25	49.57	68.30	18.73	PK	Horizontal	PASS
4	10932.97	33.82	5.01	38.83	54.00	15.17	AV	Horizontal	PASS
5	12293.65	31.09	7.09	38.18	54.00	15.82	AV	Horizontal	PASS
6	17974.49	27.58	10.31	37.89	54.00	16.11	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11A 5825MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

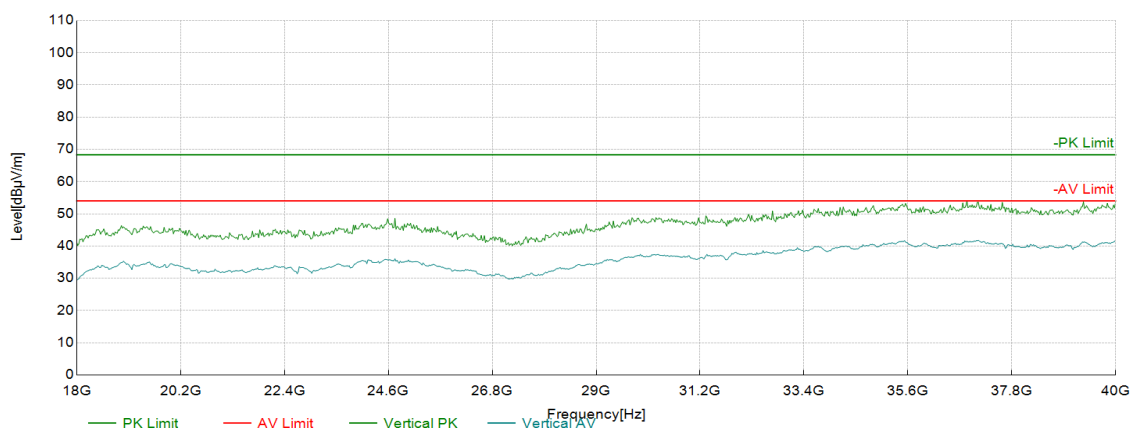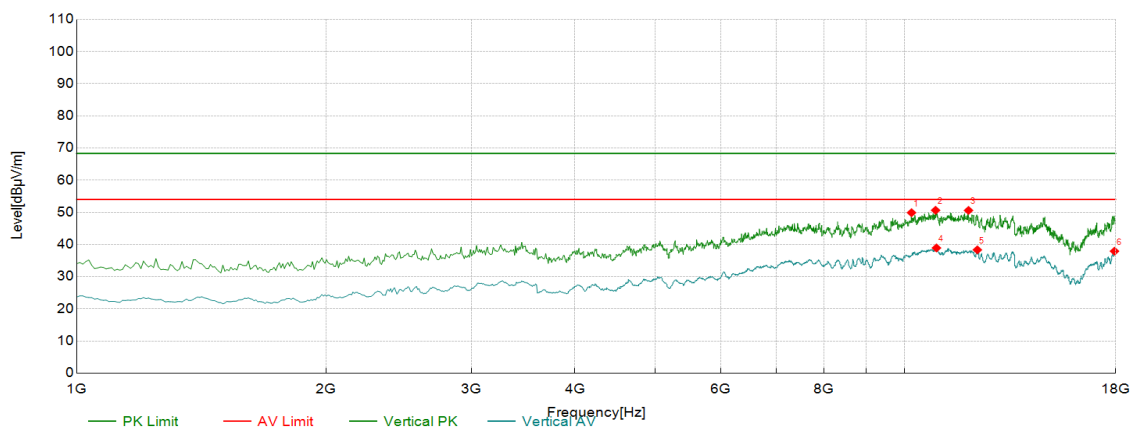

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10201.60	46.42	3.47	49.89	68.30	18.41	PK	Vertical	PASS
2	10907.45	45.60	5.04	50.64	68.30	17.66	PK	Vertical	PASS
3	11953.48	43.10	7.50	50.60	68.30	17.70	PK	Vertical	PASS
4	10932.97	33.92	5.01	38.93	54.00	15.07	AV	Vertical	PASS
5	12251.13	31.07	7.27	38.34	54.00	15.66	AV	Vertical	PASS
6	17940.47	27.87	10.05	37.92	54.00	16.08	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5180MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

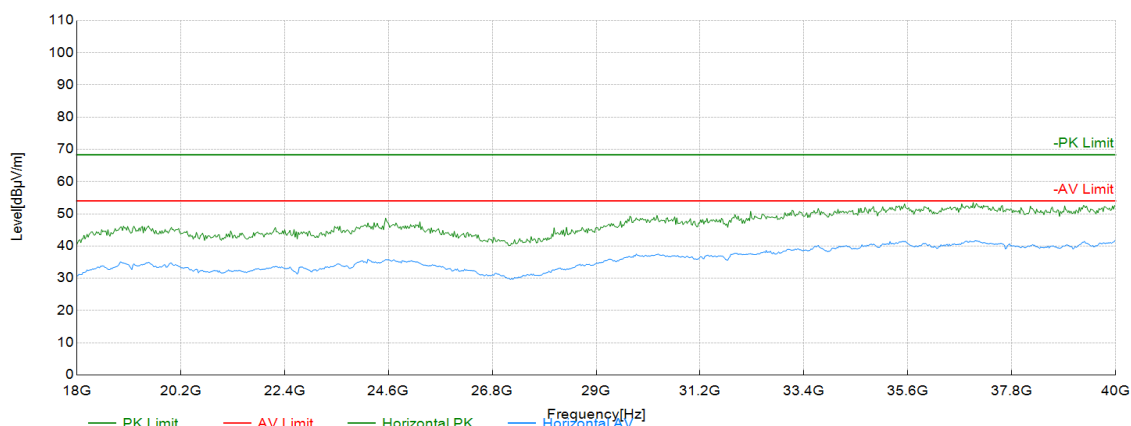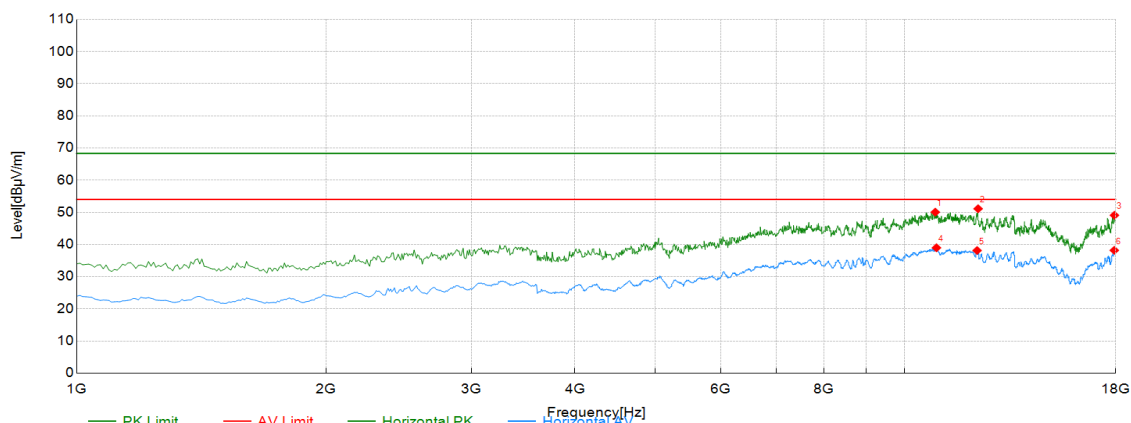

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10898.95	45.03	5.03	50.06	68.30	18.24	PK	Horizontal	PASS
2	12276.64	43.96	7.16	51.12	68.30	17.18	PK	Horizontal	PASS
3	17940.47	39.04	10.05	49.09	68.30	19.21	PK	Horizontal	PASS
4	10932.97	33.97	5.01	38.98	54.00	15.02	AV	Horizontal	PASS
5	12242.62	30.85	7.29	38.14	54.00	15.86	AV	Horizontal	PASS
6	17931.97	28.21	9.98	38.19	54.00	15.81	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5180MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

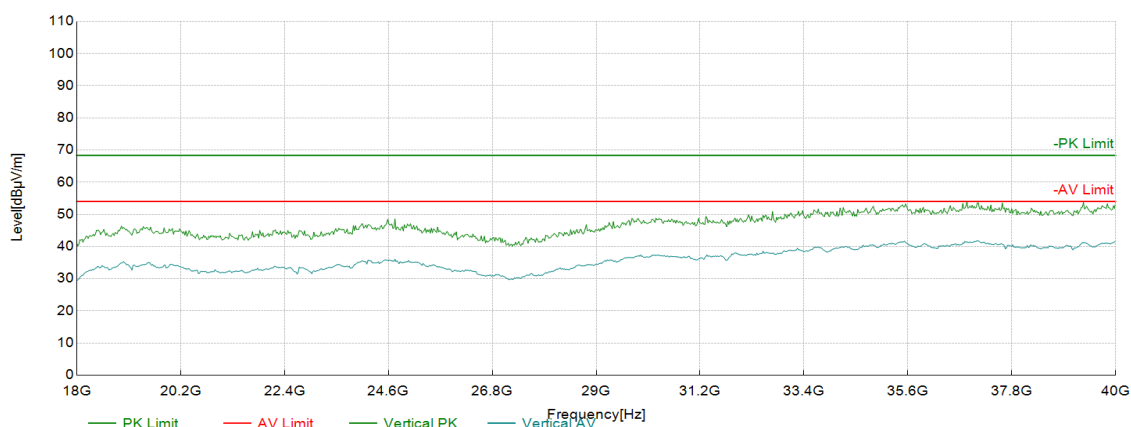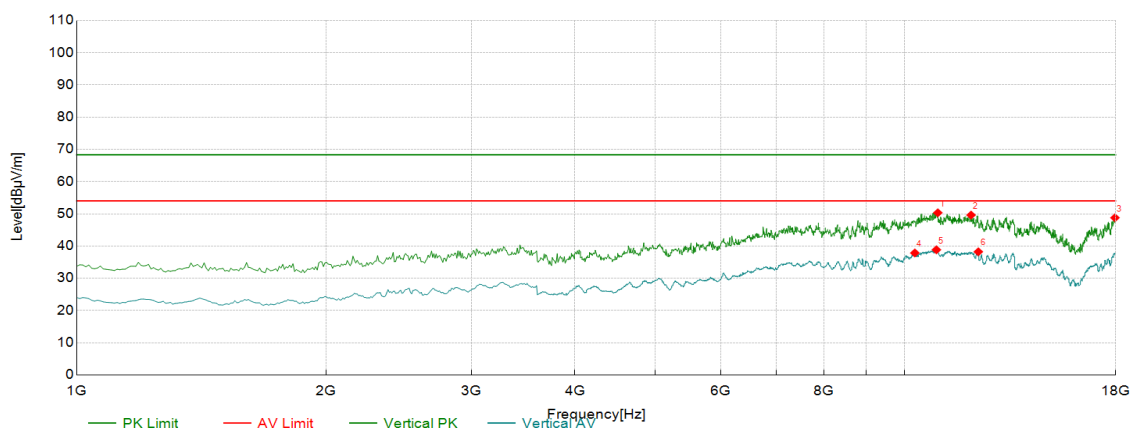

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10975.49	45.33	4.99	50.32	68.30	17.98	PK	Vertical	PASS
2	12038.52	41.92	7.69	49.61	68.30	18.69	PK	Vertical	PASS
3	17965.98	38.53	10.25	48.78	68.30	19.52	PK	Vertical	PASS
4	10295.15	34.06	3.80	37.86	54.00	16.14	AV	Vertical	PASS
5	10932.97	33.82	5.01	38.83	54.00	15.17	AV	Vertical	PASS
6	12285.14	31.09	7.13	38.22	54.00	15.78	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5200MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

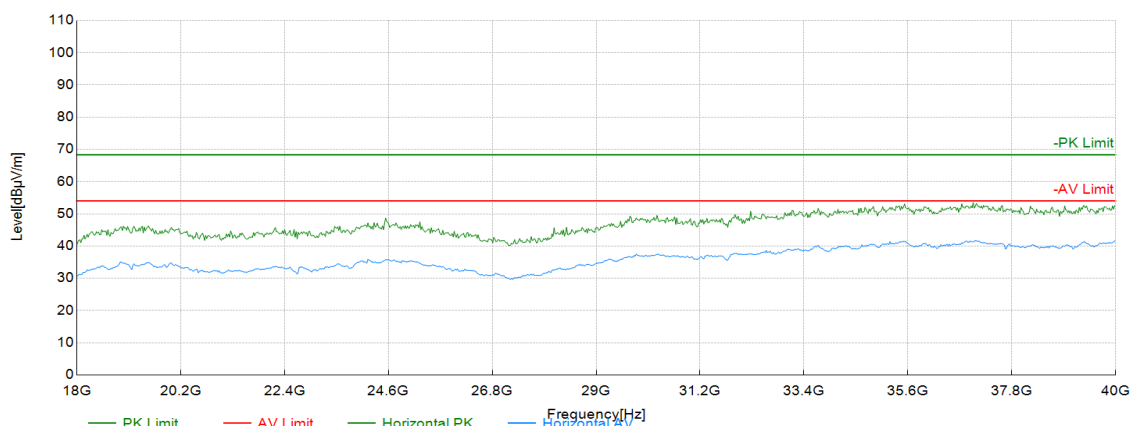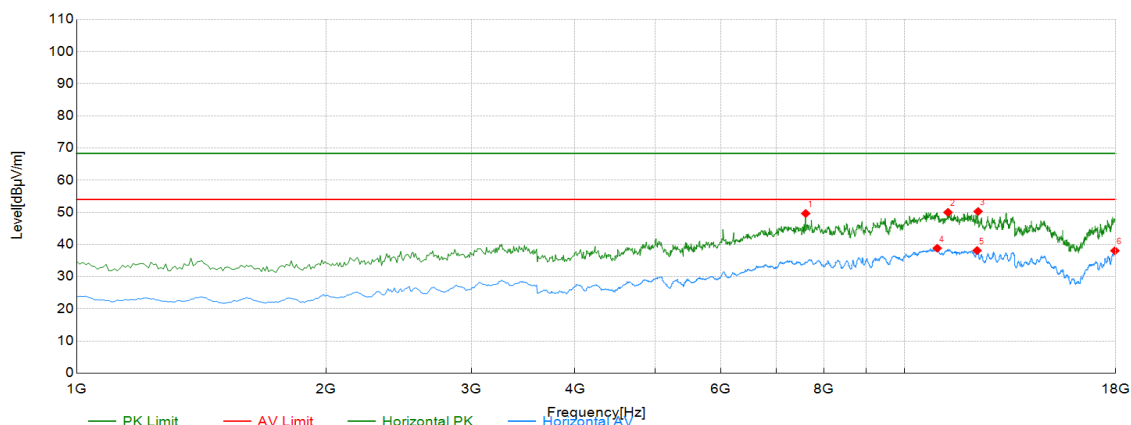

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	7599.30	52.82	-3.17	49.65	68.30	18.65	PK	Horizontal	PASS
2	11290.15	44.12	5.88	50.00	68.30	18.30	PK	Horizontal	PASS
3	12276.64	43.11	7.16	50.27	68.30	18.03	PK	Horizontal	PASS
4	10958.48	33.86	4.99	38.85	54.00	15.15	AV	Horizontal	PASS
5	12242.62	30.84	7.29	38.13	54.00	15.87	AV	Horizontal	PASS
6	17965.98	27.82	10.25	38.07	54.00	15.93	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5200MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

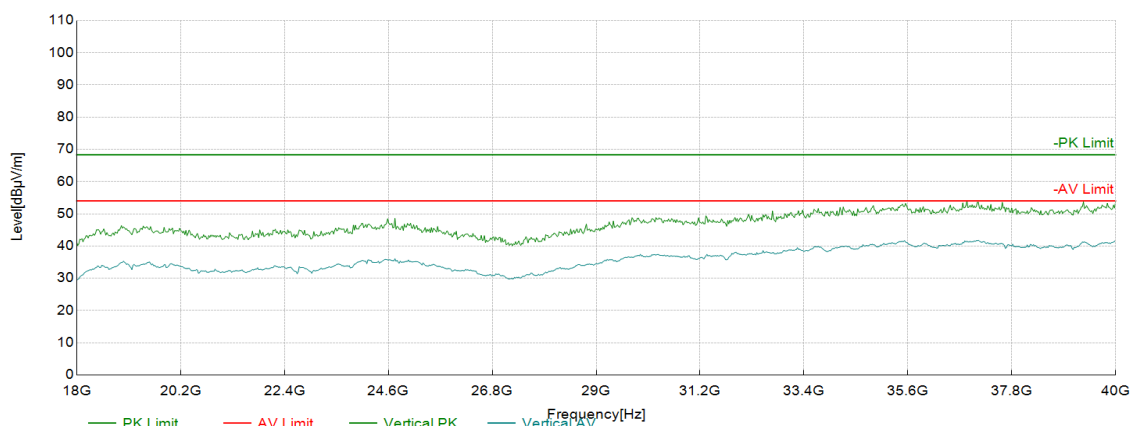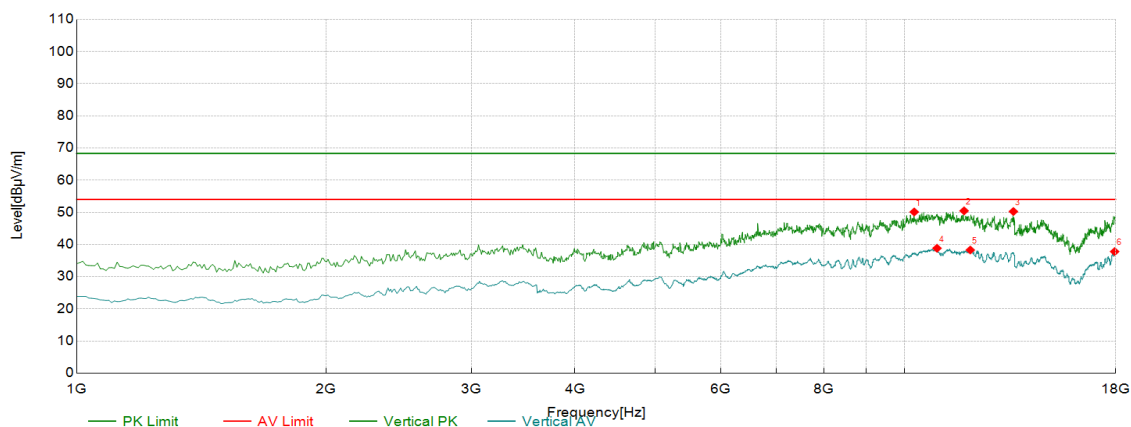

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10278.14	46.38	3.74	50.12	68.30	18.18	PK	Vertical	PASS
2	11808.90	43.54	6.93	50.47	68.30	17.83	PK	Vertical	PASS
3	13543.77	43.68	6.59	50.27	68.30	18.03	PK	Vertical	PASS
4	10949.97	33.83	5.00	38.83	54.00	15.17	AV	Vertical	PASS
5	12013.01	30.55	7.74	38.29	54.00	15.71	AV	Vertical	PASS
6	17948.97	27.69	10.11	37.80	54.00	16.20	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5240MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

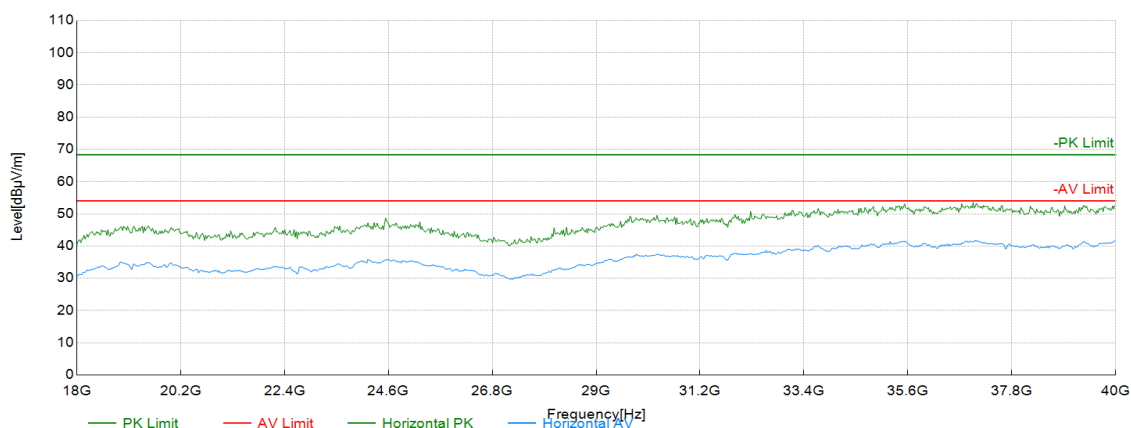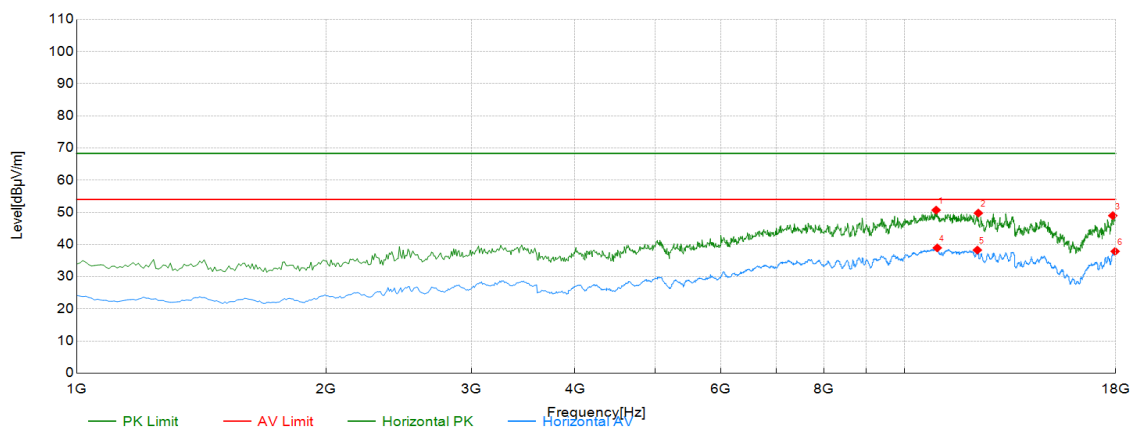

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10924.46	45.68	5.01	50.69	68.30	17.61	PK	Horizontal	PASS
2	12285.14	42.64	7.13	49.77	68.30	18.53	PK	Horizontal	PASS
3	17855.43	39.63	9.36	48.99	68.30	19.31	PK	Horizontal	PASS
4	10958.48	33.96	4.99	38.95	54.00	15.05	AV	Horizontal	PASS
5	12251.13	31.00	7.27	38.27	54.00	15.73	AV	Horizontal	PASS
6	17974.49	27.55	10.31	37.86	54.00	16.14	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5240MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

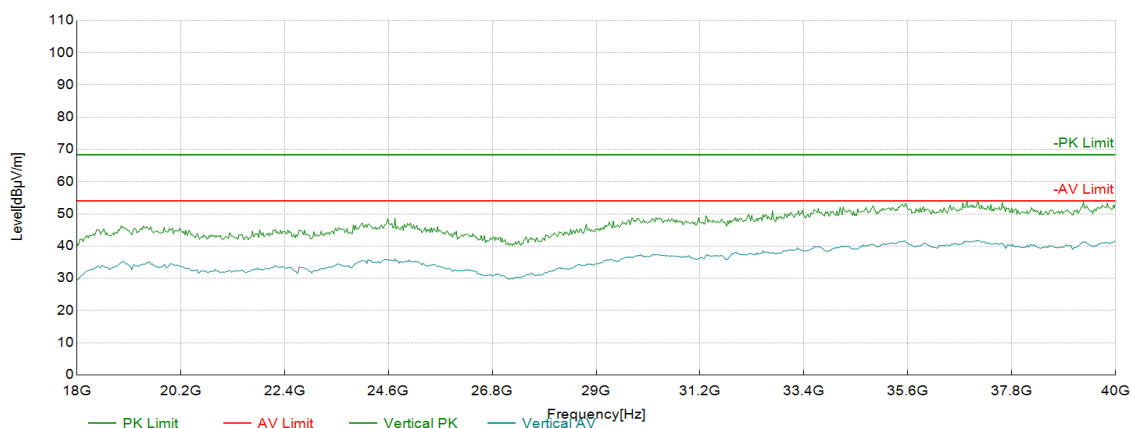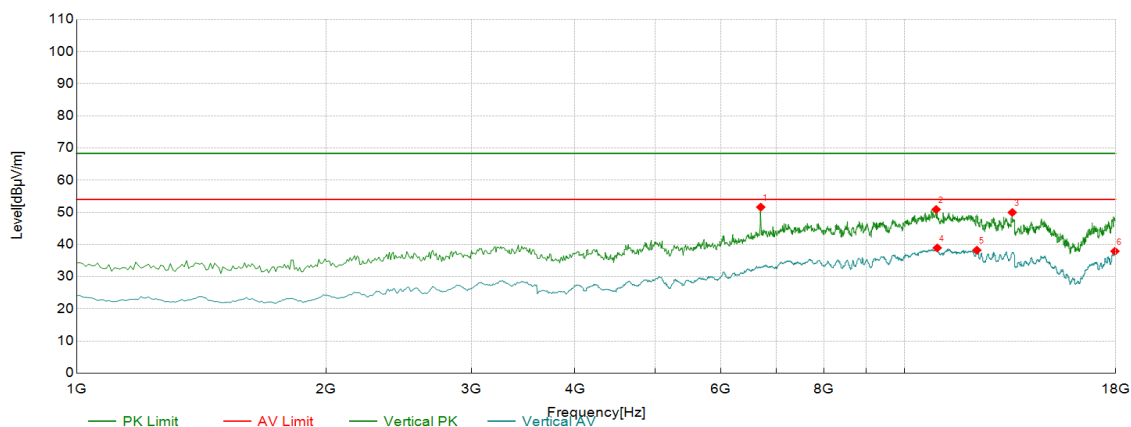

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	6706.35	56.25	-4.64	51.61	68.30	16.69	PK	Vertical	PASS
2	10924.46	45.89	5.01	50.90	68.30	17.40	PK	Vertical	PASS
3	13501.25	43.31	6.66	49.97	68.30	18.33	PK	Vertical	PASS
4	10958.48	33.96	4.99	38.95	54.00	15.05	AV	Vertical	PASS
5	12234.12	30.90	7.33	38.23	54.00	15.77	AV	Vertical	PASS
6	17965.98	27.66	10.25	37.91	54.00	16.09	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5260MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

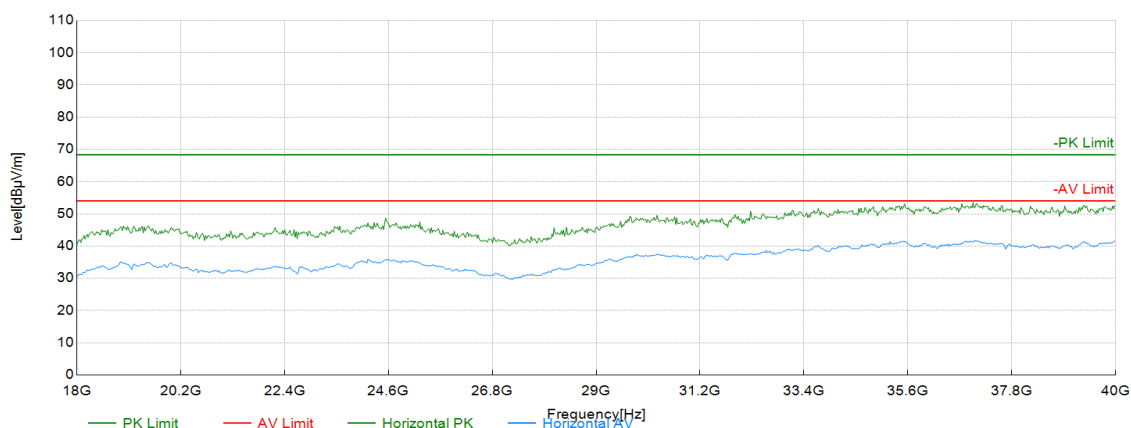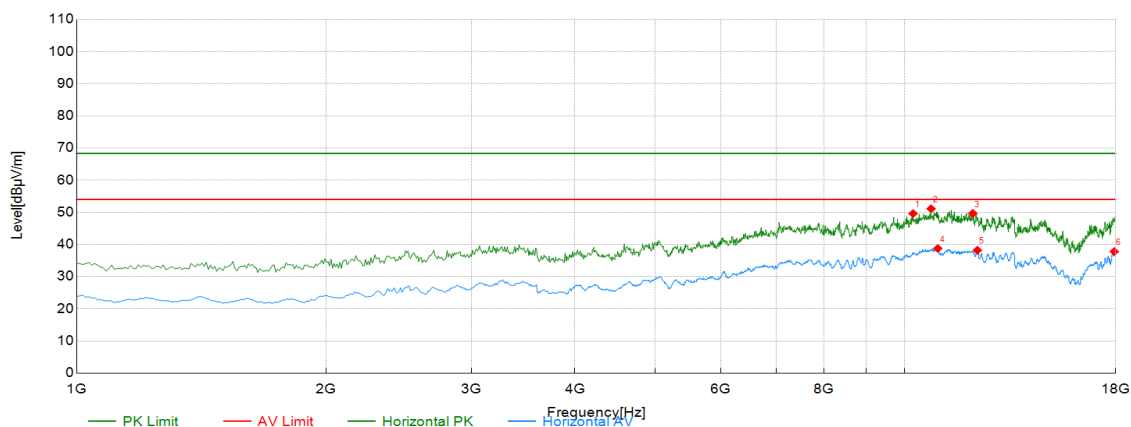

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10244.12	45.99	3.62	49.61	68.30	18.69	PK	Horizontal	PASS
2	10771.39	46.22	4.90	51.12	68.30	17.18	PK	Horizontal	PASS
3	12098.05	42.10	7.57	49.67	68.30	18.63	PK	Horizontal	PASS
4	10975.49	33.79	4.99	38.78	54.00	15.22	AV	Horizontal	PASS
5	12251.13	30.95	7.27	38.22	54.00	15.78	AV	Horizontal	PASS
6	17931.97	27.82	9.98	37.80	54.00	16.20	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5260MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

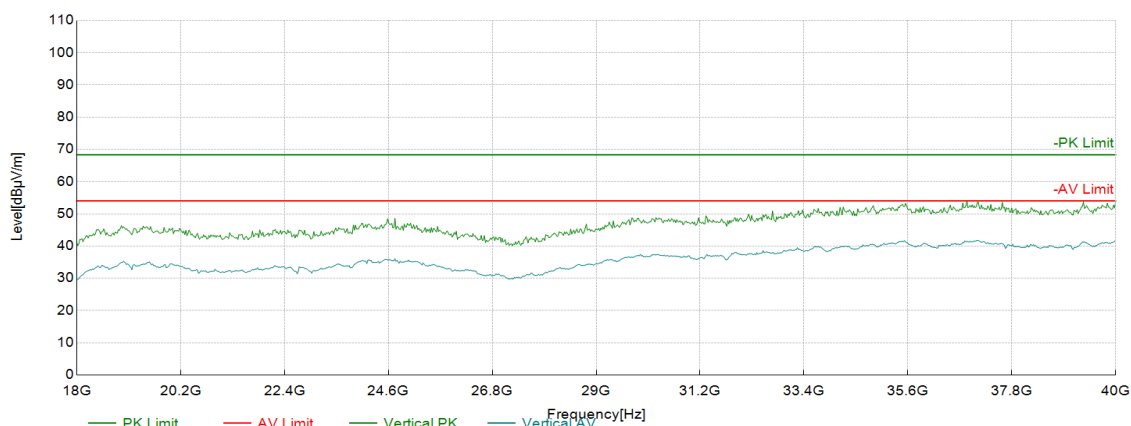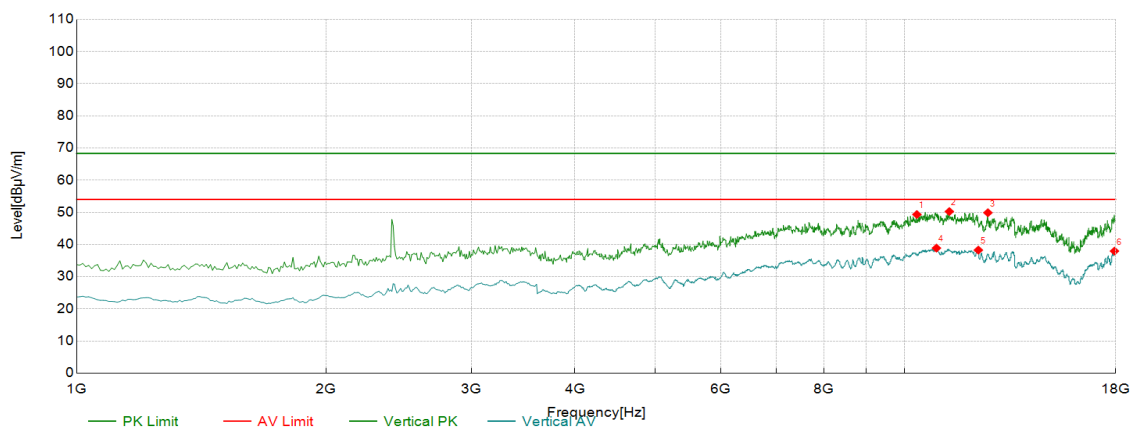

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10354.68	45.40	3.93	49.33	68.30	18.97	PK	Vertical	PASS
2	11332.67	44.25	6.01	50.26	68.30	18.04	PK	Vertical	PASS
3	12616.81	43.03	6.85	49.88	68.30	18.42	PK	Vertical	PASS
4	10932.97	33.87	5.01	38.88	54.00	15.12	AV	Vertical	PASS
5	12285.14	31.14	7.13	38.27	54.00	15.73	AV	Vertical	PASS
6	17940.47	27.90	10.05	37.95	54.00	16.05	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5280MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

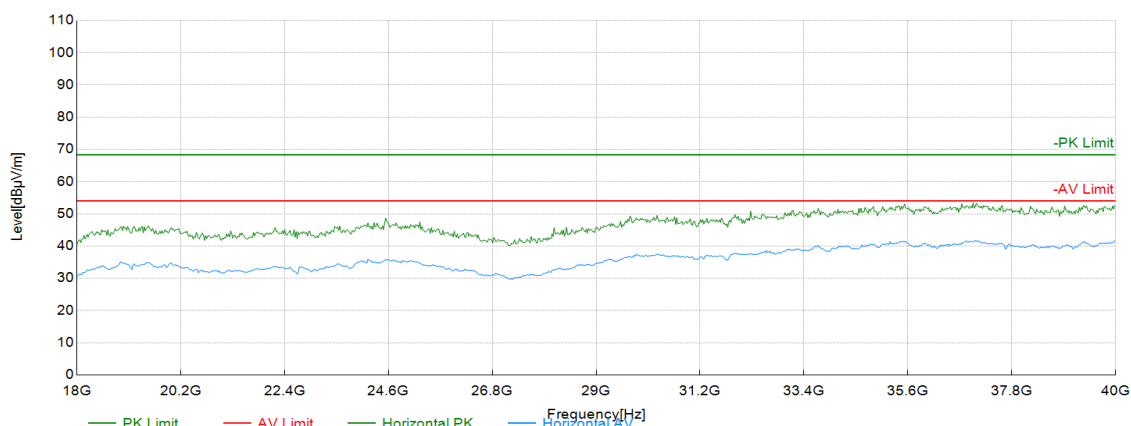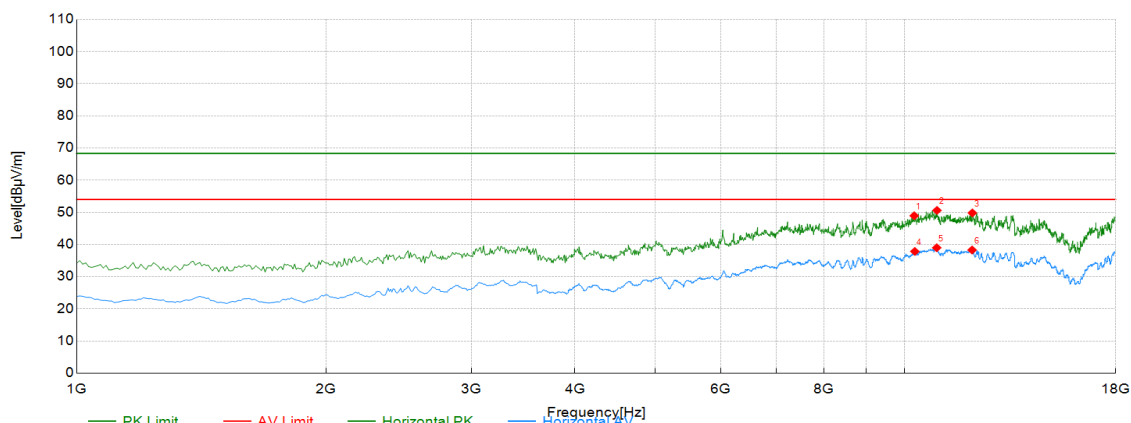

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10278.14	45.20	3.74	48.94	68.30	19.36	PK	Horizontal	PASS
2	10949.97	45.61	5.00	50.61	68.30	17.69	PK	Horizontal	PASS
3	12081.04	42.21	7.61	49.82	68.30	18.48	PK	Horizontal	PASS
4	10295.15	34.04	3.80	37.84	54.00	16.16	AV	Horizontal	PASS
5	10941.47	33.98	5.01	38.99	54.00	15.01	AV	Horizontal	PASS
6	12072.54	30.67	7.62	38.29	54.00	15.71	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5280MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

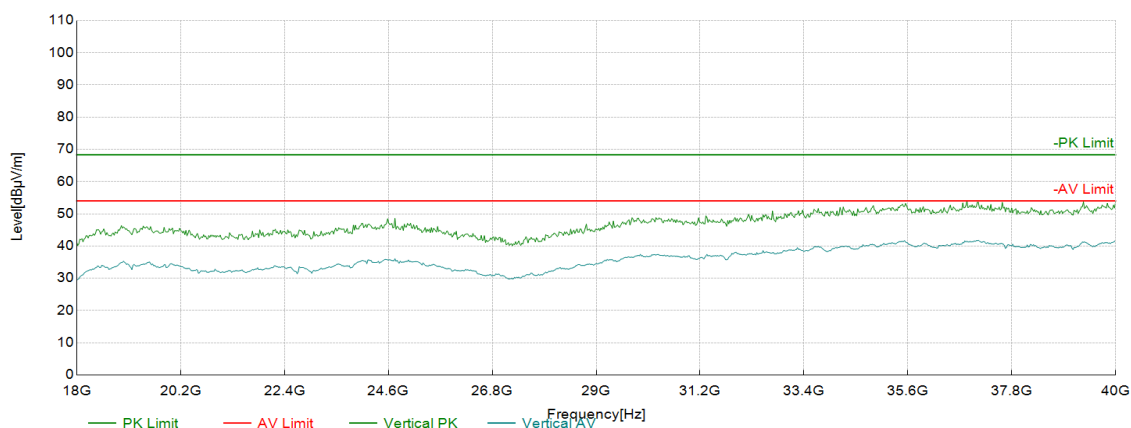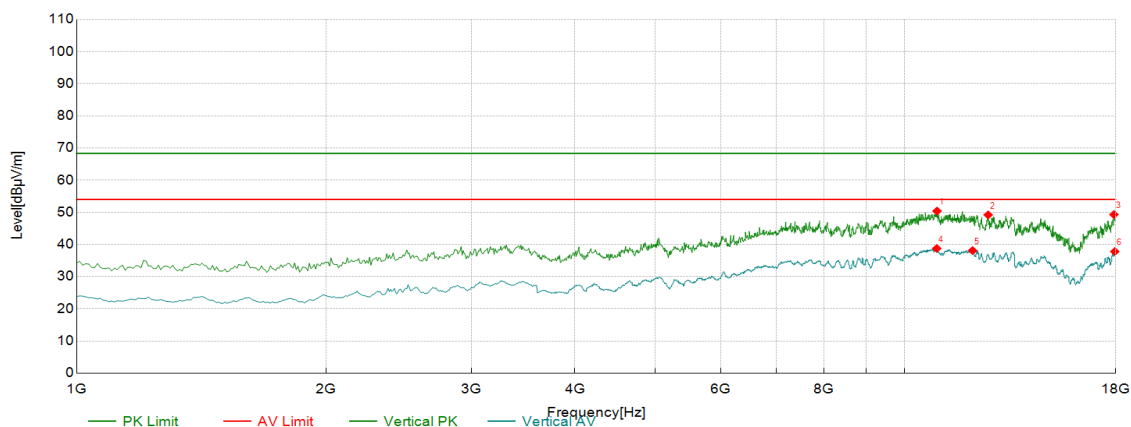

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10949.97	45.40	5.00	50.40	68.30	17.90	PK	Vertical	PASS
2	12625.31	42.38	6.84	49.22	68.30	19.08	PK	Vertical	PASS
3	17914.96	39.46	9.86	49.32	68.30	18.98	PK	Vertical	PASS
4	10941.47	33.75	5.01	38.76	54.00	15.24	AV	Vertical	PASS
5	12089.54	30.53	7.59	38.12	54.00	15.88	AV	Vertical	PASS
6	17957.48	27.63	10.18	37.81	54.00	16.19	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5320MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

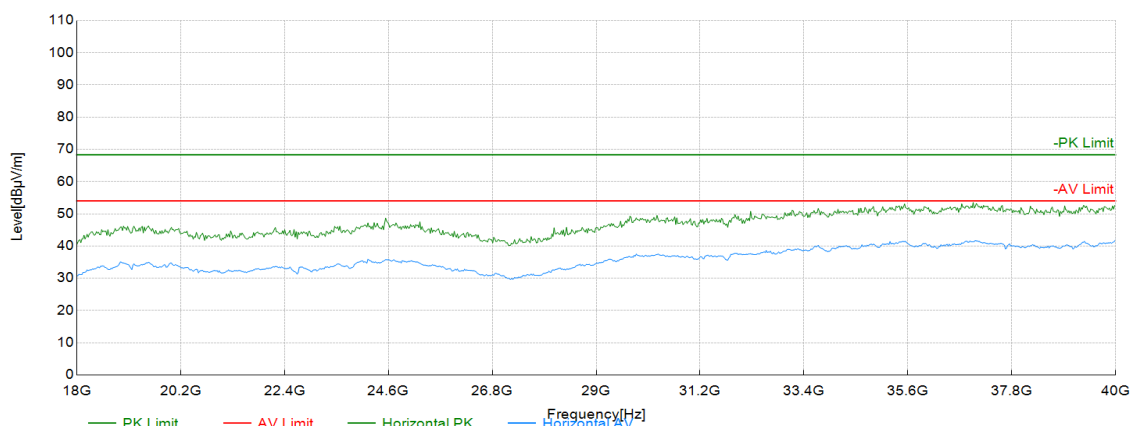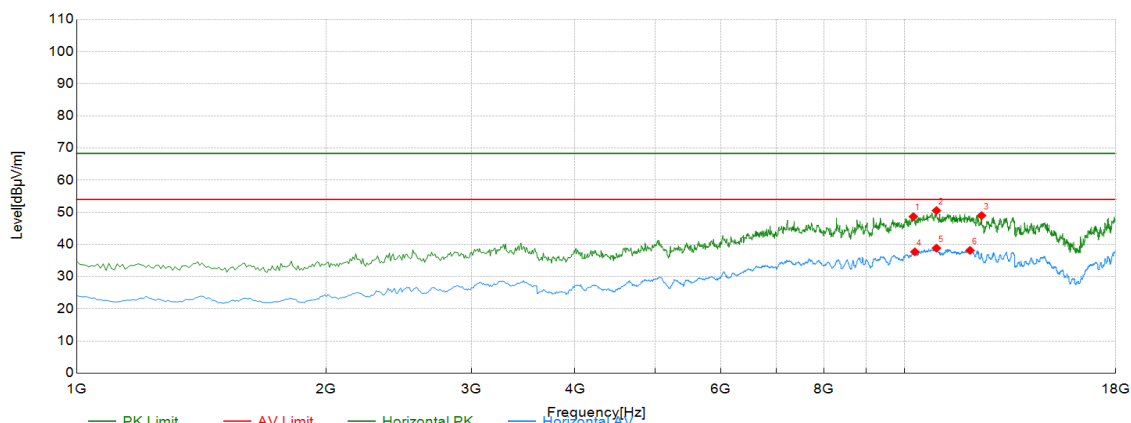

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10252.63	45.02	3.65	48.67	68.30	19.63	PK	Horizontal	PASS
2	10932.97	45.55	5.01	50.56	68.30	17.74	PK	Horizontal	PASS
3	12395.70	41.94	7.06	49.00	68.30	19.30	PK	Horizontal	PASS
4	10295.15	33.92	3.80	37.72	54.00	16.28	AV	Horizontal	PASS
5	10932.97	33.86	5.01	38.87	54.00	15.13	AV	Horizontal	PASS
6	12004.50	30.41	7.76	38.17	54.00	15.83	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5320MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

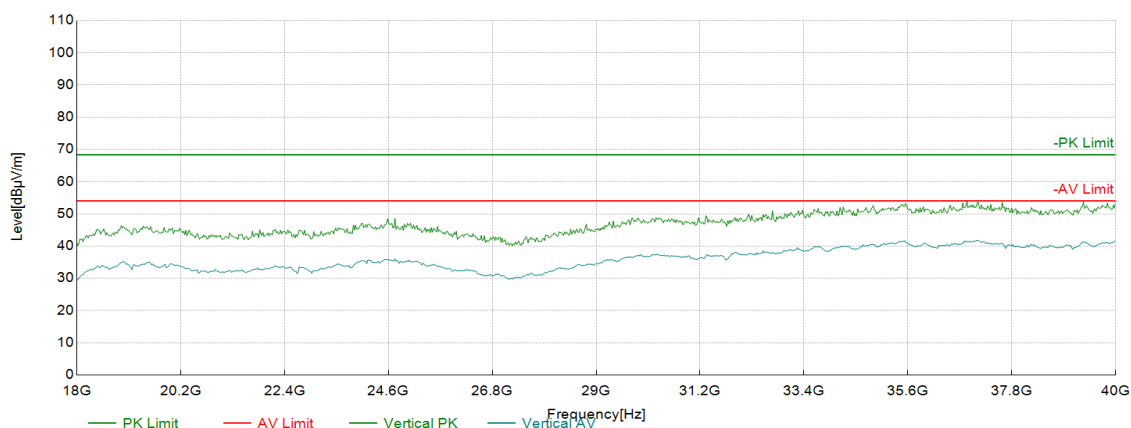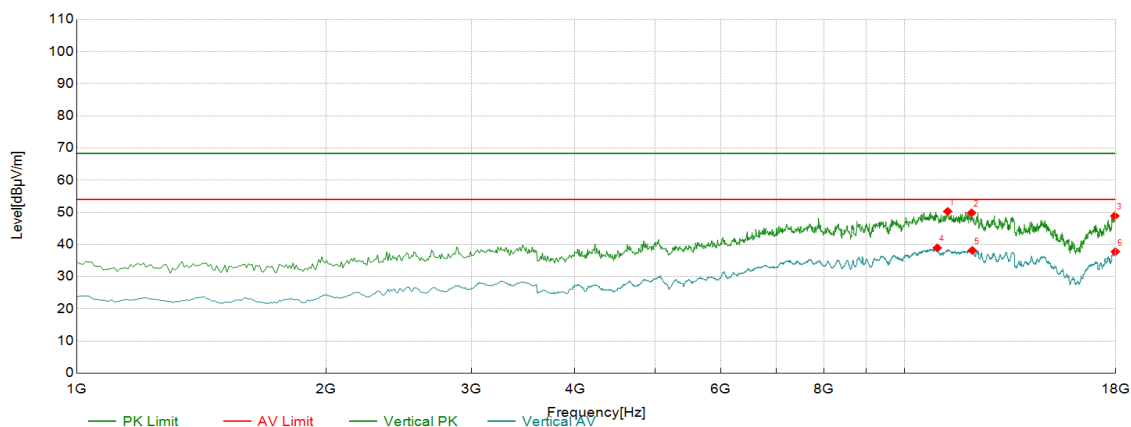

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11281.64	44.44	5.84	50.28	68.30	18.02	PK	Vertical	PASS
2	12055.53	42.18	7.66	49.84	68.30	18.46	PK	Vertical	PASS
3	17957.48	38.70	10.18	48.88	68.30	19.42	PK	Vertical	PASS
4	10958.48	33.95	4.99	38.94	54.00	15.06	AV	Vertical	PASS
5	12081.04	30.55	7.61	38.16	54.00	15.84	AV	Vertical	PASS
6	17982.99	27.39	10.37	37.76	54.00	16.24	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5500MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

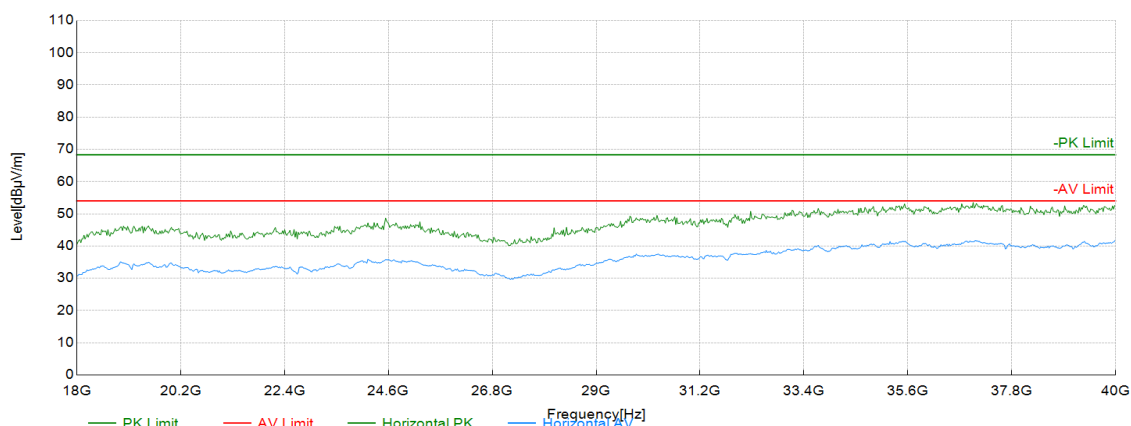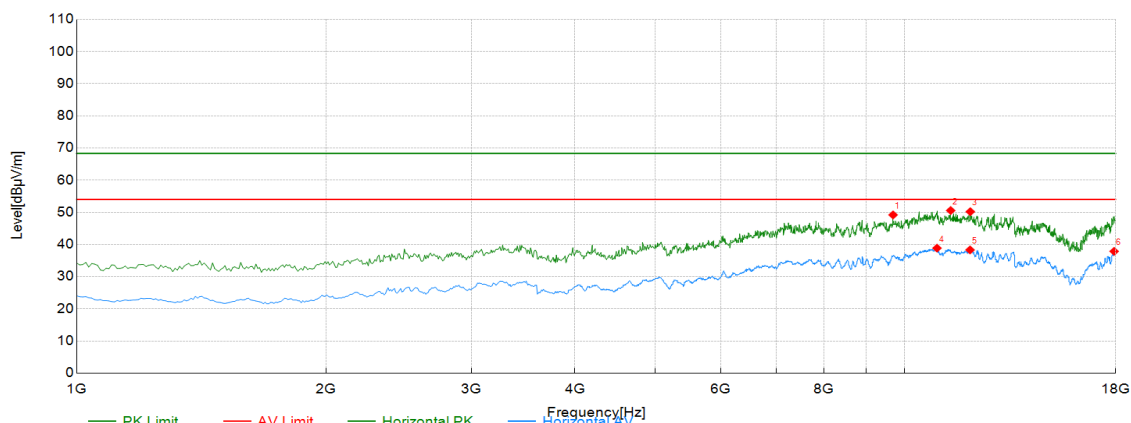

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9691.35	47.36	1.84	49.20	68.30	19.10	PK	Horizontal	PASS
2	11375.19	44.45	6.12	50.57	68.30	17.73	PK	Horizontal	PASS
3	12013.01	42.47	7.74	50.21	68.30	18.09	PK	Horizontal	PASS
4	10949.97	33.87	5.00	38.87	54.00	15.13	AV	Horizontal	PASS
5	12004.50	30.56	7.76	38.32	54.00	15.68	AV	Horizontal	PASS
6	17923.46	27.95	9.92	37.87	54.00	16.13	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5500MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

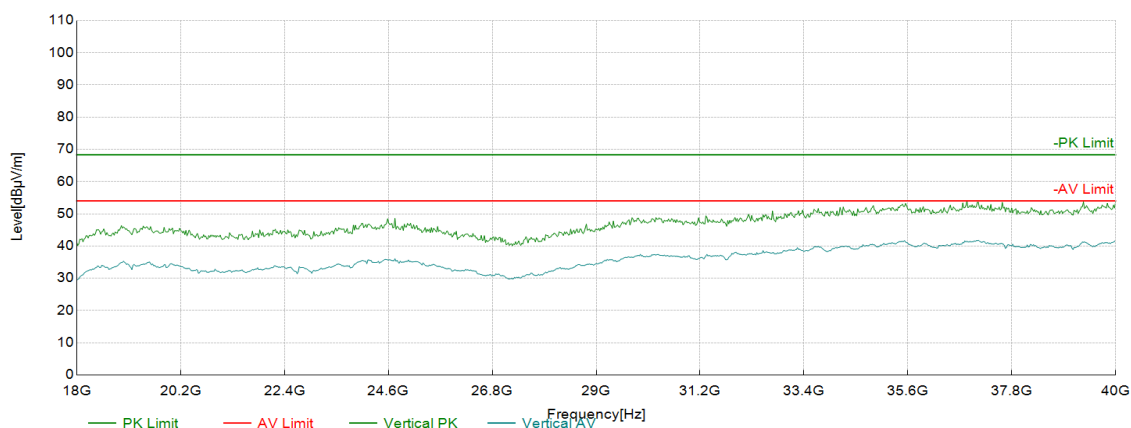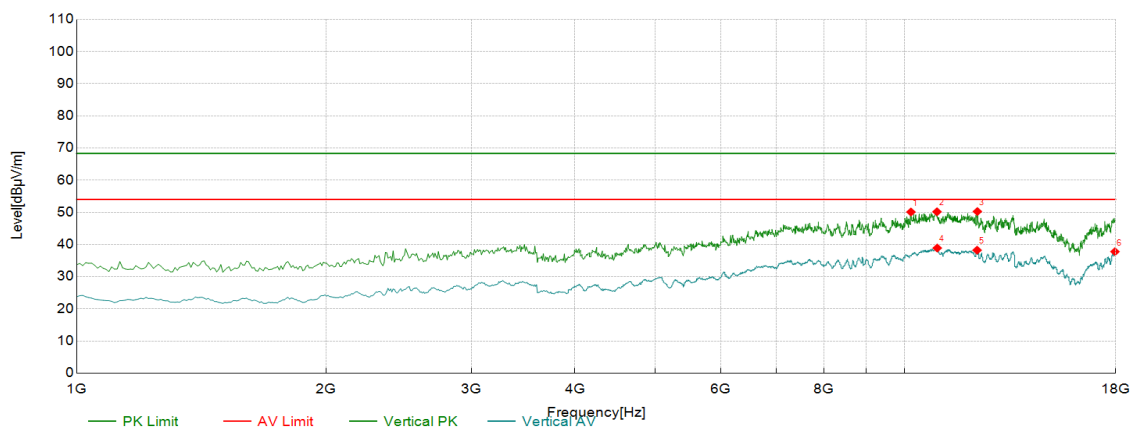

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10184.59	46.66	3.45	50.11	68.30	18.19	PK	Vertical	PASS
2	10949.97	45.18	5.00	50.18	68.30	18.12	PK	Vertical	PASS
3	12251.13	42.99	7.27	50.26	68.30	18.04	PK	Vertical	PASS
4	10958.48	33.91	4.99	38.90	54.00	15.10	AV	Vertical	PASS
5	12242.62	30.94	7.29	38.23	54.00	15.77	AV	Vertical	PASS
6	17965.98	27.52	10.25	37.77	54.00	16.23	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5580MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

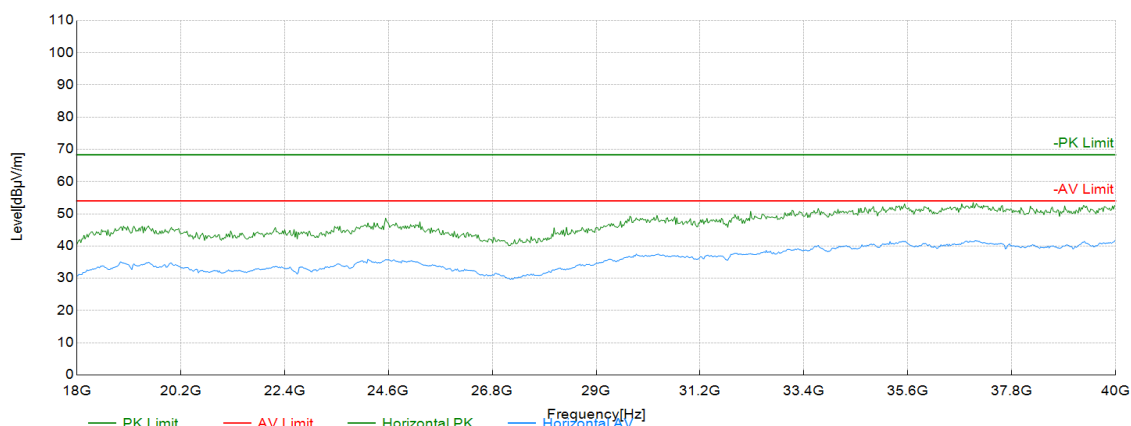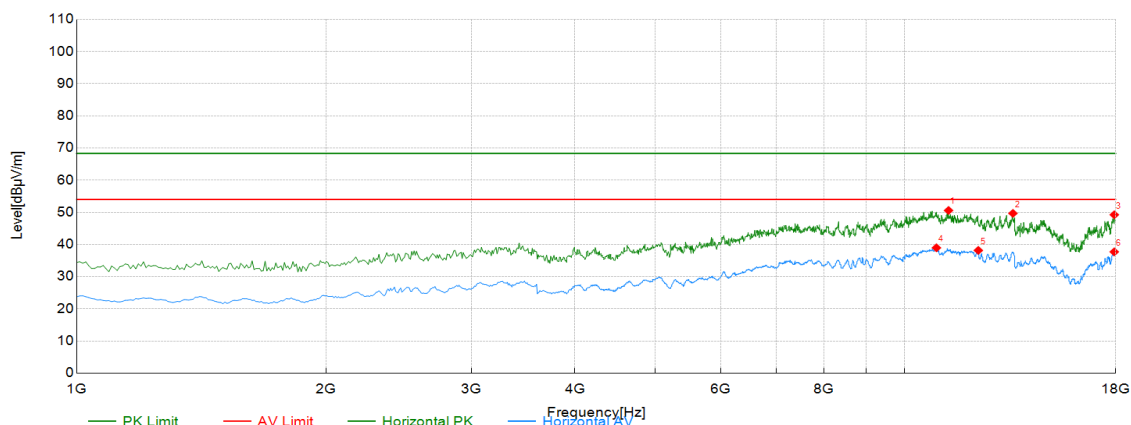

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11307.15	44.66	5.93	50.59	68.30	17.71	PK	Horizontal	PASS
2	13526.76	43.08	6.61	49.69	68.30	18.61	PK	Horizontal	PASS
3	17931.97	39.26	9.98	49.24	68.30	19.06	PK	Horizontal	PASS
4	10932.97	33.96	5.01	38.97	54.00	15.03	AV	Horizontal	PASS
5	12285.14	31.04	7.13	38.17	54.00	15.83	AV	Horizontal	PASS
6	17931.97	27.73	9.98	37.71	54.00	16.29	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5580MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

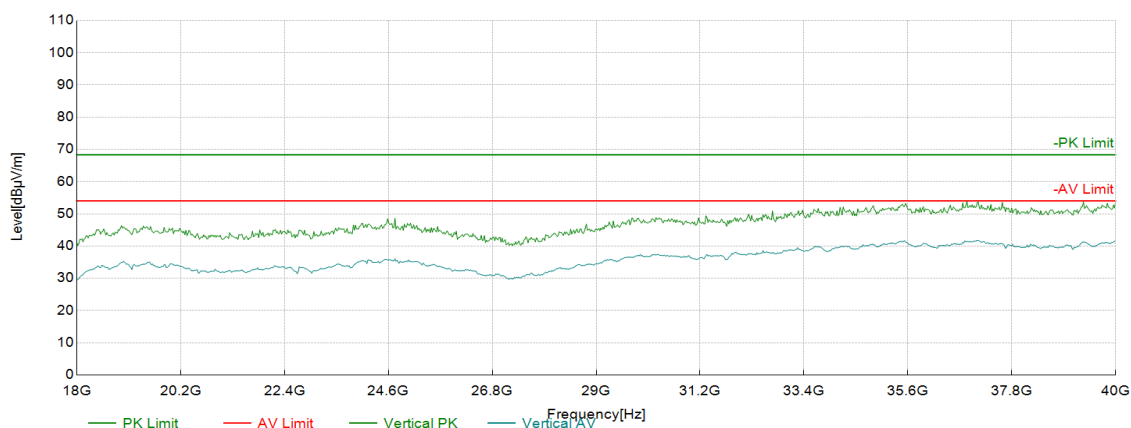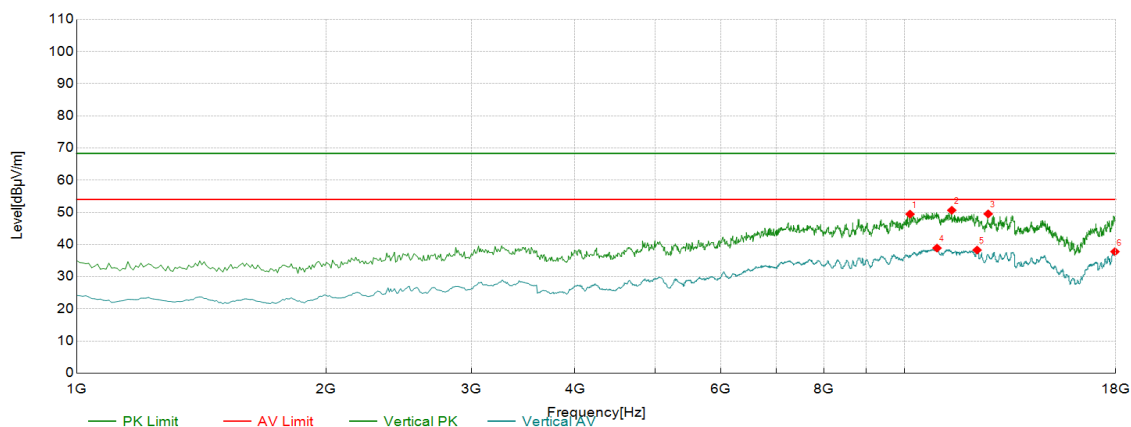

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10159.08	46.02	3.42	49.44	68.30	18.86	PK	Vertical	PASS
2	11409.20	44.43	6.21	50.64	68.30	17.66	PK	Vertical	PASS
3	12625.31	42.68	6.84	49.52	68.30	18.78	PK	Vertical	PASS
4	10949.97	33.88	5.00	38.88	54.00	15.12	AV	Vertical	PASS
5	12242.62	30.99	7.29	38.28	54.00	15.72	AV	Vertical	PASS
6	17965.98	27.52	10.25	37.77	54.00	16.23	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5700MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

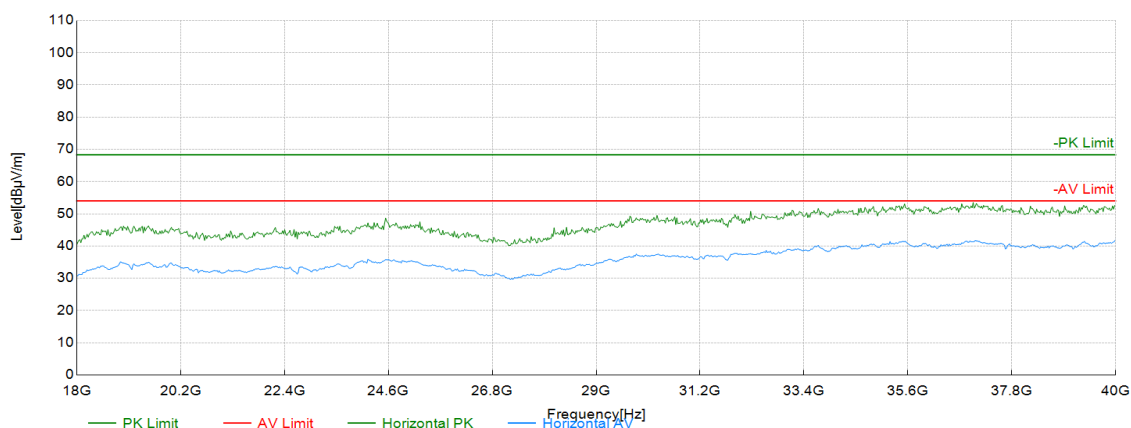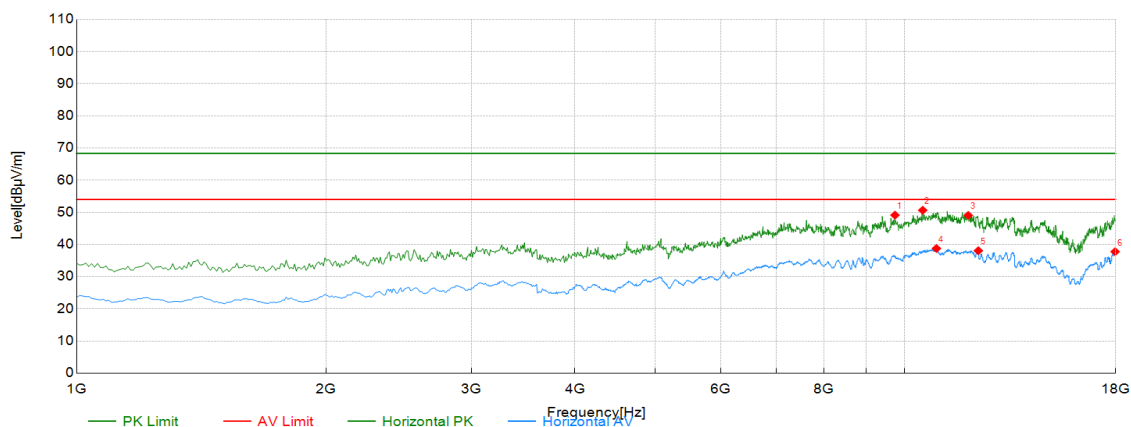

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9742.37	47.12	2.01	49.13	68.30	19.17	PK	Horizontal	PASS
2	10524.76	46.39	4.26	50.65	68.30	17.65	PK	Horizontal	PASS
3	11944.97	41.62	7.44	49.06	68.30	19.24	PK	Horizontal	PASS
4	10932.97	33.75	5.01	38.76	54.00	15.24	AV	Horizontal	PASS
5	12285.14	30.94	7.13	38.07	54.00	15.93	AV	Horizontal	PASS
6	17974.49	27.46	10.31	37.77	54.00	16.23	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5700MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

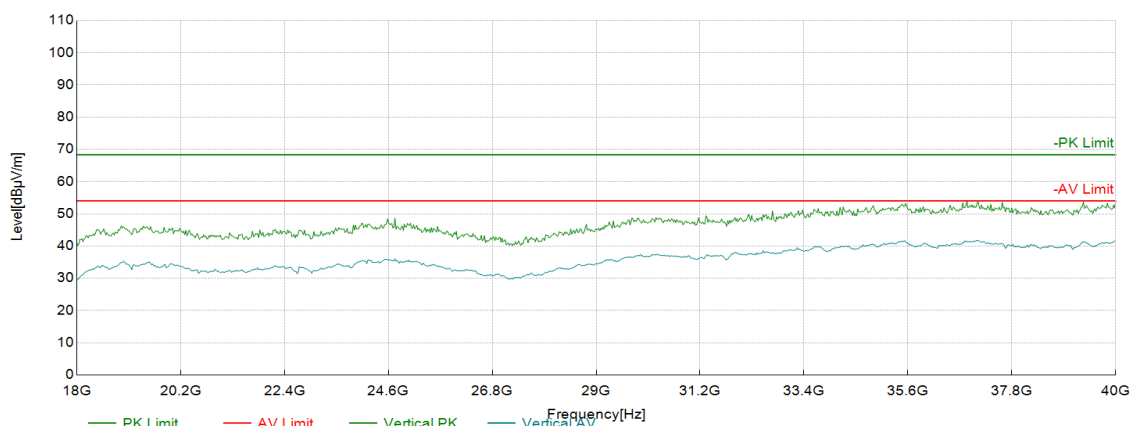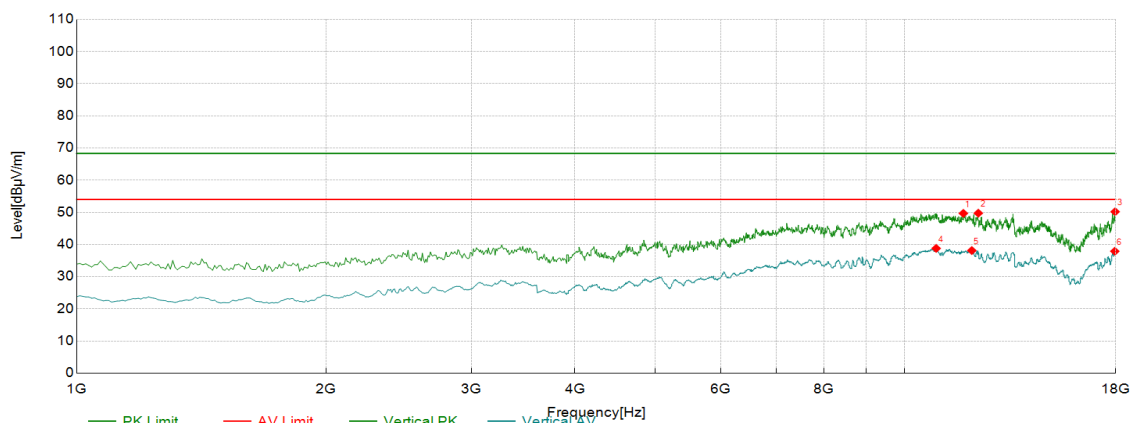

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11783.39	42.83	6.86	49.69	68.30	18.61	PK	Vertical	PASS
2	12285.14	42.61	7.13	49.74	68.30	18.56	PK	Vertical	PASS
3	17974.49	39.88	10.31	50.19	68.30	18.11	PK	Vertical	PASS
4	10924.46	33.78	5.01	38.79	54.00	15.21	AV	Vertical	PASS
5	12064.03	30.49	7.64	38.13	54.00	15.87	AV	Vertical	PASS
6	17957.48	27.72	10.18	37.90	54.00	16.10	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5745MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

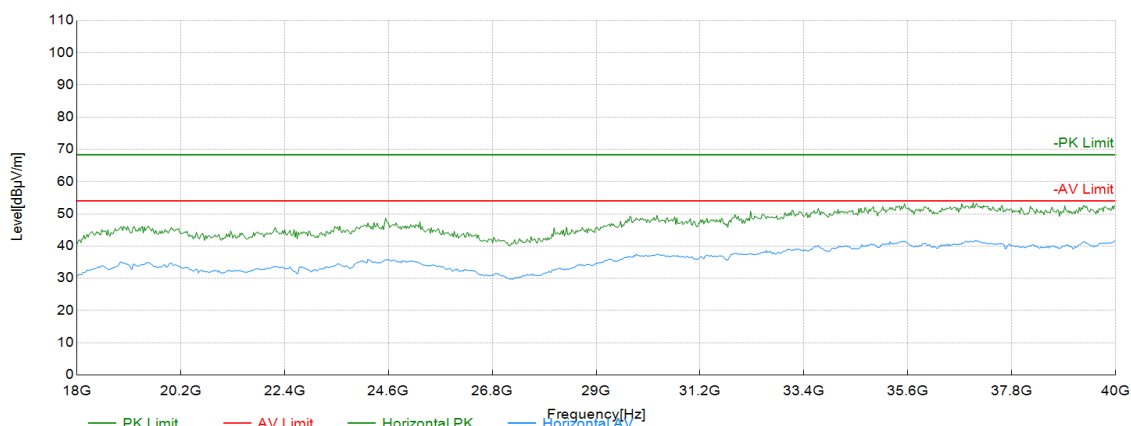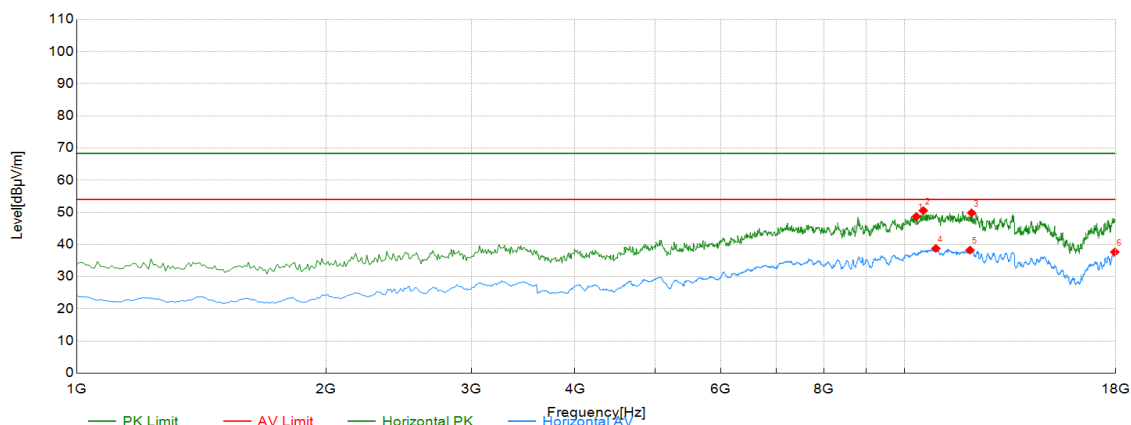

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10337.67	44.81	3.90	48.71	68.30	19.59	PK	Horizontal	PASS
2	10541.77	46.23	4.32	50.55	68.30	17.75	PK	Horizontal	PASS
3	12055.53	42.18	7.66	49.84	68.30	18.46	PK	Horizontal	PASS
4	10915.96	33.75	5.03	38.78	54.00	15.22	AV	Horizontal	PASS
5	12004.50	30.49	7.76	38.25	54.00	15.75	AV	Horizontal	PASS
6	17957.48	27.49	10.18	37.67	54.00	16.33	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5745MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

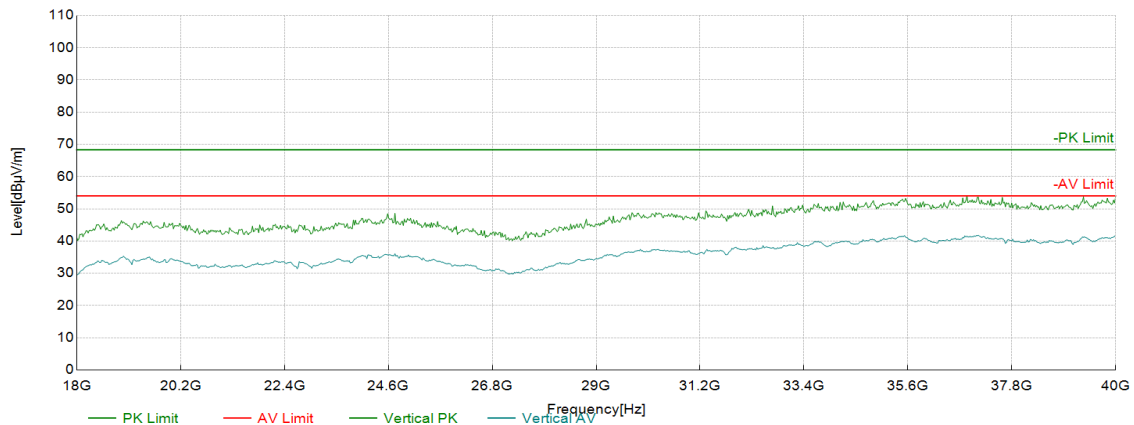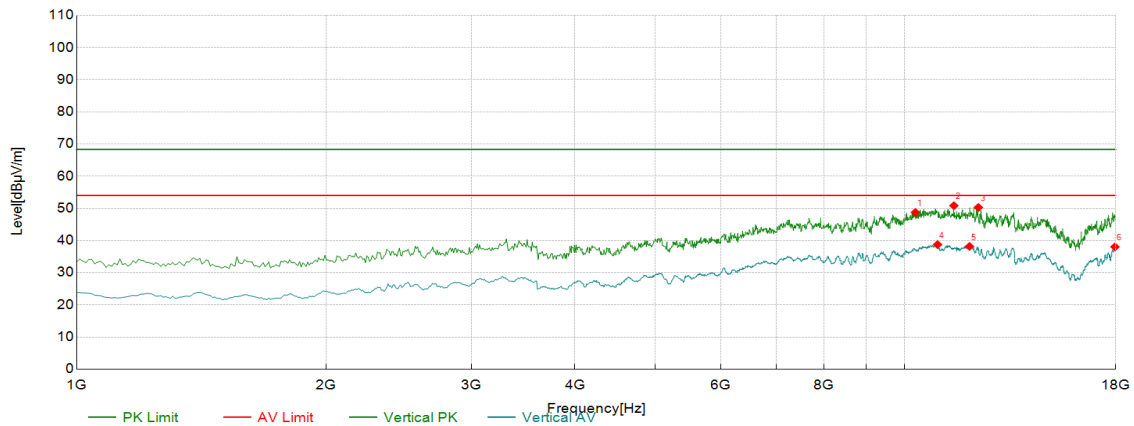

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10312.16	44.89	3.84	48.73	68.30	19.57	PK	Vertical	PASS
2	11477.24	44.42	6.41	50.83	68.30	17.47	PK	Vertical	PASS
3	12285.14	43.14	7.13	50.27	68.30	18.03	PK	Vertical	PASS
4	10966.98	33.73	5.00	38.73	54.00	15.27	AV	Vertical	PASS
5	11987.49	30.47	7.69	38.16	54.00	15.84	AV	Vertical	PASS
6	17965.98	27.77	10.25	38.02	54.00	15.98	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5785MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

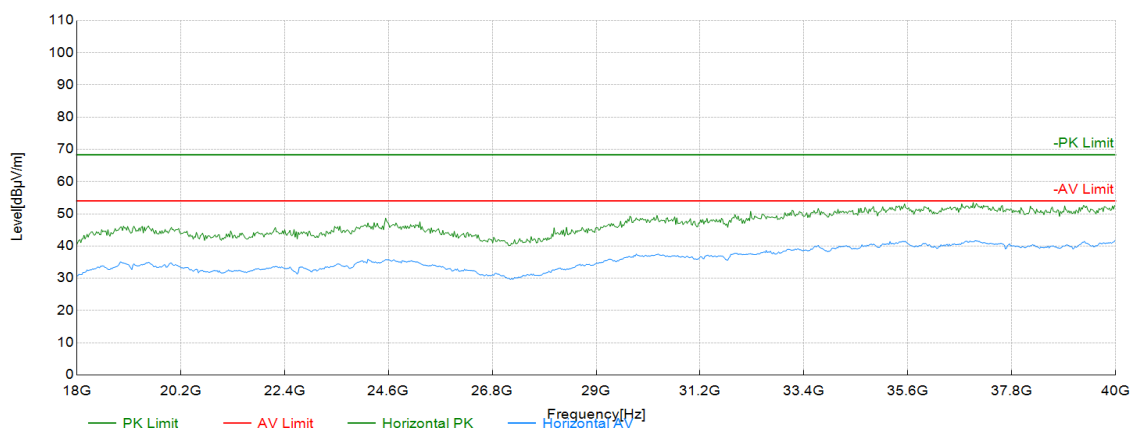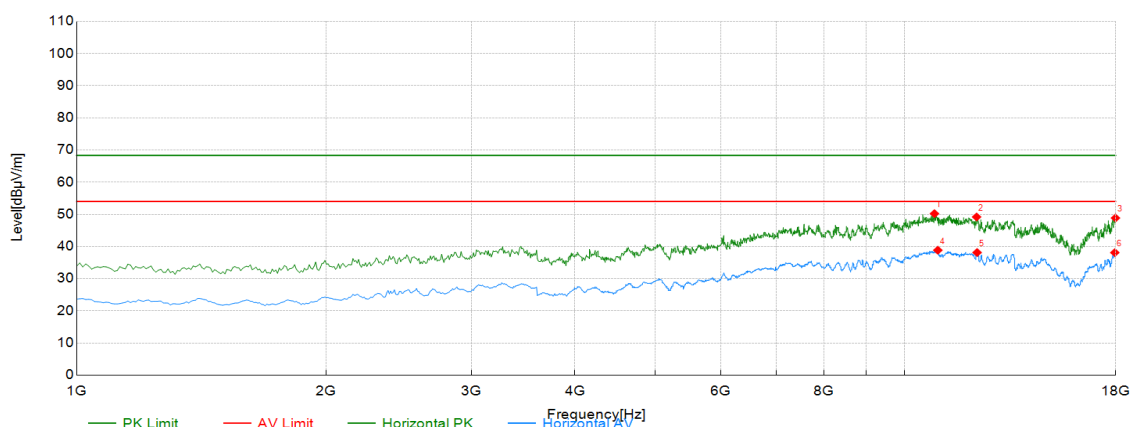

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10873.44	45.19	5.02	50.21	68.30	18.09	PK	Horizontal	PASS
2	12225.61	41.82	7.37	49.19	68.30	19.11	PK	Horizontal	PASS
3	17991.50	38.43	10.44	48.87	68.30	19.43	PK	Horizontal	PASS
4	10975.49	33.86	4.99	38.85	54.00	15.15	AV	Horizontal	PASS
5	12242.62	30.83	7.29	38.12	54.00	15.88	AV	Horizontal	PASS
6	17957.48	27.93	10.18	38.11	54.00	15.89	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5785MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

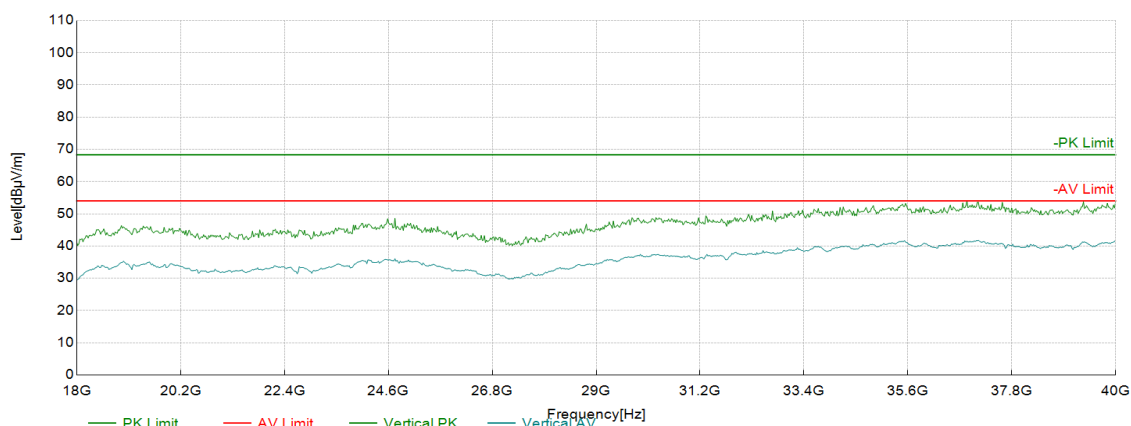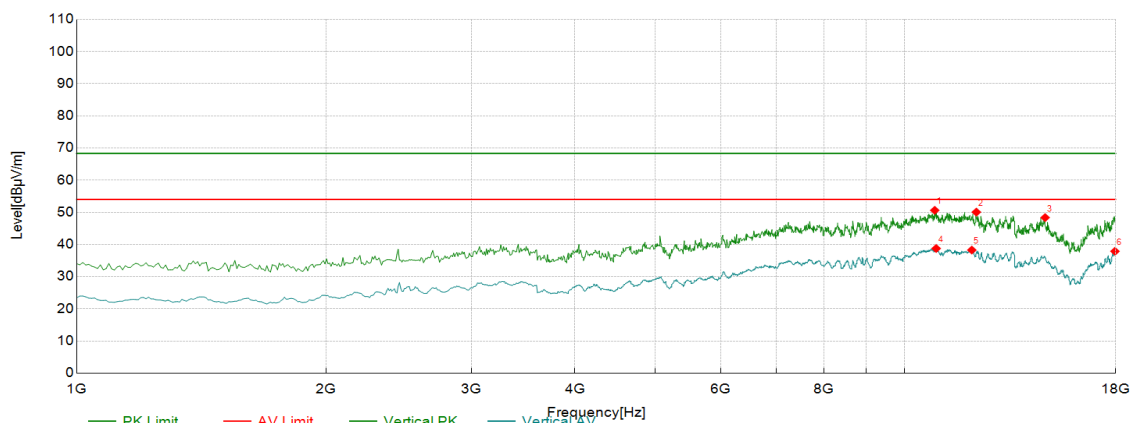

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10881.94	45.61	5.03	50.64	68.30	17.66	PK	Vertical	PASS
2	12217.11	42.67	7.40	50.07	68.30	18.23	PK	Vertical	PASS
3	14793.90	41.73	6.64	48.37	68.30	19.93	PK	Vertical	PASS
4	10924.46	33.75	5.01	38.76	54.00	15.24	AV	Vertical	PASS
5	12064.03	30.64	7.64	38.28	54.00	15.72	AV	Vertical	PASS
6	17965.98	27.63	10.25	37.88	54.00	16.12	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5825MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

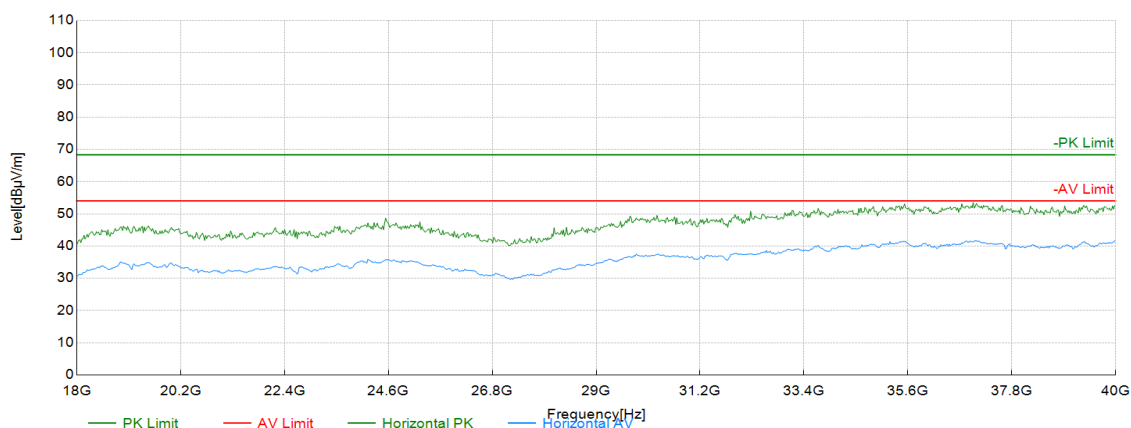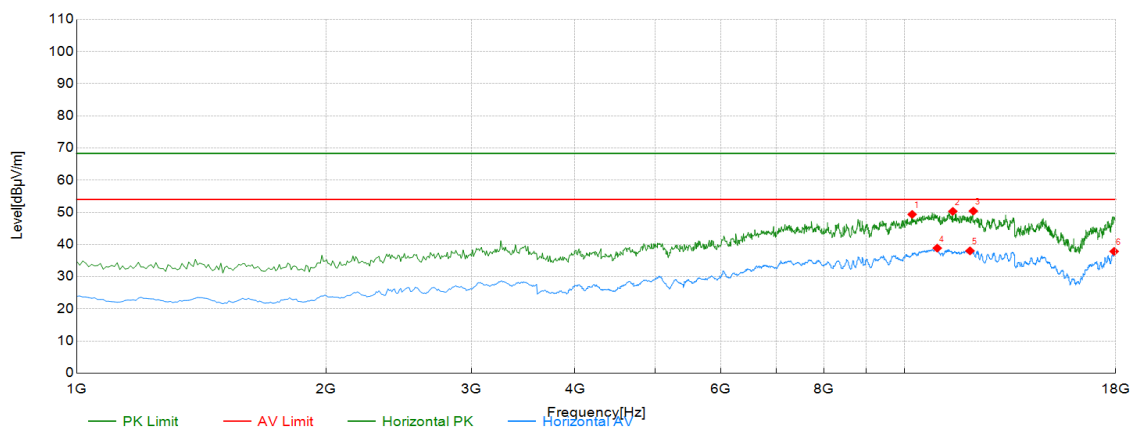

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10218.61	45.82	3.54	49.36	68.30	18.94	PK	Horizontal	PASS
2	11443.22	44.00	6.31	50.31	68.30	17.99	PK	Horizontal	PASS
3	12115.06	42.85	7.55	50.40	68.30	17.90	PK	Horizontal	PASS
4	10958.48	33.88	4.99	38.87	54.00	15.13	AV	Horizontal	PASS
5	12004.50	30.27	7.76	38.03	54.00	15.97	AV	Horizontal	PASS
6	17923.46	27.93	9.92	37.85	54.00	16.15	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX 5825MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

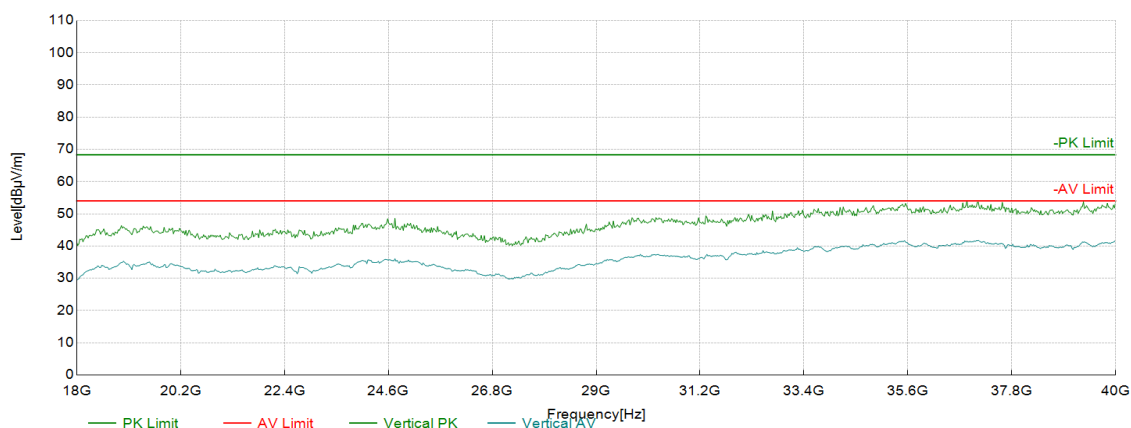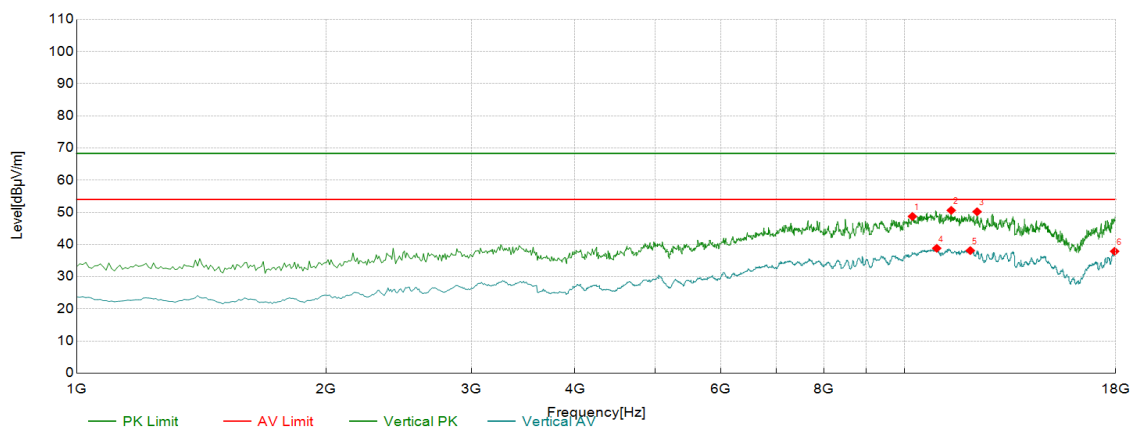

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10227.11	45.17	3.56	48.73	68.30	19.57	PK	Vertical	PASS
2	11392.20	44.45	6.17	50.62	68.30	17.68	PK	Vertical	PASS
3	12242.62	42.90	7.29	50.19	68.30	18.11	PK	Vertical	PASS
4	10941.47	33.81	5.01	38.82	54.00	15.18	AV	Vertical	PASS
5	12013.01	30.37	7.74	38.11	54.00	15.89	AV	Vertical	PASS
6	17948.97	27.77	10.11	37.88	54.00	16.12	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 5190MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

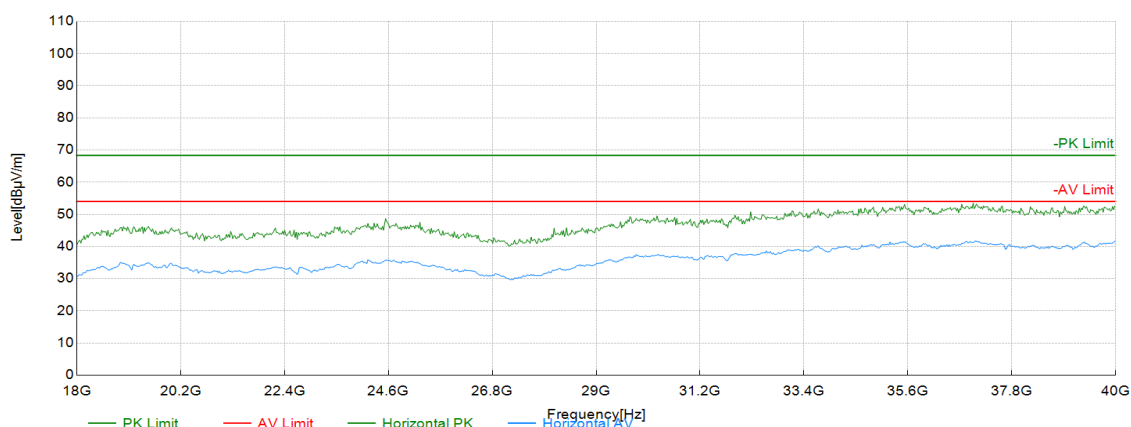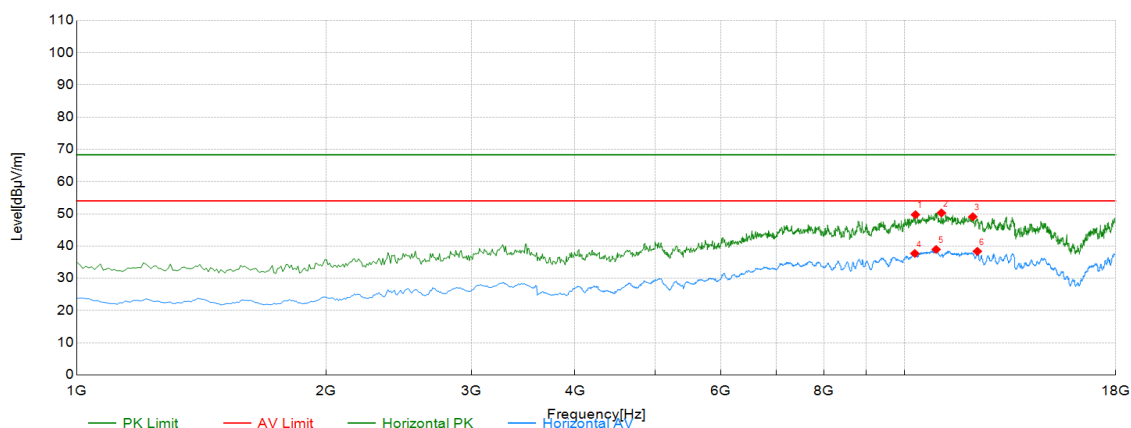

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10312.16	45.89	3.84	49.73	68.30	18.57	PK	Horizontal	PASS
2	11086.04	44.98	5.30	50.28	68.30	18.02	PK	Horizontal	PASS
3	12098.05	41.52	7.57	49.09	68.30	19.21	PK	Horizontal	PASS
4	10295.15	33.90	3.80	37.70	54.00	16.30	AV	Horizontal	PASS
5	10924.46	33.93	5.01	38.94	54.00	15.06	AV	Horizontal	PASS
6	12251.13	31.09	7.27	38.36	54.00	15.64	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 5190MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

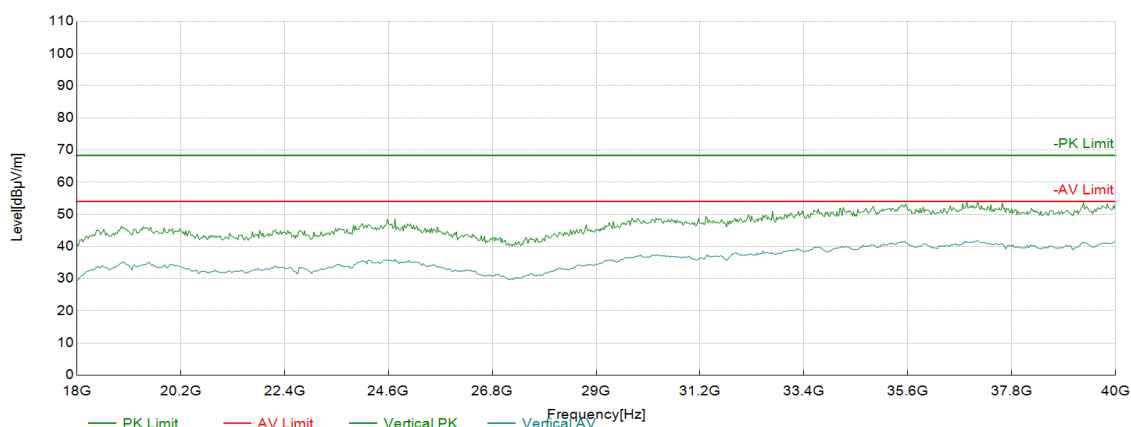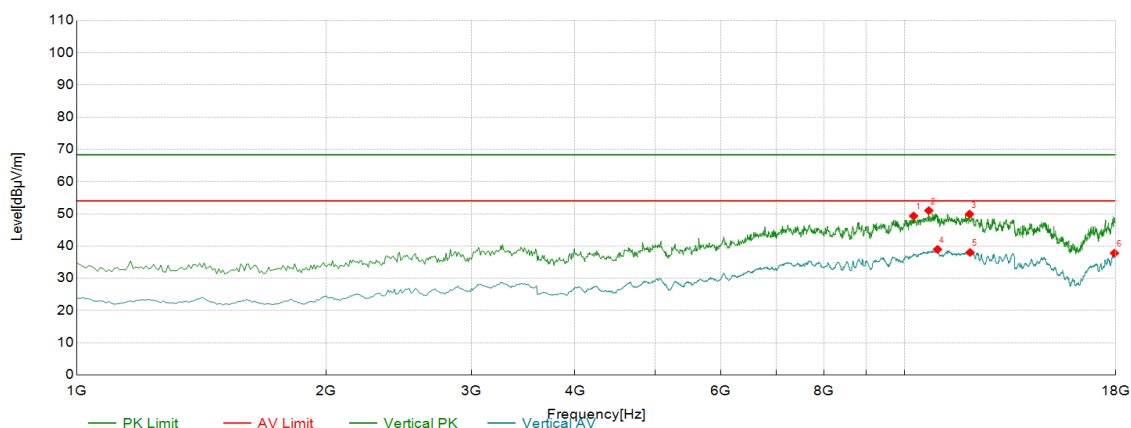

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10261.13	45.65	3.68	49.33	68.30	18.97	PK	Vertical	PASS
2	10703.35	46.33	4.67	51.00	68.30	17.30	PK	Vertical	PASS
3	11987.49	42.21	7.69	49.90	68.30	18.40	PK	Vertical	PASS
4	10966.98	33.96	5.00	38.96	54.00	15.04	AV	Vertical	PASS
5	12004.50	30.26	7.76	38.02	54.00	15.98	AV	Vertical	PASS
6	17940.47	27.75	10.05	37.80	54.00	16.20	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 5230MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

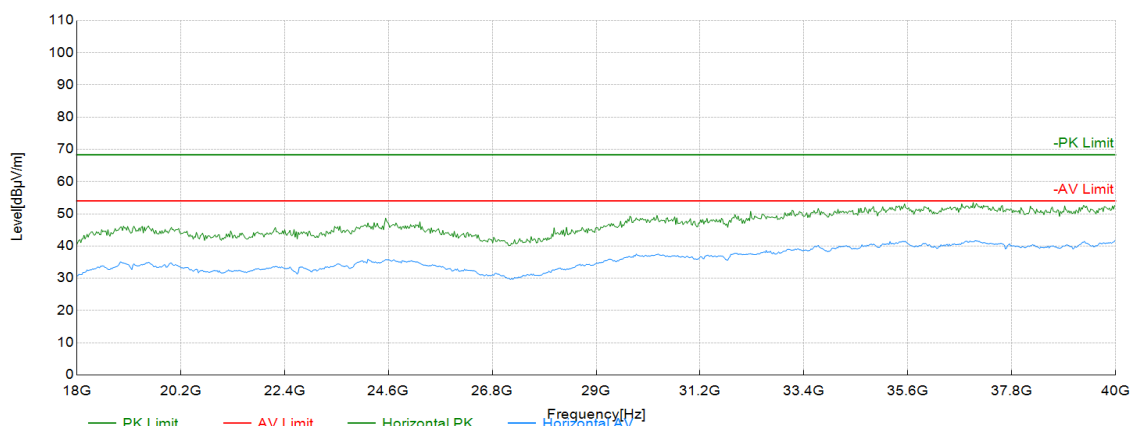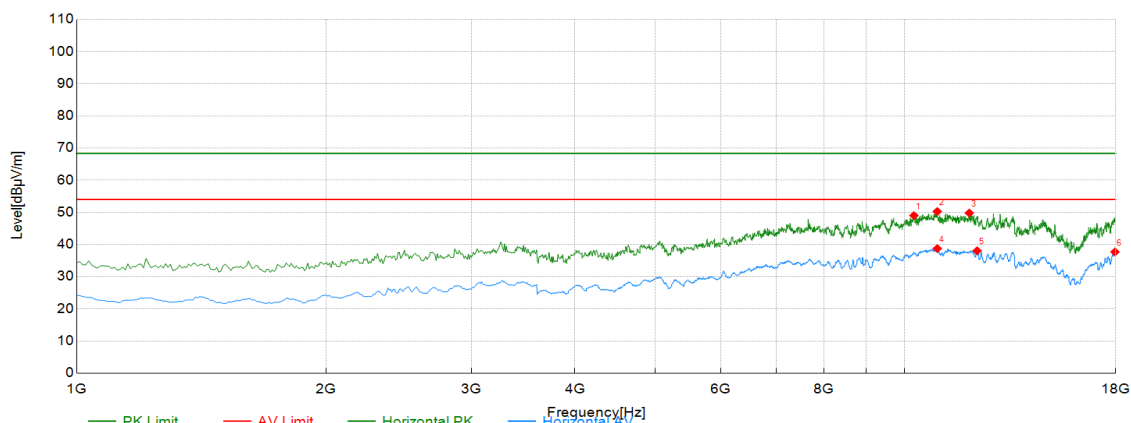

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10269.63	45.30	3.71	49.01	68.30	19.29	PK	Horizontal	PASS
2	10958.48	45.26	4.99	50.25	68.30	18.05	PK	Horizontal	PASS
3	11978.99	42.14	7.65	49.79	68.30	18.51	PK	Horizontal	PASS
4	10958.48	33.76	4.99	38.75	54.00	15.25	AV	Horizontal	PASS
5	12242.62	30.75	7.29	38.04	54.00	15.96	AV	Horizontal	PASS
6	17965.98	27.45	10.25	37.70	54.00	16.30	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 5230MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

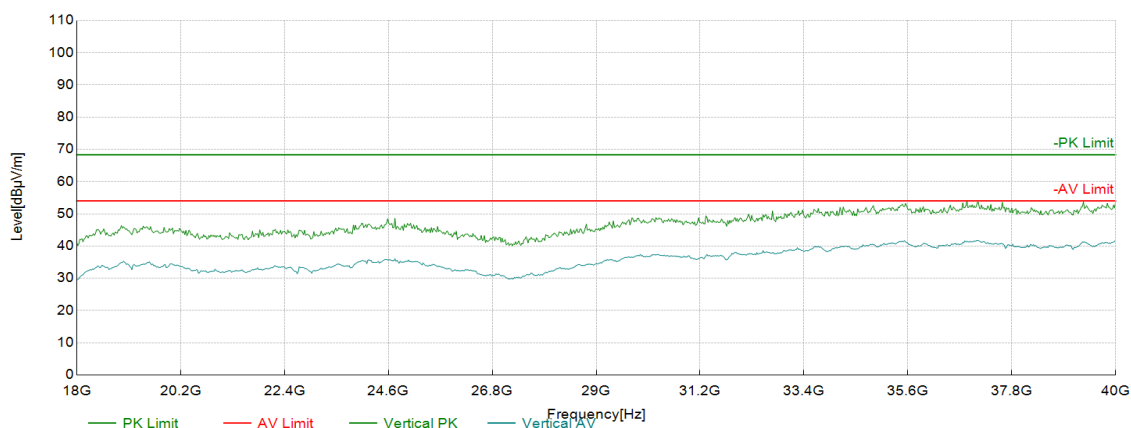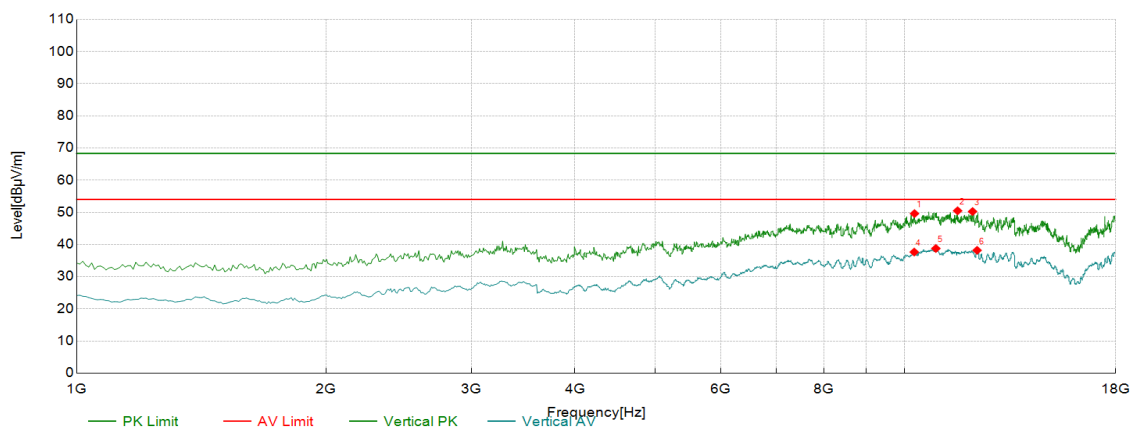

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10286.64	45.84	3.77	49.61	68.30	18.69	PK	Vertical	PASS
2	11596.30	44.03	6.45	50.48	68.30	17.82	PK	Vertical	PASS
3	12089.54	42.67	7.59	50.26	68.30	18.04	PK	Vertical	PASS
4	10278.14	33.91	3.74	37.65	54.00	16.35	AV	Vertical	PASS
5	10915.96	33.73	5.03	38.76	54.00	15.24	AV	Vertical	PASS
6	12242.62	30.90	7.29	38.19	54.00	15.81	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 5270MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

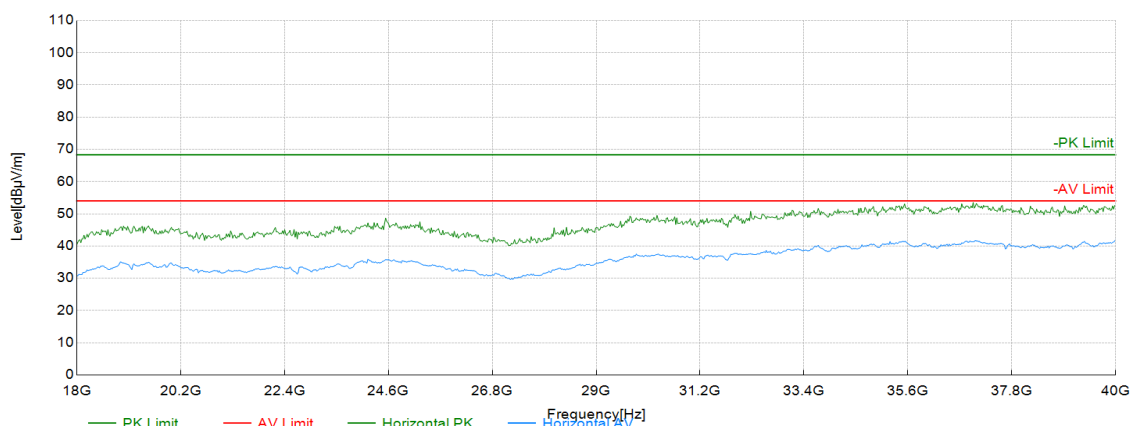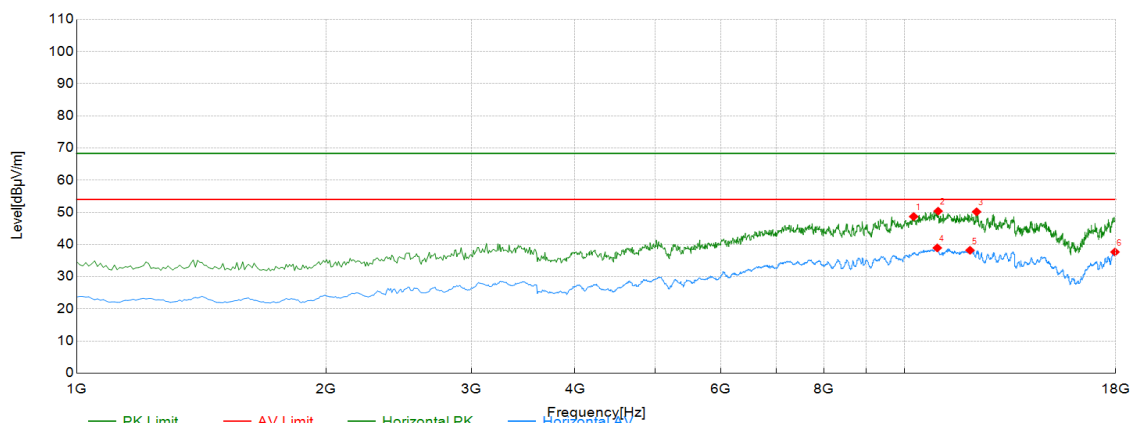

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10261.13	45.01	3.68	48.69	68.30	19.61	PK	Horizontal	PASS
2	10983.99	45.41	4.97	50.38	68.30	17.92	PK	Horizontal	PASS
3	12225.61	42.80	7.37	50.17	68.30	18.13	PK	Horizontal	PASS
4	10958.48	33.95	4.99	38.94	54.00	15.06	AV	Horizontal	PASS
5	12004.50	30.44	7.76	38.20	54.00	15.80	AV	Horizontal	PASS
6	17965.98	27.42	10.25	37.67	54.00	16.33	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 5270MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

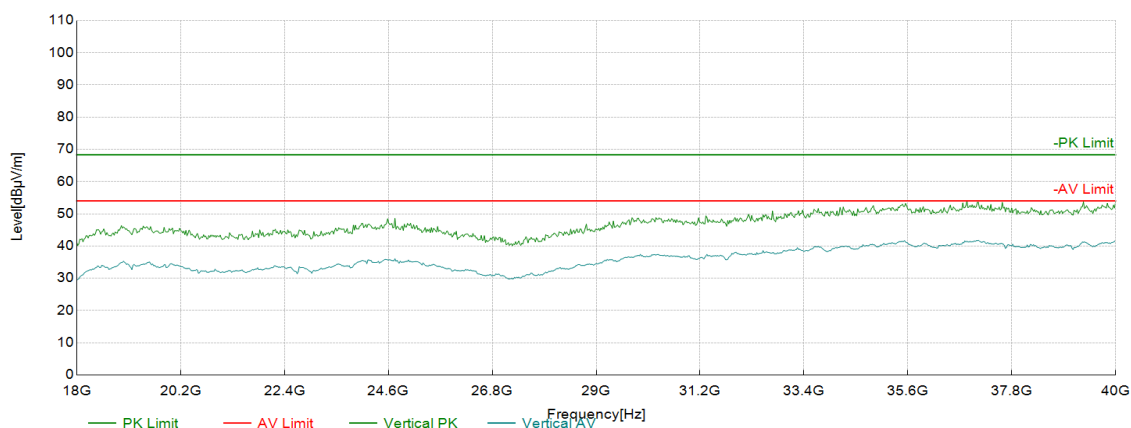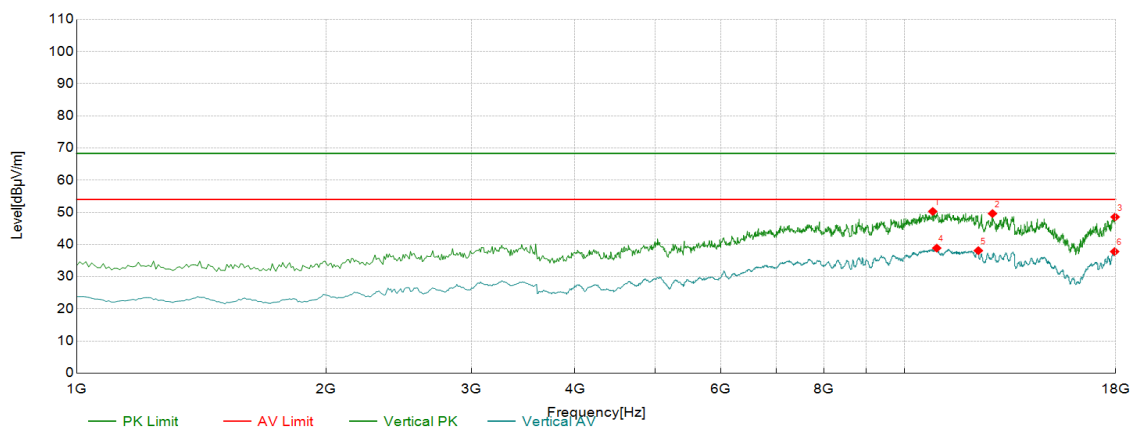

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10822.41	45.28	5.00	50.28	68.30	18.02	PK	Vertical	PASS
2	12778.39	42.93	6.69	49.62	68.30	18.68	PK	Vertical	PASS
3	17974.49	38.26	10.31	48.57	68.30	19.73	PK	Vertical	PASS
4	10941.47	33.87	5.01	38.88	54.00	15.12	AV	Vertical	PASS
5	12285.14	30.97	7.13	38.10	54.00	15.90	AV	Vertical	PASS
6	17948.97	27.69	10.11	37.80	54.00	16.20	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 5310MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

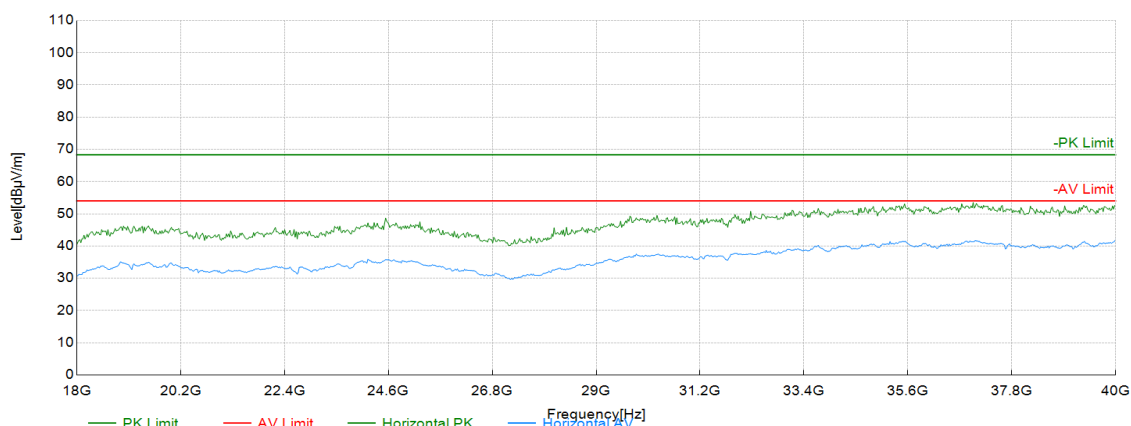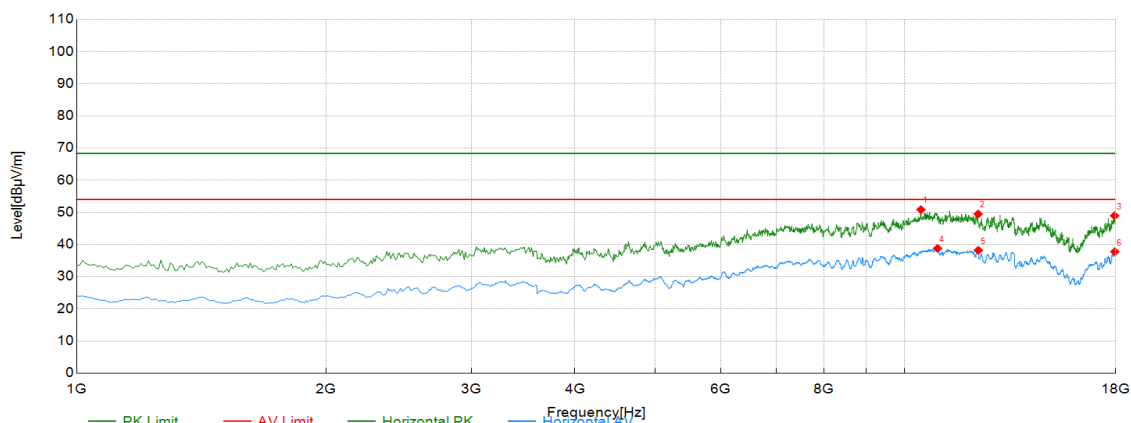

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10473.74	46.67	4.15	50.82	68.30	17.48	PK	Horizontal	PASS
2	12276.64	42.32	7.16	49.48	68.30	18.82	PK	Horizontal	PASS
3	17948.97	38.84	10.11	48.95	68.30	19.35	PK	Horizontal	PASS
4	10966.98	33.80	5.00	38.80	54.00	15.20	AV	Horizontal	PASS
5	12285.14	31.07	7.13	38.20	54.00	15.80	AV	Horizontal	PASS
6	17957.48	27.58	10.18	37.76	54.00	16.24	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 5310MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

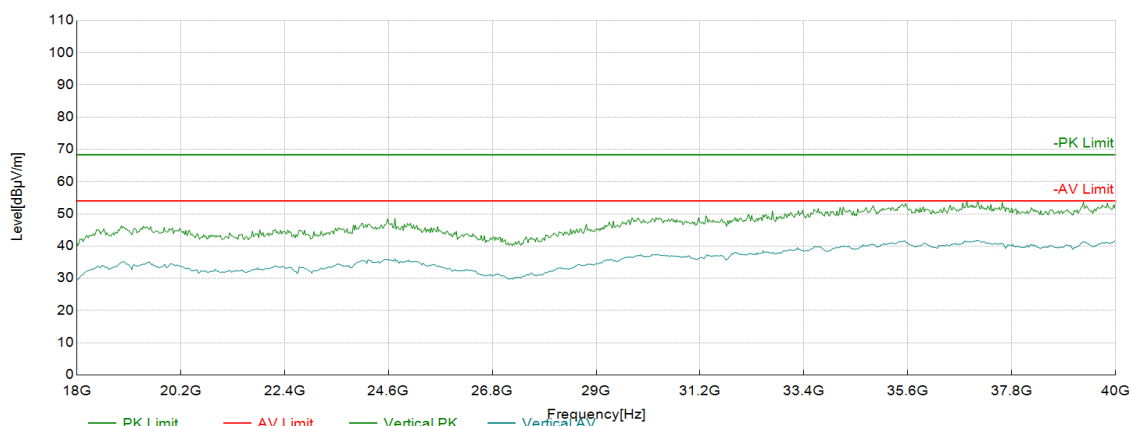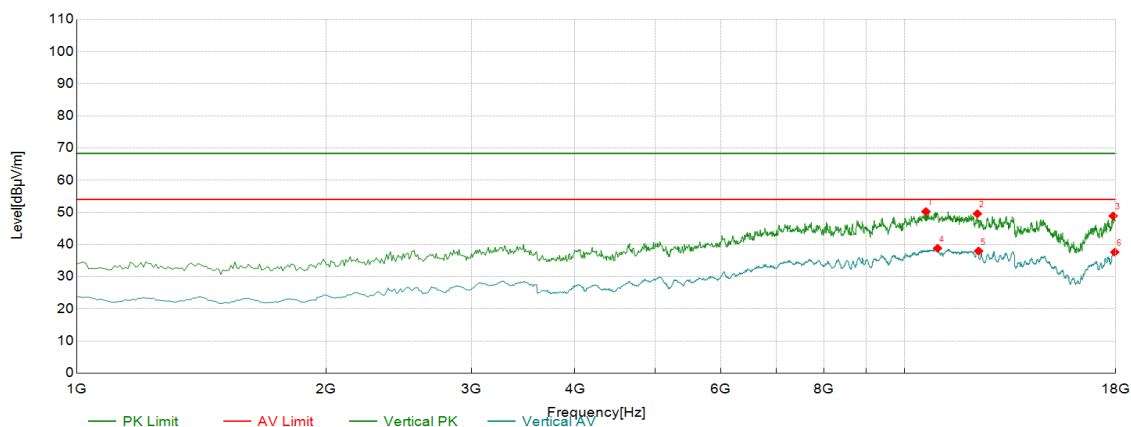

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10618.31	45.70	4.55	50.25	68.30	18.05	PK	Vertical	PASS
2	12251.13	42.29	7.27	49.56	68.30	18.74	PK	Vertical	PASS
3	17872.44	39.37	9.52	48.89	68.30	19.41	PK	Vertical	PASS
4	10966.98	33.83	5.00	38.83	54.00	15.17	AV	Vertical	PASS
5	12293.65	30.89	7.09	37.98	54.00	16.02	AV	Vertical	PASS
6	17957.48	27.44	10.18	37.62	54.00	16.38	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 5510MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

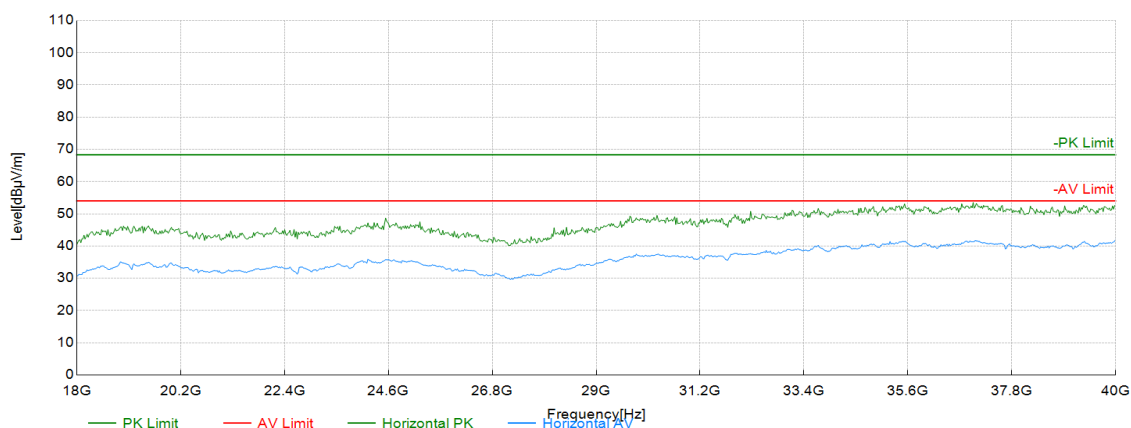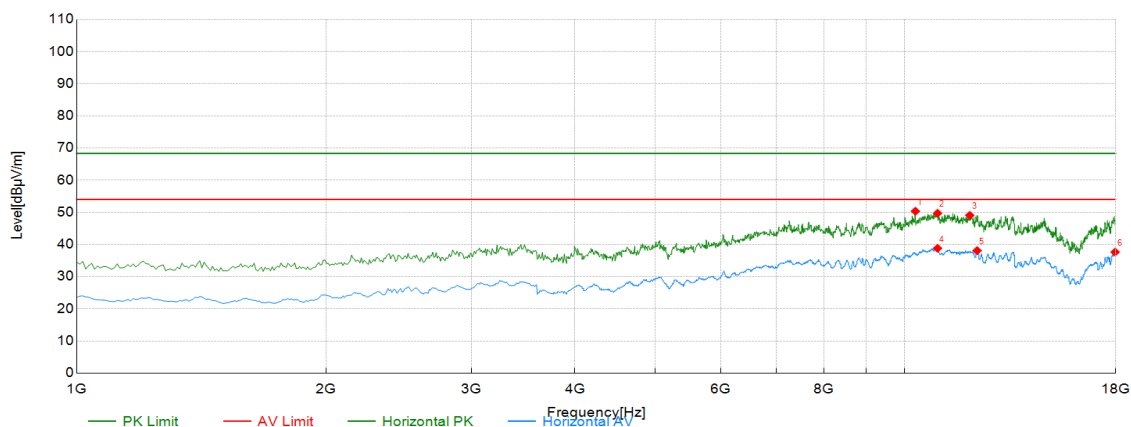

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10312.16	46.51	3.84	50.35	68.30	17.95	PK	Horizontal	PASS
2	10966.98	44.72	5.00	49.72	68.30	18.58	PK	Horizontal	PASS
3	11996.00	41.32	7.75	49.07	68.30	19.23	PK	Horizontal	PASS
4	10966.98	33.82	5.00	38.82	54.00	15.18	AV	Horizontal	PASS
5	12242.62	30.81	7.29	38.10	54.00	15.90	AV	Horizontal	PASS
6	17974.49	27.34	10.31	37.65	54.00	16.35	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 5510MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

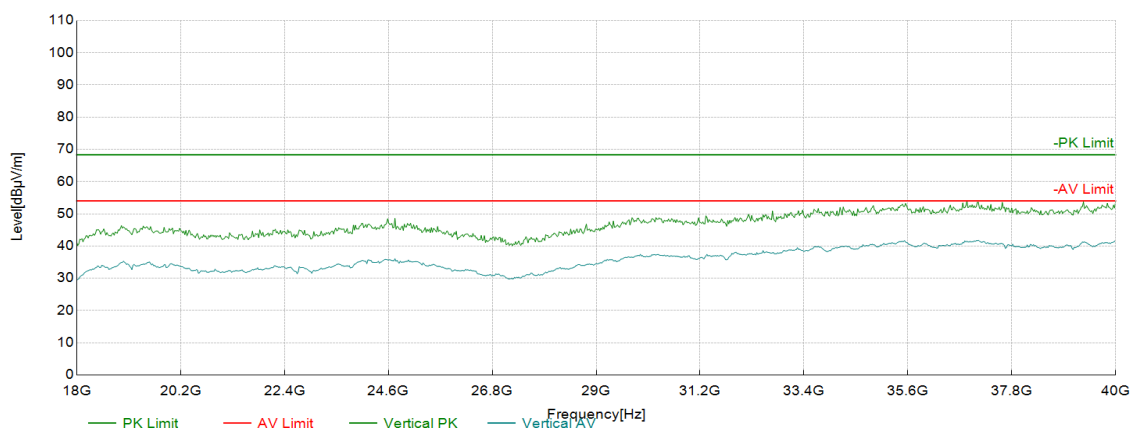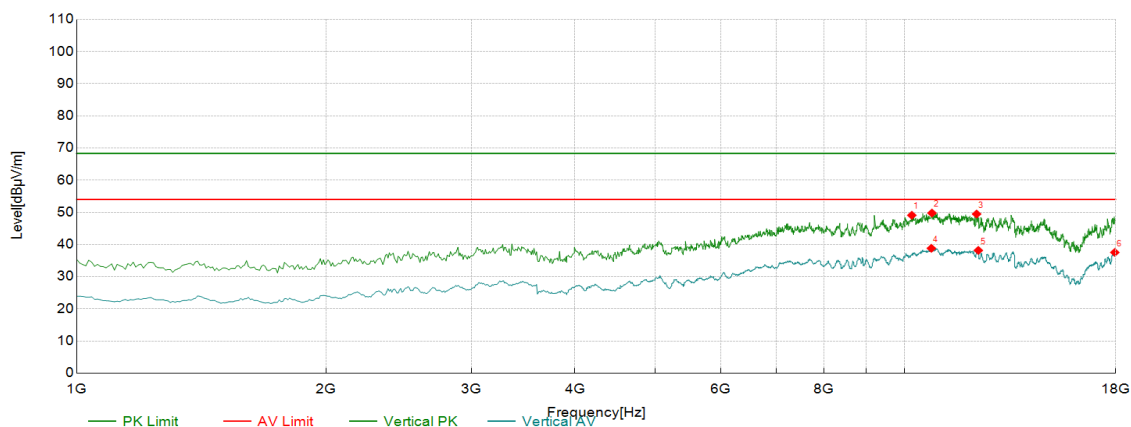

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10210.11	45.58	3.51	49.09	68.30	19.21	PK	Vertical	PASS
2	10796.90	44.80	4.98	49.78	68.30	18.52	PK	Vertical	PASS
3	12225.61	42.10	7.37	49.47	68.30	18.83	PK	Vertical	PASS
4	10779.89	33.88	4.93	38.81	54.00	15.19	AV	Vertical	PASS
5	12285.14	31.04	7.13	38.17	54.00	15.83	AV	Vertical	PASS
6	17957.48	27.36	10.18	37.54	54.00	16.46	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 5670MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

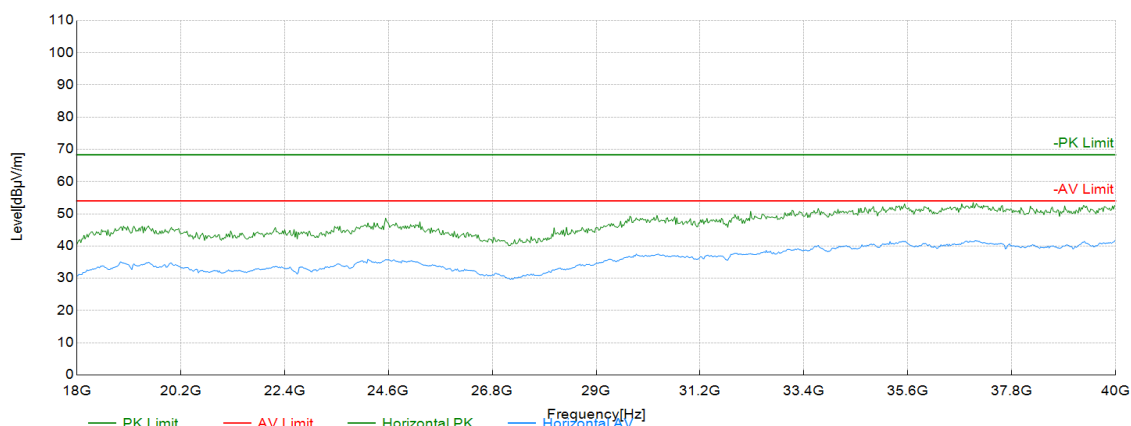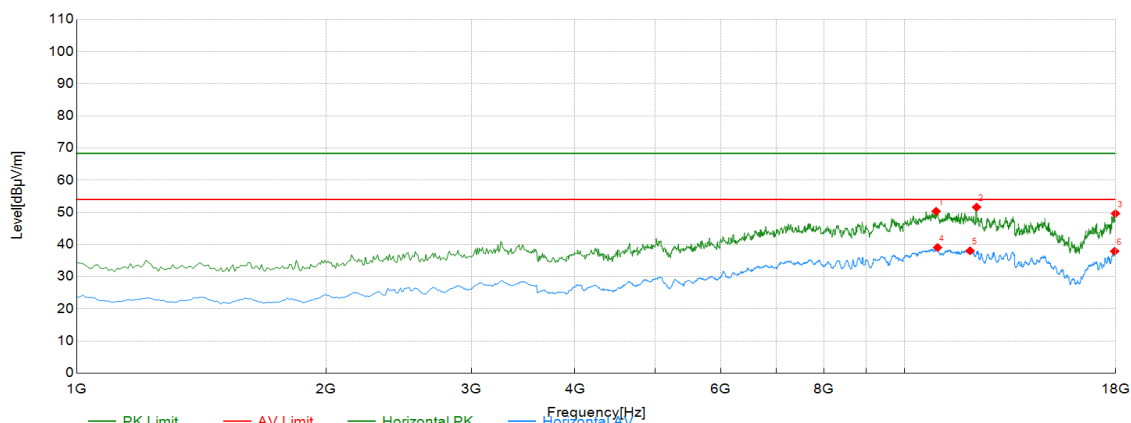

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10924.46	45.34	5.01	50.35	68.30	17.95	PK	Horizontal	PASS
2	12225.61	44.23	7.37	51.60	68.30	16.70	PK	Horizontal	PASS
3	17991.50	39.19	10.44	49.63	68.30	18.67	PK	Horizontal	PASS
4	10966.98	34.07	5.00	39.07	54.00	14.93	AV	Horizontal	PASS
5	12004.50	30.29	7.76	38.05	54.00	15.95	AV	Horizontal	PASS
6	17948.97	27.80	10.11	37.91	54.00	16.09	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 5670MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

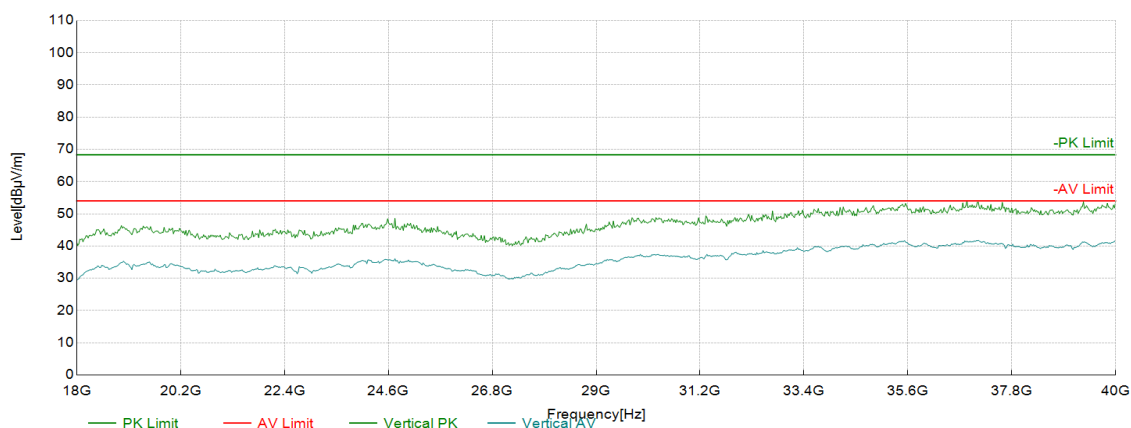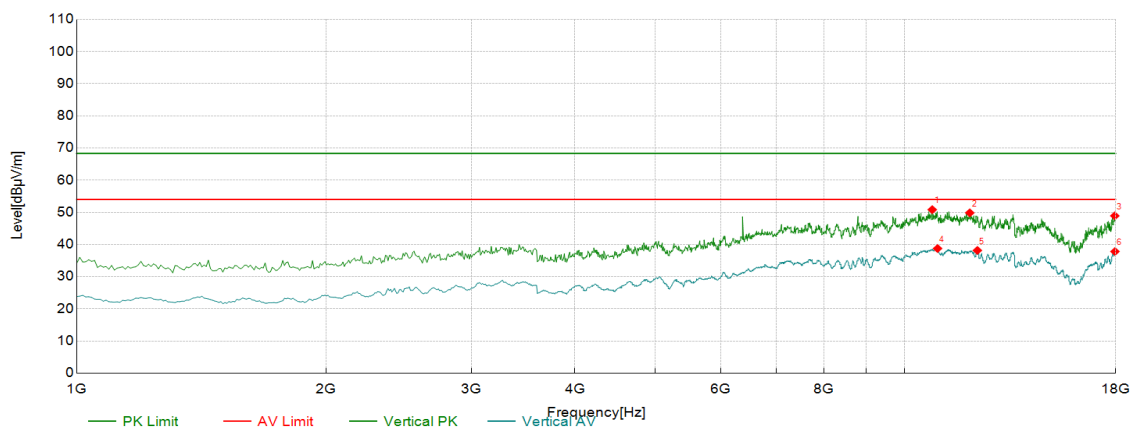

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10805.40	45.83	5.00	50.83	68.30	17.47	PK	Vertical	PASS
2	11996.00	42.09	7.75	49.84	68.30	18.46	PK	Vertical	PASS
3	17957.48	38.74	10.18	48.92	68.30	19.38	PK	Vertical	PASS
4	10966.98	33.75	5.00	38.75	54.00	15.25	AV	Vertical	PASS
5	12251.13	30.89	7.27	38.16	54.00	15.84	AV	Vertical	PASS
6	17965.98	27.57	10.25	37.82	54.00	16.18	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 5755MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

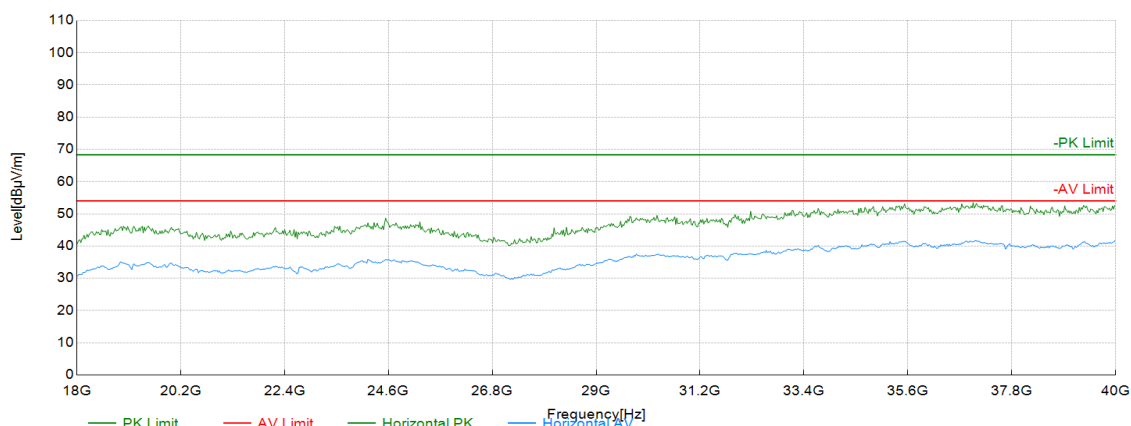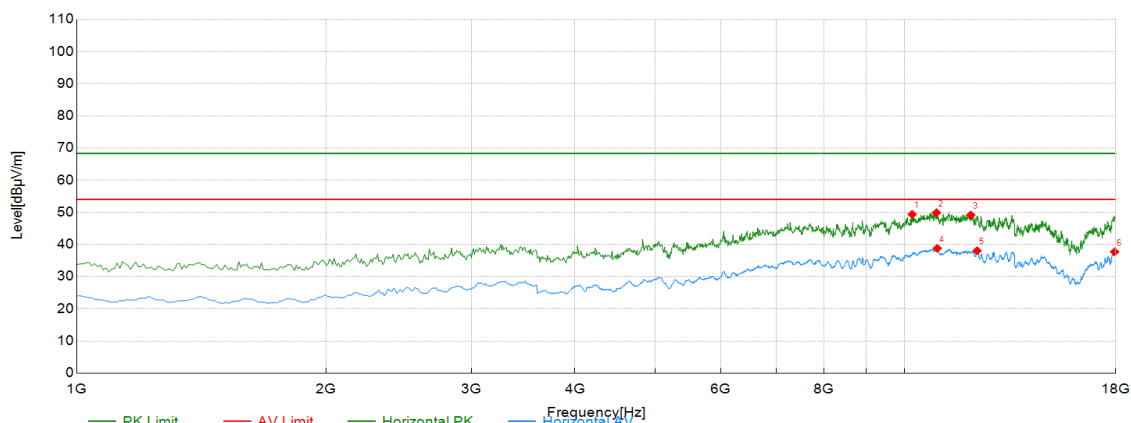

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10218.61	45.84	3.54	49.38	68.30	18.92	PK	Horizontal	PASS
2	10932.97	44.89	5.01	49.90	68.30	18.40	PK	Horizontal	PASS
3	12030.02	41.45	7.71	49.16	68.30	19.14	PK	Horizontal	PASS
4	10958.48	33.82	4.99	38.81	54.00	15.19	AV	Horizontal	PASS
5	12242.62	30.77	7.29	38.06	54.00	15.94	AV	Horizontal	PASS
6	17948.97	27.62	10.11	37.73	54.00	16.27	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 5755MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

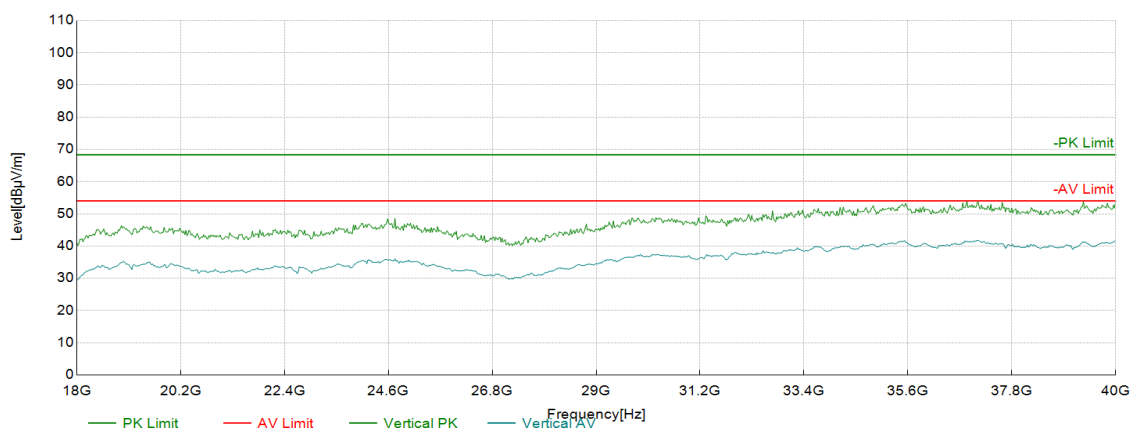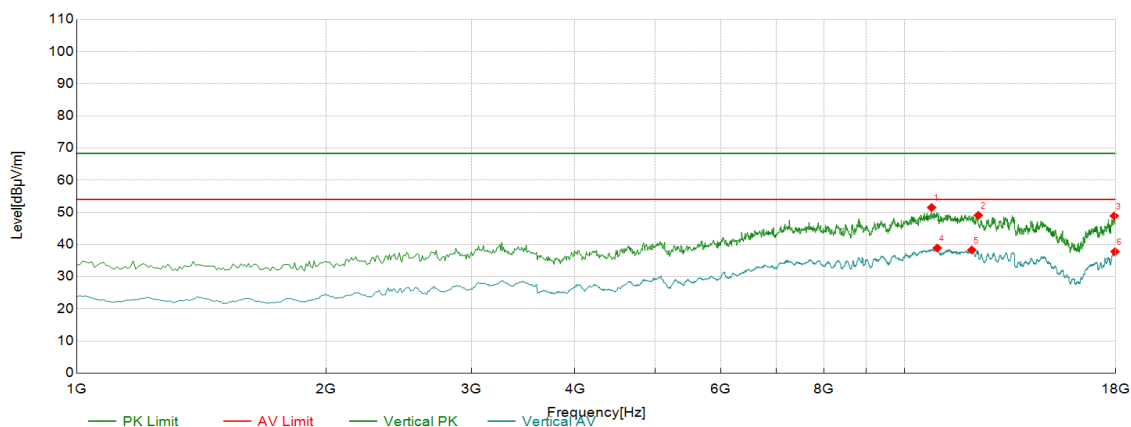

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10788.39	46.54	4.96	51.50	68.30	16.80	PK	Vertical	PASS
2	12285.14	41.93	7.13	49.06	68.30	19.24	PK	Vertical	PASS
3	17931.97	38.90	9.98	48.88	68.30	19.42	PK	Vertical	PASS
4	10958.48	33.92	4.99	38.91	54.00	15.09	AV	Vertical	PASS
5	12064.03	30.66	7.64	38.30	54.00	15.70	AV	Vertical	PASS
6	17965.98	27.53	10.25	37.78	54.00	16.22	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 5795MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

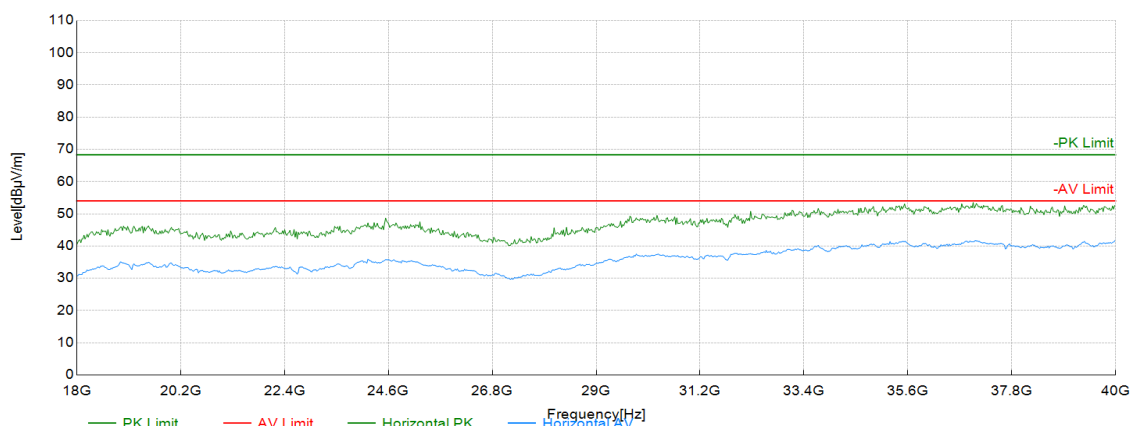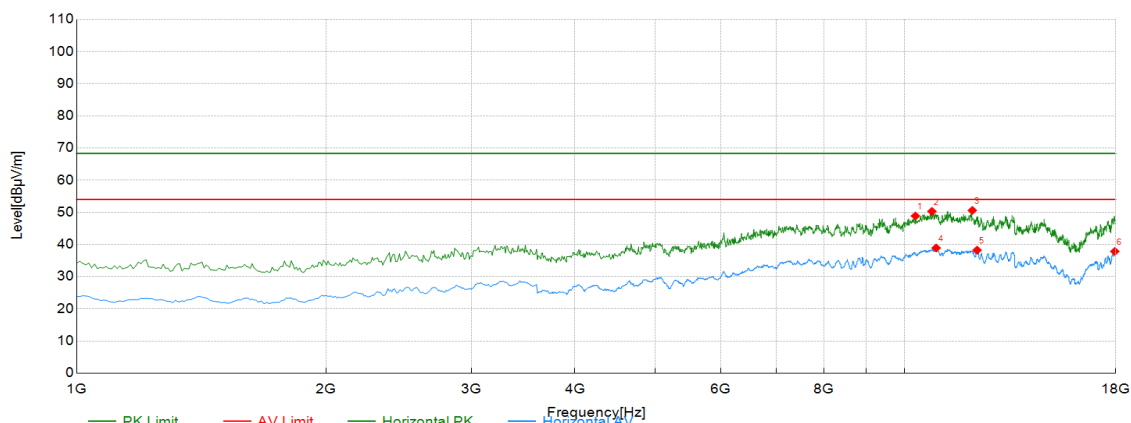

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10312.16	45.02	3.84	48.86	68.30	19.44	PK	Horizontal	PASS
2	10796.90	45.32	4.98	50.30	68.30	18.00	PK	Horizontal	PASS
3	12081.04	42.99	7.61	50.60	68.30	17.70	PK	Horizontal	PASS
4	10924.46	33.91	5.01	38.92	54.00	15.08	AV	Horizontal	PASS
5	12242.62	30.94	7.29	38.23	54.00	15.77	AV	Horizontal	PASS
6	17957.48	27.68	10.18	37.86	54.00	16.14	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 5795MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.1018		
Remark:	Only show the worst data.		

Test Graph

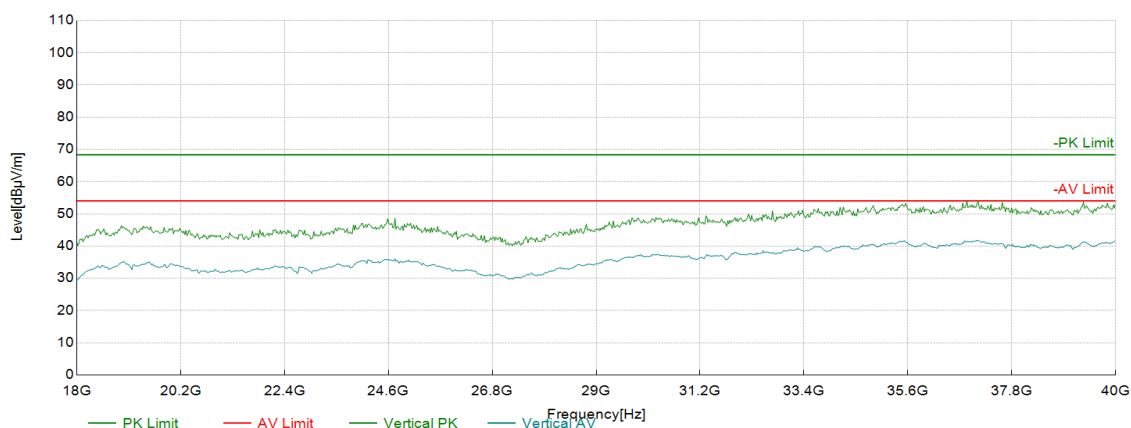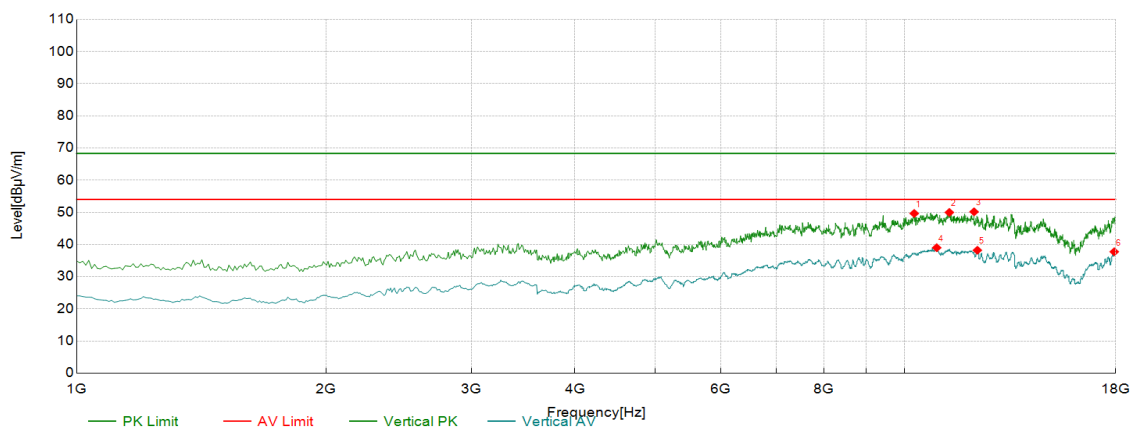

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	10278.14	45.91	3.74	49.65	68.30	18.65	PK	Vertical	PASS
2	11332.67	43.97	6.01	49.98	68.30	18.32	PK	Vertical	PASS
3	12140.57	42.65	7.52	50.17	68.30	18.13	PK	Vertical	PASS
4	10941.47	33.99	5.01	39.00	54.00	15.00	AV	Vertical	PASS
5	12251.13	30.95	7.27	38.22	54.00	15.78	AV	Vertical	PASS
6	17931.97	27.76	9.98	37.74	54.00	16.26	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)

3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.




Attachment C-- Restricted Bands Requirement Test Data

---Radiation Test

Test Mode:	802.11A-5180MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

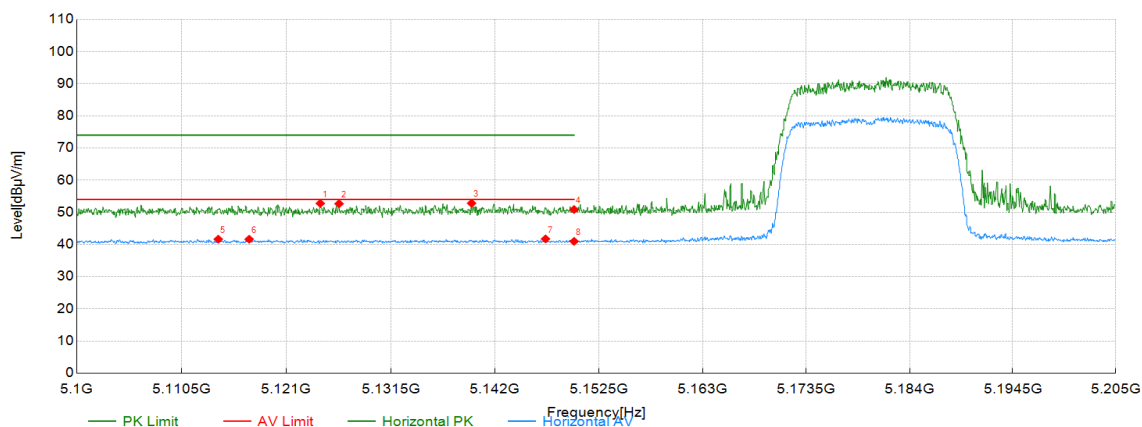

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5124.42	35.18	17.60	52.78	74.00	21.22	PK	Horizont	PASS
2	5126.32	35.09	17.59	52.68	74.00	21.32	PK	Horizont	PASS
3	5139.66	35.28	17.55	52.83	74.00	21.17	PK	Horizont	PASS
4	5150.00	33.36	17.52	50.88	74.00	23.12	PK	Horizont	PASS
5	5114.18	24.02	17.63	41.65	54.00	12.35	AV	Horizont	PASS
6	5117.28	24.02	17.62	41.64	54.00	12.36	AV	Horizont	PASS
7	5147.12	24.21	17.53	41.74	54.00	12.26	AV	Horizont	PASS
8	5150.00	23.46	17.52	40.98	54.00	13.02	AV	Horizont	PASS


Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)
2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11A-5180MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

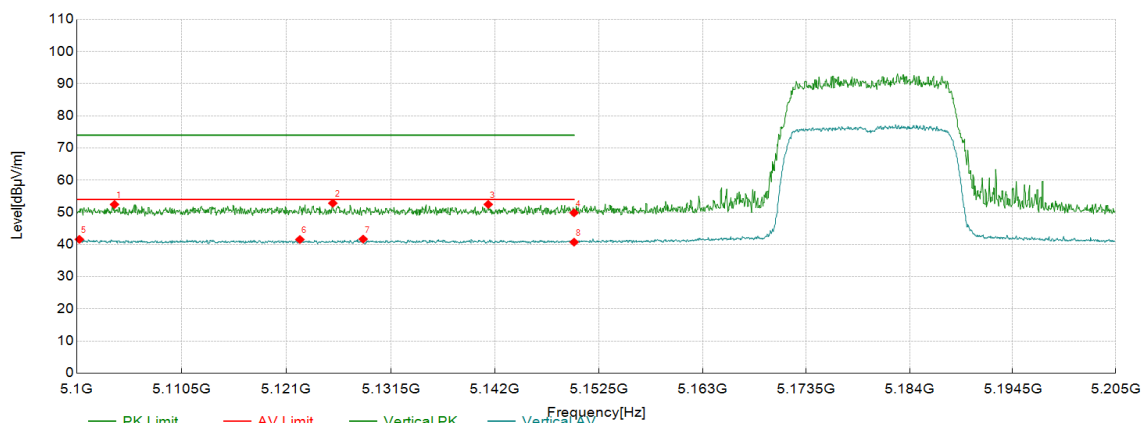

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5103.78	34.79	17.66	52.45	74.00	21.55	PK	Vertical	PASS
2	5125.69	35.24	17.60	52.84	74.00	21.16	PK	Vertical	PASS
3	5141.34	34.92	17.55	52.47	74.00	21.53	PK	Vertical	PASS
4	5150.00	32.35	17.52	49.87	74.00	24.13	PK	Vertical	PASS
5	5100.26	23.91	17.68	41.59	54.00	12.41	AV	Vertical	PASS
6	5122.38	23.94	17.61	41.55	54.00	12.45	AV	Vertical	PASS
7	5128.73	24.09	17.59	41.68	54.00	12.32	AV	Vertical	PASS
8	5150.00	23.21	17.52	40.73	54.00	13.27	AV	Vertical	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11A-5320MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

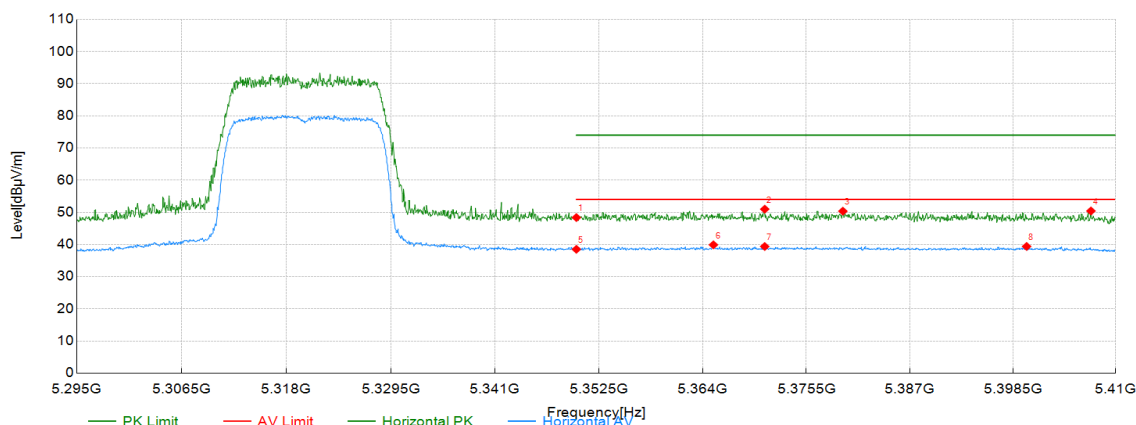

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	34.86	13.52	48.38	74.00	25.62	PK	Horizont	PASS
2	5370.88	37.41	13.58	50.99	74.00	23.01	PK	Horizont	PASS
3	5379.57	36.77	13.60	50.37	74.00	23.63	PK	Horizont	PASS
4	5407.24	36.76	13.67	50.43	74.00	23.57	PK	Horizont	PASS
5	5350.00	24.99	13.52	38.51	54.00	15.49	AV	Horizont	PASS
6	5365.19	26.33	13.56	39.89	54.00	14.11	AV	Horizont	PASS
7	5370.88	25.80	13.58	39.38	54.00	14.62	AV	Horizont	PASS
8	5400.05	25.74	13.66	39.40	54.00	14.60	AV	Horizont	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11A-5320MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

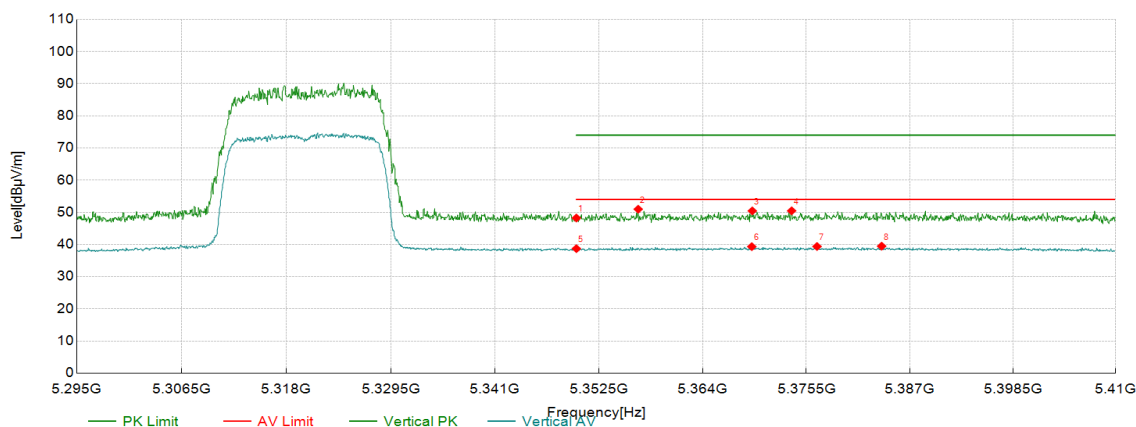

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	34.72	13.52	48.24	74.00	25.76	PK	Vertical	PASS
2	5356.84	37.45	13.53	50.98	74.00	23.02	PK	Vertical	PASS
3	5369.50	36.89	13.57	50.46	74.00	23.54	PK	Vertical	PASS
4	5373.87	36.89	13.59	50.48	74.00	23.52	PK	Vertical	PASS
5	5350.00	25.19	13.52	38.71	54.00	15.29	AV	Vertical	PASS
6	5369.44	25.76	13.57	39.33	54.00	14.67	AV	Vertical	PASS
7	5376.69	25.79	13.59	39.38	54.00	14.62	AV	Vertical	PASS
8	5383.88	25.86	13.62	39.48	54.00	14.52	AV	Vertical	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11A-5500MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

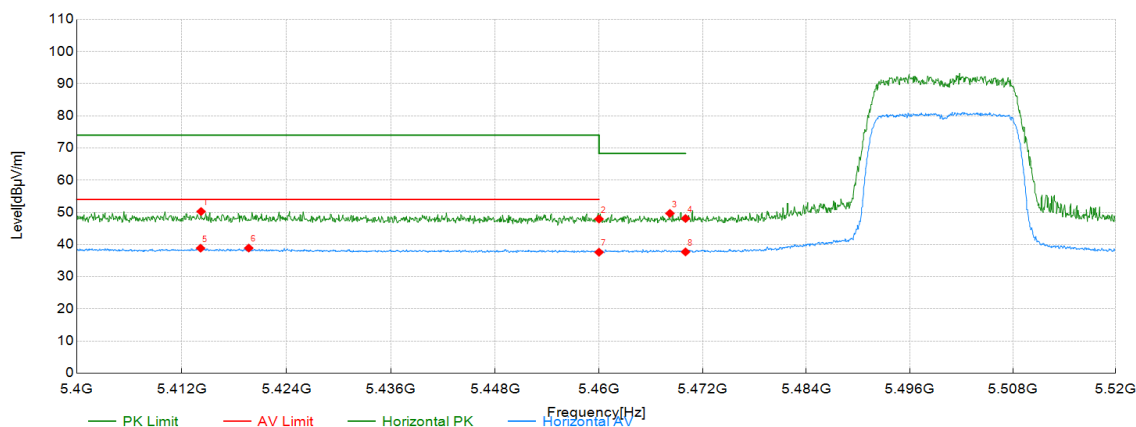

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5414.23	36.58	13.68	50.26	74.00	23.74	PK	Horizont	PASS
2	5460.00	34.21	13.72	47.93	68.30	20.37	PK	Horizont	PASS
3	5468.19	35.95	13.73	49.68	68.30	18.62	PK	Horizont	PASS
4	5470.00	34.36	13.73	48.09	68.30	20.21	PK	Horizont	PASS
5	5414.17	25.17	13.68	38.85	54.00	15.15	AV	Horizont	PASS
6	5419.69	25.21	13.68	38.89	54.00	15.11	AV	Horizont	PASS
7	5460.00	23.88	13.72	37.60	54.00	16.40	AV	Horizont	PASS
8	5470.00	23.97	13.73	37.70	-	-	AV	Horizont	NA

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11A-5500MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph



Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5438.72	36.66	13.70	50.36	74.00	23.64	PK	Vertical	PASS
2	5460.00	34.38	13.72	48.10	68.30	20.20	PK	Vertical	PASS
3	5462.61	35.91	13.72	49.63	68.30	18.67	PK	Vertical	PASS
4	5470.00	32.57	13.73	46.30	68.30	22.00	PK	Vertical	PASS
5	5402.46	25.27	13.67	38.94	54.00	15.06	AV	Vertical	PASS
6	5421.13	25.02	13.68	38.70	54.00	15.30	AV	Vertical	PASS
7	5460.00	24.84	13.72	38.56	54.00	15.44	AV	Vertical	PASS
8	5470.00	24.29	13.73	38.02	-	-	AV	Vertical	NA

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11A-5745MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

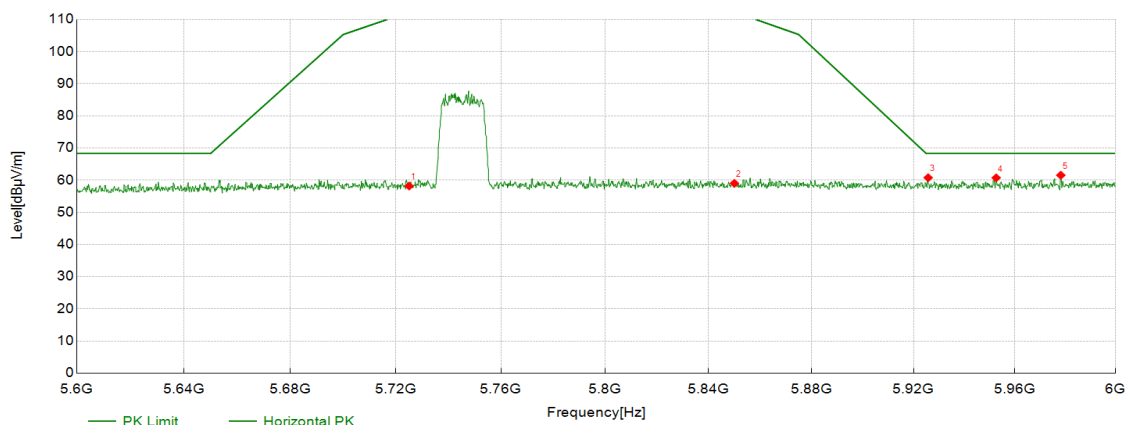

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	43.60	14.58	58.18	122.30	64.12	PK	Horizont	PASS
2	5850.00	43.92	15.10	59.02	122.30	63.28	PK	Horizont	PASS
3	5925.76	45.36	15.42	60.78	68.30	7.52	PK	Horizont	PASS
4	5952.58	45.35	15.39	60.74	68.30	7.56	PK	Horizont	PASS
5	5978.19	46.13	15.42	61.55	68.30	6.75	PK	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11A-5745MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

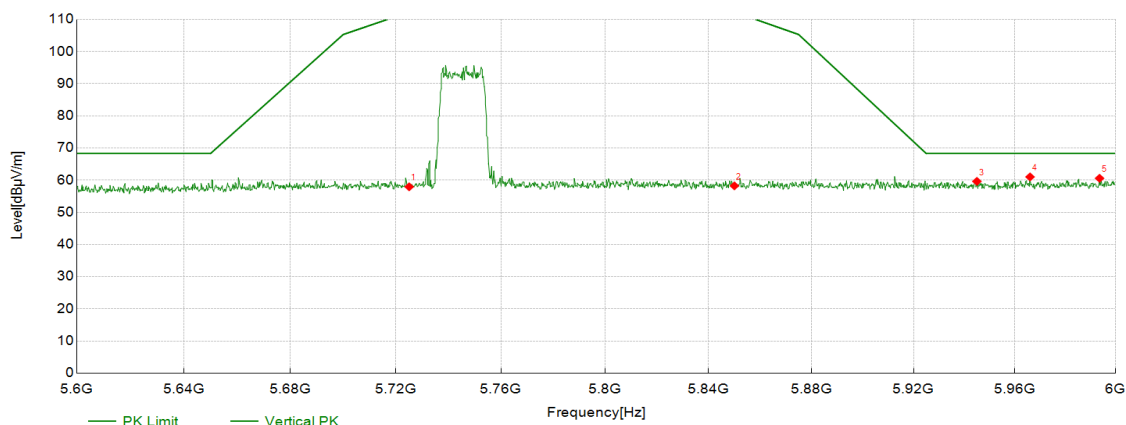

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	43.36	14.58	57.94	122.30	64.36	PK	Vertical	PASS
2	5850.00	43.14	15.10	58.24	122.30	64.06	PK	Vertical	PASS
3	5944.97	44.24	15.40	59.64	68.30	8.66	PK	Vertical	PASS
4	5965.98	45.61	15.41	61.02	68.30	7.28	PK	Vertical	PASS
5	5993.60	45.16	15.43	60.59	68.30	7.71	PK	Vertical	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11A-5825MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

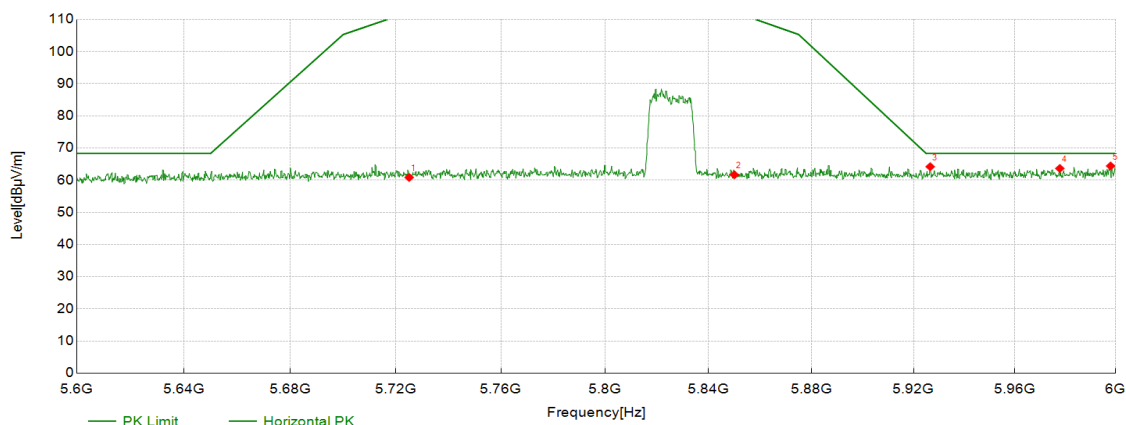

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	42.26	18.58	60.84	122.30	61.46	PK	Horizont	PASS
2	5850.00	42.57	19.10	61.67	122.30	60.63	PK	Horizont	PASS
3	5926.56	44.77	19.42	64.19	68.30	4.11	PK	Horizont	PASS
4	5977.79	44.23	19.42	63.65	68.30	4.65	PK	Horizont	PASS
5	5998.00	44.98	19.44	64.42	68.30	3.88	PK	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11A-5825MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

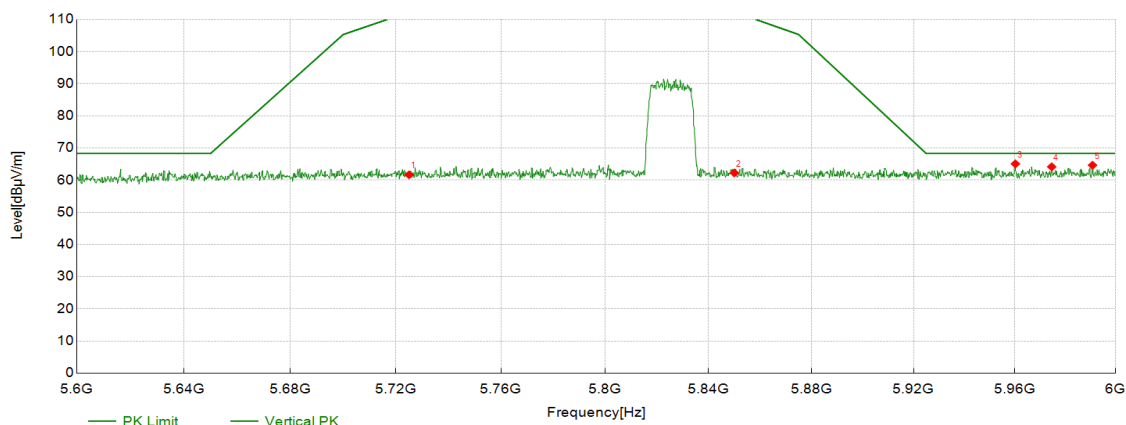

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	43.10	18.58	61.68	122.30	60.62	PK	Vertical	PASS
2	5850.00	43.15	19.10	62.25	122.30	60.05	PK	Vertical	PASS
3	5960.18	45.68	19.40	65.08	68.30	3.22	PK	Vertical	PASS
4	5974.59	44.75	19.42	64.17	68.30	4.13	PK	Vertical	PASS
5	5990.80	45.22	19.43	64.65	68.30	3.65	PK	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N20-5180MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

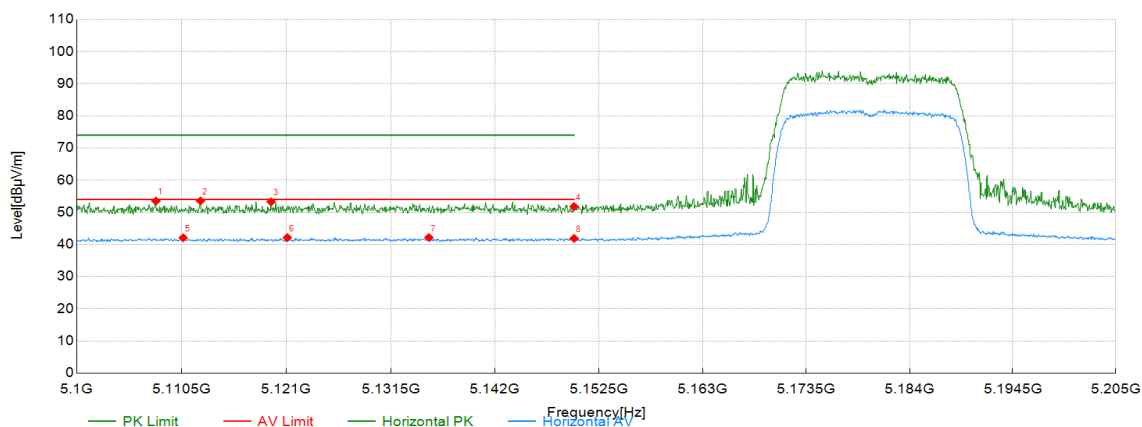

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5107.93	35.88	17.65	53.53	74.00	20.47	PK	Horizont	PASS
2	5112.40	35.93	17.64	53.57	74.00	20.43	PK	Horizont	PASS
3	5119.49	35.69	17.61	53.30	74.00	20.70	PK	Horizont	PASS
4	5150.00	34.29	17.52	51.81	74.00	22.19	PK	Horizont	PASS
5	5110.66	24.45	17.65	42.10	54.00	11.90	AV	Horizont	PASS
6	5121.12	24.52	17.62	42.14	54.00	11.86	AV	Horizont	PASS
7	5135.35	24.61	17.57	42.18	54.00	11.82	AV	Horizont	PASS
8	5150.00	24.36	17.52	41.88	54.00	12.12	AV	Horizont	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11N20-5180MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

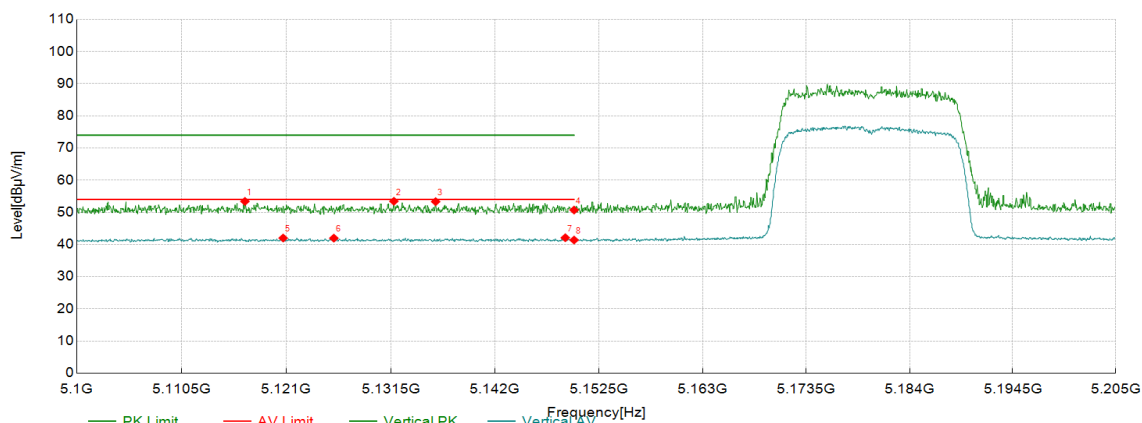

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5116.86	35.79	17.62	53.41	74.00	20.59	PK	Vertical	PASS
2	5131.83	35.87	17.58	53.45	74.00	20.55	PK	Vertical	PASS
3	5136.03	35.76	17.57	53.33	74.00	20.67	PK	Vertical	PASS
4	5150.00	33.19	17.52	50.71	74.00	23.29	PK	Vertical	PASS
5	5120.70	24.39	17.62	42.01	54.00	11.99	AV	Vertical	PASS
6	5125.79	24.38	17.60	41.98	54.00	12.02	AV	Vertical	PASS
7	5149.11	24.59	17.52	42.11	54.00	11.89	AV	Vertical	PASS
8	5150.00	23.87	17.52	41.39	54.00	12.61	AV	Vertical	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11N20-5320MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

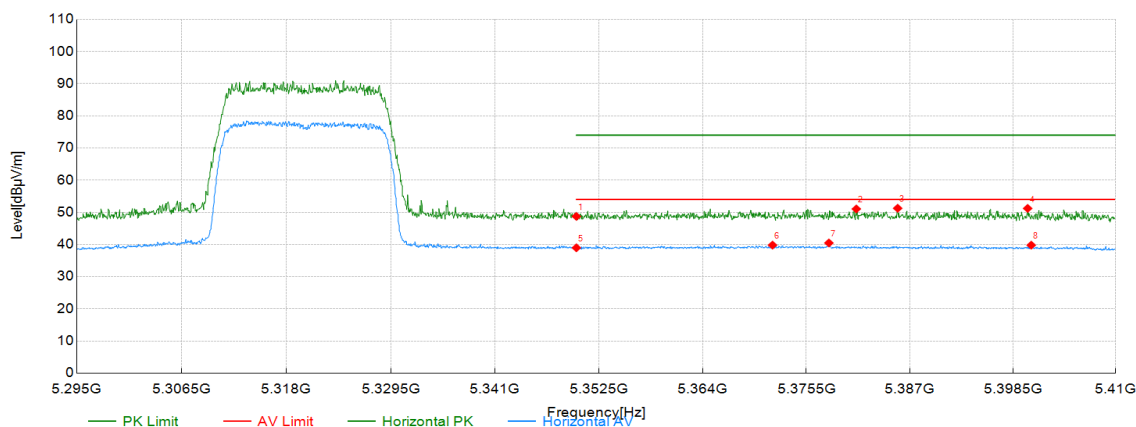

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	35.22	13.52	48.74	74.00	25.26	PK	Horizont	PASS
2	5381.06	37.45	13.61	51.06	74.00	22.94	PK	Horizont	PASS
3	5385.67	37.65	13.62	51.27	74.00	22.73	PK	Horizont	PASS
4	5400.16	37.57	13.66	51.23	74.00	22.77	PK	Horizont	PASS
5	5350.00	25.46	13.52	38.98	54.00	15.02	AV	Horizont	PASS
6	5371.74	26.23	13.58	39.81	54.00	14.19	AV	Horizont	PASS
7	5378.01	26.88	13.60	40.48	54.00	13.52	AV	Horizont	PASS
8	5400.57	26.13	13.66	39.79	54.00	14.21	AV	Horizont	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11N20-5320MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

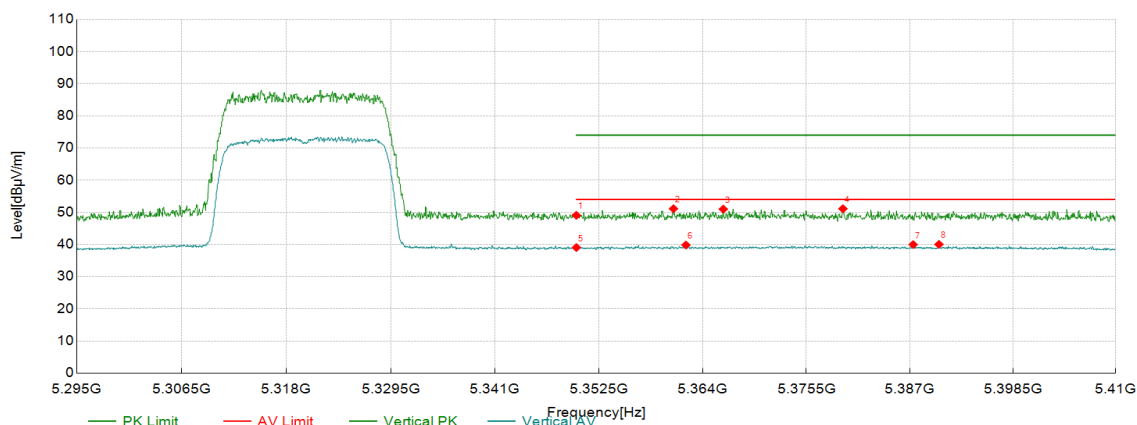

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	35.55	13.52	49.07	74.00	24.93	PK	Vertical	PASS
2	5360.76	37.58	13.55	51.13	74.00	22.87	PK	Vertical	PASS
3	5366.28	37.43	13.56	50.99	74.00	23.01	PK	Vertical	PASS
4	5379.57	37.52	13.60	51.12	74.00	22.88	PK	Vertical	PASS
5	5350.00	25.54	13.52	39.06	54.00	14.94	AV	Vertical	PASS
6	5362.14	26.28	13.55	39.83	54.00	14.17	AV	Vertical	PASS
7	5387.39	26.35	13.62	39.97	54.00	14.03	AV	Vertical	PASS
8	5390.27	26.41	13.63	40.04	54.00	13.96	AV	Vertical	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11N20-5500MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

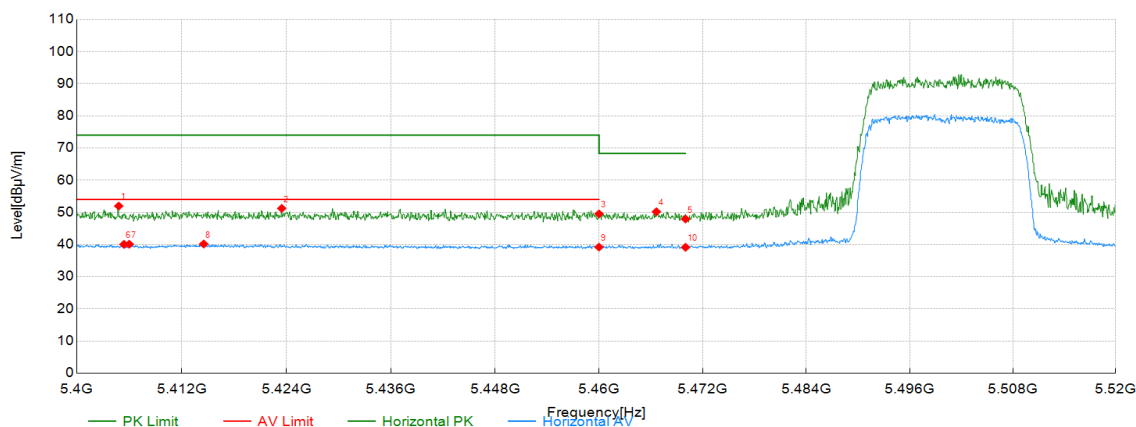

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5404.80	34.29	17.67	51.96	74.00	22.04	PK	Horizont	PASS
2	5423.47	33.54	17.69	51.23	74.00	22.77	PK	Horizont	PASS
3	5460.00	31.80	17.72	49.52	68.30	18.78	PK	Horizont	PASS
4	5466.63	32.46	17.73	50.19	68.30	18.11	PK	Horizont	PASS
5	5470.00	30.20	17.73	47.93	68.30	20.37	PK	Horizont	PASS
6	5405.40	22.38	17.67	40.05	54.00	13.95	AV	Horizont	PASS
7	5406.00	22.41	17.67	40.08	54.00	13.92	AV	Horizont	PASS
8	5414.53	22.48	17.68	40.16	54.00	13.84	AV	Horizont	PASS
9	5460.00	21.47	17.72	39.19	54.00	14.81	AV	Horizont	PASS
10	5470.00	21.40	17.73	39.13	-	-	AV	Horizont	NA

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N20-5500MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

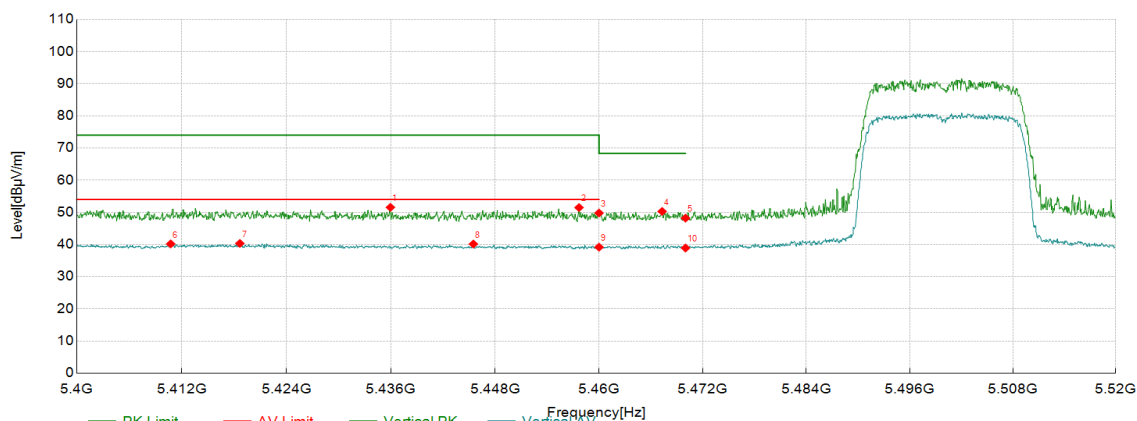

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5435.96	33.85	17.70	51.55	74.00	22.45	PK	Vertical	PASS
2	5457.69	33.77	17.72	51.49	74.00	22.51	PK	Vertical	PASS
3	5460.00	32.07	17.72	49.79	68.30	18.51	PK	Vertical	PASS
4	5467.29	32.56	17.73	50.29	68.30	18.01	PK	Vertical	PASS
5	5470.00	30.47	17.73	48.20	68.30	20.10	PK	Vertical	PASS
6	5410.75	22.51	17.67	40.18	54.00	13.82	AV	Vertical	PASS
7	5418.67	22.65	17.68	40.33	54.00	13.67	AV	Vertical	PASS
8	5445.50	22.44	17.71	40.15	54.00	13.85	AV	Vertical	PASS
9	5460.00	21.46	17.72	39.18	54.00	14.82	AV	Vertical	PASS
10	5470.00	21.18	17.73	38.91	-	-	AV	Vertical	NA

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)

