


Test Mode:	802.11N20-5745MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

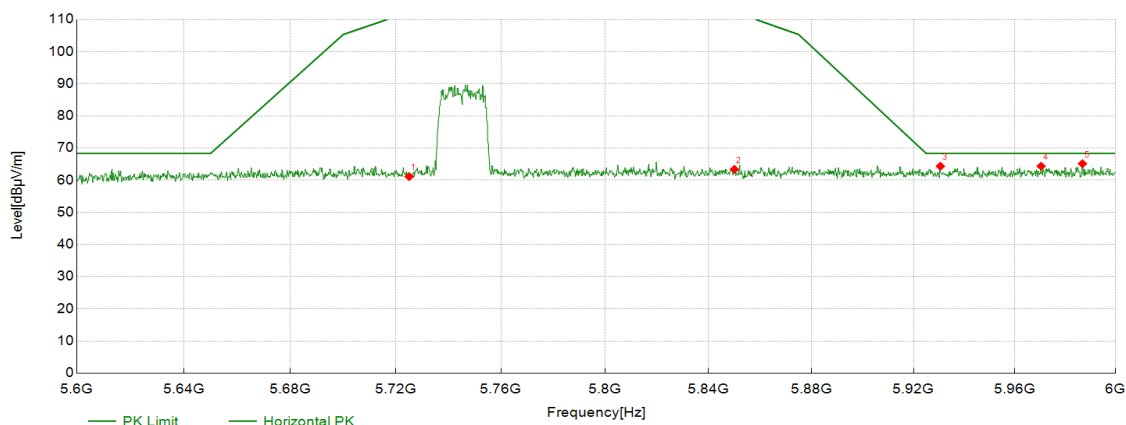

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	42.54	18.58	61.12	122.30	61.18	PK	Horizont	PASS
2	5850.00	44.29	19.10	63.39	122.30	58.91	PK	Horizont	PASS
3	5930.57	44.92	19.41	64.33	68.30	3.97	PK	Horizont	PASS
4	5970.39	44.95	19.41	64.36	68.30	3.94	PK	Horizont	PASS
5	5986.79	45.69	19.43	65.12	68.30	3.18	PK	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N20-5745MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

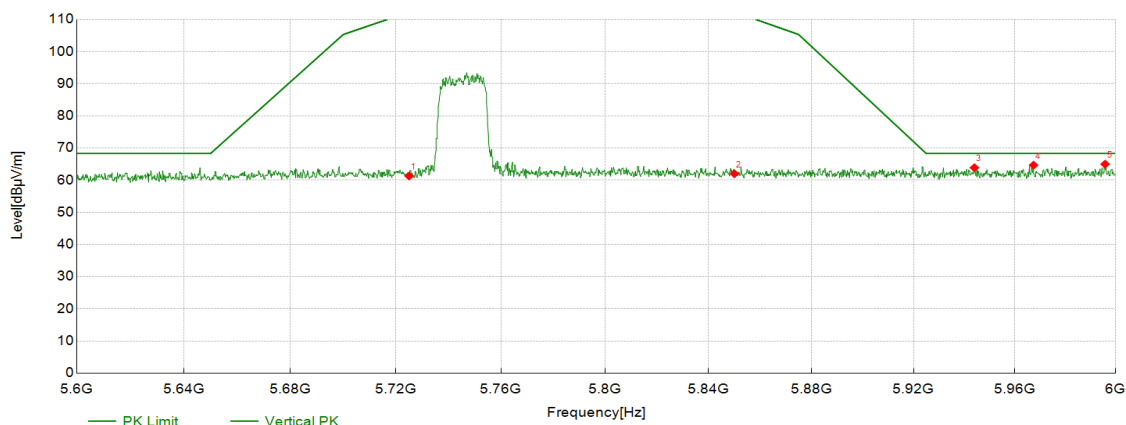

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	42.71	18.58	61.29	122.30	61.01	PK	Vertical	PASS
2	5850.00	42.91	19.10	62.01	122.30	60.29	PK	Vertical	PASS
3	5943.97	44.48	19.40	63.88	68.30	4.42	PK	Vertical	PASS
4	5967.38	45.25	19.41	64.66	68.30	3.64	PK	Vertical	PASS
5	5995.80	45.54	19.44	64.98	68.30	3.32	PK	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N20-5825MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

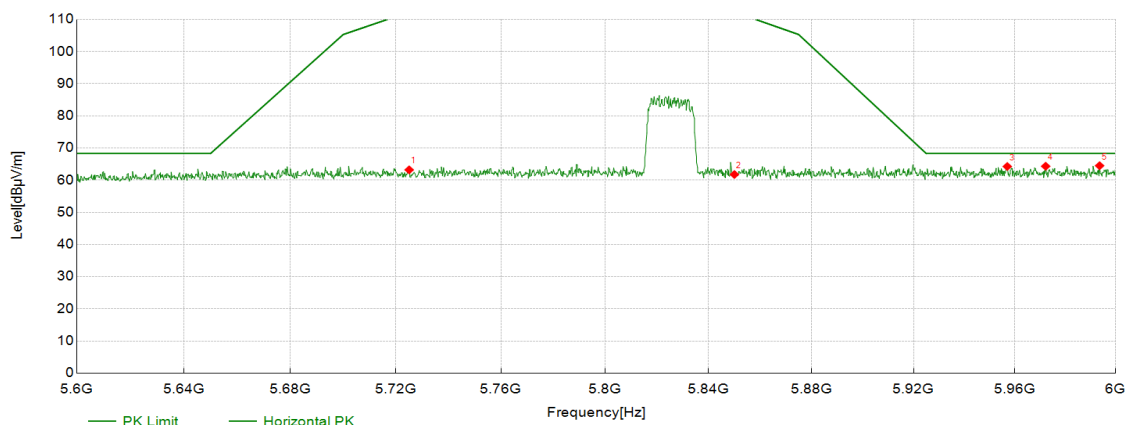

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	44.64	18.58	63.22	122.30	59.08	PK	Horizont	PASS
2	5850.00	42.67	19.10	61.77	122.30	60.53	PK	Horizont	PASS
3	5956.98	44.87	19.40	64.27	68.30	4.03	PK	Horizont	PASS
4	5972.19	44.92	19.41	64.33	68.30	3.97	PK	Horizont	PASS
5	5993.60	45.07	19.43	64.50	68.30	3.80	PK	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N20-5825MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

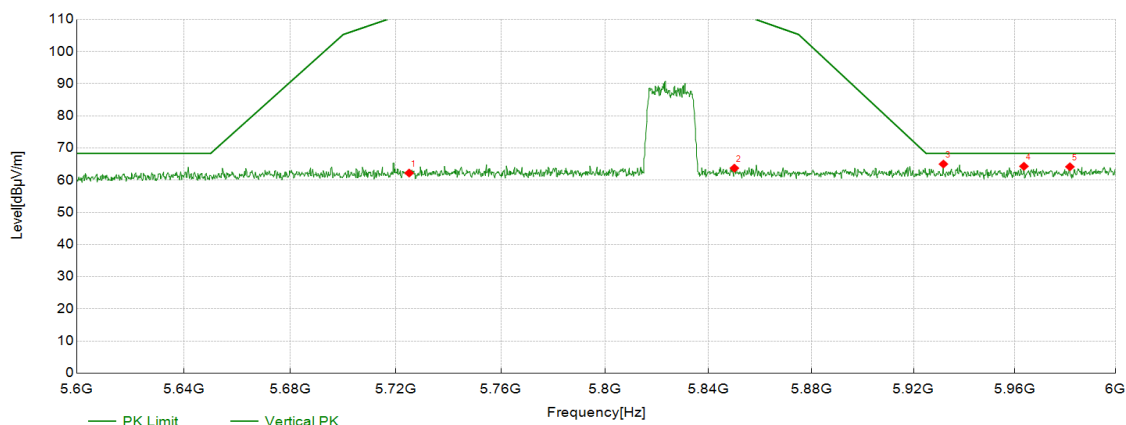

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	43.64	18.58	62.22	122.30	60.08	PK	Vertical	PASS
2	5850.00	44.65	19.10	63.75	122.30	58.55	PK	Vertical	PASS
3	5931.77	45.61	19.41	65.02	68.30	3.28	PK	Vertical	PASS
4	5963.58	44.91	19.41	64.32	68.30	3.98	PK	Vertical	PASS
5	5981.79	44.75	19.42	64.17	68.30	4.13	PK	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC20-5180MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

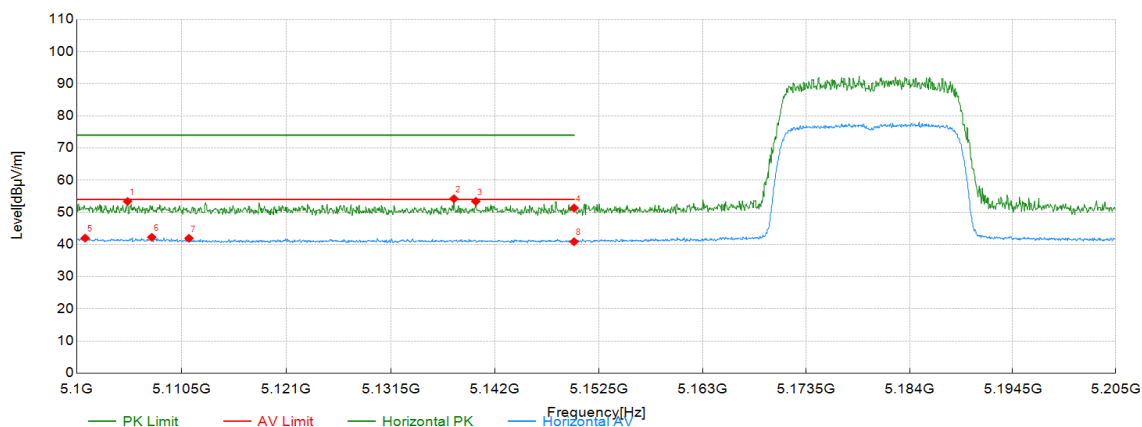

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5105.10	35.74	17.66	53.40	74.00	20.60	PK	Horizont	PASS
2	5137.87	36.69	17.56	54.25	74.00	19.75	PK	Horizont	PASS
3	5140.08	35.86	17.55	53.41	74.00	20.59	PK	Horizont	PASS
4	5150.00	33.82	17.52	51.34	74.00	22.66	PK	Horizont	PASS
5	5100.84	24.30	17.68	41.98	54.00	12.02	AV	Horizont	PASS
6	5107.51	24.59	17.65	42.24	54.00	11.76	AV	Horizont	PASS
7	5111.24	24.28	17.65	41.93	54.00	12.07	AV	Horizont	PASS
8	5150.00	23.35	17.52	40.87	54.00	13.13	AV	Horizont	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11AC20-5180MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

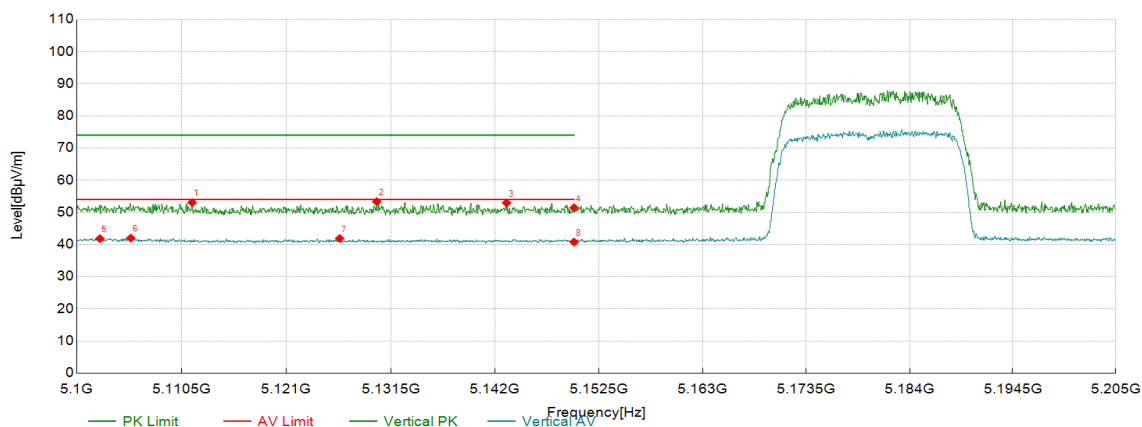

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5111.56	35.41	17.64	53.05	74.00	20.95	PK	Vertical	PASS
2	5130.10	35.77	17.58	53.35	74.00	20.65	PK	Vertical	PASS
3	5143.18	35.40	17.55	52.95	74.00	21.05	PK	Vertical	PASS
4	5150.00	33.92	17.52	51.44	74.00	22.56	PK	Vertical	PASS
5	5102.31	24.15	17.67	41.82	54.00	12.18	AV	Vertical	PASS
6	5105.41	24.34	17.66	42.00	54.00	12.00	AV	Vertical	PASS
7	5126.37	24.29	17.59	41.88	54.00	12.12	AV	Vertical	PASS
8	5150.00	23.24	17.52	40.76	54.00	13.24	AV	Vertical	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11AC20-5320MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

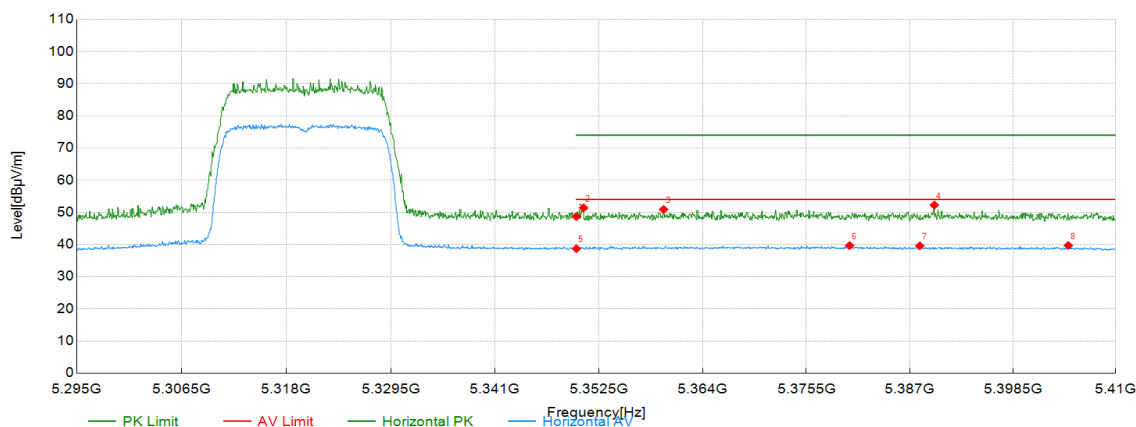

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	35.15	13.52	48.67	74.00	25.33	PK	Horizont	PASS
2	5350.80	37.87	13.52	51.39	74.00	22.61	PK	Horizont	PASS
3	5359.66	37.36	13.55	50.91	74.00	23.09	PK	Horizont	PASS
4	5389.75	38.62	13.63	52.25	74.00	21.75	PK	Horizont	PASS
5	5350.00	25.16	13.52	38.68	54.00	15.32	AV	Horizont	PASS
6	5380.32	26.06	13.61	39.67	54.00	14.33	AV	Horizont	PASS
7	5388.14	25.95	13.63	39.58	54.00	14.42	AV	Horizont	PASS
8	5404.71	26.05	13.67	39.72	54.00	14.28	AV	Horizont	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11AC20-5320MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

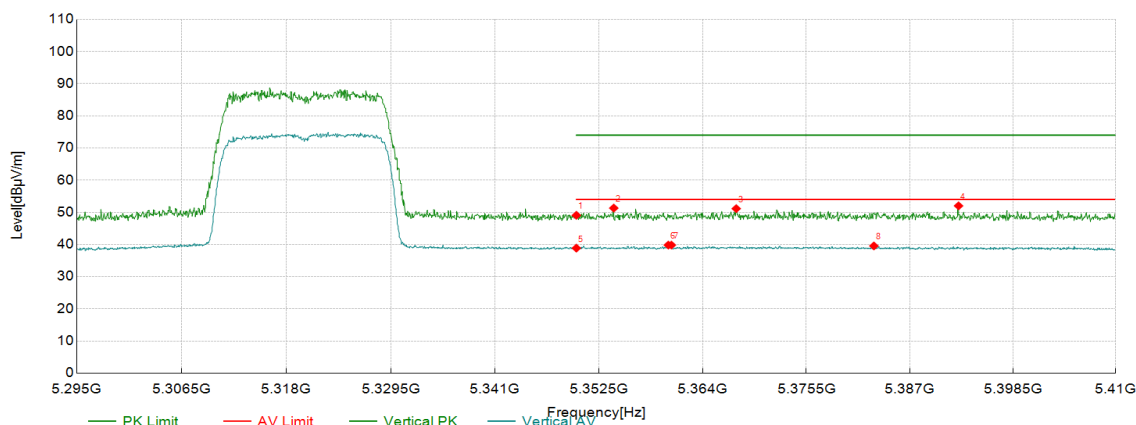

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	35.56	13.52	49.08	74.00	24.92	PK	Vertical	PASS
2	5354.14	37.80	13.53	51.33	74.00	22.67	PK	Vertical	PASS
3	5367.72	37.59	13.57	51.16	74.00	22.84	PK	Vertical	PASS
4	5392.45	38.38	13.64	52.02	74.00	21.98	PK	Vertical	PASS
5	5350.00	25.35	13.52	38.87	54.00	15.13	AV	Vertical	PASS
6	5360.18	26.27	13.55	39.82	54.00	14.18	AV	Vertical	PASS
7	5360.53	26.28	13.55	39.83	54.00	14.17	AV	Vertical	PASS
8	5383.02	25.94	13.62	39.56	54.00	14.44	AV	Vertical	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11AC20-5500MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

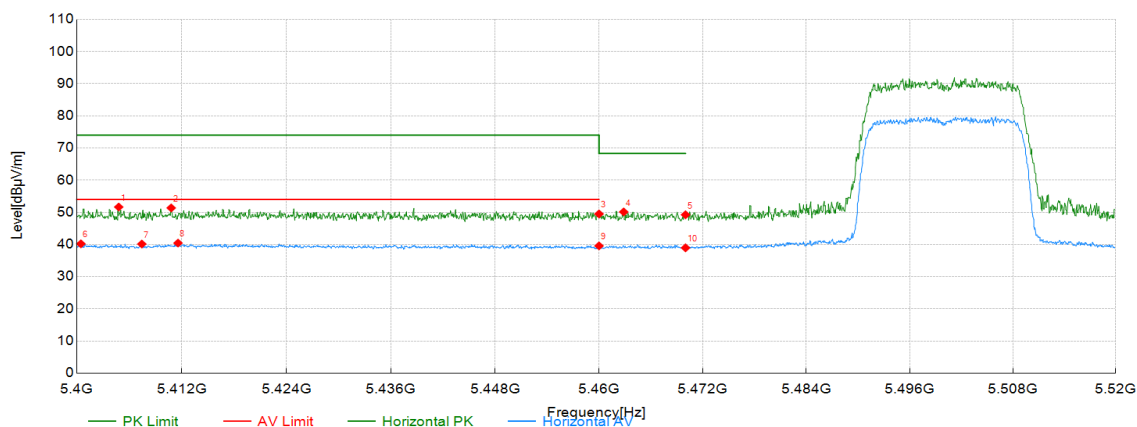

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5404.80	33.99	17.67	51.66	74.00	22.34	PK	Horizont	PASS
2	5410.81	33.70	17.67	51.37	74.00	22.63	PK	Horizont	PASS
3	5460.00	31.79	17.72	49.51	68.30	18.79	PK	Horizont	PASS
4	5462.85	32.41	17.72	50.13	68.30	18.17	PK	Horizont	PASS
5	5470.00	31.51	17.73	49.24	68.30	19.06	PK	Horizont	PASS
6	5400.48	22.55	17.66	40.21	54.00	13.79	AV	Horizont	PASS
7	5407.44	22.49	17.67	40.16	54.00	13.84	AV	Horizont	PASS
8	5411.59	22.77	17.68	40.45	54.00	13.55	AV	Horizont	PASS
9	5460.00	21.86	17.72	39.58	54.00	14.42	AV	Horizont	PASS
10	5470.00	21.24	17.73	38.97	-	-	AV	Horizont	NA

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC20-5500MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

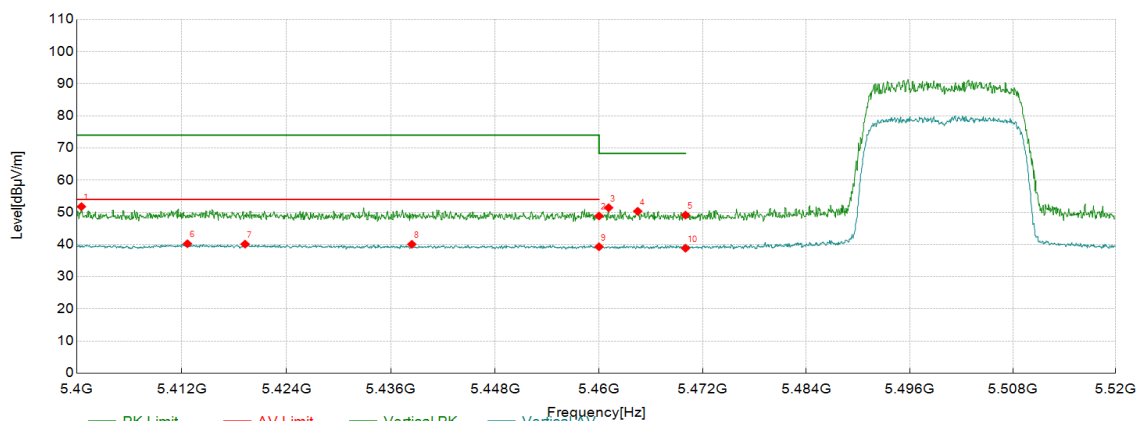

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5400.54	34.12	17.66	51.78	74.00	22.22	PK	Vertical	PASS
2	5460.00	31.13	17.72	48.85	68.30	19.45	PK	Vertical	PASS
3	5461.11	33.71	17.72	51.43	68.30	16.87	PK	Vertical	PASS
4	5464.47	32.61	17.73	50.34	68.30	17.96	PK	Vertical	PASS
5	5470.00	31.42	17.73	49.15	68.30	19.15	PK	Vertical	PASS
6	5412.67	22.56	17.68	40.24	54.00	13.76	AV	Vertical	PASS
7	5419.27	22.44	17.68	40.12	54.00	13.88	AV	Vertical	PASS
8	5438.42	22.37	17.70	40.07	54.00	13.93	AV	Vertical	PASS
9	5460.00	21.56	17.72	39.28	54.00	14.72	AV	Vertical	PASS
10	5470.00	21.12	17.73	38.85	-	-	AV	Vertical	NA

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11AC20-5745MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

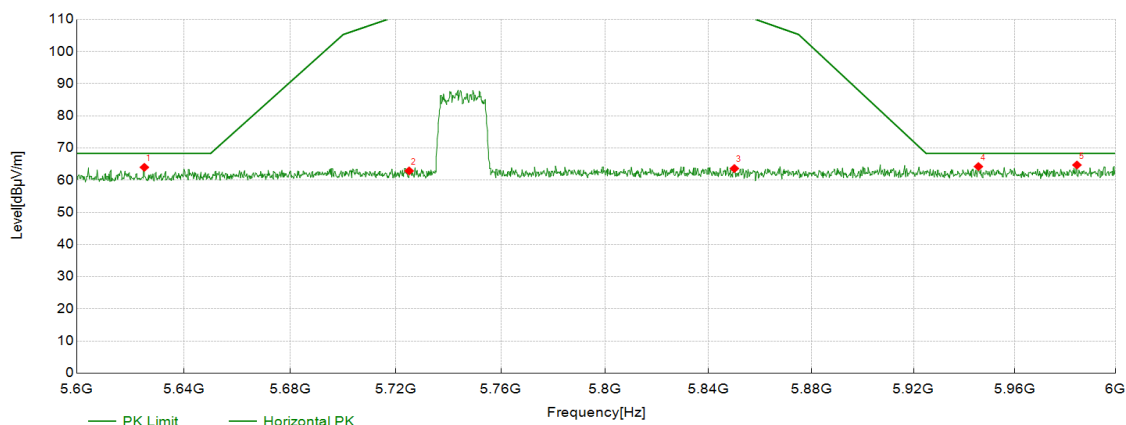

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5625.21	45.82	18.18	64.00	68.30	4.30	PK	Horizont	PASS
2	5725.00	44.30	18.58	62.88	122.30	59.42	PK	Horizont	PASS
3	5850.00	44.53	19.10	63.63	122.30	58.67	PK	Horizont	PASS
4	5945.57	44.84	19.40	64.24	68.30	4.06	PK	Horizont	PASS
5	5984.59	45.29	19.43	64.72	68.30	3.58	PK	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC20-5745MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

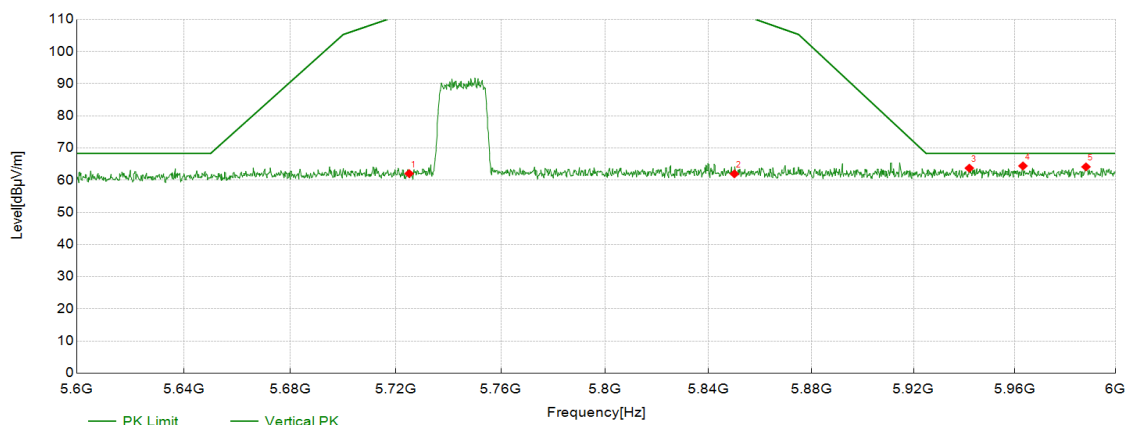

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	43.47	18.58	62.05	122.30	60.25	PK	Vertical	PASS
2	5850.00	42.87	19.10	61.97	122.30	60.33	PK	Vertical	PASS
3	5941.97	44.35	19.40	63.75	68.30	4.55	PK	Vertical	PASS
4	5963.18	45.03	19.40	64.43	68.30	3.87	PK	Vertical	PASS
5	5988.19	44.72	19.43	64.15	68.30	4.15	PK	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC20-5825MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

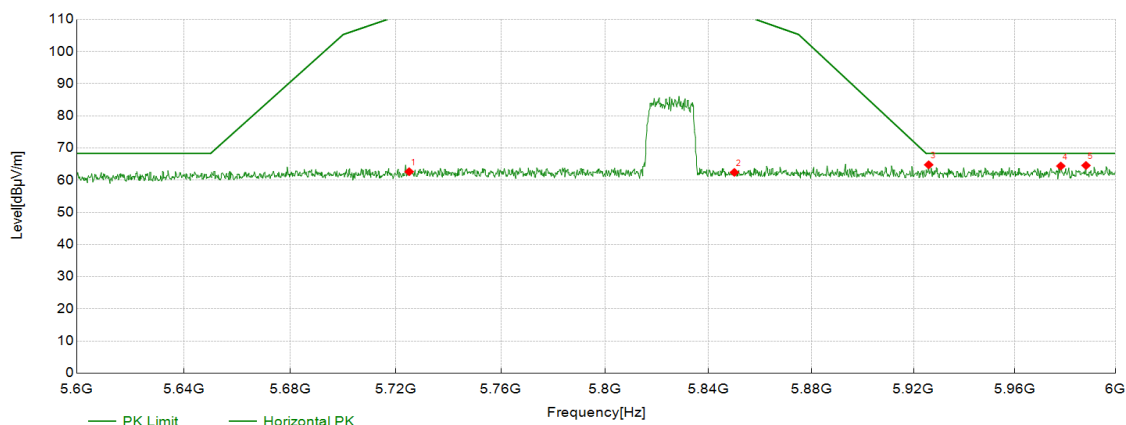

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	44.06	18.58	62.64	122.30	59.66	PK	Horizont	PASS
2	5850.00	43.32	19.10	62.42	122.30	59.88	PK	Horizont	PASS
3	5925.96	45.37	19.42	64.79	68.30	3.51	PK	Horizont	PASS
4	5978.19	44.98	19.42	64.40	68.30	3.90	PK	Horizont	PASS
5	5988.19	45.14	19.43	64.57	68.30	3.73	PK	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC20-5825MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

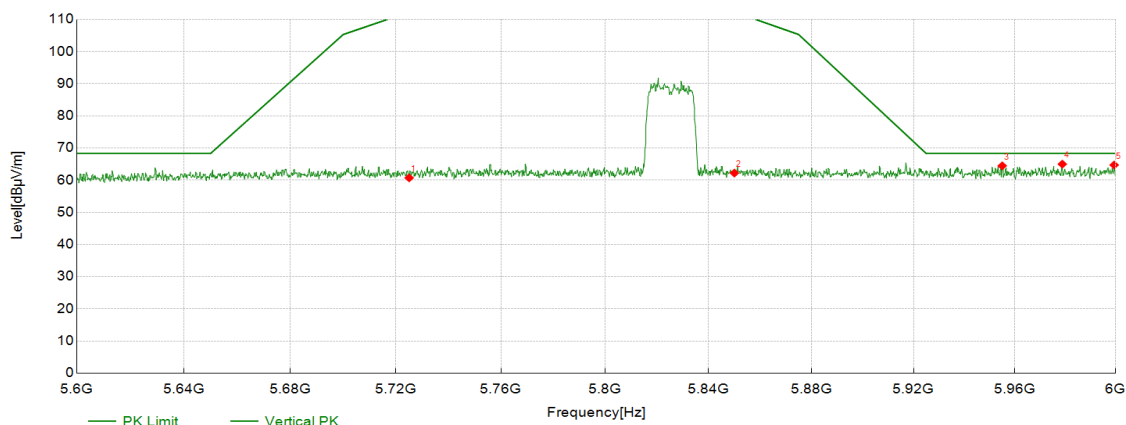

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	42.14	18.58	60.72	122.30	61.58	PK	Vertical	PASS
2	5850.00	43.11	19.10	62.21	122.30	60.09	PK	Vertical	PASS
3	5954.98	45.06	19.40	64.46	68.30	3.84	PK	Vertical	PASS
4	5978.79	45.58	19.42	65.00	68.30	3.30	PK	Vertical	PASS
5	5999.40	45.28	19.44	64.72	68.30	3.58	PK	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX20-5180MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

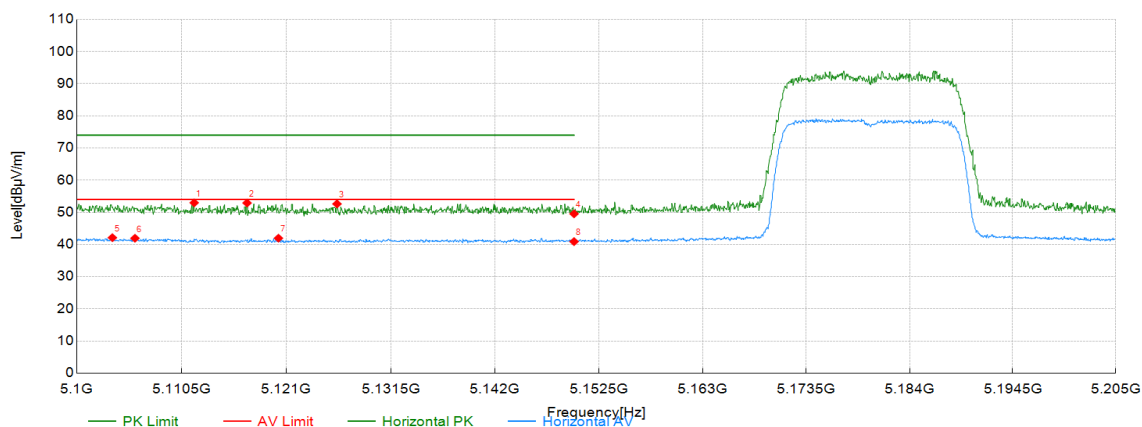

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5111.77	35.33	17.64	52.97	74.00	21.03	PK	Horizont	PASS
2	5117.07	35.29	17.62	52.91	74.00	21.09	PK	Horizont	PASS
3	5126.11	35.03	17.60	52.63	74.00	21.37	PK	Horizont	PASS
4	5150.00	32.02	17.52	49.54	74.00	24.46	PK	Horizont	PASS
5	5103.57	24.45	17.67	42.12	54.00	11.88	AV	Horizont	PASS
6	5105.83	24.28	17.66	41.94	54.00	12.06	AV	Horizont	PASS
7	5120.22	24.35	17.62	41.97	54.00	12.03	AV	Horizont	PASS
8	5150.00	23.38	17.52	40.90	54.00	13.10	AV	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX20-5180MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

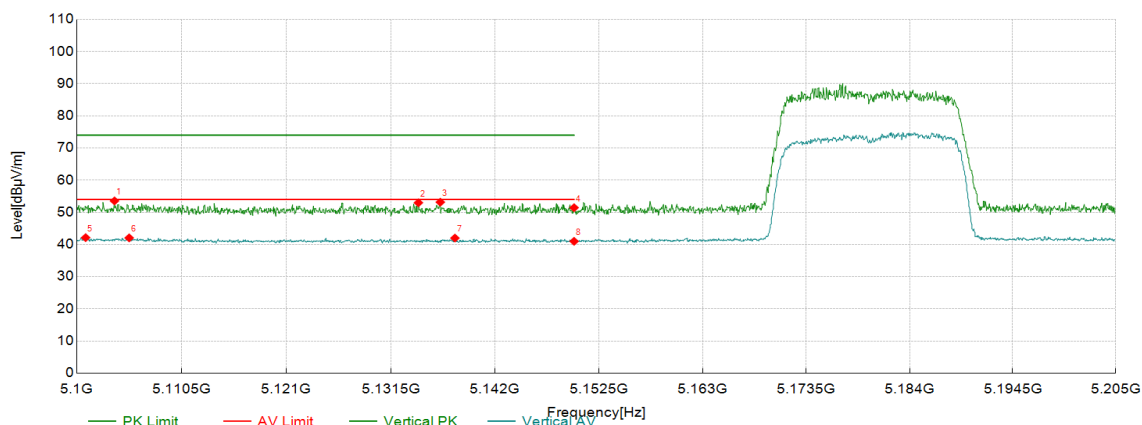

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5103.78	35.90	17.66	53.56	74.00	20.44	PK	Vertical	PASS
2	5134.30	35.41	17.57	52.98	74.00	21.02	PK	Vertical	PASS
3	5136.51	35.60	17.56	53.16	74.00	20.84	PK	Vertical	PASS
4	5150.00	33.92	17.52	51.44	74.00	22.56	PK	Vertical	PASS
5	5100.89	24.46	17.68	42.14	54.00	11.86	AV	Vertical	PASS
6	5105.25	24.40	17.66	42.06	54.00	11.94	AV	Vertical	PASS
7	5137.98	24.45	17.56	42.01	54.00	11.99	AV	Vertical	PASS
8	5150.00	23.47	17.52	40.99	54.00	13.01	AV	Vertical	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11AX20-5320MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

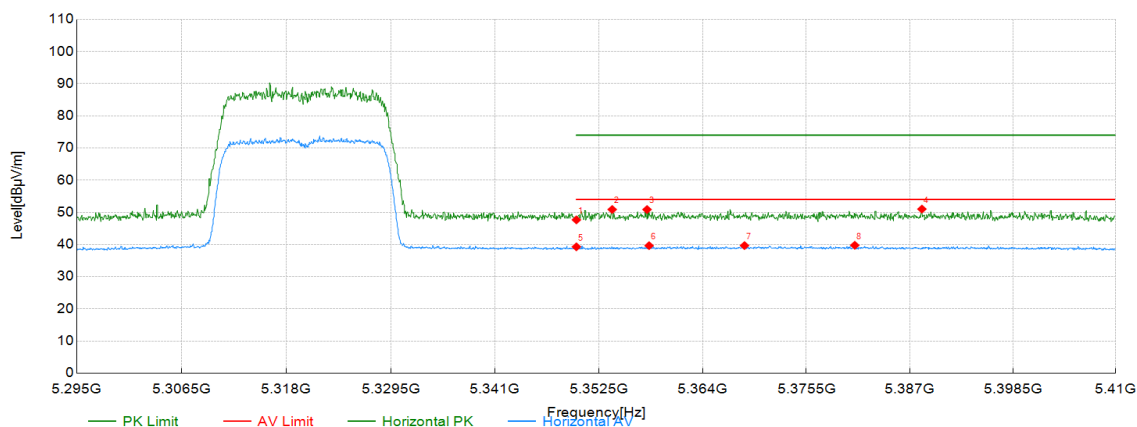

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	34.14	13.52	47.66	74.00	26.34	PK	Horizont	PASS
2	5353.97	37.36	13.53	50.89	74.00	23.11	PK	Horizont	PASS
3	5357.82	37.33	13.54	50.87	74.00	23.13	PK	Horizont	PASS
4	5388.37	37.39	13.63	51.02	74.00	22.98	PK	Horizont	PASS
5	5350.00	25.76	13.52	39.28	54.00	14.72	AV	Horizont	PASS
6	5358.05	26.11	13.54	39.65	54.00	14.35	AV	Horizont	PASS
7	5368.64	26.10	13.57	39.67	54.00	14.33	AV	Horizont	PASS
8	5380.89	26.14	13.61	39.75	54.00	14.25	AV	Horizont	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11AX20-5320MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

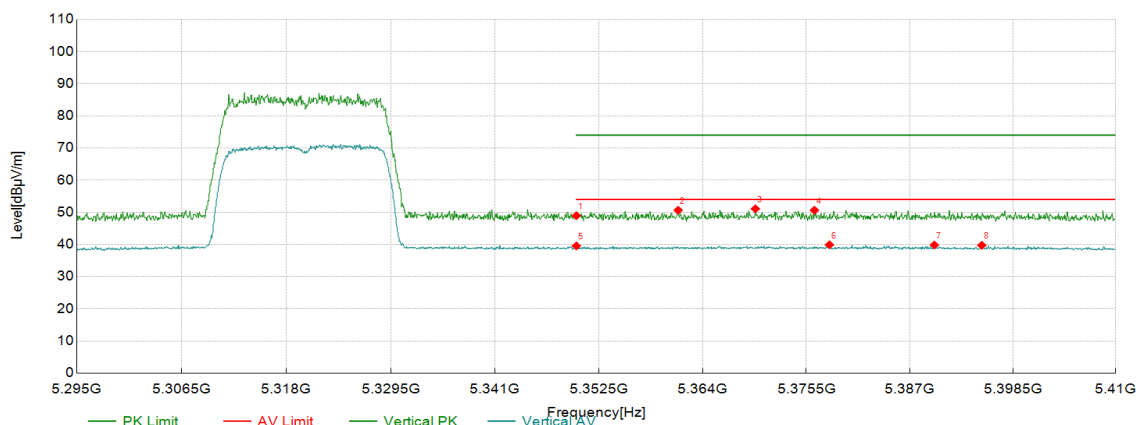

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	35.45	13.52	48.97	74.00	25.03	PK	Vertical	PASS
2	5361.27	37.12	13.55	50.67	74.00	23.33	PK	Vertical	PASS
3	5369.84	37.51	13.58	51.09	74.00	22.91	PK	Vertical	PASS
4	5376.40	37.07	13.59	50.66	74.00	23.34	PK	Vertical	PASS
5	5350.00	26.03	13.52	39.55	54.00	14.45	AV	Vertical	PASS
6	5378.07	26.31	13.60	39.91	54.00	14.09	AV	Vertical	PASS
7	5389.75	26.21	13.63	39.84	54.00	14.16	AV	Vertical	PASS
8	5395.04	26.11	13.65	39.76	54.00	14.24	AV	Vertical	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11AX20-5500MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

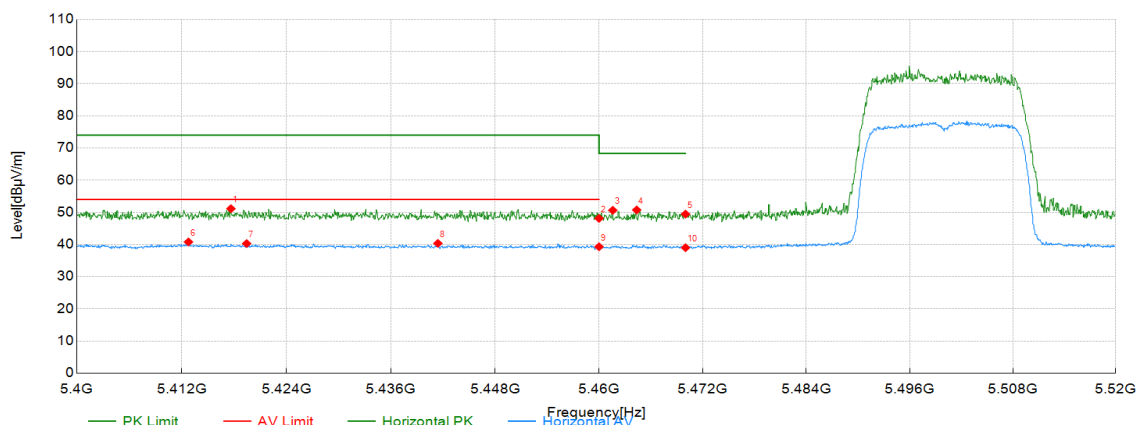

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5417.65	33.46	17.68	51.14	74.00	22.86	PK	Horizont	PASS
2	5460.00	30.40	17.72	48.12	68.30	20.18	PK	Horizont	PASS
3	5461.59	32.92	17.72	50.64	68.30	17.66	PK	Horizont	PASS
4	5464.35	33.01	17.73	50.74	68.30	17.56	PK	Horizont	PASS
5	5470.00	31.72	17.73	49.45	68.30	18.85	PK	Horizont	PASS
6	5412.79	23.11	17.68	40.79	54.00	13.21	AV	Horizont	PASS
7	5419.45	22.62	17.68	40.30	54.00	13.70	AV	Horizont	PASS
8	5441.42	22.66	17.70	40.36	54.00	13.64	AV	Horizont	PASS
9	5460.00	21.57	17.72	39.29	54.00	14.71	AV	Horizont	PASS
10	5470.00	21.28	17.73	39.01	-	-	AV	Horizont	NA

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX20-5500MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

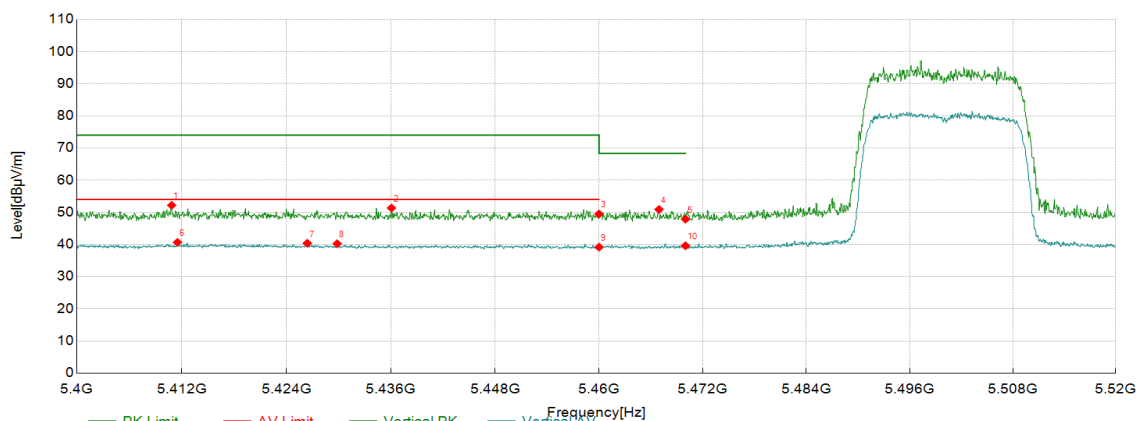

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5410.87	34.53	17.67	52.20	74.00	21.80	PK	Vertical	PASS
2	5436.08	33.66	17.70	51.36	74.00	22.64	PK	Vertical	PASS
3	5460.00	31.76	17.72	49.48	68.30	18.82	PK	Vertical	PASS
4	5466.93	33.18	17.73	50.91	68.30	17.39	PK	Vertical	PASS
5	5470.00	30.14	17.73	47.87	68.30	20.43	PK	Vertical	PASS
6	5411.53	23.00	17.68	40.68	54.00	13.32	AV	Vertical	PASS
7	5426.41	22.70	17.69	40.39	54.00	13.61	AV	Vertical	PASS
8	5429.83	22.55	17.69	40.24	54.00	13.76	AV	Vertical	PASS
9	5460.00	21.45	17.72	39.17	54.00	14.83	AV	Vertical	PASS
10	5470.00	21.87	17.73	39.60	-	-	AV	Vertical	NA

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX20-5745MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

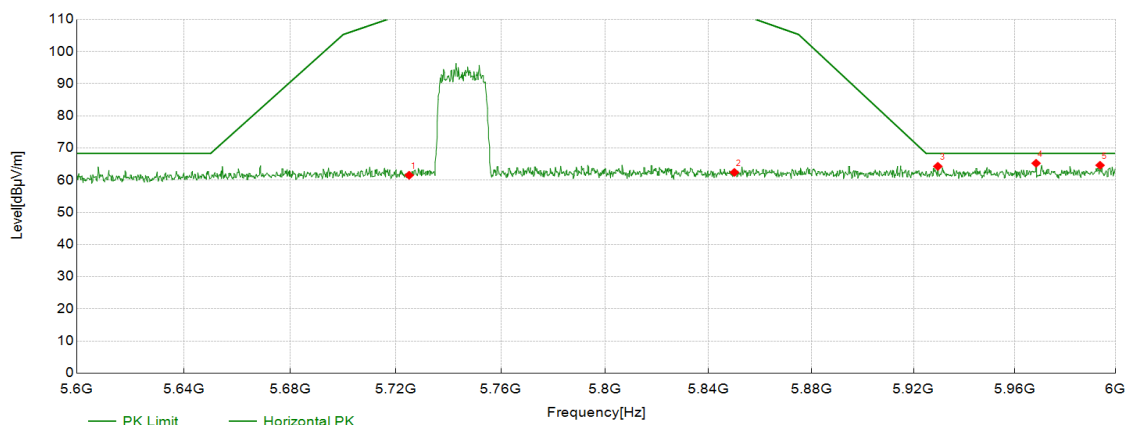

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	42.95	18.58	61.53	122.30	60.77	PK	Horizont	PASS
2	5850.00	43.32	19.10	62.42	122.30	59.88	PK	Horizont	PASS
3	5929.56	44.90	19.41	64.31	68.30	3.99	PK	Horizont	PASS
4	5968.38	45.85	19.41	65.26	68.30	3.04	PK	Horizont	PASS
5	5993.80	45.20	19.43	64.63	68.30	3.67	PK	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX20-5745MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

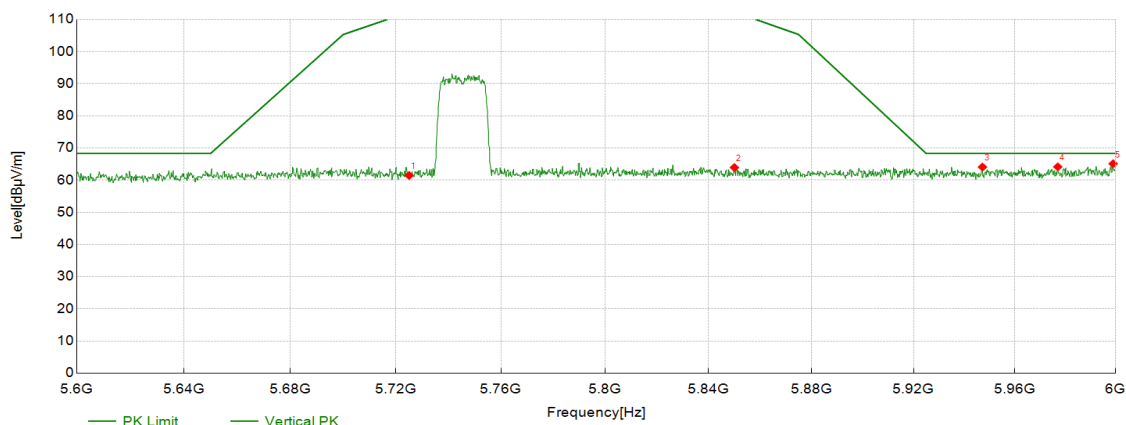

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	42.88	18.58	61.46	122.30	60.84	PK	Vertical	PASS
2	5850.00	44.84	19.10	63.94	122.30	58.36	PK	Vertical	PASS
3	5947.17	44.69	19.40	64.09	68.30	4.21	PK	Vertical	PASS
4	5976.99	44.73	19.42	64.15	68.30	4.15	PK	Vertical	PASS
5	5999.00	45.68	19.44	65.12	68.30	3.18	PK	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX20-5825MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

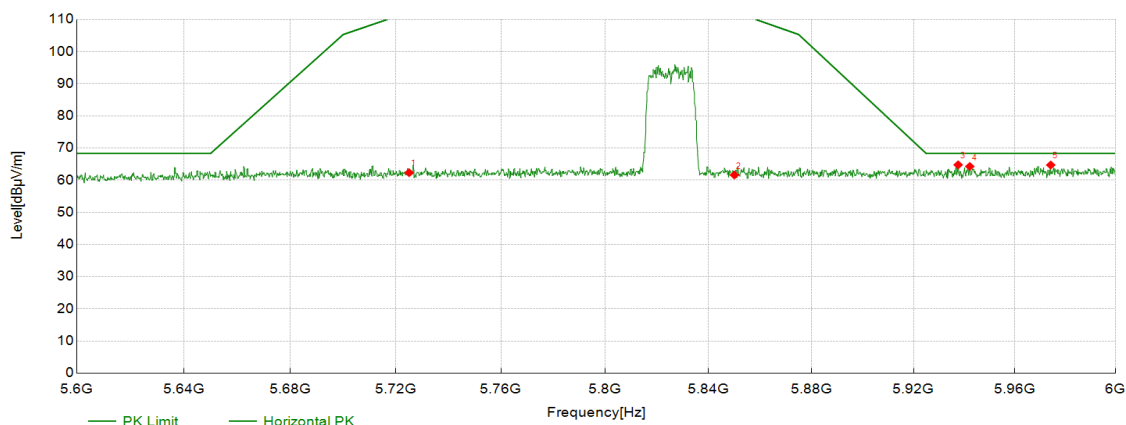

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	43.74	18.58	62.32	122.30	59.98	PK	Horizont	PASS
2	5850.00	42.51	19.10	61.61	122.30	60.69	PK	Horizont	PASS
3	5937.57	45.38	19.40	64.78	68.30	3.52	PK	Horizont	PASS
4	5942.17	44.88	19.40	64.28	68.30	4.02	PK	Horizont	PASS
5	5974.19	45.31	19.42	64.73	68.30	3.57	PK	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX20-5825MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

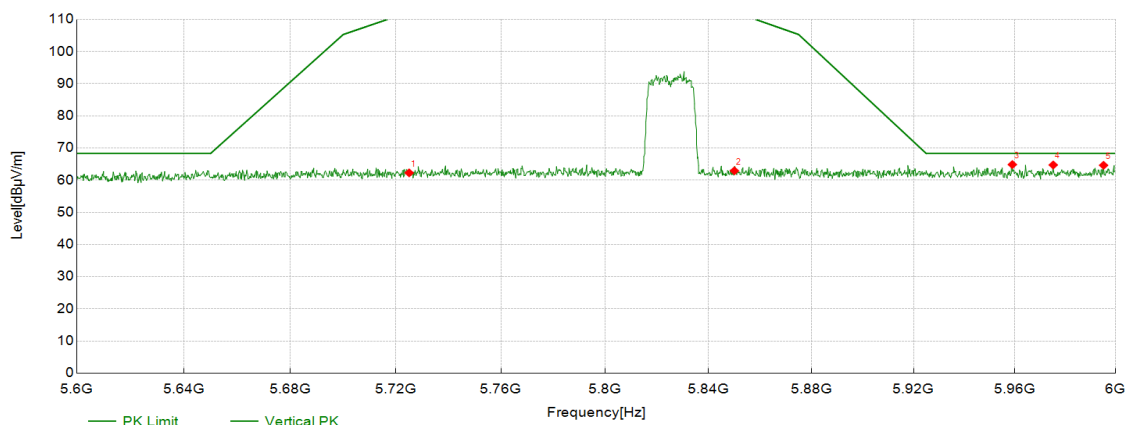

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	43.69	18.58	62.27	122.30	60.03	PK	Vertical	PASS
2	5850.00	43.82	19.10	62.92	122.30	59.38	PK	Vertical	PASS
3	5958.98	45.46	19.40	64.86	68.30	3.44	PK	Vertical	PASS
4	5975.19	45.31	19.42	64.73	68.30	3.57	PK	Vertical	PASS
5	5995.20	45.19	19.44	64.63	68.30	3.67	PK	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N40-5190MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

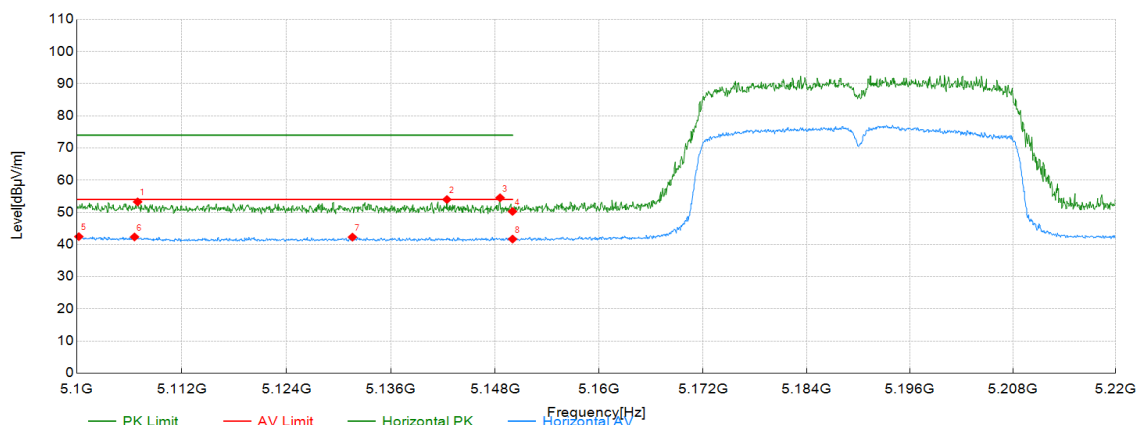

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5106.96	35.61	17.65	53.26	74.00	20.74	PK	Horizont	PASS
2	5142.44	36.44	17.55	53.99	74.00	20.01	PK	Horizont	PASS
3	5148.56	37.00	17.53	54.53	74.00	19.47	PK	Horizont	PASS
4	5150.00	32.76	17.52	50.28	74.00	23.72	PK	Horizont	PASS
5	5100.24	24.77	17.68	42.45	54.00	11.55	AV	Horizont	PASS
6	5106.60	24.69	17.65	42.34	54.00	11.66	AV	Horizont	PASS
7	5131.58	24.71	17.58	42.29	54.00	11.71	AV	Horizont	PASS
8	5150.00	24.17	17.52	41.69	54.00	12.31	AV	Horizont	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11N40-5190MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

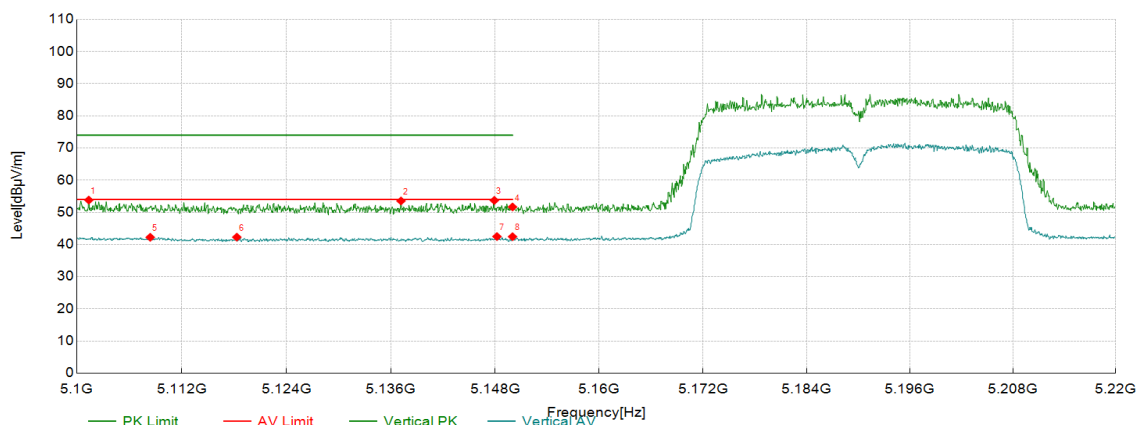

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5101.38	36.15	17.67	53.82	74.00	20.18	PK	Vertical	PASS
2	5137.16	35.99	17.56	53.55	74.00	20.45	PK	Vertical	PASS
3	5147.90	36.19	17.53	53.72	74.00	20.28	PK	Vertical	PASS
4	5150.00	34.16	17.52	51.68	74.00	22.32	PK	Vertical	PASS
5	5108.40	24.59	17.65	42.24	54.00	11.76	AV	Vertical	PASS
6	5118.31	24.67	17.62	42.29	54.00	11.71	AV	Vertical	PASS
7	5148.20	24.94	17.53	42.47	54.00	11.53	AV	Vertical	PASS
8	5150.00	24.91	17.52	42.43	54.00	11.57	AV	Vertical	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11N40-5310MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

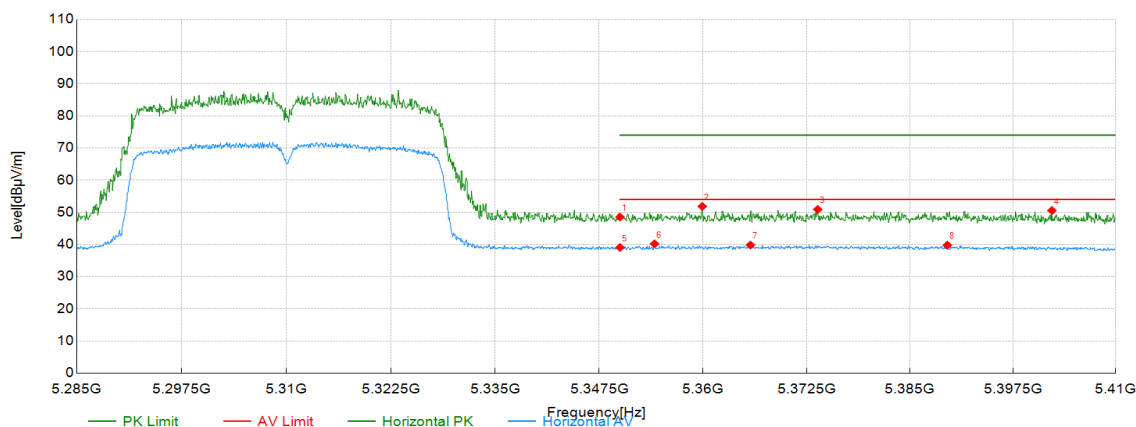

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	35.02	13.52	48.54	74.00	25.46	PK	Horizont	PASS
2	5359.91	38.30	13.55	51.85	74.00	22.15	PK	Horizont	PASS
3	5373.86	37.31	13.59	50.90	74.00	23.10	PK	Horizont	PASS
4	5402.25	36.91	13.67	50.58	74.00	23.42	PK	Horizont	PASS
5	5350.00	25.56	13.52	39.08	54.00	14.92	AV	Horizont	PASS
6	5354.16	26.67	13.53	40.20	54.00	13.80	AV	Horizont	PASS
7	5365.73	26.27	13.56	39.83	54.00	14.17	AV	Horizont	PASS
8	5389.55	26.17	13.63	39.80	54.00	14.20	AV	Horizont	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11N40-5310MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

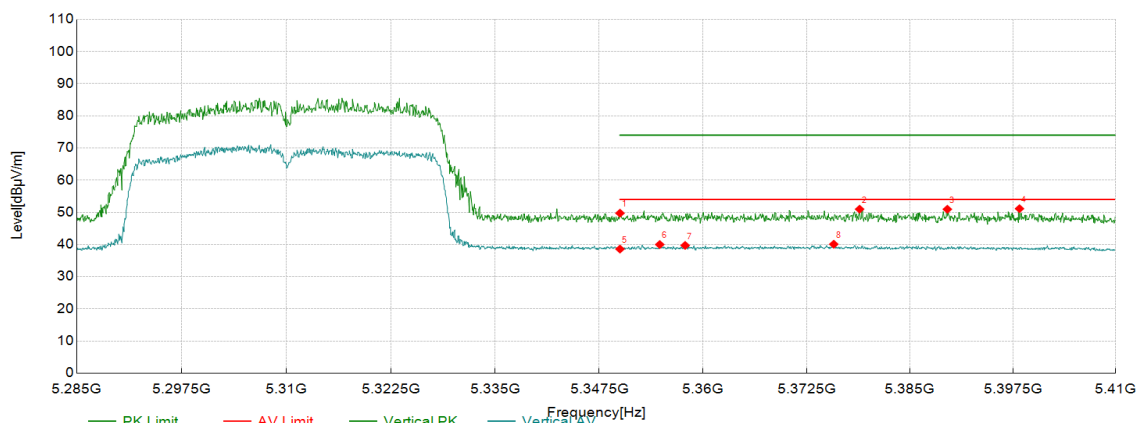

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	36.22	13.52	49.74	74.00	24.26	PK	Vertical	PASS
2	5378.92	37.39	13.60	50.99	74.00	23.01	PK	Vertical	PASS
3	5389.55	37.32	13.63	50.95	74.00	23.05	PK	Vertical	PASS
4	5398.31	37.49	13.66	51.15	74.00	22.85	PK	Vertical	PASS
5	5350.00	25.06	13.52	38.58	54.00	15.42	AV	Vertical	PASS
6	5354.78	26.46	13.53	39.99	54.00	14.01	AV	Vertical	PASS
7	5357.85	26.18	13.54	39.72	54.00	14.28	AV	Vertical	PASS
8	5375.80	26.50	13.59	40.09	54.00	13.91	AV	Vertical	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11N40-5510MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

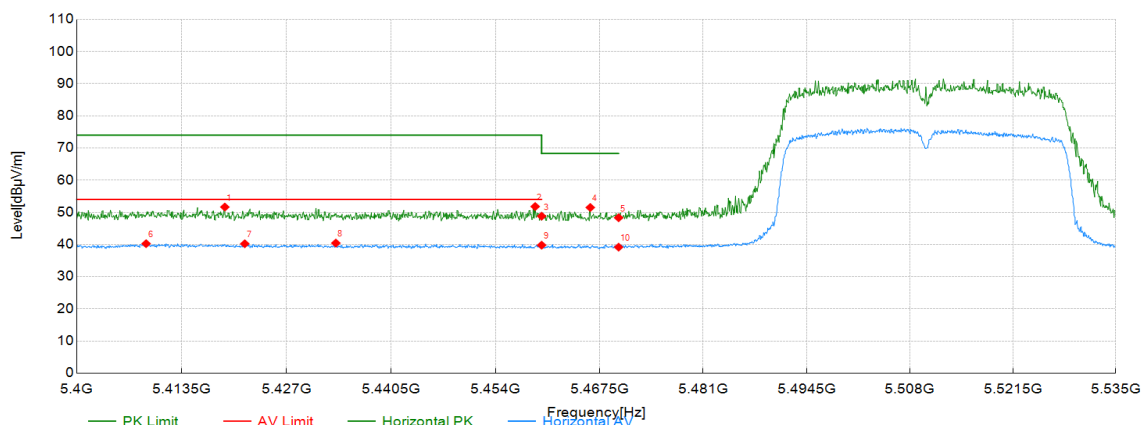

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5419.04	33.97	17.68	51.65	74.00	22.35	PK	Horizont	PASS
2	5459.16	34.09	17.72	51.81	74.00	22.19	PK	Horizont	PASS
3	5460.00	31.09	17.72	48.81	68.30	19.49	PK	Horizont	PASS
4	5466.32	33.78	17.73	51.51	68.30	16.79	PK	Horizont	PASS
5	5470.00	30.60	17.73	48.33	68.30	19.97	PK	Horizont	PASS
6	5408.91	22.59	17.67	40.26	54.00	13.74	AV	Horizont	PASS
7	5421.61	22.55	17.68	40.23	54.00	13.77	AV	Horizont	PASS
8	5433.36	22.74	17.70	40.44	54.00	13.56	AV	Horizont	PASS
9	5460.00	22.07	17.72	39.79	54.00	14.21	AV	Horizont	PASS
10	5470.00	21.45	17.73	39.18	-	-	AV	Horizont	NA

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N40-5510MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

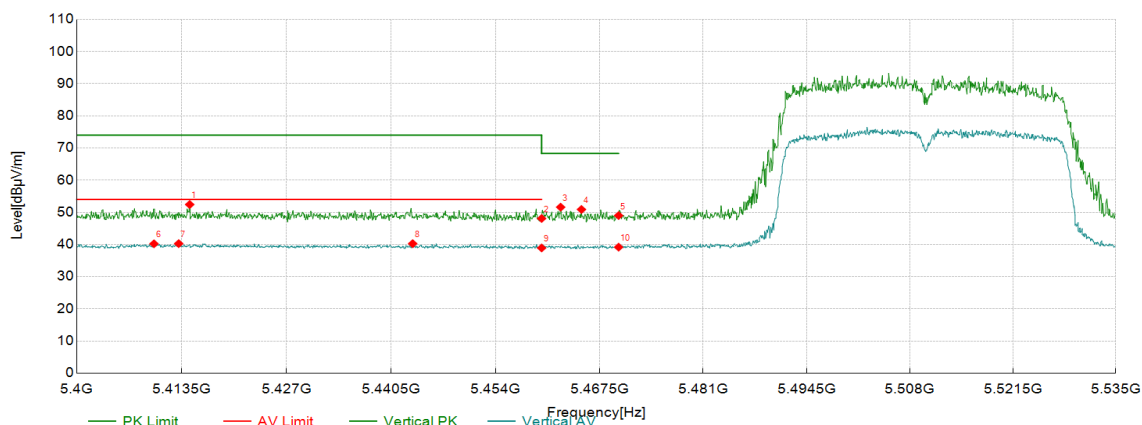

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5414.52	34.75	17.68	52.43	74.00	21.57	PK	Vertical	PASS
2	5460.00	30.37	17.72	48.09	68.30	20.21	PK	Vertical	PASS
3	5462.47	33.89	17.72	51.61	68.30	16.69	PK	Vertical	PASS
4	5465.17	33.16	17.73	50.89	68.30	17.41	PK	Vertical	PASS
5	5470.00	31.28	17.73	49.01	68.30	19.29	PK	Vertical	PASS
6	5409.93	22.55	17.67	40.22	54.00	13.78	AV	Vertical	PASS
7	5413.10	22.59	17.68	40.27	54.00	13.73	AV	Vertical	PASS
8	5443.29	22.55	17.71	40.26	54.00	13.74	AV	Vertical	PASS
9	5460.00	21.21	17.72	38.93	54.00	15.07	AV	Vertical	PASS
10	5470.00	21.45	17.73	39.18	-	-	AV	Vertical	NA

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N40-5755MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

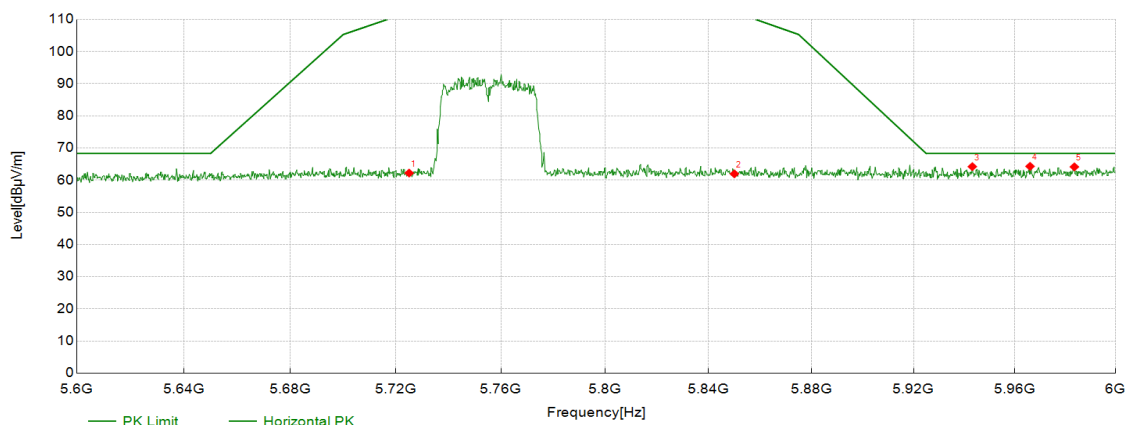

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	43.63	18.58	62.21	122.30	60.09	PK	Horizont	PASS
2	5850.00	42.87	19.10	61.97	122.30	60.33	PK	Horizont	PASS
3	5943.17	44.82	19.40	64.22	68.30	4.08	PK	Horizont	PASS
4	5965.98	44.89	19.41	64.30	68.30	4.00	PK	Horizont	PASS
5	5983.59	44.72	19.42	64.14	68.30	4.16	PK	Horizont	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11N40-5755MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

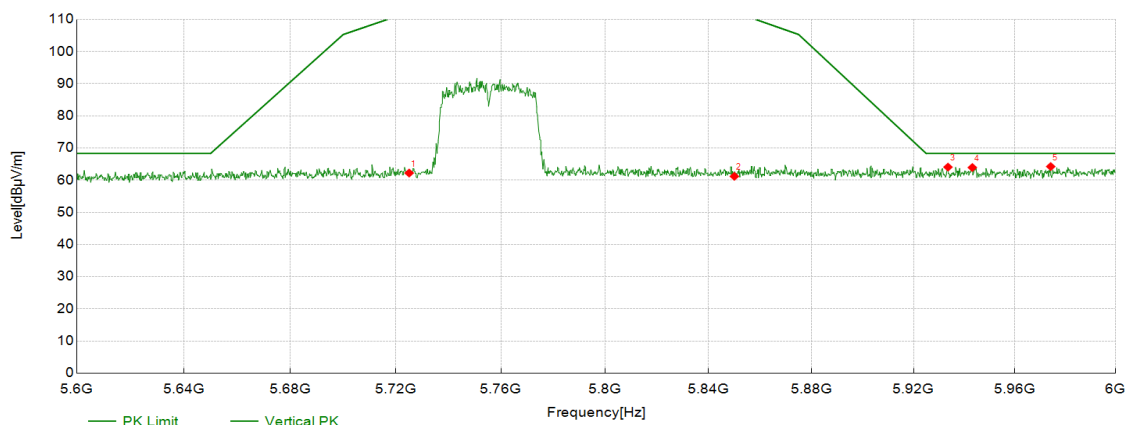

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	43.64	18.58	62.22	122.30	60.08	PK	Vertical	PASS
2	5850.00	42.10	19.10	61.20	122.30	61.10	PK	Vertical	PASS
3	5933.57	44.66	19.41	64.07	68.30	4.23	PK	Vertical	PASS
4	5943.17	44.54	19.40	63.94	68.30	4.36	PK	Vertical	PASS
5	5974.19	44.82	19.42	64.24	68.30	4.06	PK	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N40-5795MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

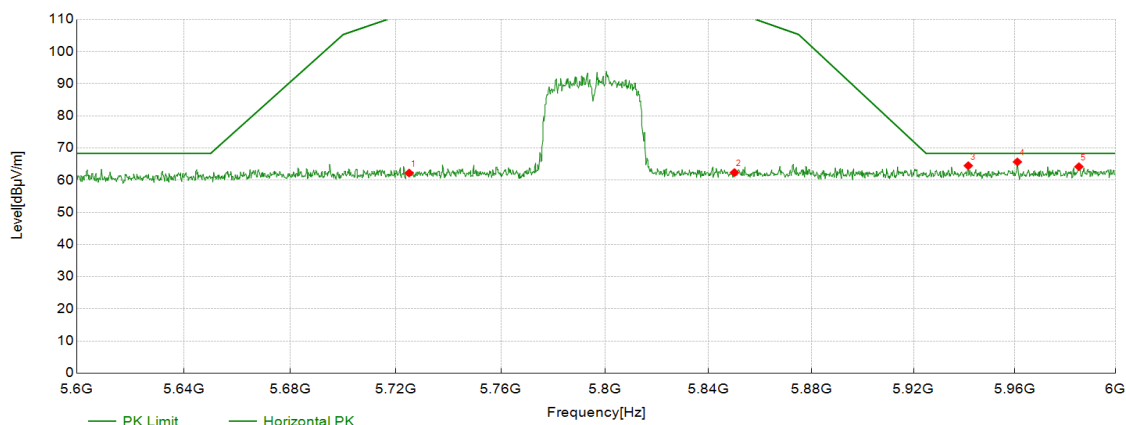

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	43.65	18.58	62.23	122.30	60.07	PK	Horizont	PASS
2	5850.00	43.26	19.10	62.36	122.30	59.94	PK	Horizont	PASS
3	5941.57	45.10	19.40	64.50	68.30	3.80	PK	Horizont	PASS
4	5960.98	46.29	19.40	65.69	68.30	2.61	PK	Horizont	PASS
5	5985.39	44.77	19.43	64.20	68.30	4.10	PK	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N40-5795MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

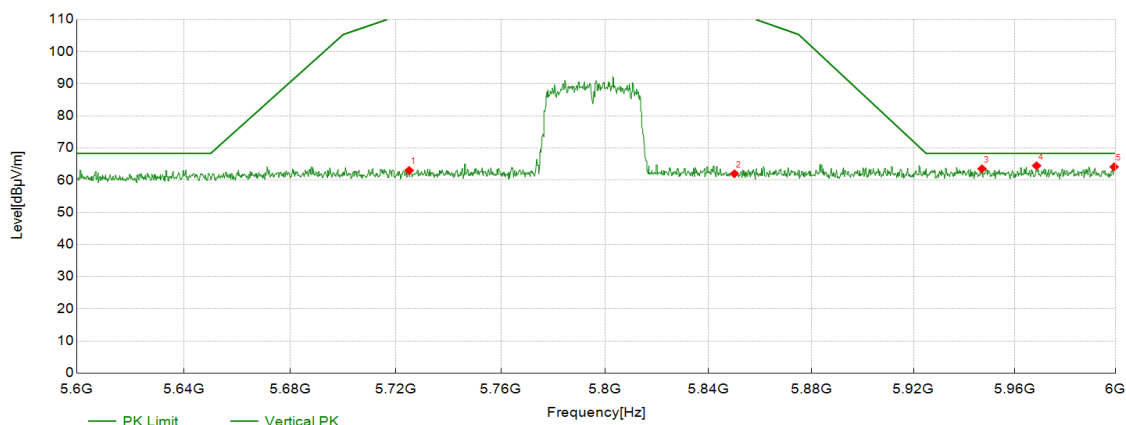

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	44.46	18.58	63.04	122.30	59.26	PK	Vertical	PASS
2	5850.00	42.89	19.10	61.99	122.30	60.31	PK	Vertical	PASS
3	5946.97	44.15	19.40	63.55	68.30	4.75	PK	Vertical	PASS
4	5968.58	45.07	19.41	64.48	68.30	3.82	PK	Vertical	PASS
5	5999.40	44.71	19.44	64.15	68.30	4.15	PK	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC40-5190MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

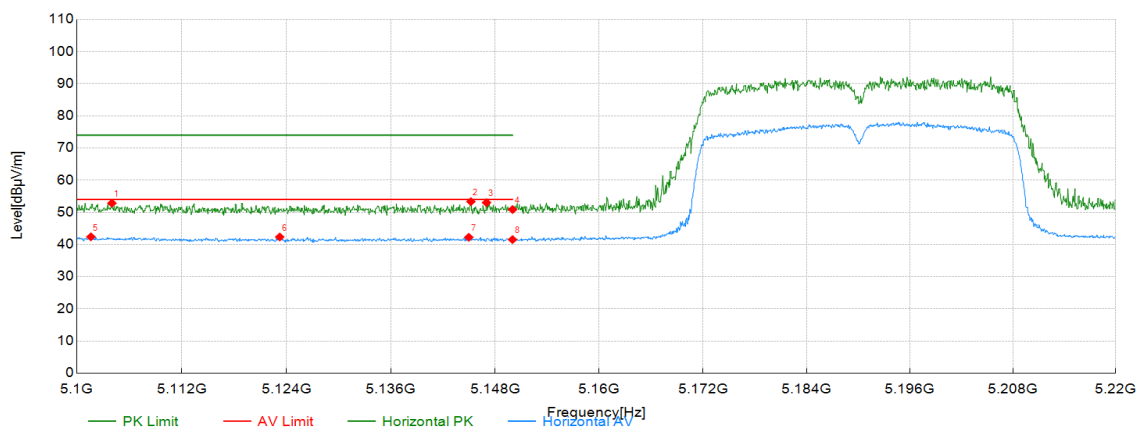

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5104.02	35.18	17.66	52.84	74.00	21.16	PK	Horizont	PASS
2	5145.20	35.80	17.54	53.34	74.00	20.66	PK	Horizont	PASS
3	5147.00	35.49	17.53	53.02	74.00	20.98	PK	Horizont	PASS
4	5150.00	33.36	17.52	50.88	74.00	23.12	PK	Horizont	PASS
5	5101.62	24.72	17.67	42.39	54.00	11.61	AV	Horizont	PASS
6	5123.23	24.73	17.61	42.34	54.00	11.66	AV	Horizont	PASS
7	5144.96	24.70	17.54	42.24	54.00	11.76	AV	Horizont	PASS
8	5150.00	24.01	17.52	41.53	54.00	12.47	AV	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC40-5190MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

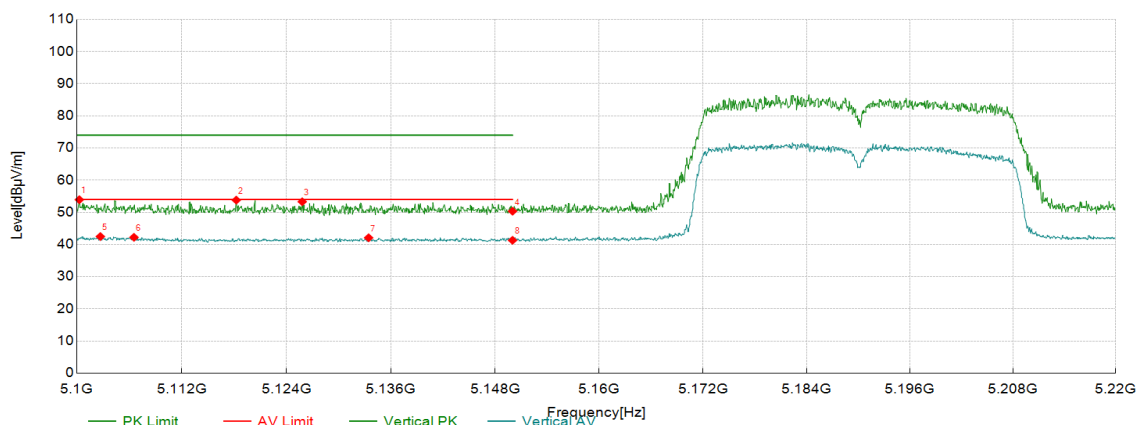

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5100.30	36.25	17.68	53.93	74.00	20.07	PK	Vertical	PASS
2	5118.25	36.18	17.62	53.80	74.00	20.20	PK	Vertical	PASS
3	5125.81	35.70	17.60	53.30	74.00	20.70	PK	Vertical	PASS
4	5150.00	32.84	17.52	50.36	74.00	23.64	PK	Vertical	PASS
5	5102.70	24.81	17.67	42.48	54.00	11.52	AV	Vertical	PASS
6	5106.54	24.58	17.65	42.23	54.00	11.77	AV	Vertical	PASS
7	5133.44	24.51	17.58	42.09	54.00	11.91	AV	Vertical	PASS
8	5150.00	23.79	17.52	41.31	54.00	12.69	AV	Vertical	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11AC40-5310MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

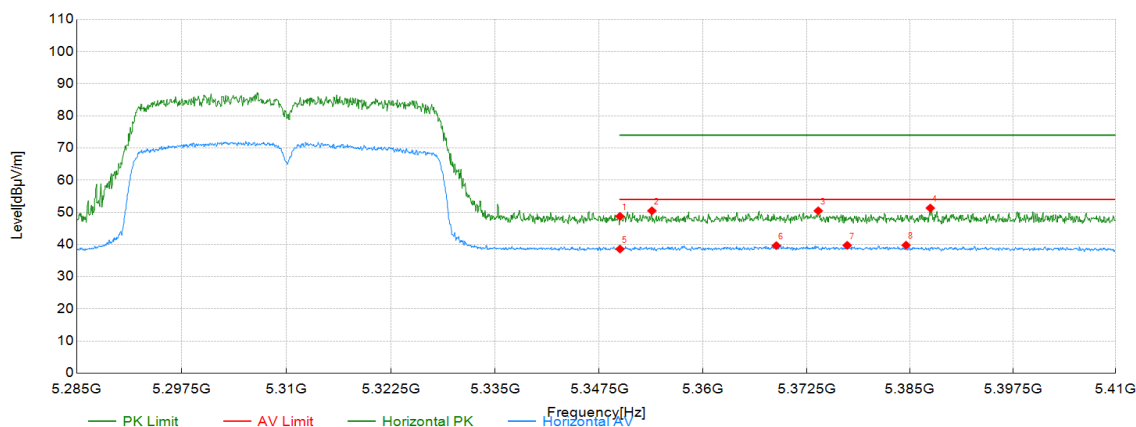

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	35.24	13.52	48.76	74.00	25.24	PK	Horizont	PASS
2	5353.85	36.96	13.53	50.49	74.00	23.51	PK	Horizont	PASS
3	5373.92	36.90	13.59	50.49	74.00	23.51	PK	Horizont	PASS
4	5387.49	37.71	13.62	51.33	74.00	22.67	PK	Horizont	PASS
5	5350.00	25.08	13.52	38.60	54.00	15.40	AV	Horizont	PASS
6	5368.85	26.09	13.57	39.66	54.00	14.34	AV	Horizont	PASS
7	5377.42	26.15	13.59	39.74	54.00	14.26	AV	Horizont	PASS
8	5384.55	26.18	13.62	39.80	54.00	14.20	AV	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC40-5310MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

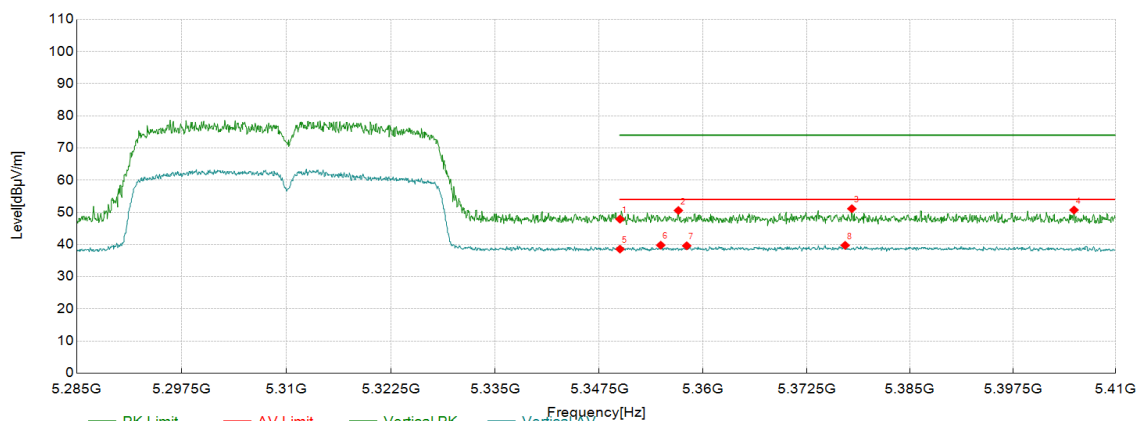

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	34.37	13.52	47.89	74.00	26.11	PK	Vertical	PASS
2	5357.04	37.05	13.53	50.58	74.00	23.42	PK	Vertical	PASS
3	5377.98	37.53	13.60	51.13	74.00	22.87	PK	Vertical	PASS
4	5404.93	37.04	13.67	50.71	74.00	23.29	PK	Vertical	PASS
5	5350.00	25.05	13.52	38.57	54.00	15.43	AV	Vertical	PASS
6	5354.91	26.26	13.53	39.79	54.00	14.21	AV	Vertical	PASS
7	5358.04	26.06	13.54	39.60	54.00	14.40	AV	Vertical	PASS
8	5377.17	26.15	13.59	39.74	54.00	14.26	AV	Vertical	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11AC40-5510MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

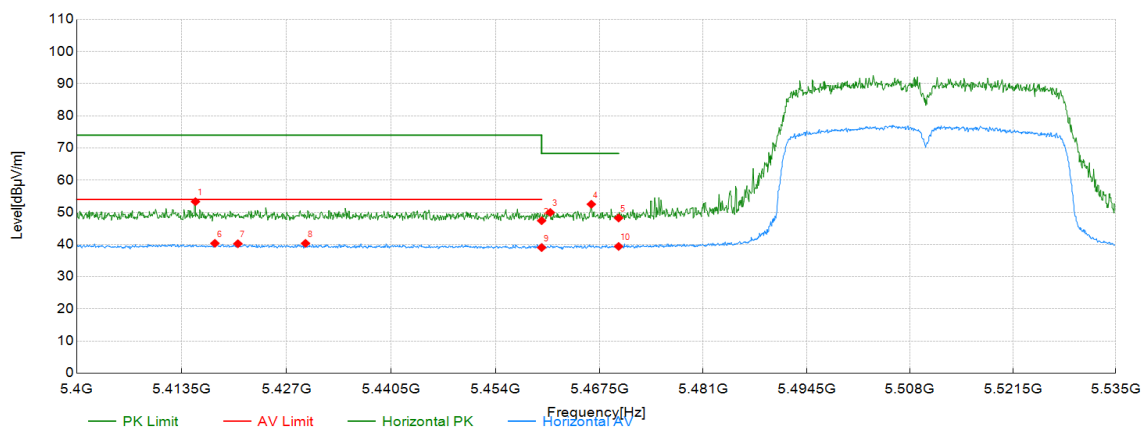

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5415.26	35.65	17.68	53.33	74.00	20.67	PK	Horizont	PASS
2	5460.00	29.69	17.72	47.41	68.30	20.89	PK	Horizont	PASS
3	5461.12	32.23	17.72	49.95	68.30	18.35	PK	Horizont	PASS
4	5466.45	34.79	17.73	52.52	68.30	15.78	PK	Horizont	PASS
5	5470.00	30.52	17.73	48.25	68.30	20.05	PK	Horizont	PASS
6	5417.76	22.69	17.68	40.37	54.00	13.63	AV	Horizont	PASS
7	5420.73	22.56	17.68	40.24	54.00	13.76	AV	Horizont	PASS
8	5429.44	22.67	17.69	40.36	54.00	13.64	AV	Horizont	PASS
9	5460.00	21.33	17.72	39.05	54.00	14.95	AV	Horizont	PASS
10	5470.00	21.67	17.73	39.40	-	-	AV	Horizont	NA

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC40-5510MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

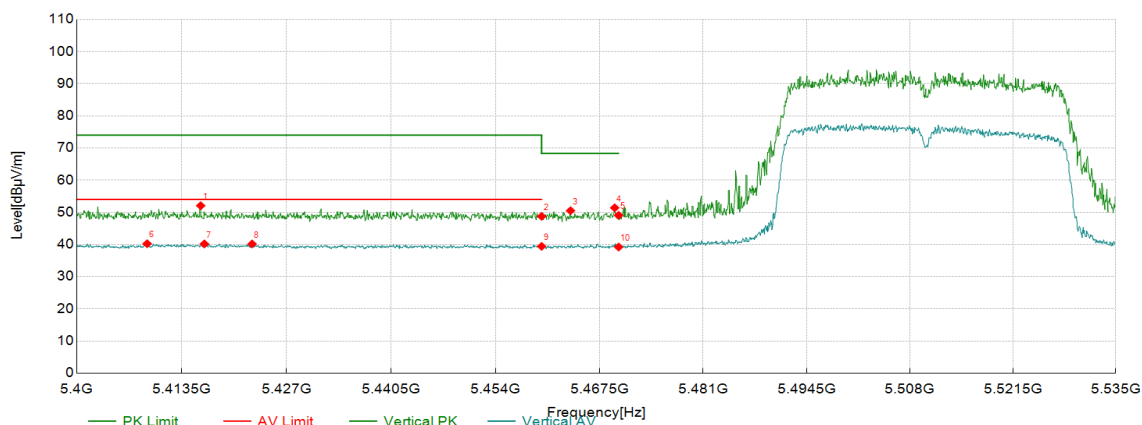

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5415.94	34.38	17.68	52.06	74.00	21.94	PK	Vertical	PASS
2	5460.00	31.04	17.72	48.76	68.30	19.54	PK	Vertical	PASS
3	5463.75	32.79	17.73	50.52	68.30	17.78	PK	Vertical	PASS
4	5469.49	33.68	17.73	51.41	68.30	16.89	PK	Vertical	PASS
5	5470.00	31.35	17.73	49.08	68.30	19.22	PK	Vertical	PASS
6	5409.05	22.57	17.67	40.24	54.00	13.76	AV	Vertical	PASS
7	5416.41	22.51	17.68	40.19	54.00	13.81	AV	Vertical	PASS
8	5422.56	22.49	17.69	40.18	54.00	13.82	AV	Vertical	PASS
9	5460.00	21.71	17.72	39.43	54.00	14.57	AV	Vertical	PASS
10	5470.00	21.48	17.73	39.21	-	-	AV	Vertical	NA

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC40-5755MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

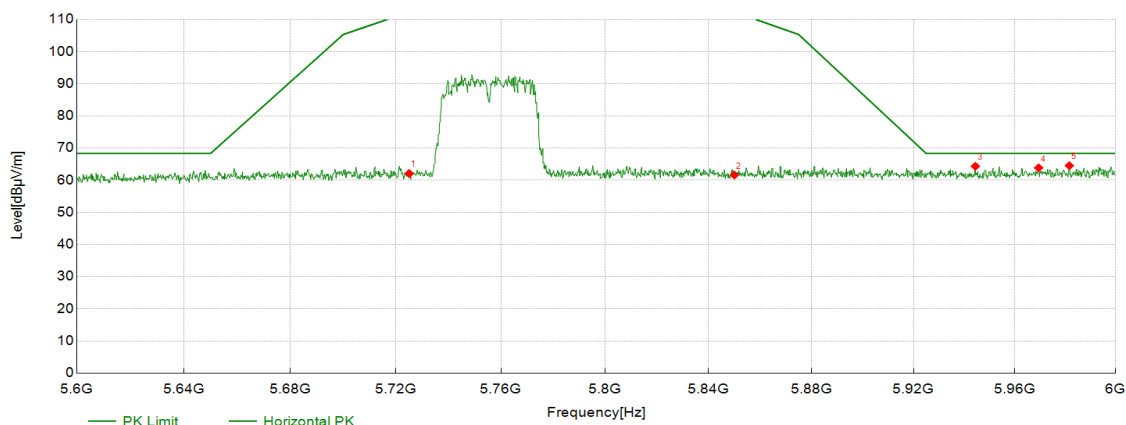

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	43.50	18.58	62.08	122.30	60.22	PK	Horizont	PASS
2	5850.00	42.49	19.10	61.59	122.30	60.71	PK	Horizont	PASS
3	5944.37	44.92	19.40	64.32	68.30	3.98	PK	Horizont	PASS
4	5969.38	44.43	19.41	63.84	68.30	4.46	PK	Horizont	PASS
5	5981.59	45.10	19.42	64.52	68.30	3.78	PK	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC40-5755MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

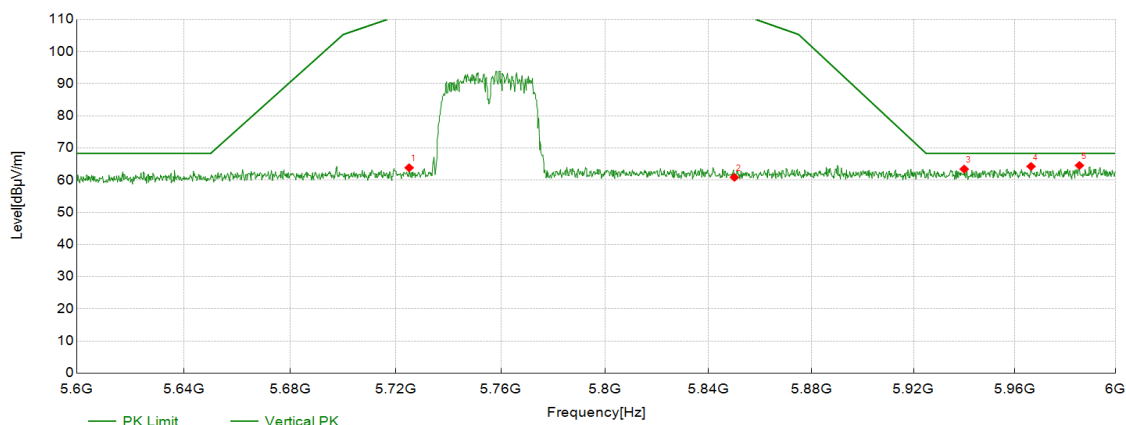

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	45.29	18.58	63.87	122.30	58.43	PK	Vertical	PASS
2	5850.00	41.77	19.10	60.87	122.30	61.43	PK	Vertical	PASS
3	5939.97	44.05	19.40	63.45	68.30	4.85	PK	Vertical	PASS
4	5966.38	44.87	19.41	64.28	68.30	4.02	PK	Vertical	PASS
5	5985.59	45.15	19.43	64.58	68.30	3.72	PK	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC40-5795MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

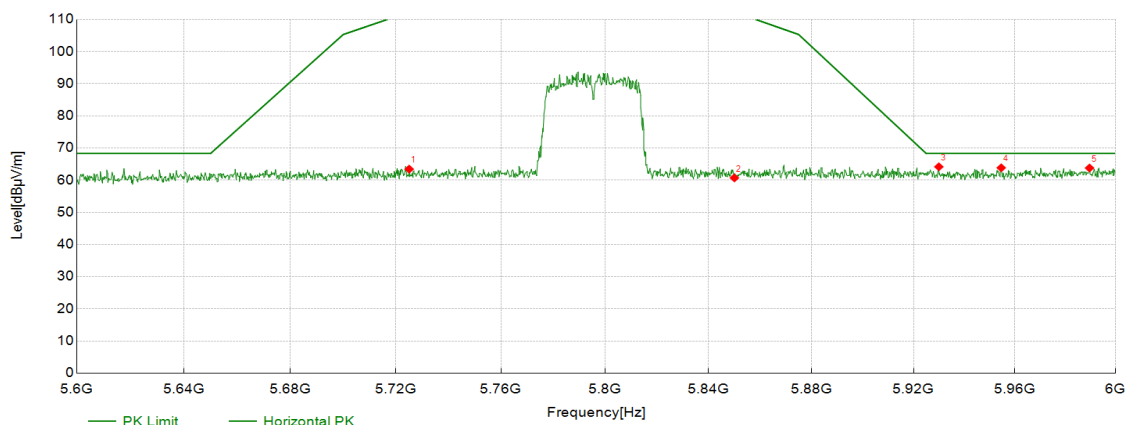

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	44.86	18.58	63.44	122.30	58.86	PK	Horizont	PASS
2	5850.00	41.61	19.10	60.71	122.30	61.59	PK	Horizont	PASS
3	5929.96	44.76	19.41	64.17	68.30	4.13	PK	Horizont	PASS
4	5954.58	44.45	19.40	63.85	68.30	4.45	PK	Horizont	PASS
5	5989.59	44.36	19.43	63.79	68.30	4.51	PK	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC40-5795MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

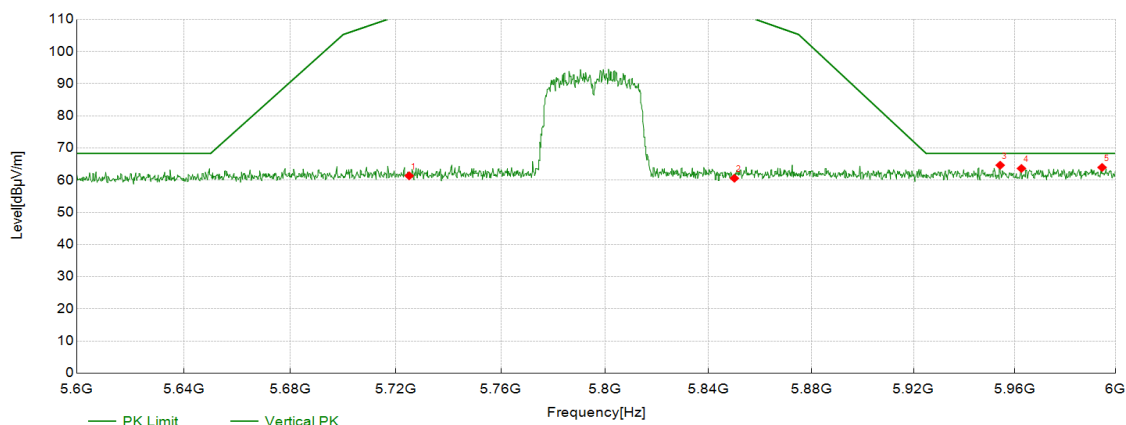

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	42.78	18.58	61.36	122.30	60.94	PK	Vertical	PASS
2	5850.00	41.50	19.10	60.60	122.30	61.70	PK	Vertical	PASS
3	5954.18	45.25	19.40	64.65	68.30	3.65	PK	Vertical	PASS
4	5962.58	44.24	19.40	63.64	68.30	4.66	PK	Vertical	PASS
5	5994.60	44.53	19.43	63.96	68.30	4.34	PK	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX40-5190MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

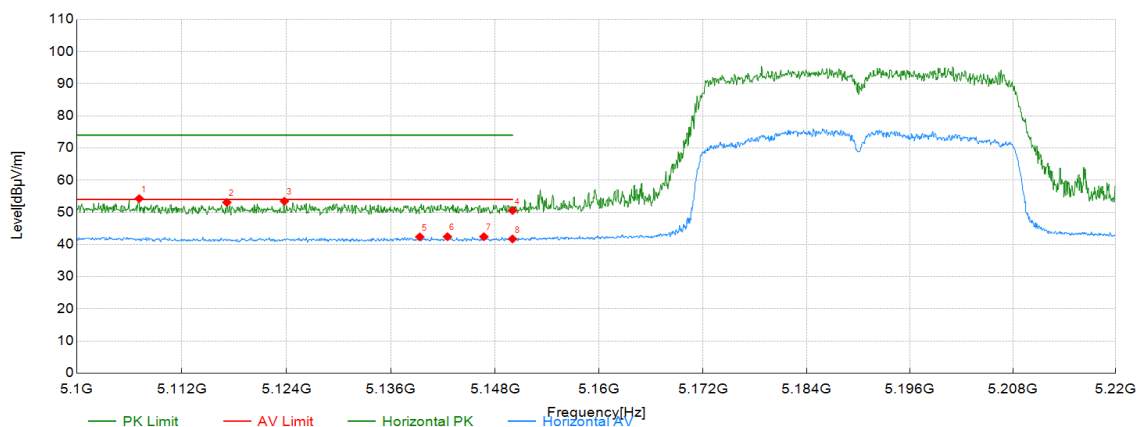

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5107.14	36.63	17.65	54.28	74.00	19.72	PK	Horizont	PASS
2	5117.17	35.45	17.62	53.07	74.00	20.93	PK	Horizont	PASS
3	5123.77	35.86	17.60	53.46	74.00	20.54	PK	Horizont	PASS
4	5150.00	33.06	17.52	50.58	74.00	23.42	PK	Horizont	PASS
5	5139.32	24.83	17.55	42.38	54.00	11.62	AV	Horizont	PASS
6	5142.50	24.87	17.55	42.42	54.00	11.58	AV	Horizont	PASS
7	5146.70	24.89	17.53	42.42	54.00	11.58	AV	Horizont	PASS
8	5150.00	24.21	17.52	41.73	54.00	12.27	AV	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX40-5190MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

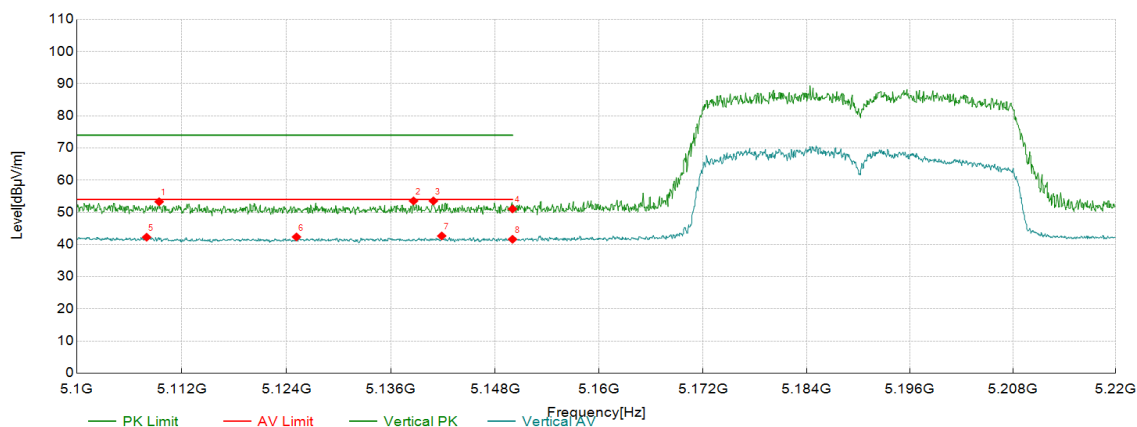

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5109.42	35.65	17.65	53.30	74.00	20.70	PK	Vertical	PASS
2	5138.60	35.99	17.56	53.55	74.00	20.45	PK	Vertical	PASS
3	5140.88	35.99	17.56	53.55	74.00	20.45	PK	Vertical	PASS
4	5150.00	33.54	17.52	51.06	74.00	22.94	PK	Vertical	PASS
5	5107.98	24.62	17.65	42.27	54.00	11.73	AV	Vertical	PASS
6	5125.15	24.75	17.60	42.35	54.00	11.65	AV	Vertical	PASS
7	5141.84	25.11	17.55	42.66	54.00	11.34	AV	Vertical	PASS
8	5150.00	24.10	17.52	41.62	54.00	12.38	AV	Vertical	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11AX40-5310MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

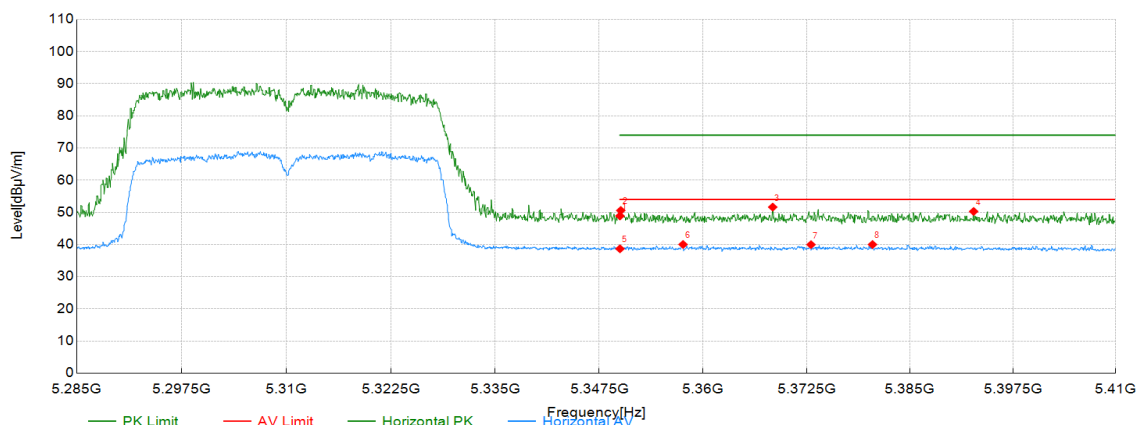

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	35.36	13.52	48.88	74.00	25.12	PK	Horizont	PASS
2	5350.10	37.07	13.52	50.59	74.00	23.41	PK	Horizont	PASS
3	5368.42	38.06	13.57	51.63	74.00	22.37	PK	Horizont	PASS
4	5392.74	36.63	13.65	50.28	74.00	23.72	PK	Horizont	PASS
5	5350.00	25.14	13.52	38.66	54.00	15.34	AV	Horizont	PASS
6	5357.60	26.47	13.54	40.01	54.00	13.99	AV	Horizont	PASS
7	5373.04	26.37	13.59	39.96	54.00	14.04	AV	Horizont	PASS
8	5380.49	26.38	13.61	39.99	54.00	14.01	AV	Horizont	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11AX40-5310MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

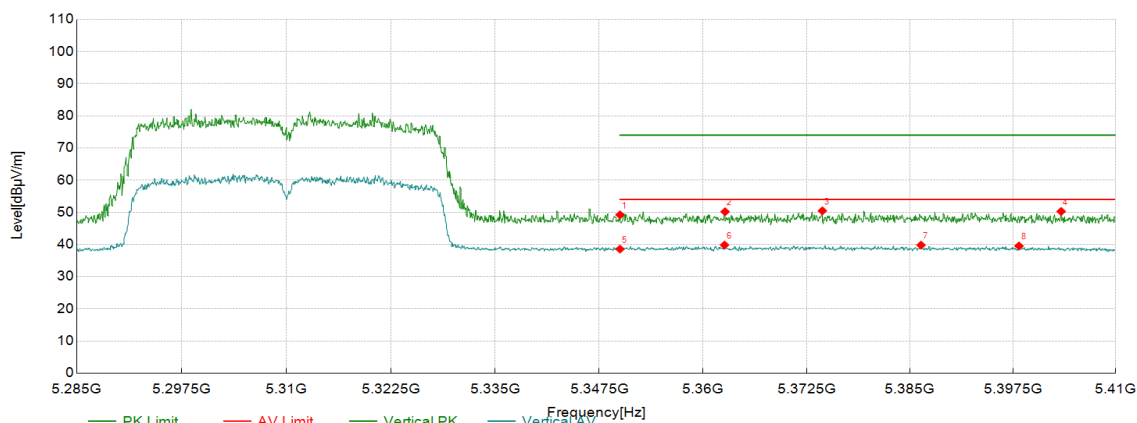

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	35.71	13.52	49.23	74.00	24.77	PK	Vertical	PASS
2	5362.66	36.64	13.56	50.20	74.00	23.80	PK	Vertical	PASS
3	5374.42	36.89	13.59	50.48	74.00	23.52	PK	Vertical	PASS
4	5403.37	36.62	13.67	50.29	74.00	23.71	PK	Vertical	PASS
5	5350.00	25.05	13.52	38.57	54.00	15.43	AV	Vertical	PASS
6	5362.60	26.29	13.56	39.85	54.00	14.15	AV	Vertical	PASS
7	5386.36	26.19	13.62	39.81	54.00	14.19	AV	Vertical	PASS
8	5398.24	25.89	13.66	39.55	54.00	14.45	AV	Vertical	PASS

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11AX40-5510MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

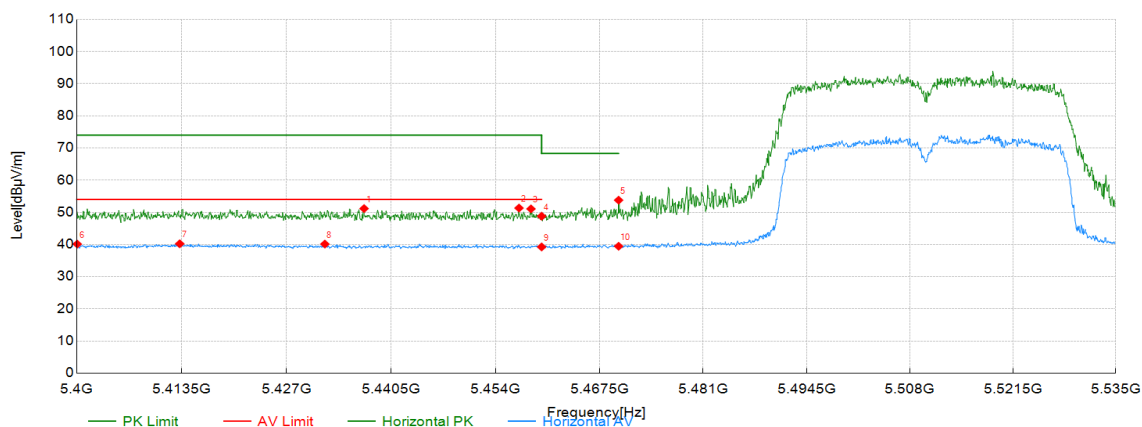

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5437.01	33.47	17.70	51.17	74.00	22.83	PK	Horizont	PASS
2	5457.07	33.62	17.72	51.34	74.00	22.66	PK	Horizont	PASS
3	5458.62	33.36	17.72	51.08	74.00	22.92	PK	Horizont	PASS
4	5460.00	31.08	17.72	48.80	68.30	19.50	PK	Horizont	PASS
5	5470.00	36.05	17.73	53.78	68.30	14.52	PK	Horizont	PASS
6	5400.07	22.47	17.66	40.13	54.00	13.87	AV	Horizont	PASS
7	5413.24	22.54	17.68	40.22	54.00	13.78	AV	Horizont	PASS
8	5431.94	22.44	17.69	40.13	54.00	13.87	AV	Horizont	PASS
9	5460.00	21.53	17.72	39.25	54.00	14.75	AV	Horizont	PASS
10	5470.00	21.72	17.73	39.45	-	-	AV	Horizont	NA

Remark:


1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11AX40-5510MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

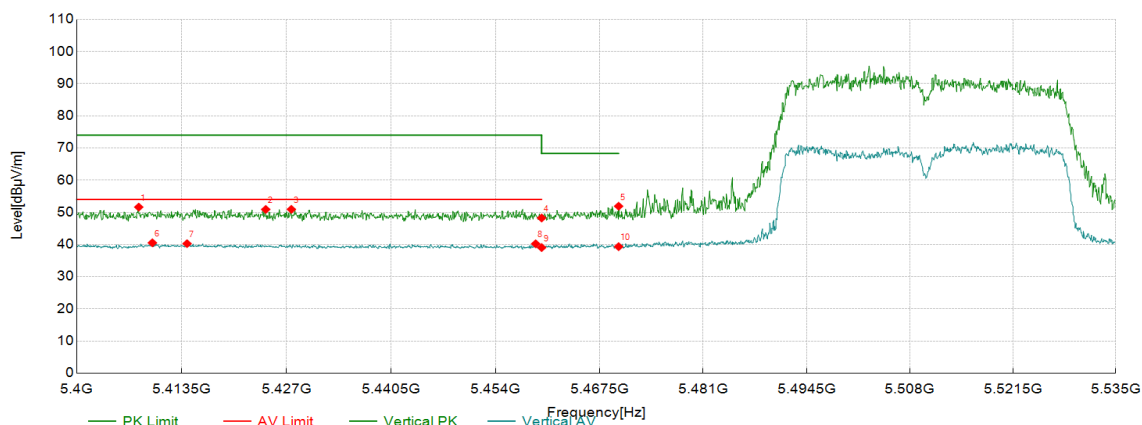

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5407.97	33.96	17.67	51.63	74.00	22.37	PK	Vertical	PASS
2	5424.31	33.22	17.69	50.91	74.00	23.09	PK	Vertical	PASS
3	5427.62	33.24	17.69	50.93	74.00	23.07	PK	Vertical	PASS
4	5460.00	30.53	17.72	48.25	68.30	20.05	PK	Vertical	PASS
5	5470.00	34.18	17.73	51.91	68.30	16.39	PK	Vertical	PASS
6	5409.72	22.86	17.67	40.53	54.00	13.47	AV	Vertical	PASS
7	5414.18	22.58	17.68	40.26	54.00	13.74	AV	Vertical	PASS
8	5459.23	22.51	17.72	40.23	54.00	13.77	AV	Vertical	PASS
9	5460.00	21.33	17.72	39.05	54.00	14.95	AV	Vertical	PASS
10	5470.00	21.60	17.73	39.33	-	-	AV	Vertical	NA

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX40-5755MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

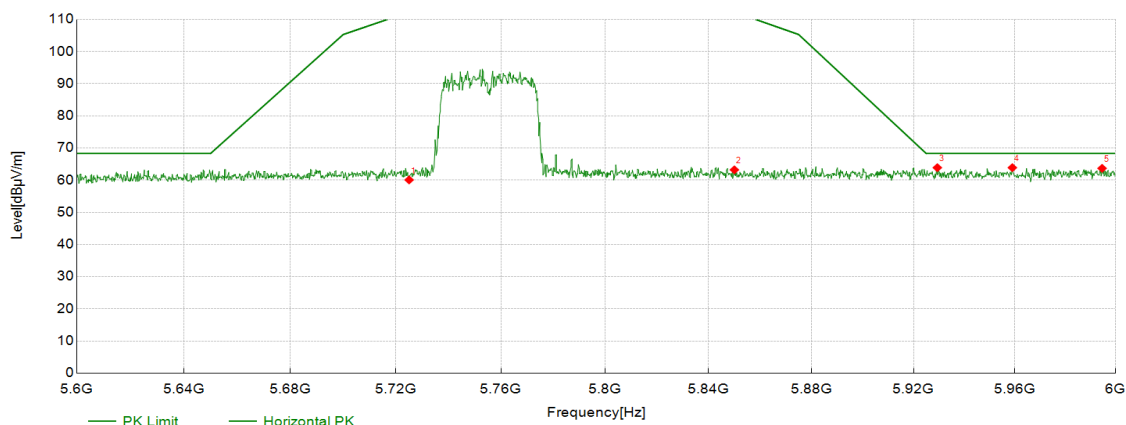

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	41.50	18.58	60.08	122.30	62.22	PK	Horizont	PASS
2	5850.00	44.12	19.10	63.22	122.30	59.08	PK	Horizont	PASS
3	5929.36	44.48	19.41	63.89	68.30	4.41	PK	Horizont	PASS
4	5958.98	44.49	19.40	63.89	68.30	4.41	PK	Horizont	PASS
5	5994.60	44.25	19.43	63.68	68.30	4.62	PK	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX40-5755MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

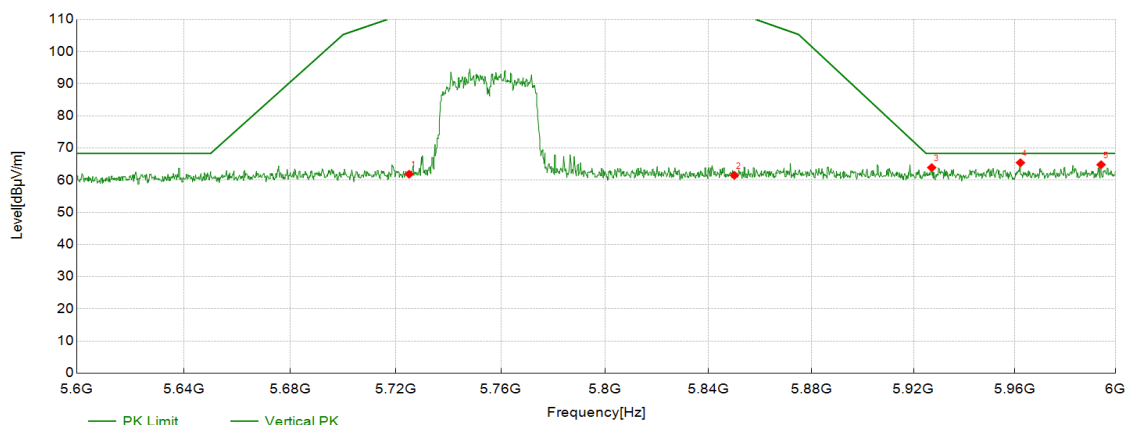

Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	43.28	18.58	61.86	122.30	60.44	PK	Vertical	PASS
2	5850.00	42.40	19.10	61.50	122.30	60.80	PK	Vertical	PASS
3	5927.16	44.49	19.42	63.91	68.30	4.39	PK	Vertical	PASS
4	5962.18	46.03	19.40	65.43	68.30	2.87	PK	Vertical	PASS
5	5994.20	45.39	19.43	64.82	68.30	3.48	PK	Vertical	PASS

Remark:


1. Level (dBµV/m)= Factor (dB/m)+ Read Level (dBµV)

2. Margin (dB) =Limit(dBµV/m)-Level(dBµV/m)



Test Mode:	802.11AX40-5795MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

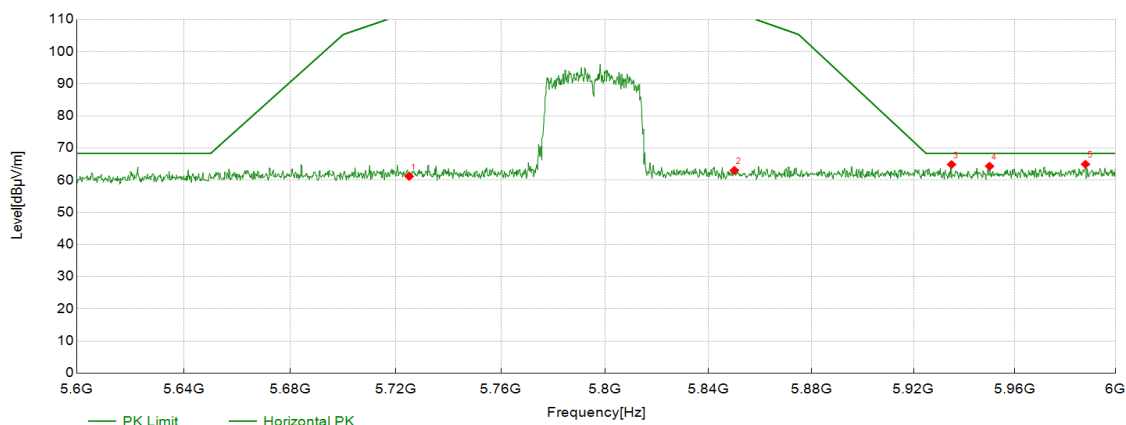

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	42.59	18.58	61.17	122.30	61.13	PK	Horizont	PASS
2	5850.00	43.95	19.10	63.05	122.30	59.25	PK	Horizont	PASS
3	5934.97	45.48	19.41	64.89	68.30	3.41	PK	Horizont	PASS
4	5949.97	44.96	19.39	64.35	68.30	3.95	PK	Horizont	PASS
5	5987.99	45.54	19.43	64.97	68.30	3.33	PK	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX40-5795MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

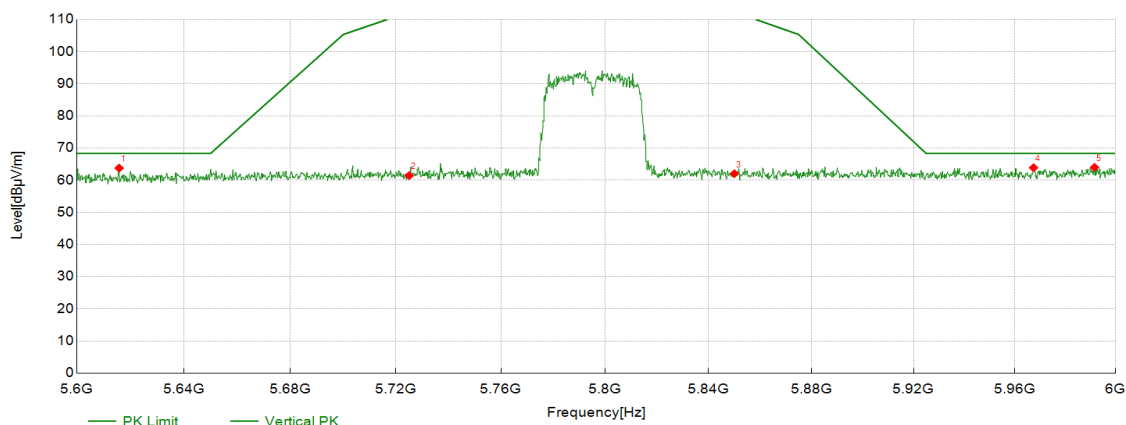

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5615.81	45.59	18.17	63.76	68.30	4.54	PK	Vertical	PASS
2	5725.00	42.84	18.58	61.42	122.30	60.88	PK	Vertical	PASS
3	5850.00	42.93	19.10	62.03	122.30	60.27	PK	Vertical	PASS
4	5967.38	44.46	19.41	63.87	68.30	4.43	PK	Vertical	PASS
5	5991.60	44.57	19.43	64.00	68.30	4.30	PK	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)

--- END OF REPORT ---

