
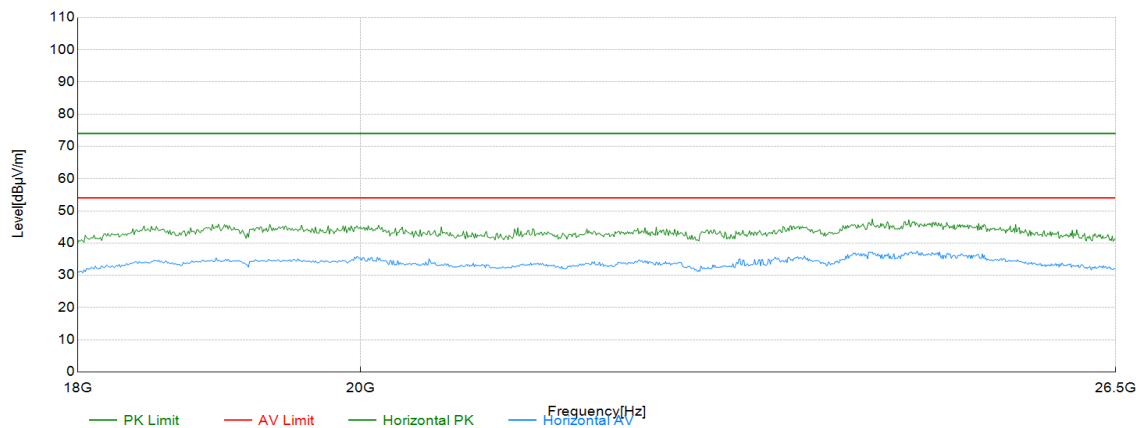


Test Mode:	802.11N20 2462MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

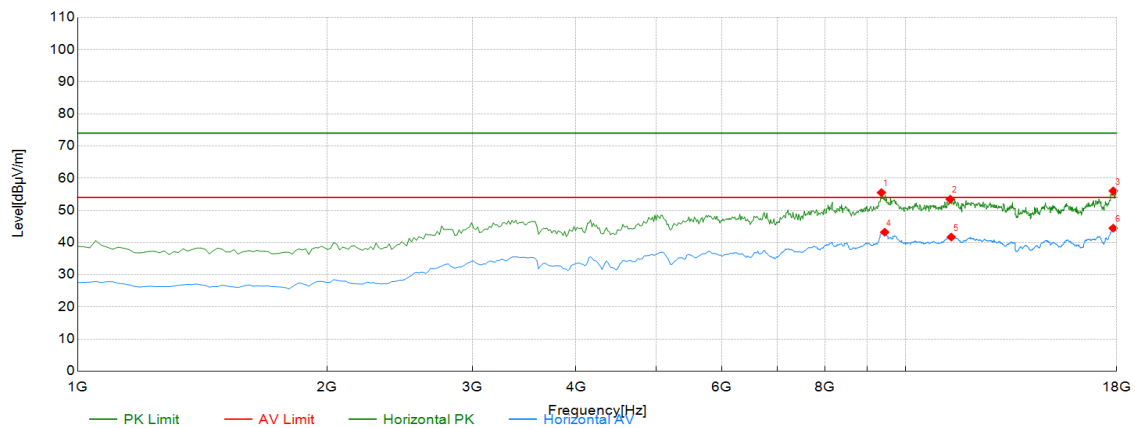

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9355.36	48.31	7.21	55.52	74.00	18.48	PK	Horizont	PASS
2	11329.33	43.80	9.66	53.46	74.00	20.54	PK	Horizont	PASS
3	17829.83	39.82	16.22	56.04	74.00	17.96	PK	Horizont	PASS
4	9440.44	35.08	8.13	43.21	54.00	10.79	AV	Horizont	PASS
5	11363.36	31.95	9.73	41.68	54.00	12.32	AV	Horizont	PASS
6	17829.83	28.23	16.22	44.45	54.00	9.55	AV	Horizont	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11N20 2462MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

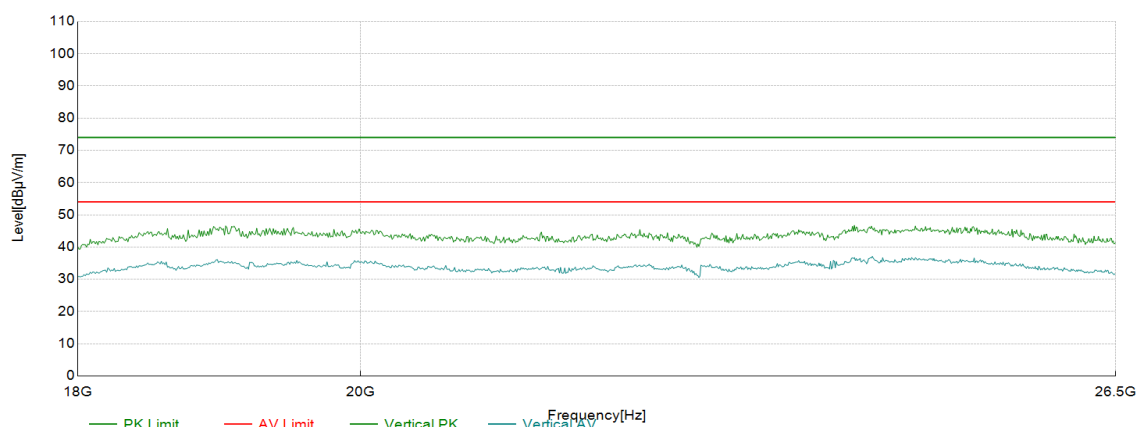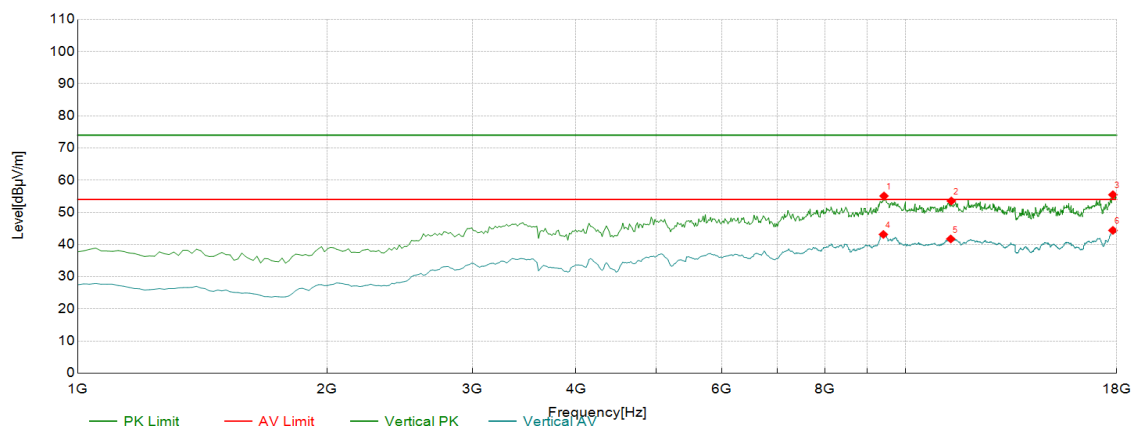

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9423.42	47.25	7.84	55.09	74.00	18.91	PK	Vertical	PASS
2	11363.36	43.80	9.73	53.53	74.00	20.47	PK	Vertical	PASS
3	17812.81	39.20	16.27	55.47	74.00	18.53	PK	Vertical	PASS
4	9406.41	35.58	7.55	43.13	54.00	10.87	AV	Vertical	PASS
5	11346.35	32.03	9.69	41.72	54.00	12.28	AV	Vertical	PASS
6	17812.81	28.13	16.27	44.40	54.00	9.60	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11N20 2422MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

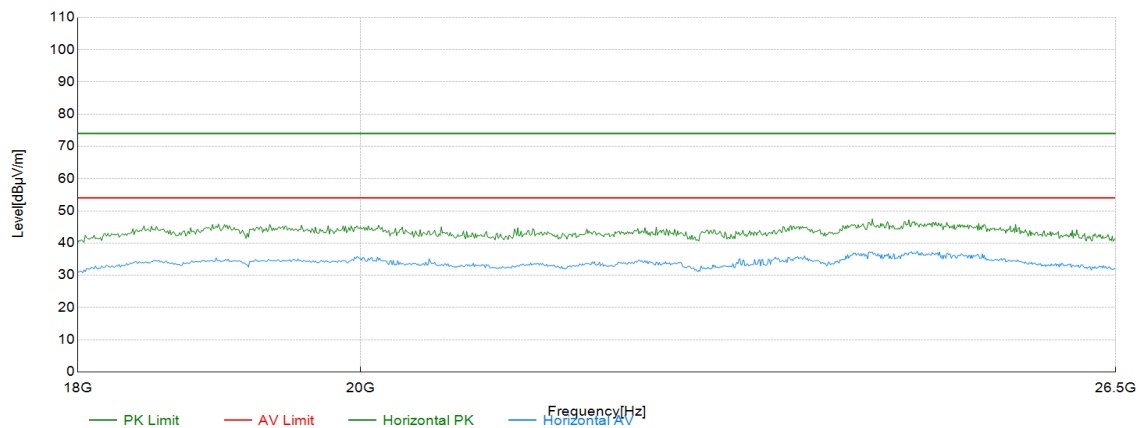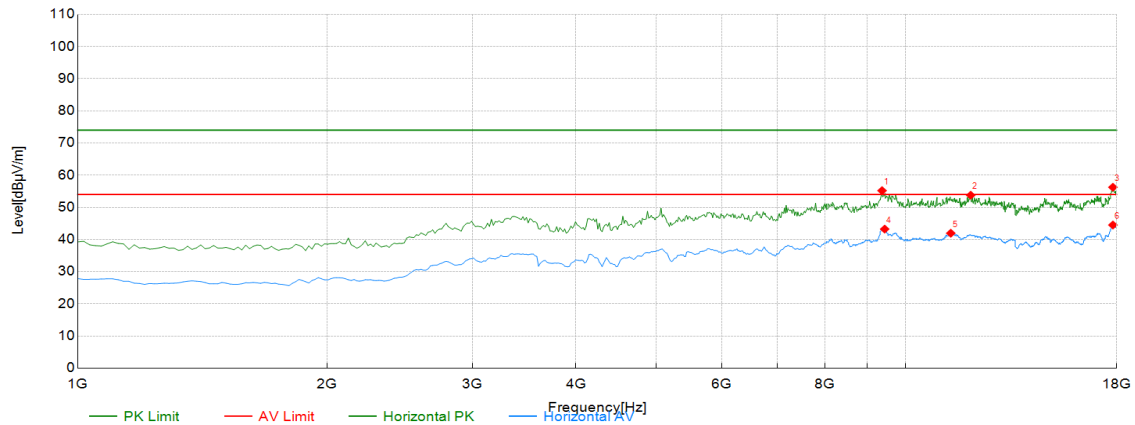

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9372.37	47.90	7.29	55.19	74.00	18.81	PK	Horizont	PASS
2	11992.99	42.71	11.06	53.77	74.00	20.23	PK	Horizont	PASS
3	17812.81	39.97	16.27	56.24	74.00	17.76	PK	Horizont	PASS
4	9440.44	35.11	8.13	43.24	54.00	10.76	AV	Horizont	PASS
5	11346.35	32.26	9.69	41.95	54.00	12.05	AV	Horizont	PASS
6	17812.81	28.24	16.27	44.51	54.00	9.49	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11N40 2422MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

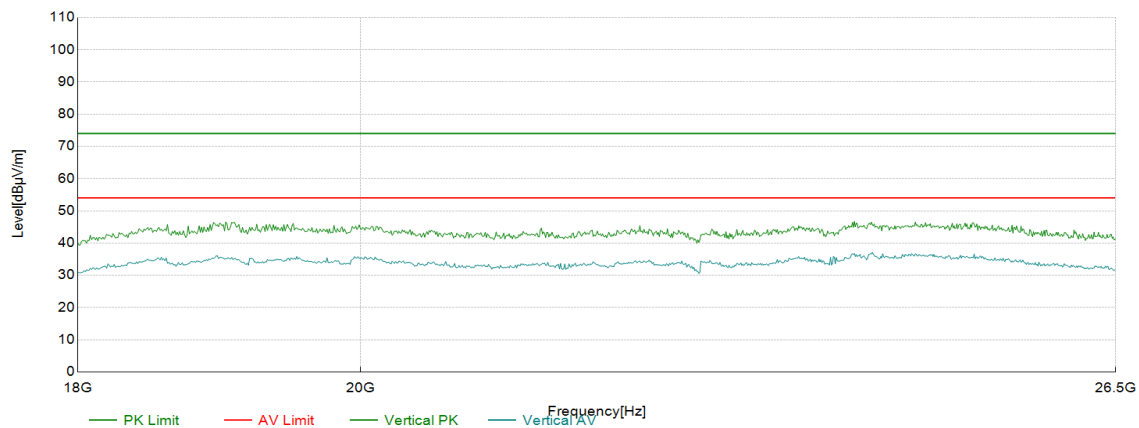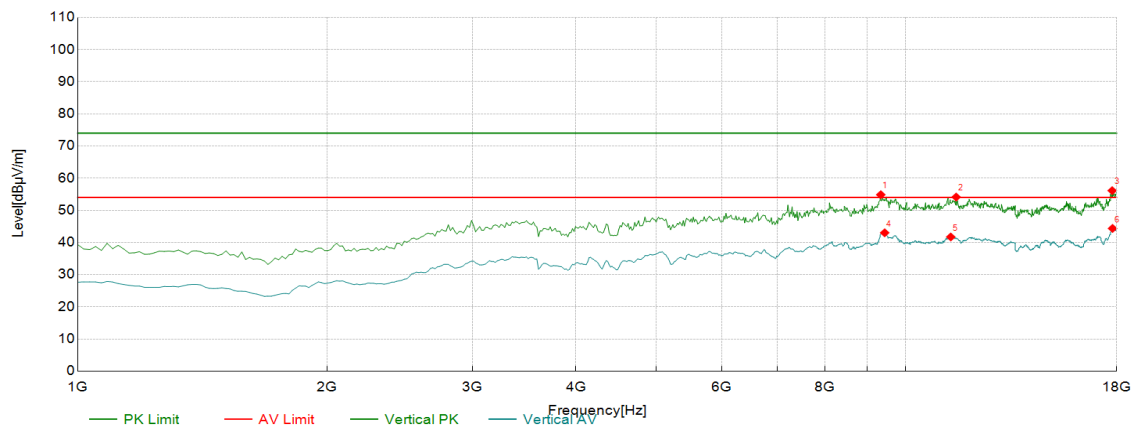

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9338.34	48.07	6.80	54.87	74.00	19.13	PK	Vertical	PASS
2	11516.52	44.36	9.77	54.13	74.00	19.87	PK	Vertical	PASS
3	17778.78	40.08	16.04	56.12	74.00	17.88	PK	Vertical	PASS
4	9440.44	34.89	8.13	43.02	54.00	10.98	AV	Vertical	PASS
5	11346.35	32.03	9.69	41.72	54.00	12.28	AV	Vertical	PASS
6	17795.80	28.13	16.25	44.38	54.00	9.62	AV	Vertical	PASS



Remark:

- Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)
- Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)
- The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
- No report for the emission which below the prescribed limit.



Test Mode:	802.11N40 2437MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

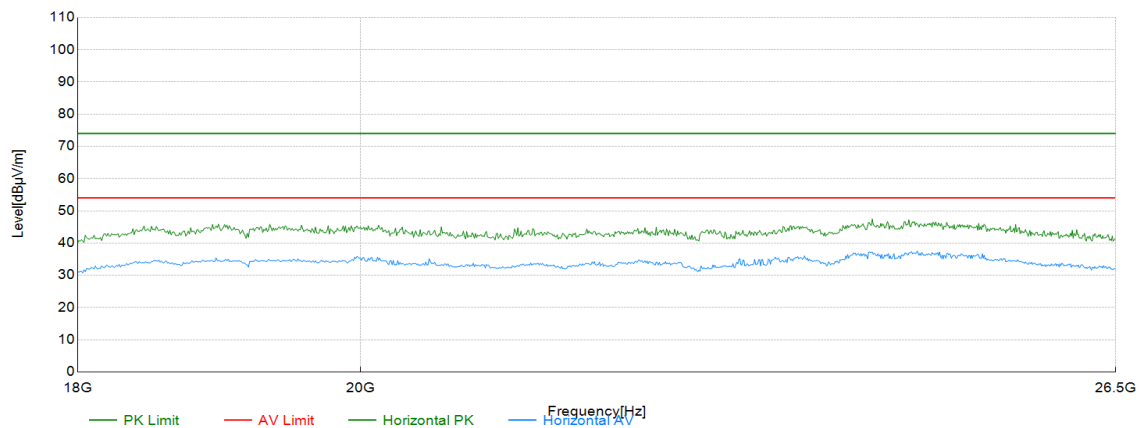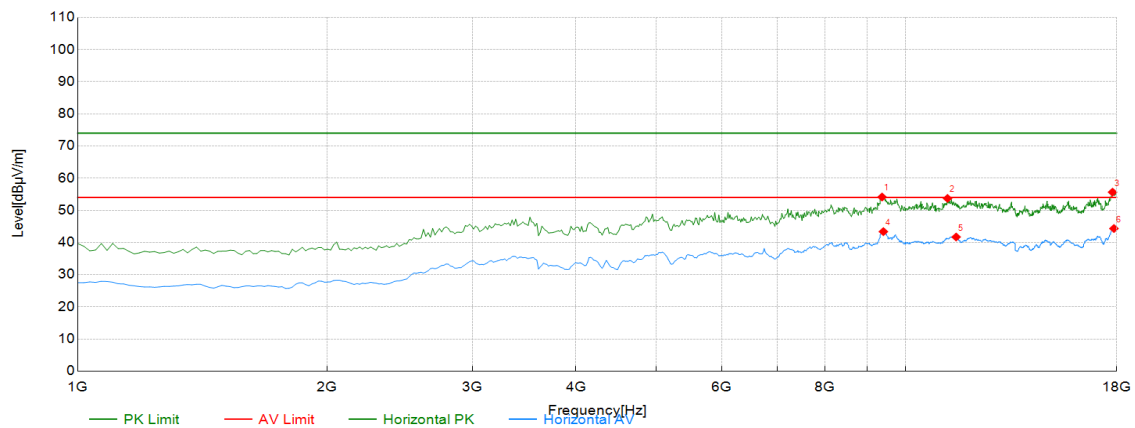

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9372.37	46.85	7.29	54.14	74.00	19.86	PK	Horizont	PASS
2	11244.24	44.26	9.45	53.71	74.00	20.29	PK	Horizont	PASS
3	17795.80	39.41	16.25	55.66	74.00	18.34	PK	Horizont	PASS
4	9406.41	35.83	7.55	43.38	54.00	10.62	AV	Horizont	PASS
5	11516.52	31.94	9.77	41.71	54.00	12.29	AV	Horizont	PASS
6	17863.86	28.20	16.15	44.35	54.00	9.65	AV	Horizont	PASS



Remark:

- Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)
- Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)
- The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
- No report for the emission which below the prescribed limit.



Test Mode:	802.11N40 2437MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

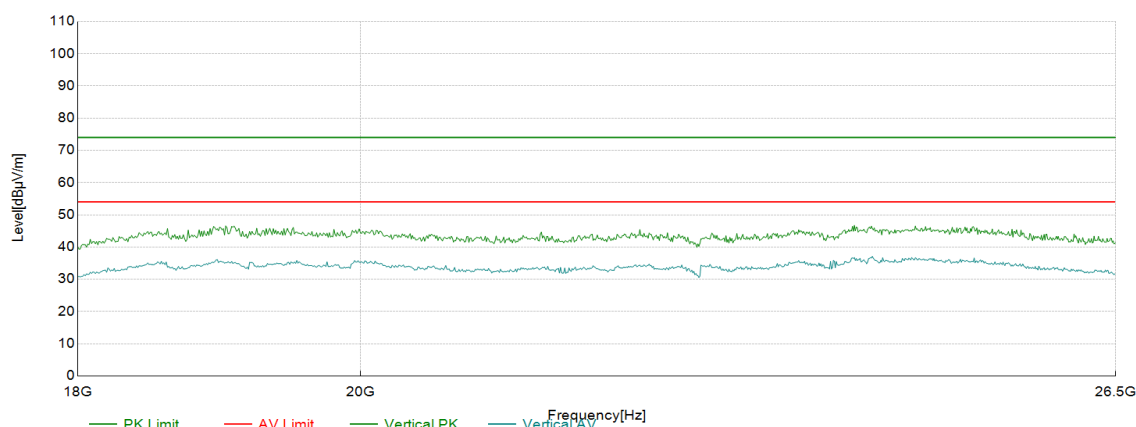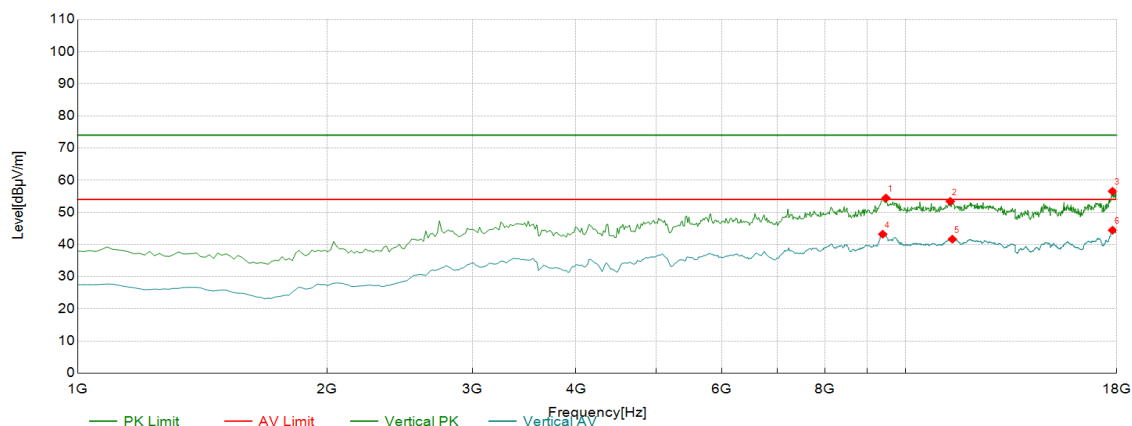

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9474.47	46.02	8.42	54.44	74.00	19.56	PK	Vertical	PASS
2	11329.33	43.76	9.66	53.42	74.00	20.58	PK	Vertical	PASS
3	17795.80	40.30	16.25	56.55	74.00	17.45	PK	Vertical	PASS
4	9389.39	35.81	7.39	43.20	54.00	10.80	AV	Vertical	PASS
5	11397.40	31.87	9.78	41.65	54.00	12.35	AV	Vertical	PASS
6	17795.80	28.19	16.25	44.44	54.00	9.56	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11N40 2452MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

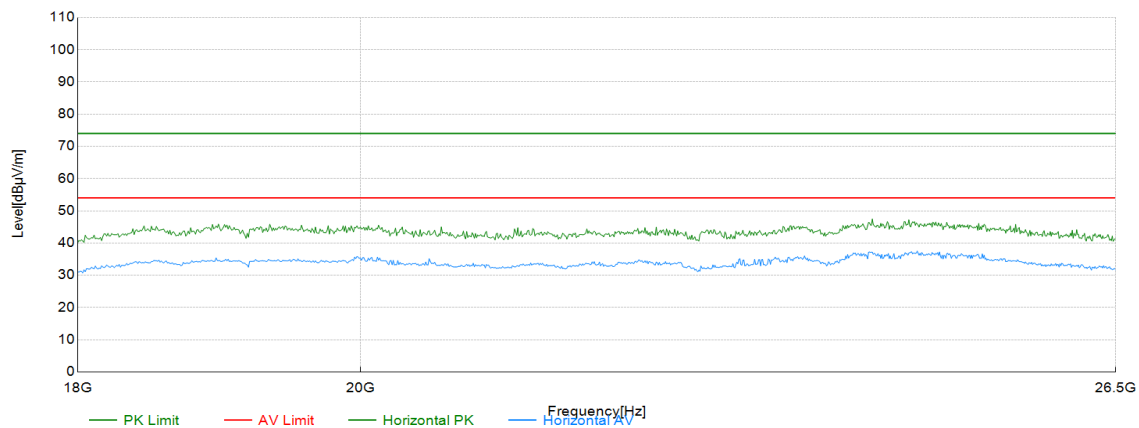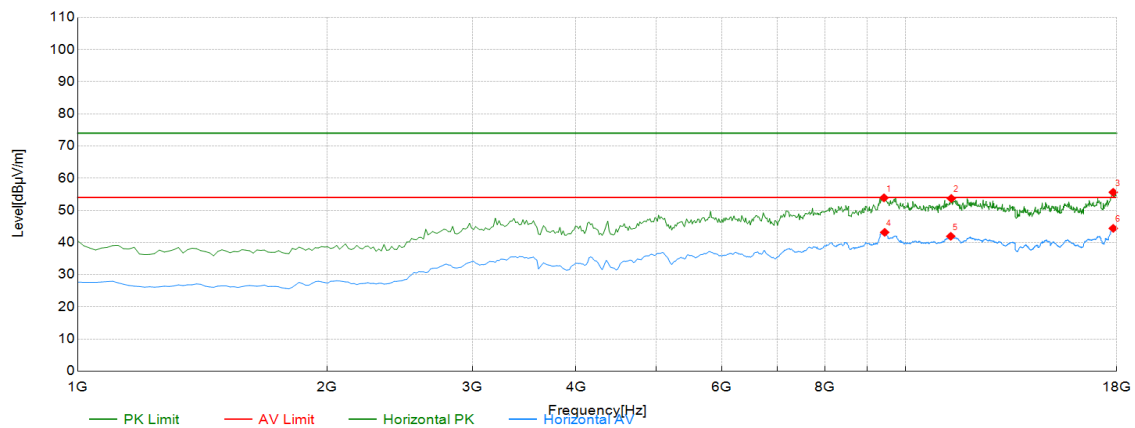

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9423.42	46.05	7.84	53.89	74.00	20.11	PK	Horizont	PASS
2	11363.36	43.96	9.73	53.69	74.00	20.31	PK	Horizont	PASS
3	17829.83	39.39	16.22	55.61	74.00	18.39	PK	Horizont	PASS
4	9440.44	35.03	8.13	43.16	54.00	10.84	AV	Horizont	PASS
5	11346.35	32.24	9.69	41.93	54.00	12.07	AV	Horizont	PASS
6	17829.83	28.18	16.22	44.40	54.00	9.60	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11N40 2452MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

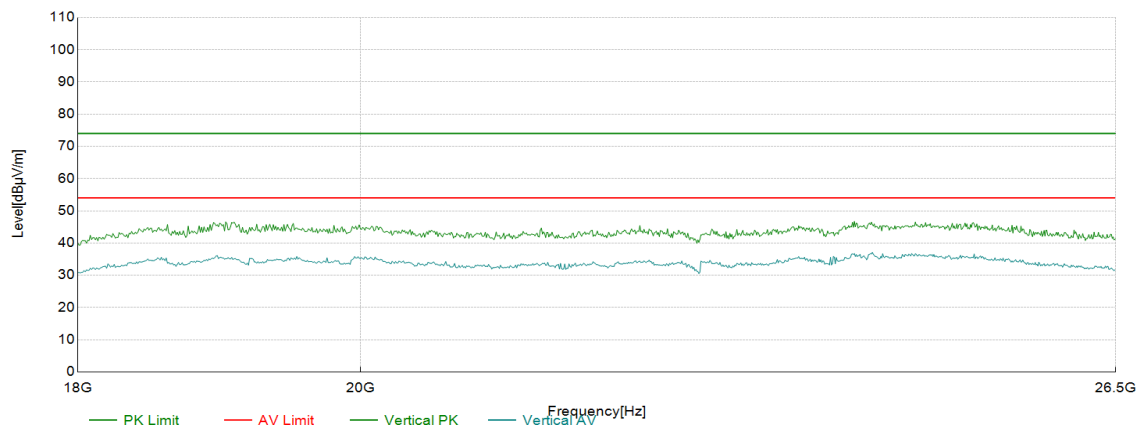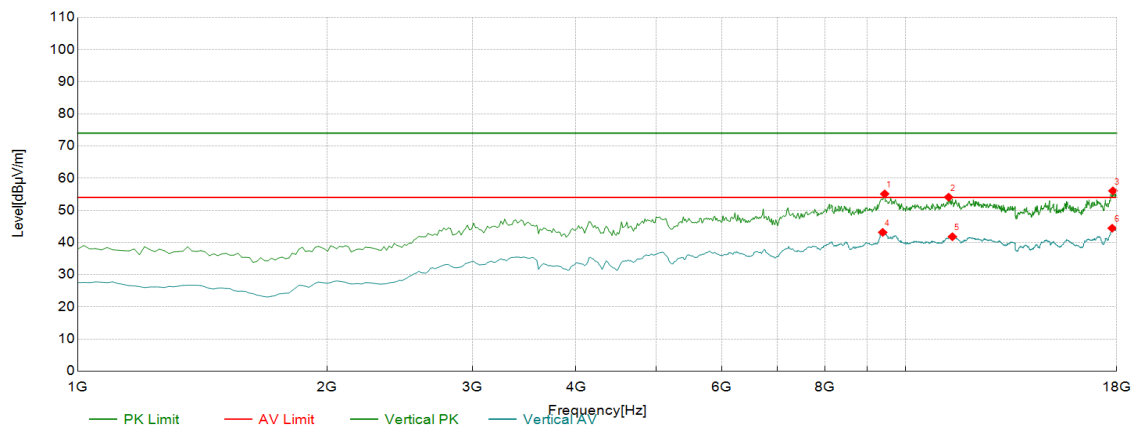

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9440.44	46.99	8.13	55.12	74.00	18.88	PK	Vertical	PASS
2	11278.28	44.54	9.55	54.09	74.00	19.91	PK	Vertical	PASS
3	17812.81	39.78	16.27	56.05	74.00	17.95	PK	Vertical	PASS
4	9389.39	35.76	7.39	43.15	54.00	10.85	AV	Vertical	PASS
5	11397.40	32.02	9.78	41.80	54.00	12.20	AV	Vertical	PASS
6	17778.78	28.40	16.04	44.44	54.00	9.56	AV	Vertical	PASS



Remark:

- Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)
- Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)
- The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
- No report for the emission which below the prescribed limit.



Test Mode:	802.11AX20 2412MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

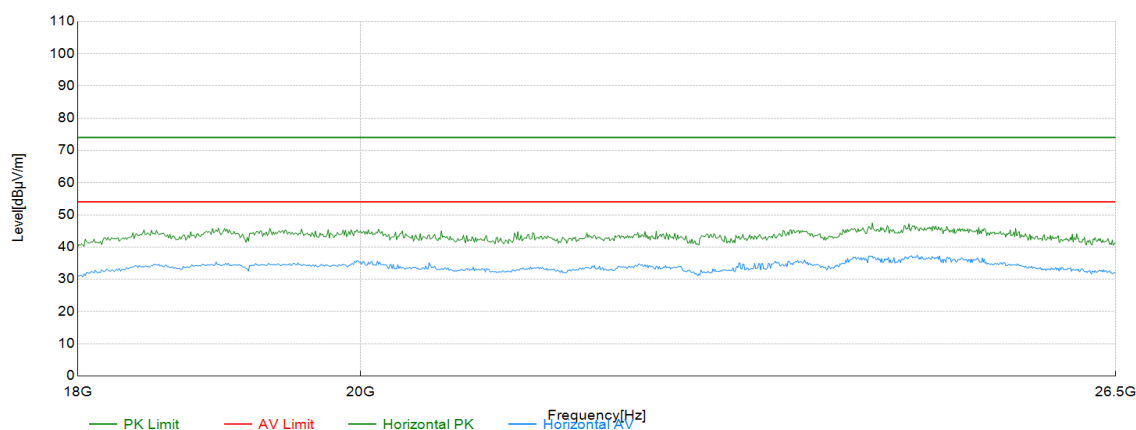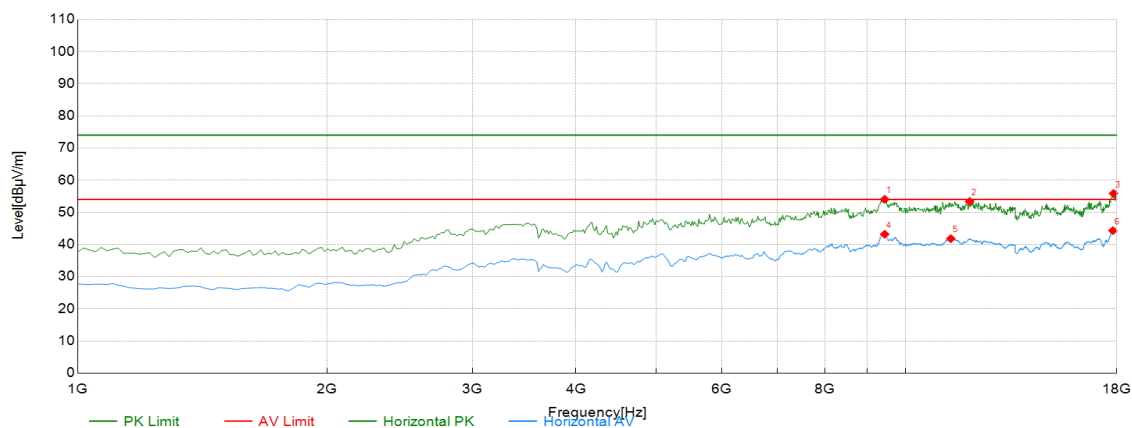

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9440.44	45.92	8.13	54.05	74.00	19.95	PK	Horizont	PASS
2	11958.96	42.34	11.04	53.38	74.00	20.62	PK	Horizont	PASS
3	17846.85	39.69	16.18	55.87	74.00	18.13	PK	Horizont	PASS
4	9440.44	35.06	8.13	43.19	54.00	10.81	AV	Horizont	PASS
5	11346.35	32.12	9.69	41.81	54.00	12.19	AV	Horizont	PASS
6	17812.81	28.04	16.27	44.31	54.00	9.69	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX20 2412MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

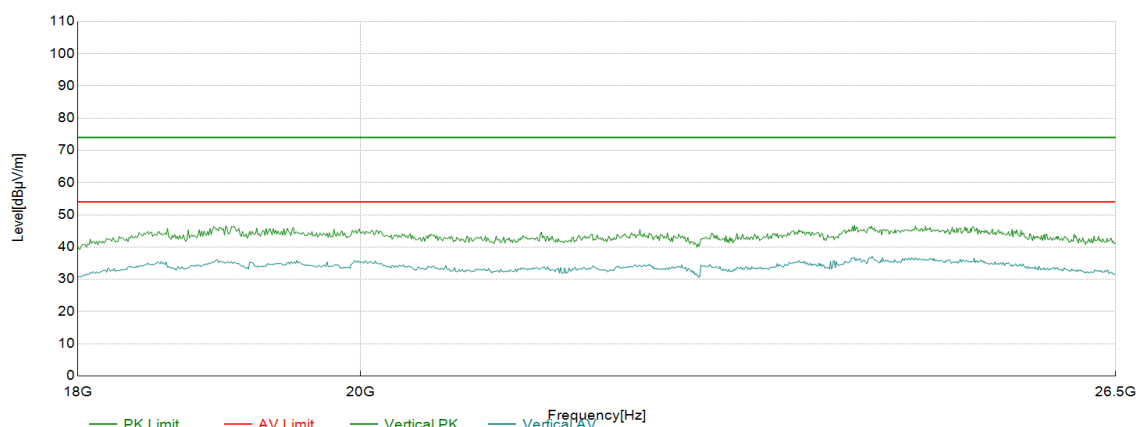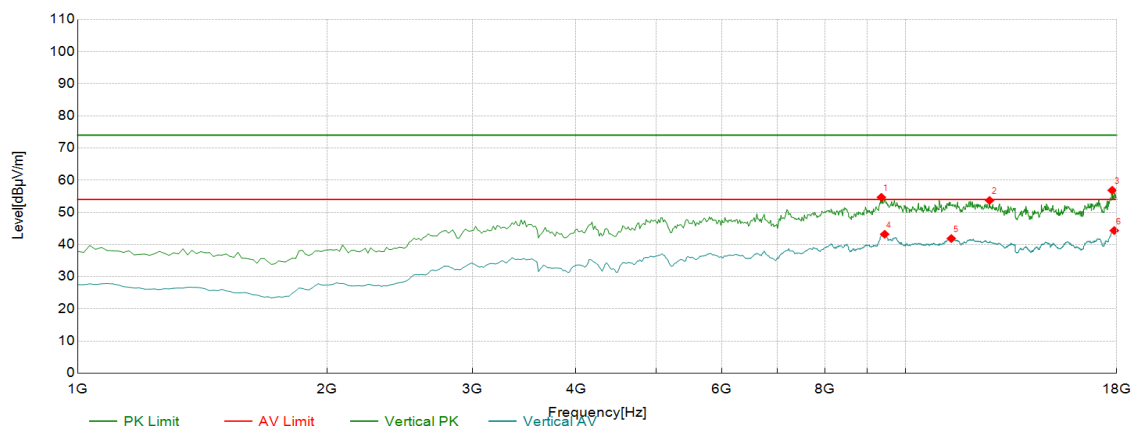

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9355.36	47.46	7.21	54.67	74.00	19.33	PK	Vertical	PASS
2	12639.64	43.74	9.96	53.70	74.00	20.30	PK	Vertical	PASS
3	17778.78	40.81	16.04	56.85	74.00	17.15	PK	Vertical	PASS
4	9440.44	35.06	8.13	43.19	54.00	10.81	AV	Vertical	PASS
5	11363.36	32.12	9.73	41.85	54.00	12.15	AV	Vertical	PASS
6	17880.88	28.24	16.10	44.34	54.00	9.66	AV	Vertical	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX20 2437MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

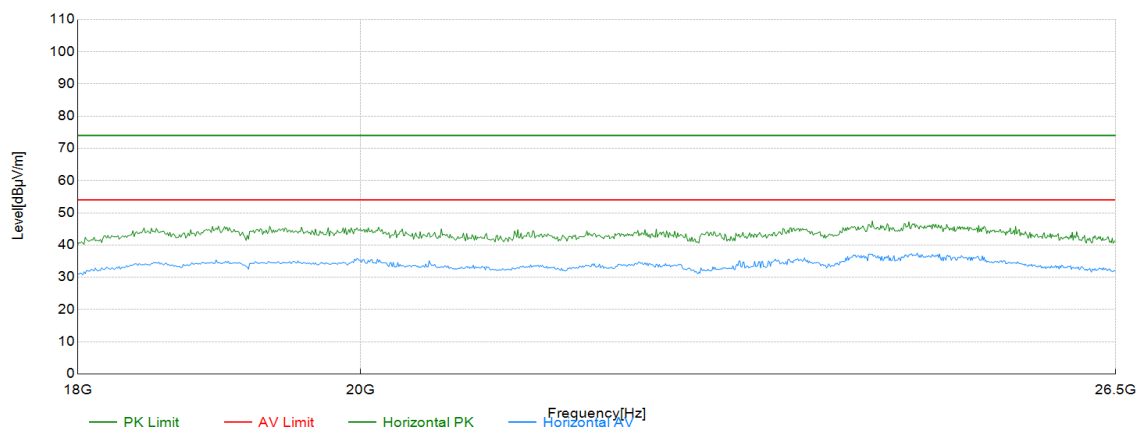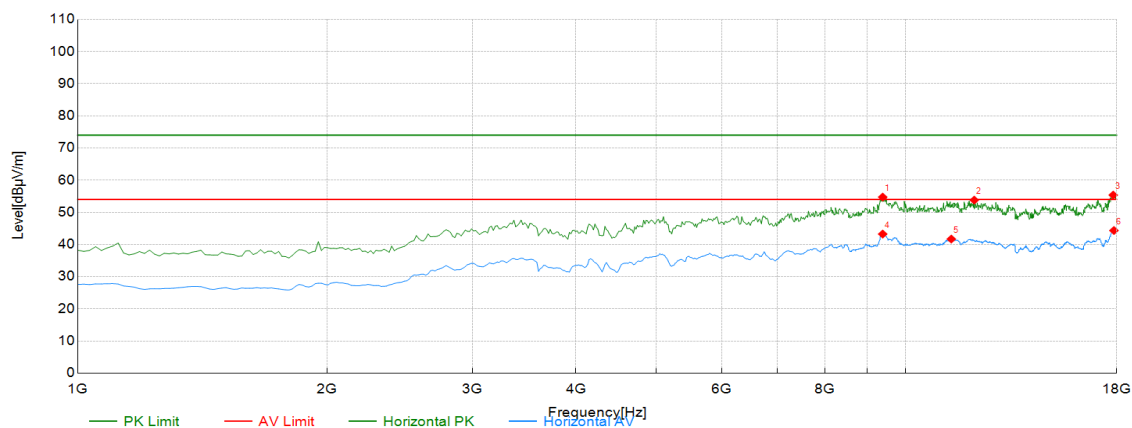

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9389.39	47.35	7.39	54.74	74.00	19.26	PK	Horizont	PASS
2	12112.11	42.56	11.24	53.80	74.00	20.20	PK	Horizont	PASS
3	17829.83	39.14	16.22	55.36	74.00	18.64	PK	Horizont	PASS
4	9389.39	35.86	7.39	43.25	54.00	10.75	AV	Horizont	PASS
5	11363.36	31.97	9.73	41.70	54.00	12.30	AV	Horizont	PASS
6	17863.86	28.21	16.15	44.36	54.00	9.64	AV	Horizont	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX20 2437MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

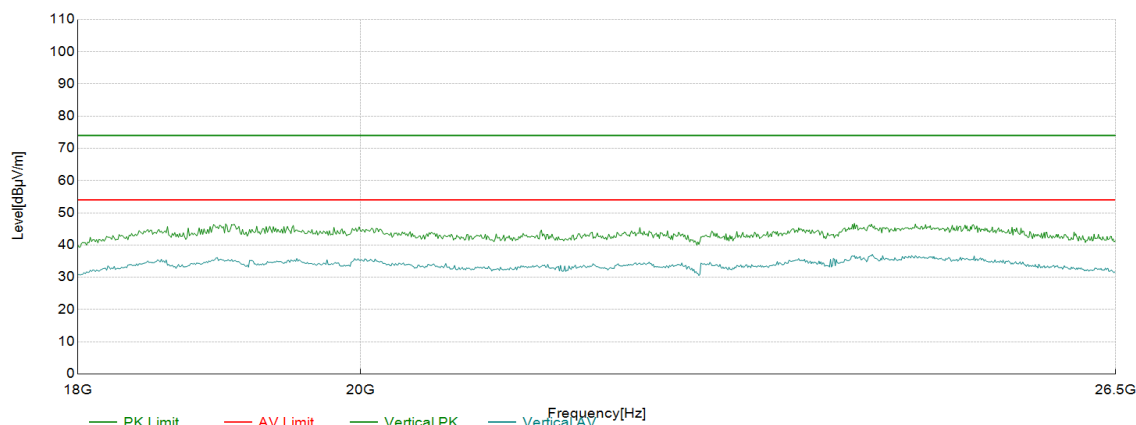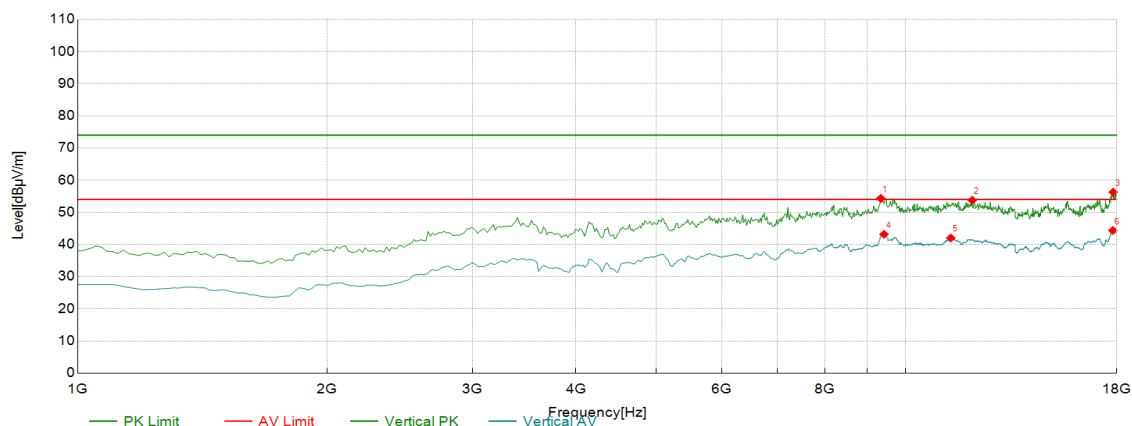

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9338.34	47.54	6.80	54.34	74.00	19.66	PK	Vertical	PASS
2	12044.04	42.59	11.16	53.75	74.00	20.25	PK	Vertical	PASS
3	17829.83	40.06	16.22	56.28	74.00	17.72	PK	Vertical	PASS
4	9423.42	35.33	7.84	43.17	54.00	10.83	AV	Vertical	PASS
5	11346.35	32.33	9.69	42.02	54.00	11.98	AV	Vertical	PASS
6	17812.81	28.11	16.27	44.38	54.00	9.62	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX20 2462MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

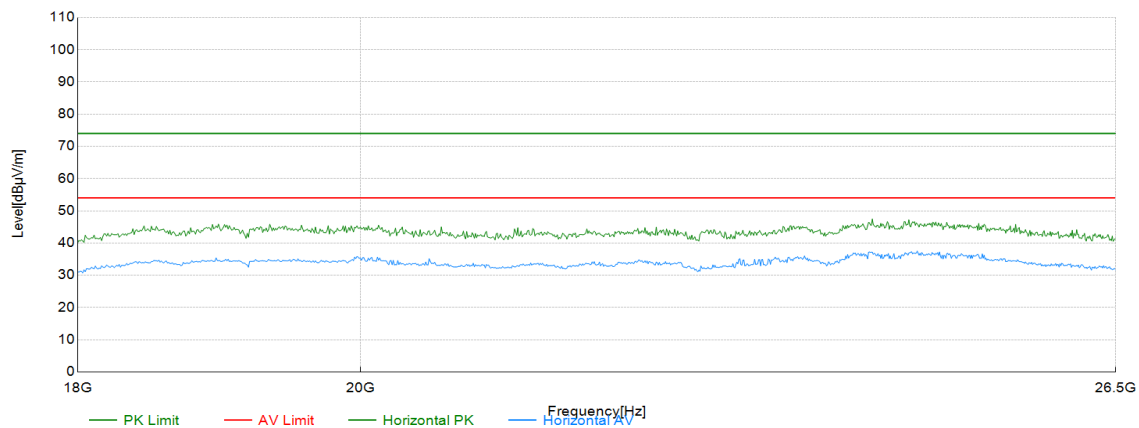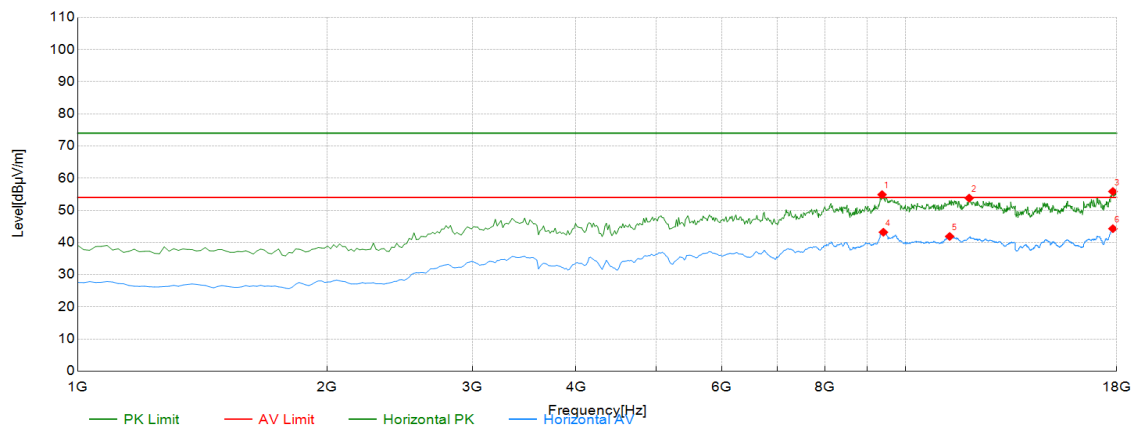

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9372.37	47.61	7.29	54.90	74.00	19.10	PK	Horizont	PASS
2	11941.94	42.77	11.03	53.80	74.00	20.20	PK	Horizont	PASS
3	17812.81	39.60	16.27	55.87	74.00	18.13	PK	Horizont	PASS
4	9406.41	35.64	7.55	43.19	54.00	10.81	AV	Horizont	PASS
5	11312.31	32.24	9.64	41.88	54.00	12.12	AV	Horizont	PASS
6	17812.81	28.03	16.27	44.30	54.00	9.70	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX20 2462MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

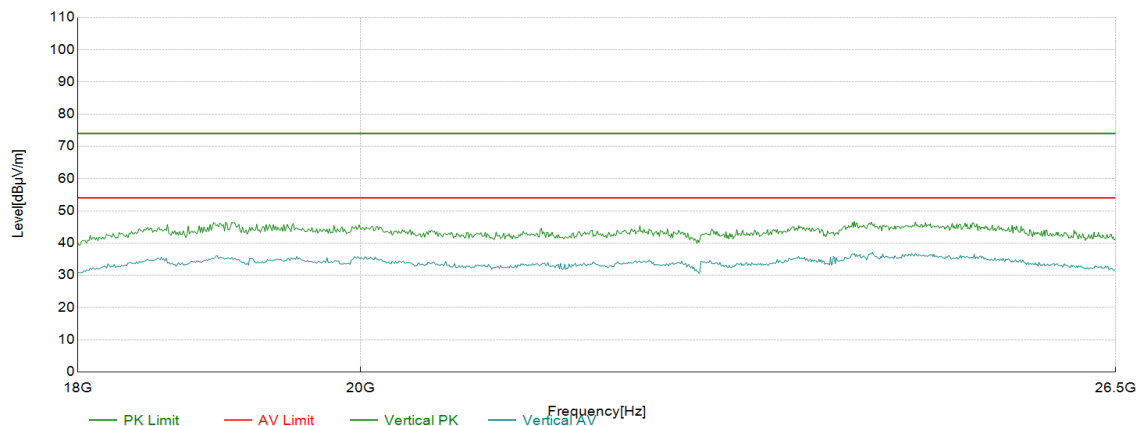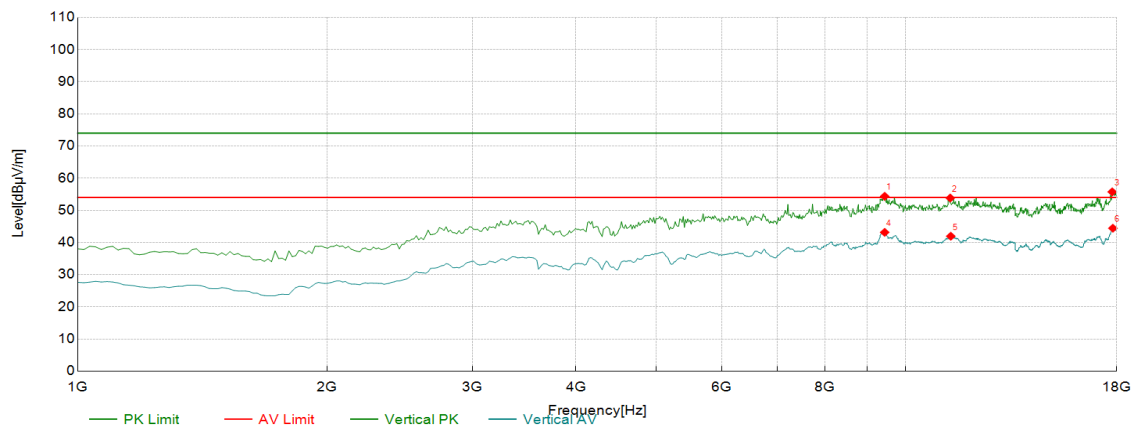

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9440.44	46.24	8.13	54.37	74.00	19.63	PK	Vertical	PASS
2	11329.33	44.18	9.66	53.84	74.00	20.16	PK	Vertical	PASS
3	17778.78	39.70	16.04	55.74	74.00	18.26	PK	Vertical	PASS
4	9440.44	35.03	8.13	43.16	54.00	10.84	AV	Vertical	PASS
5	11346.35	32.26	9.69	41.95	54.00	12.05	AV	Vertical	PASS
6	17812.81	28.17	16.27	44.44	54.00	9.56	AV	Vertical	PASS



Remark:

- Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)
- Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)
- The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
- No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 2422MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

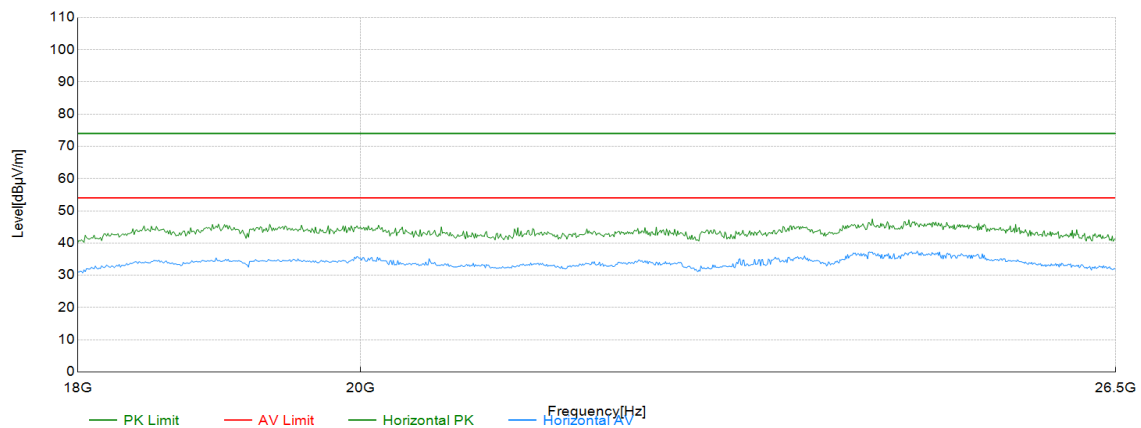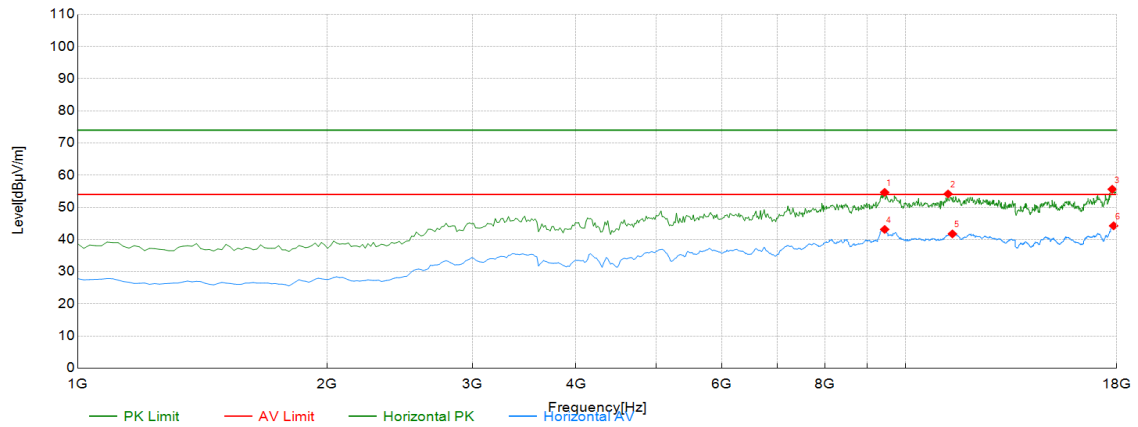

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9440.44	46.53	8.13	54.66	74.00	19.34	PK	Horizont	PASS
2	11261.26	44.66	9.50	54.16	74.00	19.84	PK	Horizont	PASS
3	17778.78	39.60	16.04	55.64	74.00	18.36	PK	Horizont	PASS
4	9440.44	35.00	8.13	43.13	54.00	10.87	AV	Horizont	PASS
5	11397.40	31.97	9.78	41.75	54.00	12.25	AV	Horizont	PASS
6	17846.85	28.08	16.18	44.26	54.00	9.74	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 2422MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

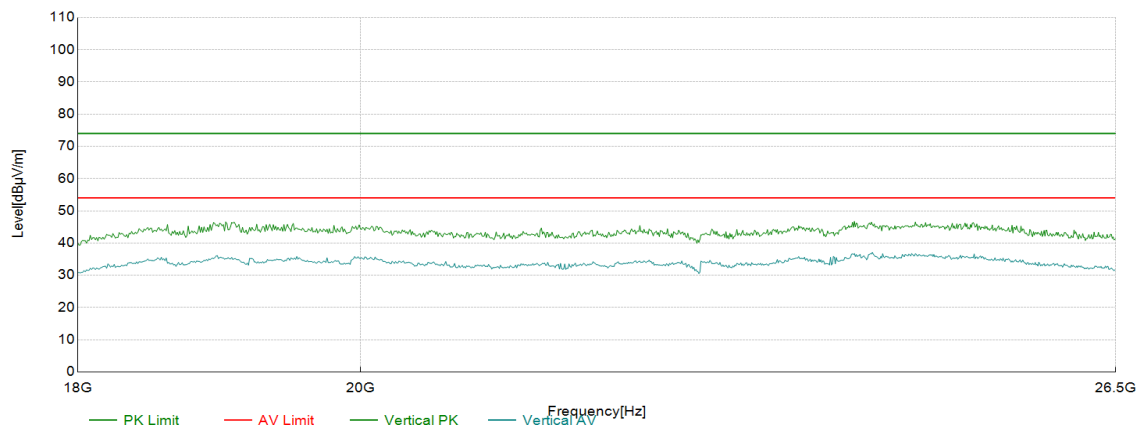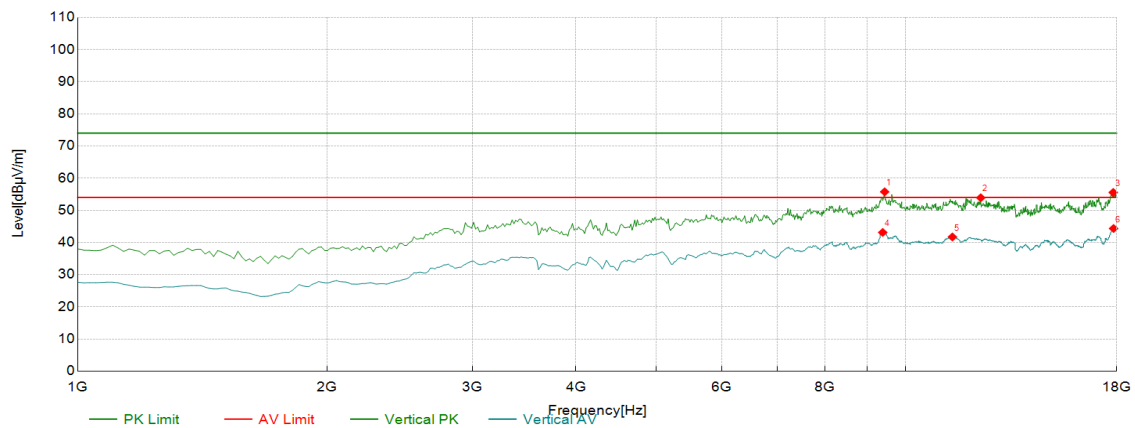

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9440.44	47.64	8.13	55.77	74.00	18.23	PK	Vertical	PASS
2	12333.33	43.72	10.20	53.92	74.00	20.08	PK	Vertical	PASS
3	17829.83	39.35	16.22	55.57	74.00	18.43	PK	Vertical	PASS
4	9389.39	35.74	7.39	43.13	54.00	10.87	AV	Vertical	PASS
5	11397.40	31.94	9.78	41.72	54.00	12.28	AV	Vertical	PASS
6	17846.85	28.18	16.18	44.36	54.00	9.64	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 2437MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

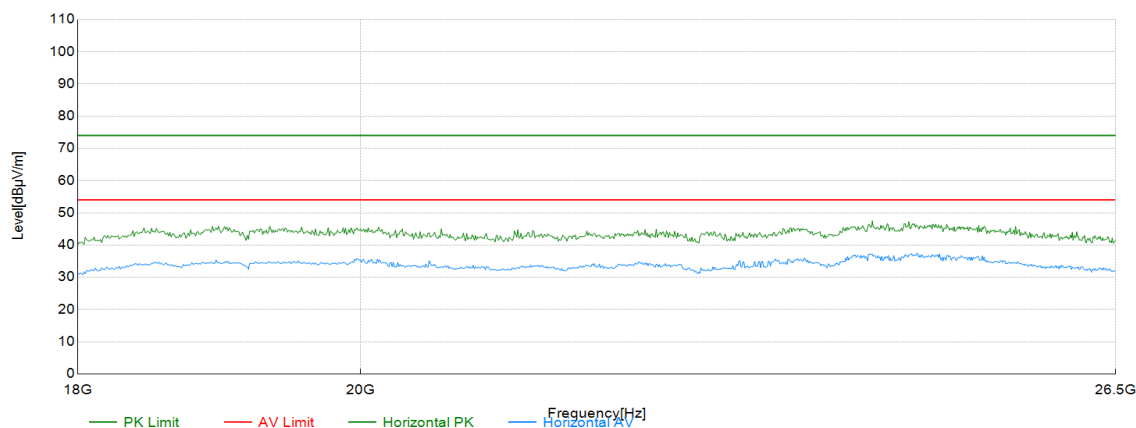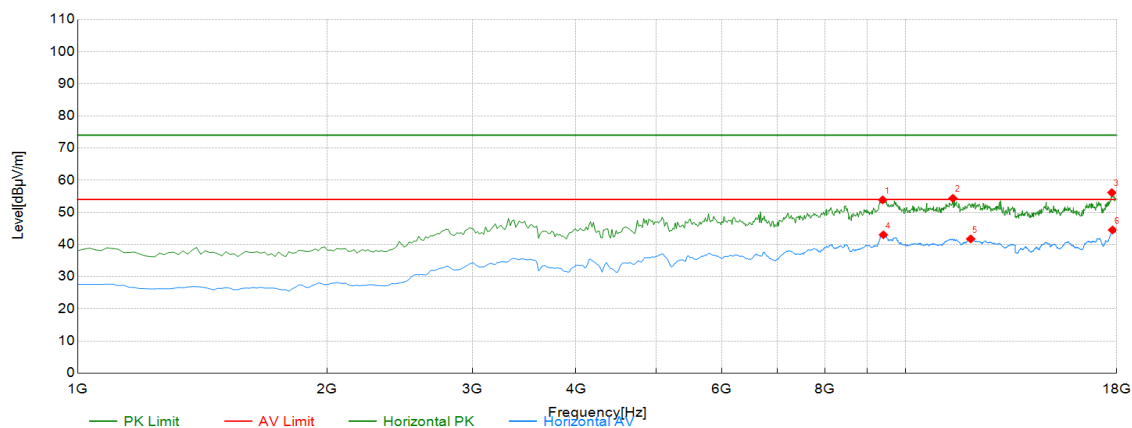

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9389.39	46.49	7.39	53.88	74.00	20.12	PK	Horizont	PASS
2	11414.41	44.58	9.79	54.37	74.00	19.63	PK	Horizont	PASS
3	17761.76	40.33	15.81	56.14	74.00	17.86	PK	Horizont	PASS
4	9406.41	35.47	7.55	43.02	54.00	10.98	AV	Horizont	PASS
5	11992.99	30.67	11.06	41.73	54.00	12.27	AV	Horizont	PASS
6	17795.80	28.27	16.25	44.52	54.00	9.48	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 2437MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

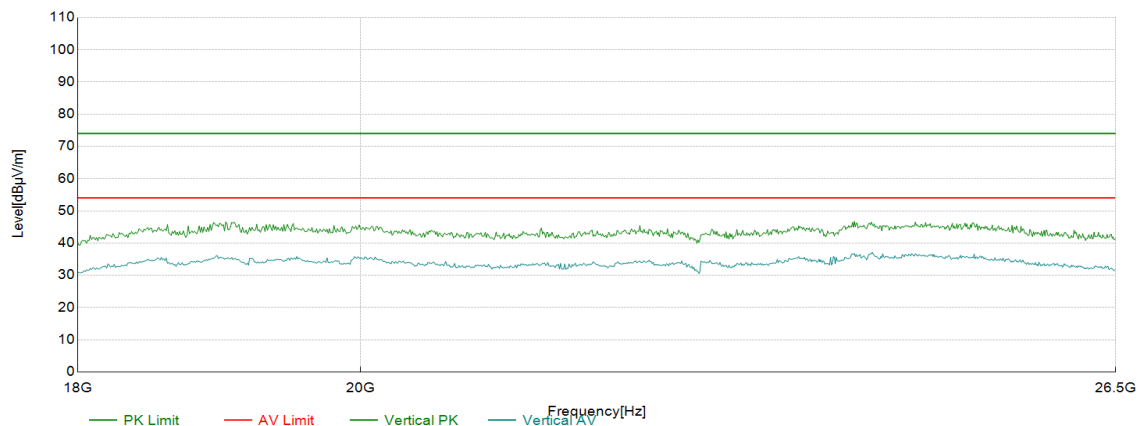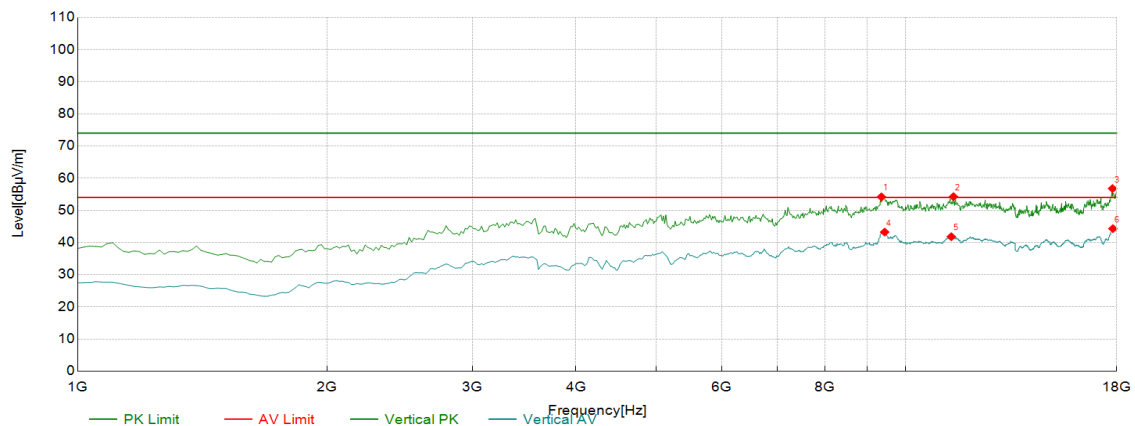

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9355.36	46.97	7.21	54.18	74.00	19.82	PK	Vertical	PASS
2	11431.43	44.47	9.79	54.26	74.00	19.74	PK	Vertical	PASS
3	17795.80	40.52	16.25	56.77	74.00	17.23	PK	Vertical	PASS
4	9440.44	35.11	8.13	43.24	54.00	10.76	AV	Vertical	PASS
5	11363.36	32.07	9.73	41.80	54.00	12.20	AV	Vertical	PASS
6	17812.81	28.05	16.27	44.32	54.00	9.68	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 2452MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

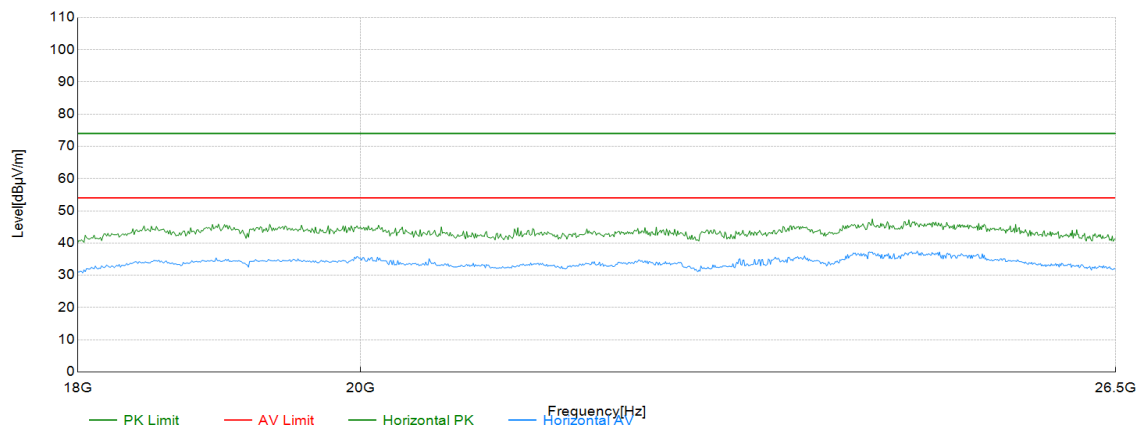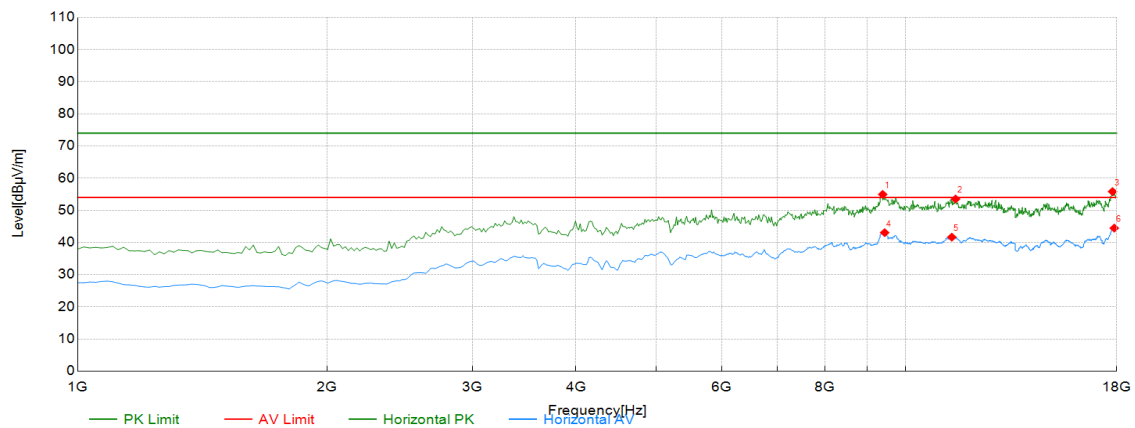

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9389.39	47.57	7.39	54.96	74.00	19.04	PK	Horizont	PASS
2	11499.50	43.75	9.77	53.52	74.00	20.48	PK	Horizont	PASS
3	17795.80	39.58	16.25	55.83	74.00	18.17	PK	Horizont	PASS
4	9440.44	34.93	8.13	43.06	54.00	10.94	AV	Horizont	PASS
5	11380.38	31.91	9.75	41.66	54.00	12.34	AV	Horizont	PASS
6	17880.88	28.38	16.10	44.48	54.00	9.52	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	802.11AX40 2452MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

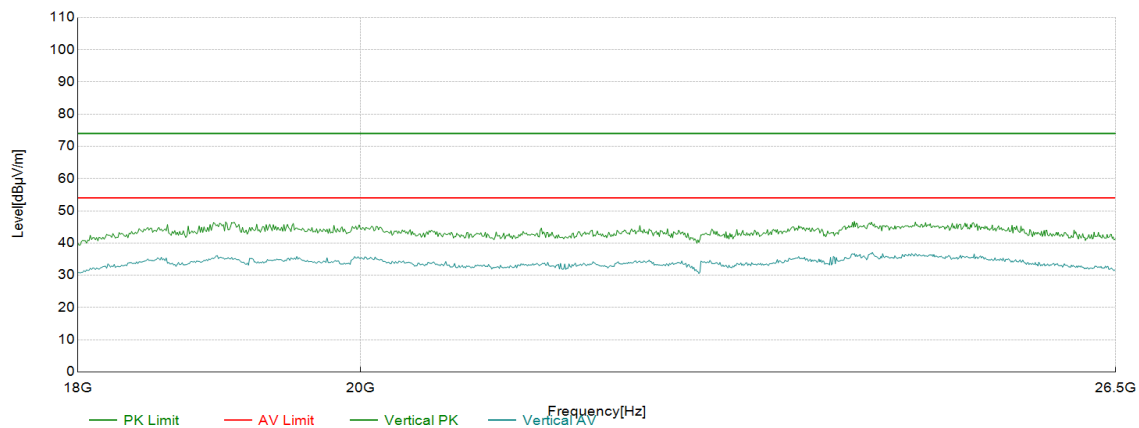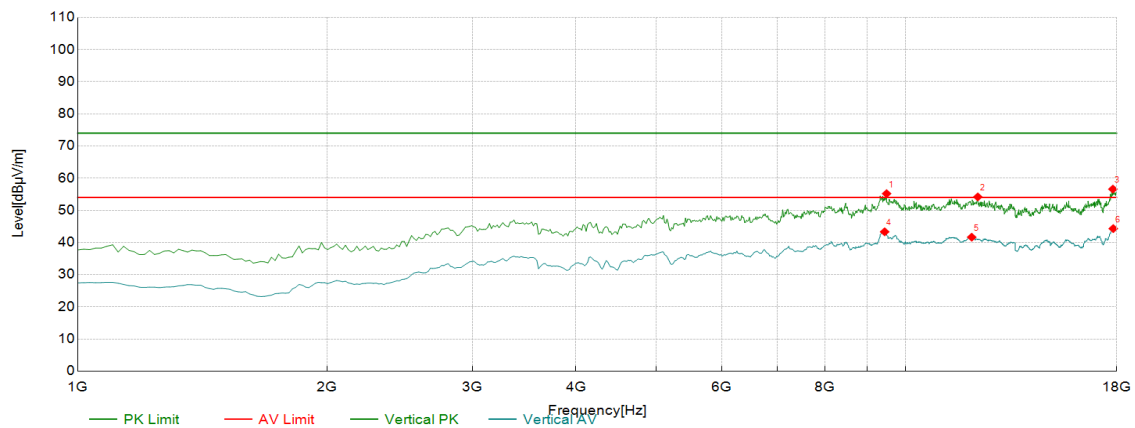

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9491.49	46.69	8.50	55.19	74.00	18.81	PK	Vertical	PASS
2	12231.23	43.39	10.79	54.18	74.00	19.82	PK	Vertical	PASS
3	17812.81	40.34	16.27	56.61	74.00	17.39	PK	Vertical	PASS
4	9440.44	35.20	8.13	43.33	54.00	10.67	AV	Vertical	PASS
5	12027.03	30.52	11.13	41.65	54.00	12.35	AV	Vertical	PASS
6	17829.83	28.10	16.22	44.32	54.00	9.68	AV	Vertical	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)

3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.




Attachment C--Restricted Bands Requirement Test Data

Radiation Test

Test Mode:	802.11B-2462MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

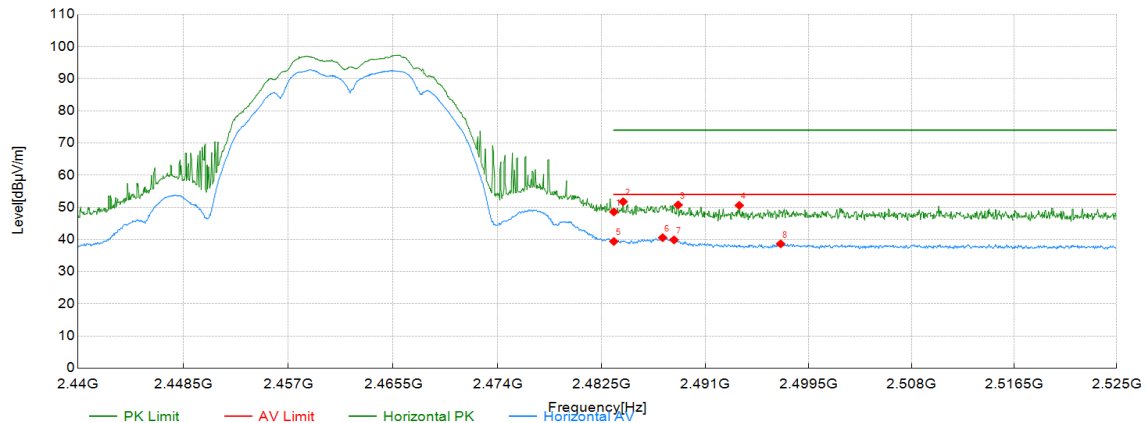

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	39.33	9.24	48.57	74.00	25.43	PK	Horizont	PASS
2	2484.26	42.50	9.25	51.75	74.00	22.25	PK	Horizont	PASS
3	2488.77	41.48	9.27	50.75	74.00	23.25	PK	Horizont	PASS
4	2493.79	41.29	9.31	50.60	74.00	23.40	PK	Horizont	PASS
5	2483.50	30.14	9.24	39.38	54.00	14.62	AV	Horizont	PASS
6	2487.50	31.29	9.26	40.55	54.00	13.45	AV	Horizont	PASS
7	2488.43	30.61	9.27	39.88	54.00	14.12	AV	Horizont	PASS
8	2497.19	29.31	9.33	38.64	54.00	15.36	AV	Horizont	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11B-2462MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

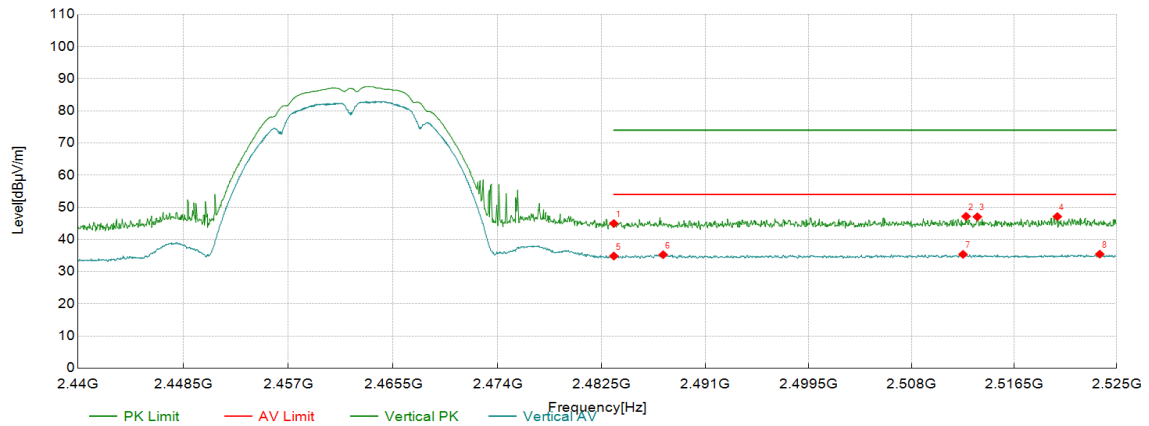

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	35.73	9.24	44.97	74.00	29.03	PK	Vertical	PASS
2	2512.50	37.76	9.42	47.18	74.00	26.82	PK	Vertical	PASS
3	2513.43	37.64	9.42	47.06	74.00	26.94	PK	Vertical	PASS
4	2520.07	37.67	9.46	47.13	74.00	26.87	PK	Vertical	PASS
5	2483.50	25.62	9.24	34.86	54.00	19.14	AV	Vertical	PASS
6	2487.54	26.00	9.27	35.27	54.00	18.73	AV	Vertical	PASS
7	2512.24	25.96	9.42	35.38	54.00	18.62	AV	Vertical	PASS
8	2523.60	25.97	9.47	35.44	54.00	18.56	AV	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11G-2462MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

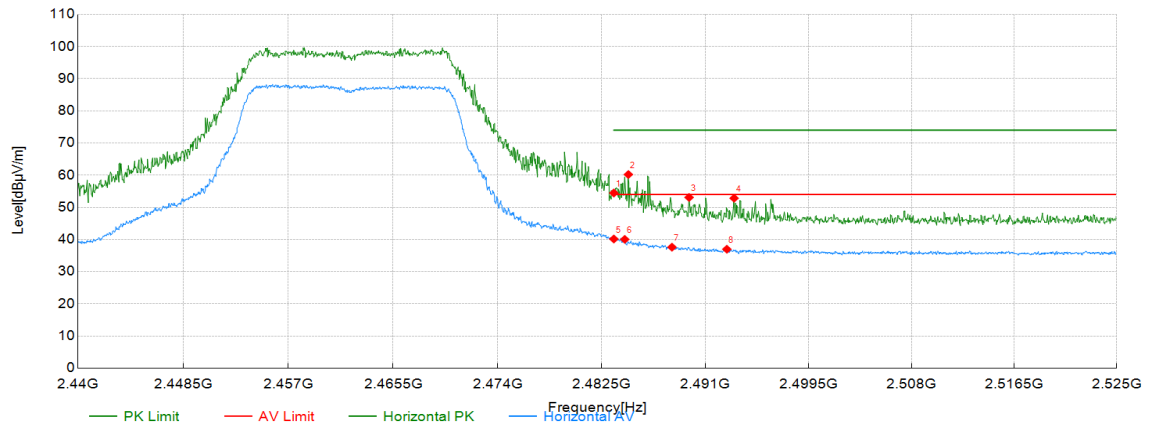

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	45.22	9.24	54.46	74.00	19.54	PK	Horizont	PASS
2	2484.69	50.96	9.25	60.21	74.00	13.79	PK	Horizont	PASS
3	2489.66	43.80	9.28	53.08	74.00	20.92	PK	Horizont	PASS
4	2493.36	43.54	9.31	52.85	74.00	21.15	PK	Horizont	PASS
5	2483.50	30.92	9.24	40.16	54.00	13.84	AV	Horizont	PASS
6	2484.39	30.79	9.25	40.04	54.00	13.96	AV	Horizont	PASS
7	2488.26	28.34	9.27	37.61	54.00	16.39	AV	Horizont	PASS
8	2492.77	27.66	9.31	36.97	54.00	17.03	AV	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11G-2462MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

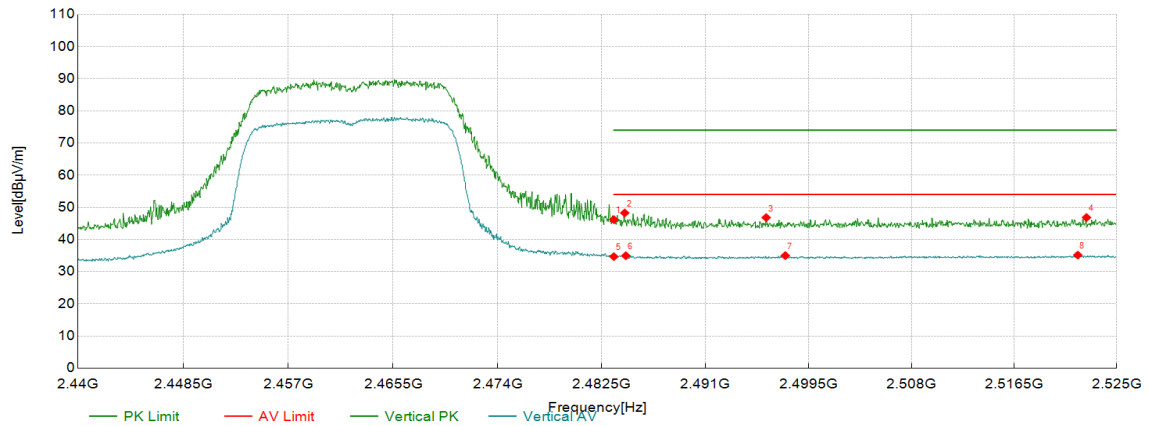

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	36.93	9.24	46.17	74.00	27.83	PK	Vertical	PASS
2	2484.39	39.02	9.25	48.27	74.00	25.73	PK	Vertical	PASS
3	2496.00	37.49	9.33	46.82	74.00	27.18	PK	Vertical	PASS
4	2522.49	37.37	9.47	46.84	74.00	27.16	PK	Vertical	PASS
5	2483.50	25.44	9.24	34.68	54.00	19.32	AV	Vertical	PASS
6	2484.48	25.70	9.25	34.95	54.00	19.05	AV	Vertical	PASS
7	2497.57	25.65	9.34	34.99	54.00	19.01	AV	Vertical	PASS
8	2521.77	25.69	9.47	35.16	54.00	18.84	AV	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N20-2462MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

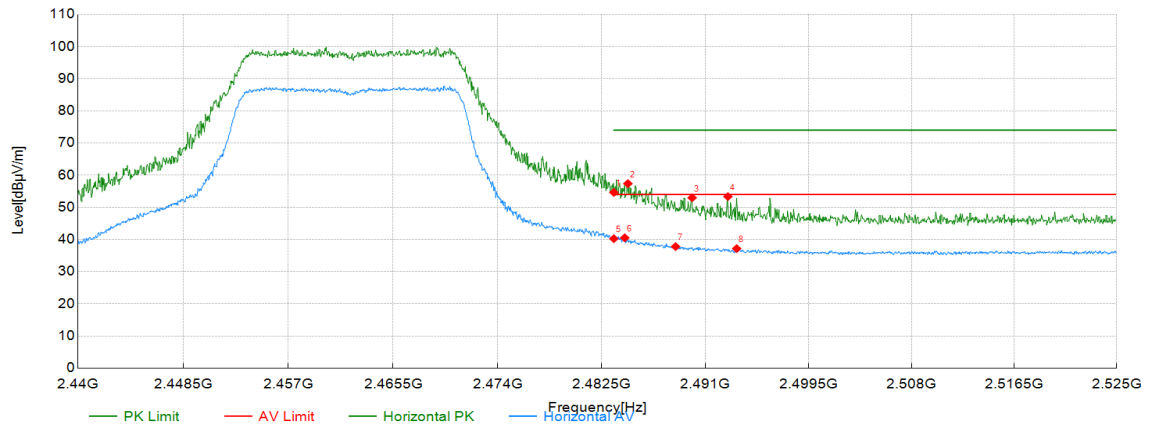

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	45.41	9.24	54.65	74.00	19.35	PK	Horizont	PASS
2	2484.65	48.13	9.25	57.38	74.00	16.62	PK	Horizont	PASS
3	2489.92	43.70	9.28	52.98	74.00	21.02	PK	Horizont	PASS
4	2492.85	44.04	9.31	53.35	74.00	20.65	PK	Horizont	PASS
5	2483.50	31.01	9.24	40.25	54.00	13.75	AV	Horizont	PASS
6	2484.39	31.28	9.25	40.53	54.00	13.47	AV	Horizont	PASS
7	2488.56	28.53	9.27	37.80	54.00	16.20	AV	Horizont	PASS
8	2493.58	27.86	9.31	37.17	54.00	16.83	AV	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N20-2462MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

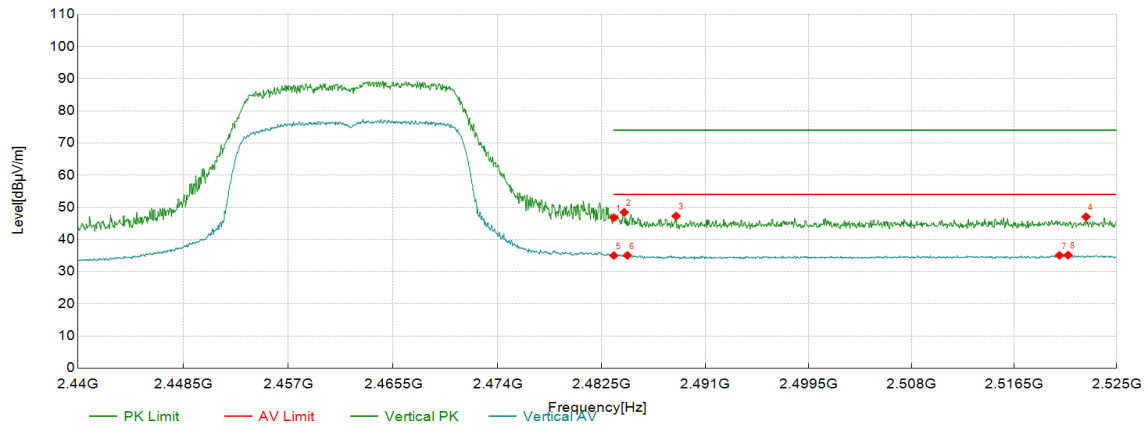

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	37.55	9.24	46.79	74.00	27.21	PK	Vertical	PASS
2	2484.35	39.20	9.25	48.45	74.00	25.55	PK	Vertical	PASS
3	2488.60	38.02	9.27	47.29	74.00	26.71	PK	Vertical	PASS
4	2522.45	37.59	9.47	47.06	74.00	26.94	PK	Vertical	PASS
5	2483.50	25.77	9.24	35.01	54.00	18.99	AV	Vertical	PASS
6	2484.60	25.81	9.25	35.06	54.00	18.94	AV	Vertical	PASS
7	2520.24	25.61	9.46	35.07	54.00	18.93	AV	Vertical	PASS
8	2520.96	25.69	9.46	35.15	54.00	18.85	AV	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX20-2462MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

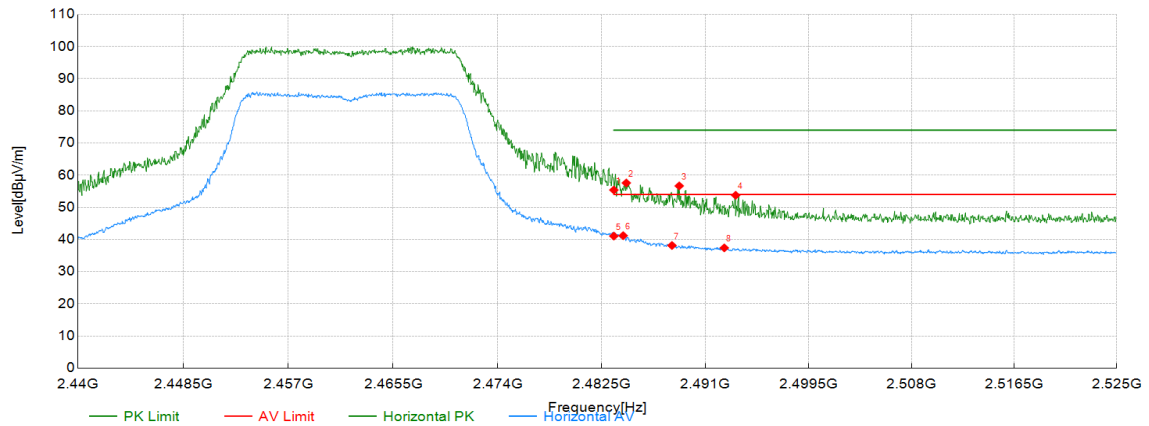

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	46.15	9.24	55.39	74.00	18.61	PK	Horizont	PASS
2	2484.52	48.33	9.25	57.58	74.00	16.42	PK	Horizont	PASS
3	2488.86	47.39	9.27	56.66	74.00	17.34	PK	Horizont	PASS
4	2493.49	44.45	9.31	53.76	74.00	20.24	PK	Horizont	PASS
5	2483.50	31.83	9.24	41.07	54.00	12.93	AV	Horizont	PASS
6	2484.26	31.94	9.25	41.19	54.00	12.81	AV	Horizont	PASS
7	2488.26	28.87	9.27	38.14	54.00	15.86	AV	Horizont	PASS
8	2492.56	28.09	9.31	37.40	54.00	16.60	AV	Horizont	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX20-2462MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

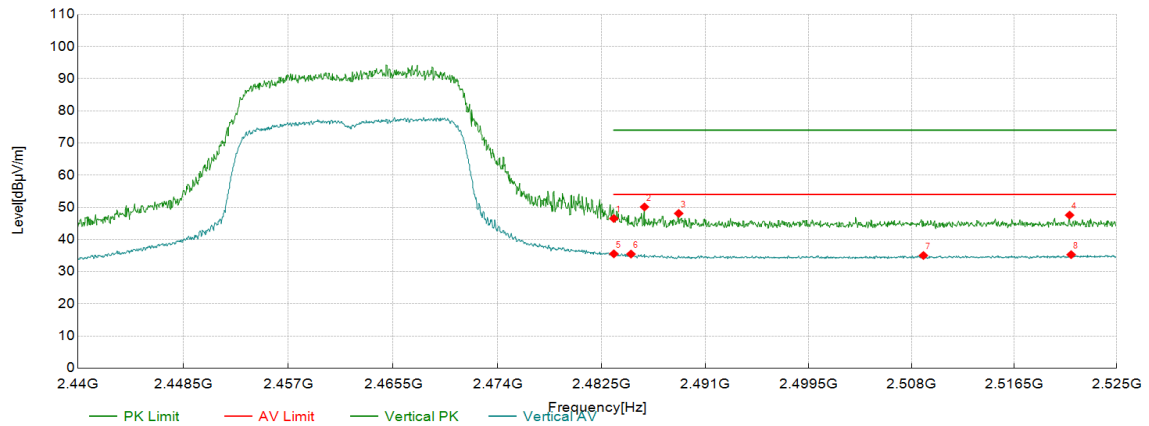

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	37.30	9.24	46.54	74.00	27.46	PK	Vertical	PASS
2	2486.01	40.86	9.26	50.12	74.00	23.88	PK	Vertical	PASS
3	2488.81	38.84	9.27	48.11	74.00	25.89	PK	Vertical	PASS
4	2521.09	38.12	9.46	47.58	74.00	26.42	PK	Vertical	PASS
5	2483.50	26.31	9.24	35.55	54.00	18.45	AV	Vertical	PASS
6	2484.90	26.22	9.25	35.47	54.00	18.53	AV	Vertical	PASS
7	2508.97	25.62	9.41	35.03	54.00	18.97	AV	Vertical	PASS
8	2521.22	25.83	9.46	35.29	54.00	18.71	AV	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N40-2452MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

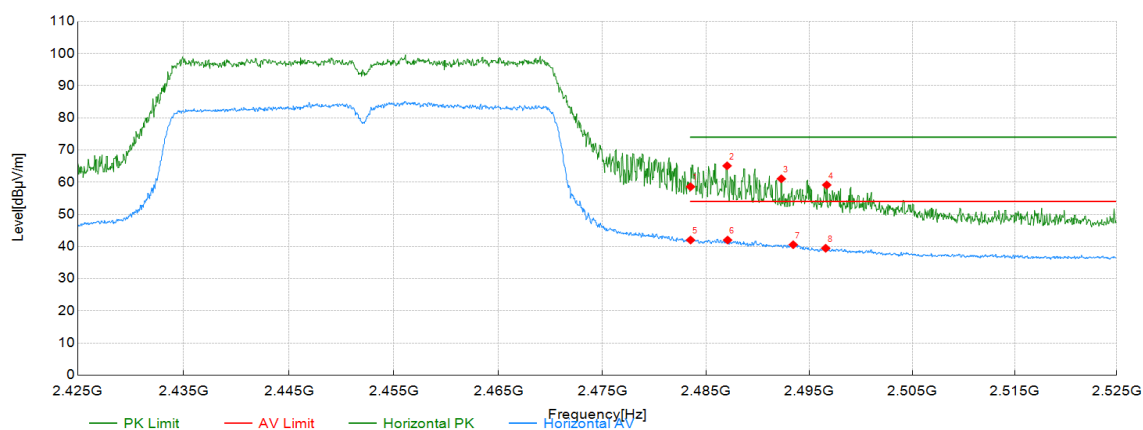

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	49.34	9.24	58.58	74.00	15.42	PK	Horizont	PASS
2	2487.03	55.83	9.26	65.09	74.00	8.91	PK	Horizont	PASS
3	2492.28	51.76	9.30	61.06	74.00	12.94	PK	Horizont	PASS
4	2496.69	49.80	9.33	59.13	74.00	14.87	PK	Horizont	PASS
5	2483.50	32.77	9.24	42.01	54.00	11.99	AV	Horizont	PASS
6	2487.08	32.74	9.26	42.00	54.00	12.00	AV	Horizont	PASS
7	2493.43	31.24	9.31	40.55	54.00	13.45	AV	Horizont	PASS
8	2496.59	30.12	9.33	39.45	54.00	14.55	AV	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N40-2452MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

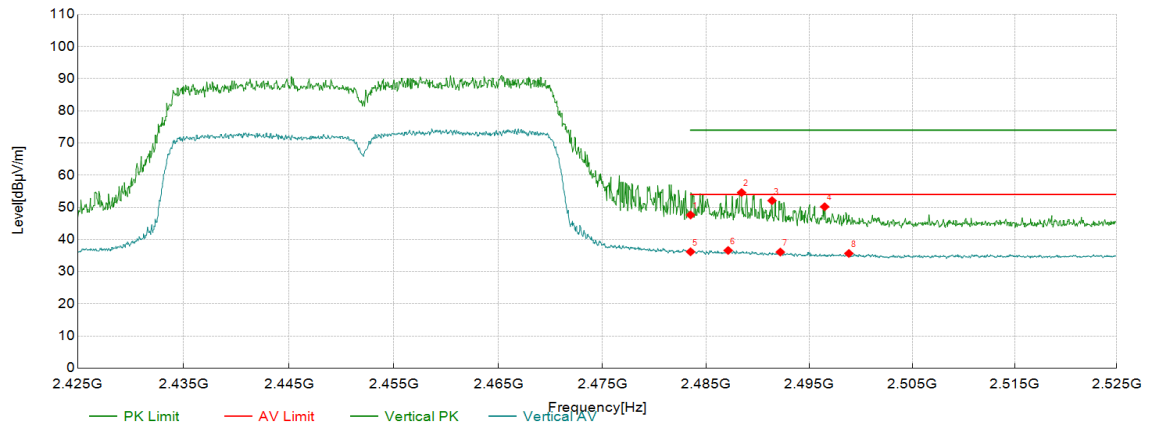

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	38.39	9.24	47.63	74.00	26.37	PK	Vertical	PASS
2	2488.43	45.33	9.27	54.60	74.00	19.40	PK	Vertical	PASS
3	2491.38	42.79	9.30	52.09	74.00	21.91	PK	Vertical	PASS
4	2496.49	40.85	9.33	50.18	74.00	23.82	PK	Vertical	PASS
5	2483.50	26.94	9.24	36.18	54.00	17.82	AV	Vertical	PASS
6	2487.13	27.33	9.26	36.59	54.00	17.41	AV	Vertical	PASS
7	2492.18	26.79	9.30	36.09	54.00	17.91	AV	Vertical	PASS
8	2498.84	26.32	9.34	35.66	54.00	18.34	AV	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX40-2452MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

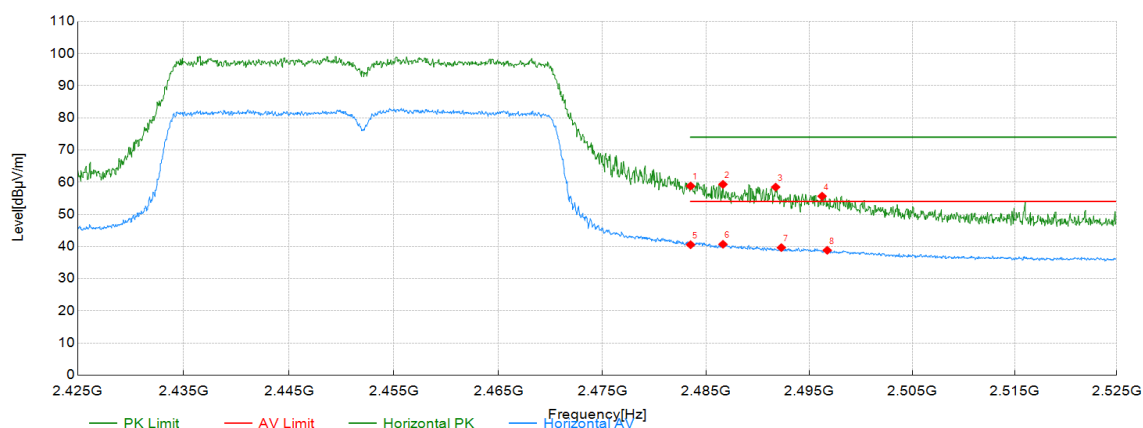

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	49.57	9.24	58.81	74.00	15.19	PK	Horizont	PASS
2	2486.63	50.06	9.26	59.32	74.00	14.68	PK	Horizont	PASS
3	2491.73	49.16	9.30	58.46	74.00	15.54	PK	Horizont	PASS
4	2496.24	46.31	9.33	55.64	74.00	18.36	PK	Horizont	PASS
5	2483.50	31.31	9.24	40.55	54.00	13.45	AV	Horizont	PASS
6	2486.63	31.44	9.26	40.70	54.00	13.30	AV	Horizont	PASS
7	2492.28	30.36	9.30	39.66	54.00	14.34	AV	Horizont	PASS
8	2496.74	29.48	9.33	38.81	54.00	15.19	AV	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX40-2452MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

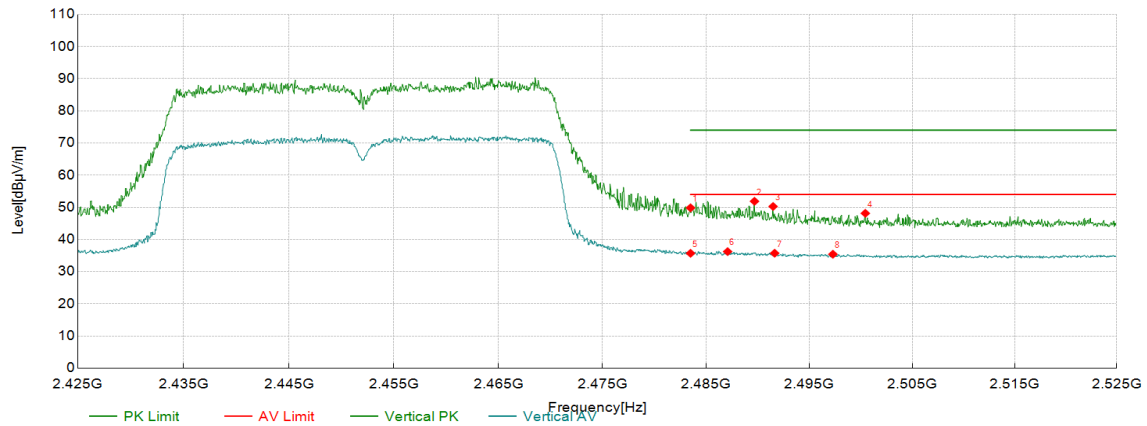

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	40.61	9.24	49.85	74.00	24.15	PK	Vertical	PASS
2	2489.68	42.61	9.28	51.89	74.00	22.11	PK	Vertical	PASS
3	2491.48	40.97	9.30	50.27	74.00	23.73	PK	Vertical	PASS
4	2500.44	38.78	9.36	48.14	74.00	25.86	PK	Vertical	PASS
5	2483.50	26.47	9.24	35.71	54.00	18.29	AV	Vertical	PASS
6	2487.08	26.97	9.26	36.23	54.00	17.77	AV	Vertical	PASS
7	2491.63	26.44	9.30	35.74	54.00	18.26	AV	Vertical	PASS
8	2497.29	26.09	9.33	35.42	54.00	18.58	AV	Vertical	PASS


Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)
2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11B-2412MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

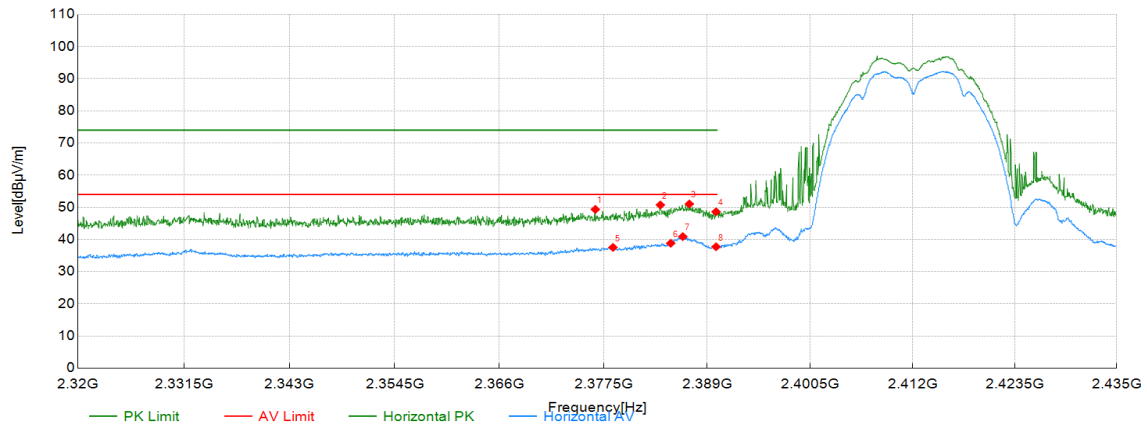

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2376.60	40.56	8.81	49.37	74.00	24.63	PK	Horizont	PASS
2	2383.81	41.92	8.82	50.74	74.00	23.26	PK	Horizont	PASS
3	2387.03	42.22	8.83	51.05	74.00	22.95	PK	Horizont	PASS
4	2390.00	39.80	8.83	48.63	74.00	25.37	PK	Horizont	PASS
5	2378.55	28.72	8.82	37.54	54.00	16.46	AV	Horizont	PASS
6	2384.96	30.00	8.82	38.82	54.00	15.18	AV	Horizont	PASS
7	2386.30	32.08	8.82	40.90	54.00	13.10	AV	Horizont	PASS
8	2390.00	28.92	8.83	37.75	54.00	16.25	AV	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11B-2412MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

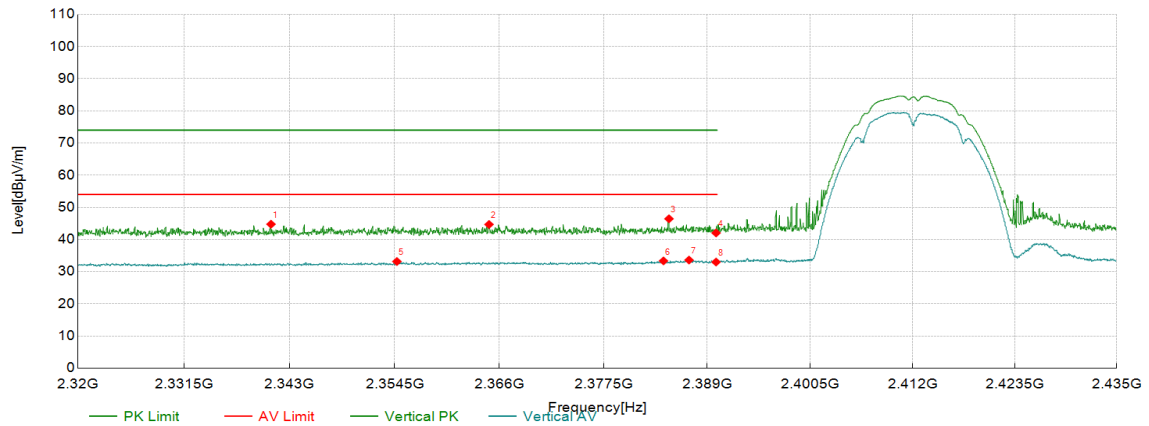

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2340.98	36.03	8.73	44.76	74.00	29.24	PK	Vertical	PASS
2	2364.86	35.88	8.80	44.68	74.00	29.32	PK	Vertical	PASS
3	2384.77	37.62	8.82	46.44	74.00	27.56	PK	Vertical	PASS
4	2390.00	33.21	8.83	42.04	74.00	31.96	PK	Vertical	PASS
5	2354.74	24.36	8.79	33.15	54.00	20.85	AV	Vertical	PASS
6	2384.15	24.53	8.82	33.35	54.00	20.65	AV	Vertical	PASS
7	2386.99	24.78	8.83	33.61	54.00	20.39	AV	Vertical	PASS
8	2390.00	24.17	8.83	33.00	54.00	21.00	AV	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11G-2412MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

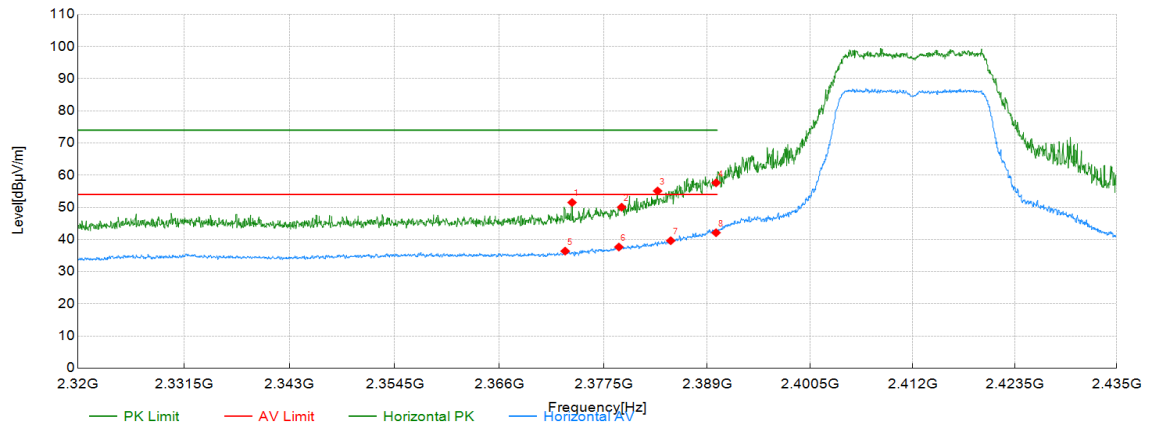

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2374.03	42.70	8.81	51.51	74.00	22.49	PK	Horizont	PASS
2	2379.51	41.23	8.82	50.05	74.00	23.95	PK	Horizont	PASS
3	2383.50	46.28	8.82	55.10	74.00	18.90	PK	Horizont	PASS
4	2390.00	48.80	8.83	57.63	74.00	16.37	PK	Horizont	PASS
5	2373.26	27.58	8.81	36.39	54.00	17.61	AV	Horizont	PASS
6	2379.21	28.84	8.82	37.66	54.00	16.34	AV	Horizont	PASS
7	2384.96	30.80	8.82	39.62	54.00	14.38	AV	Horizont	PASS
8	2390.00	33.28	8.83	42.11	54.00	11.89	AV	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11G-2412MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

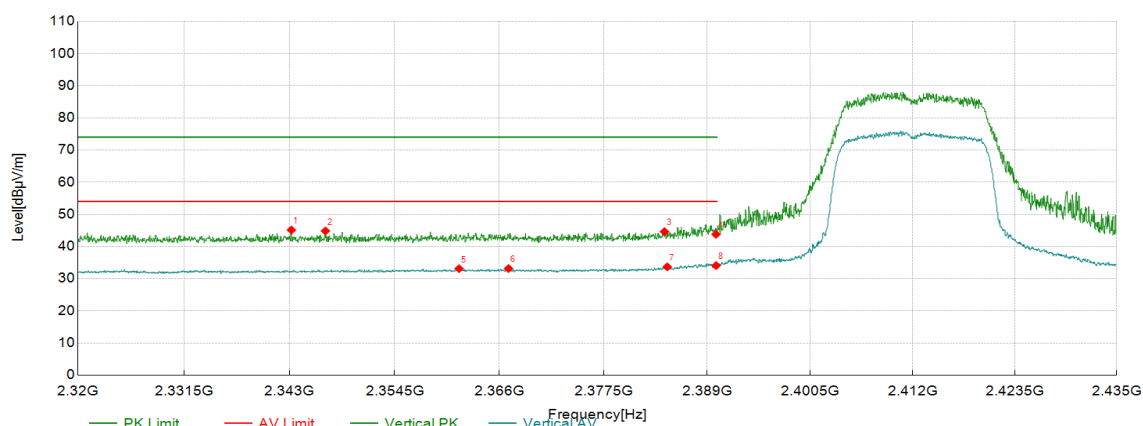

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2343.20	36.39	8.74	45.13	74.00	28.87	PK	Vertical	PASS
2	2346.92	36.06	8.77	44.83	74.00	29.17	PK	Vertical	PASS
3	2384.27	35.80	8.82	44.62	74.00	29.38	PK	Vertical	PASS
4	2390.00	34.97	8.83	43.80	74.00	30.20	PK	Vertical	PASS
5	2361.57	24.31	8.80	33.11	54.00	20.89	AV	Vertical	PASS
6	2367.01	24.35	8.80	33.15	54.00	20.85	AV	Vertical	PASS
7	2384.57	24.85	8.82	33.67	54.00	20.33	AV	Vertical	PASS
8	2390.00	25.23	8.83	34.06	54.00	19.94	AV	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N20-2412MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

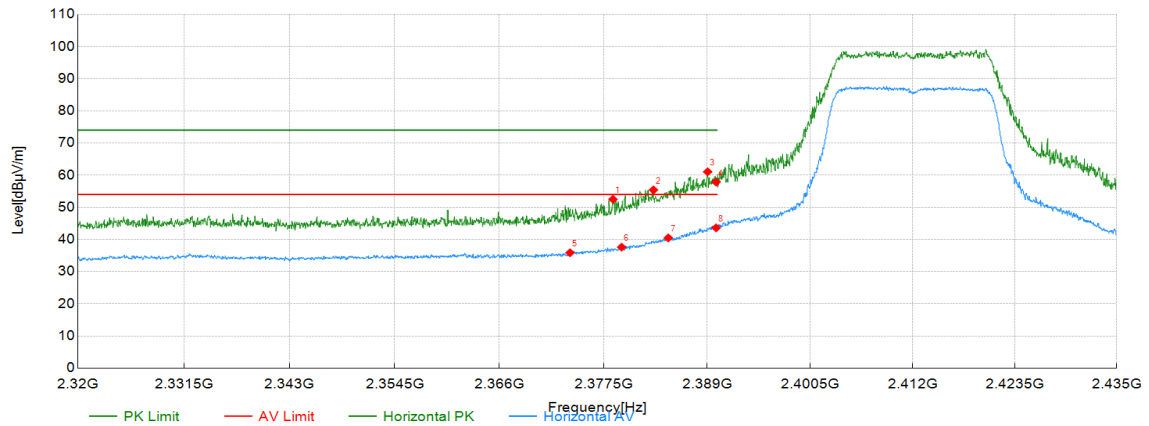

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2378.55	43.69	8.82	52.51	74.00	21.49	PK	Horizont	PASS
2	2383.04	46.59	8.82	55.41	74.00	18.59	PK	Horizont	PASS
3	2389.06	52.23	8.83	61.06	74.00	12.94	PK	Horizont	PASS
4	2390.00	49.04	8.83	57.87	74.00	16.13	PK	Horizont	PASS
5	2373.80	27.07	8.81	35.88	54.00	18.12	AV	Horizont	PASS
6	2379.51	28.80	8.82	37.62	54.00	16.38	AV	Horizont	PASS
7	2384.69	31.68	8.82	40.50	54.00	13.50	AV	Horizont	PASS
8	2390.00	34.79	8.83	43.62	54.00	10.38	AV	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N20-2412MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

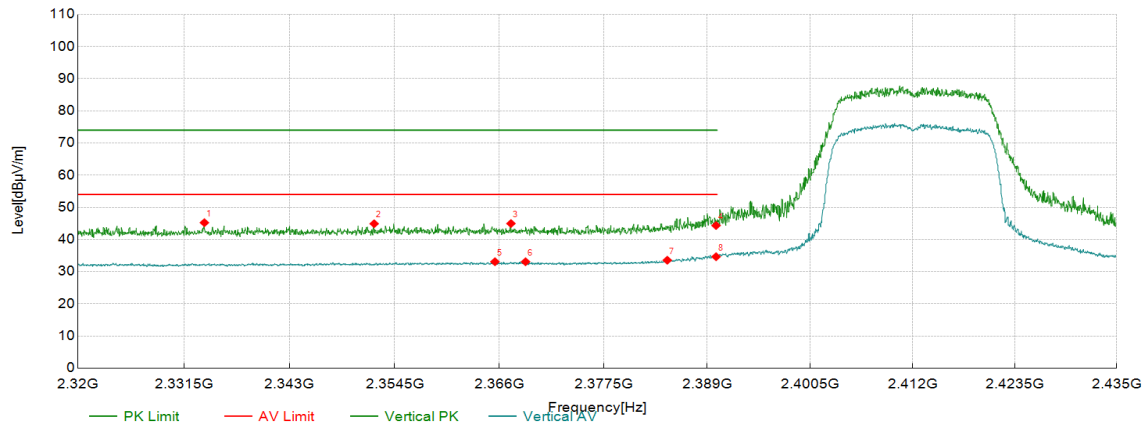

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2333.73	36.54	8.69	45.23	74.00	28.77	PK	Vertical	PASS
2	2352.25	36.11	8.79	44.90	74.00	29.10	PK	Vertical	PASS
3	2367.28	36.17	8.80	44.97	74.00	29.03	PK	Vertical	PASS
4	2390.00	35.52	8.83	44.35	74.00	29.65	PK	Vertical	PASS
5	2365.52	24.28	8.80	33.08	54.00	20.92	AV	Vertical	PASS
6	2368.89	24.28	8.80	33.08	54.00	20.92	AV	Vertical	PASS
7	2384.57	24.73	8.82	33.55	54.00	20.45	AV	Vertical	PASS
8	2390.00	25.82	8.83	34.65	54.00	19.35	AV	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX20-2412MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

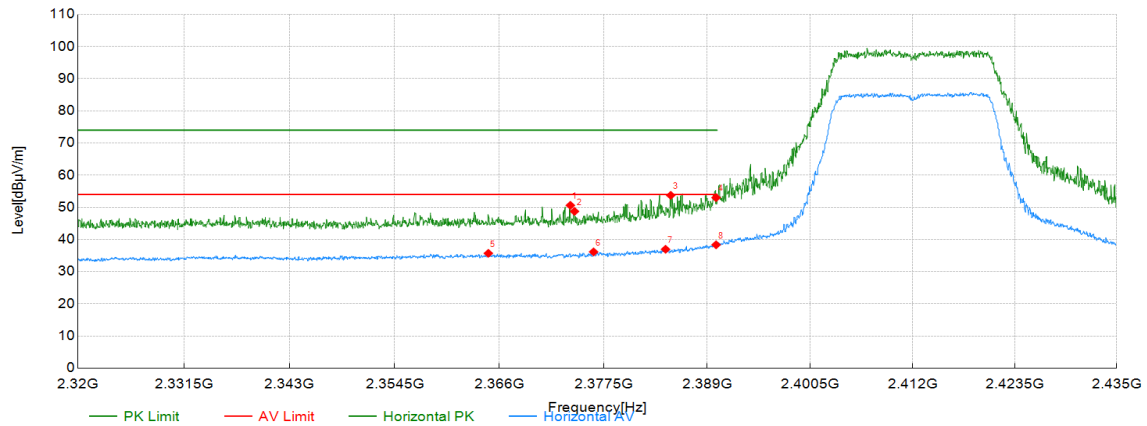

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2373.84	41.81	8.81	50.62	74.00	23.38	PK	Horizont	PASS
2	2374.30	39.94	8.81	48.75	74.00	25.25	PK	Horizont	PASS
3	2384.96	44.92	8.82	53.74	74.00	20.26	PK	Horizont	PASS
4	2390.00	44.19	8.83	53.02	74.00	20.98	PK	Horizont	PASS
5	2364.79	26.90	8.80	35.70	54.00	18.30	AV	Horizont	PASS
6	2376.41	27.33	8.81	36.14	54.00	17.86	AV	Horizont	PASS
7	2384.38	28.14	8.82	36.96	54.00	17.04	AV	Horizont	PASS
8	2390.00	29.51	8.83	38.34	54.00	15.66	AV	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX20-2412MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

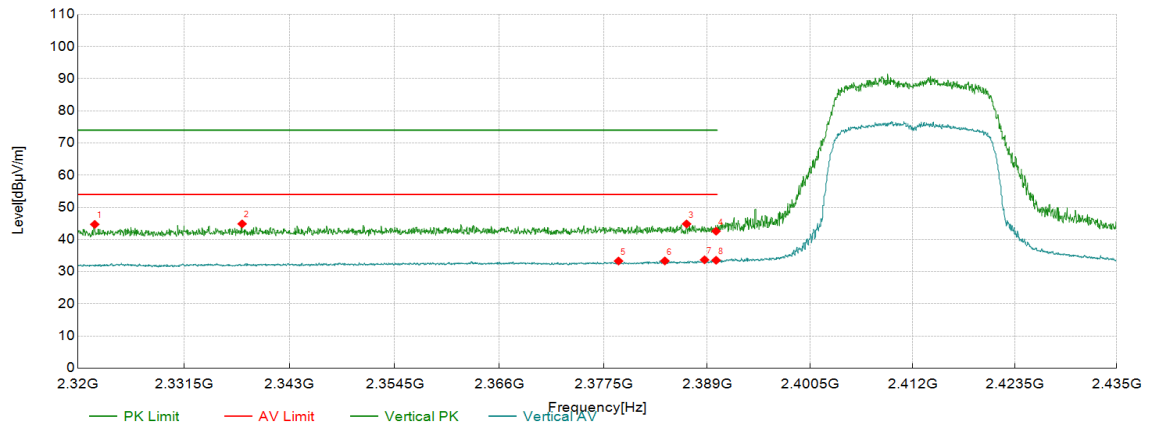

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2321.84	36.06	8.64	44.70	74.00	29.30	PK	Vertical	PASS
2	2337.83	36.15	8.72	44.87	74.00	29.13	PK	Vertical	PASS
3	2386.72	36.02	8.82	44.84	74.00	29.16	PK	Vertical	PASS
4	2390.00	33.76	8.83	42.59	74.00	31.41	PK	Vertical	PASS
5	2379.17	24.48	8.82	33.30	54.00	20.70	AV	Vertical	PASS
6	2384.31	24.51	8.82	33.33	54.00	20.67	AV	Vertical	PASS
7	2388.72	24.85	8.83	33.68	54.00	20.32	AV	Vertical	PASS
8	2390.00	24.71	8.83	33.54	54.00	20.46	AV	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N40-2422MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

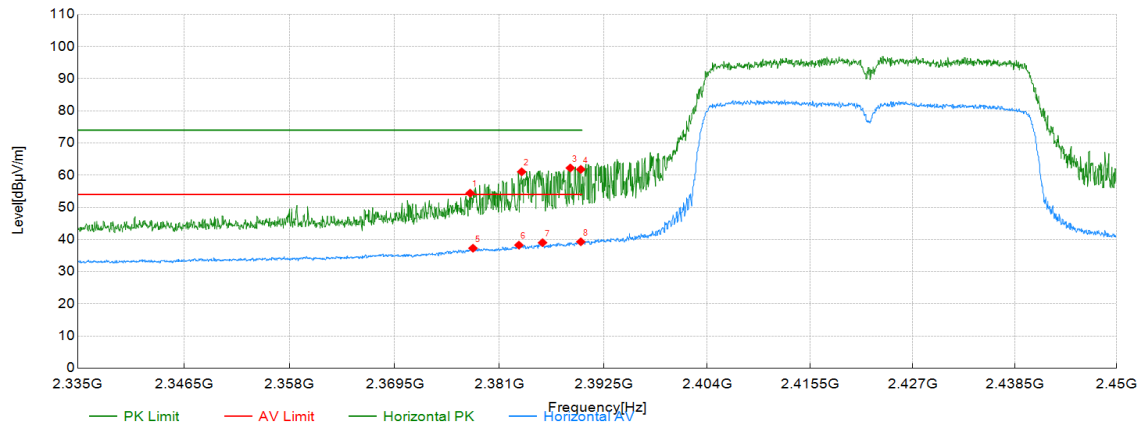

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2377.79	45.60	8.81	54.41	74.00	19.59	PK	Horizont	PASS
2	2383.47	52.23	8.82	61.05	74.00	12.95	PK	Horizont	PASS
3	2388.84	53.41	8.83	62.24	74.00	11.76	PK	Horizont	PASS
4	2390.00	52.98	8.83	61.81	74.00	12.19	PK	Horizont	PASS
5	2378.10	28.48	8.81	37.29	54.00	16.71	AV	Horizont	PASS
6	2383.16	29.44	8.82	38.26	54.00	15.74	AV	Horizont	PASS
7	2385.77	30.20	8.82	39.02	54.00	14.98	AV	Horizont	PASS
8	2390.00	30.46	8.83	39.29	54.00	14.71	AV	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N40-2422MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

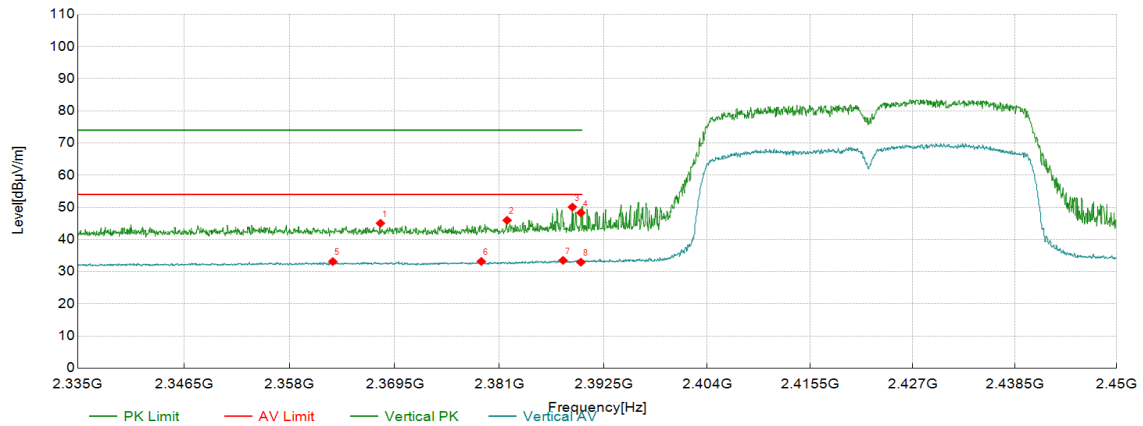

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2367.94	36.25	8.80	45.05	74.00	28.95	PK	Vertical	PASS
2	2381.86	37.15	8.82	45.97	74.00	28.03	PK	Vertical	PASS
3	2389.07	41.24	8.83	50.07	74.00	23.93	PK	Vertical	PASS
4	2390.00	39.47	8.83	48.30	74.00	25.70	PK	Vertical	PASS
5	2362.72	24.34	8.80	33.14	54.00	20.86	AV	Vertical	PASS
6	2379.02	24.36	8.82	33.18	54.00	20.82	AV	Vertical	PASS
7	2388.03	24.67	8.83	33.50	54.00	20.50	AV	Vertical	PASS
8	2390.00	24.12	8.83	32.95	54.00	21.05	AV	Vertical	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX40-2422MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

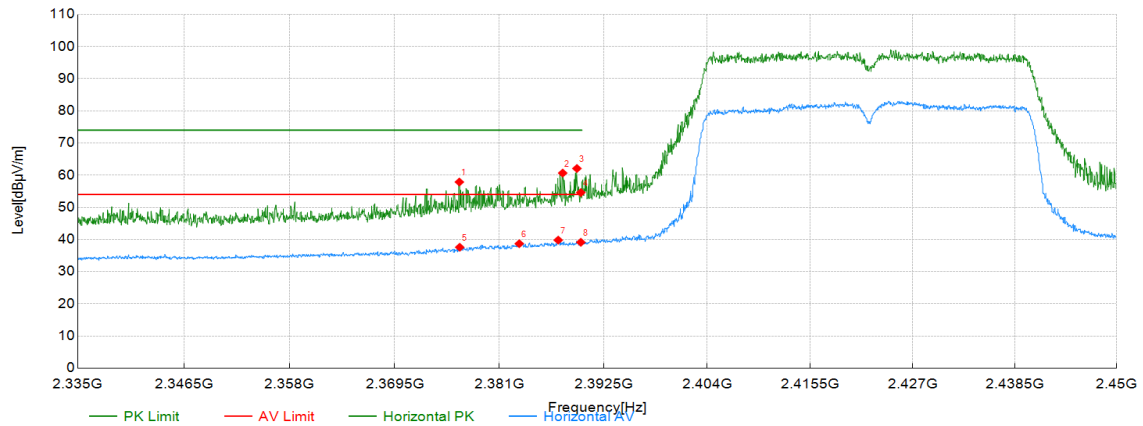

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2376.61	49.07	8.81	57.88	74.00	16.12	PK	Horizont	PASS
2	2387.99	51.83	8.83	60.66	74.00	13.34	PK	Horizont	PASS
3	2389.57	53.25	8.83	62.08	74.00	11.92	PK	Horizont	PASS
4	2390.00	45.77	8.83	54.60	74.00	19.40	PK	Horizont	PASS
5	2376.64	28.78	8.81	37.59	54.00	16.41	AV	Horizont	PASS
6	2383.20	29.88	8.82	38.70	54.00	15.30	AV	Horizont	PASS
7	2387.50	30.98	8.83	39.81	54.00	14.19	AV	Horizont	PASS
8	2390.00	30.31	8.83	39.14	54.00	14.86	AV	Horizont	PASS

Remark:


1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AX40-2422MHz Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.9	Humidity (%):	54
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

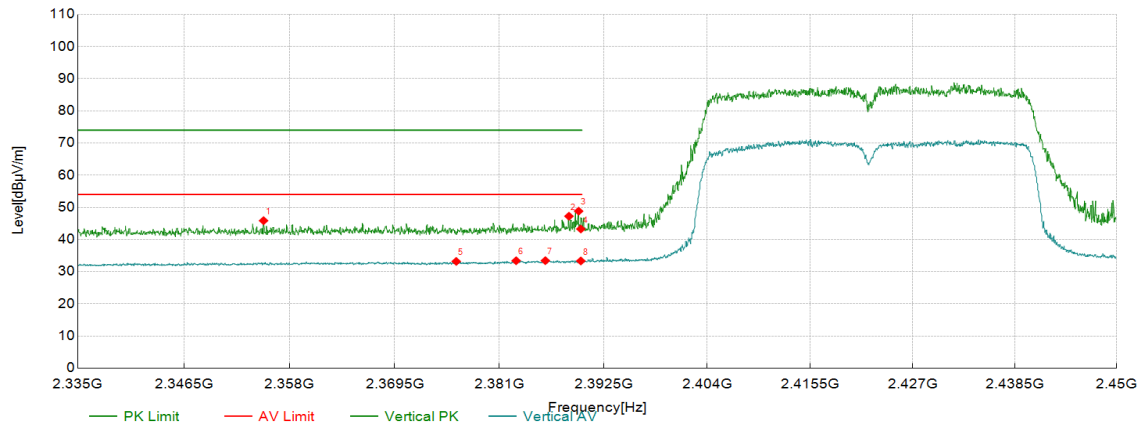

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2355.17	37.07	8.79	45.86	74.00	28.14	PK	Vertical	PASS
2	2388.68	38.41	8.83	47.24	74.00	26.76	PK	Vertical	PASS
3	2389.76	39.99	8.83	48.82	74.00	25.18	PK	Vertical	PASS
4	2390.00	34.43	8.83	43.26	74.00	30.74	PK	Vertical	PASS
5	2376.26	24.38	8.81	33.19	54.00	20.81	AV	Vertical	PASS
6	2382.86	24.58	8.82	33.40	54.00	20.60	AV	Vertical	PASS
7	2386.08	24.60	8.82	33.42	54.00	20.58	AV	Vertical	PASS
8	2390.00	24.50	8.83	33.33	54.00	20.67	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)

-----END OF REPORT-----

