


Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Remark:	/	Test_Date	2026/6/11


Test Graph

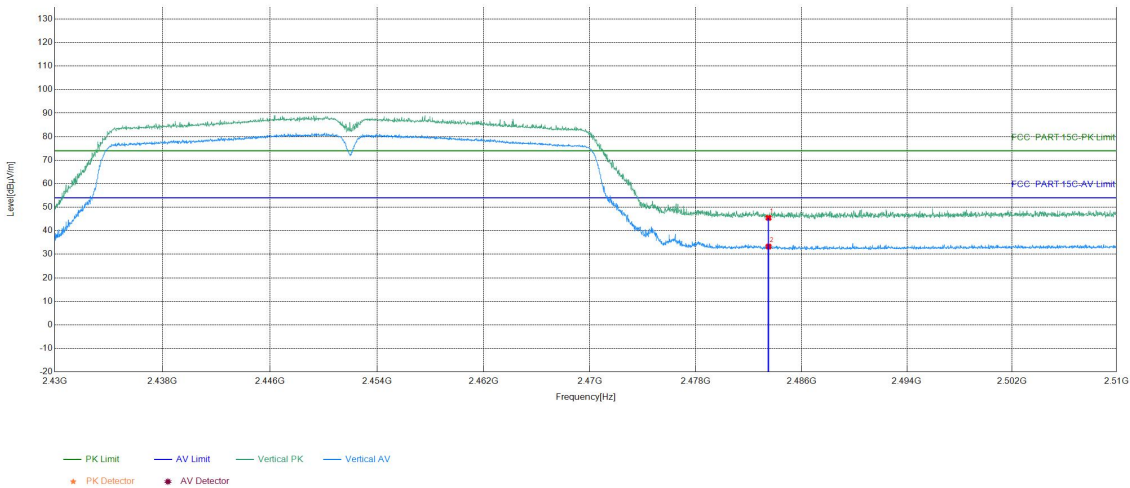

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	10.77	34.70	45.47	74.00	28.53	PASS	Vertical	PK
2	2483.5	10.77	22.52	33.29	54.00	20.71	PASS	Vertical	AV

Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2412MHz
Remark:	/	Test_Date	2026/6/11


Test Graph

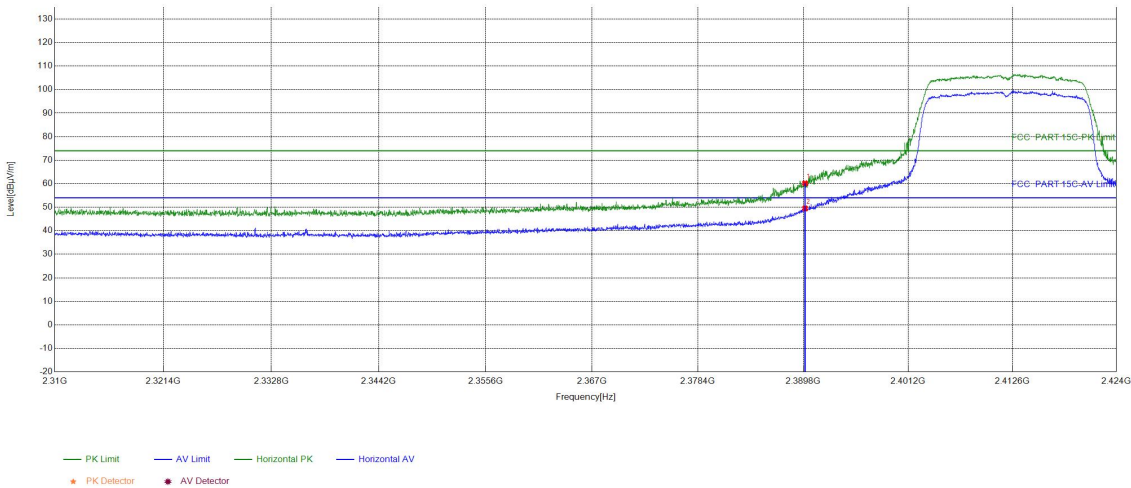

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	4.79	55.37	60.16	74.00	13.84	PASS	Horizontal	PK
2	2390	4.79	44.71	49.50	54.00	4.50	PASS	Horizontal	AV

Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2412MHz
Remark:	/	Test_Date	2026/6/11


Test Graph

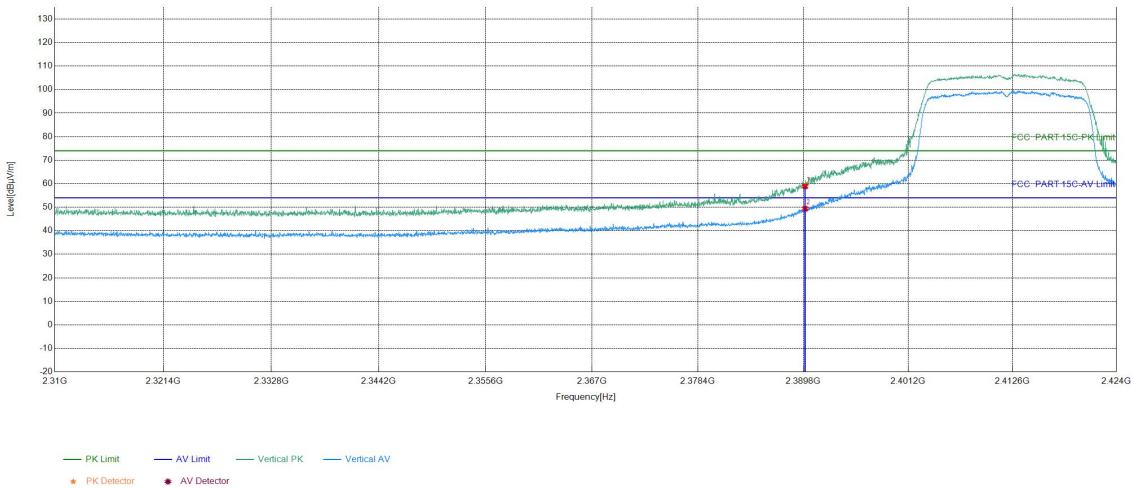

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	4.79	54.09	58.88	74.00	15.12	PASS	Vertical	PK
2	2390	4.79	44.58	49.37	54.00	4.63	PASS	Vertical	AV

Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2462MHz
Remark:	/	Test_Date	2026/6/11


Test Graph

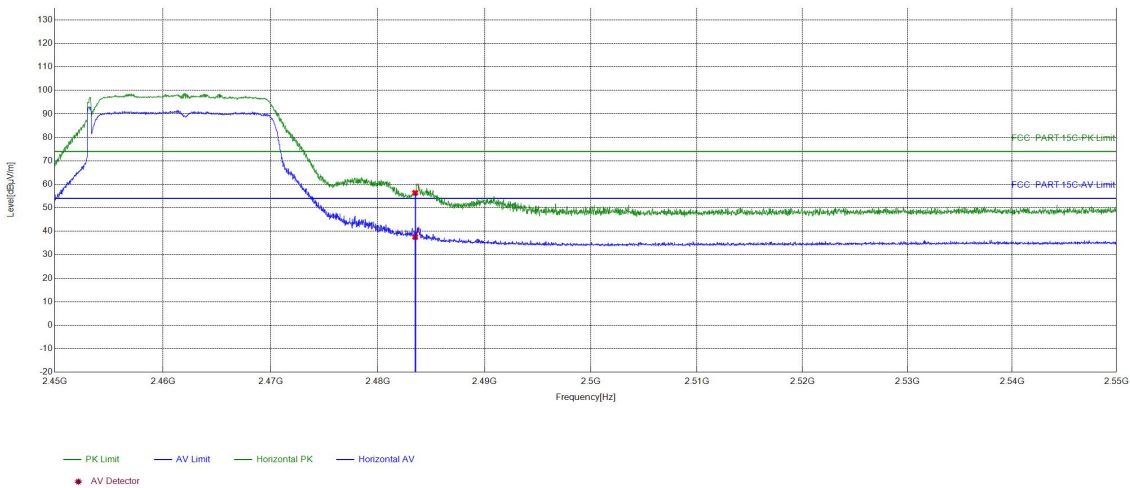

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	10.38	46.00	56.38	74.00	17.62	PASS	Horizontal	PK
2	2483.5	10.38	27.19	37.57	54.00	16.43	PASS	Horizontal	AV

Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2462MHz
Remark:	/	Test_Date	2026/6/11


Test Graph

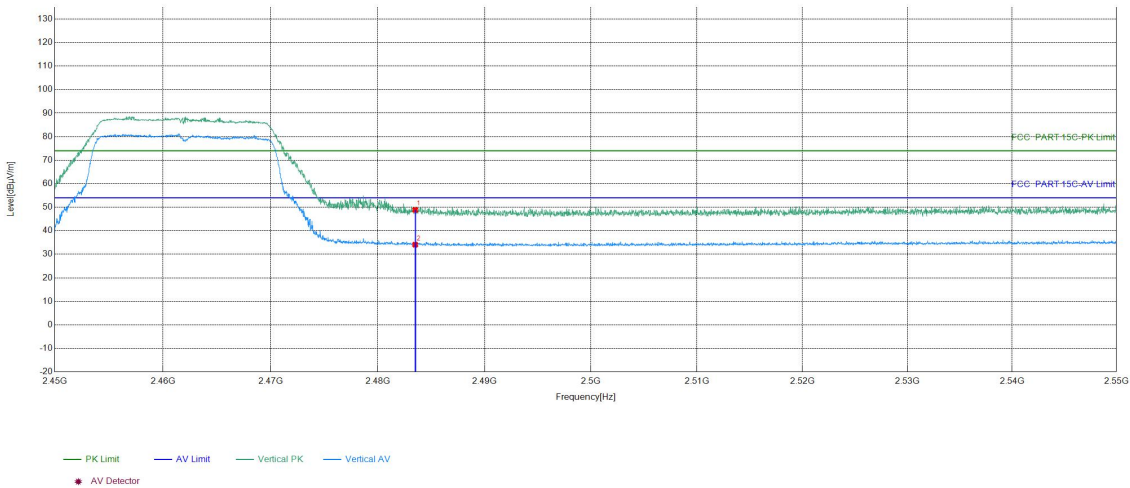

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	10.38	38.49	48.87	74.00	25.13	PASS	Vertical	PK
2	2483.5	10.38	23.70	34.08	54.00	19.92	PASS	Vertical	AV

Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2422MHz
Remark:	/	Test_Date	2026/6/11


Test Graph

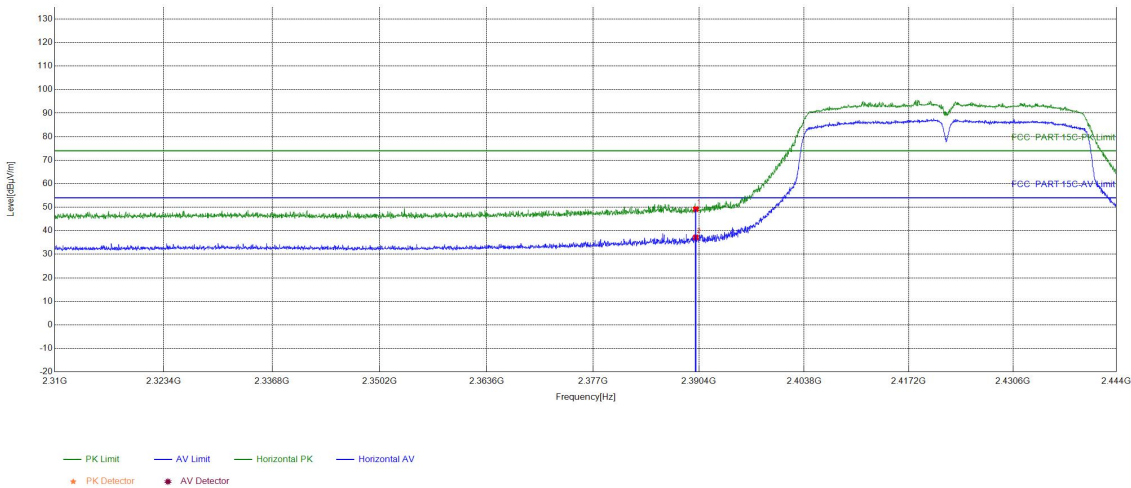

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	9.96	39.24	49.20	74.00	24.80	PASS	Horizontal	PK
2	2390	9.96	27.22	37.18	54.00	16.82	PASS	Horizontal	AV

Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2422MHz
Remark:	/	Test_Date	2026/6/11


Test Graph

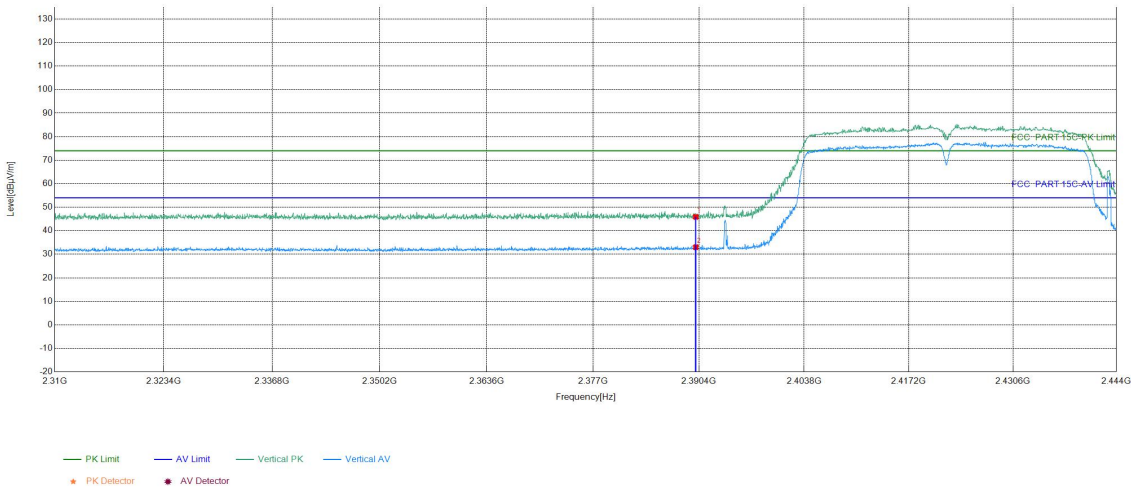

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	9.96	35.93	45.89	74.00	28.11	PASS	Vertical	PK
2	2390	9.96	23.06	33.02	54.00	20.98	PASS	Vertical	AV

Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2452MHz
Remark:	/	Test_Date	2026/6/11


Test Graph

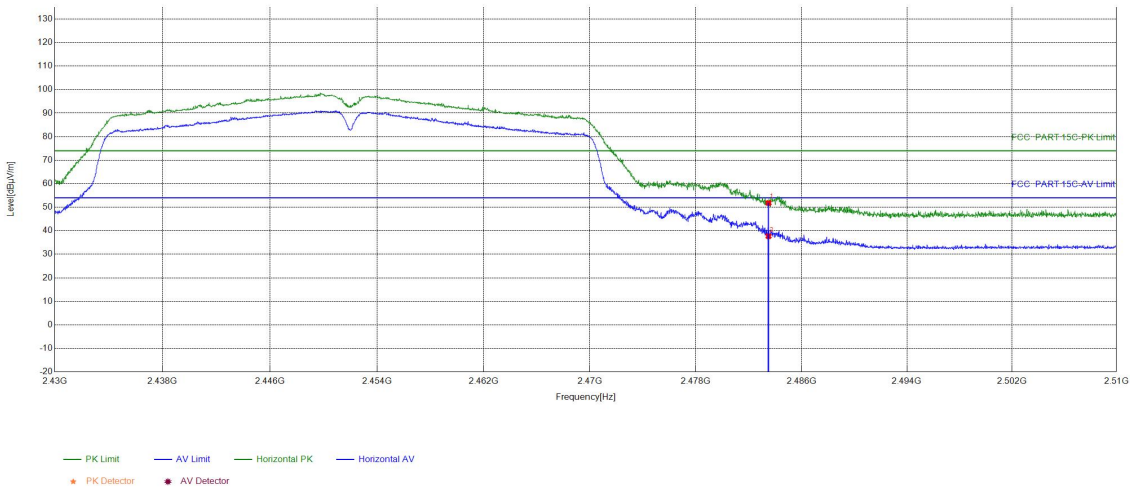

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	10.77	41.03	51.80	74.00	22.20	PASS	Horizontal	PK
2	2483.5	10.77	26.91	37.68	54.00	16.32	PASS	Horizontal	AV

Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2452MHz
Remark:	/	Test_Date	2026/6/11

Test Graph

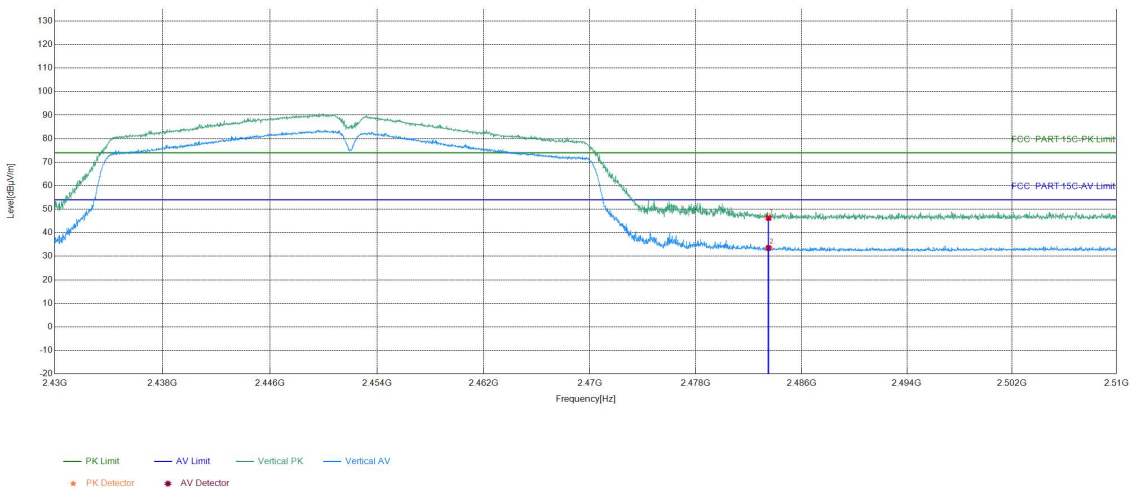

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	10.77	35.52	46.29	74.00	27.71	PASS	Vertical	PK
2	2483.5	10.77	22.75	33.52	54.00	20.48	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: 2.4G Wi-Fi of EED32S810026

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S810025.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***