





Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	-0.26	<=30	Pass
NVNT	BLE 1M	2440	-0.57	<=30	Pass
NVNT	BLE 1M	2480	-1.39	<=30	Pass

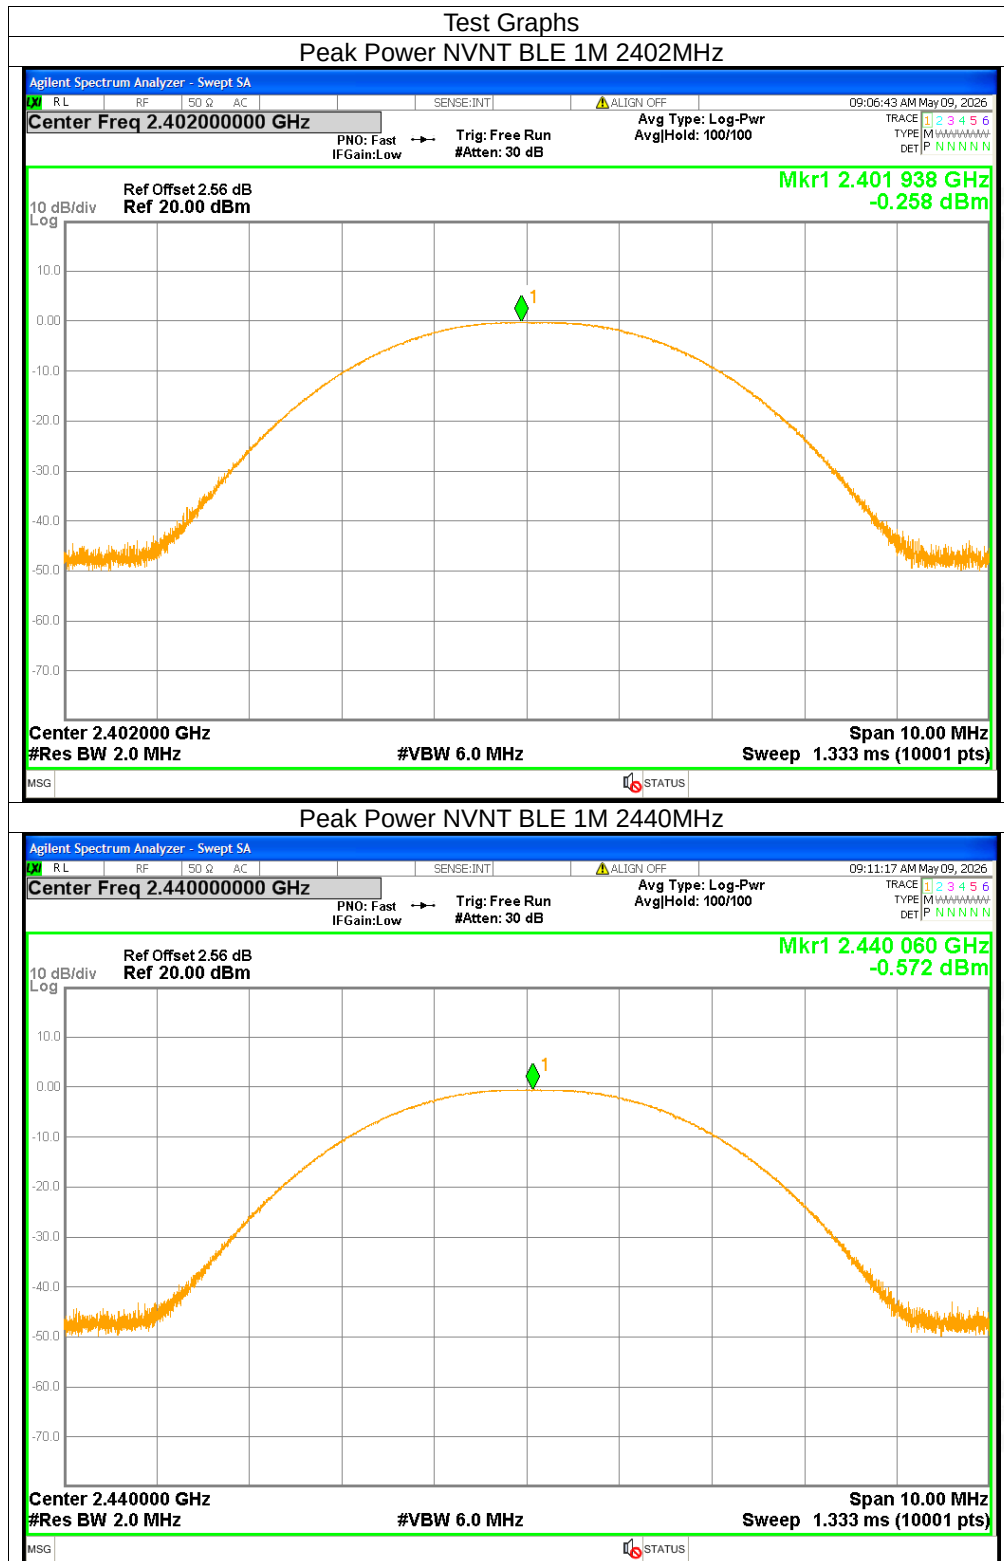


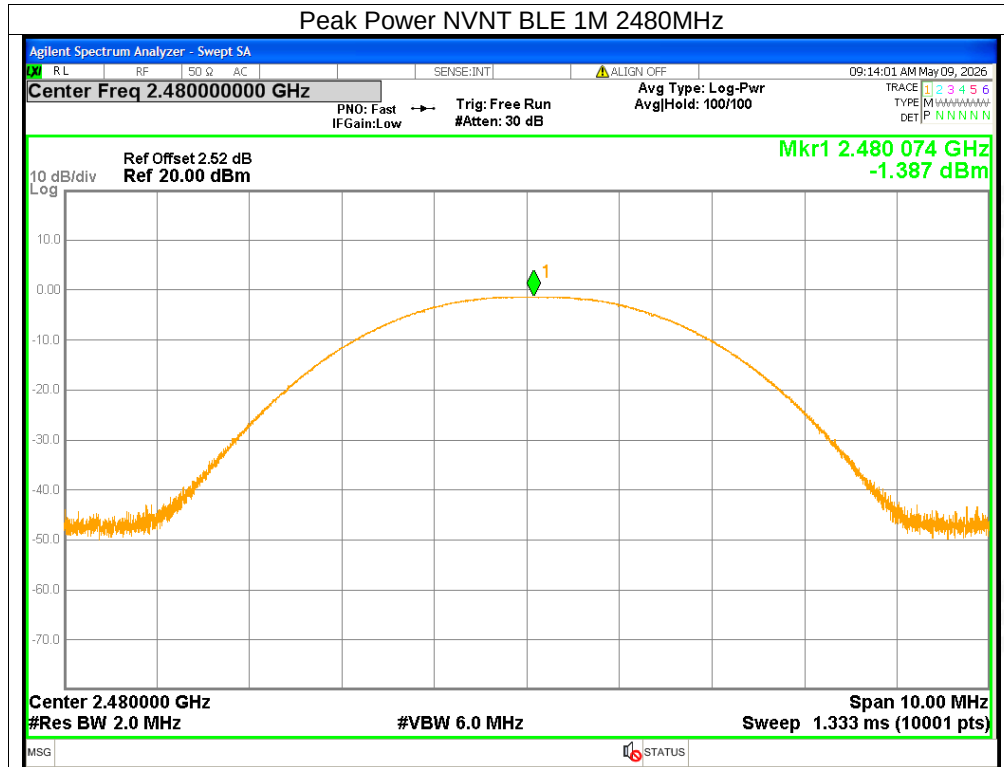




-6dB Bandwidth

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	0.7067	≥ 0.5	Pass
NVNT	BLE 1M	2440	0.6493	≥ 0.5	Pass
NVNT	BLE 1M	2480	0.6949	≥ 0.5	Pass

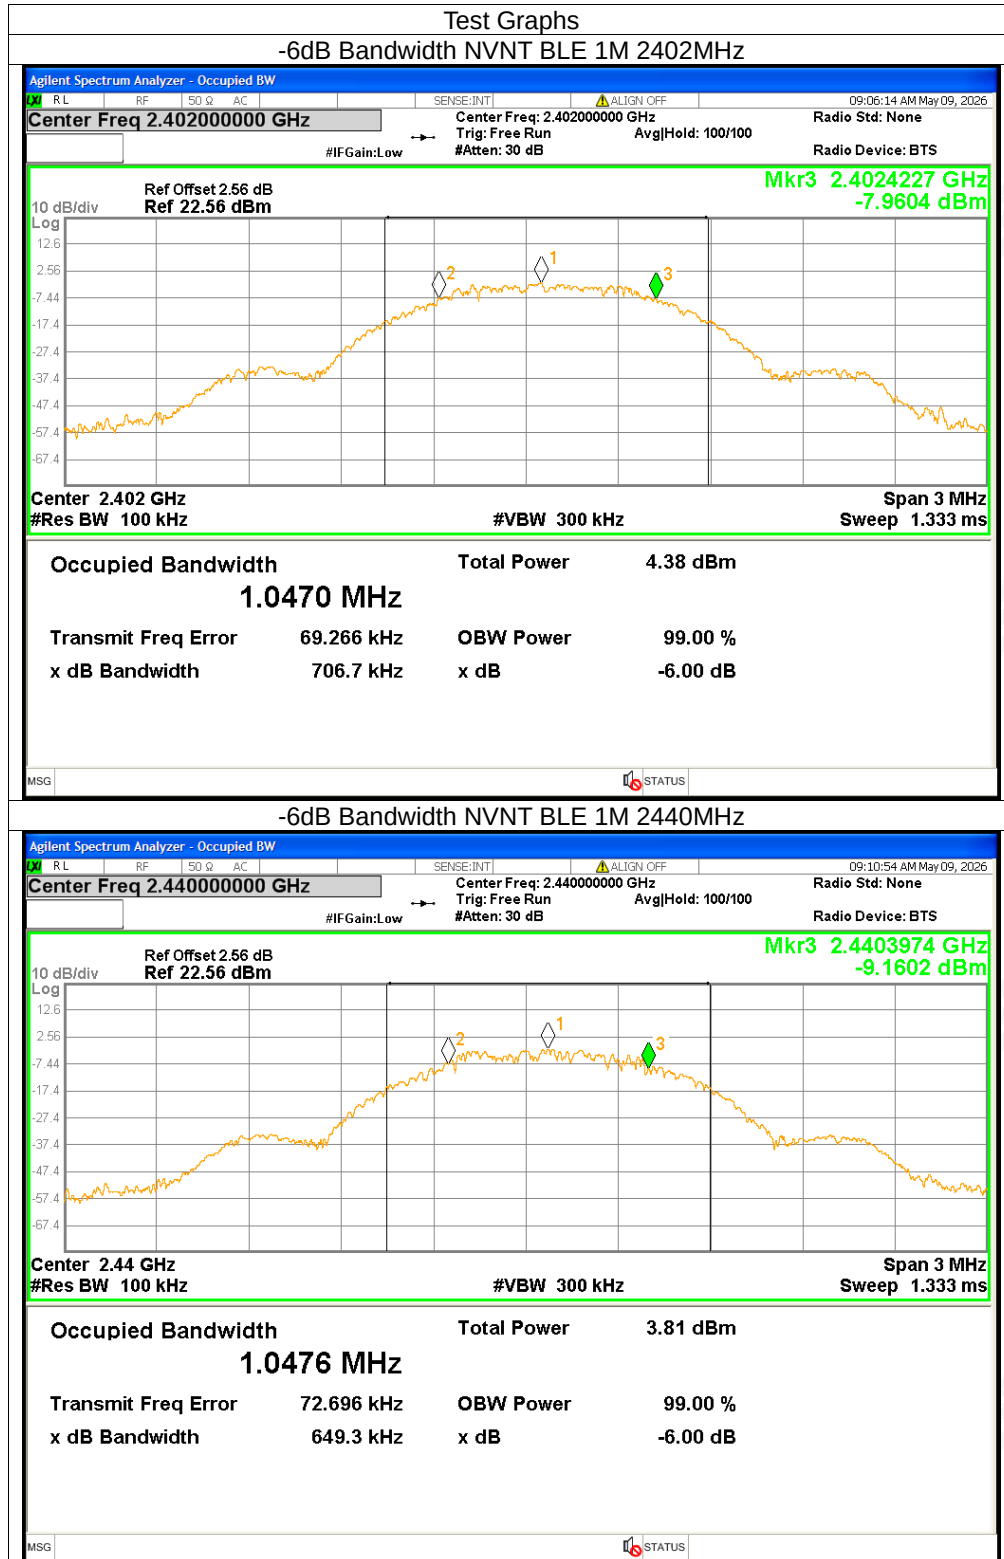


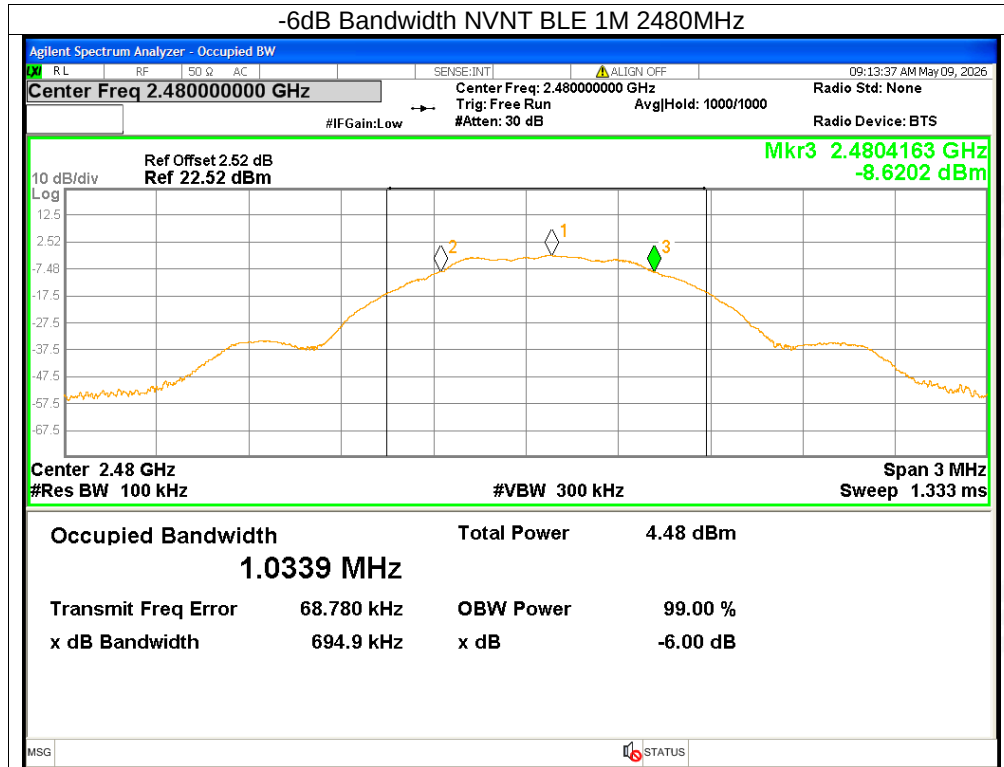




Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	-16.76	≤ 8	Pass
NVNT	BLE 1M	2440	-17.22	≤ 8	Pass
NVNT	BLE 1M	2480	-17.93	≤ 8	Pass

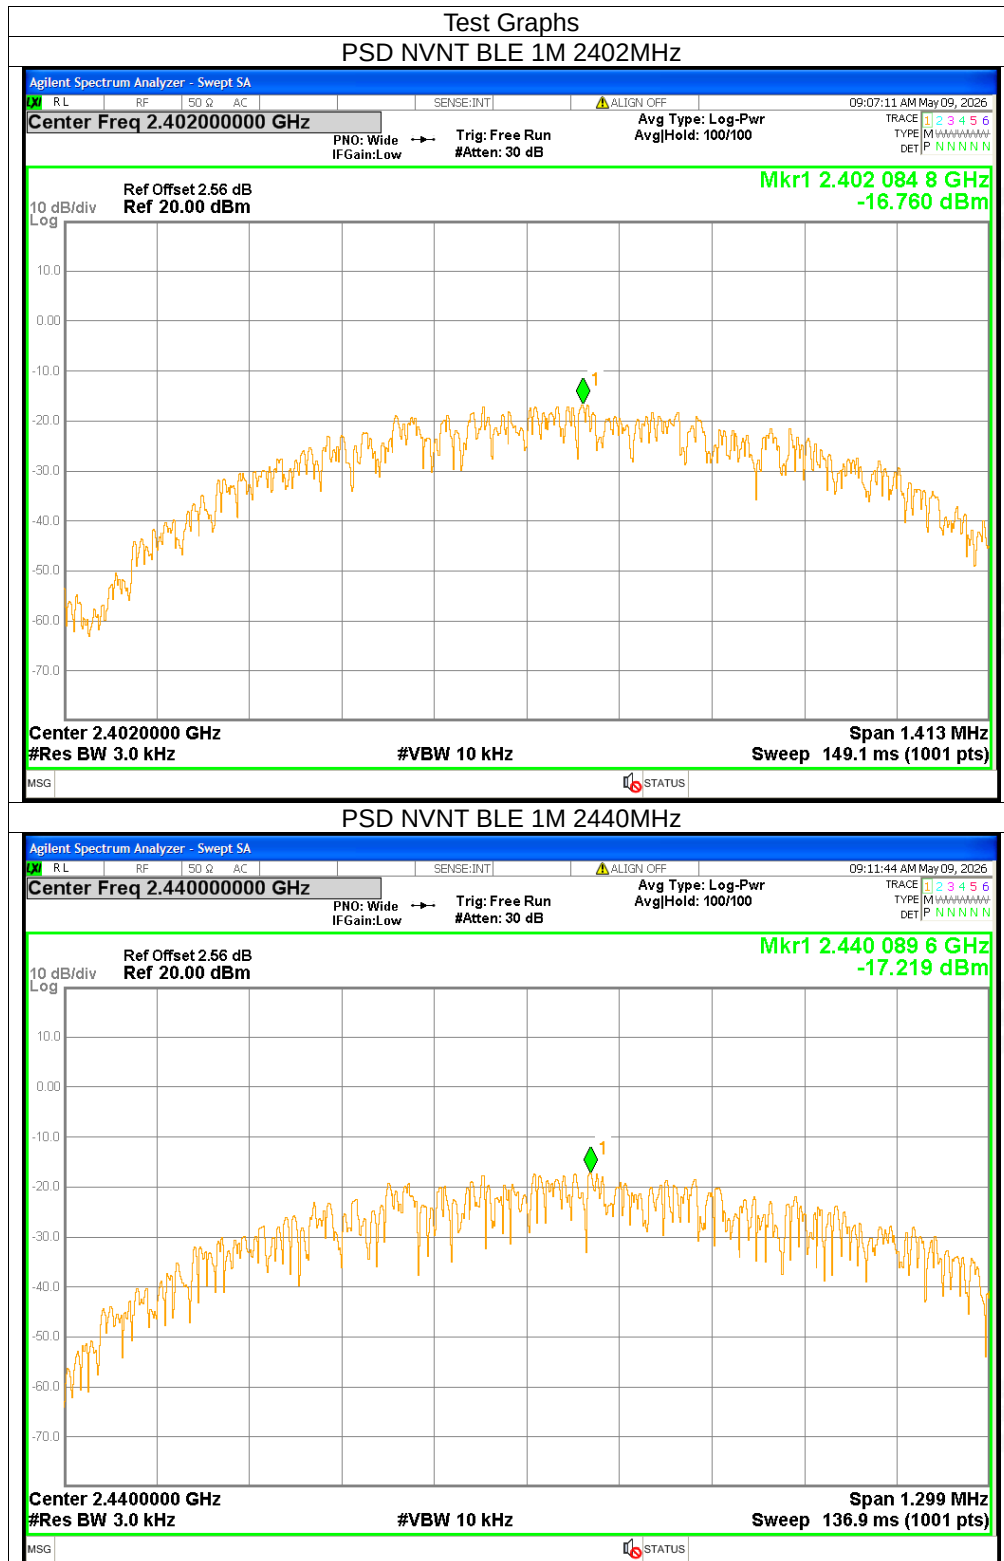

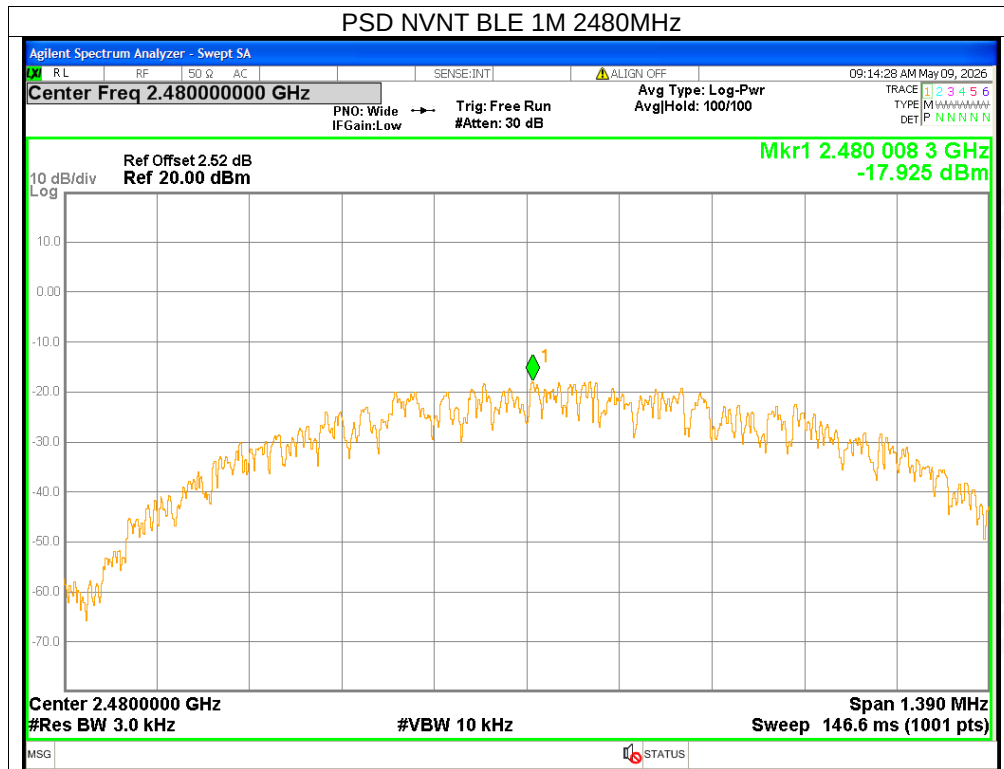




Band Edge


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-52.37	≤ -20	Pass
NVNT	BLE 1M	2480	-54.02	≤ -20	Pass



Test Graphs

Band Edge NVNT BLE 1M 2402MHz Ref

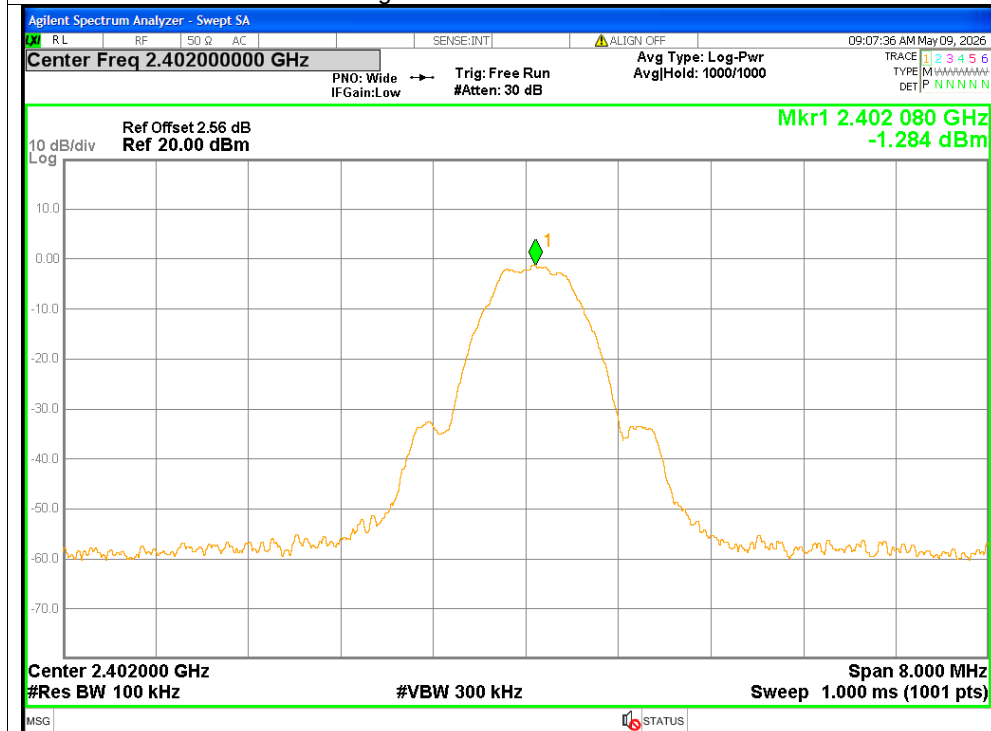

Band Edge NVNT BLE 1M 2402MHz Emission

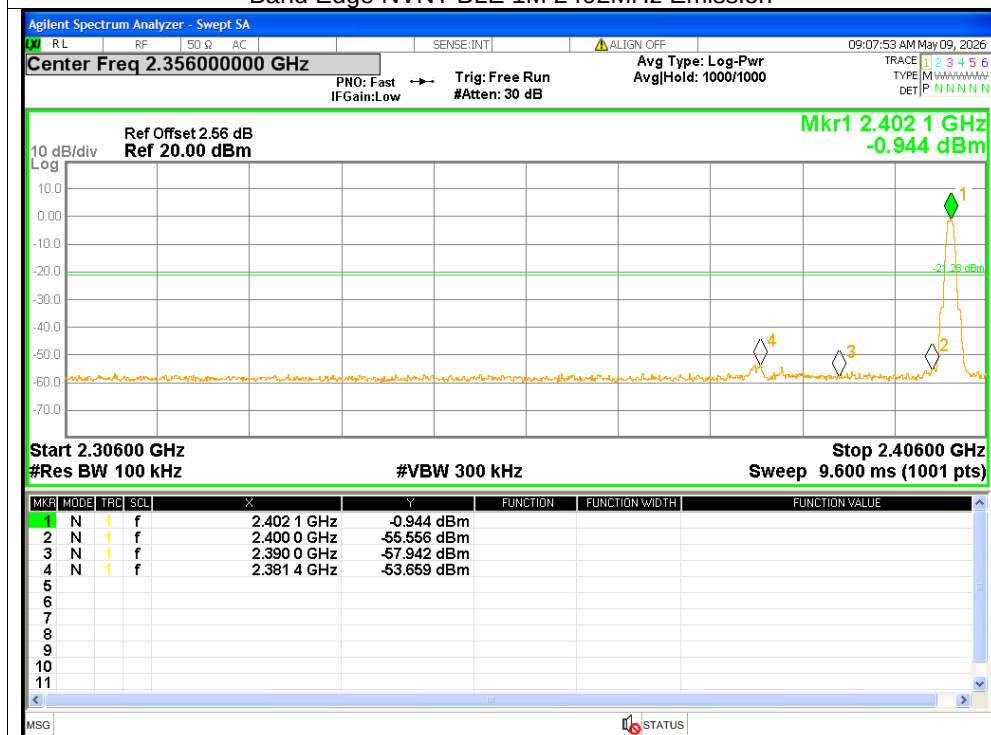

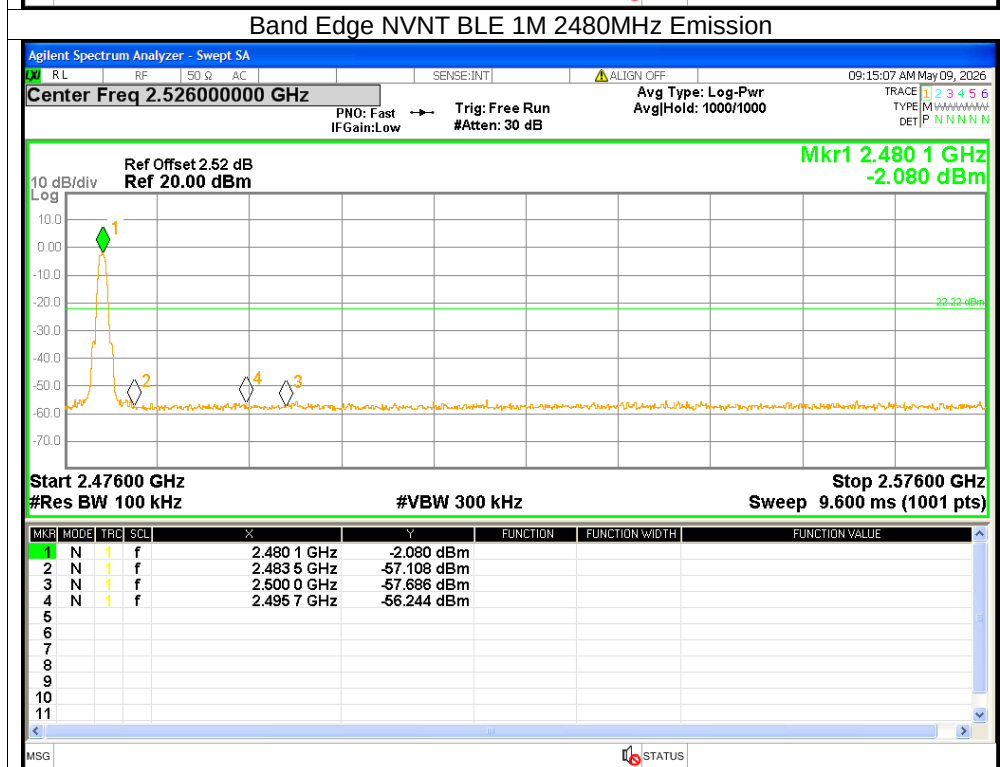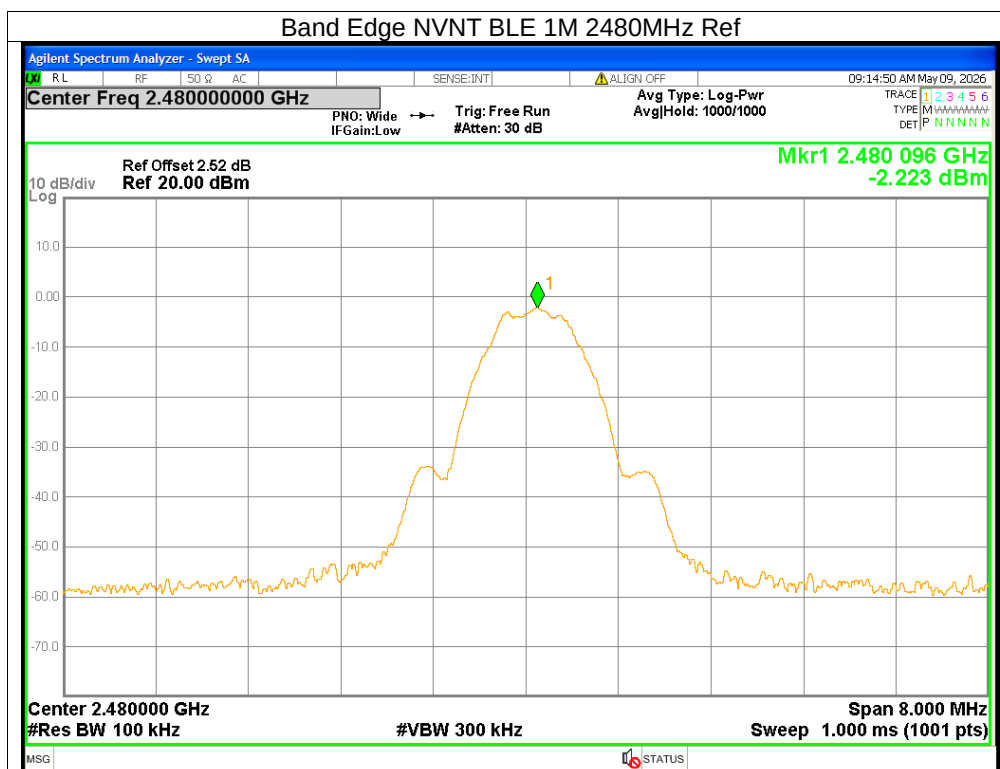




Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-39.33	≤ -20	Pass
NVNT	BLE 1M	2440	-38.33	≤ -20	Pass
NVNT	BLE 1M	2480	-37.89	≤ -20	Pass



Tx. Spurious NVNT BLE 1M 2440MHz Ref

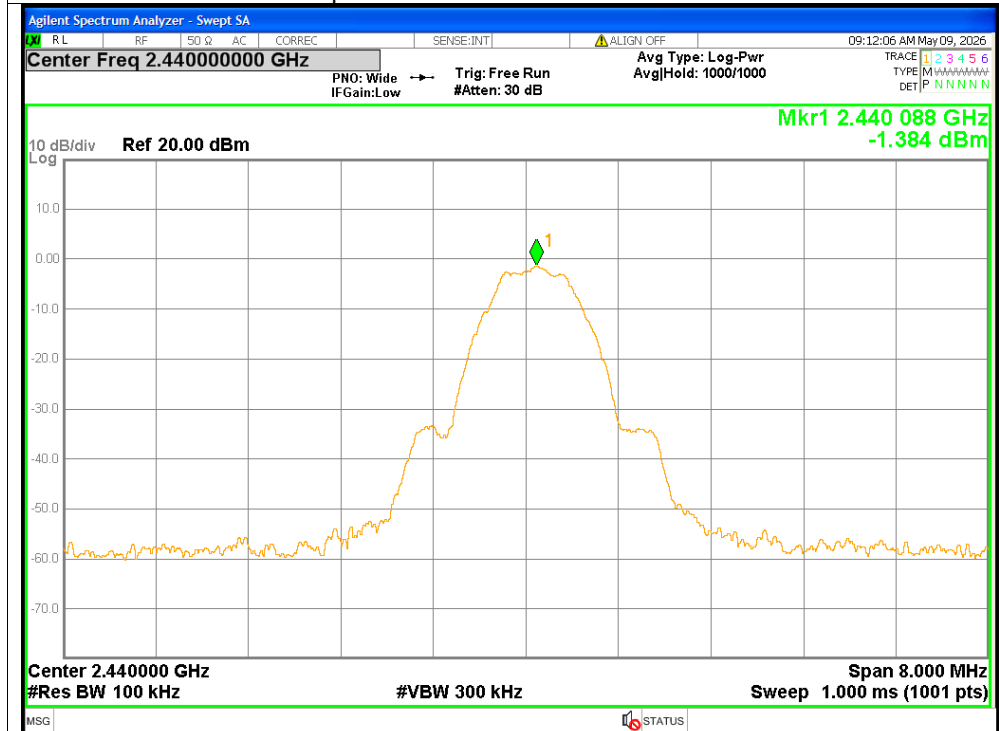


Tx. Spurious NVNT BLE 1M 2440MHz Emission

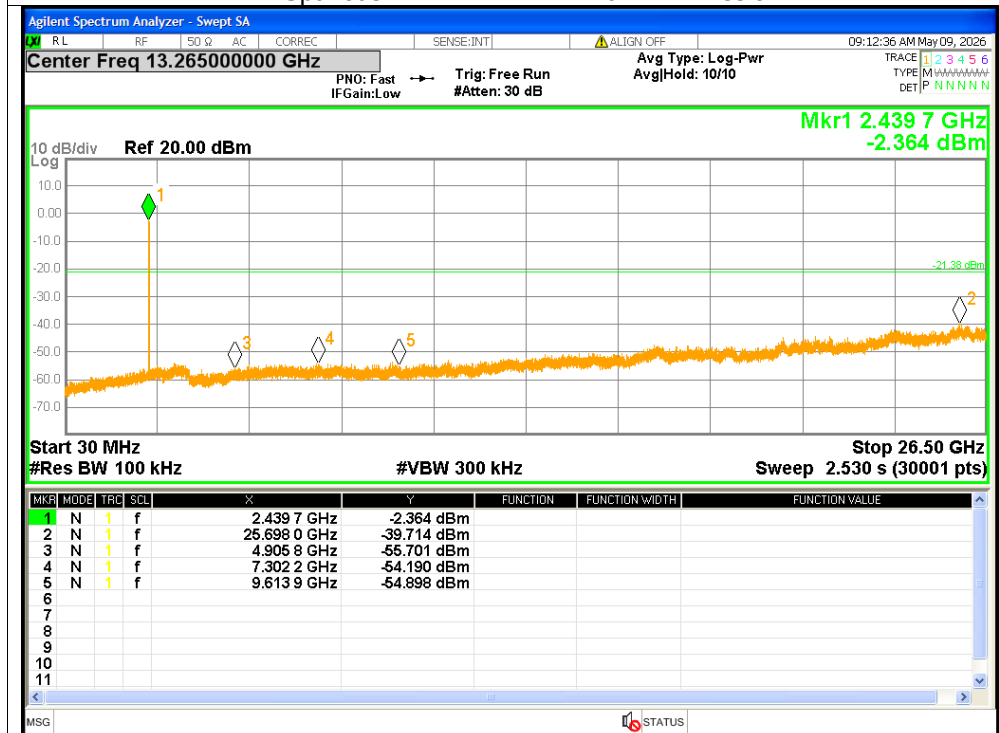




Tx. Spurious NVNT BLE 1M 2480MHz Ref

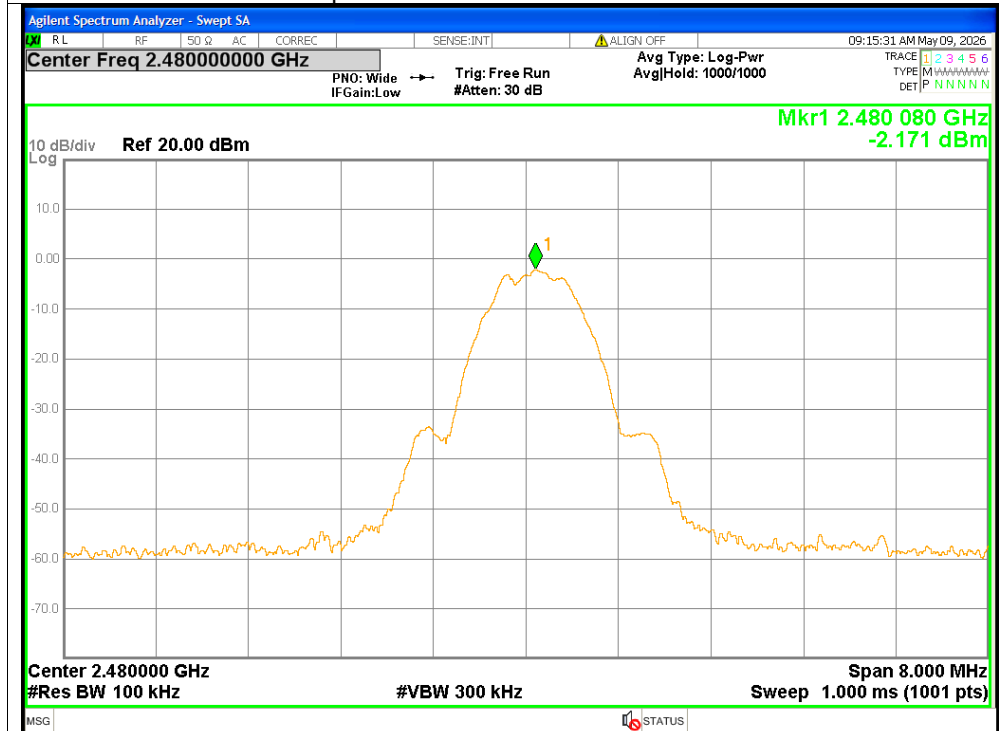

Tx. Spurious NVNT BLE 1M 2480MHz Emission

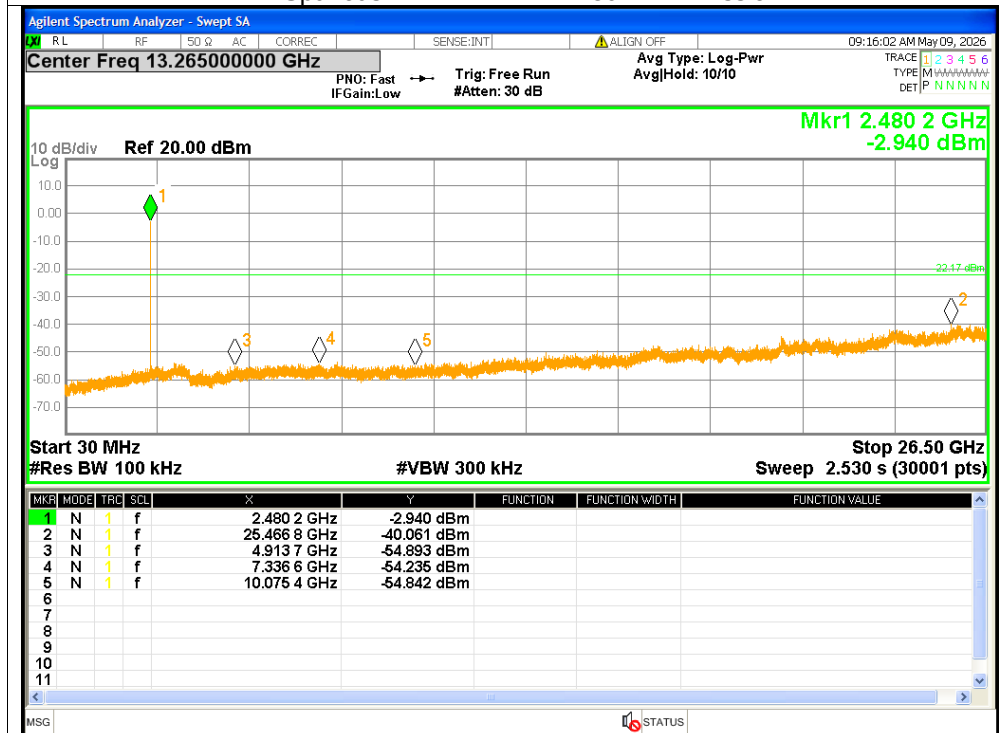



APPENDIX 2- EUT TEST PHOTO

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****