






KIEL2506-YW05992

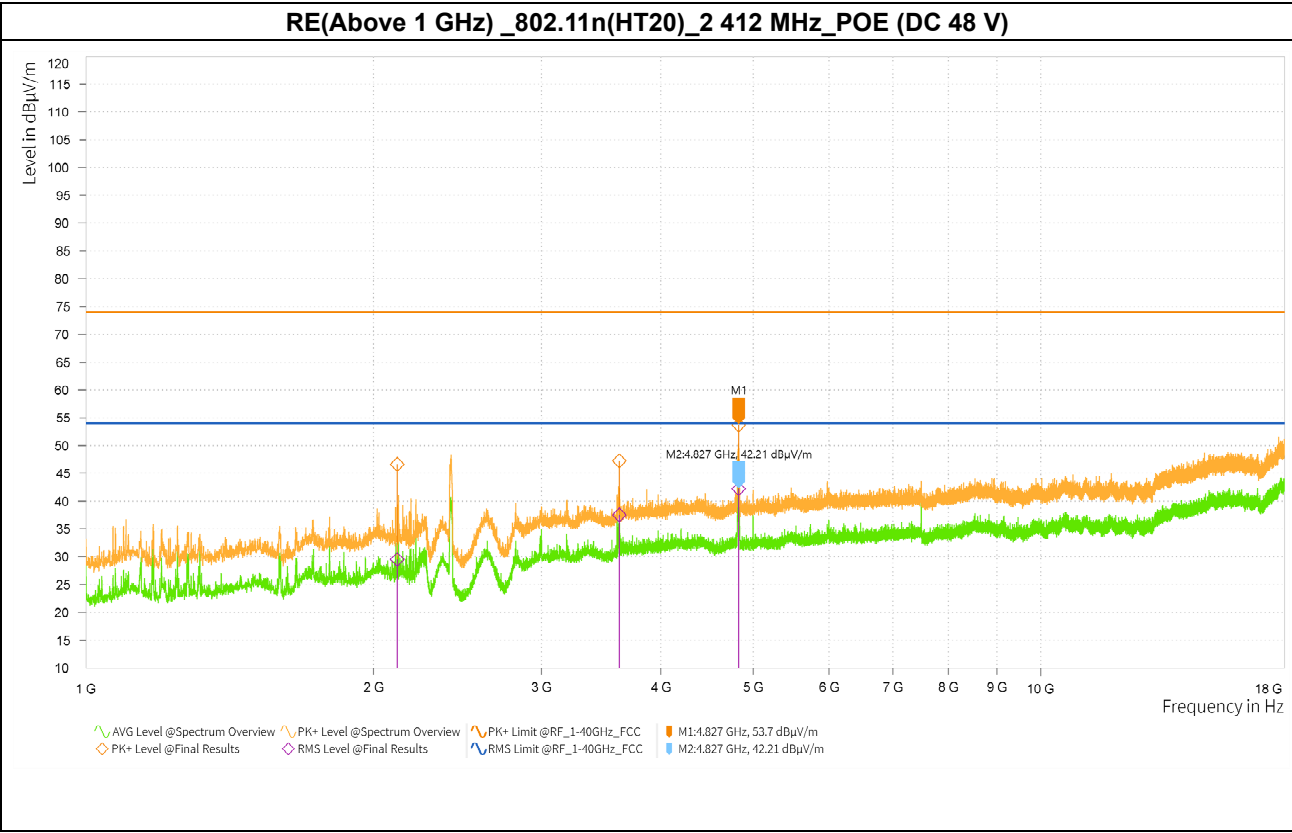


| Frequency [MHz] | Peak Reading [dBuV] | Peak Result [dBuV/m] | AVG Reading [dBuV] | AVG Result [dBuV/m] | DCCF [dB] | Height [cm] | Pol | Azimuth [deg] | Corr. [dB/m] | Peak Margin [dB] | Peak Limit [dBuV/m] | AVG Margin [dB] | AVG Limit [dBuV/m] |
|-----------------|---------------------|----------------------|--------------------|---------------------|-----------|-------------|-----|---------------|--------------|------------------|---------------------|-----------------|--------------------|
| 2 119.000       | 57.80               | 46.60                | 40.70              | 30.19               | 0.69      | 1.00        | V   | 65.1          | -11.20       | 27.40            | 74.00               | 23.81           | 54.00              |
| * 3 619.500     | 52.87               | 47.24                | 43.14              | 38.20               | 0.69      | 1.00        | H   | 44.3          | -5.63        | 26.76            | 74.00               | 15.80           | 54.00              |
| * 4 827.000     | 56.50               | 53.70                | 45.01              | 42.90               | 0.69      | 1.00        | V   | 333.3         | -2.80        | 20.30            | 74.00               | 11.10           | 54.00              |

- Note)
- Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
  - AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
  - DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
  - Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
  - Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
  - \* - indicates frequency in Restricted Band.







KIEL2506-YW05992

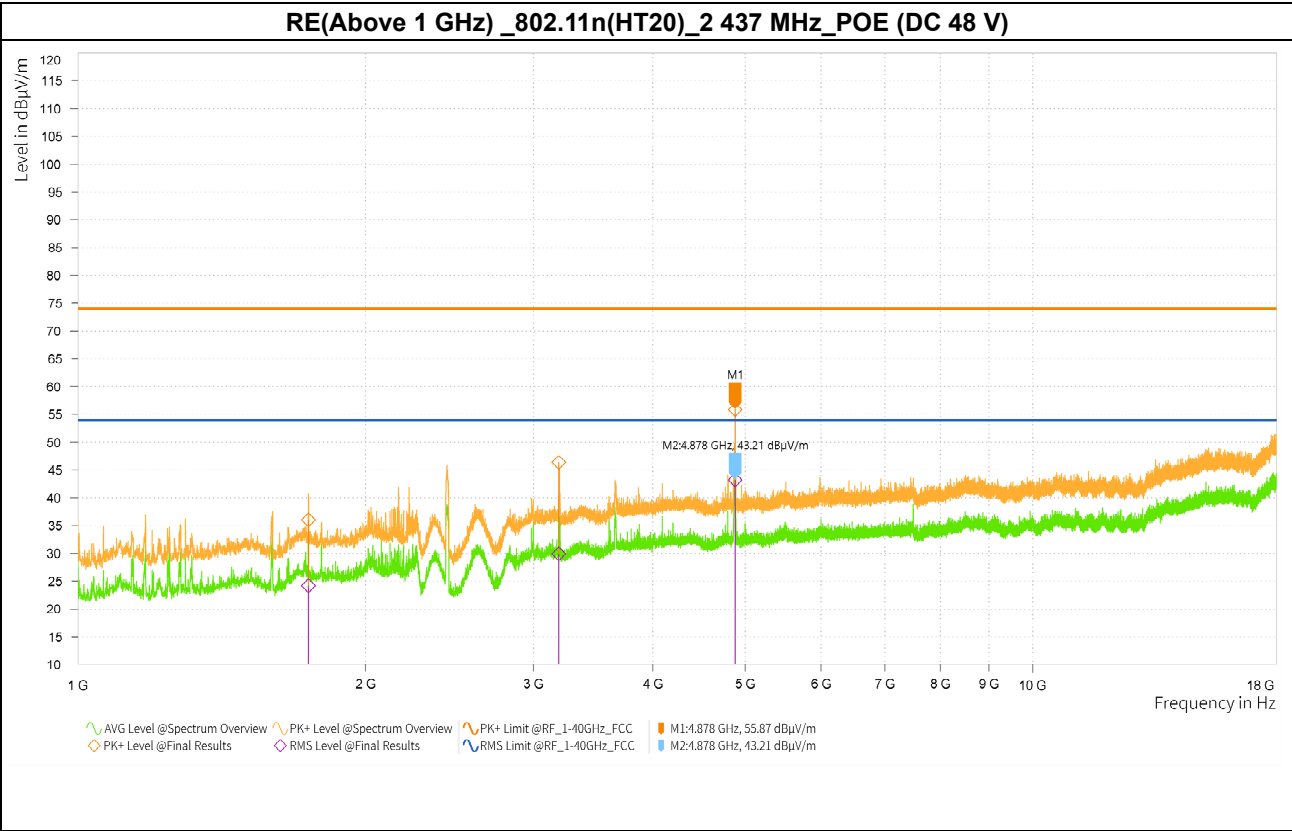


| Frequency [MHz] | Peak Reading [dBuV] | Peak Result [dBuV/m] | AVG Reading [dBuV] | AVG Result [dBuV/m] | DCCF [dB] | Height [cm] | Pol | Azimuth [deg] | Corr. [dB/m] | Peak Margin [dB] | Peak Limit [dBuV/m] | AVG Margin [dB] | AVG Limit [dBuV/m] |
|-----------------|---------------------|----------------------|--------------------|---------------------|-----------|-------------|-----|---------------|--------------|------------------|---------------------|-----------------|--------------------|
| 1 744.000       | 49.28               | 36.05                | 37.42              | 24.88               | 0.69      | 3.00        | H   | 357.7         | -13.23       | 37.95            | 74.00               | 29.12           | 54.00              |
| 3 189.500       | 53.04               | 46.41                | 36.55              | 30.61               | 0.69      | 3.00        | V   | 157.1         | -6.63        | 27.59            | 74.00               | 23.39           | 54.00              |
| * 4 878.000     | 58.47               | 55.87                | 45.81              | 43.90               | 0.69      | 1.00        | V   | 305.2         | -2.60        | 18.13            | 74.00               | 10.10           | 54.00              |

- Note)
1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
  2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
  3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
  4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
  5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
  6. \* - indicates frequency in Restricted Band.







KIEL2506-YW05992

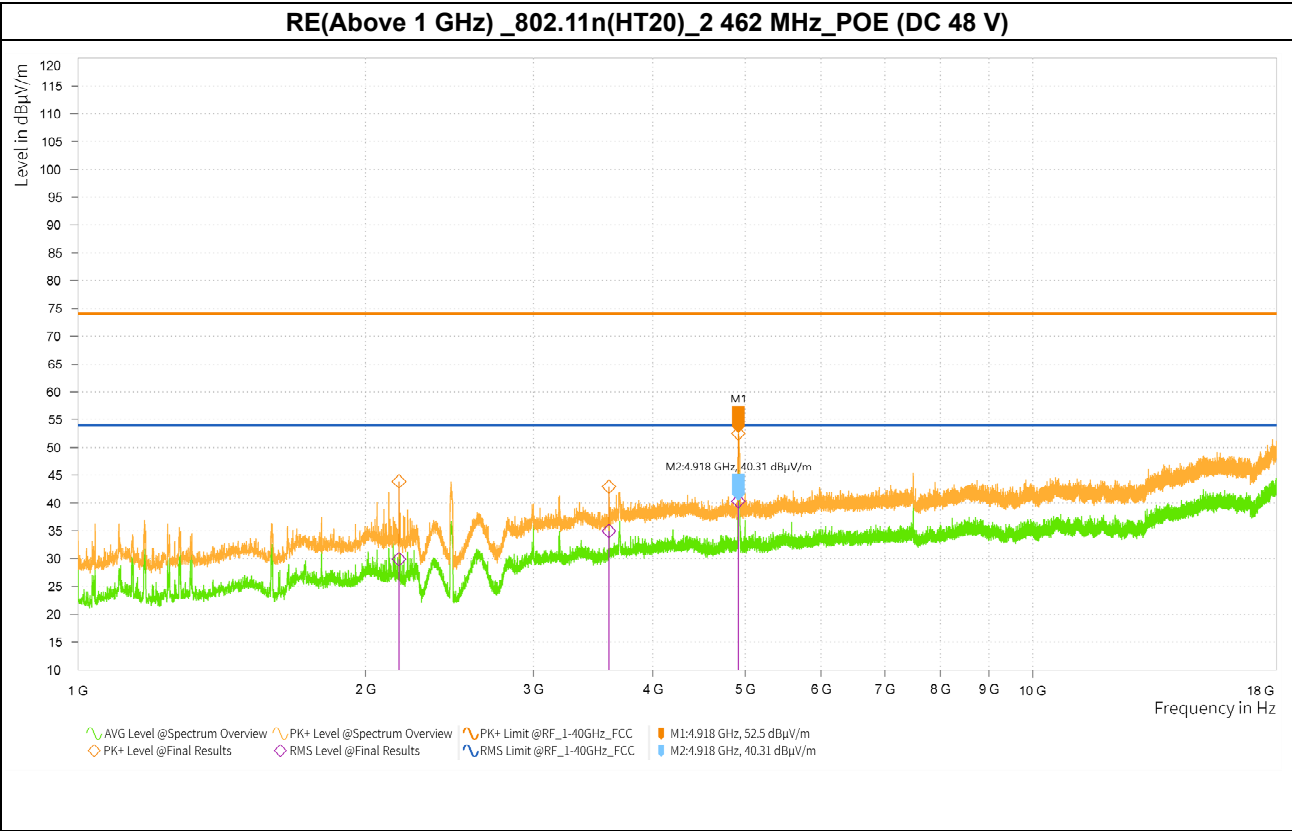

| Frequency [MHz] | Peak Reading [dBuV] | Peak Result [dBuV/m] | AVG Reading [dBuV] | AVG Result [dBuV/m] | DCCF [dB] | Height [cm] | Pol | Azimuth [deg] | Corr. [dB/m] | Peak Margin [dB] | Peak Limit [dBuV/m] | AVG Margin [dB] | AVG Limit [dBuV/m] |
|-----------------|---------------------|----------------------|--------------------|---------------------|-----------|-------------|-----|---------------|--------------|------------------|---------------------|-----------------|--------------------|
| 2 169.000       | 55.26               | 43.89                | 41.24              | 30.56               | 0.69      | 1.00        | V   | 1.5           | -11.37       | 30.11            | 74.00               | 23.44           | 54.00              |
| 3 599.500       | 48.64               | 42.92                | 40.65              | 35.62               | 0.69      | 1.00        | H   | 213.1         | -5.72        | 31.08            | 74.00               | 18.38           | 54.00              |
| * 4 917.500     | 55.01               | 52.50                | 42.82              | 41.00               | 0.69      | 1.00        | V   | 38.2          | -2.51        | 21.50            | 74.00               | 13.00           | 54.00              |


Note)

1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
6. \* - indicates frequency in Restricted Band.







KIEL2506-YW05992

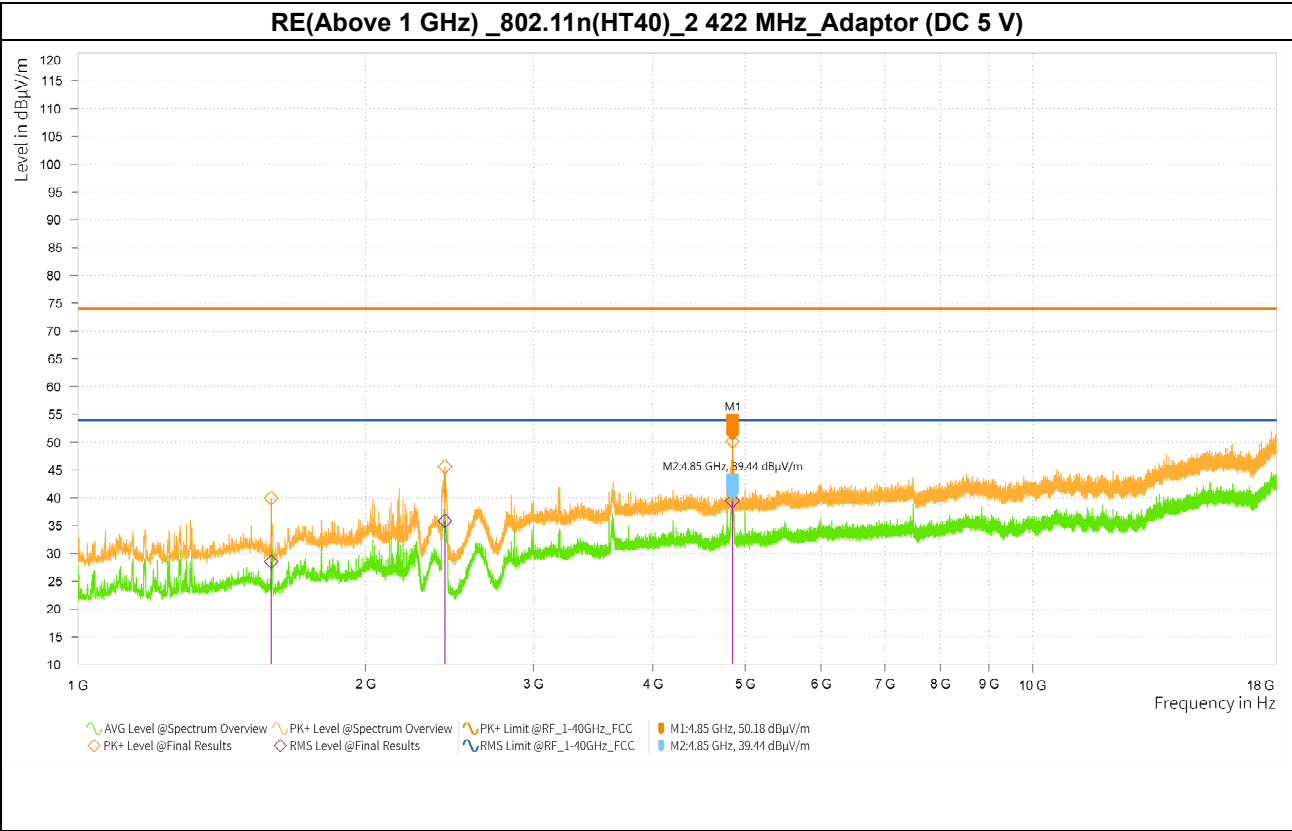

| Frequency [MHz] | Peak Reading [dBµV] | Peak Result [dBµV/m] | AVG Reading [dBµV] | AVG Result [dBµV/m] | DCCF [dB] | Height [cm] | Pol | Azimuth [deg] | Corr. [dB/m] | Peak Margin [dB] | Peak Limit [dBµV/m] | AVG Margin [dB] | AVG Limit [dBµV/m] |
|-----------------|---------------------|----------------------|--------------------|---------------------|-----------|-------------|-----|---------------|--------------|------------------|---------------------|-----------------|--------------------|
| * 1 594.000     | 53.84               | 39.95                | 42.39              | 29.65               | 1.15      | 2.00        | V   | 138.1         | -13.89       | 34.05            | 74.00               | 24.35           | 54.00              |
| 2 424.000       | 55.97               | 45.63                | 46.18              | 36.99               | 1.15      | 1.00        | V   | 0.1           | -10.34       | 28.37            | 74.00               | 17.01           | 54.00              |
| * 4 849.500     | 52.87               | 50.18                | 42.13              | 40.59               | 1.15      | 1.00        | V   | 306.1         | -2.69        | 23.82            | 74.00               | 13.41           | 54.00              |


Note)

1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
6. \* - indicates frequency in Restricted Band.





KIEL2506-YW05992

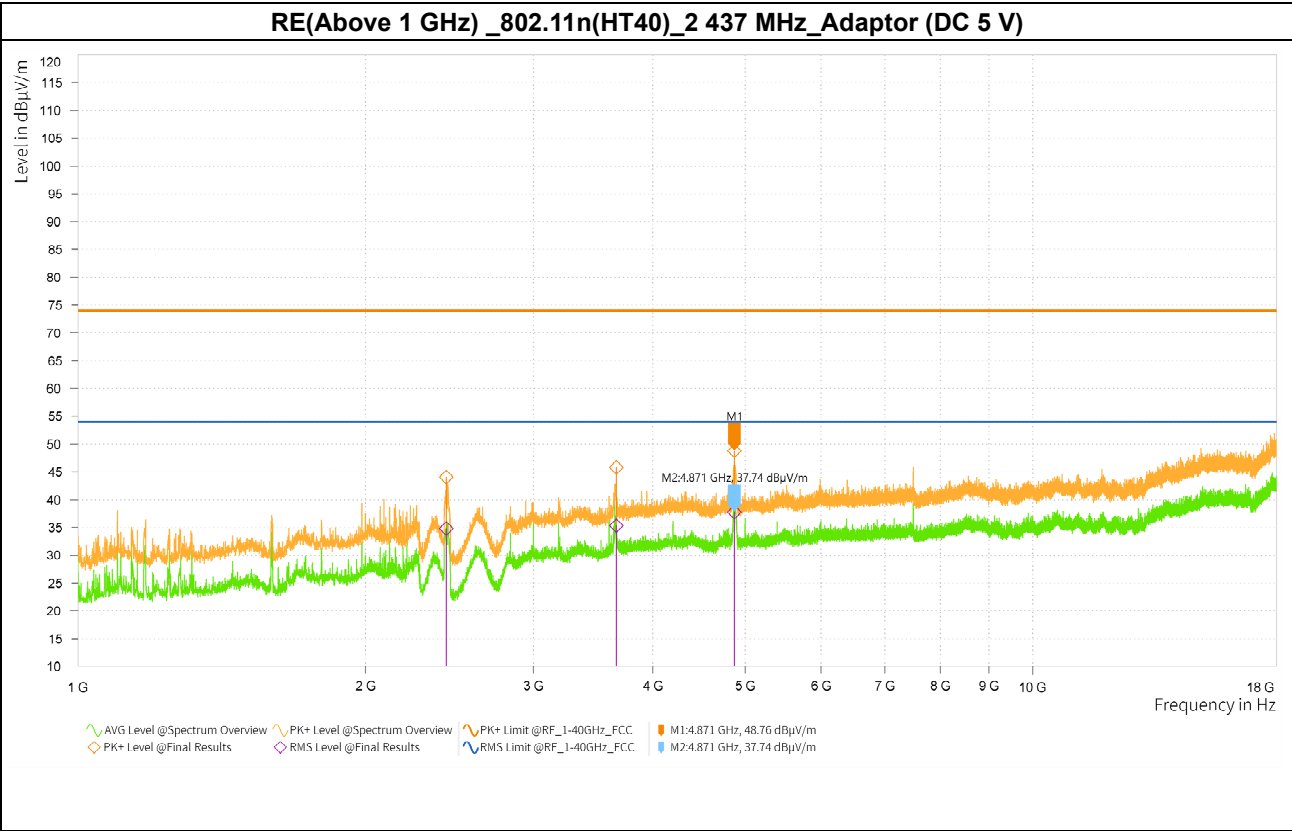

| Frequency [MHz] | Peak Reading [dBuV] | Peak Result [dBuV/m] | AVG Reading [dBuV] | AVG Result [dBuV/m] | DCCF [dB] | Height [cm] | Pol | Azimuth [deg] | Corr. [dB/m] | Peak Margin [dB] | Peak Limit [dBuV/m] | AVG Margin [dB] | AVG Limit [dBuV/m] |
|-----------------|---------------------|----------------------|--------------------|---------------------|-----------|-------------|-----|---------------|--------------|------------------|---------------------|-----------------|--------------------|
| 2 431.000       | 54.35               | 44.05                | 45.12              | 35.97               | 1.15      | 1.00        | V   | 0.8           | -10.30       | 29.95            | 74.00               | 18.03           | 54.00              |
| * 3 662.500     | 51.27               | 45.81                | 40.78              | 36.47               | 1.15      | 1.00        | H   | 30.3          | -5.46        | 28.19            | 74.00               | 17.53           | 54.00              |
| * 4 870.500     | 51.38               | 48.76                | 40.36              | 38.89               | 1.15      | 1.00        | V   | 358.7         | -2.62        | 25.24            | 74.00               | 15.11           | 54.00              |

Note)

1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)

2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF

3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)

4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)

5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)

6. \* - indicates frequency in Restricted Band.

