

FCC TEST REPORT

FCC ID: 2BNK8-KB9

Report No. : SSP25060317-1E

Applicant : Shenzhen Bairui Plastic Electronic Technology Co., LTD

Product Name : Wireless audio system

Model Name : KB9

Test Standard : FCC Part 15.249

Date of Issue : 2025-07-09



Shenzhen CCUT Quality Technology Co., Ltd.

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen,
Guangdong, China; (Tel.:+86-755-23406590 website: www.ccuttest.com)

This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

Test Report Basic Information

Applicant:	Shenzhen Bairui Plastic Electronic Technology Co., LTD 103-1, Building A3b, Huaxia Garden Technology Industrial Estate, Fuping Road, Pingdong Community, Pingdi Street, Longgang District, Shenzhen, China, 518117	
Address of Applicant:	China, 518117	
Manufacturer:	Shenzhen Bairui Plastic Electronic Technology Co., LTD 103-1, Building A3b, Huaxia Garden Technology Industrial Estate, Fuping Road, Pingdong Community, Pingdi Street, Longgang District, Shenzhen, China, 518117	
Address of Manufacturer:	China, 518117	
Product Name:	Wireless audio system	
Brand Name:	-	
Main Model:	KB9	
Series Models:	KB6, KB66, KBA, K3, B5	
Test Standard:	FCC Part 15 Subpart C ANSI C63.4-2014 ANSI C63.10-2013	
Date of Test	2025-06-24 to 2025-07-06	
Test Result:	PASS	
Tested By	 (Walker Wu)	
Reviewed By:	 (Lieber Ouyang)	
Authorized Signatory:	 (Lahm Peng)	
Note : This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.		

CONTENTS

1. General Information.....	5
1.1 Product Information	5
1.2 Test Setup Information.....	6
1.3 Compliance Standards.....	7
1.4 Test Facilities.....	7
1.5 List of Measurement Instruments	8
1.6 Measurement Uncertainty	9
2. Summary of Test Results	10
3. Antenna Requirement.....	11
3.1 Standard and Limit.....	11
3.2 Test Result	11
4. Conducted Emissions	12
4.1 Standard and Limit.....	12
4.2 Test Procedure.....	12
4.3 Test Data and Results	13
5. Radiated Emissions	16
5.1 Standard and Limit.....	16
5.2 Test Procedure.....	16
5.3 Test Data and Results	18
6. Band-edge Emissions	25
6.1 Standard and Limit.....	25
6.2 Test Procedure.....	25
6.3 Test Data and Results	25
7. Occupied Bandwidth	27
7.1 Standard and Limit.....	27
7.2 Test Procedure.....	27
7.3 Test Data and Results	27

Revision History

Revision	Issue Date	Description	Revised By
V1.0	2025-07-09	Initial Release	Lahm Peng

1. General Information

1.1 Product Information

Product Name:	Wireless audio system
Trade Name:	-
Main Model:	KB9
Series Models:	KB6, KB66, KBA, K3, B5
Rated Voltage:	DC 3.7V by battery, USB 5V Charging
Battery:	DC 3.7V, 300mAh
Test Sample No:	SSP25060317-1
Hardware Version:	V1.0
Software Version:	V1.0
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	
Note 2: The silk-screened colors and model names of the listed series of products are different from those of the main model, but the circuit and the electronic construction are the same, declared by the manufacturer.	

Wireless Specification	
Wireless Standard:	2.4GHz RF
Operating Frequency:	2420MHz ~2465MHz
Max. Field Strength:	94.5dBuV/m
Quantity of Channel:	25
Modulation:	GFSK
Antenna Gain:	0dBi
Type of Antenna:	PCB Antenna
Type of Device:	☒ Portable Device ☐ Mobile Device ☐ Modular Device

1.2 Test Setup Information

List of Test Modes			
Test Mode	Description	Remark	
TM1	Transiting mode	2420/2441/2465MHz	
TM2	Charging mode	AC 120V/60Hz	
List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
-	-	-	-
-	-	-	-
List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
Adapter	Xiaomi	HW-100225C00	HC78E2N6A23645
-	-	-	-

List of Channels							
No. of Channel	Frequency (MHz)	No. of Channel	Frequency (MHz)	No. of Channel	Frequency (MHz)	No. of Channel	Frequency (MHz)
01	2420	02	2422	03	2424	04	2426
05	2428	06	2430	07	2431	08	2433
09	2435	10	2437	11	2439	12	2441
13	2443	14	2445	15	2446	16	2447
17	2449	18	2451	19	2453	20	2455
21	2457	22	2459	23	2461	24	2463
25	2465	-	-	-	-	-	-

1.3 Compliance Standards

Compliance Standards	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
All measurements contained in this report were conducted with all above standards	
According to standards for test methodology	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Maintenance of compliance is the responsibility of the manufacturer or applicant. Any modification of the product, which result is lowering the emission, should be checked to ensure compliance has been maintained.	

1.4 Test Facilities

Laboratory Name:	Shenzhen CCUT Quality Technology Co., Ltd. 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6983.01
FCC Registration No:	583813
FCC Designation No.:	CN1373
ISED Registration No.:	CN0164
All measurement facilities used to collect the measurement data are located at 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China.	

1.5 List of Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Conducted Emissions					
AMN	ROHDE&SCHWARZ	ENV216	101097	2024-08-07	2025-08-06
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100242	2024-08-07	2025-08-06
Test Cable	N/A	Cable 5	N/A	2024-08-07	2025-08-06
EMI Test Software	FARA	EZ-EMC	EMEC-3A1+	N/A	N/A
Radiated Emissions					
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100154	2024-08-07	2025-08-06
Spectrum Analyzer	KEYSIGHT	N9020A	MY48030972	2024-08-07	2025-08-06
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40-N	101692	2024-08-07	2025-08-06
Amplifier	SCHWARZBECK	BBV 9743B	00251	2024-08-07	2025-08-06
Amplifier	HUABO	YXL0518-2.5-45	--	2024-08-07	2025-08-06
Amplifier	COM-MW	DLAN-18G-4G-02	10229104	2024-08-07	2025-08-06
Loop Antenna	DAZE	ZN30900C	21104	2024-08-03	2025-08-02
Broadband Antenna	SCHWARZBECK	VULB 9168	01320	2024-08-03	2025-08-02
Horn Antenna	SCHWARZBECK	BBHA 9120D	02553	2024-08-03	2025-08-02
Horn Antenna	COM-MW	ZLB7-18-40G-950	12221225	2024-08-03	2025-08-02
Attenuator	QUANJUDA	6dB	220731	2024-08-07	2025-08-06
Test Cable	N/A	Cable 1	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 2	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 3	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 4	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 8	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 9	N/A	2024-08-07	2025-08-06
EMI Test Software	FARA	EZ-EMC	FA-03A2 RE+	N/A	N/A
Conducted RF Testing					
RF Test System	MWRFTTest	MW100-RFCB	220418SQS-37	2024-08-07	2025-08-06
Spectrum Analyzer	KEYSIGHT	N9020A	ATO-90521	2024-08-07	2025-08-06
RF Test Software	MWRFTTest	MTS 8310	N/A	N/A	N/A
Laptop	Lenovo	ThlnkPad E15 Gen 3	SPPOZ22485	N/A	N/A

1.6 Measurement Uncertainty

Test Item	Conditions	Uncertainty
Conducted Emissions	9kHz ~ 30MHz	±1.64 dB
Radiated Emissions	9kHz ~ 30MHz	±2.88 dB
	30MHz ~ 1GHz	±3.32 dB
	1GHz ~ 18GHz	±3.50 dB
	18GHz ~ 40GHz	±3.66 dB
Occupied Bandwidth	9kHz ~ 26GHz	±4.0 %

2. Summary of Test Results

FCC Rule	Description of Test Item	Result
FCC Part 15.203	Antenna Requirement	Passed
FCC Part 15.207	Conducted Emissions	Passed
FCC Part 15.209, 15.249(a)&(d)	Radiated Emissions	Passed
FCC Part 15.249(d)	Band-edge Emissions	Passed
FCC Part 15.215(c)	Occupied Bandwidth	Passed
Passed: The EUT complies with the essential requirements in the standard Failed: The EUT does not comply with the essential requirements in the standard N/A: Not applicable		

3. Antenna Requirement

3.1 Standard and Limit

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has an PCB antenna, fulfill the requirement of this section.

4. Conducted Emissions

4.1 Standard and Limit


According to the rule FCC Part 15.207, Conducted emissions limit, the limit for a wireless device as below:

Frequency of Emission (MHz)	Conducted emissions (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz
 Note 2: The lower limit applies at the band edges

4.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.2.

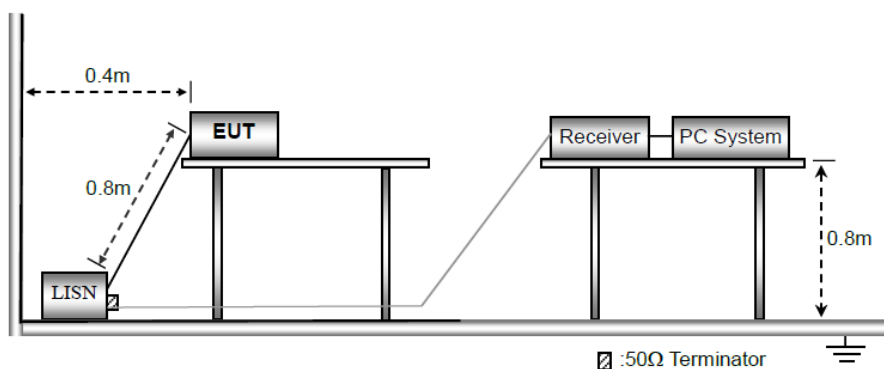

Test Setup Block Diagram

a) The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b) The following is the setting of the receiver

Attenuation: 10dB

Start Frequency: 0.15MHz

Stop Frequency: 30MHz

IF Bandwidth: 9kHz

c) The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

d) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

e) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

f) LISN is at least 80 cm from nearest part of EUT chassis.

g) For the actual test configuration, please refer to the related Item - photographs of the test setup.


4.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.207 standard limit for a wireless device, and with the worst case GFSK_2420MHz as below:

Remark: Level = Reading + Factor, Margin = Level - Limit

Test Plots and Data of Conducted Emissions


Tested Mode:	TM2
Test Voltage:	AC 120V/60Hz
Test Power Line:	Neutral
Remark:	

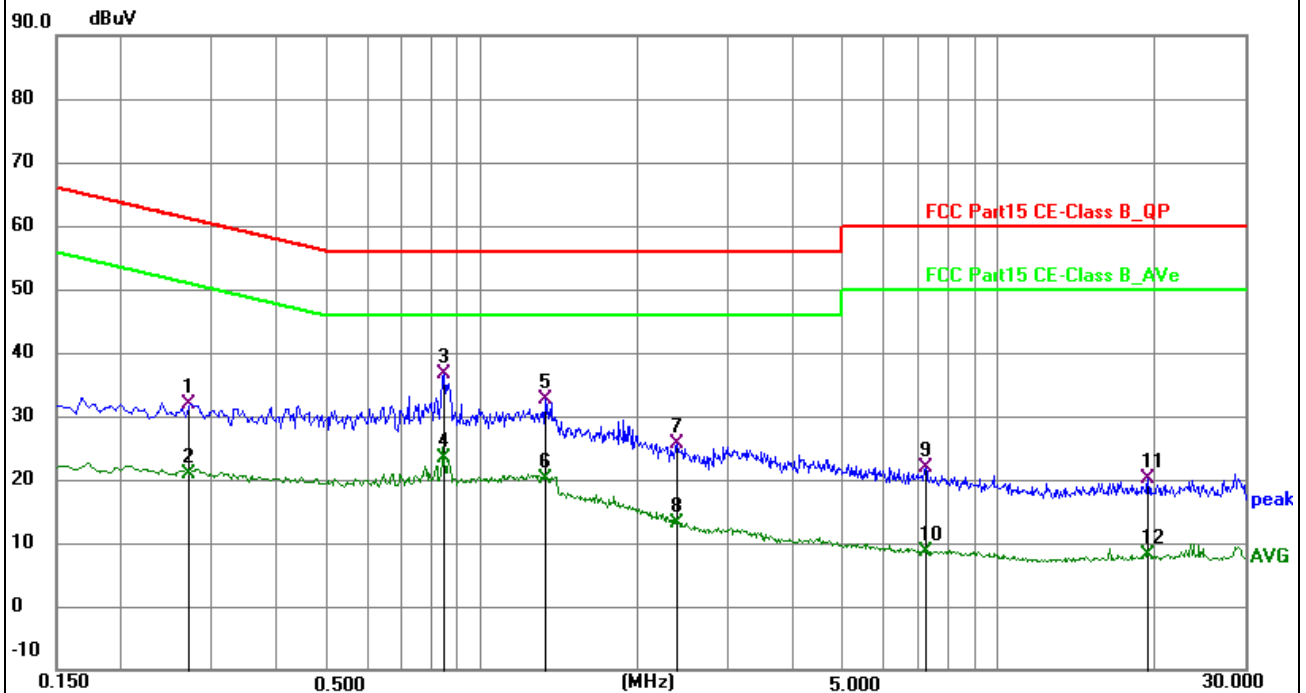

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2714	22.56	9.34	31.90	61.07	-29.17	QP	P	
2	0.2714	11.53	9.34	20.87	51.07	-30.20	AVG	P	
3 *	0.8475	27.32	9.40	36.72	56.00	-19.28	QP	P	
4	0.8475	13.92	9.40	23.32	46.00	-22.68	AVG	P	
5	1.3245	23.15	9.44	32.59	56.00	-23.41	QP	P	
6	1.3245	10.75	9.44	20.19	46.00	-25.81	AVG	P	
7	2.3865	16.22	9.47	25.69	56.00	-30.31	QP	P	
8	2.3865	3.70	9.47	13.17	46.00	-32.83	AVG	P	
9	7.2330	12.20	9.57	21.77	60.00	-38.23	QP	P	
10	7.2330	-1.04	9.57	8.53	50.00	-41.47	AVG	P	
11	19.5135	10.22	9.95	20.17	60.00	-39.83	QP	P	
12	19.5135	-1.88	9.95	8.07	50.00	-41.93	AVG	P	

Test Plots and Data of Conducted Emissions

Tested Mode:	TM2
Test Voltage:	AC 120V/60Hz
Test Power Line:	Live
Remark:	

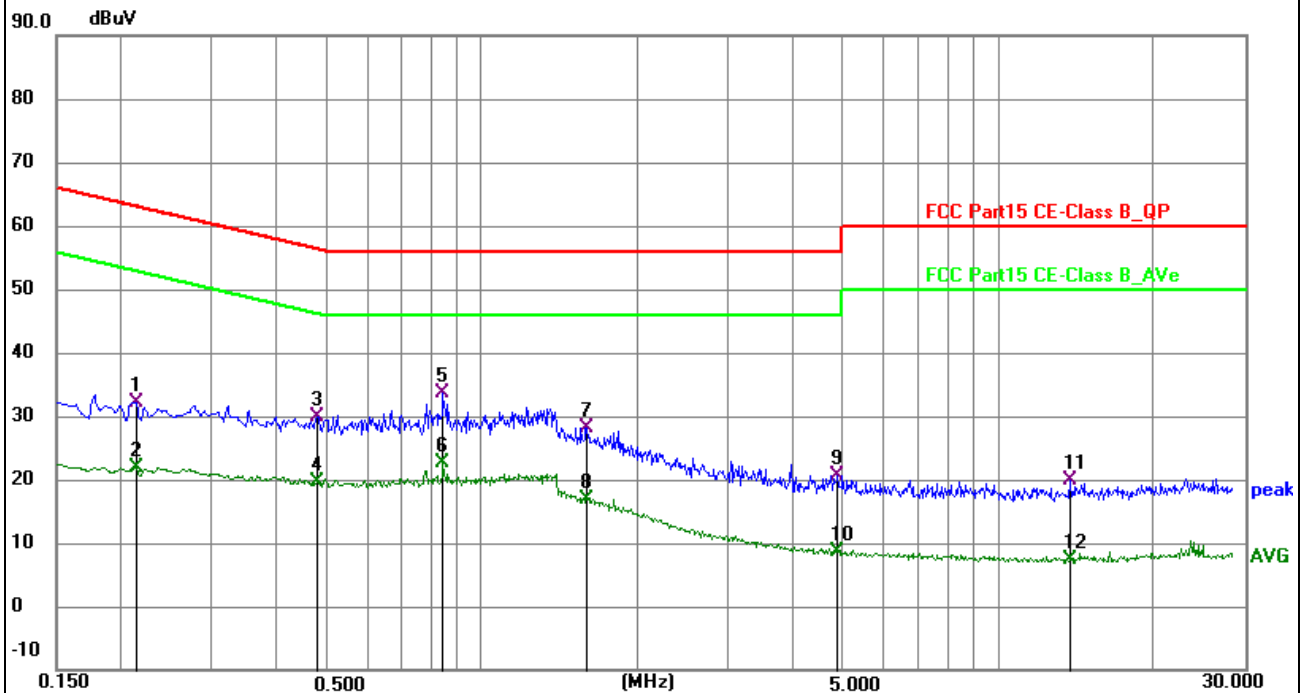

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2130	22.68	9.42	32.10	63.09	-30.99	QP	P	
2	0.2130	12.35	9.42	21.77	53.09	-31.32	AVG	P	
3	0.4785	20.32	9.58	29.90	56.37	-26.47	QP	P	
4	0.4785	9.94	9.58	19.52	46.37	-26.85	AVG	P	
5 *	0.8430	23.99	9.59	33.58	56.00	-22.42	QP	P	
6	0.8430	13.02	9.59	22.61	46.00	-23.39	AVG	P	
7	1.5990	18.50	9.64	28.14	56.00	-27.86	QP	P	
8	1.5990	7.27	9.64	16.91	46.00	-29.09	AVG	P	
9	4.8930	10.92	9.76	20.68	56.00	-35.32	QP	P	
10	4.8930	-1.10	9.76	8.66	46.00	-37.34	AVG	P	
11	13.6995	10.24	9.73	19.97	60.00	-40.03	QP	P	
12	13.6995	-2.32	9.73	7.41	50.00	-42.59	AVG	P	

5. Radiated Emissions

5.1 Standard and Limit

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

According to §15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

According to the rule FCC Part 15.209, Radiated emission limit for a wireless device as below:


Frequency of emission (MHz)	Radiated emissions (3m)
	Quasi-peak (dBuV/m)
30-88	40
88-216	43.5
216-960	46
Above 960	54
Note: The more stringent limit applies at transition frequencies.	

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

Note: Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

5.2 Test Procedure


Test is conducting under the description of ANSI C63.10 - 2013 section 6.3 to 6.6.

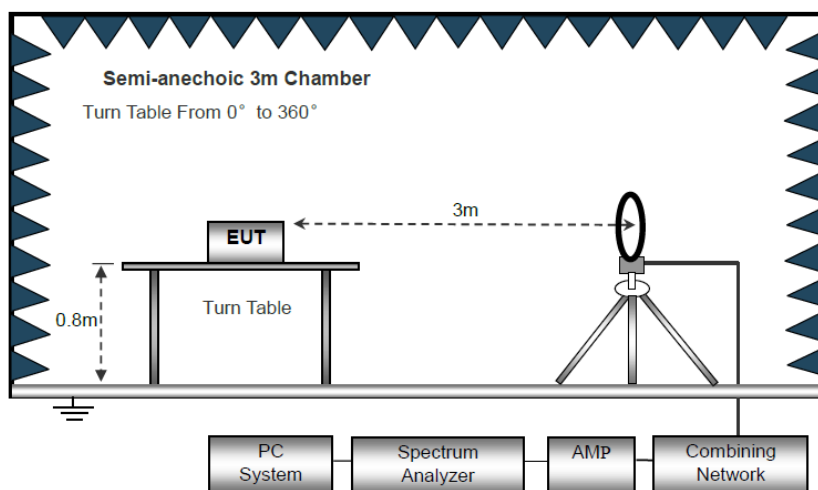

Block Diagram of Radiated Emission Below 30MHz



Block Diagram of Radiated Emission From 30MHz to 1GHz

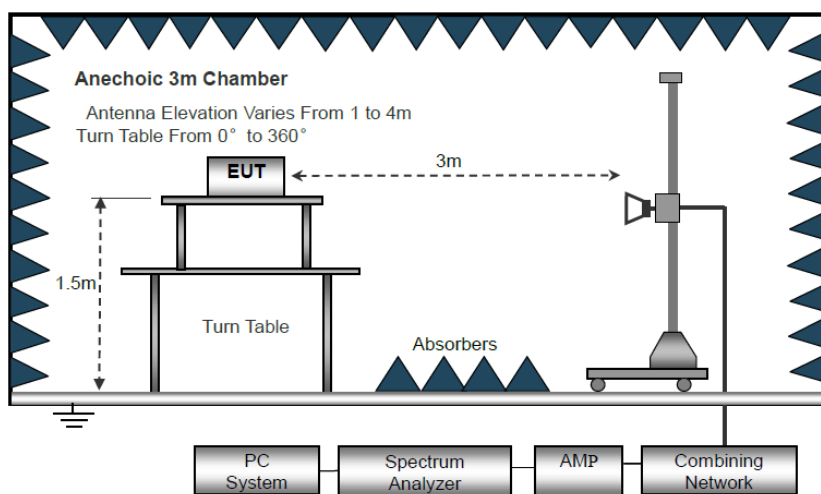

Block Diagram of Radiated Emission Above 1GHz

- a) The EUT is placed on a turntable, which is 0.8m above ground plane for test frequency range below 1GHz, and 1.5m above ground plane for test frequency range above 1GHz.
- b) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- c) Use the following spectrum analyzer settings:
Span = wide enough to fully capture the emission being measured
RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$, 10kHz for $f < 30\text{MHz}$
VBW $\geq$ RBW, Sweep = auto
Detector function = peak
Trace = max hold
- d) Follow the guidelines in ANSI C63.4-2014 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- e) The peak level, once corrected, must comply with the limit specified in Section 15.209. Set the RBW = 1MHz, VBW = 10Hz, Detector = PK for AV value, while maintaining all of the other instrument settings.
- f) For the actual test configuration, please refer to the related item - EUT test photos.


5.3 Test Data and Results

All of the modes have been tested, the EUT complied with the FCC Part 15.249 standard limit for a wireless device, and with the worst case GFSK_2420MHz as below:

Remark: Level = Reading + Factor, Margin = Level - Limit

Radiated Emission Test Data (30MHz to 1GHz)

Tested Mode:	TM1
Test Antenna Polarization:	Horizontal
Remark:	

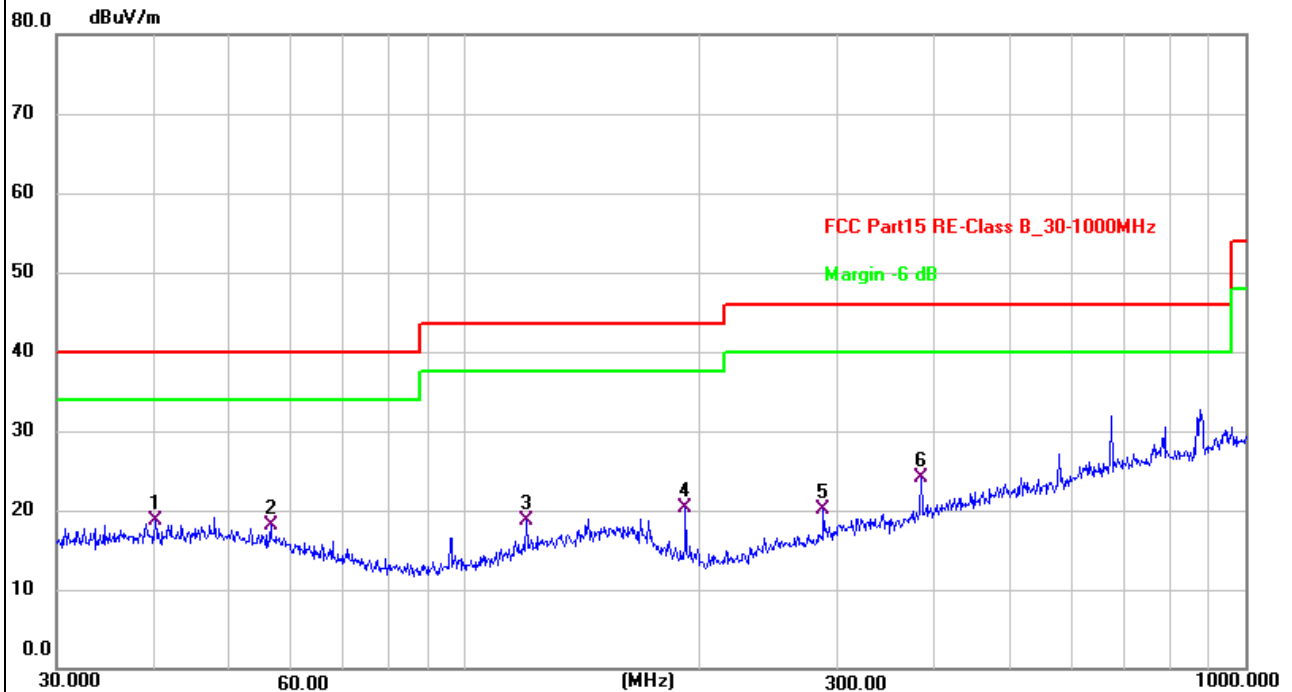


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	40.1347	26.93	-8.30	18.63	40.00	-21.37	QP	100	11	P	
2	56.3948	27.46	-9.38	18.08	40.00	-21.92	QP	100	311	P	
3	119.8556	28.44	-9.76	18.68	43.50	-24.82	QP	100	358	P	
4	191.7450	31.61	-11.31	20.30	43.50	-23.20	QP	100	105	P	
5	287.9904	28.68	-8.67	20.01	46.00	-25.99	QP	100	276	P	
6	383.9318	30.22	-6.12	24.10	46.00	-21.90	QP	100	296	P	

Radiated Emission Test Data (30MHz to 1GHz)

Tested Mode: TM1

Test Antenna Polarization: Vertical


Remark:

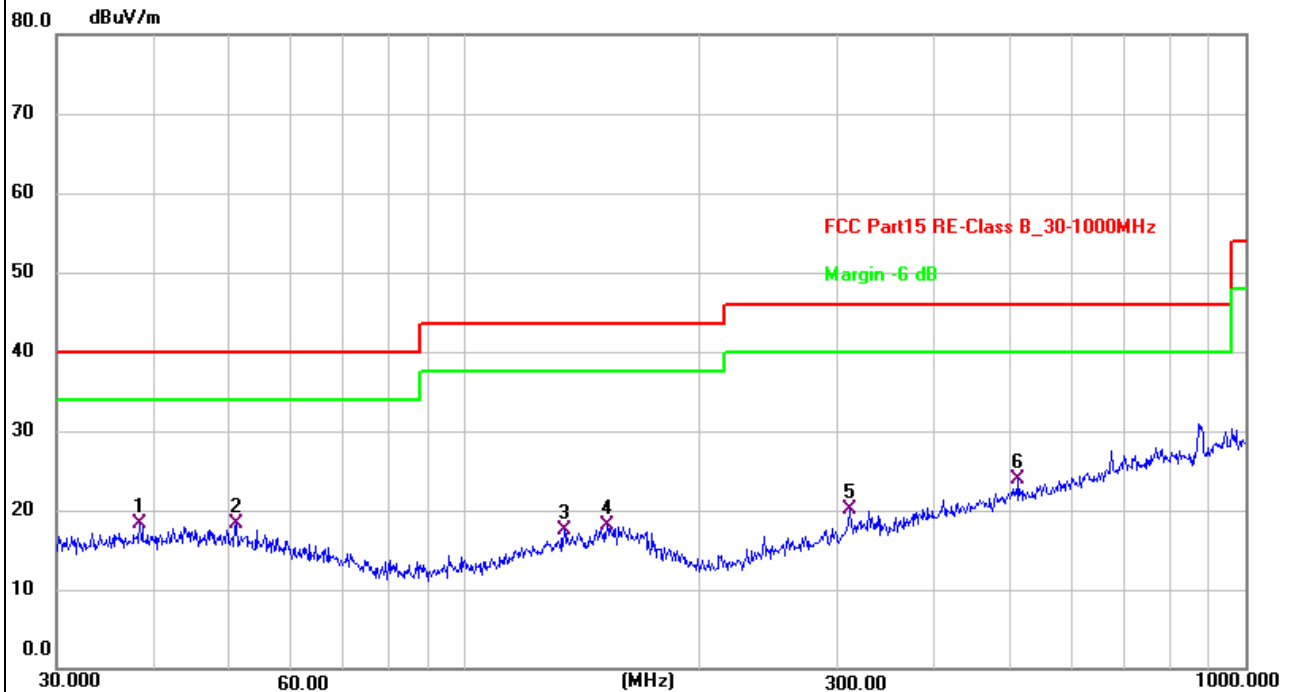

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	38.3462	26.90	-8.57	18.33	40.00	-21.67	QP	100	135	P	
2	50.9420	26.78	-8.54	18.24	40.00	-21.76	QP	100	237	P	
3	134.0882	26.09	-8.57	17.52	43.50	-25.98	QP	100	135	P	
4	152.1297	25.85	-7.75	18.10	43.50	-25.40	QP	100	146	P	
5	311.0867	27.77	-7.61	20.16	46.00	-25.84	QP	100	44	P	
6	511.8352	27.06	-3.15	23.91	46.00	-22.09	QP	100	33	P	

Radiated Emission Test Data (30MHz to 1GHz)

Tested Mode:	TM2
Test Antenna Polarization:	Horizontal
Remark:	

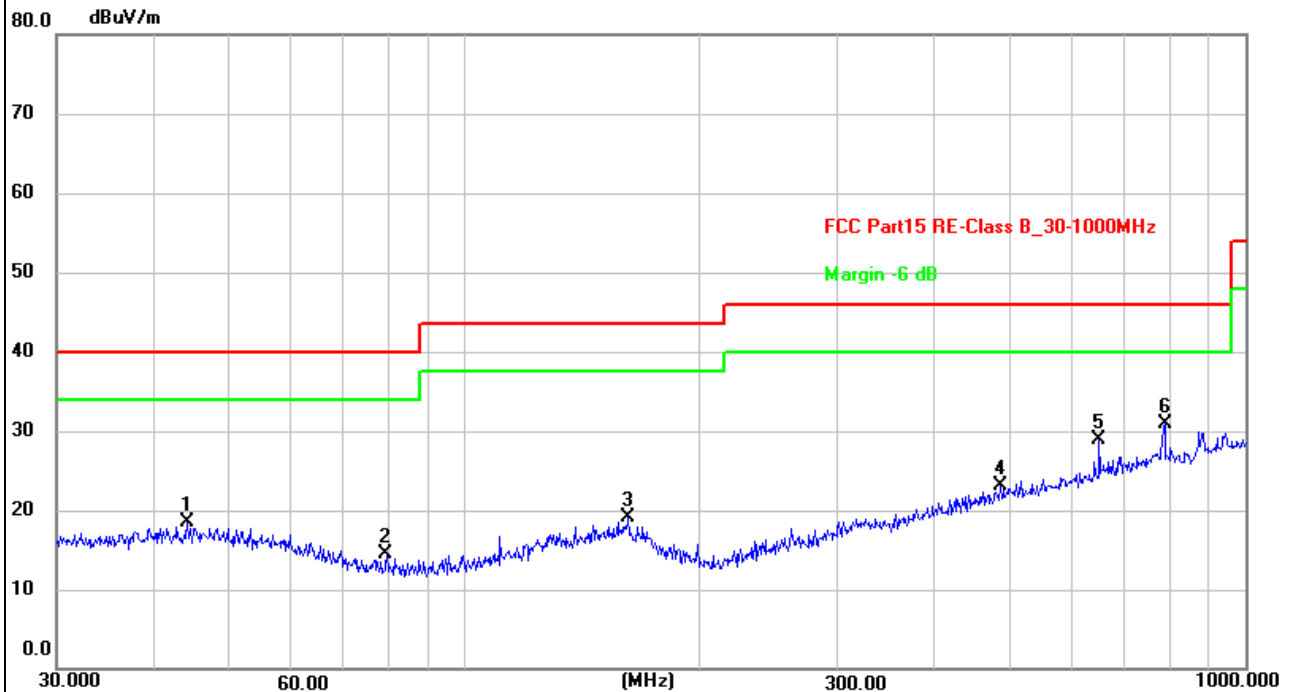


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	44.1202	26.76	-8.27	18.49	40.00	-21.51	QP	100	0	P	
2	79.5209	27.20	-12.79	14.41	40.00	-25.59	QP	100	0	P	
3	162.0414	27.16	-8.05	19.11	43.50	-24.39	QP	100	0	P	
4	485.6093	26.80	-3.63	23.17	46.00	-22.83	QP	100	0	P	
5	649.6597	29.85	-0.85	29.00	46.00	-17.00	QP	100	0	P	
6 *	787.8513	29.47	1.36	30.83	46.00	-15.17	QP	100	0	P	

Radiated Emission Test Data (30MHz to 1GHz)

Tested Mode: TM2

Test Antenna Polarization: Vertical

Remark:

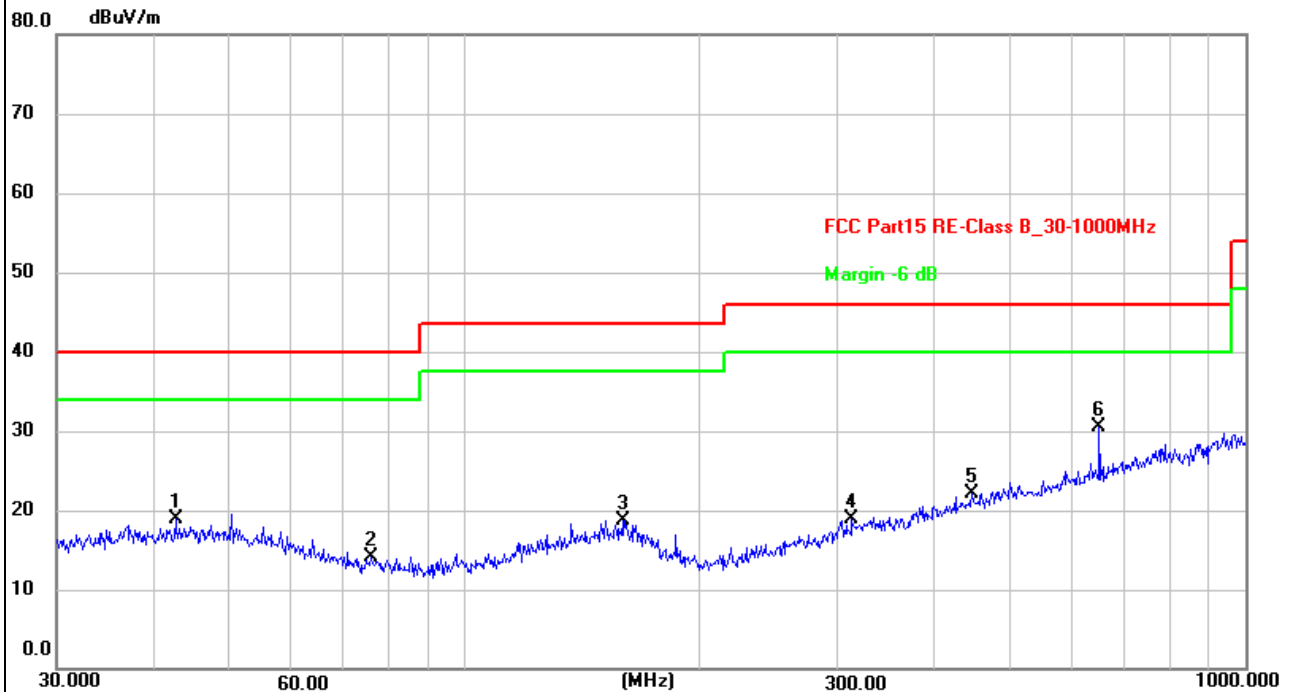

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	42.6000	27.13	-8.28	18.85	40.00	-21.15	QP	100	360	P	
2	75.7114	26.53	-12.35	14.18	40.00	-25.82	QP	100	360	P	
3	159.2251	26.50	-7.86	18.64	43.50	-24.86	QP	100	360	P	
4	313.2760	26.34	-7.52	18.82	46.00	-27.18	QP	100	360	P	
5	446.4141	26.68	-4.60	22.08	46.00	-23.92	QP	100	360	P	
6 *	649.6597	31.35	-0.85	30.50	46.00	-15.50	QP	100	360	P	

Radiated Emission Test Data (Above 1GHz) TM1 mode							
Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	H/V	PK/AV
Lowest Channel (2420MHz)							
2420	109.04	-20.89	88.15	114	-25.85	H	PK
2420	90.05	-20.89	69.16	94	-24.84	H	AV
4840	79.44	-14.72	64.72	74	-9.28	H	PK
4840	61.86	-14.72	47.14	54	-6.86	H	AV
7260	63.4	-8.41	54.99	74	-19.01	H	PK
7260	45.69	-8.41	37.28	54	-16.72	H	AV
2420	104.36	-20.89	83.47	114	-30.53	V	PK
2420	91.87	-20.89	70.98	94	-23.02	V	AV
4840	77.77	-14.72	63.05	74	-10.95	V	PK
4840	58.51	-14.72	43.79	54	-10.21	V	AV
7260	64.38	-8.41	55.97	74	-18.03	V	PK
7260	45.15	-8.41	36.74	54	-17.26	V	AV
Middle Channel (2441MHz)							
2441	106.37	-20.7	85.67	114	-28.33	H	PK
2441	92.29	-20.7	71.59	94	-22.41	H	AV
4882	74.84	-14.64	60.2	74	-13.8	H	PK
4882	60.65	-14.64	46.01	54	-7.99	H	AV
7323	63.6	-8.28	55.32	74	-18.68	H	PK
7323	47.07	-8.28	38.79	54	-15.21	H	AV
2441	114.46	-20.7	93.76	114	-20.24	V	PK
2441	85.73	-20.7	65.03	94	-28.97	V	AV
4882	74.66	-14.64	60.02	74	-13.98	V	PK
4882	59.04	-14.64	44.4	54	-9.6	V	AV
7323	63.76	-8.28	55.48	74	-18.52	V	PK
7323	45.38	-8.28	37.1	54	-16.9	V	AV

Radiated Emission Test Data (Above 1GHz) TM1 mode							
Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	H/V	PK/AV
Highest Channel (2465MHz)							
2465	115.05	-20.55	94.5	114	-19.5	H	PK
2465	95.09	-20.55	74.54	94	-19.46	H	AV
4930	74.28	-14.53	59.75	74	-14.25	H	PK
4930	61.17	-14.53	46.64	54	-7.36	H	AV
7395	64	-8.13	55.87	74	-18.13	H	PK
7395	48.13	-8.13	40	54	-14	H	AV
2465	114.39	-20.55	93.84	114	-20.16	V	PK
2465	99.67	-20.55	79.12	94	-14.88	V	AV
4930	75.47	-14.53	60.94	74	-13.06	V	PK
4930	59.19	-14.53	44.66	54	-9.34	V	AV
7395	65.43	-8.13	57.3	74	-16.7	V	PK
7395	47.13	-8.13	39	54	-15	V	AV

Note 1: this EUT was tested in 3 orthogonal positions, with the X-axis being the worst, and the worst case position data was reported.

Note 2: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The measurements greater than 20dB below the limit from 9kHz to 30MHz.

Note 3: Other emissions are attenuated 20dB below the limits from 9kHz to 30MHz, so it does not recorded report, 18GHz-26GHz not recorded for no spurious point have a margin of less than 20 dB with respect to the limits.


6. Band-edge Emissions

6.1 Standard and Limit

According to §15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

6.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.3 to 6.6 and section 6.10.

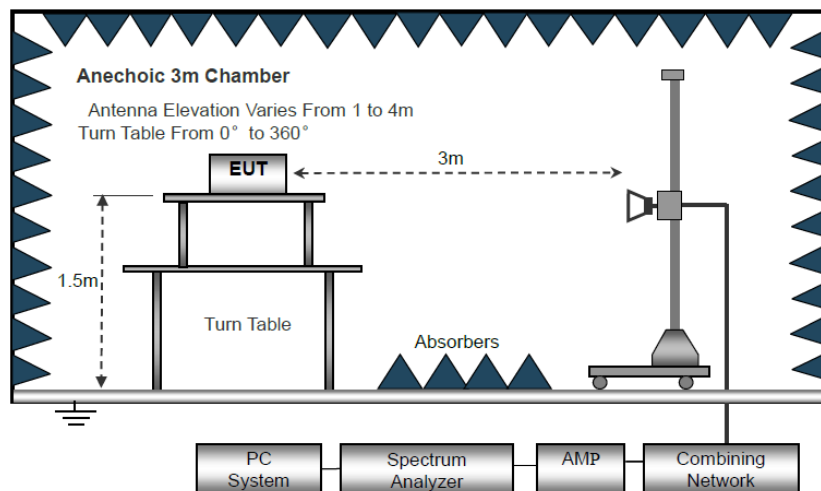

Test Setup Block Diagram

As the radiated emissions testing, set the Lowest and Highest Transmitting Channel, observed the outside band of 2310MHz to 2400MHz and 2483.5MHz to 2500MHz, than mark the higher-level emission for comparing with the FCC rules.

6.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.249 standard limit, and with the worst case as below:

Test Mode	Frequency	Limit	Result
	MHz	dBuV/dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

Radiated Emission Test Data (Band edge emissions) TM1 mode							
Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	H/V	PK/AV
Lowest Channel (2420MHz)							
2310	65.98	-21.34	44.64	74	-29.36	H	PK
2310	52.4	-21.34	31.06	54	-22.94	H	AV
2390	68.35	-20.96	47.39	74	-26.61	H	PK
2390	52.17	-20.96	31.21	54	-22.79	H	AV
2400	67.6	-20.91	46.69	74	-27.31	H	PK
2400	53.53	-20.91	32.62	54	-21.38	H	AV
2310	66.39	-21.34	45.05	74	-28.95	V	PK
2310	51.33	-21.34	29.99	54	-24.01	V	AV
2390	65.01	-20.96	44.05	74	-29.95	V	PK
2390	49.84	-20.96	28.88	54	-25.12	V	AV
2400	70.54	-20.91	49.63	74	-24.37	V	PK
2400	55.49	-20.91	34.58	54	-19.42	V	AV
Highest Channel (2465MHz)							
2483.50	71.95	-20.51	51.44	74	-22.56	H	PK
2483.50	53.59	-20.51	33.08	54	-20.92	H	AV
2500	67.71	-20.43	47.28	74	-26.72	H	PK
2500	51.33	-20.43	30.9	54	-23.1	H	AV
2483.50	67.07	-20.51	46.56	74	-27.44	V	PK
2483.50	55.42	-20.51	34.91	54	-19.09	V	AV
2500	68.28	-20.43	47.85	74	-26.15	V	PK
2500	49.8	-20.43	29.37	54	-24.63	V	AV

Remark: Level = Reading + Factor, Margin = Level - Limit

7. Occupied Bandwidth

7.1 Standard and Limit

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

7.2 Test Procedure

According to the ANSI 63.10-2013, section 6.9, the emission bandwidth test method as follows.

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 62kHz, VBW = 180kHz, Sweep = Auto.
- 4) Set a reference level on the measuring instrument equal to the highest peak value.
- 5) Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- 6) Repeat the above procedures until all frequencies measured were complete.

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.



Test Setup Block Diagram

7.3 Test Data and Results

TM1 mode

Test Channel	Test Frequency	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Lowest Channel	2420MHz	0.9369	1.521
Middle Channel	2441MHz	0.9517	1.542
Highest Channel	2465MHz	0.9346	1.517

Test Plots of Occupied Bandwidth


2420MHz



2441MHz



2465MHz

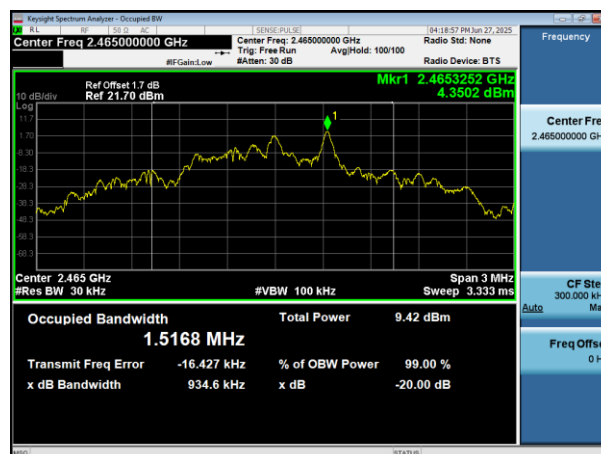

***** END OF REPORT *****