

Project No: TM-2503000493P
Report No.: TMWK2503001452KS

FCC ID: 2BNM4TURBOXC865C

Page: 1 / 37
Rev.: 01

SAR TEST REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

for

OR1 Control Tablet 11"

**Model Name.: WM400 OR1 Control Tablet 11",
WM40000 OR1 Control Tablet Interface Extension,
WM40002 OR1 Control Tablet Mounting Sleeve**

Prepared for:

**KARL STORZ SE & Co. KG
Dr.-Karl-Storz-Strasse 34, 78532 Tuttlingen, Germany**

Prepared by

**Compliance Certification Services Inc.
Wugu Lab.**

**No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City, Taiwan.**

Issue Date: September 3, 2026

Note: This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies. The test results in the report only apply to the tested sample.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Project No: TM-2503000493P
Report No.: TMWK2503001452KS

Page: 2 / 37
Rev.: 01

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	June 15, 2026	Initial Issue	ALL	Peggy Tsai
01	September 3, 2026	See the following Note Rev.(01)	P. 7, 20, 28	Peggy Tsai

Rev. (01)

1. Modify wireless technologies in section 3.2.
2. Modify dielectric property measurements results in section 7.1.
3. Modify average power measured results in section 8.3.

Table of Contents

1	ATTESTATION OF TEST RESULTS	4
2	TEST SPECIFICATION, METHODS AND PROCEDURES	5
3	DEVICE UNDER TEST (DUT) INFORMATION	6
3.1	DUT DESCRIPTION	6
3.2	WIRELESS TECHNOLOGIES	7
4	SAR MEASUREMENT SYSTEM.....	8
4.1	SYSTEM COMPONENTS	9
4.2	SAR SCAN PROCEDURES	12
5	MEASUREMENT UNCERTAINTY	14
6	RF EXPOSURE CONDITIONS (TEST CONFIGURATIONS)	15
6.1	STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	15
6.2	REQUIRED TEST CONFIGURATIONS	18
7	DIELECTRIC PROPERTY MEASUREMENTS & SYSTEM CHECK	19
7.1	DIELECTRIC PROPERTY MEASUREMENTS	19
7.2	SYSTEM CHECK	21
8	CONDUCTED OUTPUT POWER MEASUREMENTS	23
8.1	WI-FI 2.4GHZ (DTS BAND)	23
8.2	WI-FI 5GHZ (U-NII BANDS)	24
8.3	BLUETOOTH.	28
9	MEASURED AND REPORTED (SCALED) SAR RESULTS	30
9.1	WI-FI (DTS BAND)	30
9.2	WI-FI (U-NII BAND)	30
10	SIMULTANEOUS TRANSMISSION SAR ANALYSIS.....	31
10.1	SUM OF THE SAR FOR WI-FI & BT & NFC	34
11	EQUIPMENT LIST & CALIBRATION STATUS.....	35
12	FACILITIES.....	36
13	APPENDIXES	37



Project No: TM-2503000493P
Report No.: TMWK2503001452KS

Page: 4 / 37
Rev.: 01

1 Attestation of Test Results

Applicant Name	KARL STORZ SE & Co. KG			
Model Name	WM400 OR1 Control Tablet 11", WM40000 OR1 Control Tablet Interface Extension, WM40002 OR1 Control Tablet Mounting Sleeve			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
Exposure Category	SAR Limits (W/Kg) Peak spatial-average (1g of tissue)			
General population	1.6			
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)			
	DTS	NII	DSS	DXX
Body	0.31	0.77	0	0
Simultaneous TX	1.37			
Receive EUT Date:	3/31/2025			
Date Tested	5/8/2025 to 7/21/2025			
Test Results	Pass			
Compliance Certification Services Inc. , tested the above equipment in accordance with the requirements set forth in the above standards. Determination of compliance is based on the results of the compliance measurement,not taking into account measurement instrumentation uncertainty.All indications of Pass/Fail in this report are opinions expressed by Compliance Certification Services Inc, based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.				
Approved & Released By: 		Tested by: 		
Sky Zhou Asst. Section Manager Compliance Certification Services Inc.		KW Huang Engineer Compliance Certification Services Inc.		



Project No: TM-2503000493P
Report No.: TMWK2503001452KS

Page: 5 / 37
Rev.: 01

2 Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 616217 D04 SAR for laptop and tablets v01r02
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- [TCB workshop](#) October, 2016; Page 7, RF Exposure Procedures (Bluetooth Duty Factor)



Project No: TM-2503000493P
Report No.: TMWK2503001452KS

Page: 6 / 37
Rev.: 01

3 Device Under Test (DUT) Information

3.1 DUT Description

Applicant Name	KARL STORZ SE & Co. KG		
Applicant Address	Dr.-Karl-Storz-Strasse 34, 78532 Tuttlingen, Germany		
Manufacturer Name	CYPRESS TECHNOLOGY CO., LTD. ZHONGHE PLANT 3		
Manufacturer Address	4F., No. 156, Jiankang Rd, Zhonghe Dist, New Taipei City 235603, Taiwan(R.O.C)		
Product	OR1 Control Tablet 11"		
Trade Name	 KARL STORZ—ENDOSKOPE		
Model No.	WM400 OR1 Control Tablet 11", WM40000 OR1 Control Tablet Interface Extension, WM40002 OR1 Control Tablet Mounting Sleeve		
Model Discrepancy	Name	Difference	
	WM400 OR1 Control Tablet 11"	Tablet	
	WM40000 OR1 Control Tablet Interface Extension	Extension Box	
	WM40002 OR1 Control Tablet Mounting Sleeve	Sleeve	
Device Dimension	Overall (Length x Width): 253 mm x 185 mm Overall Diagonal: 313 mm		
Back Cover	☒ The Back Cover is not removable.		
Battery Options	☒ Standard – Lithium-ion battery, Rating 3.6Vdc, 28.44Wh		
Hardware Version	PCB-3566D PCB-3554D PCB-3565D		
Software Version	D1_20241226		


3.2 Wireless Technologies

Wireless technologies	Frequency bands	Peak Antenna Gain (dBi)	Operating mode	Duty Cycle used for SAR testing
Wi-Fi (Chain 0)	2.4 GHz ¹	3.19	802.11b 802.11g 802.11n (HT20) 802.11n (HT40) 802.11ax (HE20) 802.11ax (HE40)	97.78% (802.11b) 99.25% (802.11g) 99.63% (802.11n/ax 20MHz BW) 99.63% (802.11n/ax 40MHz BW)
	5 GHz ¹	4.31	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80) 802.11ax (HE20) 802.11ax (HE40) 802.11ax (HE80)	99.1% (802.11a) 99.71% (802.11n/ax 20MHz BW) 99.71% (802.11n/ax 40MHz BW) 99.71% (802.11ac/ax 80MHz BW)
Bluetooth	2.4 GHz ¹	3.19	BR,EDR,LE	76.8%
Antenna Specification	Brand Name	ARISTOTLE		
	Type	PIFA antenna		
	Parts Number	RFA-25-JP267-4B-150		
Wi-Fi (Chain 1)	2.4 GHz ¹	1.98	802.11b 802.11g 802.11n (HT20) 802.11n (HT40) 802.11ax (HE20) 802.11ax (HE40)	97.78% (802.11b) 99.25% (802.11g) 99.63% (802.11n/ax 20MHz BW) 99.63% (802.11n/ax 40MHz BW)
	5 GHz ¹	4.46	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80) 802.11ax (HE20) 802.11ax (HE40) 802.11ax (HE80)	99.1% (802.11a) 99.71% (802.11n/ax 20MHz BW) 99.71% (802.11n/ax 40MHz BW) 99.71% (802.11ac/ax 80MHz BW)
Antenna Specification	Brand Name	ARISTOTLE		
	Type	PIFA antenna		
	Parts Number	RFA-25-JP812-4G-150		
NFC	13.56MHz	-		N/A ²
Antenna Specification	Type	PCB Antenna		

Notes:

- Duty cycle for Wi-Fi and BT is referenced from the DTS and U-NII and BT reports.
- Measured Duty Cycle is not required due to SAR test exemption.
- The sample selected for test was prototype that representative to production product and was provided by manufacturer
- Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received


4 SAR Measurement System

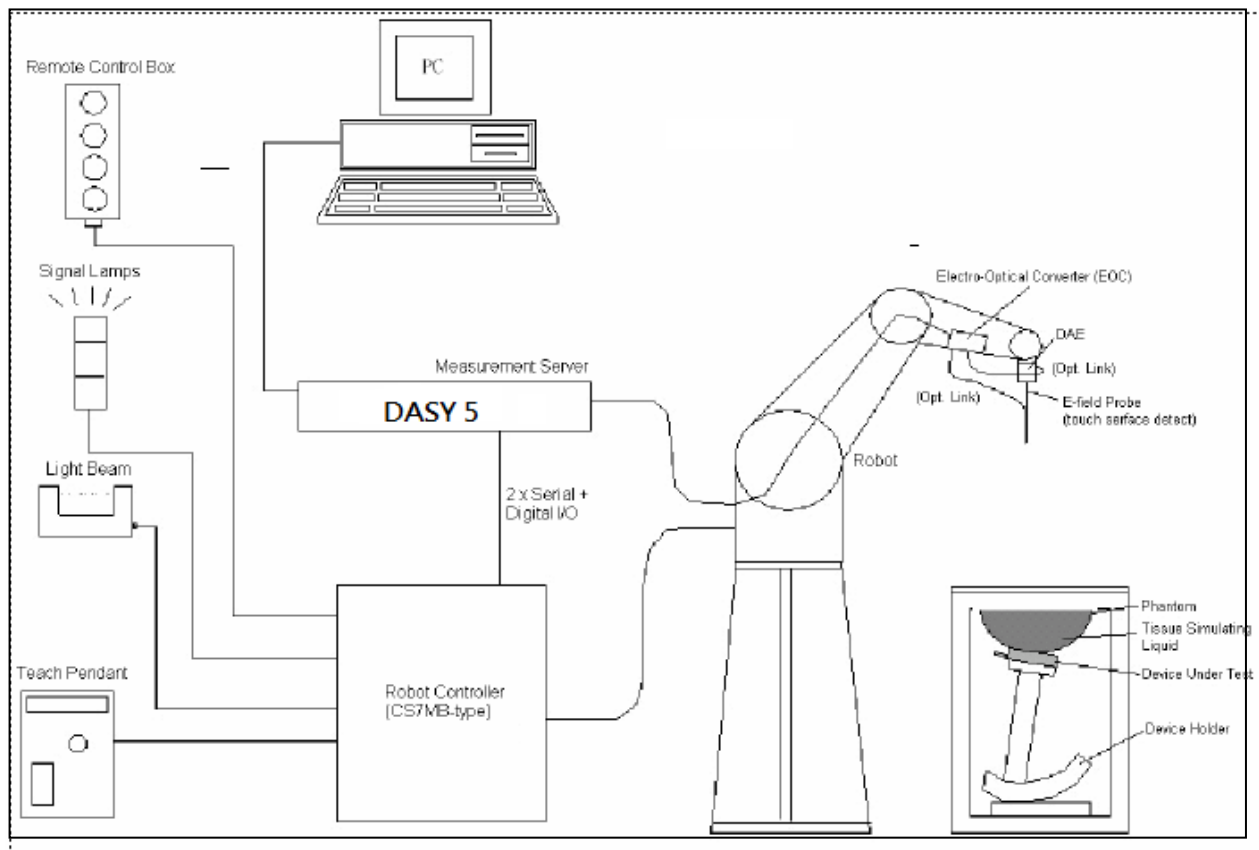

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7 or Windows XP.
- DASY software version: NEO52 D10.3 S14.6.13.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.

4.1 System Components

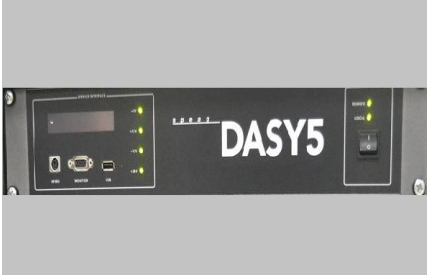DASY5 Measurement Server	
	The DASY5 measurement server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chip disk and 64MB RAM. The necessary circuits for communication with either the DAE4 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY5 I/O-board, which is directly connected to the PC/104 bus of the CPU board. The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
	The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server. Calibration: No calibration required.
Data Acquisition Electronics (DAE)	
	The data acquisition electronics (DAE4) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.


EX3DV4 Isotropic E-Field Probe for Dosimetric Measurements	
	Construction: Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE) Calibration: Basic Broad Band Calibration in air: 10-3000 MHz. Conversion Factors (CF) for HSL 900 and HSL 1800 CF-Calibration for other liquids and frequencies upon request. Frequency: 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz) Directivity: ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in HSL (rotation normal to probe axis) Dynamic Range: 10 μW/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μW/g)
	Dimensions: Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1 mm Application: High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
SAM Phantom	
	Construction: The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE1528: 2013. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot. Shell Thickness: 2 ± 0.2 mm Filling Volume: Approx. 25 liters Dimensions: Height: 810mm; Length: 1000mm; Width: 500mm
ELI Phantom	
	Construction: Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEEE1528: 2013 and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY5 and higher and is compatible with all SPEAG dosimetric probes and dipoles Shell Thickness: 2.0 ± 0.2 mm (sagging: <1%) Filling Volume: Approx. 25 liters Dimensions: Major ellipse axis: 600 mm Minor axis: 400 mm 500mm

Device Holder for SAM Twin Phantom



Construction: In combination with the Twin SAM Phantom V4.0 or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).

System Validation Kits for SAM Phantom

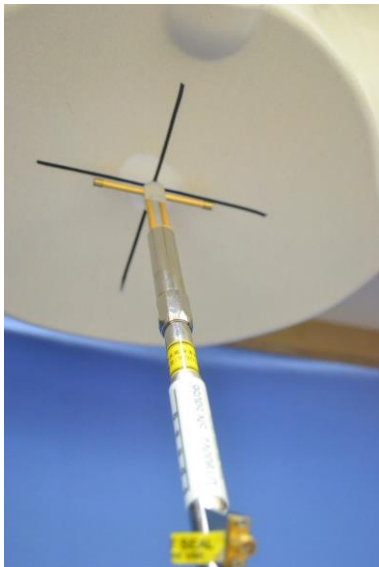

Construction: Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.


Frequency: 2450, 5300, 5600, 5800 MHz

Return loss: > 20 dB at specified validation position

Power capability: > 100 W (f < 1GHz); > 40 W (f > 1GHz)

Dimensions: D2450V2: dipole length: 51.5 mm; overall height: 290 mm
D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm

System Validation Kits for ELI phantom

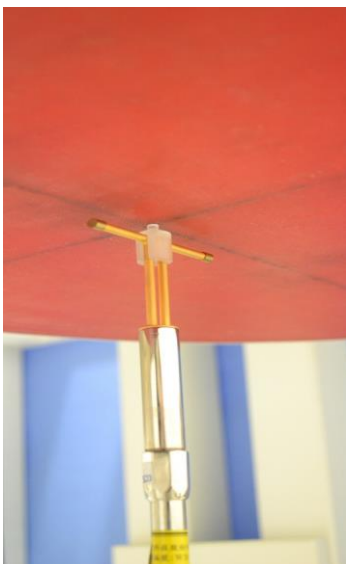

Construction: Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

Frequency: 2450, 5300, 5600, 5800 MHz

Return loss: > 20 dB at specified validation position

Power capability: > 100 W (f < 1GHz); > 40 W (f > 1GHz)

Dimensions: D2450V2: dipole length: 51.5 mm; overall height: 290 mm
D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm

4.2 SAR Scan Procedures

Step 1: Power Reference Measurement

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE1528 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

- Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}$
Maximum zoom scan spatial resolution, normal to phantom surface	Uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Maximum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$	

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1

5 Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE1528: 2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6 RF Exposure Conditions (Test Configurations)

Refer to Appendixes 1 for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

6.1 Standalone SAR Test Exclusion Considerations

Since the *Dedicated Host Approach* is applied, the standalone SAR test exclusion procedure in KDB 447498 is applied in conjunction with KDB 616217 § 4.3 to determine the minimum test separation distance:

- When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.
- When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.

SAR Test Exclusion Calculations for WLAN & BT

Antennas < 50mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)					Calculated Threshold Value				
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Rear	Edge 1	Edge 2	Edge 3	Edge 4
Antenna 0													
Wi-Fi 2.4 GHz	2462	9.50	9	5	112	8	112	141.5	2.8 -EXEMPT-	> 50 mm	1.8 -EXEMPT-	> 50 mm	> 50 mm
Wi-Fi 5.2 GHz	5240	10.50	11	5	112	8	112	141.5	5 -MEASURE-	> 50 mm	3.1 -MEASURE-	> 50 mm	> 50 mm
Wi-Fi 5.3 GHz	5320	10.50	11	5	112	8	112	141.5	5.1 -MEASURE-	> 50 mm	3.2 -MEASURE-	> 50 mm	> 50 mm
Wi-Fi 5.5 GHz	5700	8.50	7	5	112	8	112	141.5	3.3 -MEASURE-	> 50 mm	2.1 -EXEMPT-	> 50 mm	> 50 mm
Wi-Fi 5.8 GHz	5825	10.00	10	5	112	8	112	141.5	4.8 -MEASURE-	> 50 mm	3 -MEASURE-	> 50 mm	> 50 mm
Bluetooth	2480	8.00	6	5	112	8	112	141.5	1.9 -EXEMPT-	> 50 mm	1.2 -EXEMPT-	> 50 mm	> 50 mm
Antenna 1													
Wi-Fi 2.4 GHz	2462	10.50	11	5	17	160	225	10	3.5 -MEASURE-	1 -EXEMPT-	> 50 mm	> 50 mm	1.7 -EXEMPT-
Wi-Fi 5.2 GHz	5240	10.50	11	5	17	160	225	10	5 -MEASURE-	1.5 -EXEMPT-	> 50 mm	> 50 mm	2.5 -EXEMPT-
Wi-Fi 5.3 GHz	5320	10.50	11	5	17	160	225	10	5.1 -MEASURE-	1.5 -EXEMPT-	> 50 mm	> 50 mm	2.5 -EXEMPT-
Wi-Fi 5.5 GHz	5700	8.00	6	5	17	160	225	10	2.9 -EXEMPT-	0.8 -EXEMPT-	> 50 mm	> 50 mm	1.4 -EXEMPT-
Wi-Fi 5.8 GHz	5825	9.50	9	5	17	160	225	10	4.3 -MEASURE-	1.3 -EXEMPT-	> 50 mm	> 50 mm	2.2 -EXEMPT-

Note(s):

According to KDB 447498, if the calculated threshold value is >3 then SAR testing is required.

Antennas > 50mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)					Calculated Threshold Value				
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Rear	Edge 1	Edge 2	Edge 3	Edge 4
Antenna 0													
Wi-Fi 2.4 GHz	2462	9.50	9	5	112	8	112	141.5	< 50 mm	715.6 mW -EXEMPT-	< 50 mm	715.6 mW -EXEMPT-	1010.6 mW -EXEMPT-
Wi-Fi 5.2 GHz	5240	10.50	11	5	112	8	112	141.5	< 50 mm	685.5 mW -EXEMPT-	< 50 mm	685.5 mW -EXEMPT-	980.5 mW -EXEMPT-
Wi-Fi 5.3 GHz	5320	10.50	11	5	112	8	112	141.5	< 50 mm	685 mW -EXEMPT-	< 50 mm	685 mW -EXEMPT-	980 mW -EXEMPT-
Wi-Fi 5.5 GHz	5700	8.50	7	5	112	8	112	141.5	< 50 mm	682.8 mW -EXEMPT-	< 50 mm	682.8 mW -EXEMPT-	977.8 mW -EXEMPT-
Wi-Fi 5.8 GHz	5825	10.00	10	5	112	8	112	141.5	< 50 mm	682.2 mW -EXEMPT-	< 50 mm	682.2 mW -EXEMPT-	977.2 mW -EXEMPT-
Bluetooth	2480	8.00	6	5	112	8	112	141.5	< 50 mm	715.3 mW -EXEMPT-	< 50 mm	715.3 mW -EXEMPT-	1010.3 mW -EXEMPT-
Antenna 1													
Wi-Fi 2.4 GHz	2462	10.50	11	5	17	160	225	10	< 50 mm	< 50 mm	1195.6 mW -EXEMPT-	1845.6 mW -EXEMPT-	< 50 mm
Wi-Fi 5.2 GHz	5240	10.50	11	5	17	160	225	10	< 50 mm	< 50 mm	1165.5 mW -EXEMPT-	1815.5 mW -EXEMPT-	< 50 mm
Wi-Fi 5.3 GHz	5320	10.50	11	5	17	160	225	10	< 50 mm	< 50 mm	1165 mW -EXEMPT-	1815 mW -EXEMPT-	< 50 mm
Wi-Fi 5.5 GHz	5700	8.00	6	5	17	160	225	10	< 50 mm	< 50 mm	1162.8 mW -EXEMPT-	1812.8 mW -EXEMPT-	< 50 mm
Wi-Fi 5.8 GHz	5825	9.50	9	5	17	160	225	10	< 50 mm	< 50 mm	1162.2 mW -EXEMPT-	1812.2 mW -EXEMPT-	< 50 mm

Note(s):

According to KDB 447498, if the calculated Power threshold is less than the output power then SAR testing is required.

SAR Test Exclusion Calculations for NFC

4.3.1 b) 1.	
f(GHz)	0.1
min. test separation distance (mm)	5
Threshold at 50 mm	474
b) 1. SAR test exclusion thresholds (mW)	444

4.3.1 C) 1.	
f(GHz)	0.01356
b) 1. SAR test exclusion thresholds (mW)	444
c) 1. SAR test exclusion thresholds (mW)	830

4.3.1 C) 2.	
f(GHz)	0.01356
max. Electric field strength (dBuV/m @3m)	52.9
max. EIRP power (dBm)	-42.33
max. EIRP Tune up power (dBm)	-42
max. EIRP power (mW)	0
min. test separation distance (mm)	5
c) 1. SAR test exclusion thresholds (mW)	830
c) 2. SAR test exclusion thresholds (mW)	415
Result	Pass

6.2 Required Test Configurations

The table below identifies the standalone test configurations required for this device according to the findings in Section 6.1:

Antenna 0					
Test Configurations	Rear	Edge 1	Edge 2	Edge 3	Edge 4
Wi-Fi 2.4 GHz	No	No	No	No	No
Wi-Fi 5.2 GHz	Yes	No	Yes	No	No
Wi-Fi 5.3 GHz	Yes	No	Yes	No	No
Wi-Fi 5.5 GHz	Yes	No	No	No	No
Wi-Fi 5.8 GHz	Yes	No	Yes	No	No
Bluetooth	No	No	No	No	No

Antenna 1					
Test Configurations	Rear	Edge 1	Edge 2	Edge 3	Edge 4
Wi-Fi 2.4 GHz	Yes	No	No	No	No
Wi-Fi 5.2 GHz	Yes	No	No	No	No
Wi-Fi 5.3 GHz	Yes	No	No	No	No
Wi-Fi 5.5 GHz	No	No	No	No	No
Wi-Fi 5.8 GHz	Yes	No	No	No	No

Note(s):

Yes = Testing is required.

No = Testing is not required.

7 Dielectric Property Measurements & System Check

7.1 Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies $\leq 3\text{ GHz}$.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Typical Composition of Ingredients for Liquid Tissue Phantoms Simulating Liquids for 600 MHz -10 GHz, Manufactured by SPEAG:

Broad-band head tissue simulating liquids	SPEAG Product	Frequency range (MHz)	Main Ingredients
	HBBL600-10000V6	600 - 10000	Water, Oil

Dielectric Property Measurements Results:

Date	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
			Measured	Target	Delta (%)	Measured	Target	Delta (%)
2025/7/18	Head	5150	36.81	36.05	2.11	4.56	4.61	-1.15
		5250	36.66	35.95	1.97	4.67	4.71	-0.79
		5350	36.53	35.85	1.90	4.86	4.81	1.04
2025/7/18	Head	5500	36.33	35.65	1.91	5.00	4.97	0.70
		5600	36.13	35.50	1.77	5.08	5.07	0.22
		5725	35.93	35.38	1.55	5.28	5.20	1.71
2025/7/18	Head	5725	35.93	35.38	1.55	5.28	5.20	1.71
		5750	35.88	35.35	1.50	5.28	5.22	1.05
		5850	35.78	35.25	1.50	5.31	5.32	-0.34
2025/7/21	Head	2400	40.02	39.30	1.83	1.77	1.76	0.91
		2450	39.81	39.20	1.56	1.83	1.80	1.56
		2480	39.70	39.16	1.38	1.87	1.83	1.80

7.2 System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15 mm (below 1 GHz) and 10 mm (above 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube
- Distance between probe sensors and phantom surface was set to 2 mm.
- The dipole input power (forward power) was 250 mW (below 2GHz) and 100 mW
- The results are normalized to 1 W input power.



Project No: TM-2503000493P
Report No.: TMWK2503001452KS

Page: 22 / 37
Rev.: 01

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within $\pm 10\%$ of the manufacturer calibrated dipole SAR target. Refer to Appendix 2 for the SAR System Check Plots.

Date	Tissue Type	Dipole S/N	Input Power (mW)	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Delta 1g ± 10 (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Delta 10g ± 10 (%)	Plot No.
2025/7/18	Head	D5GHzV2-1349-5250	100	7.83	80.90	78.3	-3.21	2.27	23.10	22.7	-1.73	1
2025/7/18	Head	D5GHzV2-1349-5600	100	8.52	82.40	85.2	3.40	2.42	23.50	24.2	2.98	2
2025/7/18	Head	D5GHzV2-1349-5750	100	8.12	80.80	81.2	0.50	2.32	23.00	23.2	0.87	3
2025/7/21	Head	D2450V2-728	250	13.70	52.70	54.8	3.98	6.78	24.90	27.12	8.92	4

8 Conducted Output Power Measurements

8.1 Wi-Fi 2.4GHz (DTS Band)

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11g/n/ac/ax mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Measured Results

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Tune-up Limit (dBm)		SAR Test (Yes/No)	
					Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1
2.4GHz (DTS)	802.11b	1 Mbps	1	2412	8.50	10.02	9.5	10.5	Yes	Yes
			6	2437	9.39	9.55				
			11	2462	8.57	9.55				
	802.11g	6 Mbps	1	2412	8.64	9.79	9.0	10.0	No	No
			6	2437	8.97	9.57				
			11	2462	8.76	9.51				
	802.11n (HT20)	MCS0	1	2412	8.72	9.13	9.0	10.0	No	No
			6	2437	8.60	9.09				
			11	2462	8.94	10.00				
	802.11ax (HE20)	MCS0	1	2412	8.83	9.16	9.0	10.0	No	No
			6	2437	8.78	9.26				
			11	2462	8.76	9.81				
	802.11n (HT40)	MCS0	3	2422	8.55	9.17	9.0	10.0	No	No
			6	2437	8.58	9.84				
			9	2452	8.77	8.63				
	802.11ax (HE40)	MCS0	3	2422	8.89	9.41	9.0	10.0	No	No
			6	2437	8.42	9.65				
			9	2452	8.63	8.57				

8.2 Wi-Fi 5GHz (U-NII Bands)

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.

When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR

SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

Measured Results

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Tune-up Limit (dBm)		SAR Test (Yes/No)	
					Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1
5.2GHz (U-NII 1)	802.11a	6 Mbps	36	5180	10.33	10.18	10.5	10.5	No	No
			40	5200	10.34	9.95				
			44	5220	10.15	10.14				
			48	5240	10.15	10.42				
	802.11n (HT20)	MCS0	36	5180	9.56	8.12	10.0	9.5	No	No
			40	5200	9.99	9.01				
			44	5220	9.92	8.56				
			48	5240	9.90	8.93				
	802.11ac (VHT20)	MCS0	36	5180	9.53	8.08	10.0	9.5	No	No
			40	5200	9.60	8.54				
			44	5220	9.86	8.50				
			48	5240	9.86	8.91				
	802.11ax (HE20)	MCS0	36	5180	9.87	8.41	10.0	9.5	No	No
			40	5200	9.91	8.76				
			44	5220	9.60	8.32				
			48	5240	9.62	8.88				
	802.11n (HT40)	MCS0	38	5190	9.79	8.69	10.0	9.0	No	No
			46	5230	9.74	8.49				
	802.11ac (VHT40)	MCS0	38	5190	9.74	8.58	10.0	9.0	No	No
			46	5230	9.62	8.41				
	802.11ax (HE40)	MCS0	38	5190	9.98	8.78	10.0	9.0	No	No
			46	5230	9.94	8.77				
	802.11ac (VHT80)	MCS0	42	5210	9.92	8.75	10.0	9.0	No	No
	802.11ax (HE80)	MCS0	42	5210	9.93	8.51	10.0	9.0	No	No

Measured Results (continued)

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Tune-up Limit (dBm)		SAR Test (Yes/No)	
					Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1
5.3GHz (U-NII 2A)	802.11a	6 Mbps	52	5260	10.08	9.75	10.5	10.5	Yes	Yes
			56	5280	9.66	9.96				
			60	5300	9.39	9.98				
			64	5320	9.32	10.00				
	802.11n (HT20)	MCS0	52	5260	9.99	9.63	10.0	10.0	No	No
			56	5280	9.93	9.86				
			60	5300	9.70	9.94				
			64	5320	9.63	9.91				
	802.11ac (VHT20)	MCS0	52	5260	9.93	9.24	10.0	10.0	No	No
			56	5280	9.52	9.27				
			60	5300	9.27	9.60				
			64	5320	9.26	9.54				
	802.11ax (HE20)	MCS0	52	5260	9.65	9.05	10.0	10.0	No	No
			56	5280	9.80	9.67				
			60	5300	9.58	9.81				
			64	5320	9.47	9.72				
	802.11n (HT40)	MCS0	54	5270	9.99	9.55	10.0	10.0	No	No
			62	5310	9.58	9.80				
	802.11ac (VHT40)	MCS0	54	5270	9.96	9.52	10.0	10.0	No	No
			62	5310	9.52	9.69				
	802.11ax (HE40)	MCS0	54	5270	9.78	9.35	10.0	10.0	No	No
			62	5310	9.70	9.92				
	802.11ac (VHT80)	MCS0	58	5290	9.58	9.61	10.0	10.0	No	No
	802.11ax (HE80)	MCS0	58	5290	9.56	9.63	10.0	10.0	No	No

Measured Results (continued)

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pw r (dBm)		Tune-up Limit (dBm)		SAR Test (Yes/No)	
					Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1
5.5GHz (U-NII 2C)	802.11a	6 Mbps	100	5500	7.36	7.96	8.5	8.0	Yes	Yes
			116	5580	8.18	7.95				
			124	5620	8.19	7.35				
			132	5660	8.37	7.88				
			140	5700	8.33	7.85				
			144	5720	8.20	7.78				
	802.11n (HT20)	MCS0	100	5500	7.99	6.72	8.0	7.0	No	No
			116	5580	7.95	5.59		5.5		
			124	5620	7.81	3.99				
			132	5660	7.96	4.63				
			140	5700	7.99	5.29				
			144	5720	7.92	5.02				
	802.11ac (VHT20)	MCS0	100	5500	7.95	6.68	8.0	7.0	No	No
			116	5580	7.89	5.52		5.5		
			124	5620	7.79	3.97				
			132	5660	7.95	4.59				
			140	5700	7.95	5.24				
			144	5720	7.90	4.97				
	802.11ax (HE20)	MCS0	100	5500	7.84	6.52	8.0	7.0	No	No
			116	5580	7.77	5.18		5.5		
			124	5620	7.62	4.48				
			132	5660	7.78	5.10				
			140	5700	7.88	5.17				
			144	5720	7.81	4.85				
	802.11n (HT40)	MCS0	102	5510	7.75	5.75	8.0	6.5	No	No
			110	5550	7.65	5.80				
			118	5590	7.83	4.88				
			126	5630	7.92	4.98				
			134	5670	7.82	5.27				
			142	5710	7.68	4.92				
	802.11ac (VHT40)	MCS0	102	5510	7.48	5.47	8.0	6.5	No	No
			110	5550	7.58	5.45				
			118	5590	7.60	4.64				
			126	5630	7.72	4.76				
			134	5670	7.57	5.15				
			142	5710	7.48	4.66				
	802.11ax (HE40)	MCS0	102	5510	7.84	6.06	8.0	6.5	No	No
			110	5550	7.85	5.76				
			118	5590	7.46	4.59				
			126	5630	7.67	4.74				
			134	5670	7.62	5.13				
			142	5710	7.95	5.14				
	802.11ac (VHT80)	MCS0	106	5530	7.98	6.06	8.0	6.5	No	No
			122	5610	7.82	4.74				
			138	5690	7.73	5.31				
	802.11ax (HE80)	MCS0	106	5530	7.98	6.10	8.0	6.5	No	No
			122	5610	7.82	4.76				
			138	5690	7.78	5.37				

Measured Results (continued)

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Tune-up Limit (dBm)		SAR Test (Yes/No)	
					Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1
5.8GHz (U-NII 3)	802.11a	6 Mbps	149	5745	9.50	8.19	10.0	9.5	Yes	Yes
			157	5785	8.99	8.31				
			165	5825	9.00	9.15				
	802.11n (HT20)	MCS0	149	5745	9.36	6.75	9.5	8.5	No	No
			157	5785	9.20	7.39				
			165	5825	9.24	8.27				
	802.11ac (VHT20)	MCS0	149	5745	9.22	6.71	9.5	8.5	No	No
			157	5785	9.14	7.30				
			165	5825	9.20	8.20				
	802.11ax (HE20)	MCS0	149	5745	9.23	6.46	9.5	7.0	No	No
			157	5785	9.34	7.71		9.0		
			165	5825	9.49	8.59				
	802.11n (HT40)	MCS0	151	5755	9.23	6.82	9.5	8.0	No	No
			159	5795	9.32	7.55				
	802.11ac (VHT40)	MCS0	151	5755	9.22	6.79	9.5	8.0	No	No
			159	5795	9.29	7.52				
	802.11ax (HE40)	MCS0	151	5755	9.16	6.76	9.5	8.0	No	No
			159	5795	9.14	7.53				
802.11ac (VHT80)	MCS0	155	5775	9.40	7.46	9.5	8.0	No	No	
802.11ax (HE80)	MCS0	155	5775	9.38	7.49	9.5	8.0	No	No	

8.3 Bluetooth.

Average Power Measured Results


Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)	Meas. Avg Pwr (mW)	Tune-up Limit (dBm)	SAR Test (Yes/No)
2.4	GFSK	1 Mbps	0	2402	6.51	4.48	8.0	No
			39	2441	7.67	5.85		
			78	2480	5.62	3.65		
	EDR, $\pi/4$ DQPSK	2 Mbps	0	2402	4.17	2.61	6.0	No
			39	2441	5.42	3.48		
			78	2480	3.37	2.17	4.0	
	EDR, 8-DPSK	3 Mbps	0	2402	4.18	2.62	6.0	No
			39	2441	5.40	3.47		
			78	2480	3.34	2.16	4.0	
	LE, GFSK	1 Mbps	0	2402	4.30	2.69	6.0	No
			19	2440	5.39	3.46		
			39	2480	3.20	2.09	4.0	

Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
GFSK	DH5	2.88	3.75	76.80%	1.15

Duty Cycle plots

GFSK

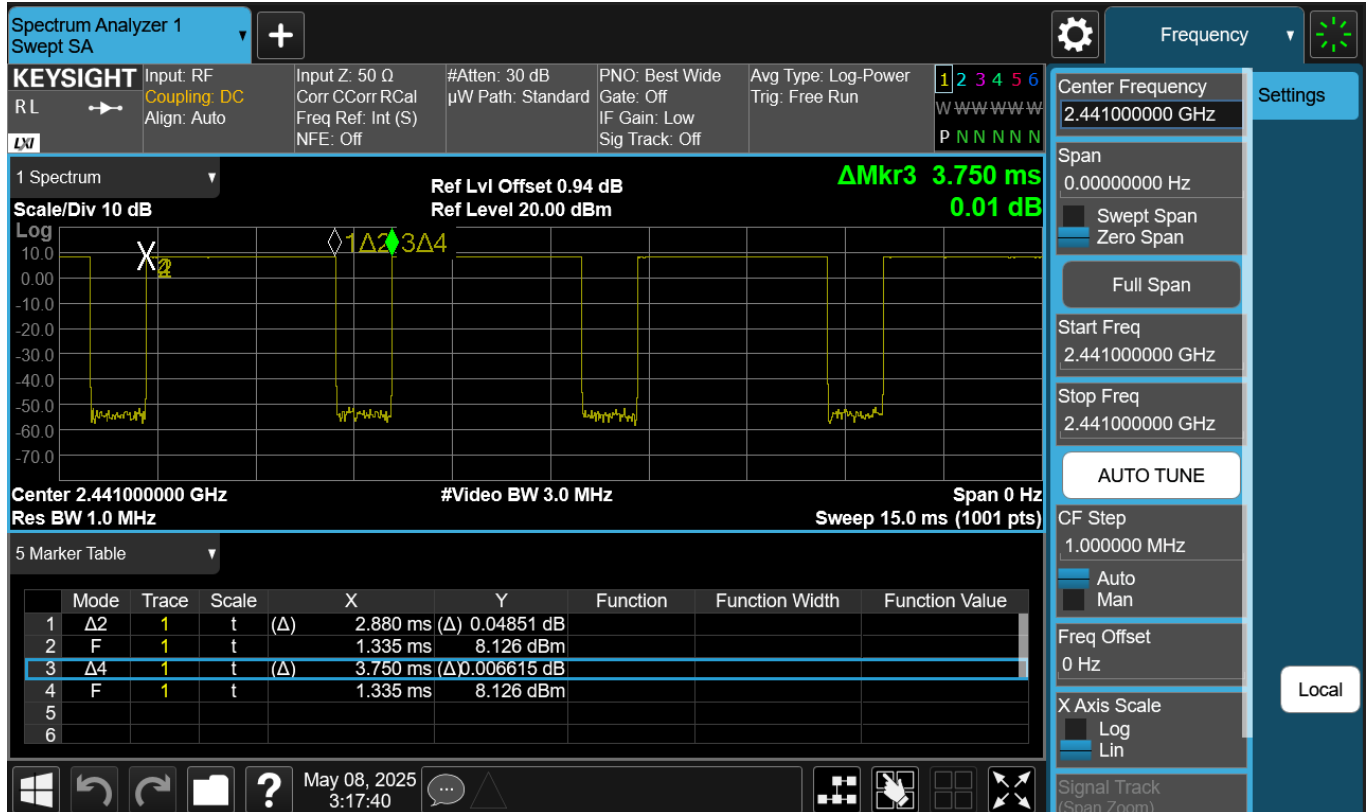

9 Measured and Reported (Scaled) SAR Results

9.1 Wi-Fi (DTS Band)

When the 802.11b reported SAR of the highest measured maximum output power channel is ≤ 0.8 W/kg, no further SAR testing is required. If SAR is > 0.8 W/kg and ≤ 1.2 W/kg, SAR is required for the next highest measured output power channel. Finally, if SAR is > 1.2 W/kg, SAR is required for the third channel.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	
Body	802.11b	1	0	Rear	1	2412	97.78%	10.5	10.02	0.267	0.305	1

9.2 Wi-Fi (U-NII Band)

Frequency Band	RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
5.3 (U-NII 2A)	Body	802.11a	0	0	Rear	52	5260	99.1%	10.5	10.08	0.690	0.767	2
					Edge 2	52	5260	99.1%	10.5	10.08	0.028	0.031	
5.3 (U-NII 2A)	Body	802.11a	1	0	Rear	64	5320	99.1%	10.5	10.00	0.311	0.352	3
5.5 (U-NII 2C)	Body	802.11a	0	0	Rear	132	5660	99.1%	8.5	8.37	0.730	0.759	4
5.8 (U-NII 3)	Body	802.11a	0	0	Rear	149	5745	99.1%	10.0	9.50	0.666	0.754	5
					Edge 2	149	5745	99.1%	10.0	9.50	0.026	0.029	
5.8 (U-NII 3)	Body	802.11a	1	0	Rear	165	5825	99.1%	9.5	9.15	0.268	0.293	6

10 Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

SAR to Peak Location Ratio (SPLSR)

KDB 447498 D01 General RF Exposure Guidance explains how to calculate the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / R_i$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

R_i is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(\text{SAR}_1 + \text{SAR}_2)^{1.5} / R_i \leq 0.04$$

When an individual antenna transmits at on two bands simultaneously, the sum of the highest reported SAR for the frequency bands should be used to determine SAR₁ or SAR₂. When SPLSR is necessary, the smallest distance between the peak SAR locations for the antenna pair with respect to the peaks from each antenna should be used.

The antennas in all antenna pairs that do not qualify for simultaneous transmission SAR test exclusion must be tested for SAR compliance, according to the enlarged zoom scan and volume scan post-processing procedures in KDB Publication 865664 D01



Project No: TM-2503000493P
Report No.: TMWK2503001452KS

Page: 32 / 37
Rev.: 01

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations						
Body	1	DTS	+	DTS	+	BT	+	NFC
	2	U-NII	+	U-NII	+	BT	+	NFC

Estimated SAR for Simultaneous Transmission SAR Analysis Considerations for SAR estimation

- When standalone SAR test exclusion applies, standalone SAR must also be estimated to determine simultaneous transmission SAR test exclusion.
- Dedicated Host Approach criteria for SAR test exclusion is likewise applied to SAR estimation, with certain distinctions between test exclusion and SAR estimation:
 - When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied for SAR estimation; this is the same between test exclusion and SAR estimation calculations.
 - When the separation distance from the antenna to an adjacent edge is > 5 mm but ≤ 50 mm, the actual antenna-to-edge separation distance is applied for SAR estimation.
 - When the minimum test separation distance is > 50 mm, the estimated SAR value is 0.4 W/kg
- Please refer to Estimated SAR Tables to see which test positions are inherently compliant as they consist of only estimated SAR values for all applicable transmitters and consequently will always have sum of SAR values < 1.2 W/kg. Simultaneous transmission SAR analysis was therefore not performed for these test positions.
- Estimated independent SAR value formula:
 - $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})/x}]$ W/kg, for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distance is > 50 mm.

Estimated SAR for WLAN & BT

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)					Estimated 1-g SAR Value (W/kg)				
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Rear	Edge 1	Edge 2	Edge 3	Edge 4
Antenna 0													
Wi-Fi 2.4 GHz	2462	9.50	9	5	112	8	112	141.5	0.377	0.400	0.235	0.400	0.400
Wi-Fi 5.2 GHz	5240	10.50	11	5	112	8	112	141.5	-MEASURE	0.400	-MEASURE	0.400	0.400
Wi-Fi 5.3 GHz	5320	10.50	11	5	112	8	112	141.5	-MEASURE	0.400	-MEASURE	0.400	0.400
Wi-Fi 5.5 GHz	5700	8.50	7	5	112	8	112	141.5	-MEASURE	0.400	0.279	0.400	0.400
Wi-Fi 5.8 GHz	5825	10.00	10	5	112	8	112	141.5	-MEASURE	0.400	-MEASURE	0.400	0.400
Bluetooth	2480	8.00	6	5	112	8	112	141.5	0.252	0.400	0.157	0.400	0.400
Antenna 1													
Wi-Fi 2.4 GHz	2462	10.50	11	5	17	160	225	10	-MEASURE	0.135	0.400	0.400	0.230
Wi-Fi 5.2 GHz	5240	10.50	11	5	17	160	225	10	-MEASURE	0.197	0.400	0.400	0.336
Wi-Fi 5.3 GHz	5320	10.50	11	5	17	160	225	10	-MEASURE	0.199	0.400	0.400	0.338
Wi-Fi 5.5 GHz	5700	8.00	6	5	17	160	225	10	0.382	0.112	0.400	0.400	0.191
Wi-Fi 5.8 GHz	5825	9.50	9	5	17	160	225	10	-MEASURE	0.170	0.400	0.400	0.290

Estimated SAR for NFC

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)	Estimated 1-g SAR Value (W/kg)
		dBm	mW		
NFC	13.56	-42	0	5	0

10.1 Sum of the SAR for Wi-Fi & BT & NFC

Test Position	Standalone SAR (W/kg)						Σ 1-g SAR (W/kg)	
	DTS		U-NII		BT	NFC	DTS + DTS + BT + NFC	U-NII + U-NII + BT + NFC
	Chain 0 ①	Chain 1 ②	Chain 0 ③	Chain 1 ④	⑤	⑥	① + ② + ⑤ + ⑥	③ + ④ + ⑤ + ⑥
Rear	0.377	0.305	0.767	0.352	0.252	0	0.93	1.37
Edge 2			0.031	0.4	0.157	0		0.59

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

11 Equipment List & Calibration Status

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements				
Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Dielectric Assessment Kit	SPEAG	DAKS-3.5	1053	2026/2/16
Thermometer	TES	TES-1306	210801061	2025/10/16

System Check				
Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Signal Generator	Agilent	N5181A	MY50145543	2025/12/13
Power Meter	Anritsu	ML2496A	2136002	2026/7/6
Power Sensor	Anritsu	MA2411B	1911386	2026/7/6
Power Sensor	Anritsu	MA2411B	1911387	2025/8/29
Dual Directional Coupler	Agilent	772D	MY46151258	2025/9/29
Amplifier	EMCI	ZVE-8G	980190	N/A
Data Acquisition Electronics	SPEAG	DAE4	558	2025/11/17
Dosimetric E-Field Probe	SPEAG	EX3DV4	7754	2025/11/26
System Validation Dipole	SPEAG	D2450V2	728	2025/8/22
System Validation Dipole	SPEAG	D5GHzV2	1349	2026/1/16
Humidity/Temperature meter	HTC	HTC-1	HTC-D07	2026/5/25
Thermometer	TES	TES-1306	210801061	2025/10/16

Software Version
DASY NEO52 D10.3 S14.6.13
SEMCAD-XPostPro



Project No: TM-2503000493P
Report No.: TMWK2503001452KS

Page: 36 / 37
Rev.: 01

12 Facilities

All measurement facilities used to collect the measurement data are located at

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan.



Project No: TM-2503000493P
Report No.: TMWK2503001452KS

Page: 37 / 37
Rev.: 01

13 Appendixes

Exhibit	Content
1	SAR Setup Photos
2	SAR System Check Plots
3	Highest SAR Test Plots
4	SAR DAE and Probe Calibration Certificates
5	SAR Dipole Calibration Certificates

END OF REPORT