


Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 207 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ac80_Band3
Frequency : 5530 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

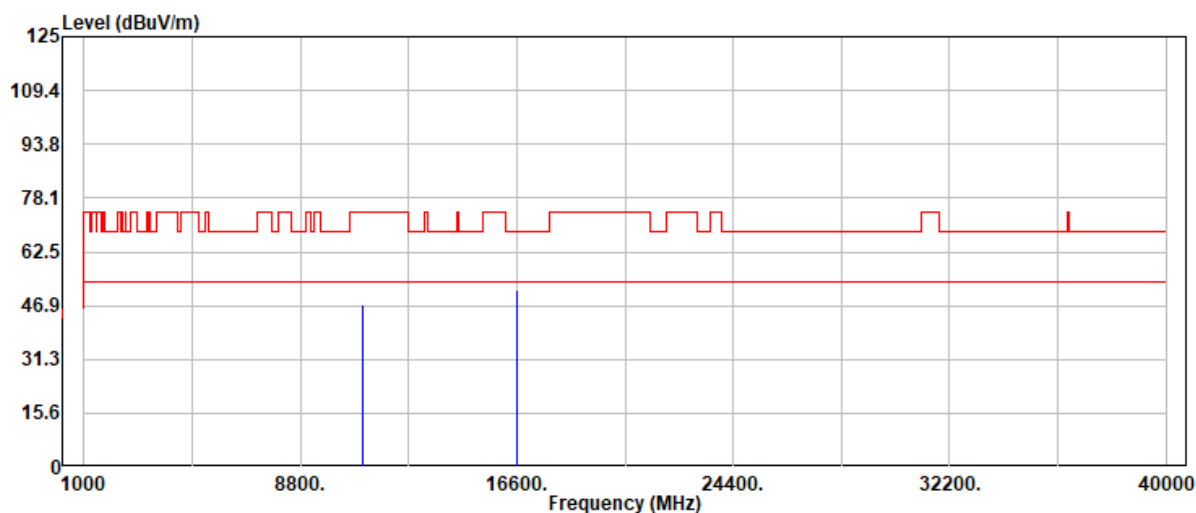


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11060.00	32.97	14.11	47.08	74.00	-26.92	Peak
11060.00	25.39	14.11	39.50	54.00	-14.50	Average
16590.00	31.62	19.88	51.50	68.20	-16.70	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 208 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ac80_Band3
Frequency : 5530 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

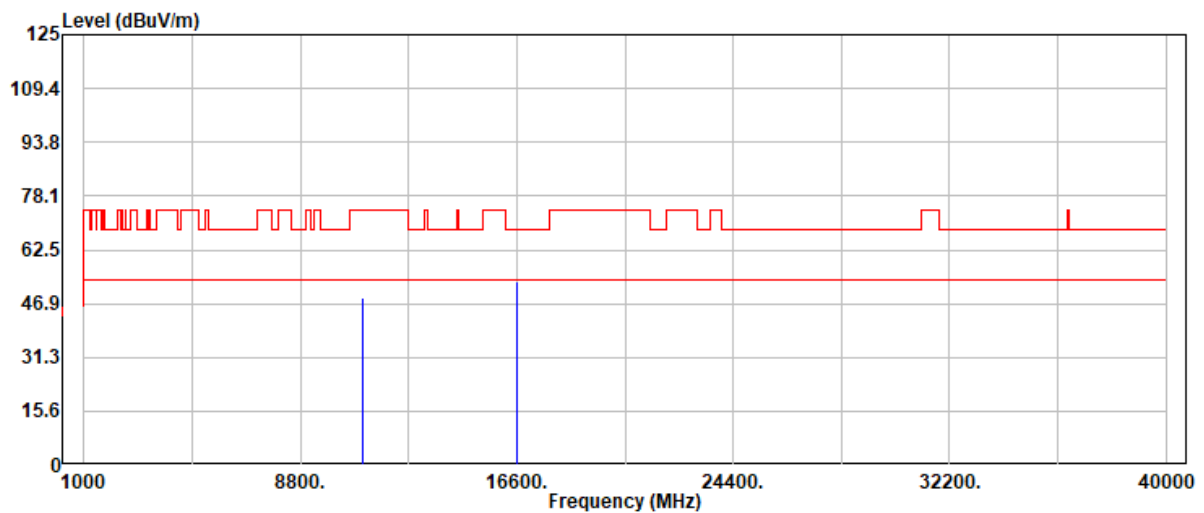


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11060.00	34.27	14.11	48.38	74.00	-25.62	Peak
11060.00	25.41	14.11	39.52	54.00	-14.48	Average
16590.00	33.59	19.88	53.47	68.20	-14.73	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 209 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ac80_Band3
Frequency : 5610 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

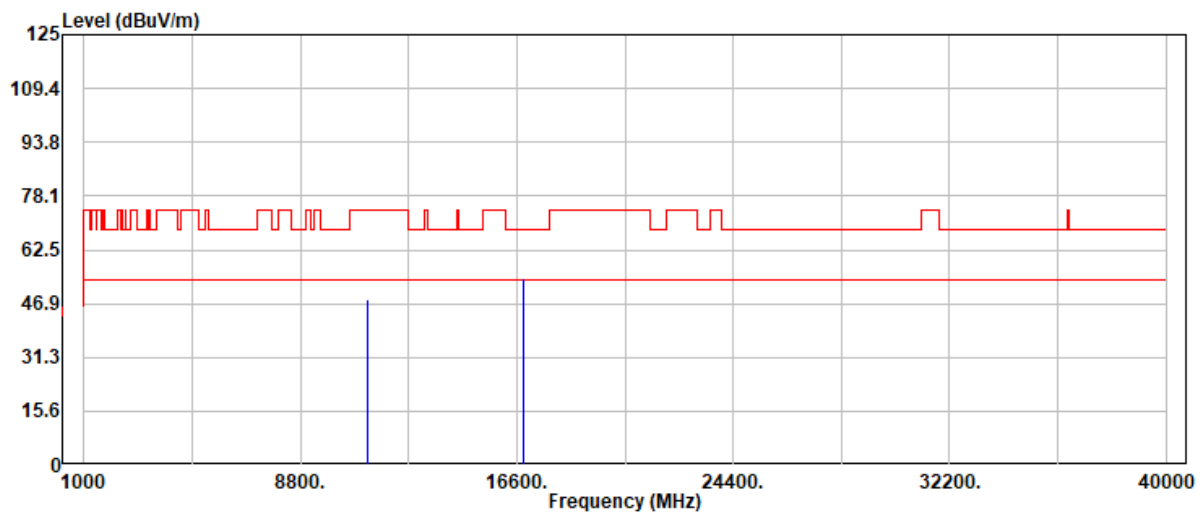


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11220.00	33.62	14.27	47.89	74.00	-26.11	Peak
11220.00	25.41	14.27	39.68	54.00	-14.32	Average
16830.00	31.86	22.52	54.38	68.20	-13.82	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 210 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ac80_Band3
Frequency : 5610 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

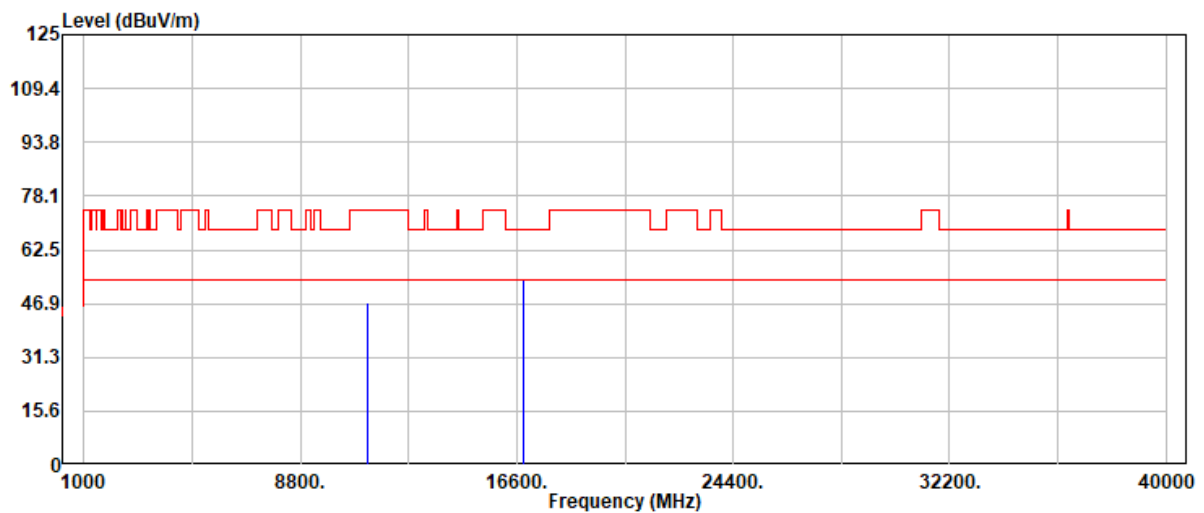


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11220.00	32.84	14.27	47.11	74.00	-26.89	Peak
11220.00	25.94	14.27	40.21	54.00	-13.79	Average
16830.00	31.29	22.52	53.81	68.20	-14.39	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 211 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ac80_Band3~4
Frequency : 5690 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

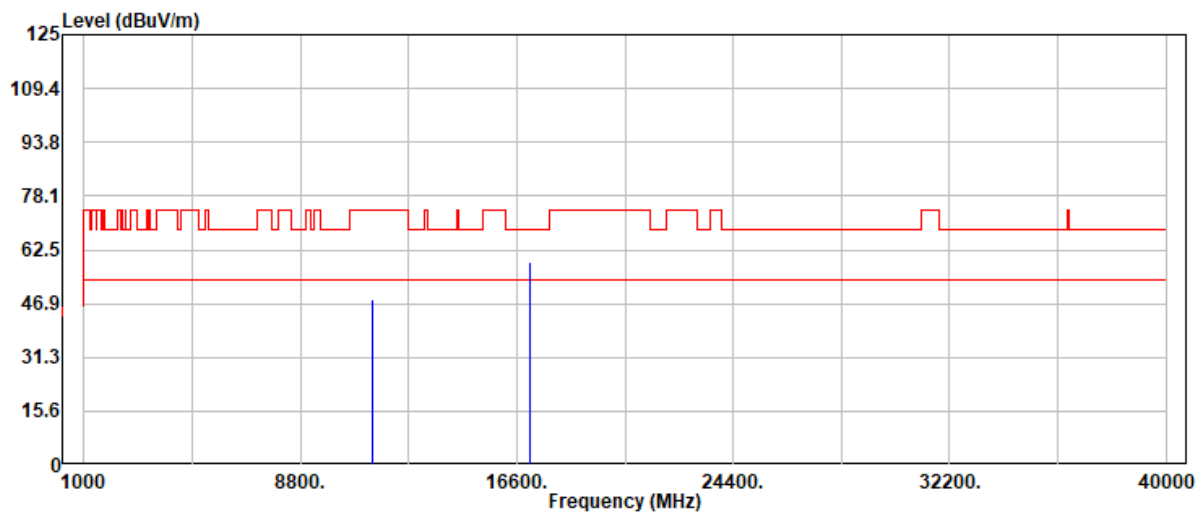


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11380.00	34.20	13.75	47.95	74.00	-26.05	Peak
11380.00	25.88	13.75	39.63	54.00	-14.37	Average
17070.00	32.86	26.09	58.95	68.20	-9.25	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 212 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ac80_Band3~4
Frequency : 5690 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

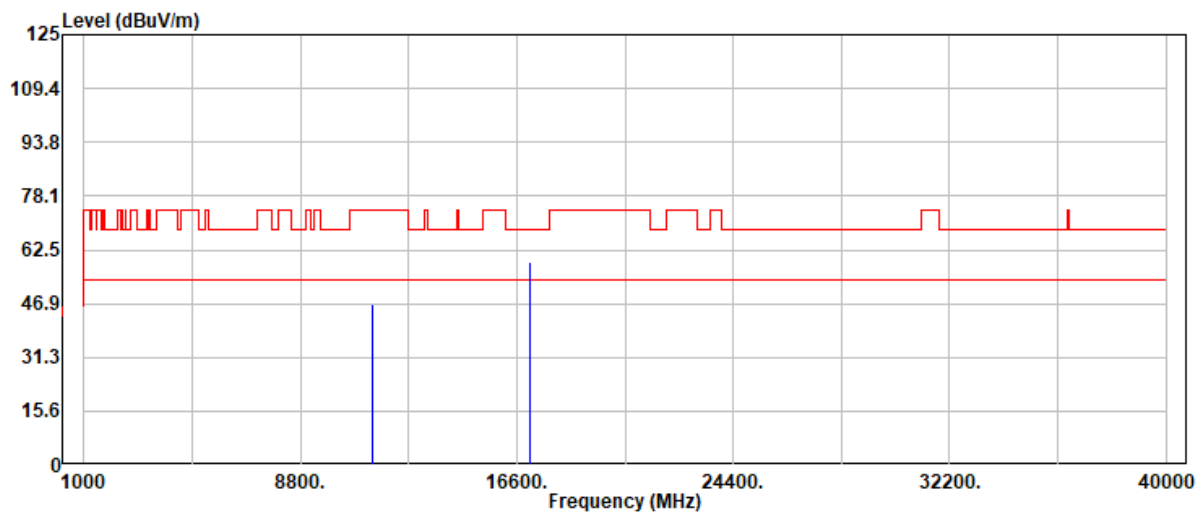


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11380.00	33.09	13.75	46.84	74.00	-27.16	Peak
11380.00	25.63	13.75	39.38	54.00	-14.62	Average
17070.00	32.88	26.09	58.97	68.20	-9.23	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 213 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax20_Band3
Frequency : 5500 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

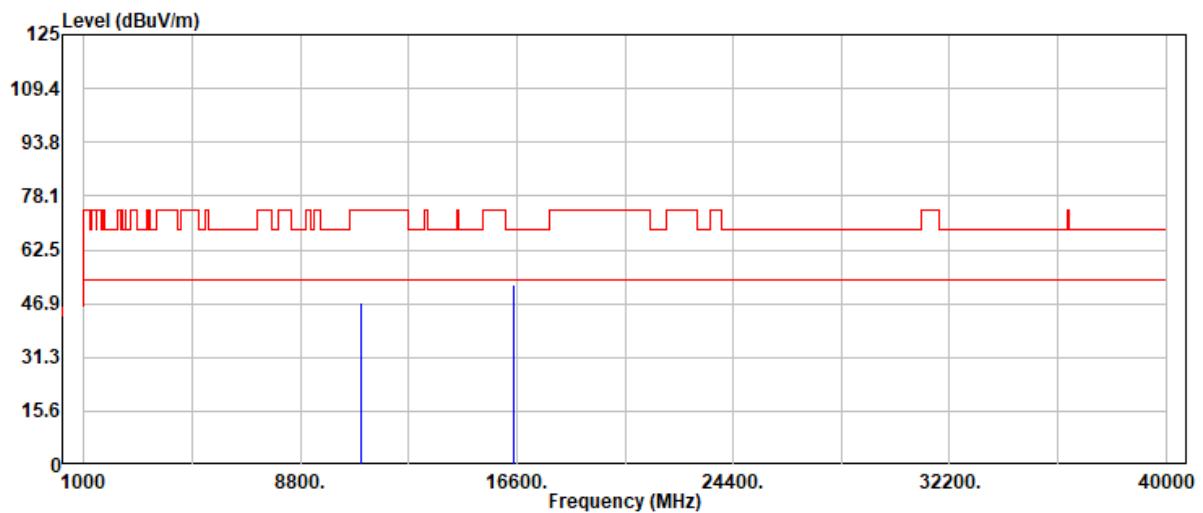


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11000.00	33.07	14.11	47.18	74.00	-26.82	Peak
11000.00	25.44	14.11	39.55	54.00	-14.45	Average
16500.00	32.35	19.86	52.21	68.20	-15.99	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 214 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax20_Band3
Frequency : 5500 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

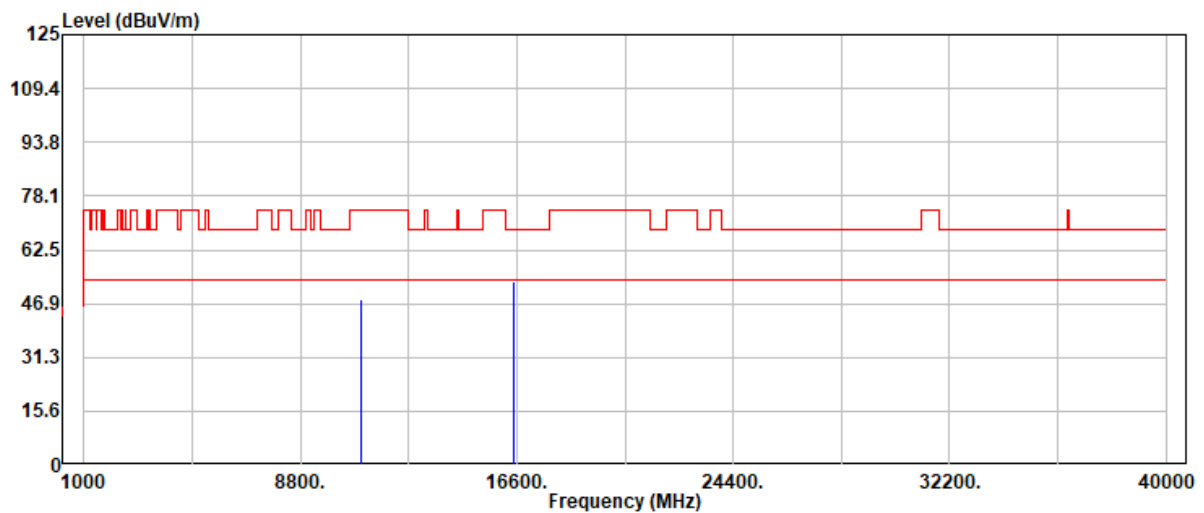


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11000.00	33.96	14.11	48.07	74.00	-25.93	Peak
11000.00	25.57	14.11	39.68	54.00	-14.32	Average
16500.00	33.50	19.86	53.36	68.20	-14.84	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 215 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax20_Band3
Frequency : 5600 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

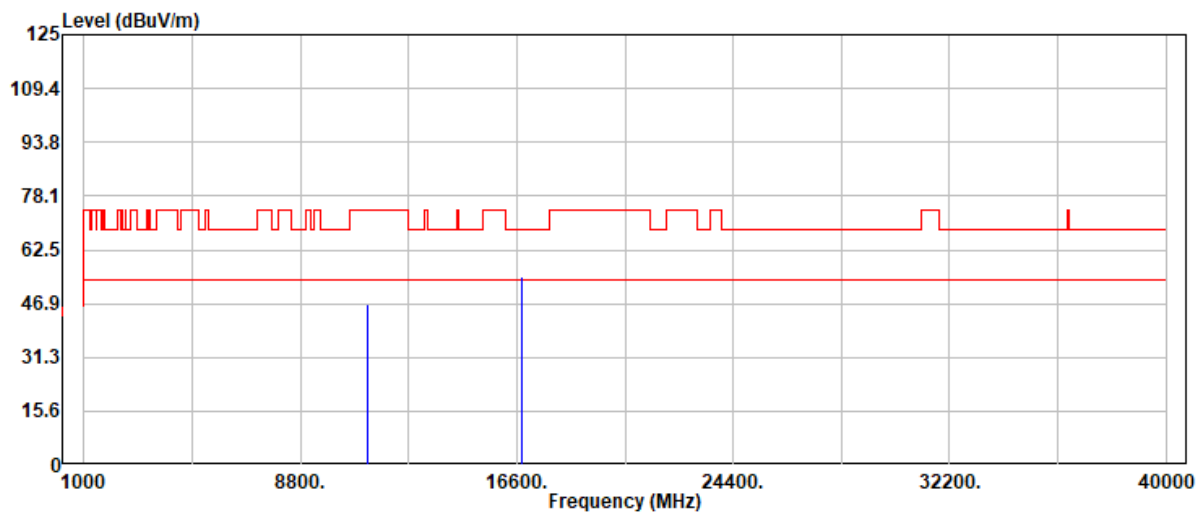


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11200.00	32.61	14.29	46.90	74.00	-27.10	Peak
11200.00	25.48	14.29	39.77	54.00	-14.23	Average
16800.00	32.48	22.23	54.71	68.20	-13.49	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 216 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax20_Band3
Frequency : 5600 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

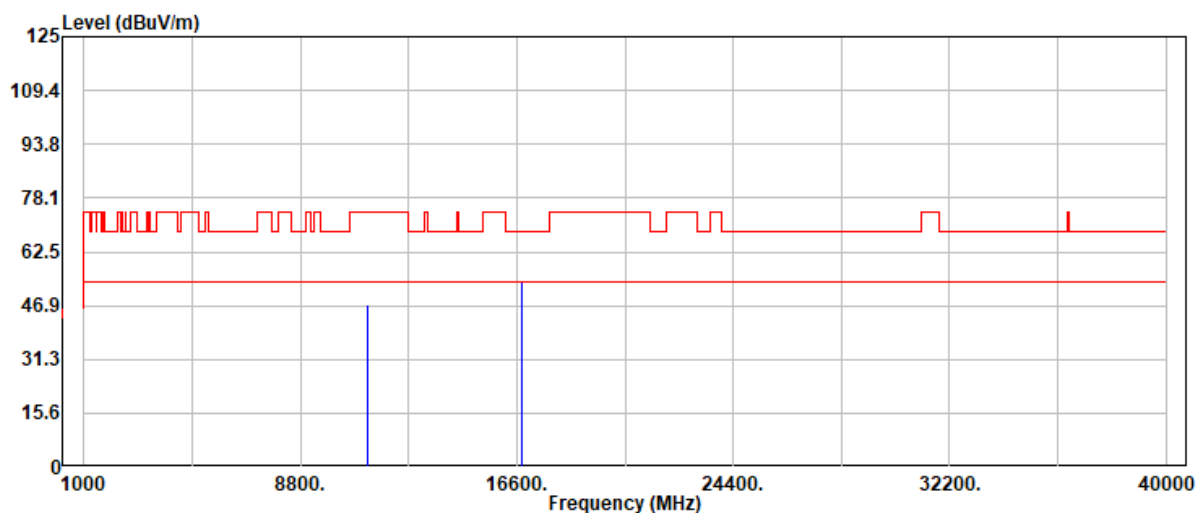


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11200.00	32.93	14.29	47.22	74.00	-26.78	Peak
11200.00	25.48	14.29	39.77	54.00	-14.23	Average
16800.00	31.77	22.23	54.00	68.20	-14.20	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 217 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax20_Band3~4
Frequency : 5720 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

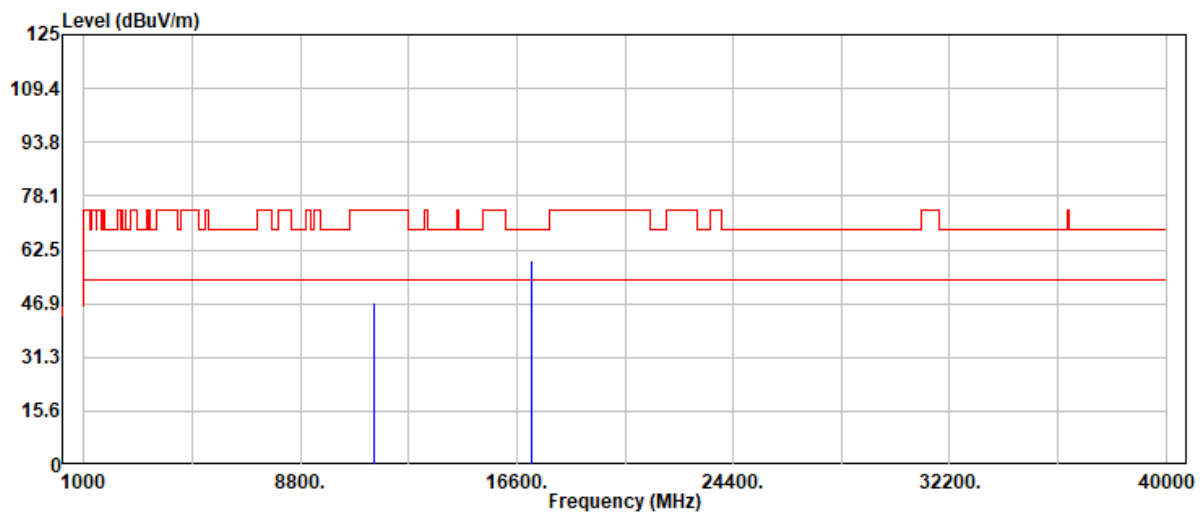


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11440.00	33.02	13.95	46.97	74.00	-27.03	Peak
11440.00	25.72	13.95	39.67	54.00	-14.33	Average
17160.00	32.85	26.57	59.42	68.20	-8.78	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 218 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax20_Band3~4
Frequency : 5720 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

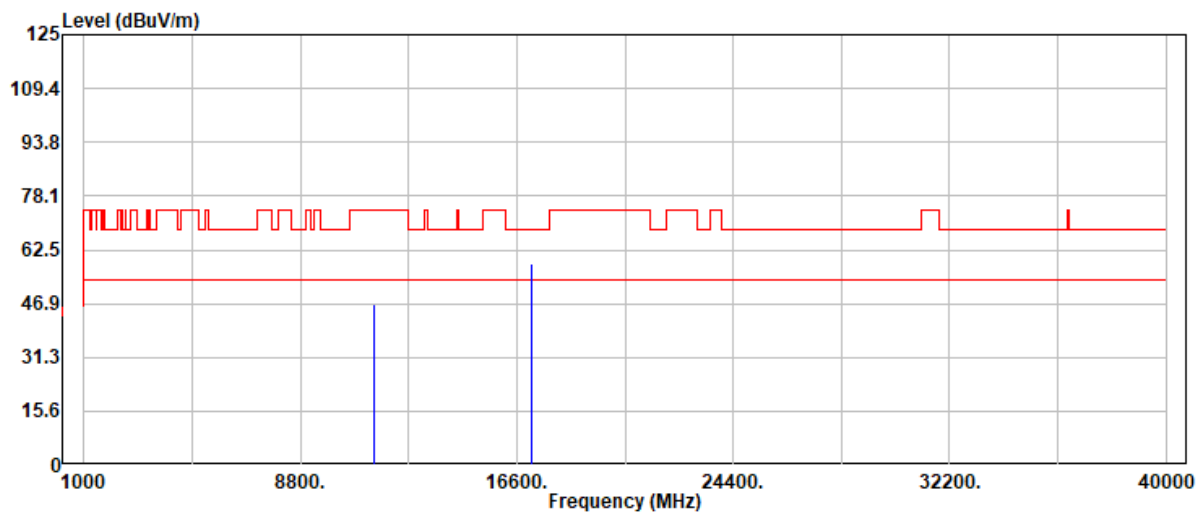


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11440.00	32.75	13.95	46.70	74.00	-27.30	Peak
11440.00	25.70	13.95	39.65	54.00	-14.35	Average
17160.00	31.92	26.57	58.49	68.20	-9.71	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 219 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax40_Band3
Frequency : 5510 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

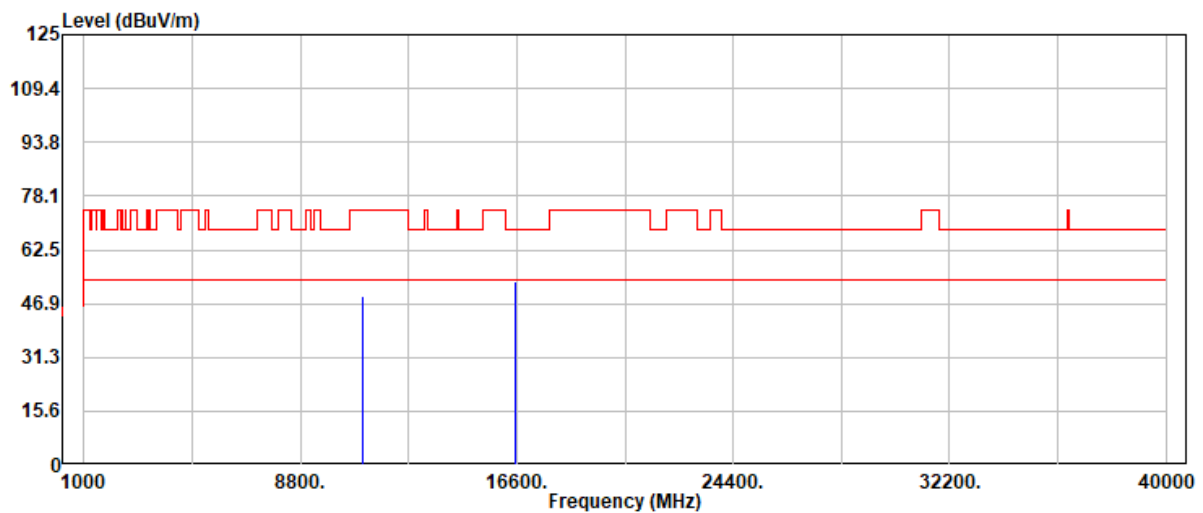


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11020.00	35.16	14.12	49.28	74.00	-24.72	Peak
11020.00	25.47	14.12	39.59	54.00	-14.41	Average
16530.00	33.47	19.80	53.27	68.20	-14.93	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 220 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax40_Band3
Frequency : 5510 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

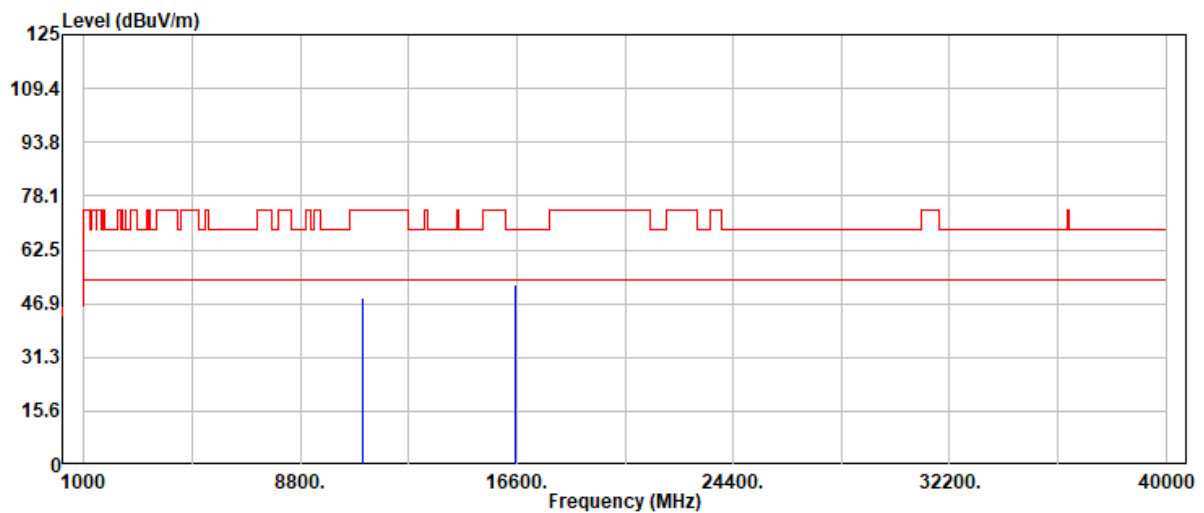


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11020.00	34.26	14.12	48.38	74.00	-25.62	Peak
11020.00	25.78	14.12	39.90	54.00	-14.10	Average
16530.00	32.42	19.80	52.22	68.20	-15.98	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 221 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax40_Band3
Frequency : 5630 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

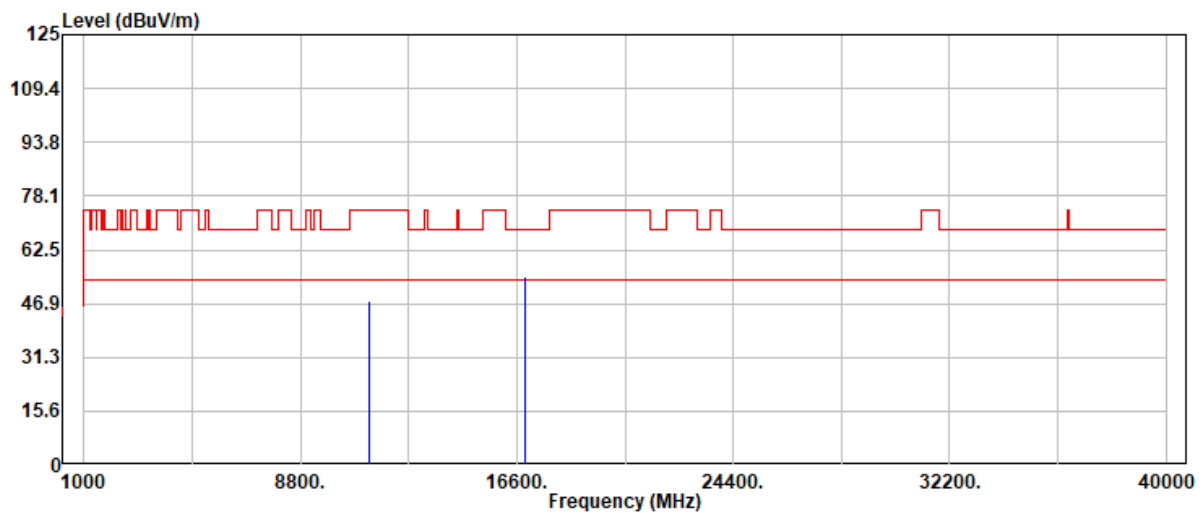


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11260.00	33.26	14.25	47.51	74.00	-26.49	Peak
11260.00	25.62	14.25	39.87	54.00	-14.13	Average
16890.00	31.69	22.99	54.68	68.20	-13.52	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 222 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax40_Band3
Frequency : 5630 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

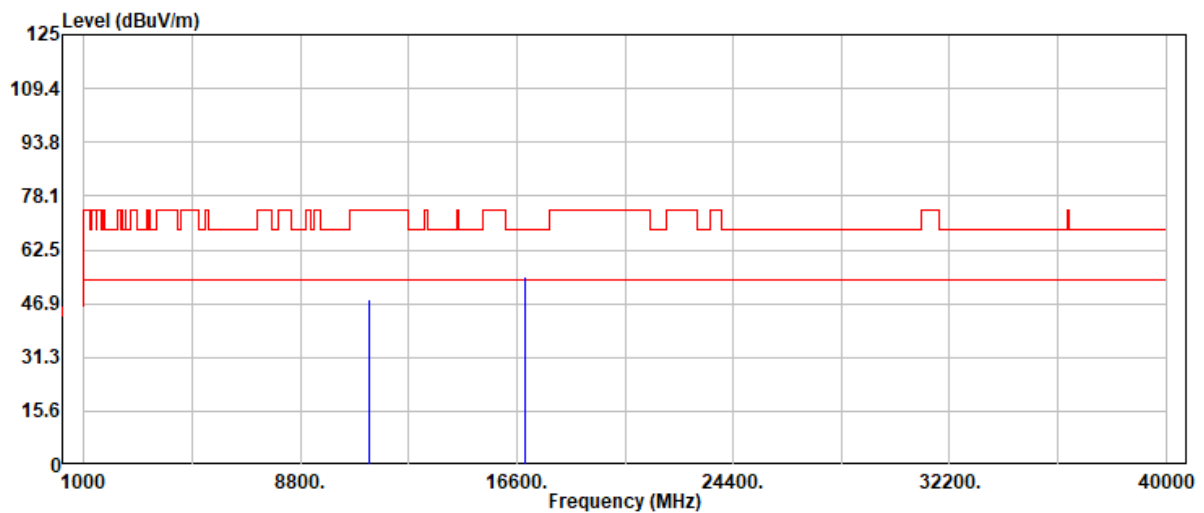


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11260.00	33.74	14.25	47.99	74.00	-26.01	Peak
11260.00	25.62	14.25	39.87	54.00	-14.13	Average
16890.00	31.61	22.99	54.60	68.20	-13.60	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 223 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax40_Band3~4
Frequency : 5710 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

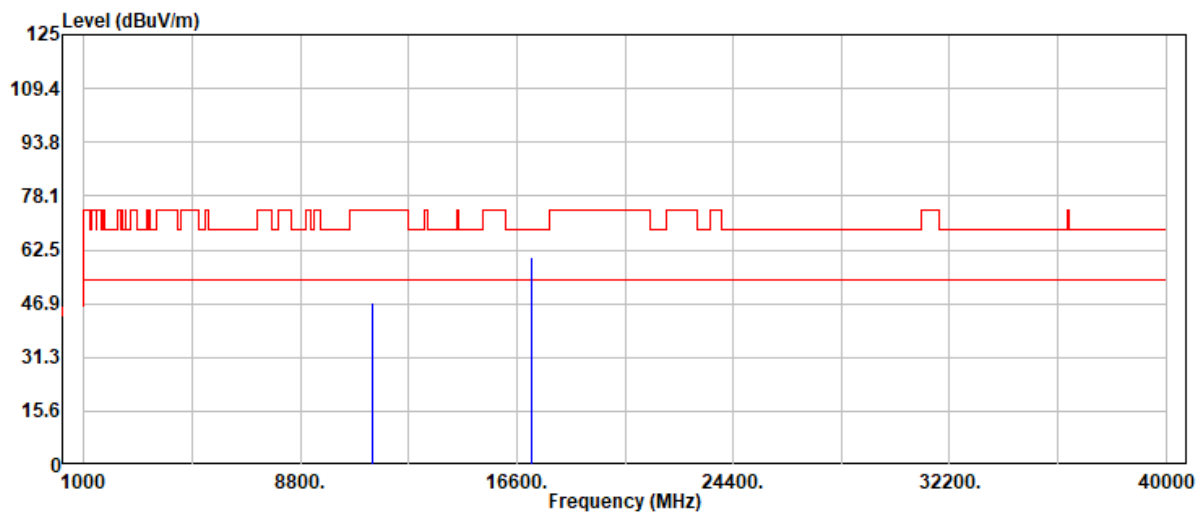


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11420.00	33.14	13.84	46.98	74.00	-27.02	Peak
11420.00	25.38	13.84	39.22	54.00	-14.78	Average
17130.00	33.75	26.54	60.29	68.20	-7.91	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 224 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax40_Band3~4
Frequency : 5710 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

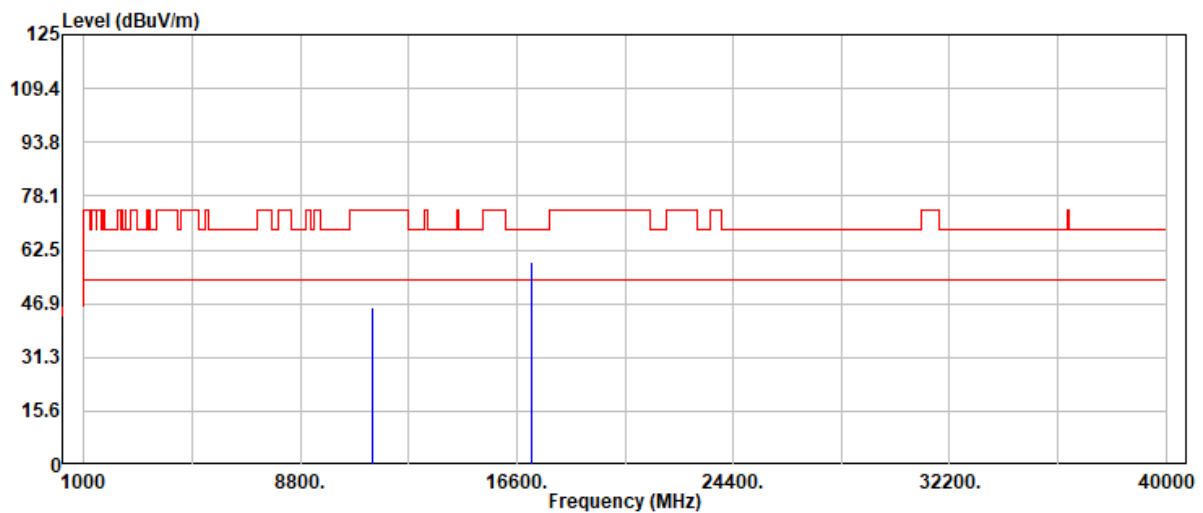


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11420.00	32.14	13.84	45.98	74.00	-28.02	Peak
11420.00	25.72	13.84	39.56	54.00	-14.44	Average
17130.00	32.50	26.54	59.04	68.20	-9.16	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 225 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax80_Band3
Frequency : 5530 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

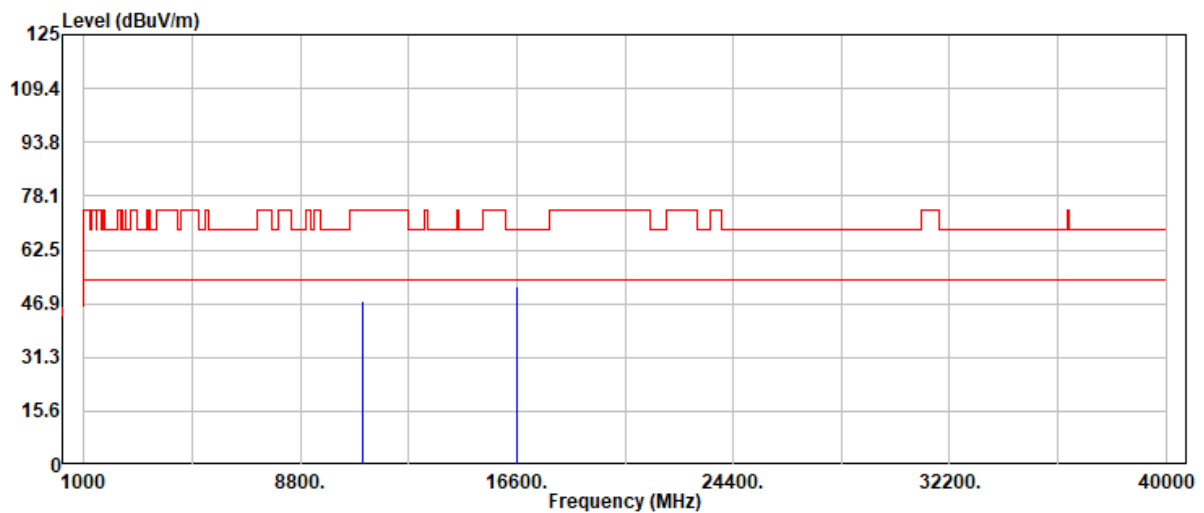


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11060.00	33.77	14.11	47.88	74.00	-26.12	Peak
11060.00	25.69	14.11	39.80	54.00	-14.20	Average
16590.00	32.05	19.88	51.93	68.20	-16.27	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 226 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax80_Band3
Frequency : 5530 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

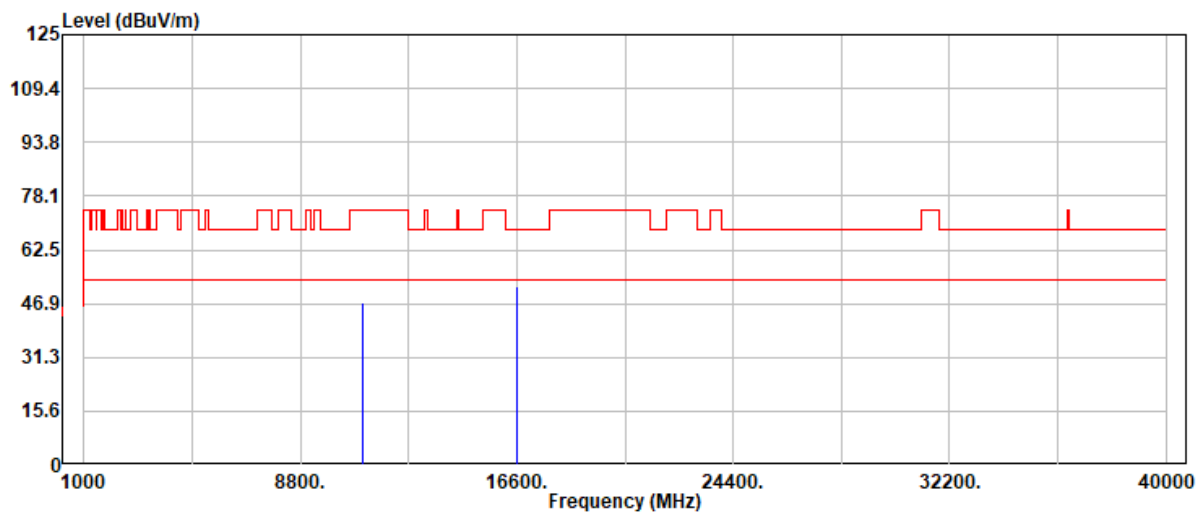


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11060.00	33.05	14.11	47.16	74.00	-26.84	Peak
11060.00	25.48	14.11	39.59	54.00	-14.41	Average
16590.00	31.80	19.88	51.68	68.20	-16.52	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 227 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax80_Band3
Frequency : 5610 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

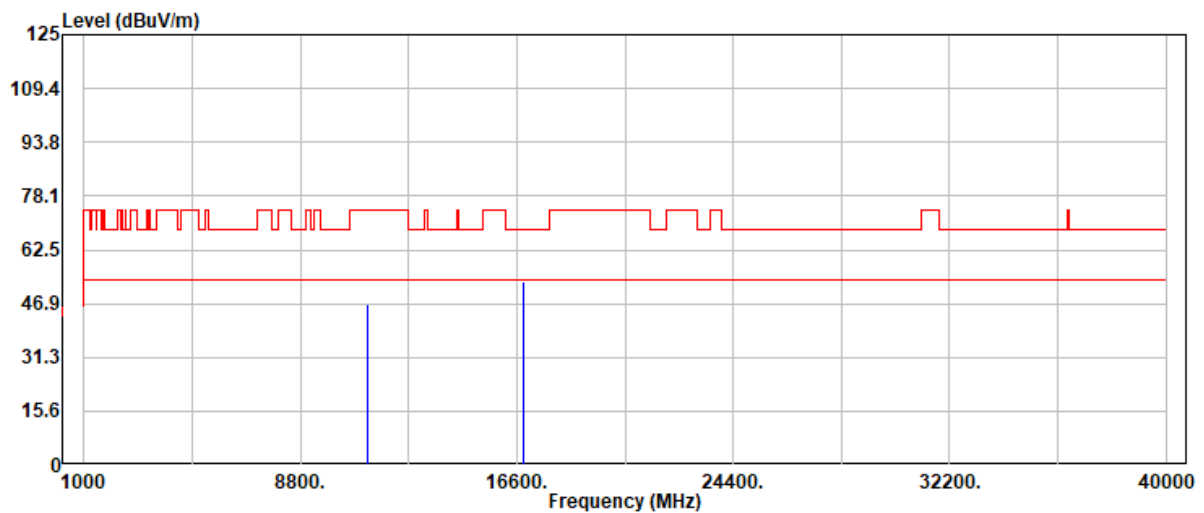


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11220.00	32.21	14.27	46.48	74.00	-27.52	Peak
11220.00	25.81	14.27	40.08	54.00	-13.92	Average
16830.00	30.73	22.52	53.25	68.20	-14.95	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 228 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax80_Band3
Frequency : 5610 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

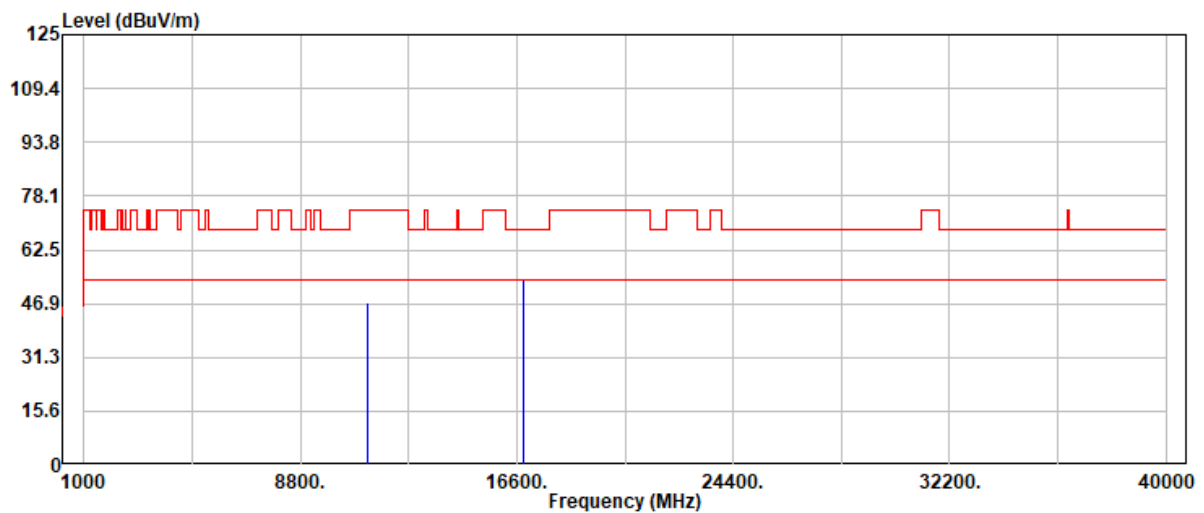


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11220.00	32.77	14.27	47.04	74.00	-26.96	Peak
11220.00	25.55	14.27	39.82	54.00	-14.18	Average
16830.00	31.32	22.52	53.84	68.20	-14.36	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 229 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax80_Band3~4
Frequency : 5690 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

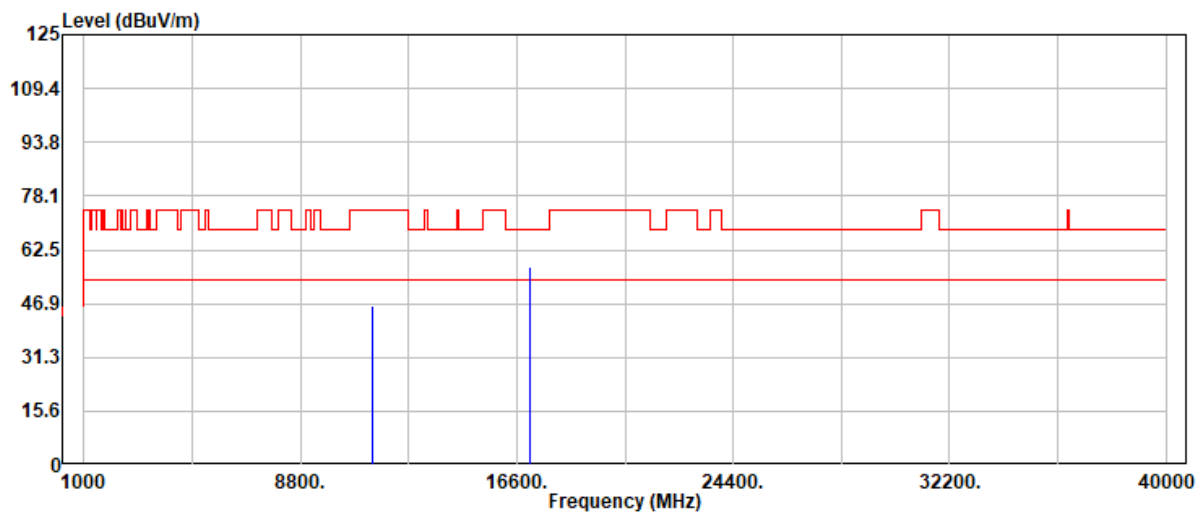


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11380.00	32.38	13.75	46.13	74.00	-27.87	Peak
11380.00	25.70	13.75	39.45	54.00	-14.55	Average
17070.00	31.62	26.09	57.71	68.20	-10.49	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 230 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax80_Band3~4
Frequency : 5690 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

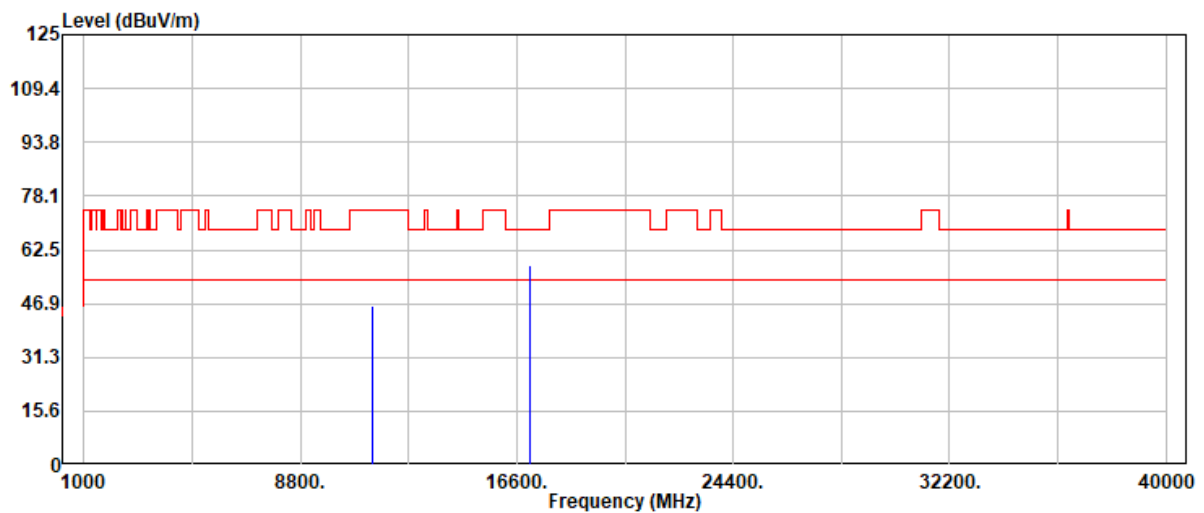


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11380.00	32.68	13.75	46.43	74.00	-27.57	Peak
11380.00	25.86	13.75	39.61	54.00	-14.39	Average
17070.00	32.05	26.09	58.14	68.20	-10.06	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 231 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax40_Band4
Frequency : 5795 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

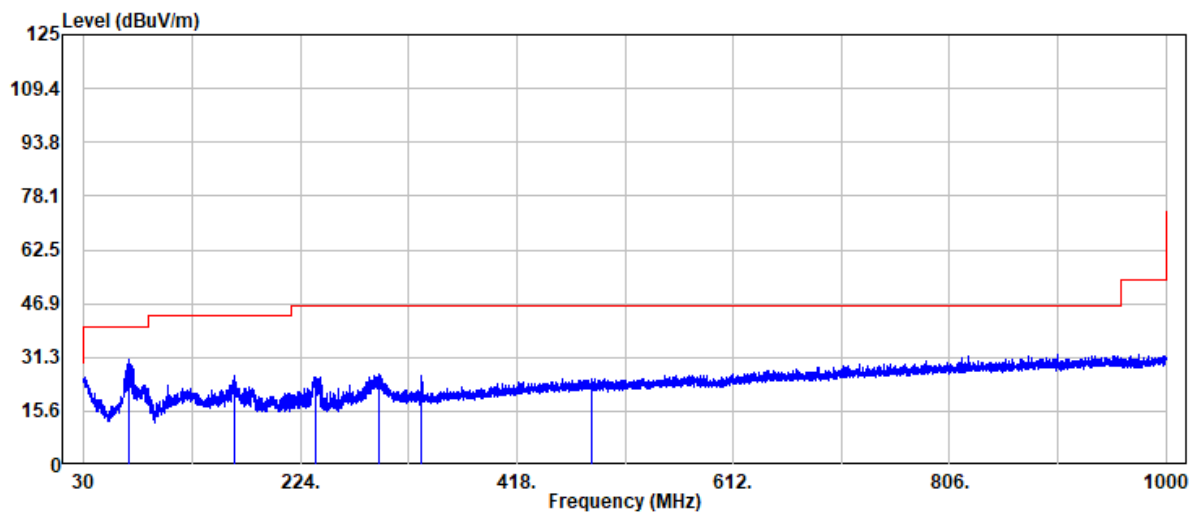


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
70.01	46.37	-15.81	30.56	40.00	-9.44	Peak
164.83	37.30	-11.41	25.89	43.50	-17.61	Peak
237.34	37.16	-11.53	25.63	46.00	-20.37	Peak
293.96	35.65	-9.42	26.23	46.00	-19.77	Peak
332.03	34.93	-8.79	26.14	46.00	-19.86	Peak
485.17	29.62	-4.44	25.18	46.00	-20.82	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 232 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax40_Band4
Frequency : 5795 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

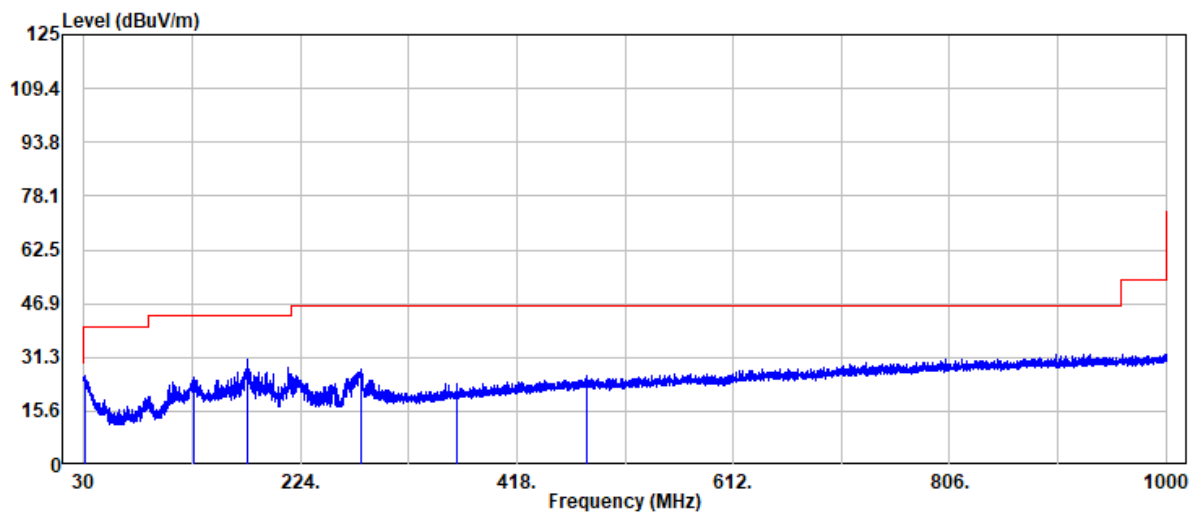


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	Level	-----	FS	@3m	-----	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
30.49	29.00	-3.11	25.89	40.00	-14.11	Peak
128.33	34.28	-9.68	24.60	43.50	-18.90	Peak
176.71	42.78	-12.02	30.76	43.50	-12.74	Peak
278.20	37.16	-9.51	27.65	46.00	-18.35	Peak
364.89	31.44	-7.85	23.59	46.00	-22.41	Peak
481.17	30.57	-4.48	26.09	46.00	-19.91	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 233 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11a_Band4_CH0
Frequency : 5745 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

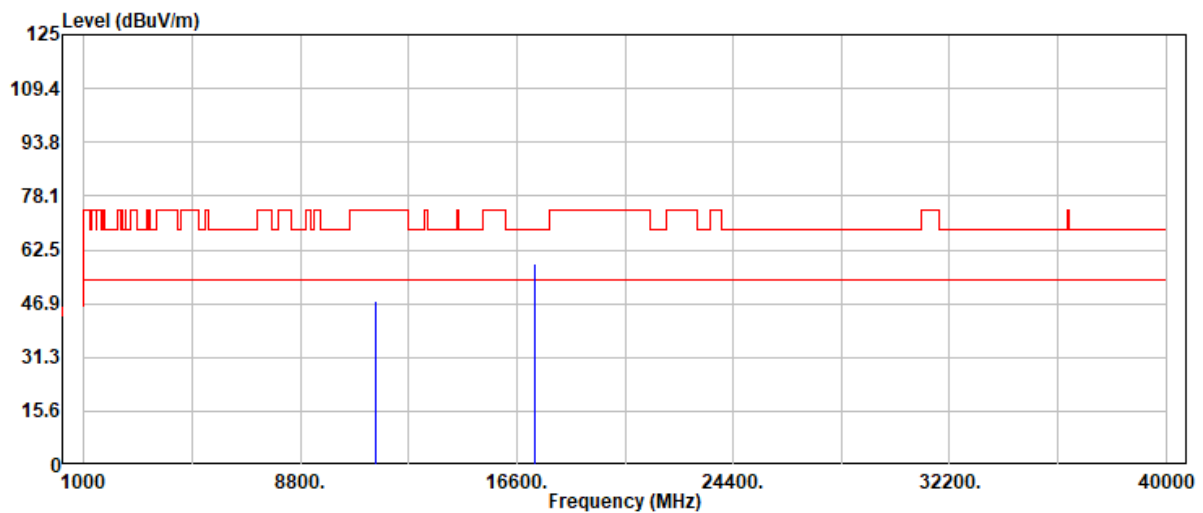


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11490.00	33.70	13.90	47.60	74.00	-26.40	Peak
11490.00	24.89	13.90	38.79	54.00	-15.21	Average
17235.00	32.00	26.38	58.38	68.20	-9.82	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 234 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11a_Band4_CH0
Frequency : 5745 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

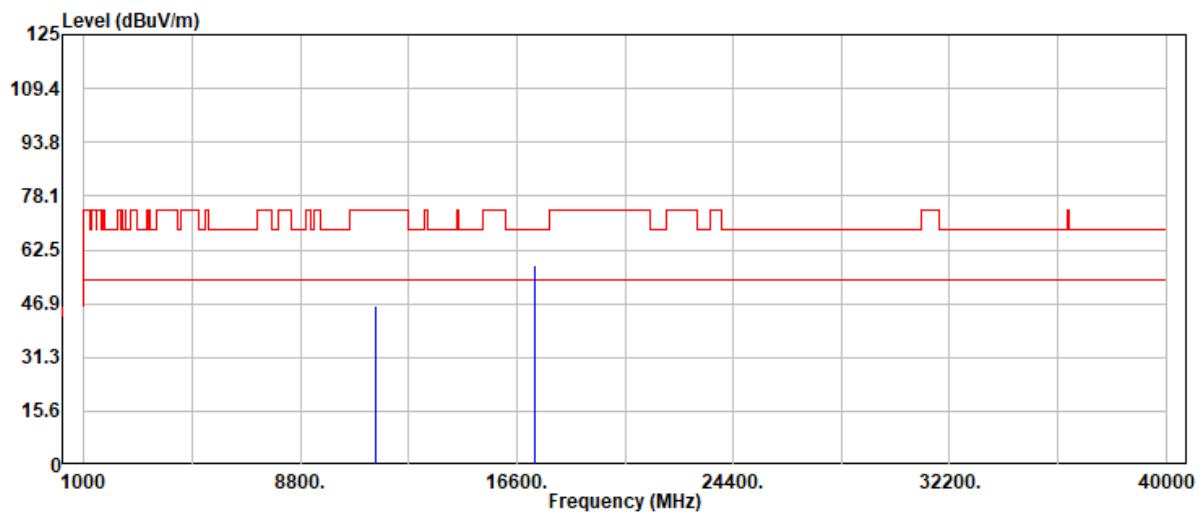


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11490.00	32.22	13.90	46.12	74.00	-27.88	Peak
11490.00	24.96	13.90	38.86	54.00	-15.14	Average
17235.00	31.50	26.38	57.88	68.20	-10.32	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 235 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11a_Band4_CH0
Frequency : 5785 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

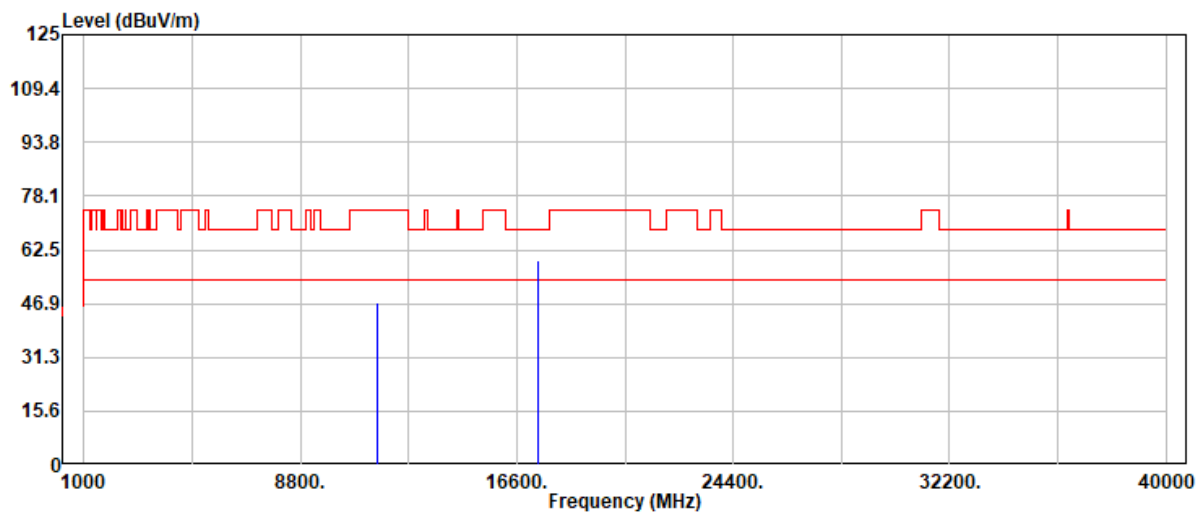


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11570.00	32.91	14.06	46.97	74.00	-27.03	Peak
11570.00	24.97	14.06	39.03	54.00	-14.97	Average
17355.00	33.08	26.57	59.65	68.20	-8.55	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 236 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11a_Band4_CH0
Frequency : 5785 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

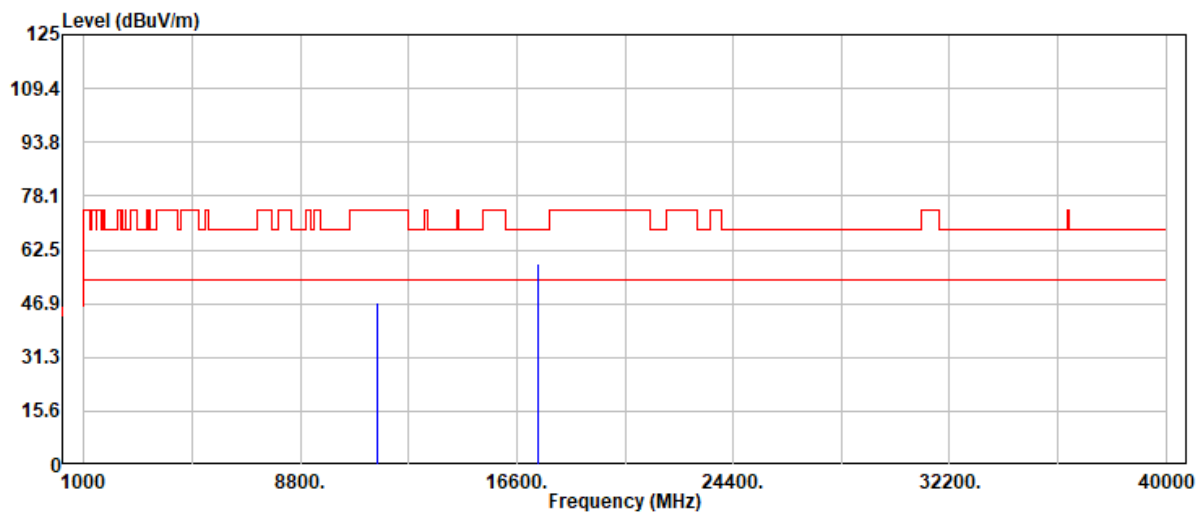


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11570.00	33.03	14.06	47.09	74.00	-26.91	Peak
11570.00	25.26	14.06	39.32	54.00	-14.68	Average
17355.00	32.03	26.57	58.60	68.20	-9.60	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 237 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11a_Band4_CH0
Frequency : 5825 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

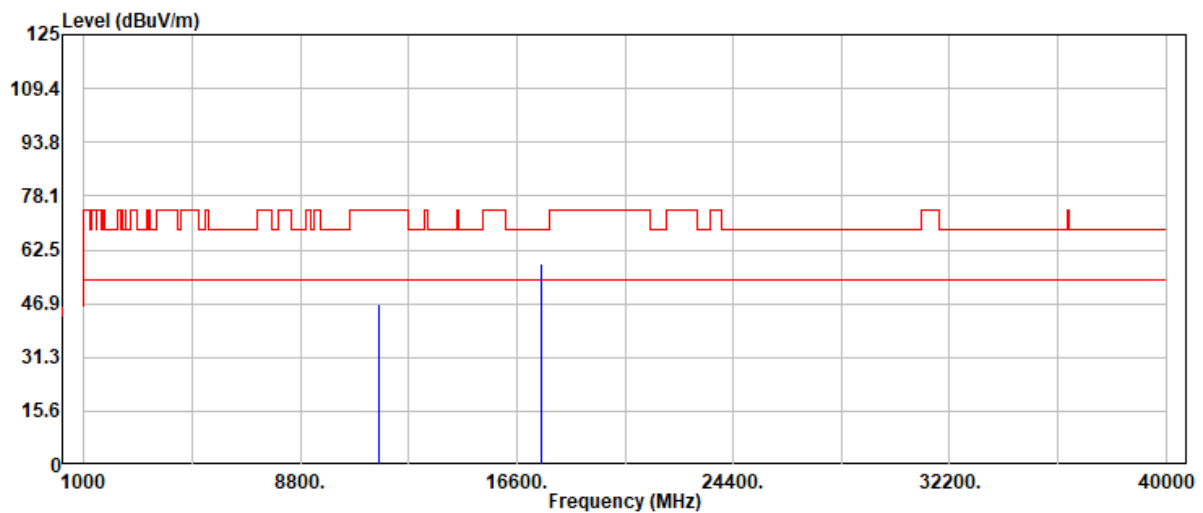


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11650.00	32.75	13.80	46.55	74.00	-27.45	Peak
11650.00	25.53	13.80	39.33	54.00	-14.67	Average
17475.00	32.43	26.16	58.59	68.20	-9.61	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 238 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11a_Band4_CH0
Frequency : 5825 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

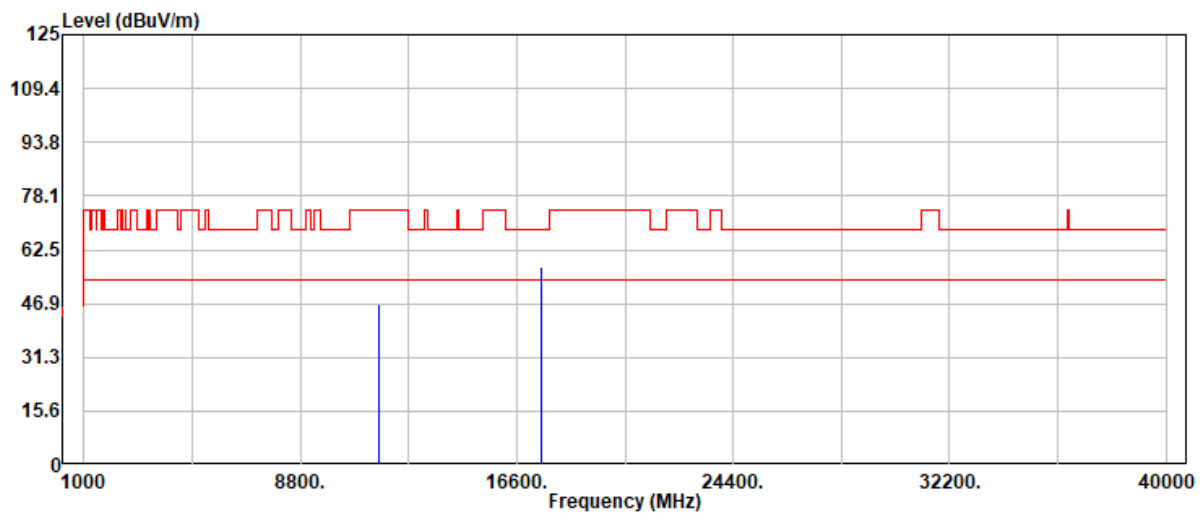


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11650.00	32.93	13.80	46.73	74.00	-27.27	Peak
11650.00	25.71	13.80	39.51	54.00	-14.49	Average
17475.00	31.36	26.16	57.52	68.20	-10.68	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 239 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11n20_Band4
Frequency : 5745 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

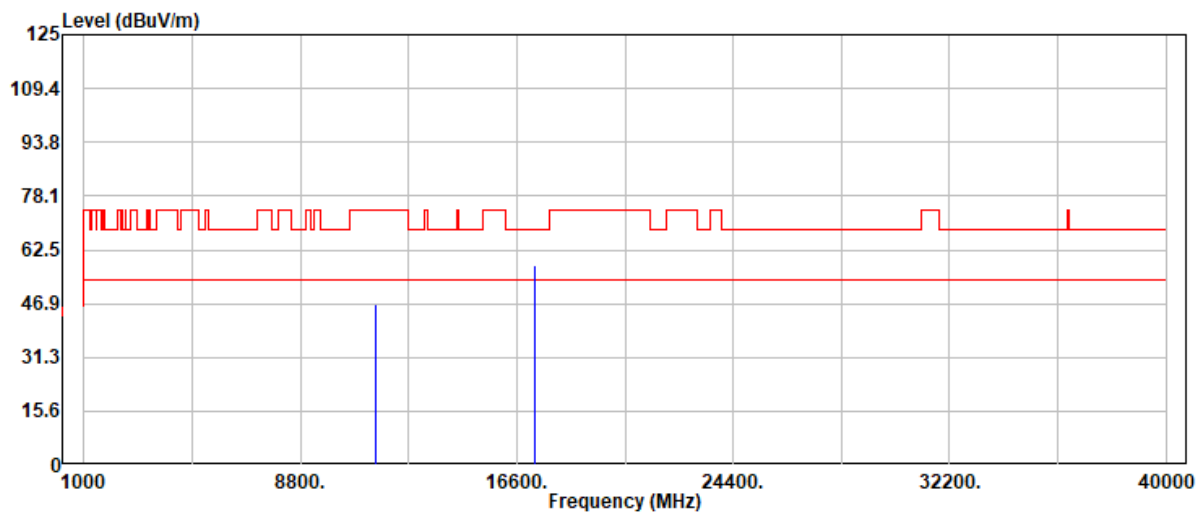


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11490.00	32.78	13.90	46.68	74.00	-27.32	Peak
11490.00	25.76	13.90	39.66	54.00	-14.34	Average
17235.00	31.67	26.38	58.05	68.20	-10.15	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 240 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11n20_Band4
Frequency : 5745 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

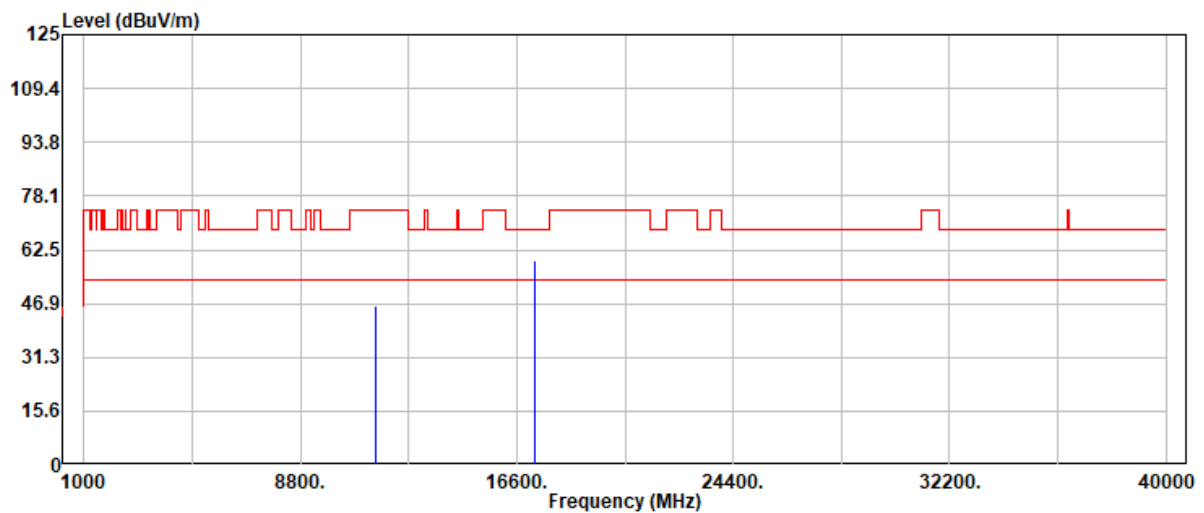


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11490.00	32.29	13.90	46.19	74.00	-27.81	Peak
11490.00	25.69	13.90	39.59	54.00	-14.41	Average
17235.00	32.88	26.38	59.26	68.20	-8.94	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 241 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11n20_Band4
Frequency : 5785 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

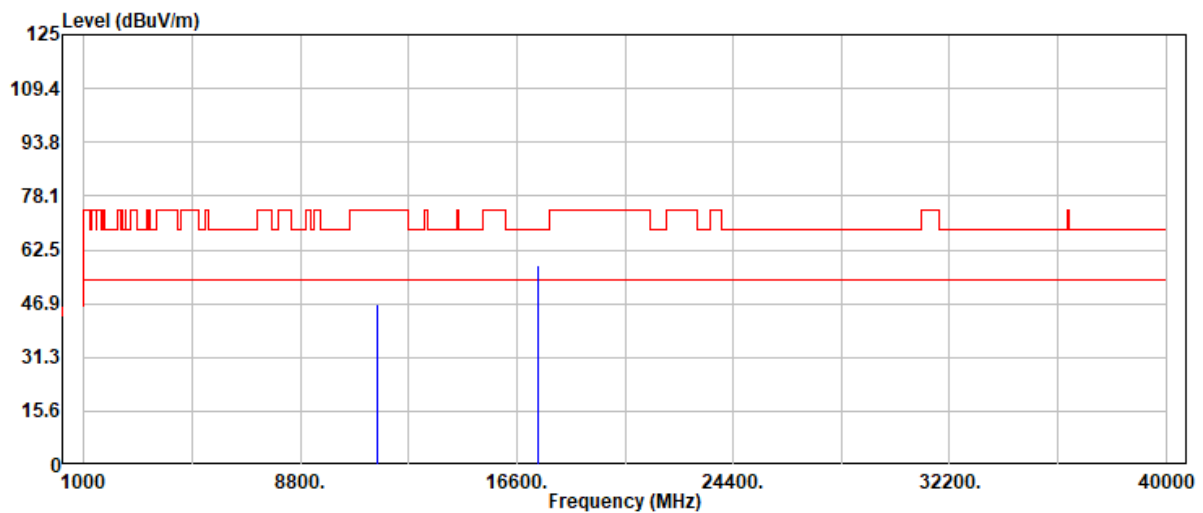


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11570.00	32.54	14.06	46.60	74.00	-27.40	Peak
11570.00	25.47	14.06	39.53	54.00	-14.47	Average
17355.00	31.60	26.57	58.17	68.20	-10.03	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 242 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11n20_Band4
Frequency : 5785 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-04
Temp./Humi. : 25.6/56
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

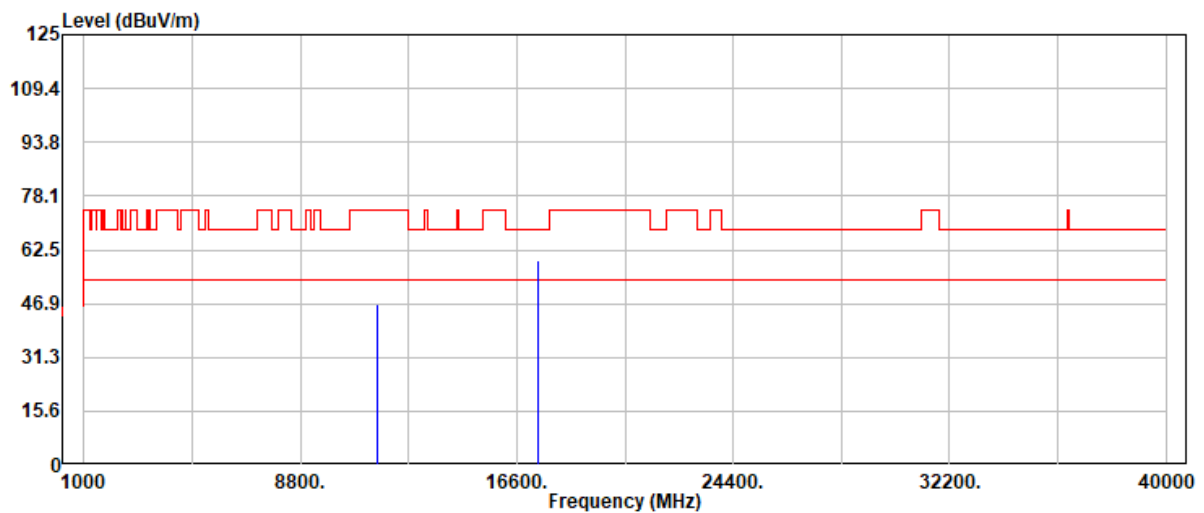


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11570.00	32.61	14.06	46.67	74.00	-27.33	Peak
11570.00	25.41	14.06	39.47	54.00	-14.53	Average
17355.00	32.81	26.57	59.38	68.20	-8.82	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 243 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11n20_Band4
Frequency : 5825 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

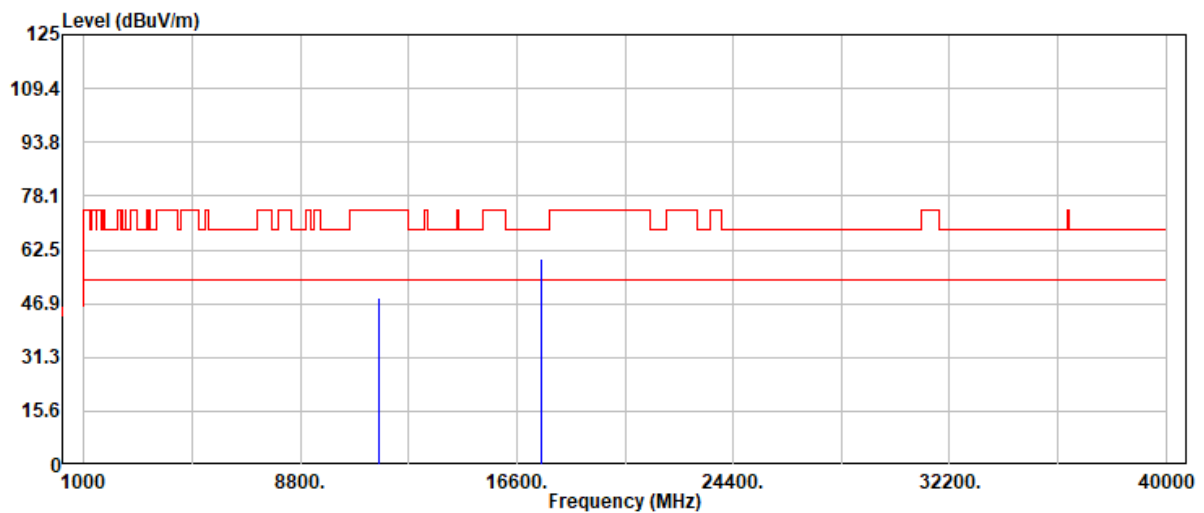


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11650.00	34.77	13.80	48.57	74.00	-25.43	Peak
11650.00	25.48	13.80	39.28	54.00	-14.72	Average
17475.00	33.91	26.16	60.07	68.20	-8.13	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 244 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11n20_Band4
Frequency : 5825 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

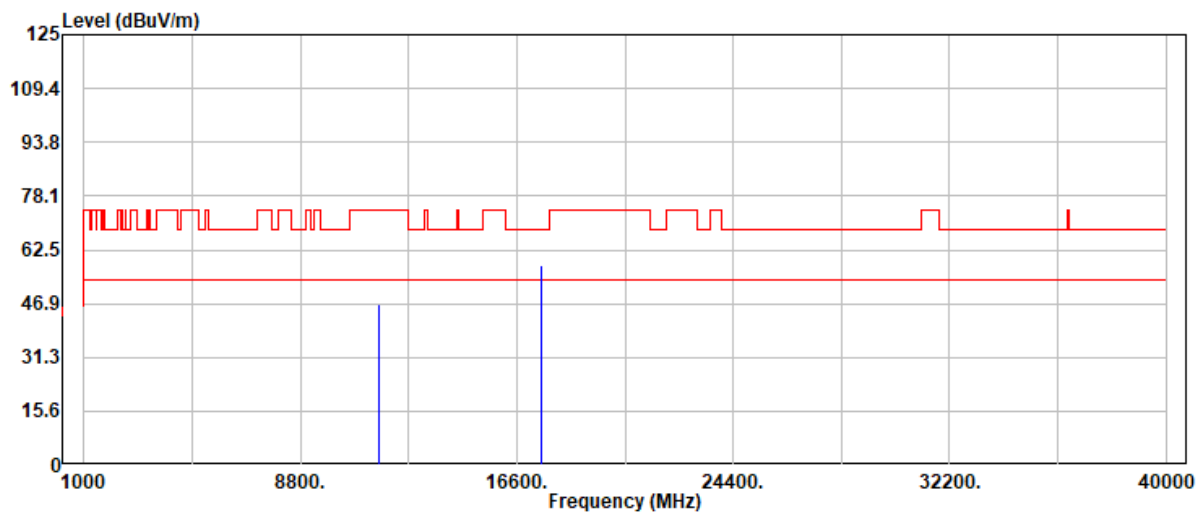


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11650.00	32.76	13.80	46.56	74.00	-27.44	Peak
11650.00	24.80	13.80	38.60	54.00	-15.40	Average
17475.00	31.83	26.16	57.99	68.20	-10.21	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 245 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11n40_Band4
Frequency : 5755 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

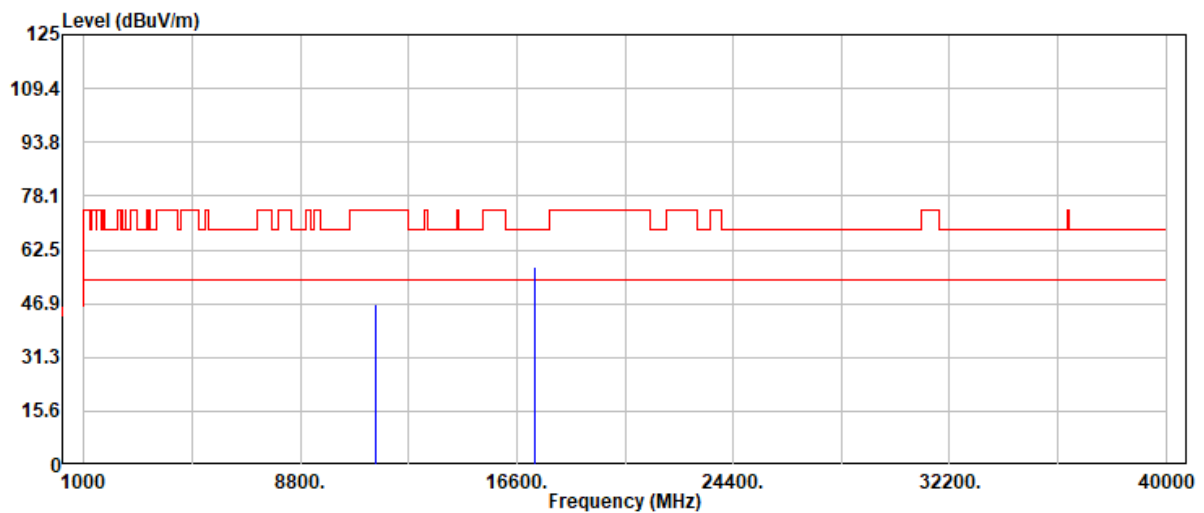


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11510.00	32.79	13.91	46.70	74.00	-27.30	Peak
11510.00	25.85	13.91	39.76	54.00	-14.24	Average
17265.00	31.21	26.56	57.77	68.20	-10.43	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 246 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11n40_Band4
Frequency : 5755 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

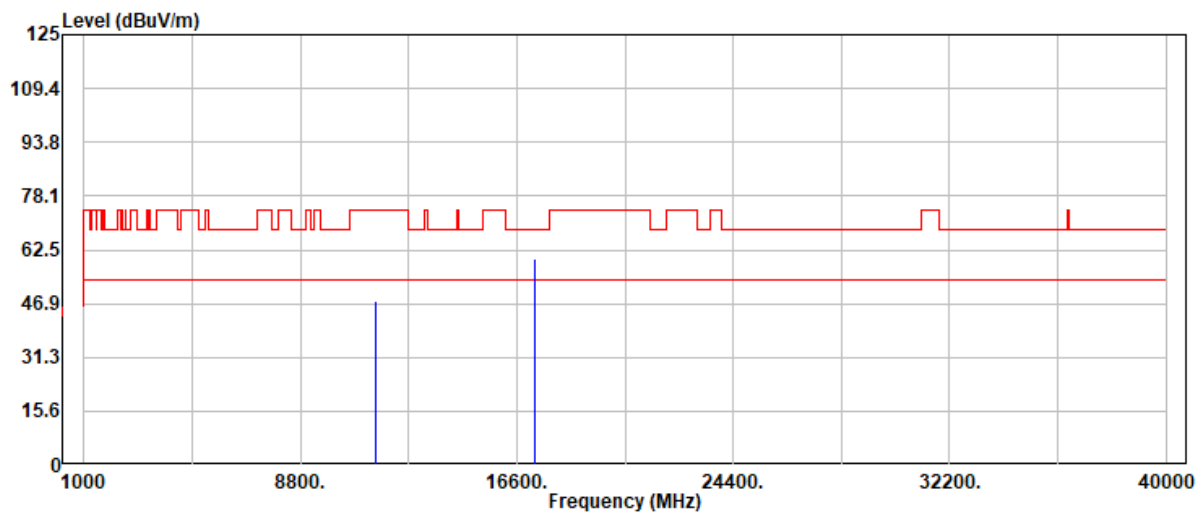


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11510.00	33.80	13.91	47.71	74.00	-26.29	Peak
11510.00	25.69	13.91	39.60	54.00	-14.40	Average
17265.00	33.12	26.56	59.68	68.20	-8.52	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 247 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11n40_Band4
Frequency : 5795 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

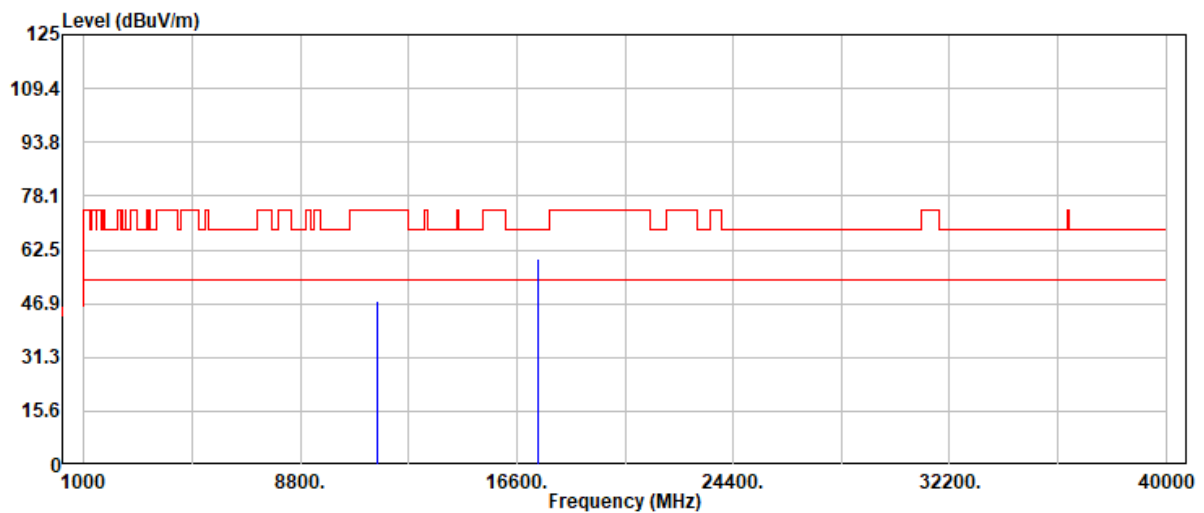


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11590.00	33.51	14.09	47.60	74.00	-26.40	Peak
11590.00	25.26	14.09	39.35	54.00	-14.65	Average
17385.00	33.10	26.58	59.68	68.20	-8.52	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 248 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11n40_Band4
Frequency : 5795 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

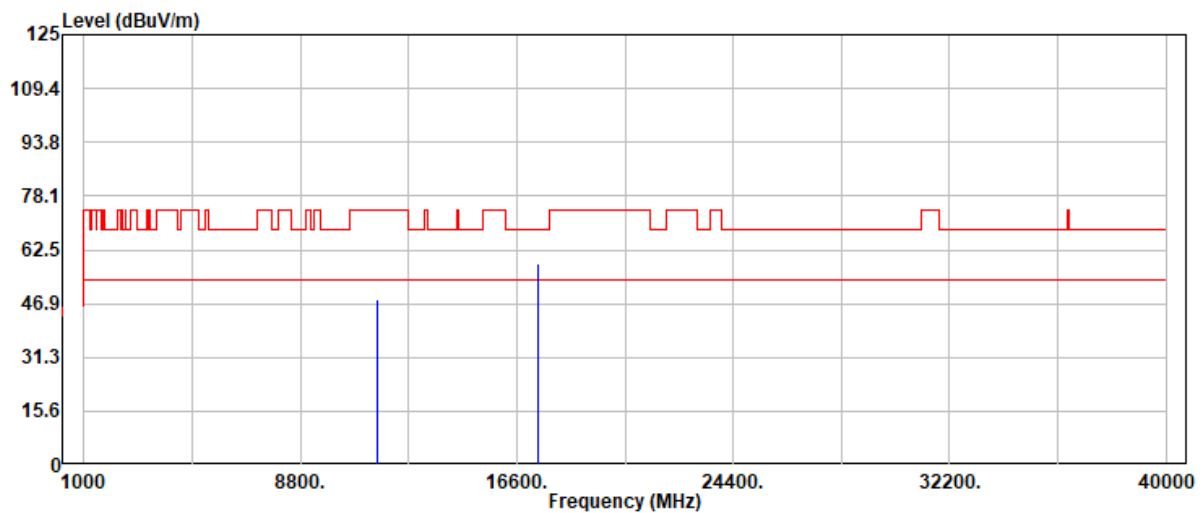


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11590.00	34.20	14.09	48.29	74.00	-25.71	Peak
11590.00	24.98	14.09	39.07	54.00	-14.93	Average
17385.00	31.76	26.58	58.34	68.20	-9.86	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 249 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ac80_Band4
Frequency : 5775 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

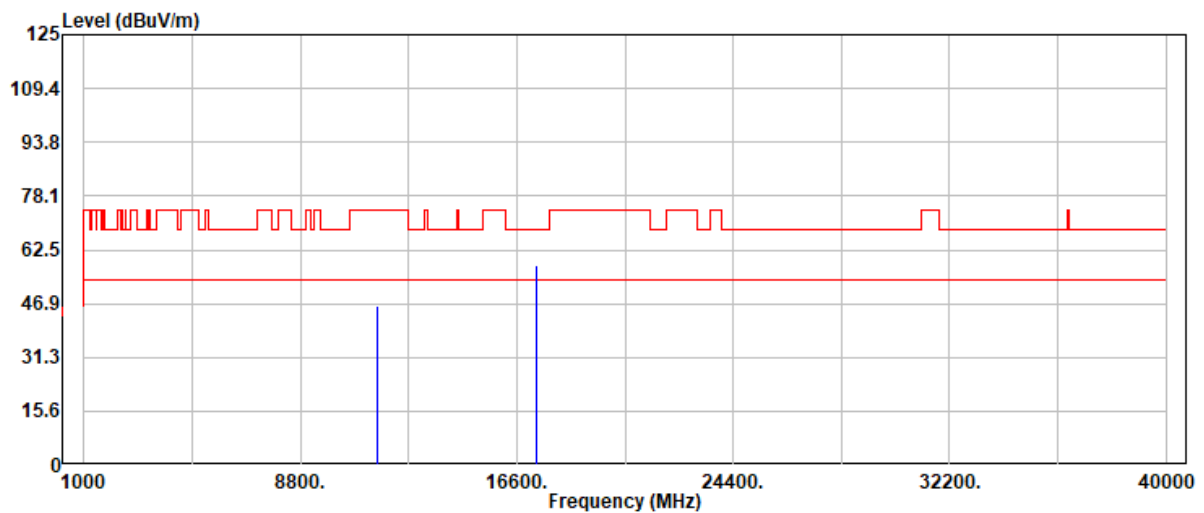


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11550.00	32.40	14.03	46.43	74.00	-27.57	Peak
11550.00	25.41	14.03	39.44	54.00	-14.56	Average
17325.00	31.41	26.67	58.08	68.20	-10.12	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 250 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ac80_Band4
Frequency : 5775 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

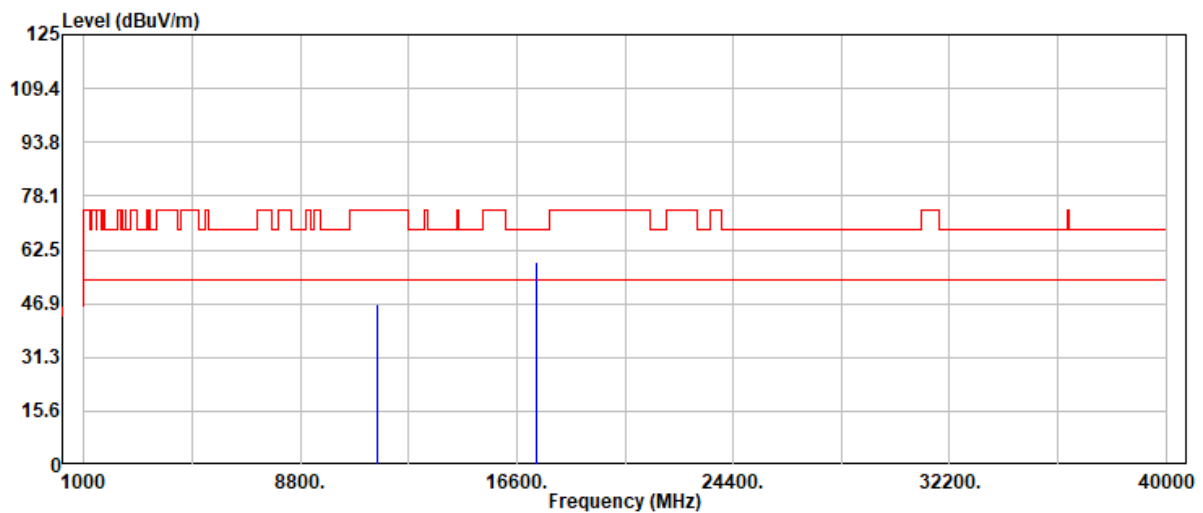


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11550.00	32.67	14.03	46.70	74.00	-27.30	Peak
11550.00	25.49	14.03	39.52	54.00	-14.48	Average
17325.00	32.39	26.67	59.06	68.20	-9.14	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 251 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax20_Band4
Frequency : 5745 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

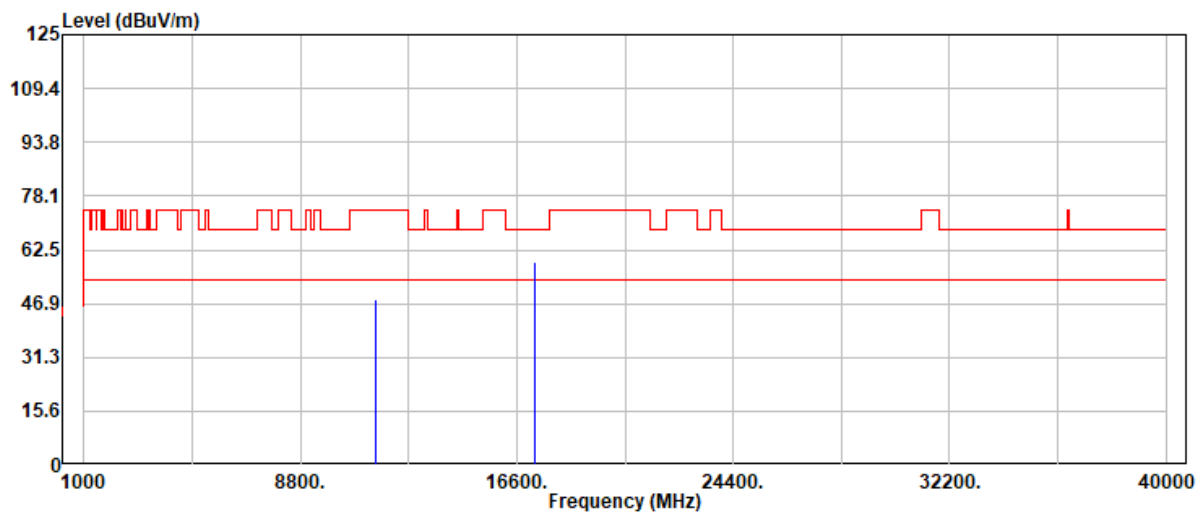


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11490.00	34.15	13.90	48.05	74.00	-25.95	Peak
11490.00	25.50	13.90	39.40	54.00	-14.60	Average
17235.00	32.59	26.38	58.97	68.20	-9.23	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 252 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax20_Band4
Frequency : 5745 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

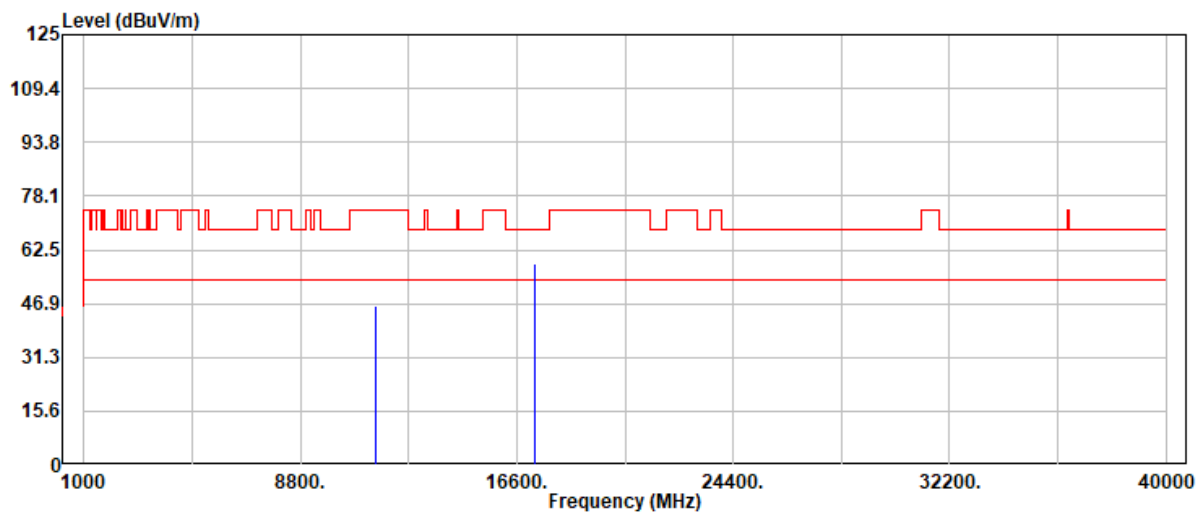


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11490.00	32.18	13.90	46.08	74.00	-27.92	Peak
11490.00	25.81	13.90	39.71	54.00	-14.29	Average
17235.00	32.00	26.38	58.38	68.20	-9.82	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 253 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax20_Band4
Frequency : 5785 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

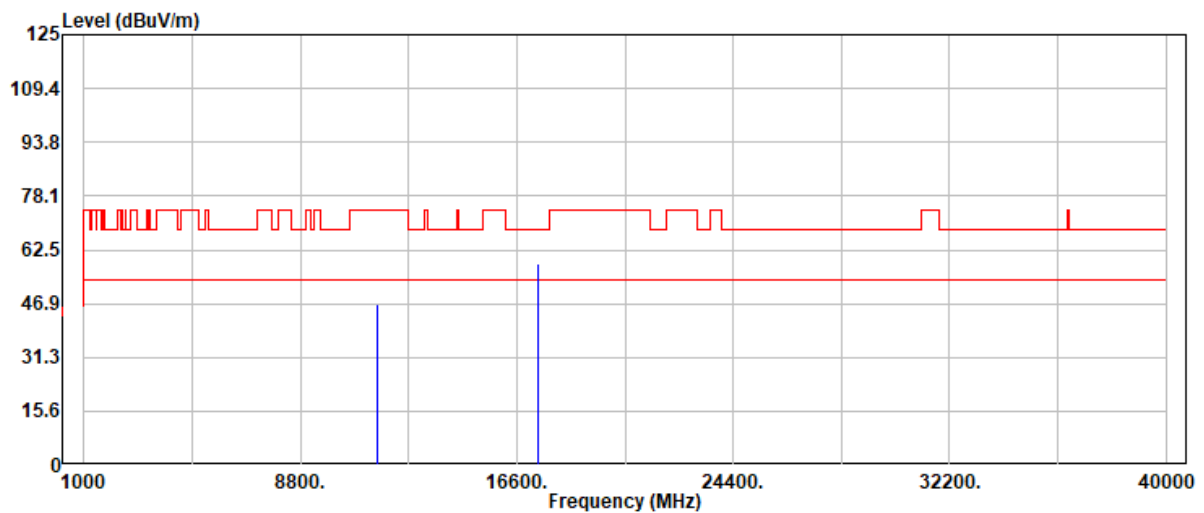


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11570.00	32.42	14.06	46.48	74.00	-27.52	Peak
11570.00	25.49	14.06	39.55	54.00	-14.45	Average
17355.00	31.99	26.57	58.56	68.20	-9.64	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 254 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax20_Band4
Frequency : 5785 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

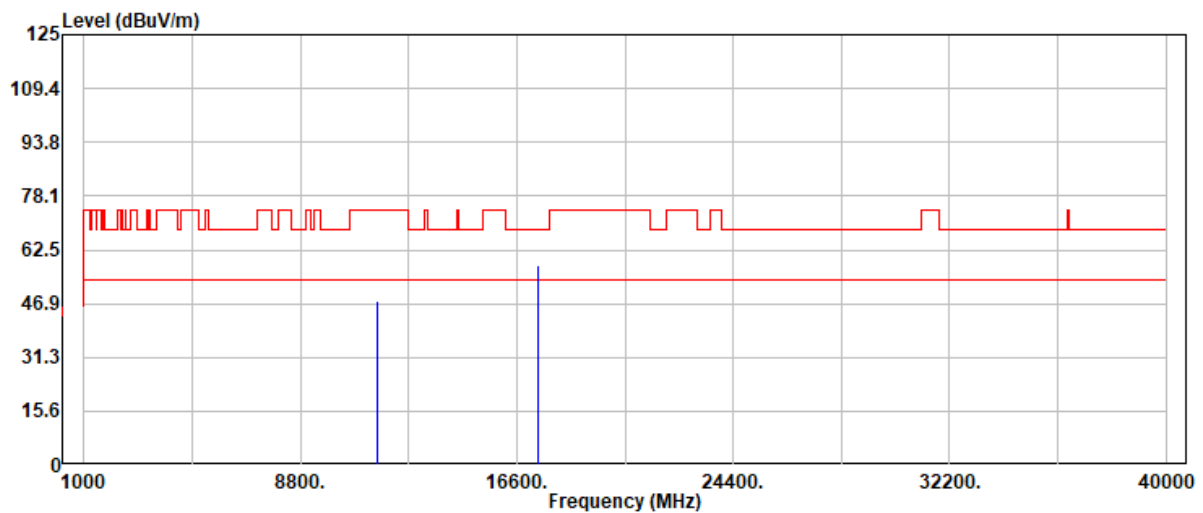


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11570.00	33.59	14.06	47.65	74.00	-26.35	Peak
11570.00	25.77	14.06	39.83	54.00	-14.17	Average
17355.00	31.37	26.57	57.94	68.20	-10.26	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 255 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax20_Band4
Frequency : 5825 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

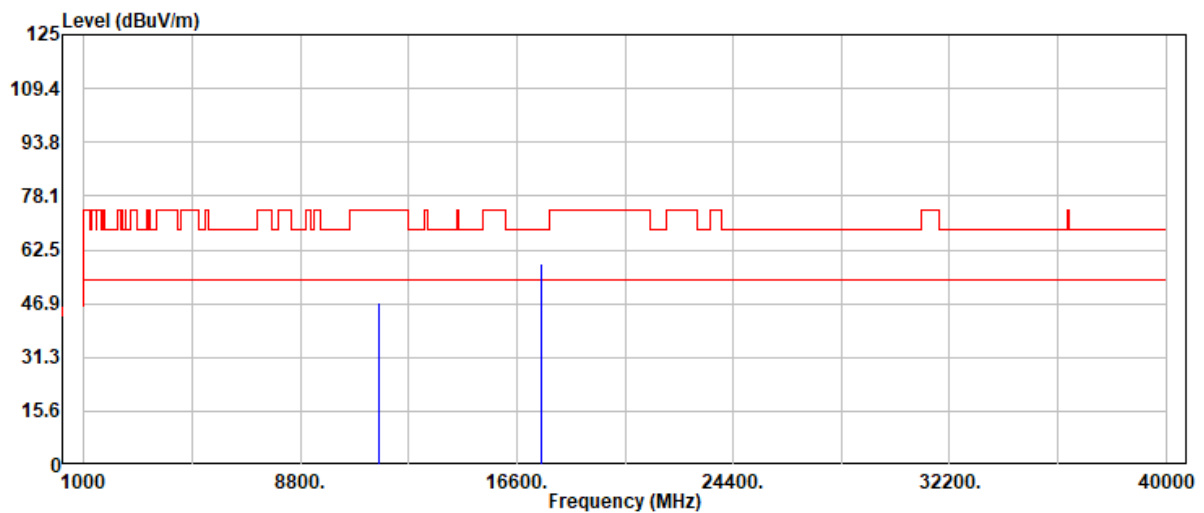


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11650.00	33.60	13.80	47.40	74.00	-26.60	Peak
11650.00	25.82	13.80	39.62	54.00	-14.38	Average
17475.00	32.33	26.16	58.49	68.20	-9.71	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 256 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax20_Band4
Frequency : 5825 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

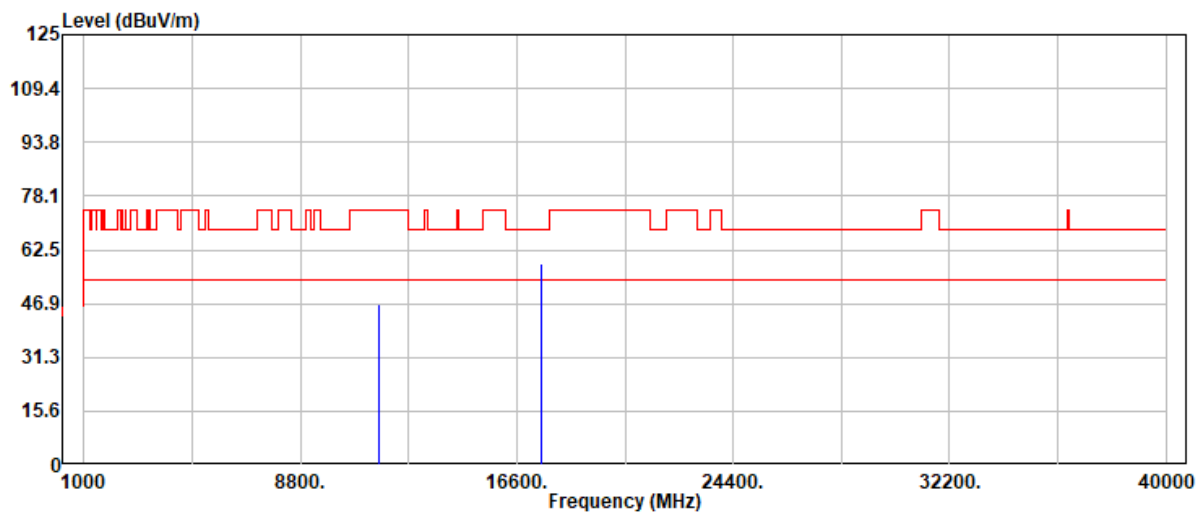


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11650.00	32.71	13.80	46.51	74.00	-27.49	Peak
11650.00	25.82	13.80	39.62	54.00	-14.38	Average
17475.00	32.43	26.16	58.59	68.20	-9.61	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 257 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax40_Band4
Frequency : 5755 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

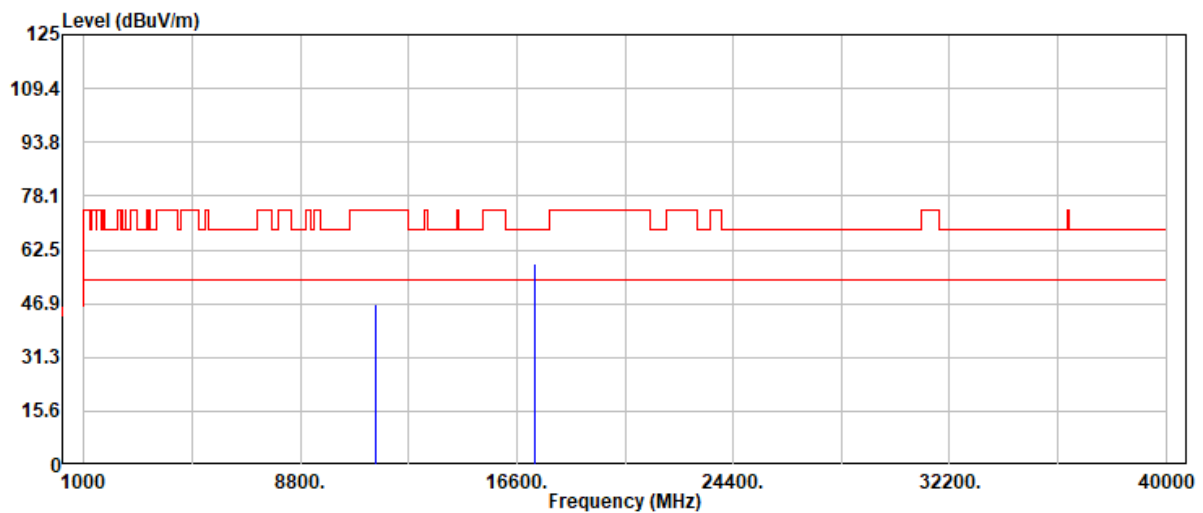


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11510.00	32.62	13.91	46.53	74.00	-27.47	Peak
11510.00	25.67	13.91	39.58	54.00	-14.42	Average
17265.00	31.96	26.56	58.52	68.20	-9.68	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 258 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax40_Band4
Frequency : 5755 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

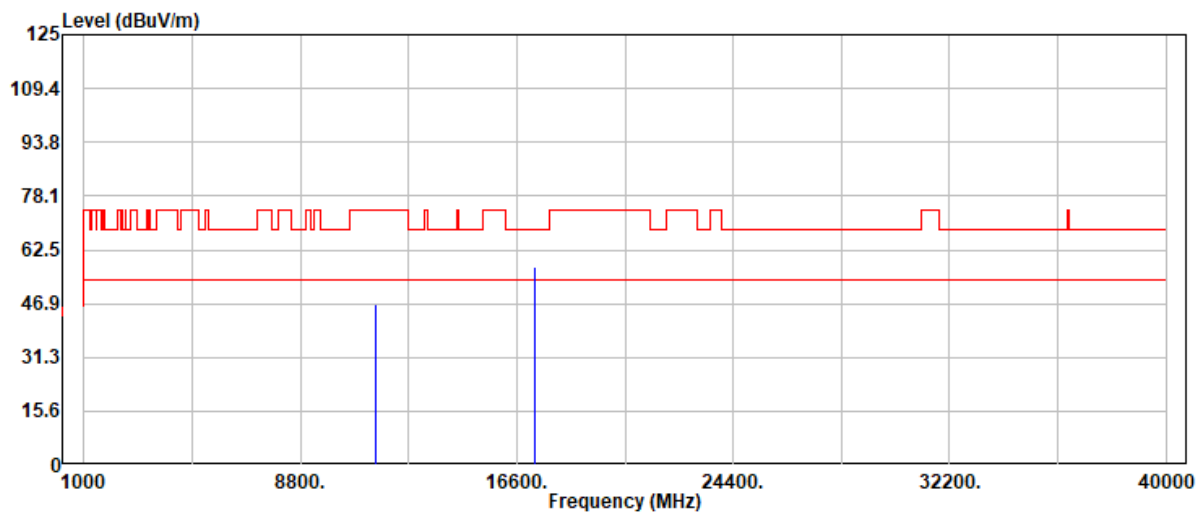


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11510.00	32.71	13.91	46.62	74.00	-27.38	Peak
11510.00	25.72	13.91	39.63	54.00	-14.37	Average
17265.00	30.94	26.56	57.50	68.20	-10.70	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 259 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax40_Band4
Frequency : 5795 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

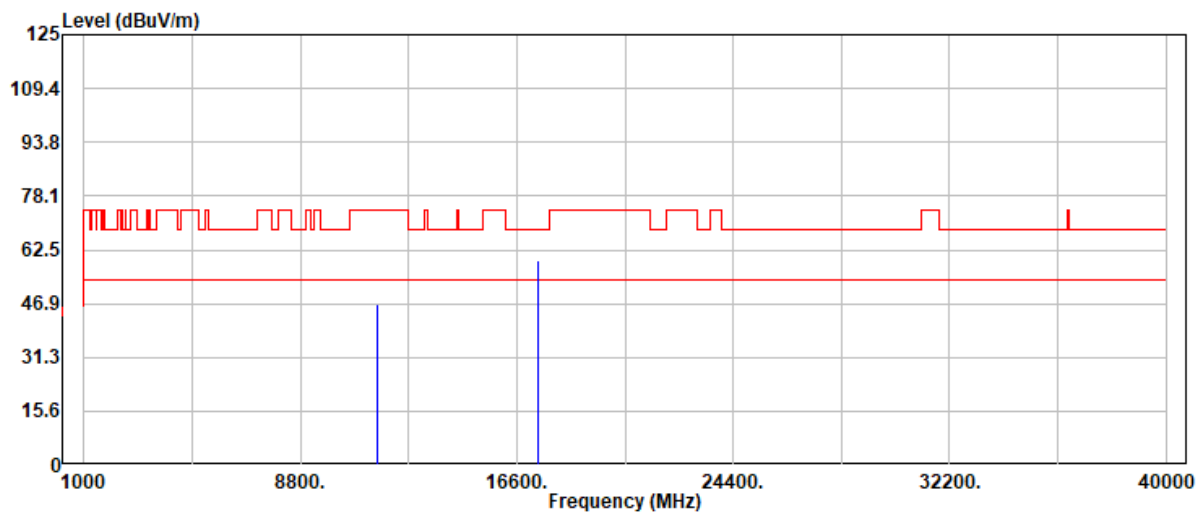


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11590.00	32.77	14.09	46.86	74.00	-27.14	Peak
11590.00	25.86	14.09	39.95	54.00	-14.05	Average
17385.00	33.04	26.58	59.62	68.20	-8.58	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 260 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax40_Band4
Frequency : 5795 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

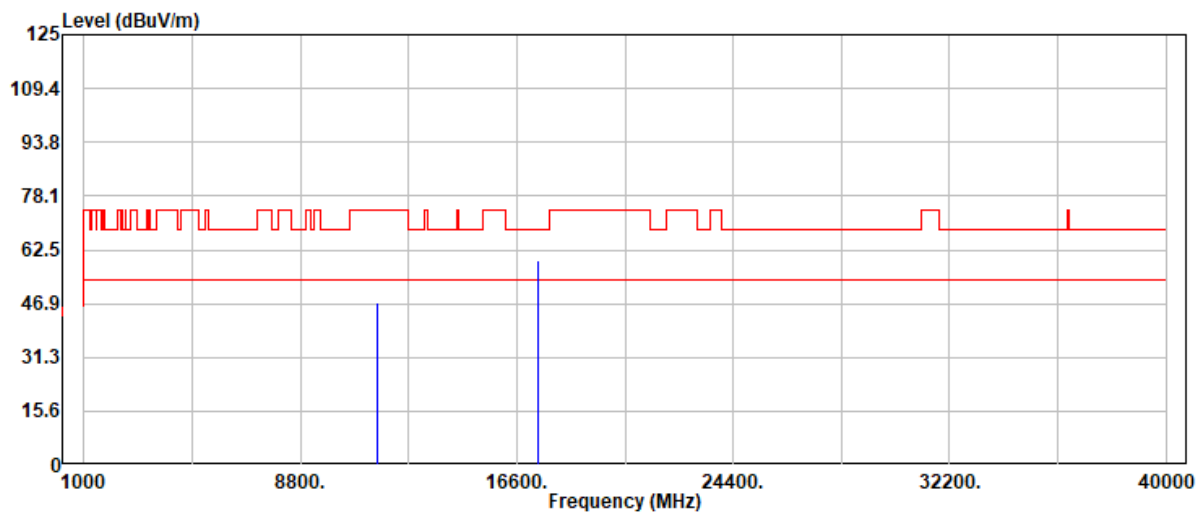


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11590.00	32.86	14.09	46.95	74.00	-27.05	Peak
11590.00	25.75	14.09	39.84	54.00	-14.16	Average
17385.00	32.84	26.58	59.42	68.20	-8.78	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 261 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax80_Band4
Frequency : 5775 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

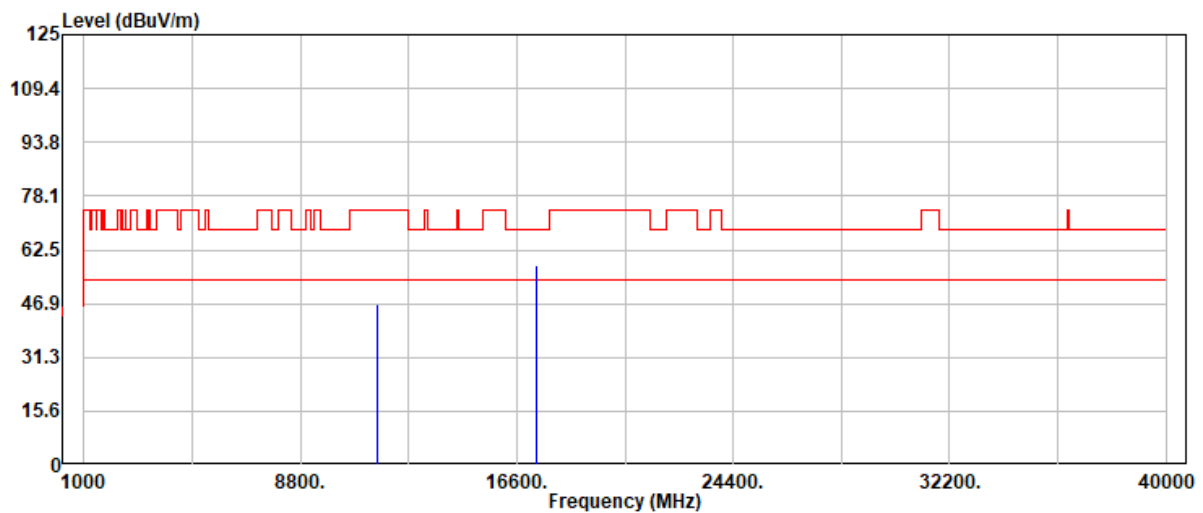


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11550.00	32.70	14.03	46.73	74.00	-27.27	Peak
11550.00	25.70	14.03	39.73	54.00	-14.27	Average
17325.00	31.30	26.67	57.97	68.20	-10.23	Peak

Project No: TM-2503000493P
Report No.: TMWK2503001451KR

Page 262 / 262
Rev. 01

Project No : TM-2503000493P
Operation Band : 802.11ax80_Band4
Frequency : 5775 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-07-05
Temp./Humi. : 25.2/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

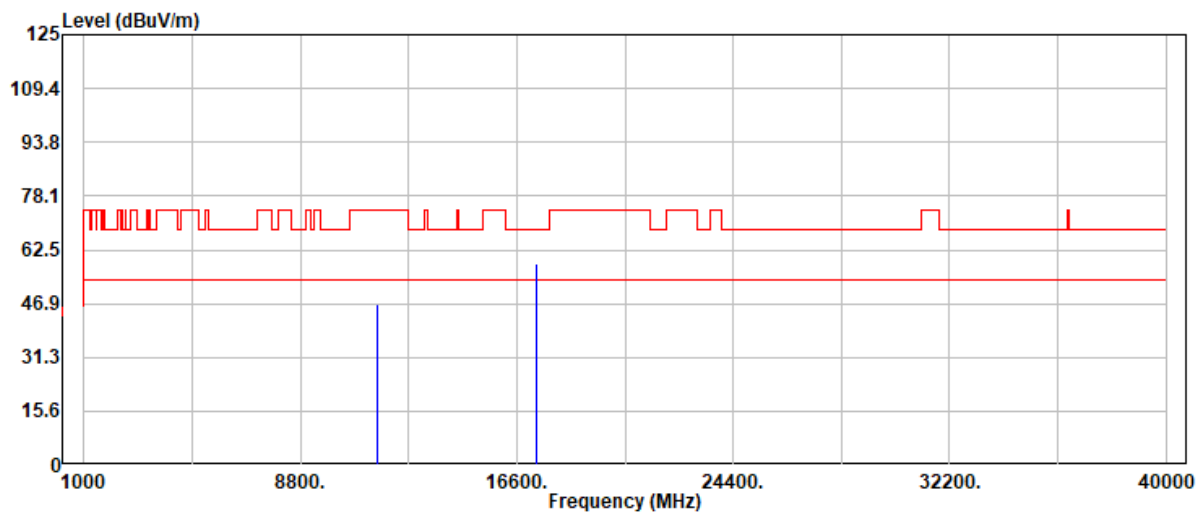

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11550.00	32.64	14.03	46.67	74.00	-27.33	Peak
11550.00	25.83	14.03	39.86	54.00	-14.14	Average
17325.00	31.90	26.67	58.57	68.20	-9.63	Peak

- End of Test Report -