Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V05
Report Template Revision Date: 2021-11-03

TEST REPORT

Report No.:	CQASZ20250902267E-03
Applicant:	SHENZHEN JINGMAI TECHNOLOGY INNOVATION CO., LTD
Address of Applicant:	A-301, HonShengYuan Industrial Park, NO.339 of BuLong Road,BanTian ST,LongGang Dist, ShenZhen

Equipment Under Test (EUT):

Product:	Carplay Box
Model No.:	RC23, RC25, RC26, RC31, RC33, RC34, RC35, RC36, RC37, RC38, RC39, RC40, RC41, RC42, RC43, RC44, RC45, RC46
Test Model No.:	RC23
Brand Name:	N/A
FCC ID:	2BNPY-RC23
Standards:	47 CFR Part 15, Subpart C KDB558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2020
Date of Receipt:	2025-09-22
Date of Test:	2025-09-22 to 2025-10-21
Date of Issue:	2025-10-24
Test Result :	**PASS***

***In the configuration tested, the EUT complied with the standards specified above**

Tested By: lewis zhou

(Lewis Zhou)

Reviewed By: Timo Lei

(Timo Lei)

Approved By:

(Jack Ai)

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20250902267E-03	Rev.01	Initial report	2025-10-24

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15.203	N/A	PASS
AC Power Line Conducted Emission	47 CFR Part 15.207	ANSI C63.10-2020	PASS
Conducted Peak & Average Output Power	47 CFR Part 15.247	ANSI C63.10-2020	PASS
6dB Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10-2020	PASS
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10-2020	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15.247	ANSI C63.10-2020	PASS
RF Conducted Spurious Emissions	47 CFR Part 15.247	ANSI C63.10-2020	PASS
Radiated Spurious Emissions	47 CFR Part 15.209	ANSI C63.10-2020	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15.205/15.209	ANSI C63.10-2020	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

3 Contents

Page

1 VERSION **2**
2 TEST SUMMARY **3**
3 CONTENTS **4**
4 GENERAL INFORMATION **6**
4.1 CLIENT INFORMATION 6
4.2 GENERAL DESCRIPTION OF EUT 6
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD 6
4.4 TEST ENVIRONMENT AND MODE 9
4.5 DESCRIPTION OF SUPPORT UNITS 13
4.6 TEST LOCATION 13
4.7 TEST FACILITY 13
4.8 TEST CONFIGURATION 13
4.9 STATEMENT OF THE MEASUREMENT UNCERTAINTY 14
4.10 DEVIATION FROM STANDARDS 14
4.11 ABNORMALITIES FROM STANDARD CONDITIONS 14
4.12 OTHER INFORMATION REQUESTED BY THE CUSTOMER 14
4.13 EQUIPMENT LIST 15
5 TEST RESULTS AND MEASUREMENT DATA **16**
5.1 ANTENNA REQUIREMENT 16
5.2 CONDUCTED EMISSIONS 17
5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER 21
Test Result *22*
Note: Duty cycle correction factor details please see section 4.4. ..... *22*
When Duty cycle >98%, D.C.F is not required. *22*
Test Graphs *23*
5.4 99% OCCUPIED BANDWIDTH 28
Test Result *29*
Test Graphs *30*
5.5 6DB OCCUPIED BANDWIDTH 35
Test Result *36*
Test Graphs *37*
5.6 POWER SPECTRAL DENSITY 42
Test Result *43*
Test Graphs *44*
5.7 BAND-EDGE FOR RF CONDUCTED EMISSIONS 49
Test Result *50*
5.7.1 Test Graphs *51*
5.8 RF CONDUCTED SPURIOUS EMISSIONS 55
Test Result *56*
Test Graphs *58*
5.9 RADIATED SPURIOUS EMISSIONS 73
5.9.1 Radiated emission below 1GHz *76*
5.9.2 Transmitter emission above 1GHz *78*
5.10 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY 86
6 PHOTOGRAPHS - EUT TEST SETUP **92**
6.1 RADIATED SPURIOUS EMISSION 92
6.2 CONDUCTED EMISSION 93
6.3 RF CONDUCTED MEASUREMENT 94

7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS 95

4 General Information

4.1 Client Information

Applicant:	SHENZHEN JINGMAI TECHNOLOGY INNOVATION CO., LTD
Address of Applicant:	A-301, HonShengYuan Industrial Park, NO.339 of BuLong Road,BanTian ST,LongGang Dist, ShenZhen
Manufacturer:	Dongguan Zhongke Zhilian Technology Co., Ltd.
Address of Manufacturer:	Room 901, Building 2, No. 2 Ma'anling Road, Tangxia Town, Dongguan City, Guangdong Province, China
Factory:	Dongguan Zhongke Zhilian Technology Co., Ltd.
Address of Factory:	Room 901, Building 2, No. 2 Ma'anling Road, Tangxia Town, Dongguan City, Guangdong Province, China

4.2 General Description of EUT

Product Name:	Carplay Box
Model No.:	RC23, RC25, RC26, RC31, RC33, RC34, RC35, RC36, RC37, RC38, RC39, RC40, RC41, RC42, RC43, RC44, RC45, RC46
Test Model No.:	RC23
Trade Mark:	N/A
Software Version:	X6-RK3528-13
Hardware Version:	SFN3528C_WWHUX_V04
Power Supply:	Power supply DC 5V
EUT Supports Radios application:	Bluetooth: 2402-2480MHz 2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz; 802.11n(HT40): 2422MHz~2452MHz
Simultaneous Transmission	☒ Simultaneous TX is supported and evaluated in this report. ☐ Simultaneous TX is not supported.

4.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps IEEE for 802.11n(HT40) :

	13.5Mbps/27Mbps/40.5Mbps/54Mbps/81Mbps/108Mbps/121.5Mbps/135Mbps
Product Type:	☒ Mobile ☐ Portable ☐ Fix Location
Test Software of EUT:	Adb
Antenna Type:	Chip antenna
Antenna Gain:	5.19dBi

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel(802.11n HT40)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz
4	2427MHz	7	2442MHz		
5	2432MHz	8	2447MHz		

Note:
In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz

Note:
Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.4 Test Environment and Mode

Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emissions:	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Transmitting mode:	EUT is set in RF test mode in all supported modulation types, bandwidth and data rate, etc.
EUT Power level:	Class13
Run Software:	

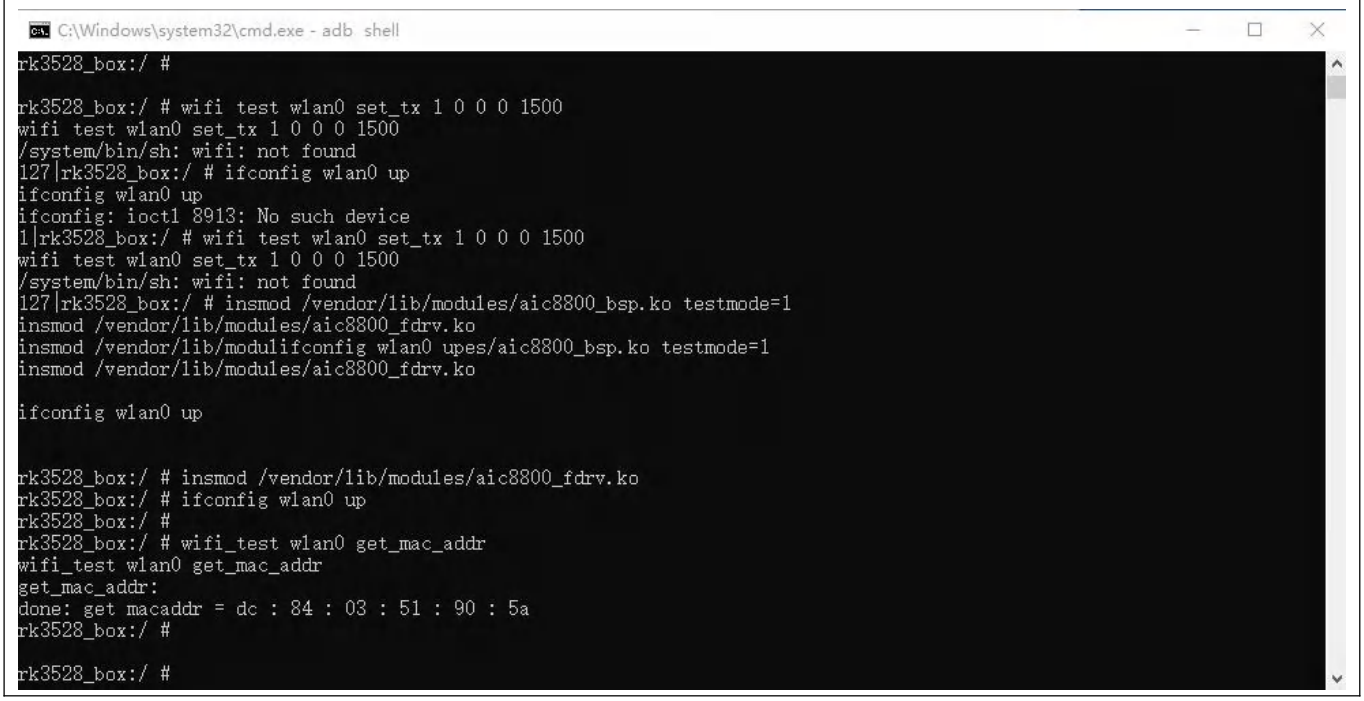

Operated Mode for Worst Duty Cycle:				
Test Mode	On time [Ton] (ms)	Period [Ttotal] ms)	Duty Cycle(%)	Average correction factor(dB)
IEEE802.11b	0.99	1.01	98.02	/
IEEE802.11g	0.69	0.70	98.57	/
IEEE802.11n (HT20)	0.65	0.67	97.01	0.13
IEEE802.11n (HT40)	0.33	0.34	97.06	0.13

Remark:

1) Duty cycle= On Time/ Period;

2) Duty Cycle factor = 10 * log(1/ Duty cycle);

Test Graph_IEEE802.11b Duty Cycle:

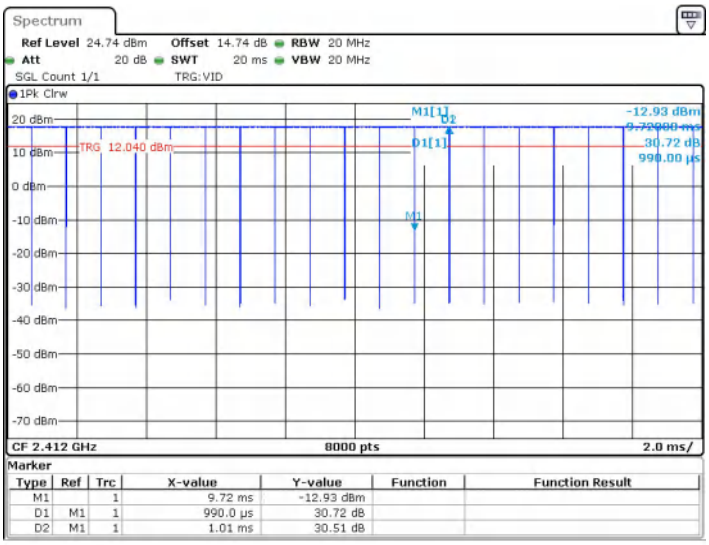

Test Graph_IEEE802.11g Duty Cycle:

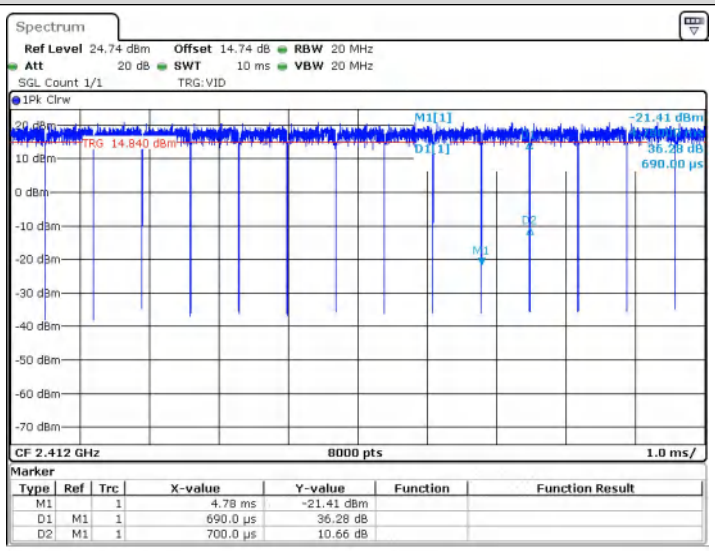

Test Graph_IEEE802.11 n (HT20) Duty Cycle:

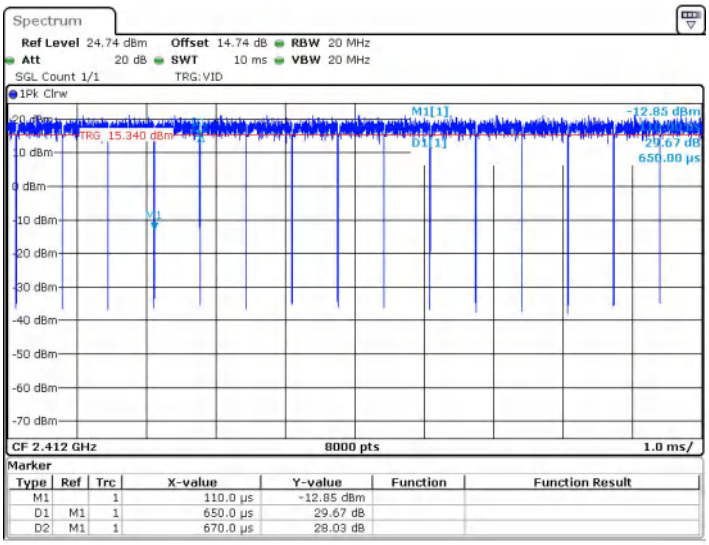

Test Graph_IEEE802.11 n (HT40) Duty Cycle:

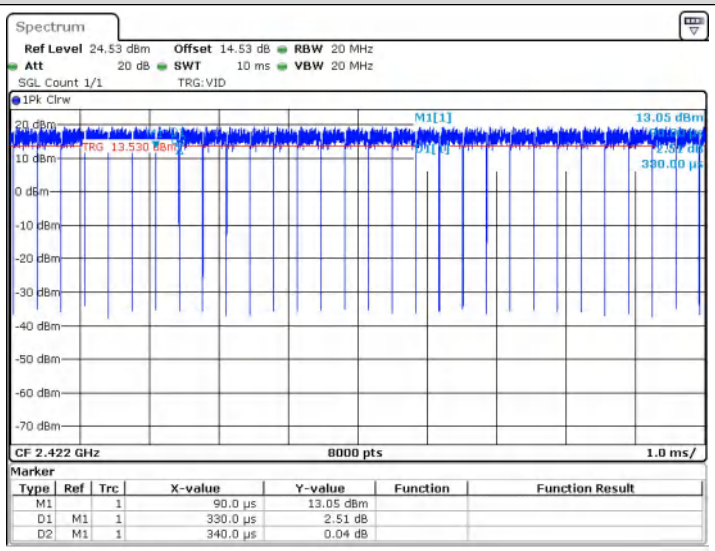

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 4742.01)

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• FCC Registration No.: 522263

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Test configuration

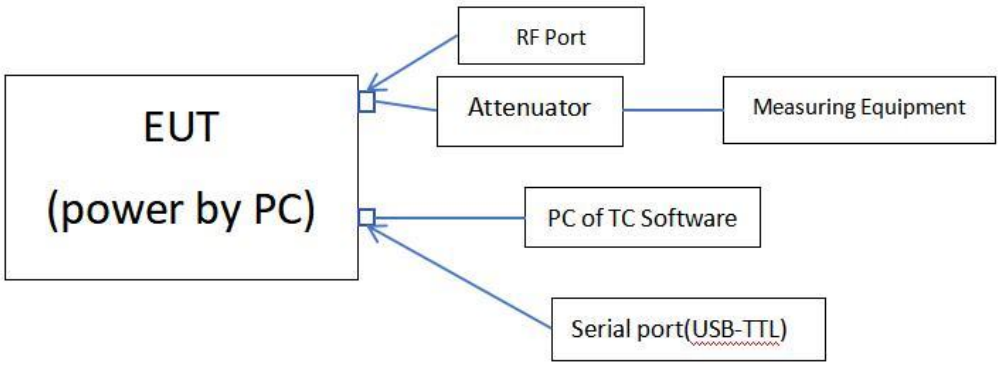

4.9 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.10 Deviation from Standards

None.

4.11 Abnormalities from Standard Conditions

None.

4.12 Other Information Requested by the Customer

None.

4.13 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2025/8/31	2026/8/30
Spectrum analyzer	R&S	FSU26	CQA-038	2025/8/31	2026/8/30
Spectrum analyzer	R&S	FSU40	CQA-075	2025/8/31	2026/8/30
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2025/8/31	2026/8/30
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2025/8/31	2026/8/30
Preamplifier	EMCI	EMC184055SE	CQA-089	2025/8/31	2026/8/30
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2025/8/31	2026/8/30
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2025/8/31	2026/8/30
Antenna Connector	CQA	RFC-01	CQA-080	2025/8/31	2026/8/30
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2025/8/31	2026/8/30
Power meter	R&S	NRVD	CQA-029	2025/8/31	2026/8/30
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2025/8/31	2026/8/30
EMI Test Receiver	R&S	ESR7	CQA-005	2025/8/31	2026/8/30
LISN	R&S	ENV216	CQA-003	2025/8/31	2026/8/30
Coaxial cable	CQA	N/A	CQA-C009	2025/8/31	2026/8/30
DC power	KEYSIGHT	E3631A	CQA-028	2025/8/31	2026/8/30

Test software:

	Manufacturer	Software brand	Software version
Radiated Emissions test software	Tonscend	JS1120-3	Version:8
Conducted Emissions test software	Audix	e3	Version:9
RF Conducted test software	Audix	e3	V3.5.39

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is Chip antenna. The connection/connection type between the antenna to the EUT's antenna port is: permanently attachment. This is either permanently attachment or a unique coupling that satisfies the requirement.	

5.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207
Test Method:	ANSI C63.10: 2020
Test Frequency Range:	150kHz to 30MHz
Limit:	

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test Procedure:

1) The mains terminal disturbance voltage test was conducted in a shielded room.
2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2020 on conducted measurement.

Test Setup:

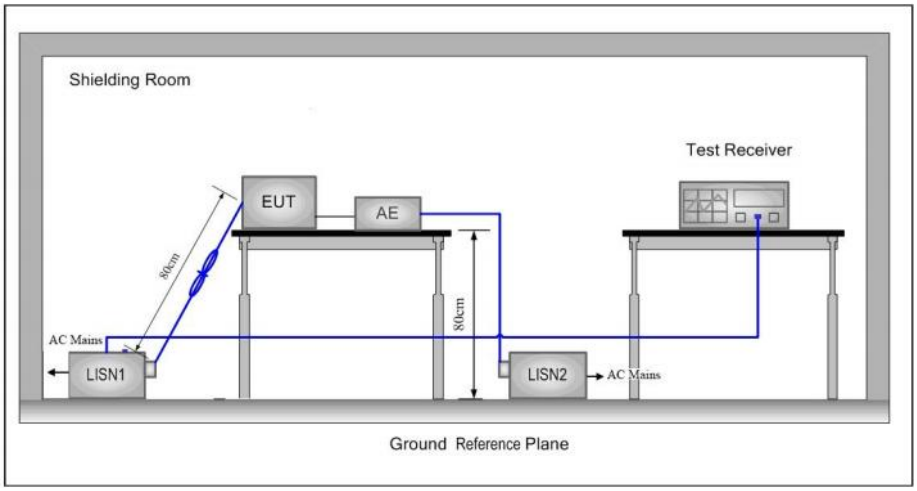

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

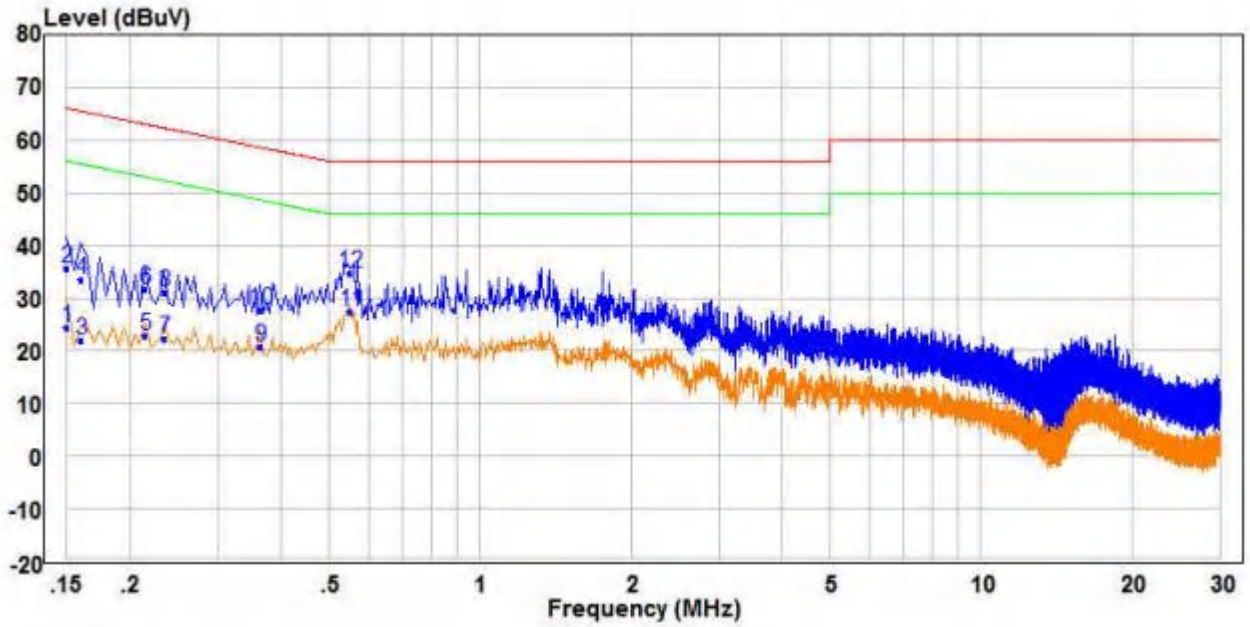

		Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.150	14.70	9.70	24.40	56.00	-31.60	Average	Line
2		0.150	25.94	9.70	35.64	66.00	-30.36	QP	Line
3		0.160	12.42	9.68	22.10	55.46	-33.36	Average	Line
4		0.160	23.76	9.68	33.44	65.46	-32.02	QP	Line
5		0.215	13.16	9.59	22.75	53.01	-30.26	Average	Line
6		0.215	22.21	9.59	31.80	63.01	-31.21	QP	Line
7		0.235	12.68	9.56	22.24	52.27	-30.03	Average	Line
8		0.235	21.50	9.56	31.06	62.27	-31.21	QP	Line
9		0.365	11.11	9.57	20.68	48.61	-27.93	Average	Line
10		0.365	18.24	9.57	27.81	58.61	-30.80	QP	Line
11	PP	0.550	17.59	9.75	27.34	46.00	-18.66	Average	Line
12	QP	0.550	25.06	9.75	34.81	56.00	-21.19	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

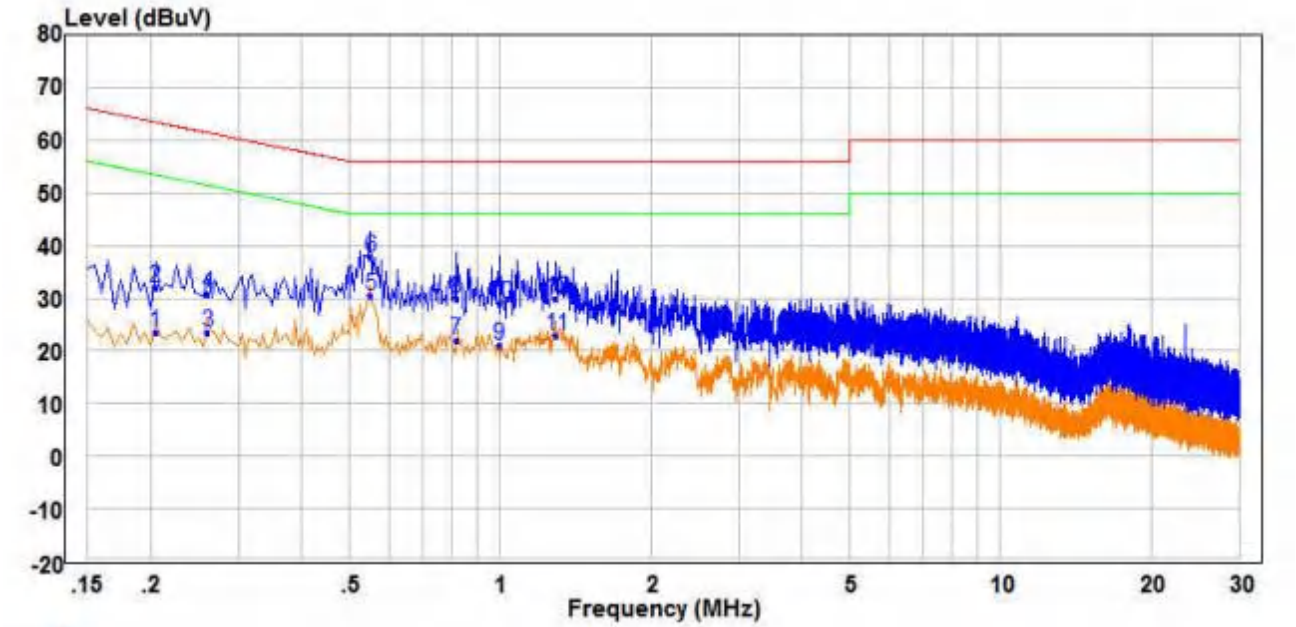

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.205	13.86	9.60	23.46	53.41	-29.95	Average	Neutral
2	0.205	22.50	9.60	32.10	63.41	-31.31	QP	Neutral
3	0.260	13.85	9.53	23.38	51.43	-28.05	Average	Neutral
4	0.260	21.35	9.53	30.88	61.43	-30.55	QP	Neutral
5 PP	0.550	20.68	9.75	30.43	46.00	-15.57	Average	Neutral
6 QP	0.550	28.08	9.75	37.83	56.00	-18.17	QP	Neutral
7	0.815	12.01	9.82	21.83	46.00	-24.17	Average	Neutral
8	0.815	20.13	9.82	29.95	56.00	-26.05	QP	Neutral
9	0.995	11.25	9.70	20.95	46.00	-25.05	Average	Neutral
10	0.995	19.33	9.70	29.03	56.00	-26.97	QP	Neutral
11	1.295	13.08	9.71	22.79	46.00	-23.21	Average	Neutral
12	1.295	20.22	9.71	29.93	56.00	-26.07	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Conducted Peak & Average Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2020
Test Setup:	*Setup for Power meter measurement method*  *Setup for Spectrum analyser measurement method* 
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass

Test Result

Test Mode	Frequency[MHz]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	15.03	≤30.00	PASS
	2437	15.64	≤30.00	PASS
	2462	14.56	≤30.00	PASS
11G	2412	11.68	≤30.00	PASS
	2437	12.22	≤30.00	PASS
	2462	11.08	≤30.00	PASS
11N20SISO	2412	12.00	≤30.00	PASS
	2437	12.55	≤30.00	PASS
	2462	11.40	≤30.00	PASS
11N40SISO	2422	10.77	≤30.00	PASS
	2437	10.85	≤30.00	PASS
	2452	10.51	≤30.00	PASS

Note: Duty cycle correction factor details please see section 4.4.

When Duty cycle >98%, D.C.F is not required.

Test Graphs

11B_Ant1_2412

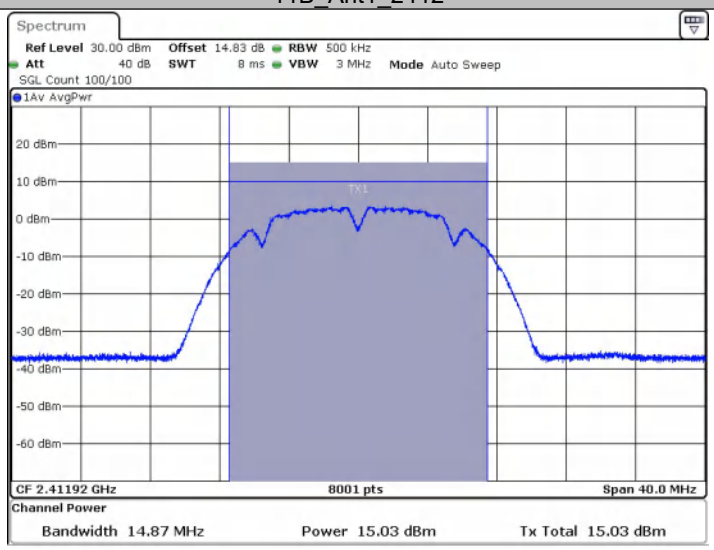

11B_Ant1_2437

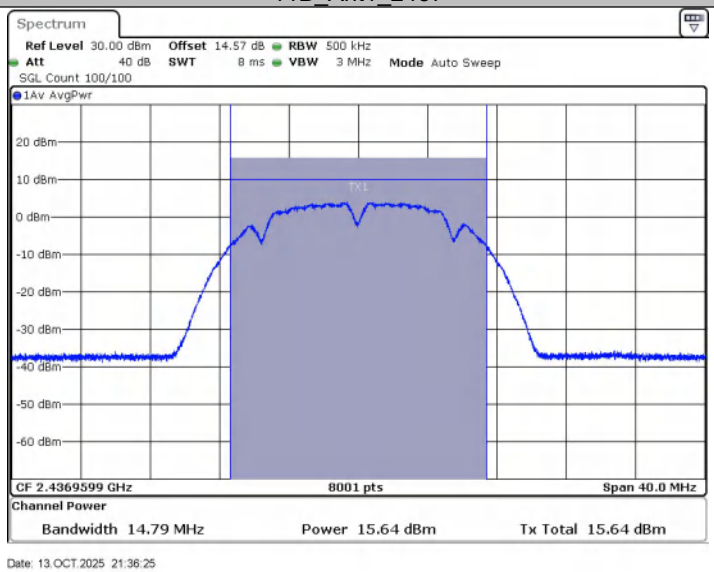

11B_Ant1_2462

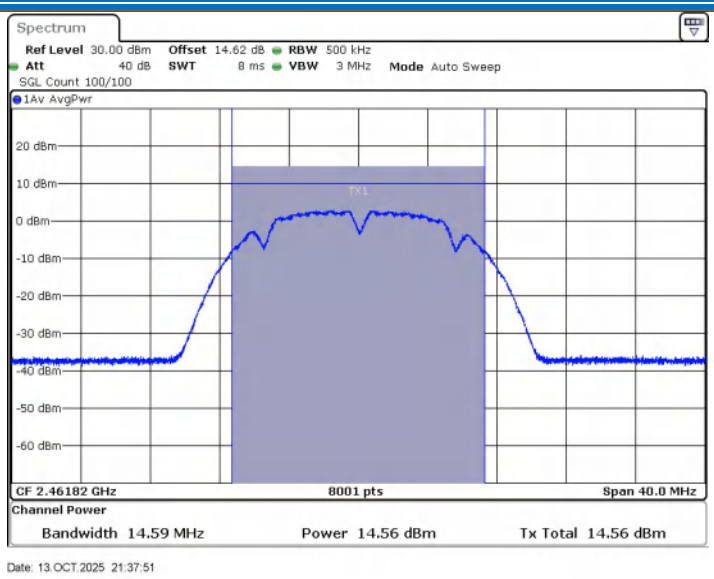

11G_Ant1_2412

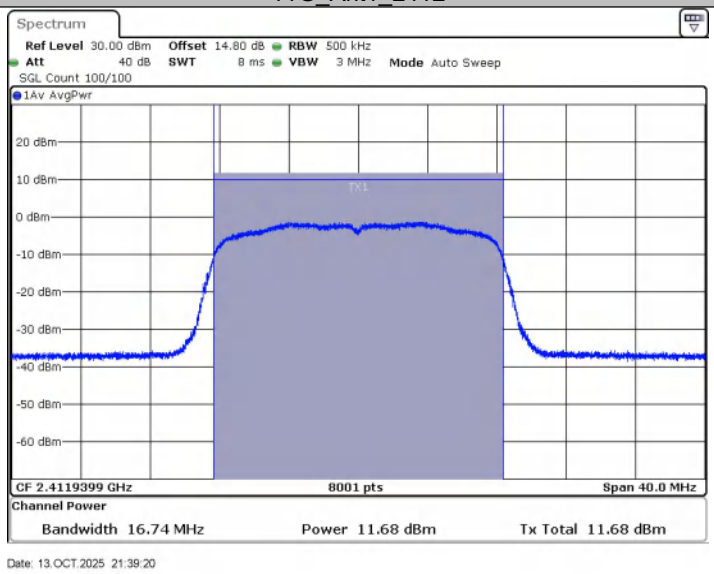

11G_Ant1_2437

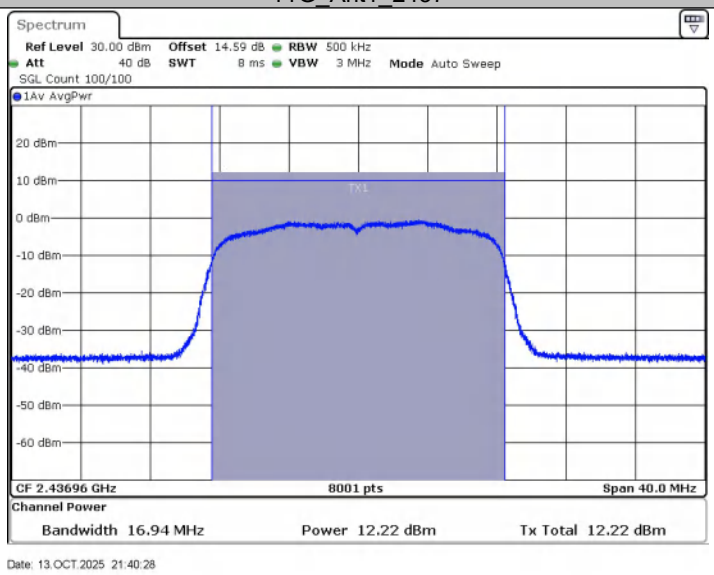

11G_Ant1_2462

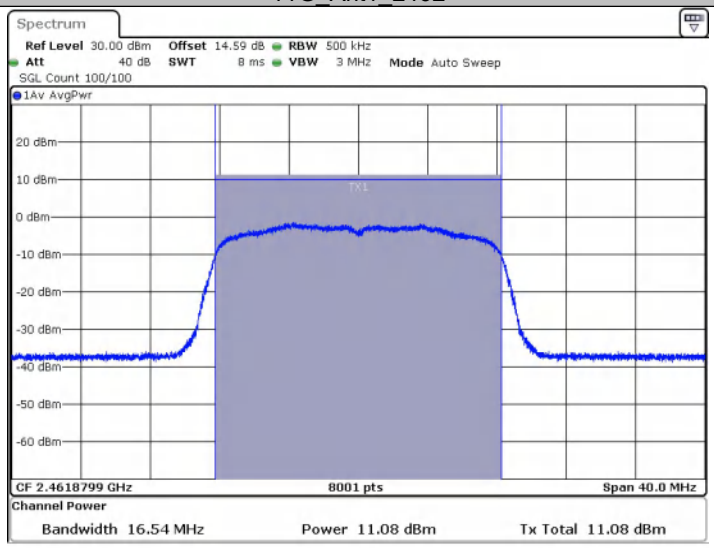

11N20SISO_Ant1_2412

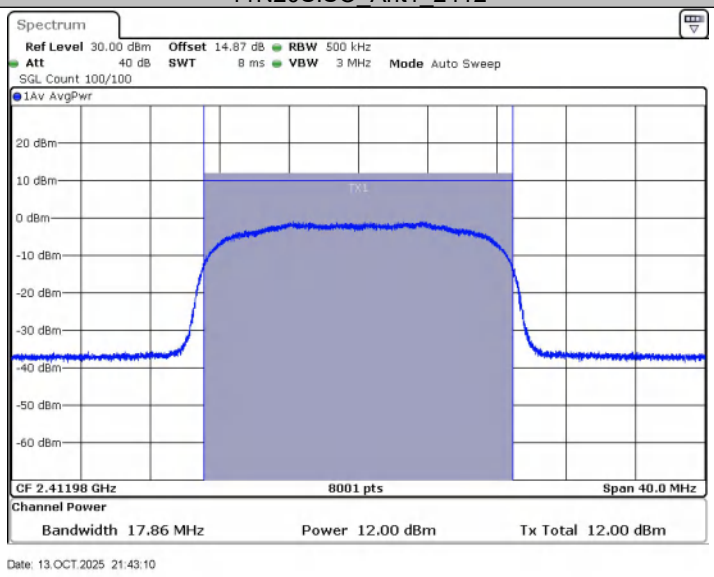

11N20SISO_Ant1_2437

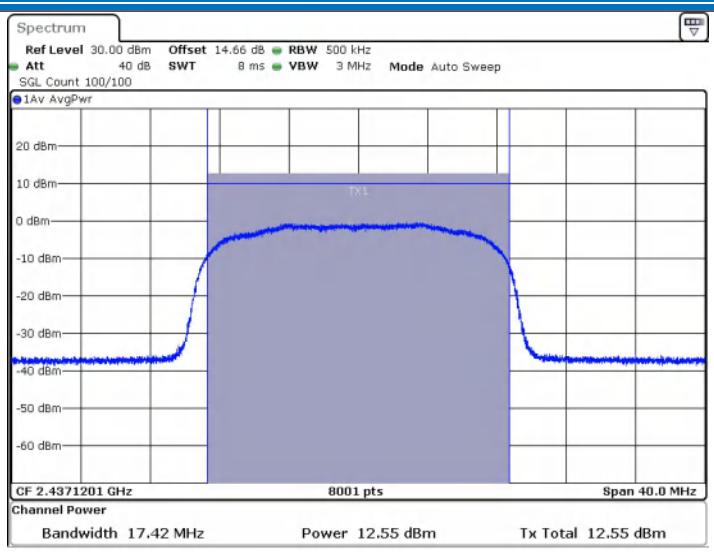

11N20SISO_Ant1_2462

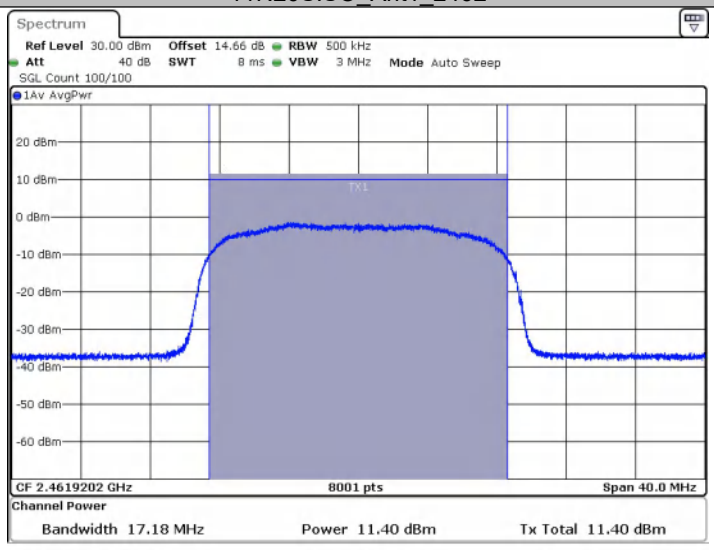

11N40SISO_Ant1_2422

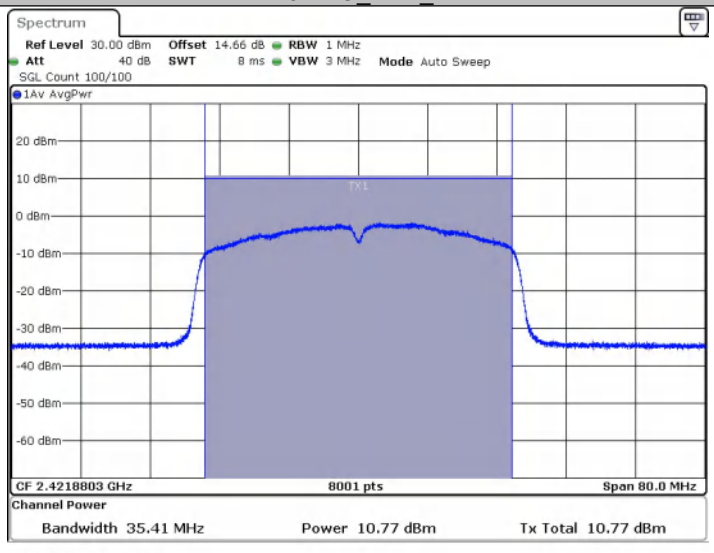

11N40SISO_Ant1_2437

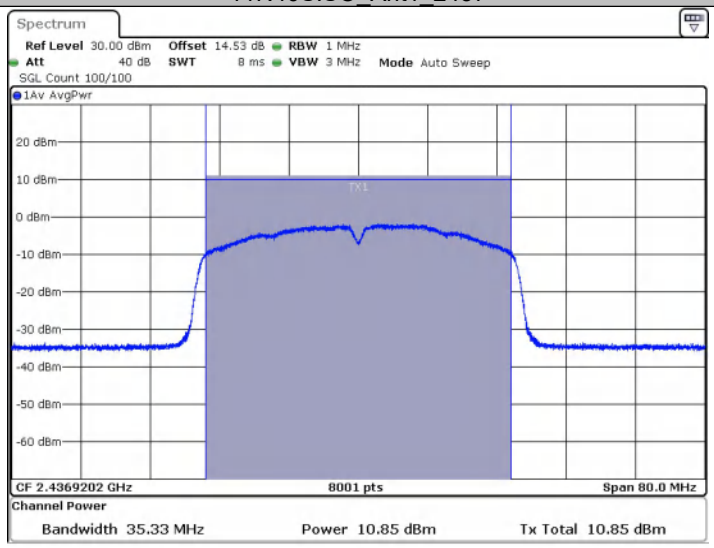

11N40SISO_Ant1_2452

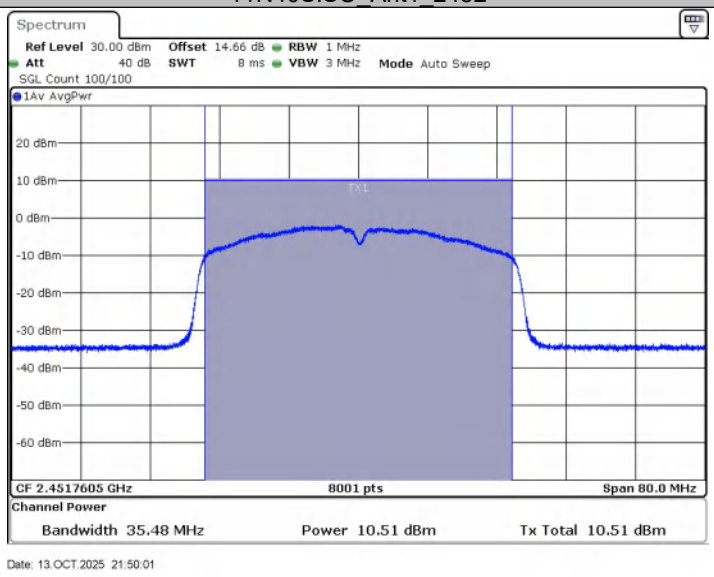

5.4 99% Occupied Bandwidth

Test Requirement:	47 CFR Part 15C
Test Method:	ANSI C63.10: 2020
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

Test Result

TestMode	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
11B	2412	14.865	2404.4875	2419.3526
	2437	14.785	2429.5674	2444.3526
	2462	14.585	2454.5275	2469.1129
11G	2412	16.743	2403.5684	2420.3117
	2437	16.943	2428.4885	2445.4316
	2462	16.543	2453.6084	2470.1518
11N20SISO	2412	17.862	2403.0490	2420.9111
	2437	17.423	2428.4086	2445.8312
	2462	17.183	2453.3287	2470.5115
11N40SISO	2422	35.405	2404.1778	2439.5824
	2437	35.325	2419.2577	2454.5824
	2452	35.485	2434.0180	2469.5025

Test Graphs

11B_Ant1_2412

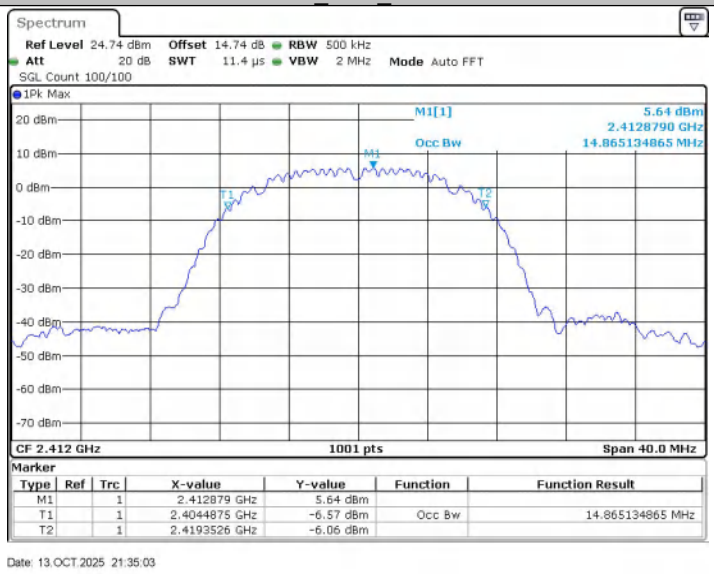

11B_Ant1_2437

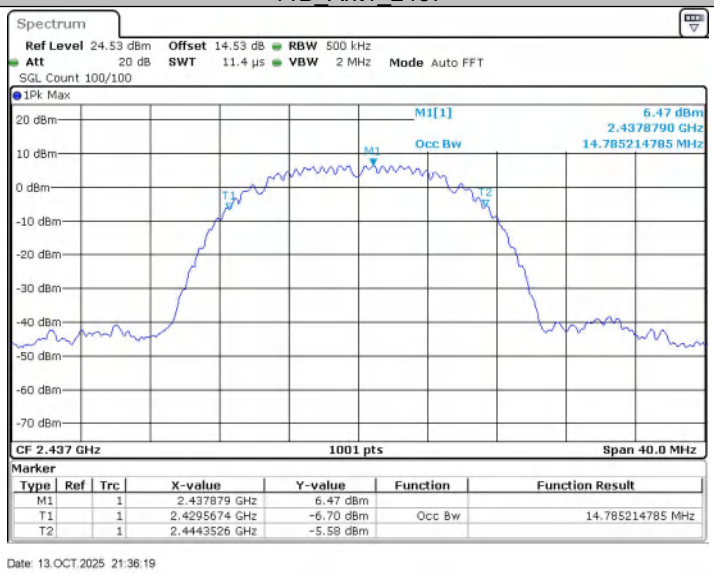

11B_Ant1_2462

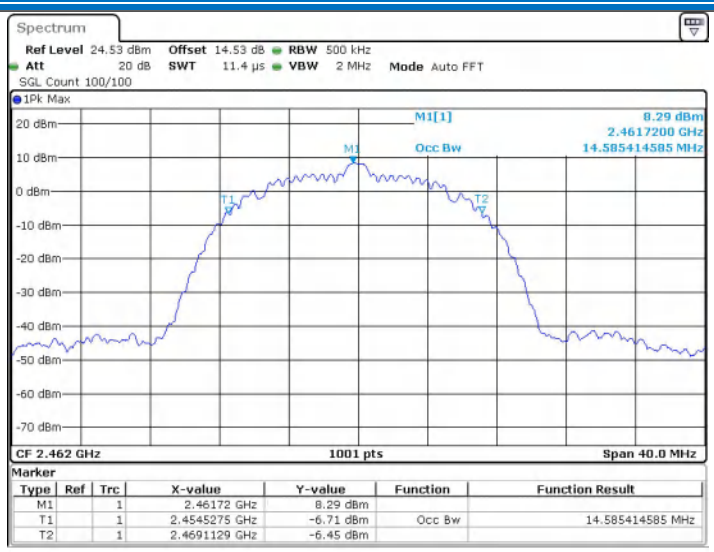

11G_Ant1_2412

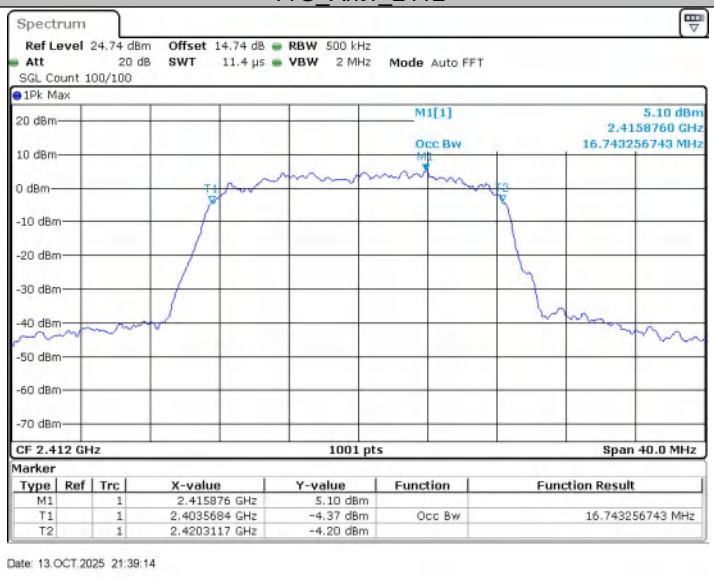

11G_Ant1_2437

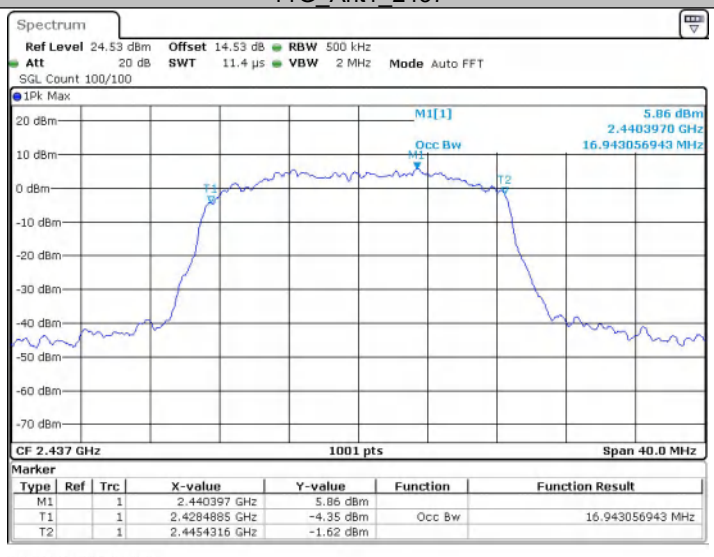

11G_Ant1_2462

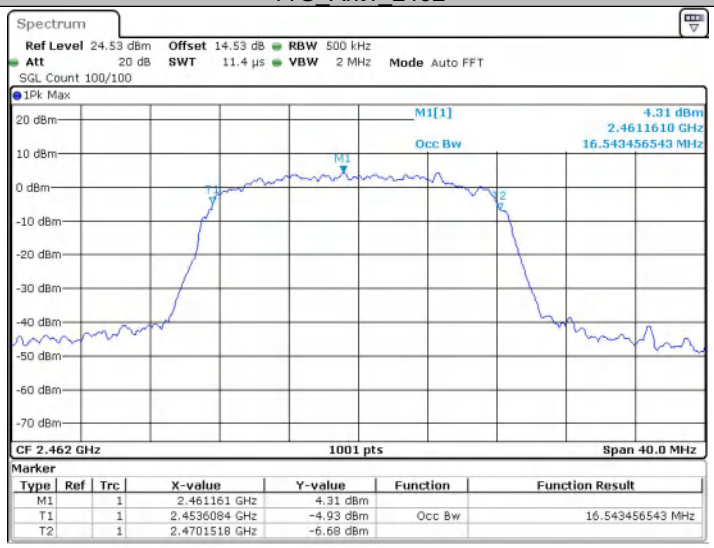

11N20SISO_Ant1_2412

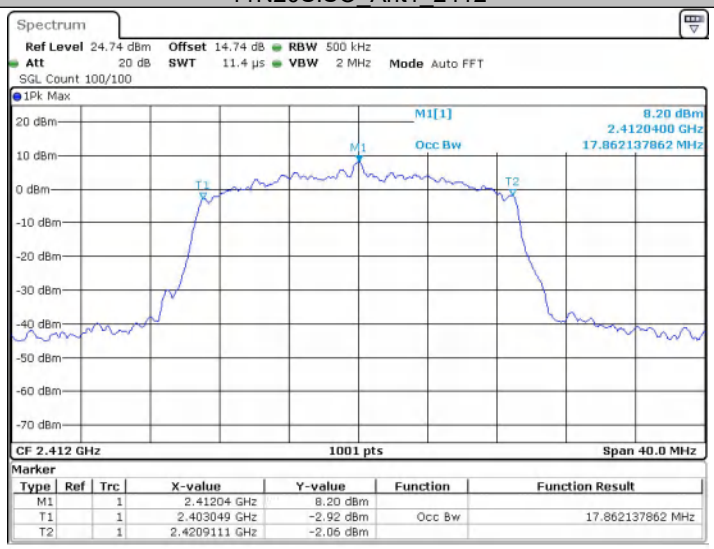

11N20SISO_Ant1_2437

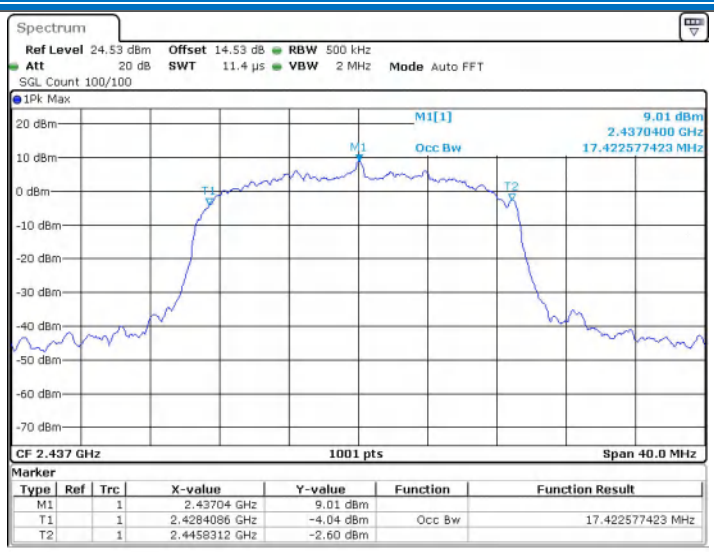

11N20SISO_Ant1_2462

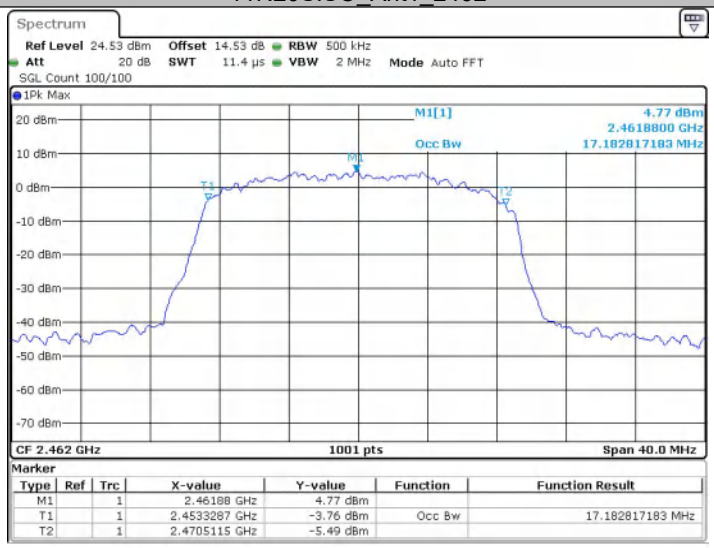

11N40SISO_Ant1_2422

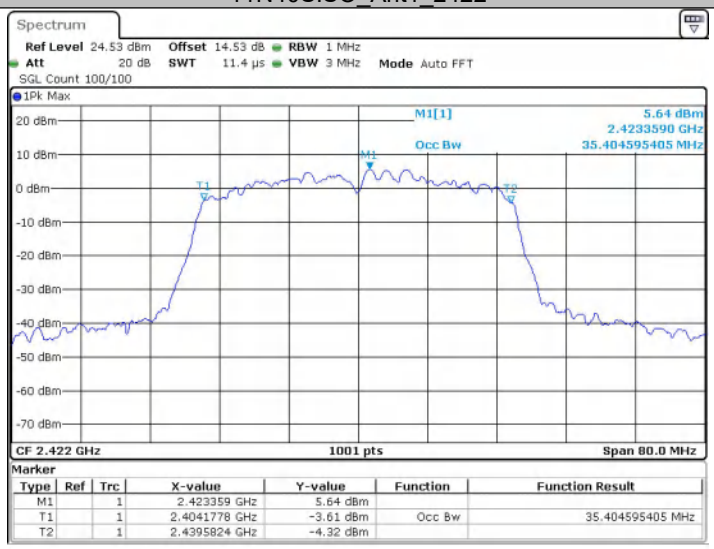

11N40SISO_Ant1_2437

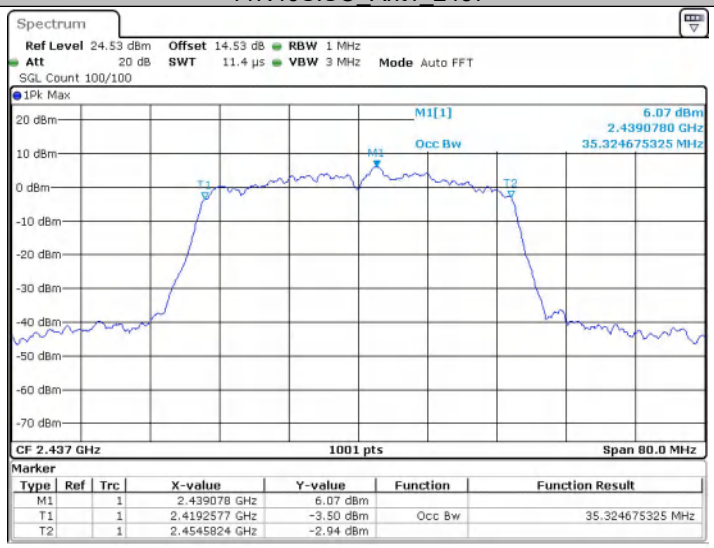

11N40SISO_Ant1_2452

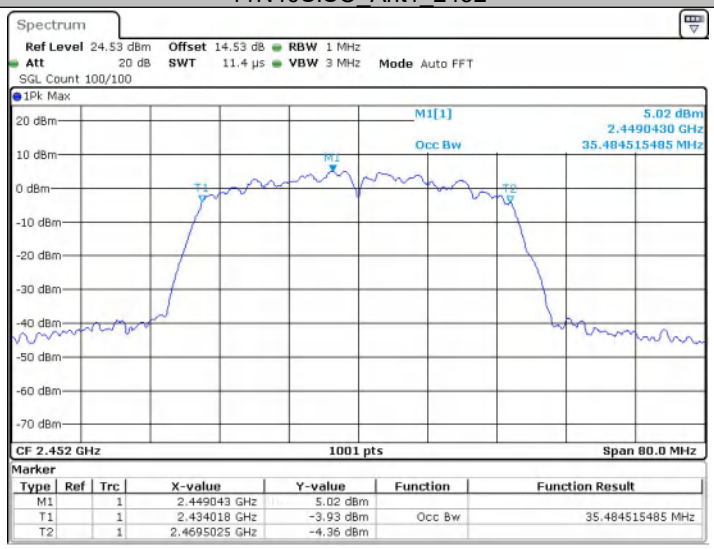

5.5 6dB Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2020
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass

Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.04	0.5	PASS
		2437	12.04	0.5	PASS
		2462	12.08	0.5	PASS
11G	Ant1	2412	15.68	0.5	PASS
		2437	15.68	0.5	PASS
		2462	15.56	0.5	PASS
11N20SISO	Ant1	2412	13.76	0.5	PASS
		2437	15.04	0.5	PASS
		2462	13.80	0.5	PASS
11N40SISO	Ant1	2422	33.84	0.5	PASS
		2437	32.64	0.5	PASS
		2452	31.28	0.5	PASS

Test Graphs

11B_Ant1_2412

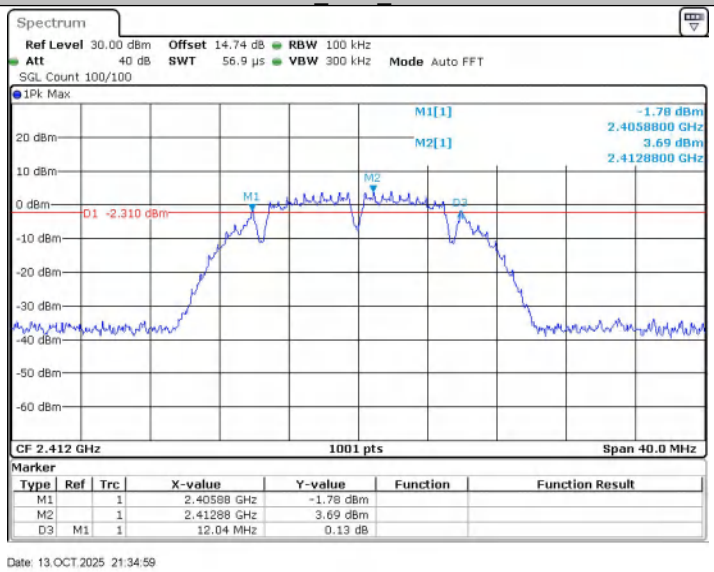

11B_Ant1_2437

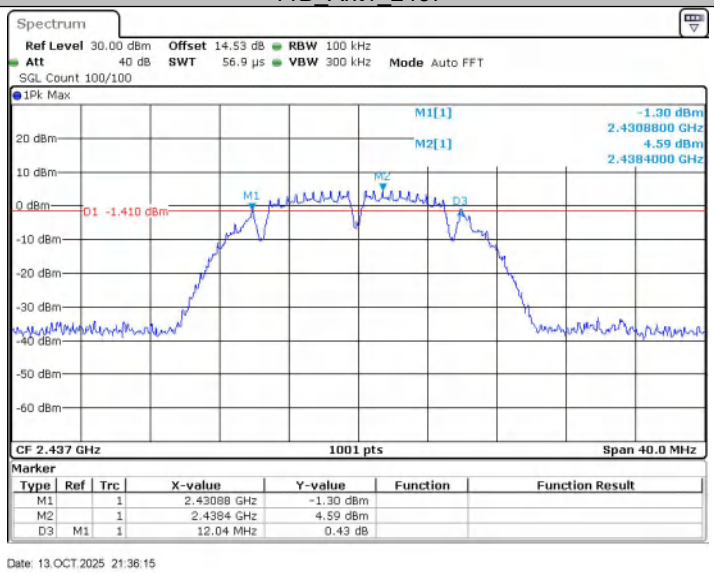

11B_Ant1_2462

11G_Ant1_2412

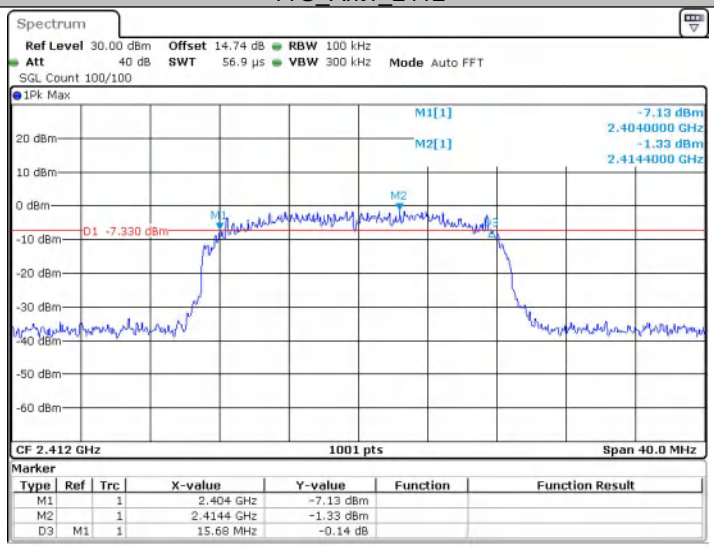

11G_Ant1_2437

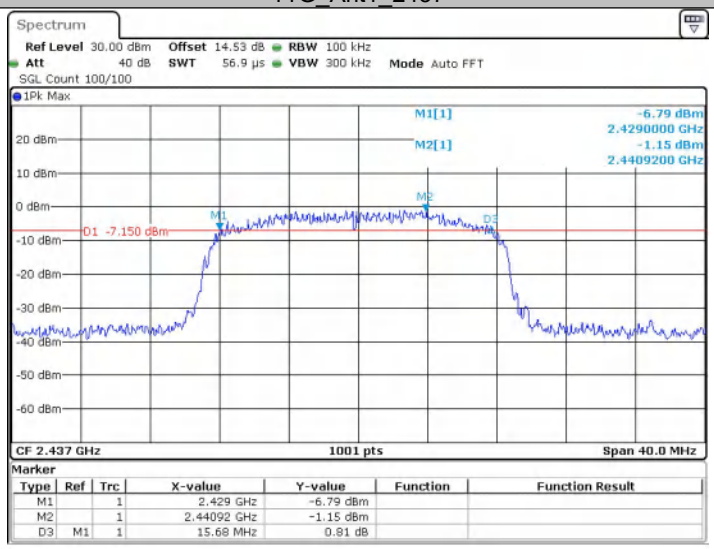

11G_Ant1_2462

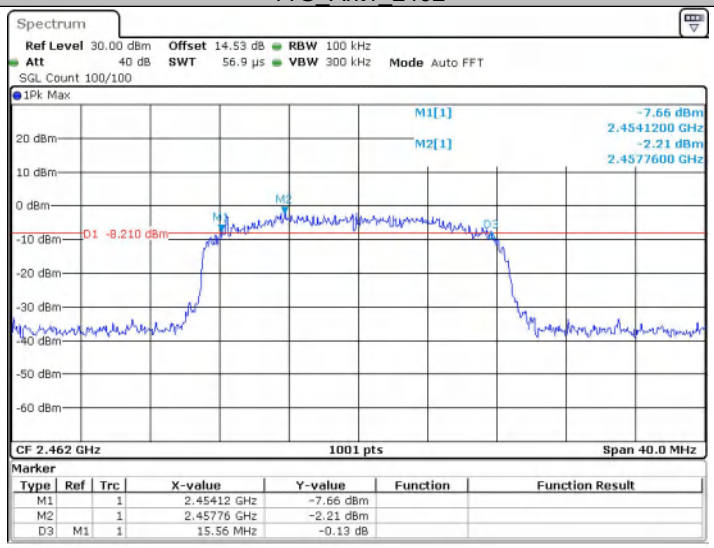

11N20SISO_Ant1_2412

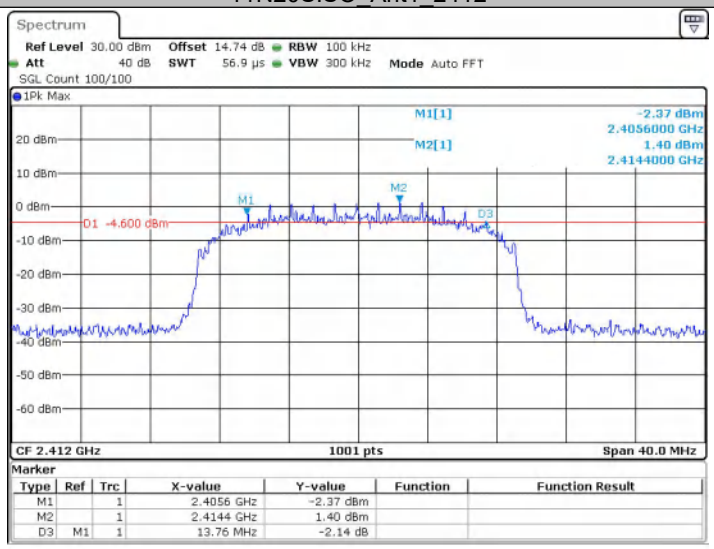

11N20SISO_Ant1_2437

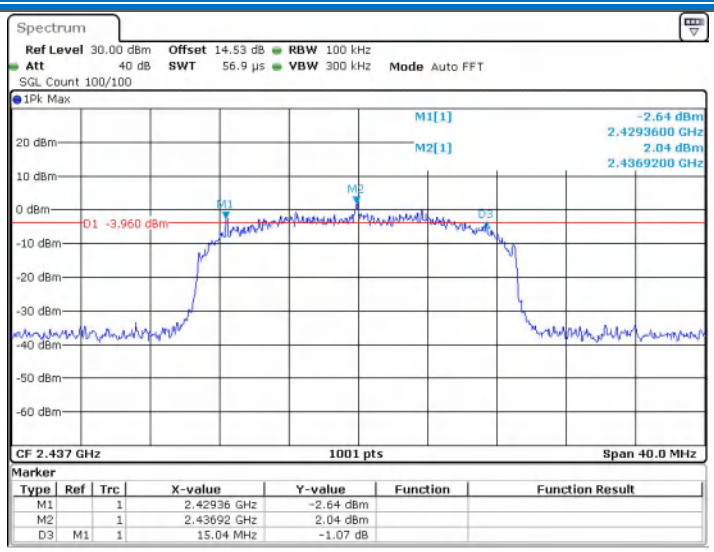

11N20SISO_Ant1_2462

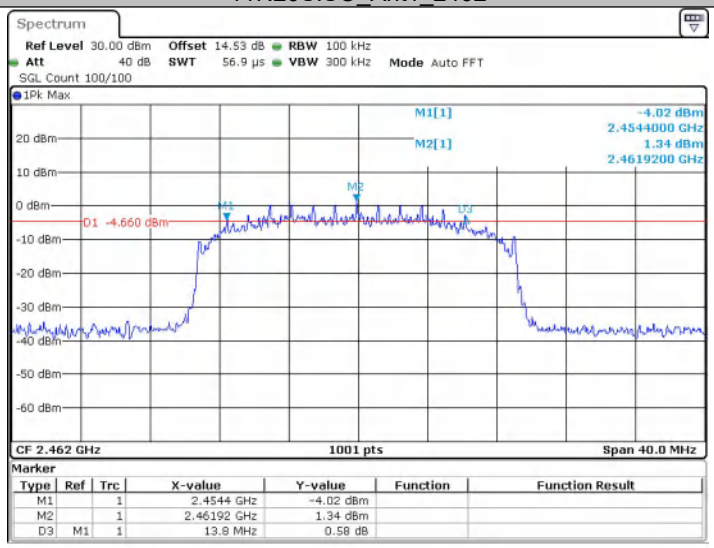

11N40SISO_Ant1_2422

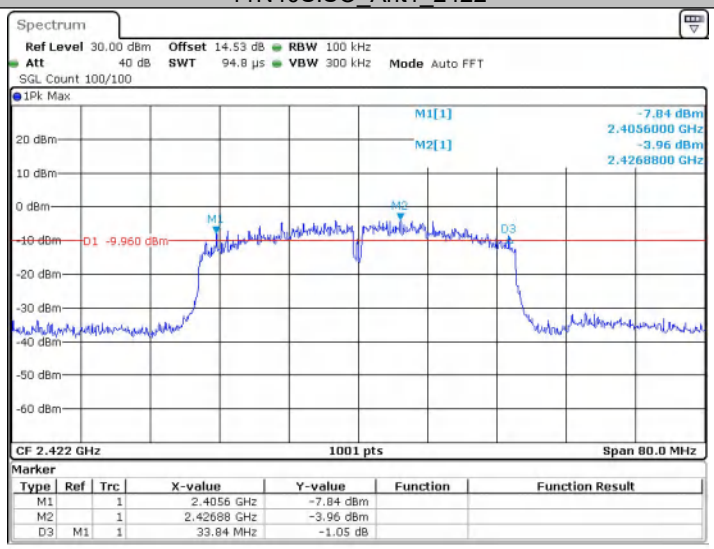

11N40SISO_Ant1_2437

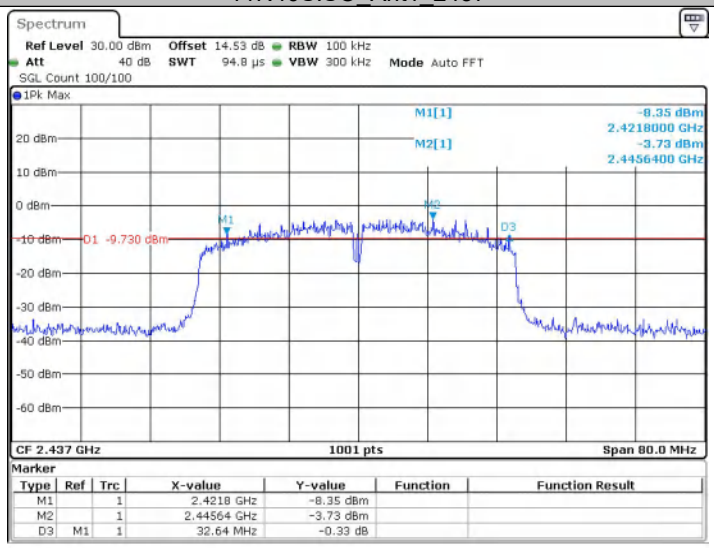

Date: 13.OCT.2025 21:48:11

11N40SISO_Ant1_2452

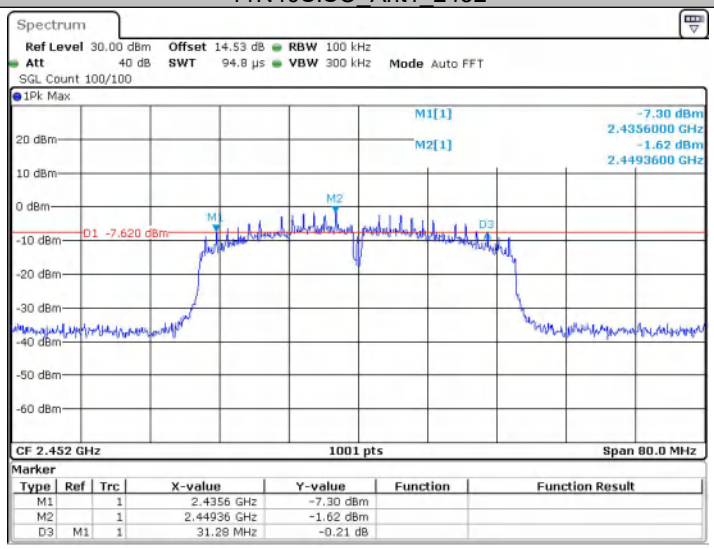

Date: 13.OCT.2025 21:49:51

5.6 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2020
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	≤8.00dBm/3kHz
Test Results:	Pass

Test Result

TestMode	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	2412	-13.93	≤8.00	PASS
	2437	-12.84	≤8.00	PASS
	2462	-13.60	≤8.00	PASS
11G	2412	-11.93	≤8.00	PASS
	2437	-11.95	≤8.00	PASS
	2462	-12.83	≤8.00	PASS
11N20SISO	2412	-11.78	≤8.00	PASS
	2437	-11.18	≤8.00	PASS
	2462	-11.84	≤8.00	PASS
11N40SISO	2422	-12.93	≤8.00	PASS
	2437	-13.76	≤8.00	PASS
	2452	-14.27	≤8.00	PASS

Note: Duty cycle correction factor details please see section 4.4.
When Duty cycle >98%, D.C.F is not required.

Test Graphs

11B_Ant1_2412

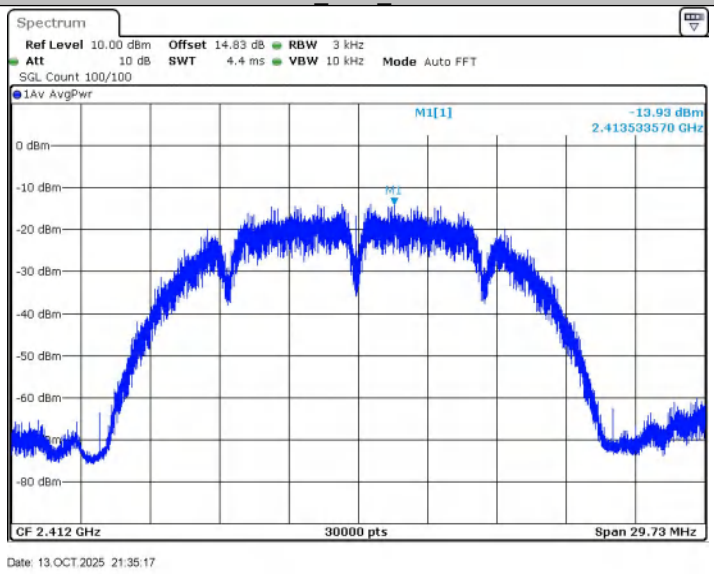

11B_Ant1_2437

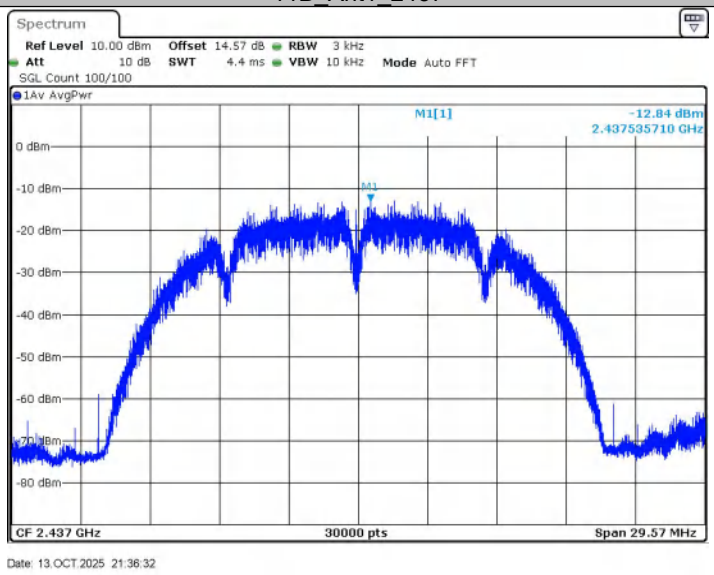

11B_Ant1_2462

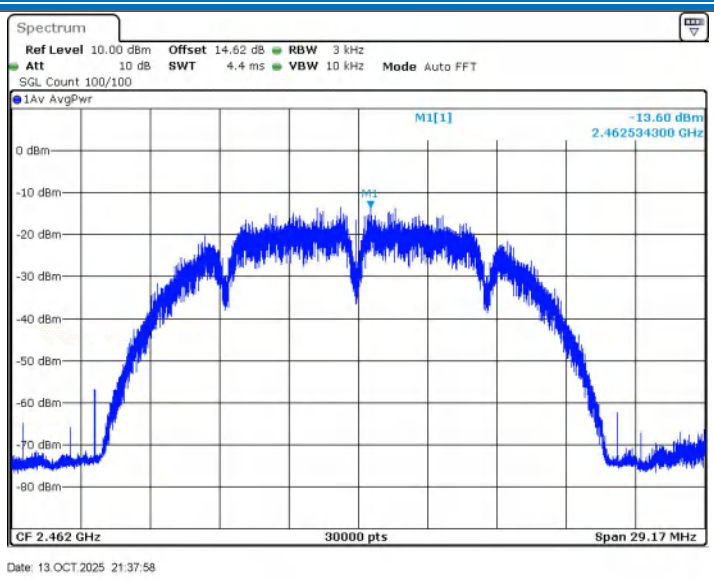

11G_Ant1_2412

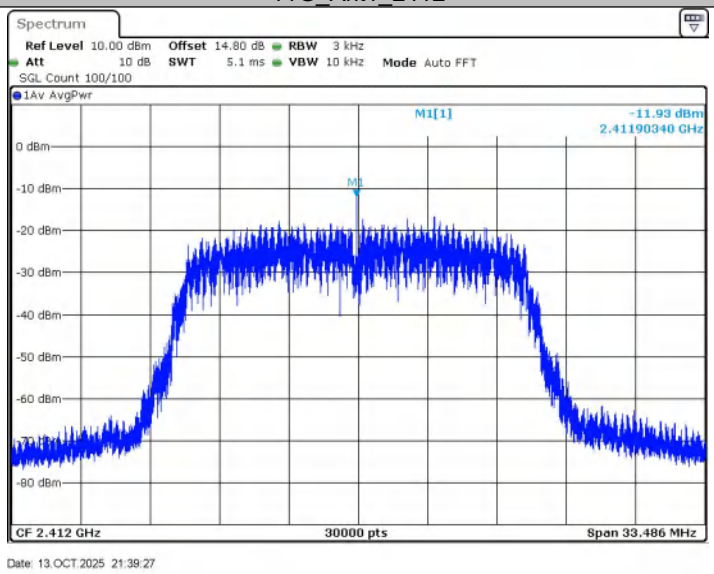

11G_Ant1_2437

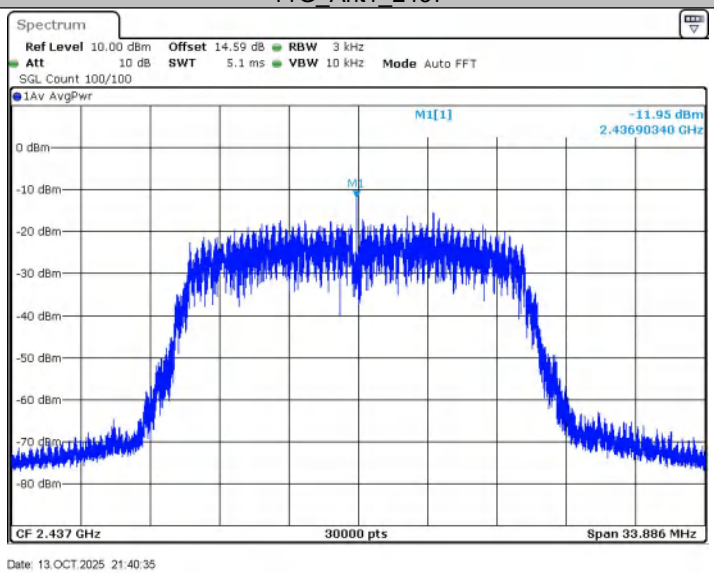

11G_Ant1_2462

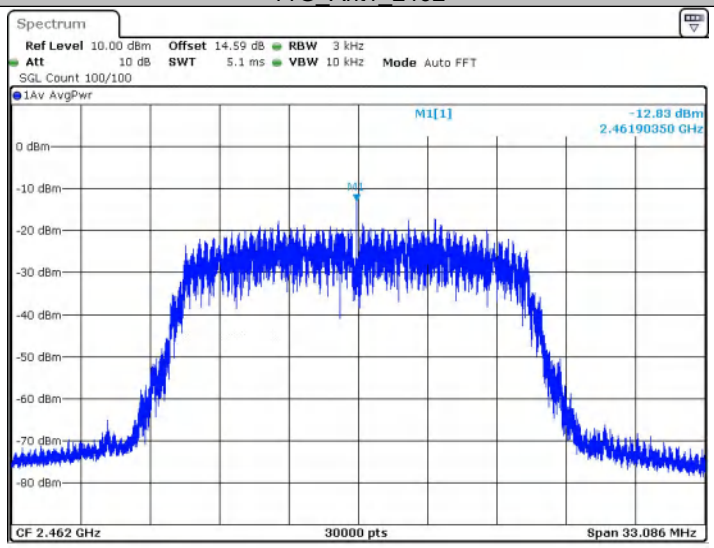

11N20SISO_Ant1_2412

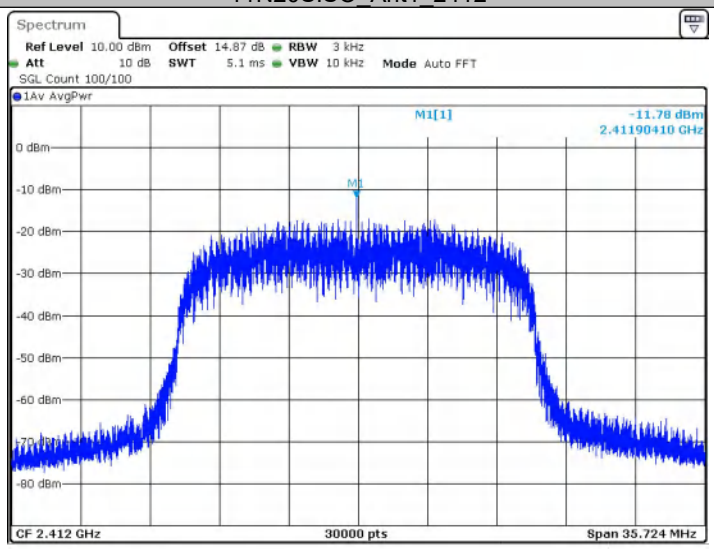

11N20SISO_Ant1_2437

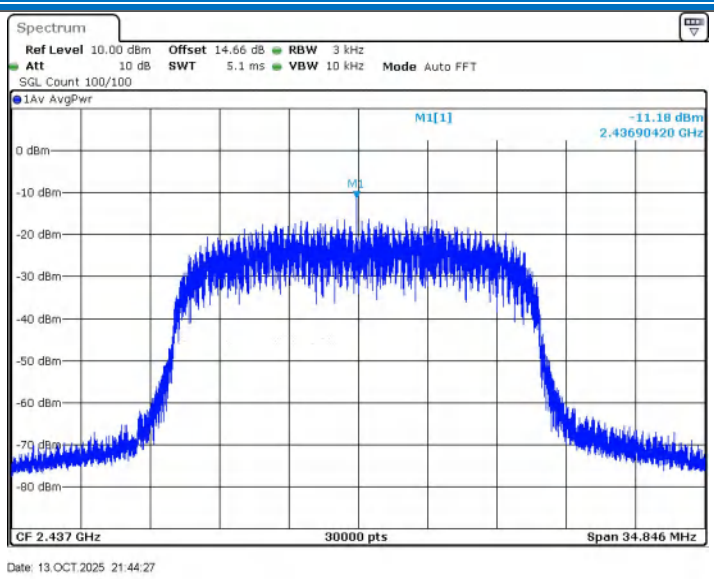

11N20SISO_Ant1_2462

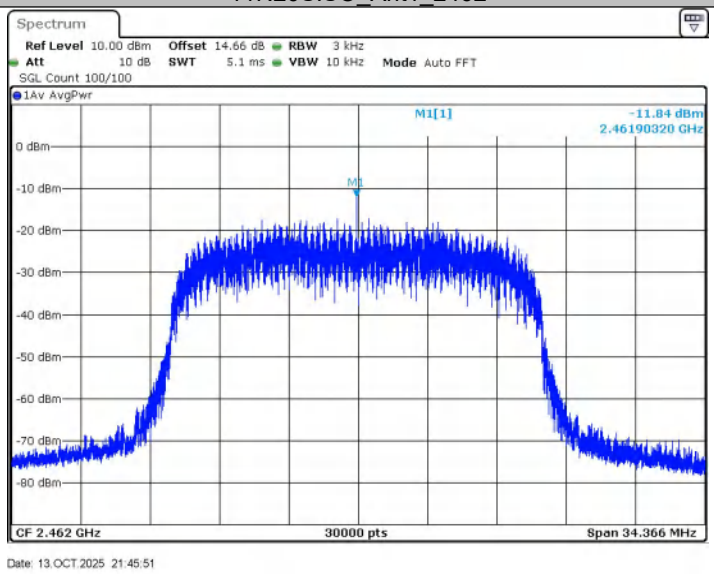

11N40SISO_Ant1_2422

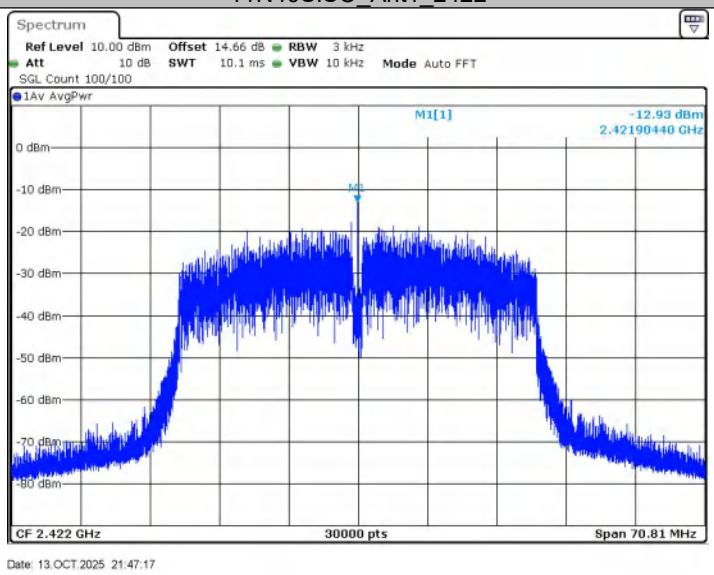

11N40SISO_Ant1_2437

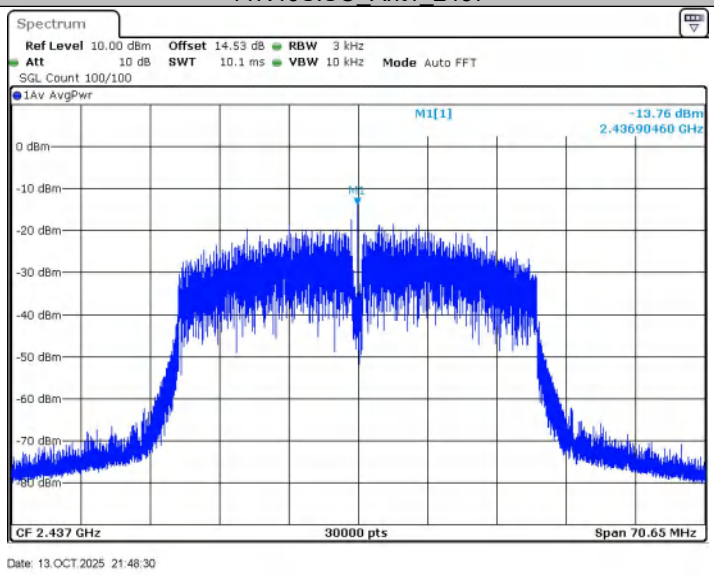

11N40SISO_Ant1_2452

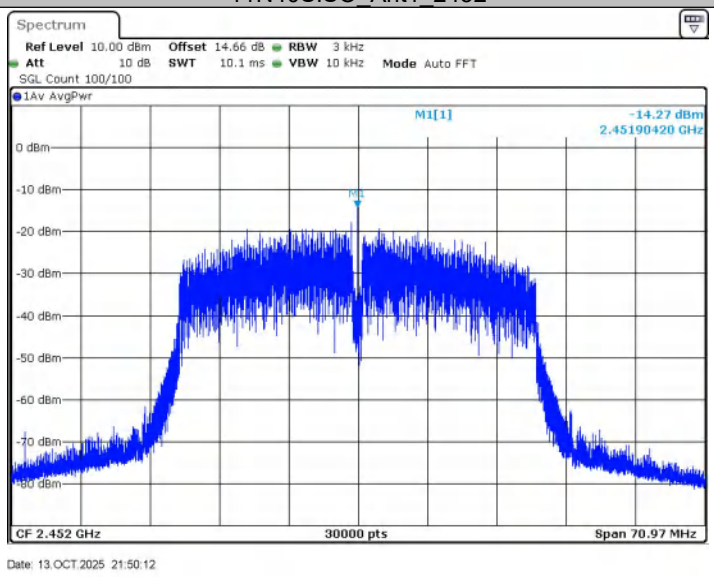

5.7 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2020
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test Result

TestMode	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Low	2412	3.91	-42.42	≤-26.09	PASS
	High	2462	3.51	-41.66	≤-26.49	PASS
11G	Low	2412	0.24	-42.05	≤-29.76	PASS
	High	2462	0.19	-41.72	≤-29.81	PASS
11N20SISO	Low	2412	2.58	-41.82	≤-27.42	PASS
	High	2462	1.78	-40.69	≤-28.22	PASS
11N40SISO	Low	2422	-1.70	-41.99	≤-31.7	PASS
	High	2452	-1.66	-41.51	≤-31.66	PASS

5.7.1 Test Graphs

11B_Ant1_Low_2412

11B_Ant1_High_2462

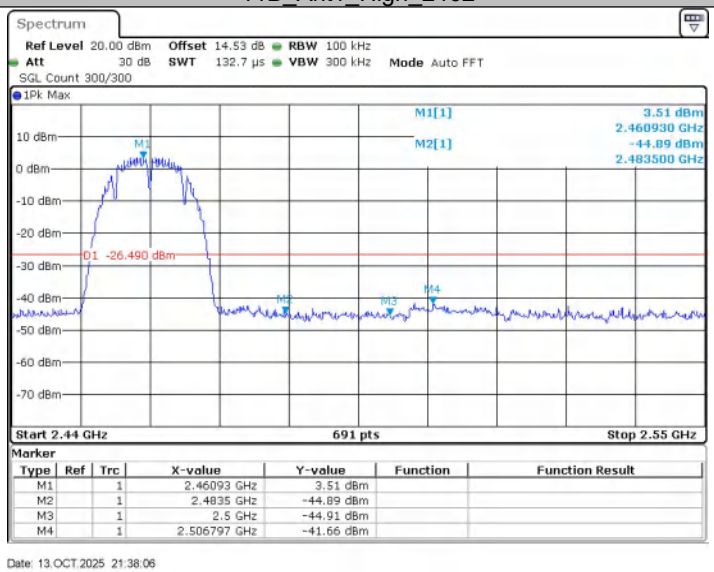

11G_Ant1_Low_2412

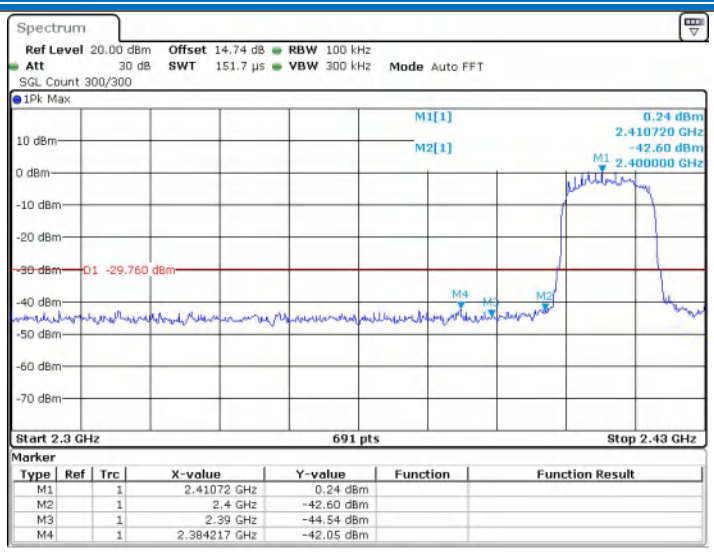

11G_Ant1_High_2462

11N20SISO_Ant1_Low_2412

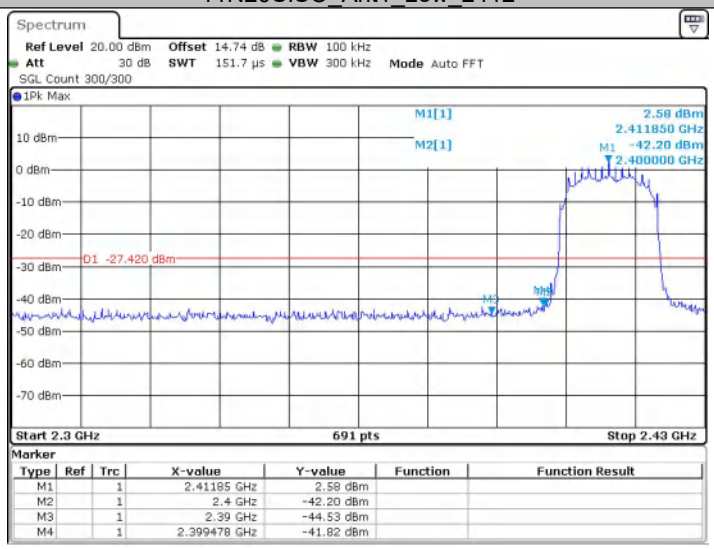

11N20SISO_Ant1_High_2462

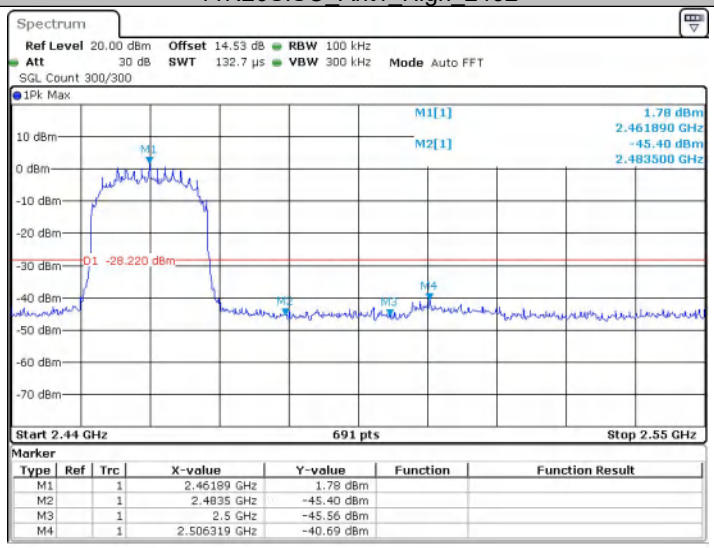

11N40SISO_Ant1_Low_2422

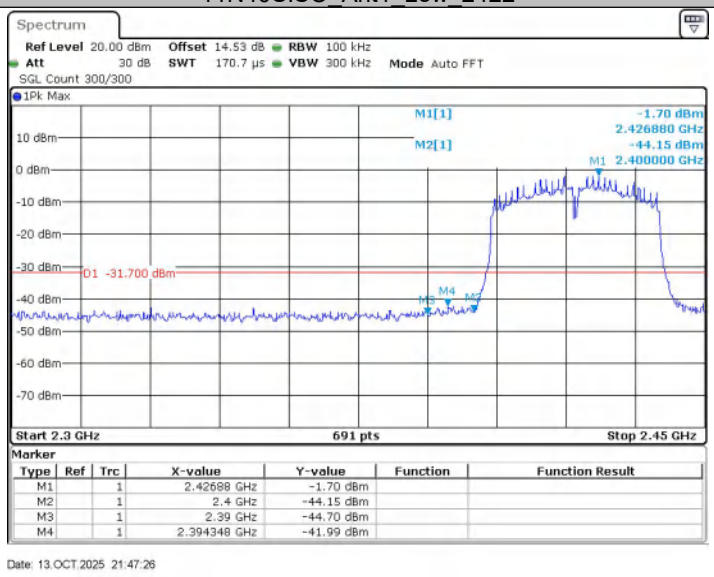

11N40SISO_Ant1_High_2452

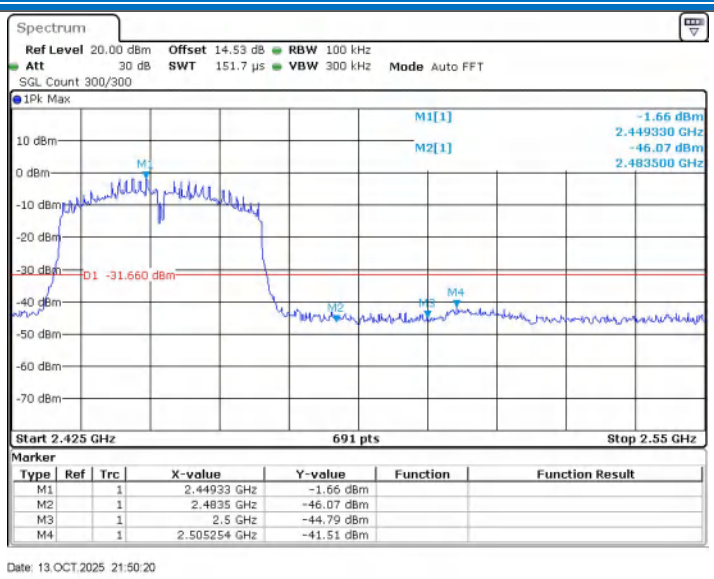
Spectrum
Ref Level 20.00 dBm Offset 14.53 dB RBW 100 kHz
Att 30 dB SWT 151.7 µs VBW 300 kHz Mode Auto FFT
SGL Count 300/300
1Pk Max
M1[1] -1.66 dBm
2.449330 GHz
M2[1] -46.07 dBm
2.483500 GHz
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
D1 -31.660 dBm
Start 2.425 GHz
691 pts
Stop 2.55 GHz
Marker
Type Ref Trc X-value Y-value Function Function Result
M1 1 2.44933 GHz -1.66 dBm
M2 1 2.4835 GHz -46.07 dBm
M3 1 2.5 GHz -44.79 dBm
M4 1 2.505254 GHz -41.51 dBm
Date: 13.OCT.2025 21:50:20

5.8 RF Conducted Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2020
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test Result

TestMode	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	Reference	1.82	1.82	---	PASS
		30~1000	1.82	-50.39	≤-28.18	PASS
		1000~26500	1.82	-44.66	≤-28.18	PASS
	2437	Reference	2.71	2.71	---	PASS
		30~1000	2.71	-51.48	≤-27.29	PASS
		1000~26500	2.71	-46.2	≤-27.29	PASS
	2462	Reference	1.55	1.55	---	PASS
		30~1000	1.55	-51.19	≤-28.45	PASS
		1000~26500	1.55	-46.97	≤-28.45	PASS
11G	2412	Reference	-2.81	-2.81	---	PASS
		30~1000	-2.81	-50.62	≤-32.81	PASS
		1000~26500	-2.81	-45.69	≤-32.81	PASS
	2437	Reference	-2.01	-2.01	---	PASS
		30~1000	-2.01	-51.32	≤-32.01	PASS
		1000~26500	-2.01	-47.36	≤-32.01	PASS
	2462	Reference	-3.26	-3.26	---	PASS
		30~1000	-3.26	-50.51	≤-33.26	PASS
		1000~26500	-3.26	-45.62	≤-33.26	PASS
11N20SISO	2412	Reference	-1.55	-1.55	---	PASS
		30~1000	-1.55	-50.76	≤-31.55	PASS
		1000~26500	-1.55	-46.69	≤-31.55	PASS
	2437	Reference	-1.32	-1.32	---	PASS
		30~1000	-1.32	-51.52	≤-31.32	PASS
		1000~26500	-1.32	-47.2	≤-31.32	PASS
	2462	Reference	-1.58	-1.58	---	PASS
		30~1000	-1.58	-50.55	≤-31.58	PASS
		1000~26500	-1.58	-46.15	≤-31.58	PASS
11N40SISO	2422	Reference	-5.59	-5.59	---	PASS
		30~1000	-5.59	-50.1	≤-35.59	PASS
		1000~26500	-5.59	-47.72	≤-35.59	PASS
	2437	Reference	-5.16	-5.16	---	PASS
		30~1000	-5.16	-49.8	≤-35.16	PASS
		1000~26500	-5.16	-47.51	≤-35.16	PASS
	2452	Reference	-5.30	-5.30	---	PASS

		30~1000	-5.30	-51.35	≤-35.3	PASS
		1000~26500	-5.30	-47.54	≤-35.3	PASS

Test Graphs

11B_Ant1_2412_0~Reference

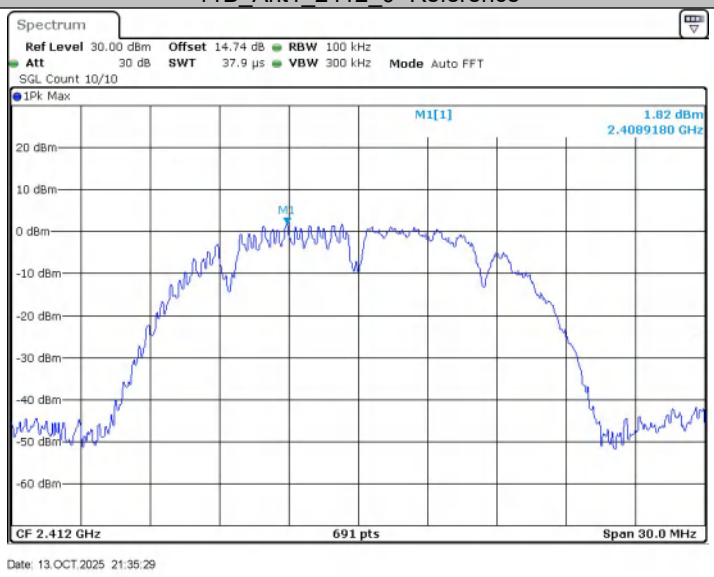

11B_Ant1_2412_30~1000

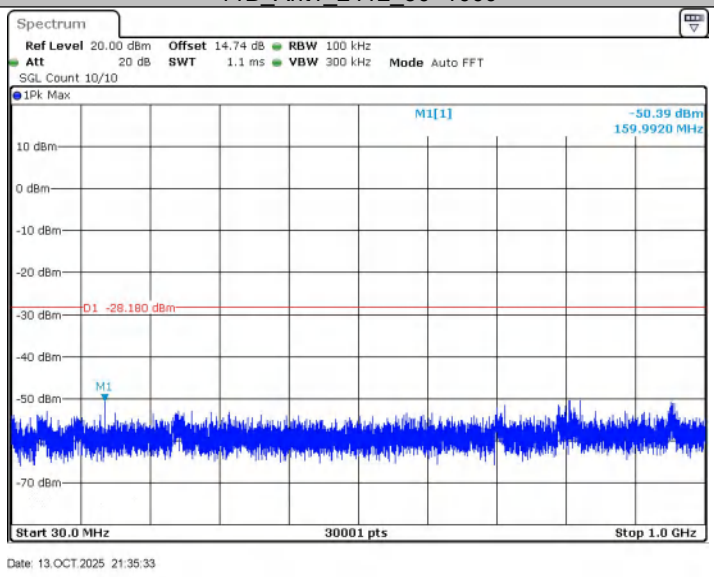

11B_Ant1_2412_1000~26500

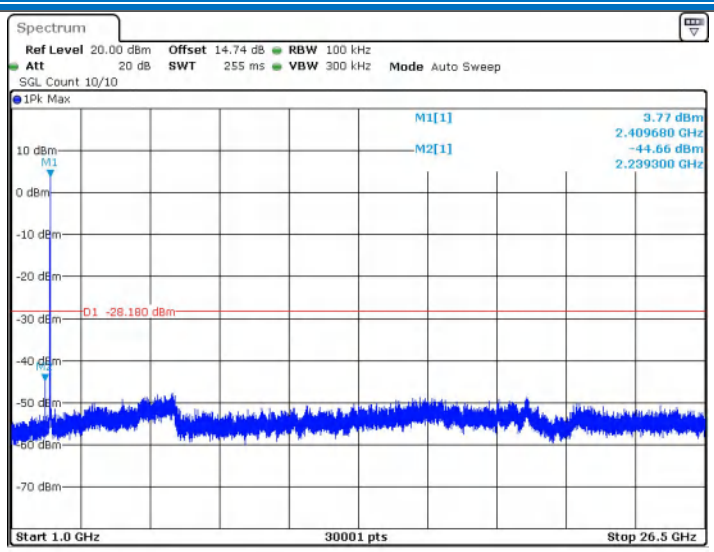

11B_Ant1_2437_0~Reference

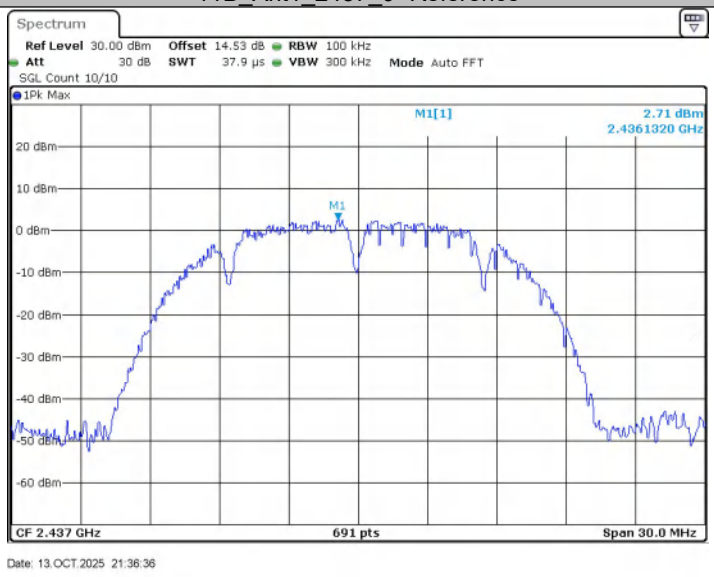

11B_Ant1_2437_30~1000

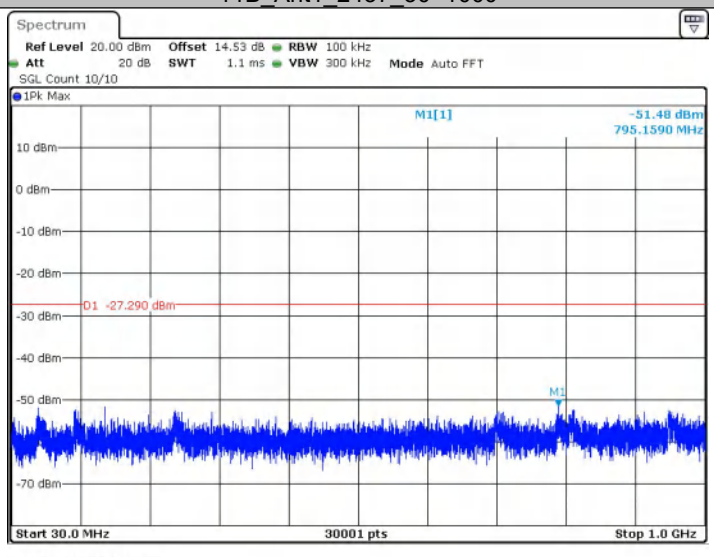

11B_Ant1_2437_1000~26500

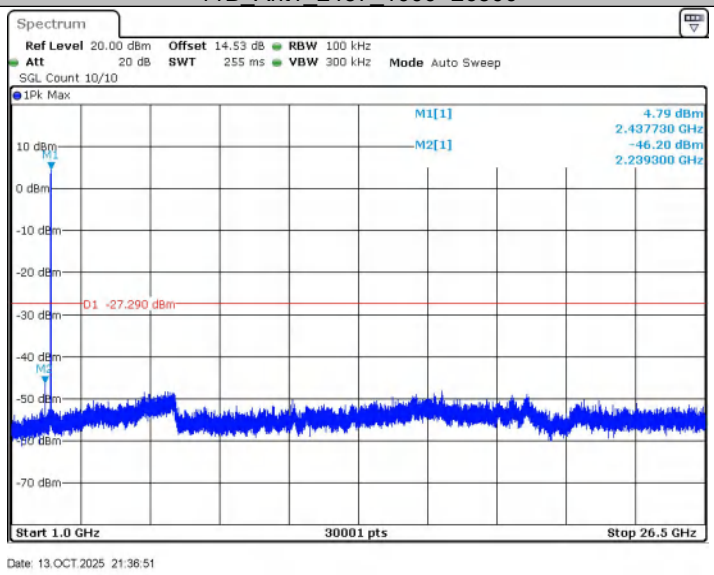

11B_Ant1_2462_0~Reference

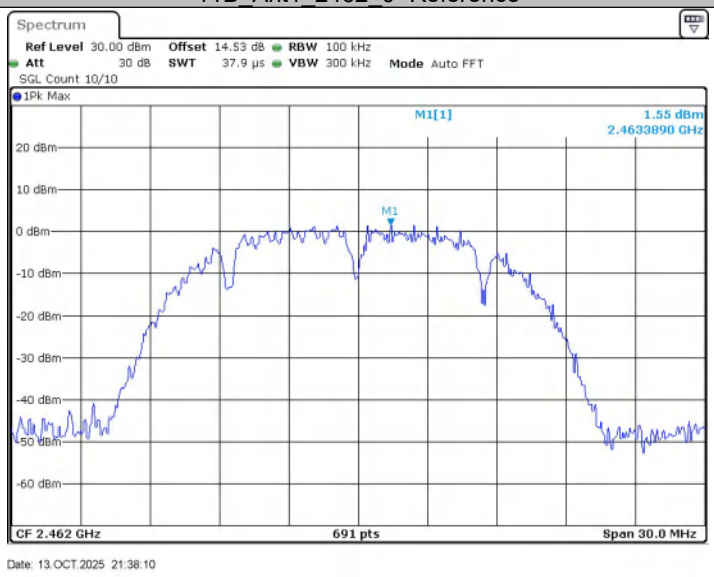

11B_Ant1_2462_30~1000

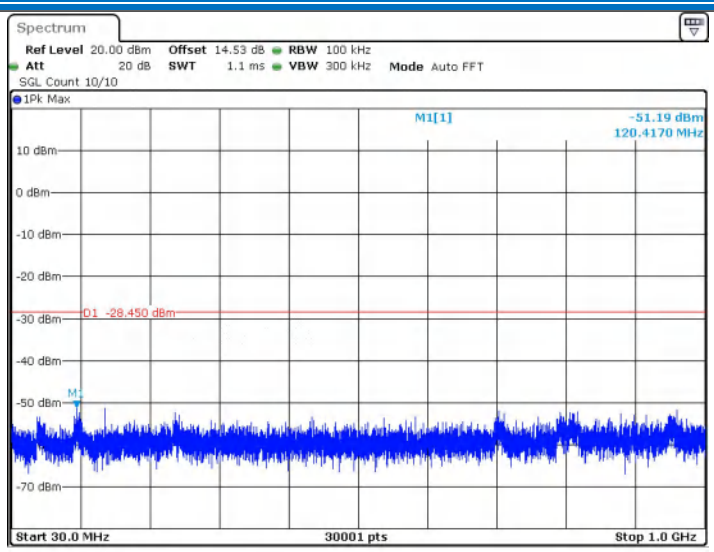

11B_Ant1_2462_1000~26500

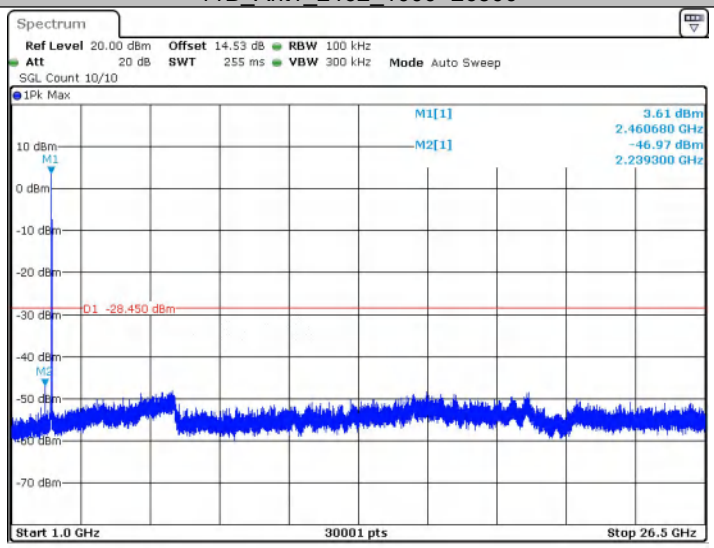

11G_Ant1_2412_0~Reference

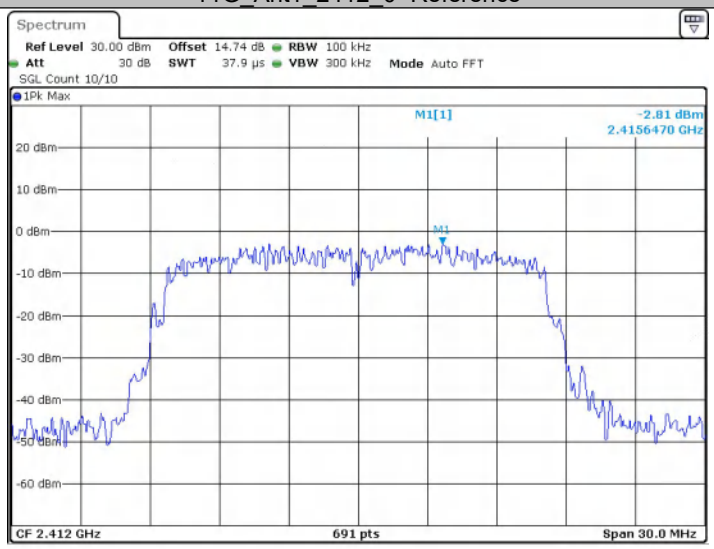

11G_Ant1_2412_30~1000

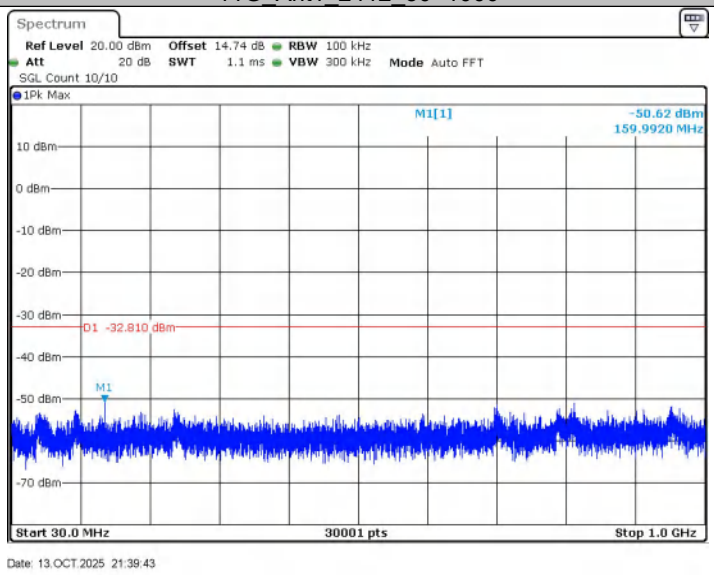

11G_Ant1_2412_1000~26500

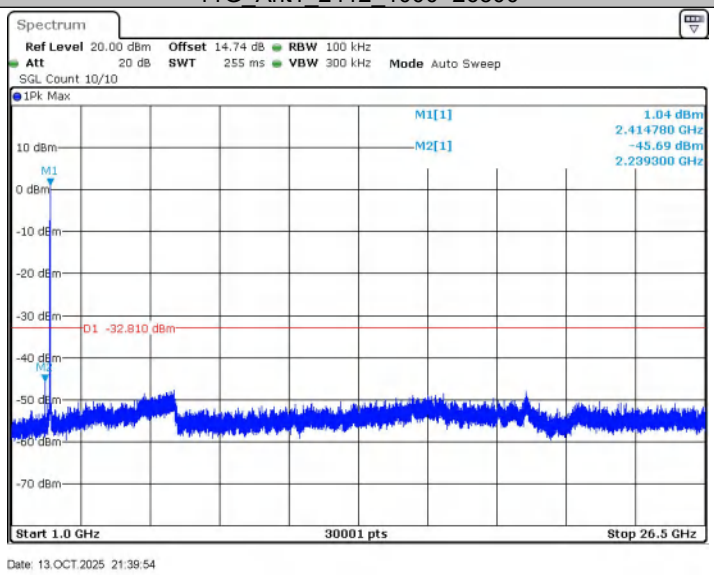

11G_Ant1_2437_0~Reference

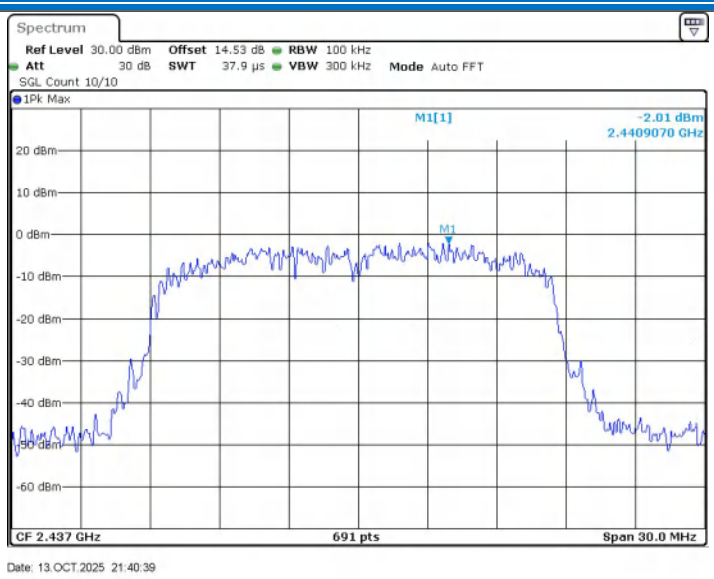

11G_Ant1_2437_30~1000

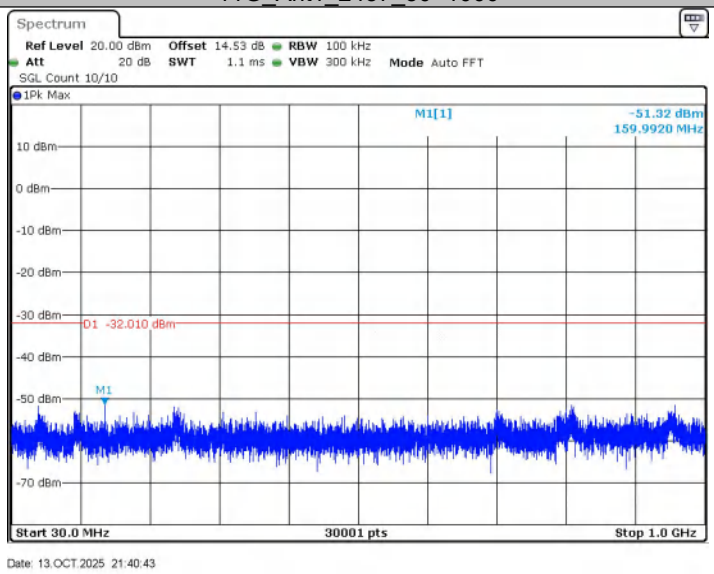

11G_Ant1_2437_1000~26500

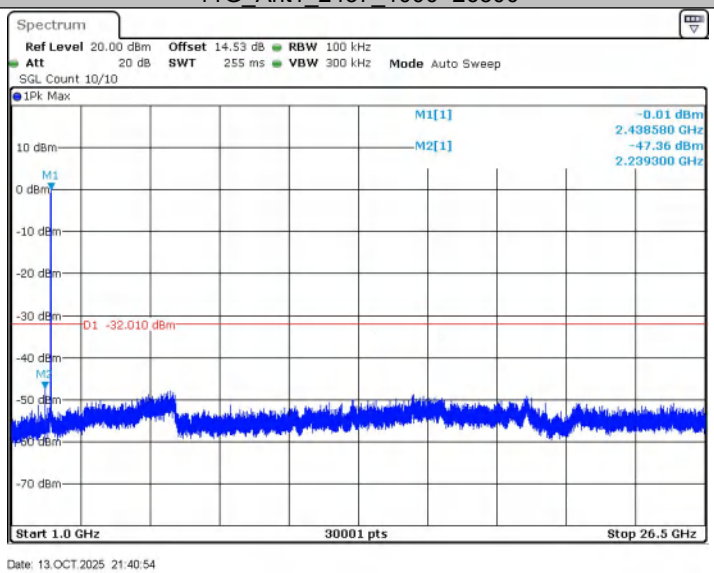

11G_Ant1_2462_0~Reference

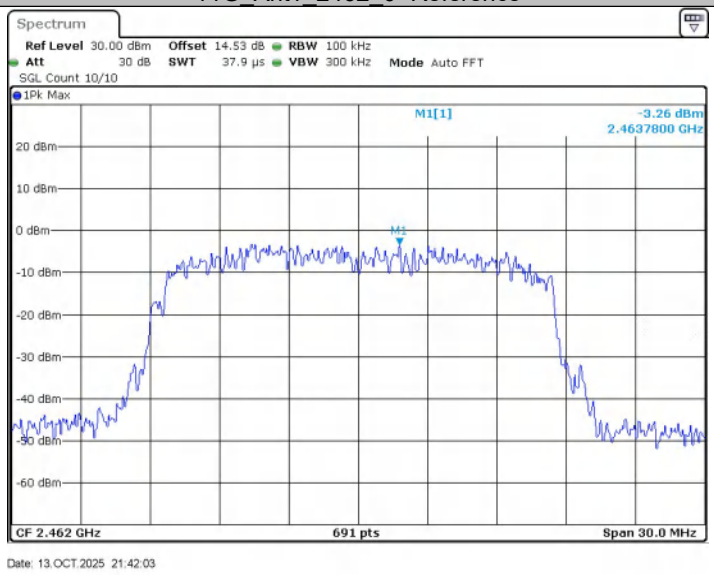

11G_Ant1_2462_30~1000

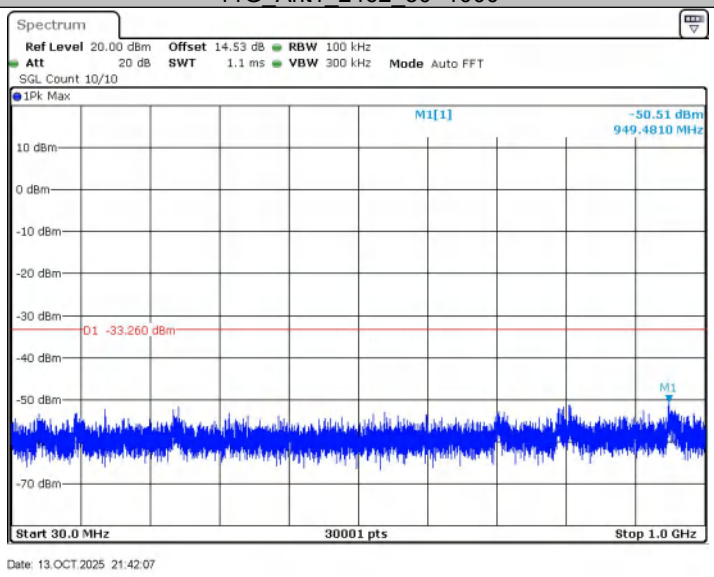

11G_Ant1_2462_1000~26500

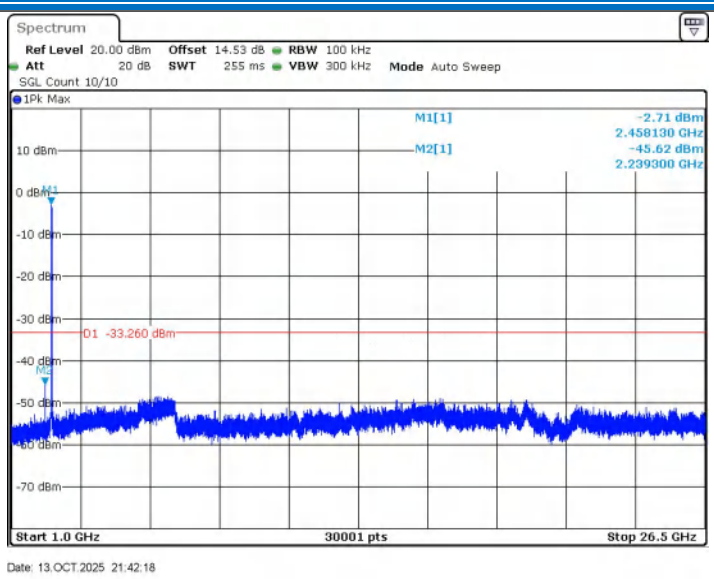

11N20SISO_Ant1_2412_0~Reference

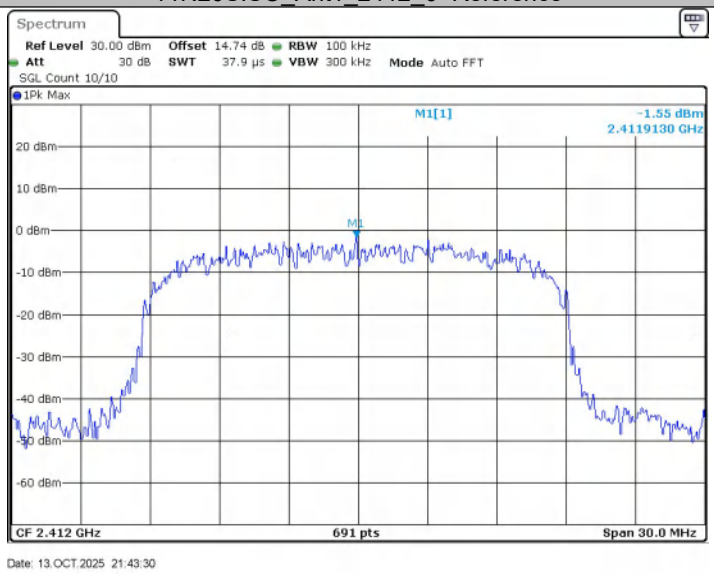

11N20SISO_Ant1_2412_30~1000

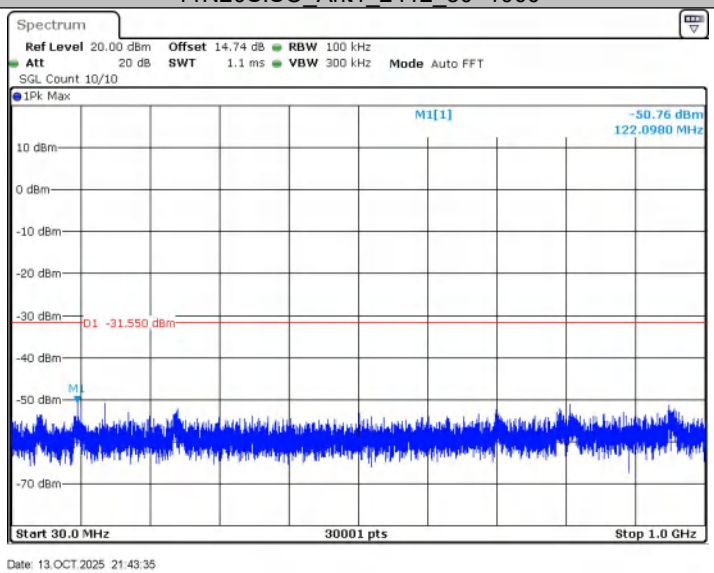

11N20SISO_Ant1_2412_1000~26500

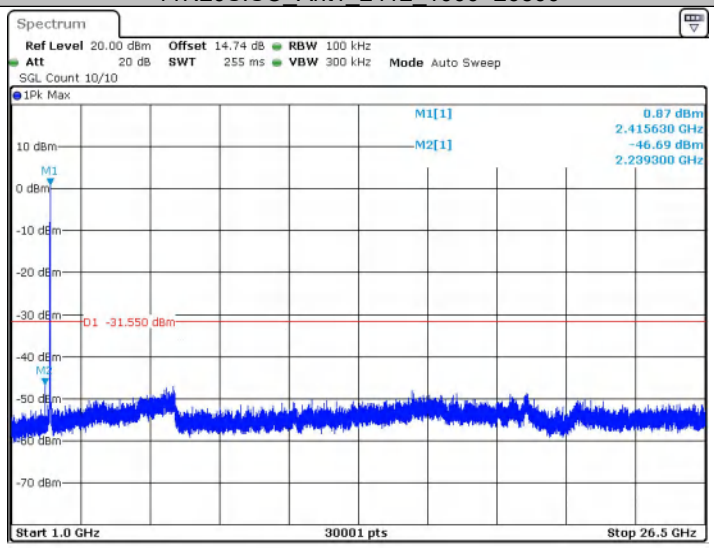

11N20SISO_Ant1_2437_0~Reference

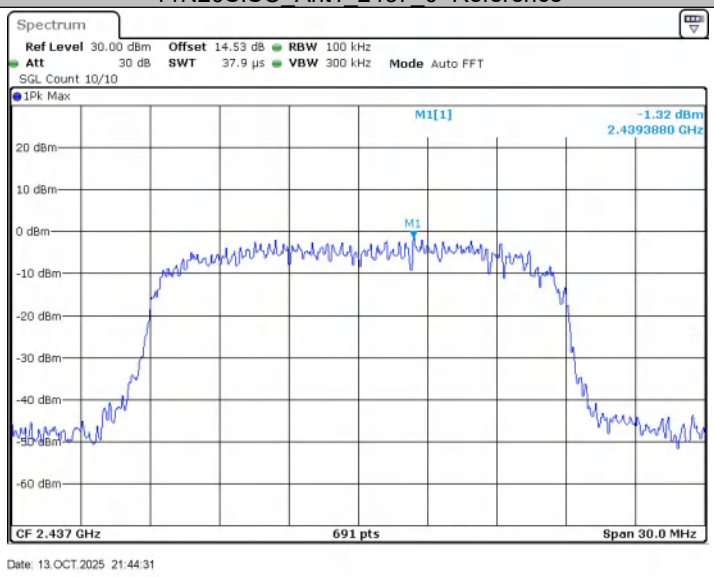

11N20SISO_Ant1_2437_30~1000

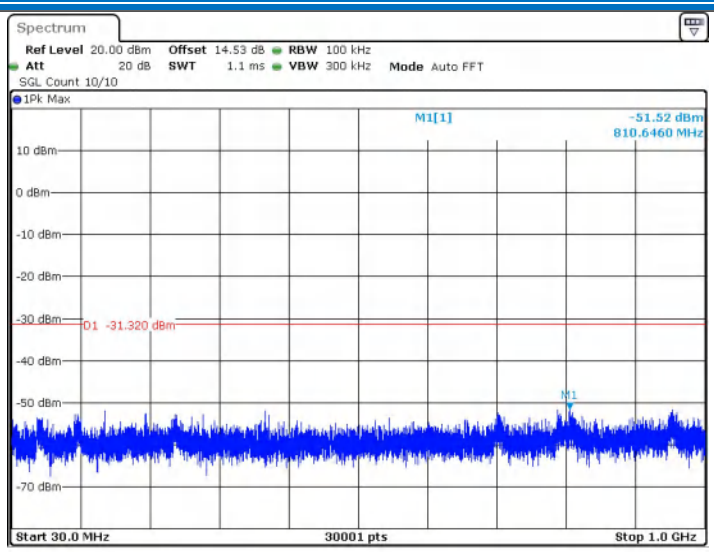

11N20SISO_Ant1_2437_1000~26500

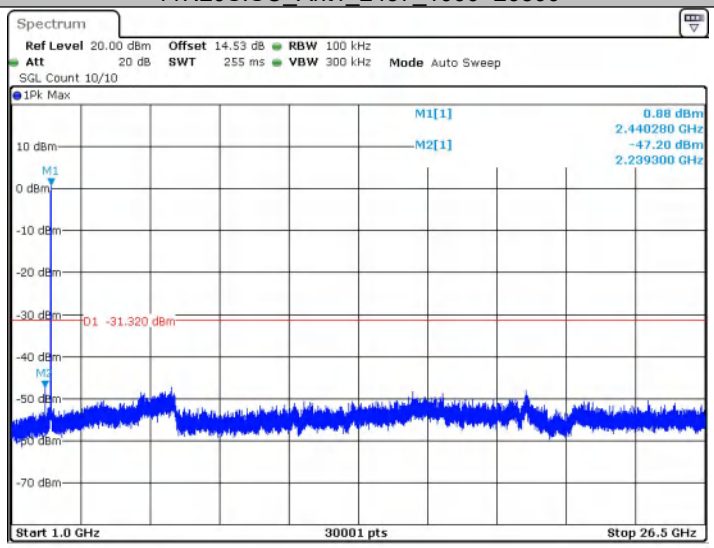

11N20SISO_Ant1_2462_0~Reference

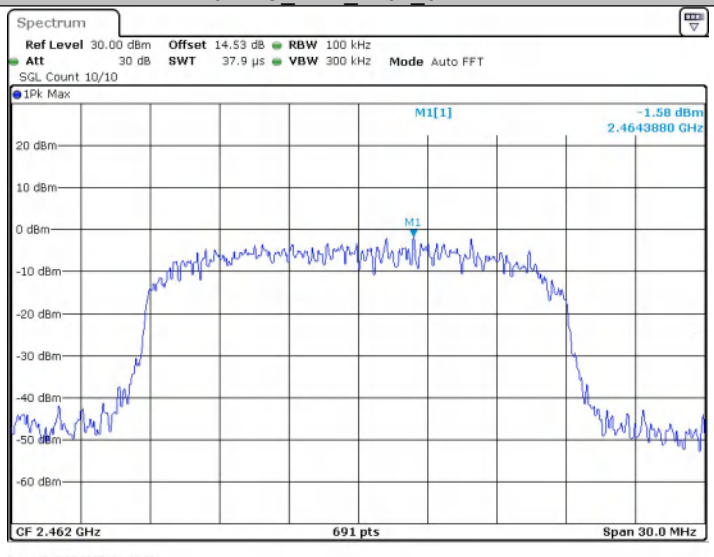

11N20SISO_Ant1_2462_30~1000

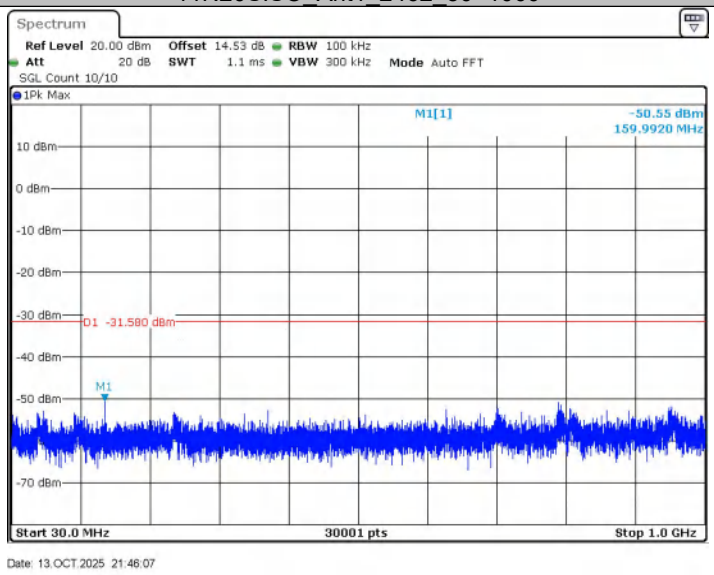

11N20SISO_Ant1_2462_1000~26500

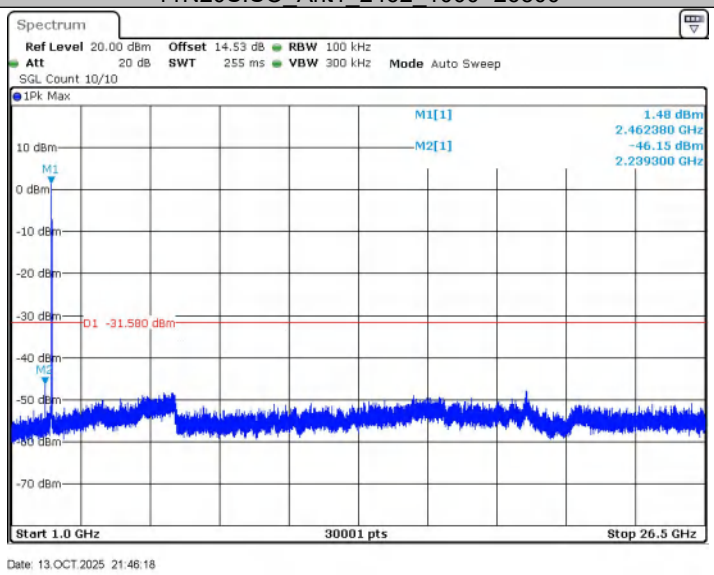

11N40SISO_Ant1_2422_0~Reference

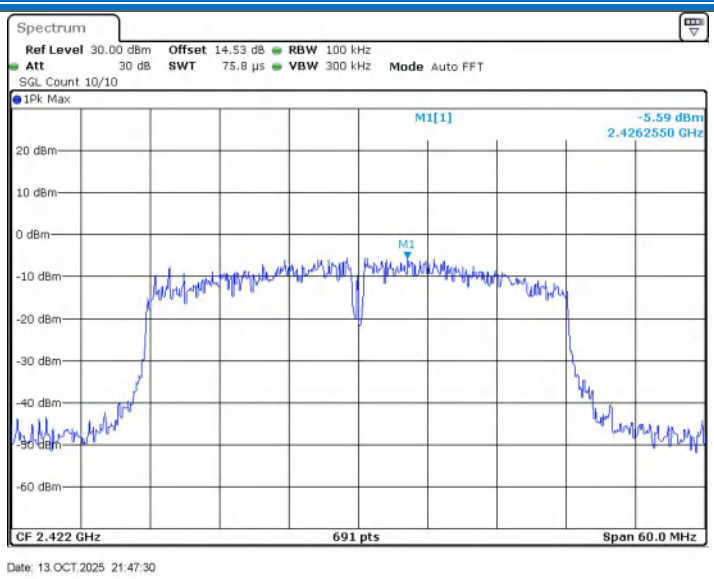

11N40SISO_Ant1_2422_30~1000

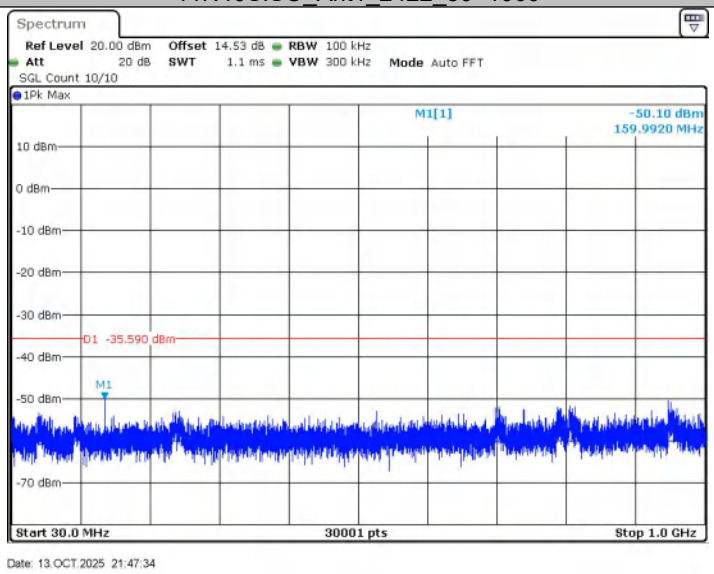

11N40SISO_Ant1_2422_1000~26500

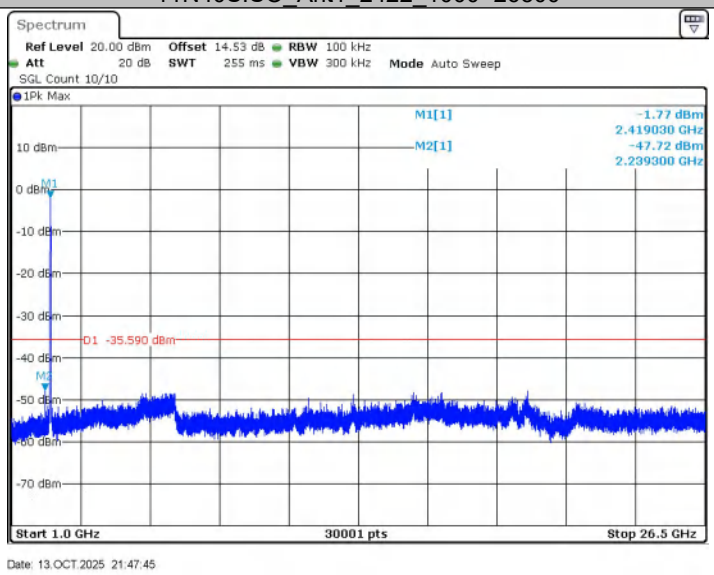

11N40SISO_Ant1_2437_0~Reference

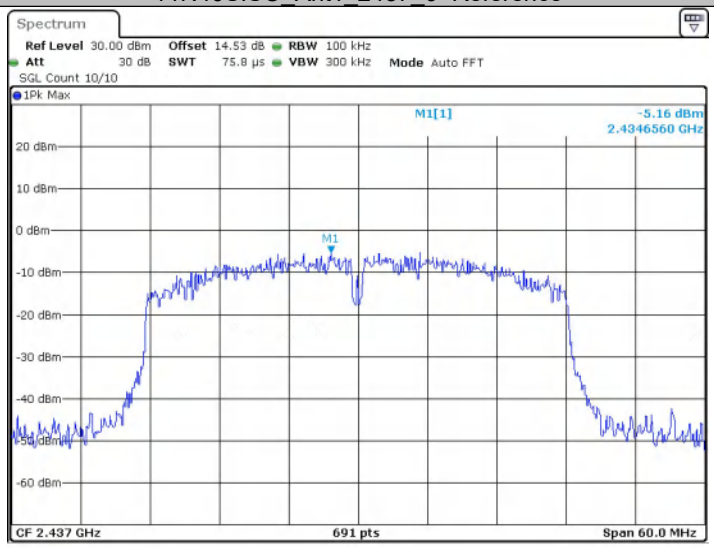

11N40SISO_Ant1_2437_30~1000

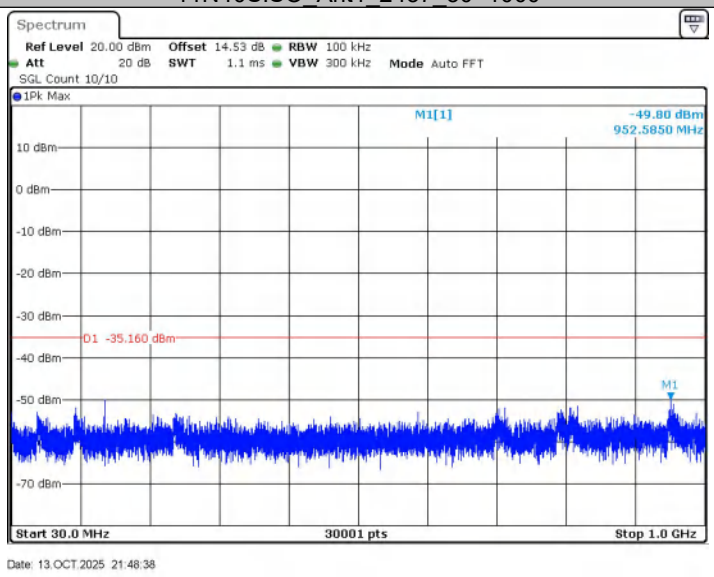

11N40SISO_Ant1_2437_1000~26500

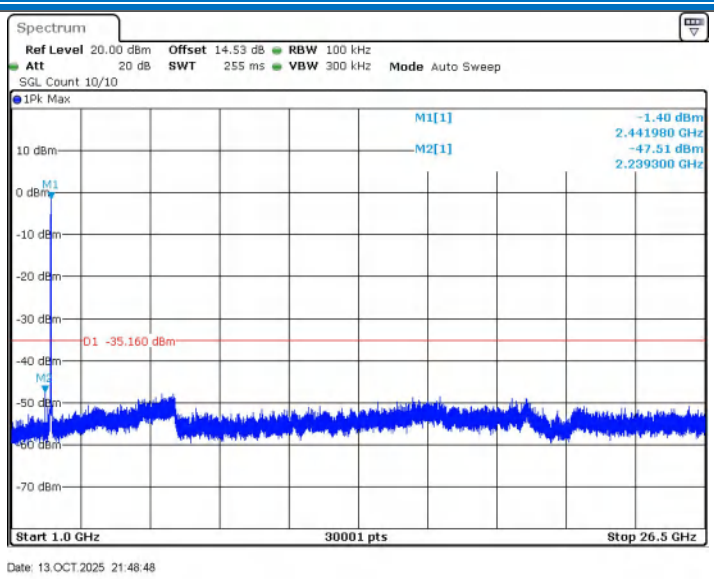

11N40SISO_Ant1_2452_0~Reference

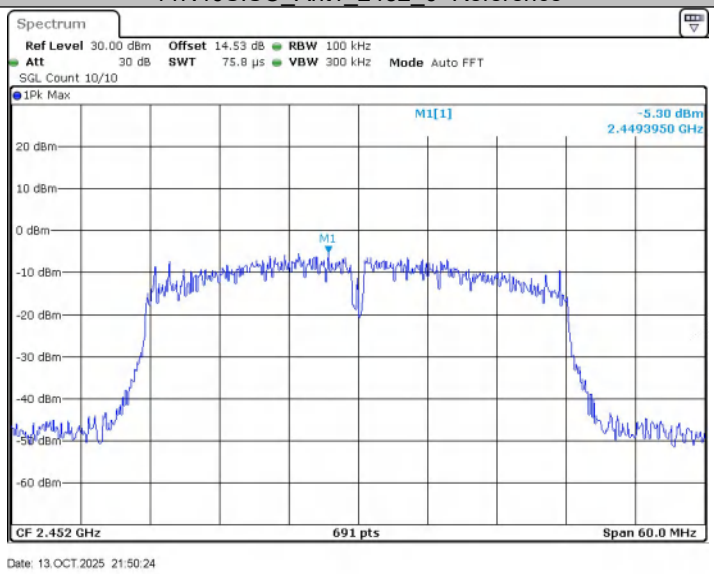

11N40SISO_Ant1_2452_30~1000

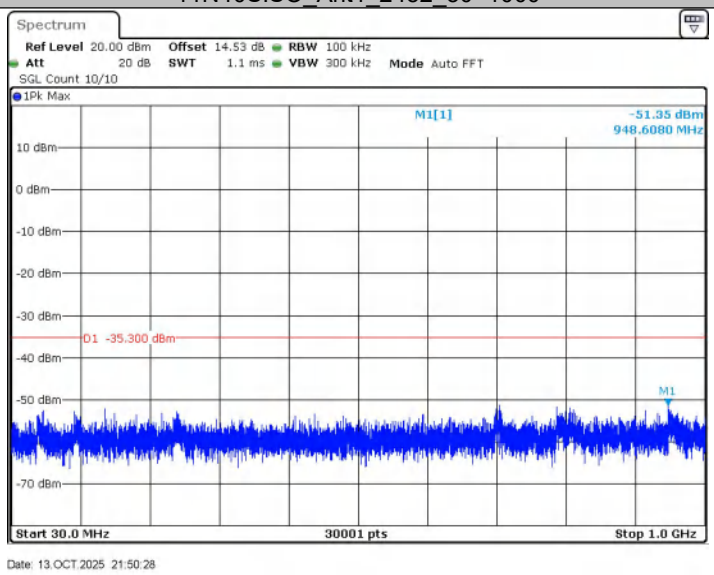

11N40SISO_Ant1_2452_1000~26500

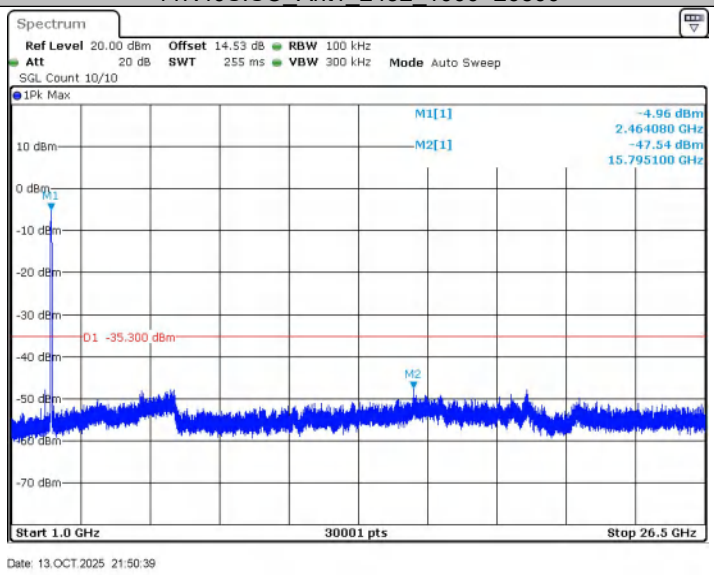

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205
Test Method:	ANSI C63.10 2020
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Limit:

Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Setup:	

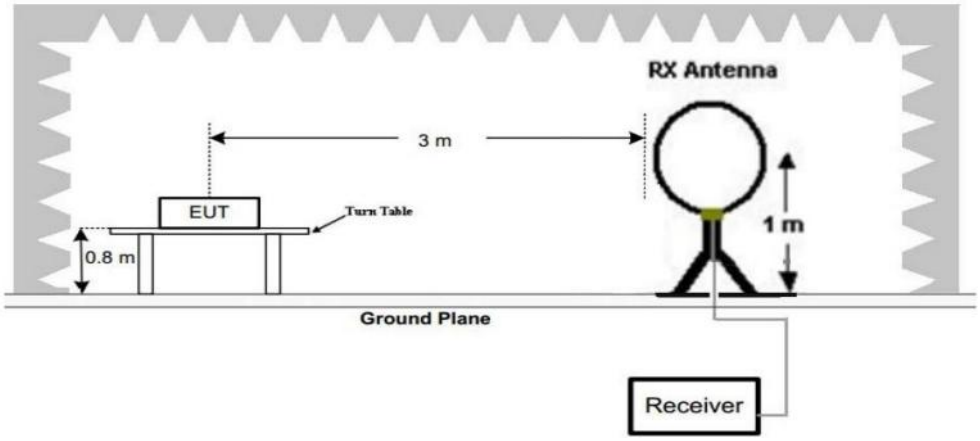

Figure 1. Below 30MHz

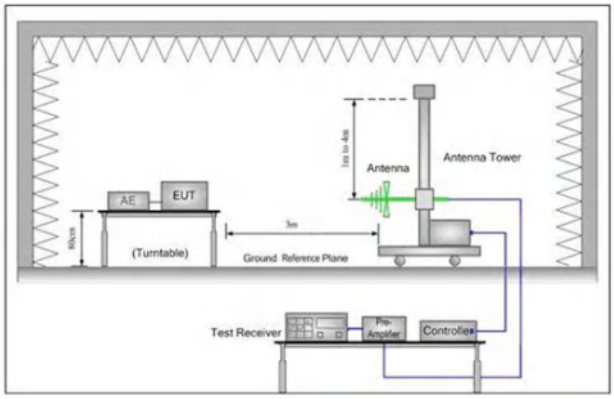

Figure 2. 30MHz to 1GHz

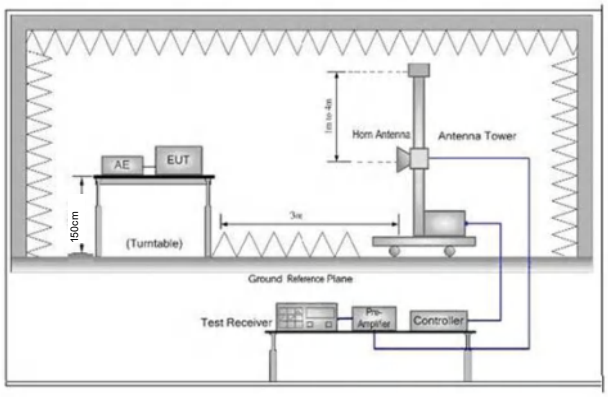

Figure 3. Above 1 GHz

Test Procedure:	a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

5.9.1 Radiated emission below 1GHz

30MHz~1GHz
Vertical

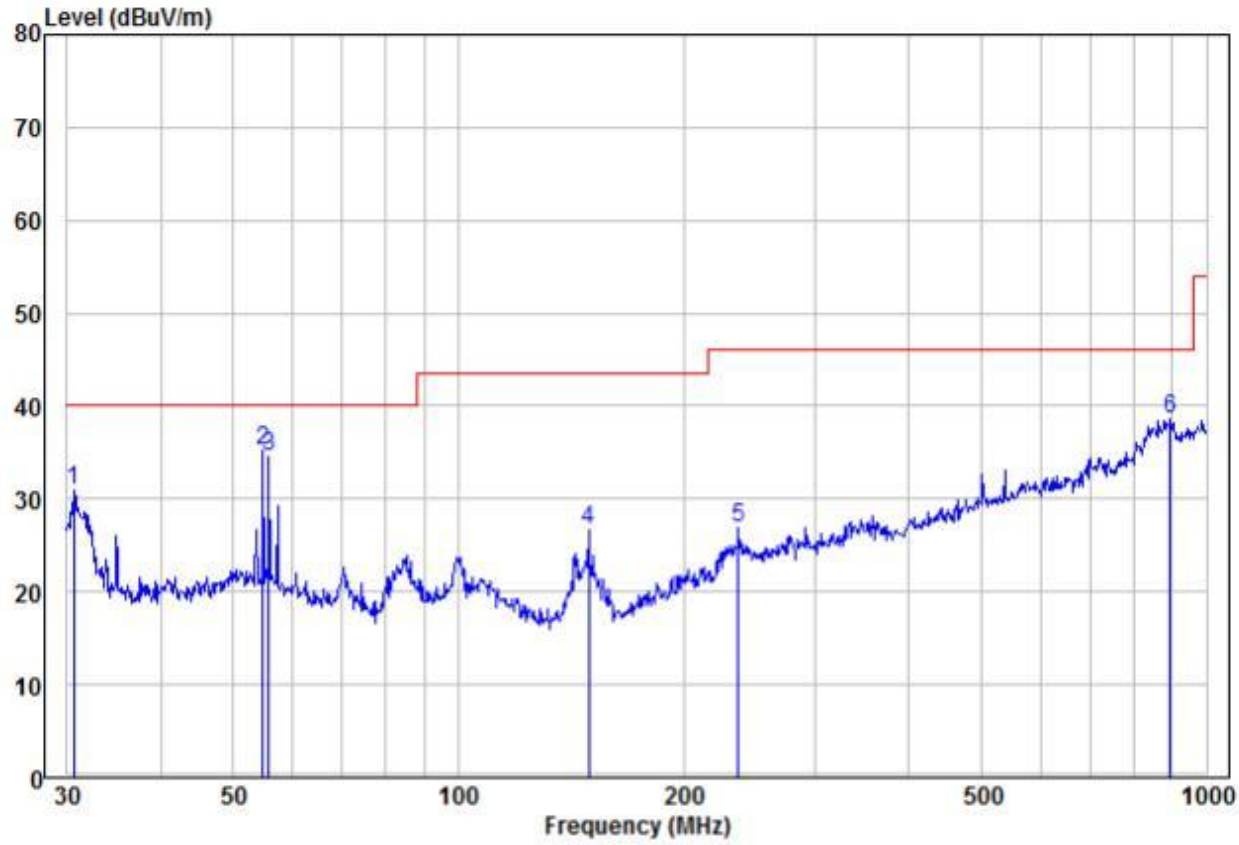

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	APos	TPos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			cm	deg
1	30.64	22.69	8.22	30.91	40.00	-9.09	Peak	VERTICAL	100	266
2 pp	54.83	22.43	12.82	35.25	40.00	-4.75	Peak	VERTICAL	100	105
3	55.80	21.81	12.70	34.51	40.00	-5.49	Peak	VERTICAL	100	254
4	149.49	18.00	8.75	26.75	43.50	-16.75	Peak	VERTICAL	100	90
5	236.64	11.97	14.87	26.84	46.00	-19.16	Peak	VERTICAL	100	3
6	893.86	9.52	29.20	38.72	46.00	-7.28	Peak	VERTICAL	100	36

Remark:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Factor= Antenna Factor + Cable Factor – Preamplifier Factor,
Level = Read Level + Factor,
Over Limit=Level-Limit Line.

Horizontal

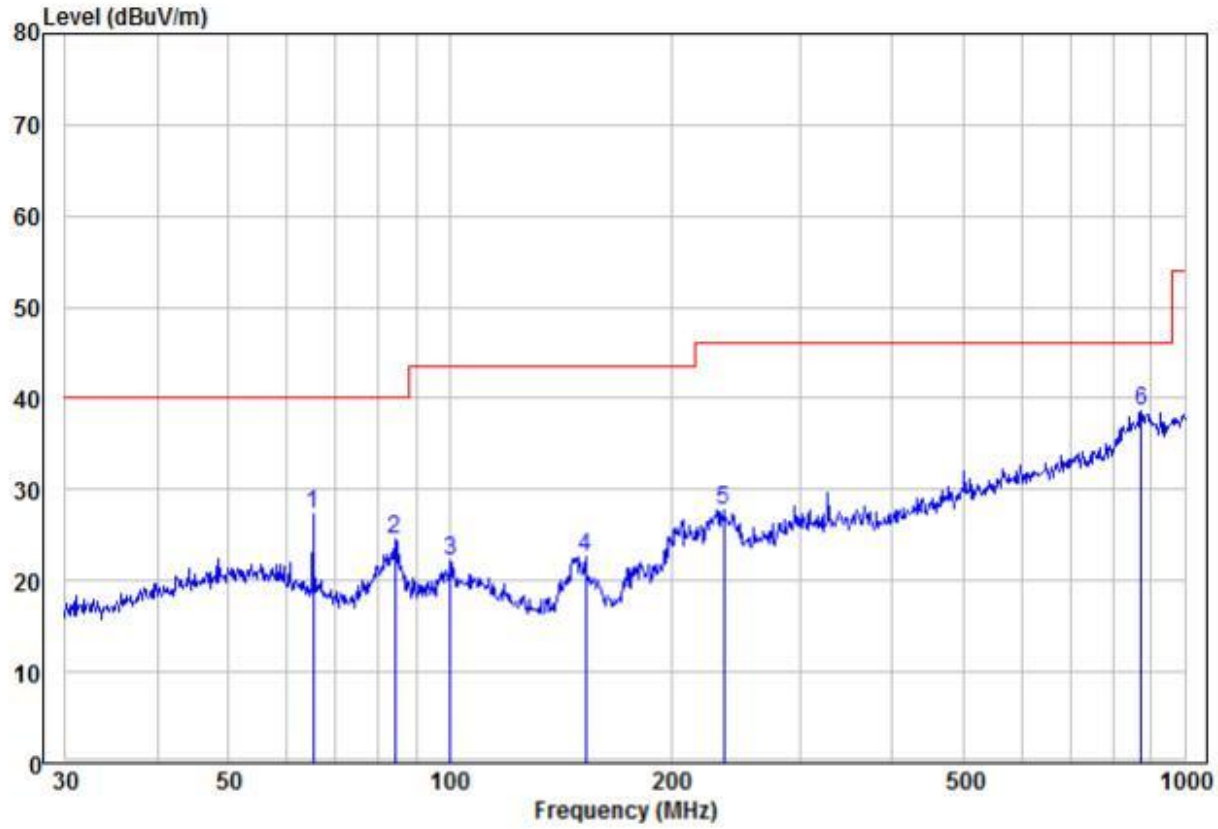

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	APos	TPos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			cm	deg
1	65.11	16.45	10.82	27.27	40.00	-12.73	Peak	HORIZONTAL	100	250
2	84.11	15.83	8.76	24.59	40.00	-15.41	Peak	HORIZONTAL	100	103
3	100.23	10.23	11.88	22.11	43.50	-21.39	Peak	HORIZONTAL	100	177
4	153.20	13.68	8.89	22.57	43.50	-20.93	Peak	HORIZONTAL	100	93
5	235.82	12.94	14.79	27.73	46.00	-18.27	Peak	HORIZONTAL	100	360
6 pp	872.18	9.69	28.84	38.53	46.00	-7.47	Peak	HORIZONTAL	100	42

Remark:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Factor= Antenna Factor + Cable Factor – Preamplifier Factor,
Level = Read Level + Factor,
Over Limit=Level-Limit Line.

5.9.2 Transmitter emission above 1GHz

Test mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	53.49	-4.26	49.23	74	-24.77	peak	H	1.5	206
4824.000	36.32	-4.26	32.06	54	-21.94	AVG	H	1.5	246
7236.000	52.07	1.18	53.25	74	-20.75	peak	H	1.5	48
7236.000	38.75	1.18	39.93	54	-14.07	AVG	H	1.5	335
4824.000	55.12	-4.26	50.86	74	-23.14	peak	V	1.5	43
4824.000	37.99	-4.26	33.73	54	-20.27	AVG	V	1.5	209
7236.000	50.55	1.18	51.73	74	-22.27	peak	V	1.5	225
7236.000	35.29	1.18	36.47	54	-17.53	AVG	V	1.5	277

Test mode:		802.11b(1Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	51.81	-4.12	47.69	74	-26.31	peak	H	1.5	7
4874.000	37.73	-4.12	33.61	54	-20.39	AVG	H	1.5	259
7311.000	48.99	1.46	50.45	74	-23.55	peak	H	1.5	204
7311.000	36.61	1.46	38.07	54	-15.93	AVG	H	1.5	279
4874.000	52.28	-4.12	48.16	74	-25.84	peak	V	1.5	163
4874.000	36.04	-4.12	31.92	54	-22.08	AVG	V	1.5	108
7311.000	48.33	1.46	49.79	74	-24.21	peak	V	1.5	78
7311.000	36.60	1.46	38.06	54	-15.94	AVG	V	1.5	143

Test mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol. H/V	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)			(m)	(Degree)
4924.000	53.00	-4.03	48.97	74	-25.03	peak	H	1.5	31
4924.000	37.33	-4.03	33.30	54	-20.70	AVG	H	1.5	155
7386.000	50.02	1.66	51.68	74	-22.32	peak	H	1.5	223
7386.000	37.27	1.66	38.93	54	-15.07	AVG	H	1.5	131
4924.000	54.37	-4.03	50.34	74	-23.66	peak	V	1.5	158
4924.000	37.42	-4.03	33.39	54	-20.61	AVG	V	1.5	56
7386.000	50.29	1.66	51.95	74	-22.05	peak	V	1.5	260
7386.000	37.20	1.66	38.86	54	-15.14	AVG	V	1.5	123

Remark:

1) The 1Mbps of rate of 802.11b is the worst case.
2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
   Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
3) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
4824.000	52.85	-4.26	48.59	74	-25.41	peak	H	1.5	3
4824.000	36.13	-4.26	31.87	54	-22.13	AVG	H	1.5	151
7236.000	52.12	1.18	53.30	74	-20.70	peak	H	1.5	201
7236.000	37.18	1.18	38.36	54	-15.64	AVG	H	1.5	127
4824.000	56.22	-4.26	51.96	74	-22.04	peak	V	1.5	65
4824.000	39.47	-4.26	35.21	54	-18.79	AVG	V	1.5	119
7236.000	52.21	1.18	53.39	74	-20.61	peak	V	1.5	311
7236.000	36.98	1.18	38.16	54	-15.84	AVG	V	1.5	96

Test mode:		802.11g(6Mbps)		Test channel:		Middle			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
4874.000	53.02	-4.12	48.90	74	-25.10	peak	H	1.5	138
4874.000	37.38	-4.12	33.26	54	-20.74	AVG	H	1.5	320
7311.000	49.09	1.46	50.55	74	-23.45	peak	H	1.5	93
7311.000	35.37	1.46	36.83	54	-17.17	AVG	H	1.5	313
4874.000	53.28	-4.12	49.16	74	-24.84	peak	V	1.5	211
4874.000	37.00	-4.12	32.88	54	-21.12	AVG	V	1.5	274
7311.000	48.73	1.46	50.19	74	-23.81	peak	V	1.5	173
7311.000	35.82	1.46	37.28	54	-16.72	AVG	V	1.5	311

Test mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol. H/V	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)			(m)	(Degree)
4924.000	52.27	-4.03	48.24	74	-25.76	peak	H	1.5	197
4924.000	37.56	-4.03	33.53	54	-20.47	AVG	H	1.5	165
7386.000	49.38	1.66	51.04	74	-22.96	peak	H	1.5	197
7386.000	36.75	1.66	38.41	54	-15.59	AVG	H	1.5	212
4924.000	54.53	-4.03	50.50	74	-23.50	peak	V	1.5	67
4924.000	38.68	-4.03	34.65	54	-19.35	AVG	V	1.5	12
7386.000	50.71	1.66	52.37	74	-21.63	peak	V	1.5	43
7386.000	37.33	1.66	38.99	54	-15.01	AVG	V	1.5	111

Remark:

1) The 6Mbps of rate of 802.11g is the worst case.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

3) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n20(6.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detecto r Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	53.01	-4.26	48.75	74	-25.25	peak	H	1.5	80
4824.000	37.89	-4.26	33.63	54	-20.37	AVG	H	1.5	117
7236.000	50.31	1.18	51.49	74	-22.51	peak	H	1.5	59
7236.000	37.32	1.18	38.50	54	-15.50	AVG	H	1.5	194
4824.000	55.84	-4.26	51.58	74	-22.42	peak	V	1.5	39
4824.000	38.06	-4.26	33.80	54	-20.20	AVG	V	1.5	314
7236.000	51.77	1.18	52.95	74	-21.05	peak	V	1.5	17
7236.000	35.71	1.18	36.89	54	-17.11	AVG	V	1.5	311

Test mode:		802.11n20(6.5Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	51.88	-4.12	47.76	74	-26.24	peak	H	1.5	186
4874.000	37.89	-4.12	33.77	54	-20.23	AVG	H	1.5	138
7311.000	48.43	1.46	49.89	74	-24.11	peak	H	1.5	185
7311.000	36.60	1.46	38.06	54	-15.94	AVG	H	1.5	179
4874.000	54.12	-4.12	50.00	74	-24.00	peak	V	1.5	165
4874.000	36.24	-4.12	32.12	54	-21.88	AVG	V	1.5	353
7311.000	49.42	1.46	50.88	74	-23.12	peak	V	1.5	271
7311.000	35.58	1.46	37.04	54	-16.96	AVG	V	1.5	90

Test mode:		802.11n20(6.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol. H/V	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)			(m)	(Degree)
4924.000	51.42	-4.03	47.39	74	-26.61	peak	H	1.5	210
4924.000	37.28	-4.03	33.25	54	-20.75	AVG	H	1.5	96
7386.000	51.12	1.66	52.78	74	-21.22	peak	H	1.5	242
7386.000	37.41	1.66	39.07	54	-14.93	AVG	H	1.5	238
4924.000	54.88	-4.03	50.85	74	-23.15	peak	V	1.5	147
4924.000	38.37	-4.03	34.34	54	-19.66	AVG	V	1.5	107
7386.000	50.33	1.66	51.99	74	-22.01	peak	V	1.5	23
7386.000	36.99	1.66	38.65	54	-15.35	AVG	V	1.5	352

Remark:

1) The MCS0 of rate of 802.11n20 is the worst case.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

3) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n40(13.5Mbps)		Test channel:		Lowest			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
4824.000	53.56	-4.24	49.32	74	-24.68	peak	H	1.5	339
4824.000	36.68	-4.24	32.44	54	-21.56	AVG	H	1.5	51
7236.000	50.68	1.2	51.88	74	-22.12	peak	H	1.5	176
7236.000	37.55	1.2	38.75	54	-15.25	AVG	H	1.5	75
4824.000	55.85	-4.24	51.61	74	-22.39	peak	V	1.5	238
4824.000	38.44	-4.24	34.20	54	-19.80	AVG	V	1.5	320
7236.000	50.46	1.2	51.66	74	-22.34	peak	V	1.5	272
7236.000	35.22	1.2	36.42	54	-17.58	AVG	V	1.5	86

Test mode:		802.11n40(13.5Mbps)		Test channel:		Middle			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
4874.000	51.37	-4.12	47.25	74	-26.75	peak	H	1.5	135
4874.000	37.25	-4.12	33.13	54	-20.87	AVG	H	1.5	23
7311.000	50.19	1.46	51.65	74	-22.35	peak	H	1.5	240
7311.000	35.07	1.46	36.53	54	-17.47	AVG	H	1.5	307
4874.000	53.06	-4.12	48.94	74	-25.06	peak	V	1.5	26
4874.000	36.45	-4.12	32.33	54	-21.67	AVG	V	1.5	226
7311.000	48.79	1.46	50.25	74	-23.75	peak	V	1.5	190
7311.000	35.88	1.46	37.34	54	-16.66	AVG	V	1.5	318

Test mode:		802.11n40(13.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol. H/V	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)			(m)	(Degree)
4924.000	52.66	-4.05	48.61	74	-25.39	peak	H	1.5	13
4924.000	36.17	-4.05	32.12	54	-21.88	AVG	H	1.5	201
7386.000	51.45	1.64	53.09	74	-20.91	peak	H	1.5	104
7386.000	37.05	1.64	38.69	54	-15.31	AVG	H	1.5	243
4924.000	56.12	-4.05	52.07	74	-21.93	peak	V	1.5	153
4924.000	38.24	-4.05	34.19	54	-19.81	AVG	V	1.5	295
7386.000	52.02	1.64	53.66	74	-20.34	peak	V	1.5	254
7386.000	35.67	1.64	37.31	54	-16.69	AVG	V	1.5	352

Remark:

1) The MCS0 of rate of 802.11n40 is the worst case.
2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
   Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
3) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

5.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205
Test Method:	ANSI C63.10 2020
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
Limit:	

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
	74.0	Peak Value

Test Setup:

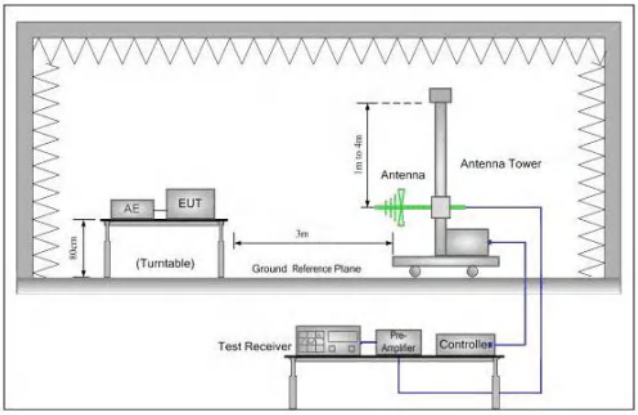

Figure 1. 30MHz to 1GHz

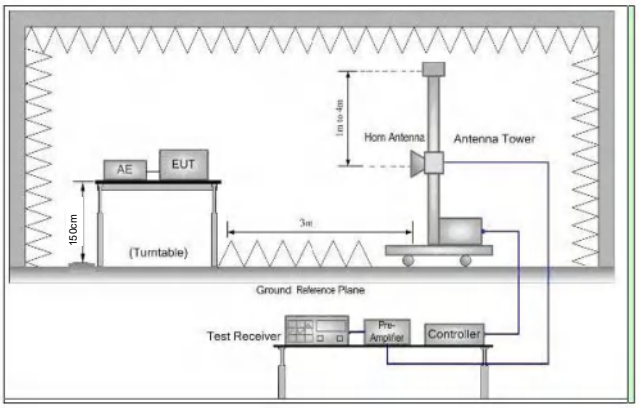

Figure 2. Above 1 GHz

Test Procedure:

a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and

	then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Test Results:	Pass

Test data:

Worse case mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
2390.000	58.69	-9.2	49.49	74	-24.51	peak	H	1.5	216
2390.000	44.61	-9.2	35.41	54	-18.59	AVG	H	1.5	225
2400.000	59.84	-9.39	50.45	74	-23.55	peak	H	1.5	314
2400.000	46.69	-9.39	37.30	54	-16.70	AVG	H	1.5	20
2390.000	58.28	-9.2	49.08	74	-24.92	peak	V	1.5	11
2390.000	44.81	-9.2	35.61	54	-18.39	AVG	V	1.5	306
2400.000	60.03	-9.39	50.64	74	-23.36	peak	V	1.5	84
2400.000	46.86	-9.39	37.47	54	-16.53	AVG	V	1.5	342

Worse case mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
2483.500	58.04	-9.29	48.75	74	-25.25	peak	H	1.5	239
2483.500	43.72	-9.29	34.43	54	-19.57	AVG	H	1.5	126
2483.500	58.32	-9.29	49.03	74	-24.97	peak	V	1.5	136
2483.500	46.11	-9.29	36.82	54	-17.18	AVG	V	1.5	15

Worse case mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2390.000	58.38	-9.2	49.18	74	-24.82	peak	H	1.5	135
2390.000	44.56	-9.2	35.36	54	-18.64	AVG	H	1.5	96
2400.000	59.30	-9.39	49.91	74	-24.09	peak	H	1.5	215
2400.000	46.93	-9.39	37.54	54	-16.46	AVG	H	1.5	311
2390.000	59.19	-9.2	49.99	74	-24.01	peak	V	1.5	21
2390.000	44.42	-9.2	35.22	54	-18.78	AVG	V	1.5	204
2400.000	59.77	-9.39	50.38	74	-23.62	peak	V	1.5	106
2400.000	46.20	-9.39	36.81	54	-17.19	AVG	V	1.5	318

Worse case mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2483.500	57.78	-9.29	48.49	74	-25.51	peak	H	1.5	347
2483.500	43.67	-9.29	34.38	54	-19.62	AVG	H	1.5	188
2483.500	57.70	-9.29	48.41	74	-25.59	peak	V	1.5	23
2483.500	45.75	-9.29	36.46	54	-17.54	AVG	V	1.5	175

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2390.000	59.08	-9.2	49.88	74	-24.12	peak	H	1.5	29
2390.000	44.22	-9.2	35.02	54	-18.98	AVG	H	1.5	10
2400.000	59.62	-9.39	50.23	74	-23.77	peak	H	1.5	232
2400.000	46.90	-9.39	37.51	54	-16.49	AVG	H	1.5	327
2390.000	58.93	-9.2	49.73	74	-24.27	peak	V	1.5	331
2390.000	44.44	-9.2	35.24	54	-18.76	AVG	V	1.5	283
2400.000	59.47	-9.39	50.08	74	-23.92	peak	V	1.5	236
2400.000	46.40	-9.39	37.01	54	-16.99	AVG	V	1.5	349

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2483.500	57.54	-9.29	48.25	74	-25.75	peak	H	1.5	25
2483.500	44.27	-9.29	34.98	54	-19.02	AVG	H	1.5	136
2483.500	58.01	-9.29	48.72	74	-25.28	peak	V	1.5	100
2483.500	45.87	-9.29	36.58	54	-17.42	AVG	V	1.5	206

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Lowest			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
2390.000	58.92	-9.2	49.72	74	-24.28	peak	H	1.5	58
2390.000	44.51	-9.2	35.31	54	-18.69	AVG	H	1.5	85
2400.000	59.24	-9.39	49.85	74	-24.15	peak	H	1.5	43
2400.000	46.06	-9.39	36.67	54	-17.33	AVG	H	1.5	273
2390.000	59.02	-9.2	49.82	74	-24.18	peak	V	1.5	279
2390.000	44.29	-9.2	35.09	54	-18.91	AVG	V	1.5	58
2400.000	59.92	-9.39	50.53	74	-23.47	peak	V	1.5	108
2400.000	46.64	-9.39	37.25	54	-16.75	AVG	V	1.5	92

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Highest			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
2483.500	57.74	-9.29	48.45	74	-25.55	peak	H	1.5	258
2483.500	44.15	-9.29	34.86	54	-19.14	AVG	H	1.5	126
2483.500	57.78	-9.29	48.49	74	-25.51	peak	V	1.5	57
2483.500	46.12	-9.29	36.83	54	-17.17	AVG	V	1.5	356

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

6 Photographs - EUT Test Setup

6.1 Radiated Spurious Emission

9kHz~30MHz:

30MHz~1GHz:

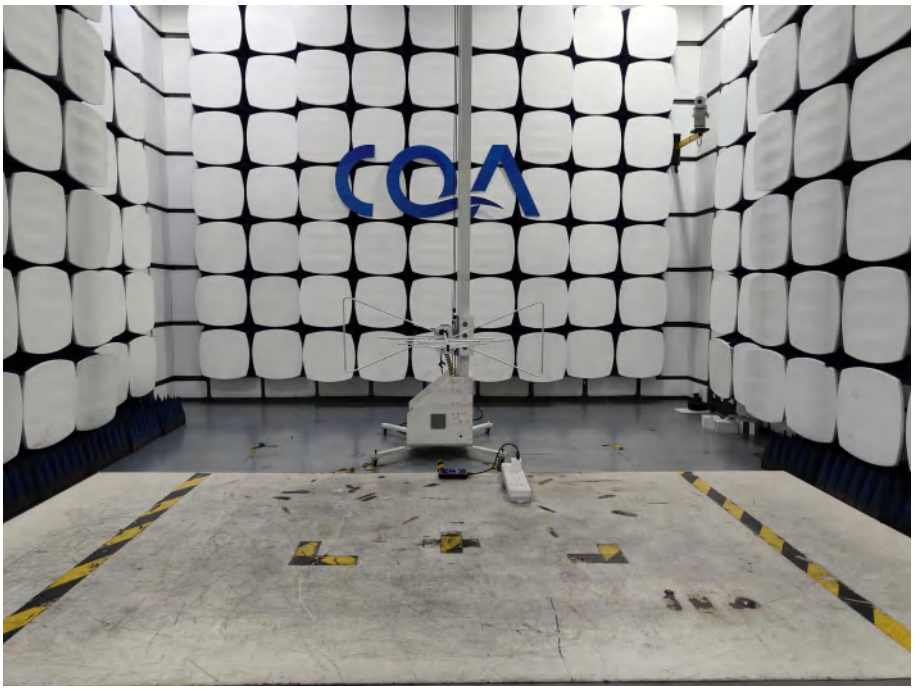

Above 1GHz:

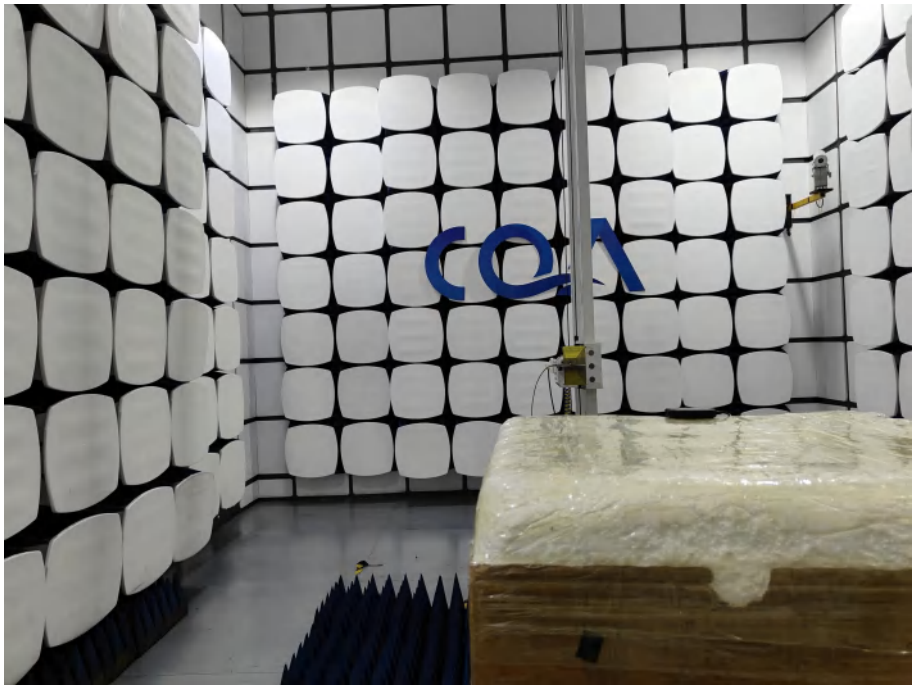

6.2 Conducted Emission

6.3 RF Conducted measurement

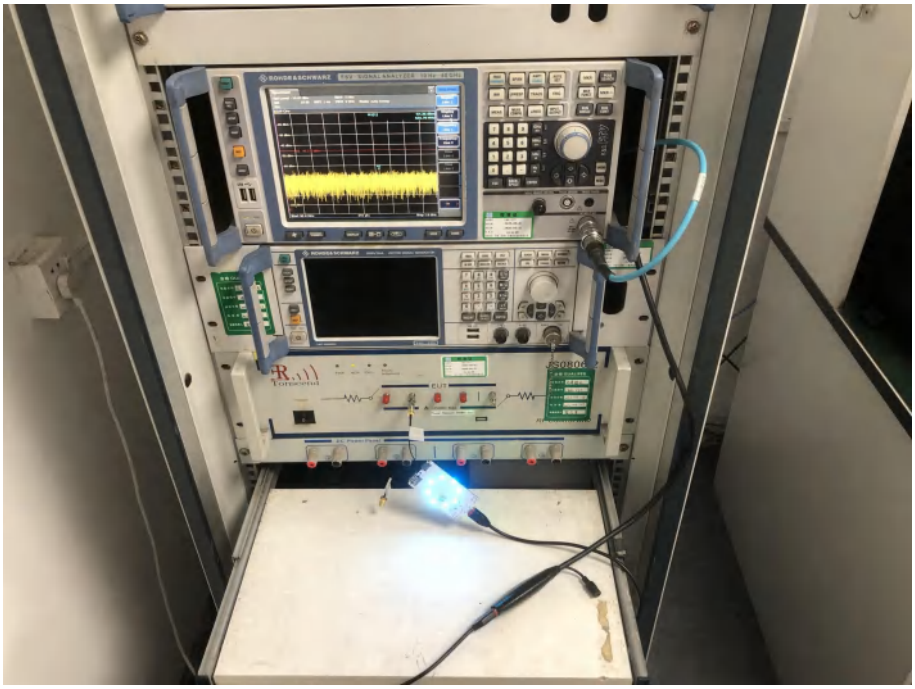

7 Photographs - EUT Constructional Details

Refer to PHOTOGRAPHS OF EUT for CQASZ20250902267E-01.

*** END OF REPORT ***