

FCC Test Report

Report No. : 1812C60380312501

Applicant : JMTEK TECHNOLOGY(ZHONGSHAN) CO., LTD

Address : 3F B3 and 3F B4 Chuangzhi Science Park,
No.22 Xingpu Avenue East, Huangpu Town,
Zhongshan City, Guangdong Province,
528429 China

Product Name : Magnetic Power Bank

Report Date : 2026-07-28

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information.....	5
1.1. Client Information	5
1.2. Description of Device (EUT)	5
1.3. Auxiliary Equipment Used During Test	6
1.4. Description of Test Modes	6
1.5. Description Of Test Setup	8
1.6. Test Equipment List	10
1.7. Measurement Uncertainty	11
1.8. Description of Test Facility	11
1.9. Disclaimer	11
2. Summary of Test Results	12
3. Conducted Emission Test	13
3.1. Test Standard and Limit	13
3.2. Test Setup	13
3.3. Test Procedure	13
3.4. Test Data	13
4. Radiation Spurious Emission.....	16
4.1. Test Standard and Limit	16
4.2. Test Setup	16
4.3. Test Procedure	17
4.4. Test Data	17
5. 20dB Occupy Bandwidth Test	22
5.1. Test Standard and Limit	22
5.2. Test Setup	22
5.3. Test Procedure	22
5.4. Test Data	22
6. Antenna Requirement	24
6.1. Test Standard and Requirement	24
6.2. Antenna Connected Construction	24
APPENDIX I -- TEST SETUP PHOTOGRAPH	25
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	25
APPENDIX III -- INTERNAL PHOTOGRAPH.....	25

TEST REPORT

Applicant : JMTEK TECHNOLOGY(ZHONGSHAN) CO., LTD
Manufacturer : JMTEK TECHNOLOGY(ZHONGSHAN) CO., LTD
Product Name : Magnetic Power Bank
Model No. : SMPB800
Trade Mark : N/A

Rating(s) : Input:(USB-C):5V=3A 9V=2A 12V=1.5A
Output:Total 22.5W Max
USB-C:5V=3A 9V=2.22A 12V=1.67A
Wireless:15W Max
USB-C+Wireless:5V=3A
Battery:5000mAh 3.85V 19.25Wh

Test Standard(s) : 47 CFR Part 15 Subpart C

**Test Method(s) : ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
ANSI C63.30-2021**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the 47 CFR Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

2026-07-02

Date of Test

2026-07-02 to 2026-07-15

Prepared By

Polly Mo

(Polly Mo)

Approved & Authorized Signer

Jules Guo

(Jules Guo)

Revision History

Report Version	Description	Issued Date
R00	Original Issue.	2026-07-28

1. General Information

1.1. Client Information

Applicant	:	JMTEK TECHNOLOGY(ZHONGSHAN) CO., LTD
Address	:	3F B3 and 3F B4 Chuangzhi Science Park, No.22 Xingpu Avenue East, Huangpu Town, Zhongshan City, Guangdong Province, 528429 China
Manufacturer	:	JMTEK TECHNOLOGY(ZHONGSHAN) CO., LTD
Address	:	3F B3 and 3F B4 Chuangzhi Science Park, No.22 Xingpu Avenue East, Huangpu Town, Zhongshan City, Guangdong Province, 528429 China
Factory	:	JMTEK TECHNOLOGY(ZHONGSHAN) CO., LTD
Address	:	3F B3 and 3F B4 Chuangzhi Science Park, No.22 Xingpu Avenue East, Huangpu Town, Zhongshan City, Guangdong Province, 528429 China

1.2. Description of Device (EUT)

Product Name	:	Magnetic Power Bank
Model No.	:	SMPB800
Trade Mark	:	N/A
Test Power Supply	:	AC 120V/60Hz for adapter, DC 3.85V battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A
RF Specification		
Operation Frequency	:	112kHz-205kHz
Modulation Type	:	ASK
Antenna Type	:	Inductive loop coil Antenna
Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
Wireless charging load	Shenzhen Ouju Technology Co., Ltd.	CD2577	/
Xiaomi 67W adapter	Xiaomi	MDY-13-ES	WA622091100375G
Xiaomi 33W adapter	Xiaomi	MDY-11-EX	SA62212LA04358J


1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Modes	Descriptions
TM1	Adapter+WPT Mode (5W 1% Load)
TM2	Adapter+WPT Mode (5W 50% Load)
TM3	Adapter+WPT Mode (5W 99% Load)
TM4	Adapter+WPT Mode (7.5W 1% Load)
TM5	Adapter+WPT Mode (7.5W 50% Load)
TM6	Adapter+WPT Mode (7.5W 99% Load)
TM7	Adapter+WPT Mode (10W 1% Load)
TM8	Adapter+WPT Mode (10W 50% Load)
TM9	Adapter+WPT Mode (10W 99% Load)
TM10	Adapter+WPT Mode (15W 1% Load)
TM11	Adapter+WPT Mode (15W 50% Load)
TM12	Adapter+WPT Mode (15W 99% Load)
TM13	WPT Mode (5W 1% Load)
TM14	WPT Mode (5W 50% Load)
TM15	WPT Mode (5W 99% Load)
TM16	WPT Mode (7.5W 1% Load)
TM17	WPT Mode (7.5W 50% Load)
TM18	WPT Mode (7.5W 99% Load)
TM19	WPT Mode (10W 1% Load)
TM20	WPT Mode (10W 50% Load)
TM21	WPT Mode (10W 99% Load)

TM22	WPT Mode (15W 1% Load)
TM23	WPT Mode (15W 50% Load)
TM24	WPT Mode (15W 99% Load)
TM25	Standby Mode


1.5. Description Of Test Setup

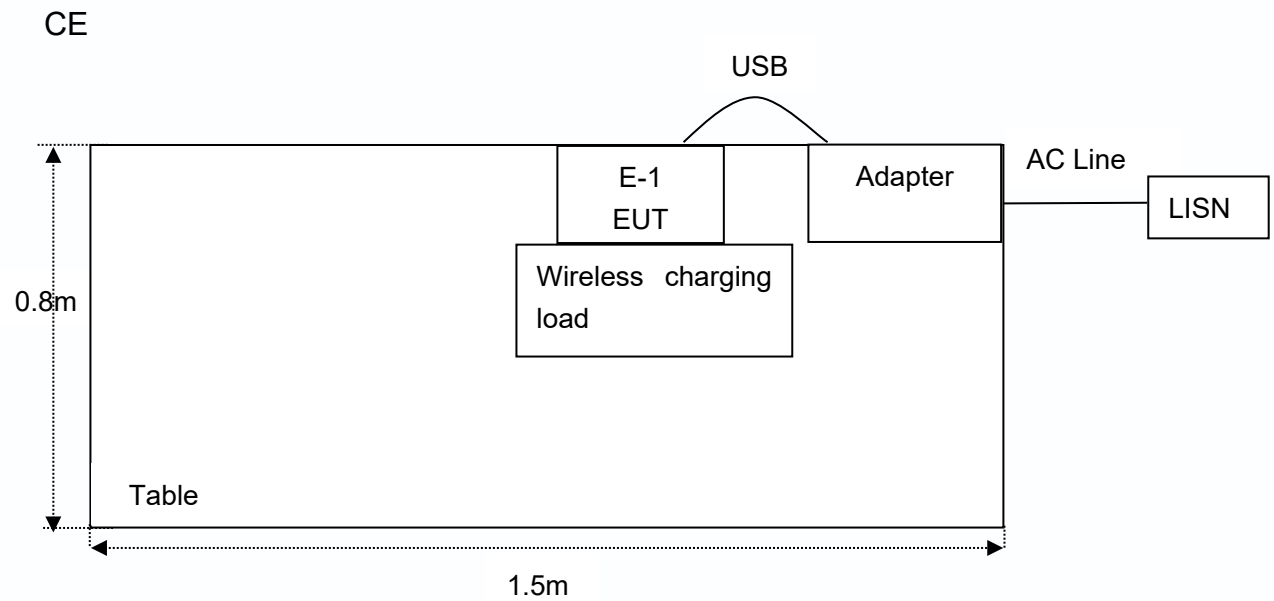

RE(below 30MHz)

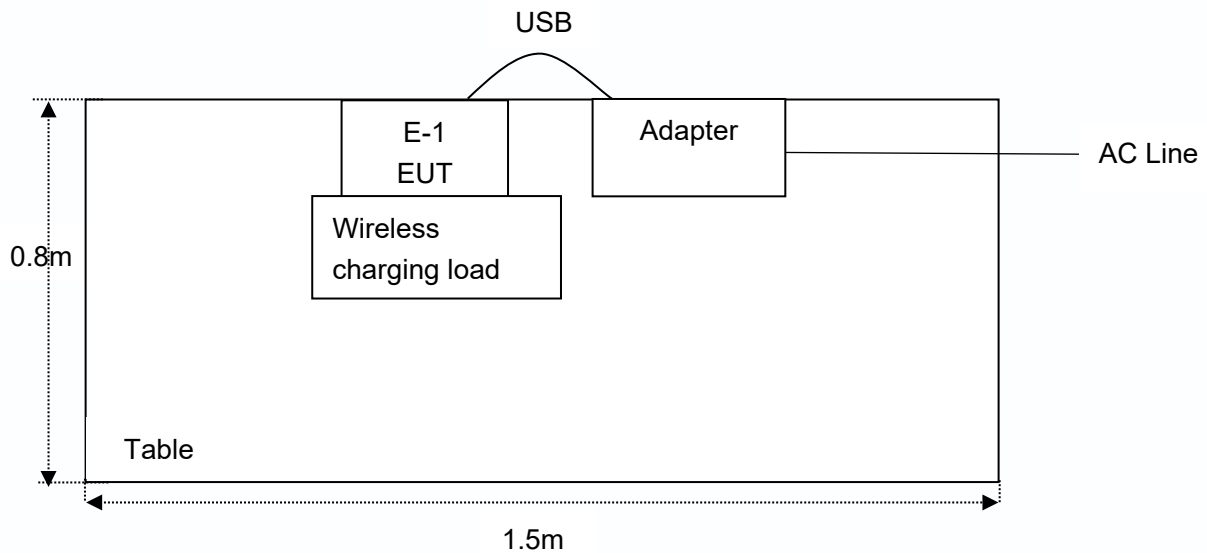

RE(30MHz-1GHz)

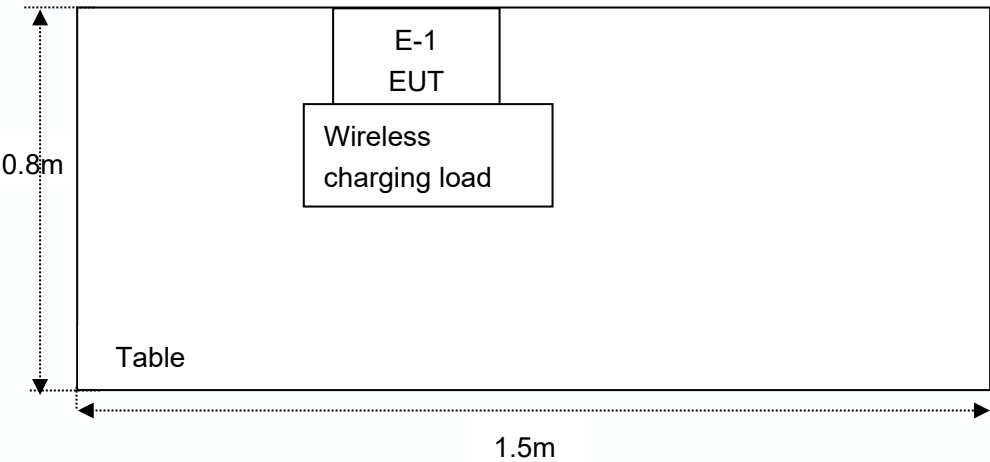

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	2025-09-05	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	2025-12-30	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	2025-12-30	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	2025-12-30	1 Year
5.	MXA Spectrum Analysis	Agilent	N9020A	2025-09-05	1 Year
6.	EMI Preamplifier	SKET Electronic	LNPA-0118G-45	2025-12-30	1 Year
7.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	2025-10-27	3 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	2025-10-26	3 Year
9.	Loop Antenna(9K- 30M)	Schwarzbeck	FMZB1519B	2025-09-05	1 Year
10.	Horn Antenna	A-INFO	LB-180400-KF	2024-01-22	3 Year
11.	Pre-amplifier	SONOMA	310N	2025-12-30	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A
13.	MXA Spectrum Analysis	KEYSIGHT	N9020A	2025-09-05	1 Year
14.	MXG RF Vector Signal Generator	Agilent	N5182A	2025-12-29	1 Year
15.	Signal Generator	Agilent	E4421B	2025-12-29	1 Year
16.	DC Power Supply	IVYTECH	IV3605	2025-09-05	1 Year
17.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-HWHS80B	2025-08-29	1 Year
18.	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	2025-12-29	1 Year

1.7. Measurement Uncertainty

Parameter	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	2.8dB
Occupied Bandwidth	552Hz
Radiated spurious emissions (Below 30MHz)	3.14dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.94dB; Vertical: 4.34dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 279531

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 279531.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

1.9. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.
7. The data in this report will be synchronized with the corresponding national market supervision and management departments and cross-border e-commerce platforms as required by regulatory agencies.
8. Unless otherwise specified, use the binary decision rule of simple acceptance ($w=0$) for conformity determination with reference to ILAC-G8:09/2019.

2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission Test	PASS
15.205/15.209	Spurious Emission	PASS
15.215(c)	20dB Occupy Bandwidth	PASS

Note: N/A” denotes test is not applicable in this Test Report


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

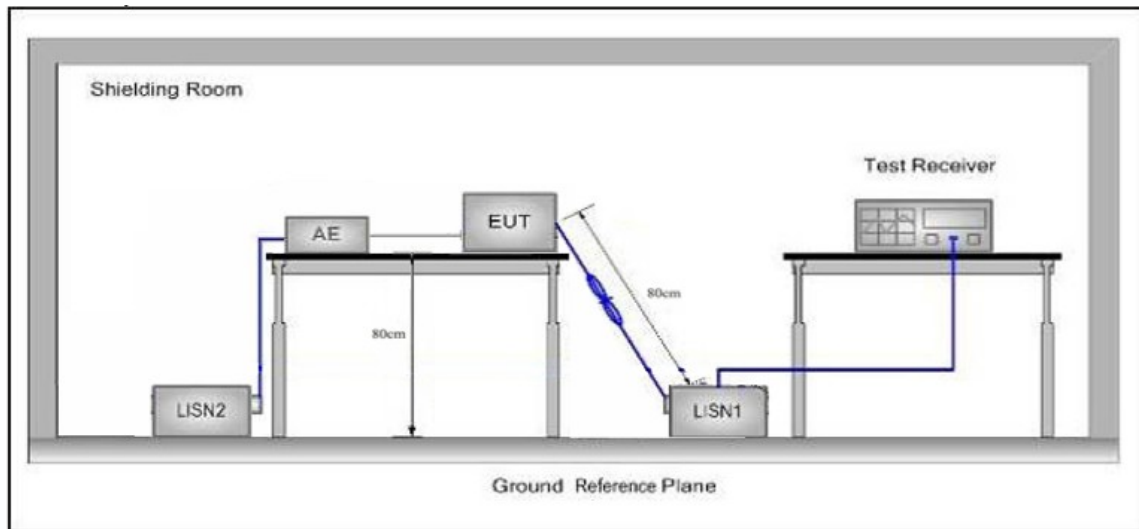

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

During the test, pre-scan all modes, only the worst case is recorded in the report.
Please to see the following pages.

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: TM12
Test Specification: AC 120V/60Hz for adapter
Comment: Live Line
Temp.(°C)/Hum.(%RH): 25.3°C/69%RH

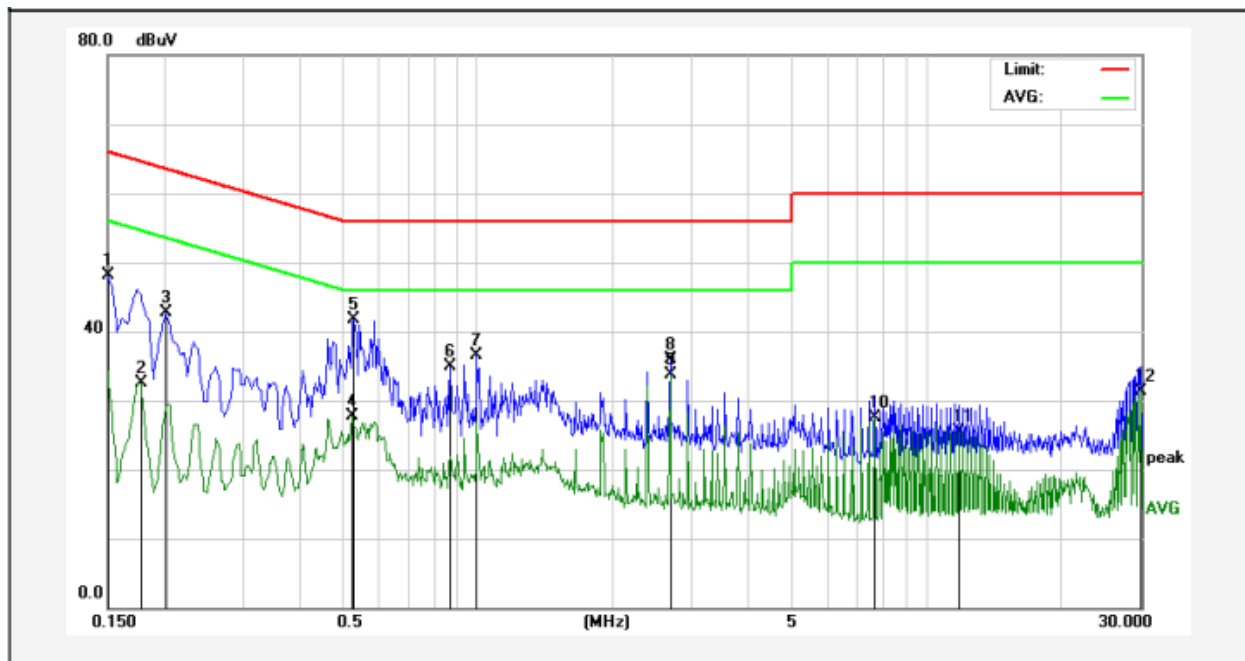

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	30.18	17.92	48.10	65.99	-17.89	QP	
2	0.1780	14.54	18.00	32.54	54.57	-22.03	AVG	
3	0.2020	24.65	18.05	42.70	63.52	-20.82	QP	
4	0.5260	9.61	18.11	27.72	46.00	-18.28	AVG	
5	0.5299	23.67	18.11	41.78	56.00	-14.22	QP	
6	0.8700	16.78	18.10	34.88	56.00	-21.12	QP	
7	0.9980	18.50	18.10	36.60	56.00	-19.40	QP	
8	2.6860	17.93	18.04	35.97	56.00	-20.03	QP	
9	2.6860	15.59	18.04	33.63	46.00	-12.37	AVG	
10	7.6700	9.57	17.96	27.53	50.00	-22.47	AVG	
11	11.7940	7.47	18.12	25.59	50.00	-24.41	AVG	
12	29.9260	13.36	18.04	31.40	50.00	-18.60	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: TM12
Test Specification: AC 120V/60Hz for adapter
Comment: Neutral Line
Temp.(°C)/Hum.(%RH): 25.3°C/69%RH

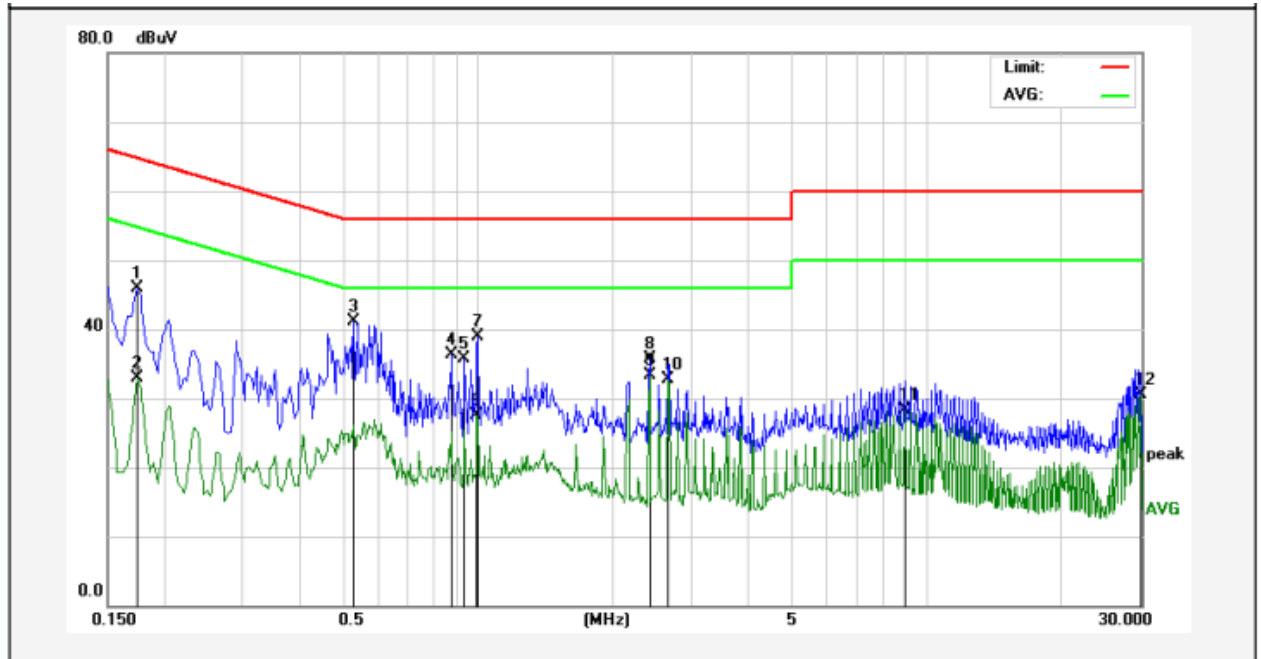

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1740	27.82	17.99	45.81	64.76	-18.95	QP	
2	0.1740	14.91	17.99	32.90	54.76	-21.86	AVG	
3	0.5299	22.91	18.11	41.02	56.00	-14.98	QP	
4	0.8780	18.28	18.10	36.38	56.00	-19.62	QP	
5	0.9340	17.66	18.10	35.76	56.00	-20.24	QP	
6	0.9980	9.37	18.10	27.47	46.00	-18.53	AVG	
7	1.0020	20.89	18.10	38.99	56.00	-17.01	QP	
8	2.4100	17.66	18.05	35.71	56.00	-20.29	QP	
9	2.4100	15.21	18.05	33.26	46.00	-12.74	AVG	
10	2.6619	14.59	18.04	32.63	46.00	-13.37	AVG	
11	8.9460	10.35	17.94	28.29	50.00	-21.71	AVG	
12	29.9100	12.40	18.04	30.44	50.00	-19.56	AVG	

Note:

Result(dBμV) = Reading(dBμV) + Factor(dB);

Over Limit(dB) = Result(dBμV) - Limit(dBμV)

4. Radiation Spurious Emission

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

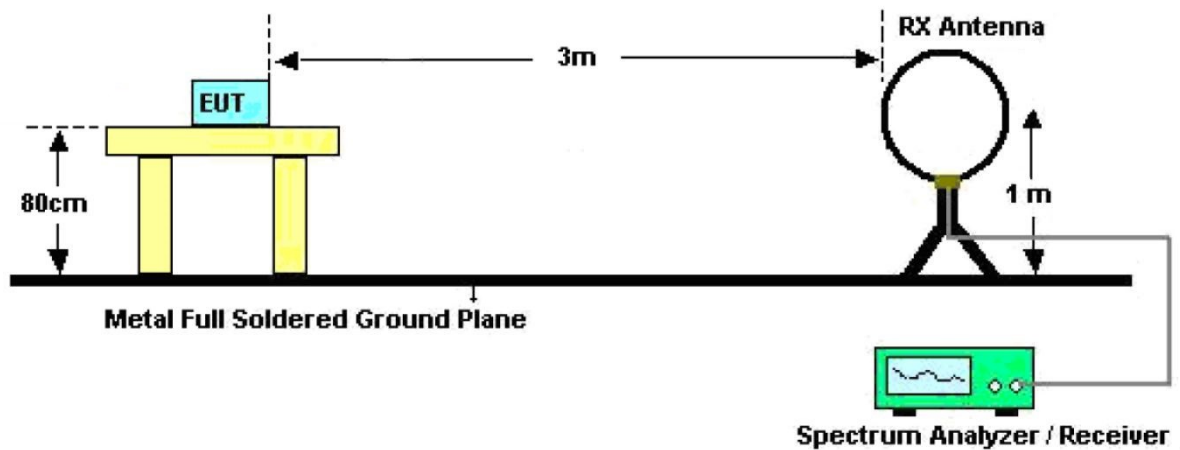


Figure 1. Below 30MHz

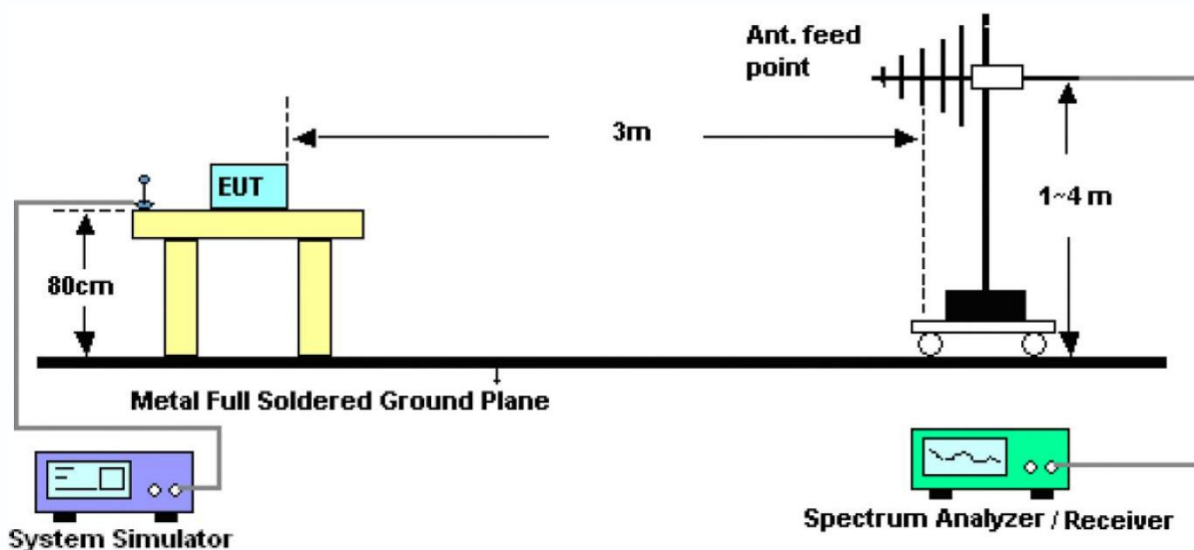


Figure 2. 30MHz to 1GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.


4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

Test Results (Between 9KHz – 150KHz)


Test Mode: TM24
Distance: 3m
Power Source: AC 120V/60Hz for adapter
Polarization: Coplane
Temp.(°C)/Hum.(%RH): 25.3°C/55%RH

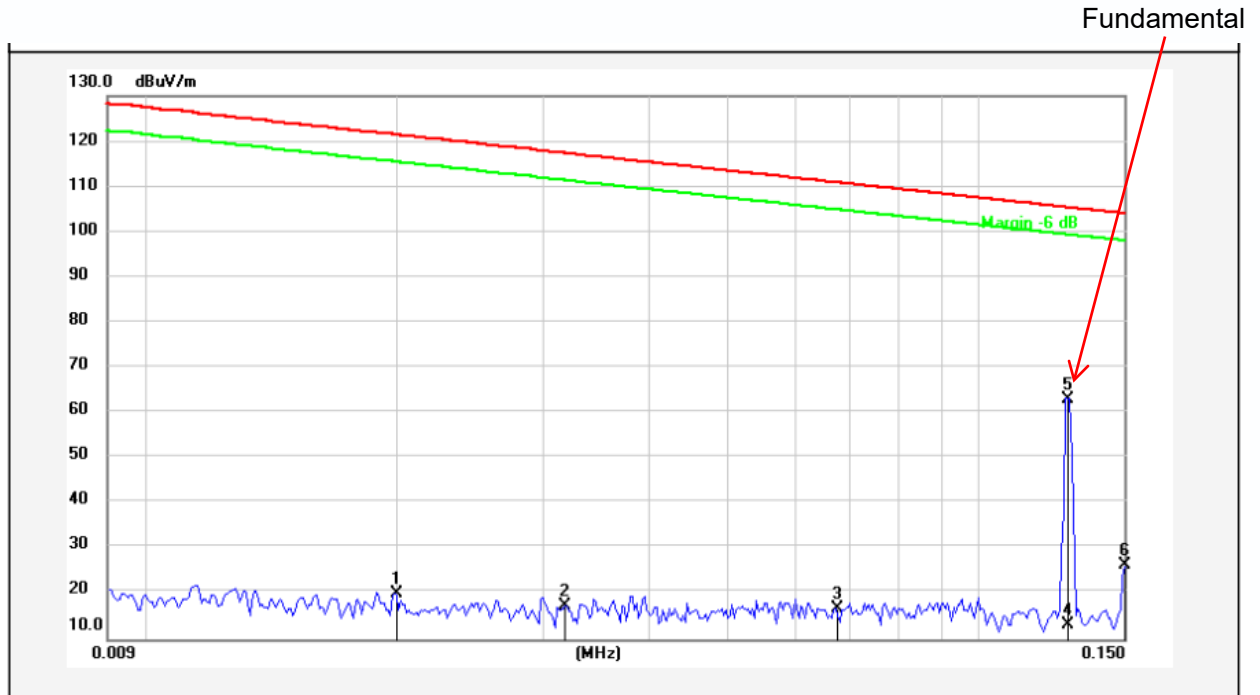

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Remark
1	0.0200	-0.11	20.29	20.18	121.41	-101.23	peak	
2	0.0318	-3.24	20.56	17.32	117.41	-100.09	peak	
3	0.0675	-3.57	20.37	16.80	110.91	-94.11	peak	
4	0.1280	-7.33	20.34	13.01	105.39	-92.38	peak	
5	0.1280	42.67	20.34	63.01	105.39	-42.38	peak	
6	0.1500	6.09	20.33	26.42	104.02	-77.60	peak	

Test Results (Between 0.15MHz – 30MHz)

Test Mode: TM24
Distance: 3m
Power Source: AC 120V/60Hz for adapter
Polarization: Coplane
Temp.(°C)/Hum.(%RH): 25.3°C/55%RH

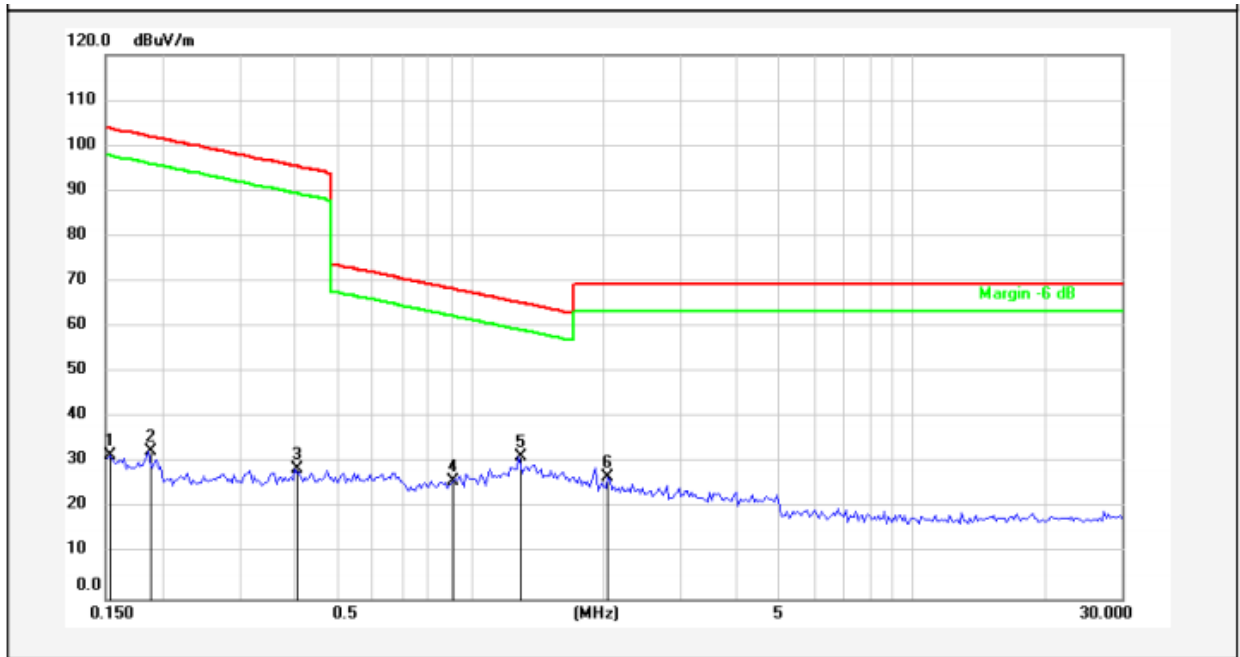


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Remark
1	0.1532	11.45	20.33	31.78	103.84	-72.06	peak	
2	0.1874	12.15	20.32	32.47	102.10	-69.63	peak	
3	0.4019	8.37	20.28	28.65	95.51	-66.86	peak	
4	0.9184	5.71	20.26	25.97	68.36	-42.39	peak	
5	1.2892	10.96	20.26	31.22	65.42	-34.20	peak	
6	2.0549	6.50	20.28	26.78	69.50	-42.72	peak	

Remark: According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.


Test Results (Between 30MHz –1000 MHz)

Test Mode: TM24
Distance: 3m
Power Source: DC 3.85V battery inside
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 24.6°C/63%RH

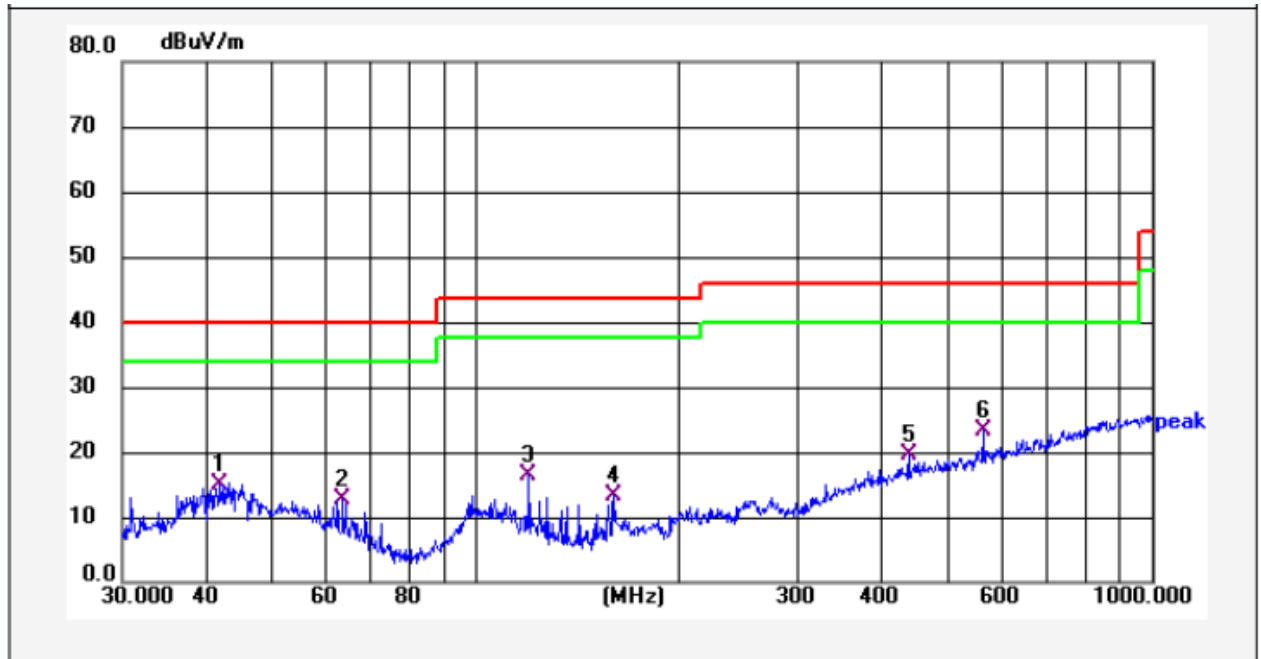

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Remark
1	41.823	39.14	-24.16	14.98	40.00	-25.02	QP	
2	63.591	38.50	-25.78	12.72	40.00	-27.28	QP	
3	119.856	40.65	-24.34	16.31	43.50	-27.19	QP	
4	160.557	39.91	-26.70	13.21	43.50	-30.29	QP	
5	437.695	36.21	-16.60	19.61	46.00	-26.39	QP	
6	562.662	37.77	-14.35	23.42	46.00	-22.58	QP	

Test Mode: TM24
Distance: 3m
Power Source: DC 3.85V battery inside
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 24.6°C/63%RH

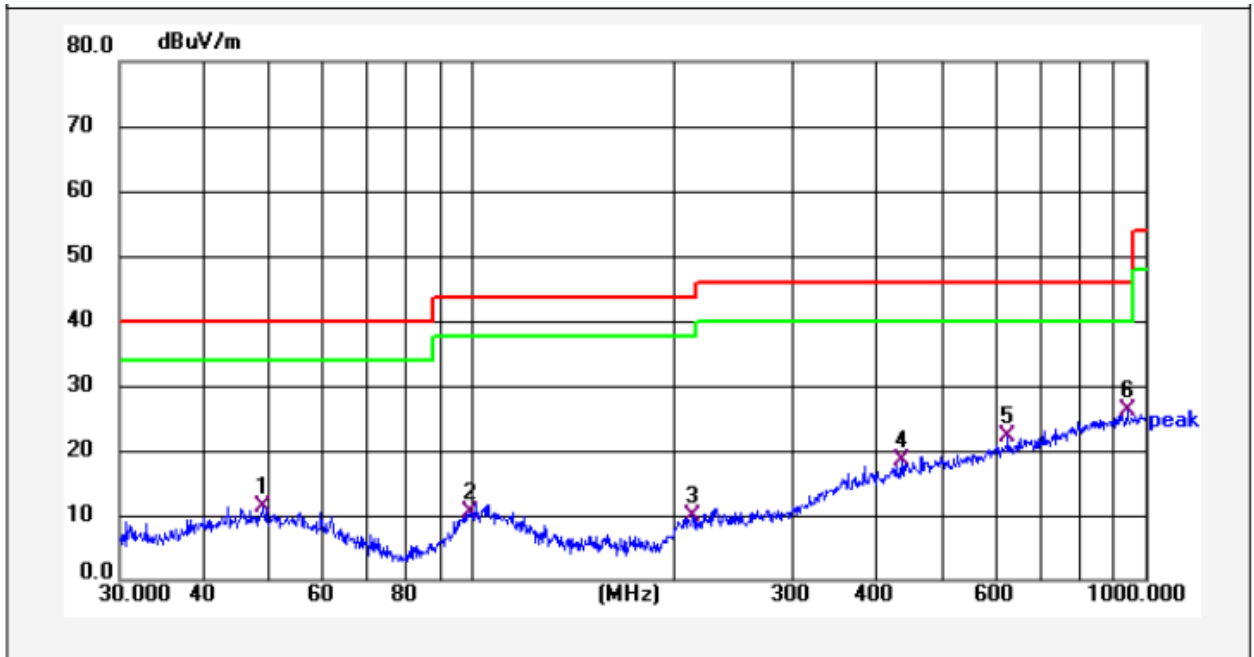

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Remark
1	49.057	34.75	-23.42	11.33	40.00	-28.67	QP	
2	99.572	32.59	-22.19	10.40	43.50	-33.10	QP	
3	213.389	33.92	-24.09	9.83	43.50	-33.67	QP	
4	436.928	34.98	-16.62	18.36	46.00	-27.64	QP	
5	626.175	35.30	-13.19	22.11	46.00	-23.89	QP	
6	939.244	34.55	-8.53	26.02	46.00	-19.98	QP	


Note:
Result(dBμV/m) = Reading(dBμV) + Factor(dB/m);
Over Limit(dB) = Result(dBμV/m) - Limit(dBμV/m)

5. 20dB Occupy Bandwidth Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.215(c)
Test Limit	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

5.2. Test Setup




5.3. Test Procedure

The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=1%-5%OBW, VBW≥3*RBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

5.4. Test Data

Temperature:	25.7 °C	Humidity:	56 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

Freq. (MHz)	Bandwidth (kHz)	Results
128.0	759.8	PASS

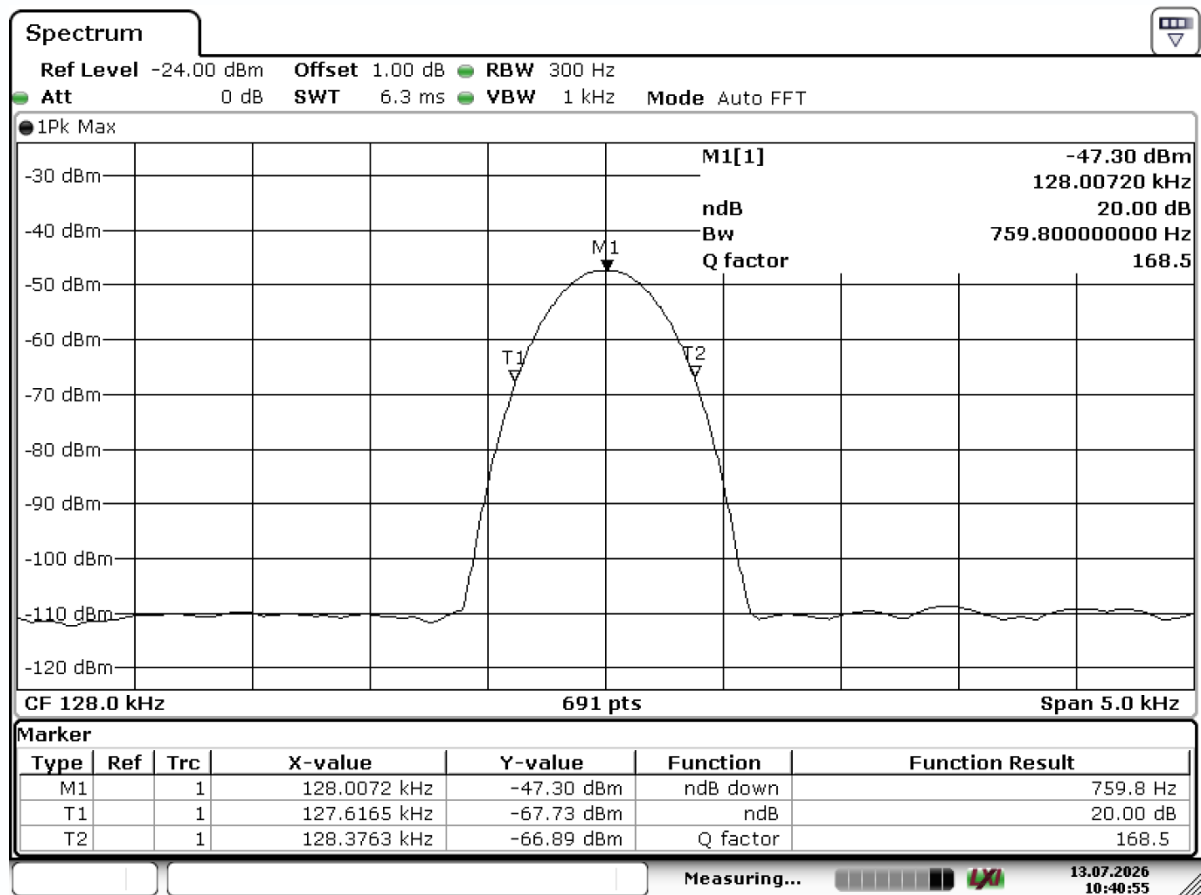

Note: When required, the occupied bandwidth shall be measured using the procedure specified by the regulatory authority or purchasing agency, e.g., in ANSI C63.10 [B1]. However, in case of continuous wave WPT systems, it is acceptable to use an RBW that is above the 1% to 5% range usually prescribed for OBW measurement. See also 10.4.2c) and 10.4.2d).

6. Antenna Requirement

6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

6.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached. It complies with the standard requirement.

APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_RF

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

