



Report No.: SUCR260400030105

Page: 1 of 543

TEST REPORT

Application No.: SUCR2604000301MO
FCC ID: 2BNX7S5560DNAA
Applicant: Eagle Wireless Inc.
Address of Applicant: 1974 E. 66th St., Suite 200-B Cleveland, OH 44103 USA
Manufacturer: Eagle Wireless Inc.
Address of Manufacturer: 1974 E. 66th St., Suite 200-B Cleveland, OH 44103 USA
Equipment Under Test (EUT):
EUT Name: 5G Sub-6 GHz Smart Module with Wi-Fi 6E & Bluetooth
Model No.: S5560D-NA
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2026-03-30
Date of Test: 2026-03-30 to 2026-05-30
Date of Issue: 2026-06-08

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Revision Record			
Version	Description	Date	Remark
00	Original	2026-06-08	/

Authorized for issue by:				
Prepared By		Nature Shen		
		Nature_Shen/Project Engineer		
Approved By		Cedar cheng		
		Cedar Cheng /Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Customer Declaration

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Radiated Emissions (Below 1GHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.10 (2020) Section 6.6 & 12.7	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5 & 12.7.2	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
In-Band Emissions		ANSI C63.10 (2020) Section 12.6	47 CFR Part 15, Subpart E 15.407 (b)	Pass
Contention Based Protocol		KDB 987594 D02 Section II.I.	47 CFR Part 15, Subpart E 15.407 (d)(6)	Pass
Duty Cycle		ANSI C63.10 (2020) Section 12.2	ANSI C63.10 (2020) Section 12.2	Pass
99% Bandwidth		ANSI C63.10 (2020) Section 12.5.3	ANSI C63.10 (2020) Section 12.5.3	Pass
26dB Emission Bandwidth		ANSI C63.10 (2020) Section 12.5.2	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Maximum Conducted Output Power		ANSI C63.10 (2020) Section 12.4	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Power Spectral Density		ANSI C63.10 (2020) Section 12.6	47 CFR Part 15, Subpart E 15.407 (a)	Pass

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Environment Parameter	5
4.3 Description of Support Units	6
4.4 Measurement Uncertainty & Decision Rule	6
4.5 Test Location	7
4.6 Test Facility	7
4.7 Deviation from Standards.....	7
4.8 Abnormalities from Standard Conditions.....	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement.....	10
6.1 Antenna Requirement	10
7 Radio Spectrum Matter Test Results	11
7.1 Radiated Emissions (Below 1GHz)	11
7.2 Radiated Emissions (Above 1GHz).....	15
7.3 Radiated Emissions which fall in the restricted bands	140
7.4 In-Band Emissions	190
7.5 Contention Based Protocol.....	192
7.6 Duty Cycle	193
7.7 99% Bandwidth	194
7.8 26dB Emission Bandwidth.....	195
7.9 Maximum Conducted Output Power	196
7.10 Power Spectral Density	198
8 Test Setup Photo	200
9 EUT Constructional Details (EUT Photos).....	200
10 Appendix.....	201

4 General Information

4.1 Details of E.U.T.

Hardware Version:	R1.0
Software Version:	S5560DNAPAR04A01
SN:	P1Y25CJ43000041/ P1Y25CJ43000053/ P1Y25CJ43000026
Power supply:	12V
Operation Frequency/Number of channels (20MHz):	U-NII-5: 5945-6405MHz (24 Channels); U-NII-6: 6425-6525MHz (6 Channels); U-NII-7: 6545-6865MHz (17Channels); U-NII-8: 6885-7105MHz (12Channels)
Operation Frequency/Number of channels/(40MHz):	U-NII-5: 5955-6395MHz (12 Channels); U-NII-6: 6435-6515MHz (3 Channels); U-NII-7: 6555-6875MHz (9 Channels); U-NII-8: 6915-7075MHz (5 Channels)
Operation Frequency/Number of channels (80MHz):	U-NII-5: 5975-6375MHz (6 Channels); U-NII-6: 6455-6535MHz (2 Channels); U-NII-7: 6615-6855MHz (4 Channels); U-NII-8: 6935-7015MHz (2 Channels)
Modulation Type:	802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024-QAM, 4096-QAM)
Channel Spacing:	802.11 a/ax 20: 20MHz; 802.11 ax 40: 40MHz; 802.11 ax 80: 80MHz; 802.11 ax 160: 160MHz
FCC Classification	Low-power indoor Access Points(6ID)
Antenna Type:	Dipole Antenna
Antenna Gain:	Ant1: U-NII-5:1.6dBi; U-NII-6:1.6dBi; U-NII-7:1.6dBi; U-NII-8:1.6dBi; (Provided by the manufacturer) Ant2: U-NII-5:1.6dBi; U-NII-6:1.6dBi; U-NII-7:1.6dBi; U-NII-8:1.6dBi (Provided by the manufacturer)
Antenna Number:	2
Smart System:	☒ MIMO 802.11a/ax: 2Tx & 2Rx

4.2 Environment Parameter

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Value	Temperature(°C)	Voltage(V)
NTNV	25	4
Note:		
NV:Normal Voltage	LV:Low Extreme Test Voltage	HV:High Extreme Test Voltage
NT:Normal Temperature	LT:Low Extreme Test Temperature	HT:High Extreme Test Temperature

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Computer	Lenovo	T14	2YK6GR
Mouse	Lenovo	3D optical Mouse	N/A
Router	Smavwave Technology Co.,Ltd	SRT 421	RT421X02211300001

4.4 Measurement Uncertainty & Decision Rule

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	Conduction emission	$\pm 3.0\text{dB}$ (150kHz to 30MHz)
5	RF conducted power	$\pm 0.75\text{dB}$
6	RF power density	$\pm 2.84\text{dB}$
7	Conducted Spurious emissions	$\pm 0.75\text{dB}$
8	RF Radiated power	$\pm 1.56\text{dB}$ (9KHz-30MHz)
		$\pm 4.80\text{dB}$ (30MHz-1GHz)
		$\pm 4.80\text{dB}$ (1GHz-18GHz)
		$\pm 4.80\text{dB}$ (18GHz-40GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Supply voltages	$\pm 1\%$
12	Time	$\pm 3\%$
Remark: The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.		

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)
Pilot Free Trade Zone

No tests were sub-contracted.

Note:

1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).

2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).

3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 6336.01)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.is accredited by the American Association for Laboratory Accreditation (A2LA).

• **FCC (Designation Number: CN1312)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized as an accredited testing laboratory. Test Firm Registration Number:717327

• **ISED (CAB Identifier: CN0120)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 27594

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
RF Conducted Test						
1	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/14/2026	1/13/2027
2	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-15	11/21/2025	11/20/2026
3	MXG Vector signal genitor	KEYSIGHT	N5182B	SUWI-01-38-01	1/14/2026	1/13/2027
4	Signal Generator	ROHDE&SCHWARZ	SMW200A	SUWI-01-07-08	1/14/2026	1/13/2027
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-08-01	1/14/2026	1/13/2027
6	MXG Vector Signal Generator	ROHDE&SCHWARZ	SMR20	SUWI-01-33-01	11/21/2025	11/20/2026
7	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-13	5/8/2025	5/7/2026
					4/22/2026	4/21/2027
8	Wideband Radio Communication Test Station	Anritsu	MT8000A	SUWI-01-34-02	11/21/2025	11/20/2026
9	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	11/21/2025	11/20/2026
10	Power meter	Anritsu	ML2495A	SUWI-01-31-01	11/21/2025	11/20/2026
11	Pulse power sensor	Anritsu	MA2411B	SUWI-01-32-01	11/21/2025	11/20/2026
12	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/14/2026	1/13/2027
13	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2/11/2026	2/10/2027
14	Temperature Chamber	GIANT FORCE	ICT-017-40-SP-SD	SUWI-01-13-02	5/7/2025	5/6/2026
					5/7/2026	5/6/2027
15	Measurement Software	TST	TST 272 V2.02	SUWI-03-55-03	NCR	NCR
16	RF Control unit	TST	TSCB3023R2	SUWI-02-20-01	NCR	NCR
17	RFCables	Tonscend	NA	SUWI-01-03-01	1/15/2026	1/14/2027
RF Radiated Test						
1	Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/3/2023	6/2/2026
2	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/14/2026	1/13/2027
3	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	11/20/2025	11/19/2026
4	Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/14/2026	1/13/2027
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-18-01	1/14/2026	1/13/2027
6	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9168	SUWI-01-11-04	11/29/2025	11/28/2027
7	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	5/7/2025	5/6/2027
8	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/7/2025	5/6/2027
9	Active Loop Antenna	SCHWRZBECK MESS-ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/7/2025	5/6/2027

10	Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	1/14/2026	1/13/2027
11	Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	1/14/2026	1/13/2027
12	Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	1/14/2026	1/13/2027
13	Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	8/25/2025	8/24/2026
14	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	8/25/2025	8/24/2026
15	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	8/26/2025	8/25/2026
16	Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-06	11/21/2025	11/20/2026
17	Signal Generator	ROHDE&SCHWARZ	SMB100A	SUWI-01-08-01	1/14/2026	1/13/2027
18	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/14/2026	1/13/2027
19	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/11/2026	2/10/2027
20	Measurement Software	Tonscend	JS32-RE 4.0.0.0	SUWI-02-09-06	NCR	NCR
21	RF Control unit	Tonscend	JS0806-1	SUWI-02-20-01	NCR	NCR
22	RFCables	Tonscend	NA	SUWI-01-03-02	1/15/2026	1/14/2027

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is Dipole Antenna and no consideration of replacement. The best case gain of the

Ant1: U-NII-5:1.6dBi; U-NII-6:1.6dBi; U-NII-7:1.6dBi; U-NII-8:1.6dBi

Ant2: U-NII-5:1.6dBi; U-NII-6:1.6dBi; U-NII-7:1.6dBi; U-NII-8:1.6dBi

Antenna location: Refer to internal photo.

7 Radio Spectrum Matter Test Results

7.1 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2020) Section 6.4,6.5

Measurement Distance: 3m

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	11	TX mode (U-NII-5)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Pre-scan	12	TX mode (U-NII-6)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Pre-scan	13	TX mode (U-NII-7)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Pre-scan	14	TX mode (U-NII-8)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

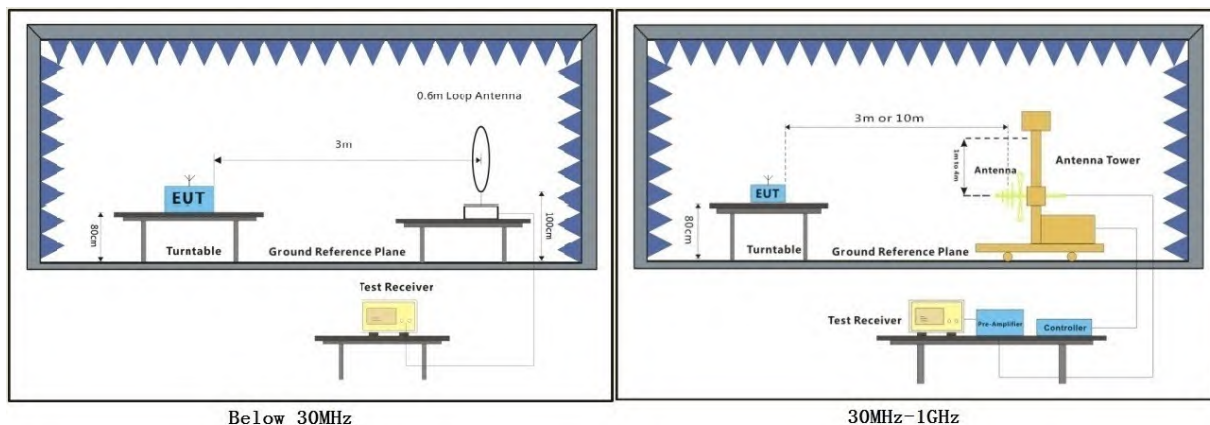

7.1.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8m above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3m or 10m away from the interference-receiving antenna, which was mounted on the variable-height antenna tower.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1m) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. At frequencies below 1GHz, measurements may be performed at a distance different to specified in the regulations.

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.


EX. Below 30MHz, Aux Factor = 40 dB/decade of distance, the aux factor is $40\log(3/300) = -80\text{dB}$ (for 3m test distance).

EX. Above 30MHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(10/3) = 10.46\text{dB}$ (for 10m test distance).

2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the worst-case test curve is displayed.

Test Mode: 11; Polarity: Horizontal

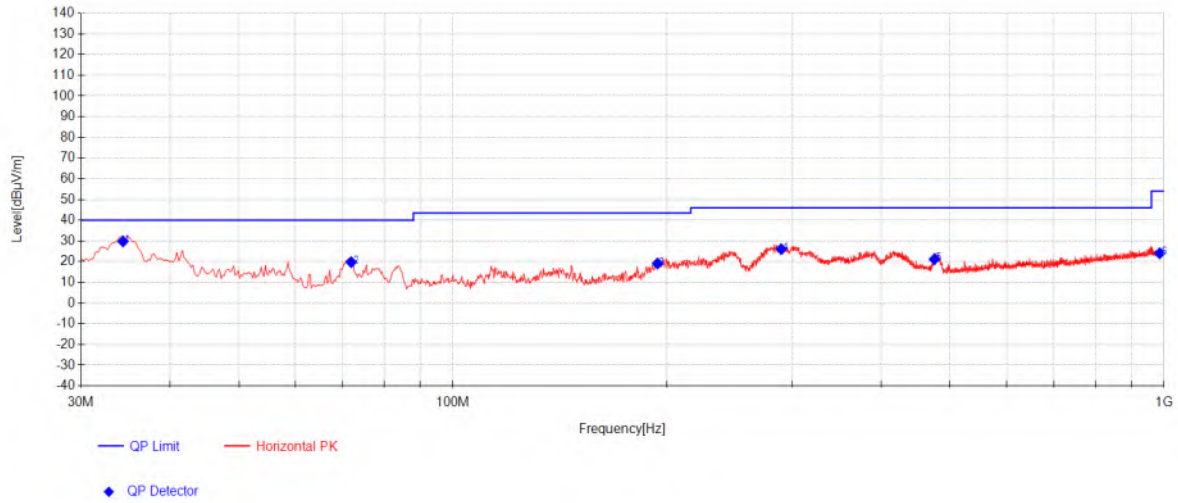

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	34.365	50.98	12.76	-33.96	29.79	40.00	10.21	Horizontal
2	71.9525	43.14	10.02	-33.40	19.76	40.00	20.24	Horizontal
3	193.93	41.29	10.07	-32.30	19.06	43.50	24.44	Horizontal
4	289.475	45.13	12.59	-31.68	26.04	46.00	19.96	Horizontal
5	475.4725	34.85	17.01	-30.68	21.17	46.00	24.83	Horizontal
6	985.935	27.6	24.39	-27.94	24.05	54.00	29.95	Horizontal

Test Mode: 11; Polarity: Vertical

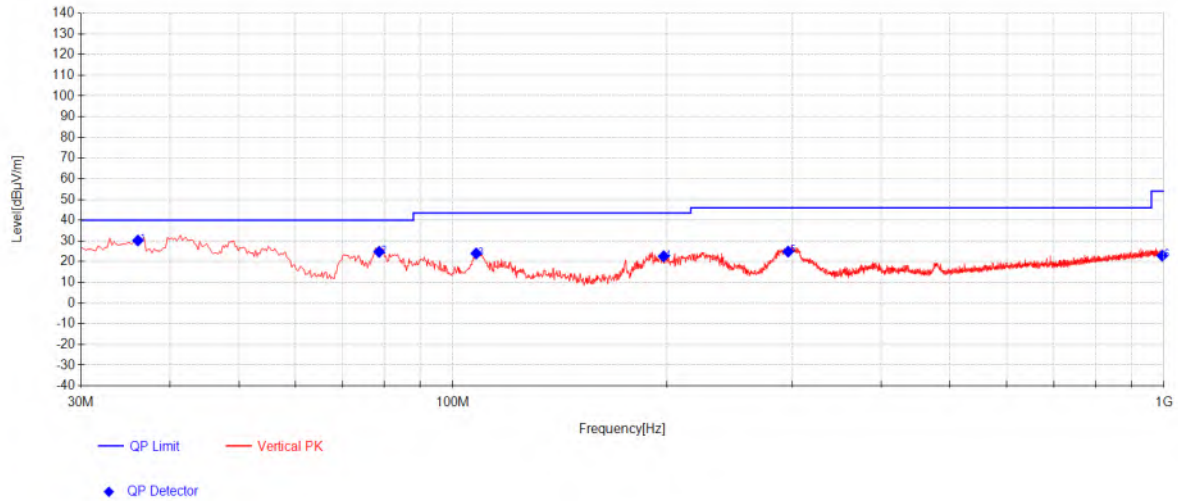

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	36.0625	51.25	12.89	-33.93	30.21	40.00	9.79	Vertical
2	78.7425	48.65	9.41	-33.35	24.71	40.00	15.29	Vertical
3	107.8425	46.87	10.10	-33.02	23.95	43.50	19.55	Vertical
4	197.81	44.96	9.90	-32.27	22.59	43.50	20.91	Vertical
5	296.0225	43.76	12.72	-31.64	24.84	46.00	21.16	Vertical
6	994.18	26.26	24.45	-27.86	22.85	54.00	31.15	Vertical

7.2 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2020) Section 6.6 & 12.7

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark:

1. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

2. Above 18GHz, measurements may be performed at a distance shorter than that specified in the regulations

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Above 18GHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(1/3) = -9.54\text{dB}$ (for 1m test distance).

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 41 % RH

Atmospheric Pressure: 1001 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	11	TX mode (U-NII-5)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-6)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Final test	13	TX mode (U-NII-7)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Final test	14	TX mode (U-NII-8)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

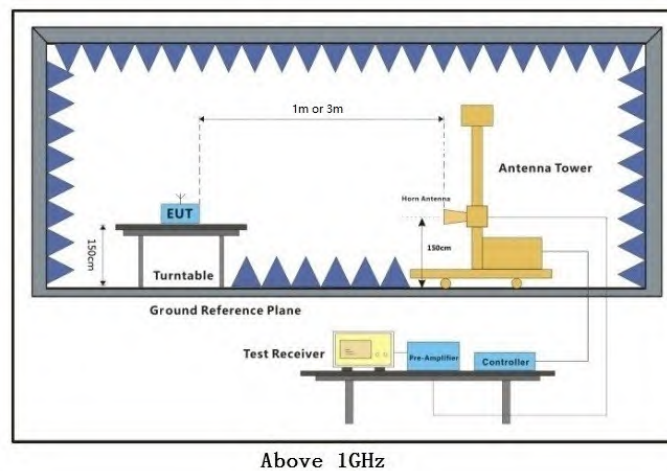


7.2.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 40GHz, The points marked on below plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the below harmonics were the highest point could be found when testing, so only the below harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
7. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle<98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

11a_TX_CH_001_Horizontal

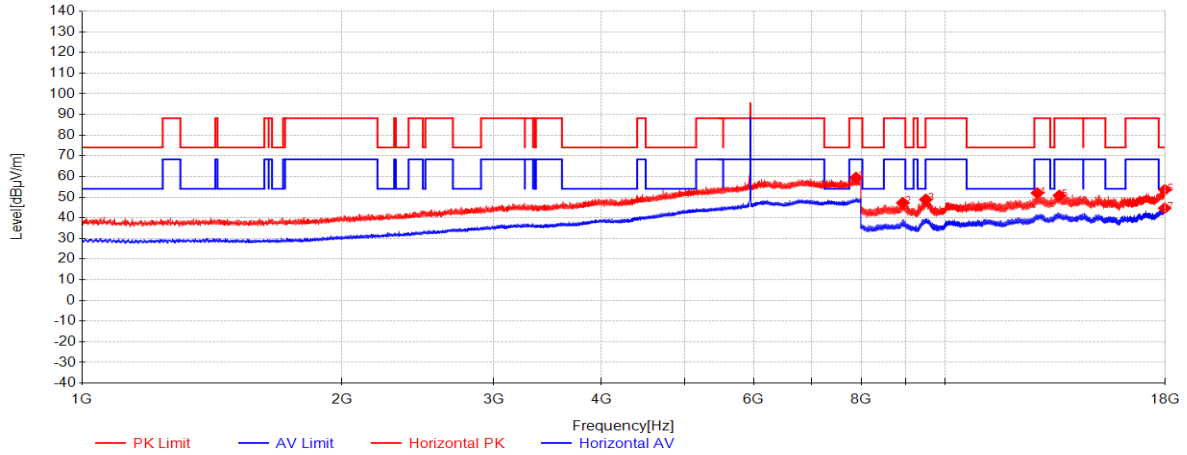


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7889.75	41.17	37.08	-18.84	59.40	88.20	28.80	Horizontal
2	8938.6667	48.10	37.96	-38.83	47.23	88.20	40.97	Horizontal
3	9506.3333	48.93	38.05	-38.17	48.81	88.20	39.39	Horizontal
4	12800.3333	46.91	39.66	-34.59	51.98	88.20	36.22	Horizontal
5	13574.3333	44.96	40.19	-34.37	50.78	88.20	37.42	Horizontal
6	17992.3333	42.63	41.68	-30.74	53.56	74.00	20.44	Horizontal
7	17985	33.78	41.66	-30.77	44.67	54.00	9.33	Horizontal

11a_TX_CH_001_Vertical

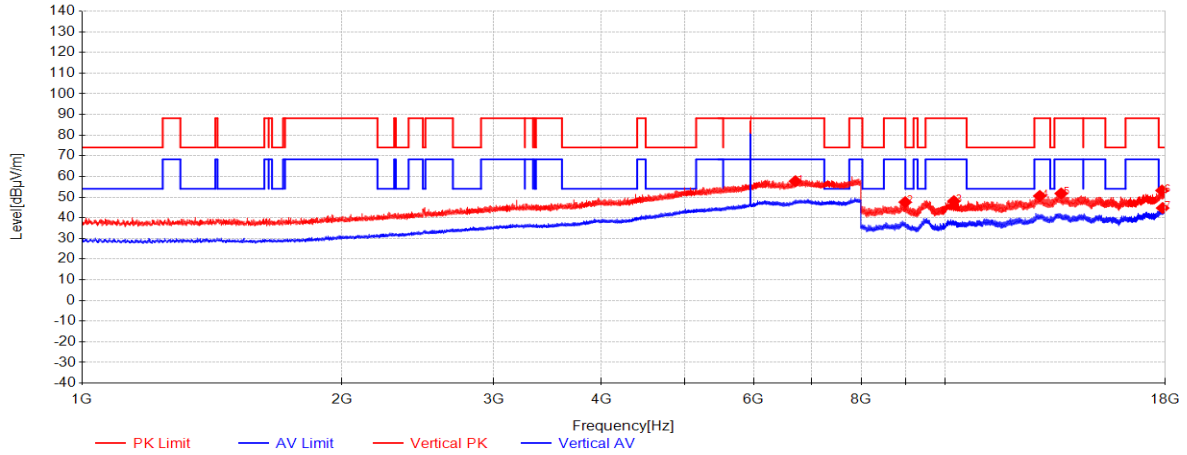


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6711.125	38.64	35.84	-16.78	57.70	88.20	30.50	Vertical
2	8996.3333	48.11	38.00	-38.55	47.56	88.20	40.64	Vertical
3	10245.6667	46.36	38.39	-36.71	48.04	88.20	40.16	Vertical
4	12883.6667	45.63	39.76	-34.81	50.58	88.20	37.62	Vertical
5	13644	46.08	40.22	-34.55	51.76	88.20	36.44	Vertical
6	17855.6667	42.63	41.28	-30.72	53.19	74.00	20.81	Vertical
7	17885	34.30	41.37	-30.93	44.73	54.00	9.27	Vertical

11a_TX_CH_045_Horizontal

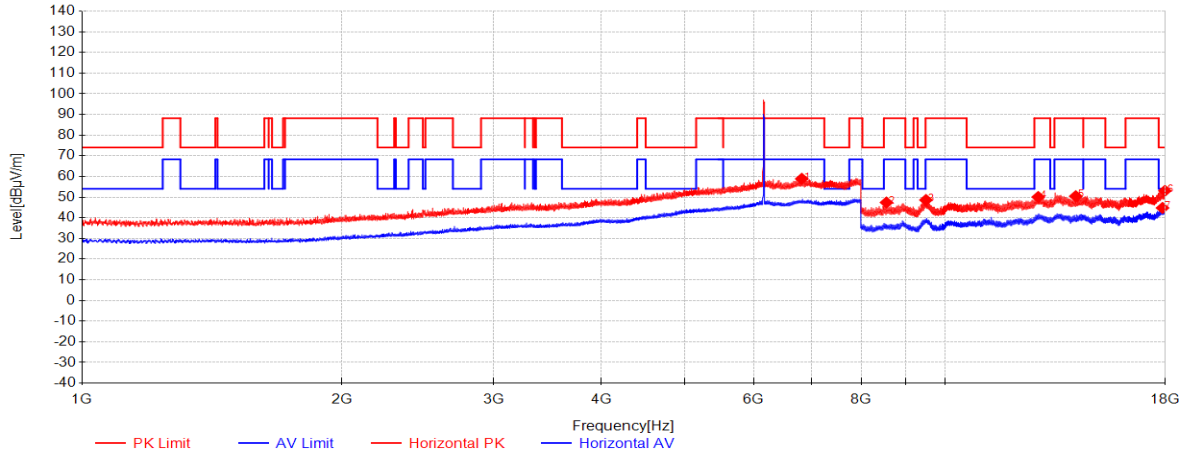


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6825.75	39.99	36.02	-17.13	58.88	88.20	29.32	Horizontal
2	8558.3333	49.20	37.69	-39.48	47.41	88.20	40.79	Horizontal
3	9509.3333	48.72	38.05	-38.16	48.61	88.20	39.59	Horizontal
4	12830.3333	45.04	39.70	-34.67	50.07	88.20	38.13	Horizontal
5	14183.6667	45.20	40.29	-35.04	50.45	88.20	37.75	Horizontal
6	17993.3333	42.12	41.68	-30.74	53.06	74.00	20.94	Horizontal
7	17879	34.31	41.35	-30.89	44.77	54.00	9.23	Horizontal

11a_TX_CH_045_Vertical

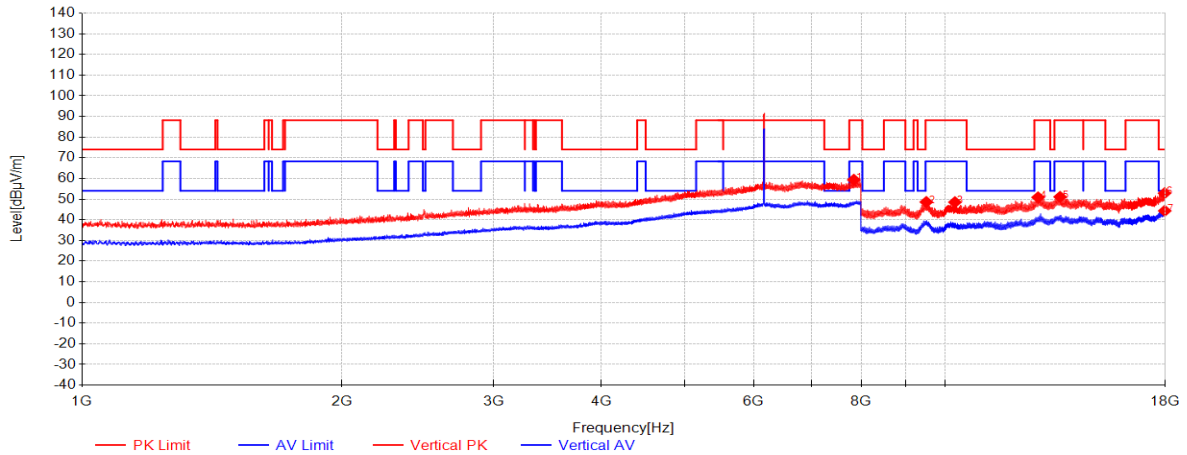


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7843.8125	41.13	36.99	-18.78	59.34	88.20	28.86	Vertical
2	9519.6667	48.68	38.05	-38.12	48.61	88.20	39.59	Vertical
3	10273.3333	46.86	38.43	-36.79	48.50	88.20	39.70	Vertical
4	12825.6667	45.82	39.69	-34.66	50.85	88.20	37.35	Vertical
5	13602.6667	45.22	40.20	-34.34	51.08	88.20	37.12	Vertical
6	17976.3333	42.03	41.63	-30.80	52.87	74.00	21.13	Vertical
7	17986.6667	33.45	41.66	-30.76	44.35	54.00	9.65	Vertical

11a_TX_CH_049_Horizontal

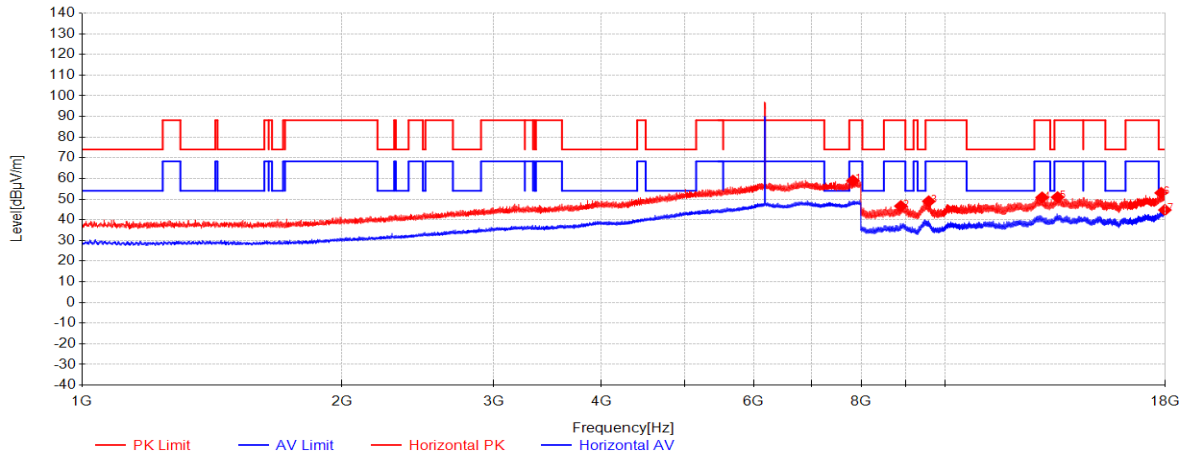


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7825.4375	40.73	36.95	-18.75	58.93	88.20	29.27	Horizontal
2	8892.6667	47.75	37.92	-39.03	46.65	88.20	41.55	Horizontal
3	9580.6667	48.77	38.06	-37.90	48.93	88.20	39.27	Horizontal
4	12965.3333	45.78	39.86	-34.85	50.79	88.20	37.41	Horizontal
5	13510.3333	45.23	40.16	-34.47	50.91	88.20	37.29	Horizontal
6	17816	42.28	41.17	-30.44	53.01	74.00	20.99	Horizontal
7	17992.3333	33.82	41.68	-30.74	44.75	54.00	9.25	Horizontal

11a_TX_CH_049_Vertical

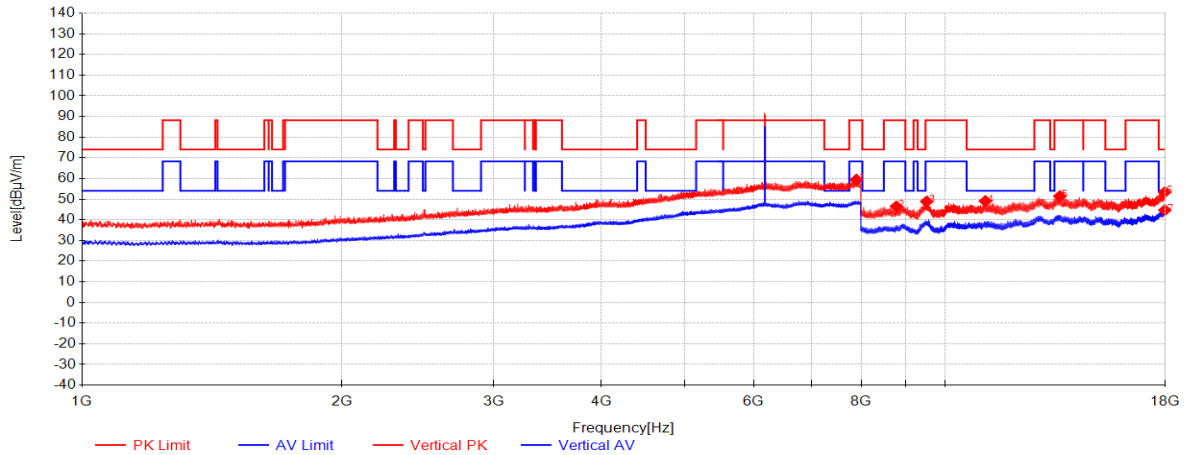


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7896.75	41.18	37.09	-18.86	59.42	88.20	28.78	Vertical
2	8787.3333	47.76	37.85	-39.15	46.46	88.20	41.74	Vertical
3	9528.6667	48.88	38.05	-38.09	48.85	88.20	39.35	Vertical
4	11143.3333	45.46	39.21	-35.62	49.05	74.00	24.95	Vertical
5	13595.6667	45.60	40.20	-34.34	51.46	88.20	36.74	Vertical
6	17978.6667	42.45	41.64	-30.79	53.30	74.00	20.70	Vertical
7	17991.3333	33.74	41.67	-30.75	44.67	54.00	9.33	Vertical

11a_TX_CH_093_Horizontal

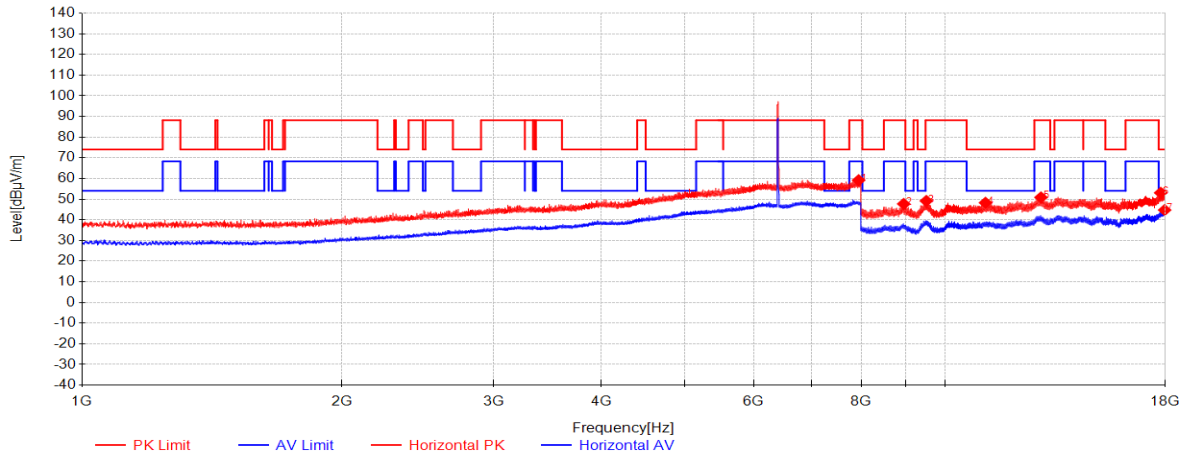


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7945.3125	40.81	37.19	-18.82	59.18	88.20	29.02	Horizontal
2	8961.3333	48.43	37.97	-38.72	47.68	88.20	40.52	Horizontal
3	9518.6667	49.21	38.05	-38.12	49.14	88.20	39.06	Horizontal
4	11147.3333	44.66	39.21	-35.62	48.25	74.00	25.75	Horizontal
5	12927.3333	45.87	39.81	-34.85	50.83	88.20	37.37	Horizontal
6	17796	42.29	41.11	-30.35	53.05	74.00	20.95	Horizontal
7	17981	33.86	41.64	-30.78	44.72	54.00	9.28	Horizontal

11a_TX_CH_093_Vertical

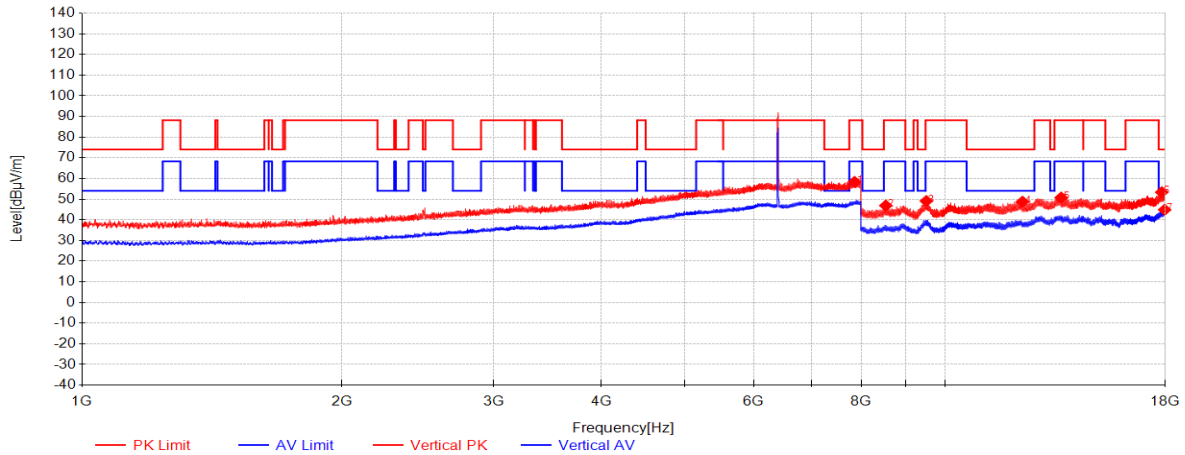


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7859.125	40.12	37.02	-18.80	58.34	88.20	29.86	Vertical
2	8542.6667	48.84	37.68	-39.64	46.88	88.20	41.32	Vertical
3	9518.6667	49.15	38.05	-38.12	49.08	88.20	39.12	Vertical
4	12303.6667	43.95	39.06	-34.26	48.75	74.00	25.25	Vertical
5	13643	45.06	40.22	-34.54	50.74	88.20	37.46	Vertical
6	17842.6667	42.72	41.24	-30.63	53.34	74.00	20.66	Vertical
7	17980	33.98	41.64	-30.78	44.84	54.00	9.16	Vertical

11a_TX_CH_097_Horizontal

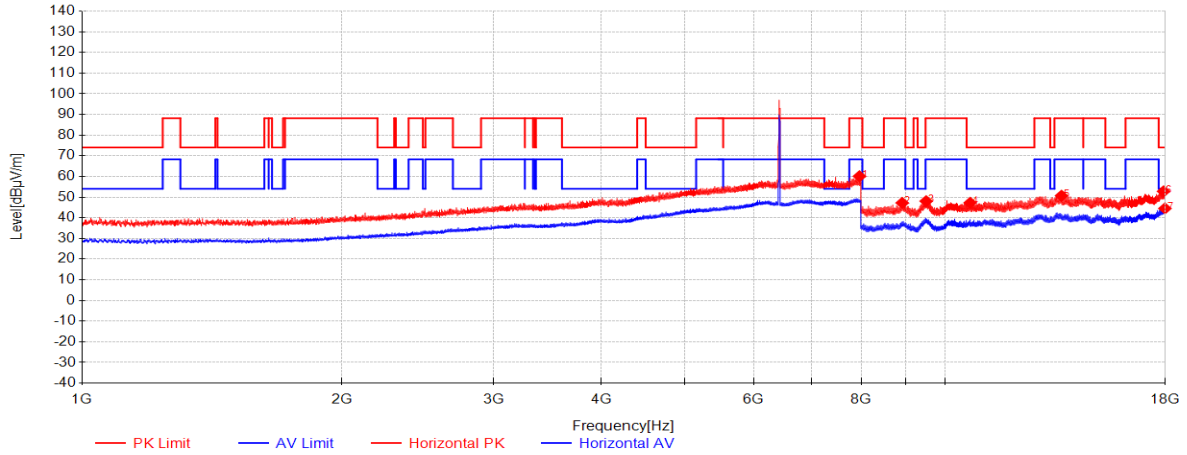


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7962.8125	41.67	37.23	-18.81	60.09	88.20	28.11	Horizontal
2	8925.6667	48.15	37.95	-38.89	47.20	88.20	41.00	Horizontal
3	9514.6667	48.12	38.05	-38.14	48.03	88.20	40.17	Horizontal
4	10700.3333	44.43	38.94	-36.10	47.27	74.00	26.73	Horizontal
5	13655.6667	45.05	40.23	-34.60	50.68	88.20	37.52	Horizontal
6	17929.6667	42.23	41.50	-30.95	52.78	74.00	21.22	Horizontal
7	17993.6667	33.58	41.68	-30.74	44.52	54.00	9.48	Horizontal

11a_TX_CH_097_Vertical

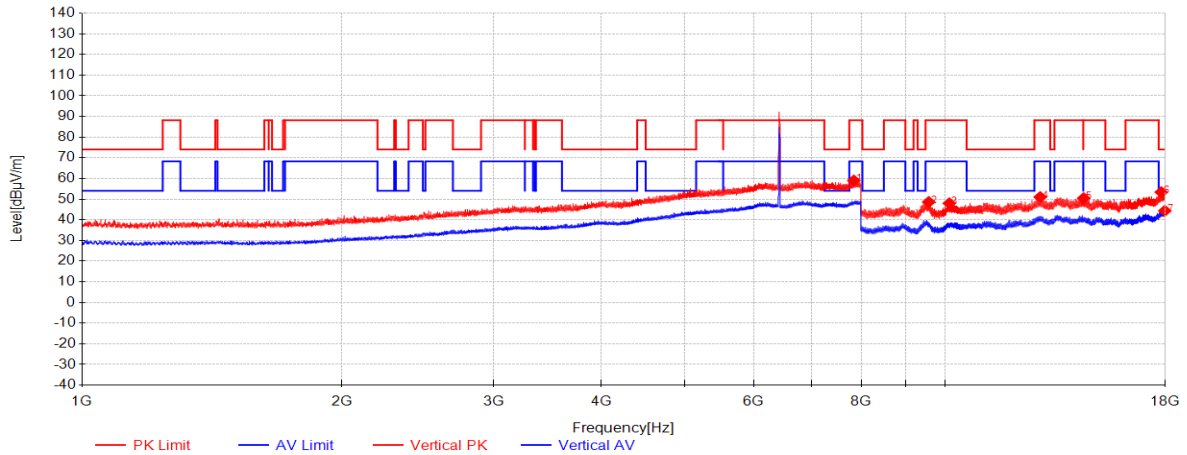


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7843.375	40.79	36.99	-18.78	59.00	88.20	29.20	Vertical
2	9580.3333	48.45	38.06	-37.90	48.61	88.20	39.59	Vertical
3	10120.6667	46.64	38.24	-36.90	47.99	88.20	40.21	Vertical
4	12899.3333	46.06	39.78	-34.85	50.99	88.20	37.21	Vertical
5	14485.3333	44.86	40.11	-34.53	50.44	74.00	23.56	Vertical
6	17819	42.65	41.18	-30.46	53.37	74.00	20.63	Vertical
7	17989.3333	33.46	41.67	-30.75	44.37	54.00	9.63	Vertical

11a_TX_CH_105_Horizontal

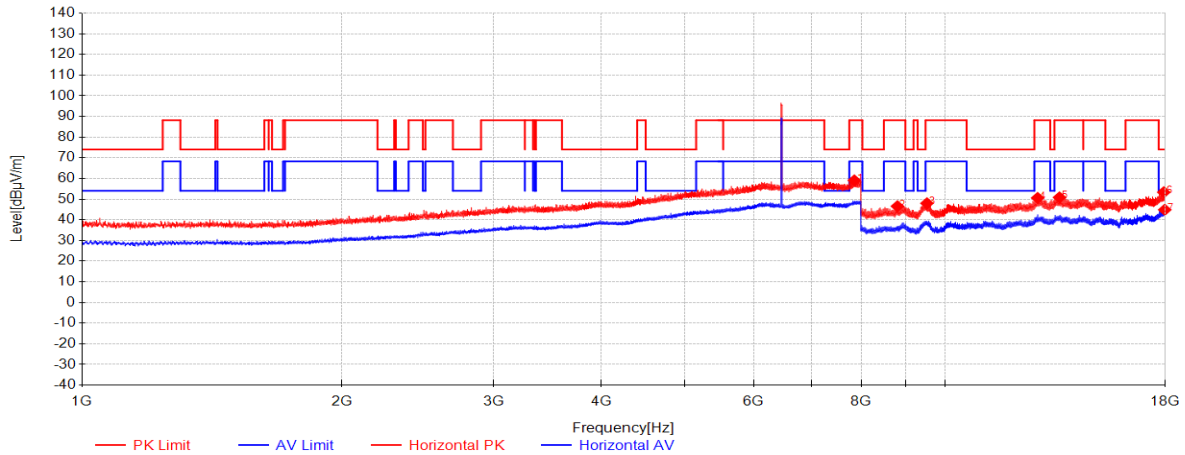


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7854.3125	40.85	37.01	-18.79	59.07	88.20	29.13	Horizontal
2	8812	47.81	37.87	-39.13	46.55	88.20	41.65	Horizontal
3	9534.6667	47.99	38.05	-38.07	47.98	88.20	40.22	Horizontal
4	12812.3333	45.52	39.67	-34.62	50.57	88.20	37.63	Horizontal
5	13581.6667	45.00	40.19	-34.36	50.83	88.20	37.37	Horizontal
6	17941	42.71	41.53	-30.91	53.33	74.00	20.67	Horizontal
7	17987	33.94	41.66	-30.76	44.84	54.00	9.16	Horizontal

11a_TX_CH_105_Vertical

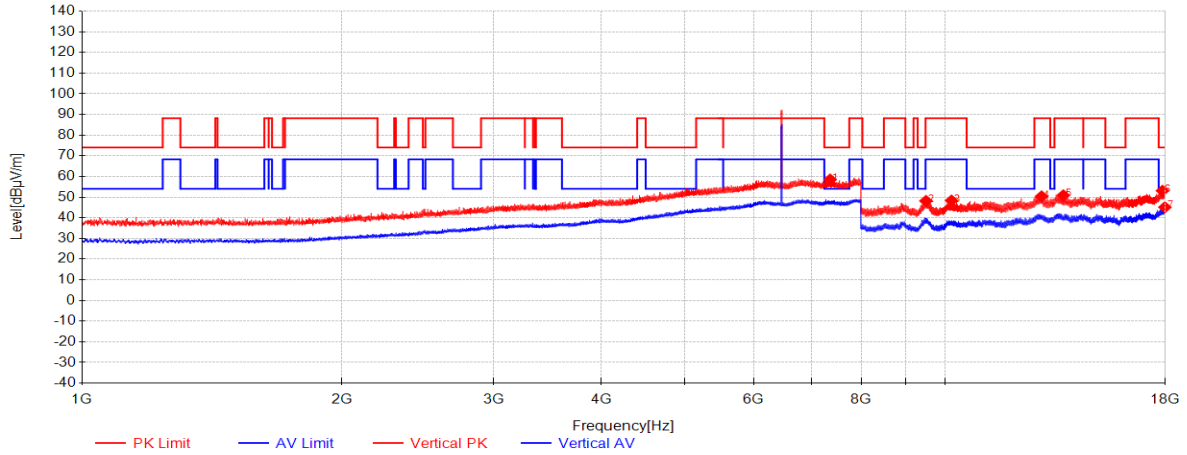


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7363.875	39.97	36.30	-17.75	58.52	74.00	15.48	Vertical
2	9508.6667	48.28	38.05	-38.16	48.17	88.20	40.03	Vertical
3	10179.6667	46.70	38.32	-36.67	48.35	88.20	39.85	Vertical
4	12947.3333	45.37	39.84	-34.85	50.36	88.20	37.84	Vertical
5	13721	45.46	40.26	-34.83	50.89	88.20	37.31	Vertical
6	17877	42.60	41.34	-30.87	53.07	74.00	20.93	Vertical
7	17993.6667	34.18	41.68	-30.74	45.12	54.00	8.88	Vertical

11a_TX_CH_113_Horizontal

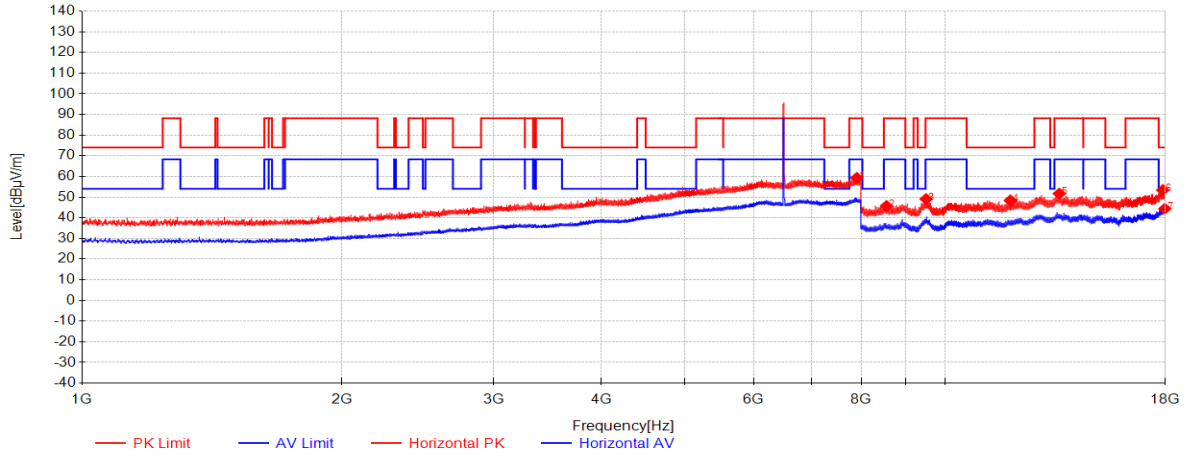


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7905.9375	41.03	37.11	-18.86	59.29	88.20	28.91	Horizontal
2	8559.3333	47.47	37.69	-39.47	45.69	88.20	42.51	Horizontal
3	9512.6667	49.19	38.05	-38.14	49.10	88.20	39.10	Horizontal
4	11911	44.48	38.75	-34.85	48.39	74.00	25.61	Horizontal
5	13574.3333	45.87	40.19	-34.37	51.69	88.20	36.51	Horizontal
6	17893	43.00	41.39	-30.99	53.40	74.00	20.60	Horizontal
7	17989.6667	33.47	41.67	-30.75	44.39	54.00	9.61	Horizontal

11a_TX_CH_113_Vertical

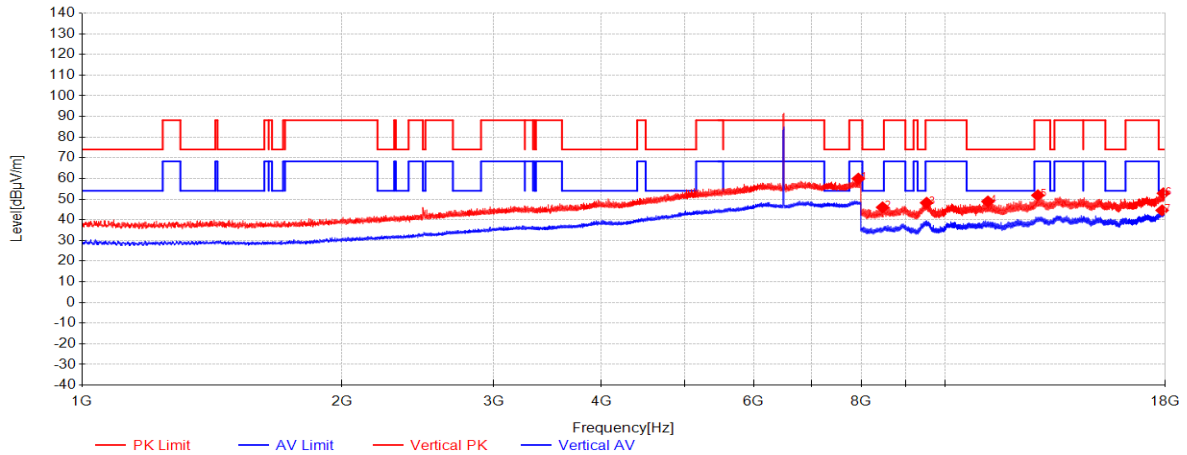


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7939.1875	41.56	37.18	-18.83	59.91	88.20	28.29	Vertical
2	8470	48.44	37.63	-40.07	46.00	74.00	28.00	Vertical
3	9525.6667	48.30	38.05	-38.10	48.25	88.20	39.95	Vertical
4	11219	45.28	39.17	-35.59	48.86	74.00	25.14	Vertical
5	12818.3333	46.81	39.68	-34.64	51.85	88.20	36.35	Vertical
6	17920.3333	42.33	41.47	-30.97	52.82	74.00	21.18	Vertical
7	17860	34.03	41.29	-30.75	44.57	54.00	9.43	Vertical

11a_TX_CH_117_Horizontal

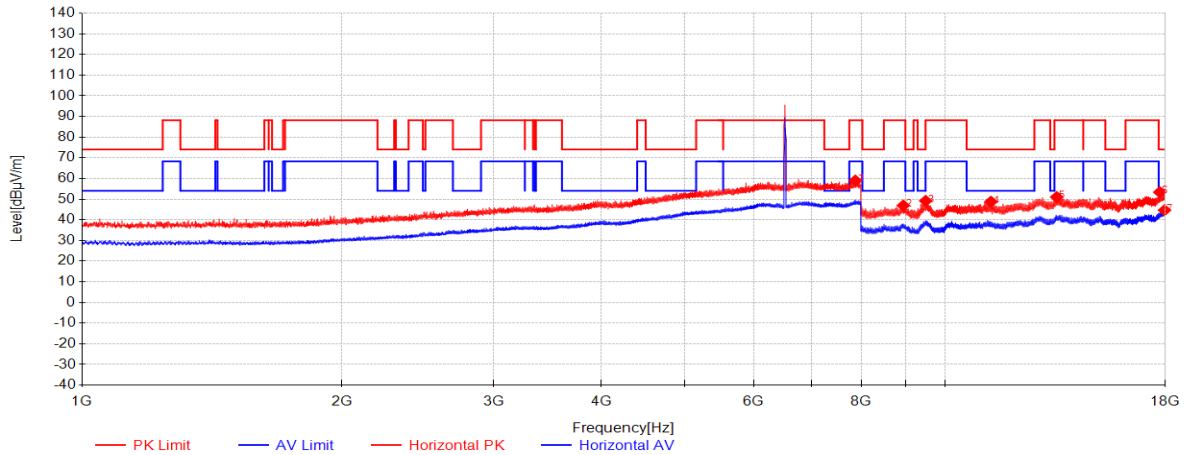


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7874.4375	40.80	37.05	-18.82	59.03	88.20	29.17	Horizontal
2	8951.3333	47.73	37.97	-38.77	46.93	88.20	41.27	Horizontal
3	9501.6667	49.31	38.05	-38.18	49.18	88.20	39.02	Horizontal
4	11310.3333	44.99	39.11	-35.35	48.75	74.00	25.25	Horizontal
5	13479	45.46	40.14	-34.58	51.02	88.20	37.18	Horizontal
6	17749.3333	43.08	40.97	-30.69	53.36	74.00	20.64	Horizontal
7	17974	33.82	41.62	-30.80	44.64	54.00	9.36	Horizontal

11a_TX_CH_117_Vertical

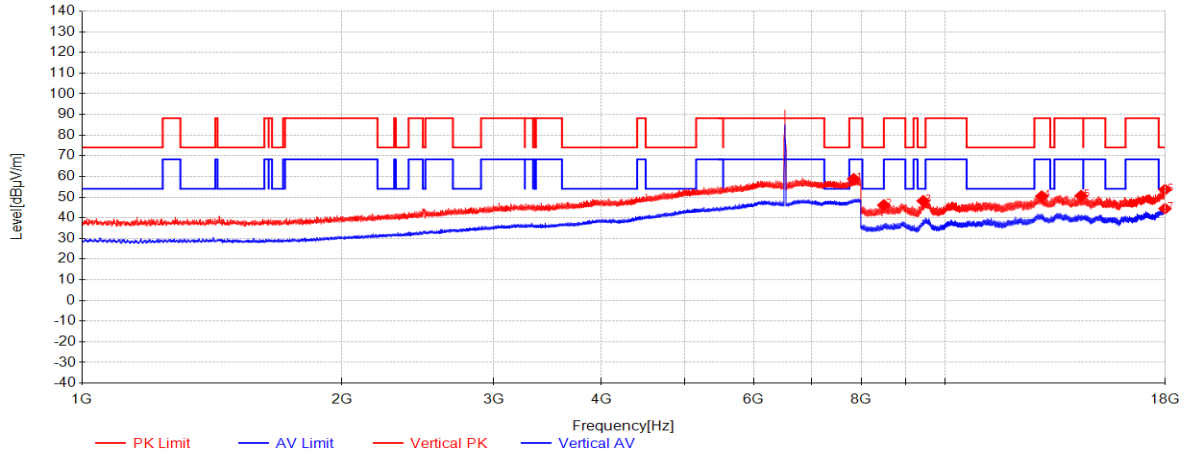


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7841.1875	40.57	36.98	-18.77	58.78	88.20	29.42	Vertical
2	8497.6667	48.53	37.65	-40.05	46.13	74.00	27.87	Vertical
3	9439.3333	48.39	38.04	-38.27	48.16	74.00	25.84	Vertical
4	12953.6667	45.41	39.84	-34.85	50.40	88.20	37.80	Vertical
5	14390.3333	44.30	40.17	-33.81	50.65	88.20	37.55	Vertical
6	17998	42.65	41.69	-30.73	53.62	74.00	20.38	Vertical
7	17997.6667	33.45	41.69	-30.73	44.42	54.00	9.58	Vertical

11a_TX_CH_149_Horizontal

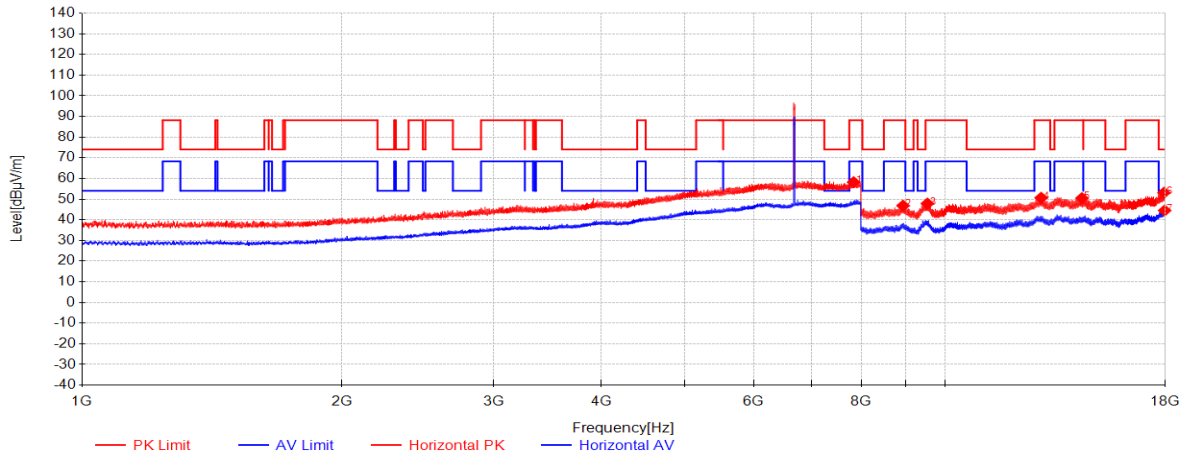


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7838.5625	39.98	36.98	-18.77	58.19	88.20	30.01	Horizontal
2	8945	47.67	37.96	-38.80	46.83	88.20	41.37	Horizontal
3	9546.3333	47.82	38.05	-38.02	47.85	88.20	40.35	Horizontal
4	12931.6667	45.66	39.82	-34.85	50.63	88.20	37.57	Horizontal
5	14421	44.26	40.15	-33.93	50.47	88.20	37.73	Horizontal
6	17947	42.44	41.55	-30.89	53.10	74.00	20.90	Horizontal
7	17980.3333	33.63	41.64	-30.78	44.49	54.00	9.51	Horizontal

11a_TX_CH_149_Vertical

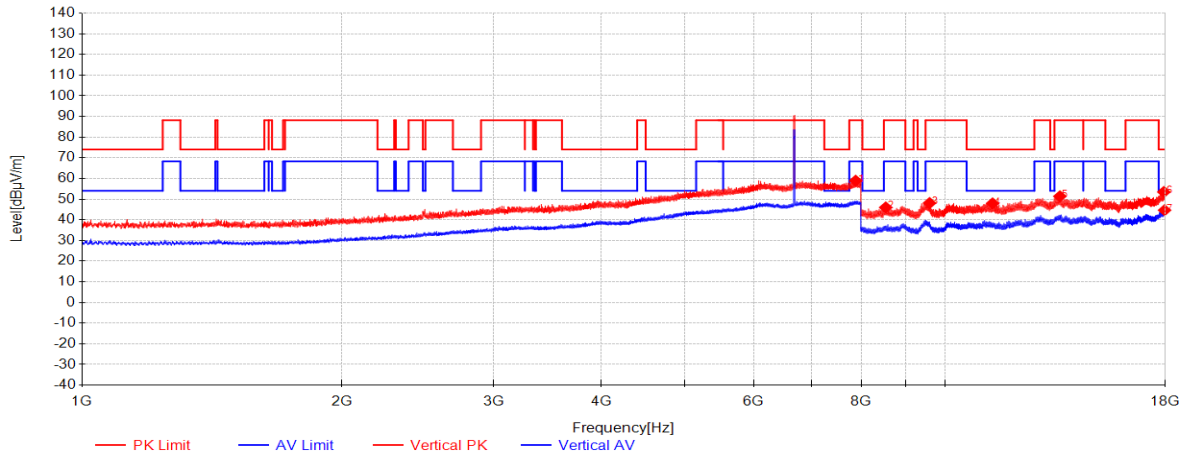


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7881.875	40.68	37.06	-18.83	58.91	88.20	29.29	Vertical
2	8540.3333	47.97	37.68	-39.66	45.99	88.20	42.21	Vertical
3	9601	47.88	38.06	-37.83	48.11	88.20	40.09	Vertical
4	11359.6667	44.50	39.08	-35.65	47.94	74.00	26.06	Vertical
5	13594.6667	45.51	40.20	-34.34	51.37	88.20	36.83	Vertical
6	17943.6667	42.81	41.54	-30.90	53.45	74.00	20.55	Vertical
7	17977.6667	33.82	41.64	-30.79	44.66	54.00	9.34	Vertical

11a_TX_CH_181_Horizontal

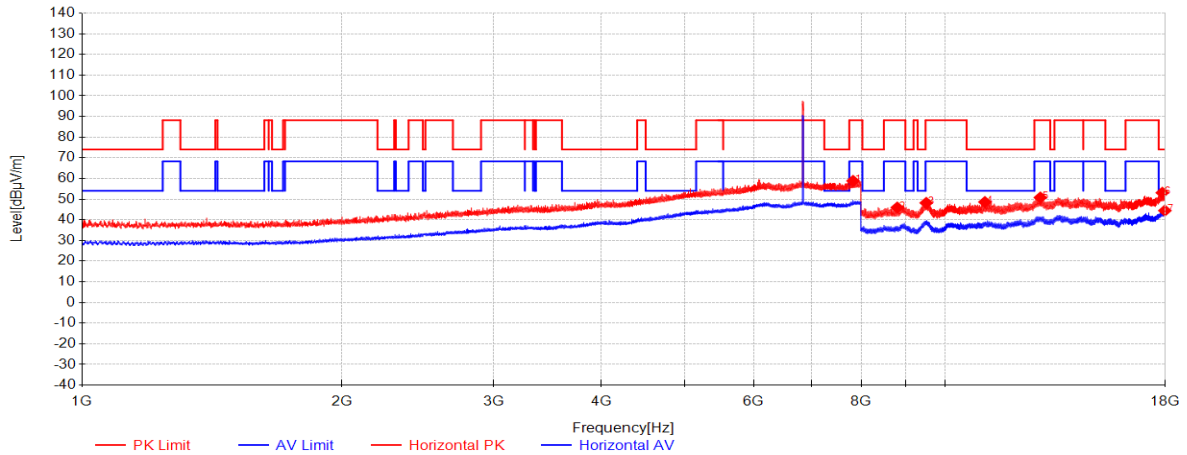


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7828.0625	40.63	36.96	-18.75	58.83	88.20	29.37	Horizontal
2	8807.6667	47.18	37.87	-39.13	45.91	88.20	42.29	Horizontal
3	9517	48.27	38.05	-38.13	48.19	88.20	40.01	Horizontal
4	11129.6667	44.98	39.22	-35.61	48.59	74.00	25.41	Horizontal
5	12904.3333	45.84	39.79	-34.85	50.78	88.20	37.42	Horizontal
6	17873	42.59	41.33	-30.85	53.08	74.00	20.92	Horizontal
7	17991.3333	33.52	41.67	-30.75	44.45	54.00	9.55	Horizontal

11a_TX_CH_181_Vertical

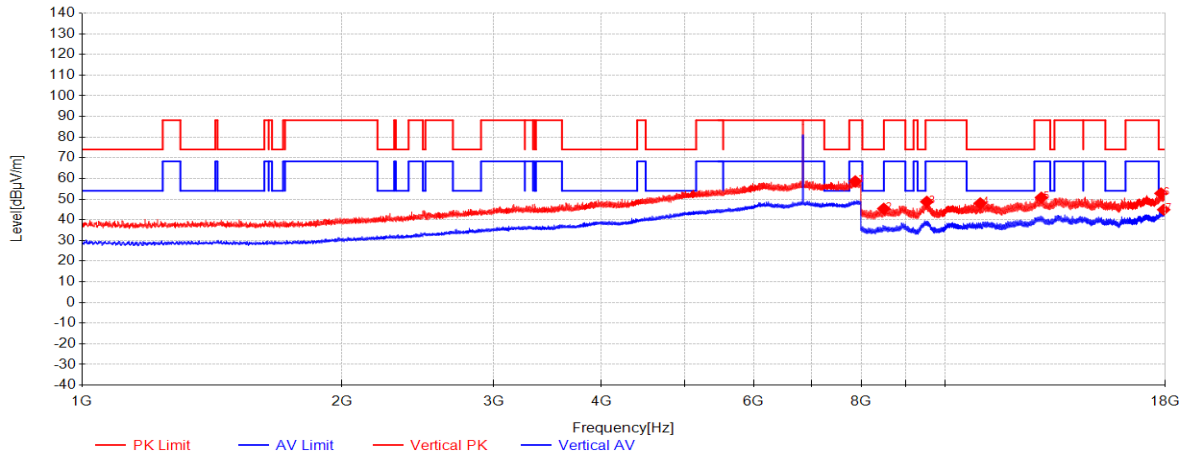


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7874	40.42	37.05	-18.82	58.65	88.20	29.55	Vertical
2	8496.3333	47.82	37.65	-40.05	45.41	74.00	28.59	Vertical
3	9531	48.79	38.05	-38.08	48.76	88.20	39.44	Vertical
4	10991	44.40	39.29	-35.68	48.01	74.00	25.99	Vertical
5	12941	45.80	39.83	-34.85	50.78	88.20	37.42	Vertical
6	17808	42.00	41.14	-30.38	52.77	74.00	21.23	Vertical
7	17935	34.30	41.51	-30.93	44.88	54.00	9.12	Vertical

11a_TX_CH_185_Horizontal

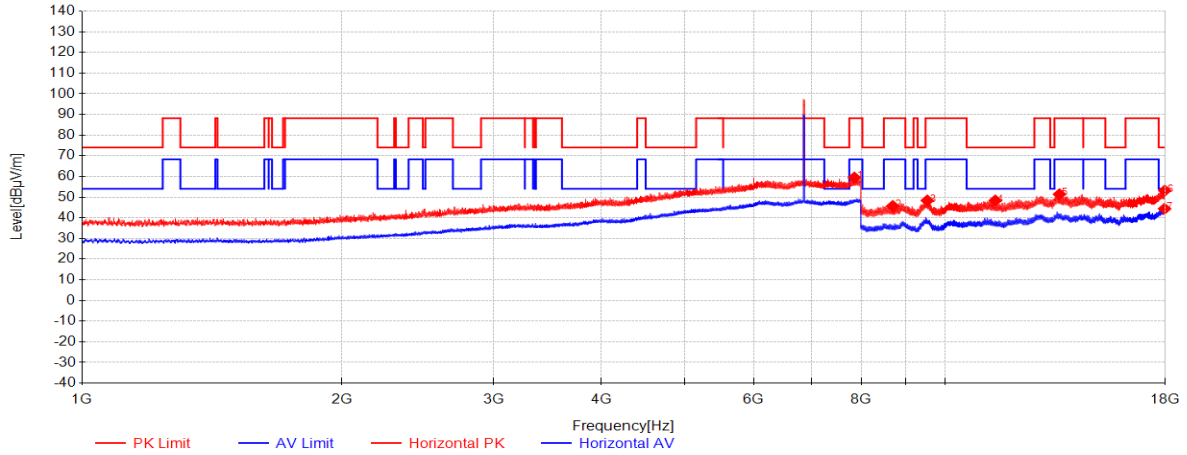


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7856.0625	41.22	37.01	-18.79	59.44	88.20	28.76	Horizontal
2	8703.6667	47.13	37.79	-39.24	45.69	88.20	42.51	Horizontal
3	9544.3333	48.34	38.05	-38.03	48.36	88.20	39.84	Horizontal
4	11441.6667	45.14	39.03	-35.81	48.36	74.00	25.64	Horizontal
5	13580.6667	45.58	40.19	-34.36	51.41	88.20	36.79	Horizontal
6	17986.3333	42.26	41.66	-30.76	53.16	74.00	20.84	Horizontal
7	17977	33.54	41.63	-30.79	44.38	54.00	9.62	Horizontal

11a_TX_CH_185_Vertical

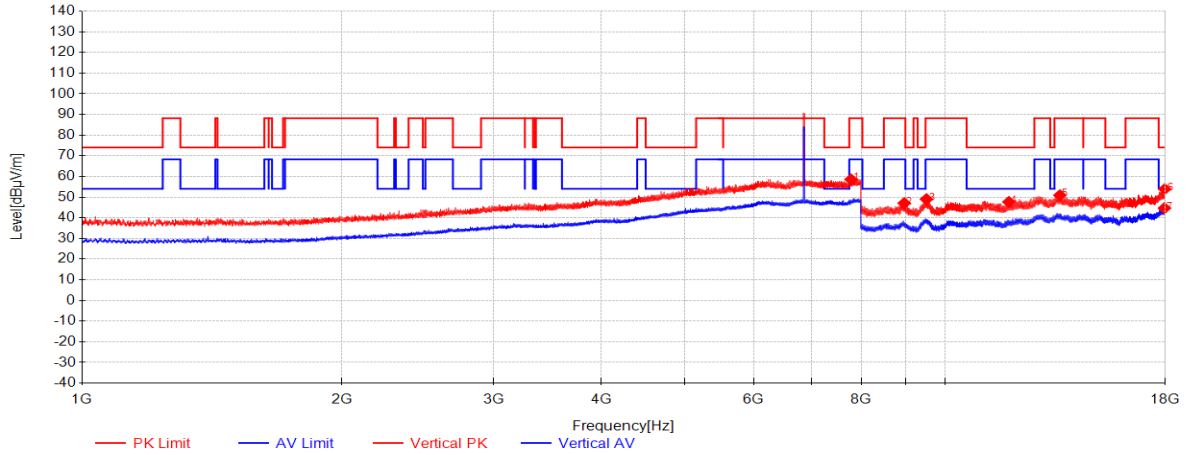


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7786.0625	40.40	36.87	-18.70	58.57	88.20	29.63	Vertical
2	8972.3333	47.78	37.98	-38.67	47.10	88.20	41.10	Vertical
3	9521.3333	49.07	38.05	-38.11	49.01	88.20	39.19	Vertical
4	11867.3333	43.87	38.78	-34.98	47.67	74.00	26.33	Vertical
5	13594.3333	45.04	40.20	-34.34	50.90	88.20	37.30	Vertical
6	17986.3333	43.01	41.66	-30.76	53.91	74.00	20.09	Vertical
7	17972	33.86	41.62	-30.81	44.67	54.00	9.33	Vertical

11a_TX_CH_189_Horizontal

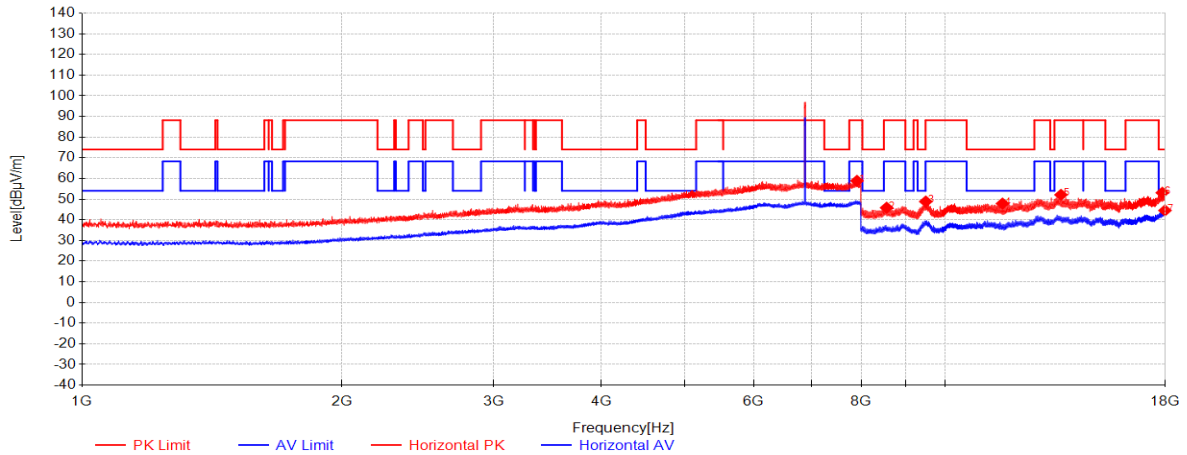


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7909.875	40.61	37.12	-18.85	58.88	88.20	29.32	Horizontal
2	8562.3333	47.59	37.69	-39.45	45.84	88.20	42.36	Horizontal
3	9505	48.97	38.05	-38.17	48.85	88.20	39.35	Horizontal
4	11665	44.23	38.90	-35.27	47.86	74.00	26.14	Horizontal
5	13635	46.37	40.22	-34.50	52.09	88.20	36.11	Horizontal
6	17871.6667	42.60	41.33	-30.84	53.09	74.00	20.91	Horizontal
7	17996.6667	33.54	41.69	-30.73	44.50	54.00	9.50	Horizontal

11a_TX_CH_189_Vertical

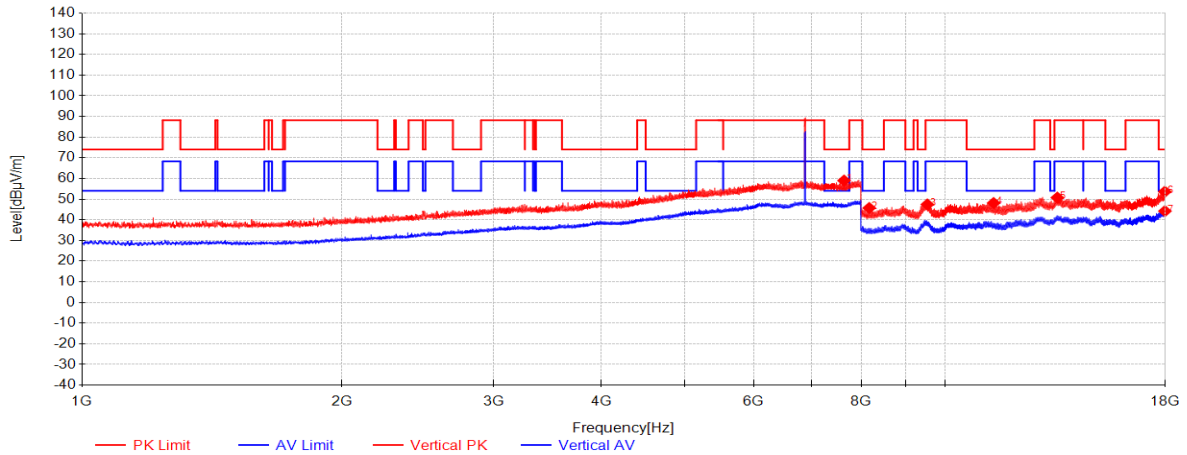


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7642.125	40.89	36.58	-18.51	58.96	74.00	15.04	Vertical
2	8173	48.48	37.42	-40.18	45.72	74.00	28.28	Vertical
3	9545.3333	47.39	38.05	-38.03	47.42	88.20	40.78	Vertical
4	11391.6667	44.89	39.06	-35.84	48.11	74.00	25.89	Vertical
5	13502	45.07	40.15	-34.49	50.73	88.20	37.47	Vertical
6	17989	42.71	41.67	-30.76	53.62	74.00	20.38	Vertical
7	17994.6667	33.27	41.68	-30.74	44.22	54.00	9.78	Vertical

11a_TX_CH_209_Horizontal

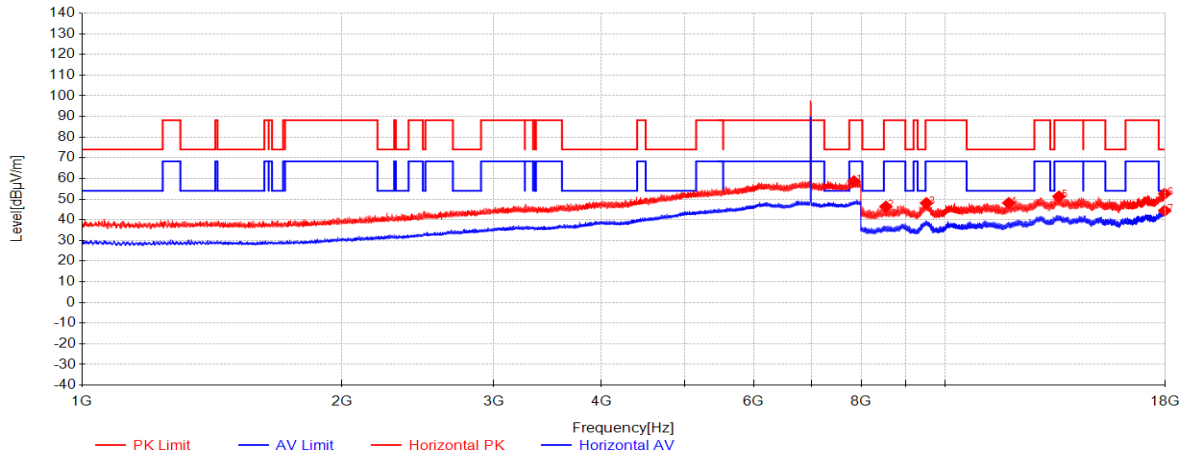


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7846	40.46	36.99	-18.78	58.67	88.20	29.53	Horizontal
2	8544.3333	48.32	37.68	-39.62	46.38	88.20	41.82	Horizontal
3	9521.3333	48.16	38.05	-38.11	48.10	88.20	40.10	Horizontal
4	11860.6667	44.37	38.78	-35.02	48.14	74.00	25.86	Horizontal
5	13561.6667	45.53	40.18	-34.39	51.32	88.20	36.88	Horizontal
6	17986.3333	41.71	41.66	-30.76	52.61	74.00	21.39	Horizontal
7	17985.6667	33.56	41.66	-30.77	44.45	54.00	9.55	Horizontal

11a_TX_CH_209_Vertical

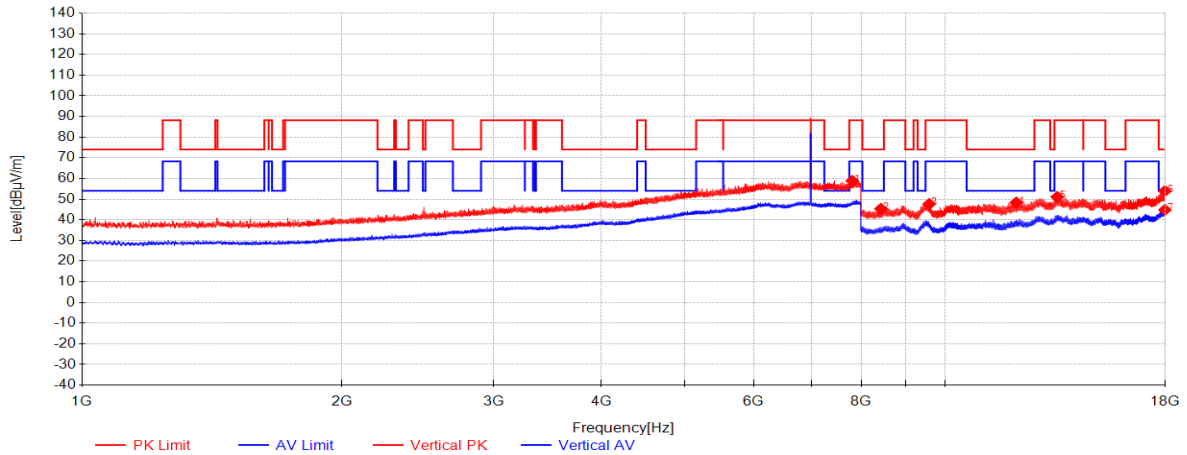


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7811.4375	40.63	36.92	-18.73	58.83	88.20	29.37	Vertical
2	8432	47.82	37.60	-40.10	45.32	74.00	28.68	Vertical
3	9591.3333	47.42	38.06	-37.86	47.62	88.20	40.58	Vertical
4	12101.6667	44.45	38.82	-34.91	48.36	74.00	25.64	Vertical
5	13497.6667	45.42	40.15	-34.50	51.07	88.20	37.13	Vertical
6	17989.6667	43.00	41.67	-30.75	53.92	74.00	20.08	Vertical
7	17993.3333	33.87	41.68	-30.74	44.81	54.00	9.19	Vertical

11a_TX_CH_233_Horizontal

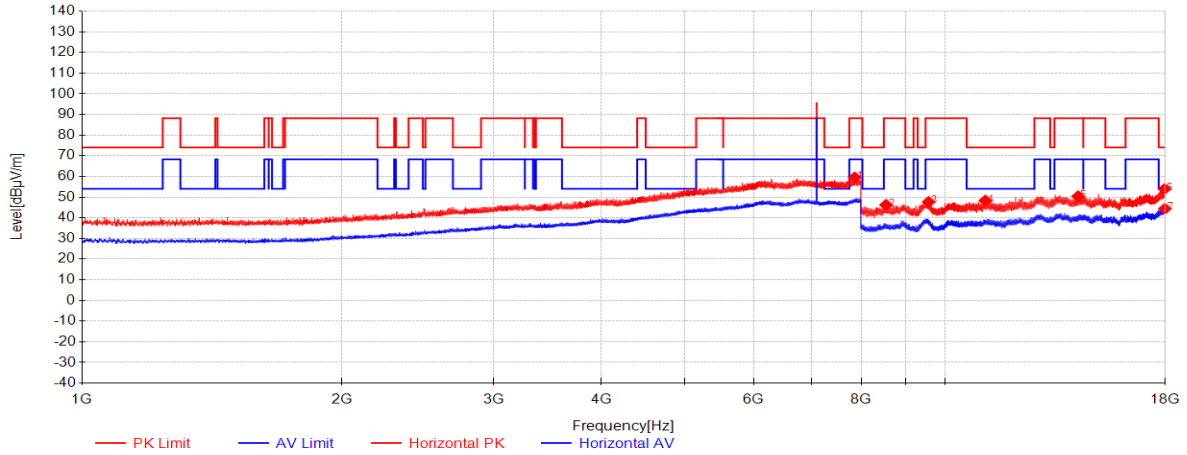


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7863.0625	41.27	37.03	-18.80	59.49	88.20	28.71	Horizontal
2	8548	48.16	37.68	-39.58	46.26	88.20	41.94	Horizontal
3	9577.6667	47.51	38.06	-37.91	47.66	88.20	40.54	Horizontal
4	11143.6667	44.74	39.21	-35.62	48.33	74.00	25.67	Horizontal
5	14272.3333	44.81	40.24	-34.66	50.38	88.20	37.82	Horizontal
6	17974.3333	43.11	41.63	-30.80	53.93	74.00	20.07	Horizontal
7	17991.6667	33.46	41.68	-30.75	44.39	54.00	9.61	Horizontal

11a_TX_CH_233_Veritical

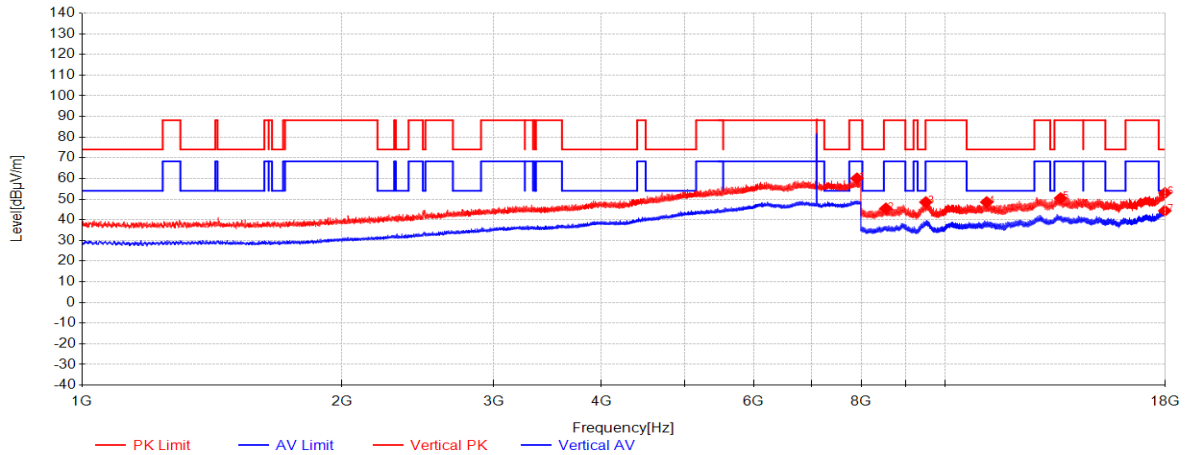


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7909	41.76	37.12	-18.85	60.03	88.20	28.17	Vertical
2	8543.3333	47.43	37.68	-39.63	45.48	88.20	42.72	Vertical
3	9506.3333	48.65	38.05	-38.17	48.53	88.20	39.67	Vertical
4	11183.3333	45.00	39.19	-35.65	48.54	74.00	25.46	Vertical
5	13623	44.69	40.21	-34.44	50.46	88.20	37.74	Vertical
6	17996.3333	41.97	41.69	-30.73	52.93	74.00	21.07	Vertical
7	17989.6667	33.44	41.67	-30.75	44.36	54.00	9.64	Vertical

11ax(HE20)_TX_CH_001_Horizontal

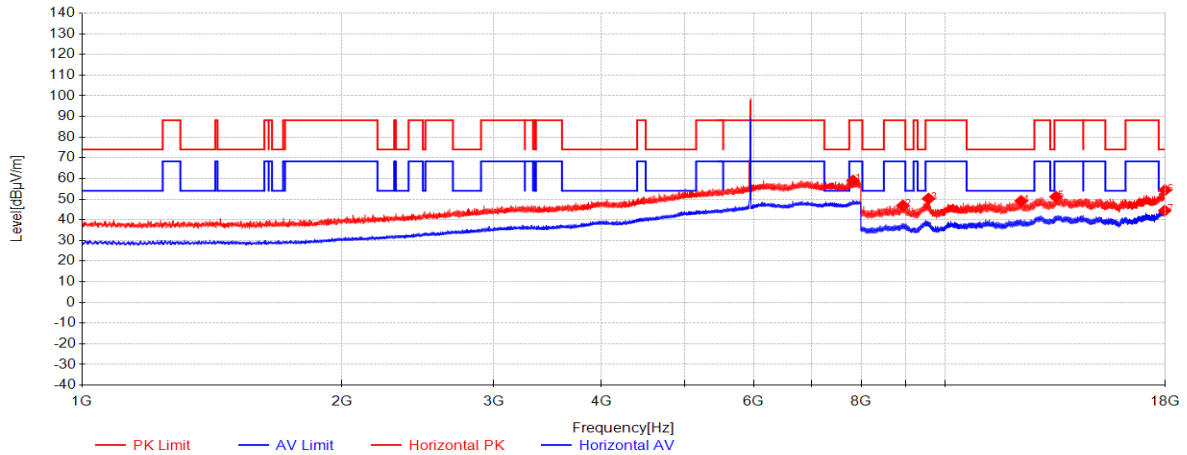


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7827.625	40.76	36.96	-18.75	58.96	88.20	29.24	Horizontal
2	8941.6667	47.75	37.96	-38.82	46.89	88.20	41.31	Horizontal
3	9575	50.08	38.06	-37.92	50.22	88.20	37.98	Horizontal
4	12258.6667	44.67	39.01	-34.60	49.08	74.00	24.92	Horizontal
5	13454.3333	45.70	40.13	-34.69	51.14	88.20	37.06	Horizontal
6	17994.3333	43.38	41.68	-30.74	54.33	74.00	19.67	Horizontal
7	17987.3333	33.59	41.66	-30.76	44.49	54.00	9.51	Horizontal

11ax(HE20)_TX_CH_001_Vertical

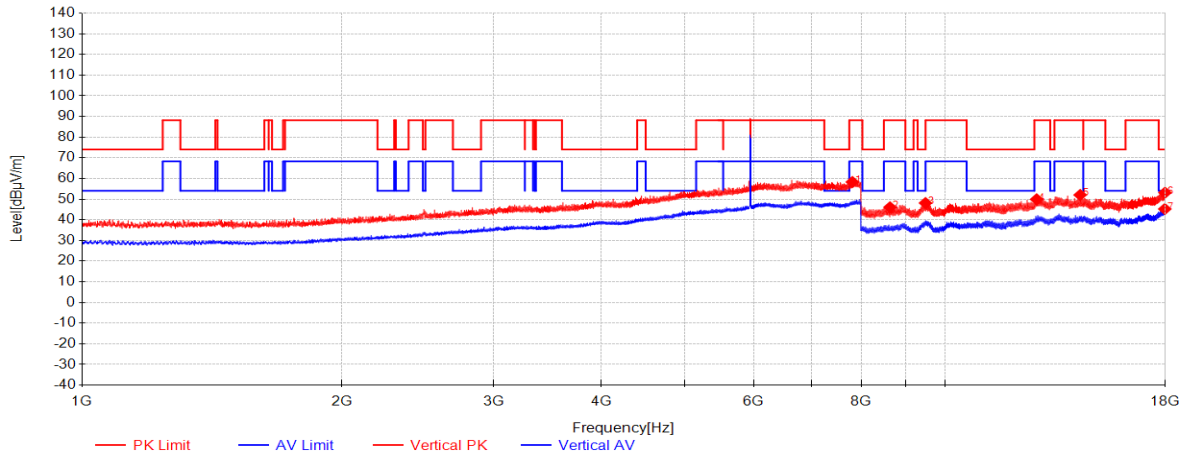


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7813.1875	40.10	36.93	-18.73	58.30	88.20	29.90	Vertical
2	8638.6667	47.45	37.75	-39.14	46.06	88.20	42.14	Vertical
3	9497.3333	48.27	38.05	-38.19	48.13	74.00	25.87	Vertical
4	12777.6667	44.89	39.63	-34.63	49.90	88.20	38.30	Vertical
5	14351.3333	45.95	40.19	-34.11	52.03	88.20	36.17	Vertical
6	17998.3333	42.15	41.70	-30.73	53.12	74.00	20.88	Vertical
7	17991	34.30	41.67	-30.75	45.23	54.00	8.77	Vertical

11ax(HE20)_TX_CH_045_Horizontal

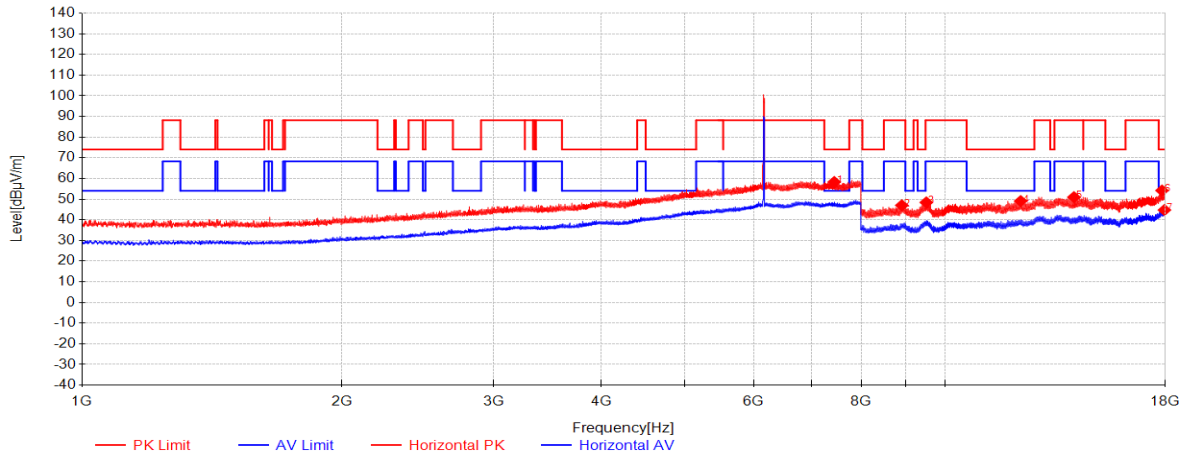


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7444.8125	39.97	36.30	-17.96	58.31	74.00	15.69	Horizontal
2	8915.6667	47.98	37.94	-38.94	46.98	88.20	41.22	Horizontal
3	9518.6667	48.47	38.05	-38.12	48.40	88.20	39.80	Horizontal
4	12244	44.80	38.99	-34.73	49.06	74.00	24.94	Horizontal
5	14115.6667	45.45	40.33	-34.83	50.95	88.20	37.25	Horizontal
6	17856.6667	43.59	41.28	-30.73	54.15	74.00	19.85	Horizontal
7	17970.3333	33.94	41.61	-30.81	44.74	54.00	9.26	Horizontal

11ax(HE20)_TX_CH_045_Vertical

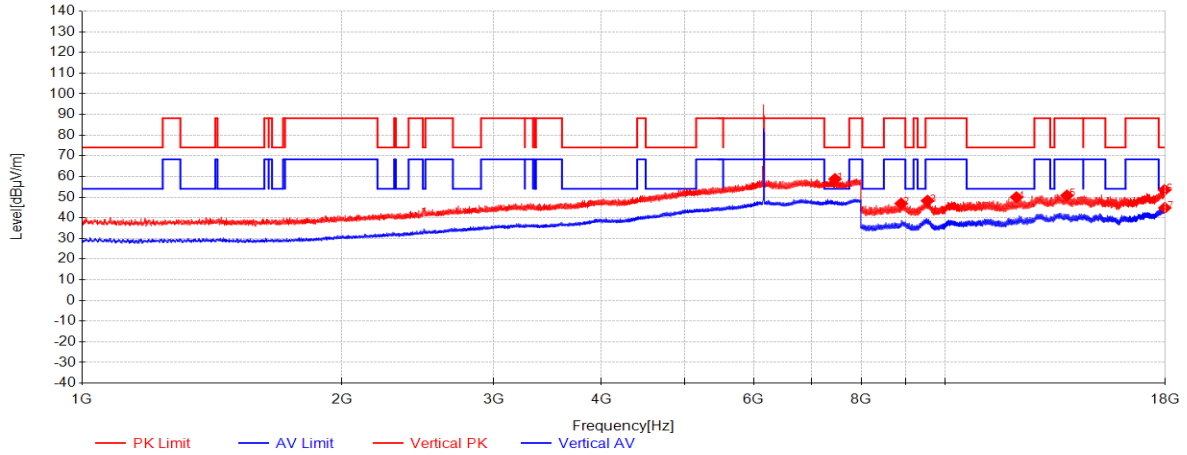


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7459.6875	40.48	36.30	-18.02	58.76	74.00	15.24	Vertical
2	8899	48.00	37.93	-39.02	46.91	88.20	41.29	Vertical
3	9549.3333	48.21	38.05	-38.01	48.25	88.20	39.95	Vertical
4	12107	46.04	38.83	-34.93	49.94	74.00	24.06	Vertical
5	13856.3333	45.04	40.33	-34.56	50.81	88.20	37.39	Vertical
6	17976	42.62	41.63	-30.80	53.45	74.00	20.55	Vertical
7	17989	33.89	41.67	-30.76	44.80	54.00	9.20	Vertical

11ax(HE20)_TX_CH_049_Horizontal

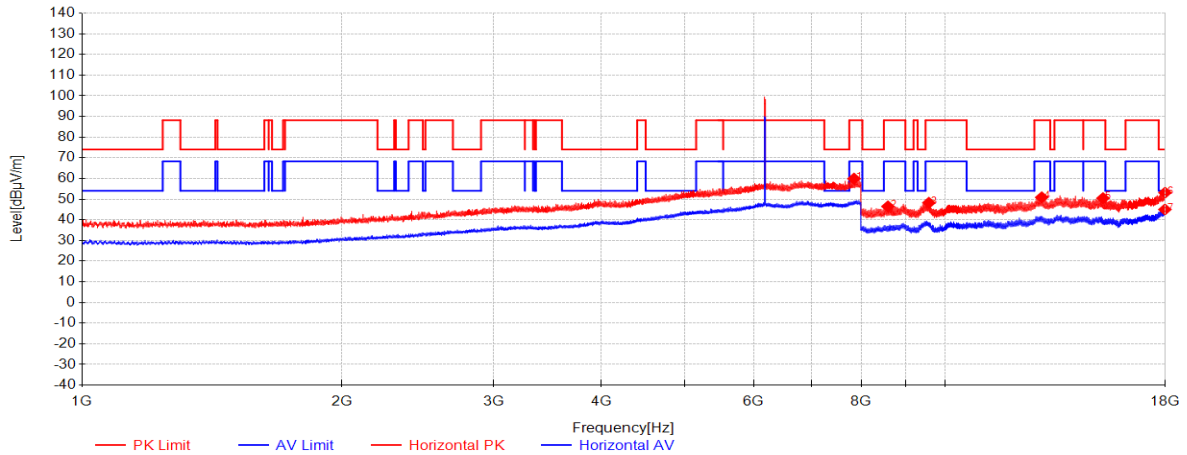


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7847.75	41.68	37.00	-18.78	59.89	88.20	28.31	Horizontal
2	8591.6667	47.89	37.71	-39.16	46.44	88.20	41.76	Horizontal
3	9584	48.04	38.06	-37.89	48.21	88.20	39.99	Horizontal
4	12951.6667	45.86	39.84	-34.85	50.85	88.20	37.35	Horizontal
5	15254	44.40	39.34	-33.32	50.43	88.20	37.77	Horizontal
6	17999.3333	42.13	41.70	-30.72	53.11	74.00	20.89	Horizontal
7	17994	34.06	41.68	-30.74	45.00	54.00	9.00	Horizontal

11ax(HE20)_TX_CH_049_Vertical

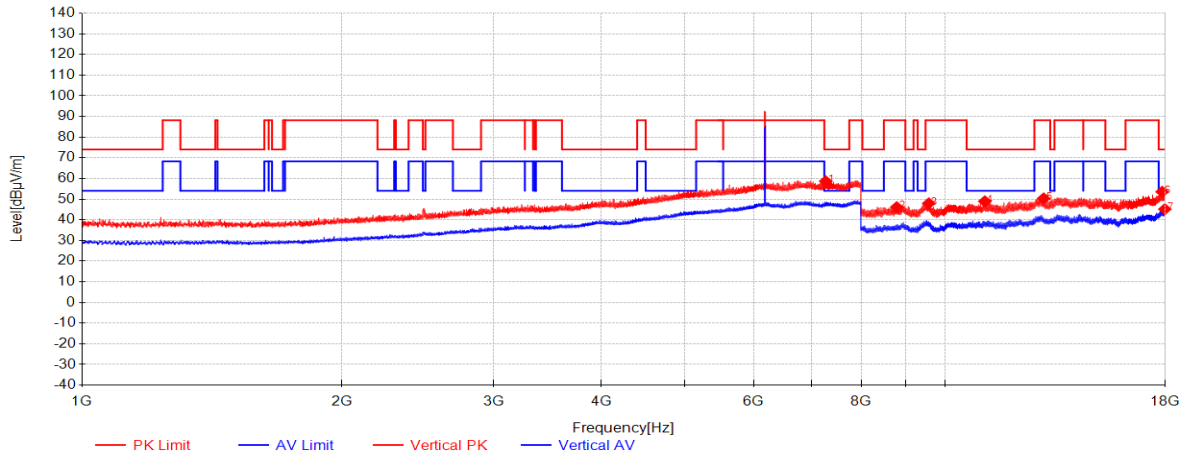


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7276.375	40.11	36.30	-17.78	58.63	74.00	15.37	Vertical
2	8796	47.39	37.86	-39.14	46.10	88.20	42.10	Vertical
3	9580.3333	47.77	38.06	-37.90	47.93	88.20	40.27	Vertical
4	11127.3333	45.30	39.22	-35.61	48.91	74.00	25.09	Vertical
5	13019.3333	45.25	39.91	-34.83	50.33	88.20	37.87	Vertical
6	17863.6667	43.03	41.30	-30.78	53.56	74.00	20.44	Vertical
7	17989	34.24	41.67	-30.76	45.15	54.00	8.85	Vertical

11ax(HE20)_TX_CH_093_Horizontal

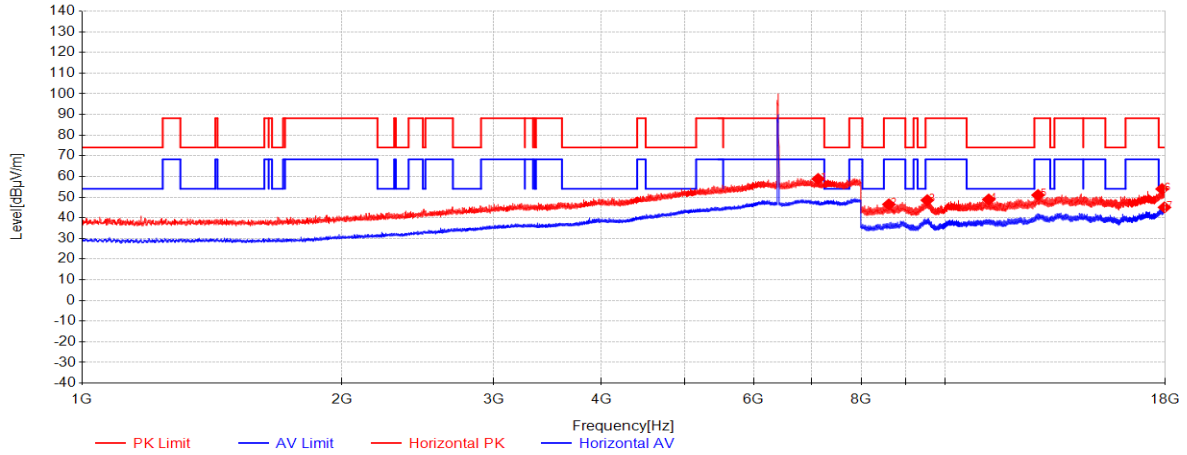


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7130.6875	39.97	36.30	-17.48	58.79	88.20	29.41	Horizontal
2	8612.3333	47.84	37.73	-39.10	46.47	88.20	41.73	Horizontal
3	9542	48.50	38.05	-38.04	48.52	88.20	39.68	Horizontal
4	11242.3333	45.19	39.15	-35.50	48.84	74.00	25.16	Horizontal
5	12823.6667	45.97	39.69	-34.65	51.01	88.20	37.19	Horizontal
6	17858.3333	43.37	41.29	-30.74	53.92	74.00	20.08	Horizontal
7	17973	34.22	41.62	-30.81	45.04	54.00	8.96	Horizontal

11ax(HE20)_TX_CH_093_Vertical

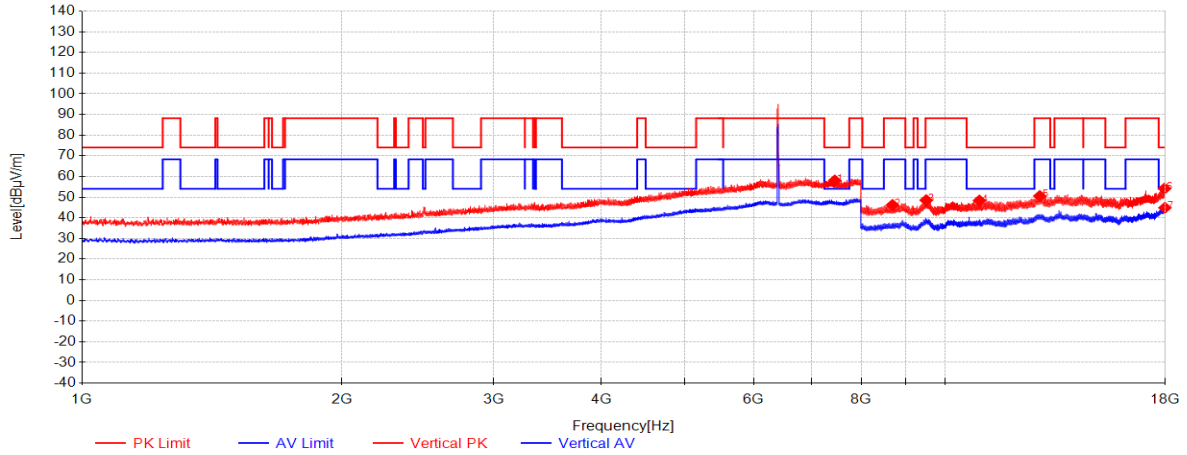


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7454.875	39.73	36.30	-18.00	58.03	74.00	15.97	Vertical
2	8695	47.64	37.79	-39.23	46.19	88.20	42.01	Vertical
3	9515.6667	48.60	38.05	-38.13	48.52	88.20	39.68	Vertical
4	10967.6667	44.82	39.26	-35.76	48.32	74.00	25.68	Vertical
5	12885	45.59	39.76	-34.81	50.54	88.20	37.66	Vertical
6	17977	43.31	41.63	-30.79	54.15	74.00	19.85	Vertical
7	17995.3333	33.90	41.69	-30.73	44.85	54.00	9.15	Vertical

11ax(HE20)_TX_CH_097_Horizontal

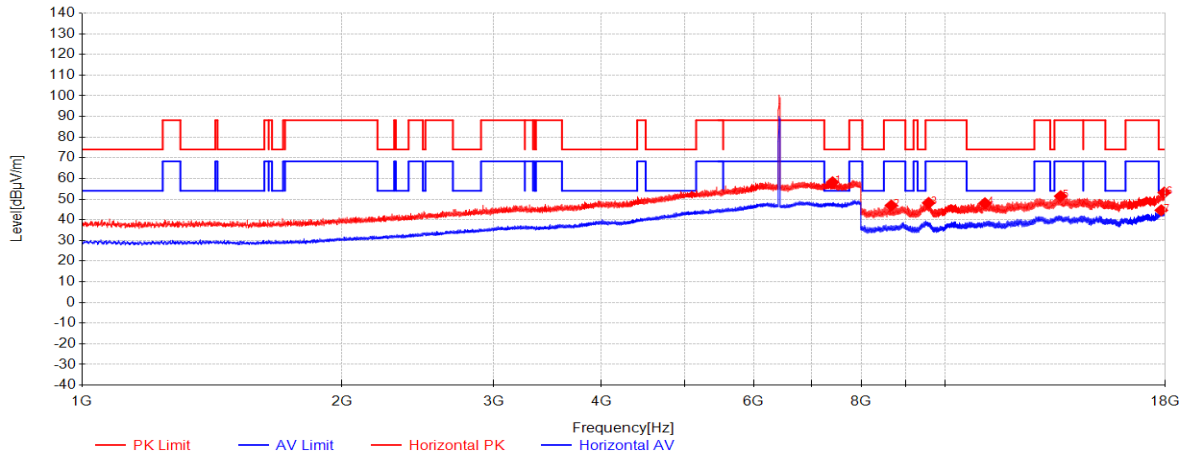


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7409.375	39.66	36.30	-17.79	58.17	74.00	15.83	Horizontal
2	8669.6667	48.35	37.77	-39.19	46.93	88.20	41.27	Horizontal
3	9578	48.03	38.06	-37.91	48.18	88.20	40.02	Horizontal
4	11131	44.38	39.22	-35.61	47.99	74.00	26.01	Horizontal
5	13623.3333	45.65	40.21	-34.44	51.42	88.20	36.78	Horizontal
6	17958.6667	42.43	41.58	-30.85	53.16	74.00	20.84	Horizontal
7	17818.3333	33.88	41.17	-30.45	44.60	54.00	9.40	Horizontal

11ax(HE20)_TX_CH_097_Vertical

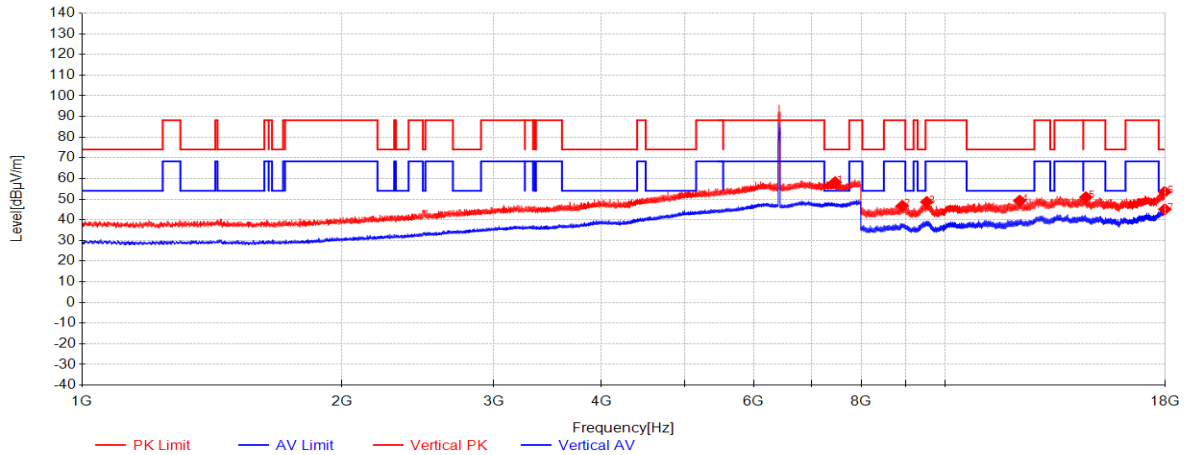


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7460.5625	39.91	36.30	-18.03	58.18	74.00	15.82	Vertical
2	8926.6667	47.69	37.95	-38.89	46.75	88.20	41.45	Vertical
3	9530.6667	48.63	38.05	-38.08	48.60	88.20	39.60	Vertical
4	12213	45.25	38.96	-35.01	49.19	74.00	24.81	Vertical
5	14573.6667	45.20	40.06	-34.36	50.90	88.20	37.30	Vertical
6	17981.6667	42.62	41.65	-30.78	53.49	74.00	20.51	Vertical
7	17990	34.15	41.67	-30.75	45.07	54.00	8.93	Vertical

11ax(HE20)_TX_CH_105_Horizontal

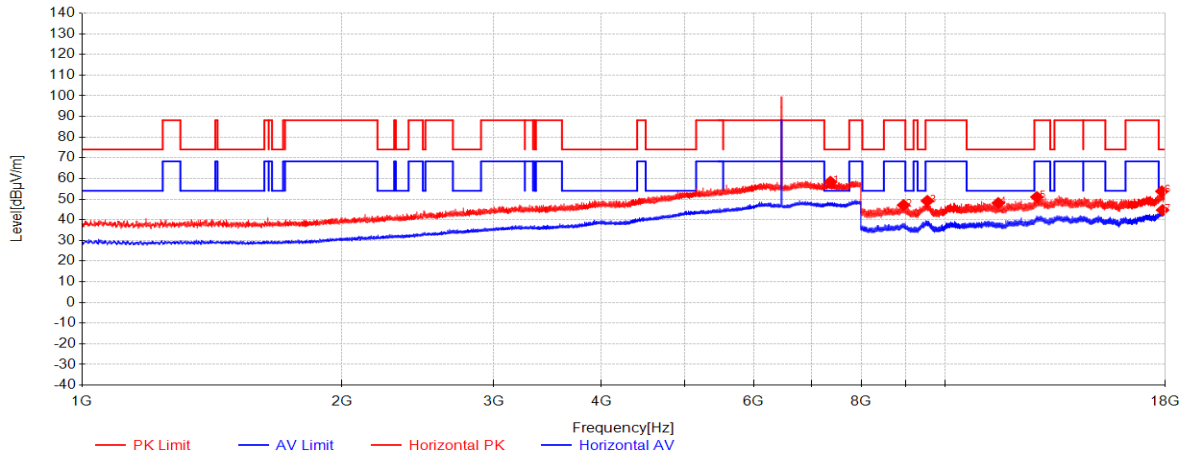


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7368.25	39.84	36.30	-17.75	58.39	74.00	15.61	Horizontal
2	8957	47.89	37.97	-38.74	47.12	88.20	41.08	Horizontal
3	9545.6667	49.11	38.05	-38.03	49.14	88.20	39.06	Horizontal
4	11533.6667	44.50	38.98	-35.38	48.10	74.00	25.90	Horizontal
5	12784.6667	45.97	39.64	-34.61	51.00	88.20	37.20	Horizontal
6	17848	43.18	41.26	-30.67	53.77	74.00	20.23	Horizontal
7	17882.3333	34.24	41.36	-30.91	44.69	54.00	9.31	Horizontal

11ax(HE20)_TX_CH_105_Vertical

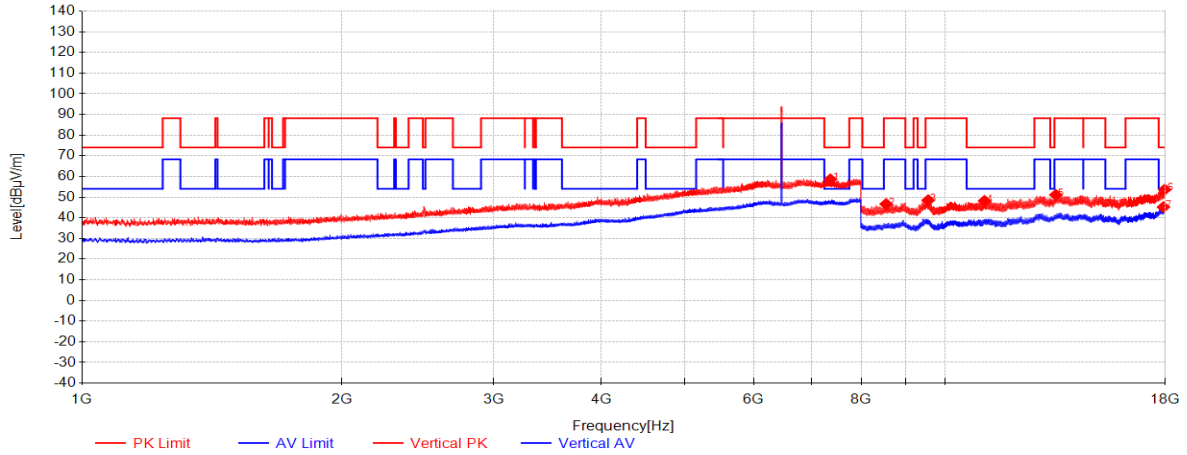


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7368.25	40.01	36.30	-17.75	58.56	74.00	15.44	Vertical
2	8549.3333	48.54	37.68	-39.57	46.65	88.20	41.55	Vertical
3	9567.3333	48.37	38.06	-37.95	48.48	88.20	39.72	Vertical
4	11117	44.54	39.23	-35.60	48.17	74.00	25.83	Vertical
5	13448.3333	45.67	40.12	-34.72	51.08	88.20	37.12	Vertical
6	17987	42.75	41.66	-30.76	53.65	74.00	20.35	Vertical
7	17923.3333	34.68	41.48	-30.97	45.19	54.00	8.81	Vertical

11ax(HE20)_TX_CH_113_Horizontal

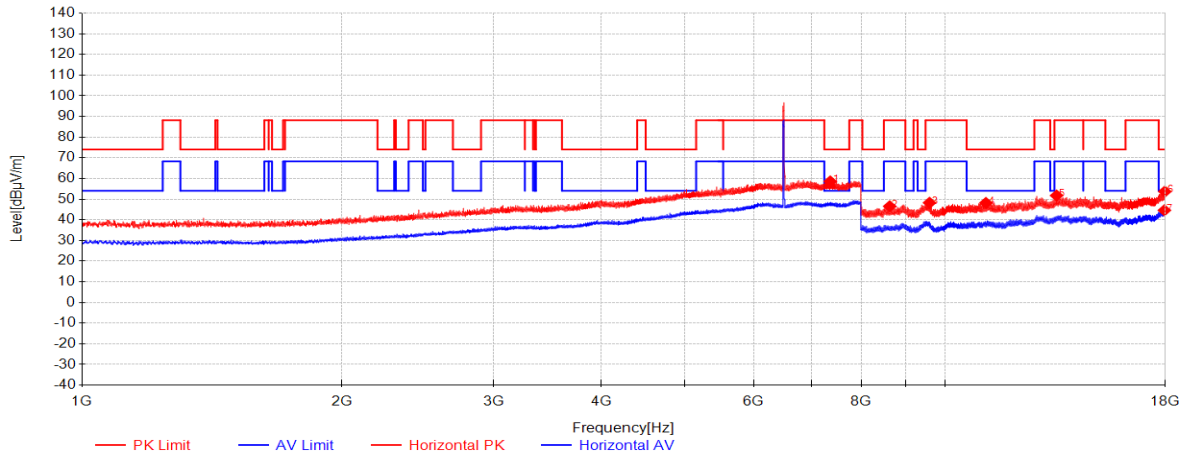


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7366.0625	40.02	36.30	-17.75	58.57	74.00	15.43	Horizontal
2	8631.6667	47.91	37.74	-39.13	46.52	88.20	41.68	Horizontal
3	9600.3333	48.02	38.06	-37.83	48.25	88.20	39.95	Horizontal
4	11160	44.60	39.20	-35.63	48.17	74.00	25.83	Horizontal
5	13475.3333	46.20	40.14	-34.60	51.74	88.20	36.46	Horizontal
6	17990.6667	42.76	41.67	-30.75	53.68	74.00	20.32	Horizontal
7	17970.3333	33.80	41.61	-30.81	44.60	54.00	9.40	Horizontal

11ax(HE20)_TX_CH_113_Vertical

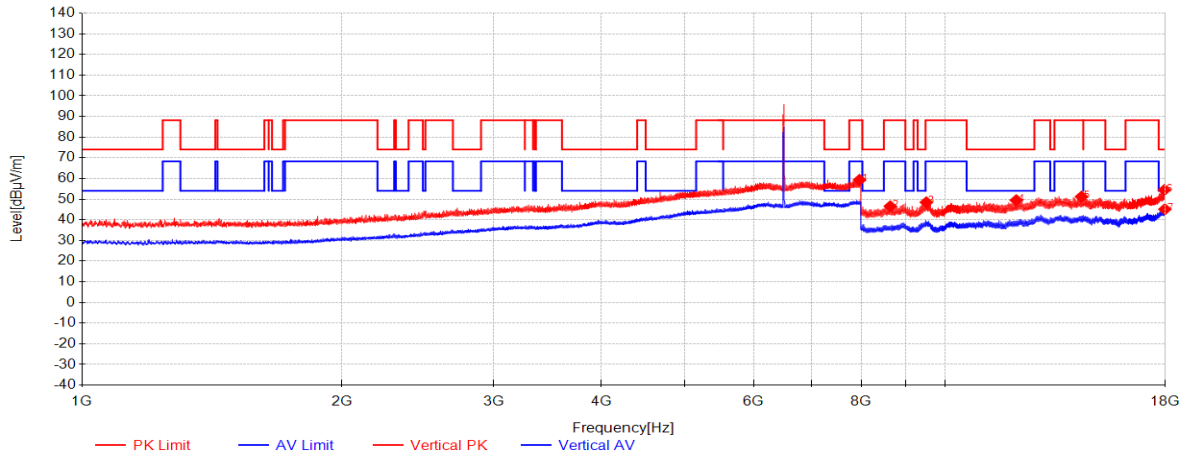


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7962.8125	40.88	37.23	-18.81	59.30	88.20	28.90	Vertical
2	8644.6667	47.94	37.75	-39.15	46.54	88.20	41.66	Vertical
3	9518	48.53	38.05	-38.13	48.46	88.20	39.74	Vertical
4	12102.3333	45.57	38.82	-34.92	49.48	74.00	24.52	Vertical
5	14402.6667	44.79	40.16	-33.76	51.18	88.20	37.02	Vertical
6	17967	43.64	41.60	-30.83	54.42	74.00	19.58	Vertical
7	17991.6667	34.17	41.68	-30.75	45.10	54.00	8.90	Vertical

11ax(HE20)_TX_CH_117_Horizontal

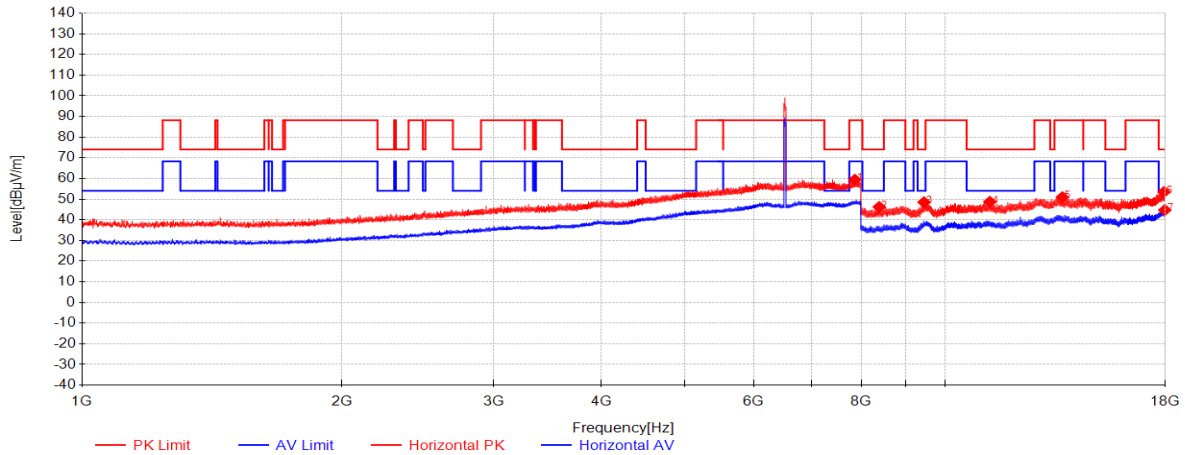


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7865.6875	41.17	37.03	-18.81	59.39	88.20	28.81	Horizontal
2	8394	48.75	37.58	-40.12	46.21	74.00	27.79	Horizontal
3	9459.6667	48.70	38.05	-38.25	48.50	74.00	25.50	Horizontal
4	11277	44.93	39.13	-35.38	48.69	74.00	25.31	Horizontal
5	13683.6667	45.43	40.24	-34.74	50.93	88.20	37.27	Horizontal
6	17951	42.75	41.56	-30.88	53.43	74.00	20.57	Horizontal
7	17989.6667	33.81	41.67	-30.75	44.73	54.00	9.27	Horizontal

11ax(HE20)_TX_CH_117_Vertical

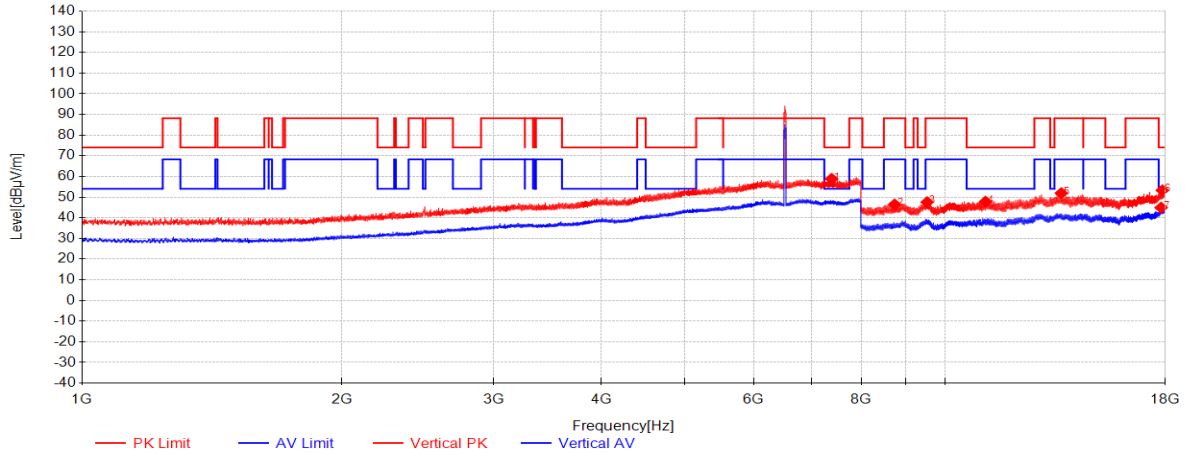


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7392.75	40.33	36.30	-17.75	58.88	74.00	15.12	Vertical
2	8747.3333	47.80	37.82	-39.19	46.43	88.20	41.77	Vertical
3	9539.6667	47.55	38.05	-38.05	47.56	88.20	40.64	Vertical
4	11148.6667	44.20	39.21	-35.62	47.79	74.00	26.21	Vertical
5	13647.6667	46.24	40.22	-34.56	51.90	88.20	36.30	Vertical
6	17871.6667	42.79	41.33	-30.84	53.28	74.00	20.72	Vertical
7	17813	34.17	41.16	-30.41	44.91	54.00	9.09	Vertical

11ax(HE20)_TX_CH_149_Horizontal

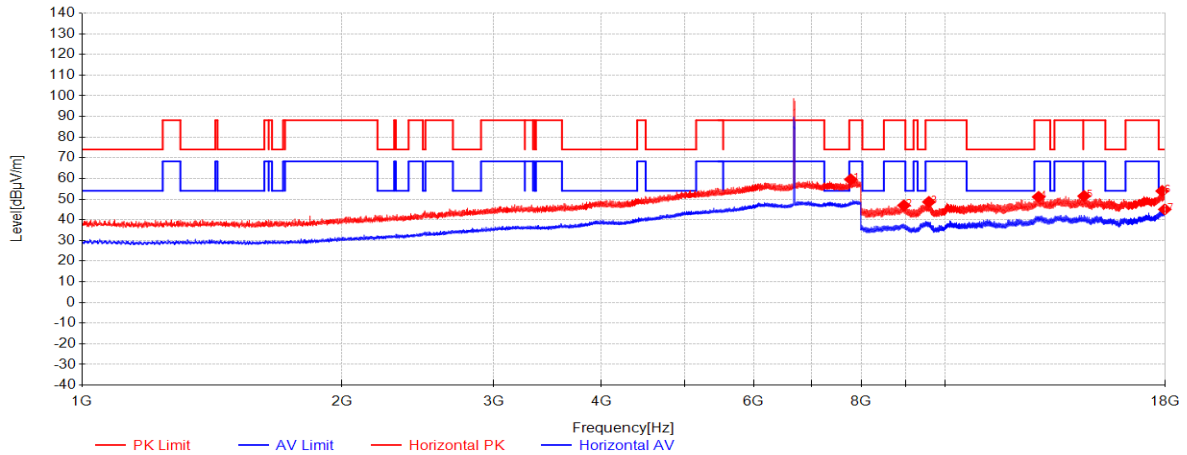


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7780.8125	41.35	36.86	-18.69	59.52	88.20	28.68	Horizontal
2	8967	47.68	37.98	-38.69	46.97	88.20	41.23	Horizontal
3	9584.6667	48.47	38.06	-37.89	48.64	88.20	39.56	Horizontal
4	12845	46.06	39.71	-34.71	51.07	88.20	37.13	Horizontal
5	14502	46.05	40.10	-34.65	51.50	88.20	36.70	Horizontal
6	17862.3333	43.38	41.30	-30.77	53.91	74.00	20.09	Horizontal
7	17987.6667	34.15	41.66	-30.76	45.05	54.00	8.95	Horizontal

11ax(HE20)_TX_CH_149_Vertical

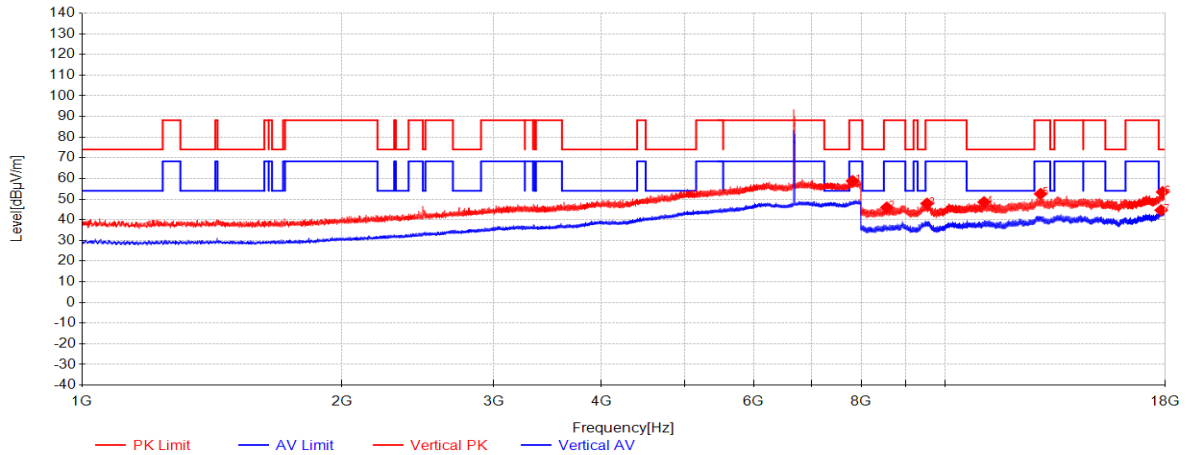


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7816.6875	40.60	36.93	-18.74	58.80	88.20	29.40	Vertical
2	8566	47.71	37.70	-39.41	46.00	88.20	42.20	Vertical
3	9536	47.88	38.05	-38.06	47.87	88.20	40.33	Vertical
4	11104	44.93	39.24	-35.59	48.57	74.00	25.43	Vertical
5	12913.6667	47.59	39.80	-34.85	52.54	88.20	35.66	Vertical
6	17881.3333	42.99	41.36	-30.91	53.44	74.00	20.56	Vertical
7	17813	33.91	41.16	-30.41	44.65	54.00	9.35	Vertical

11ax(HE20)_TX_CH_181_Horizontal

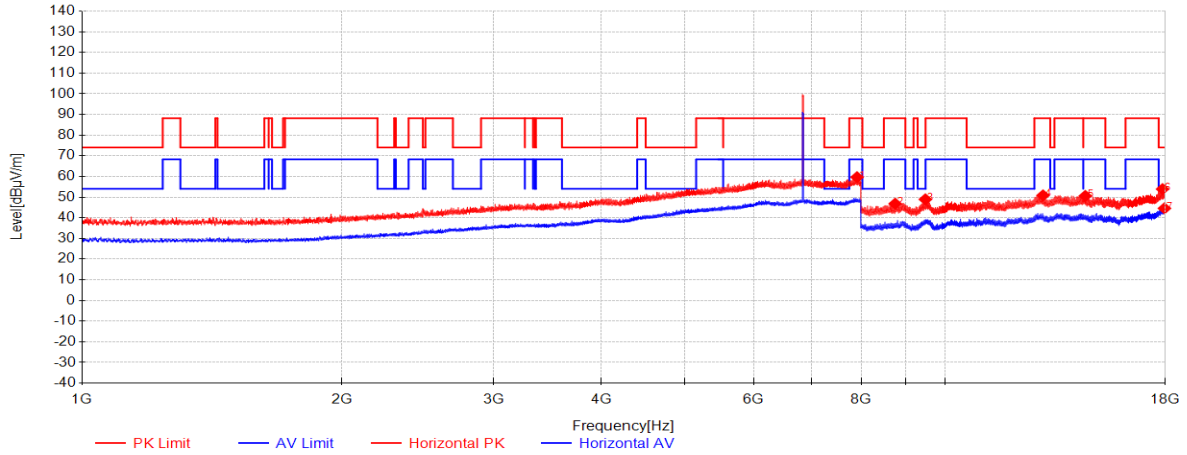


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7911.625	41.38	37.12	-18.85	59.65	88.20	28.55	Horizontal
2	8759.6667	48.16	37.83	-39.18	46.81	88.20	41.39	Horizontal
3	9494	49.06	38.05	-38.20	48.91	74.00	25.09	Horizontal
4	12997	45.76	39.90	-34.85	50.81	88.20	37.39	Horizontal
5	14548.6667	44.95	40.07	-34.46	50.56	88.20	37.64	Horizontal
6	17880	43.44	41.35	-30.90	53.90	74.00	20.10	Horizontal
7	17972	33.77	41.62	-30.81	44.58	54.00	9.42	Horizontal

11ax(HE20)_TX_CH_181_Vertical

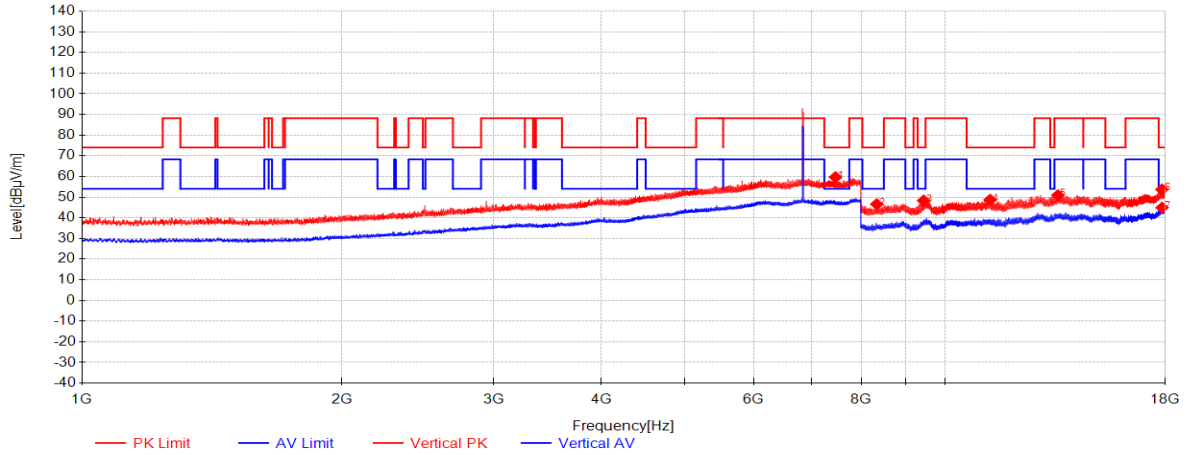


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7468.875	41.43	36.30	-18.07	59.66	74.00	14.34	Vertical
2	8338.6667	49.14	37.54	-40.08	46.60	74.00	27.40	Vertical
3	9449.3333	48.56	38.04	-38.26	48.34	74.00	25.66	Vertical
4	11284	44.94	39.13	-35.35	48.72	74.00	25.28	Vertical
5	13524.3333	45.20	40.16	-34.45	50.91	88.20	37.29	Vertical
6	17849.6667	43.13	41.26	-30.68	53.72	74.00	20.28	Vertical
7	17858	34.36	41.29	-30.74	44.91	54.00	9.09	Vertical

11ax(HE20)_TX_CH_185_Horizontal

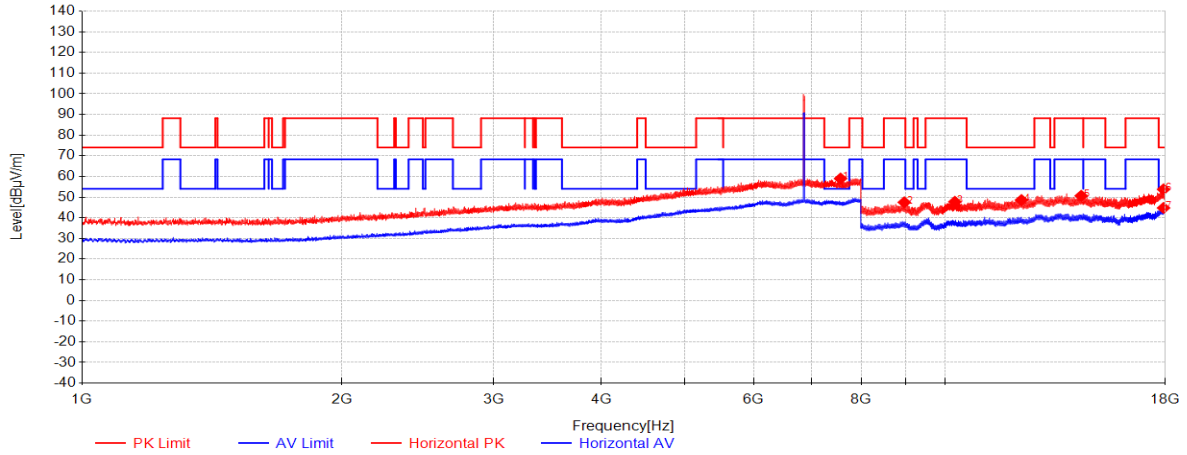


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7570.8125	40.91	36.44	-18.37	58.99	74.00	15.01	Horizontal
2	8975	48.16	37.98	-38.65	47.49	88.20	40.71	Horizontal
3	10271.6667	46.11	38.43	-36.78	47.75	88.20	40.45	Horizontal
4	12271.3333	44.02	39.03	-34.49	48.56	74.00	25.44	Horizontal
5	14392.6667	44.26	40.16	-33.80	50.63	88.20	37.57	Horizontal
6	17929	43.22	41.49	-30.95	53.77	74.00	20.23	Horizontal
7	17929	34.23	41.49	-30.95	44.78	54.00	9.22	Horizontal

11ax(HE20)_TX_CH_185_Vertical

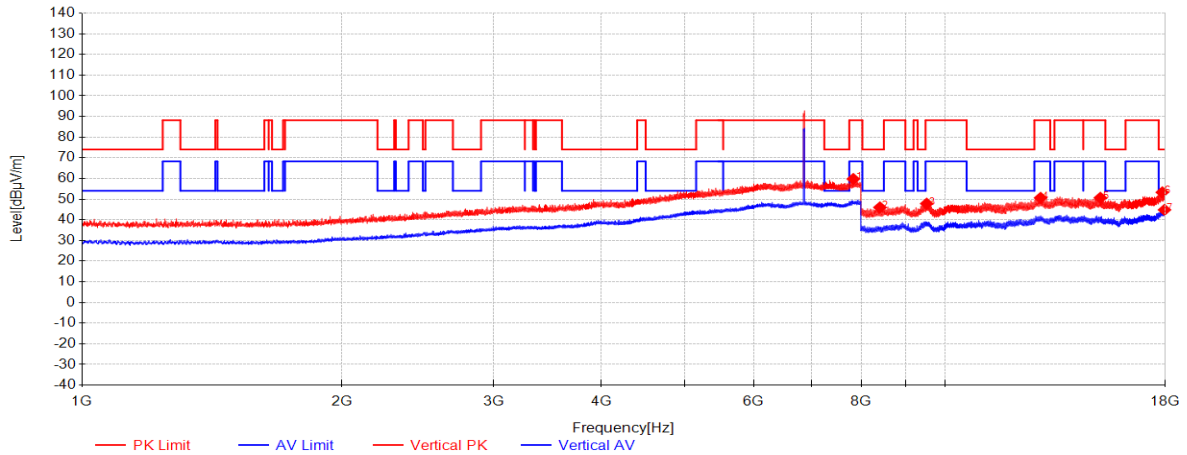


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7833.3125	41.54	36.97	-18.76	59.75	88.20	28.45	Vertical
2	8409	48.53	37.59	-40.11	46.00	74.00	28.00	Vertical
3	9528	47.85	38.05	-38.09	47.81	88.20	40.39	Vertical
4	12913	45.68	39.80	-34.85	50.63	88.20	37.57	Vertical
5	15148.3333	44.69	39.53	-33.58	50.64	88.20	37.56	Vertical
6	17869.3333	42.80	41.32	-30.82	53.30	74.00	20.70	Vertical
7	17973.6667	33.99	41.62	-30.80	44.81	54.00	9.19	Vertical

11ax(HE20)_TX_CH_189_Horizontal

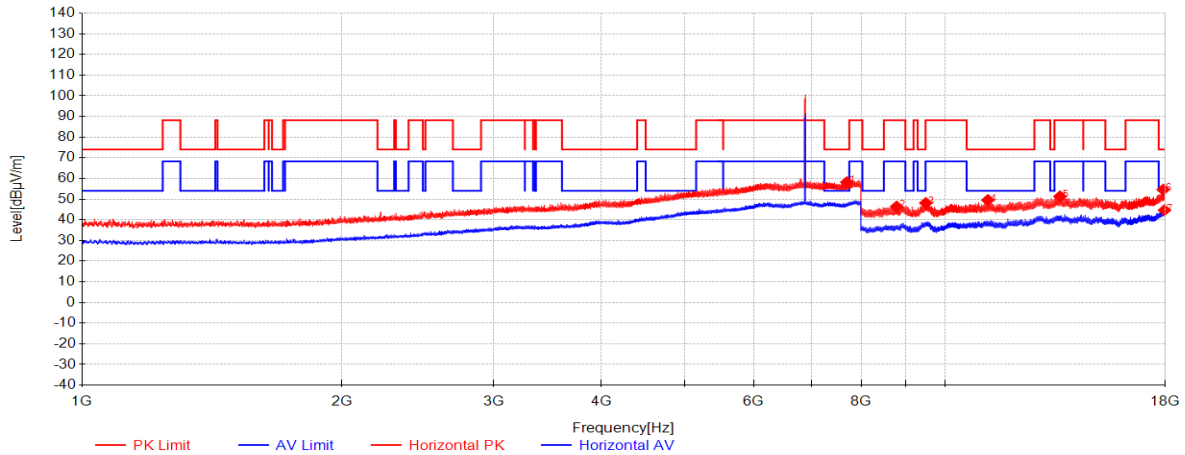


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7699.4375	40.10	36.70	-18.63	58.17	74.00	15.83	Horizontal
2	8793.6667	47.67	37.86	-39.15	46.38	88.20	41.82	Horizontal
3	9506.3333	48.25	38.05	-38.17	48.13	88.20	40.07	Horizontal
4	11217	46.00	39.17	-35.60	49.57	74.00	24.43	Horizontal
5	13600	45.44	40.20	-34.33	51.31	88.20	36.89	Horizontal
6	17914.6667	44.15	41.45	-30.99	54.61	74.00	19.39	Horizontal
7	17974.3333	33.85	41.63	-30.80	44.67	54.00	9.33	Horizontal

11ax(HE20)_TX_CH_189_Vertical

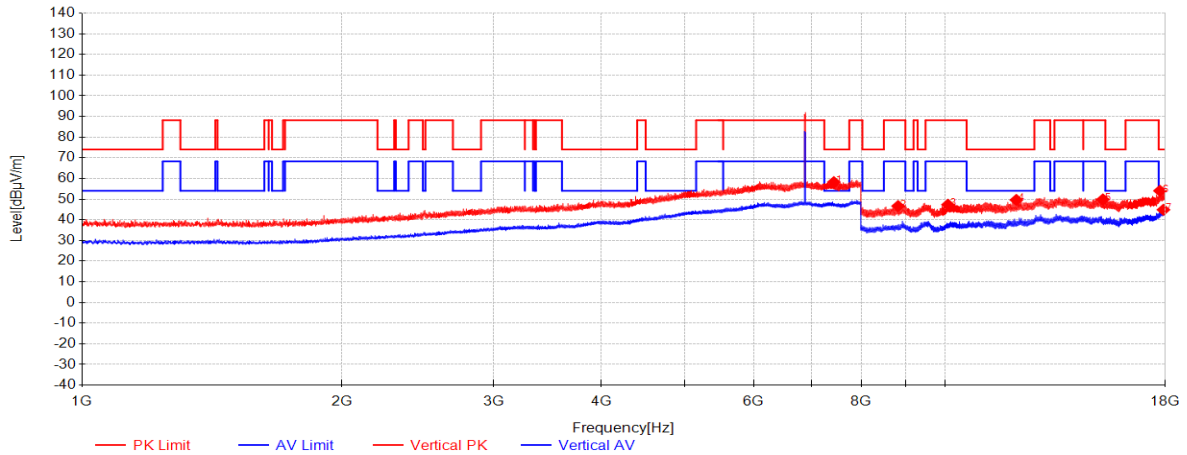


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7436.9375	39.84	36.30	-17.92	58.22	74.00	15.78	Vertical
2	8827	47.86	37.88	-39.11	46.63	88.20	41.57	Vertical
3	10084	46.14	38.20	-37.02	47.32	88.20	40.88	Vertical
4	12105	45.70	38.83	-34.92	49.60	74.00	24.40	Vertical
5	15248.6667	43.78	39.35	-33.31	49.82	88.20	38.38	Vertical
6	17755.3333	43.69	40.99	-30.65	54.03	74.00	19.97	Vertical
7	17924	34.33	41.48	-30.96	44.85	54.00	9.15	Vertical

11ax(HE20)_TX_CH_209_Horizontal

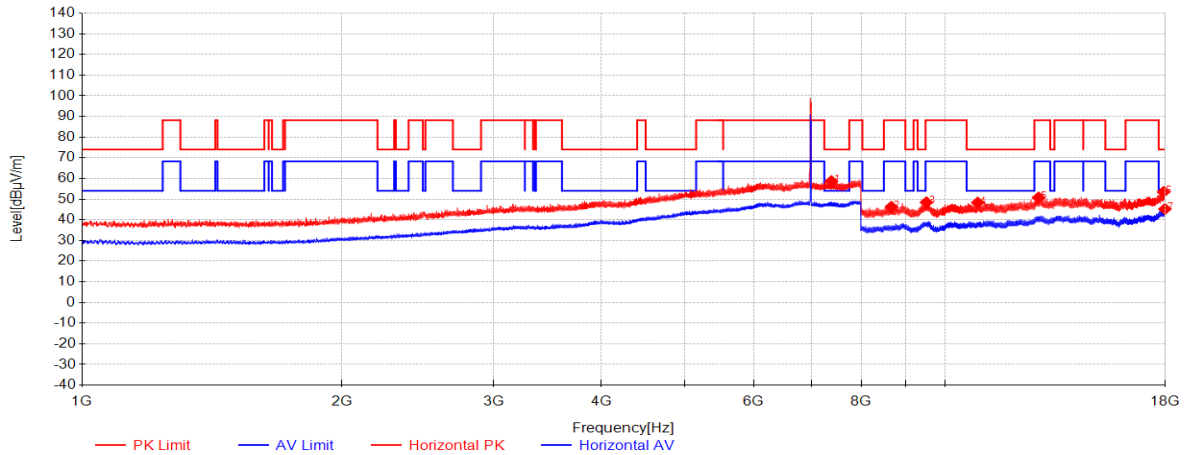


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7387.0625	40.15	36.30	-17.75	58.70	74.00	15.30	Horizontal
2	8670	47.68	37.77	-39.19	46.26	88.20	41.94	Horizontal
3	9521.3333	48.51	38.05	-38.11	48.45	88.20	39.75	Horizontal
4	10918.6667	45.04	39.20	-35.93	48.32	74.00	25.68	Horizontal
5	12840.6667	45.72	39.71	-34.70	50.73	88.20	37.47	Horizontal
6	17931	42.92	41.50	-30.94	53.48	74.00	20.52	Horizontal
7	17994.3333	34.29	41.68	-30.74	45.24	54.00	8.76	Horizontal

11ax(HE20)_TX_CH_209_Vertical

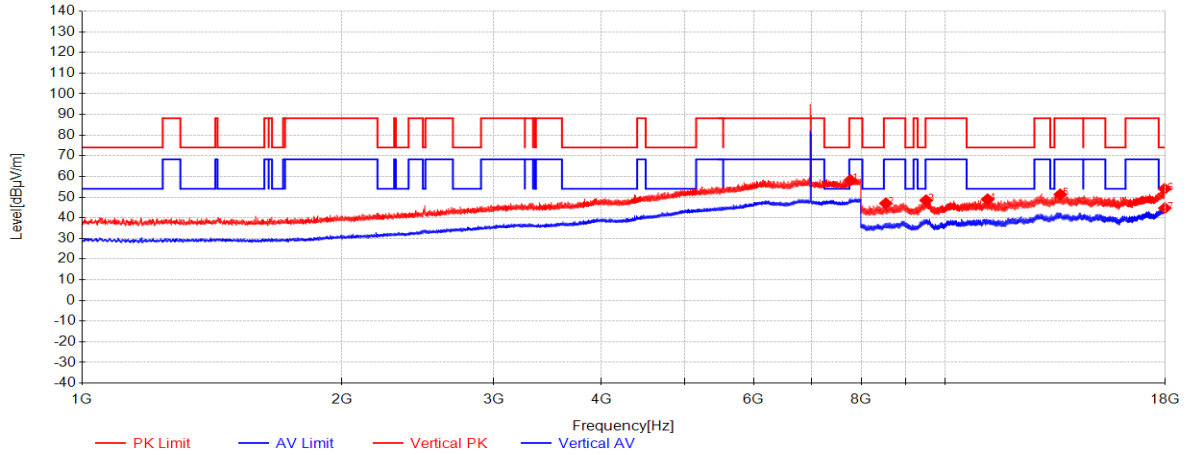


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7772.0625	40.11	36.84	-18.69	58.27	88.20	29.93	Vertical
2	8542.6667	48.95	37.68	-39.64	46.99	88.20	41.21	Vertical
3	9512.6667	48.56	38.05	-38.14	48.47	88.20	39.73	Vertical
4	11209	45.36	39.17	-35.63	48.91	74.00	25.09	Vertical
5	13608	45.48	40.20	-34.37	51.31	88.20	36.89	Vertical
6	17985	43.13	41.66	-30.77	54.02	74.00	19.98	Vertical
7	17989.3333	33.77	41.67	-30.75	44.68	54.00	9.32	Vertical

11ax(HE20)_TX_CH_233_Horizontal

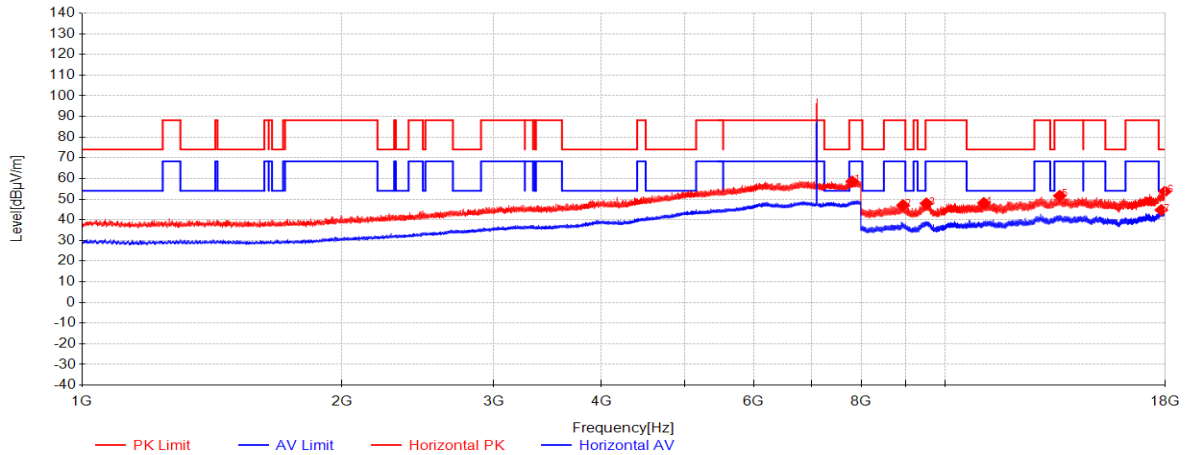


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7808.375	40.35	36.92	-18.72	58.54	88.20	29.66	Horizontal
2	8942.6667	47.90	37.96	-38.81	47.05	88.20	41.15	Horizontal
3	9520.3333	48.00	38.05	-38.12	47.94	88.20	40.26	Horizontal
4	11098	44.49	39.24	-35.59	48.14	74.00	25.86	Horizontal
5	13590	45.77	40.20	-34.35	51.62	88.20	36.58	Horizontal
6	17995.3333	42.74	41.69	-30.73	53.69	74.00	20.31	Horizontal
7	17821.6667	34.00	41.18	-30.48	44.71	54.00	9.29	Horizontal

11ax(HE20)_TX_CH_233_Vertical

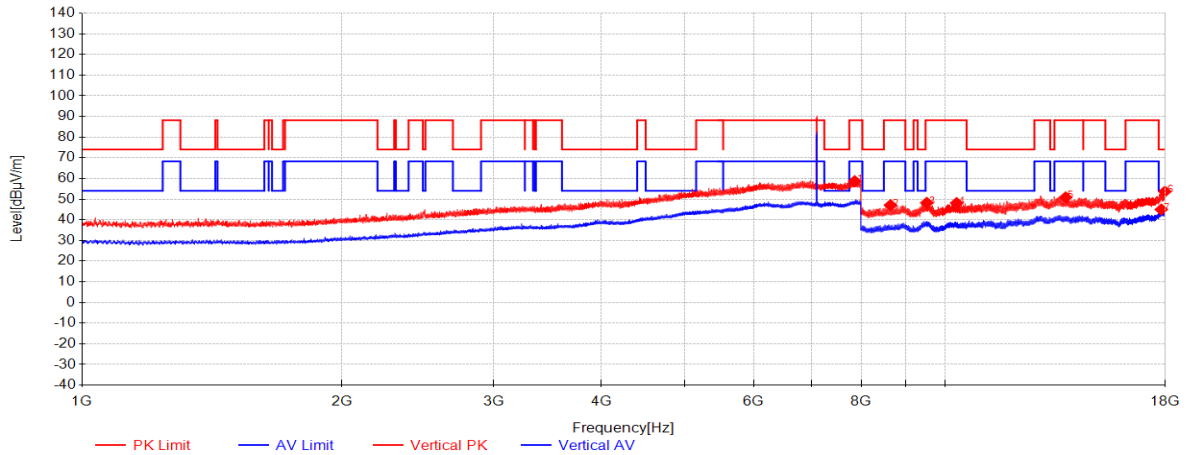


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7861.75	40.48	37.02	-18.80	58.70	88.20	29.50	Vertical
2	8651	48.47	37.76	-39.16	47.06	88.20	41.14	Vertical
3	9532	48.23	38.05	-38.07	48.21	88.20	39.99	Vertical
4	10320.3333	46.39	38.48	-36.76	48.11	88.20	40.09	Vertical
5	13806.3333	45.41	40.30	-34.84	50.87	88.20	37.33	Vertical
6	17993.6667	42.74	41.68	-30.74	53.68	74.00	20.32	Vertical
7	17821.6667	34.28	41.18	-30.48	44.99	54.00	9.01	Vertical

11ax(HE40)_TX_CH_003_Horizontal

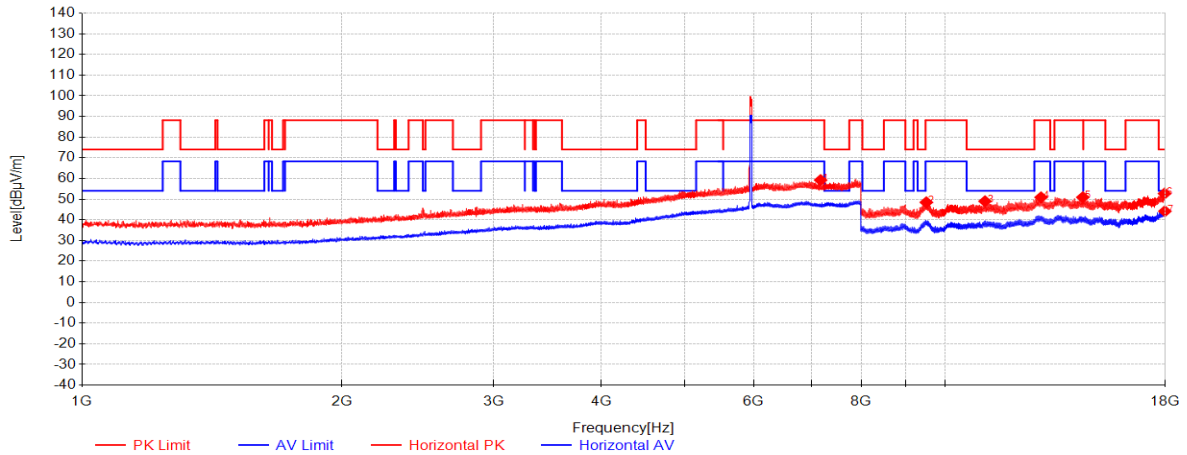


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7177.9375	40.66	36.30	-17.75	59.21	88.20	28.99	Horizontal
2	9518.6667	48.53	38.05	-38.12	48.46	88.20	39.74	Horizontal
3	11132.6667	45.36	39.22	-35.61	48.97	74.00	25.03	Horizontal
4	12929.3333	45.88	39.82	-34.85	50.85	88.20	37.35	Horizontal
5	14453.3333	45.01	40.13	-34.23	50.91	88.20	37.29	Horizontal
6	17974.3333	41.86	41.63	-30.80	52.68	74.00	21.32	Horizontal
7	17993.6667	33.21	41.68	-30.74	44.15	54.00	9.85	Horizontal

11ax(HE40)_TX_CH_003_Vertical

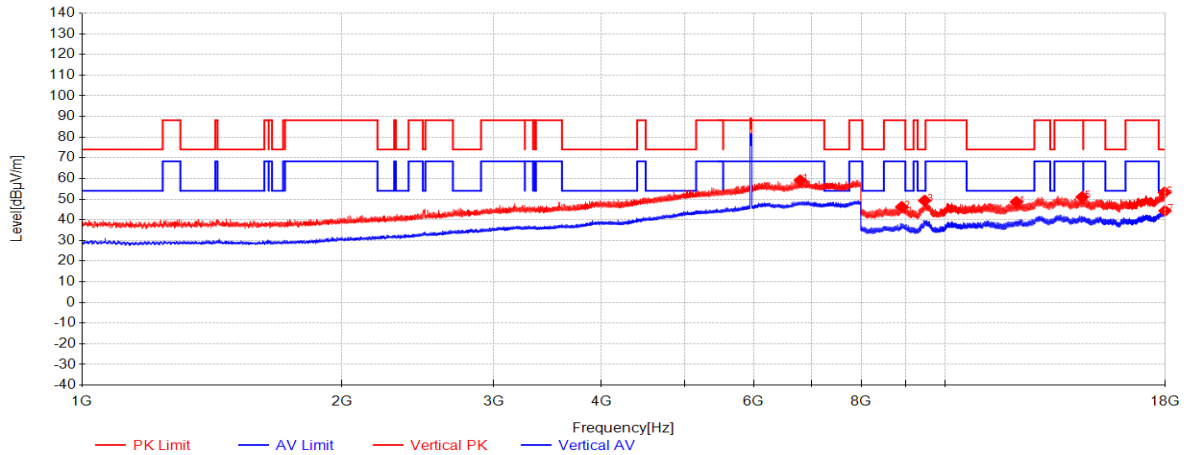


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6799.5	40.17	35.98	-17.04	59.11	88.20	29.09	Vertical
2	8914.3333	47.25	37.94	-38.95	46.24	88.20	41.96	Vertical
3	9475.3333	49.46	38.05	-38.22	49.28	74.00	24.72	Vertical
4	12104.3333	44.76	38.83	-34.92	48.67	74.00	25.33	Vertical
5	14430	44.89	40.14	-34.02	51.02	88.20	37.18	Vertical
6	17971	42.40	41.62	-30.81	53.20	74.00	20.80	Vertical
7	17997	33.39	41.69	-30.73	44.35	54.00	9.65	Vertical

11ax(HE40)_TX_CH_043_Horizontal

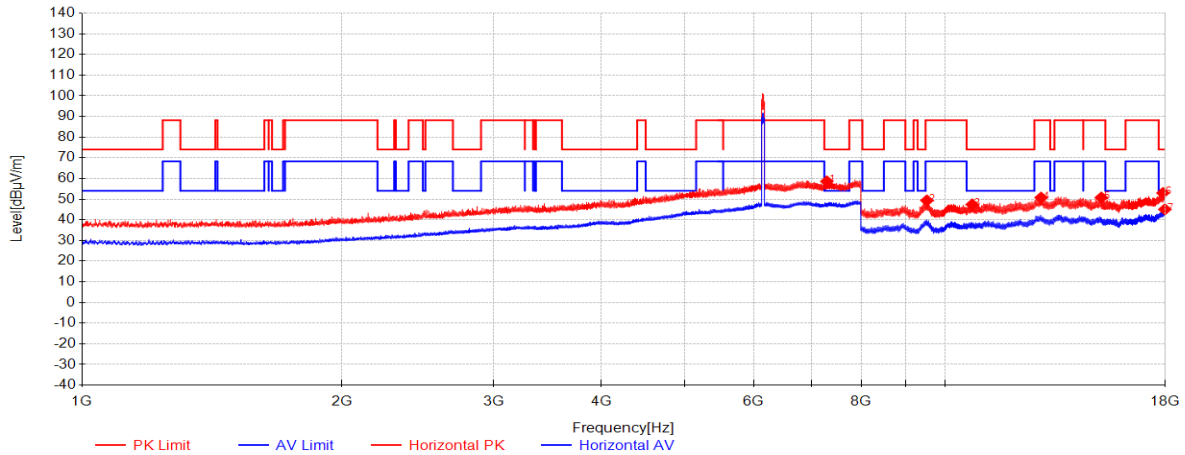


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7299.5625	40.03	36.30	-17.75	58.58	74.00	15.42	Horizontal
2	9533	49.38	38.05	-38.07	49.36	88.20	38.84	Horizontal
3	10757.6667	44.69	39.01	-36.29	47.41	74.00	26.59	Horizontal
4	12930.6667	45.77	39.82	-34.85	50.74	88.20	37.46	Horizontal
5	15184.6667	44.67	39.47	-33.38	50.75	88.20	37.45	Horizontal
6	17901.6667	42.58	41.41	-31.03	52.96	74.00	21.04	Horizontal
7	17992.3333	34.12	41.68	-30.74	45.05	54.00	8.95	Horizontal

11ax(HE40)_TX_CH_043_Vertical

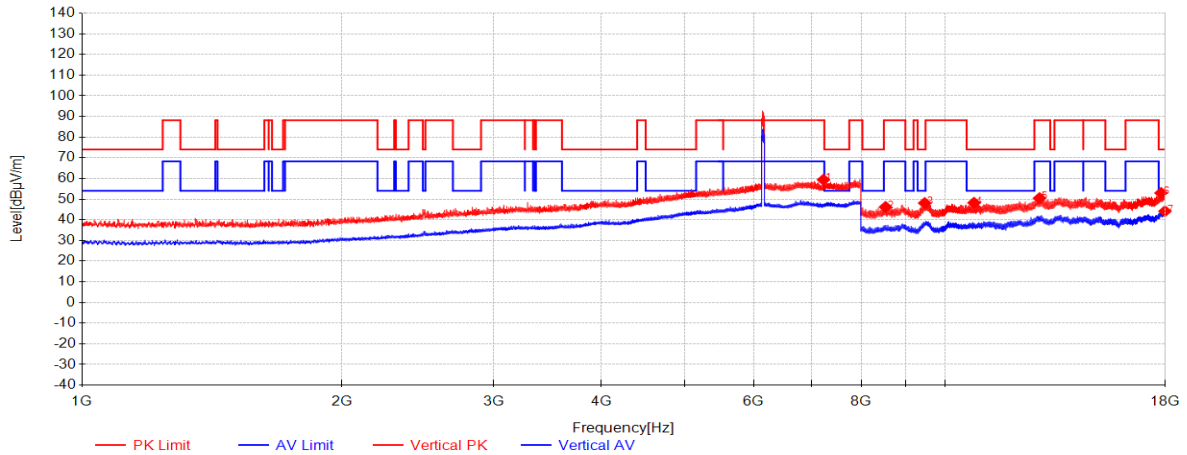


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7233.0625	40.91	36.30	-17.84	59.37	88.20	28.83	Vertical
2	8537.3333	48.21	37.68	-39.69	46.20	88.20	42.00	Vertical
3	9477	48.24	38.05	-38.22	48.07	74.00	25.93	Vertical
4	10810.6667	45.55	39.07	-36.38	48.24	74.00	25.76	Vertical
5	12875.6667	45.51	39.75	-34.79	50.47	88.20	37.73	Vertical
6	17810.3333	42.20	41.15	-30.39	52.96	74.00	21.04	Vertical
7	17996.6667	33.20	41.69	-30.73	44.16	54.00	9.84	Vertical

11ax(HE40)_TX_CH_051_Horizontal

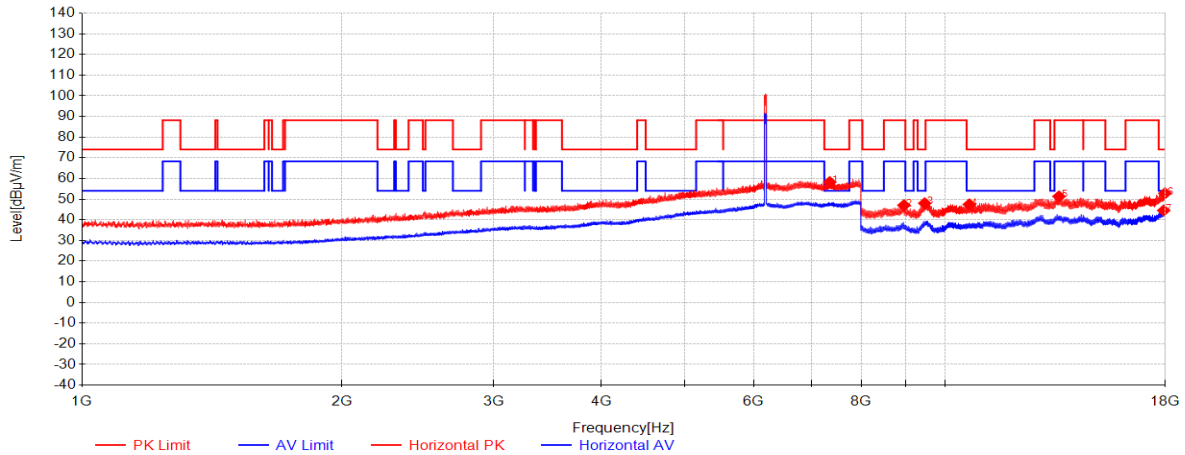


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7354.25	39.69	36.30	-17.75	58.24	74.00	15.76	Horizontal
2	8966.6667	47.76	37.98	-38.69	47.04	88.20	41.16	Horizontal
3	9477.3333	48.16	38.05	-38.22	47.99	74.00	26.01	Horizontal
4	10676.3333	44.71	38.91	-36.18	47.44	74.00	26.56	Horizontal
5	13561.3333	45.53	40.18	-34.39	51.32	88.20	36.88	Horizontal
6	17996.3333	41.84	41.69	-30.73	52.80	74.00	21.20	Horizontal
7	17934.3333	33.93	41.51	-30.93	44.51	54.00	9.49	Horizontal

11ax(HE40)_TX_CH_051_Vertical

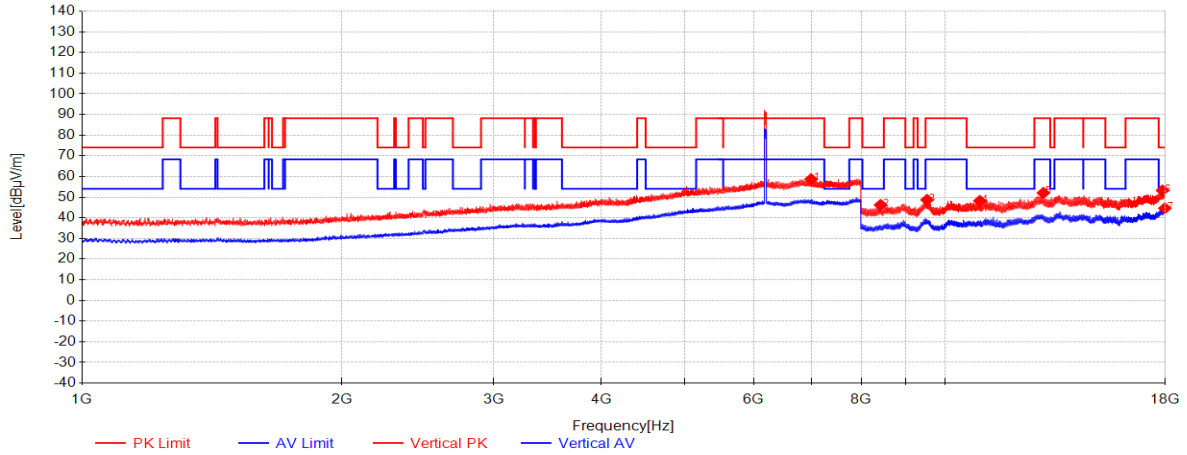


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6998.125	39.68	36.30	-17.27	58.70	88.20	29.50	Vertical
2	8423.3333	48.75	37.60	-40.10	46.24	74.00	27.76	Vertical
3	9536	48.70	38.05	-38.06	48.69	88.20	39.51	Vertical
4	10980.6667	44.62	39.28	-35.72	48.18	74.00	25.82	Vertical
5	13009.6667	46.99	39.90	-34.84	52.05	88.20	36.15	Vertical
6	17875	42.76	41.34	-30.86	53.24	74.00	20.76	Vertical
7	17990.6667	33.69	41.67	-30.75	44.61	54.00	9.39	Vertical

11ax(HE40)_TX_CH_091_Horizontal

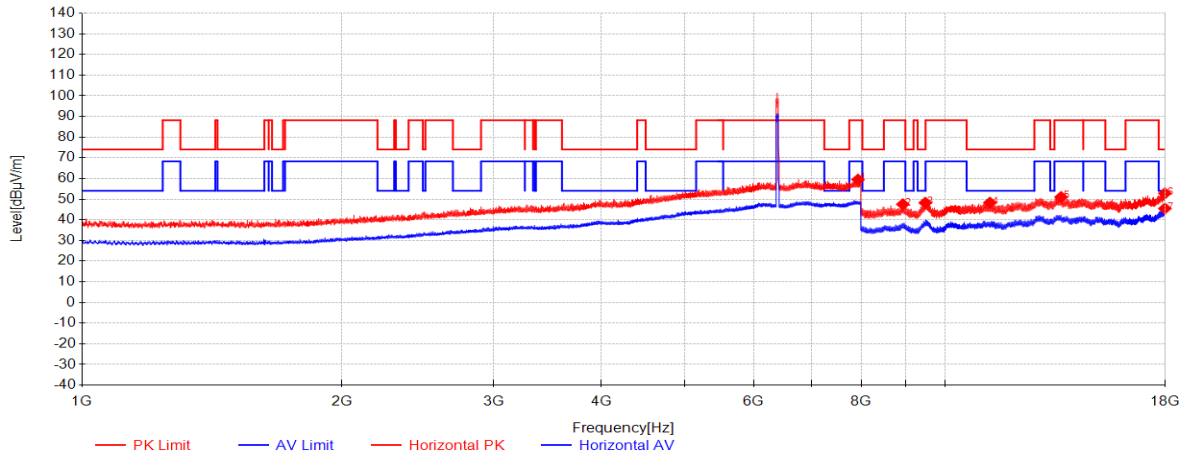


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7931.75	41.11	37.16	-18.83	59.44	88.20	28.76	Horizontal
2	8939.3333	48.37	37.96	-38.83	47.50	88.20	40.70	Horizontal
3	9492.6667	48.39	38.05	-38.20	48.24	74.00	25.76	Horizontal
4	11279	44.53	39.13	-35.37	48.29	74.00	25.71	Horizontal
5	13638.6667	45.30	40.22	-34.52	51.00	88.20	37.20	Horizontal
6	17994.6667	41.83	41.68	-30.74	52.78	74.00	21.22	Horizontal
7	17990.3333	34.54	41.67	-30.75	45.46	54.00	8.54	Horizontal

11ax(HE40)_TX_CH_091_Vertical

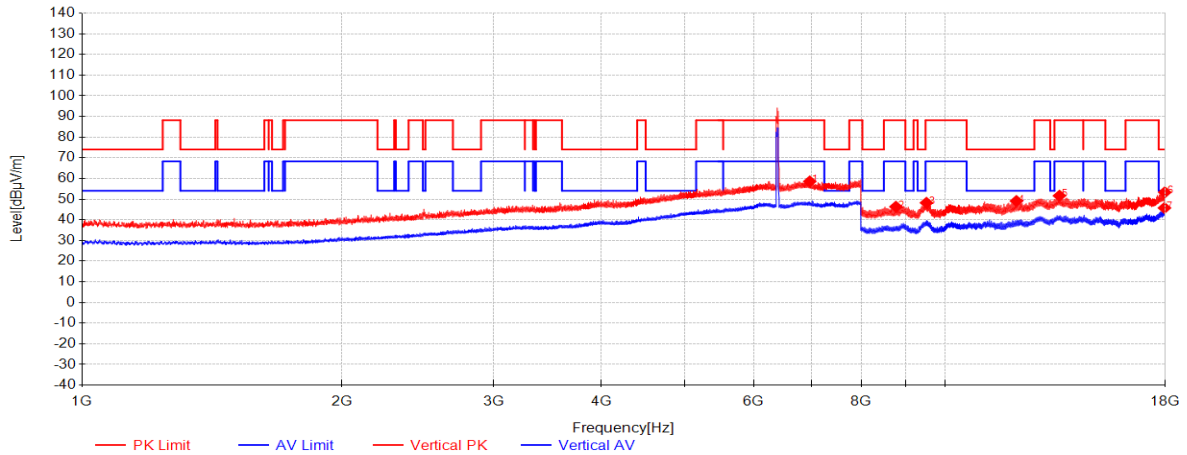


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6973.625	39.60	36.26	-17.30	58.55	88.20	29.65	Vertical
2	8776	47.64	37.84	-39.16	46.32	88.20	41.88	Vertical
3	9522.6667	48.27	38.05	-38.11	48.21	88.20	39.99	Vertical
4	12105.6667	45.18	38.83	-34.92	49.08	74.00	24.92	Vertical
5	13579.3333	45.82	40.19	-34.36	51.65	88.20	36.55	Vertical
6	17989.6667	42.39	41.67	-30.75	53.31	74.00	20.69	Vertical
7	17972	34.92	41.62	-30.81	45.73	54.00	8.27	Vertical

11ax(HE40)_TX_CH_099_Horizontal

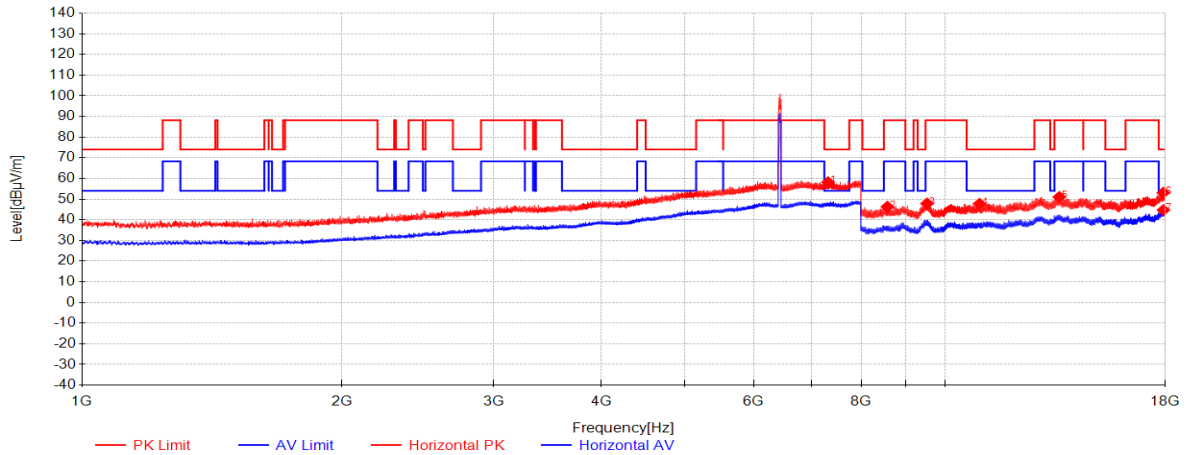


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7322.3125	39.65	36.30	-17.75	58.20	74.00	15.80	Horizontal
2	8578.6667	47.89	37.71	-39.29	46.31	88.20	41.89	Horizontal
3	9536	47.88	38.05	-38.06	47.87	88.20	40.33	Horizontal
4	10966.3333	44.20	39.26	-35.76	47.70	74.00	26.30	Horizontal
5	13575	45.21	40.19	-34.37	51.03	88.20	37.17	Horizontal
6	17917.3333	42.61	41.46	-30.98	53.09	74.00	20.91	Horizontal
7	17923.3333	34.22	41.48	-30.97	44.73	54.00	9.27	Horizontal

11ax(HE40)_TX_CH_099_Vertical

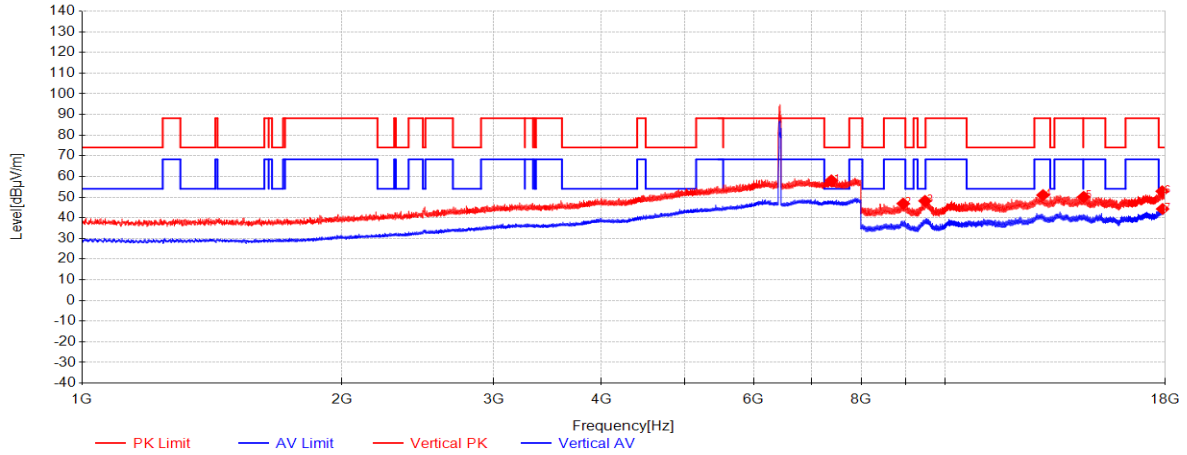


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7387.9375	39.52	36.30	-17.75	58.07	74.00	15.93	Vertical
2	8949.6667	47.69	37.96	-38.78	46.88	88.20	41.32	Vertical
3	9485	48.35	38.05	-38.21	48.19	74.00	25.81	Vertical
4	12997	45.93	39.90	-34.85	50.98	88.20	37.22	Vertical
5	14486.3333	44.50	40.11	-34.53	50.07	74.00	23.93	Vertical
6	17864.6667	42.29	41.31	-30.79	52.81	74.00	21.19	Vertical
7	17883	33.82	41.36	-30.92	44.26	54.00	9.74	Vertical

11ax(HE40)_TX_CH_107_Horizontal

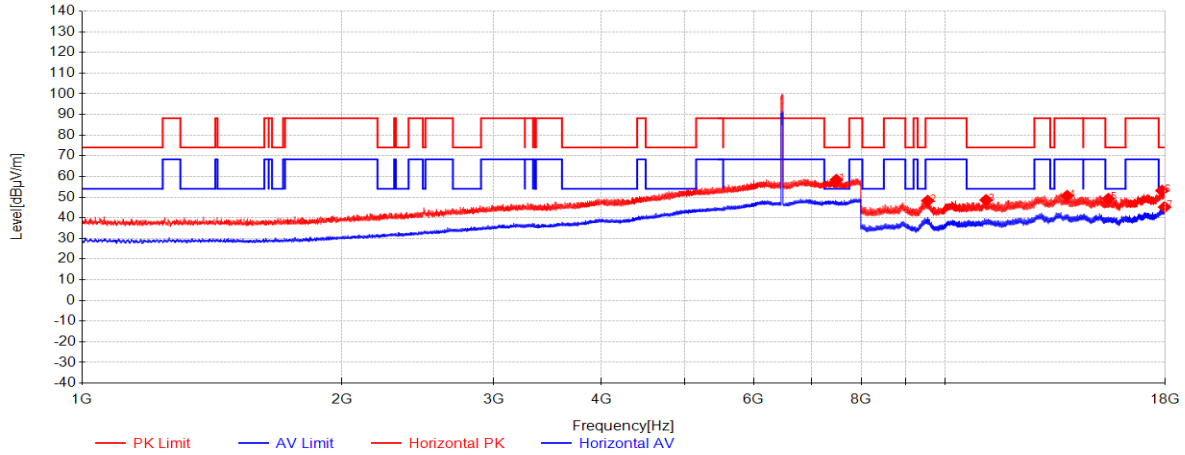


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7486.375	40.23	36.30	-18.15	58.38	74.00	15.62	Horizontal
2	9553.3333	48.16	38.06	-38.00	48.22	88.20	39.98	Horizontal
3	11166.3333	45.05	39.20	-35.64	48.61	74.00	25.39	Horizontal
4	13860.3333	44.84	40.33	-34.54	50.63	88.20	37.57	Horizontal
5	15473.6667	43.10	38.95	-32.81	49.23	74.00	24.77	Horizontal
6	17854.3333	42.56	41.28	-30.71	53.13	74.00	20.87	Horizontal
7	17979.3333	34.33	41.64	-30.79	45.18	54.00	8.82	Horizontal

11ax(HE40)_TX_CH_107_Vertical

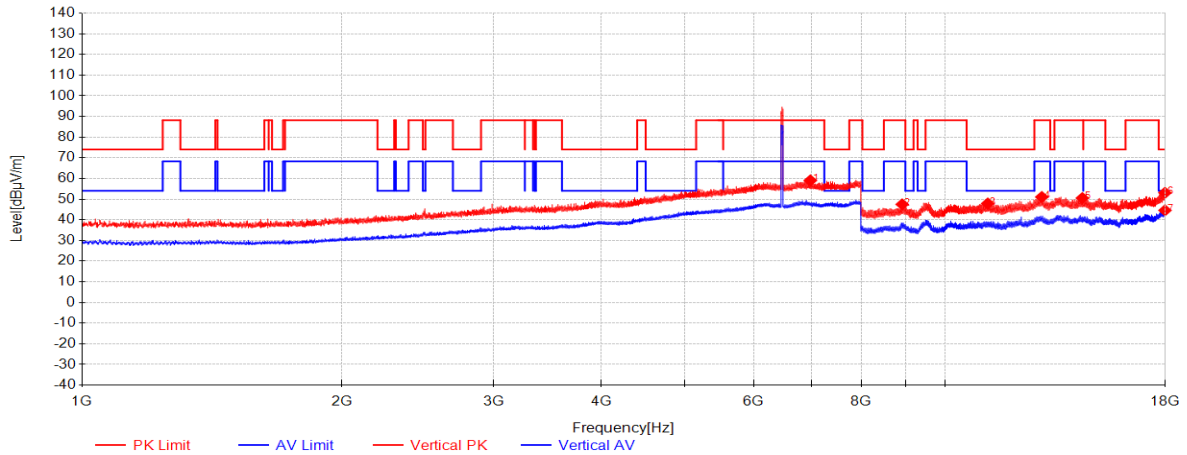


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6984.5625	40.05	36.28	-17.29	59.04	88.20	29.16	Vertical
2	8924.6667	48.42	37.95	-38.90	47.47	88.20	40.73	Vertical
3	11214.3333	44.32	39.17	-35.61	47.88	74.00	26.12	Vertical
4	12956	46.02	39.85	-34.85	51.02	88.20	37.18	Vertical
5	14436	44.44	40.14	-34.07	50.51	88.20	37.69	Vertical
6	17996.3333	42.10	41.69	-30.73	53.06	74.00	20.94	Vertical
7	17998.6667	33.61	41.70	-30.72	44.58	54.00	9.42	Vertical

11ax(HE40)_TX_CH_115_Horizontal

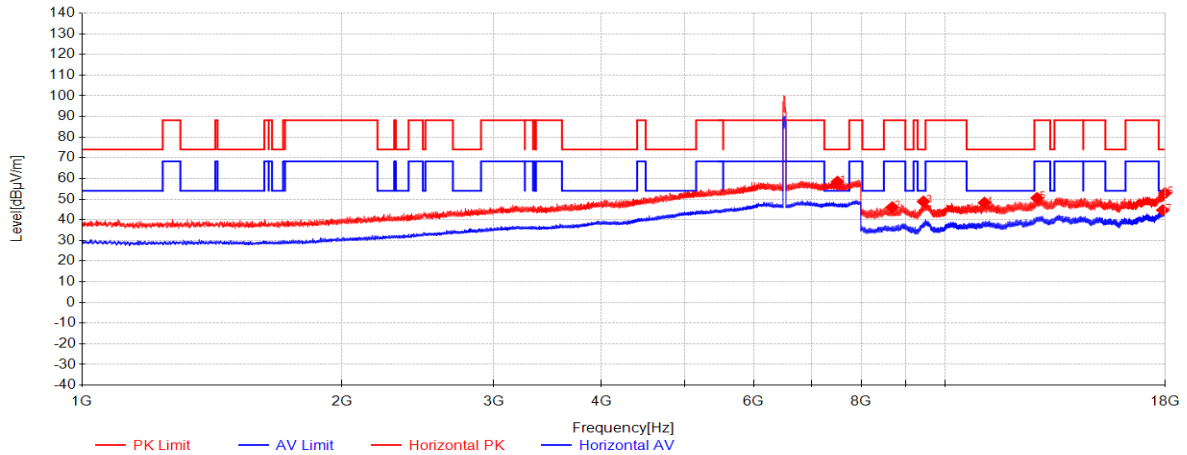


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7507.8125	40.34	36.32	-18.23	58.43	74.00	15.57	Horizontal
2	8690	47.51	37.78	-39.22	46.07	88.20	42.13	Horizontal
3	9446	49.05	38.04	-38.27	48.83	74.00	25.17	Horizontal
4	11117.3333	44.61	39.23	-35.60	48.24	74.00	25.76	Horizontal
5	12792.3333	45.52	39.65	-34.60	50.57	88.20	37.63	Horizontal
6	17998.6667	41.90	41.70	-30.72	52.87	74.00	21.13	Horizontal
7	17894	34.28	41.39	-31.00	44.68	54.00	9.32	Horizontal

11ax(HE40)_TX_CH_115_Vertical

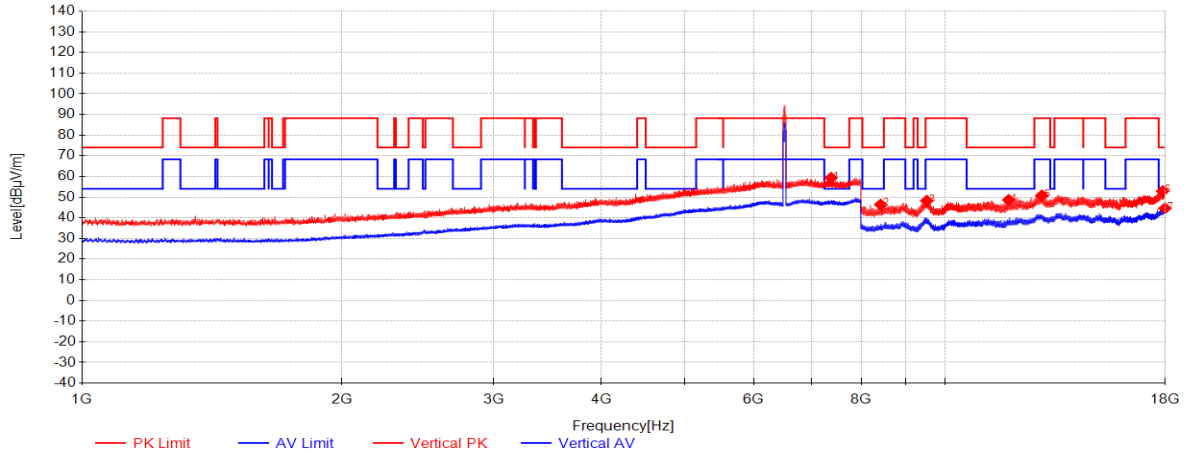


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7381.8125	40.77	36.30	-17.75	59.32	74.00	14.68	Vertical
2	8426	48.86	37.60	-40.10	46.36	74.00	27.64	Vertical
3	9529.6667	48.27	38.05	-38.08	48.24	88.20	39.96	Vertical
4	11860	44.87	38.78	-35.02	48.63	74.00	25.37	Vertical
5	12956	45.80	39.85	-34.85	50.80	88.20	37.40	Vertical
6	17888.3333	42.46	41.38	-30.96	52.88	74.00	21.12	Vertical
7	17993.3333	33.65	41.68	-30.74	44.59	54.00	9.41	Vertical

11ax(HE40)_TX_CH_123_Horizontal

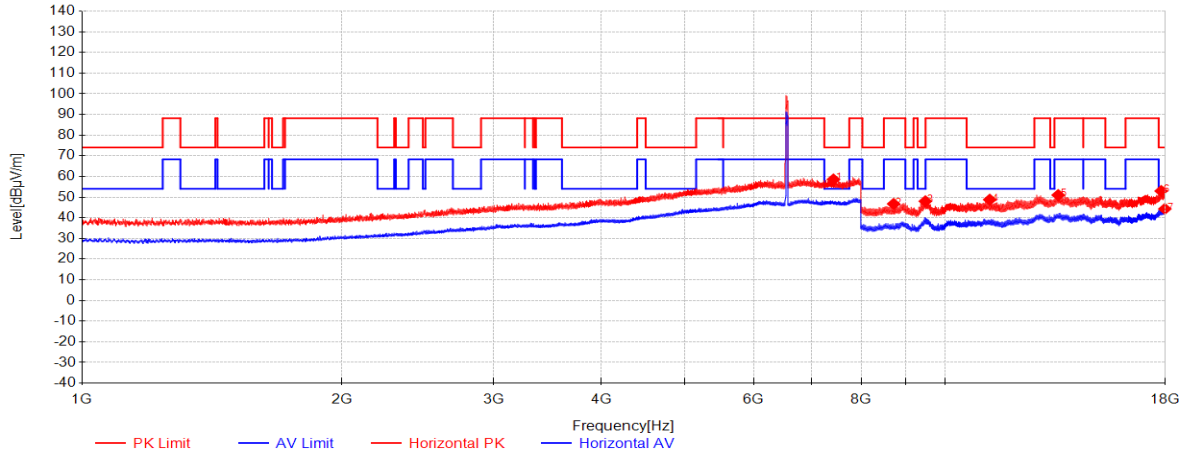


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7428.625	40.12	36.30	-17.88	58.54	74.00	15.46	Horizontal
2	8723	48.12	37.81	-39.22	46.71	88.20	41.49	Horizontal
3	9493.6667	48.14	38.05	-38.20	47.99	74.00	26.01	Horizontal
4	11275	45.01	39.13	-35.38	48.76	74.00	25.24	Horizontal
5	13534	45.26	40.17	-34.44	50.99	88.20	37.21	Horizontal
6	17815	42.22	41.16	-30.43	52.96	74.00	21.04	Horizontal
7	17990.3333	33.38	41.67	-30.75	44.30	54.00	9.70	Horizontal

11ax(HE40)_TX_CH_123_Vertical

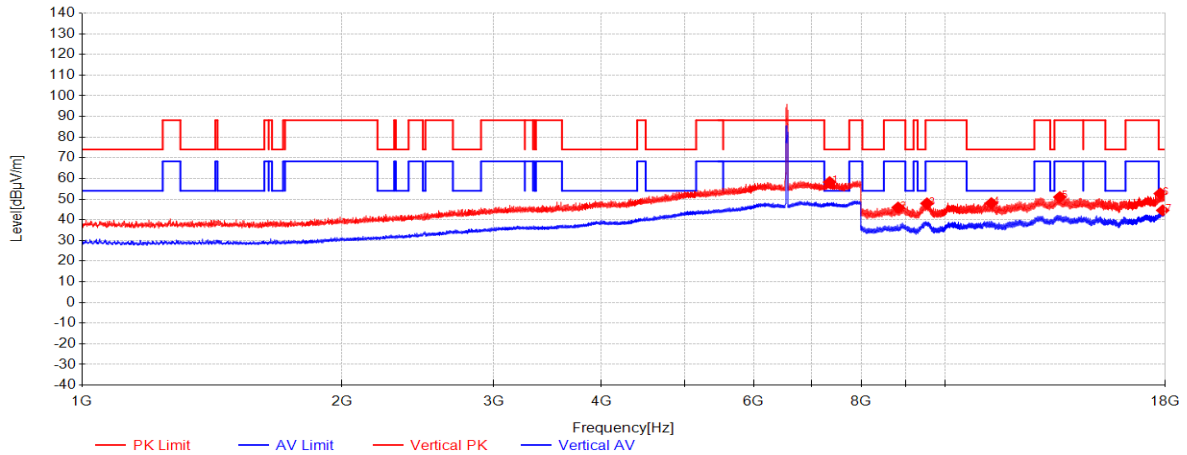


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7354.25	39.66	36.30	-17.75	58.21	74.00	15.79	Vertical
2	8827.3333	47.16	37.88	-39.11	45.93	88.20	42.27	Vertical
3	9535	47.93	38.05	-38.06	47.92	88.20	40.28	Vertical
4	11322.3333	44.36	39.11	-35.42	48.04	74.00	25.96	Vertical
5	13593.6667	45.14	40.20	-34.34	51.00	88.20	37.20	Vertical
6	17772.3333	42.16	41.04	-30.52	52.68	74.00	21.32	Vertical
7	17889.3333	34.15	41.38	-30.96	44.57	54.00	9.43	Vertical

11ax(HE40)_TX_CH_147_Horizontal

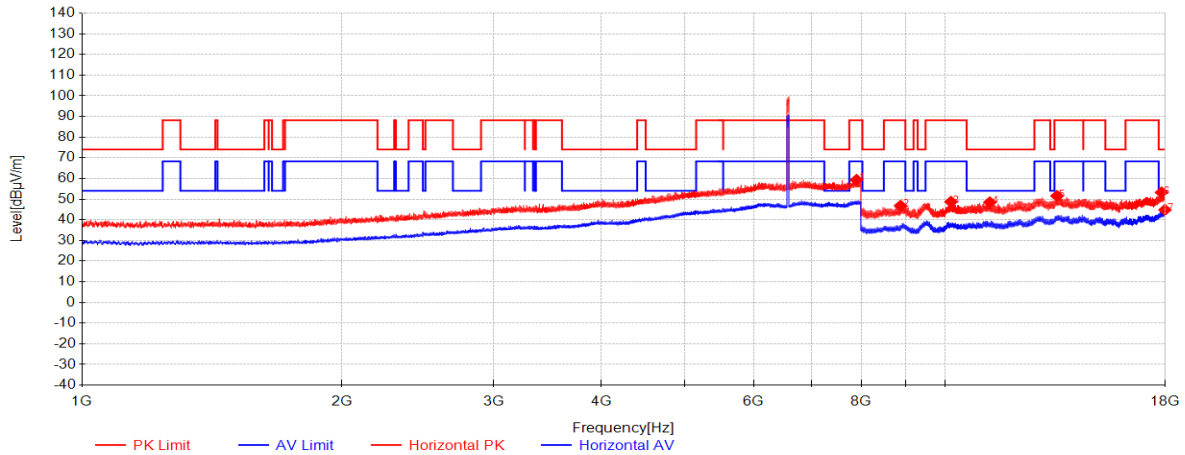


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7900.25	41.10	37.10	-18.86	59.34	88.20	28.86	Horizontal
2	8886.3333	47.92	37.92	-39.04	46.80	88.20	41.40	Horizontal
3	10165.3333	47.14	38.30	-36.73	48.71	88.20	39.49	Horizontal
4	11276	44.71	39.13	-35.38	48.47	74.00	25.53	Horizontal
5	13490.6667	45.94	40.15	-34.53	51.55	88.20	36.65	Horizontal
6	17833	42.57	41.22	-30.56	53.23	74.00	20.77	Horizontal
7	17995.6667	33.84	41.69	-30.73	44.79	54.00	9.21	Horizontal

11ax(HE40)_TX_CH_147_Vertical

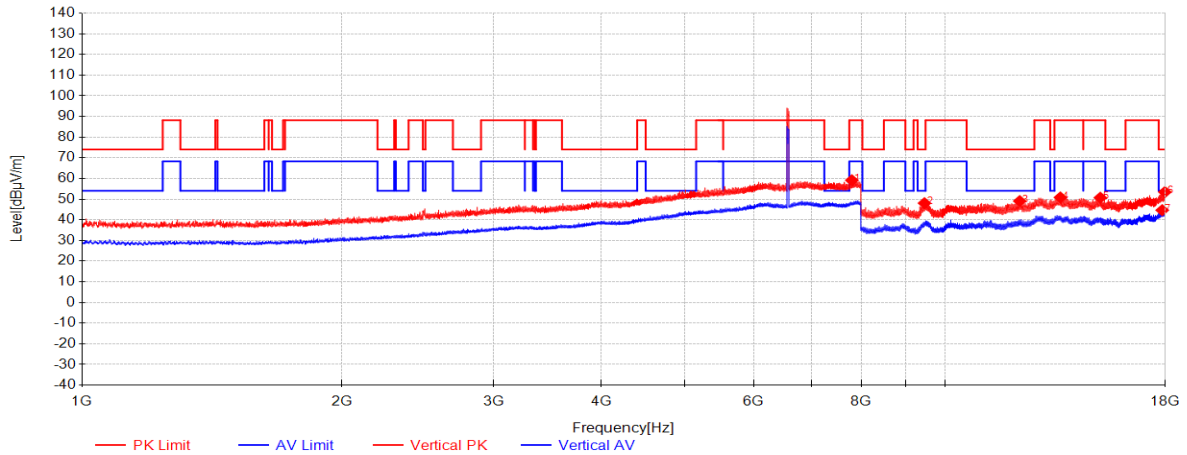


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7802.6875	40.94	36.91	-18.71	59.13	88.20	29.07	Vertical
2	9471.6667	48.22	38.05	-38.23	48.04	74.00	25.96	Vertical
3	12213.3333	45.11	38.96	-35.01	49.06	74.00	24.94	Vertical
4	13614.3333	44.99	40.21	-34.40	50.80	88.20	37.40	Vertical
5	15144	44.77	39.54	-33.61	50.70	88.20	37.50	Vertical
6	17992.6667	42.50	41.68	-30.74	53.44	74.00	20.56	Vertical
7	17866.3333	34.14	41.31	-30.80	44.65	54.00	9.35	Vertical

11ax(HE40)_TX_CH_179_Horizontal

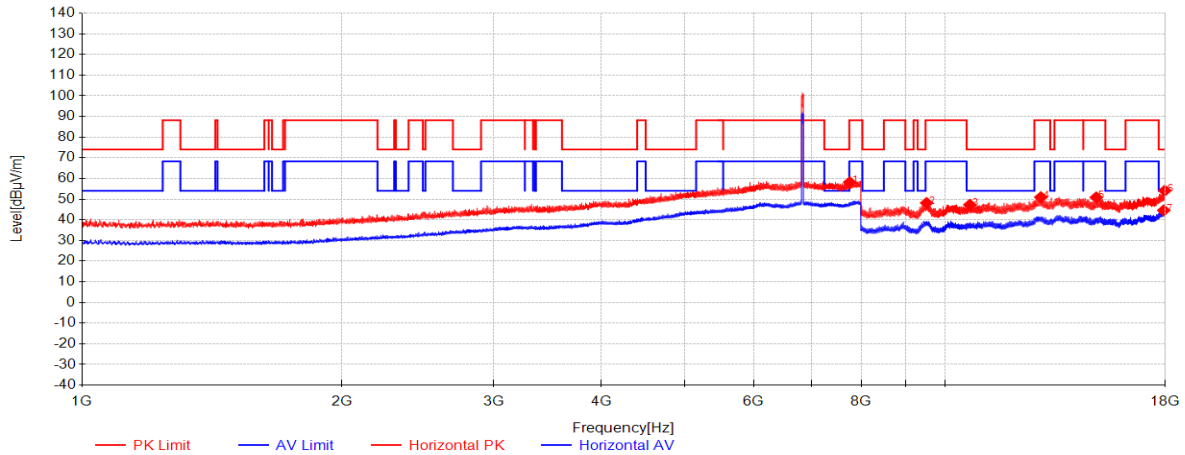


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7757.625	40.03	36.82	-18.68	58.17	88.20	30.03	Horizontal
2	9526.3333	48.19	38.05	-38.10	48.15	88.20	40.05	Horizontal
3	10691.3333	44.48	38.93	-36.13	47.28	74.00	26.72	Horizontal
4	12921.6667	45.96	39.81	-34.85	50.92	88.20	37.28	Horizontal
5	14981.6667	44.87	39.81	-33.85	50.83	88.20	37.37	Horizontal
6	17989.6667	43.20	41.67	-30.75	54.12	74.00	19.88	Horizontal
7	17936.6667	33.99	41.52	-30.92	44.58	54.00	9.42	Horizontal

11ax(HE40)_TX_CH_179_Vertical

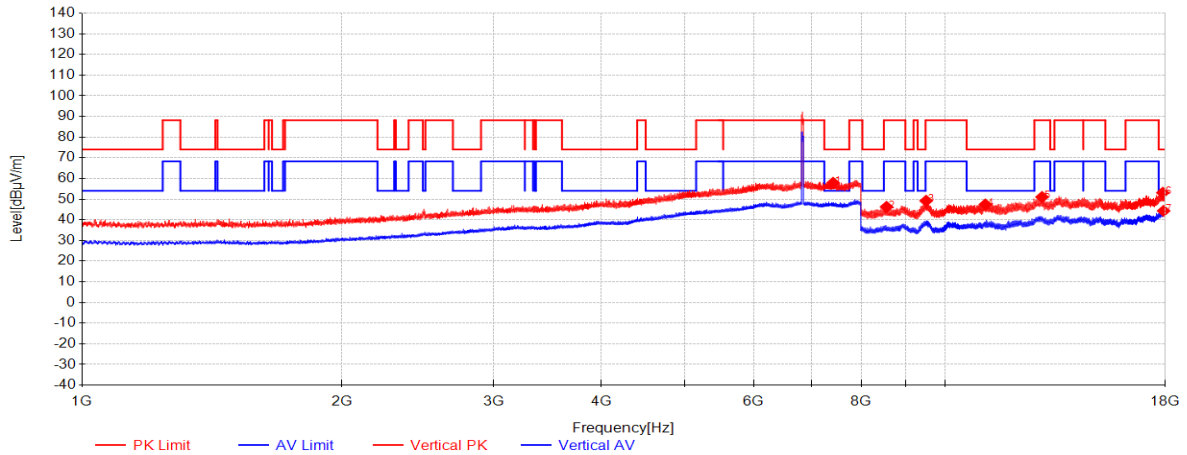


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7421.1875	39.44	36.30	-17.85	57.89	74.00	16.11	Vertical
2	8559.6667	48.05	37.69	-39.47	46.27	88.20	41.93	Vertical
3	9513.6667	49.28	38.05	-38.14	49.19	88.20	39.01	Vertical
4	11142	43.81	39.21	-35.62	47.41	74.00	26.59	Vertical
5	12963.3333	46.02	39.86	-34.85	51.03	88.20	37.17	Vertical
6	17896	42.71	41.40	-31.01	53.10	74.00	20.90	Vertical
7	17932	33.76	41.50	-30.94	44.33	54.00	9.67	Vertical

11ax(HE40)_TX_CH_187_Horizontal

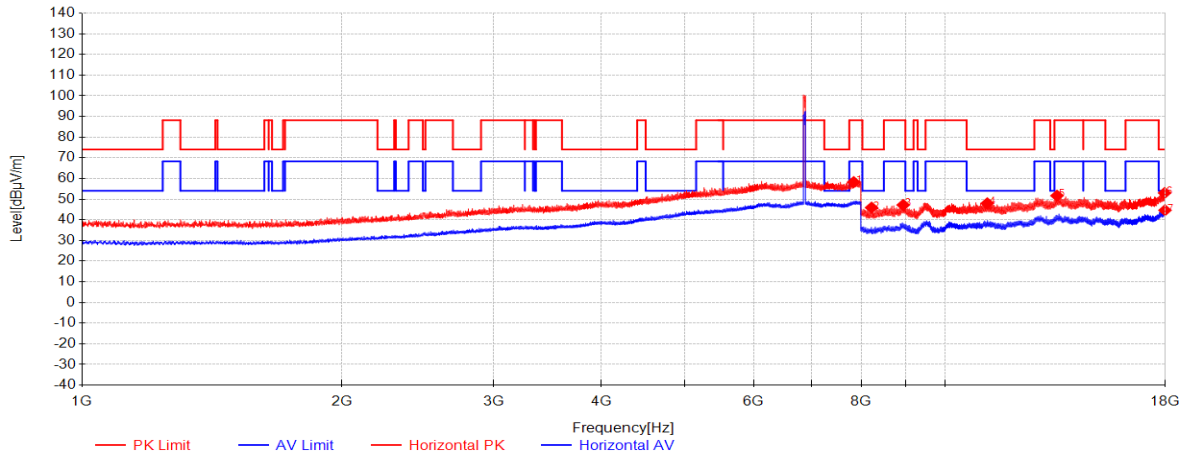


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7840.75	40.03	36.98	-18.77	58.24	88.20	29.96	Horizontal
2	8224	48.59	37.46	-40.15	45.90	74.00	28.10	Horizontal
3	8949.6667	47.97	37.96	-38.78	47.16	88.20	41.04	Horizontal
4	11200.3333	44.45	39.18	-35.66	47.97	74.00	26.03	Horizontal
5	13490	46.05	40.15	-34.53	51.66	88.20	36.54	Horizontal
6	17977.6667	42.13	41.64	-30.79	52.97	74.00	21.03	Horizontal
7	17998.3333	33.65	41.70	-30.73	44.62	54.00	9.38	Horizontal

11ax(HE40)_TX_CH_187_Vertical

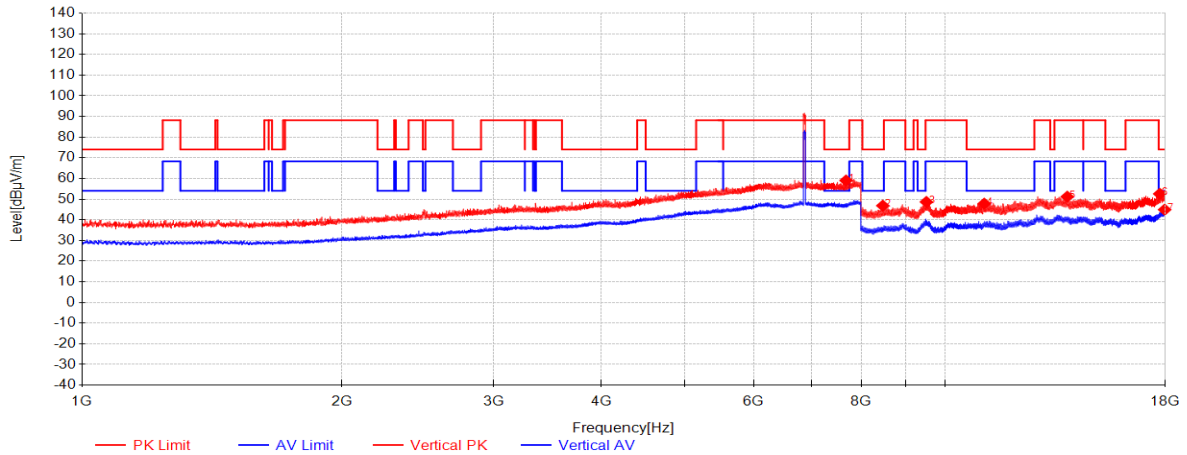


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7683.25	40.93	36.67	-18.60	59.00	74.00	15.00	Vertical
2	8474.6667	49.26	37.63	-40.07	46.82	74.00	27.18	Vertical
3	9520.6667	48.70	38.05	-38.12	48.64	88.20	39.56	Vertical
4	11109.3333	44.19	39.23	-35.60	47.83	74.00	26.17	Vertical
5	13865.3333	45.36	40.33	-34.51	51.19	88.20	37.01	Vertical
6	17749.3333	42.26	40.97	-30.69	52.54	74.00	21.46	Vertical
7	17981.6667	34.03	41.65	-30.78	44.90	54.00	9.10	Vertical

11ax(HE40)_TX_CH_195_Horizontal

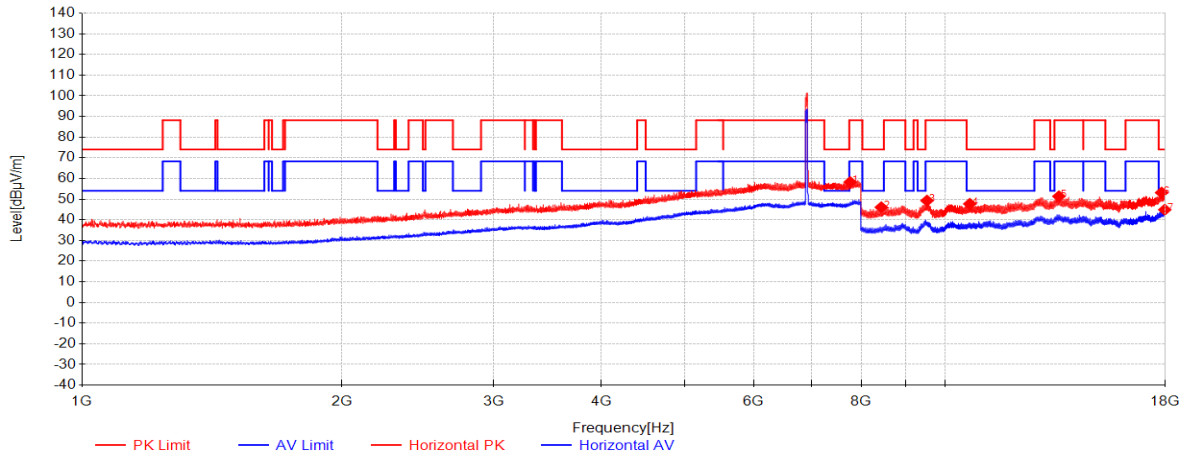


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7767.25	40.07	36.83	-18.68	58.22	88.20	29.98	Horizontal
2	8440.3333	48.52	37.61	-40.09	46.04	74.00	27.96	Horizontal
3	9535.3333	49.28	38.05	-38.06	49.27	88.20	38.93	Horizontal
4	10689.3333	44.92	38.93	-36.14	47.71	74.00	26.29	Horizontal
5	13559	45.56	40.18	-34.40	51.34	88.20	36.86	Horizontal
6	17837.6667	42.48	41.23	-30.59	53.12	74.00	20.88	Horizontal
7	17986.6667	33.99	41.66	-30.76	44.89	54.00	9.11	Horizontal

11ax(HE40)_TX_CH_195_Vertical

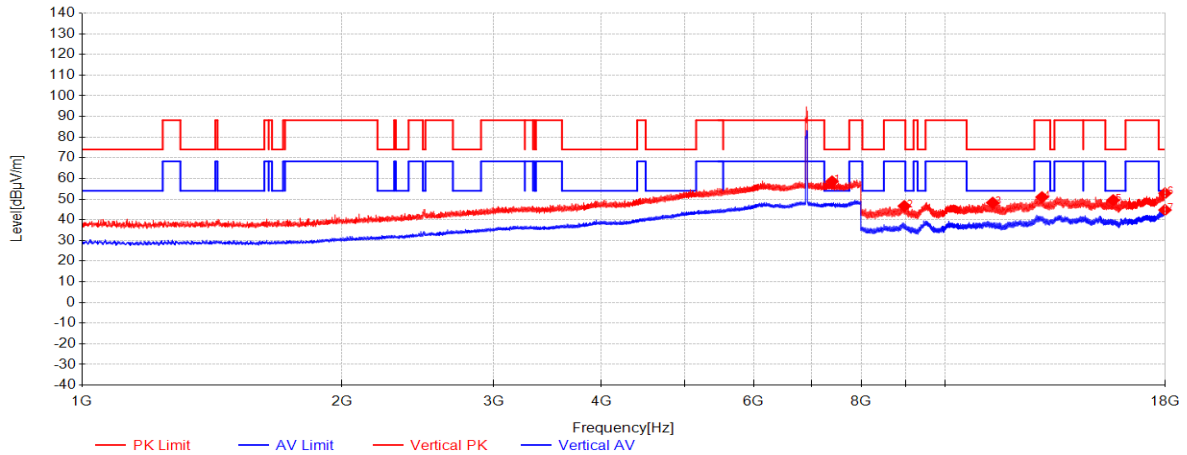


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7400.625	40.03	36.30	-17.75	58.58	74.00	15.42	Vertical
2	8975.3333	47.34	37.98	-38.65	46.67	88.20	41.53	Vertical
3	11362.6667	44.86	39.08	-35.67	48.28	74.00	25.72	Vertical
4	12962.6667	45.95	39.86	-34.85	50.96	88.20	37.24	Vertical
5	15672.6667	43.76	38.59	-32.85	49.50	74.00	24.50	Vertical
6	17999	41.87	41.70	-30.72	52.84	74.00	21.16	Vertical
7	17997.6667	33.77	41.69	-30.73	44.74	54.00	9.26	Vertical

11ax(HE40)_TX_CH_203_Horizontal

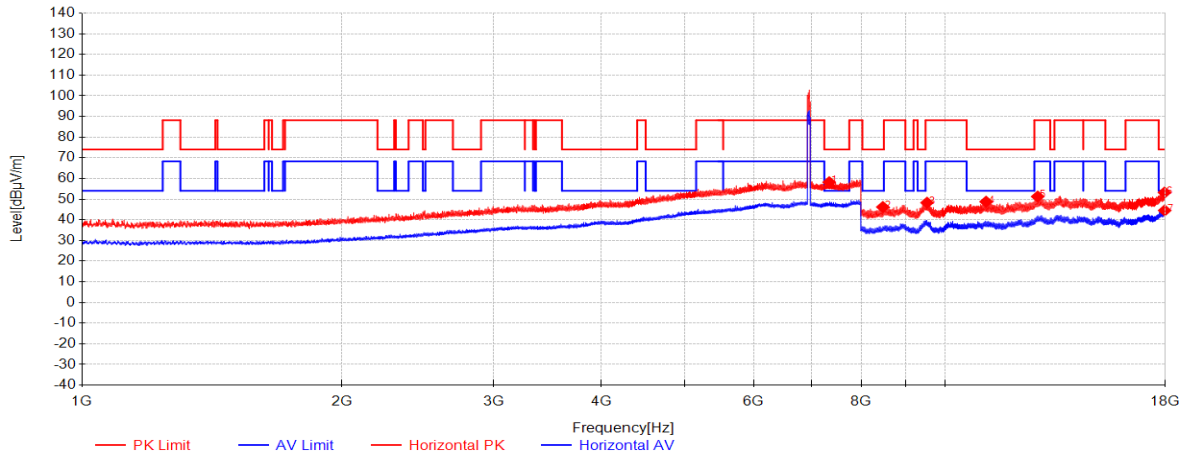


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7345.0625	39.65	36.30	-17.75	58.20	74.00	15.80	Horizontal
2	8476.3333	48.60	37.63	-40.07	46.17	74.00	27.83	Horizontal
3	9537	48.29	38.05	-38.06	48.29	88.20	39.91	Horizontal
4	11166	45.18	39.20	-35.64	48.74	74.00	25.26	Horizontal
5	12814.3333	46.20	39.68	-34.63	51.25	88.20	36.95	Horizontal
6	17974.3333	42.37	41.63	-30.80	53.19	74.00	20.81	Horizontal
7	17985	33.63	41.66	-30.77	44.52	54.00	9.48	Horizontal

11ax(HE40)_TX_CH_203_Vertical

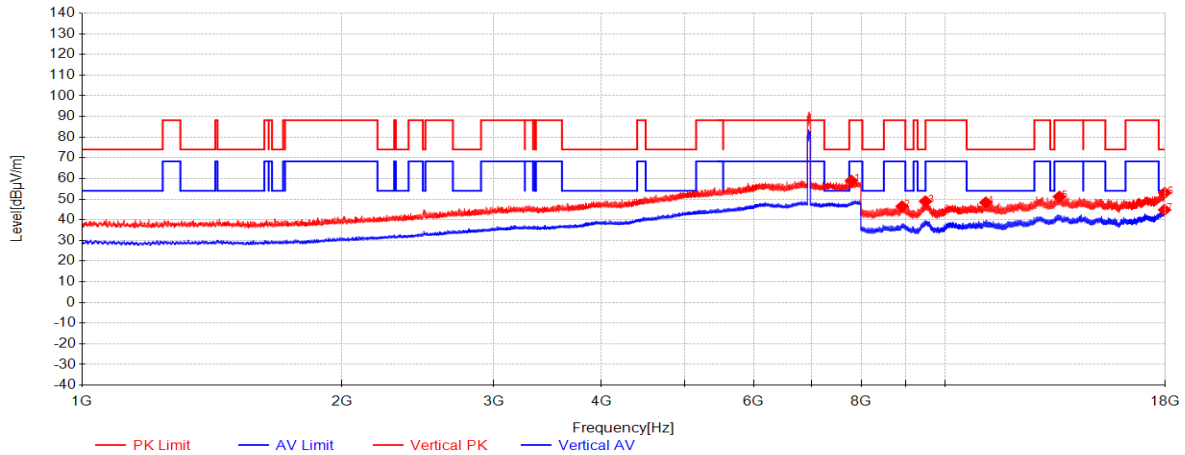

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7793.0625	40.77	36.89	-18.70	58.95	88.20	29.25	Vertical
2	8921.6667	47.47	37.95	-38.91	46.50	88.20	41.70	Vertical
3	9497.3333	49.08	38.05	-38.19	48.94	74.00	25.06	Vertical
4	11155.6667	44.79	39.21	-35.63	48.37	74.00	25.63	Vertical
5	13577.6667	45.39	40.19	-34.37	51.21	88.20	36.99	Vertical
6	17983	42.14	41.65	-30.77	53.02	74.00	20.98	Vertical
7	17975.3333	33.96	41.63	-30.80	44.79	54.00	9.21	Vertical

11ax(HE40)_TX_CH_211_Horizontal

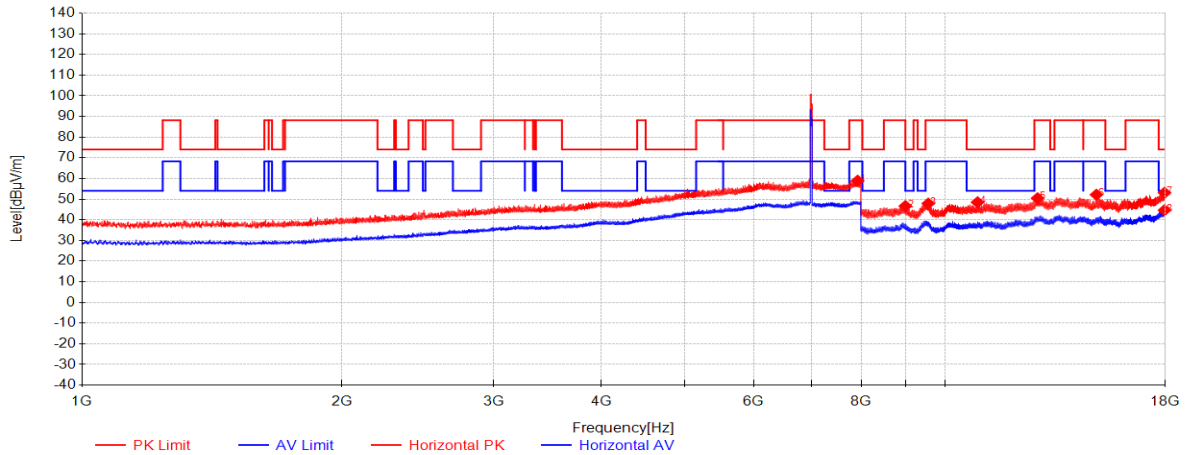

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7924.75	40.61	37.15	-18.84	58.92	88.20	29.28	Horizontal
2	9000.3333	47.18	38.00	-38.53	46.65	74.00	27.35	Horizontal
3	9567.6667	47.76	38.06	-37.95	47.87	88.20	40.33	Horizontal
4	10913.3333	45.23	39.20	-35.94	48.48	74.00	25.52	Horizontal
5	12809	45.38	39.67	-34.61	50.44	88.20	37.76	Horizontal
6	14987.6667	46.23	39.81	-33.88	52.15	88.20	36.05	Horizontal
7	17977.3333	42.24	41.63	-30.79	53.08	74.00	20.92	Horizontal
8	17975.3333	33.82	41.63	-30.80	44.65	54.00	9.35	Horizontal