

RF TEST REPORT

FCC ID: 2BNYN-DX-ETS-5000KA

Test Report No.....: RF250320018-02-001

Product(s) Name.....: 50" CLASS SMART 4K UHD LED TV

Model(s).....: ETS-5000KA, 50Z11, 50S10, WD49FX5201, 50*****
("*" can be any alphanumeric character symbol or blank, which represents different color and sales area code.)

Trade Mark.....: N/A

Applicant.....: Dual Shine Electronics Technology(Xiamen) Co., Ltd

Address.....: NO.188, XINTIAN RD, HOUXI TOWN, JIMEI DISTRICT, XIAMEN,
FUJIAN PROVINCE, CHINA

Receipt Date.....: 2025.04.01

Test Date.....: 2025.04.02~2025.04.08

Issued Date.....: 2025.04.09

Standards.....: 47 CFR FCC Part 15, Subpart C(Section 15.247);
ANSI C63.10:2020

Testing Laboratory.....: Shenzhen Haiyun Standard Technical Co., Ltd.

Prepared By:	Checked By:	Approved By:	
Jason Huang	Black Ding	Tim Zhang	
<i>Jason Huang</i>	<i>Black Ding</i>	<i>Tim Zhang</i>	

Table of Contents

History of this test report.....	4
1. General Information	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Basic Description of Equipment Under Test.....	5
1.4 Transmit Operating Mode	6
2. Summary of Test Results	7
2.1 Summary of Test Items	7
2.2 Application of Standard	7
2.3 Test Instruments.....	8
2.4 Test Mode	9
2.5 Test Condition	9
2.6 Measurement Uncertainty.....	9
2.7 Duty Cycle of Test Signal	10
2.8 Test Location.....	10
2.9 SUPPORT UNITS	10
2.10 Description of Support Units	10
2.11 Deviation from Standards.....	10
3. Test Procedure And Results	11
3.1 AC Power Line Conducted Emission	11
3.1.1 Limit.....	11
3.1.2 Test Procedure	11
3.1.3 Test Setup.....	11
3.1.4 Test Result.....	12
3.2 Radiated Emission and Band Edge	14
3.2.1 Limit.....	14
3.2.2 Test Procedure	14
3.2.3 Test Setup.....	16
3.2.4 Test Result.....	17
3.3 Spurious Emission at Antenna Port.....	39

3.3.1	Limit	39
3.3.2	Test Procedure	39
3.3.3	Test Setup.....	40
3.3.4	The Result	40
3.4	6dB Bandwidth.....	41
3.4.1	Limit	41
3.4.2	Test Procedure	41
3.4.3	Test Setup.....	41
3.4.4	Test Result.....	42
3.5	Maximum conducted output power	55
3.5.1	Limit.....	55
3.5.2	Test Procedure	55
3.5.3	Test Setup.....	55
3.5.4	The Result	56
3.6	Power Spectral Density.....	57
3.6.1	Limit.....	57
3.6.2	Test Procedure	57
3.6.3	Test Setup.....	57
3.6.4	The Result	58

History of this test report

Original Report Issue Date: 2025.04.09

- ☒ No additional attachment
- ☐ Additional attachments were issued following record

Attachment No.	Issue Date	Description

1. General Information

1.1 Applicant

Dual Shine Electronics Technology(Xiamen) Co., Ltd

NO.188, XINTIAN RD, HOUXI TOWN, JIMEI DISTRICT,XIAMEN, FUJIAN PROVINCE, CHINA

1.2 Manufacturer

Dual Shine Electronics Technology(Xiamen) Co., Ltd

NO.188, XINTIAN RD, HOUXI TOWN, JIMEI DISTRICT,XIAMEN, FUJIAN PROVINCE, CHINA

1.3 Basic Description of Equipment Under Test

Sample No.	POC250320018-S002	
Equipment Name	50" CLASS SMART 4K UHD LED TV	
Model Name	ETS-5000KA, 50Z11, 50S10, WD49FX5201, 50***** ("**"can be any alphanumeric character symbol or blank, which represents different color and sales area code.)	
Test Model	ETS-5000KA	
Model Difference	Only the appearance color and model name are difference	
Trade Mark	N/A	
Power Supply	AC 100-240V, 50/60Hz	
Operate temperature	0℃-45℃	
EUT Stage	○ Product Unit	● Final-Sample
Operating Band	2400MHz ~ 2483.5MHz	
Product Type	IEEE 802.11b: WLAN (SISO) IEEE 802.11g: WLAN(SISO) IEEE 802.11n: WLAN(MIMO)	
Nominal Bandwidth	20MHz / 40MHz	
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM	
Data Rate (Mbps)	IEEE 802.11b mode: 1/2/5.5/11 IEEE 802.11g mode: 6/9/12/18/24/36/48/54 IEEE 802.11n mode: up to 300	
Antenna gain	Ant1: 3.02dBi, Ant2: 3.02dBi	
Antenna type	Double copper tube antenna	

Eleven channels are provided for 802.11b, 802.11g, 802.11n (20MHz):

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400MHz ~ 2483.5 MHz	01	2412MHz	07	2442MHz
	02	2417MHz	08	2447MHz
	03	2422MHz	09	2452MHz
	04	2427MHz	10	2457MHz
	05	2432MHz	11	2462MHz
	06	2437MHz	/	/

Seven channels are provided for 802.11n (40MHz):

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400MHz ~ 2483.5 MHz	03	2422 MHz	07	2442MHz
	04	2427MHz	08	2447MHz
	05	2432MHz	09	2452MHz
	06	2437MHz	/	/

1.4 Transmit Operating Mode

Transmit Operating Mode					Transmit Multiple Antennas			
☒	Operating mode 1 (single antenna)				☒	1TX		
☒	Operating mode 2 (multiple antenna, no beam forming)				☒	2TX	☐ 3TX	☐ 4TX
☐	Operating mode 3 (multiple antenna, with beam forming)				☐	2TX	☐ 3TX	☐ 4TX
☒	802.11b	Operating mode	☒	1TX	☐	2TX	☐	3TX
☒	802.11g	Operating mode	☒	1TX	☐	2TX	☐	3TX
☒	802.11n(20MHz)	Operating mode	☐	1TX	☒	2TX	☐	3TX
☒	802.11n(40MHz)	Operating mode	☐	1TX	☒	2TX	☐	3TX

2. Summary of Test Results

2.1 Summary of Test Items

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Test item	FCC Clause	Results	Remarks
AC Power Conducted Emission	15.207	Pass	Meet the requirement of the limit
Radiated Emission and Band Edge Measurement	15.205/15.209 /15.247(d)	Pass	Meet the requirement of the limit
Spurious Emission at Antenna Port	15.247(d)	Note2	Meet the requirement of the limit
6dB Bandwidth	15.247(a)(2)	Pass	Meet the requirement of the limit
Maximum Conducted Power	15.247(b)	Note2	Meet the requirement of the limit
Power Spectral Density	15.247(e)	Note2	Meet the requirement of the limit
Antenna Requirements	15.203	Compliance	Note1

Note:

1. The EUT has 2 double copper tube antennas arrangement which was permanently attached.
2. For test data, please refer to the report 4790010773.1-3.
3. Module report 4790010773.1-3(FCC ID: 2AR82-SKIWB663U21), this module is used for 50" CLASS SMART 4K UHD LED TV with change in antenna type. Therefore, the radiated emission and band edge and AC power conducted emission were tested with reference to the original report, while the rest remained unchanged.
4. For MIMO mode, Directional gain= $G_{ANT} + \text{Array Gain}$ =6.03 dBi, the conducted power limit value and PSD limit value will be reduced by 0.03 dB, but the final test results for conducted power and PSD remain PASS

2.2 Application of Standard

47 CFR FCC Part 15, Subpart C (Section 15.247)

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10:2020

2.3 Test Instruments

Radiated Emission							
No.	Name of Equipment	Manufacturer	Model Number	Serial Number	Inventory No.	Last Calibration	Due Calibration
1	Test receiver	Rohde&Schwarz	ESU	100184	JLE011	2025/3/1	2026/2/28
2	Log periodic antenna	Schwarzbeck	VULB 9168	1151	JLE012	2024/4/20	2025/4/19
3	Low frequency amplifier	/	LNA 0920N	2014	JLE023	2025/3/1	2026/2/28
4	High frequency amplifier	Schwarzbeck	BBV 9718	9718-284	JLE024	2025/3/1	2026/2/28
5	Horn Antenna	SCHWARZBECK	BBHA 9120 D	02670	JLE028	2024/4/20	2025/4/19
6	Temp&Humidity Recorder	Meideshi	JR900	/	JLE021	2024/4/24	2025/4/23
7	Horn Antenna	SCHWARZBECK	BBHA 9170	9170#685	JLE029	2024/7/15	2025/7/14
8	Loop Antenna	SCHWARZBECK	FMZB1519B	00029	JLE030	2024/7/15	2025/7/14
9	Broadband preamplifier	Schwarzbeck	BBV9721	9721-019	JLE025	2025/3/1	2026/2/28
10	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				
Conducted Emission							
1	LISN	Rohde&Schwarz	ENV216	100075	JLE002	2025/3/1	2026/2/28
2	ISN	Schwarzbeck	CATE 5 8158	#171	JLE003	2025/2/21	2026/2/20
3	ISN	Schwarzbeck	CAT 3 8158	00187	JLE032	2025/2/21	2026/2/20
4	Test receiver	Rohde&Schwarz	ESCI	100718	JLE010	2025/3/1	2026/2/28
5	Pulse limiter	Rohde&Schwarz	ESH3-Z2	102299	JLE047	2025/3/1	2026/2/28
6	Temp&Humidity Recorder	Meideshi	JR900	/	JLE020	2024/4/24	2025/4/23
7	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				

2.4 Test Mode

Test Items	Mode	Data Rate	Channel
Radiated Emission and Band Edge Measurement	802.11B ant2	1Mbps	01/06/11
	802.11G ant2	6Mbps	01/06/11
	802.11N20MIMO	MCS0	01/06/11
	802.11N40MIMO	MCS0	03/06/09
AC Power Conducted Emission	802.11N20MIMO	MCS0	01
6dB Bandwidth	802.11B	1Mbps	01/06/11
	802.11G	6Mbps	01/06/11
	802.11N20MIMO	MCS0	01/06/11
	802.11N40MIMO	MCS0	03/06/09

Note: 1. For AC Power Conducted Emission and Radiated Emission below 1GHz, only worst case was recorded.

2. For 802.11B/G mode, worst case for 802.11B/G ant2 mode was recorded.

2.5 Test Condition

Applicable to	Environmental conditions	Input Power	Tested by
AC Power Conducted Emission	23.7°C, 49% RH	AC 120V/60Hz	Freedom Zhuo
Radiated Emission and Band Edge Measurement	24.2°C, 49% RH	AC 120V/60Hz	Freedom Zhuo
6dB Bandwidth	23.1°C, 50% RH	AC 120V/60Hz	Albert Fan

Note: The applicant declare the operating environment of EUT as below:

Normal conditions: 120V AC, 0~45°C

2.6 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	±102kHz
RF power conducted	±0.377dB
Power Spectral Density	±0.743dB
Conducted Spurious Emission	±1.328dB
Conducted emission(9kHz~30MHz) AC main	±2.68dB
Radiated emission(9kHz~30MHz)	±2.74dB
Radiated emission (30MHz~1GHz)	±4.22dB
Radiated emission (1GHz~18GHz)	±5.06dB
Radiated emission (18GHz~40GHz)	±4.98dB

2.7 Duty Cycle of Test Signal

Test result: PASS

Note: For test data, please refer to the report 4790010773.1-3.

2.8 Test Location

Company:	Shenzhen Haiyun Standard Technical Co., Ltd.
Address:	No. 110-113, 115, 116, Block B, Jinyuan Business Building, Bao'an District, Shenzhen, China
CNAS Registration Number:	CNAS L18252
CAB identifier	CN0145
A2LA Certificate Number	6823.01
Telephone:	0755-26024411

2.9 SUPPORT UNITS

Support Equipment				
No.	Equipment	Model Name	Manufacturer	Remarks
1	PC	M4500T	Thinkpad	M032004854IT
2	USB Disk	/	Kingston	/
3	Earphone	/	/	/

2.10 Description of Support Units

None

2.11 Deviation from Standards

None

3. Test Procedure And Results

3.1 AC Power Line Conducted Emission

3.1.1 Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.


3.1.2 Test Procedure

Test Method	
☒ Conducted Measurement	☐ Radiated Measurement
Test Channels	
☐ Lowest, Middle and Highest Channel	☐ Lowest and Highest Channel
Environmental conditions	
☒ Normal	☐ Normal and Extreme

Note: ● : Test ○ : No Test

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

3.1.3 Test Setup

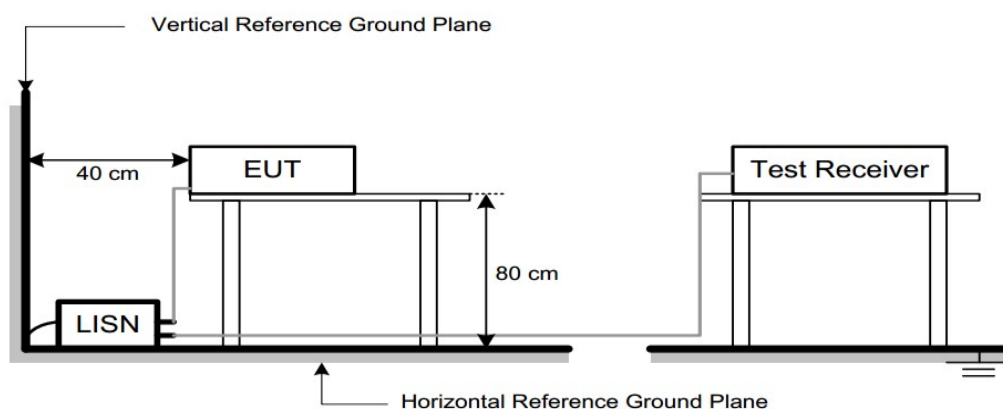

3.1.4 Test Result


Note:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Measurement = Reading + Correct Factor.
3. Over = Measurement – Limit


We only recorded the data of the worst mode. Please see the following:

150kHz~30MHz	Worst Case Operating Mode: 11N20MIMO Channel 01
--------------	---

Line

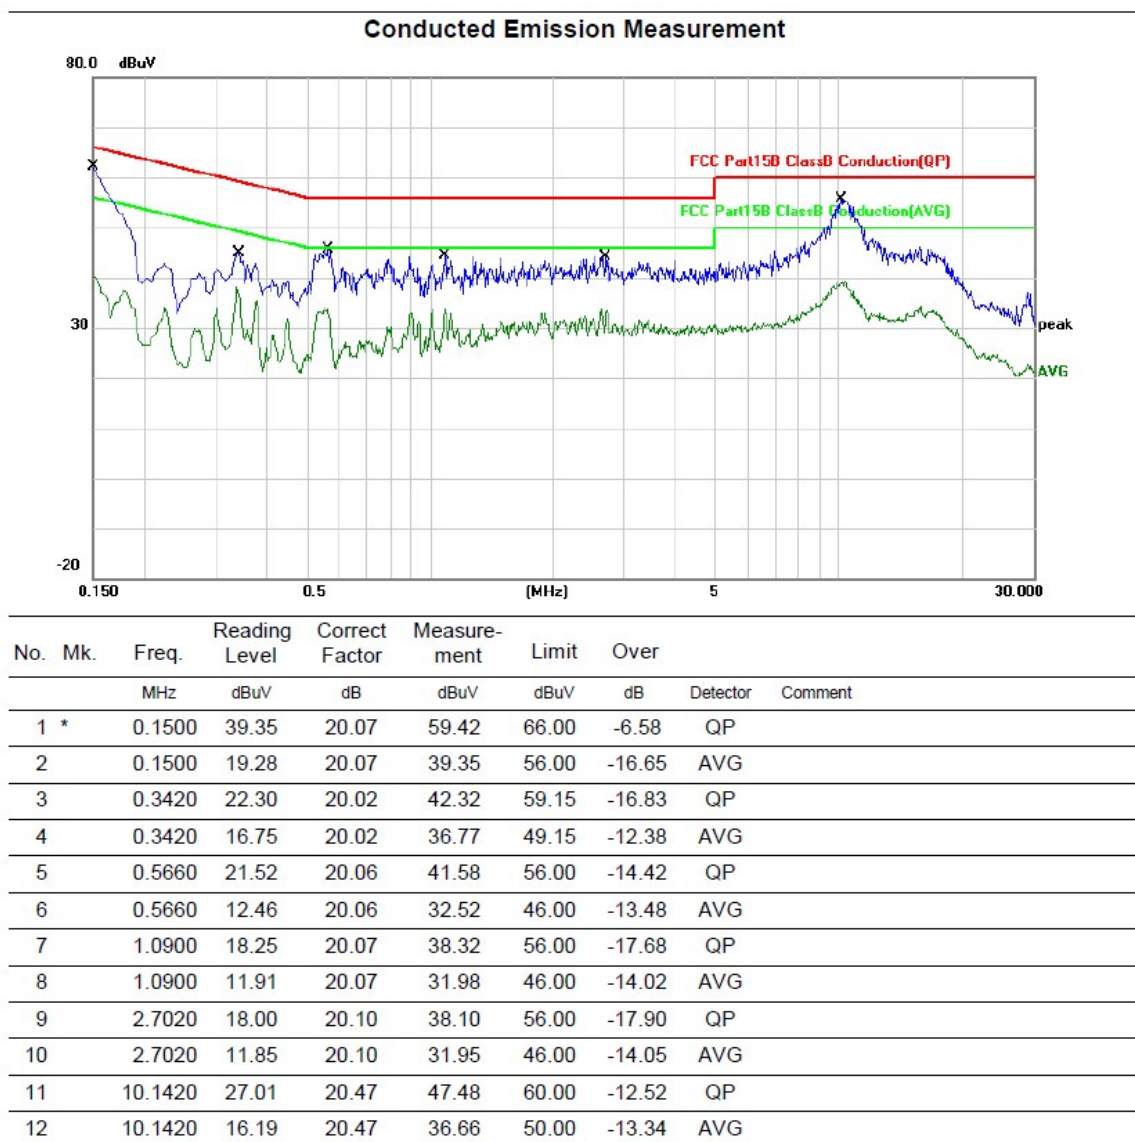

Conducted Emission Measurement

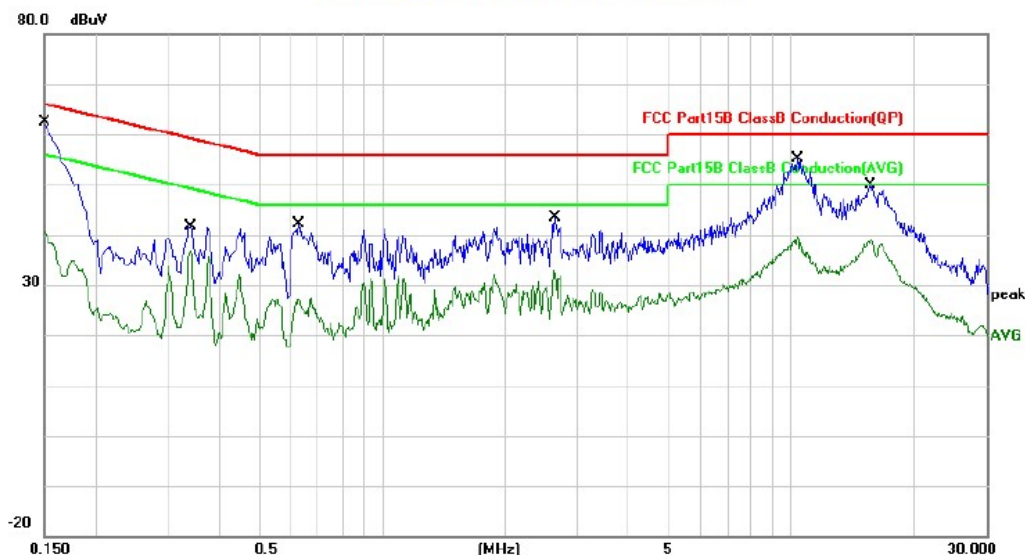

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1500	39.53	20.07	59.60	66.00	-6.40	QP	
2		0.1500	19.42	20.07	39.49	56.00	-16.51	AVG	
3		0.3420	19.62	20.02	39.64	59.15	-19.51	QP	
4		0.3420	16.71	20.02	36.73	49.15	-12.42	AVG	
5		0.6300	17.88	20.00	37.88	56.00	-18.12	QP	
6		0.6300	5.73	20.00	25.73	46.00	-20.27	AVG	
7		2.6620	18.02	20.08	38.10	56.00	-17.90	QP	
8		2.6620	11.85	20.08	31.93	46.00	-14.07	AVG	
9		10.3460	26.28	20.46	46.74	60.00	-13.26	QP	
10		10.3460	15.66	20.46	36.12	50.00	-13.88	AVG	
11		15.5620	23.77	20.38	44.15	60.00	-15.85	QP	
12		15.5620	17.53	20.38	37.91	50.00	-12.09	AVG	

3.2 Radiated Emission and Band Edge

3.2.1 Limit

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequency (MHz)	Distance Meters(m)	Field Strength Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 – 0.49	300	2400/F(kHz)	-
0.490 – 1.705	30	24000/F(kHz)	-
1.705 – 30	30	30	-
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V}/\text{m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.2.2 Test Procedure

Test Method	
☐ Conducted Measurement	☒ Radiated Measurement
Test Channels	
☒ Lowest, Middle and Highest Channel	☐ Lowest and Highest Channel
Environmental conditions	
☒ Normal	☐ Normal and Extreme
Note: ☒ : Test ☐ : No Test	

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of

the antenna are set to make the measurement.

- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e) The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f) The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g) All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h) All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i) For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz


Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value

3.2.3 Test Setup


(A) Radiated Emission Test Set-Up Frequency Below 30MHz

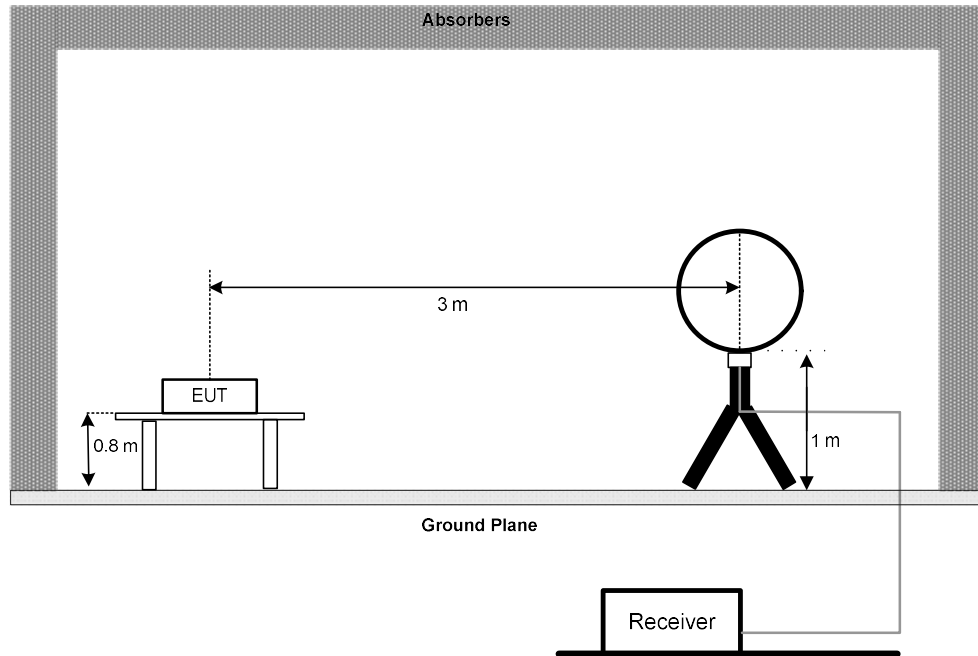

(B) Radiated Emission Test Set-Up Frequency 30 MHz-1000 MHz

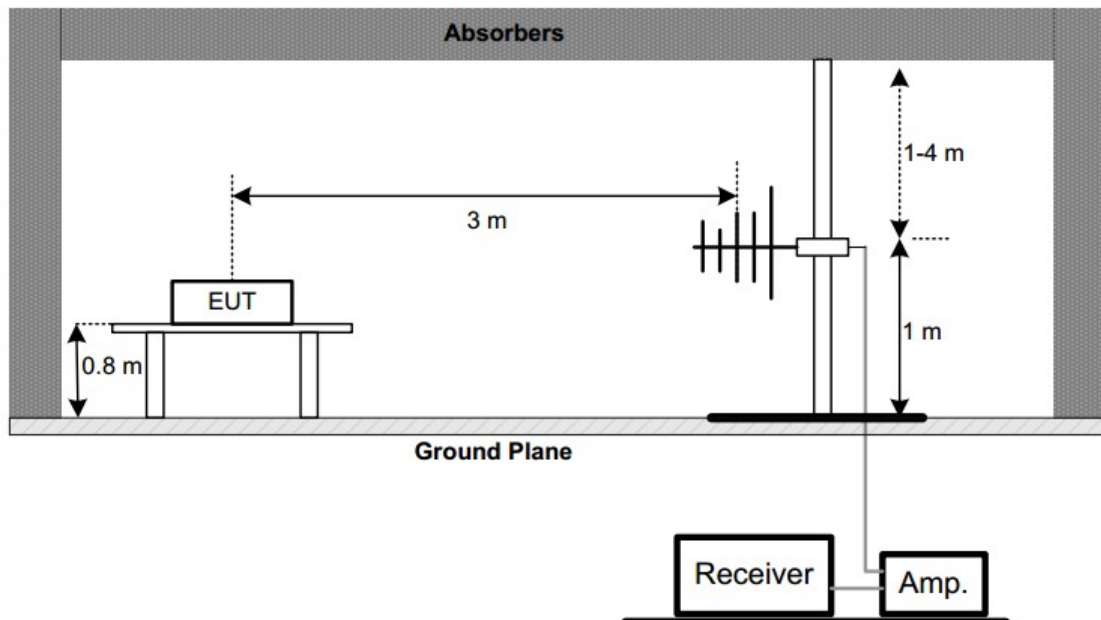

(C) Radiated Emission Test Set-Up Frequency Above 1 GHz

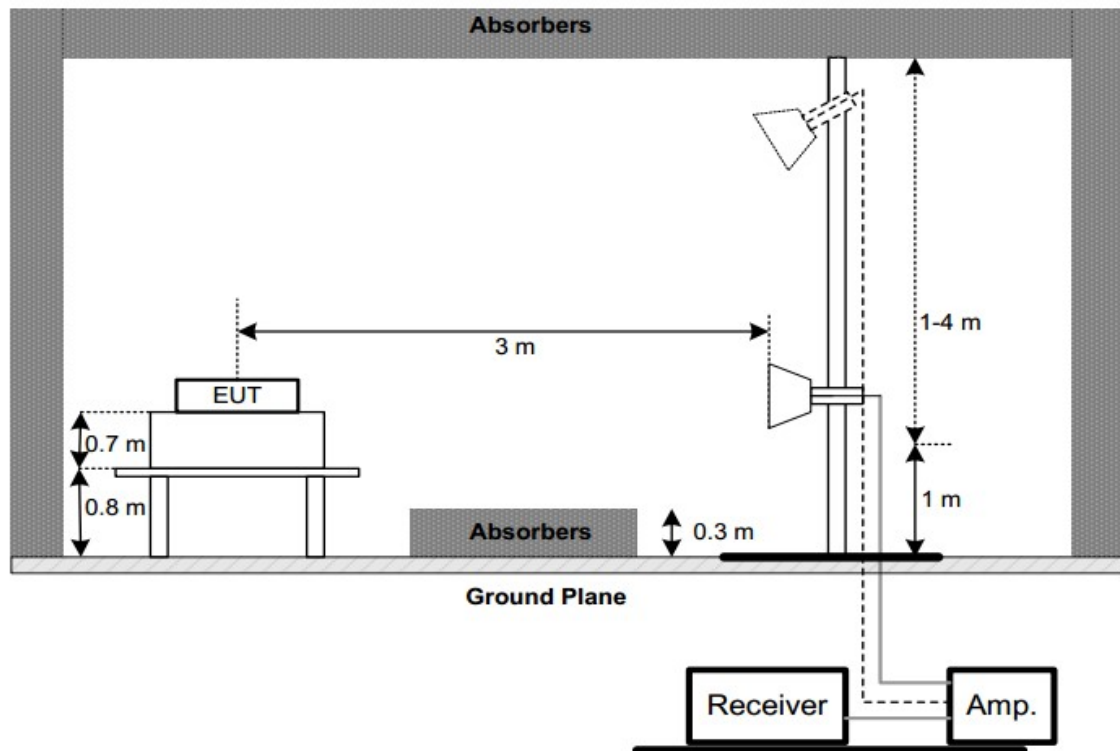

3.2.4 Test Result

1) Radiated emission: 9kHz-30MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not recorded in this report.

2) Radiated emission: 30MHz-1GHz

Note:


1. Measurement = Reading + Correct Factor.
2. Over = Measurement – Limit

We only recorded the data of the worst mode. Please see the following:


Below 1GHz (30MHz~1GHz)

Worst Case Operating Mode: 11N20MIMO Channel 01

VERTICAL

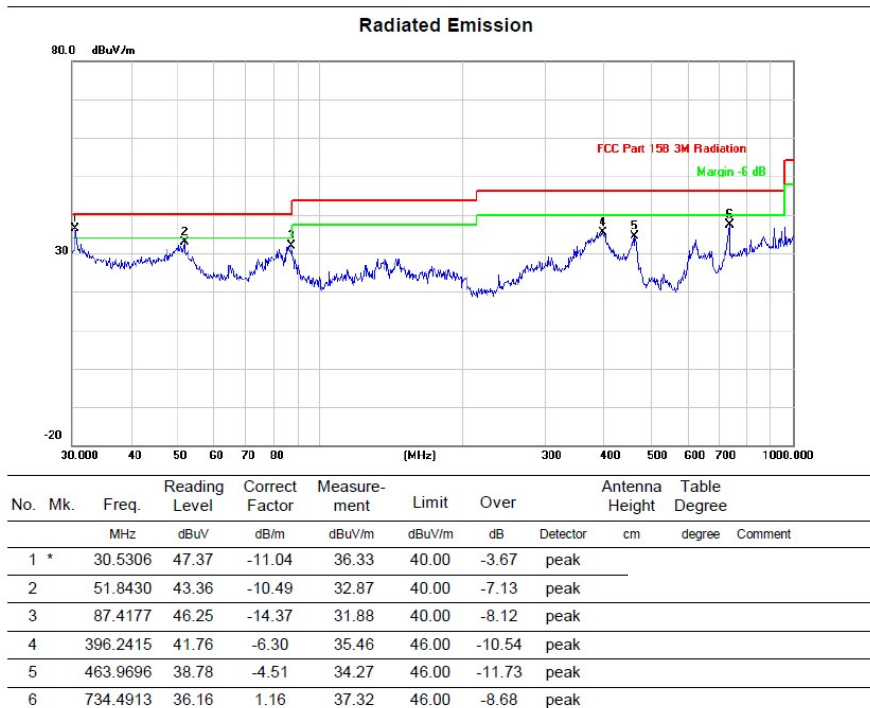

HORIZONTAL

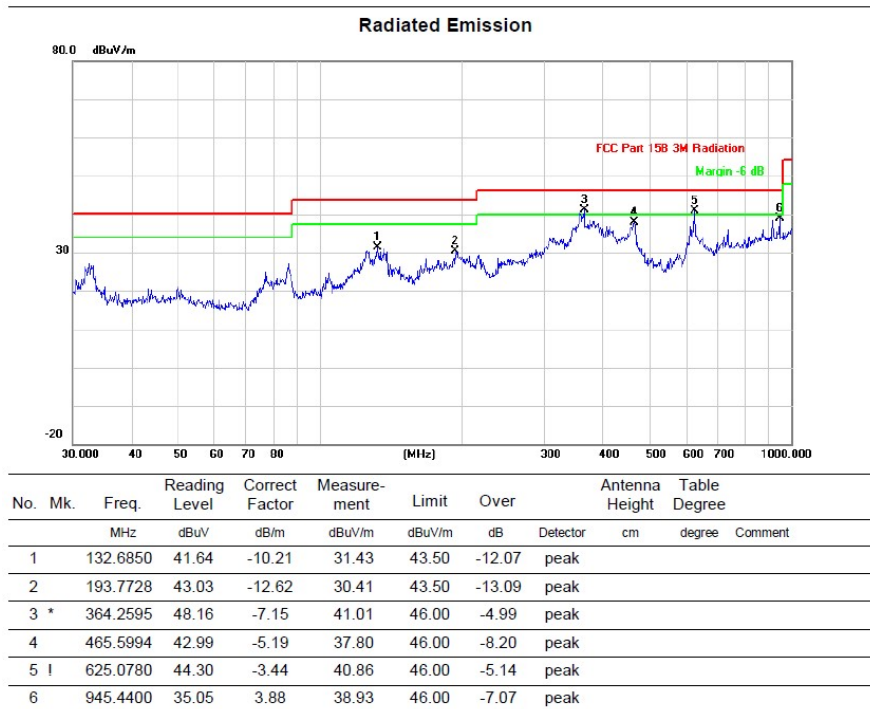



3) Radiated emission: Above 1GHz

Note:

1. Measurement = Reading + Correct Factor.
2. Over = Measurement – Limit


Above 1GHz (1GHz~18GHz)	Test mode:11B ant2	Test Channel:1
-------------------------	--------------------	----------------

VERTICAL

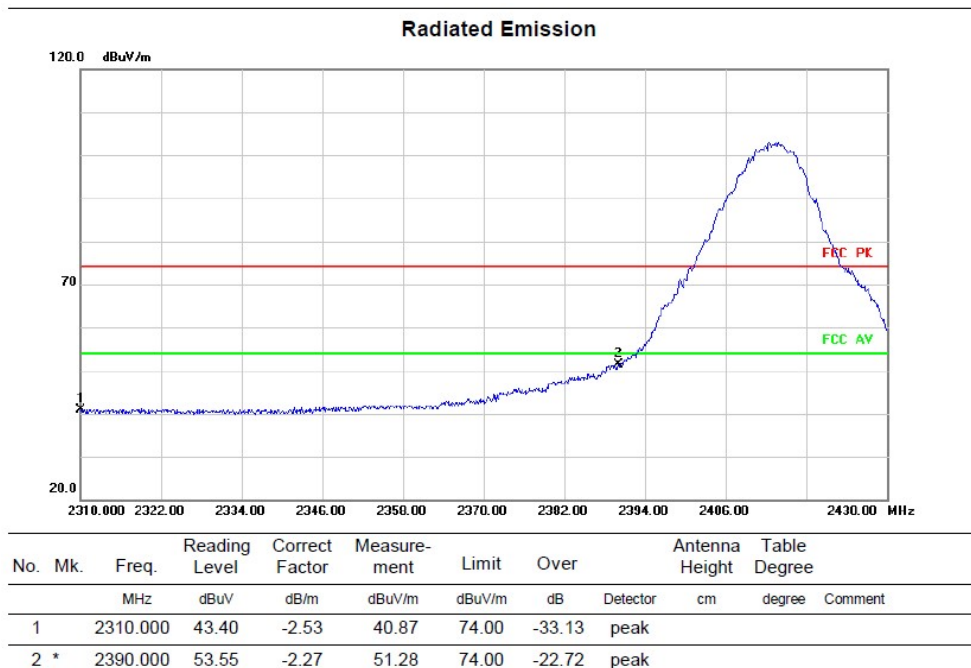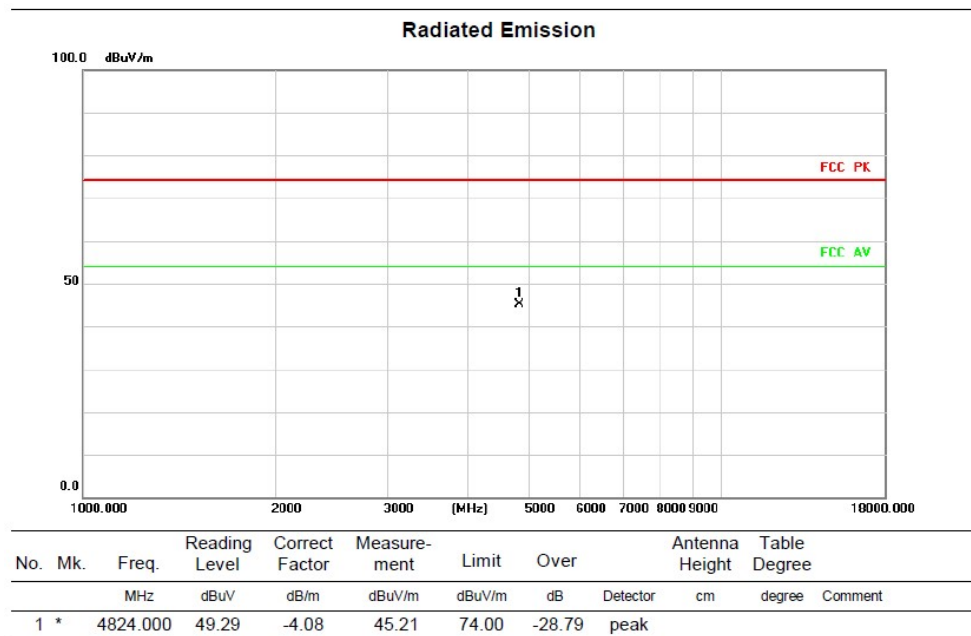


HORIZONTAL

Radiated Emission

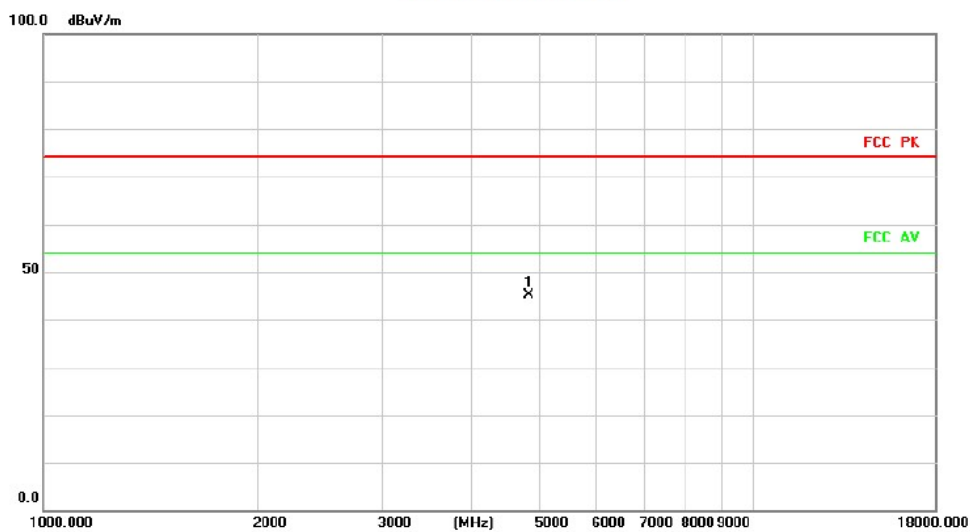

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4824.000	49.24	-4.08	45.16	74.00	-28.84	peak		

Radiated Emission

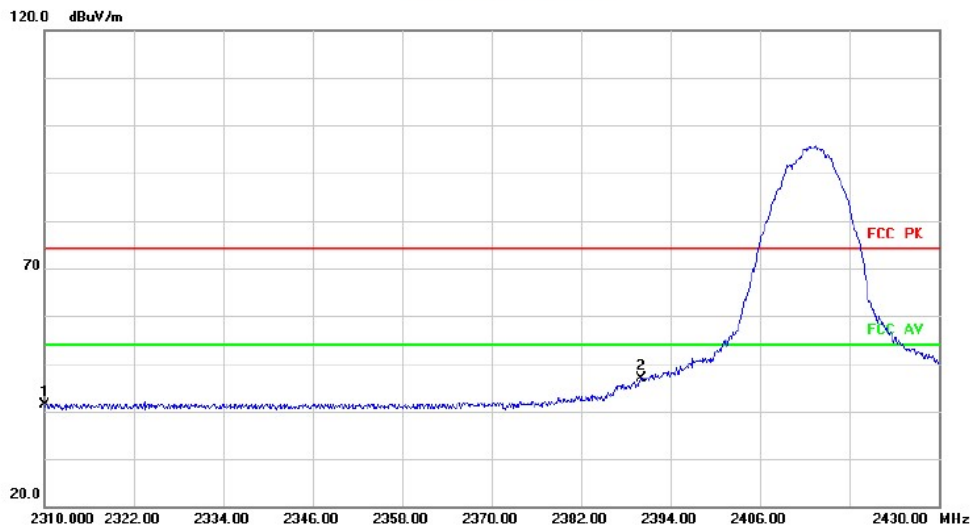


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	43.98	-2.53	41.45	74.00	-32.55	peak		
2	*	2390.000	49.16	-2.27	46.89	74.00	-27.11	peak		

Above 1GHz (1GHz~18GHz)


Test mode:11B ant2

Test Channel:6

VERTICAL

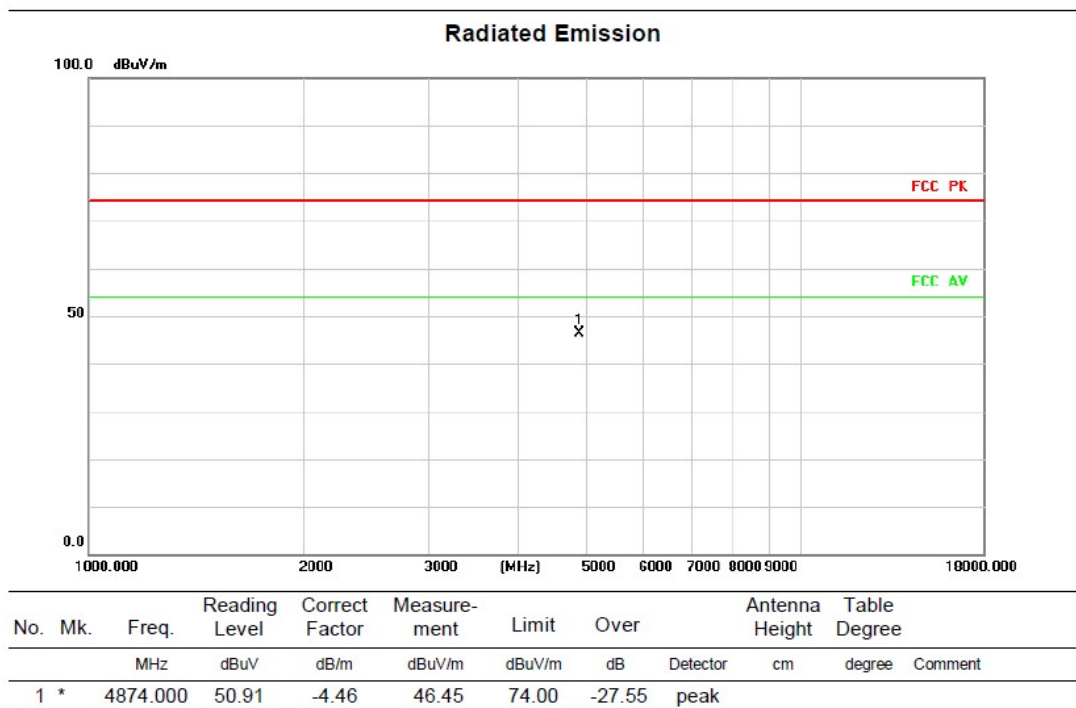

HORIZONTAL

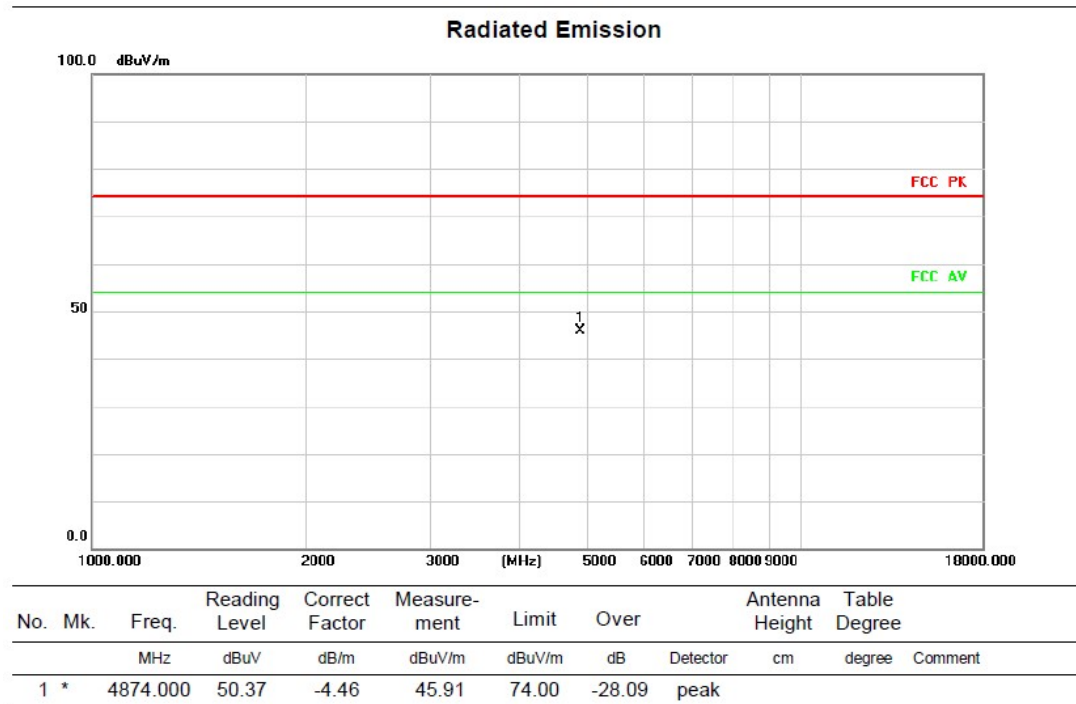

Above 1GHz (1GHz~18GHz)

Test mode: 11B ant2

Test Channel:11


VERTICAL

Radiated Emission



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4924.000	50.40	-4.56	45.84	74.00	-28.16	peak		


Radiated Emission

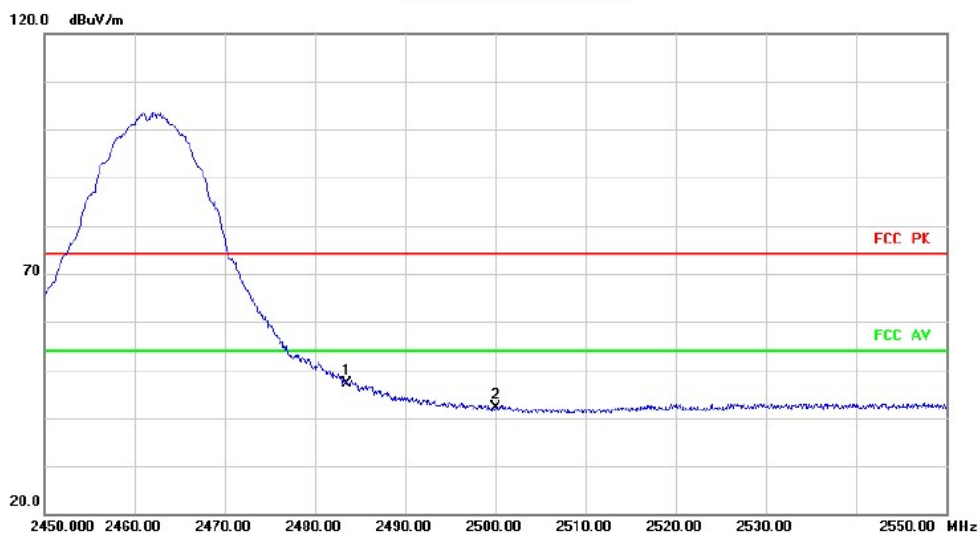

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2483.500	48.55	-1.38	47.17	74.00	-26.83	peak		
2		2500.000	43.30	-1.17	42.13	74.00	-31.87	peak		


HORIZONTAL

Radiated Emission

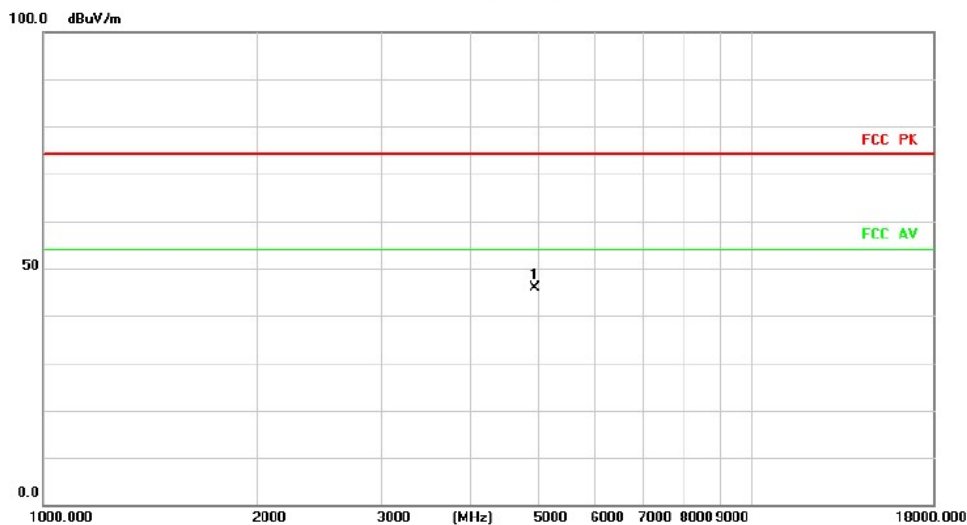

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	4924.000	50.53	-4.56	45.97	74.00	-28.03	peak	

Radiated Emission

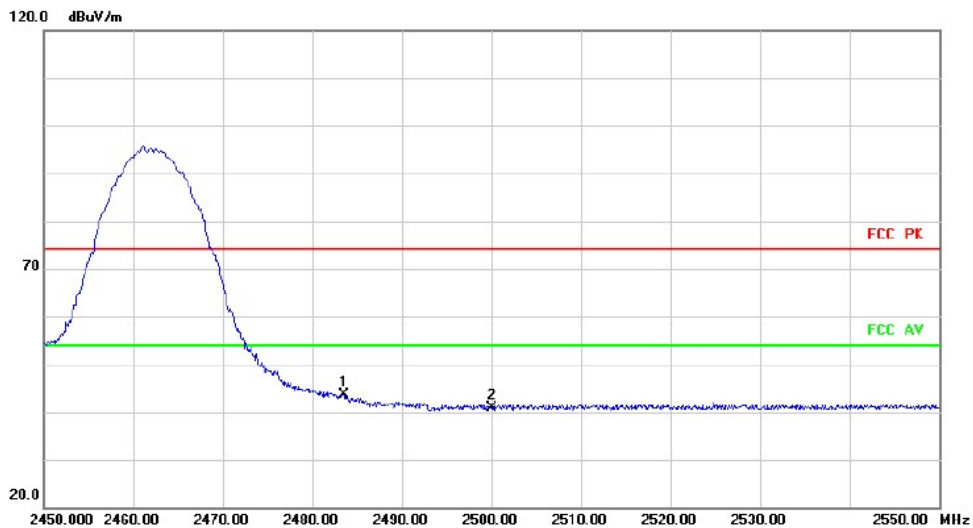

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	2483.500	44.90	-1.38	43.52	74.00	-30.48	peak	
2		2500.000	42.08	-1.17	40.91	74.00	-33.09	peak	

Above 1GHz (1GHz~18GHz)

Test mode:11G ant2

Test Channel:1


VERTICAL

Radiated Emission



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4824.000	52.13	-4.08	48.05	74.00	-25.95	peak		


Radiated Emission

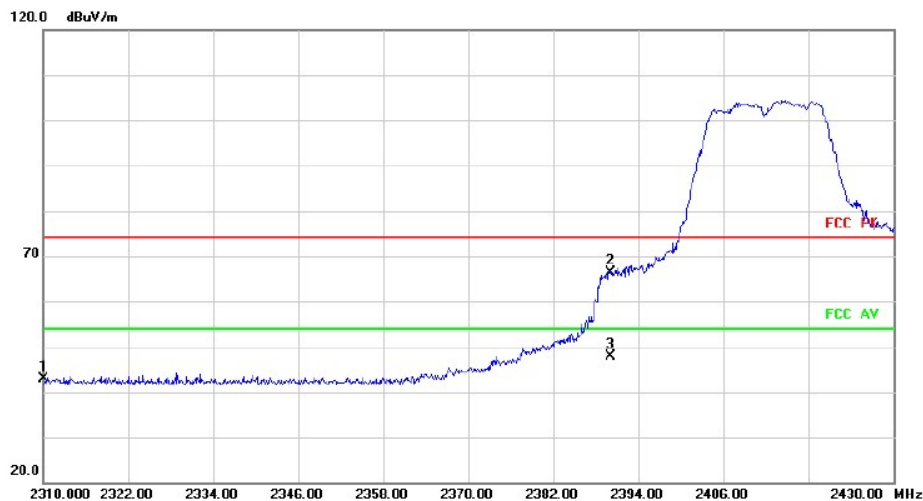

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	45.46	-2.53	42.93	74.00	-31.07	peak		
2		2390.000	68.69	-2.27	66.42	74.00	-7.58	peak		
3	*	2390.000	50.25	-2.27	47.98	54.00	-6.02	AVG		


HORIZONTAL

Radiated Emission

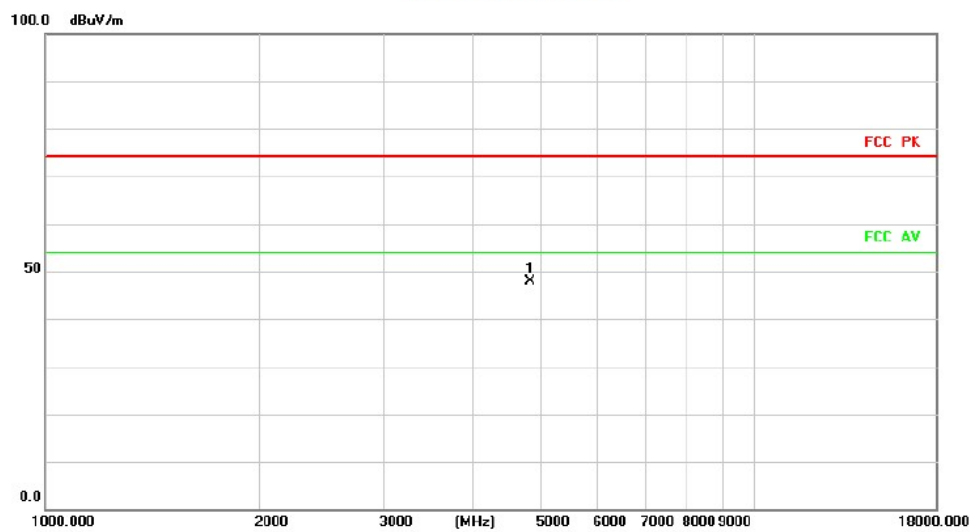

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4824.000	52.04	-4.08	47.96	74.00	-26.04	peak		

Radiated Emission

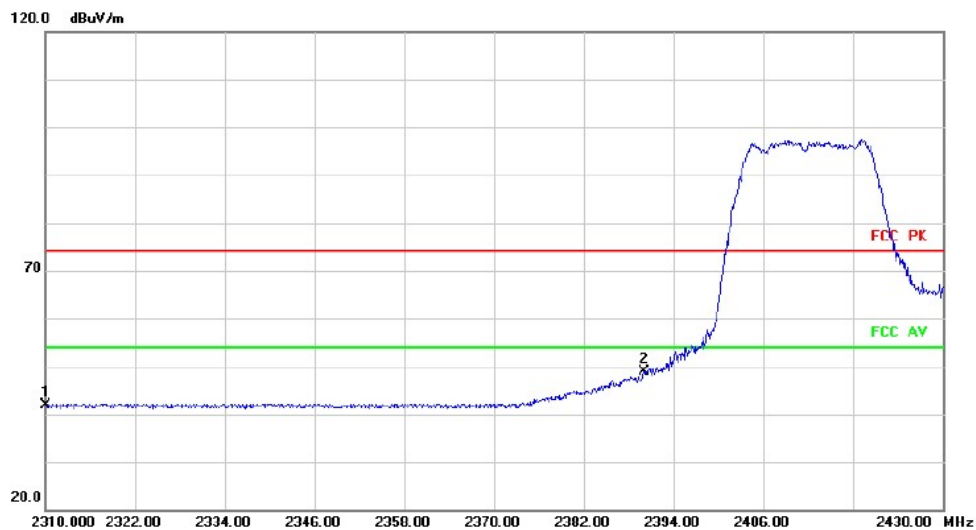


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	44.50	-2.53	41.97	74.00	-32.03	peak		
2	*	2390.000	51.25	-2.27	48.98	74.00	-25.02	peak		

Above 1GHz (1GHz~18GHz)


Test mode: 11G ant2

Test Channel:6

VERTICAL

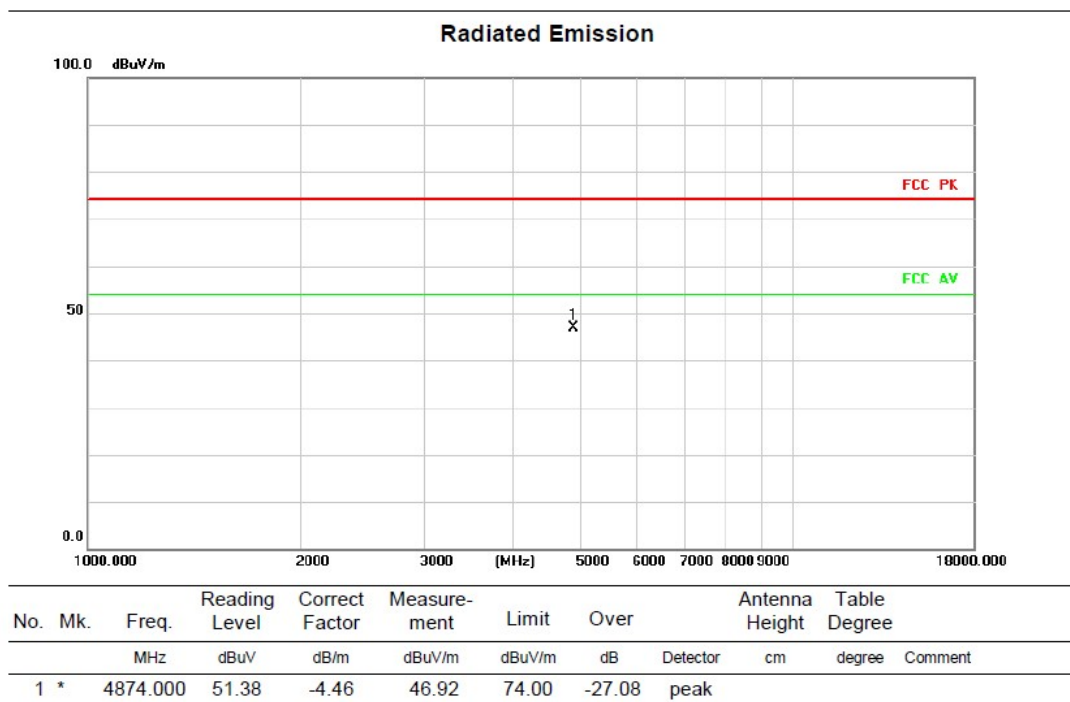

HORIZONTAL


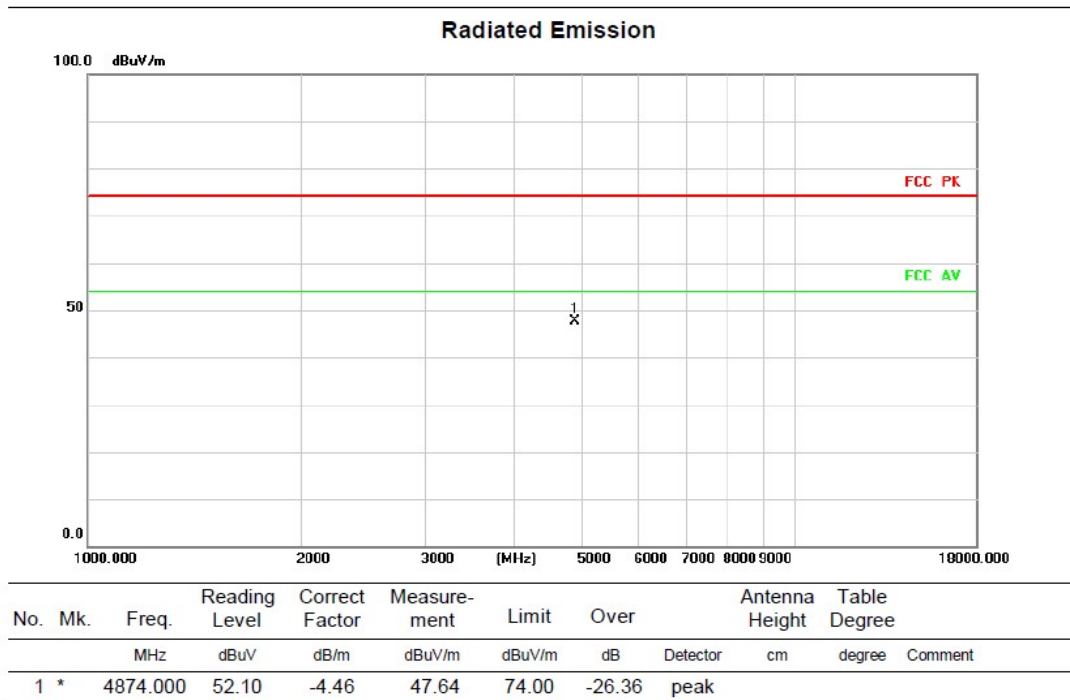


Above 1GHz (1GHz~18GHz)

Test mode: 11G ant2

Test Channel:11

VERTICAL

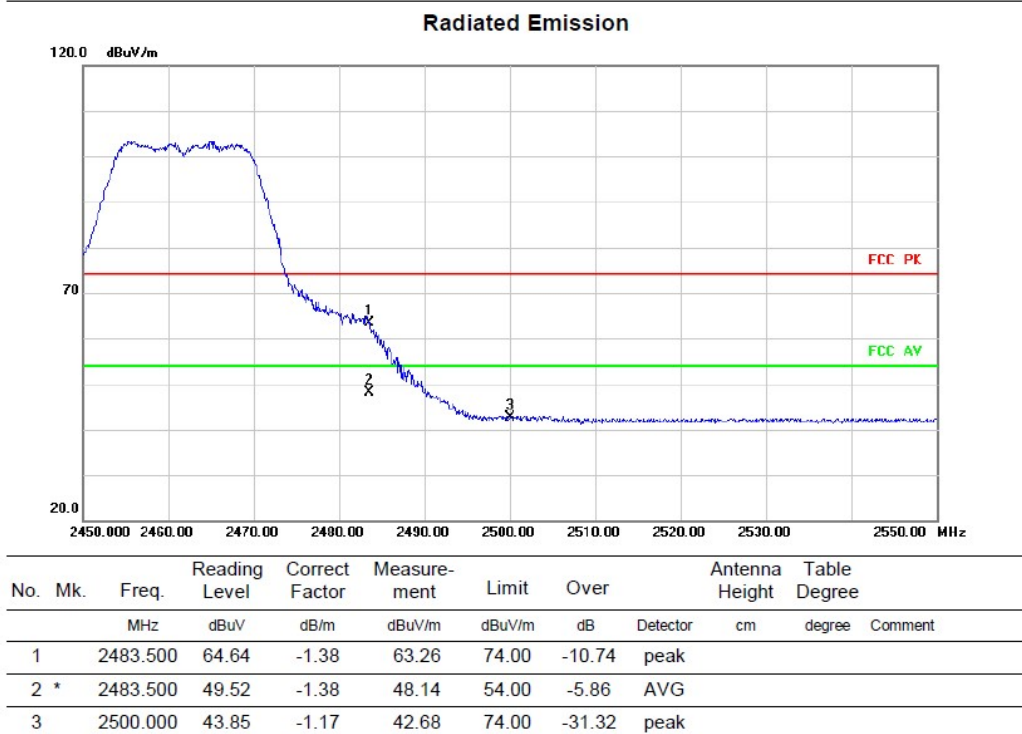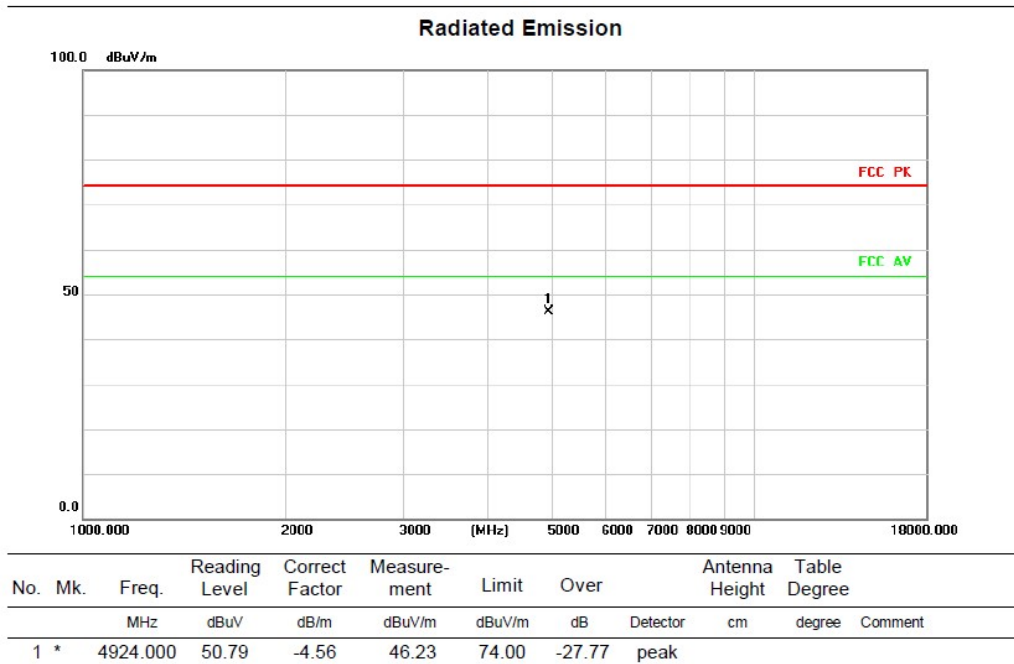


HORIZONTAL

Radiated Emission



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	4924.000	49.97	-4.56	45.41	74.00	-28.59	peak		

Radiated Emission

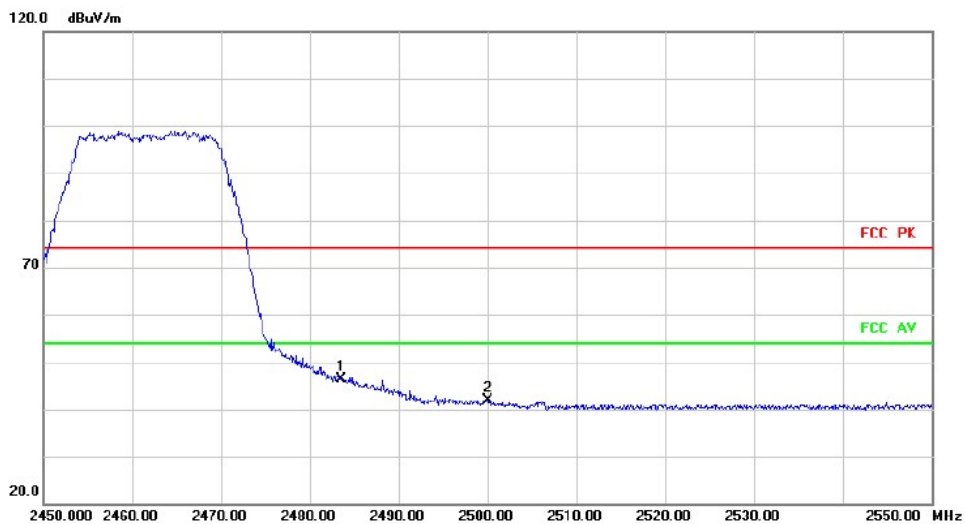

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2483.500	47.86	-1.38	46.48	74.00	-27.52	peak		
2		2500.000	42.93	-1.17	41.76	74.00	-32.24	peak		

Above 1GHz (1GHz~18GHz)

Test mode: 11N20MIMO

Test Channel:1

VERTICAL

