



Horizontal/Vertical for 1 GHz ~ 3.5 GHz

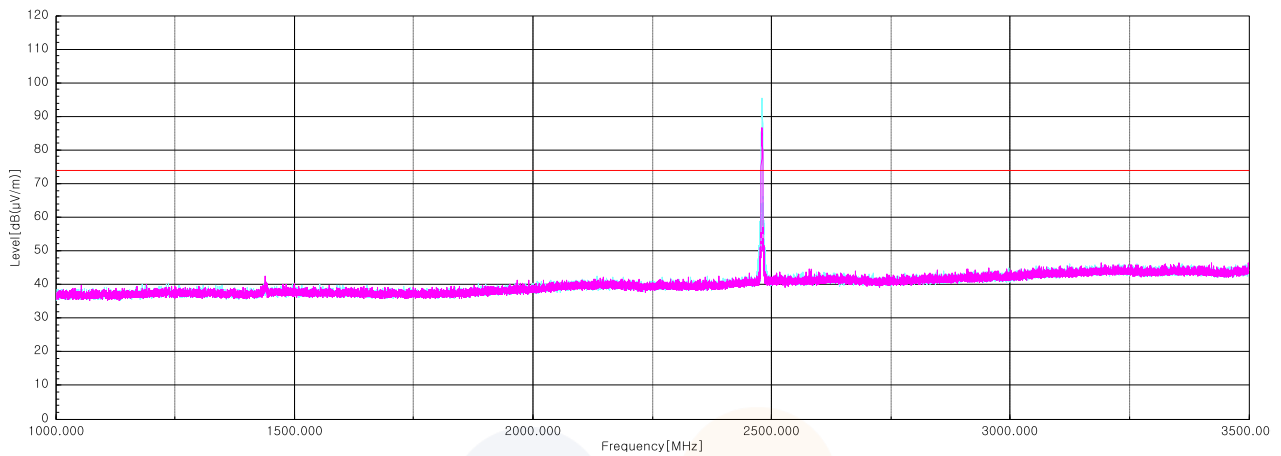


Horizontal/Vertical for 3.5 GHz ~ 18 GHz

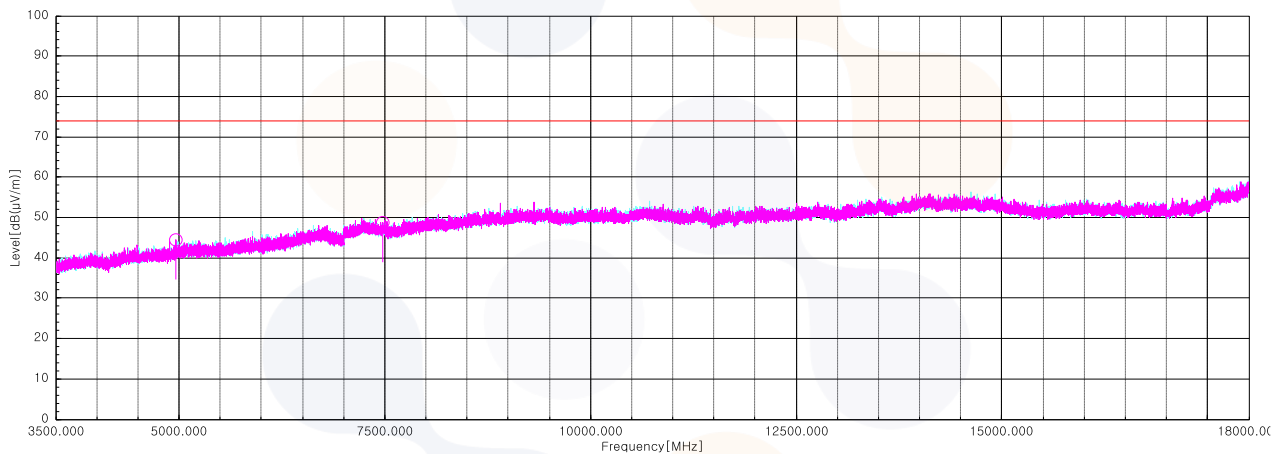

Test results (Above 18 GHz) – Worst Case : 8DPSK_2 480 MHz

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

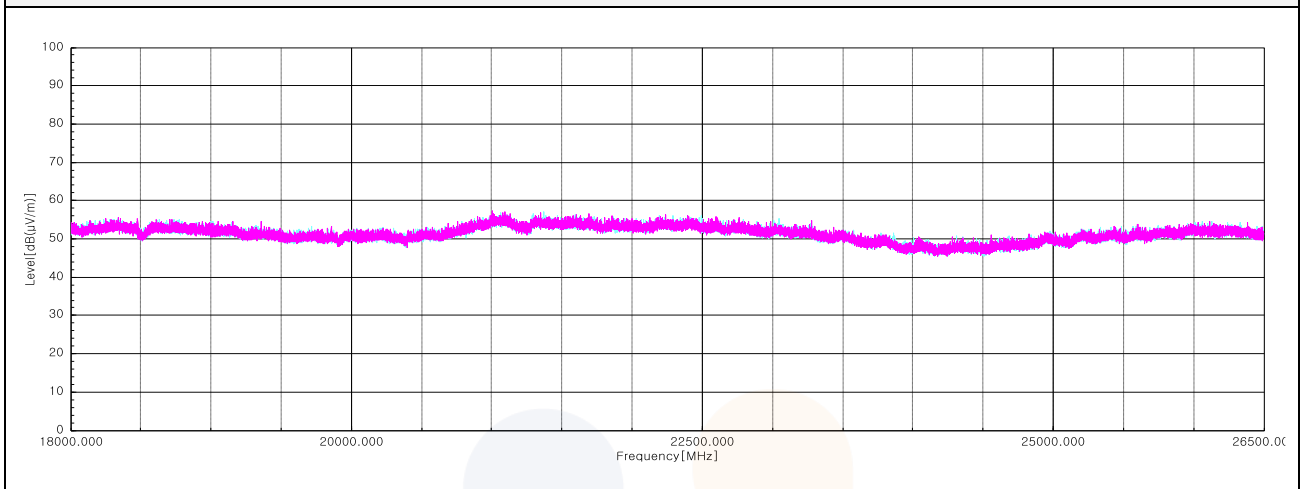


Note:

The Worst case was based on the lowest margin condition considering Harmonic and Spurious Emission.


Simultaneous condition

Case 1 : 802.11n HT20 (2 412 MHz) + BT (3DH-1)(2 480 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
4 807.42 ¹⁾	H	55.00	32.21	-44.83	-	42.38	74.00	31.62
4 865.42 ¹⁾	V	55.00	32.46	-44.57	-	42.89	74.00	31.11
7 221.18	V	55.00	37.04	-42.63	-	49.41	74.00	24.59
7 243.90	H	55.30	37.09	-42.65	-	49.74	74.00	24.26
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

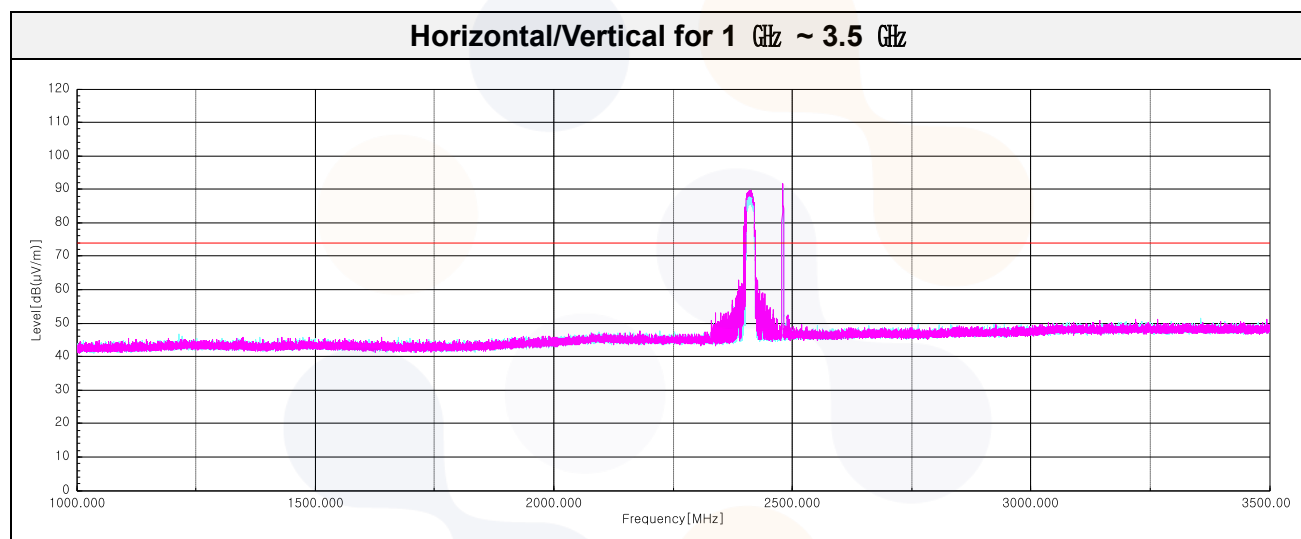

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

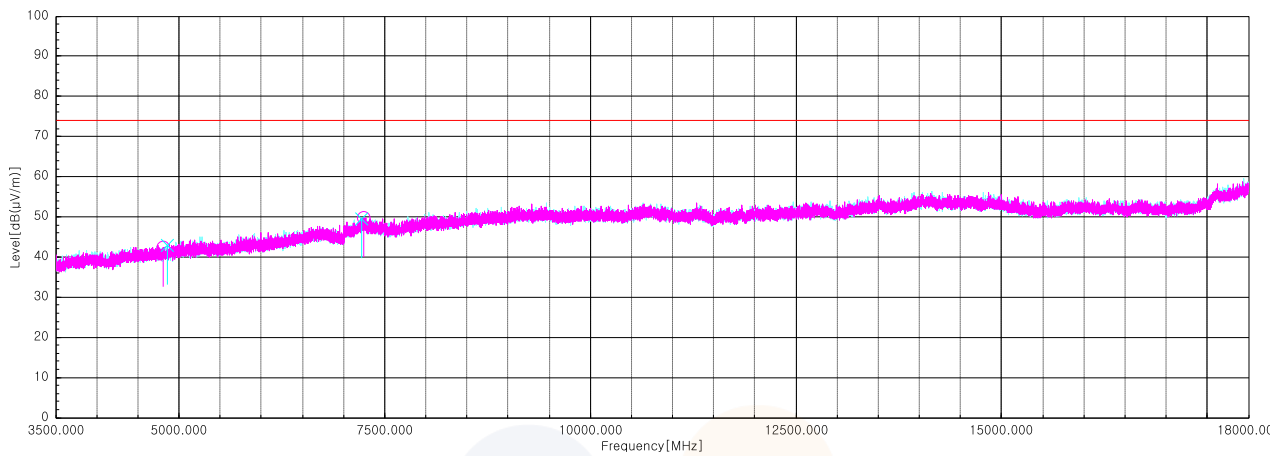


Horizontal/Vertical for 18 GHz ~ 26.5 GHz

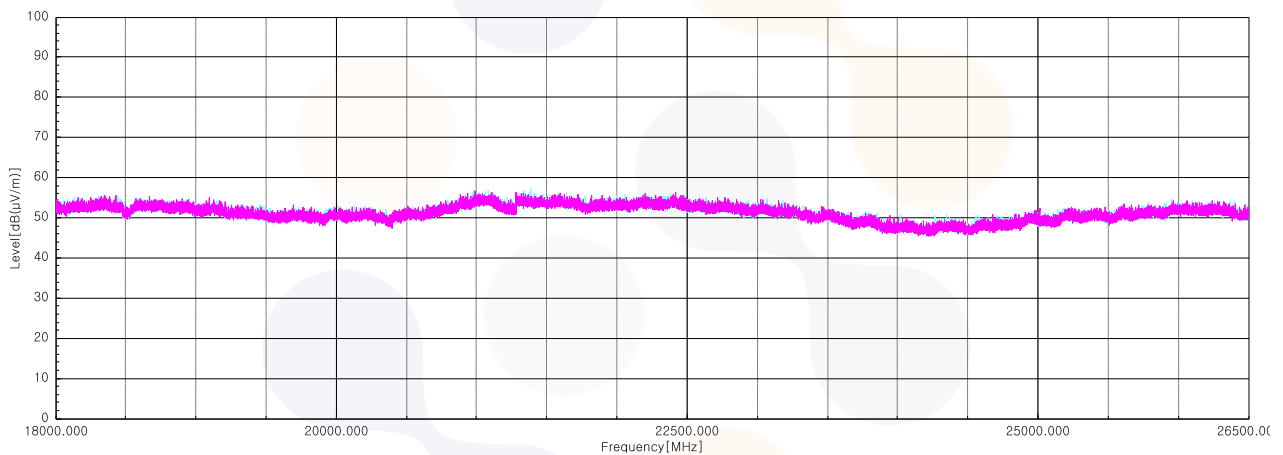


Case 2 : 802.11n HT40 (5 190 MHz) + BT (3DH-1)(2 480 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
4 960.03 ¹⁾	V	64.10	32.94	-44.16	-	52.88	74.00	21.12
7 454.12 ¹⁾	H	53.70	36.58	-42.44	-	47.84	74.00	26.16
10 367.83	H	56.50	38.96	-42.80	-	52.66	68.20	15.54
15 656.35 ¹⁾	V	55.70	37.99	-39.76	-	53.93	74.00	20.07
Average Data								
4 960.03 ¹⁾	V	59.48	32.94	-44.16	-	48.26	54.00	5.74
15 656.35 ¹⁾	V	44.68	37.99	-39.76	0.66	43.57	54.00	10.43

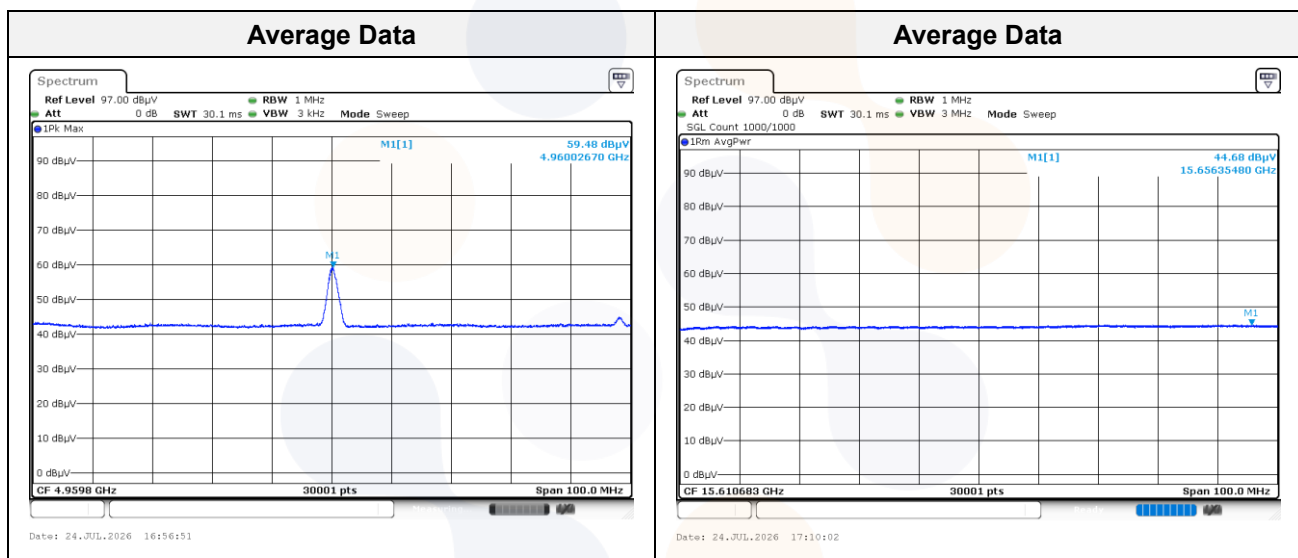


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

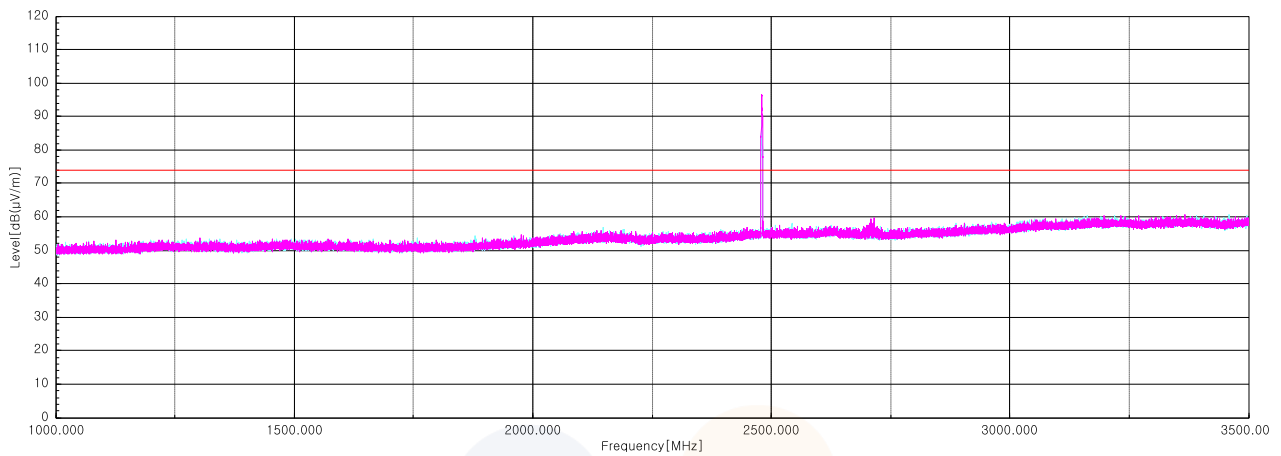


Horizontal/Vertical for 3.5 GHz ~ 5 GHz

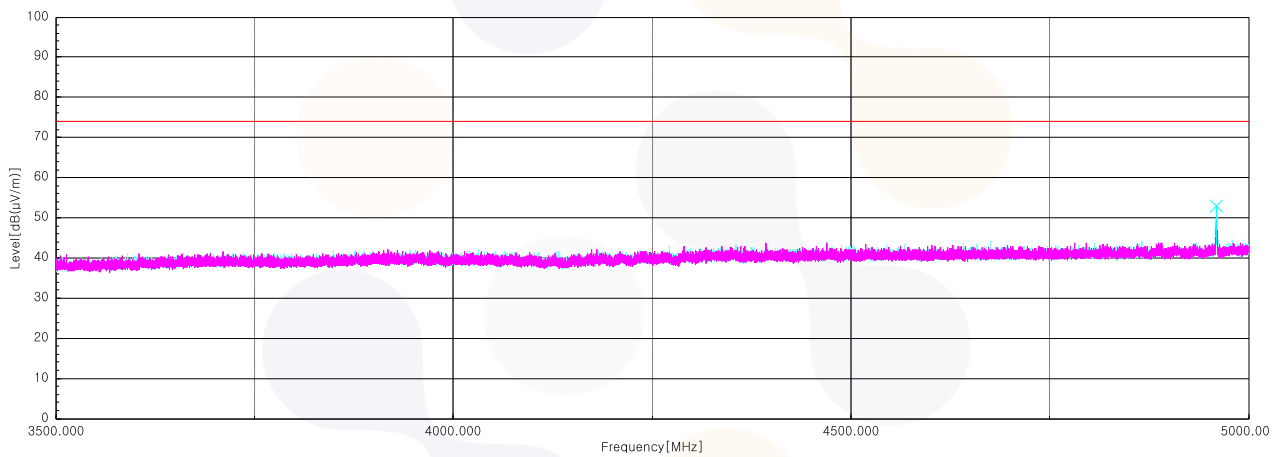


Horizontal/Vertical for 5 GHz ~ 6.5 GHz

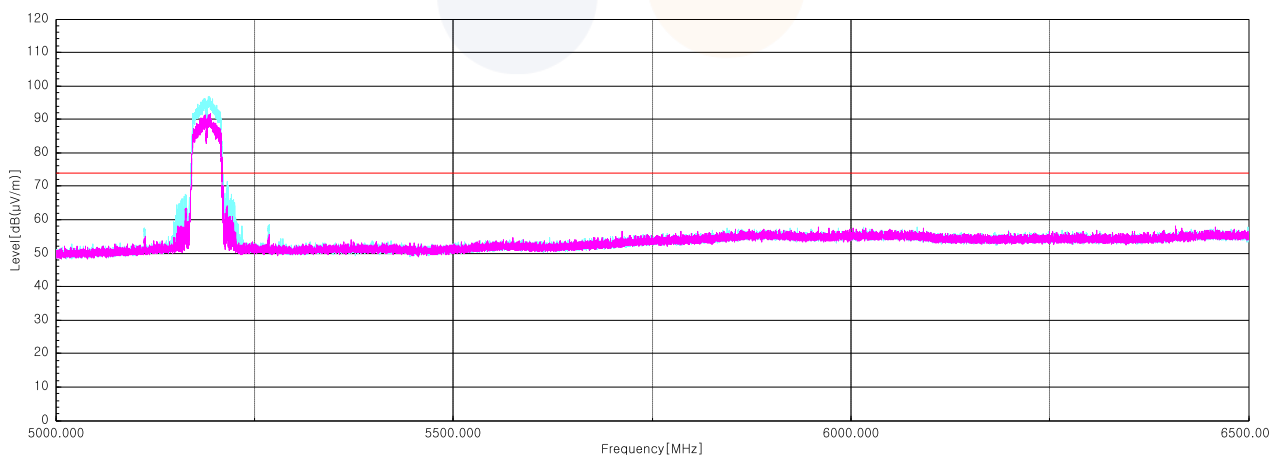

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

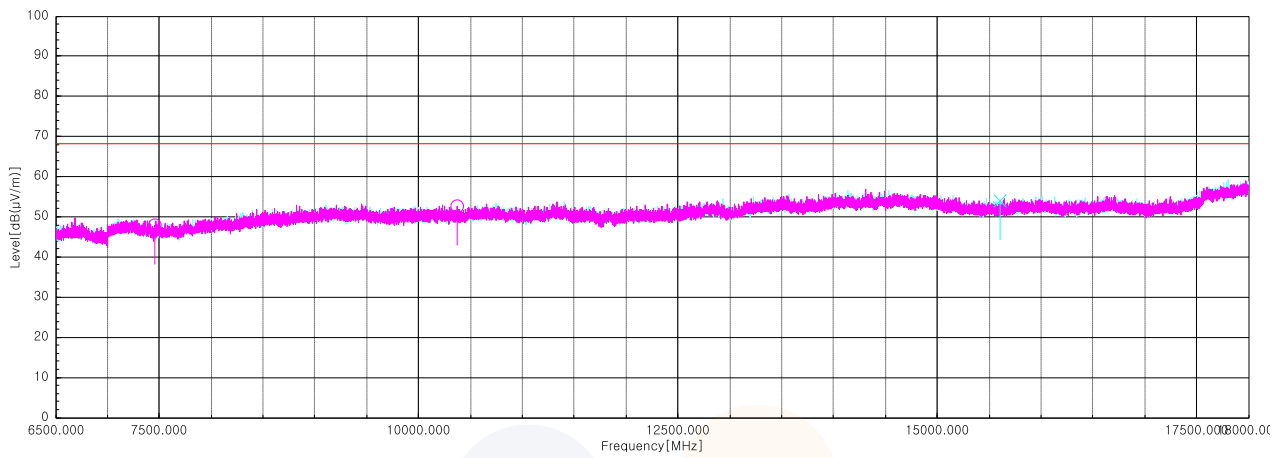


Horizontal/Vertical for 18 GHz ~ 40 GHz

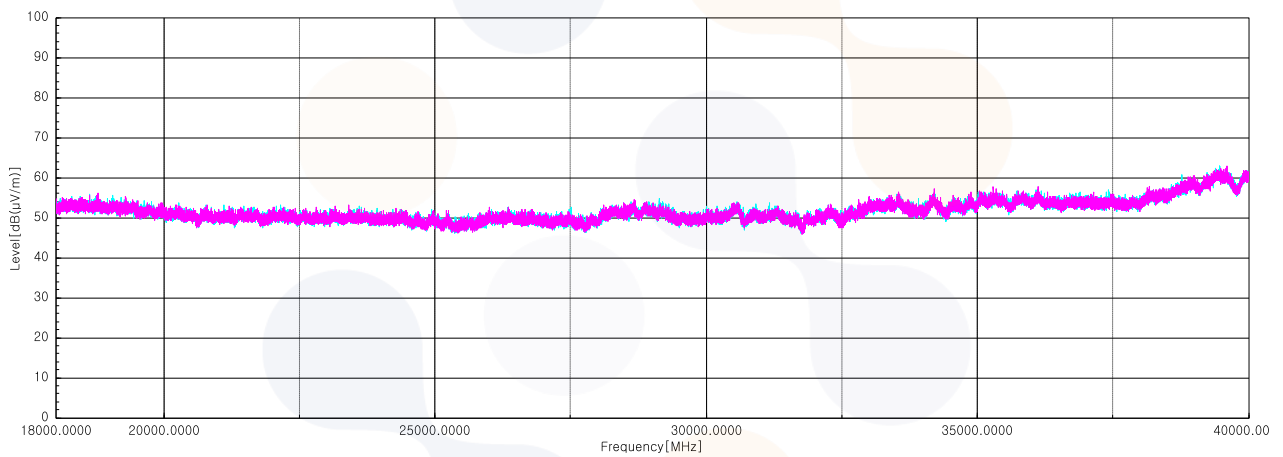

7.7. Conducted Spurious Emission

Test setup

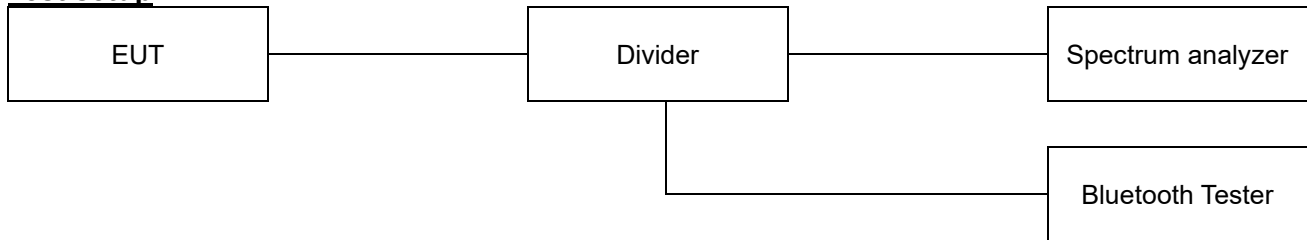

Limit

According to §15.247(d),

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operation, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation specified in §15.209(a) is not required. In addition, radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limit : 20 dBc

Test procedure

ANSI C63.10 - Section 6.10.4, 7.8.7

Test settings

▪ Band-edge

- 1) Span : Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level : As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log(\text{OBW}/\text{RBW})]$ below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred)
- 4) Sweep time = No faster than coupled (auto) time
- 5) RBW : 100 kHz
- 6) VBW : 300 kHz
- 7) Detector : Peak
- 8) Trace : Max hold


▪ Spurious emissions

- 1) Span : 30 MHz to 10 times the operating frequency in GHz
- 2) RBW : 100 kHz
- 3) VBW : 300 kHz
- 4) Sweep time : Coupled
- 5) Detector : Peak

Test results


GFSK

Conducted band-edge / Low ch.

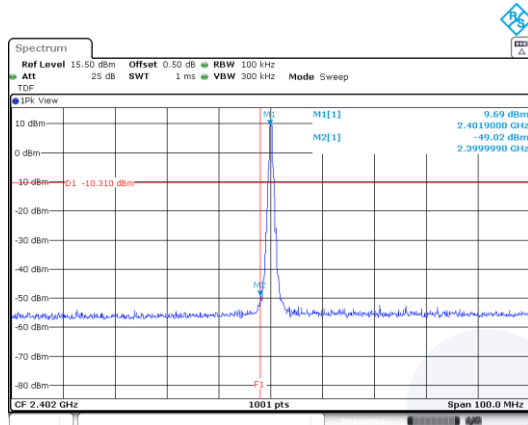


Date: 20_JUL_2026 02:14:24

Conducted spurious / Low ch.

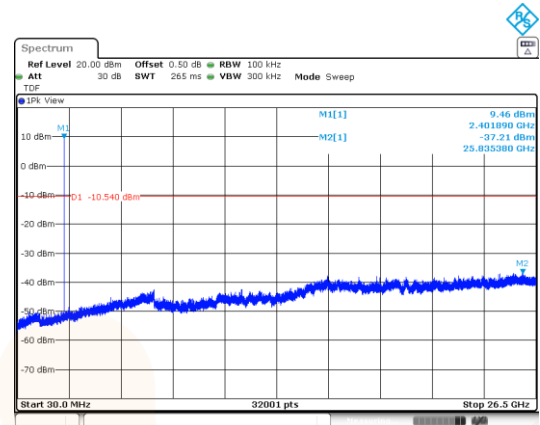


Date: 20_JUL_2026 02:24:54

Conducted band-edge / High ch.

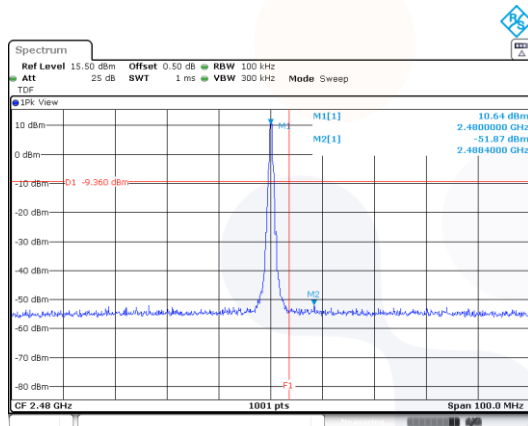


Date: 20_JUL_2026 03:55:37

Conducted spurious / Mid ch.

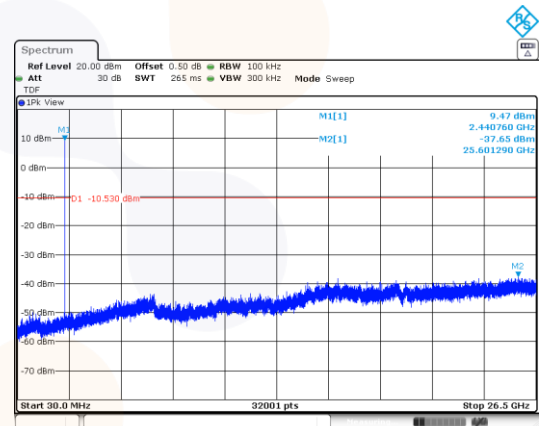


Date: 20_JUL_2026 02:16:25

Conducted band-edge / Hopping ch.

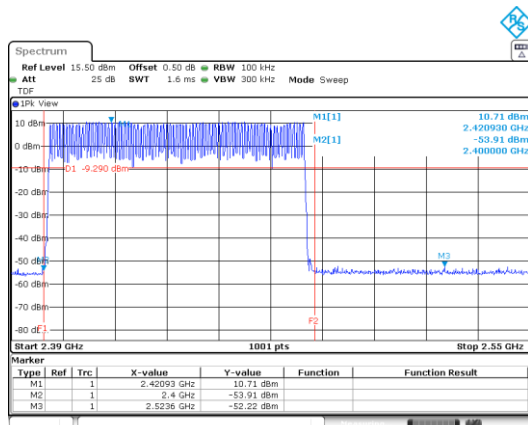

Date: 20_JUL_2026 03:57:06


Conducted spurious / High ch.

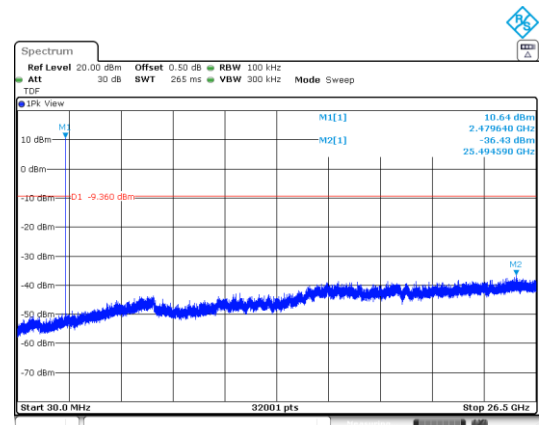


Date: 20_JUL_2026 04:00:19

8DPSK


Conducted band-edge / Low ch.

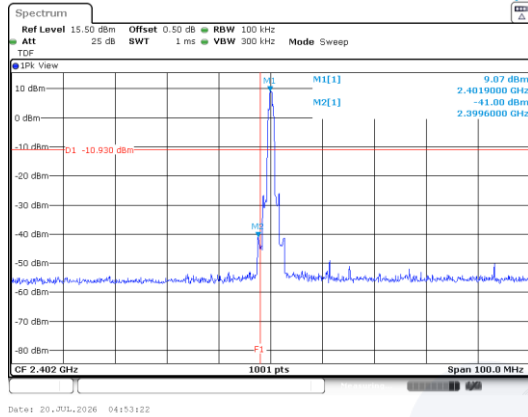


Conducted spurious / Low ch.

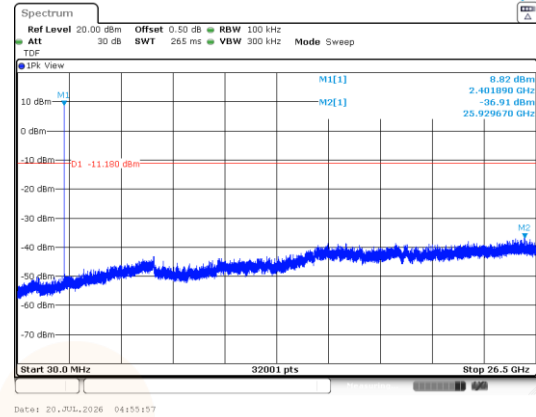


Conducted band-edge / High ch.

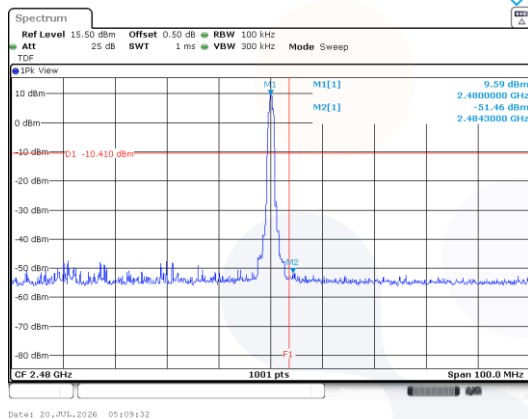


Conducted spurious / Mid ch.

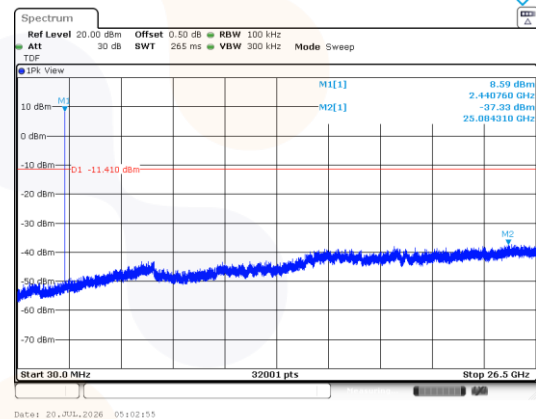

Conducted band-edge / Hopping ch.

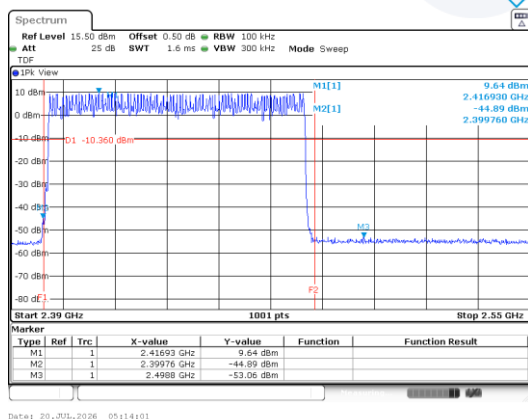


Conducted spurious / High ch.

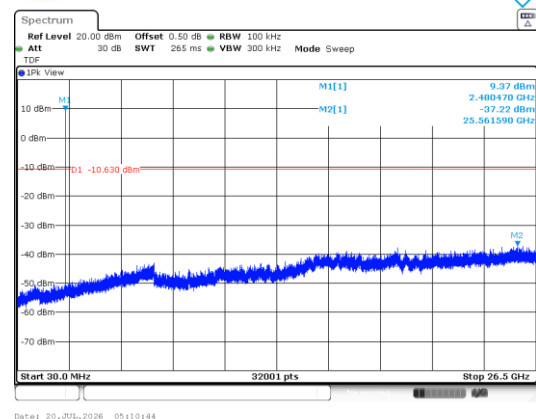

7.8. AC Conducted Emission

Test setup

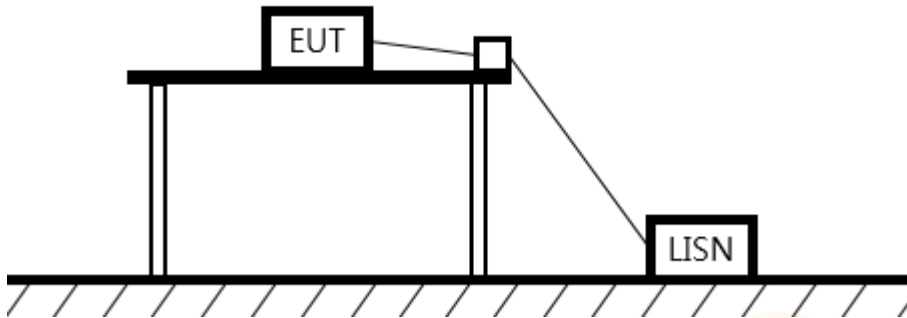

Limit

According to 15.207(a),

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50μH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall be on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.


Frequency of Emission (MHz)	Conducted limit (dBμV/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50Ω/50μH LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

Test results

Worst case: 8DPSK_2 480 MHz

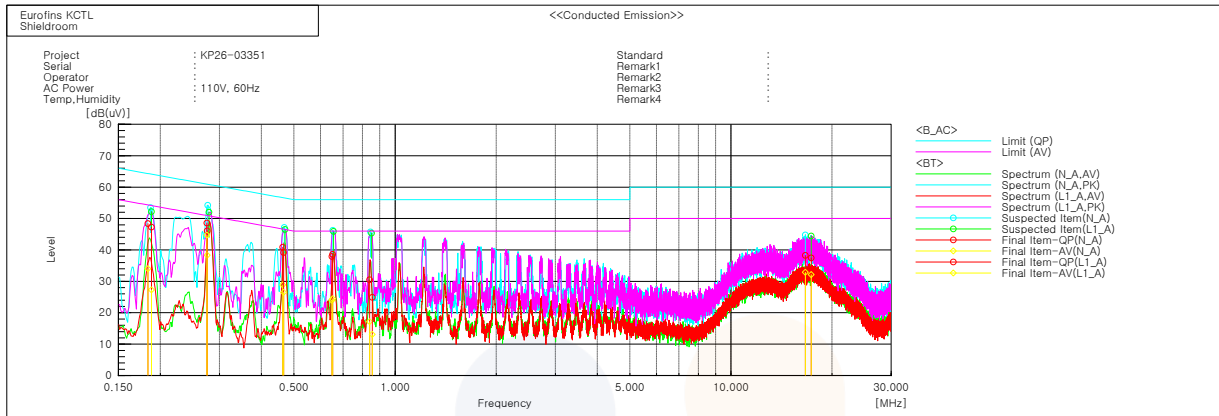

Final Result

--- N_A Phase ---									
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]
1	0.18821	36.6	16.7	10.6	47.2	27.3	64.1	54.1	16.9
2	0.27591	35.7	28.0	10.3	46.0	38.3	60.9	50.9	14.9
3	0.46276	30.2	18.3	10.6	40.8	28.9	56.6	46.6	15.8
4	0.64845	27.4	13.5	10.5	37.9	24.0	56.0	46.0	18.1
5	0.83947	20.1	6.7	10.4	30.5	17.1	56.0	46.0	25.5
6	16.65397	27.0	21.7	11.2	38.2	32.9	60.0	50.0	21.8

--- L1_A Phase ---									
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]
1	0.18355	37.8	23.4	10.6	48.4	34.0	64.3	54.3	15.9
2	0.27503	38.3	34.4	10.3	48.6	44.7	61.0	51.0	12.4
3	0.46548	28.6	16.0	10.5	39.1	26.5	56.6	46.6	17.5
4	0.65146	28.1	13.9	10.5	38.6	24.4	56.0	46.0	17.4
5	0.85543	14.5	2.7	10.4	24.9	13.1	56.0	46.0	31.1
6	17.33705	26.2	20.8	11.3	37.5	32.1	60.0	50.0	22.5

8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Bluetooth Tester	TESCOM	TC-3000C	3000C000270	27.04.24
Spectrum Analyzer	R&S	FSV30	100914	27.04.23
Signal Generator	R&S	SMB100A	176206	27.01.15
DC Power Supply	AGILENT	E3632A	KR94907664	27.04.23
Power Sensor	R&S	NRP-Z81	1137.9009.02-106223-bB	27.04.24
Attenuator	R&S	DNF	0007	27.01.15
Power Divider	Aeroflex/ Weinschel, Inc	1580-1	NX380	27.04.28
Attenuator	PASTERNAK	PE7090-10	1928	27.01.12
Spectrum Analyzer	R&S	FSVA40	101575	27.04.23
Broadband Pre-Amplifier	SCHWARZBECK	BBV9718D	57	27.01.15
Low Noise Amplifier	TESTEK	TK-PA18H	220124-L	26.09.29
Low Noise Amplifier	TESTEK	TK-PA1840H	220133-L	26.10.13
Horn Antenna	SCHWARZBECK	BBHA9120D	2763	26.10.02
Horn Antenna	SCHWARZBECK	BBHA9170	1267	26.10.02
High Pass Filter	QOTANA TECHNOLOGIE S	DBHF0508004000A	23041800061	27.04.28
High Pass Filter	Wainwright Instruments GmbH	WHKX12-2805-3000-18000-40SS	SN58	26.09.30
Bluetooth Tester	TESCOM	TC-3000B	3000B640056	27.01.15
Spectrum Analyzer	R&S	FSV40	100988	27.04.06
Amplifier	SONOMA INSTRUMENT	310N	421910	27.07.06*
Bi-log Antenna	Teseq GmbH	CBL 6112D	61521	26.12.11
Loop Antenna	R&S	HFH2-Z2	100355	28.06.29
Vector Signal Generator	R&S	SMBV100A	257566	27.07.06*
TWO-LINE V - NETWORK	R&S	ENV216	101584	27.03.24
EMI TEST RECEIVER	R&S	ESCI3	101428	27.08.11

*This equipment was calibrated during the test period, and was used after calibration.

End of test report