



FCC RADIO TEST REPORT

FCC ID : 2BO3L-16U55U
Equipment : Notebook Computer
Brand Name : LG
Model Name : 16U55U
Series Model Name : 16UG55U,16UD55U,16UB55U,16US55U,16UT55U, 16U55U*(* can be 0 to 9 or A to Z or blank denoting buyer request)
Applicant : LG Electronics USA, Inc.
111 Sylvan Avenue North Building Englewood Cliffs, NJ 07632 United States
Manufacturer : LG ELECTRONICS INC.
Standard : FCC Part 15 Subpart C §15.247

The product was received on Nov. 05, 2025 and testing was performed from Nov. 24, 2025 to Jan. 05, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 List of Measuring Equipment	22
5 Measurement Uncertainty	23
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Result	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR5N0519B	01	Initial issue of report	Jan. 28, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sheng Kuo

Report Producer: Aya Yang



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax	
Antenna Type WLAN <Main>: PIFA Antenna <Aux.>: PIFA Antenna Bluetooth: PIFA Antenna	
Integrated WLAN module	Brand Name: MediaTek Model Name: MT7922A12L

Antenna Information		
Antenna	Manufacturer	Yageo
	Antenna Type	PIFA Antenna
	Model number	DQ603299000 (TQ32990)
	Peak gain (dBi)	Aux. Antenna: Bluetooth: 6.12

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary



1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2020

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: WLAN (2.4GHz) TX + USB HD*2 + Earphone + Monitor + Ipod + Adapter
	Mode 2: BT TX + USB HD*2 + Earphone + Monitor + Ipod + Adapter
Remark: - The worst case of Conducted Emission is mode 2; only the test data of it was reported. - The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

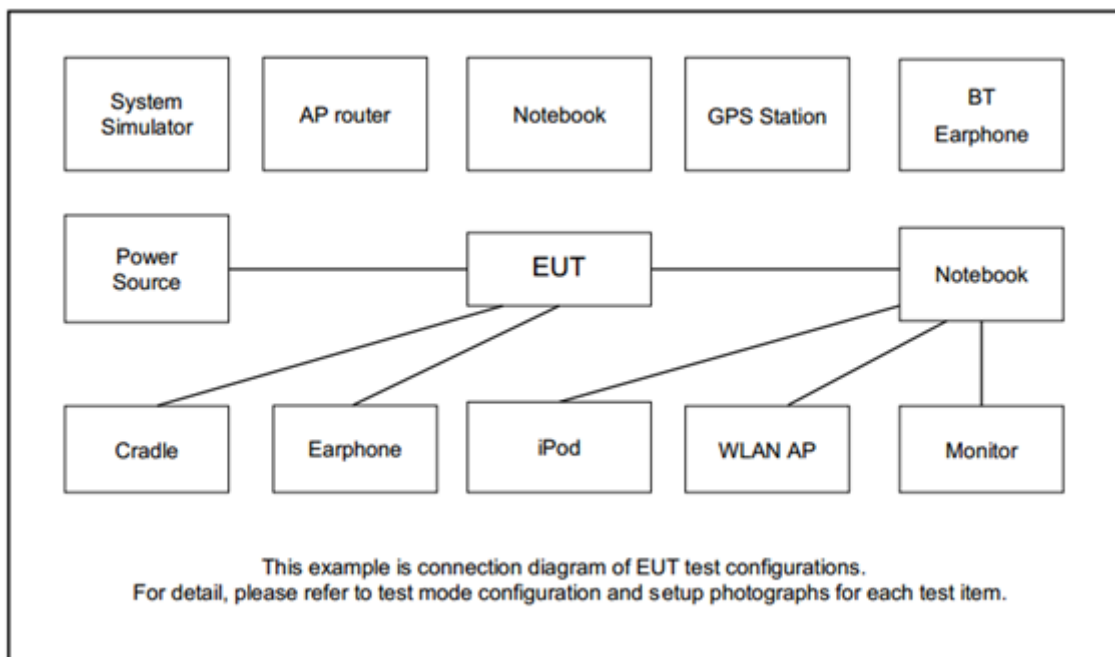

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	iPod	Apple	A1199	DoC	Shielded, 1.0m	N/A
2.	Earphone + Mic	Samsung	Ecouteur	N/A	Unshielded 1.8m	N/A
3.	LCD MONITOR	Dell	ST2220Lb	FCC DoC	Shielded, 1.6m	Unshielded, 1.8m
4.	USB HD	ADATA	HV620S-1T	FCC DoC	Shielded, 0.5m	N/A
5.	USB HD	WD	WDBPCK50000ABK-PESN	FCC DoC	Shielded, 0.5m	N/A
6.	Earphone	Apple	A1285	N/A	shielded, 1.2m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility "WCN Combo Tool #1" was installed in EUT which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth VBW $\geq 3 * RBW$. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth, and set the Video bandwidth (VBW) $\geq 3 * RBW$.
5. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = No faster than coupled (auto) time, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

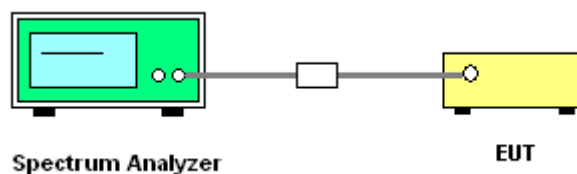

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

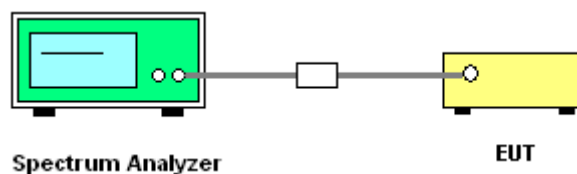

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

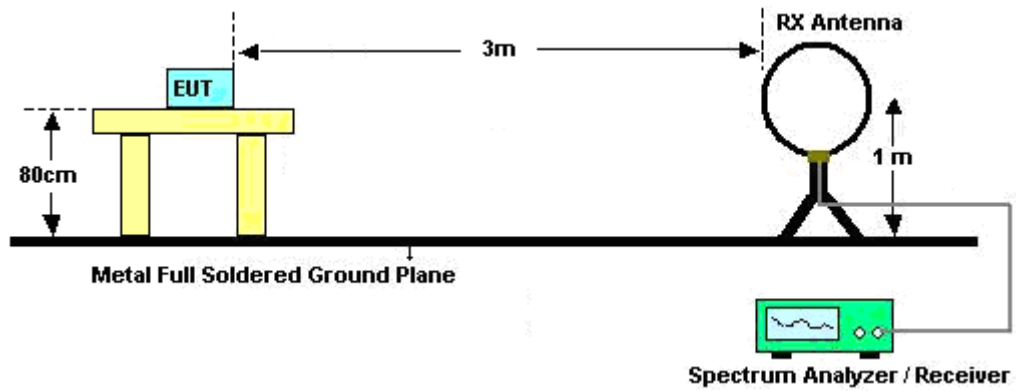


For radiated test from 30MHz to 1GHz

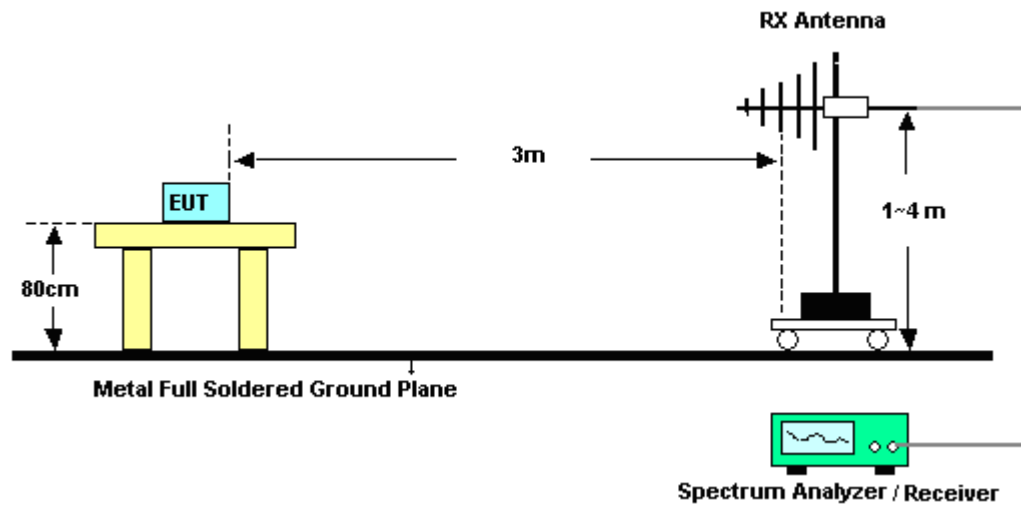

For radiated test from 1GHz to 18GHz

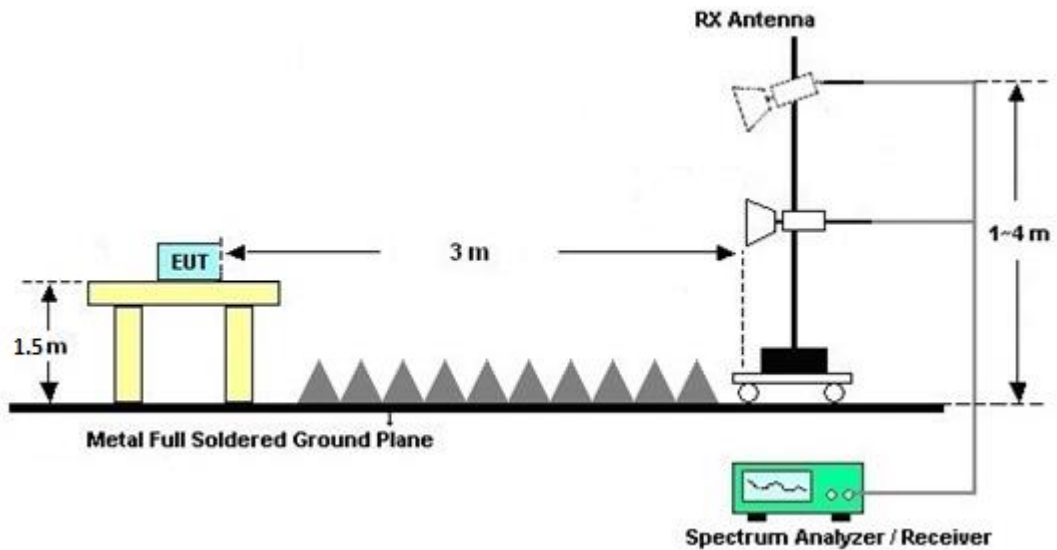

For radiated test above 18GHz

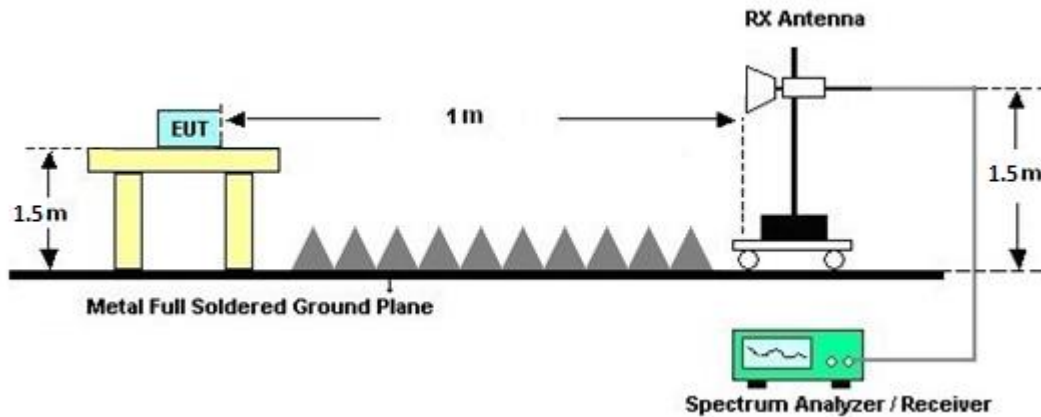

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
6. The frequency range from 150 kHz to 30 MHz is scanned.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

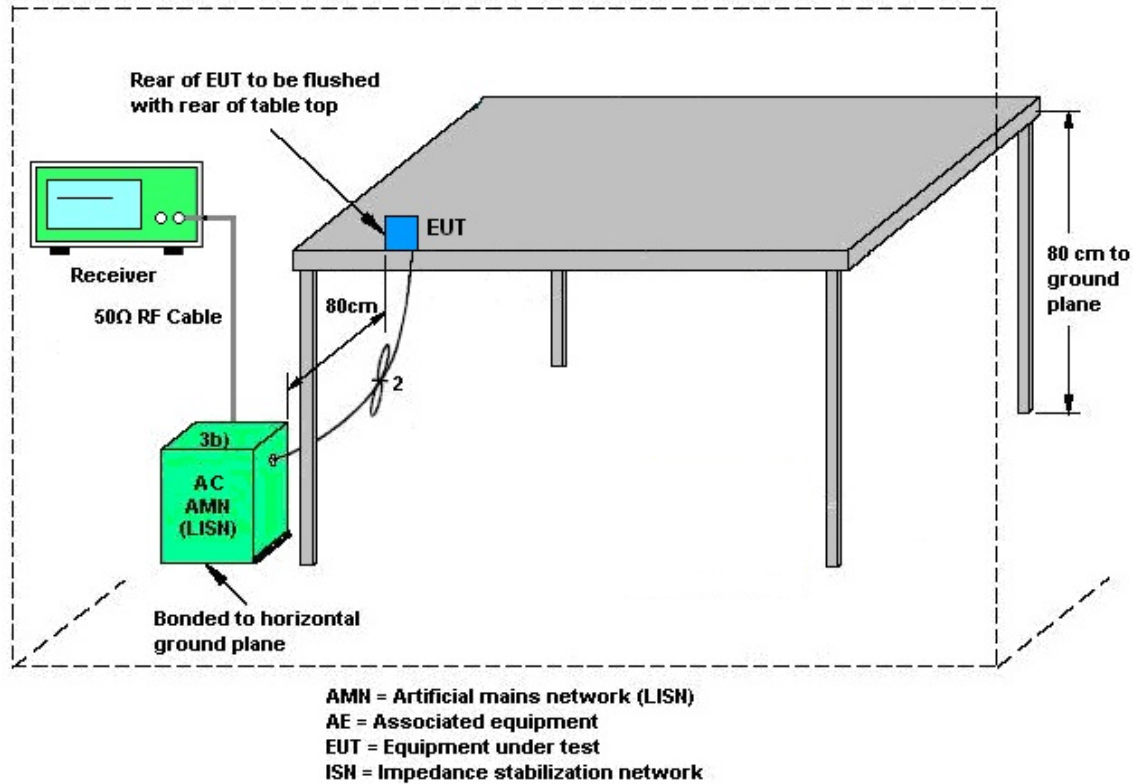

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Unique (non-standard) antenna connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Nov. 24, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Nov. 24, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2025	Nov. 24, 2025	Oct. 19, 2026	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	Nov. 24, 2025	Mar. 02, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Nov. 24, 2025	Mar. 23, 2026	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 26, 2025	Nov. 24, 2025	Mar. 25, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI7	100724	9kHz~7GHz	Feb. 13, 2025	Nov. 24, 2025	Feb. 12, 2026	Conduction (CO07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	100315	9 kHz~30 MHz	Mar. 06, 2025	Nov. 26, 2025~Dec. 22, 2025	Mar. 05, 2026	Radiation (03CH23-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N-06	47020 & 06	30MHz~1GHz	Oct. 04, 2025	Nov. 26, 2025~Dec. 22, 2025	Oct. 03, 2026	Radiation (03CH23-HY)
Amplifier	SONOMA	310N	421582	9kHz~1GHz	Jul. 13, 2025	Nov. 26, 2025~Dec. 22, 2025	Jul. 12, 2026	Radiation (03CH23-HY)
Amplifier	EMEC	EM01G18GA	060878	1GHz~18GHz	Sep. 26, 2025	Nov. 26, 2025~Dec. 22, 2025	Sep. 25, 2026	Radiation (03CH23-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C05A18E N	1GHz~18GHz	Jul. 02, 2025	Nov. 26, 2025~Dec. 22, 2025	Jul.01, 2026	Radiation (03CH23-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1225	18GHz-40GHz	Jul. 02, 2025	Nov. 26, 2025~Dec. 22, 2025	Jul. 01, 2026	Radiation (03CH23-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz-40GHz	Aug. 26, 2025	Nov. 26, 2025~Dec. 22, 2025	Aug. 25, 2026	Radiation (03CH23-HY)
Signal Analyzer	Keysight	N9010B	MY62170337	10Hz~44GHz	Aug. 26, 2025	Nov. 26, 2025~Dec. 22, 2025	Aug. 25, 2026	Radiation (03CH23-HY)
Hygrometer	TECPEL	DTM-303A	TP210001	N/A	Nov. 06, 2025	Nov. 26, 2025~Dec. 22, 2025	Nov. 05, 2026	Radiation (03CH23-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Nov. 26, 2025~Dec. 22, 2025	N/A	Radiation (03CH23-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Nov. 26, 2025~Dec. 22, 2025	N/A	Radiation (03CH23-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Nov. 26, 2025~Dec. 22, 2025	N/A	Radiation (03CH23-HY)
Software	Audix	E3 6.09824_2019122	RK-002348	N/A	N/A	Nov. 26, 2025~Dec. 22, 2025	N/A	Radiation (03CH23-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804395/2	30MHz~40GHz	Nov. 25, 2025	Nov. 26, 2025~Dec. 22, 2025	Nov. 24, 2026	Radiation (03CH23-HY)
RF Cable	EMC	EMC101Y	231115/231119/231122	30MHz~40GHz	Nov. 25, 2025	Nov. 26, 2025~Dec. 22, 2025	Nov. 24, 2026	Radiation (03CH23-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Nov. 24, 2025~Jan. 05, 2026	Nov. 03, 2026	Conducted (TH05-HY)
Power Sensor	Raditeq	RPR3008W	RPR8W-2301001(NO:146)	10MHz~8GHz	Nov. 14, 2025	Nov. 24, 2025~Jan. 05, 2026	Nov. 13, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101468	10HZ~44GHZ	Mar. 13, 2025	Nov. 24, 2025~Jan. 05, 2026	Mar. 12, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Nov. 24, 2025~Jan. 05, 2026	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final version_240823	N/A	Conducted Other Test Item	N/A	Nov. 24, 2025~Jan. 05, 2026	N/A	Conducted (TH05-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Sylvia Li	Temperature:	21~25	°C
Test Date:	2025/11/24~2026/01/05	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.034	0.710	0.50	Pass
BLE	1Mbps	1	19	2440	1.034	0.713	0.50	Pass
BLE	1Mbps	1	39	2480	1.033	0.704	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	11.70	30.00	6.12	17.82	36.00	Pass
BLE	1Mbps	1	19	2440	11.60	30.00	6.12	17.72	36.00	Pass
BLE	1Mbps	1	39	2480	11.60	30.00	6.12	17.72	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	11.16	-3.30	6.12	7.88	Pass
BLE	1Mbps	1	19	2440	10.88	-3.58	6.12	7.88	Pass
BLE	1Mbps	1	39	2480	11.08	-3.43	6.12	7.88	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.059	1.236	0.50	Pass
BLE	2Mbps	1	19	2440	2.059	1.236	0.50	Pass
BLE	2Mbps	1	39	2480	2.059	1.234	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	11.60	30.00	6.12	17.72	36.00	Pass
BLE	2Mbps	1	19	2440	11.60	30.00	6.12	17.72	36.00	Pass
BLE	2Mbps	1	39	2480	11.50	30.00	6.12	17.62	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	10.85	-5.47	6.12	7.88	Pass
BLE	2Mbps	1	19	2440	10.58	-5.75	6.12	7.88	Pass
BLE	2Mbps	1	39	2480	10.92	-5.41	6.12	7.88	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




Number of TX = 1, Ant. 2 (Measured)


6dB Bandwidth

<1M>


6 dB Bandwidth Plot on Channel 00

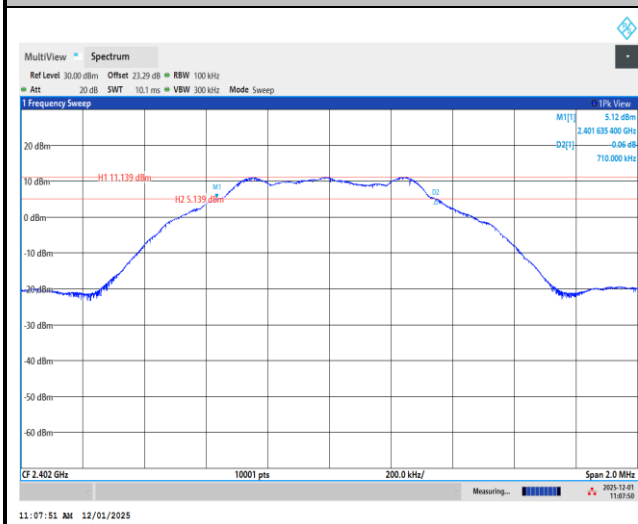

6 dB Bandwidth Plot on Channel 19

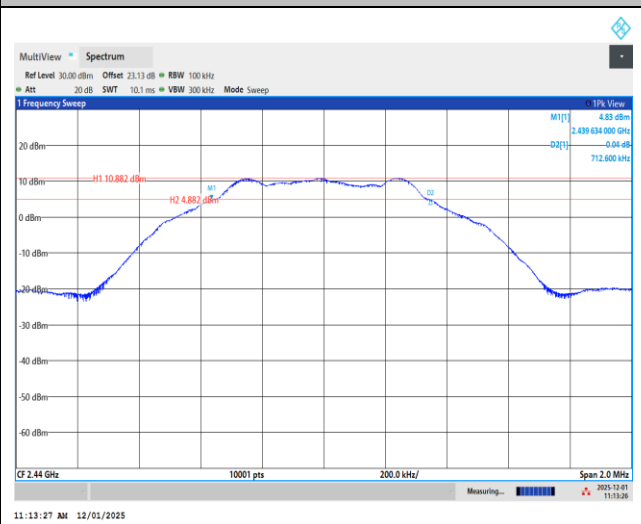


6 dB Bandwidth Plot on Channel 39

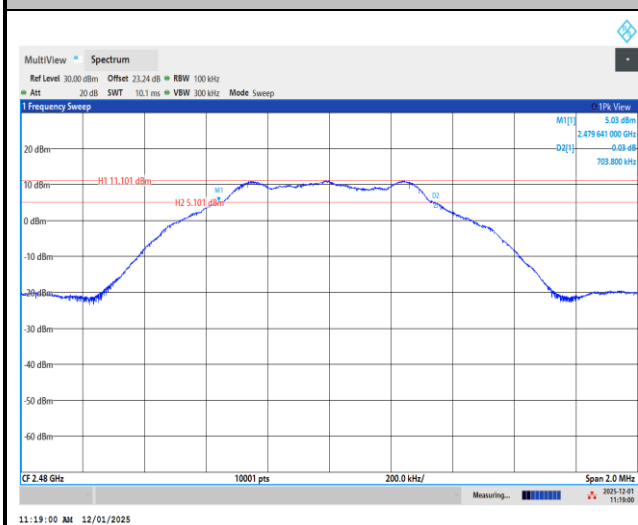




<2M>


6 dB Bandwidth Plot on Channel 00

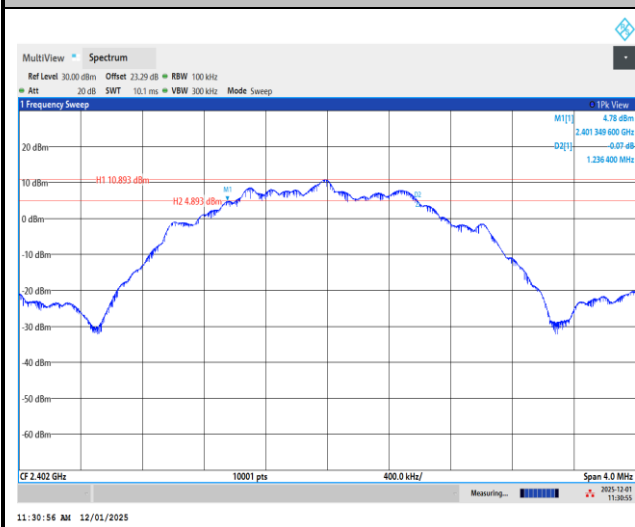

6 dB Bandwidth Plot on Channel 19



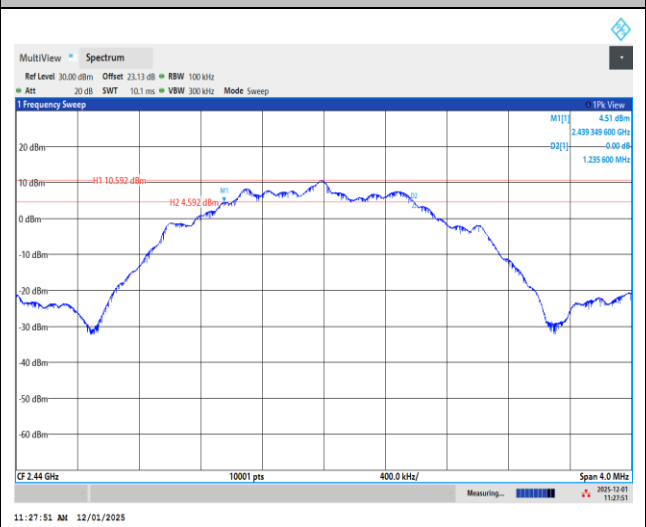


6 dB Bandwidth Plot on Channel 39

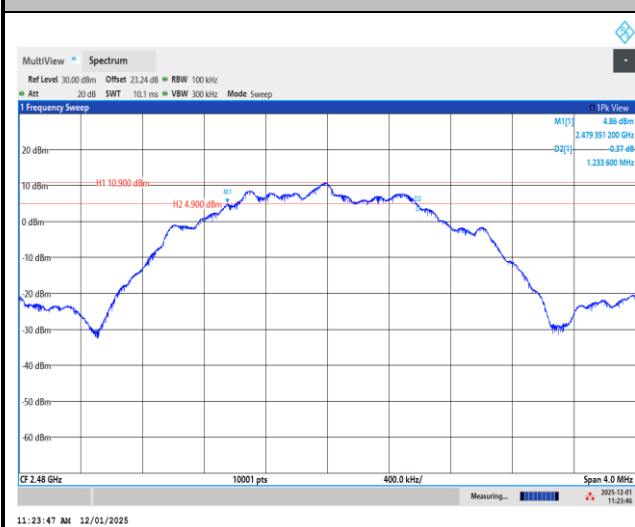

**99% Occupied Bandwidth**


<1M>

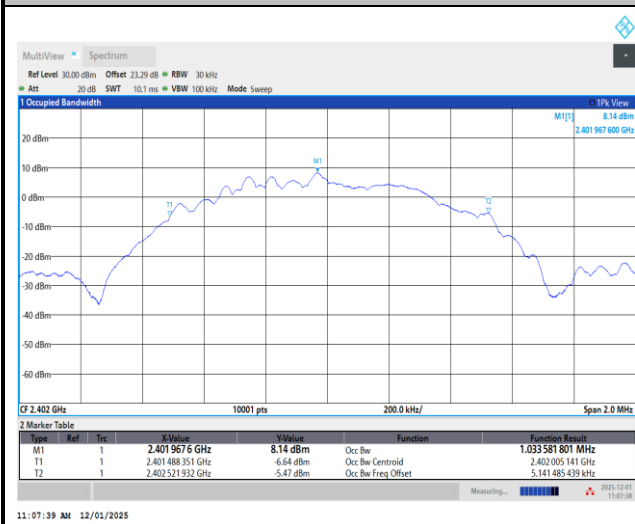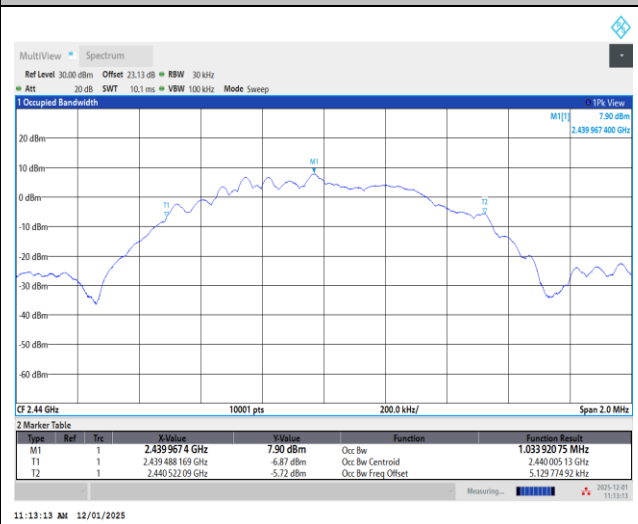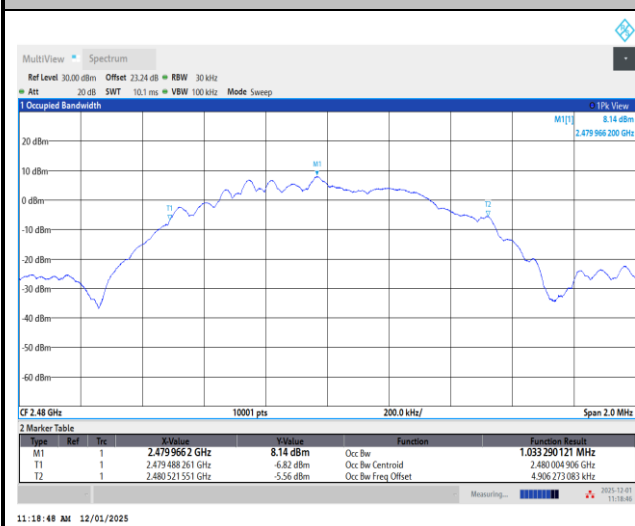99% Occupied Bandwidth Plot on Channel 00**99% Occupied Bandwidth Plot on Channel 19****99% Occupied Bandwidth Plot on Channel 39**




<2M>


99% Occupied Bandwidth Plot on Channel 00

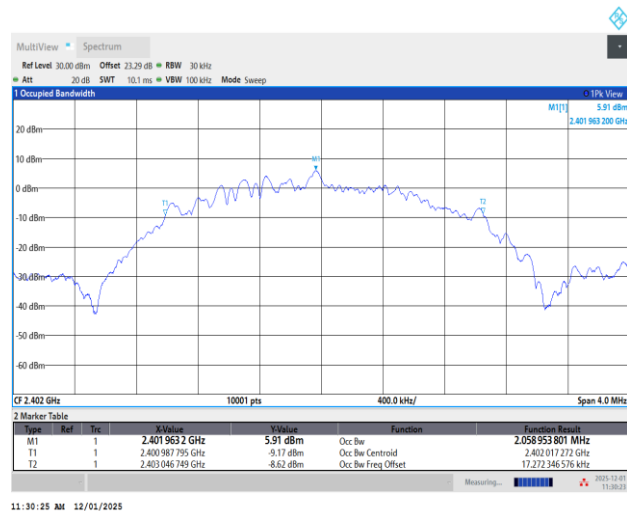

99% Occupied Bandwidth Plot on Channel 19



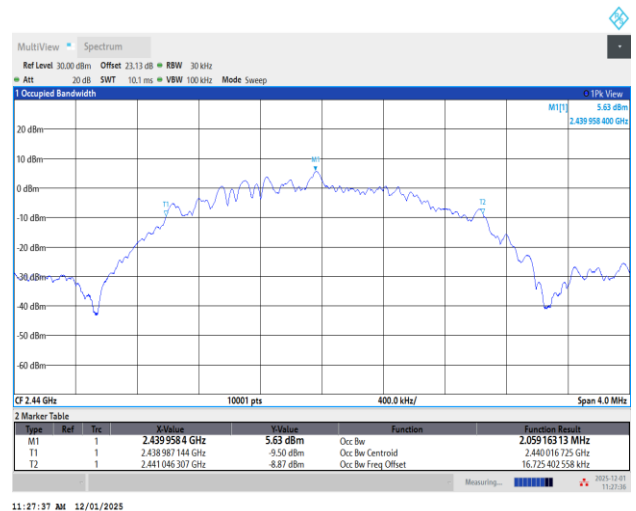


99% Occupied Bandwidth Plot on Channel 39

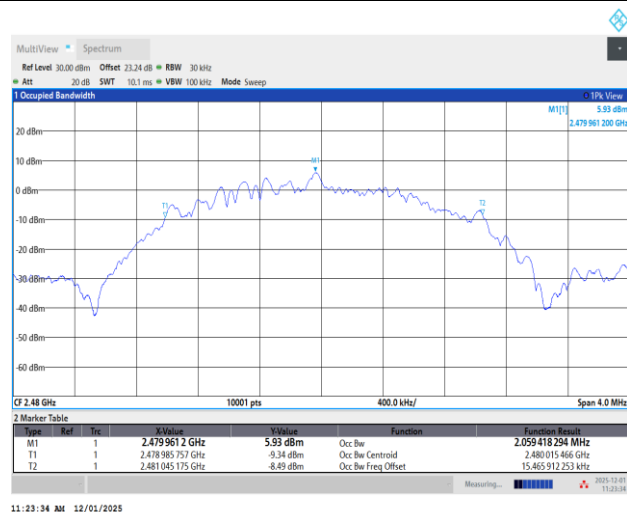

**Power Spectral Density (dBm/3kHz)**


<1M>

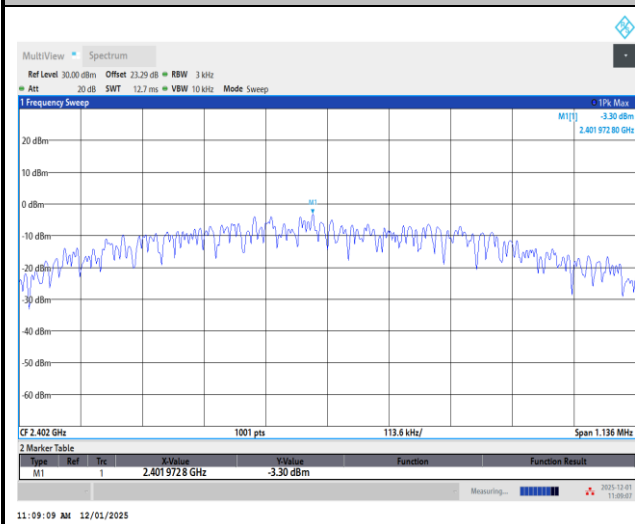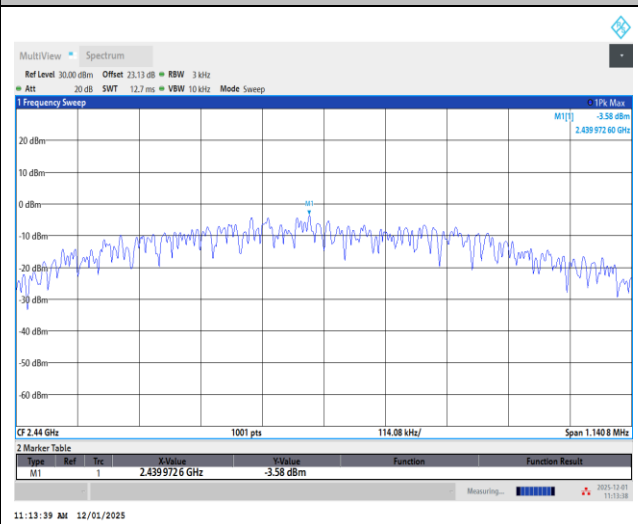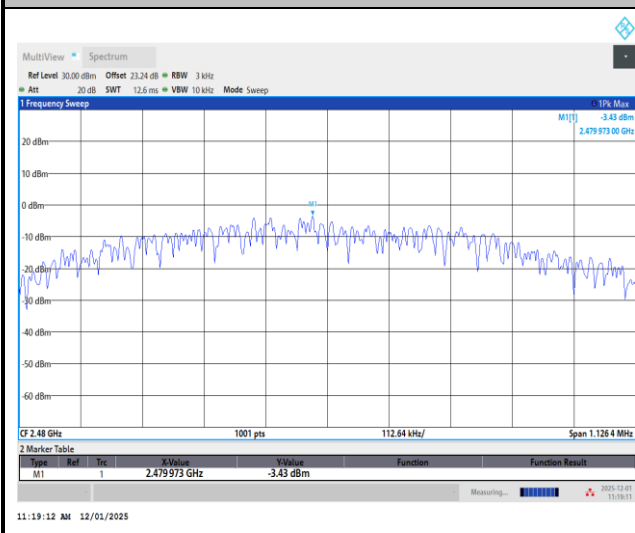Power Density (dBm/3kHz) Plot Channel 00**Power Density (dBm/3kHz) Plot Channel 19****Power Density (dBm/3kHz) Plot Channel 39**




<2M>


Power Density (dBm/3kHz) Plot Channel 00

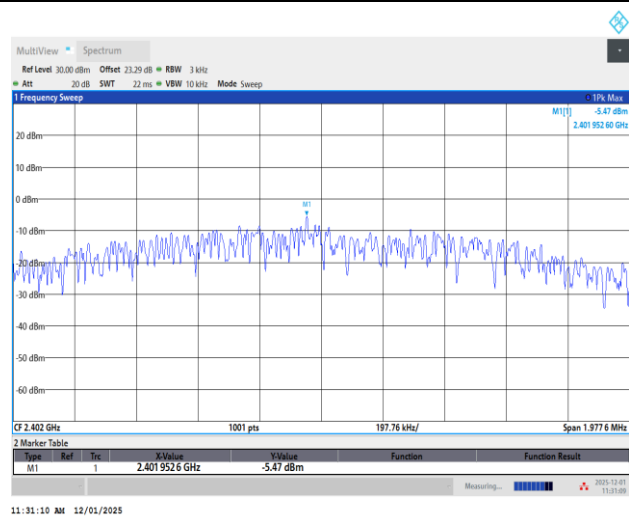

Power Density (dBm/3kHz) Plot Channel 19




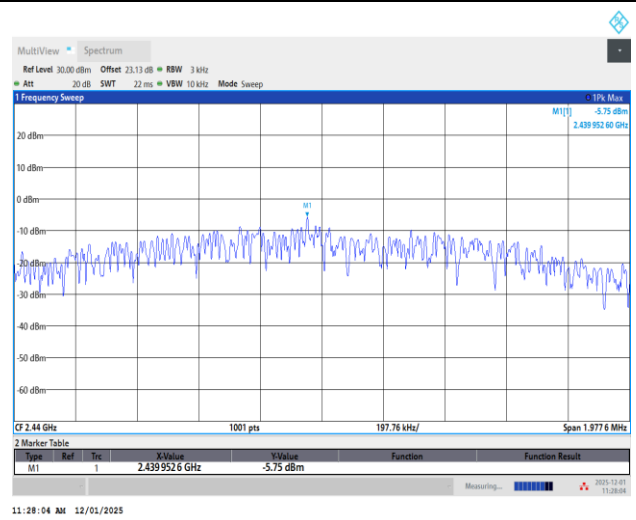


Power Density (dBm/3kHz) Plot Channel 39

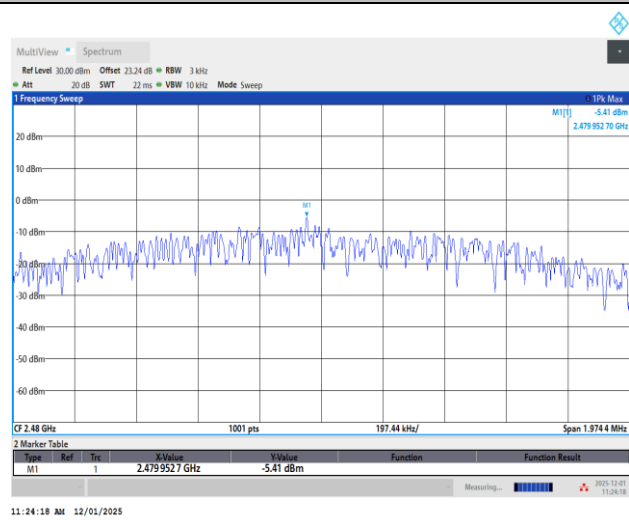

**Band Edge and Conducted Spurious Emission**


<1M>

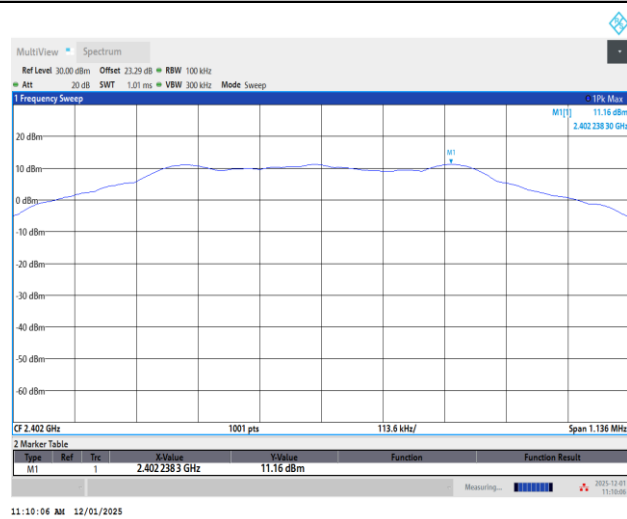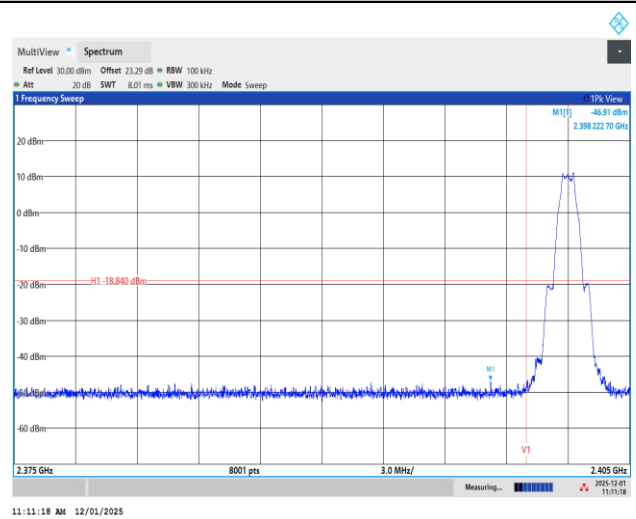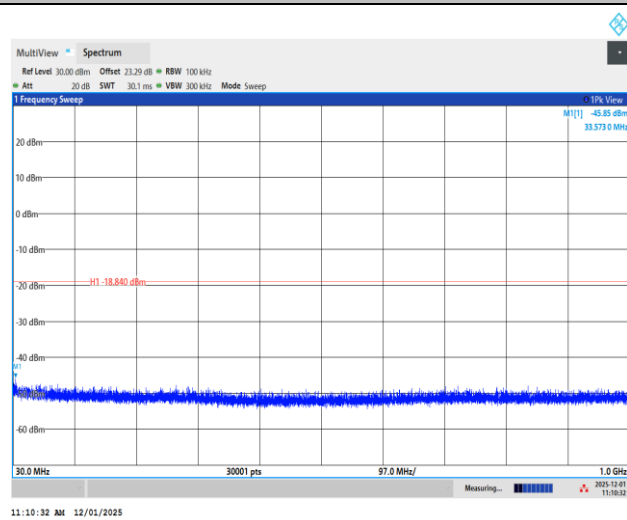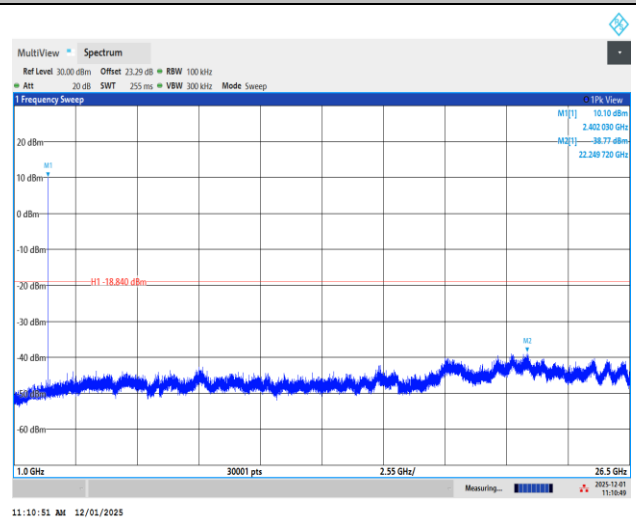Channel 00**100kHz PSD reference Level Plot****Plot on Channel 00****Spurious Emission 30MHz~1GHz Plot****Spurious Emission 1GHz~26.5GHz Plot**




Channel 19


100kHz PSD reference Level Plot

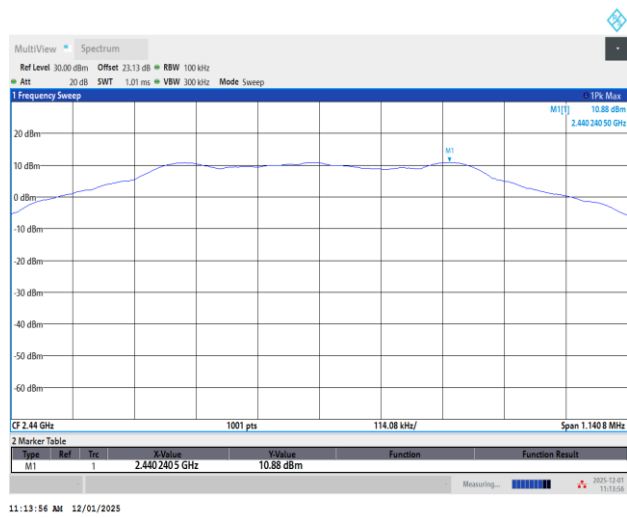

Spurious Emission 30MHz~1GHz Plot

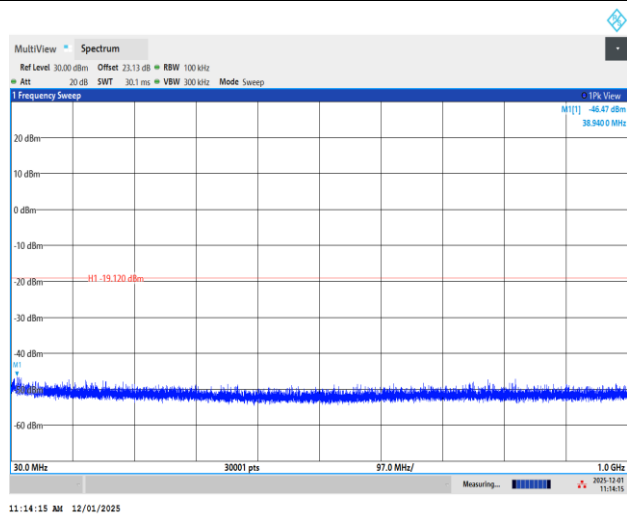


Spurious Emission 1GHz~26.5GHz Plot

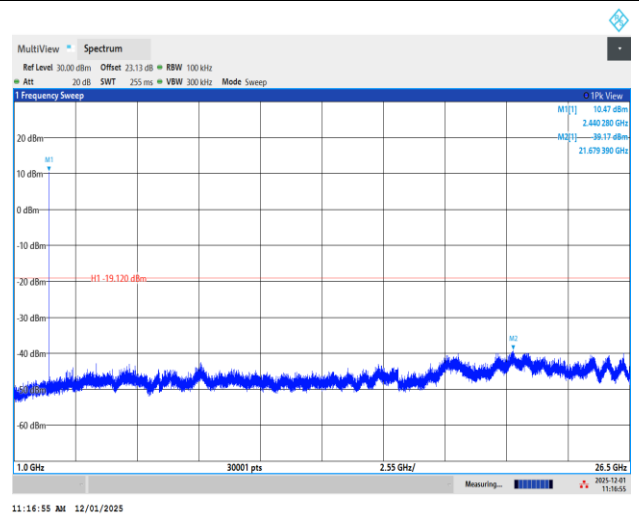




Channel 39


100kHz PSD reference Level Plot

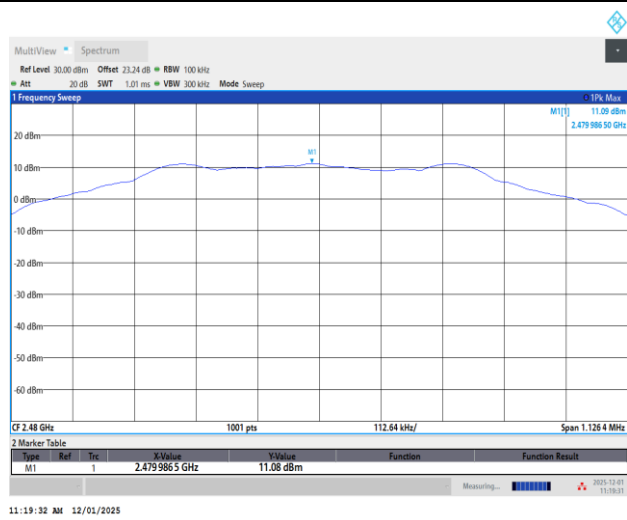


Plot on Channel 39

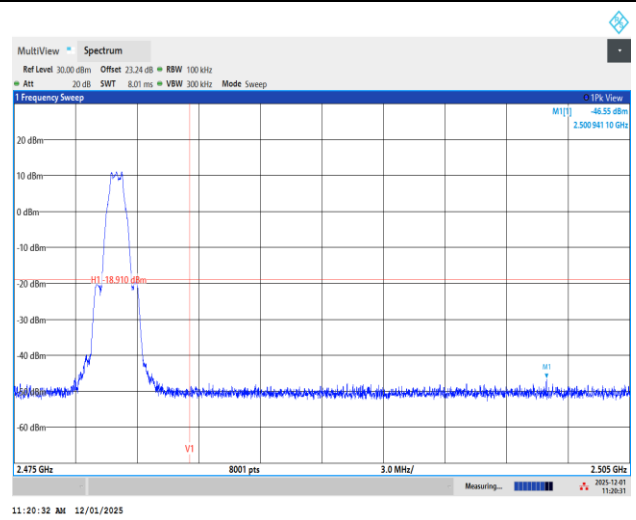

Spurious Emission 30MHz~1GHz Plot

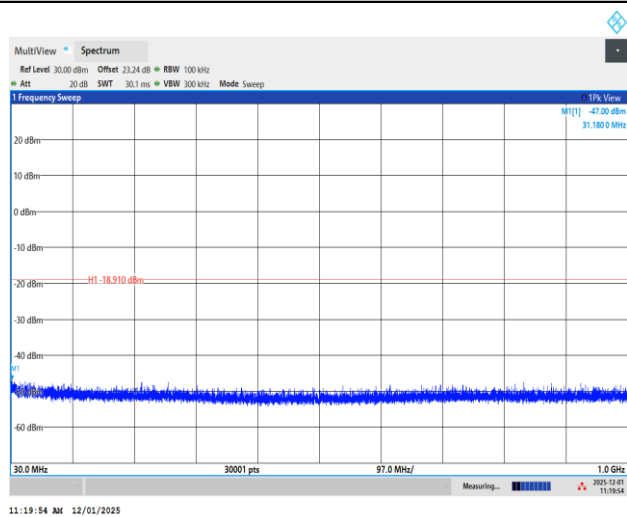


Spurious Emission 1GHz~26.5GHz Plot

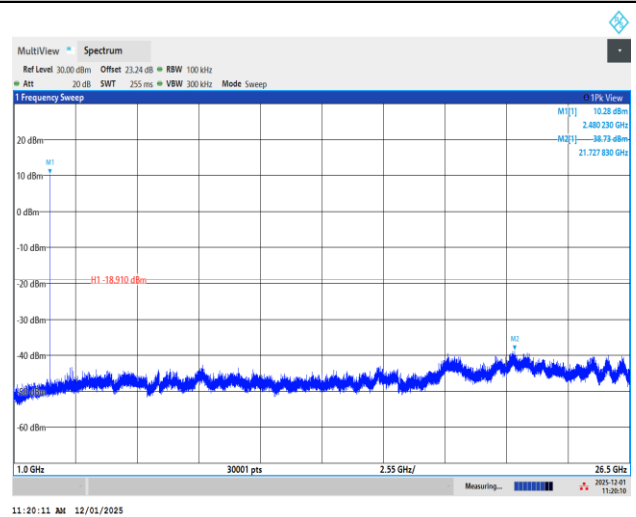




<2M>

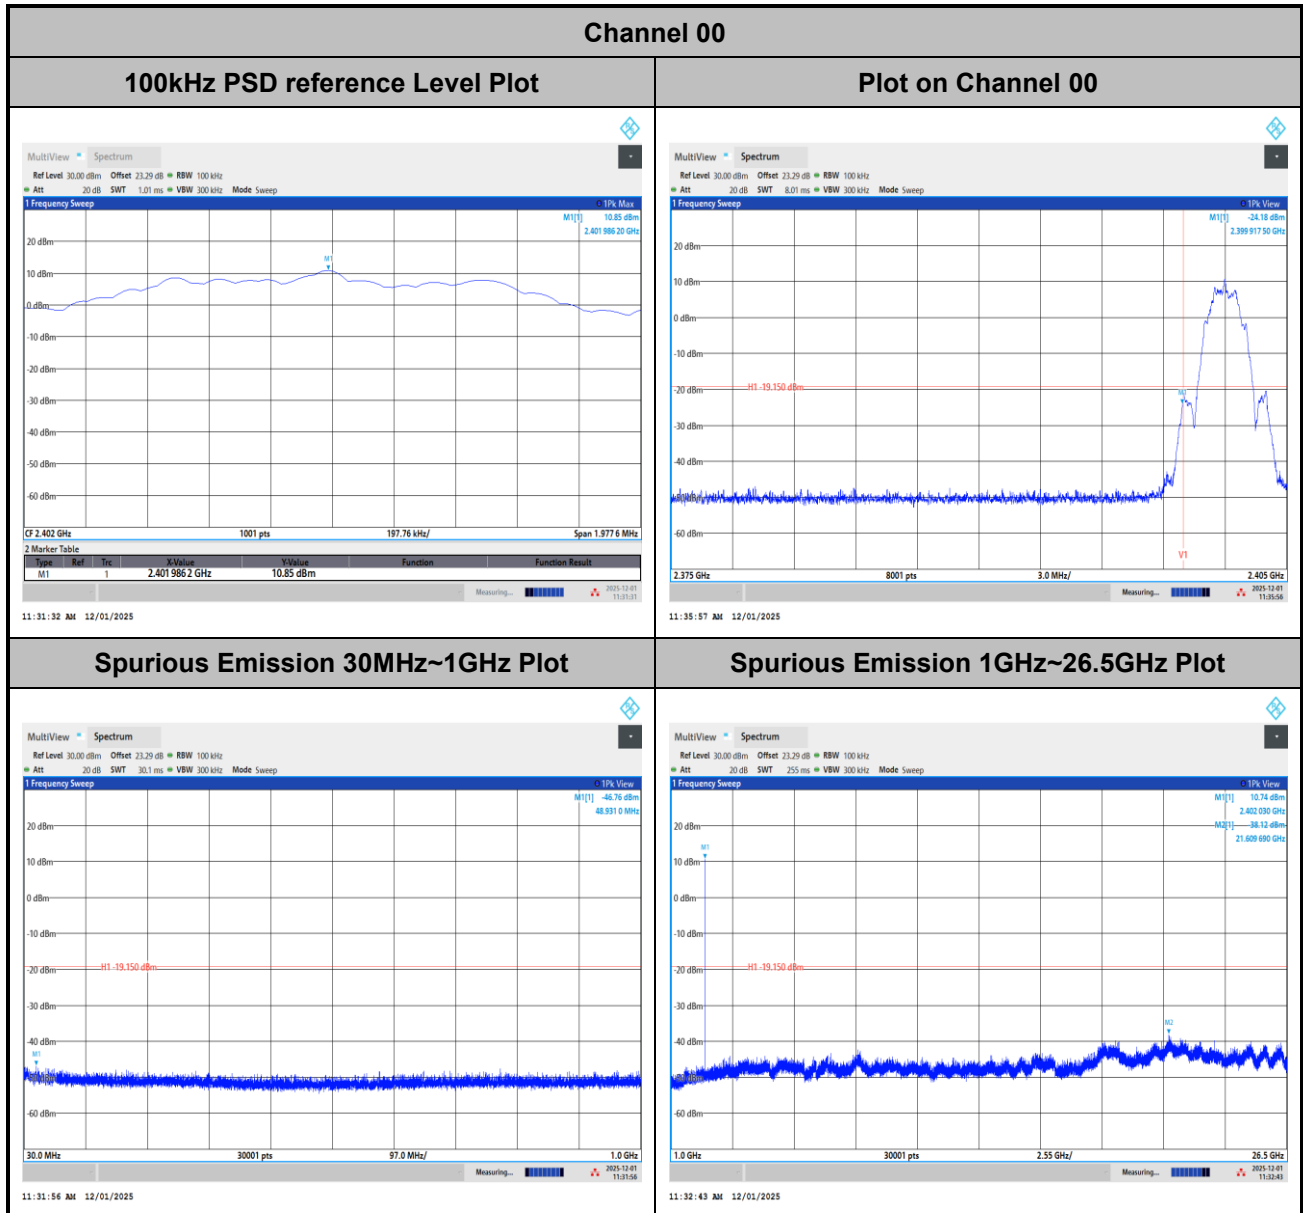




Channel 19


100kHz PSD reference Level Plot

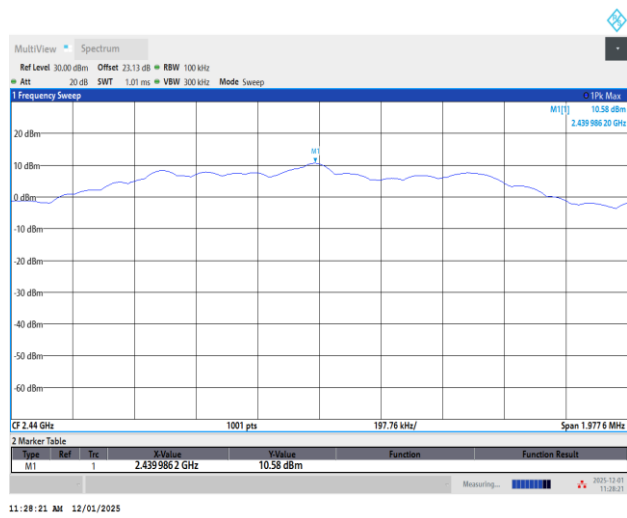

Spurious Emission 30MHz~1GHz Plot

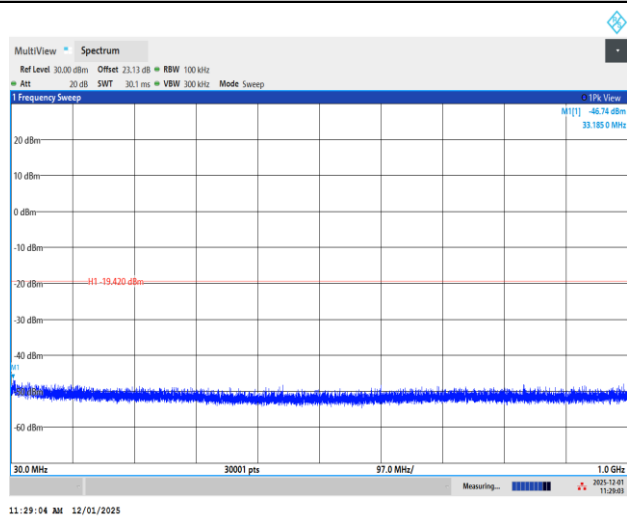


Spurious Emission 1GHz~26.5GHz Plot

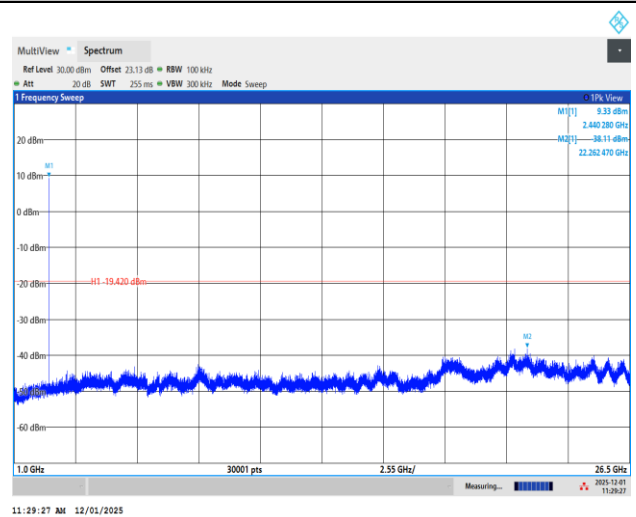




Channel 39


100kHz PSD reference Level Plot

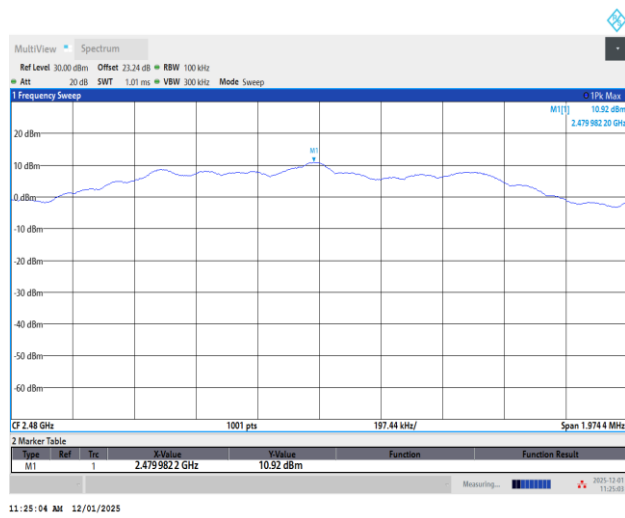


Plot on Channel 39

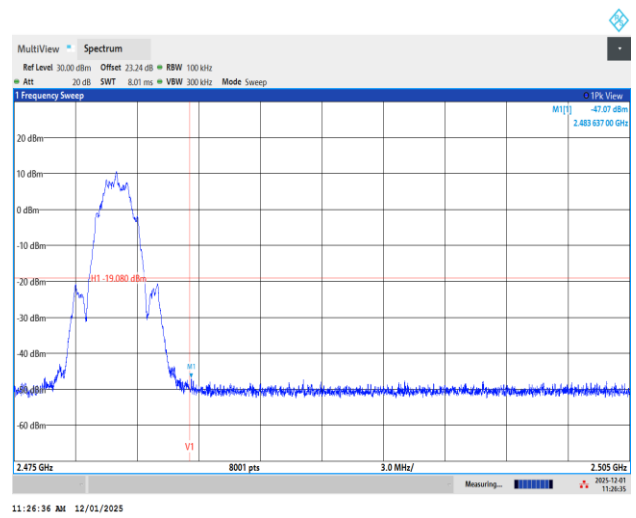

Spurious Emission 30MHz~1GHz Plot

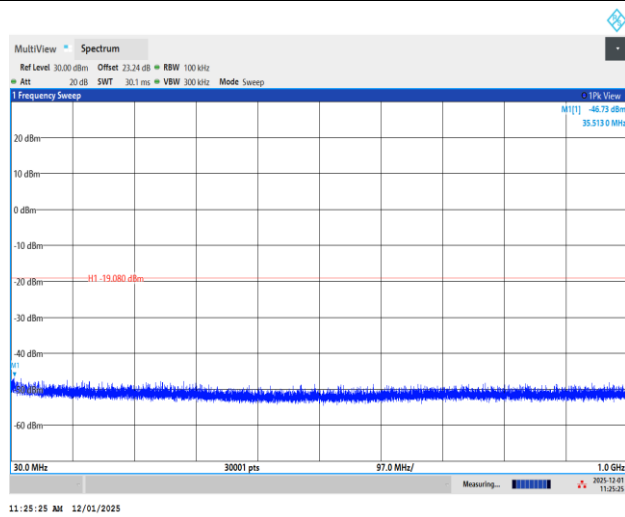

Spurious Emission 1GHz~26.5GHz Plot

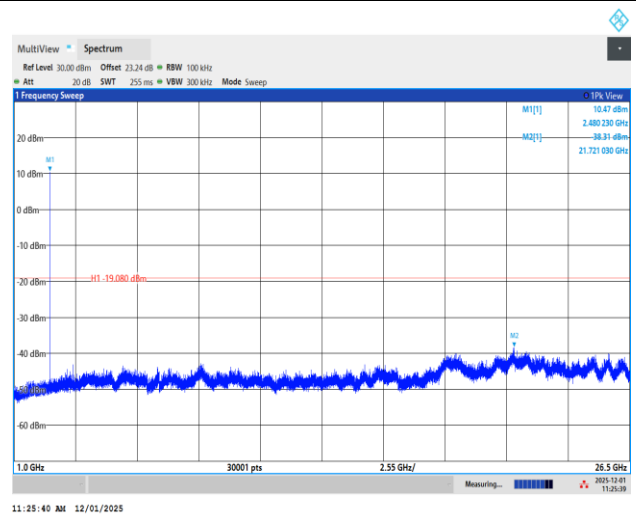



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Louis Chung	Temperature :	22.1~23.7°C
		Relative Humidity :	45.6~48.9%

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

5N0519
Mode 2
120Vac/60Hz
Line

Full Spectrum

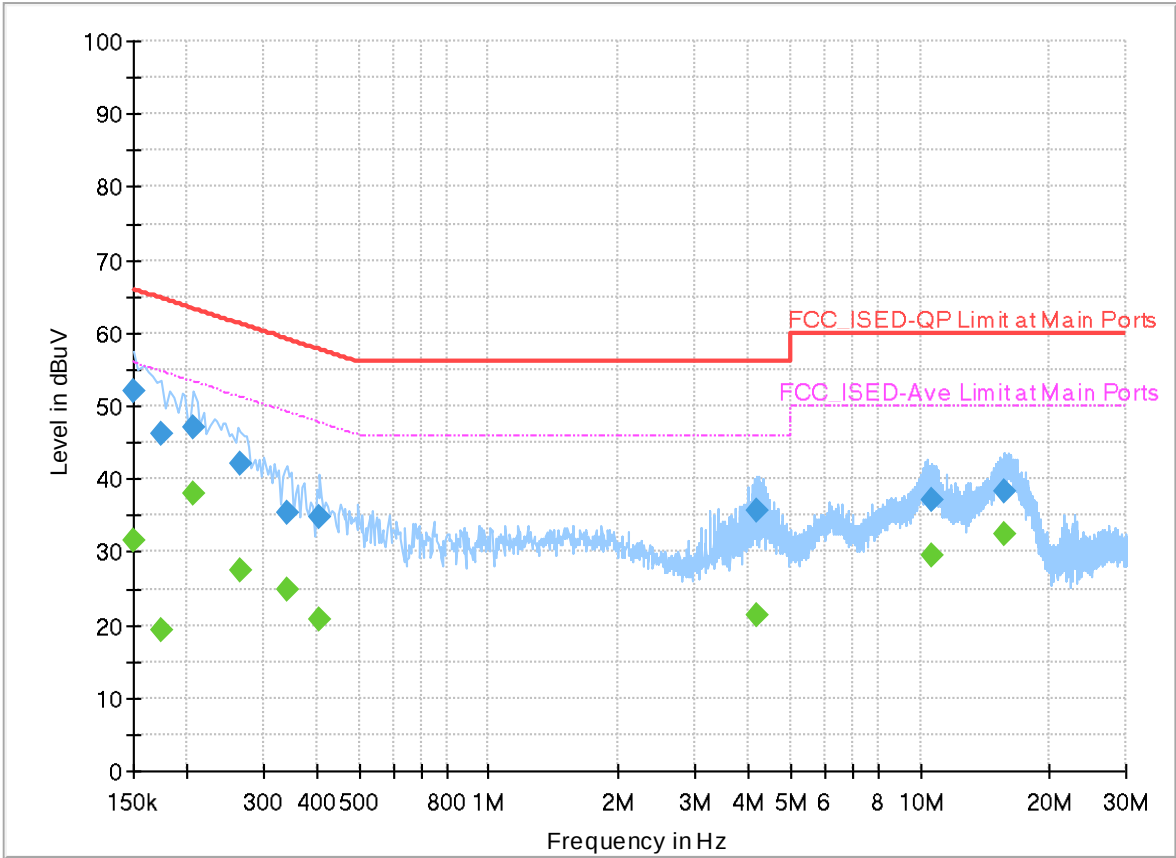


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	31.61	56.00	24.39	L1	OFF	20.0
0.150000	52.16	---	66.00	13.84	L1	OFF	20.0
0.174000	---	19.41	54.77	35.36	L1	OFF	20.0
0.174000	46.24	---	64.77	18.53	L1	OFF	20.0
0.206000	---	37.89	53.37	15.48	L1	OFF	20.0
0.206000	47.18	---	63.37	16.19	L1	OFF	20.0
0.266000	---	27.43	51.24	23.81	L1	OFF	20.0
0.266000	42.19	---	61.24	19.05	L1	OFF	20.0
0.342000	---	24.91	49.16	24.25	L1	OFF	20.0
0.342000	35.35	---	59.16	23.81	L1	OFF	20.0
0.406000	---	20.82	47.73	26.91	L1	OFF	20.0
0.406000	34.66	---	57.73	23.07	L1	OFF	20.0
4.182000	---	21.34	46.00	24.66	L1	OFF	20.0
4.182000	35.63	---	56.00	20.37	L1	OFF	20.0
10.666000	---	29.56	50.00	20.44	L1	OFF	20.1
10.666000	37.26	---	60.00	22.74	L1	OFF	20.1
15.746000	---	32.38	50.00	17.62	L1	OFF	20.2
15.746000	38.38	---	60.00	21.62	L1	OFF	20.2

EUT Information

Report NO : 5N0519
Test Mode : Mode 2
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

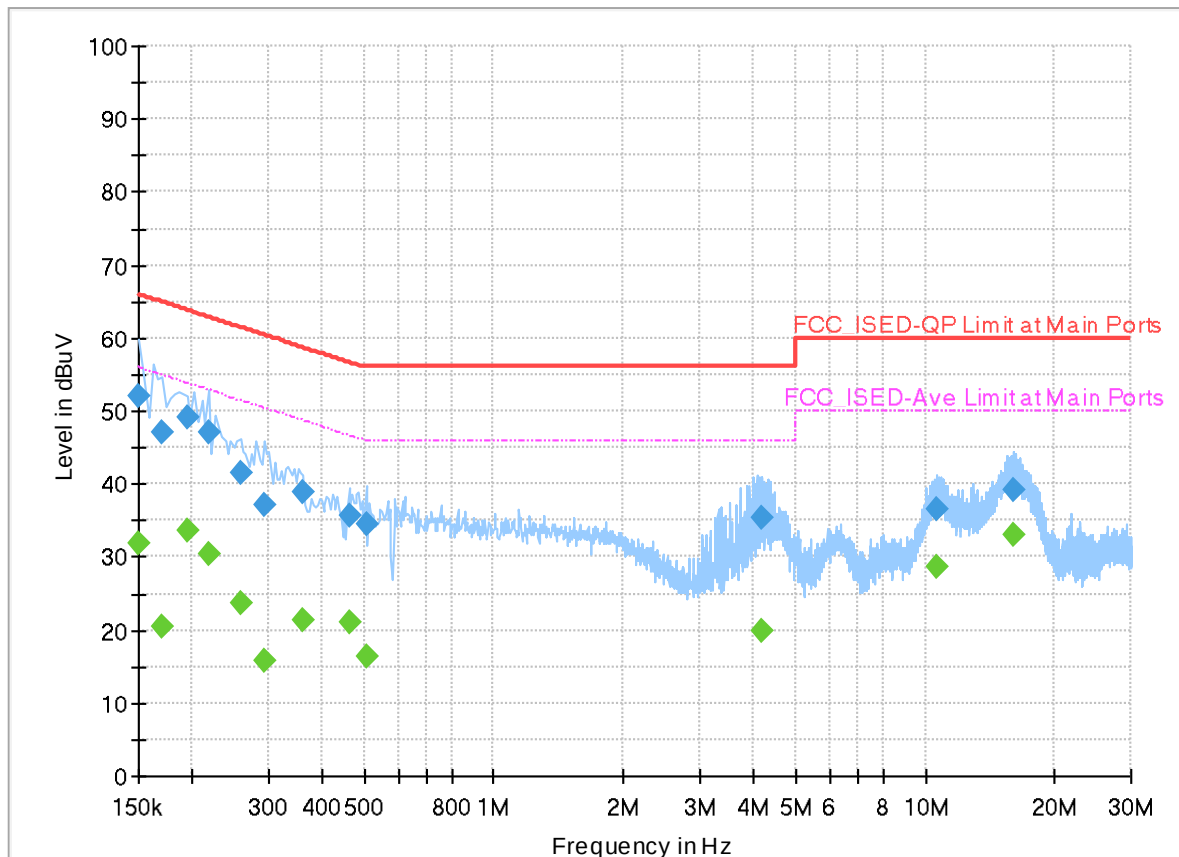

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	31.76	56.00	24.24	N	OFF	20.0
0.150000	52.18	---	66.00	13.82	N	OFF	20.0
0.170000	---	20.57	54.96	34.39	N	OFF	20.0
0.170000	46.99	---	64.96	17.97	N	OFF	20.0
0.194000	---	33.65	53.86	20.21	N	OFF	20.0
0.194000	49.18	---	63.86	14.68	N	OFF	20.0
0.218000	---	30.47	52.90	22.43	N	OFF	20.0
0.218000	46.95	---	62.90	15.95	N	OFF	20.0
0.258000	---	23.56	51.50	27.94	N	OFF	20.0
0.258000	41.39	---	61.50	20.11	N	OFF	20.0
0.294000	---	15.73	50.41	34.68	N	OFF	20.0
0.294000	37.10	---	60.41	23.31	N	OFF	20.0
0.362000	---	21.30	48.68	27.38	N	OFF	20.0
0.362000	38.90	---	58.68	19.78	N	OFF	20.0
0.462000	---	21.18	46.66	25.48	N	OFF	19.9
0.462000	35.63	---	56.66	21.03	N	OFF	19.9
0.506000	---	16.28	46.00	29.72	N	OFF	20.0
0.506000	34.39	---	56.00	21.61	N	OFF	20.0
4.190000	---	19.80	46.00	26.20	N	OFF	20.0

4.190000	35.42	---	56.00	20.58	N	OFF	20.0
10.586000	---	28.57	50.00	21.43	N	OFF	20.1
10.586000	36.51	---	60.00	23.49	N	OFF	20.1
16.114000	---	33.07	50.00	16.93	N	OFF	20.2
16.114000	39.12	---	60.00	20.88	N	OFF	20.2



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Leo Li, Karl Hou and Lucifer Jiang	Temperature :	19~23°C
		Relative Humidity :	60~64.5%

Note symbol

-L	Low channel location
-R	High channel location

C1-1. Radiated Spurious Emission Test Modes

<1Mbps>

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 9	2400-2483.5	2	Bluetooth-LE	0	2402	1Mbps	-	-
Mode 10	2400-2483.5	2	Bluetooth-LE	19	2440	1Mbps	-	-
Mode 11	2400-2483.5	2	Bluetooth-LE	39	2480	1Mbps	-	-

C1-2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
9	Bluetooth-LE	0	2331.07	41.40	54.00	-12.60	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	0	4804.00	47.65	74.00	-26.35	H	Peak	Pass	-	Harmonic
10	Bluetooth-LE	19	2499.52	41.36	54.00	-12.64	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	19	7320.00	41.05	54.00	-12.95	V	Avg.	Pass	-	Harmonic
11	Bluetooth-LE	39	2483.62	41.53	54.00	-12.47	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	39	7440.00	40.25	54.00	-13.75	H	Avg.	Pass	-	Harmonic



Mode	9																																																		
	Band Edge																																																		
	2400-2483.5 Bluetooth-LE_CH0_2402MHz																																																		
ANT	2																																																		
Pol.	Horizontal																																																		
Peak	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2372.47</td><td>51.23</td><td>74.00</td><td>-22.77</td><td>30.81</td><td>26.88</td><td>7.09</td><td>31.83</td><td>10.28</td><td>300</td><td>227</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1 2372.47	51.23	74.00	-22.77	30.81	26.88	7.09	31.83	10.28	300	227	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																										
	Freq	Level	Level	Factor	Loss	Factor	Factor	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																										
1 2372.47	51.23	74.00	-22.77	30.81	26.88	7.09	31.83	10.28	300	227	Peak																																								
Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2402.00</td><td>101.76</td><td>-----</td><td>-----</td><td>89.30</td><td>26.90</td><td>7.12</td><td>31.84</td><td>10.28</td><td>300</td><td>227</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1 2402.00	101.76	-----	-----	89.30	26.90	7.12	31.84	10.28	300	227	Peak	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Level	Factor	Loss	Factor	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																										
1 2402.00	101.76	-----	-----	89.30	26.90	7.12	31.84	10.28	300	227	Peak																																								
Avg	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2351.12</td><td>41.08</td><td>54.00</td><td>-12.92</td><td>28.56</td><td>27.00</td><td>7.06</td><td>31.82</td><td>10.28</td><td>300</td><td>227</td><td>Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1 2351.12	41.08	54.00	-12.92	28.56	27.00	7.06	31.82	10.28	300	227	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																										
	Freq	Level	Level	Factor	Loss	Factor	Factor	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																										
1 2351.12	41.08	54.00	-12.92	28.56	27.00	7.06	31.82	10.28	300	227	Average																																								
Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2402.00</td><td>101.21</td><td>-----</td><td>-----</td><td>88.75</td><td>26.90</td><td>7.12</td><td>31.84</td><td>10.28</td><td>300</td><td>227</td><td>Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1 2402.00	101.21	-----	-----	88.75	26.90	7.12	31.84	10.28	300	227	Average	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Level	Factor	Loss	Factor	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																										
1 2402.00	101.21	-----	-----	88.75	26.90	7.12	31.84	10.28	300	227	Average																																								



Mode	9																																																																																		
	Band Edge																																																																																		
	2400-2483.5 Bluetooth-LE_CH0_2402MHz																																																																																		
ANT	2																																																																																		
Pol.	Vertical						Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2387.37</td><td>51.66</td><td>74.00</td><td>-22.34</td><td>39.31</td><td>26.00</td><td>7.11</td><td>31.84</td><td>10.28</td><td>279</td><td>149</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2387.37	51.66	74.00	-22.34	39.31	26.00	7.11	31.84	10.28	279	149	Peak	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2402.00</td><td>110.68</td><td>-----</td><td>-----</td><td>98.22</td><td>26.90</td><td>7.12</td><td>31.84</td><td>10.28</td><td>279</td><td>149</td><td>Peak</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2402.00	110.68	-----	-----	98.22	26.90	7.12	31.84	10.28	279	149	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2387.37	51.66	74.00	-22.34	39.31	26.00	7.11	31.84	10.28	279	149	Peak																																																																								
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2402.00	110.68	-----	-----	98.22	26.90	7.12	31.84	10.28	279	149	Peak																																																																								
Avg	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2331.07</td><td>41.40</td><td>54.00</td><td>-12.60</td><td>28.00</td><td>27.09</td><td>7.04</td><td>31.81</td><td>10.28</td><td>279</td><td>149</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2331.07	41.40	54.00	-12.60	28.00	27.09	7.04	31.81	10.28	279	149	Average	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2402.00</td><td>110.00</td><td>-----</td><td>-----</td><td>97.54</td><td>26.90</td><td>7.12</td><td>31.84</td><td>10.28</td><td>279</td><td>149</td><td>Average</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2402.00	110.00	-----	-----	97.54	26.90	7.12	31.84	10.28	279	149	Average
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2331.07	41.40	54.00	-12.60	28.00	27.09	7.04	31.81	10.28	279	149	Average																																																																								
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2402.00	110.00	-----	-----	97.54	26.90	7.12	31.84	10.28	279	149	Average																																																																								



Mode	9																																																																																											
	Harmonic																																																																																											
	2400-2483.5_Bluetooth-LE_CH0_2402MHz																																																																																											
ANT	2																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg	Date: 2025-12-23 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4804.00</td><td>47.65</td><td>74.00 -26.35</td><td>35.35</td><td>32.41</td><td>10.51</td><td>32.33</td><td>1.71</td><td>--</td><td>-- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 4804.00	47.65	74.00 -26.35	35.35	32.41	10.51	32.33	1.71	--	-- Peak	Date: 2025-12-23 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4804.00</td><td>46.95</td><td>74.00 -27.05</td><td>34.65</td><td>32.41</td><td>10.51</td><td>32.33</td><td>1.71</td><td>--</td><td>-- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 4804.00	46.95	74.00 -27.05	34.65	32.41	10.51	32.33	1.71	--	-- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 4804.00	47.65	74.00 -26.35	35.35	32.41	10.51	32.33	1.71	--	-- Peak																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 4804.00	46.95	74.00 -27.05	34.65	32.41	10.51	32.33	1.71	--	-- Peak																																																																																			



Mode	9	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH0_2402MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-12-23 Frequency (MHz) Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2025-12-23 Frequency (MHz) Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	10																																																																																											
	Band Edge - L																																																																																											
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																											
ANT	2																																																																																											
Pol.	Horizontal												Fundamental																																																																															
Peak	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2316.37</td><td>50.84</td><td>74.00</td><td>-23.16</td><td>38.20</td><td>27.14</td><td>7.02</td><td>31.80</td><td>10.28</td><td>200</td><td>220</td><td>Peak</td></tr></table>														Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2316.37	50.84	74.00	-23.16	38.20	27.14	7.02	31.80	10.28	200	220	Peak	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>99.42</td><td>74.00</td><td>25.42</td><td>87.01</td><td>26.80</td><td>7.19</td><td>31.86</td><td>10.28</td><td>200</td><td>220</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2440.00	99.42	74.00	25.42	87.01	26.80	7.19	31.86	10.28	200	220	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	2316.37	50.84	74.00	-23.16	38.20	27.14	7.02	31.80	10.28	200	220	Peak																																																																																
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	2440.00	99.42	74.00	25.42	87.01	26.80	7.19	31.86	10.28	200	220	Peak																																																																																
Avg	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2362.00</td><td>41.12</td><td>54.00</td><td>-12.88</td><td>28.60</td><td>26.98</td><td>7.08</td><td>31.82</td><td>10.28</td><td>200</td><td>220</td><td>Average</td></tr></table>														Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2362.00	41.12	54.00	-12.88	28.60	26.98	7.08	31.82	10.28	200	220	Average	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>98.78</td><td>54.00</td><td>44.78</td><td>86.37</td><td>26.80</td><td>7.19</td><td>31.86</td><td>10.28</td><td>200</td><td>220</td><td>Average</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2440.00	98.78	54.00	44.78	86.37	26.80	7.19	31.86	10.28	200	220	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	2362.00	41.12	54.00	-12.88	28.60	26.98	7.08	31.82	10.28	200	220	Average																																																																																
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	2440.00	98.78	54.00	44.78	86.37	26.80	7.19	31.86	10.28	200	220	Average																																																																																



Mode	10																																																		
	Band Edge - R																																																		
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																		
ANT	2																																																		
Pol.	Horizontal						Fundamental																																												
Peak	Date: 2025-12-22 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.82</td><td>50.43</td><td>74.00</td><td>-23.57</td><td>37.91</td><td>26.85</td><td>7.26</td><td>31.88</td><td>10.29</td><td>200</td><td>220</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.82	50.43	74.00	-23.57	37.91	26.85	7.26	31.88	10.29	200	220	Peak	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	2484.82	50.43	74.00	-23.57	37.91	26.85	7.26	31.88	10.29	200	220	Peak																																							
Avg	Date: 2025-12-22 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2497.60</td><td>41.04</td><td>54.00</td><td>-12.96</td><td>28.45</td><td>26.90</td><td>7.29</td><td>31.89</td><td>10.29</td><td>200</td><td>220</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2497.60	41.04	54.00	-12.96	28.45	26.90	7.29	31.89	10.29	200	220	Average	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	2497.60	41.04	54.00	-12.96	28.45	26.90	7.29	31.89	10.29	200	220	Average																																							



Mode	10																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																			
ANT	2																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2330.02</td><td>50.82</td><td>74.00</td><td>-23.18</td><td>30.21</td><td>27.10</td><td>7.04</td><td>31.61</td><td>10.28</td><td>200</td><td>135</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2330.02	50.82	74.00	-23.18	30.21	27.10	7.04	31.61	10.28	200	135	Peak	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>105.17</td><td>-----</td><td>-----</td><td>92.76</td><td>26.80</td><td>7.19</td><td>31.86</td><td>10.28</td><td>200</td><td>135</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	105.17	-----	-----	92.76	26.80	7.19	31.86	10.28	200	135	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2330.02	50.82	74.00	-23.18	30.21	27.10	7.04	31.61	10.28	200	135	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	105.17	-----	-----	92.76	26.80	7.19	31.86	10.28	200	135	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2370.71</td><td>41.15</td><td>54.00</td><td>-12.85</td><td>28.72</td><td>26.89</td><td>7.09</td><td>31.83</td><td>10.28</td><td>200</td><td>135</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2370.71	41.15	54.00	-12.85	28.72	26.89	7.09	31.83	10.28	200	135	Average	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>104.61</td><td>-----</td><td>-----</td><td>92.20</td><td>26.80</td><td>7.19</td><td>31.86</td><td>10.28</td><td>200</td><td>135</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	104.61	-----	-----	92.20	26.80	7.19	31.86	10.28	200	135	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2370.71	41.15	54.00	-12.85	28.72	26.89	7.09	31.83	10.28	200	135	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	104.61	-----	-----	92.20	26.80	7.19	31.86	10.28	200	135	Average																																																																																								



Mode	10										
	Band Edge - R										
	2400-2483.5_Bluetooth-LE_CH19_2440MHz										
ANT	2										
Pol.	Vertical						Fundamental				
Peak											







Mode	10																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																									
ANT	2																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4880.00</td><td>47.06</td><td>74.00</td><td>-26.94</td><td>34.45</td><td>32.62</td><td>10.57</td><td>32.29</td><td>1.71</td><td>-- -- Peak</td></tr><tr><td>2 7320.00</td><td>50.81</td><td>74.00</td><td>-23.19</td><td>34.49</td><td>37.28</td><td>12.79</td><td>35.68</td><td>1.93</td><td>-- -- Peak</td></tr><tr><td>3 7320.00</td><td>40.55</td><td>54.00</td><td>-13.45</td><td>24.23</td><td>37.28</td><td>12.79</td><td>35.68</td><td>1.93</td><td>-- -- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4880.00	47.06	74.00	-26.94	34.45	32.62	10.57	32.29	1.71	-- -- Peak	2 7320.00	50.81	74.00	-23.19	34.49	37.28	12.79	35.68	1.93	-- -- Peak	3 7320.00	40.55	54.00	-13.45	24.23	37.28	12.79	35.68	1.93	-- -- Average	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4880.00</td><td>46.74</td><td>74.00</td><td>-27.26</td><td>34.13</td><td>32.62</td><td>10.57</td><td>32.29</td><td>1.71</td><td>-- -- Peak</td></tr><tr><td>2 7320.00</td><td>51.30</td><td>74.00</td><td>-22.70</td><td>34.98</td><td>37.28</td><td>12.79</td><td>35.68</td><td>1.93</td><td>-- -- Peak</td></tr><tr><td>3 7320.00</td><td>41.05</td><td>54.00</td><td>-12.95</td><td>24.73</td><td>37.28</td><td>12.79</td><td>35.68</td><td>1.93</td><td>-- -- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4880.00	46.74	74.00	-27.26	34.13	32.62	10.57	32.29	1.71	-- -- Peak	2 7320.00	51.30	74.00	-22.70	34.98	37.28	12.79	35.68	1.93	-- -- Peak	3 7320.00	41.05	54.00	-12.95	24.73	37.28	12.79	35.68	1.93	-- -- Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 4880.00	47.06	74.00	-26.94	34.45	32.62	10.57	32.29	1.71	-- -- Peak																																																																																																																	
2 7320.00	50.81	74.00	-23.19	34.49	37.28	12.79	35.68	1.93	-- -- Peak																																																																																																																	
3 7320.00	40.55	54.00	-13.45	24.23	37.28	12.79	35.68	1.93	-- -- Average																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 4880.00	46.74	74.00	-27.26	34.13	32.62	10.57	32.29	1.71	-- -- Peak																																																																																																																	
2 7320.00	51.30	74.00	-22.70	34.98	37.28	12.79	35.68	1.93	-- -- Peak																																																																																																																	
3 7320.00	41.05	54.00	-12.95	24.73	37.28	12.79	35.68	1.93	-- -- Average																																																																																																																	



Mode	10	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL

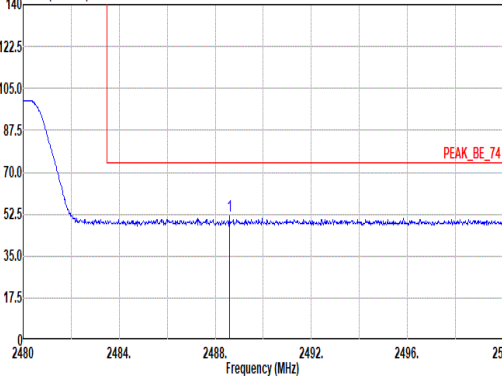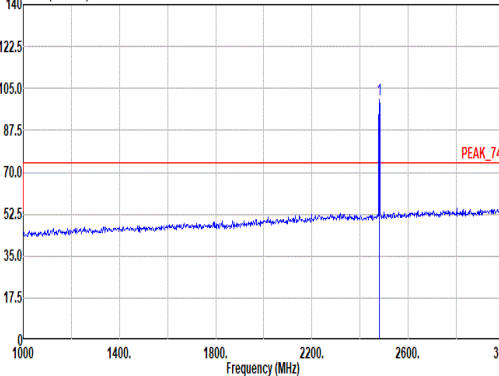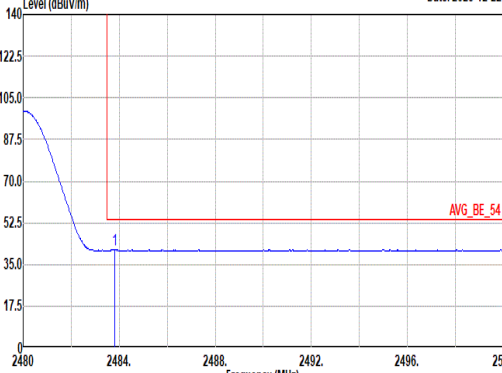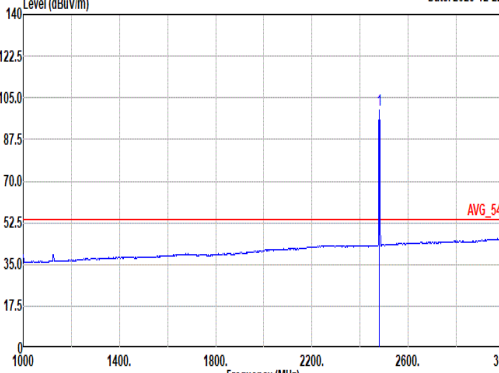

	11																																																																																			
Mode	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																			
ANT	2																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2025-12-22  Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.58</td><td>51.67</td><td>74.00</td><td>-22.33</td><td>39.10</td><td>26.09</td><td>7.27</td><td>31.88</td><td>10.29</td><td>173</td><td>220</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.58	51.67	74.00	-22.33	39.10	26.09	7.27	31.88	10.29	173	220	Peak	Level (dBuV/m) Date: 2025-12-22  Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>100.34</td><td>-----</td><td>-----</td><td>87.87</td><td>26.80</td><td>7.26</td><td>31.88</td><td>10.29</td><td>173</td><td>220</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	100.34	-----	-----	87.87	26.80	7.26	31.88	10.29	173	220	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2480.58	51.67	74.00	-22.33	39.10	26.09	7.27	31.88	10.29	173	220	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2480.00	100.34	-----	-----	87.87	26.80	7.26	31.88	10.29	173	220	Peak																																																																									
Avg	Level (dBuV/m) Date: 2025-12-22  Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.82</td><td>41.42</td><td>54.00</td><td>-12.58</td><td>28.91</td><td>26.84</td><td>7.26</td><td>31.88</td><td>10.29</td><td>173</td><td>220</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.82	41.42	54.00	-12.58	28.91	26.84	7.26	31.88	10.29	173	220	Average	Level (dBuV/m) Date: 2025-12-22  Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>99.74</td><td>-----</td><td>-----</td><td>87.27</td><td>26.80</td><td>7.26</td><td>31.88</td><td>10.29</td><td>173</td><td>220</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	99.74	-----	-----	87.27	26.80	7.26	31.88	10.29	173	220	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2483.82	41.42	54.00	-12.58	28.91	26.84	7.26	31.88	10.29	173	220	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2480.00	99.74	-----	-----	87.27	26.80	7.26	31.88	10.29	173	220	Average																																																																									





Mode	11																																																																																		
	Band Edge																																																																																		
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																		
ANT	2																																																																																		
Pol.	Vertical						Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2496.48</td><td>50.80</td><td>74.00</td><td>-23.20</td><td>38.22</td><td>26.90</td><td>7.28</td><td>31.89</td><td>10.29</td><td>264</td><td>191</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2496.48	50.80	74.00	-23.20	38.22	26.90	7.28	31.89	10.29	264	191	Peak	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>104.80</td><td>-----</td><td>-----</td><td>92.33</td><td>26.80</td><td>7.26</td><td>31.88</td><td>10.29</td><td>264</td><td>191</td><td>Peak</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	104.80	-----	-----	92.33	26.80	7.26	31.88	10.29	264	191	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2496.48	50.80	74.00	-23.20	38.22	26.90	7.28	31.89	10.29	264	191	Peak																																																																								
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2480.00	104.80	-----	-----	92.33	26.80	7.26	31.88	10.29	264	191	Peak																																																																								
Avg	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.62</td><td>41.53</td><td>54.00</td><td>-12.47</td><td>29.02</td><td>26.84</td><td>7.26</td><td>31.88</td><td>10.29</td><td>264</td><td>191</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.62	41.53	54.00	-12.47	29.02	26.84	7.26	31.88	10.29	264	191	Average	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>104.29</td><td>-----</td><td>-----</td><td>91.82</td><td>26.80</td><td>7.26</td><td>31.88</td><td>10.29</td><td>264</td><td>191</td><td>Average</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	104.29	-----	-----	91.82	26.80	7.26	31.88	10.29	264	191	Average
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2483.62	41.53	54.00	-12.47	29.02	26.84	7.26	31.88	10.29	264	191	Average																																																																								
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2480.00	104.29	-----	-----	91.82	26.80	7.26	31.88	10.29	264	191	Average																																																																								



Mode	11																																																																																																																																							
	Harmonic																																																																																																																																							
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																							
ANT	2																																																																																																																																							
Pol.	Horizontal								Vertical																																																																																																																															
Peak Avg	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4960.00</td><td>47.30</td><td>74.00</td><td>-26.70</td><td>34.29</td><td>32.92</td><td>10.62</td><td>32.24</td><td>1.71</td><td>-- -- Peak</td></tr><tr><td>2 7440.00</td><td>50.50</td><td>74.00</td><td>-23.50</td><td>34.30</td><td>37.14</td><td>12.90</td><td>35.78</td><td>1.94</td><td>-- -- Peak</td></tr><tr><td>3 7440.00</td><td>40.25</td><td>54.00</td><td>-13.75</td><td>24.05</td><td>37.14</td><td>12.90</td><td>35.78</td><td>1.94</td><td>-- -- Average</td></tr></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4960.00	47.30	74.00	-26.70	34.29	32.92	10.62	32.24	1.71	-- -- Peak	2 7440.00	50.50	74.00	-23.50	34.30	37.14	12.90	35.78	1.94	-- -- Peak	3 7440.00	40.25	54.00	-13.75	24.05	37.14	12.90	35.78	1.94	-- -- Average	Level (dBuV/m) Date: 2025-12-22 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4960.00</td><td>47.40</td><td>74.00</td><td>-26.60</td><td>34.39</td><td>32.92</td><td>10.62</td><td>32.24</td><td>1.71</td><td>-- -- Peak</td></tr><tr><td>2 7440.00</td><td>50.34</td><td>74.00</td><td>-23.66</td><td>34.14</td><td>37.14</td><td>12.90</td><td>35.78</td><td>1.94</td><td>-- -- Peak</td></tr><tr><td>3 7440.00</td><td>40.10</td><td>54.00</td><td>-13.90</td><td>23.90</td><td>37.14</td><td>12.90</td><td>35.78</td><td>1.94</td><td>-- -- Average</td></tr></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4960.00	47.40	74.00	-26.60	34.39	32.92	10.62	32.24	1.71	-- -- Peak	2 7440.00	50.34	74.00	-23.66	34.14	37.14	12.90	35.78	1.94	-- -- Peak	3 7440.00	40.10	54.00	-13.90	23.90	37.14	12.90	35.78	1.94	-- -- Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																															
1 4960.00	47.30	74.00	-26.70	34.29	32.92	10.62	32.24	1.71	-- -- Peak																																																																																																																															
2 7440.00	50.50	74.00	-23.50	34.30	37.14	12.90	35.78	1.94	-- -- Peak																																																																																																																															
3 7440.00	40.25	54.00	-13.75	24.05	37.14	12.90	35.78	1.94	-- -- Average																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																															
1 4960.00	47.40	74.00	-26.60	34.39	32.92	10.62	32.24	1.71	-- -- Peak																																																																																																																															
2 7440.00	50.34	74.00	-23.66	34.14	37.14	12.90	35.78	1.94	-- -- Peak																																																																																																																															
3 7440.00	40.10	54.00	-13.90	23.90	37.14	12.90	35.78	1.94	-- -- Average																																																																																																																															

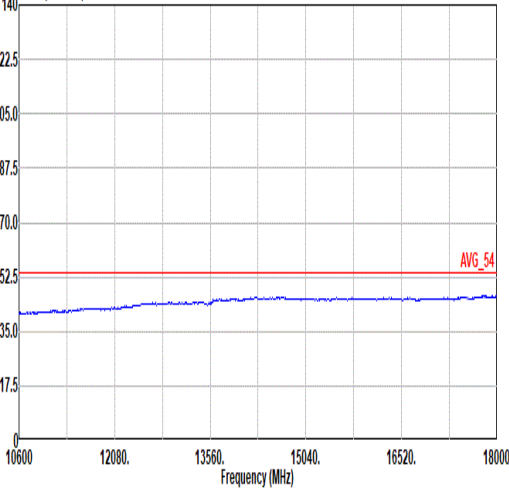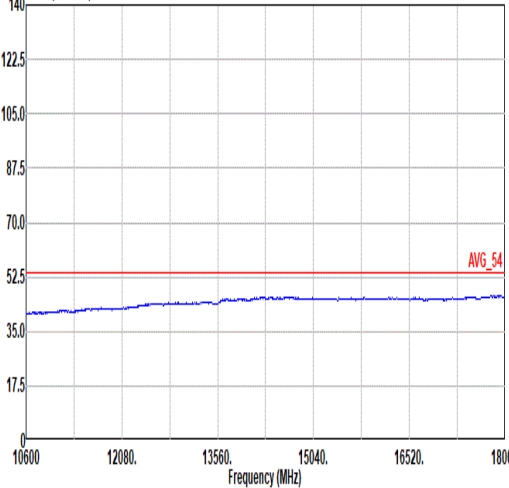

Mode	11	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-12-22  Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2025-12-22  Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



C2-1.Radiated Spurious Emission Test Modes

<2Mbps>

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	2400-2483.5	2	Bluetooth-LE	0	2402	2Mbps	-	-
Mode 13	2400-2483.5	2	Bluetooth-LE	19	2440	2Mbps	-	-
Mode 14	2400-2483.5	2	Bluetooth-LE	39	2480	2Mbps	-	-
Mode 15	2400-2483.5	2	Bluetooth-LE	39	2480	2Mbps	-	LF
Mode 16	2400-2483.5	2	Bluetooth-LE	39	2480	2Mbps	-	SHF

C2-2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
12	Bluetooth-LE	0	2378.08	42.07	54.00	-11.93	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	0	4804.00	47.51	74.00	-26.49	V	Peak	Pass	-	Harmonic
13	Bluetooth-LE	19	2499.58	42.25	54.00	-11.75	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE	19	7320.00	41.47	54.00	-12.53	H	Avg.	Pass	-	Harmonic
14	Bluetooth-LE	39	2483.54	48.25	54.00	-5.75	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE	39	7440.00	41.11	54.00	-12.89	H	Avg.	Pass	-	Harmonic
15	LF	39	739.07	36.94	46.00	-9.06	H	Peak	Pass	-	LF
16	SHF	39	24969.88	39.93	74.00	-34.07	H	Peak	Pass	-	SHF



Mode	12																																																																																	
	Band Edge																																																																																	
	2400-2483.5 Bluetooth-LE_CH0_2402MHz																																																																																	
ANT	2																																																																																	
Pol.	Horizontal					Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2025-12-23 Frequency (MHz) Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2384.61</td><td>51.69</td><td>74.00</td><td>-22.31</td><td>39.34</td><td>26.00</td><td>7.10</td><td>31.83</td><td>10.28 273 223 Peak</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor				MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2384.61	51.69	74.00	-22.31	39.34	26.00	7.10	31.83	10.28 273 223 Peak	Level (dBuV/m) Date: 2025-12-23 Frequency (MHz) Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2402.00</td><td>102.25</td><td>-----</td><td>-----</td><td>89.79</td><td>26.90</td><td>7.12</td><td>31.84</td><td>10.28 273 223 Peak</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor				MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2402.00	102.25	-----	-----	89.79	26.90	7.12	31.84	10.28 273 223 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1 2384.61	51.69	74.00	-22.31	39.34	26.00	7.10	31.83	10.28 273 223 Peak																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1 2402.00	102.25	-----	-----	89.79	26.90	7.12	31.84	10.28 273 223 Peak																																																																										
Avg	Level (dBuV/m) Date: 2025-12-23 Frequency (MHz) Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2362.26</td><td>41.79</td><td>54.00</td><td>-12.21</td><td>29.27</td><td>26.98</td><td>7.08</td><td>31.82</td><td>10.28 273 223 Average</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor				MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2362.26	41.79	54.00	-12.21	29.27	26.98	7.08	31.82	10.28 273 223 Average	Level (dBuV/m) Date: 2025-12-23 Frequency (MHz) Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2402.00</td><td>100.99</td><td>-----</td><td>-----</td><td>88.53</td><td>26.90</td><td>7.12</td><td>31.84</td><td>10.28 273 223 Average</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor				MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2402.00	100.99	-----	-----	88.53	26.90	7.12	31.84	10.28 273 223 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1 2362.26	41.79	54.00	-12.21	29.27	26.98	7.08	31.82	10.28 273 223 Average																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1 2402.00	100.99	-----	-----	88.53	26.90	7.12	31.84	10.28 273 223 Average																																																																										



Mode	12																																																																																			
	Band Edge																																																																																			
	2400-2483.5 Bluetooth-LE_CH0_2402MHz																																																																																			
ANT	2																																																																																			
Pol.	Vertical						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2355.72 50.78 74.00 -23.22 38.25 27.00 7.07 31.82 10.28 312 150 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg									1 2355.72 50.78 74.00 -23.22 38.25 27.00 7.07 31.82 10.28 312 150 Peak									Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2402.00 110.66 ----- 98.20 26.90 7.12 31.84 10.28 312 150 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg									1 2402.00 110.66 ----- 98.20 26.90 7.12 31.84 10.28 312 150 Peak								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																				
MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg																																																																																				
1 2355.72 50.78 74.00 -23.22 38.25 27.00 7.07 31.82 10.28 312 150 Peak																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																				
MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg																																																																																				
1 2402.00 110.66 ----- 98.20 26.90 7.12 31.84 10.28 312 150 Peak																																																																																				
Avg	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2378.00 42.07 54.00 -11.93 29.71 26.82 7.09 31.83 10.28 312 150 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg									1 2378.00 42.07 54.00 -11.93 29.71 26.82 7.09 31.83 10.28 312 150 Average									Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2402.00 109.15 ----- 96.69 26.90 7.12 31.84 10.28 312 150 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg									1 2402.00 109.15 ----- 96.69 26.90 7.12 31.84 10.28 312 150 Average								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																				
MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg																																																																																				
1 2378.00 42.07 54.00 -11.93 29.71 26.82 7.09 31.83 10.28 312 150 Average																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																				
MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg																																																																																				
1 2402.00 109.15 ----- 96.69 26.90 7.12 31.84 10.28 312 150 Average																																																																																				



Mode	12																																																																																																
	Harmonic																																																																																																
	2400-2483.5_Bluetooth-LE_CH0_2402MHz																																																																																																
ANT	2																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak Avg	Date: 2025-12-23 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>46.60</td><td>74.00</td><td>-27.40</td><td>34.30</td><td>32.41</td><td>10.51</td><td>32.33</td><td>1.71</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	46.60	74.00	-27.40	34.30	32.41	10.51	32.33	1.71	--	Peak	Date: 2025-12-23 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>47.51</td><td>74.00</td><td>-26.49</td><td>35.21</td><td>32.41</td><td>10.51</td><td>32.33</td><td>1.71</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	47.51	74.00	-26.49	35.21	32.41	10.51	32.33	1.71	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	4804.00	46.60	74.00	-27.40	34.30	32.41	10.51	32.33	1.71	--	Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	4804.00	47.51	74.00	-26.49	35.21	32.41	10.51	32.33	1.71	--	Peak																																																																																						



Mode	12	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH0_2402MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL







Mode	13																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																			
ANT	2																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2344.58</td><td>51.13</td><td>74.00</td><td>-22.87</td><td>38.61</td><td>27.00</td><td>7.06</td><td>31.82</td><td>10.28</td><td>260</td><td>222</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2344.58	51.13	74.00	-22.87	38.61	27.00	7.06	31.82	10.28	260	222	Peak	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>101.42</td><td>-----</td><td>-----</td><td>89.01</td><td>26.80</td><td>7.19</td><td>31.86</td><td>10.28</td><td>260</td><td>222</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	101.42	-----	-----	89.01	26.80	7.19	31.86	10.28	260	222	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2344.58	51.13	74.00	-22.87	38.61	27.00	7.06	31.82	10.28	260	222	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	101.42	-----	-----	89.01	26.80	7.19	31.86	10.28	260	222	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2328.46</td><td>41.93</td><td>54.00</td><td>-12.07</td><td>29.32</td><td>27.10</td><td>7.04</td><td>31.81</td><td>10.28</td><td>260</td><td>222</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2328.46	41.93	54.00	-12.07	29.32	27.10	7.04	31.81	10.28	260	222	Average	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>100.08</td><td>-----</td><td>-----</td><td>87.67</td><td>26.80</td><td>7.19</td><td>31.86</td><td>10.28</td><td>260</td><td>222</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	100.08	-----	-----	87.67	26.80	7.19	31.86	10.28	260	222	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2328.46	41.93	54.00	-12.07	29.32	27.10	7.04	31.81	10.28	260	222	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	100.08	-----	-----	87.67	26.80	7.19	31.86	10.28	260	222	Average																																																																																								



Mode	13										
	Band Edge - R										
	2400-2483.5_Bluetooth-LE_CH19_2440MHz										
ANT	2										
Pol.	Horizontal						Fundamental				
Peak											

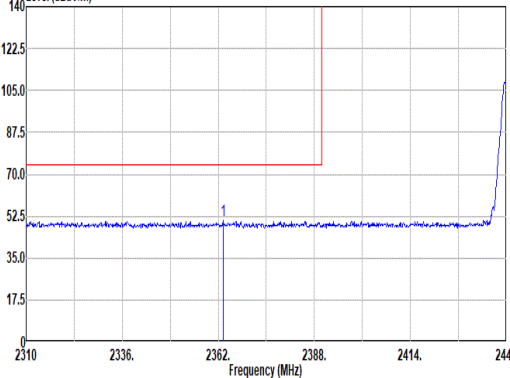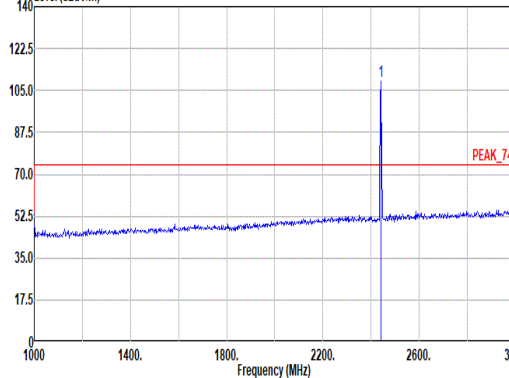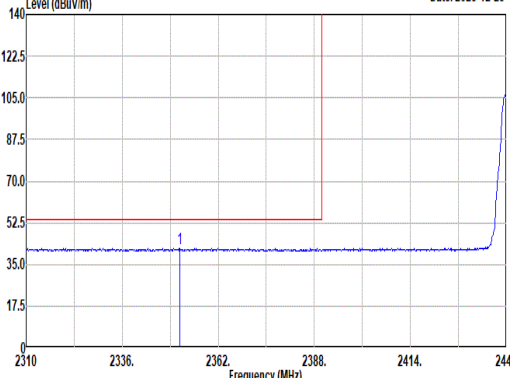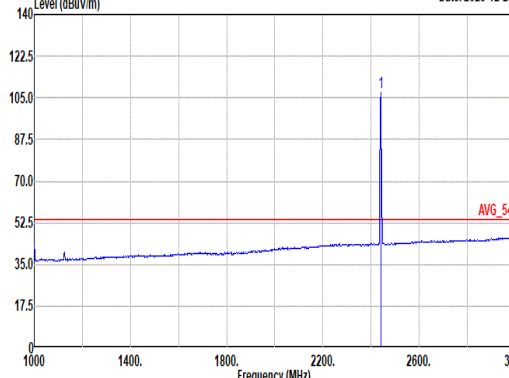

Mode	13																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																			
ANT	2																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-12-23  231023362362238824142440 Frequency (MHz) Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2363.30</td><td>50.59</td><td>74.00</td><td>-23.41</td><td>30.00</td><td>26.97</td><td>7.00</td><td>31.02</td><td>10.28</td><td>300</td><td>149</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2363.30	50.59	74.00	-23.41	30.00	26.97	7.00	31.02	10.28	300	149	Peak	Level (dBuV/m) Date: 2025-12-23  100014001800220026003000 Frequency (MHz) Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>100.05</td><td>-----</td><td>-----</td><td>96.44</td><td>26.80</td><td>7.19</td><td>31.06</td><td>10.28</td><td>300</td><td>149</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	100.05	-----	-----	96.44	26.80	7.19	31.06	10.28	300	149	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2363.30	50.59	74.00	-23.41	30.00	26.97	7.00	31.02	10.28	300	149	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	100.05	-----	-----	96.44	26.80	7.19	31.06	10.28	300	149	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2025-12-23  231023362362238824142440 Frequency (MHz) Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2351.60</td><td>41.72</td><td>54.00</td><td>-12.28</td><td>29.20</td><td>27.00</td><td>7.06</td><td>31.02</td><td>10.28</td><td>300</td><td>149</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2351.60	41.72	54.00	-12.28	29.20	27.00	7.06	31.02	10.28	300	149	Average	Level (dBuV/m) Date: 2025-12-23  100014001800220026003000 Frequency (MHz) Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>107.49</td><td>-----</td><td>-----</td><td>95.00</td><td>26.80</td><td>7.19</td><td>31.06</td><td>10.28</td><td>300</td><td>149</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	107.49	-----	-----	95.00	26.80	7.19	31.06	10.28	300	149	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2351.60	41.72	54.00	-12.28	29.20	27.00	7.06	31.02	10.28	300	149	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	107.49	-----	-----	95.00	26.80	7.19	31.06	10.28	300	149	Average																																																																																								



Mode	13																																															
	Band Edge - R																																															
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																															
ANT	2																																															
Pol.	Vertical						Fundamental																																									
Peak	Date: 2025-12-23 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.92</td><td>50.62</td><td>74.00</td><td>-23.38</td><td>38.11</td><td>26.84</td><td>7.26</td><td>31.88</td><td>10.29</td><td>300</td><td>149</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.92	50.62	74.00	-23.38	38.11	26.84	7.26	31.88	10.29	300	149	Peak	Blank					
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																						
1 2483.92	50.62	74.00	-23.38	38.11	26.84	7.26	31.88	10.29	300	149	Peak																																					
Avg	Date: 2025-12-23 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2491.48</td><td>41.92</td><td>54.00</td><td>-12.08</td><td>29.34</td><td>26.90</td><td>7.28</td><td>31.89</td><td>10.29</td><td>300</td><td>149</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2491.48	41.92	54.00	-12.08	29.34	26.90	7.28	31.89	10.29	300	149	Average	Blank					
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																						
1 2491.48	41.92	54.00	-12.08	29.34	26.90	7.28	31.89	10.29	300	149	Average																																					







Mode	13																																																																																																																																							
	Harmonic																																																																																																																																							
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																							
ANT	2																																																																																																																																							
Pol.	Horizontal								Vertical																																																																																																																															
Peak Avg	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4880.00</td><td>46.78</td><td>74.00</td><td>-27.22</td><td>34.17</td><td>32.62</td><td>10.57</td><td>32.29</td><td>1.71</td><td>-- -- Peak</td></tr><tr><td>2 7320.00</td><td>49.51</td><td>74.00</td><td>-24.49</td><td>33.19</td><td>37.28</td><td>12.79</td><td>35.68</td><td>1.93</td><td>-- -- Peak</td></tr><tr><td>3 7320.00</td><td>41.47</td><td>54.00</td><td>-12.53</td><td>25.15</td><td>37.28</td><td>12.79</td><td>35.68</td><td>1.93</td><td>-- -- Average</td></tr></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4880.00	46.78	74.00	-27.22	34.17	32.62	10.57	32.29	1.71	-- -- Peak	2 7320.00	49.51	74.00	-24.49	33.19	37.28	12.79	35.68	1.93	-- -- Peak	3 7320.00	41.47	54.00	-12.53	25.15	37.28	12.79	35.68	1.93	-- -- Average	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4880.00</td><td>46.87</td><td>74.00</td><td>-27.13</td><td>34.26</td><td>32.62</td><td>10.57</td><td>32.29</td><td>1.71</td><td>-- -- Peak</td></tr><tr><td>2 7320.00</td><td>49.89</td><td>74.00</td><td>-24.11</td><td>33.57</td><td>37.28</td><td>12.79</td><td>35.68</td><td>1.93</td><td>-- -- Peak</td></tr><tr><td>3 7320.00</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>24.86</td><td>37.28</td><td>12.79</td><td>35.68</td><td>1.93</td><td>-- -- Average</td></tr></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4880.00	46.87	74.00	-27.13	34.26	32.62	10.57	32.29	1.71	-- -- Peak	2 7320.00	49.89	74.00	-24.11	33.57	37.28	12.79	35.68	1.93	-- -- Peak	3 7320.00	41.18	54.00	-12.82	24.86	37.28	12.79	35.68	1.93	-- -- Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																															
1 4880.00	46.78	74.00	-27.22	34.17	32.62	10.57	32.29	1.71	-- -- Peak																																																																																																																															
2 7320.00	49.51	74.00	-24.49	33.19	37.28	12.79	35.68	1.93	-- -- Peak																																																																																																																															
3 7320.00	41.47	54.00	-12.53	25.15	37.28	12.79	35.68	1.93	-- -- Average																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																															
1 4880.00	46.87	74.00	-27.13	34.26	32.62	10.57	32.29	1.71	-- -- Peak																																																																																																																															
2 7320.00	49.89	74.00	-24.11	33.57	37.28	12.79	35.68	1.93	-- -- Peak																																																																																																																															
3 7320.00	41.18	54.00	-12.82	24.86	37.28	12.79	35.68	1.93	-- -- Average																																																																																																																															



Mode	13	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-12-23 Frequency (MHz) Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2025-12-23 Frequency (MHz) Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL

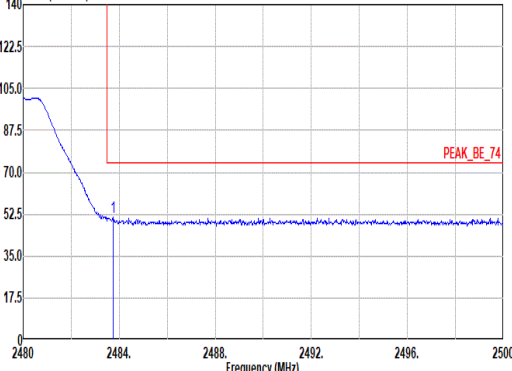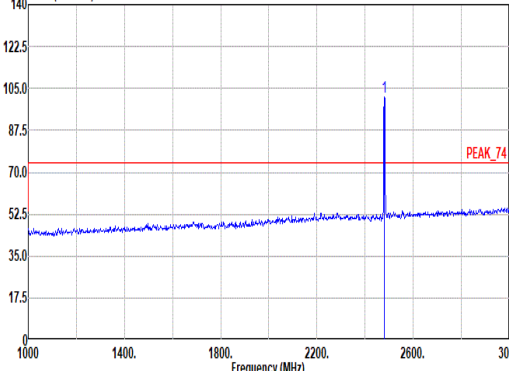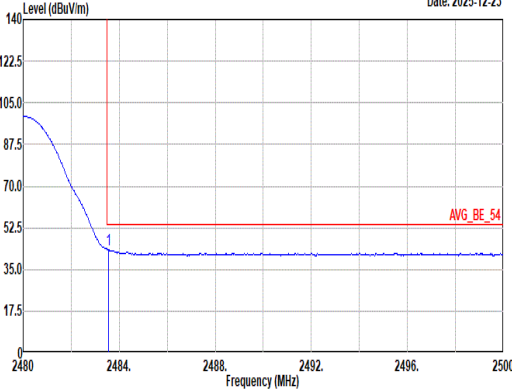
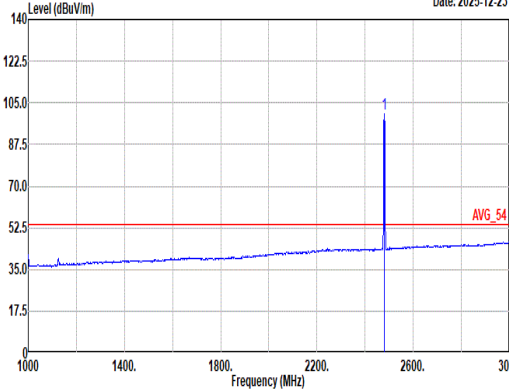


Mode	14																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																									
ANT	2																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-12-23  Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.76</td><td>51.04</td><td>74.00</td><td>-22.96</td><td>30.53</td><td>26.84</td><td>7.26</td><td>31.88</td><td>10.29</td><td>323 210 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.76	51.04	74.00	-22.96	30.53	26.84	7.26	31.88	10.29	323 210 Peak	Level (dBuV/m) Date: 2025-12-23  Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>101.45</td><td>-----</td><td>-----</td><td>88.98</td><td>26.80</td><td>7.26</td><td>31.88</td><td>10.29</td><td>323 210 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	101.45	-----	-----	88.98	26.80	7.26	31.88	10.29	323 210 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2483.76	51.04	74.00	-22.96	30.53	26.84	7.26	31.88	10.29	323 210 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2480.00	101.45	-----	-----	88.98	26.80	7.26	31.88	10.29	323 210 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2025-12-23  Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.56</td><td>43.46</td><td>54.00</td><td>-10.54</td><td>30.95</td><td>26.84</td><td>7.26</td><td>31.88</td><td>10.29</td><td>323 210 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.56	43.46	54.00	-10.54	30.95	26.84	7.26	31.88	10.29	323 210 Average	Level (dBuV/m) Date: 2025-12-23  Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>100.16</td><td>-----</td><td>-----</td><td>87.69</td><td>26.80</td><td>7.26</td><td>31.88</td><td>10.29</td><td>323 210 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	100.16	-----	-----	87.69	26.80	7.26	31.88	10.29	323 210 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2483.56	43.46	54.00	-10.54	30.95	26.84	7.26	31.88	10.29	323 210 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2480.00	100.16	-----	-----	87.69	26.80	7.26	31.88	10.29	323 210 Average																																																																																	



Mode	14																																																																																		
	Band Edge																																																																																		
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																		
ANT	2																																																																																		
Pol.	Vertical						Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.66</td><td>55.13</td><td>74.00</td><td>-18.87</td><td>42.62</td><td>26.84</td><td>7.26</td><td>31.88</td><td>10.29</td><td>318</td><td>194</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.66	55.13	74.00	-18.87	42.62	26.84	7.26	31.88	10.29	318	194	Peak	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>109.16</td><td>-----</td><td>-----</td><td>96.69</td><td>26.80</td><td>7.26</td><td>31.88</td><td>10.29</td><td>318</td><td>194</td><td>Peak</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	109.16	-----	-----	96.69	26.80	7.26	31.88	10.29	318	194	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2483.66	55.13	74.00	-18.87	42.62	26.84	7.26	31.88	10.29	318	194	Peak																																																																								
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2480.00	109.16	-----	-----	96.69	26.80	7.26	31.88	10.29	318	194	Peak																																																																								
Avg	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.54</td><td>48.25</td><td>54.00</td><td>-5.75</td><td>35.74</td><td>26.84</td><td>7.26</td><td>31.88</td><td>10.29</td><td>318</td><td>194</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.54	48.25	54.00	-5.75	35.74	26.84	7.26	31.88	10.29	318	194	Average	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>107.77</td><td>-----</td><td>-----</td><td>95.30</td><td>26.80</td><td>7.26</td><td>31.88</td><td>10.29</td><td>318</td><td>194</td><td>Average</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	107.77	-----	-----	95.30	26.80	7.26	31.88	10.29	318	194	Average
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2483.54	48.25	54.00	-5.75	35.74	26.84	7.26	31.88	10.29	318	194	Average																																																																								
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2480.00	107.77	-----	-----	95.30	26.80	7.26	31.88	10.29	318	194	Average																																																																								

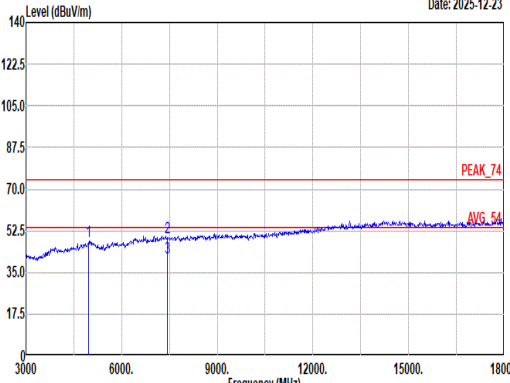
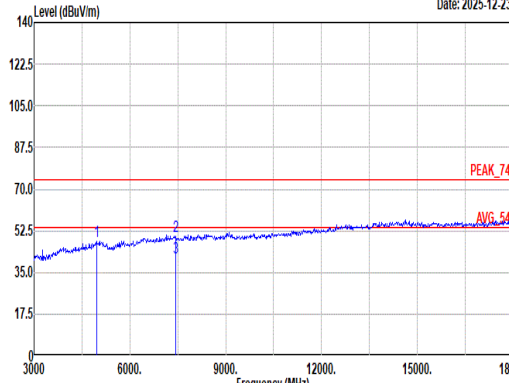


Mode	14																																																																																																																																					
	Harmonic																																																																																																																																					
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																					
ANT	2																																																																																																																																					
Pol.	Horizontal							Vertical																																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2025-12-23  Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4960.00</td><td>47.92</td><td>74.00</td><td>-26.08</td><td>34.91</td><td>32.92</td><td>10.62</td><td>32.24</td><td>1.71</td><td>-- -- Peak</td></tr><tr><td>2 7440.00</td><td>49.44</td><td>74.00</td><td>-24.56</td><td>33.24</td><td>37.14</td><td>12.90</td><td>35.78</td><td>1.94</td><td>-- -- Peak</td></tr><tr><td>3 7440.00</td><td>41.11</td><td>54.00</td><td>-12.89</td><td>24.91</td><td>37.14</td><td>12.90</td><td>35.78</td><td>1.94</td><td>-- -- Average</td></tr></table>								Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4960.00	47.92	74.00	-26.08	34.91	32.92	10.62	32.24	1.71	-- -- Peak	2 7440.00	49.44	74.00	-24.56	33.24	37.14	12.90	35.78	1.94	-- -- Peak	3 7440.00	41.11	54.00	-12.89	24.91	37.14	12.90	35.78	1.94	-- -- Average	Level (dBuV/m) Date: 2025-12-23  Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4960.00</td><td>48.20</td><td>74.00</td><td>-25.80</td><td>35.19</td><td>32.92</td><td>10.62</td><td>32.24</td><td>1.71</td><td>-- -- Peak</td></tr><tr><td>2 7440.00</td><td>50.27</td><td>74.00</td><td>-23.73</td><td>34.07</td><td>37.14</td><td>12.90</td><td>35.78</td><td>1.94</td><td>-- -- Peak</td></tr><tr><td>3 7440.00</td><td>40.98</td><td>54.00</td><td>-13.02</td><td>24.78</td><td>37.14</td><td>12.90</td><td>35.78</td><td>1.94</td><td>-- -- Average</td></tr></table>								Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4960.00	48.20	74.00	-25.80	35.19	32.92	10.62	32.24	1.71	-- -- Peak	2 7440.00	50.27	74.00	-23.73	34.07	37.14	12.90	35.78	1.94	-- -- Peak	3 7440.00	40.98	54.00	-13.02	24.78	37.14	12.90	35.78	1.94	-- -- Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																													
1 4960.00	47.92	74.00	-26.08	34.91	32.92	10.62	32.24	1.71	-- -- Peak																																																																																																																													
2 7440.00	49.44	74.00	-24.56	33.24	37.14	12.90	35.78	1.94	-- -- Peak																																																																																																																													
3 7440.00	41.11	54.00	-12.89	24.91	37.14	12.90	35.78	1.94	-- -- Average																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																													
1 4960.00	48.20	74.00	-25.80	35.19	32.92	10.62	32.24	1.71	-- -- Peak																																																																																																																													
2 7440.00	50.27	74.00	-23.73	34.07	37.14	12.90	35.78	1.94	-- -- Peak																																																																																																																													
3 7440.00	40.98	54.00	-13.02	24.78	37.14	12.90	35.78	1.94	-- -- Average																																																																																																																													



Mode	14	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2025-12-23 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL

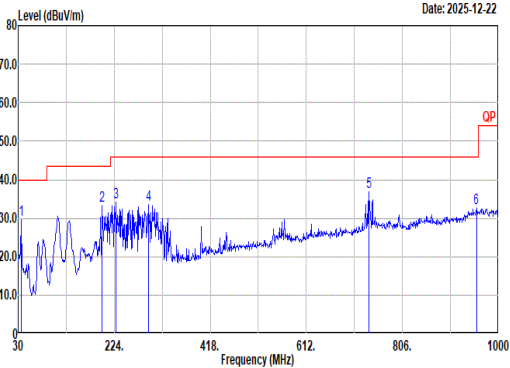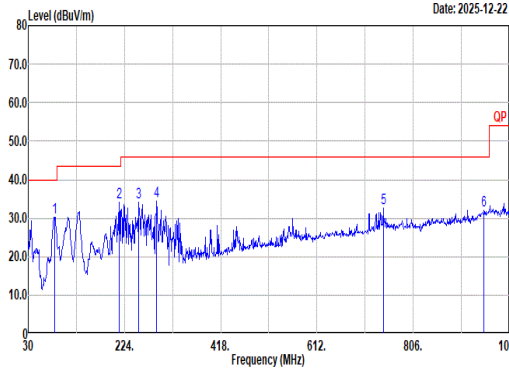

Mode	15																																																																																																																																																																																												
	LF																																																																																																																																																																																												
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																																																																												
ANT	2																																																																																																																																																																																												
Pol.	Horizontal					Vertical																																																																																																																																																																																							
QPI Peak																																																																																																																																																																																													
	Site : 03CH23-HY Condition: QP 3m CBL6111D_62028 & 003_251126 HORIZONTAL					Site : 03CH23-HY Condition: QP 3m CBL6111D_62028 & 003_251126 VERTICAL																																																																																																																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>36.79</td><td>29.49</td><td>40.00</td><td>-10.51</td><td>40.28</td><td>21.18</td><td>0.57</td><td>32.56</td><td>0.02 -- -- Peak</td></tr><tr><td>2</td><td>199.75</td><td>33.34</td><td>43.50</td><td>-10.16</td><td>49.06</td><td>15.06</td><td>1.67</td><td>32.51</td><td>0.06 -- -- Peak</td></tr><tr><td>3</td><td>227.88</td><td>34.22</td><td>46.00</td><td>-11.78</td><td>48.06</td><td>16.00</td><td>1.80</td><td>32.51</td><td>0.07 -- -- Peak</td></tr><tr><td>4</td><td>293.84</td><td>33.41</td><td>46.00</td><td>-12.59</td><td>44.59</td><td>19.15</td><td>2.12</td><td>32.52</td><td>0.07 -- -- Peak</td></tr><tr><td>5</td><td>739.07</td><td>36.94</td><td>46.00</td><td>-9.06</td><td>37.97</td><td>27.89</td><td>3.51</td><td>32.57</td><td>0.14 -- -- Peak</td></tr><tr><td>6</td><td>955.38</td><td>32.46</td><td>46.00</td><td>-13.54</td><td>28.32</td><td>30.96</td><td>4.06</td><td>31.09</td><td>0.21 -- -- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	36.79	29.49	40.00	-10.51	40.28	21.18	0.57	32.56	0.02 -- -- Peak	2	199.75	33.34	43.50	-10.16	49.06	15.06	1.67	32.51	0.06 -- -- Peak	3	227.88	34.22	46.00	-11.78	48.06	16.00	1.80	32.51	0.07 -- -- Peak	4	293.84	33.41	46.00	-12.59	44.59	19.15	2.12	32.52	0.07 -- -- Peak	5	739.07	36.94	46.00	-9.06	37.97	27.89	3.51	32.57	0.14 -- -- Peak	6	955.38	32.46	46.00	-13.54	28.32	30.96	4.06	31.09	0.21 -- -- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>83.35</td><td>30.33</td><td>40.00</td><td>-9.67</td><td>47.69</td><td>14.12</td><td>0.98</td><td>32.51</td><td>0.05 -- -- Peak</td></tr><tr><td>2</td><td>213.33</td><td>34.13</td><td>43.50</td><td>-9.37</td><td>49.91</td><td>14.94</td><td>1.73</td><td>32.51</td><td>0.06 -- -- Peak</td></tr><tr><td>3</td><td>253.10</td><td>34.22</td><td>46.00</td><td>-11.78</td><td>45.75</td><td>19.00</td><td>1.92</td><td>32.52</td><td>0.07 -- -- Peak</td></tr><tr><td>4</td><td>288.99</td><td>34.49</td><td>46.00</td><td>-11.51</td><td>45.00</td><td>19.04</td><td>2.10</td><td>32.52</td><td>0.07 -- -- Peak</td></tr><tr><td>5</td><td>745.86</td><td>32.55</td><td>46.00</td><td>-13.45</td><td>33.38</td><td>28.06</td><td>3.52</td><td>32.55</td><td>0.14 -- -- Peak</td></tr><tr><td>6</td><td>948.59</td><td>32.04</td><td>46.00</td><td>-13.96</td><td>28.26</td><td>30.69</td><td>4.06</td><td>31.17</td><td>0.20 -- -- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	83.35	30.33	40.00	-9.67	47.69	14.12	0.98	32.51	0.05 -- -- Peak	2	213.33	34.13	43.50	-9.37	49.91	14.94	1.73	32.51	0.06 -- -- Peak	3	253.10	34.22	46.00	-11.78	45.75	19.00	1.92	32.52	0.07 -- -- Peak	4	288.99	34.49	46.00	-11.51	45.00	19.04	2.10	32.52	0.07 -- -- Peak	5	745.86	32.55	46.00	-13.45	33.38	28.06	3.52	32.55	0.14 -- -- Peak	6	948.59	32.04	46.00	-13.96	28.26	30.69	4.06	31.17
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																				
1	36.79	29.49	40.00	-10.51	40.28	21.18	0.57	32.56	0.02 -- -- Peak																																																																																																																																																																																				
2	199.75	33.34	43.50	-10.16	49.06	15.06	1.67	32.51	0.06 -- -- Peak																																																																																																																																																																																				
3	227.88	34.22	46.00	-11.78	48.06	16.00	1.80	32.51	0.07 -- -- Peak																																																																																																																																																																																				
4	293.84	33.41	46.00	-12.59	44.59	19.15	2.12	32.52	0.07 -- -- Peak																																																																																																																																																																																				
5	739.07	36.94	46.00	-9.06	37.97	27.89	3.51	32.57	0.14 -- -- Peak																																																																																																																																																																																				
6	955.38	32.46	46.00	-13.54	28.32	30.96	4.06	31.09	0.21 -- -- Peak																																																																																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																				
1	83.35	30.33	40.00	-9.67	47.69	14.12	0.98	32.51	0.05 -- -- Peak																																																																																																																																																																																				
2	213.33	34.13	43.50	-9.37	49.91	14.94	1.73	32.51	0.06 -- -- Peak																																																																																																																																																																																				
3	253.10	34.22	46.00	-11.78	45.75	19.00	1.92	32.52	0.07 -- -- Peak																																																																																																																																																																																				
4	288.99	34.49	46.00	-11.51	45.00	19.04	2.10	32.52	0.07 -- -- Peak																																																																																																																																																																																				
5	745.86	32.55	46.00	-13.45	33.38	28.06	3.52	32.55	0.14 -- -- Peak																																																																																																																																																																																				
6	948.59	32.04	46.00	-13.96	28.26	30.69	4.06	31.17	0.20 -- -- Peak																																																																																																																																																																																				



Mode	16																																																																																																			
	SHF																																																																																																			
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																			
ANT	2																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak	Date: 2025-12-21 Site : 03CH23-HY Condition: PEAK_74 1m BBHA9170_1225_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24969.88</td><td>39.93</td><td>74.00</td><td>-34.07</td><td>49.43</td><td>39.60</td><td>22.35</td><td>61.91</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24969.88	39.93	74.00	-34.07	49.43	39.60	22.35	61.91	-9.54	--	--	PEAK	Date: 2025-12-21 Site : 03CH23-HY Condition: PEAK_74 1m BBHA9170_1225_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>23281.17</td><td>39.43</td><td>74.00</td><td>-34.57</td><td>50.61</td><td>39.10</td><td>21.35</td><td>62.09</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	23281.17	39.43	74.00	-34.57	50.61	39.10	21.35	62.09	-9.54	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	24969.88	39.93	74.00	-34.07	49.43	39.60	22.35	61.91	-9.54	--	--	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	23281.17	39.43	74.00	-34.57	50.61	39.10	21.35	62.09	-9.54	--	--	PEAK																																																																																								



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	61.02	382	2.62	2.7KHz
Bluetooth - LE for 2Mbps	31.73	198	5.05	5.1KHz

