

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION.....	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	107
A.2.3 Emissions in Non-restricted Frequency Bands:.....	115
A.3 DTS/OCCUPIED BANDWIDTH.....	116
A.3.1 DTS/Occupied Bandwidth Result.....	116
A.3.2 Measurement Plots	118
A.4 MAXIMUM PEAK OUTPUT POWER	126
A.4.1 Peak Output Power	126
A.4.2 Average Output Power (Reporting only).....	130
A.5 EMISSION LIMITATIONS	134
A.6 POWER SPECTRAL DENSITY	170
A.6.1 Power Spectral Density Result	170
A.6.2 Measurement Plots	173

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2025/09/05	Temp./Hum.	25°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du

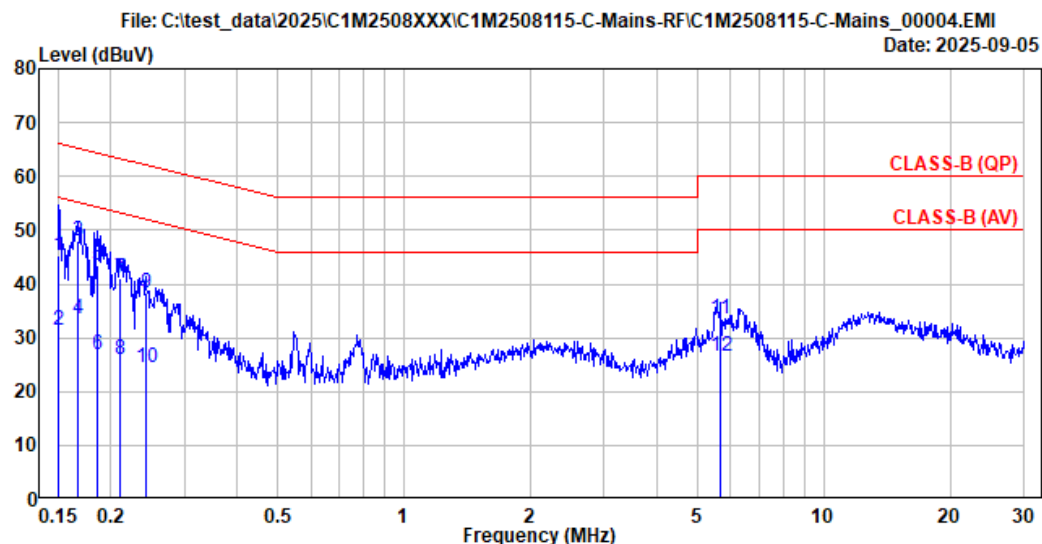

Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 25°C/52%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90U	Engineer	: Nick Du
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	10.34	0.03	9.85	25.11	45.33	65.96	20.63	QP
2	0.151	10.34	0.03	9.85	11.18	31.40	55.96	24.56	Average
3	0.167	10.33	0.03	9.85	27.72	47.93	65.09	17.16	QP
4	0.167	10.33	0.03	9.85	13.31	33.52	55.09	21.57	Average
5	0.186	10.33	0.03	9.85	23.30	43.51	64.22	20.71	QP
6	0.186	10.33	0.03	9.85	6.53	26.74	54.22	27.48	Average
7	0.211	10.32	0.03	9.85	20.90	41.10	63.18	22.08	QP
8	0.211	10.32	0.03	9.85	5.62	25.82	53.18	27.36	Average
9	0.242	10.32	0.03	9.85	18.02	38.22	62.03	23.81	QP
10	0.242	10.32	0.03	9.85	4.24	24.44	52.03	27.59	Average
11	5.677	10.49	0.10	9.87	13.07	33.53	60.00	26.47	QP
12	5.677	10.49	0.10	9.87	6.11	26.57	50.00	23.43	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2025/09/05	Temp./Hum.	25°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du

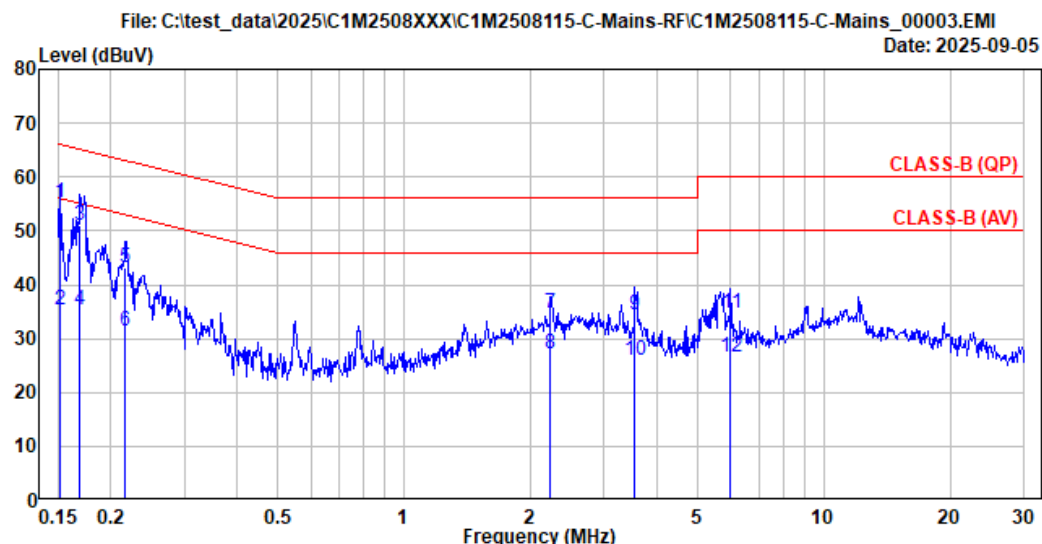

Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 25°C/52%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90U	Engineer	: Nick Du
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.34	0.03	9.85	35.12	55.34	65.92	10.58	QP
2	0.152	10.34	0.03	9.85	15.16	35.38	55.92	20.54	Average
3	0.169	10.34	0.03	9.85	30.75	50.97	65.01	14.04	QP
4	0.169	10.34	0.03	9.85	15.17	35.39	55.01	19.62	Average
5	0.217	10.33	0.03	9.85	22.82	43.03	62.94	19.91	QP
6	0.217	10.33	0.03	9.85	11.32	31.53	52.94	21.41	Average
7	2.235	10.34	0.06	9.86	14.40	34.66	56.00	21.34	QP
8	2.235	10.34	0.06	9.86	6.99	27.25	46.00	18.75	Average
9	3.553	10.36	0.08	9.86	14.09	34.39	56.00	21.61	QP
10	3.553	10.36	0.08	9.86	5.62	25.92	46.00	20.08	Average
11	5.997	10.44	0.10	9.87	14.29	34.70	60.00	25.30	QP
12	5.997	10.44	0.10	9.87	6.27	26.68	50.00	23.32	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2025/08/26~09/09	Temp./Hum.	24°C/53~55%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

A.2.1.2 Frequency Below 1GHz.

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.000	23.22	1.42	26.47	39.06	37.23	40.00	2.77	Peak
148.500	16.57	3.17	26.00	40.73	34.48	43.50	9.02	Peak
456.500	22.42	6.58	26.81	35.53	37.72	46.00	8.28	Peak
594.000	24.23	7.12	27.36	33.63	37.62	46.00	8.38	Peak
924.000	26.59	8.96	26.93	28.22	36.85	46.00	9.15	Peak
981.500	26.99	9.28	26.75	27.54	37.05	54.00	16.95	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.000	23.22	1.42	26.47	38.92	37.10	40.00	2.90	Peak
148.500	16.57	3.17	26.00	40.30	34.05	43.50	9.45	Peak
456.500	22.42	6.58	26.81	35.07	37.26	46.00	8.74	Peak
594.000	24.23	7.12	27.36	33.47	37.45	46.00	8.55	Peak
888.500	26.23	8.75	27.02	29.69	37.64	46.00	8.36	Peak
997.000	27.10	9.36	26.71	27.54	37.30	54.00	16.70	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.000	23.22	1.42	26.47	39.42	37.60	40.00	2.40	Peak
148.500	16.57	3.17	26.00	39.97	33.71	43.50	9.79	Peak
456.500	22.42	6.58	26.81	34.75	36.94	46.00	9.06	Peak
594.000	24.23	7.12	27.36	33.52	37.50	46.00	8.50	Peak
730.500	24.59	7.80	27.34	38.06	43.11	46.00	2.89	Peak
973.000	26.93	9.23	26.78	27.81	37.20	54.00	16.80	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.000	23.22	1.42	26.47	39.29	37.46	40.00	2.54	Peak
148.500	16.57	3.17	26.00	39.67	33.41	43.50	10.09	Peak
456.500	22.42	6.58	26.81	35.02	37.22	46.00	8.78	Peak
594.000	24.23	7.12	27.36	32.93	36.91	46.00	9.09	Peak
729.000	24.59	7.80	27.35	34.52	39.56	46.00	6.44	Peak
984.500	27.02	9.30	26.74	27.61	37.18	54.00	16.82	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


● Wireless LAN Mode

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

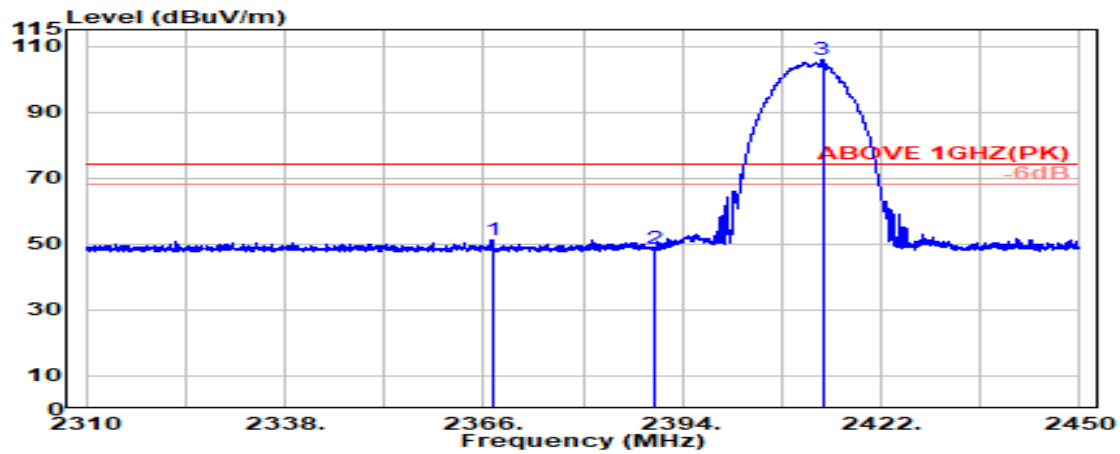

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2367.200	28.20	5.67	39.88	57.26	51.25	74.00	22.75	Peak
2390.000	28.20	5.70	39.88	54.67	48.70	74.00	25.30	Peak
@ 2413.750	28.23	5.74	39.88	111.71	105.80	---	---	Peak

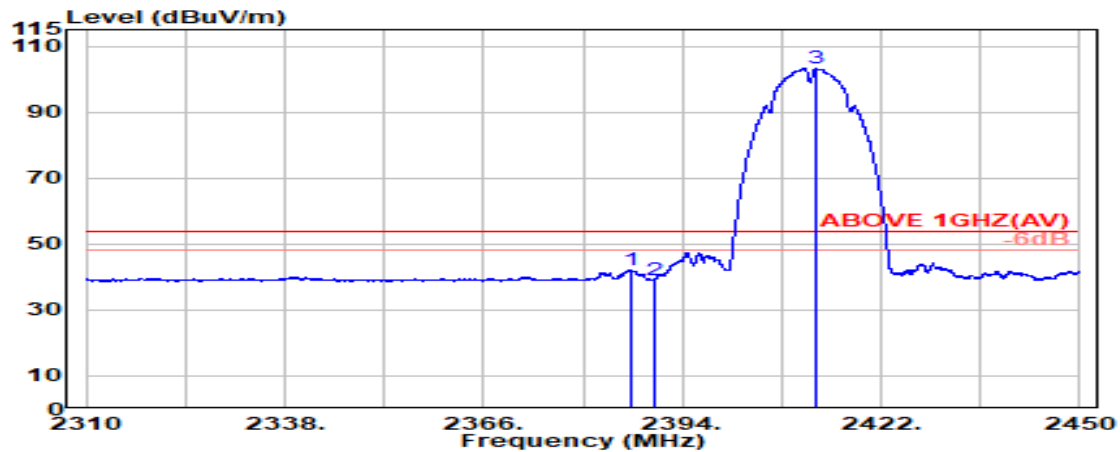

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.650	28.20	5.70	39.88	48.05	42.07	54.00	11.93	Average
2390.000	28.20	5.70	39.88	45.23	39.26	54.00	14.74	Average
@ 2412.800	28.23	5.73	39.88	109.18	103.26	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

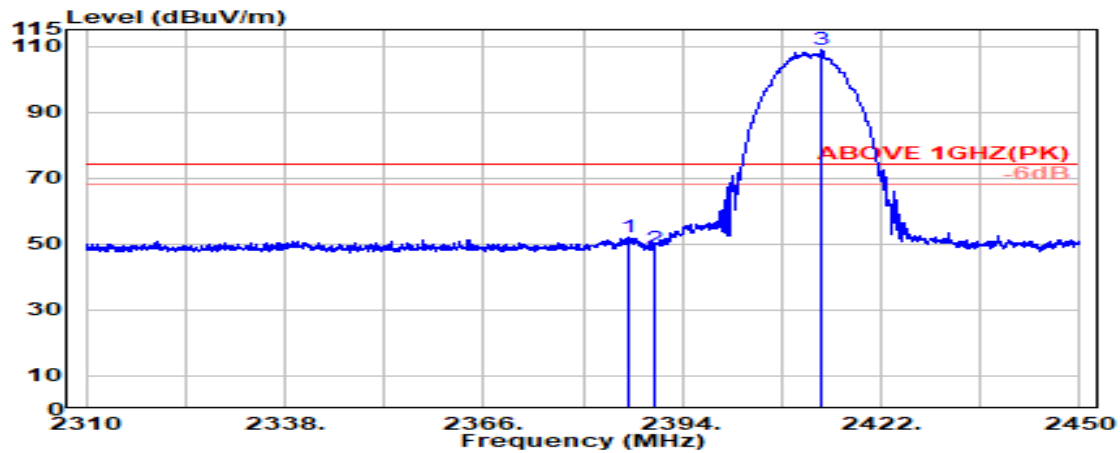

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.600	28.20	5.70	39.88	58.14	52.16	74.00	21.84	Peak
2390.000	28.20	5.70	39.88	54.72	48.74	74.00	25.26	Peak
@ 2413.700	28.23	5.74	39.88	114.93	109.01	---	---	Peak

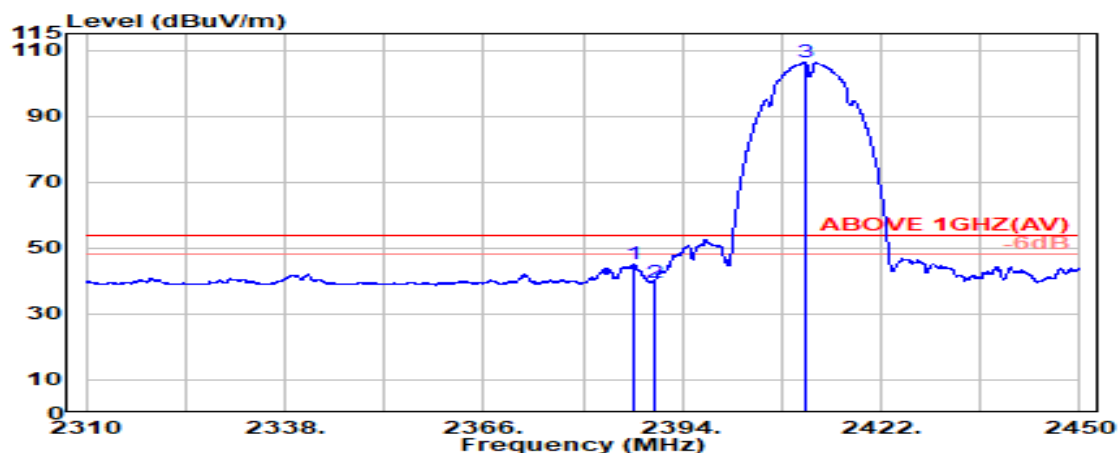

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.200	28.20	5.70	39.88	51.15	45.17	54.00	8.83	Average
2390.000	28.20	5.70	39.88	45.66	39.68	54.00	14.32	Average
@ 2411.200	28.22	5.73	39.88	112.11	106.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

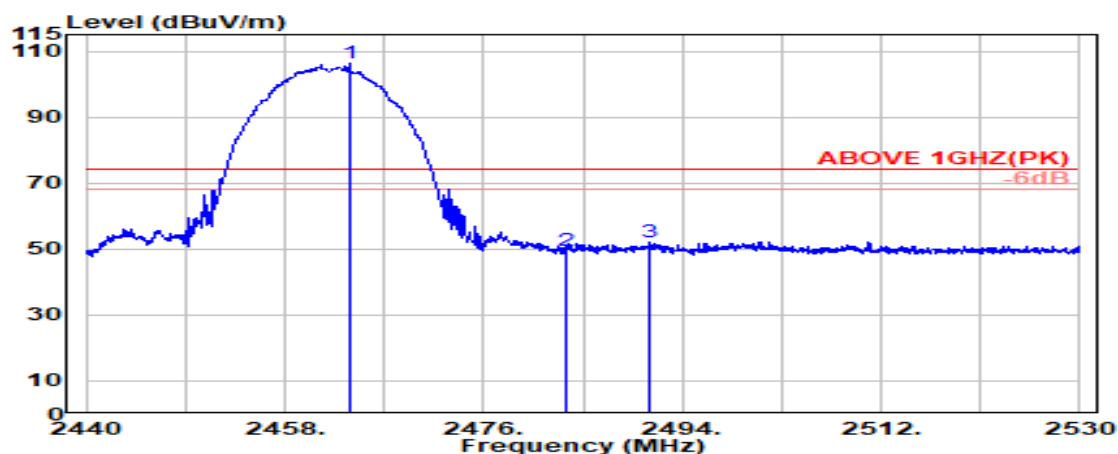

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.850	28.36	5.80	39.87	111.93	106.22	---	---	Peak
	2483.500	28.43	5.83	39.87	55.27	49.66	74.00	24.34	Peak
	2490.950	28.46	5.84	39.87	57.79	52.22	74.00	21.78	Peak

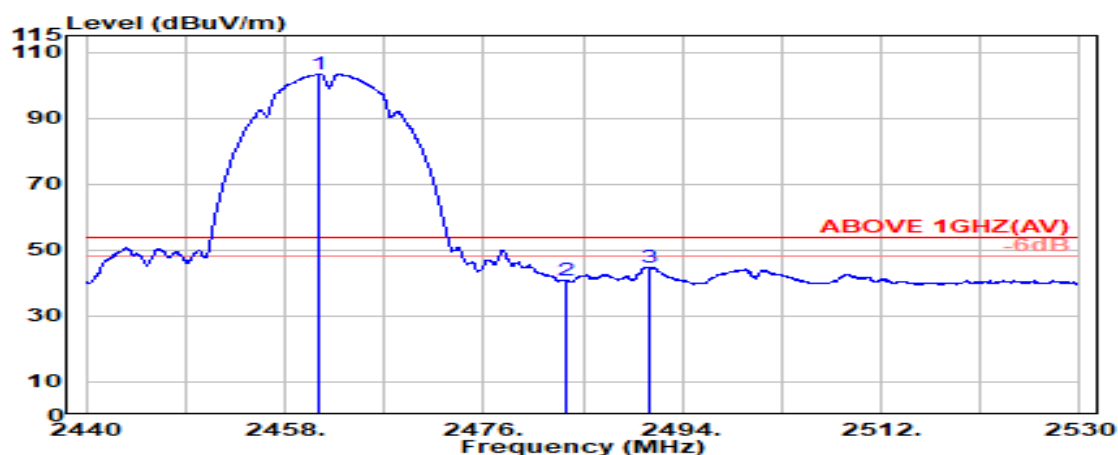

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.150	28.34	5.80	39.87	109.21	103.48	---	---	Average
	2483.500	28.43	5.83	39.87	46.51	40.90	54.00	13.10	Average
	2491.050	28.46	5.84	39.87	50.42	44.85	54.00	9.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

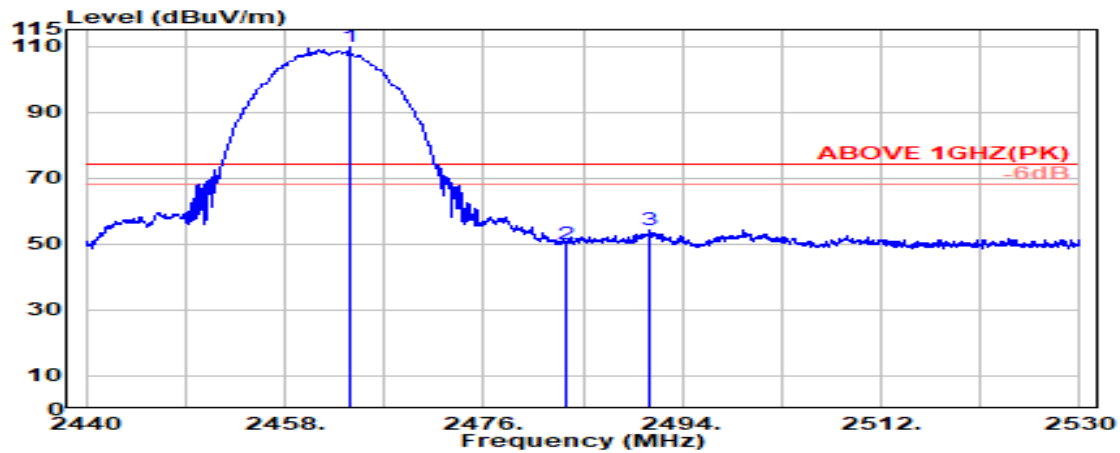

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.800	28.36	5.80	39.87	115.56	109.84	---	---	Peak
2483.500	28.43	5.83	39.87	55.53	49.92	74.00	24.08	Peak
2490.950	28.46	5.84	39.87	59.94	54.37	74.00	19.63	Peak

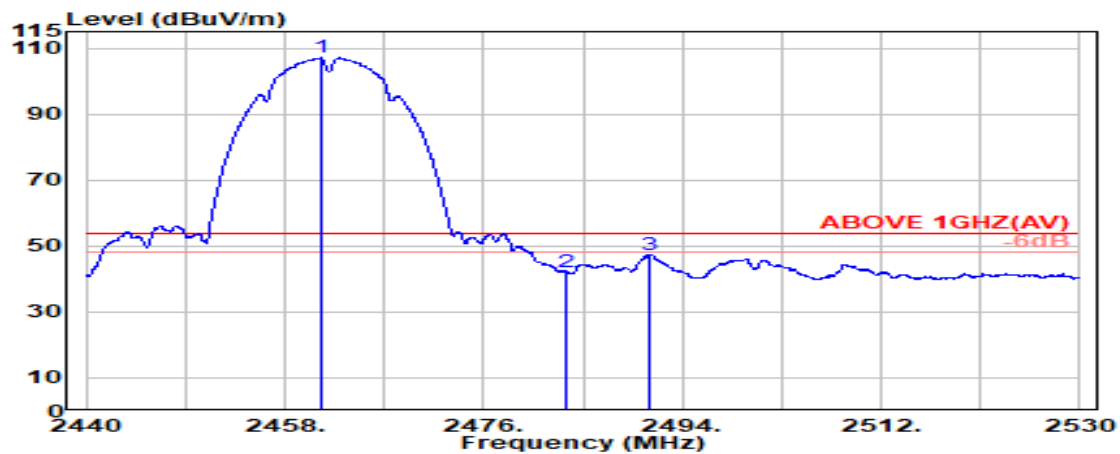

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.250	28.35	5.80	39.87	112.78	107.05	---	---	Average
2483.500	28.43	5.83	39.87	47.82	42.22	54.00	11.78	Average
2491.100	28.46	5.84	39.87	52.96	47.39	54.00	6.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

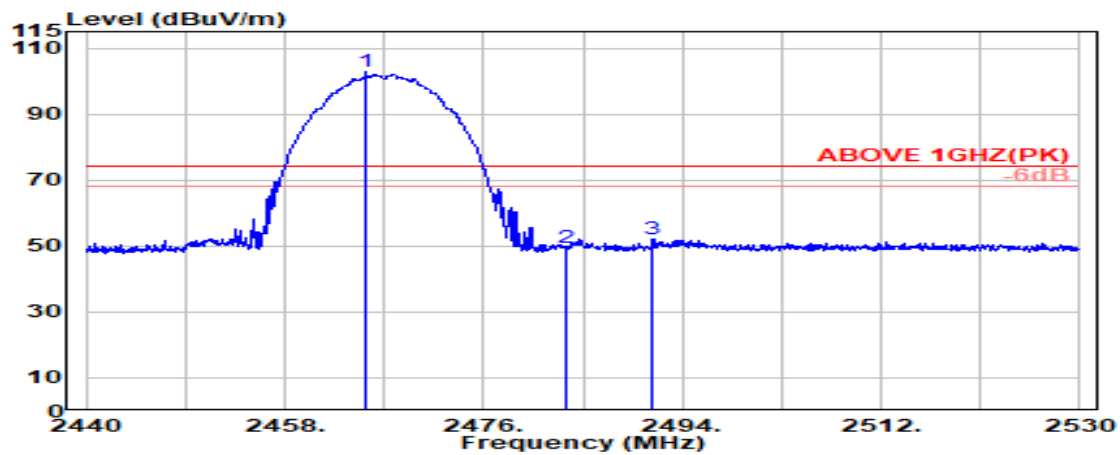

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2465.250	28.36	5.80	39.87	108.77	103.06	---	---	Peak
	2483.500	28.43	5.83	39.87	55.10	49.50	74.00	24.50	Peak
	2491.350	28.47	5.84	39.87	57.53	51.96	74.00	22.04	Peak

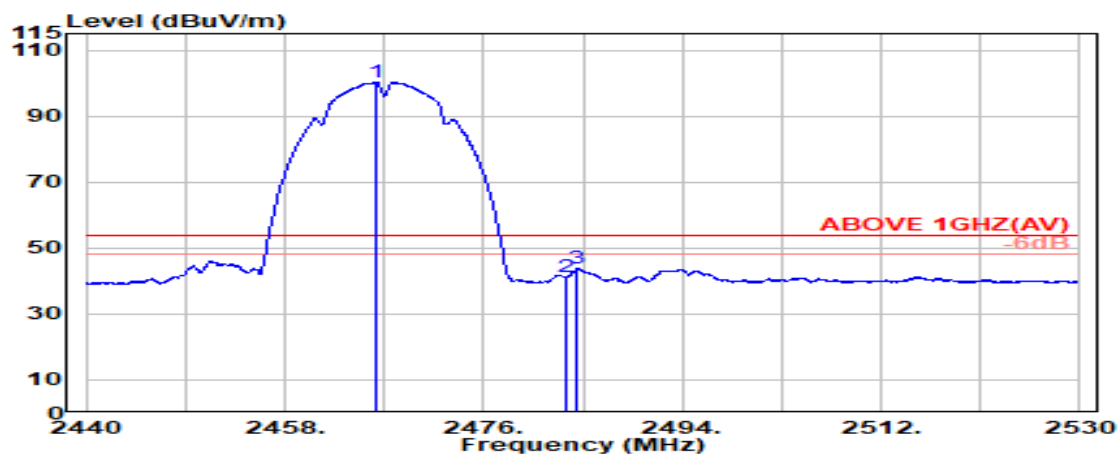

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2466.250	28.37	5.81	39.87	106.02	100.32	---	---	Average
	2483.500	28.43	5.83	39.87	46.77	41.16	54.00	12.84	Average
	2484.500	28.44	5.83	39.87	49.45	43.85	54.00	10.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

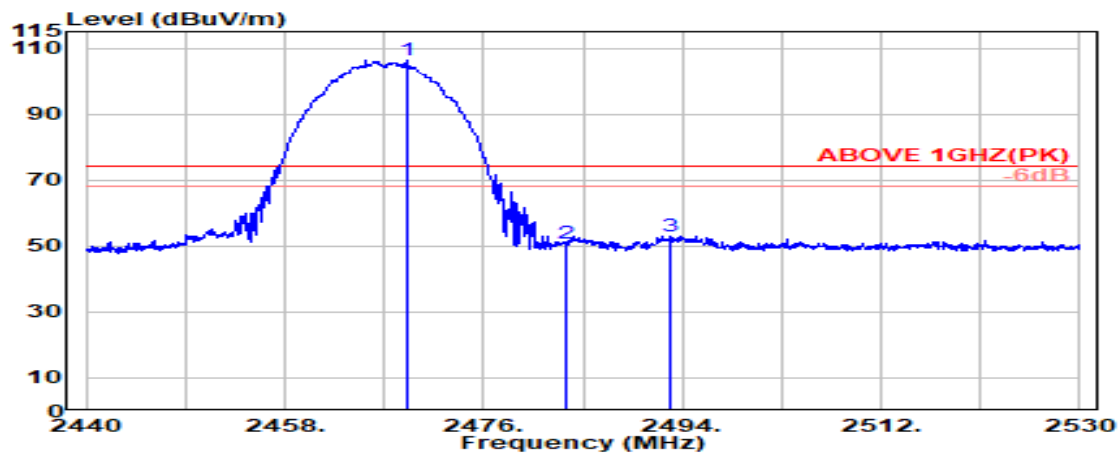

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2469.000	28.38	5.81	39.87	111.94	106.25	---	---	Peak
2483.500	28.43	5.83	39.87	56.37	50.76	74.00	23.24	Peak
2493.000	28.47	5.84	39.87	58.58	53.02	74.00	20.98	Peak

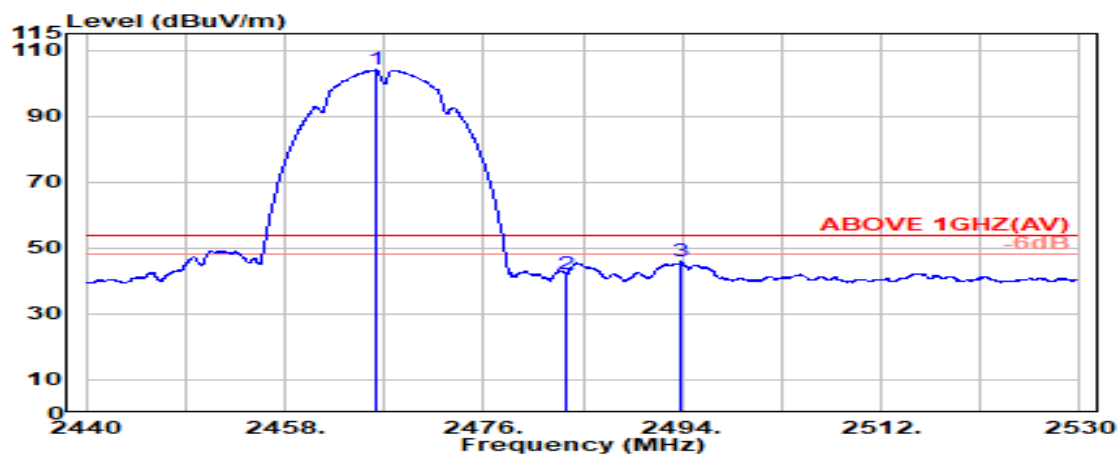

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.250	28.37	5.81	39.87	109.65	103.95	---	---	Average
2483.500	28.43	5.83	39.87	47.87	42.26	54.00	11.74	Average
2493.900	28.48	5.84	39.87	51.36	45.81	54.00	8.19	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

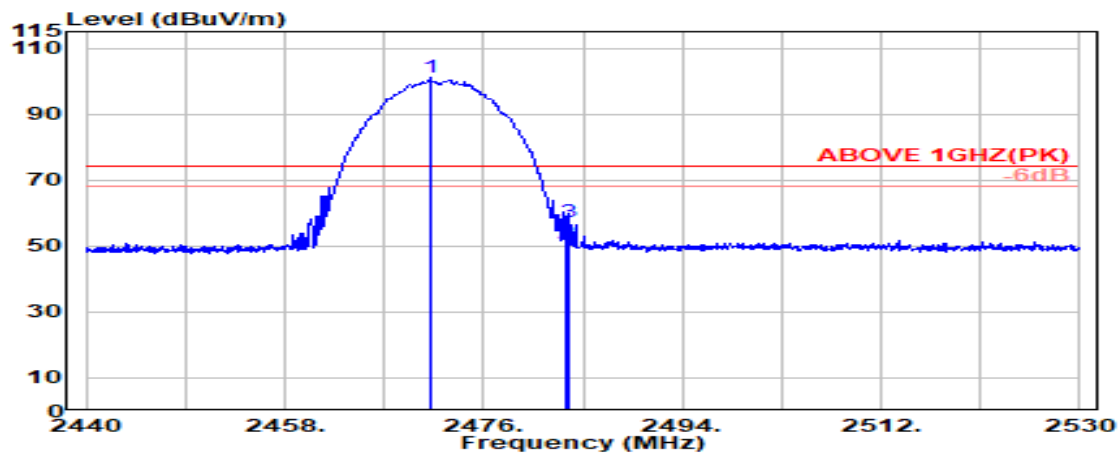

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.150	28.39	5.81	39.87	106.87	101.20	---	---	Peak
2483.500	28.43	5.83	39.87	56.34	50.73	74.00	23.27	Peak
2483.800	28.44	5.83	39.87	63.03	57.42	74.00	16.58	Peak

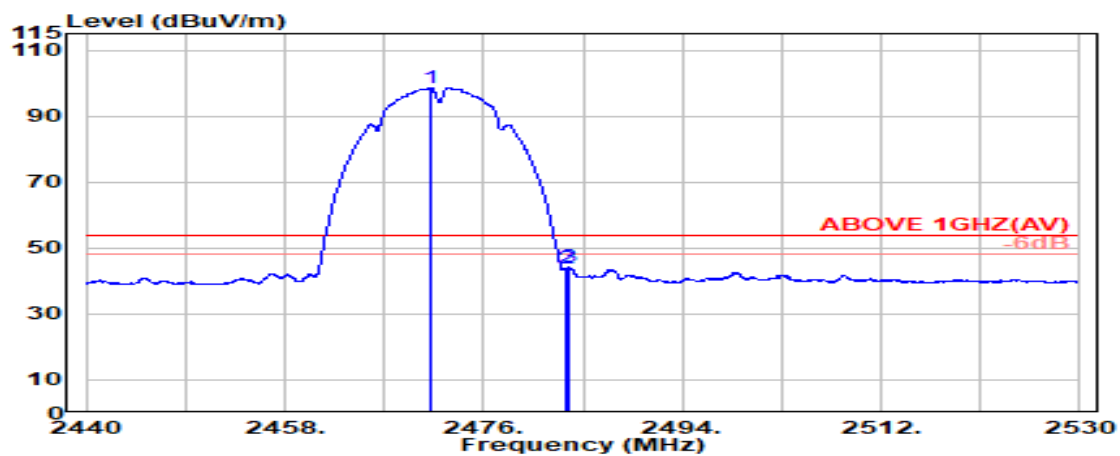

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.250	28.39	5.81	39.87	104.18	98.51	---	---	Average
2483.500	28.43	5.83	39.87	49.59	43.98	54.00	10.02	Average
2483.800	28.44	5.83	39.87	49.74	44.14	54.00	9.86	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

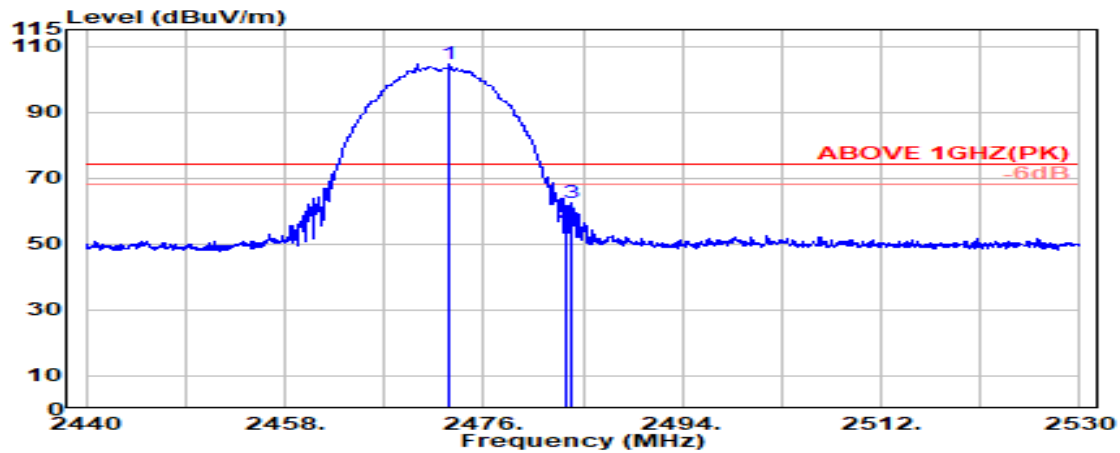

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.800	28.39	5.81	39.87	110.44	104.77	---	---	Peak
2483.500	28.43	5.83	39.87	62.03	56.42	74.00	17.58	Peak
2483.950	28.44	5.83	39.87	67.88	62.28	74.00	11.72	Peak

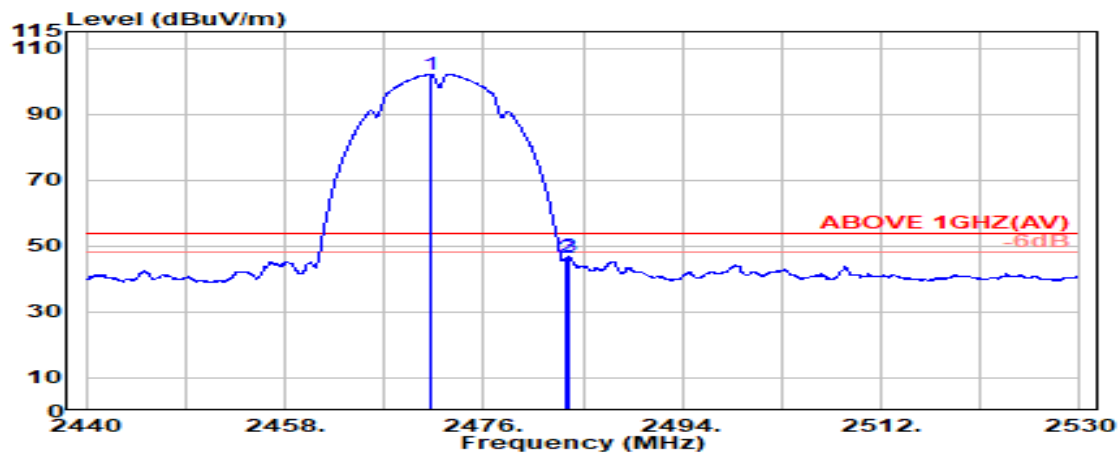

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.300	28.39	5.81	39.87	107.82	102.14	---	---	Average
2483.500	28.43	5.83	39.87	52.09	46.48	54.00	7.52	Average
2483.700	28.44	5.83	39.87	52.35	46.74	54.00	7.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

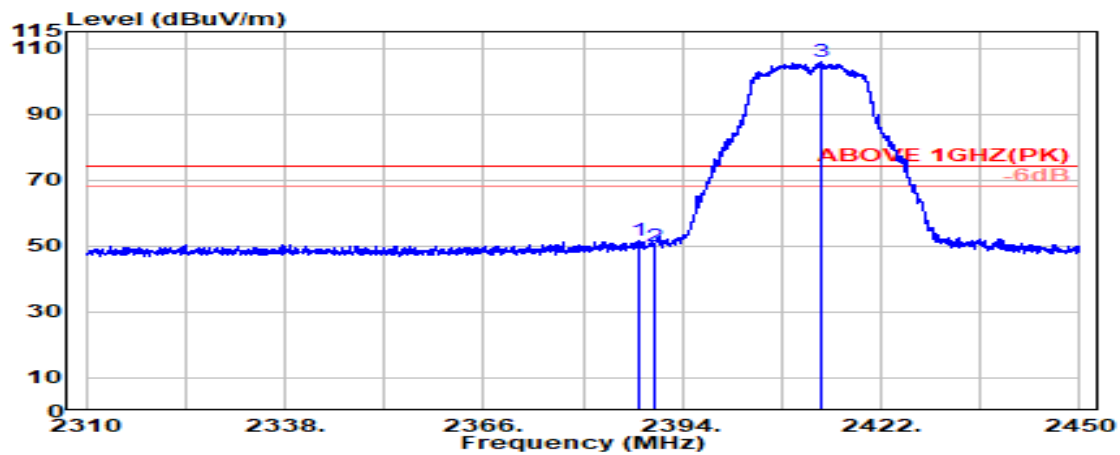

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.750	28.20	5.70	39.88	57.48	51.50	74.00	22.50	Peak
2390.000	28.20	5.70	39.88	56.08	50.11	74.00	23.89	Peak
@ 2413.400	28.23	5.73	39.88	111.62	105.70	---	---	Peak

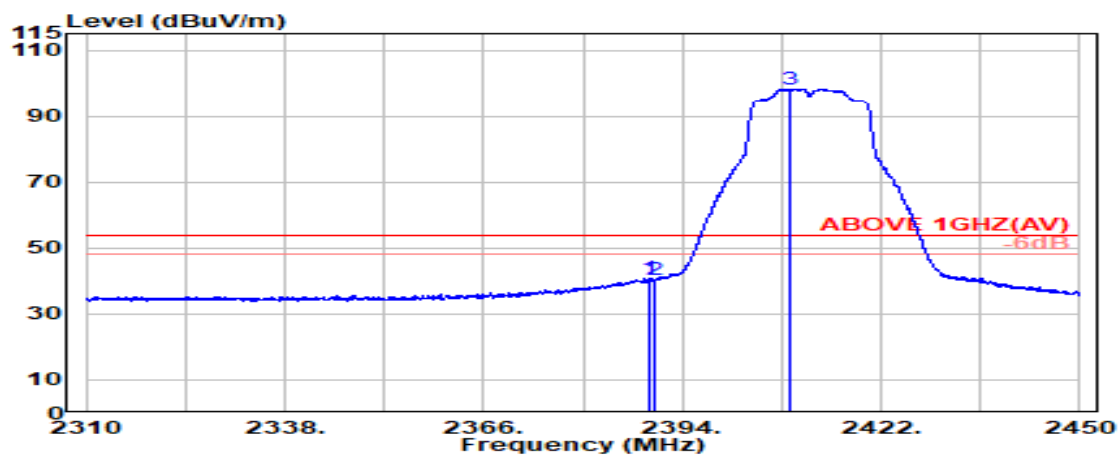

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.20	5.70	39.88	46.67	40.69	54.00	13.31	Average
2390.000	28.20	5.70	39.88	46.52	40.54	54.00	13.46	Average
@ 2409.300	28.22	5.73	39.88	104.01	98.08	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

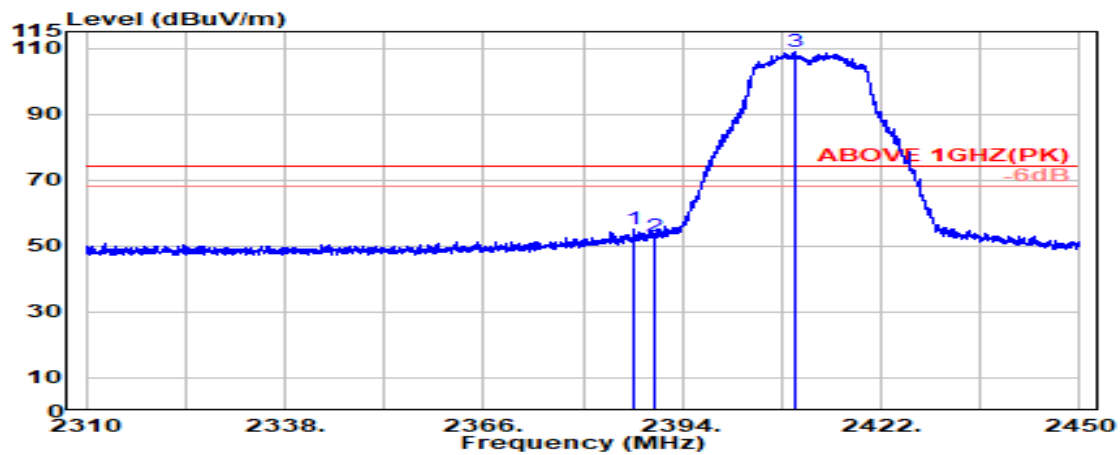

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.100	28.20	5.70	39.88	60.98	55.00	74.00	19.00	Peak
2390.000	28.20	5.70	39.88	58.77	52.79	74.00	21.21	Peak
@ 2410.000	28.22	5.73	39.88	114.72	108.79	---	---	Peak

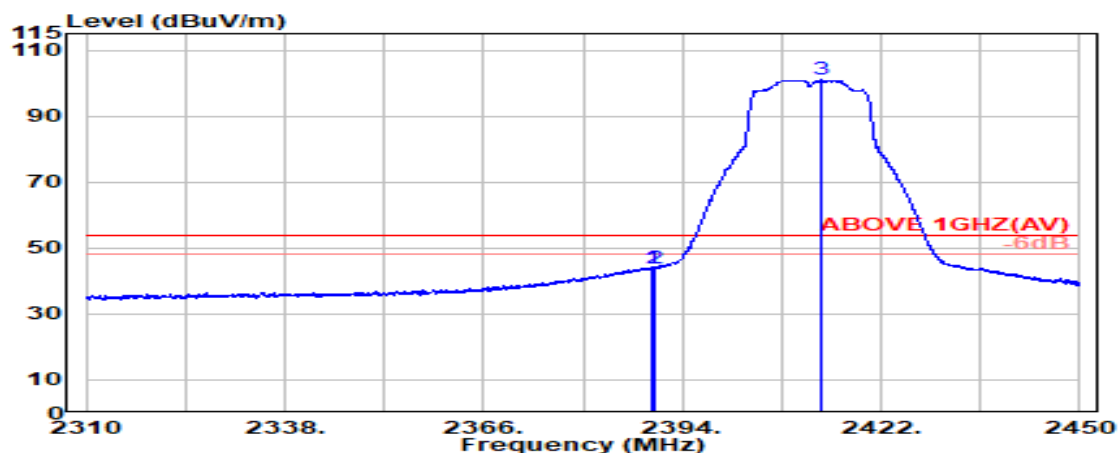

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.20	5.70	39.88	49.91	43.94	54.00	10.06	Average
2390.000	28.20	5.70	39.88	49.71	43.73	54.00	10.27	Average
@ 2413.600	28.23	5.73	39.88	106.90	100.99	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462 MHz
------	---------	-----------	-------------

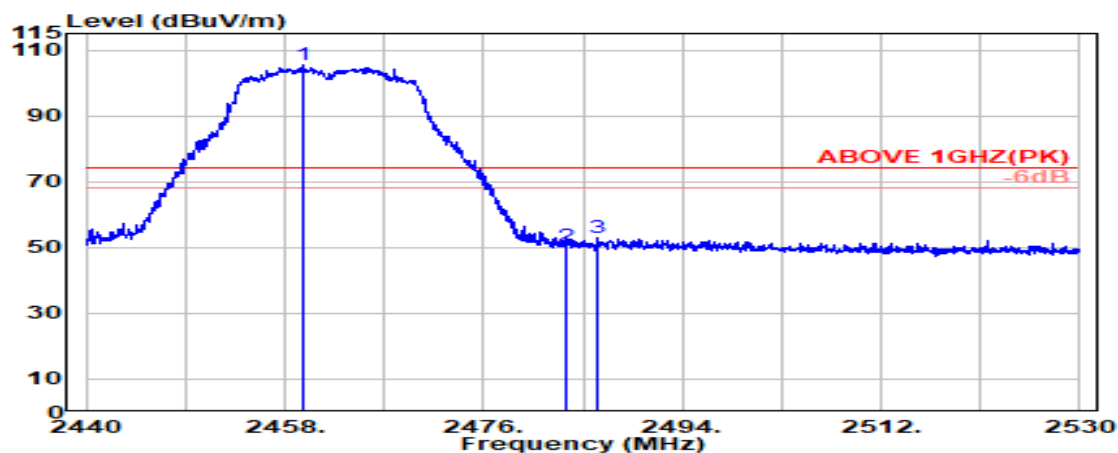

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.550	28.34	5.80	39.87	111.13	105.40	---	---	Peak
2483.500	28.43	5.83	39.87	55.76	50.15	74.00	23.85	Peak
2486.400	28.45	5.83	39.87	58.36	52.77	74.00	21.23	Peak

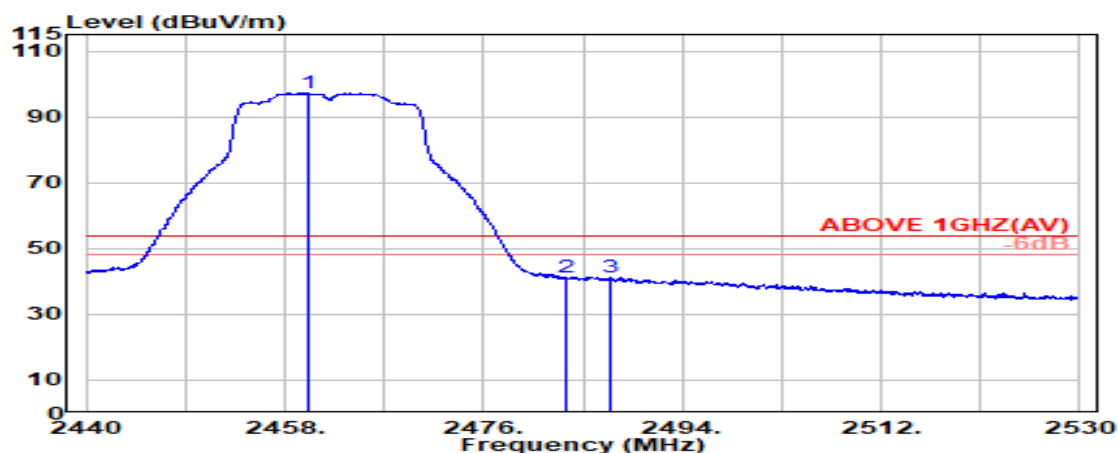

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.050	28.34	5.80	39.87	102.92	97.19	---	---	Average
2483.500	28.43	5.83	39.87	46.80	41.19	54.00	12.81	Average
2487.400	28.45	5.83	39.87	46.89	41.30	54.00	12.70	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462 MHz
------	---------	-----------	-------------

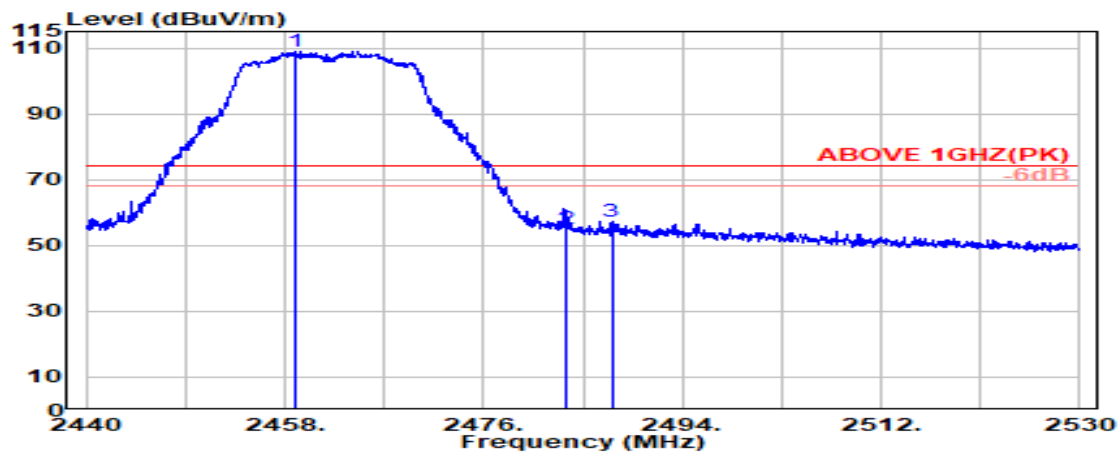

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	28.34	5.80	39.87	114.79	109.05	---	---	Peak
2483.500	28.43	5.83	39.87	60.93	55.32	74.00	18.68	Peak
2487.600	28.45	5.83	39.87	62.71	57.12	74.00	16.88	Peak

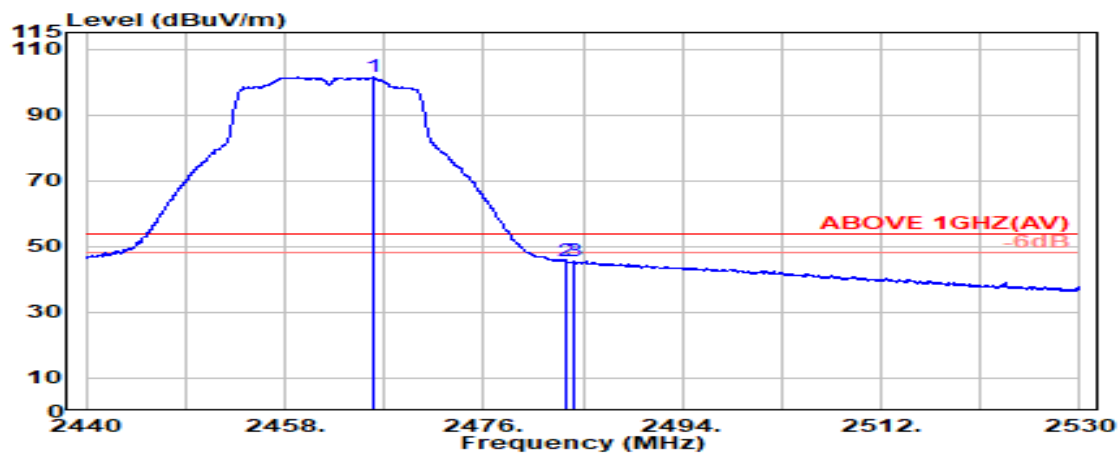


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	28.36	5.81	39.87	107.08	101.38	---	---	Average
2483.500	28.43	5.83	39.87	51.01	45.40	54.00	8.60	Average
2484.100	28.44	5.83	39.87	51.02	45.42	54.00	8.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

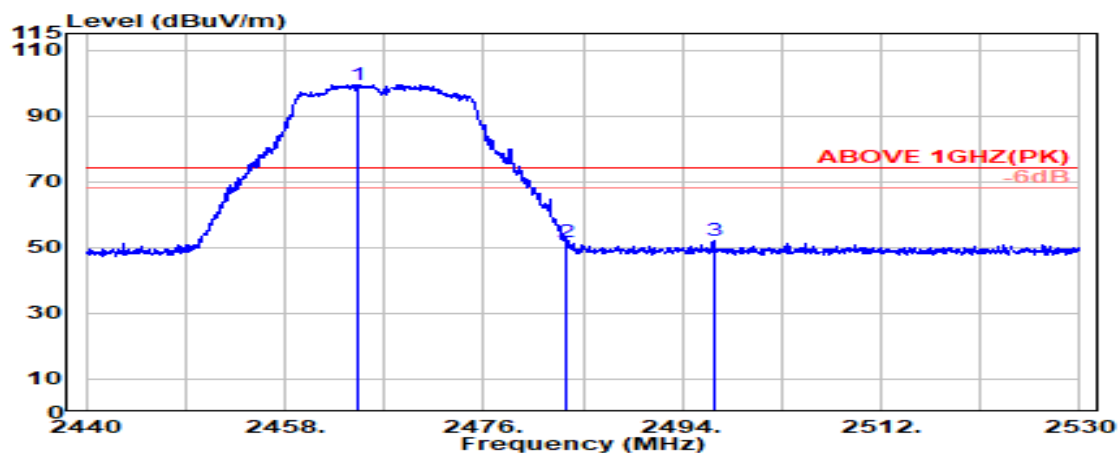

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.600	28.36	5.80	39.87	105.23	99.52	---	---	Peak
2483.500	28.43	5.83	39.87	57.40	51.80	74.00	22.20	Peak
2496.800	28.49	5.85	39.87	57.42	51.88	74.00	22.12	Peak

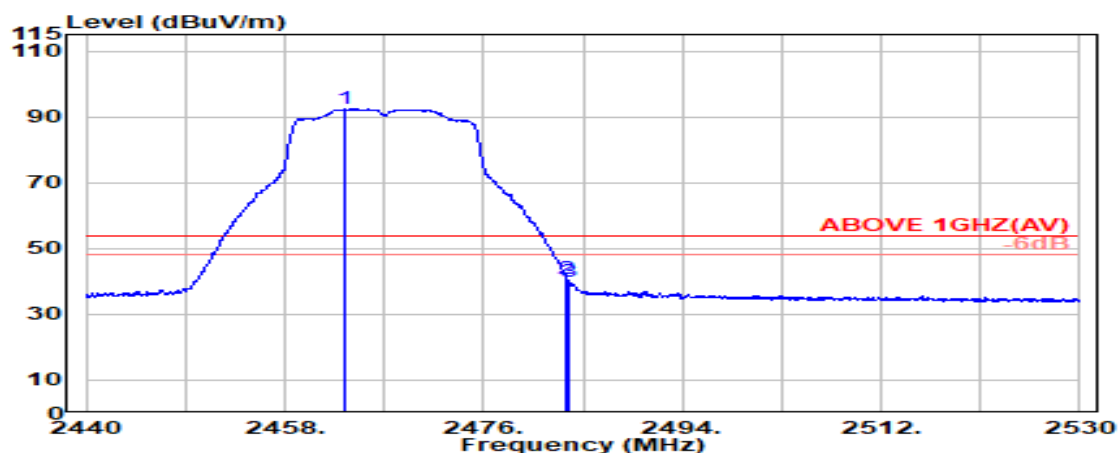


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.500	28.35	5.80	39.87	98.06	92.34	---	---	Average
2483.500	28.43	5.83	39.87	46.49	40.88	54.00	13.12	Average
2483.700	28.44	5.83	39.87	45.36	39.75	54.00	14.25	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

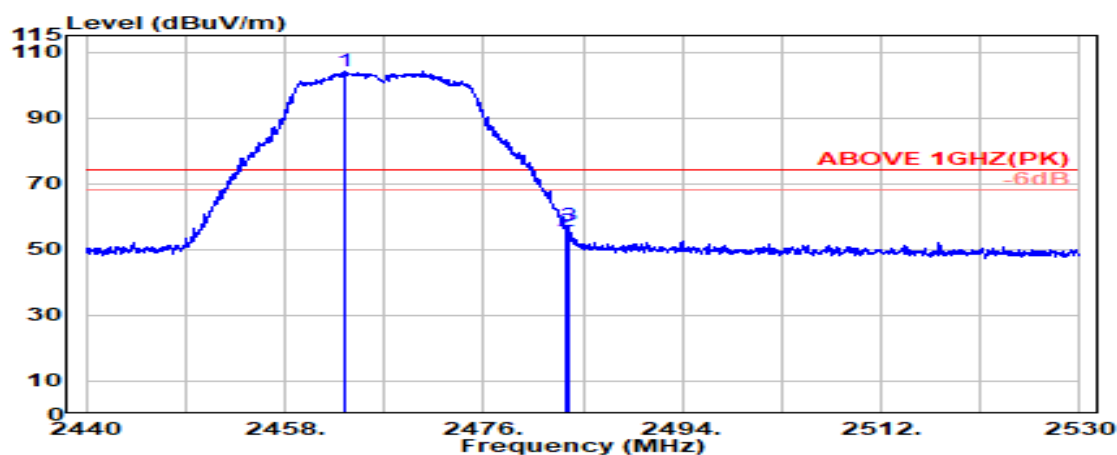

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	28.35	5.80	39.87	109.83	104.11	---	---	Peak
2483.500	28.43	5.83	39.87	61.02	55.41	74.00	18.59	Peak
2483.750	28.44	5.83	39.87	62.75	57.14	74.00	16.86	Peak

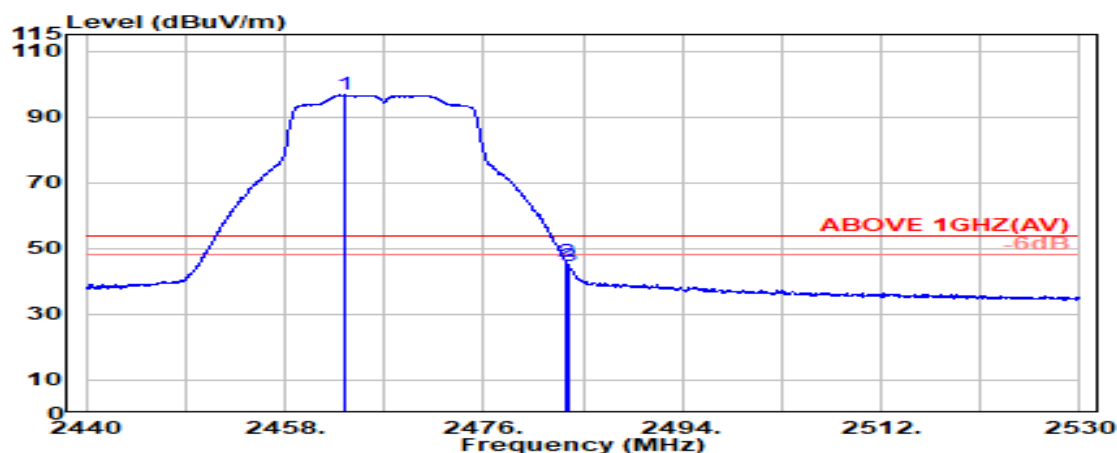

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.400	28.35	5.80	39.87	102.32	96.60	---	---	Average
2483.500	28.43	5.83	39.87	51.55	45.94	54.00	8.06	Average
2483.700	28.44	5.83	39.87	50.23	44.62	54.00	9.38	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

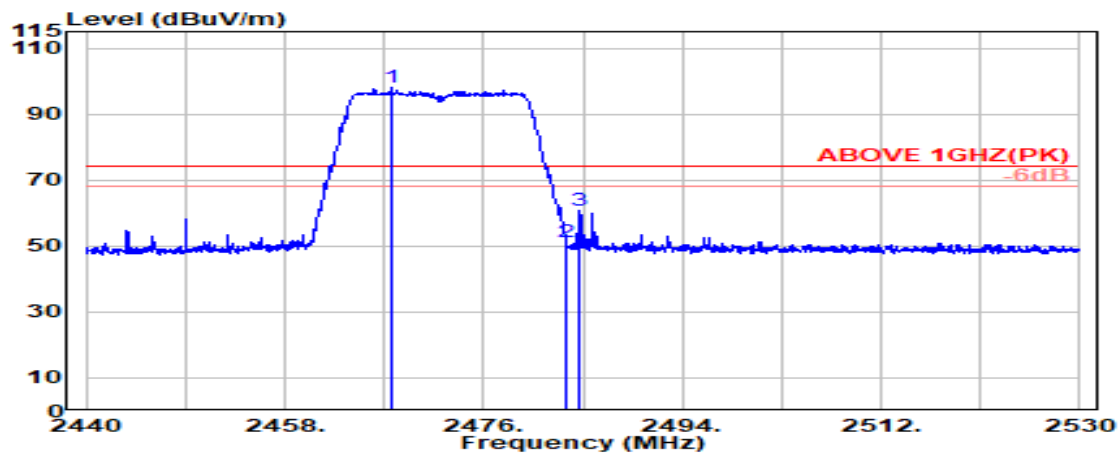

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.650	28.37	5.81	39.87	103.77	98.08	---	---	Peak
2483.500	28.43	5.83	39.87	56.75	51.14	74.00	22.86	Peak
2484.750	28.44	5.83	39.87	66.48	60.88	74.00	13.12	Peak

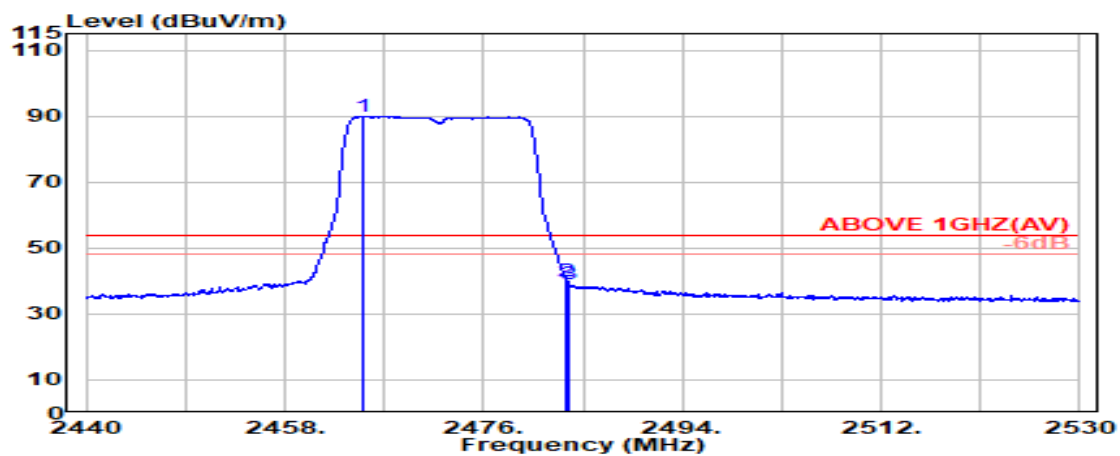

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.150	28.36	5.80	39.87	95.67	89.97	---	---	Average
2483.500	28.43	5.83	39.87	45.70	40.09	54.00	13.91	Average
2483.700	28.44	5.83	39.87	44.74	39.13	54.00	14.87	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

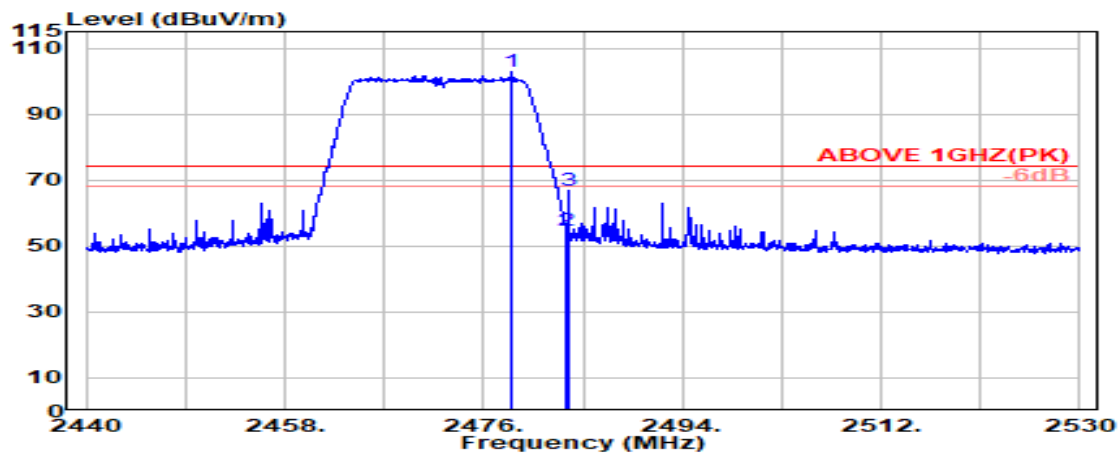

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.600	28.41	5.82	39.87	108.45	102.82	---	---	Peak
2483.500	28.43	5.83	39.87	60.17	54.56	74.00	19.44	Peak
2483.700	28.44	5.83	39.87	72.24	66.64	74.00	7.36	Peak

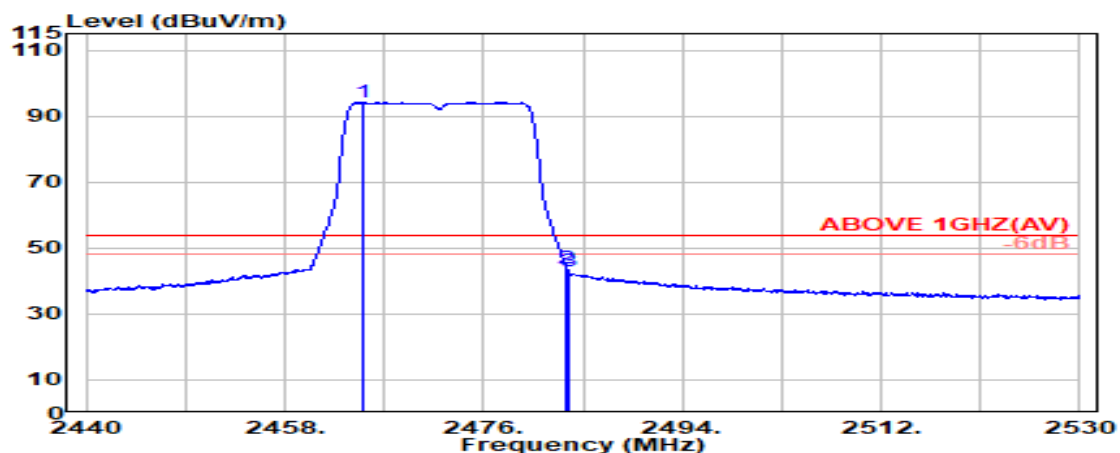

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.150	28.36	5.80	39.87	99.81	94.10	---	---	Average
2483.500	28.43	5.83	39.87	49.53	43.92	54.00	10.08	Average
2483.700	28.44	5.83	39.87	48.40	42.79	54.00	11.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

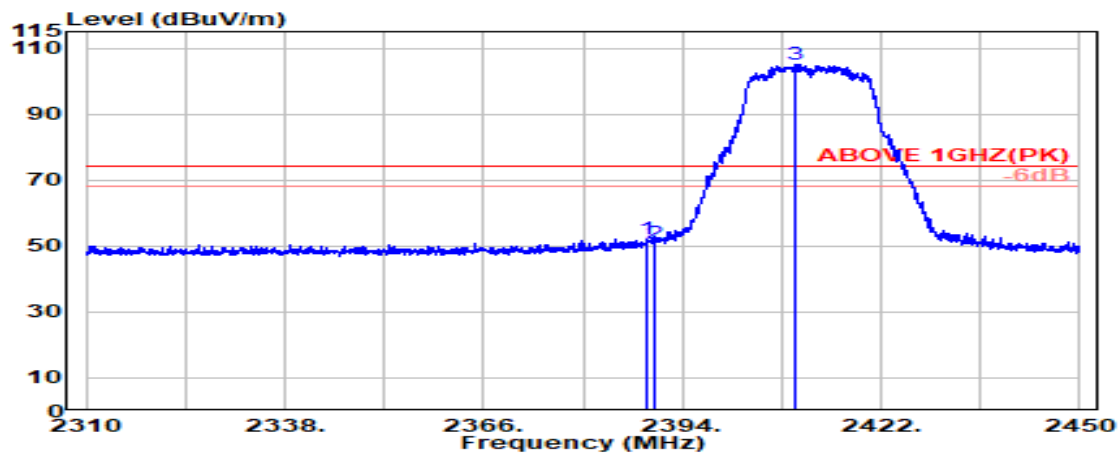

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.20	5.70	39.88	58.26	52.29	74.00	21.71	Peak
2390.000	28.20	5.70	39.88	56.89	50.91	74.00	23.09	Peak
@ 2410.050	28.22	5.73	39.88	111.03	105.11	---	---	Peak

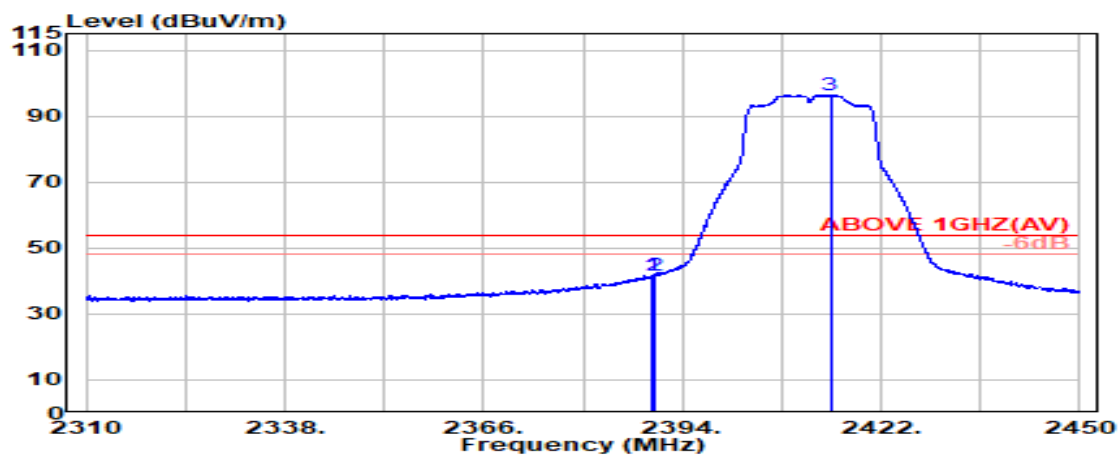

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	5.70	39.88	47.50	41.52	54.00	12.48	Average
2390.000	28.20	5.70	39.88	47.70	41.72	54.00	12.28	Average
@ 2414.850	28.23	5.74	39.88	102.25	96.34	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

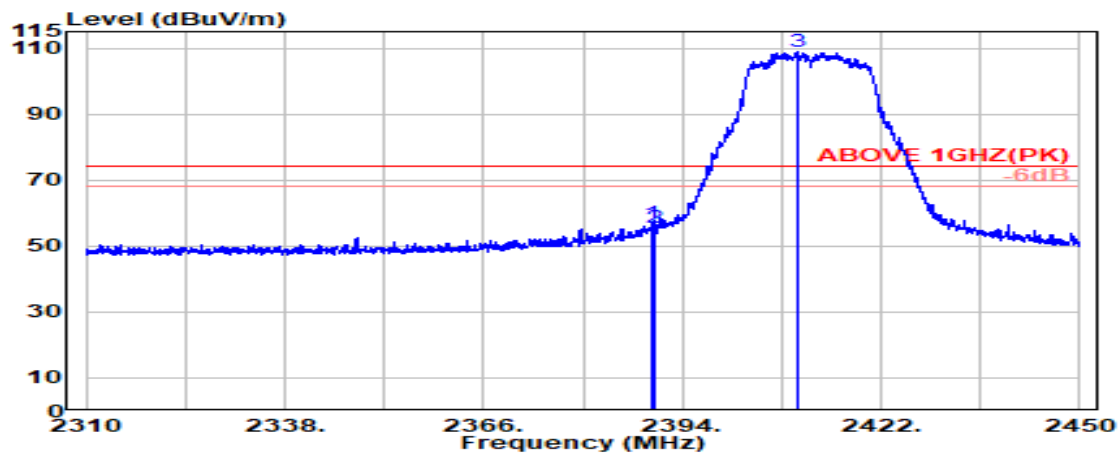

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.88	62.63	56.65	74.00	17.35	Peak
2390.000	28.20	5.70	39.88	61.33	55.36	74.00	18.64	Peak
@ 2410.300	28.22	5.73	39.88	114.97	109.05	---	---	Peak

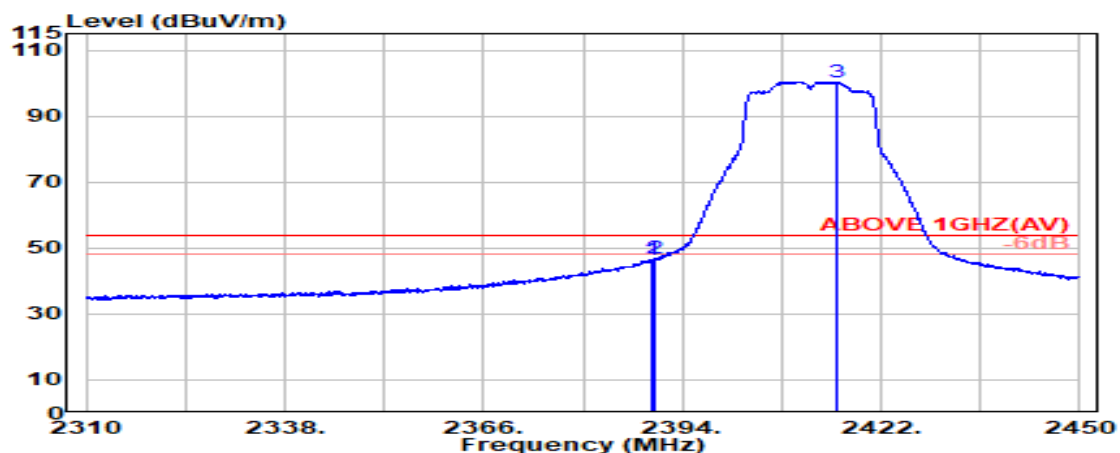

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.88	52.55	46.57	54.00	7.43	Average
2390.000	28.20	5.70	39.88	52.84	46.86	54.00	7.14	Average
@ 2415.900	28.23	5.74	39.88	106.31	100.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

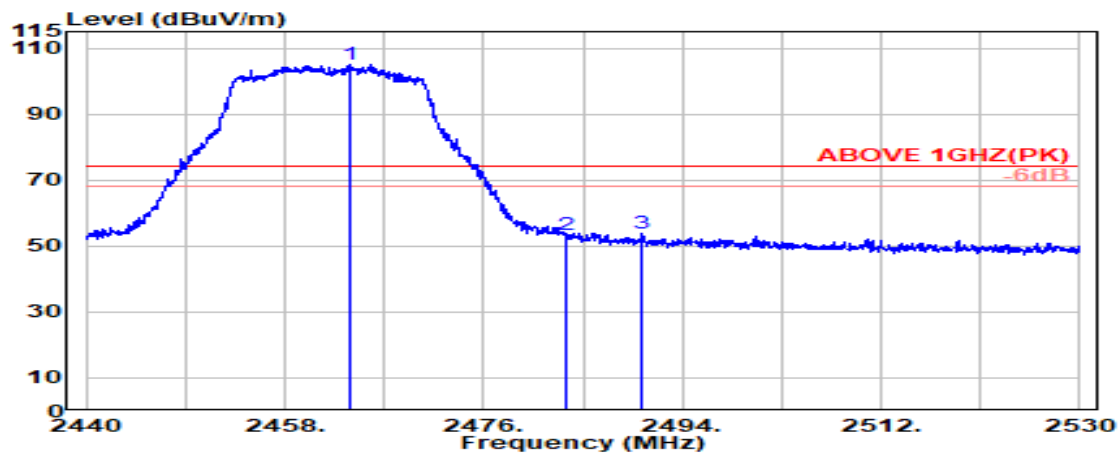

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2463.800	28.36	5.80	39.87	110.86	105.15	---	---	Peak
	2483.500	28.43	5.83	39.87	58.78	53.17	74.00	20.83	Peak
	2490.300	28.46	5.84	39.87	59.47	53.90	74.00	20.10	Peak

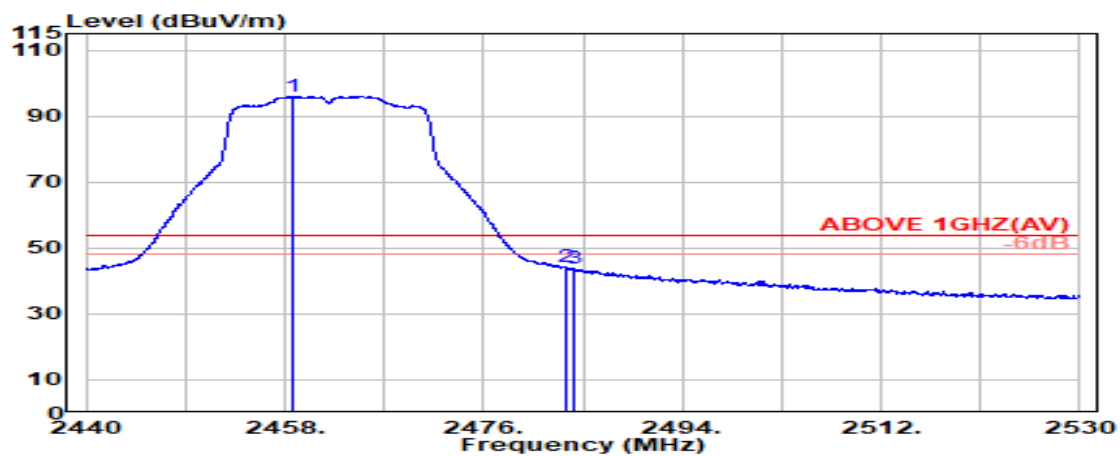

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2458.700	28.34	5.80	39.87	101.70	95.96	---	---	Average
	2483.500	28.43	5.83	39.87	49.88	44.27	54.00	9.73	Average
	2484.250	28.44	5.83	39.87	49.48	43.88	54.00	10.12	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

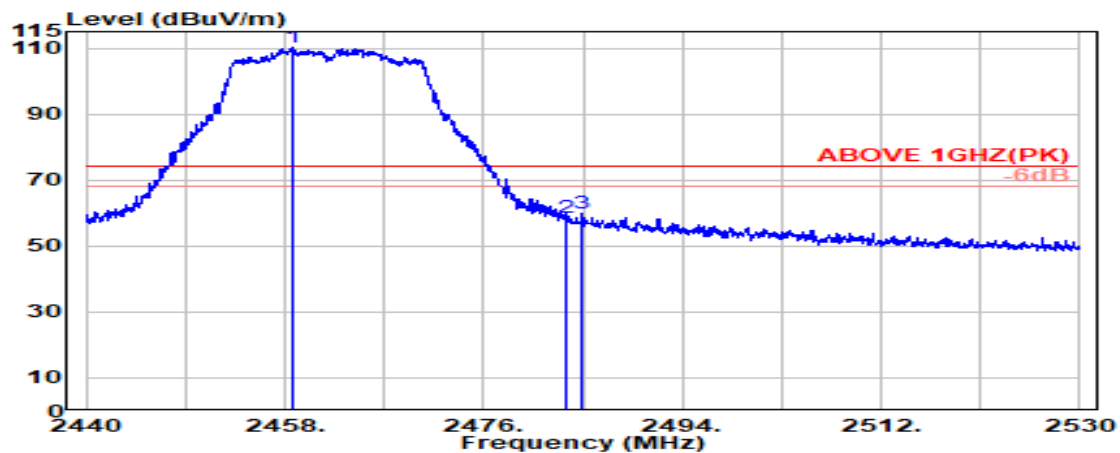

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.800	28.34	5.80	39.87	116.18	110.44	---	---	Peak
2483.500	28.43	5.83	39.87	64.13	58.52	74.00	15.48	Peak
2484.900	28.44	5.83	39.87	65.54	59.94	74.00	14.06	Peak

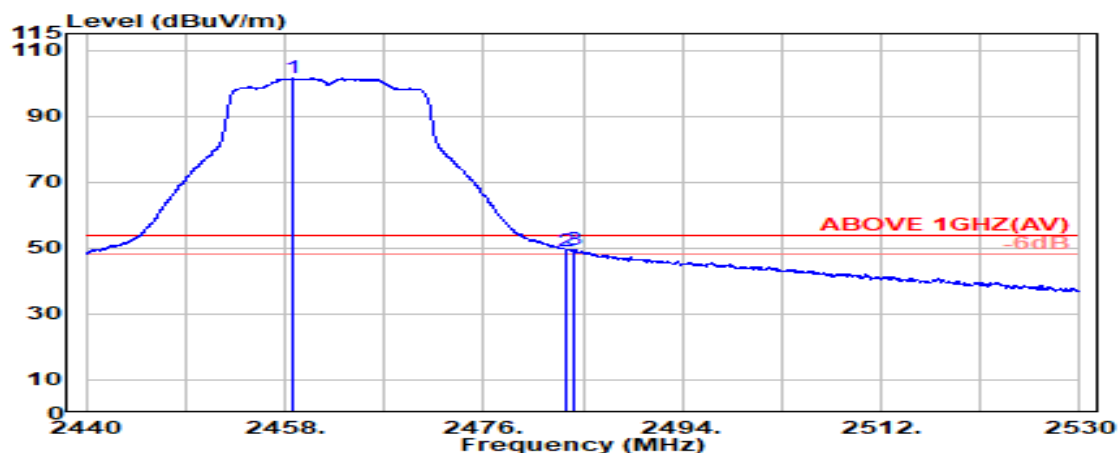

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.750	28.34	5.80	39.87	107.18	101.43	---	---	Average
2483.500	28.43	5.83	39.87	54.80	49.19	54.00	4.81	Average
2484.250	28.44	5.83	39.87	55.29	49.68	54.00	4.32	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

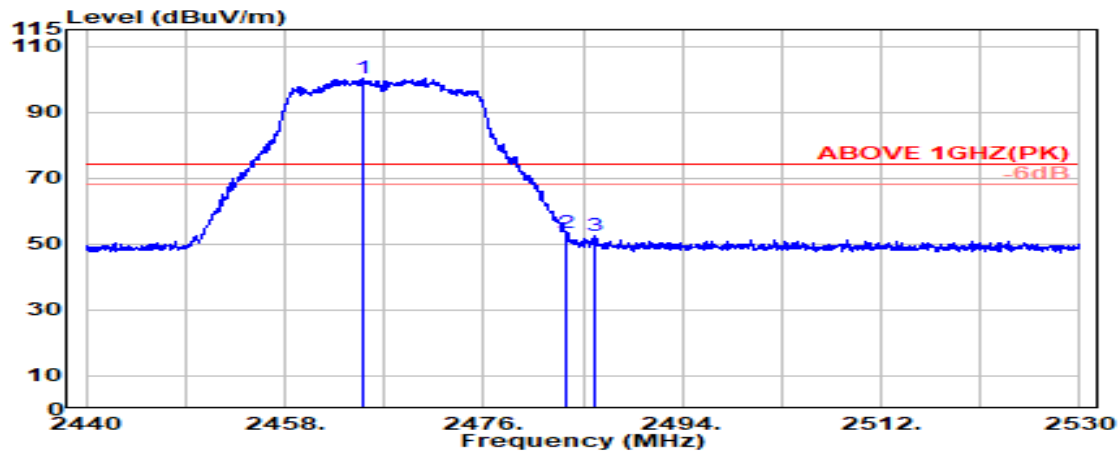

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2465.100	28.36	5.80	39.87	106.15	100.44	---	---	Peak
	2483.500	28.43	5.83	39.87	59.11	53.51	74.00	20.49	Peak
	2486.050	28.44	5.83	39.87	58.25	52.65	74.00	21.35	Peak

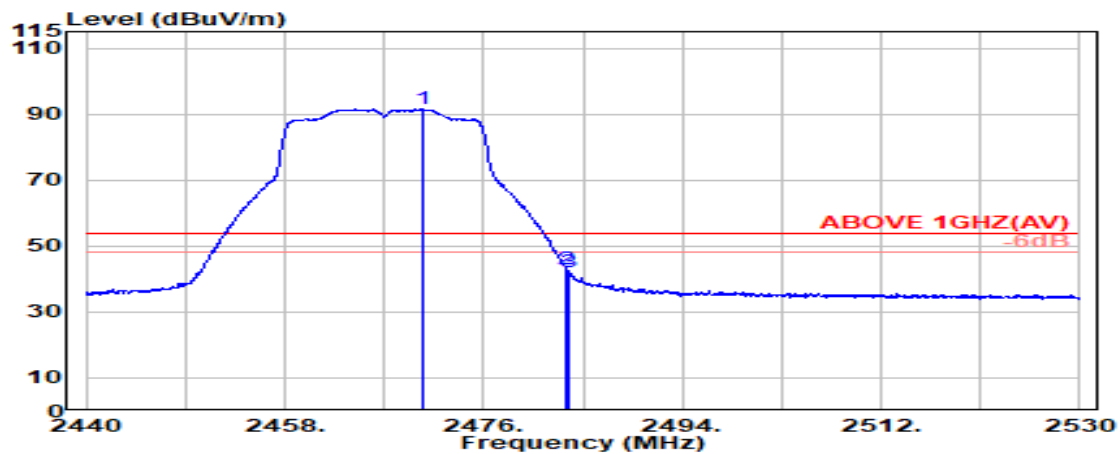


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2470.550	28.38	5.81	39.87	97.29	91.62	---	---	Average
	2483.500	28.43	5.83	39.87	48.47	42.86	54.00	11.14	Average
	2483.700	28.44	5.83	39.87	47.52	41.91	54.00	12.09	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

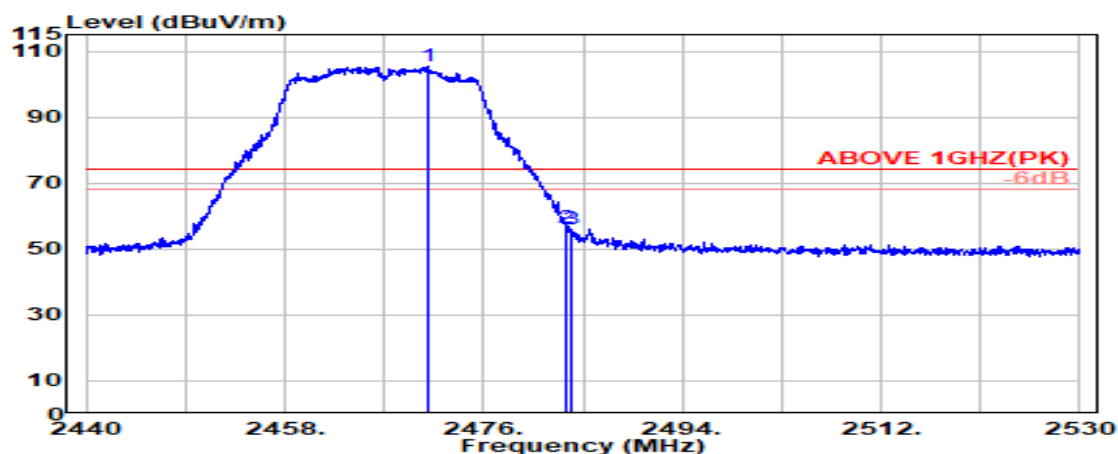

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	28.38	5.81	39.87	111.29	105.61	---	---	Peak
2483.500	28.43	5.83	39.87	62.00	56.39	74.00	17.61	Peak
2483.850	28.44	5.83	39.87	61.66	56.06	74.00	17.94	Peak

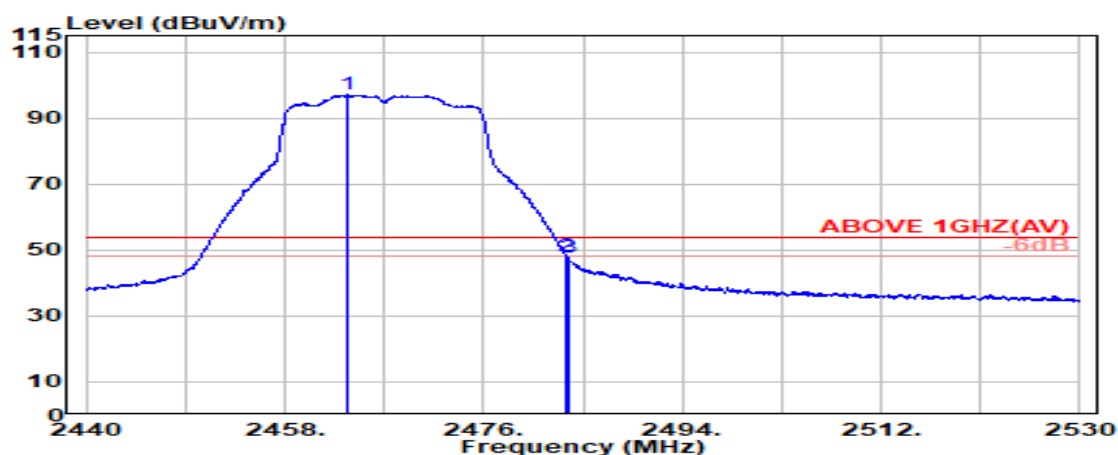

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.650	28.36	5.80	39.87	102.72	97.00	---	---	Average
2483.500	28.43	5.83	39.87	53.88	48.28	54.00	5.72	Average
2483.700	28.44	5.83	39.87	53.20	47.60	54.00	6.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

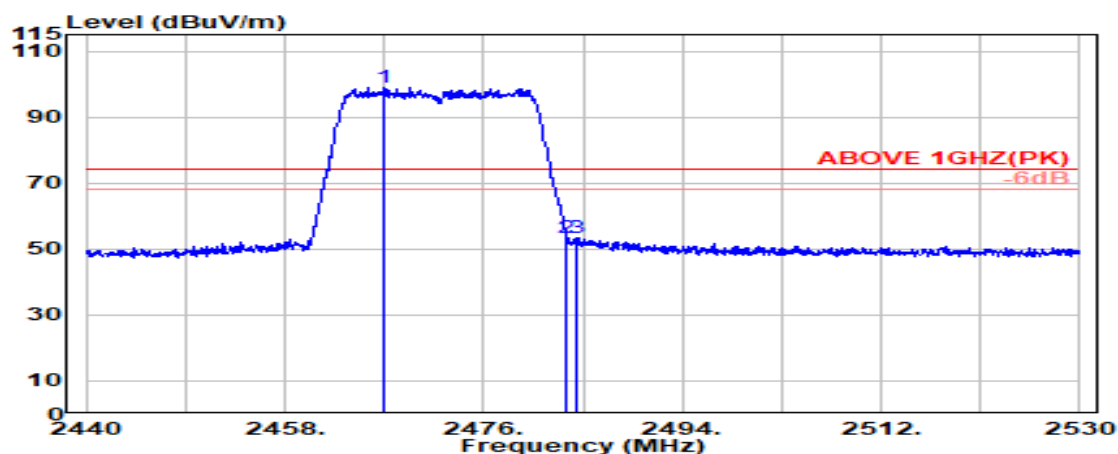

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2466.950	28.37	5.81	39.87	104.76	99.06	---	---	Peak
	2483.500	28.43	5.83	39.87	58.94	53.33	74.00	20.67	Peak
	2484.350	28.44	5.83	39.87	58.81	53.21	74.00	20.79	Peak

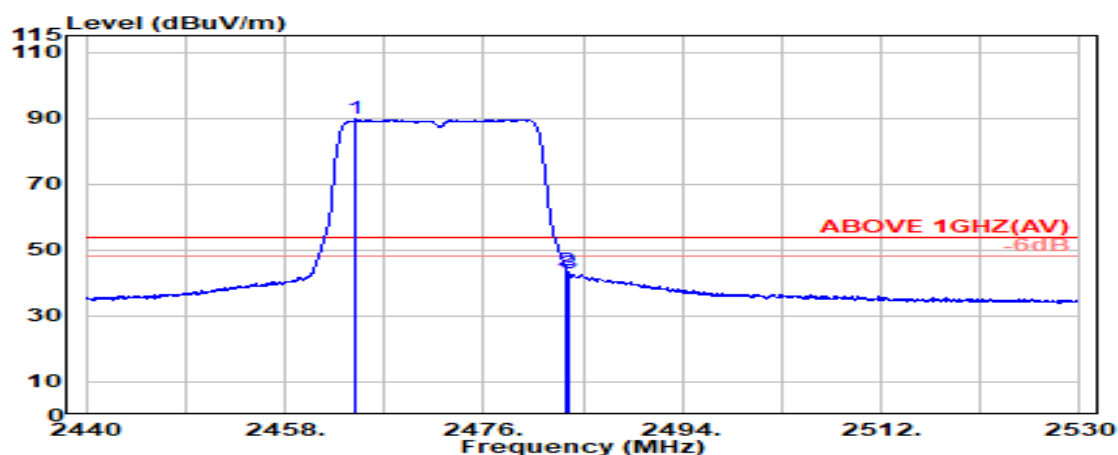


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.400	28.36	5.80	39.87	95.35	89.63	---	---	Average
	2483.500	28.43	5.83	39.87	49.35	43.74	54.00	10.26	Average
	2483.700	28.44	5.83	39.87	48.46	42.85	54.00	11.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

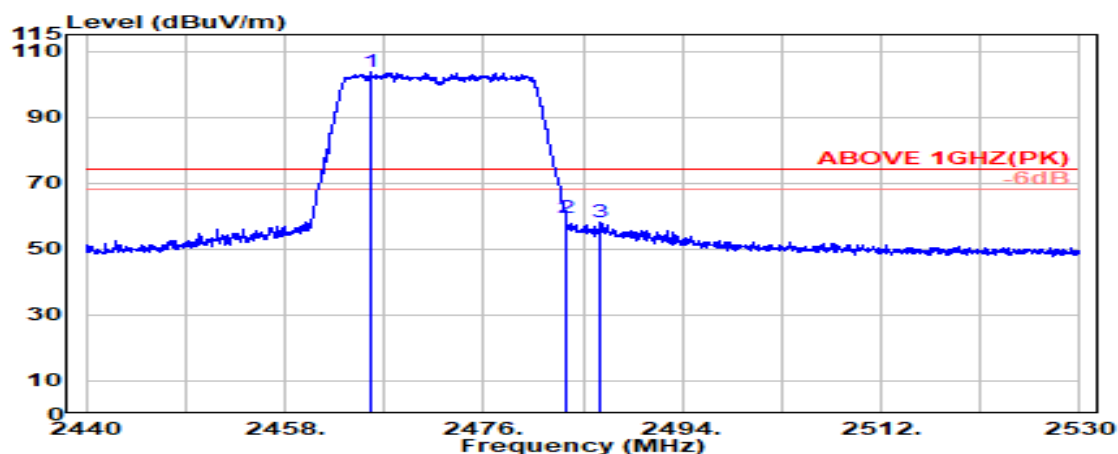

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.850	28.36	5.81	39.87	109.37	103.67	---	---	Peak
2483.500	28.43	5.83	39.87	64.93	59.33	74.00	14.67	Peak
2486.650	28.45	5.83	39.87	63.79	58.20	74.00	15.80	Peak

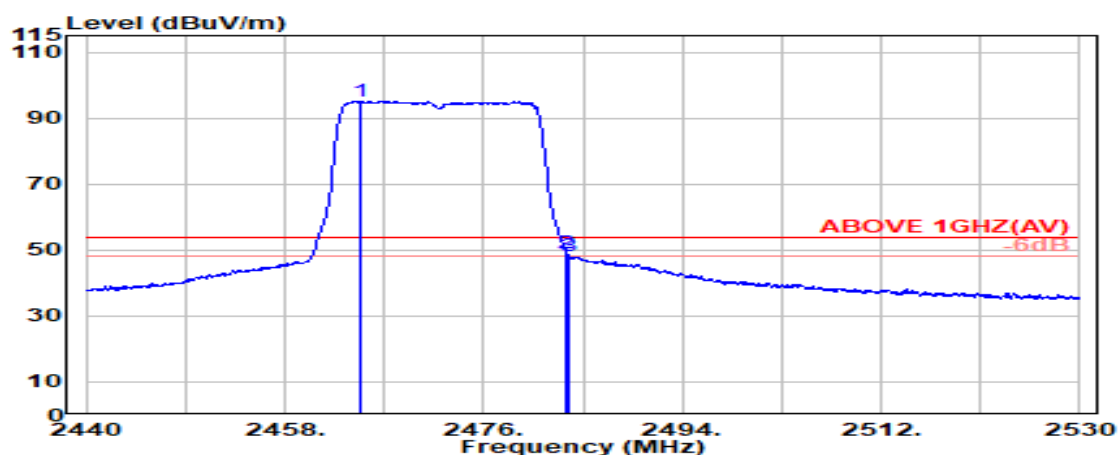

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.750	28.36	5.80	39.87	100.84	95.13	---	---	Average
2483.500	28.43	5.83	39.87	54.72	49.11	54.00	4.89	Average
2483.700	28.44	5.83	39.87	53.77	48.16	54.00	5.84	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

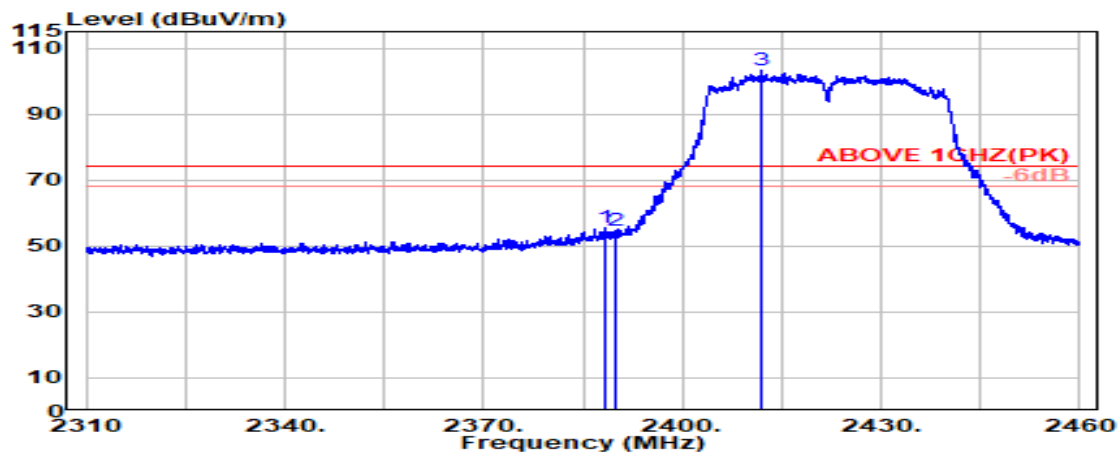

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.450	28.20	5.70	39.88	61.59	55.61	74.00	18.39	Peak
2389.800	28.20	5.70	39.88	60.78	54.80	74.00	19.20	Peak
@ 2412.050	28.22	5.73	39.88	109.17	103.25	---	---	Peak

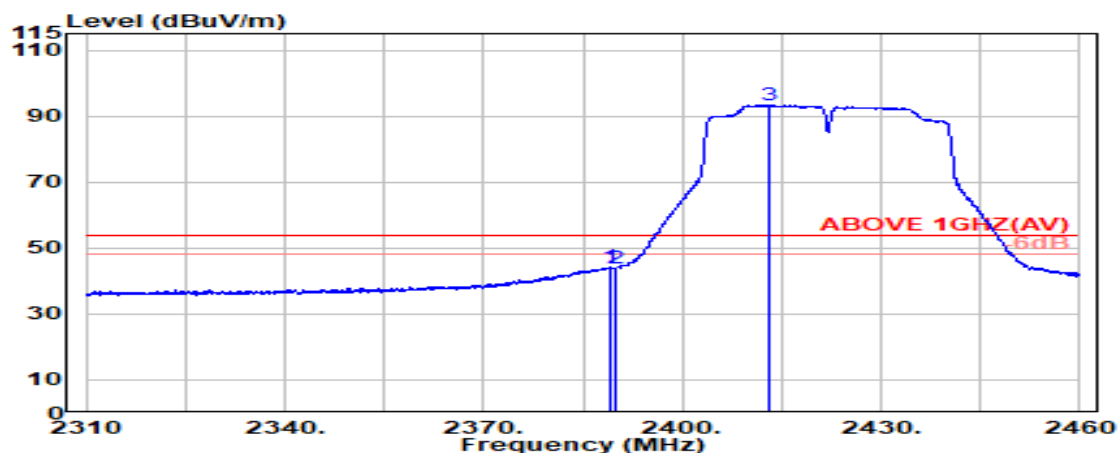

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.050	28.20	5.70	39.88	50.12	44.14	54.00	9.86	Average
2389.800	28.20	5.70	39.88	49.78	43.80	54.00	10.20	Average
@ 2413.100	28.23	5.73	39.88	99.13	93.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

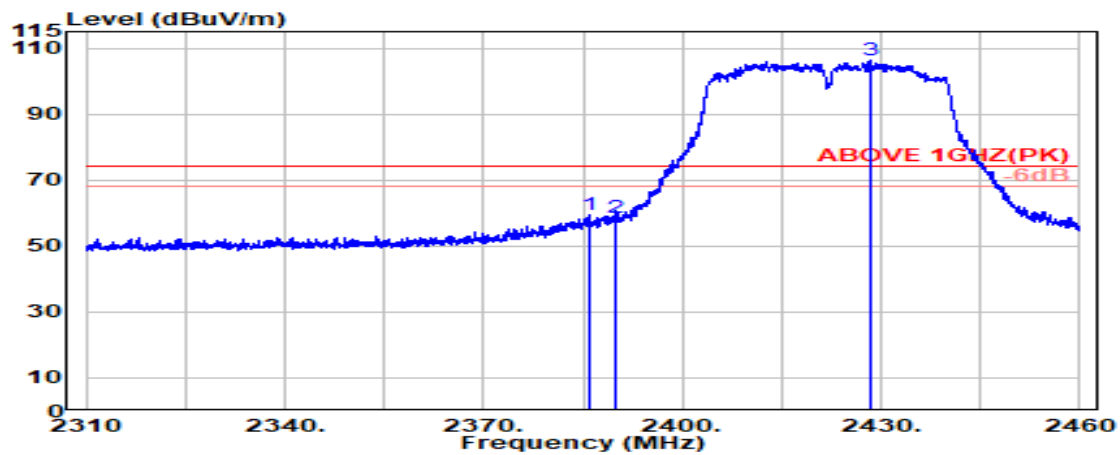

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2385.850	28.20	5.70	39.88	65.40	59.42	74.00	14.58	Peak
2389.800	28.20	5.70	39.88	64.64	58.66	74.00	15.34	Peak
@ 2428.350	28.26	5.75	39.88	112.09	106.23	---	---	Peak

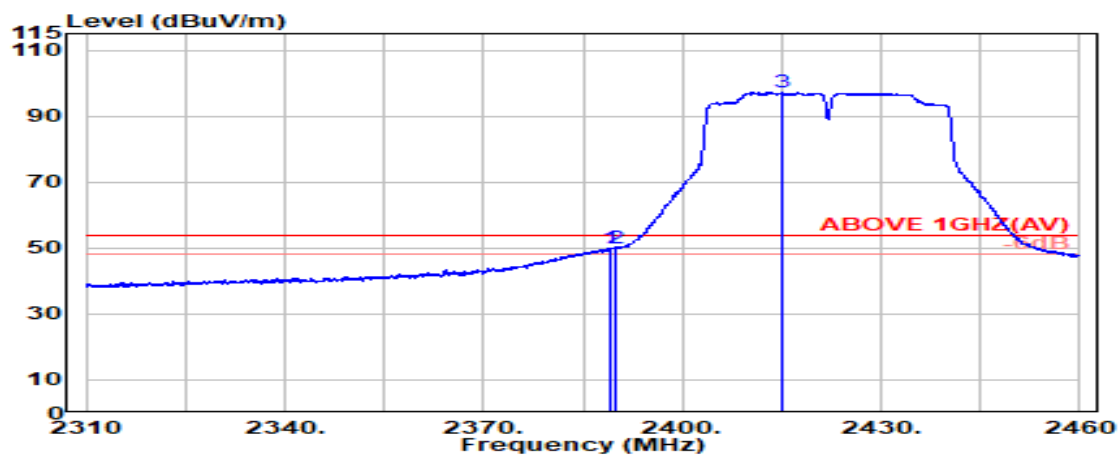


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.250	28.20	5.70	39.88	56.04	50.06	54.00	3.94	Average
2389.800	28.20	5.70	39.88	55.91	49.94	54.00	4.06	Average
@ 2414.950	28.23	5.74	39.88	103.06	97.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

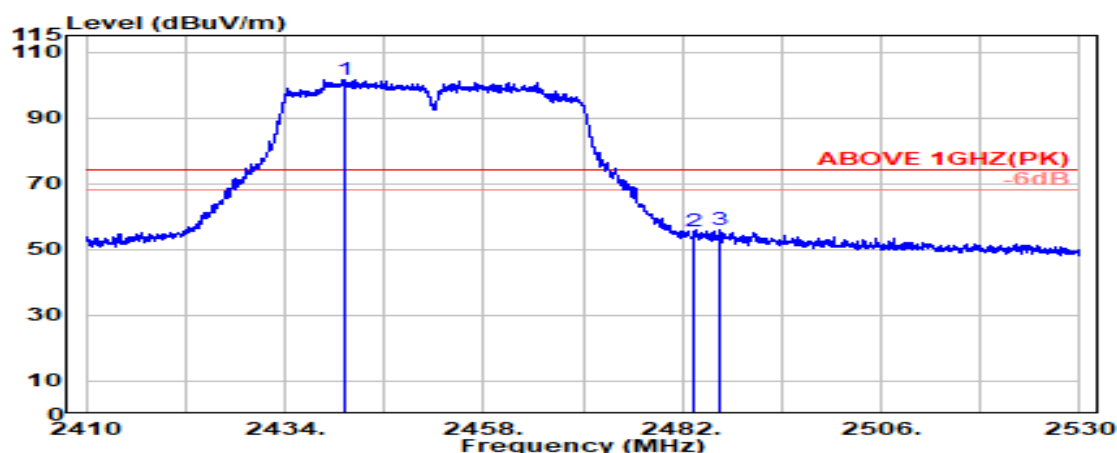

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2441.100	28.28	5.77	39.87	107.38	101.56	---	---	Peak
2483.500	28.43	5.83	39.87	61.14	55.54	74.00	18.46	Peak
2486.650	28.45	5.83	39.87	61.61	56.02	74.00	17.98	Peak

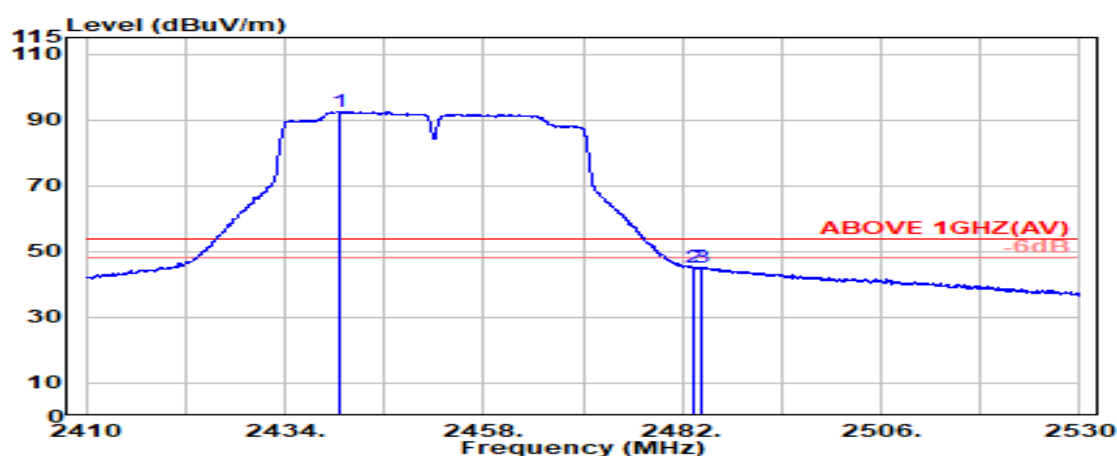

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2440.600	28.28	5.77	39.87	98.39	92.57	---	---	Average
2483.500	28.43	5.83	39.87	50.53	44.92	54.00	9.08	Average
2484.400	28.44	5.83	39.87	50.79	45.18	54.00	8.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

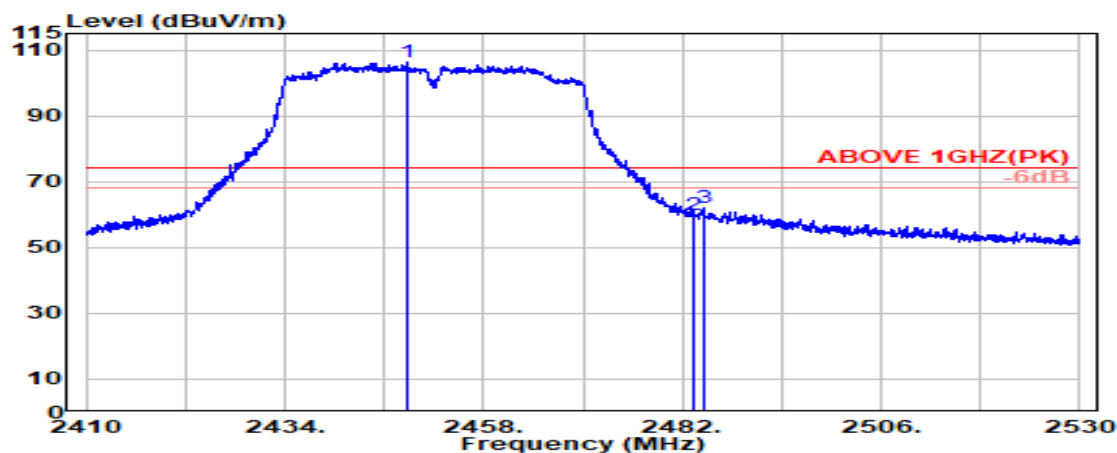

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2448.750	28.30	5.78	39.87	111.94	106.15	---	---	Peak
2483.500	28.43	5.83	39.87	65.36	59.75	74.00	14.25	Peak
2484.650	28.44	5.83	39.87	67.48	61.88	74.00	12.12	Peak

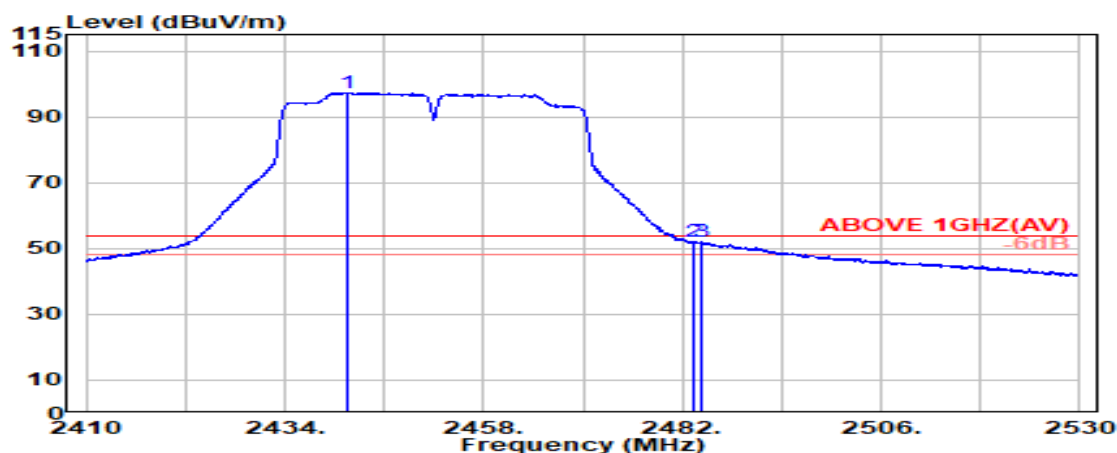

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2441.450	28.28	5.77	39.87	103.21	97.39	---	---	Average
2483.500	28.43	5.83	39.87	57.59	51.98	54.00	2.02	Average
2484.350	28.44	5.83	39.87	57.58	51.97	54.00	2.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

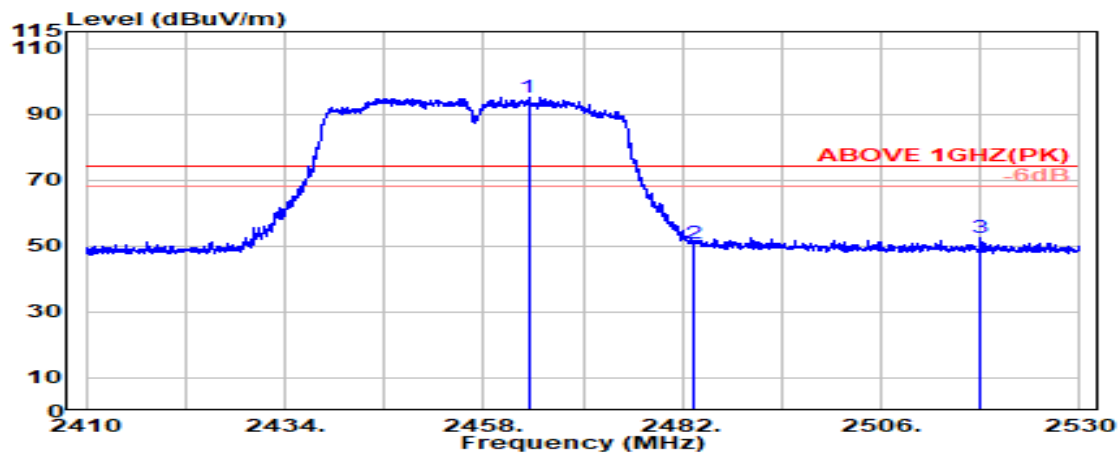

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2463.400	28.35	5.80	39.87	100.84	95.12	---	---	Peak
	2483.500	28.43	5.83	39.87	56.18	50.57	74.00	23.43	Peak
	2518.000	28.57	5.87	39.88	57.92	52.49	74.00	21.51	Peak

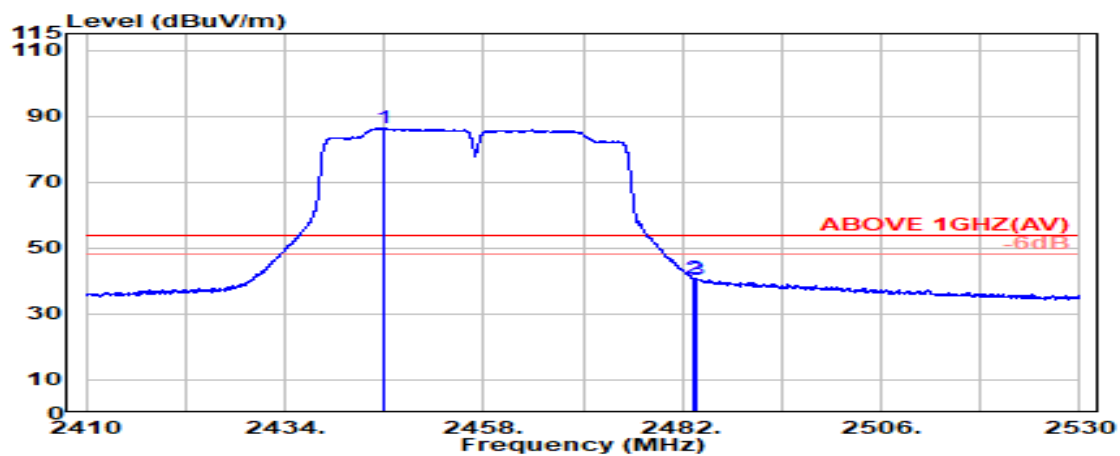

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2446.000	28.29	5.78	39.87	92.05	86.24	---	---	Average
	2483.500	28.43	5.83	39.87	46.28	40.67	54.00	13.33	Average
	2483.700	28.44	5.83	39.87	46.10	40.49	54.00	13.51	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

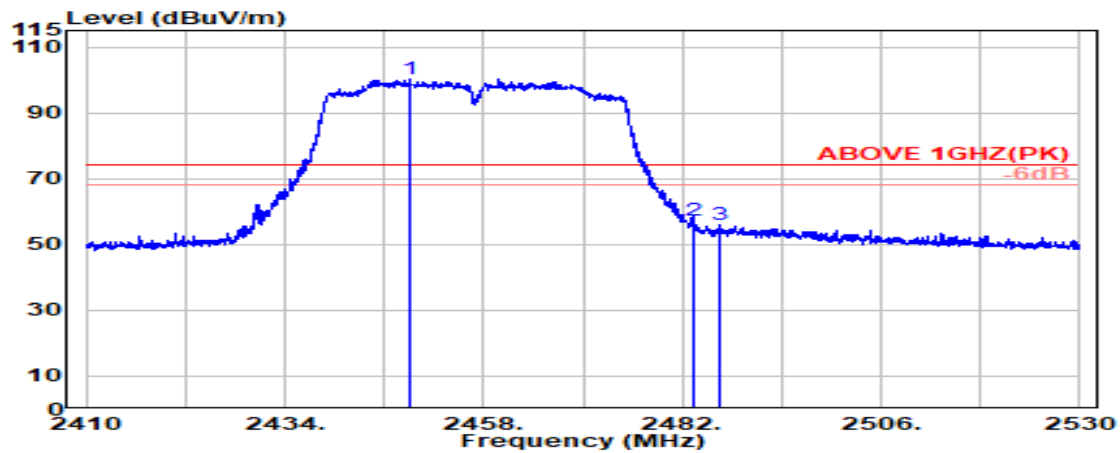

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2449.000	28.30	5.78	39.87	105.92	100.13	---	---	Peak
2483.500	28.43	5.83	39.87	62.74	57.13	74.00	16.87	Peak
2486.500	28.45	5.83	39.87	61.41	55.82	74.00	18.18	Peak

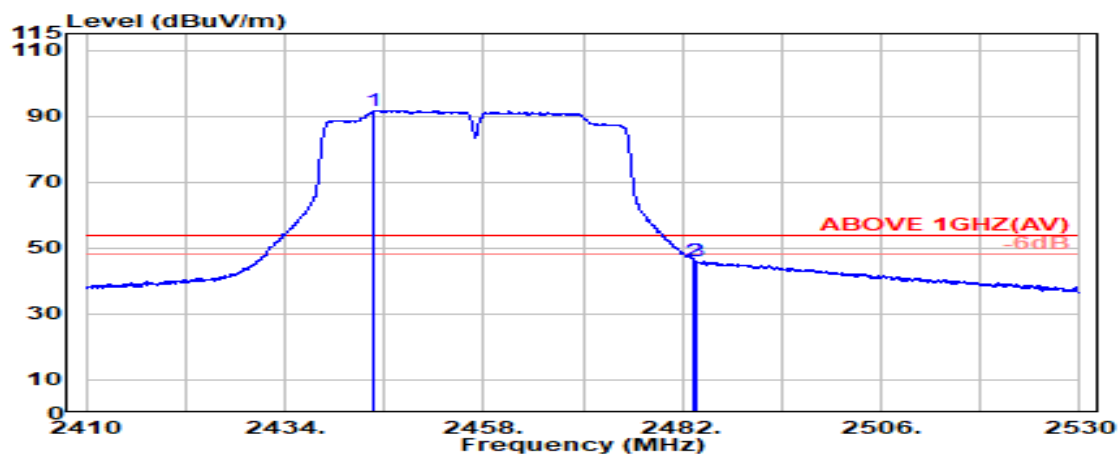

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2444.600	28.29	5.78	39.87	97.48	91.67	---	---	Average
2483.500	28.43	5.83	39.87	51.77	46.16	54.00	7.84	Average
2483.750	28.44	5.83	39.87	51.50	45.89	54.00	8.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

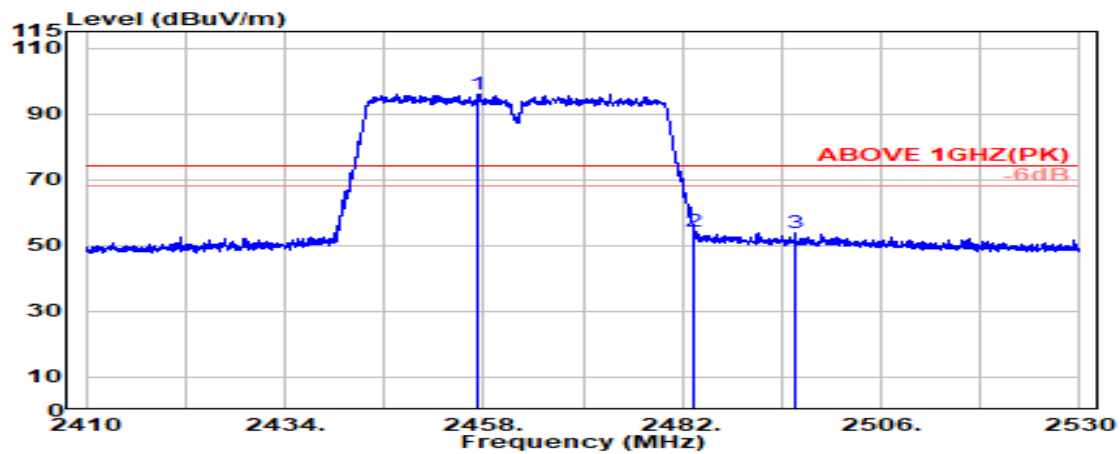

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.400	28.33	5.79	39.87	101.87	96.12	---	---	Peak
2483.500	28.43	5.83	39.87	60.01	54.40	74.00	19.60	Peak
2495.550	28.48	5.84	39.87	59.46	53.92	74.00	20.08	Peak



Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.150	28.29	5.78	39.87	92.71	86.91	---	---	Average
2483.500	28.43	5.83	39.87	49.60	43.99	54.00	10.01	Average
2483.700	28.44	5.83	39.87	49.13	43.52	54.00	10.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

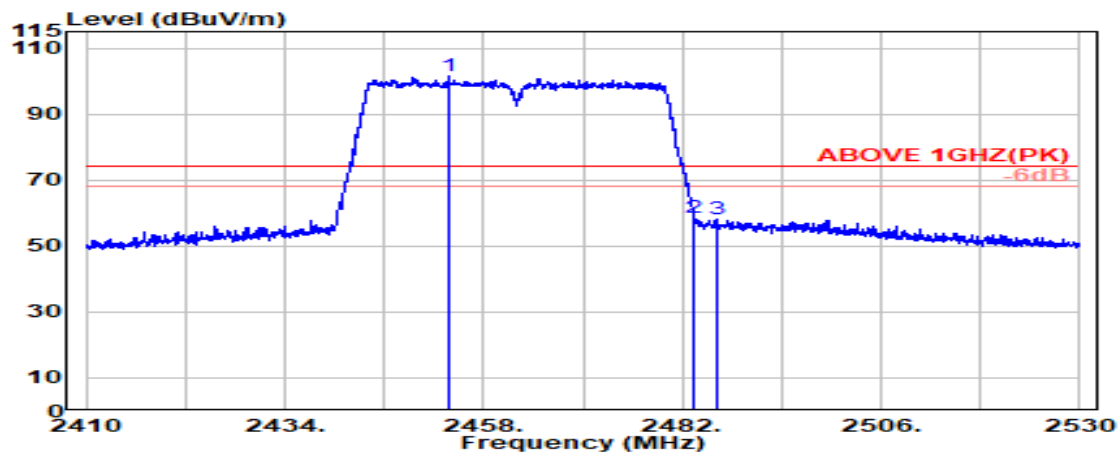

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2453.800	28.32	5.79	39.87	107.22	101.45	---	---	Peak
2483.500	28.43	5.83	39.87	64.18	58.57	74.00	15.43	Peak
2486.250	28.45	5.83	39.87	63.55	57.96	74.00	16.04	Peak

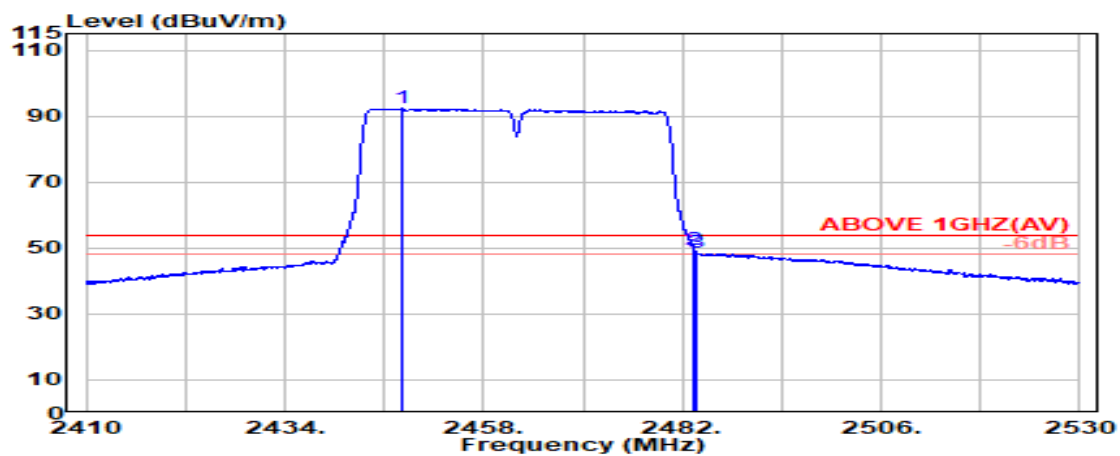

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2448.200	28.30	5.78	39.87	98.12	92.32	---	---	Average
2483.500	28.43	5.83	39.87	55.04	49.43	54.00	4.57	Average
2483.750	28.44	5.83	39.87	54.38	48.77	54.00	5.23	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

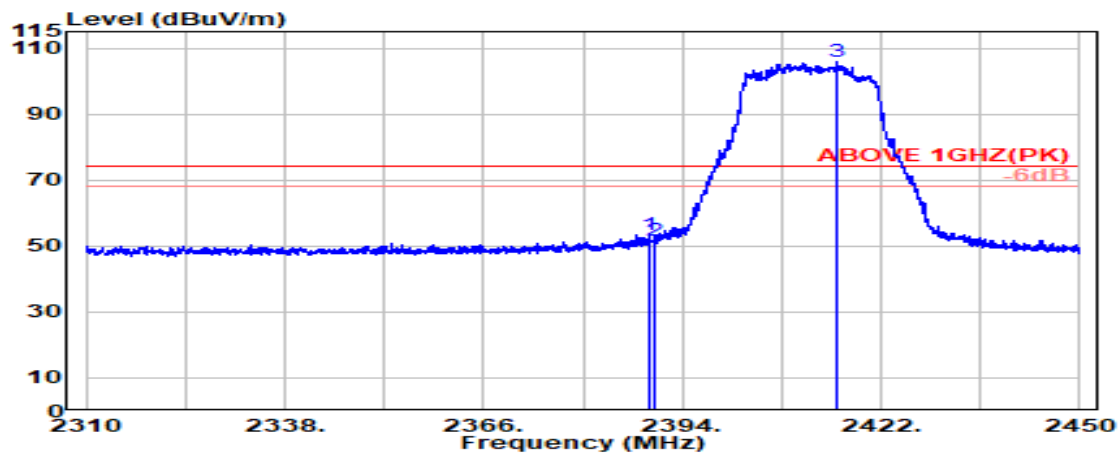

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.400	28.20	5.70	39.88	59.53	53.55	74.00	20.45	Peak
2390.000	28.20	5.70	39.88	57.81	51.83	74.00	22.17	Peak
@ 2415.800	28.23	5.74	39.88	111.71	105.81	---	---	Peak

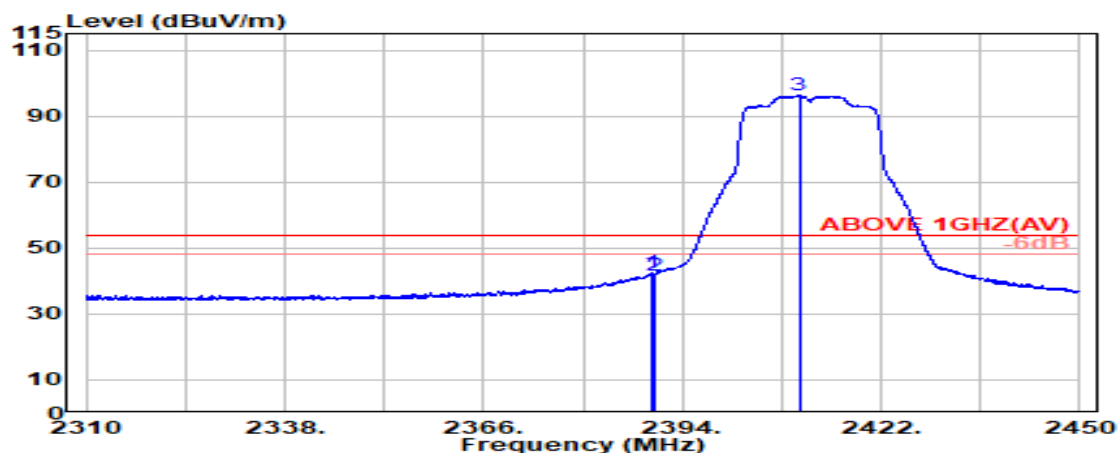

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.20	5.70	39.88	48.31	42.33	54.00	11.67	Average
2390.000	28.20	5.70	39.88	47.80	41.83	54.00	12.17	Average
@ 2410.450	28.22	5.73	39.88	102.15	96.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

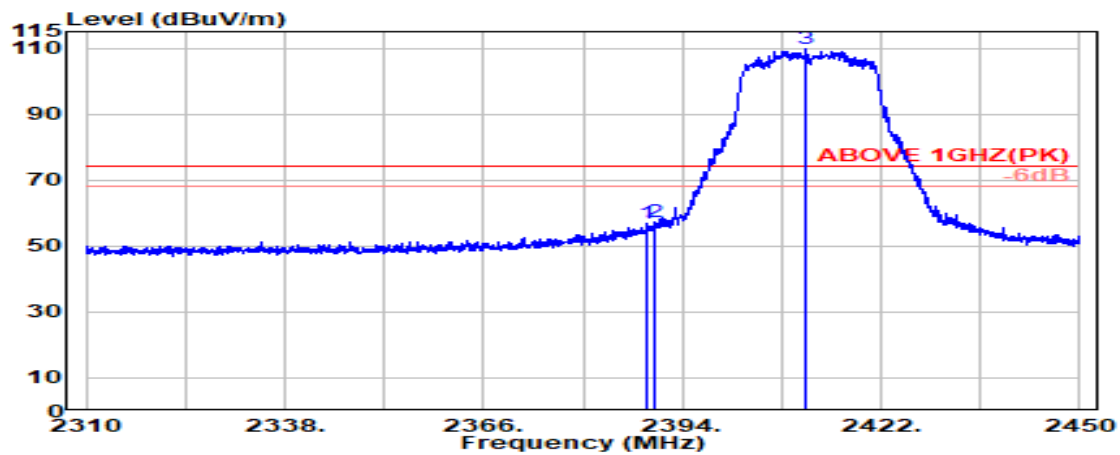

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.900	28.20	5.70	39.88	62.95	56.97	74.00	17.03	Peak
2390.000	28.20	5.70	39.88	63.12	57.15	74.00	16.85	Peak
@ 2411.400	28.22	5.73	39.88	115.67	109.75	---	---	Peak

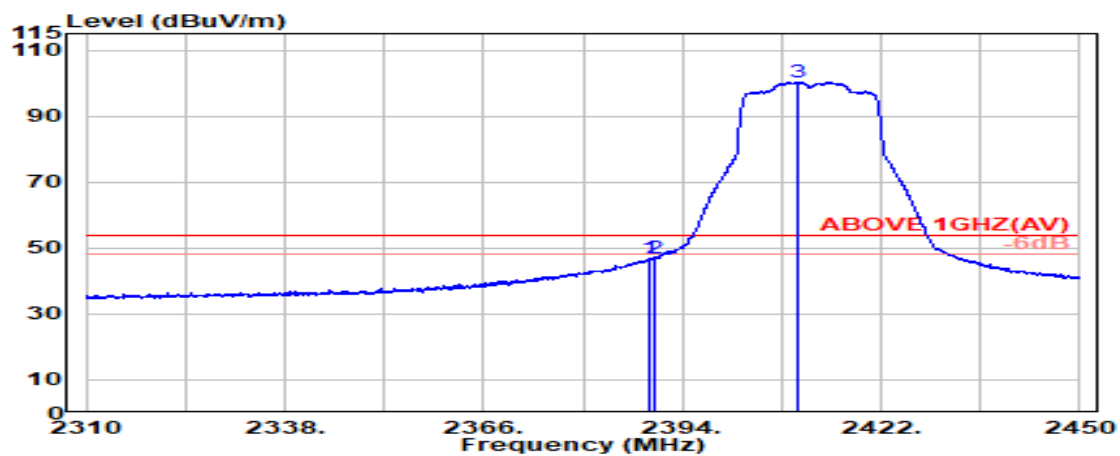


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.20	5.70	39.88	52.67	46.70	54.00	7.30	Average
2390.000	28.20	5.70	39.88	53.02	47.05	54.00	6.95	Average
@ 2410.200	28.22	5.73	39.88	106.17	100.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

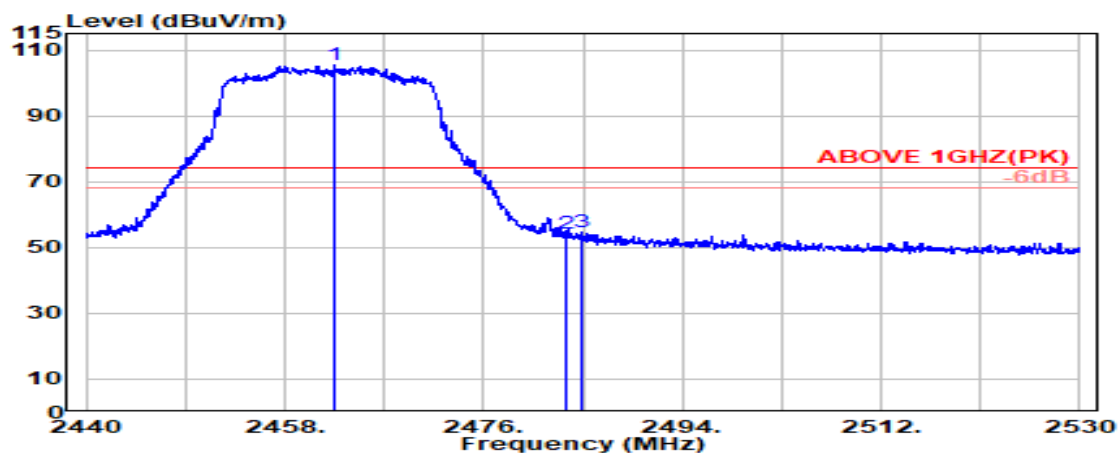

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.550	28.35	5.80	39.87	111.18	105.46	---	---	Peak
2483.500	28.43	5.83	39.87	59.89	54.28	74.00	19.72	Peak
2484.850	28.44	5.83	39.87	60.30	54.69	74.00	19.31	Peak

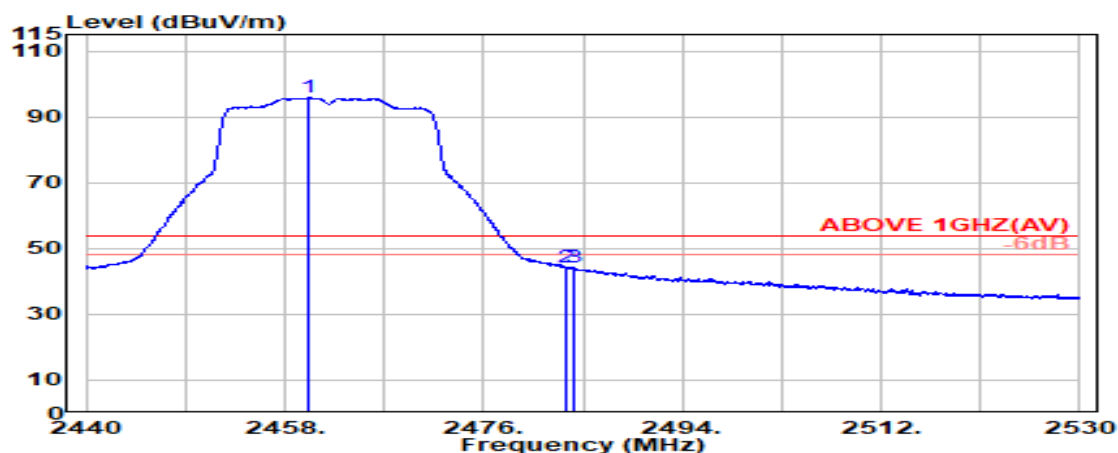

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.200	28.34	5.80	39.87	101.53	95.80	---	---	Average
2483.500	28.43	5.83	39.87	49.79	44.19	54.00	9.81	Average
2484.200	28.44	5.83	39.87	49.80	44.19	54.00	9.81	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

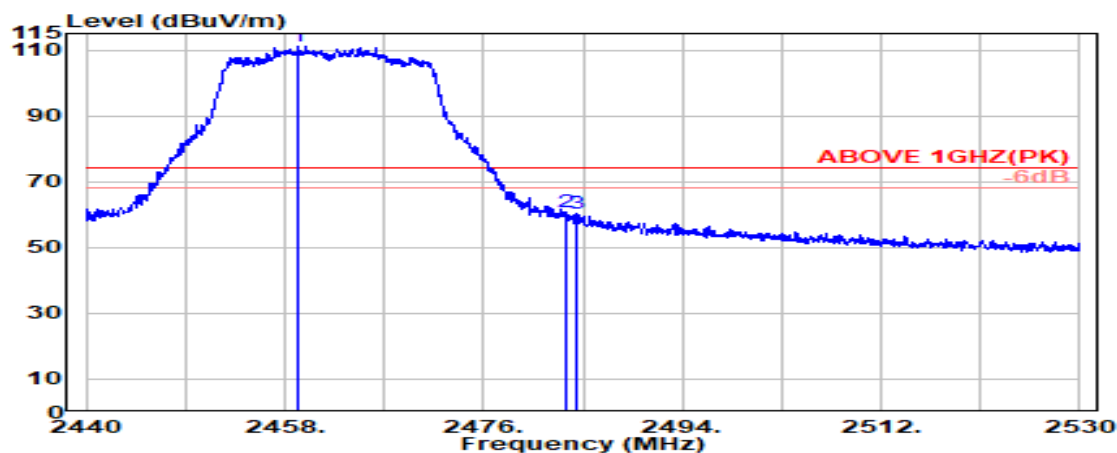

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.200	28.34	5.80	39.87	116.73	110.99	---	---	Peak
2483.500	28.43	5.83	39.87	66.49	60.88	74.00	13.12	Peak
2484.450	28.44	5.83	39.87	65.92	60.32	74.00	13.68	Peak

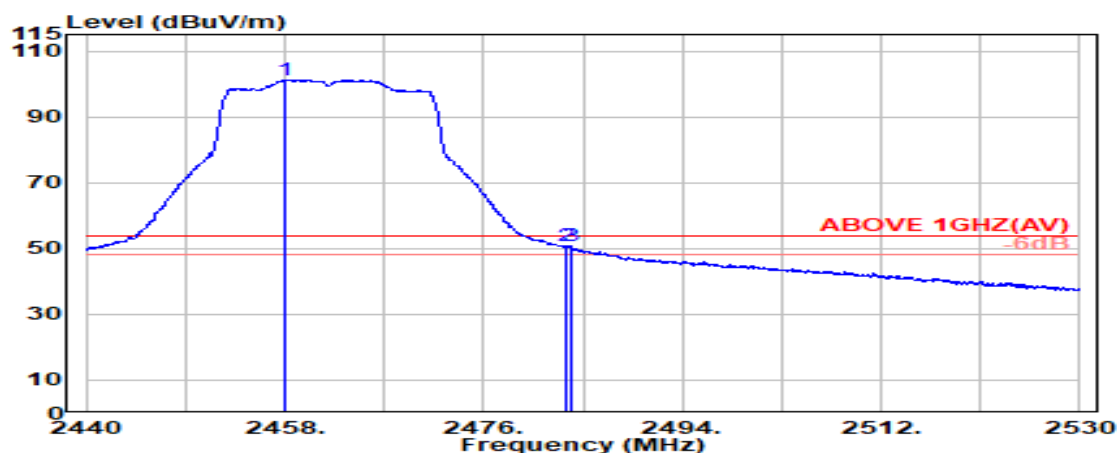


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.950	28.33	5.79	39.87	107.06	101.32	---	---	Average
2483.500	28.43	5.83	39.87	56.18	50.57	54.00	3.43	Average
2483.850	28.44	5.83	39.87	56.18	50.57	54.00	3.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

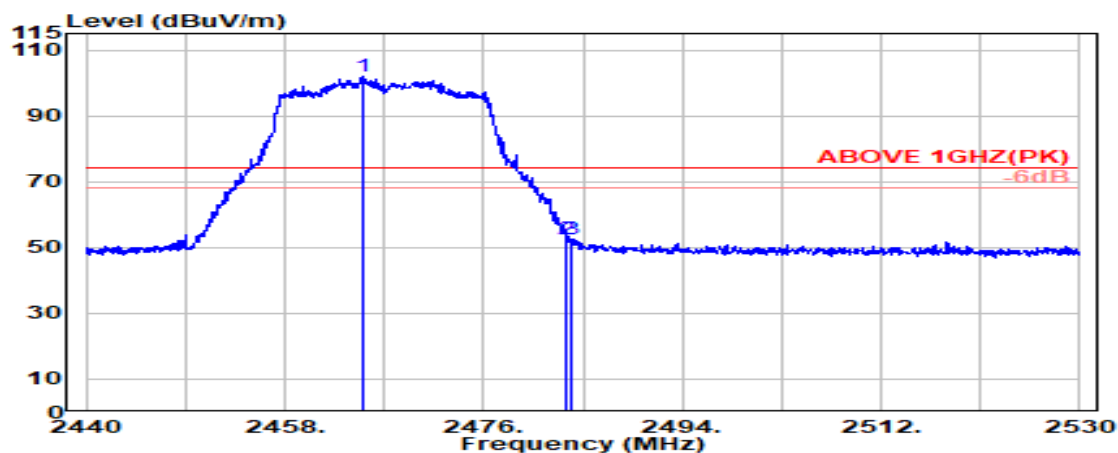

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.36	5.80	39.87	107.58	101.87	---	---	Peak
2483.500	28.43	5.83	39.87	58.17	52.56	74.00	21.44	Peak
2483.850	28.44	5.83	39.87	58.17	52.56	74.00	21.44	Peak

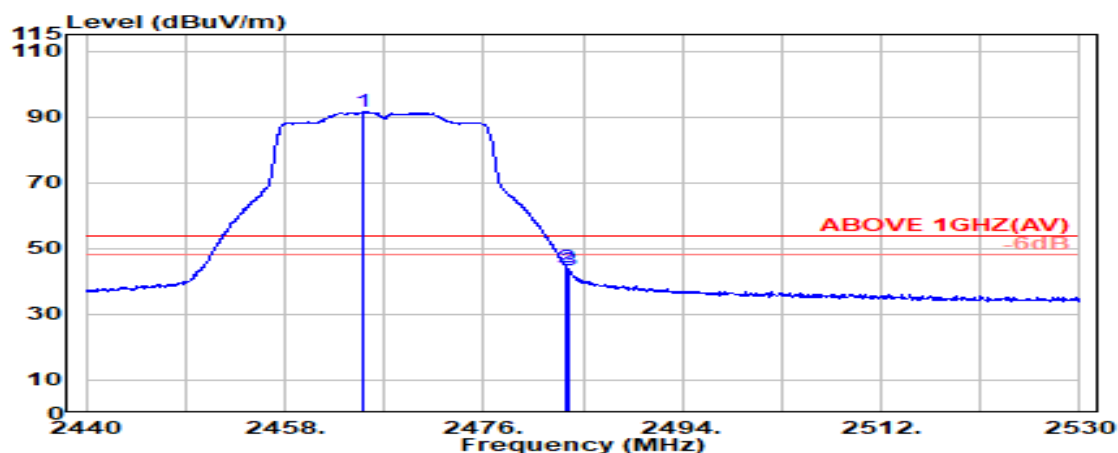


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	28.36	5.80	39.87	97.21	91.50	---	---	Average
2483.500	28.43	5.83	39.87	49.91	44.31	54.00	9.69	Average
2483.700	28.44	5.83	39.87	48.85	43.24	54.00	10.76	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

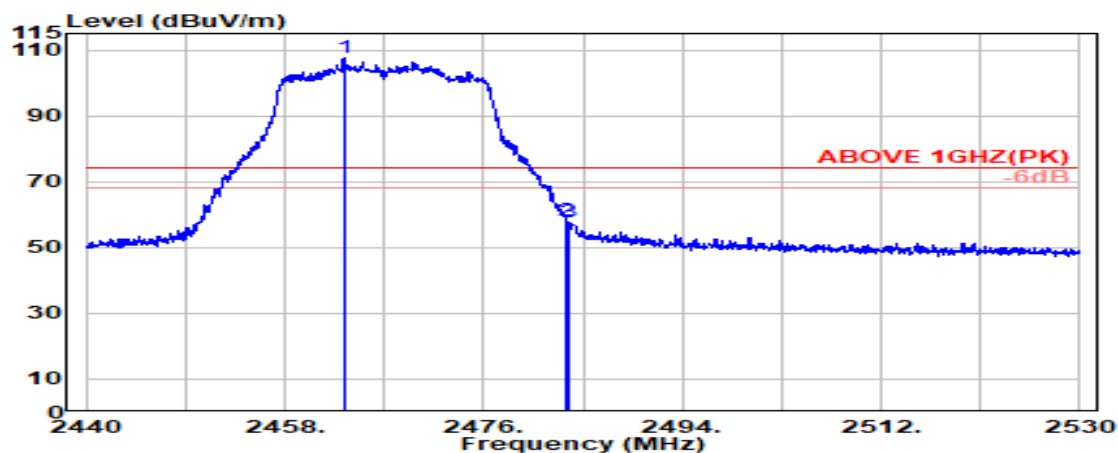

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.350	28.35	5.80	39.87	113.46	107.75	---	---	Peak
2483.500	28.43	5.83	39.87	63.86	58.25	74.00	15.75	Peak
2483.700	28.44	5.83	39.87	63.28	57.67	74.00	16.33	Peak

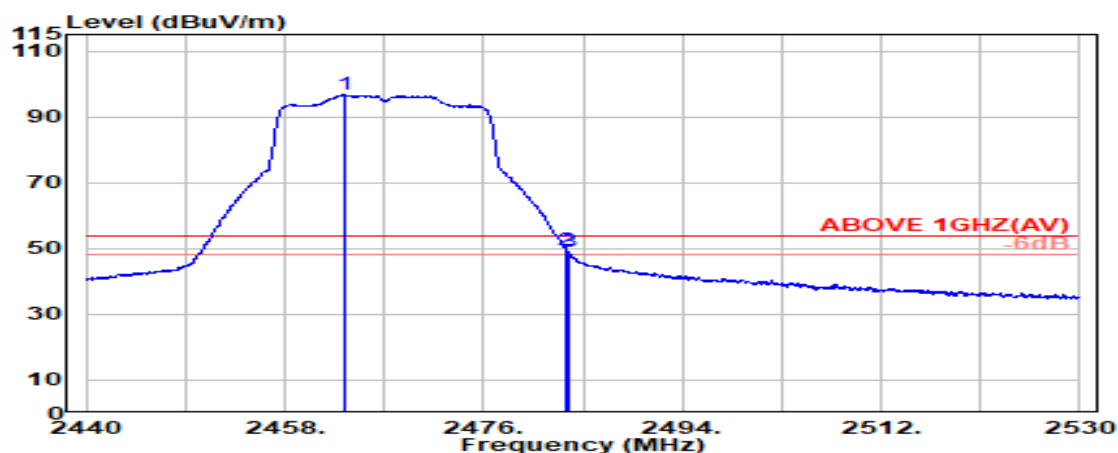

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	28.35	5.80	39.87	102.39	96.68	---	---	Average
2483.500	28.43	5.83	39.87	55.06	49.46	54.00	4.54	Average
2483.750	28.44	5.83	39.87	54.52	48.91	54.00	5.09	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

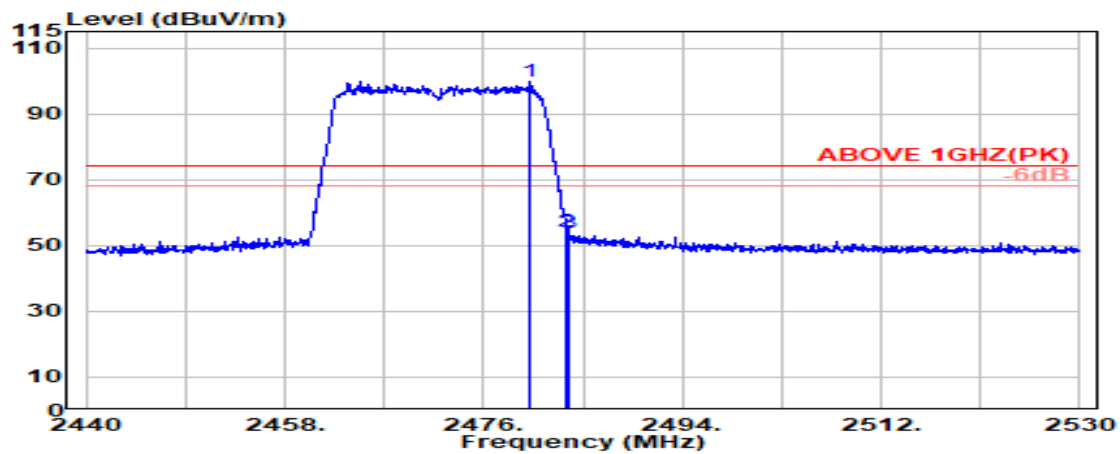

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.250	28.42	5.82	39.87	105.27	99.64	---	---	Peak
2483.500	28.43	5.83	39.87	59.69	54.08	74.00	19.92	Peak
2483.750	28.44	5.83	39.87	59.51	53.90	74.00	20.10	Peak

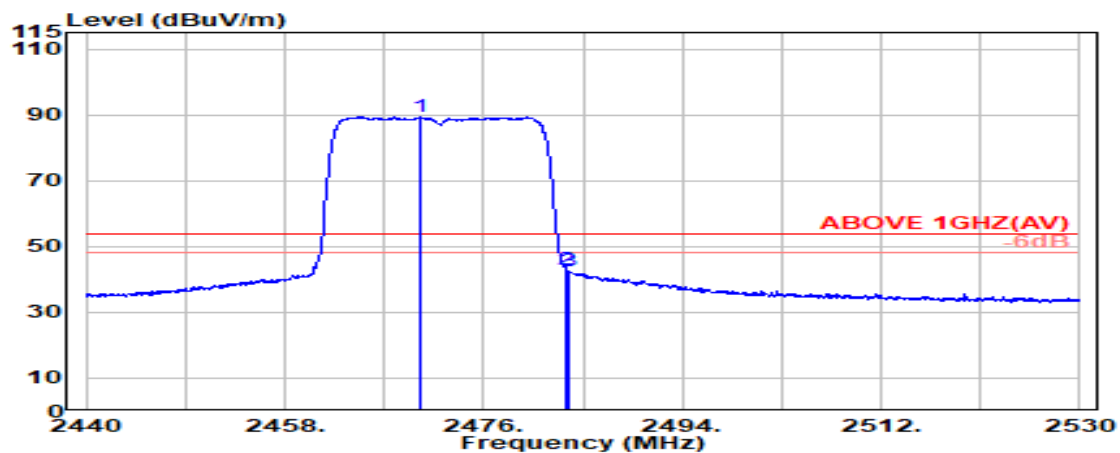


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2470.200	28.38	5.81	39.87	95.17	89.49	---	---	Average
2483.500	28.43	5.83	39.87	48.57	42.96	54.00	11.04	Average
2483.700	28.44	5.83	39.87	47.95	42.34	54.00	11.66	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

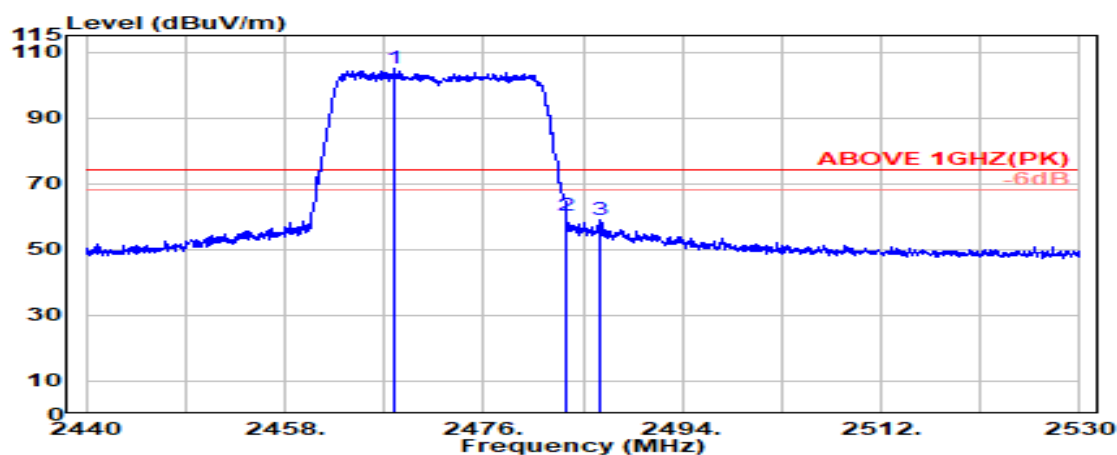

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.900	28.37	5.81	39.87	110.52	104.82	---	---	Peak
2483.500	28.43	5.83	39.87	66.05	60.44	74.00	13.56	Peak
2486.650	28.45	5.83	39.87	64.50	58.91	74.00	15.09	Peak

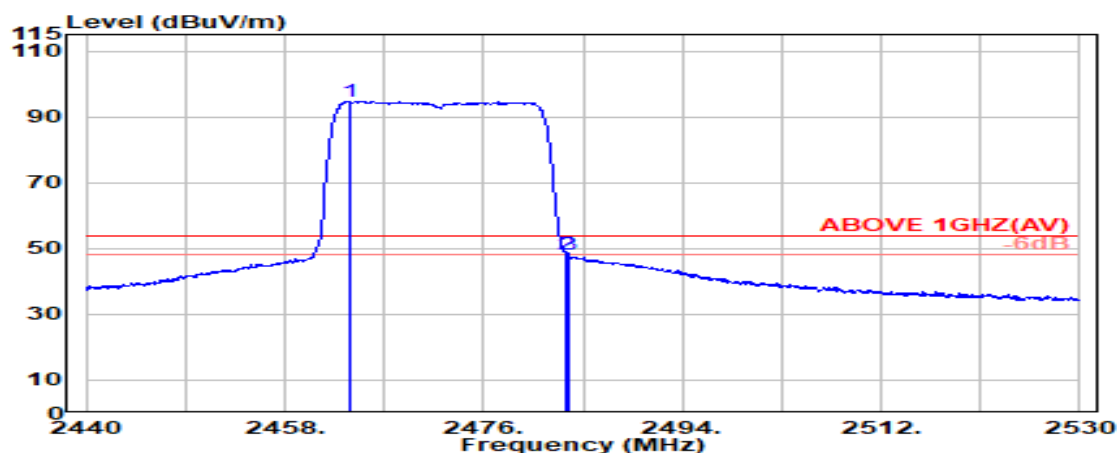

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.800	28.36	5.80	39.87	100.36	94.64	---	---	Average
2483.500	28.43	5.83	39.87	53.95	48.34	54.00	5.66	Average
2483.700	28.44	5.83	39.87	53.72	48.11	54.00	5.89	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

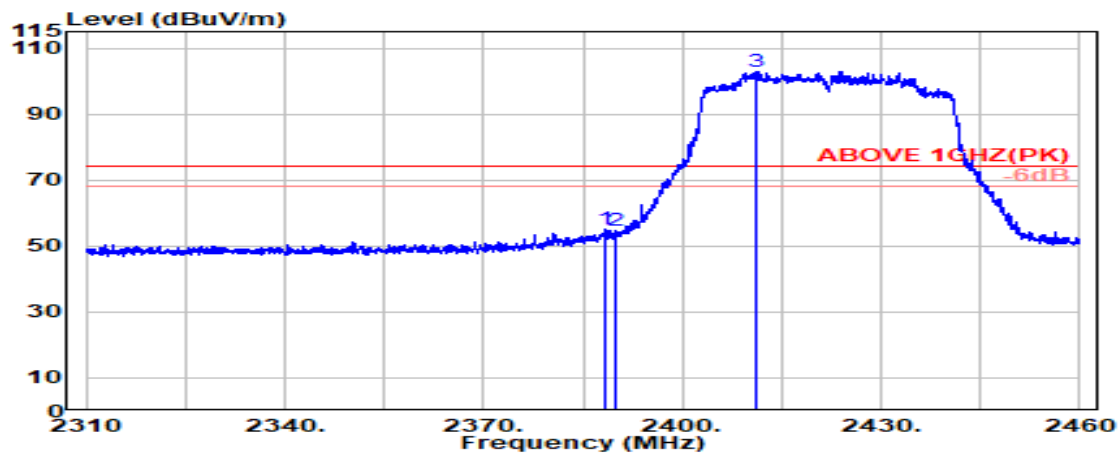

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.250	28.20	5.70	39.88	60.88	54.90	74.00	19.10	Peak
2389.800	28.20	5.70	39.88	60.65	54.67	74.00	19.33	Peak
@ 2411.150	28.22	5.73	39.88	108.92	103.00	---	---	Peak

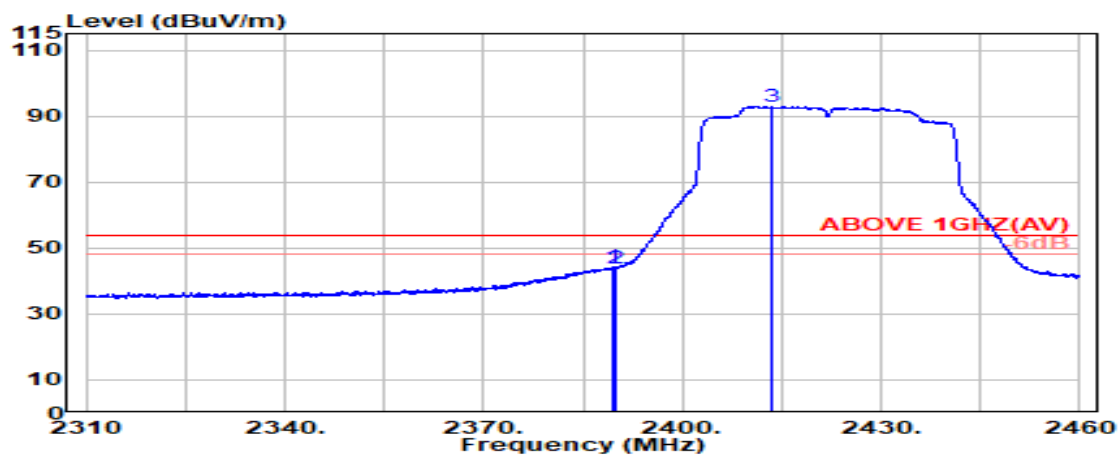

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.20	5.70	39.88	50.06	44.08	54.00	9.92	Average
2389.800	28.20	5.70	39.88	49.91	43.94	54.00	10.06	Average
@ 2413.400	28.23	5.73	39.88	98.77	92.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

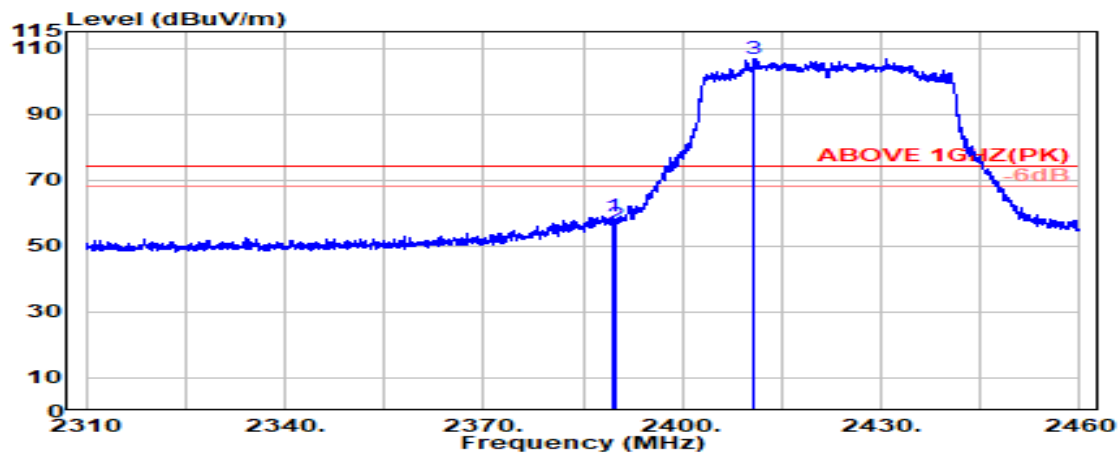

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.550	28.20	5.70	39.88	65.10	59.12	74.00	14.88	Peak
2389.800	28.20	5.70	39.88	62.50	56.53	74.00	17.47	Peak
@ 2410.900	28.22	5.73	39.88	112.76	106.84	---	---	Peak

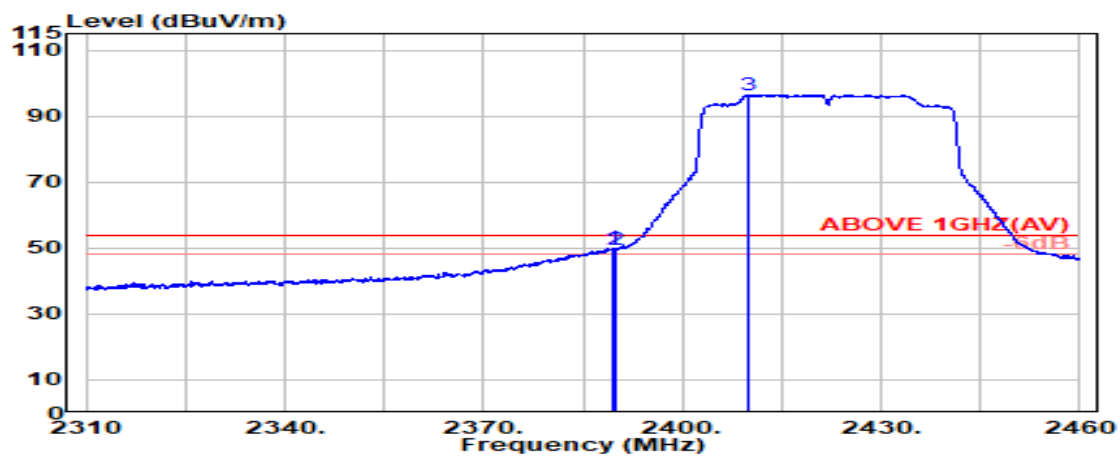

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.88	55.72	49.74	54.00	4.26	Average
2389.800	28.20	5.70	39.88	55.42	49.45	54.00	4.55	Average
@ 2409.800	28.22	5.73	39.88	102.43	96.51	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

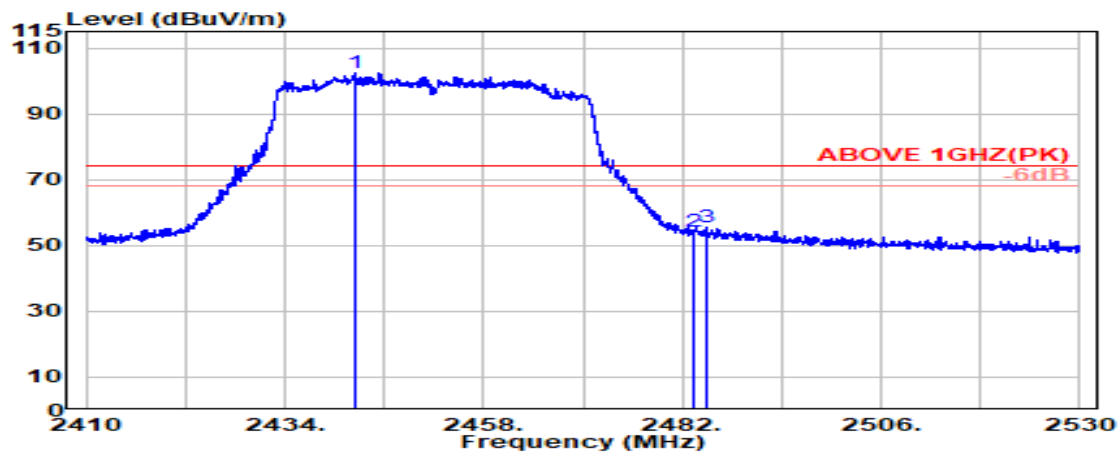

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2442.600	28.29	5.77	39.87	108.34	102.53	---	---	Peak
2483.500	28.43	5.83	39.87	59.83	54.22	74.00	19.78	Peak
2484.850	28.44	5.83	39.87	61.25	55.65	74.00	18.35	Peak

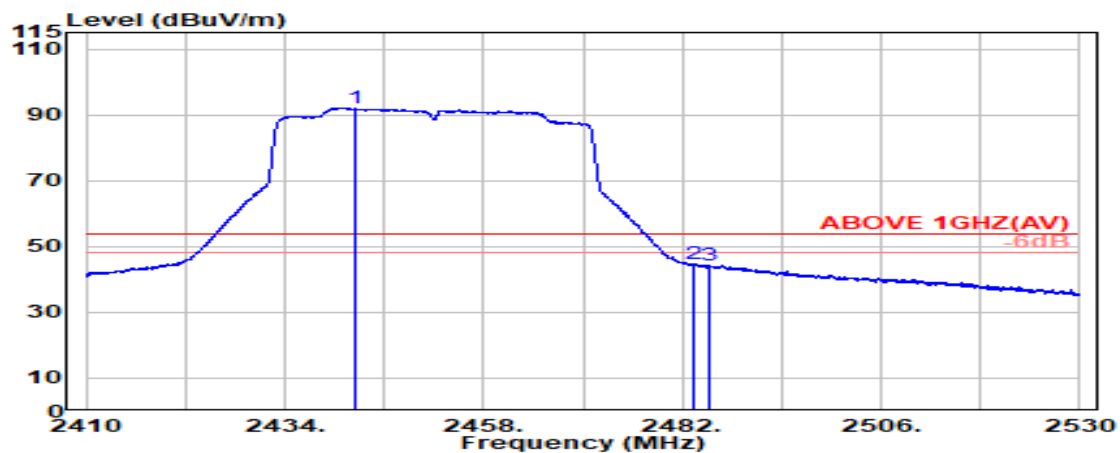

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2442.550	28.29	5.77	39.87	97.90	92.08	---	---	Average
2483.500	28.43	5.83	39.87	50.45	44.85	54.00	9.15	Average
2485.250	28.44	5.83	39.87	50.08	44.48	54.00	9.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------



Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2447.600	28.30	5.78	39.87	113.10	107.30	---	---	Peak
2483.500	28.43	5.83	39.87	64.21	58.60	74.00	15.40	Peak
2486.300	28.45	5.83	39.87	67.28	61.68	74.00	12.32	Peak

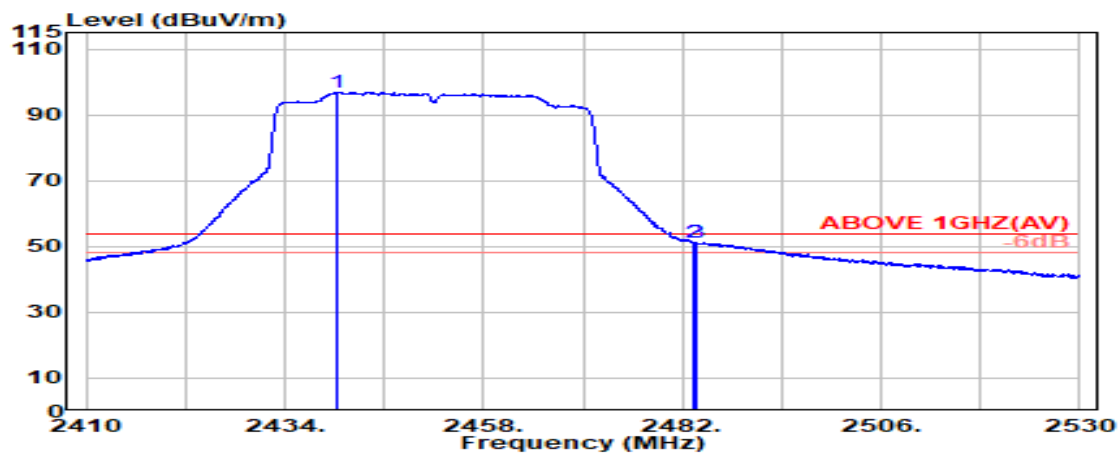

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2440.400	28.28	5.77	39.87	102.79	96.97	---	---	Average
2483.500	28.43	5.83	39.87	56.83	51.22	54.00	2.78	Average
2483.800	28.44	5.83	39.87	56.72	51.12	54.00	2.88	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

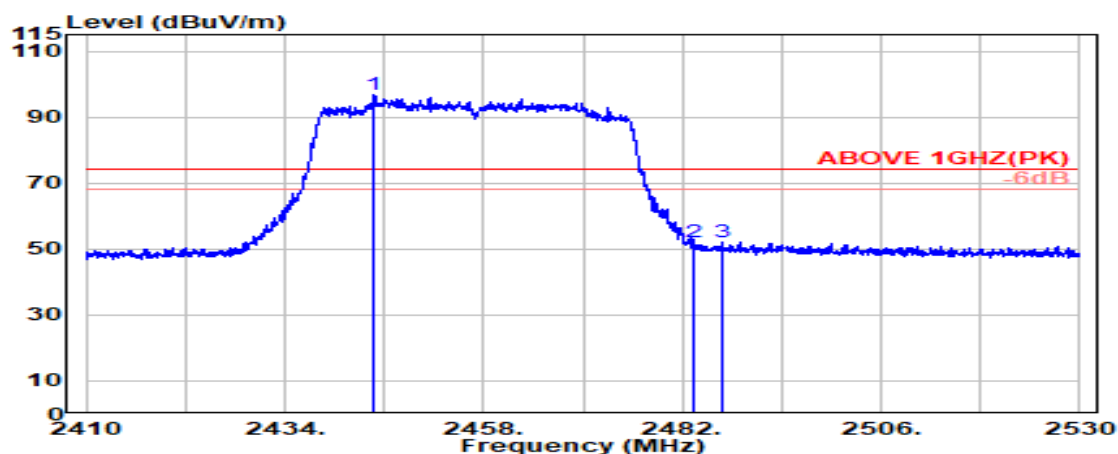

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2444.650	28.29	5.78	39.87	102.61	96.80	---	---	Peak
	2483.500	28.43	5.83	39.87	57.62	52.01	74.00	21.99	Peak
	2486.750	28.45	5.83	39.87	57.52	51.93	74.00	22.07	Peak

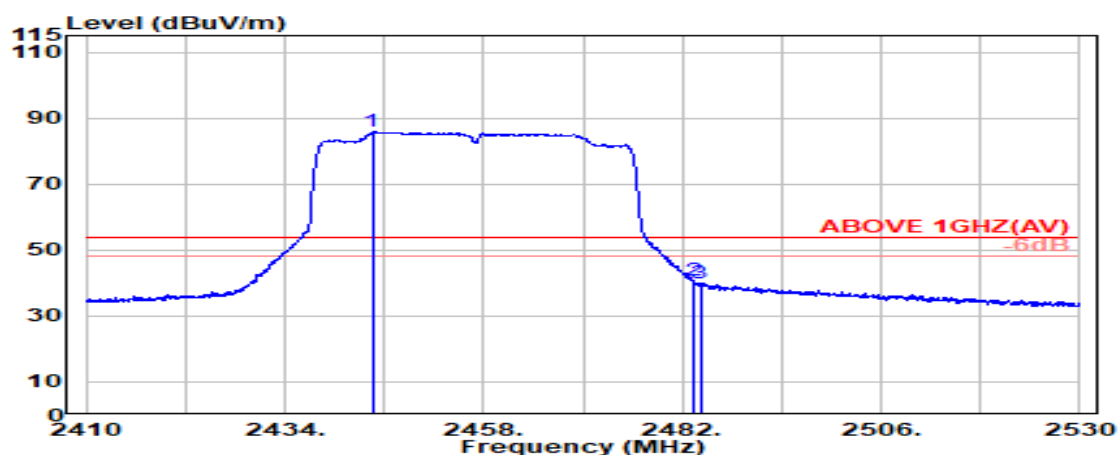

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2444.550	28.29	5.78	39.87	91.65	85.84	---	---	Average
	2483.500	28.43	5.83	39.87	46.36	40.75	54.00	13.25	Average
	2484.150	28.44	5.83	39.87	45.65	40.04	54.00	13.96	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

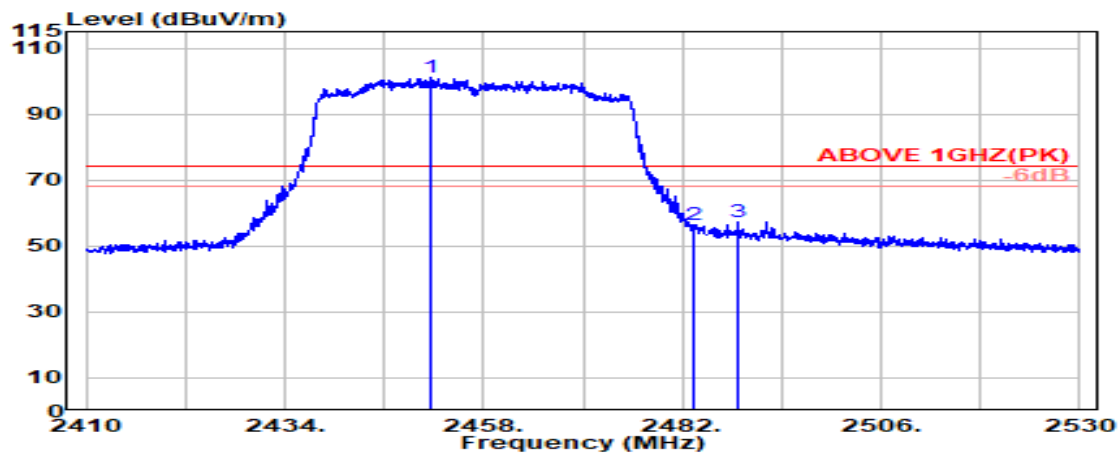

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2451.750	28.31	5.79	39.87	106.77	100.99	---	---	Peak
	2483.500	28.43	5.83	39.87	62.12	56.52	74.00	17.48	Peak
	2488.800	28.46	5.84	39.87	62.75	57.17	74.00	16.83	Peak

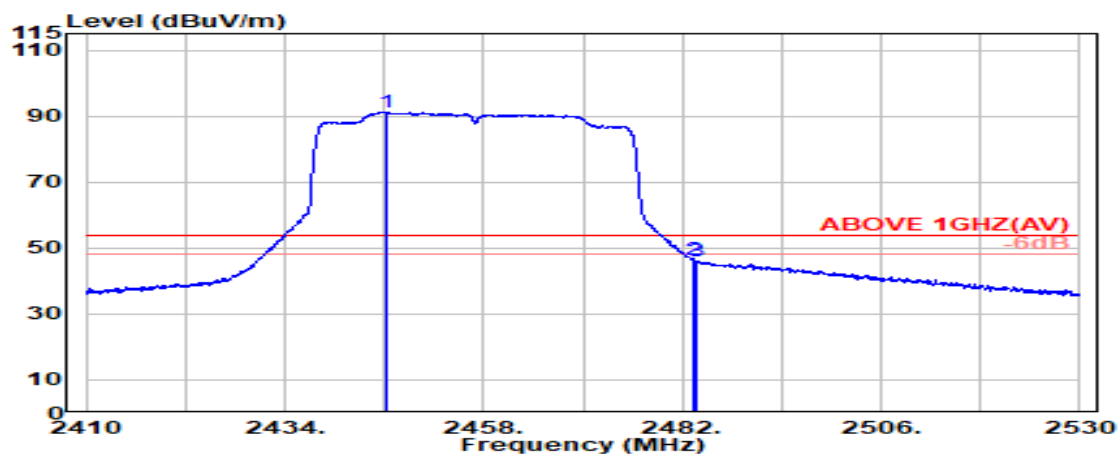


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2446.200	28.29	5.78	39.87	97.10	91.30	---	---	Average
	2483.500	28.43	5.83	39.87	51.92	46.31	54.00	7.69	Average
	2483.700	28.44	5.83	39.87	51.62	46.01	54.00	7.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

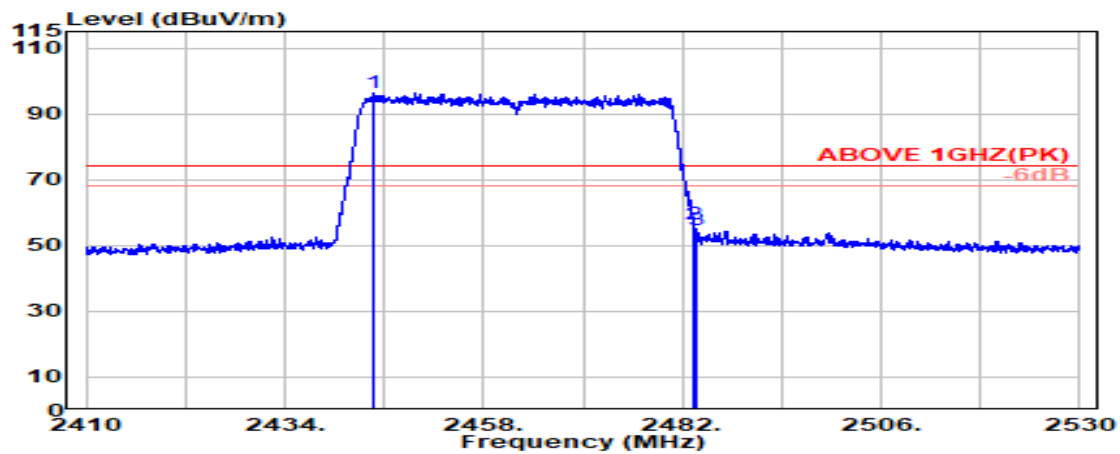

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2444.600	28.29	5.78	39.87	102.27	96.46	---	---	Peak
2483.500	28.43	5.83	39.87	62.20	56.59	74.00	17.41	Peak
2483.700	28.44	5.83	39.87	60.30	54.70	74.00	19.30	Peak

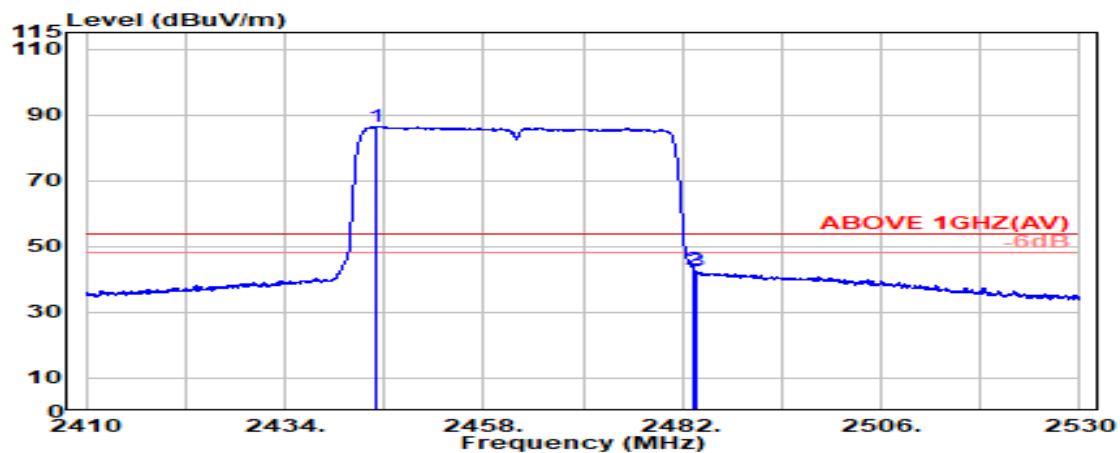

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2445.050	28.29	5.78	39.87	92.29	86.48	---	---	Average
2483.500	28.43	5.83	39.87	48.36	42.75	54.00	11.25	Average
2483.700	28.44	5.83	39.87	48.24	42.63	54.00	11.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

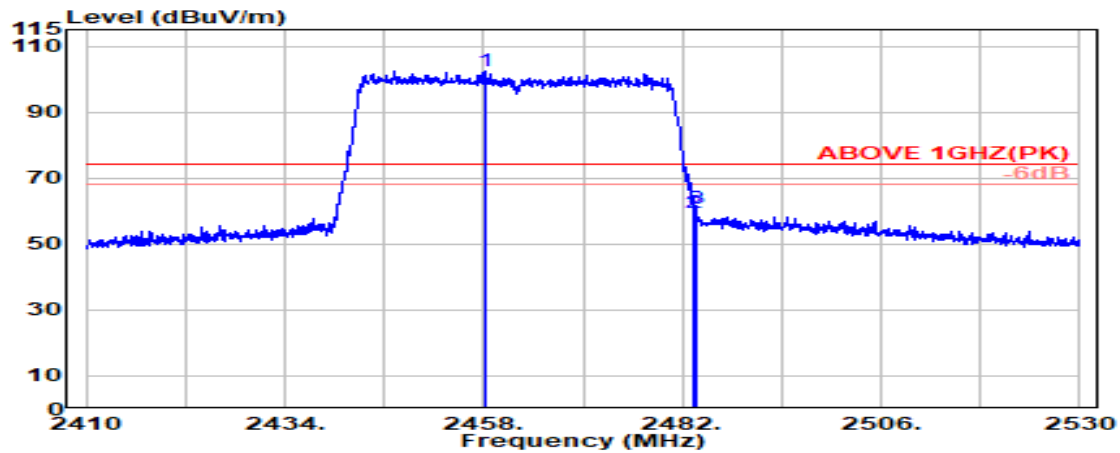

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.100	28.33	5.79	39.87	108.13	102.39	---	---	Peak
2483.500	28.43	5.83	39.87	65.26	59.66	74.00	14.34	Peak
2483.700	28.44	5.83	39.87	66.26	60.65	74.00	13.35	Peak




Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2445.900	28.29	5.78	39.87	97.71	91.90	---	---	Average
2483.500	28.43	5.83	39.87	53.86	48.25	54.00	5.75	Average
2484.200	28.44	5.83	39.87	53.80	48.19	54.00	5.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

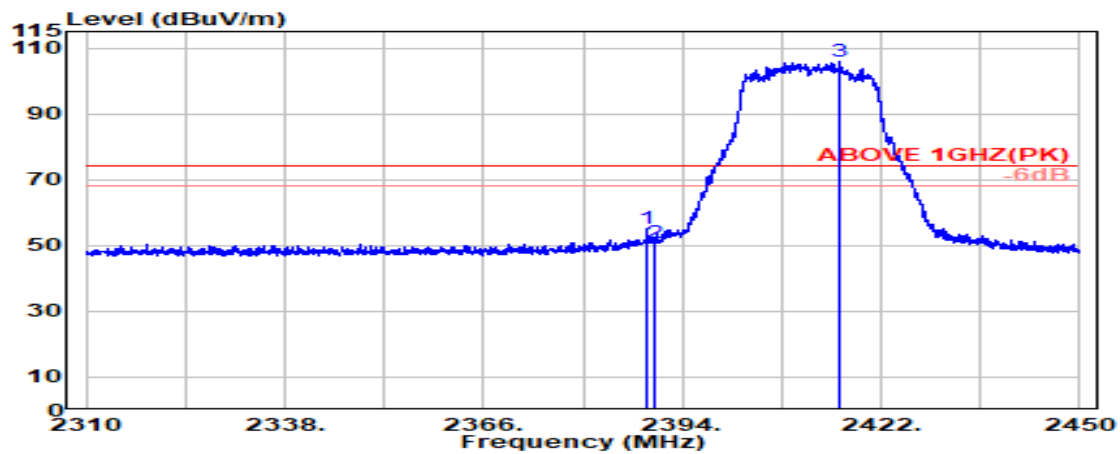

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.950	28.20	5.70	39.88	60.97	55.00	74.00	19.00	Peak
2390.000	28.20	5.70	39.88	56.72	50.74	74.00	23.26	Peak
@ 2416.000	28.23	5.74	39.88	111.65	105.74	---	---	Peak

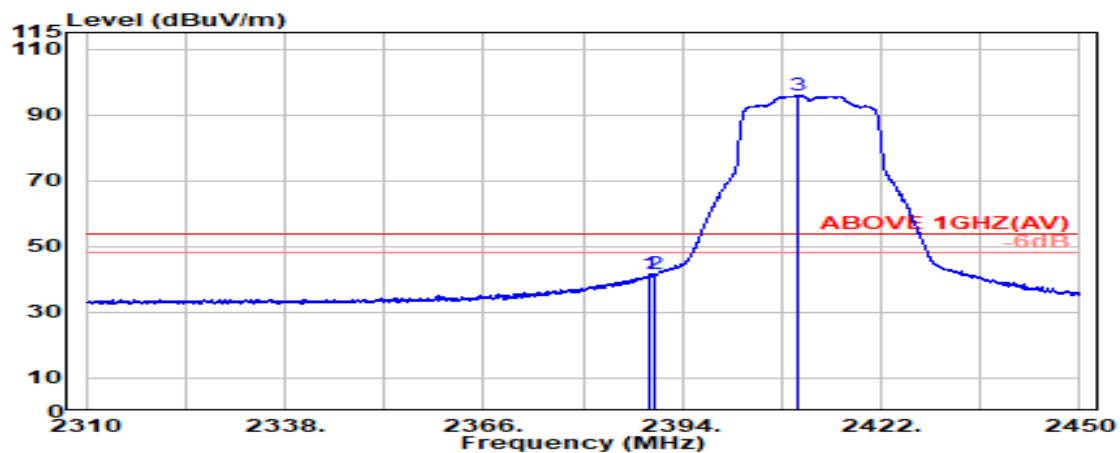


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.20	5.70	39.88	47.67	41.70	54.00	12.30	Average
2390.000	28.20	5.70	39.88	47.71	41.73	54.00	12.27	Average
@ 2410.250	28.22	5.73	39.88	101.88	95.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

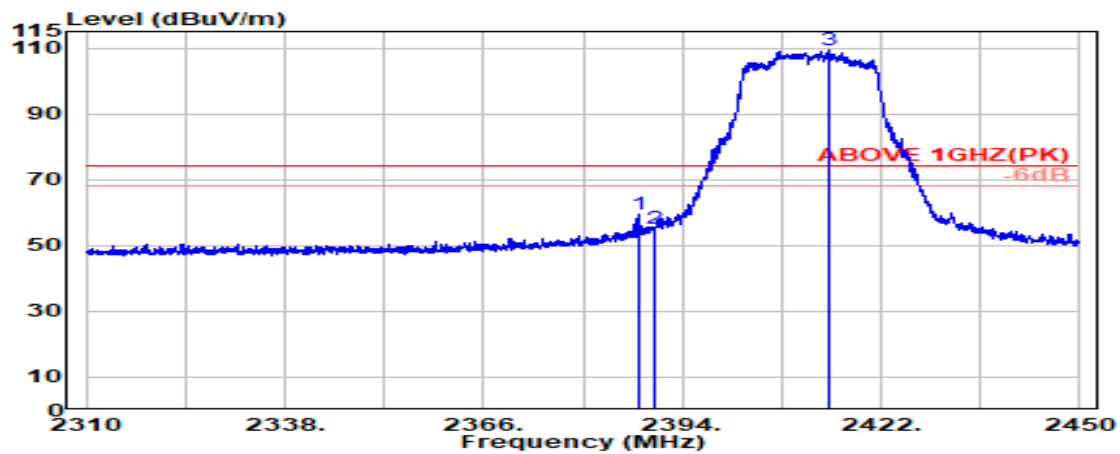

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.750	28.20	5.70	39.88	65.41	59.43	74.00	14.57	Peak
2390.000	28.20	5.70	39.88	61.08	55.11	74.00	18.89	Peak
@ 2414.550	28.23	5.74	39.88	115.22	109.31	---	---	Peak

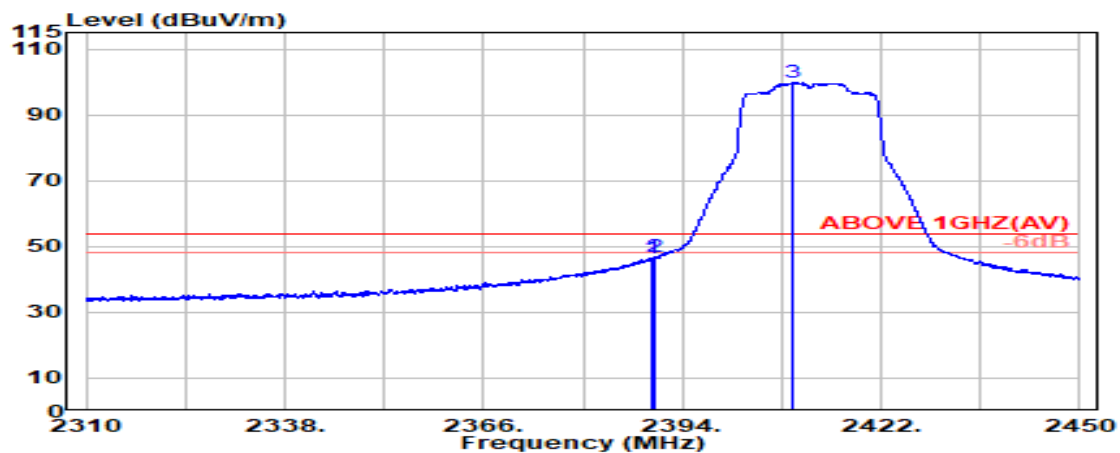


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.88	52.44	46.47	54.00	7.53	Average
2390.000	28.20	5.70	39.88	52.78	46.81	54.00	7.19	Average
@ 2409.650	28.22	5.73	39.88	105.82	99.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

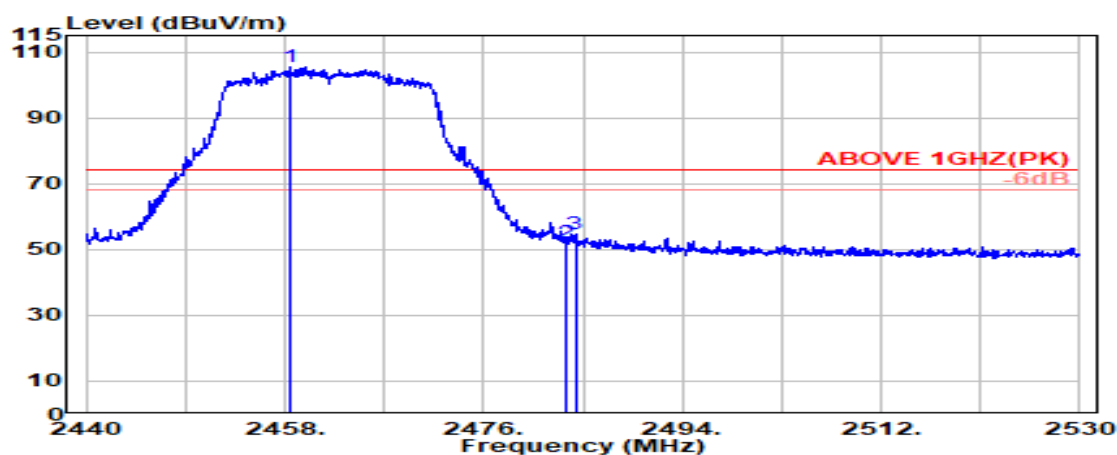

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.450	28.33	5.80	39.87	111.31	105.57	---	---	Peak
2483.500	28.43	5.83	39.87	57.69	52.08	74.00	21.92	Peak
2484.300	28.44	5.83	39.87	60.28	54.67	74.00	19.33	Peak

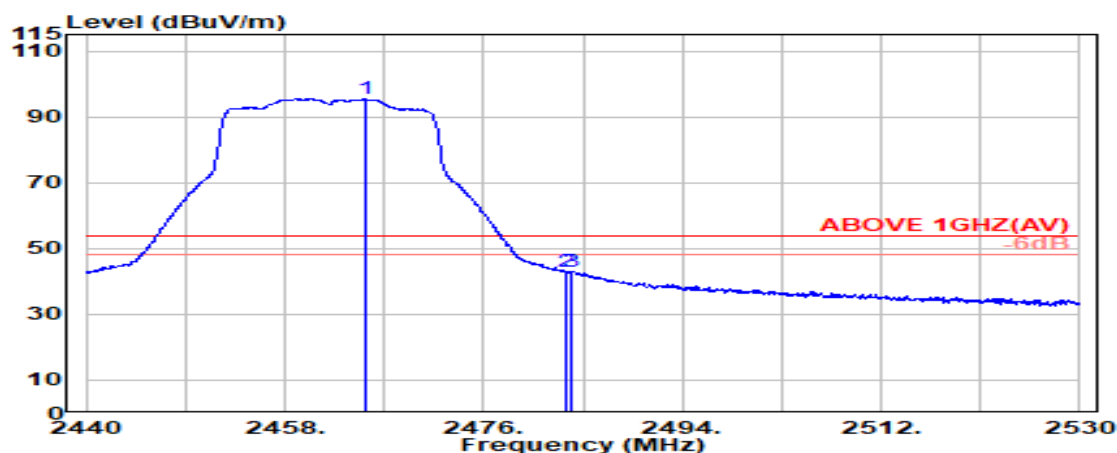

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.300	28.36	5.80	39.87	101.24	95.53	---	---	Average
2483.500	28.43	5.83	39.87	48.44	42.83	54.00	11.17	Average
2483.850	28.44	5.83	39.87	48.64	43.03	54.00	10.97	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

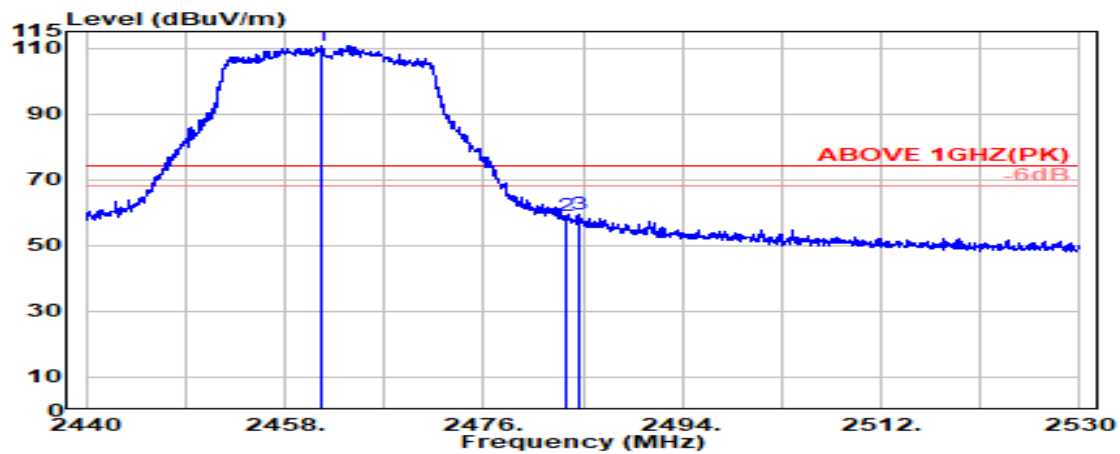

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.400	28.35	5.80	39.87	116.38	110.66	---	---	Peak
2483.500	28.43	5.83	39.87	64.84	59.23	74.00	14.77	Peak
2484.650	28.44	5.83	39.87	65.00	59.40	74.00	14.60	Peak

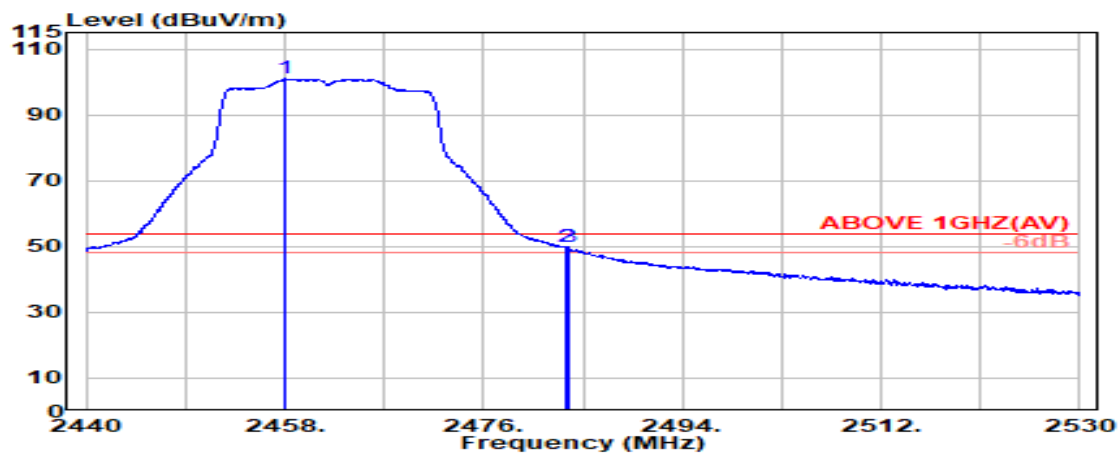

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.050	28.33	5.79	39.87	106.72	100.98	---	---	Average
2483.500	28.43	5.83	39.87	55.39	49.78	54.00	4.22	Average
2483.800	28.44	5.83	39.87	55.33	49.72	54.00	4.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

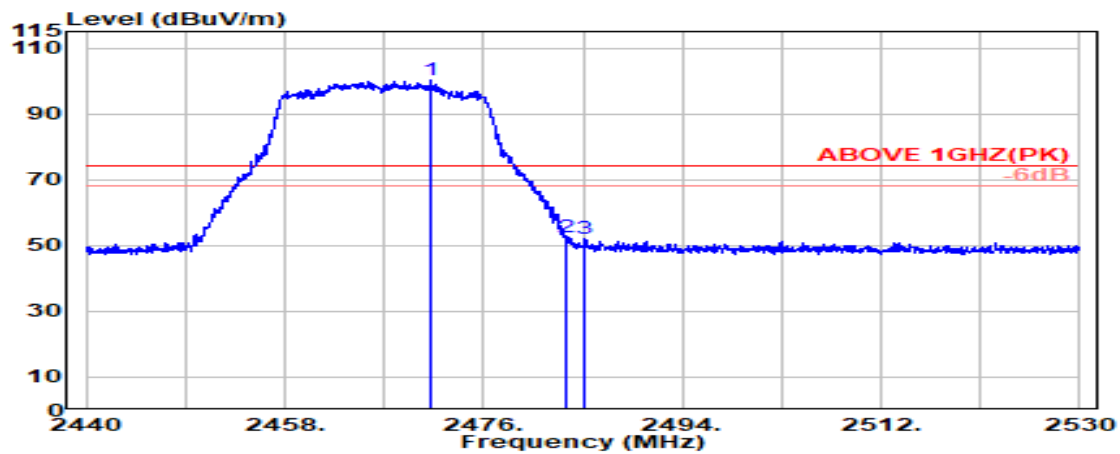

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.250	28.39	5.81	39.87	105.92	100.25	---	---	Peak
2483.500	28.43	5.83	39.87	58.08	52.47	74.00	21.53	Peak
2485.150	28.44	5.83	39.87	57.87	52.27	74.00	21.73	Peak

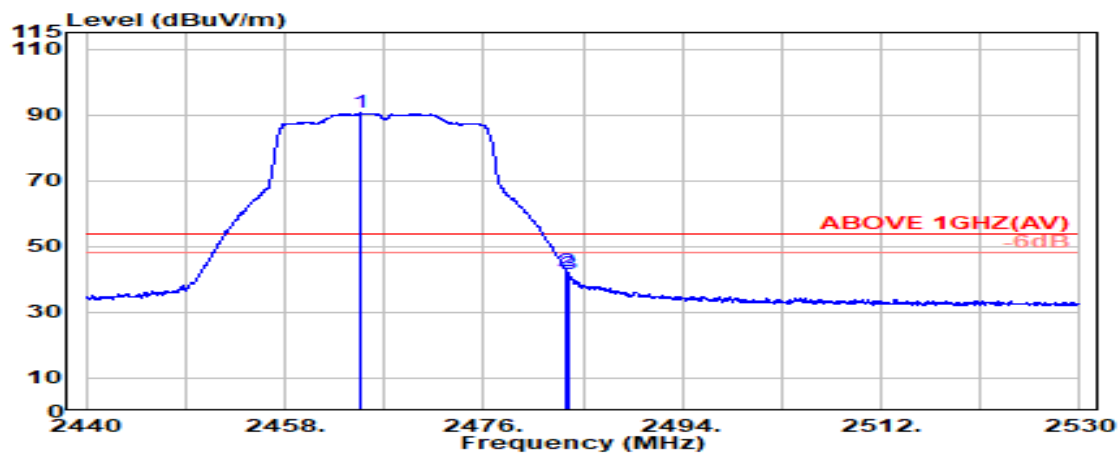

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.900	28.36	5.80	39.87	96.20	90.49	---	---	Average
2483.500	28.43	5.83	39.87	48.05	42.44	54.00	11.56	Average
2483.700	28.44	5.83	39.87	47.26	41.65	54.00	12.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

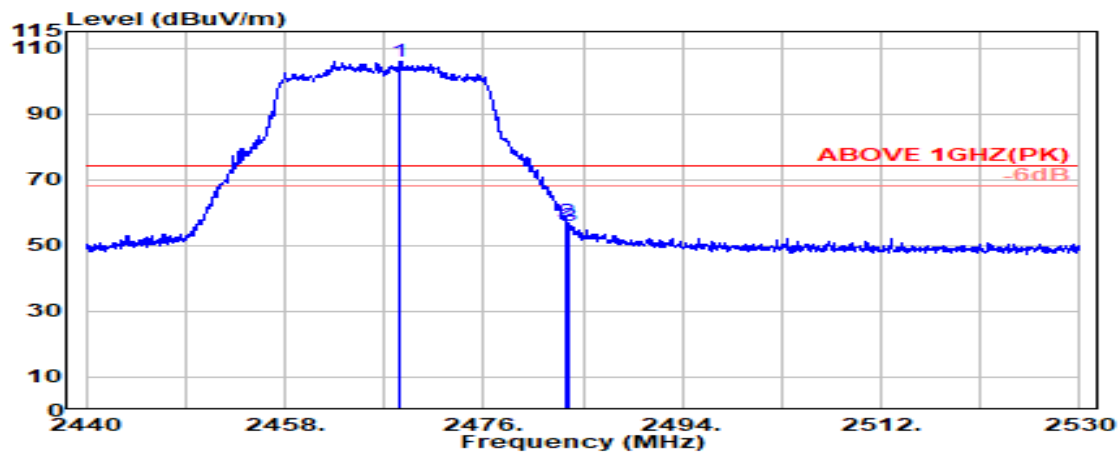

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.450	28.37	5.81	39.87	111.49	105.80	---	---	Peak
2483.500	28.43	5.83	39.87	62.86	57.25	74.00	16.75	Peak
2483.750	28.44	5.83	39.87	61.74	56.13	74.00	17.87	Peak

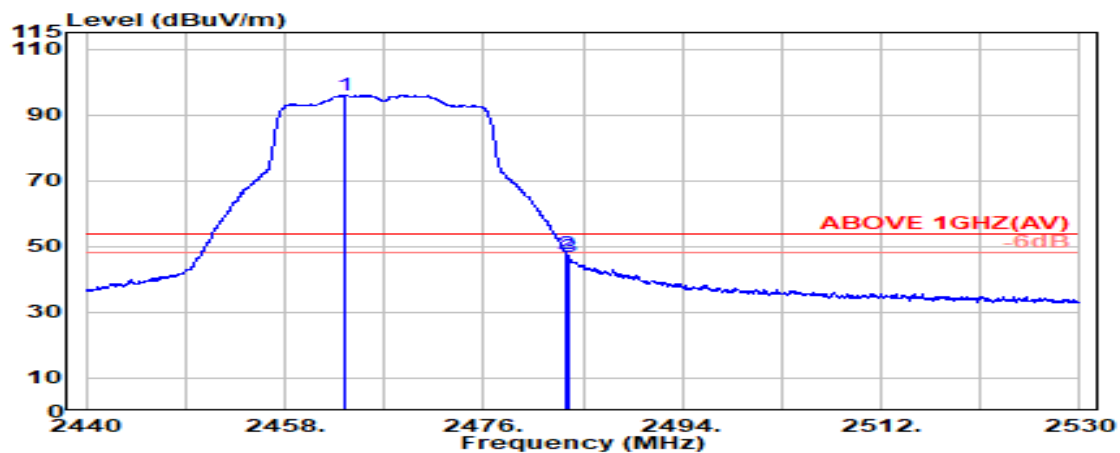

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.350	28.35	5.80	39.87	101.73	96.02	---	---	Average
2483.500	28.43	5.83	39.87	53.42	47.81	54.00	6.19	Average
2483.700	28.44	5.83	39.87	52.39	46.79	54.00	7.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

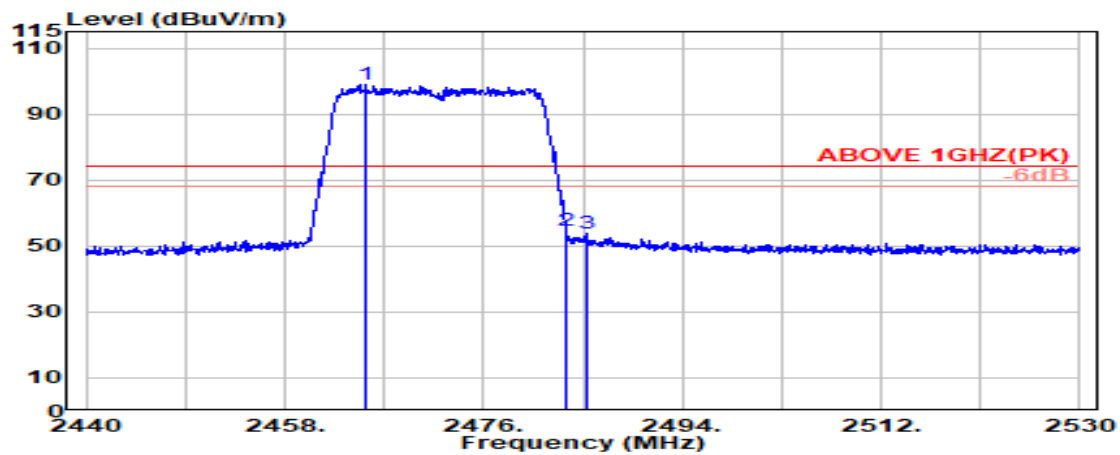

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.400	28.36	5.80	39.87	104.45	98.74	---	---	Peak
2483.500	28.43	5.83	39.87	60.49	54.89	74.00	19.11	Peak
2485.450	28.44	5.83	39.87	59.32	53.72	74.00	20.28	Peak

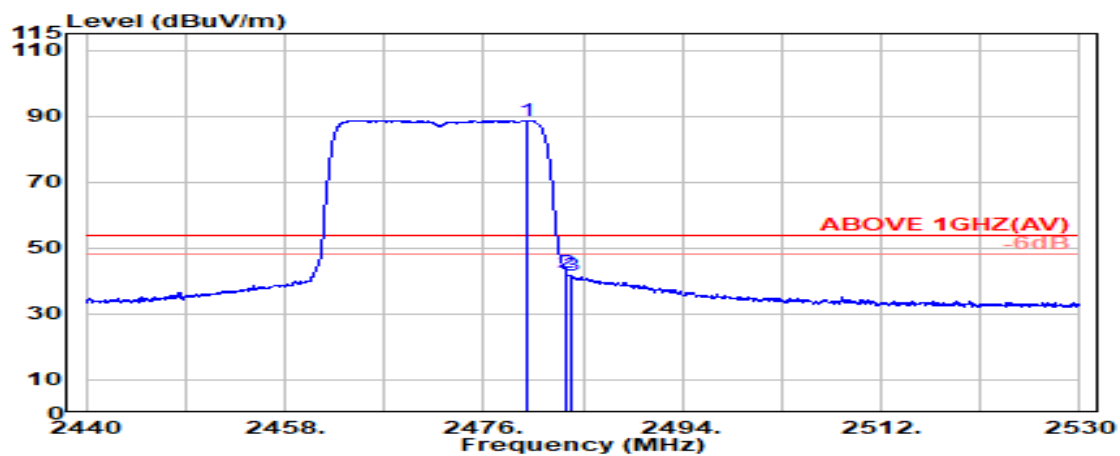

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.950	28.42	5.82	39.87	94.37	88.74	---	---	Average
2483.500	28.43	5.83	39.87	48.19	42.58	54.00	11.42	Average
2483.850	28.44	5.83	39.87	47.44	41.83	54.00	12.17	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

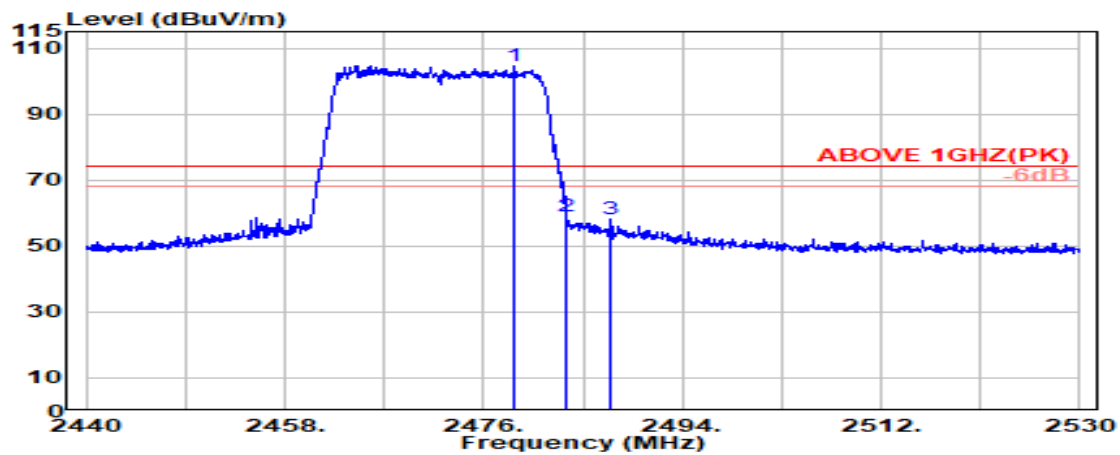

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.750	28.42	5.82	39.87	110.28	104.65	---	---	Peak
2483.500	28.43	5.83	39.87	64.75	59.15	74.00	14.85	Peak
2487.550	28.45	5.83	39.87	63.95	58.36	74.00	15.64	Peak

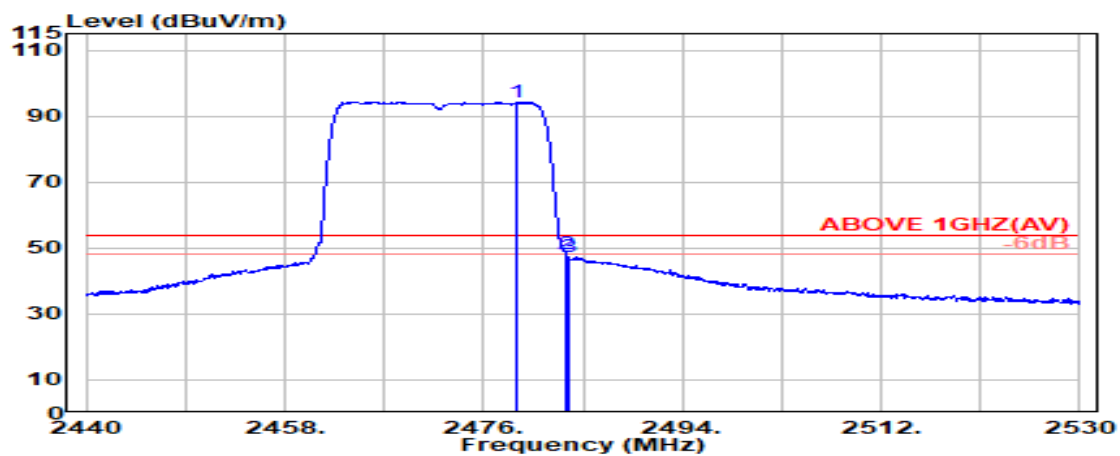

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.100	28.42	5.82	39.87	99.92	94.29	---	---	Average
2483.500	28.43	5.83	39.87	53.75	48.14	54.00	5.86	Average
2483.750	28.44	5.83	39.87	52.87	47.26	54.00	6.74	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

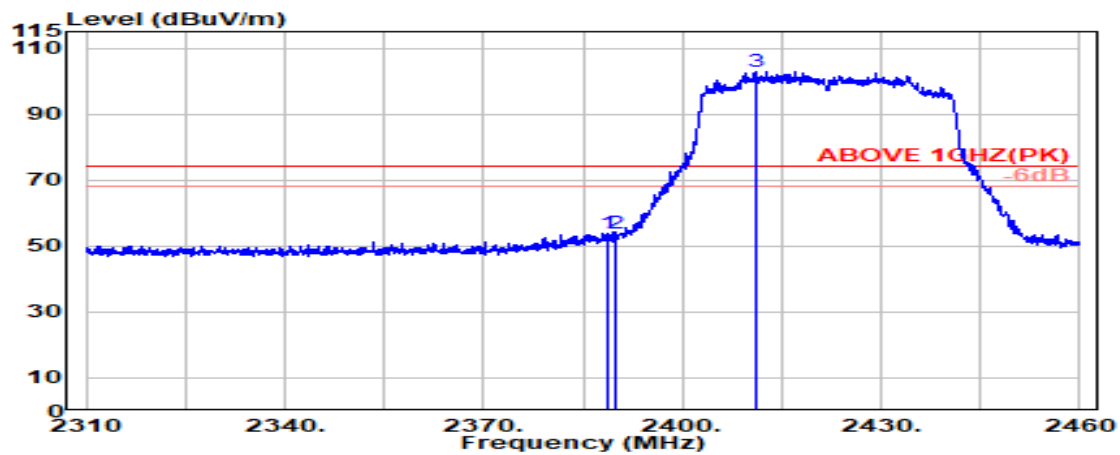

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.650	28.20	5.70	39.88	59.81	53.84	74.00	20.16	Peak
2389.800	28.20	5.70	39.88	59.68	53.71	74.00	20.29	Peak
@ 2411.050	28.22	5.73	39.88	108.96	103.03	---	---	Peak

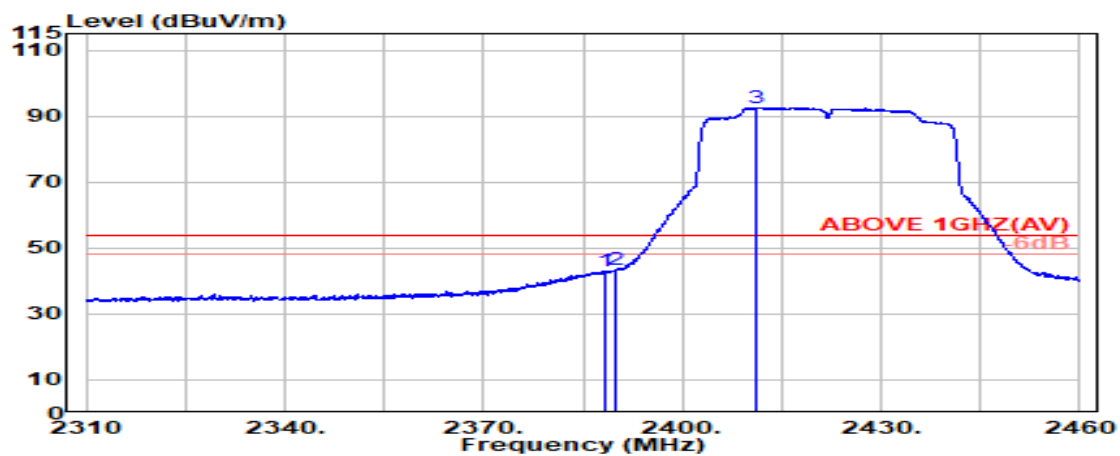

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.450	28.20	5.70	39.88	49.12	43.14	54.00	10.86	Average
2389.800	28.20	5.70	39.88	49.35	43.37	54.00	10.63	Average
@ 2411.200	28.22	5.73	39.88	98.57	92.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

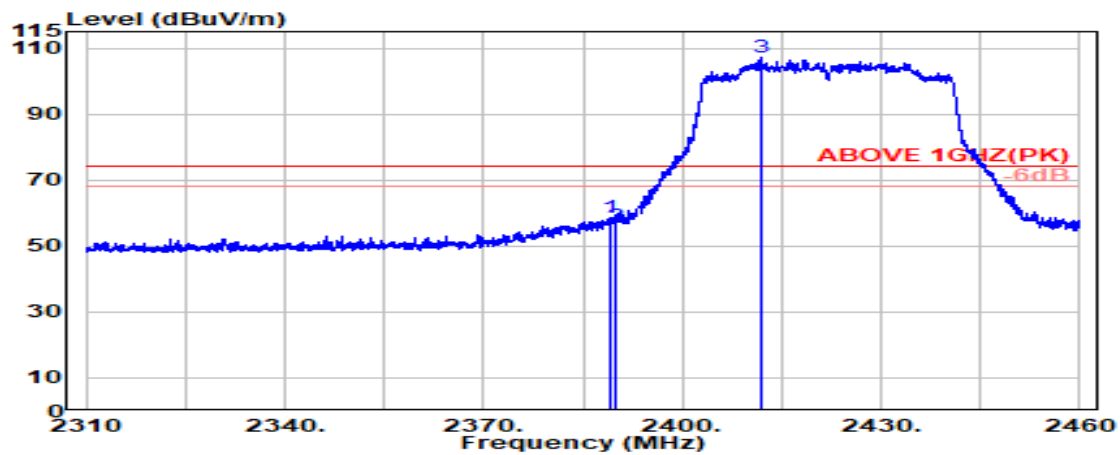

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.20	5.70	39.88	64.70	58.72	74.00	15.28	Peak
2389.800	28.20	5.70	39.88	61.88	55.90	74.00	18.10	Peak
@ 2411.800	28.22	5.73	39.88	113.02	107.10	---	---	Peak

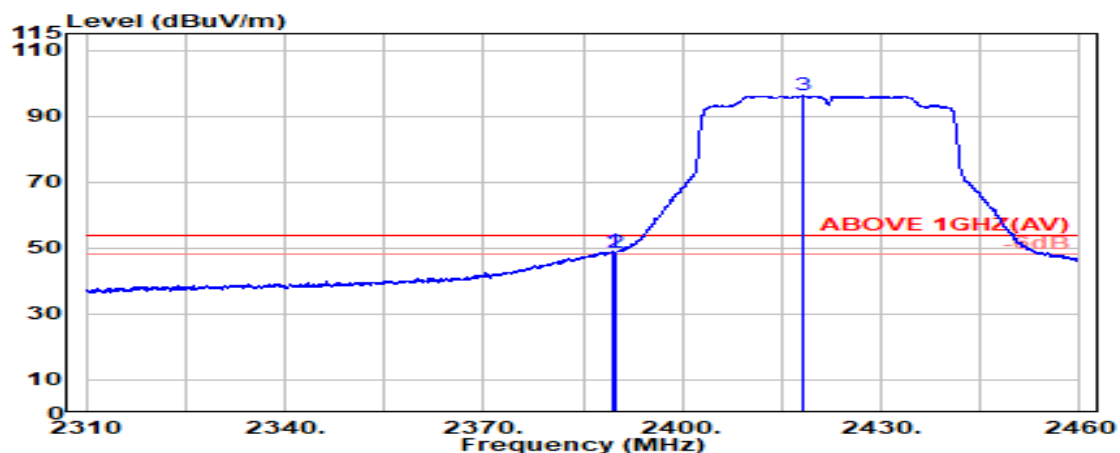

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	5.70	39.88	55.09	49.11	54.00	4.89	Average
2389.800	28.20	5.70	39.88	54.63	48.66	54.00	5.34	Average
@ 2418.200	28.24	5.74	39.88	102.09	96.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

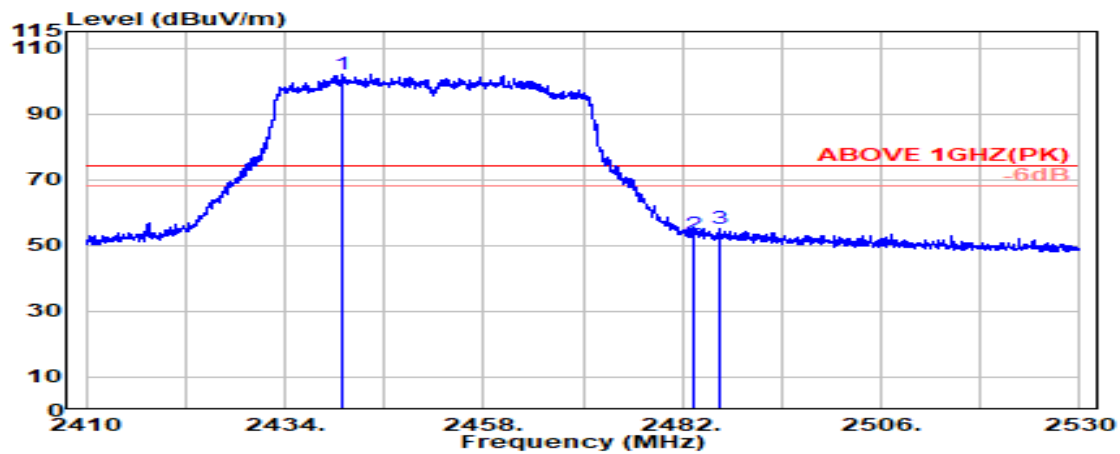

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2441.050	28.28	5.77	39.87	107.99	102.17	---	---	Peak
2483.500	28.43	5.83	39.87	59.10	53.49	74.00	20.51	Peak
2486.500	28.45	5.83	39.87	60.73	55.14	74.00	18.86	Peak

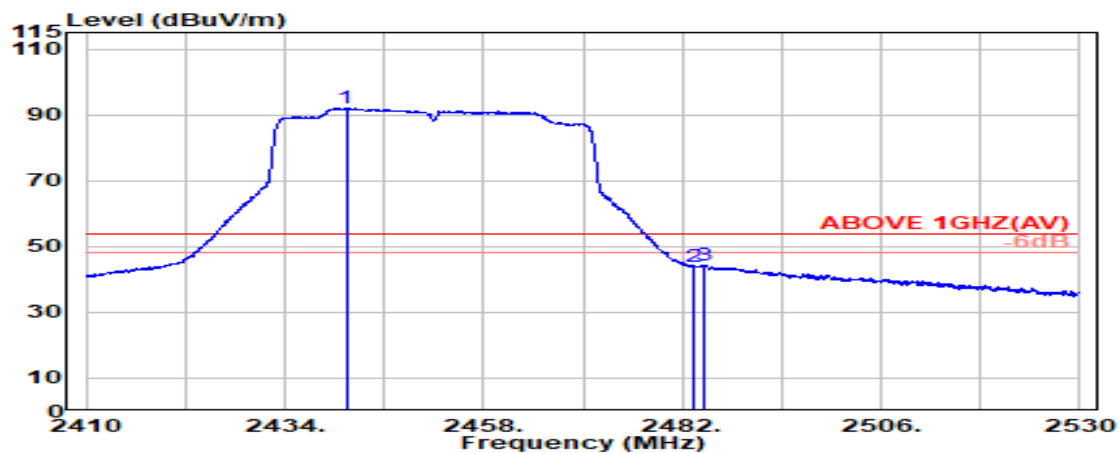

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2441.400	28.28	5.77	39.87	97.73	91.91	---	---	Average
2483.500	28.43	5.83	39.87	49.35	43.74	54.00	10.26	Average
2484.650	28.44	5.83	39.87	49.92	44.32	54.00	9.68	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

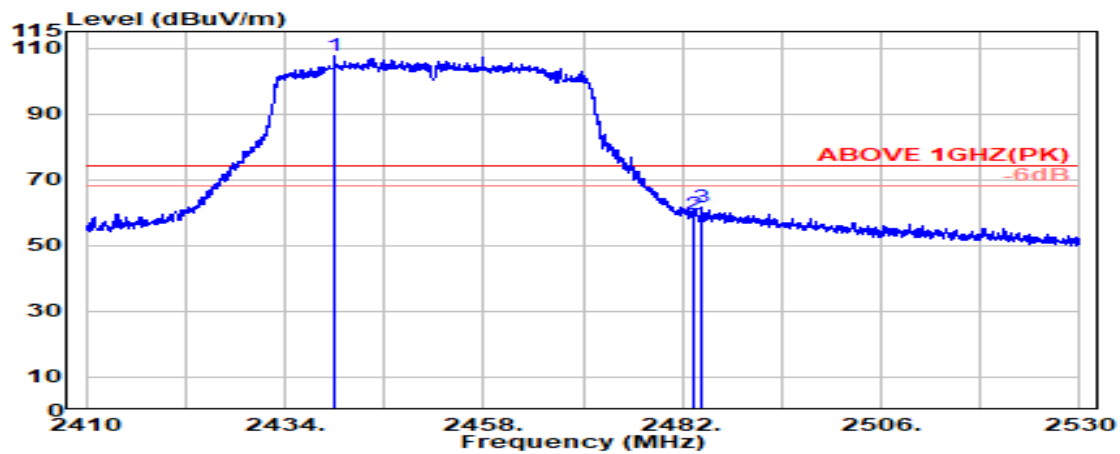

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2440.000	28.28	5.77	39.87	113.49	107.67	---	---	Peak
2483.500	28.43	5.83	39.87	65.03	59.42	74.00	14.58	Peak
2484.300	28.44	5.83	39.87	67.31	61.70	74.00	12.30	Peak

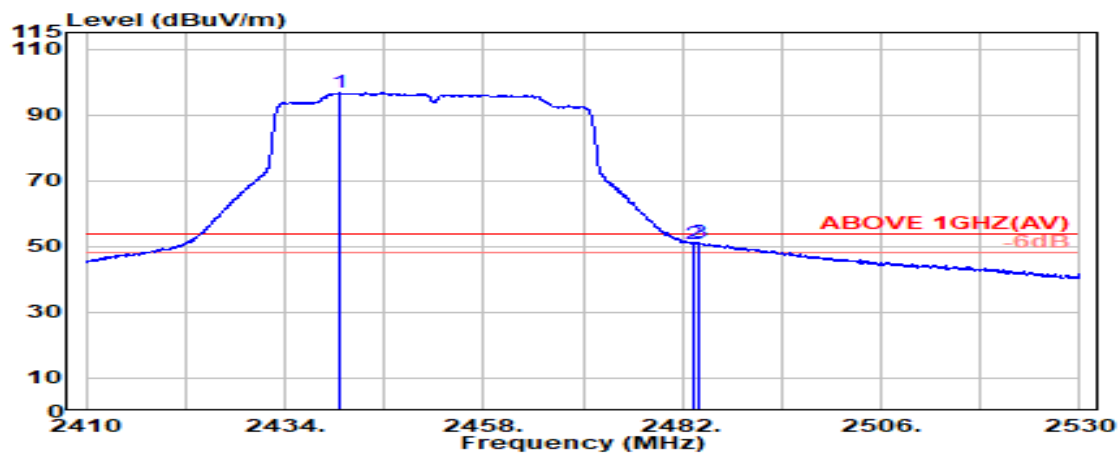

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2440.700	28.28	5.77	39.87	102.49	96.67	---	---	Average
2483.500	28.43	5.83	39.87	56.55	50.95	54.00	3.05	Average
2483.850	28.44	5.83	39.87	56.63	51.02	54.00	2.98	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

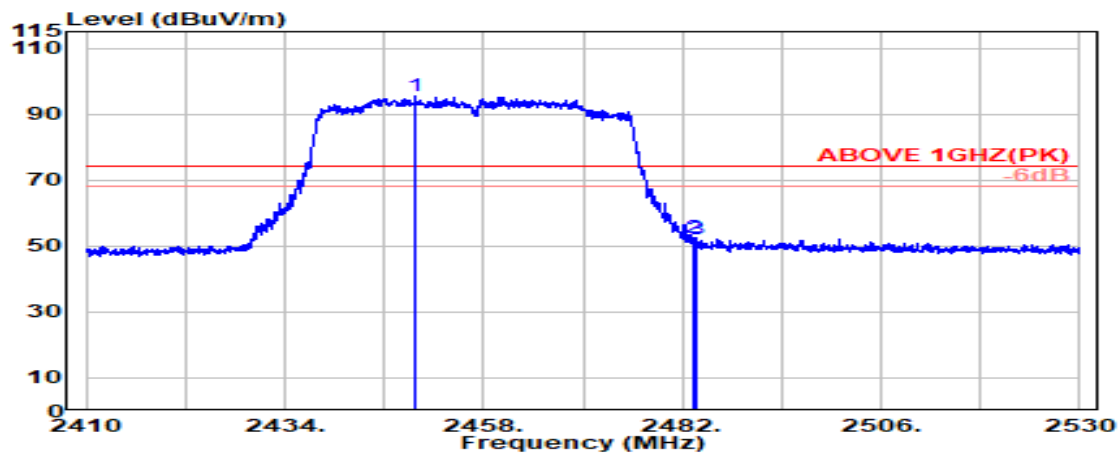

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2449.800	28.30	5.78	39.87	101.15	95.36	---	---	Peak
	2483.500	28.43	5.83	39.87	58.31	52.70	74.00	21.30	Peak
	2483.800	28.44	5.83	39.87	57.61	52.00	74.00	22.00	Peak

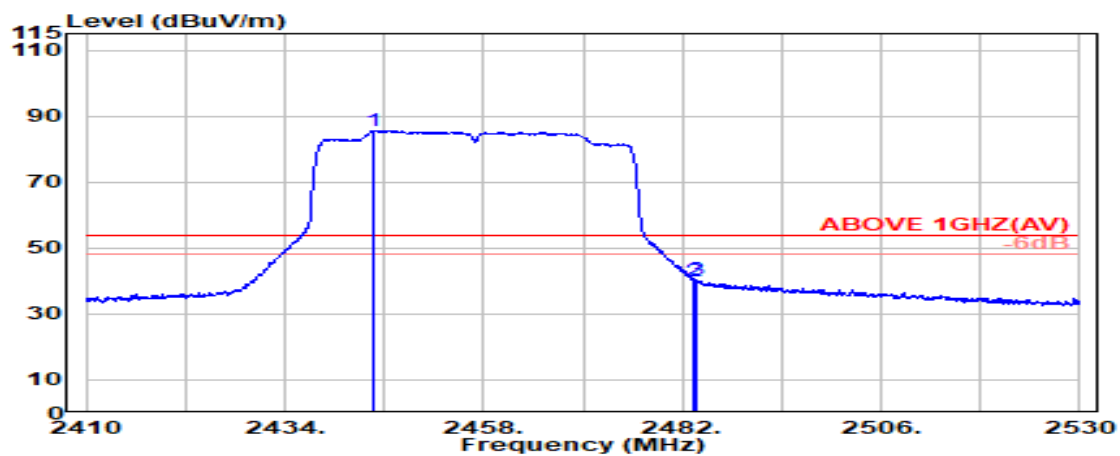

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2444.850	28.29	5.78	39.87	91.44	85.63	---	---	Average
	2483.500	28.43	5.83	39.87	45.62	40.01	54.00	13.99	Average
	2483.700	28.44	5.83	39.87	46.11	40.50	54.00	13.50	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

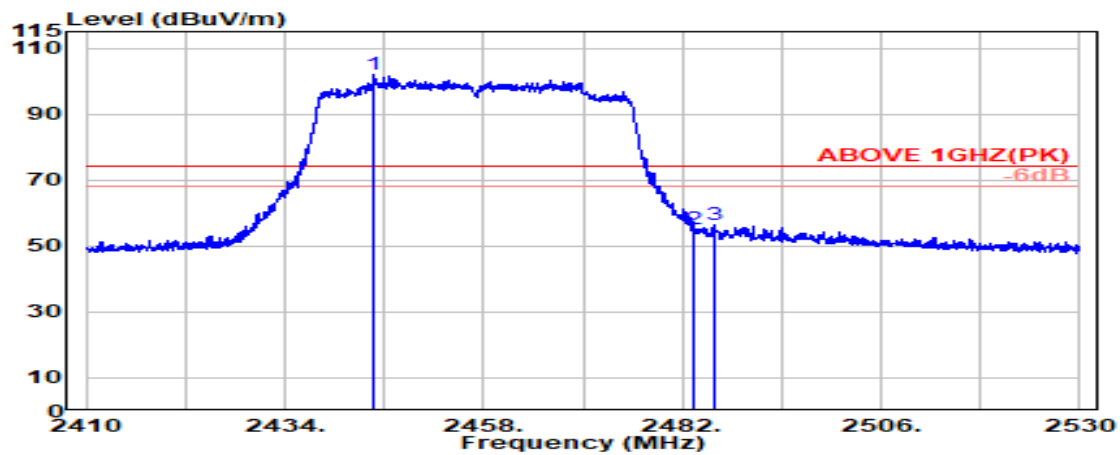

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2444.750	28.29	5.78	39.87	107.69	101.88	---	---	Peak
	2483.500	28.43	5.83	39.87	60.71	55.11	74.00	18.89	Peak
	2485.750	28.44	5.83	39.87	62.23	56.63	74.00	17.37	Peak

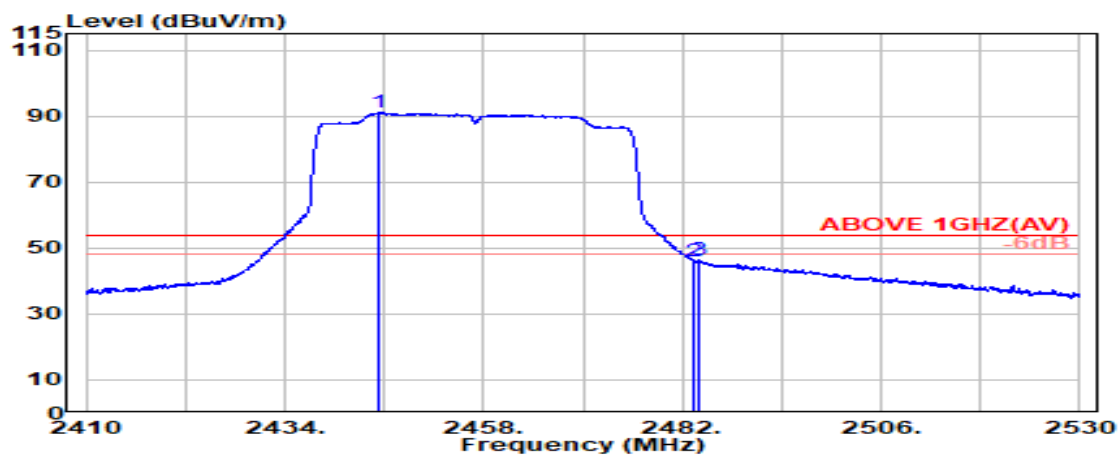


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2445.350	28.29	5.78	39.87	96.84	91.03	---	---	Average
	2483.500	28.43	5.83	39.87	51.76	46.15	54.00	7.85	Average
	2483.850	28.44	5.83	39.87	51.87	46.27	54.00	7.73	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

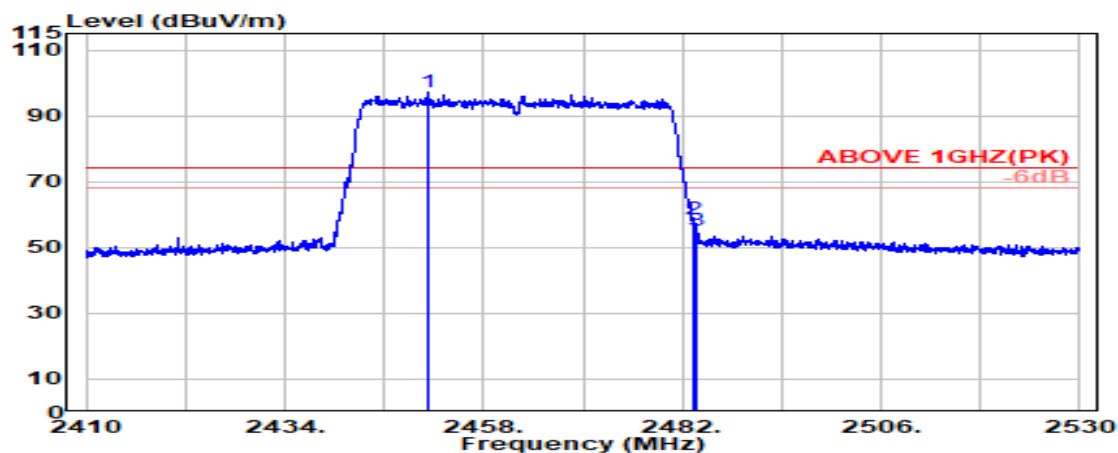

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2451.350	28.31	5.79	39.87	102.93	97.15	---	---	Peak
2483.500	28.43	5.83	39.87	64.27	58.66	74.00	15.34	Peak
2483.700	28.44	5.83	39.87	60.58	54.97	74.00	19.03	Peak

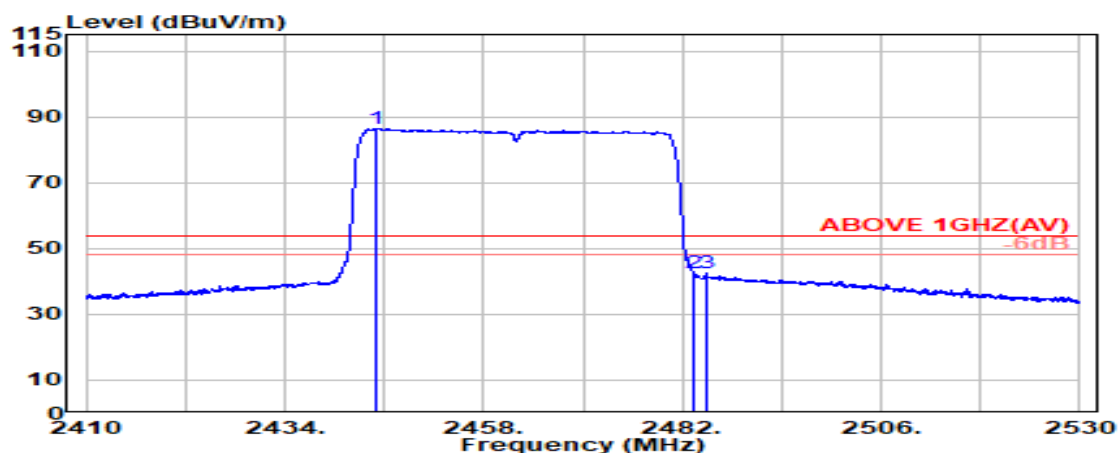


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2445.150	28.29	5.78	39.87	92.27	86.46	---	---	Average
2483.500	28.43	5.83	39.87	48.34	42.73	54.00	11.27	Average
2484.900	28.44	5.83	39.87	48.04	42.44	54.00	11.56	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

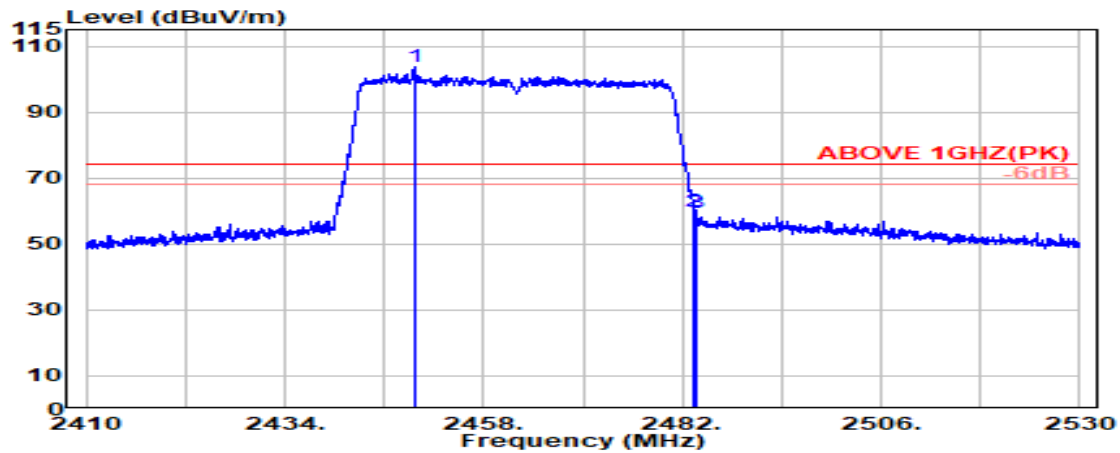

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2449.600	28.30	5.78	39.87	109.33	103.53	---	---	Peak
	2483.500	28.43	5.83	39.87	65.36	59.76	74.00	14.24	Peak
	2483.700	28.44	5.83	39.87	65.18	59.58	74.00	14.42	Peak



Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2445.350	28.29	5.78	39.87	98.05	92.24	---	---	Average
	2483.500	28.43	5.83	39.87	53.77	48.16	54.00	5.84	Average
	2483.700	28.44	5.83	39.87	53.39	47.79	54.00	6.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

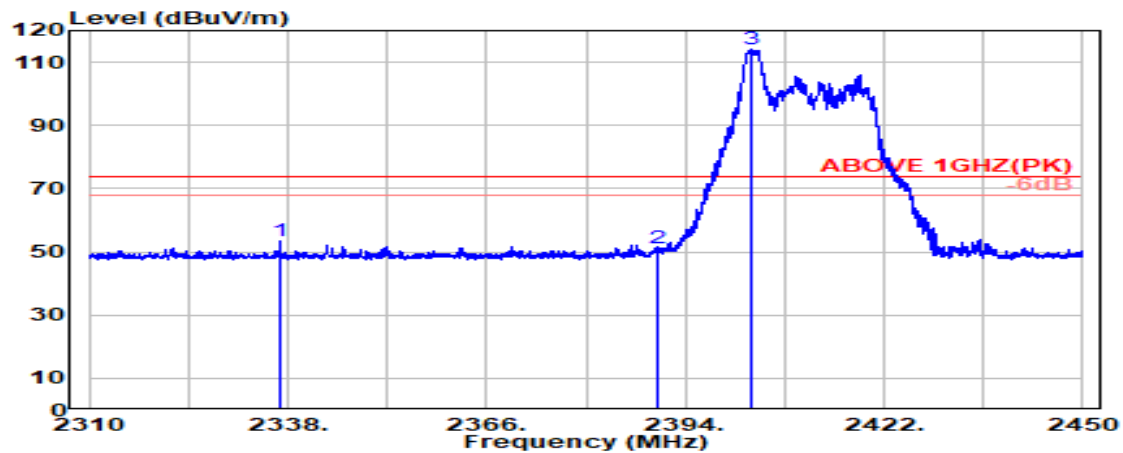

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2336.850	28.15	5.63	39.88	59.71	53.61	74.00	20.39	Peak
2390.000	28.20	5.70	39.88	57.37	51.39	74.00	22.61	Peak
@ 2403.450	28.21	5.72	39.88	120.03	114.08	---	---	Peak

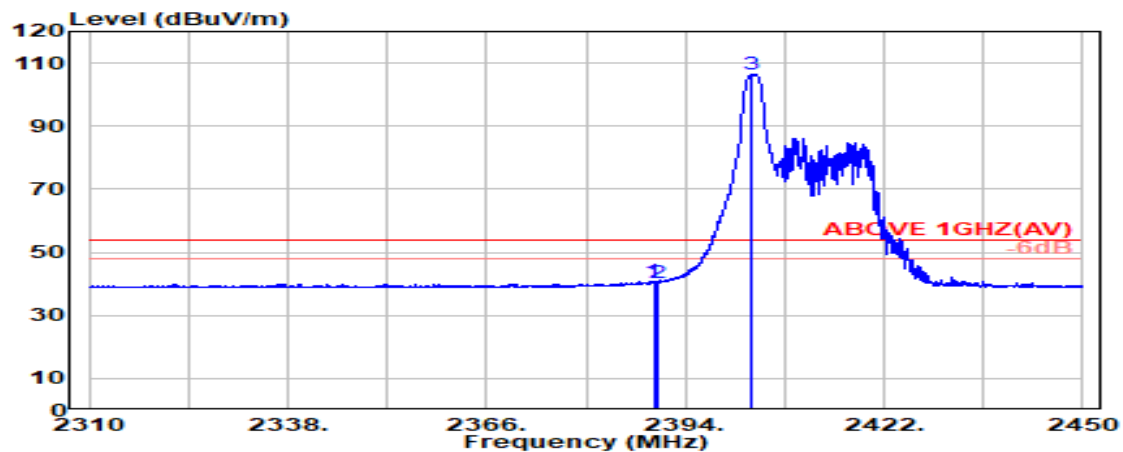

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.20	5.70	39.88	46.77	40.79	54.00	13.21	Average
2390.000	28.20	5.70	39.88	46.42	40.45	54.00	13.55	Average
@ 2403.250	28.21	5.72	39.88	112.37	106.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

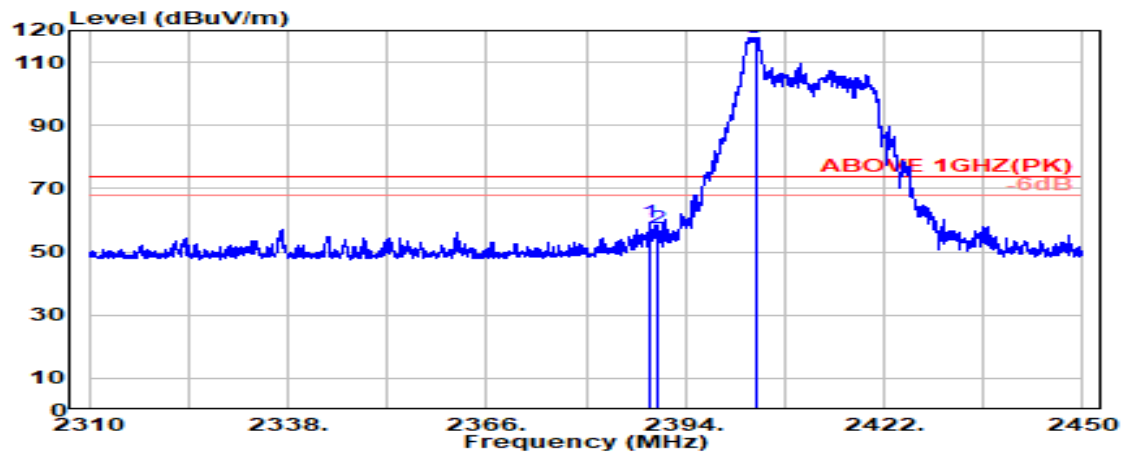

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.050	28.20	5.70	39.88	65.26	59.28	74.00	14.72	Peak
2390.000	28.20	5.70	39.88	63.28	57.31	74.00	16.69	Peak
@ 2403.850	28.21	5.72	39.88	123.86	117.91	---	---	Peak

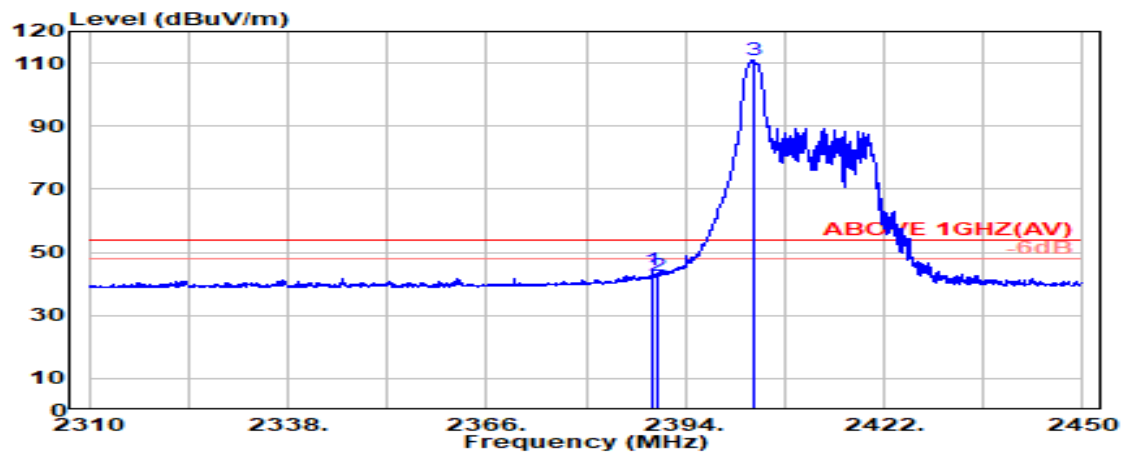

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.20	5.70	39.88	50.57	44.59	54.00	9.41	Average
2390.000	28.20	5.70	39.88	48.66	42.68	54.00	11.32	Average
@ 2403.650	28.21	5.72	39.88	116.77	110.82	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	26/8		

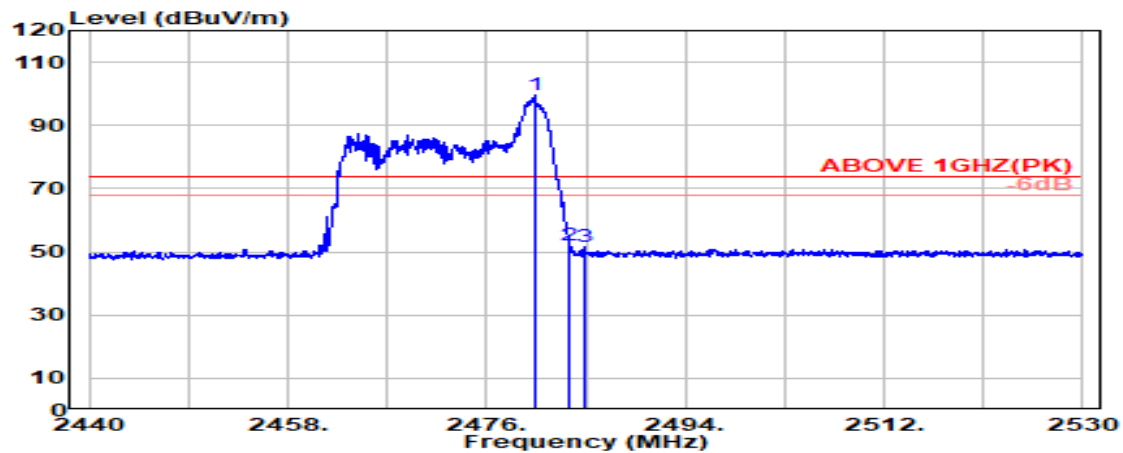

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.350	28.42	5.82	39.87	105.09	99.46	---	---	Peak
2483.500	28.43	5.83	39.87	57.81	52.20	74.00	21.80	Peak
2484.850	28.44	5.83	39.87	57.45	51.84	74.00	22.16	Peak

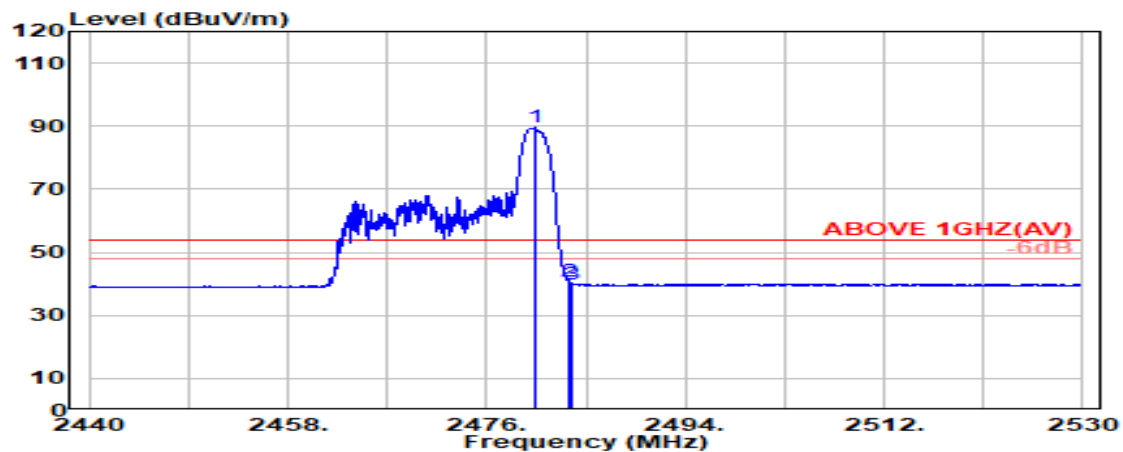

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.42	5.82	39.87	95.17	89.55	---	---	Average
2483.500	28.43	5.83	39.87	46.30	40.69	54.00	13.31	Average
2483.700	28.44	5.83	39.87	45.67	40.06	54.00	13.94	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	26/8		

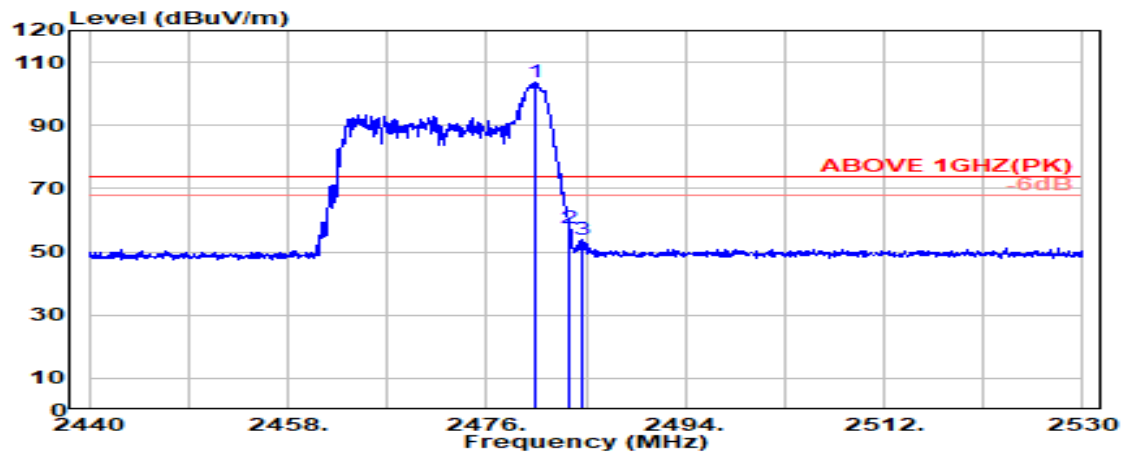

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.400	28.42	5.82	39.87	109.36	103.74	---	---	Peak
2483.500	28.43	5.83	39.87	63.13	57.52	74.00	16.48	Peak
2484.750	28.44	5.83	39.87	59.36	53.76	74.00	20.24	Peak

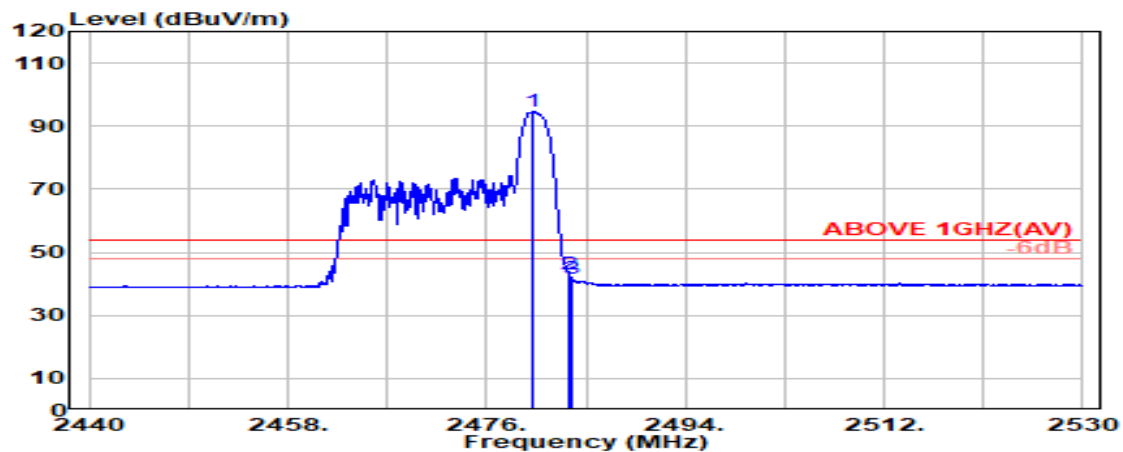

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.42	5.82	39.87	100.23	94.61	---	---	Average
2483.500	28.43	5.83	39.87	48.40	42.79	54.00	11.21	Average
2483.700	28.44	5.83	39.87	47.19	41.58	54.00	12.42	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

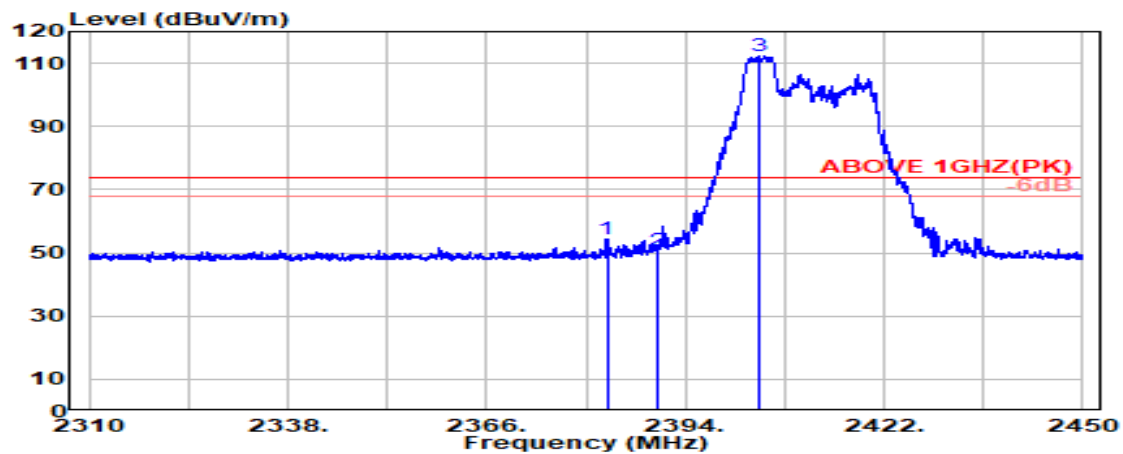

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.950	28.20	5.69	39.88	60.27	54.29	74.00	19.71	Peak
2390.000	28.20	5.70	39.88	56.76	50.79	74.00	23.21	Peak
@ 2404.400	28.21	5.72	39.88	118.33	112.38	---	---	Peak

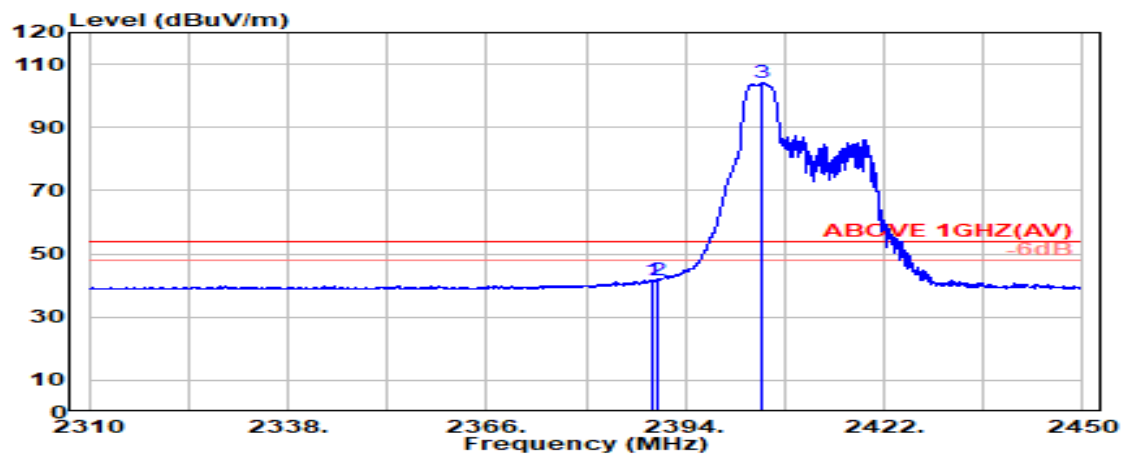

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.20	5.70	39.88	47.82	41.84	54.00	12.16	Average
2390.000	28.20	5.70	39.88	47.58	41.60	54.00	12.40	Average
@ 2404.700	28.21	5.72	39.88	110.03	104.08	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

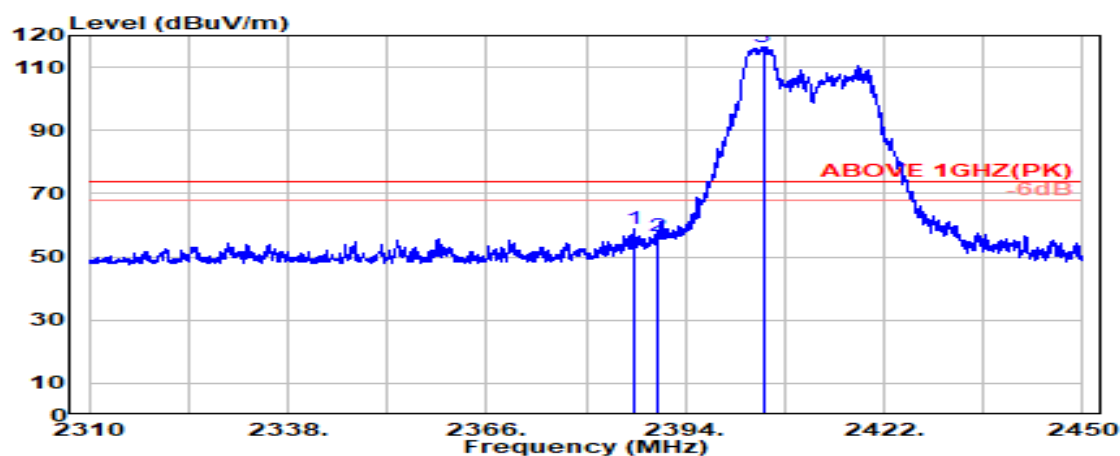

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.800	28.20	5.70	39.88	64.74	58.76	74.00	15.24	Peak
2390.000	28.20	5.70	39.88	62.37	56.40	74.00	17.60	Peak
@ 2404.950	28.21	5.72	39.88	122.53	116.59	---	---	Peak

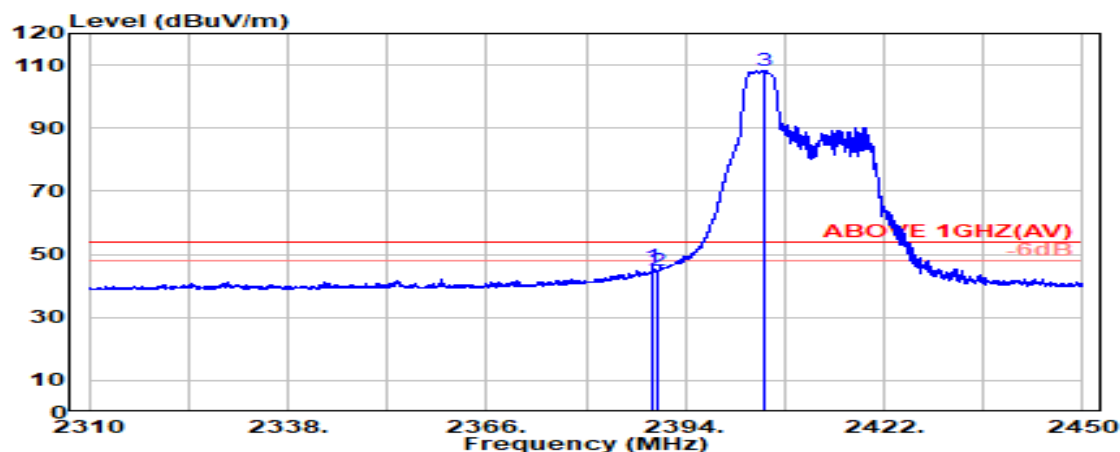

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.20	5.70	39.88	51.98	46.00	54.00	8.00	Average
2390.000	28.20	5.70	39.88	50.92	44.94	54.00	9.06	Average
@ 2405.000	28.21	5.72	39.88	114.24	108.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	52/40		

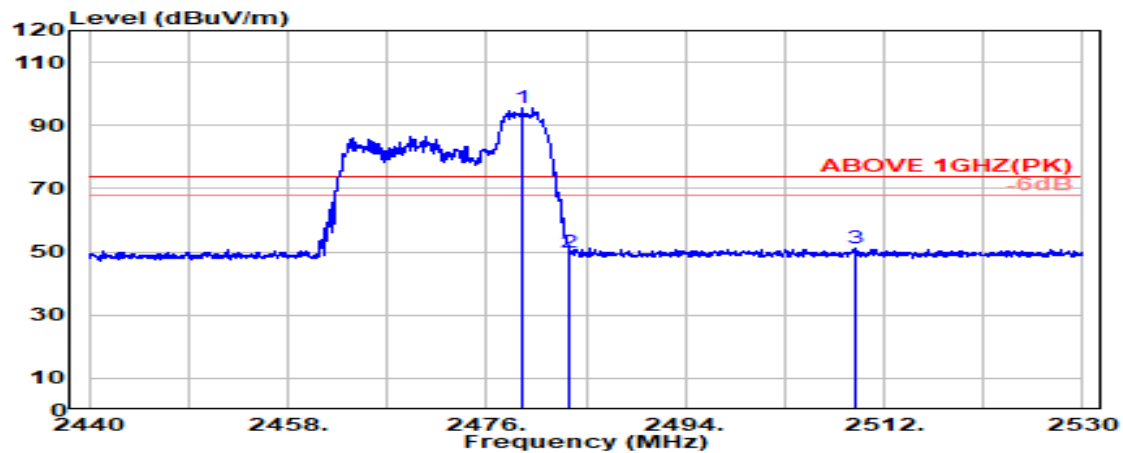

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.250	28.42	5.82	39.87	101.35	95.72	---	---	Peak
2483.500	28.43	5.83	39.87	55.57	49.96	74.00	24.04	Peak
2509.300	28.54	5.86	39.87	56.67	51.19	74.00	22.81	Peak

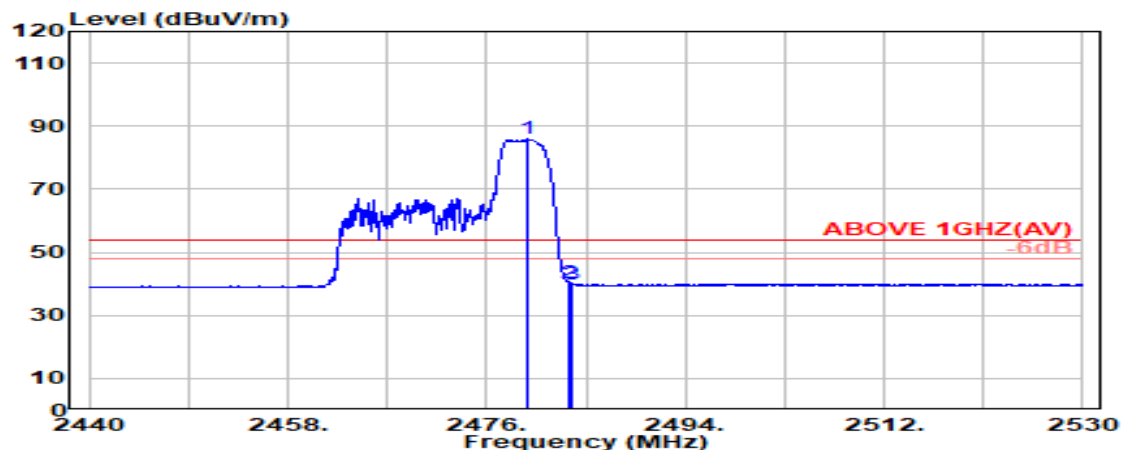

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.750	28.42	5.82	39.87	91.44	85.81	---	---	Average
2483.500	28.43	5.83	39.87	45.89	40.29	54.00	13.71	Average
2483.700	28.44	5.83	39.87	45.61	40.00	54.00	14.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	52/40		

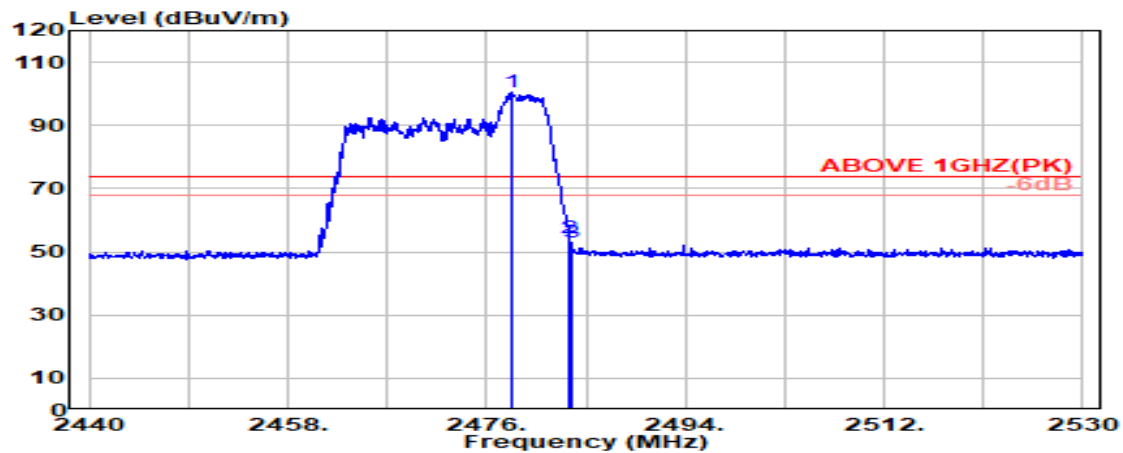

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.200	28.41	5.82	39.87	106.05	100.41	---	---	Peak
2483.500	28.43	5.83	39.87	60.13	54.53	74.00	19.47	Peak
2483.750	28.44	5.83	39.87	58.66	53.05	74.00	20.95	Peak

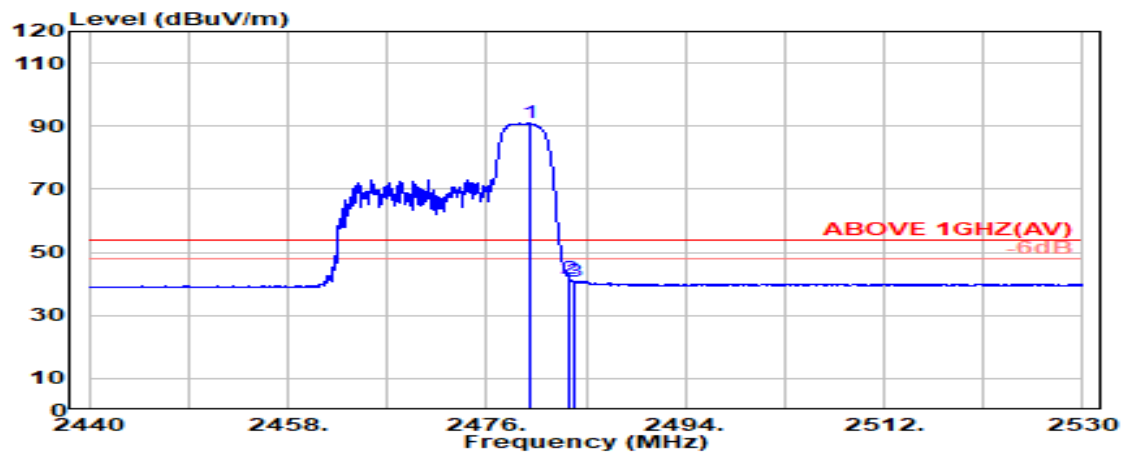

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.950	28.42	5.82	39.87	96.50	90.87	---	---	Average
2483.500	28.43	5.83	39.87	47.22	41.61	54.00	12.39	Average
2483.850	28.44	5.83	39.87	46.48	40.88	54.00	13.12	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
RU Configuration	106/53		

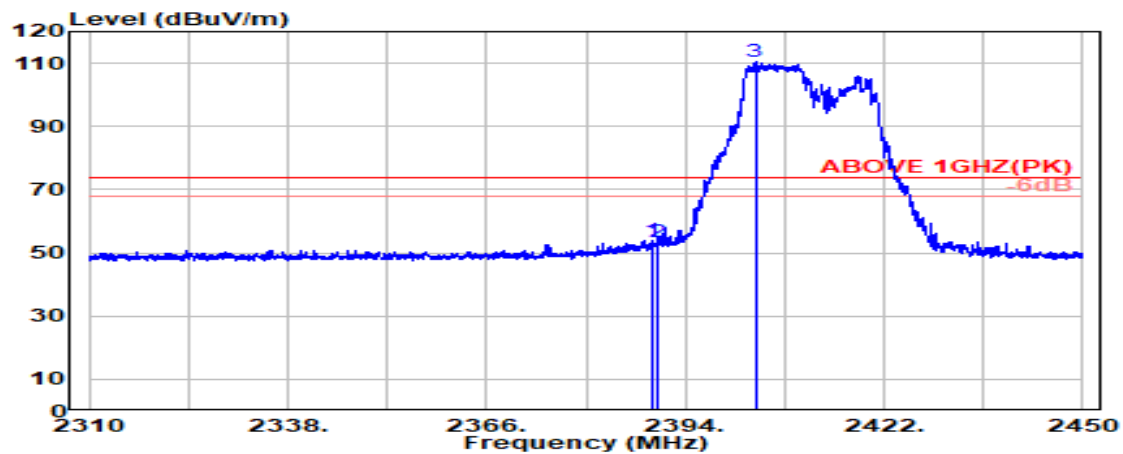

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.20	5.70	39.88	59.88	53.90	74.00	20.10	Peak
2390.000	28.20	5.70	39.88	59.53	53.56	74.00	20.44	Peak
@ 2403.850	28.21	5.72	39.88	116.36	110.42	---	---	Peak

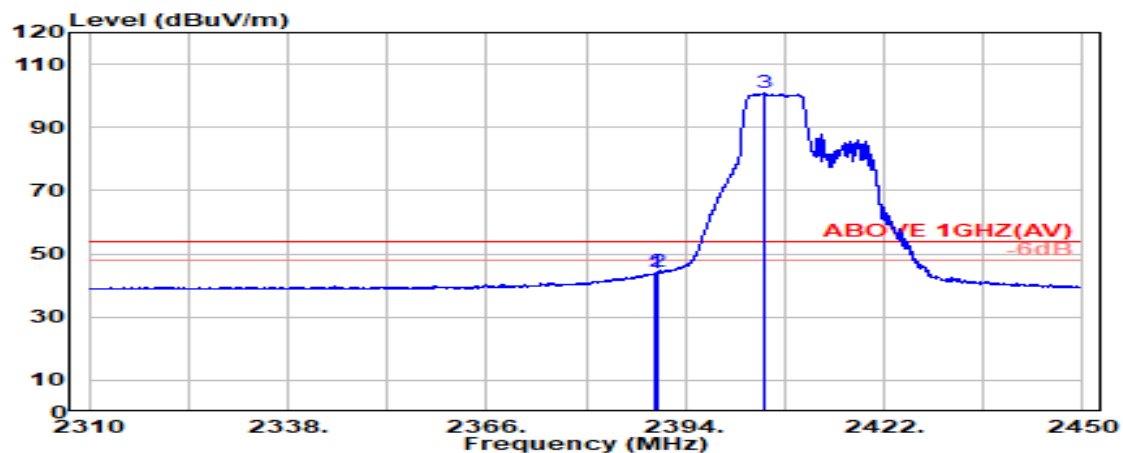

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	5.70	39.88	49.96	43.98	54.00	10.02	Average
2390.000	28.20	5.70	39.88	50.13	44.15	54.00	9.85	Average
@ 2405.150	28.21	5.72	39.88	106.73	100.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
RU Configuration	106/53		

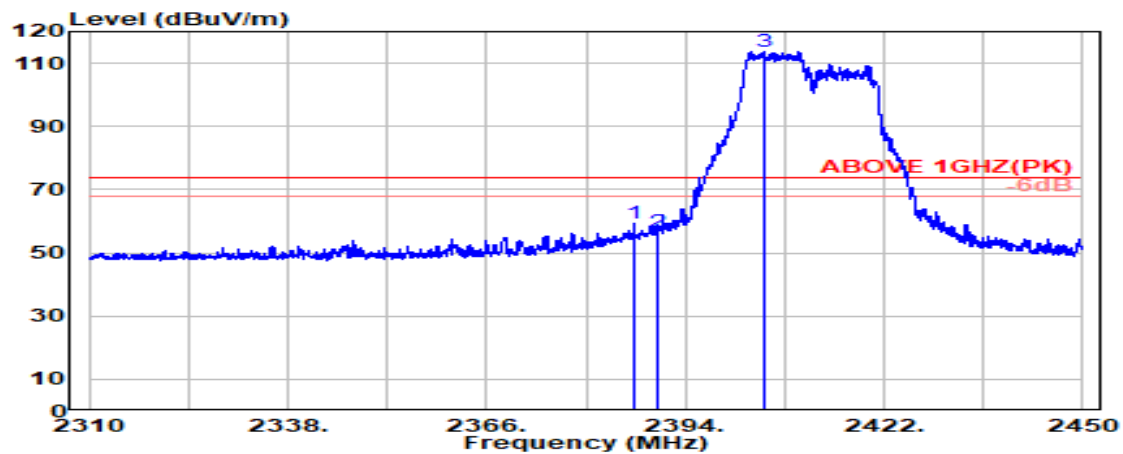

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.850	28.20	5.70	39.88	65.08	59.10	74.00	14.90	Peak
2390.000	28.20	5.70	39.88	62.52	56.54	74.00	17.46	Peak
@ 2405.000	28.21	5.72	39.88	119.83	113.88	---	---	Peak

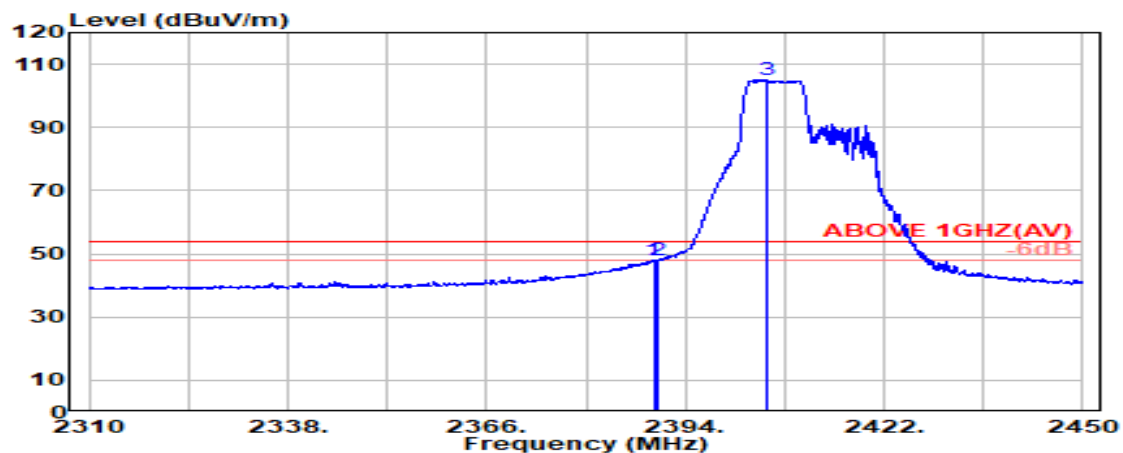

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.550	28.20	5.70	39.88	53.84	47.86	54.00	6.14	Average
2390.000	28.20	5.70	39.88	53.76	47.79	54.00	6.21	Average
@ 2405.350	28.21	5.72	39.88	110.99	105.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

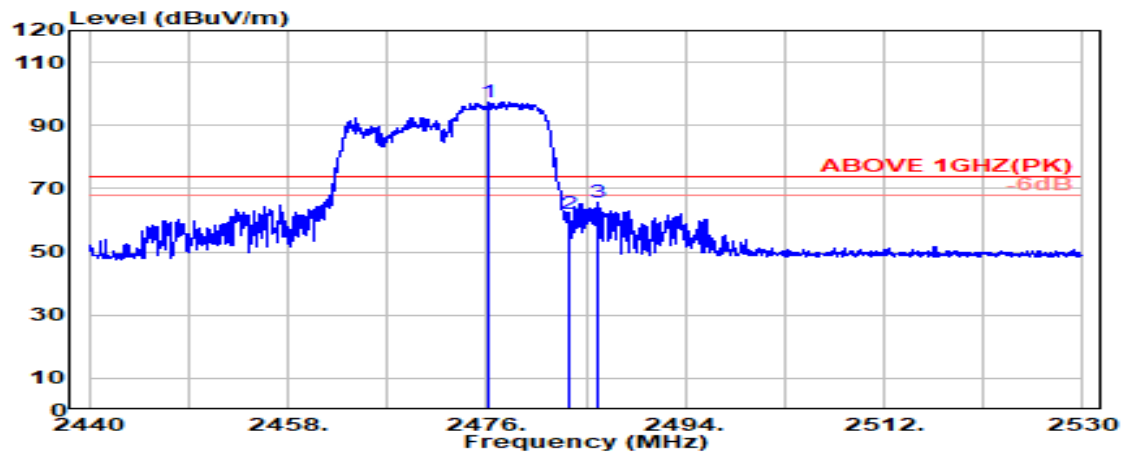

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.150	28.41	5.82	39.87	103.19	97.54	---	---	Peak
2483.500	28.43	5.83	39.87	67.79	62.18	74.00	11.82	Peak
2486.100	28.44	5.83	39.87	71.13	65.54	74.00	8.46	Peak

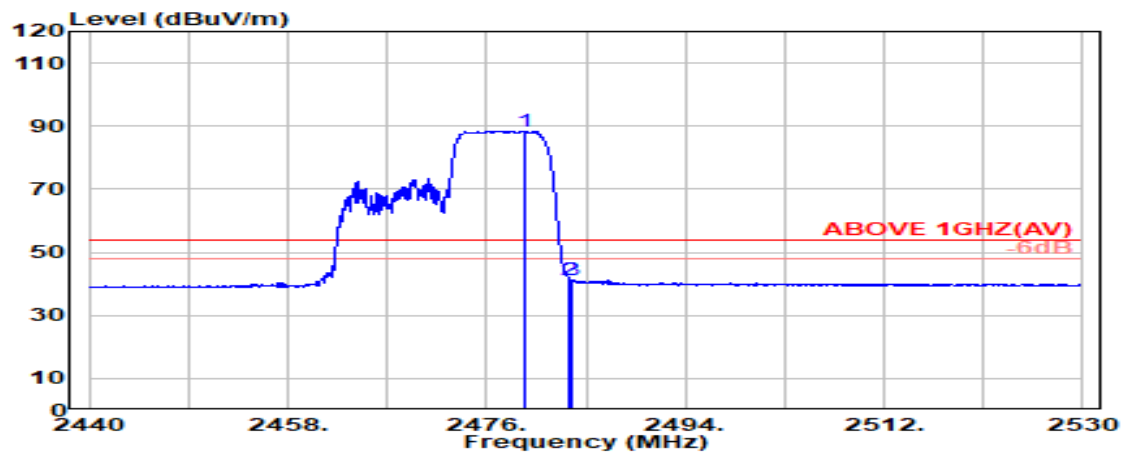

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.42	5.82	39.87	93.92	88.29	---	---	Average
2483.500	28.43	5.83	39.87	46.94	41.33	54.00	12.67	Average
2483.700	28.44	5.83	39.87	46.78	41.17	54.00	12.83	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

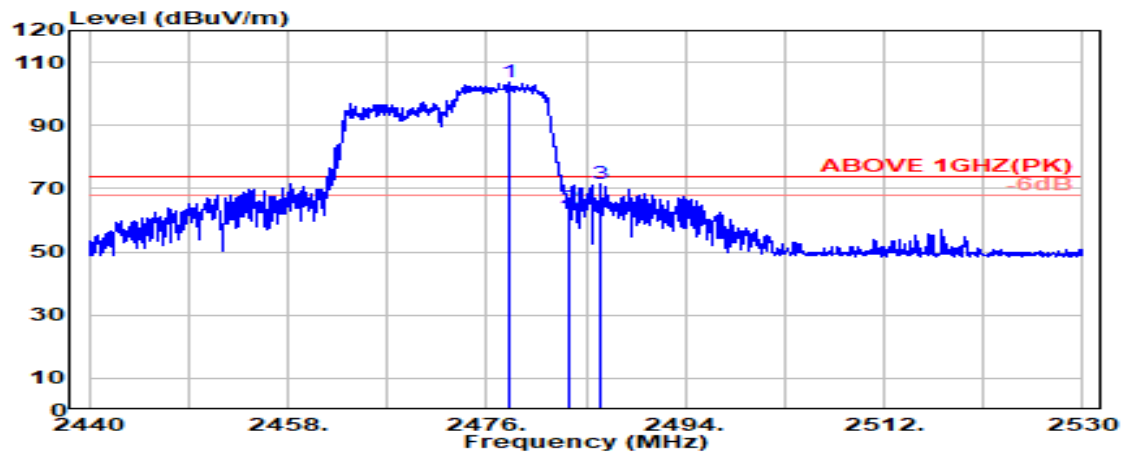

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.000	28.41	5.82	39.87	109.55	103.91	---	---	Peak
2483.500	28.43	5.83	39.87	69.43	63.82	74.00	10.18	Peak
2486.300	28.45	5.83	39.87	77.12	71.53	74.00	2.47	Peak

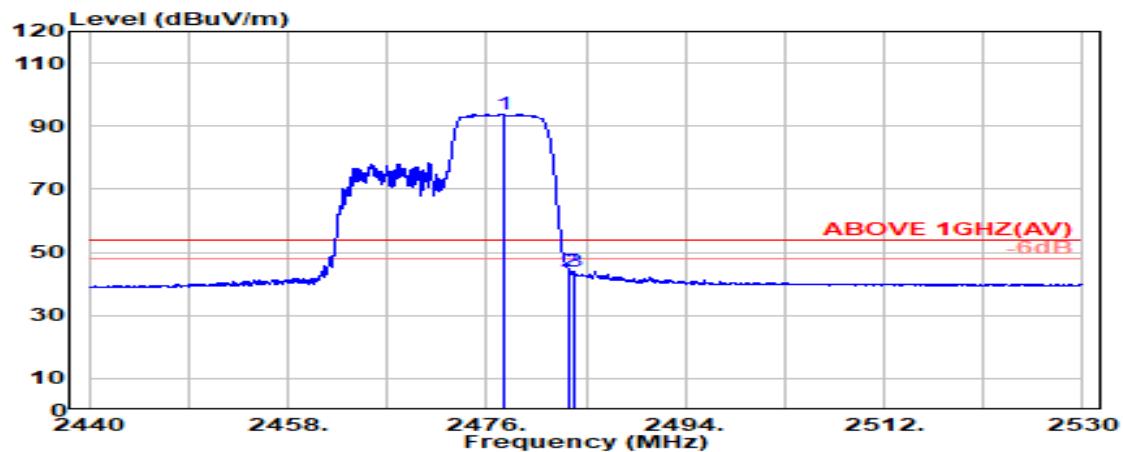

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.550	28.41	5.82	39.87	99.38	93.74	---	---	Average
2483.500	28.43	5.83	39.87	49.61	44.00	54.00	10.00	Average
2483.900	28.44	5.83	39.87	49.38	43.78	54.00	10.22	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

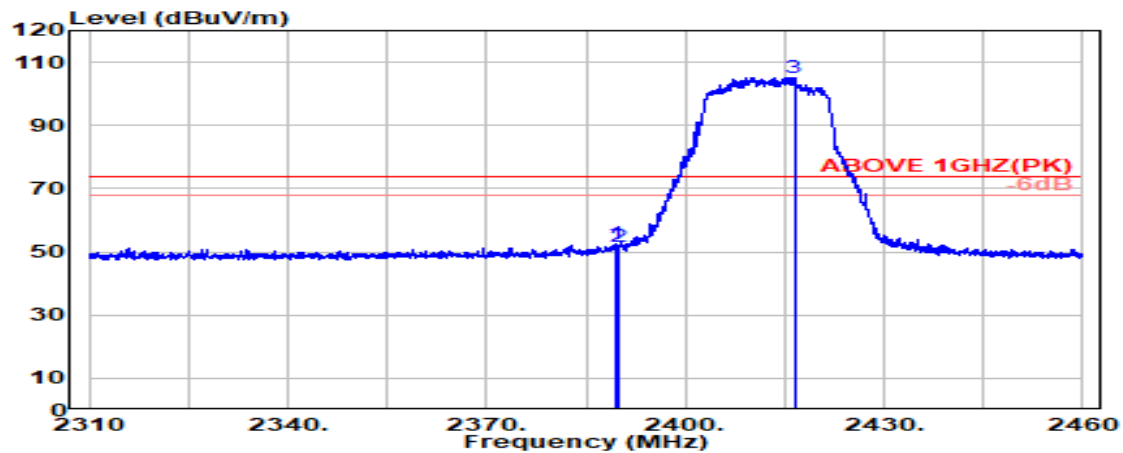

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.88	58.65	52.67	74.00	21.33	Peak
2389.800	28.20	5.70	39.88	57.58	51.61	74.00	22.39	Peak
@ 2416.450	28.23	5.74	39.88	111.07	105.16	---	---	Peak

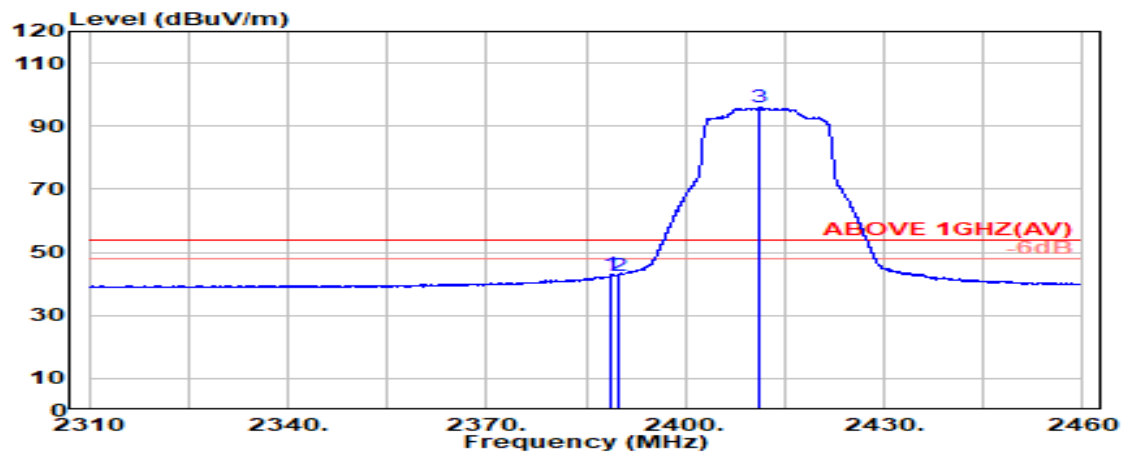

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.20	5.70	39.88	48.95	42.97	54.00	11.03	Average
2389.800	28.20	5.70	39.88	48.76	42.79	54.00	11.21	Average
@ 2411.050	28.22	5.73	39.88	101.79	95.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

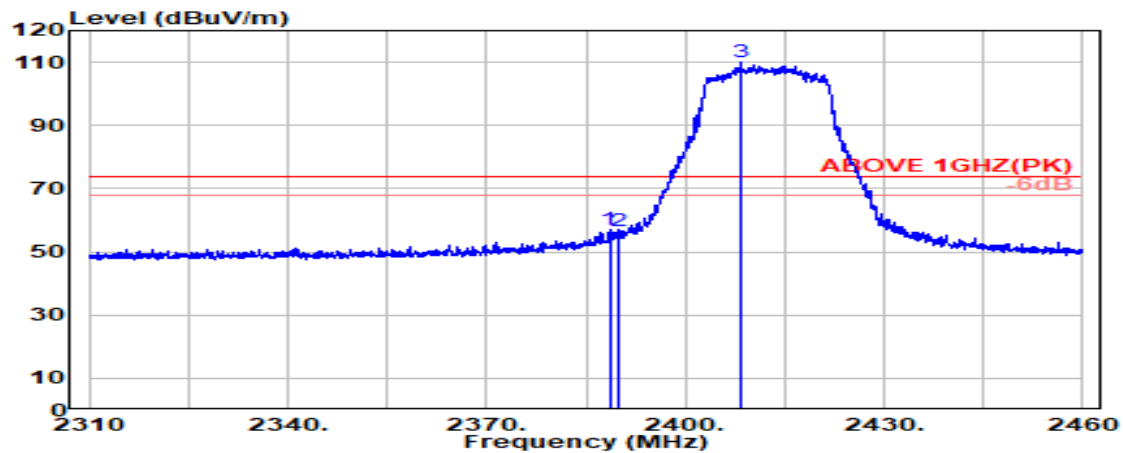

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.550	28.20	5.70	39.88	63.13	57.15	74.00	16.85	Peak
2389.800	28.20	5.70	39.88	62.60	56.62	74.00	17.38	Peak
@ 2408.350	28.22	5.73	39.88	116.07	110.14	---	---	Peak

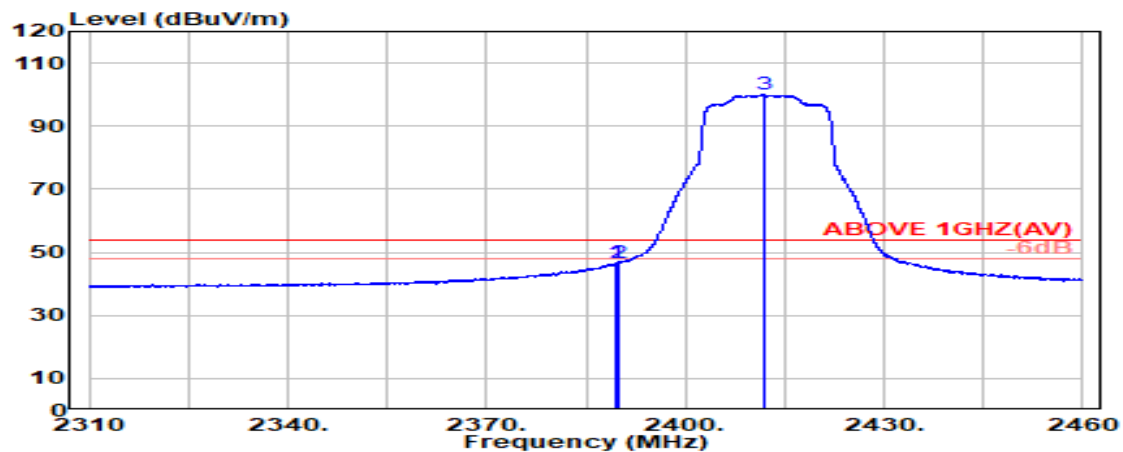

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	5.70	39.88	52.42	46.44	54.00	7.56	Average
2389.800	28.20	5.70	39.88	52.74	46.77	54.00	7.23	Average
@ 2411.950	28.22	5.73	39.88	105.80	99.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/61		

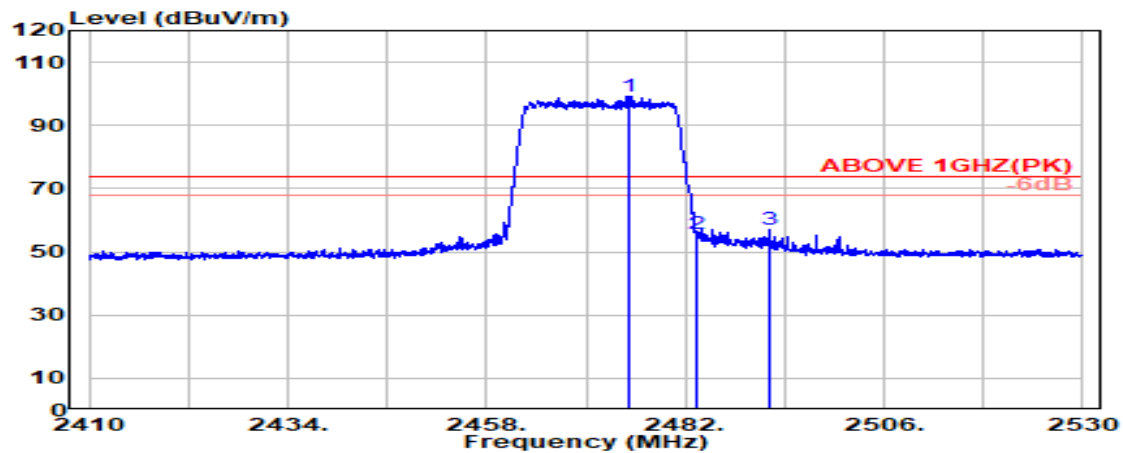

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2475.300	28.40	5.82	39.87	105.00	99.35	---	---	Peak
	2483.500	28.43	5.83	39.87	61.40	55.79	74.00	18.21	Peak
	2492.250	28.47	5.84	39.87	62.61	57.05	74.00	16.95	Peak

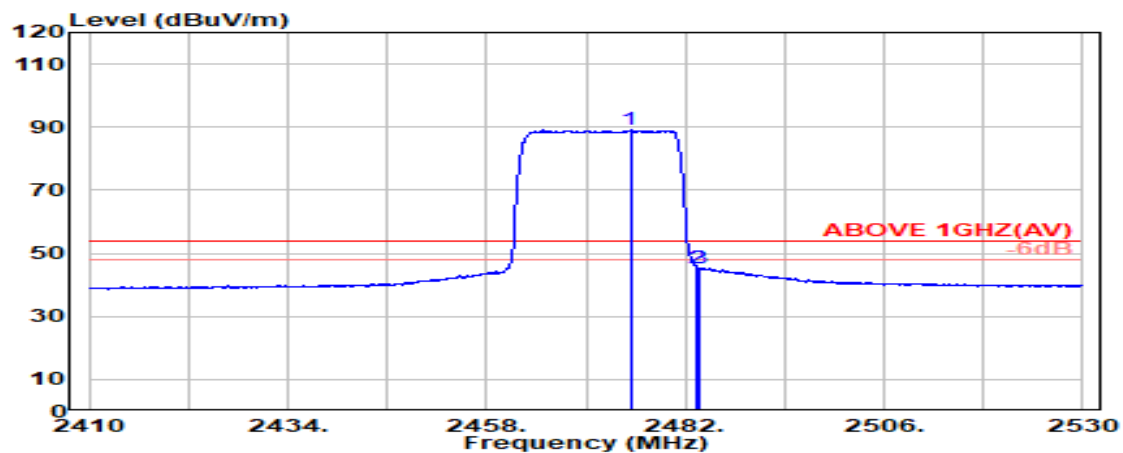

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2475.350	28.40	5.82	39.87	94.68	89.03	---	---	Average
	2483.500	28.43	5.83	39.87	51.05	45.44	54.00	8.56	Average
	2483.800	28.44	5.83	39.87	51.08	45.47	54.00	8.53	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/61		

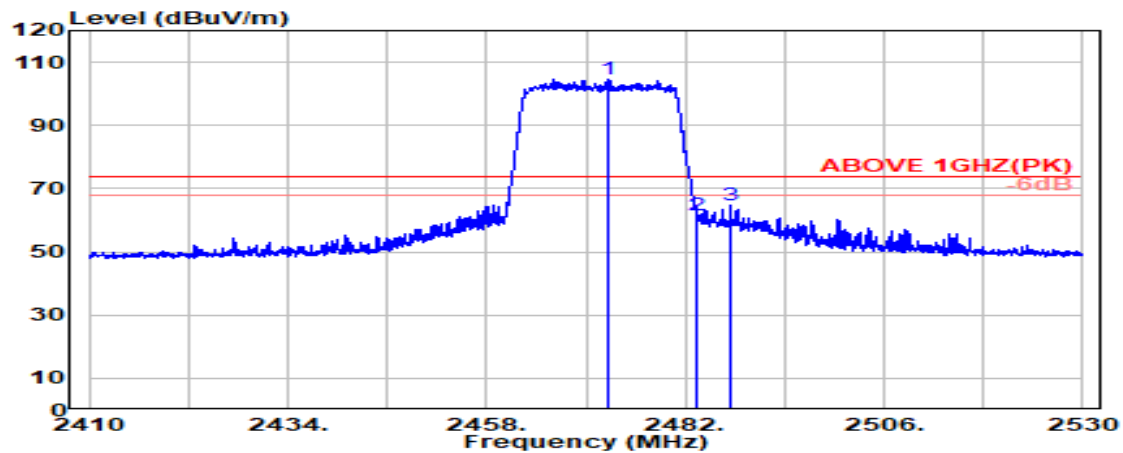

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.700	28.39	5.81	39.87	110.31	104.65	---	---	Peak
2483.500	28.43	5.83	39.87	67.07	61.46	74.00	12.54	Peak
2487.400	28.45	5.83	39.87	70.30	64.71	74.00	9.29	Peak

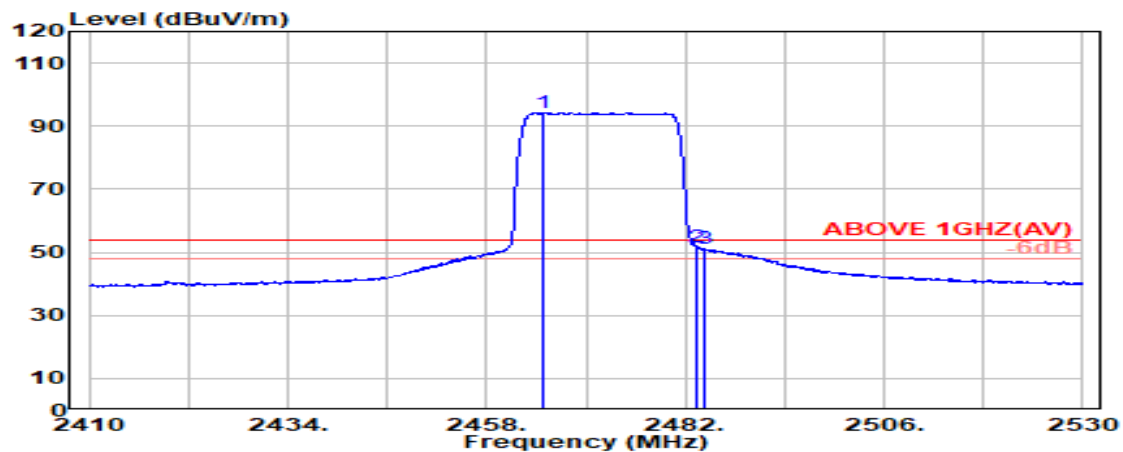

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.950	28.36	5.80	39.87	100.04	94.34	---	---	Average
2483.500	28.43	5.83	39.87	57.28	51.67	54.00	2.33	Average
2484.350	28.44	5.83	39.87	56.83	51.22	54.00	2.78	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

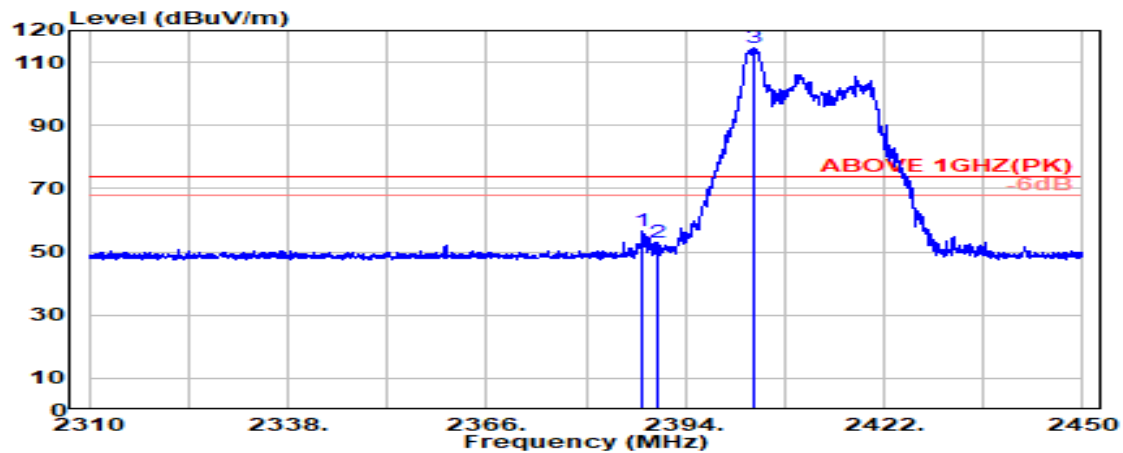

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.050	28.20	5.70	39.88	62.58	56.60	74.00	17.40	Peak
2390.000	28.20	5.70	39.88	58.85	52.88	74.00	21.12	Peak
@ 2403.600	28.21	5.72	39.88	120.48	114.53	---	---	Peak

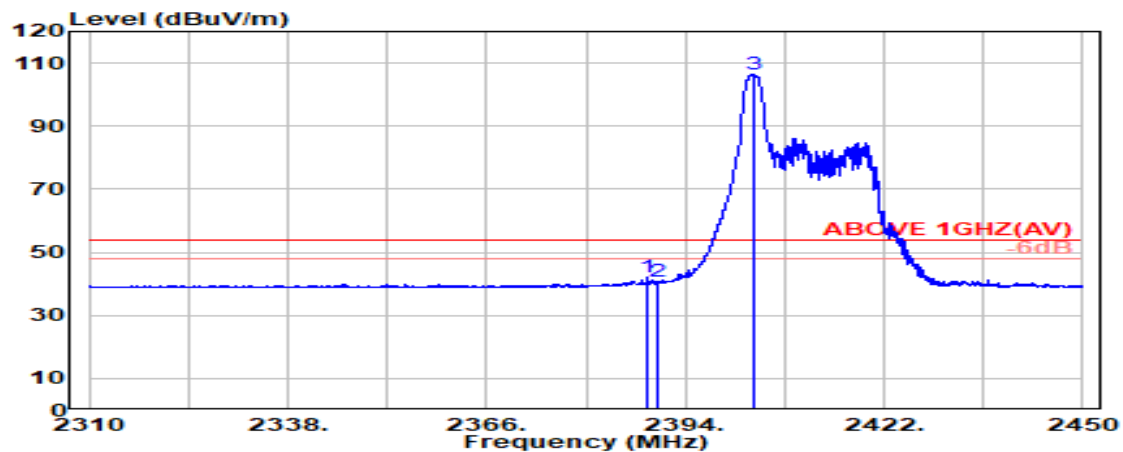

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.500	28.20	5.70	39.88	47.89	41.91	54.00	12.09	Average
2390.000	28.20	5.70	39.88	46.56	40.59	54.00	13.41	Average
@ 2403.500	28.21	5.72	39.88	112.16	106.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

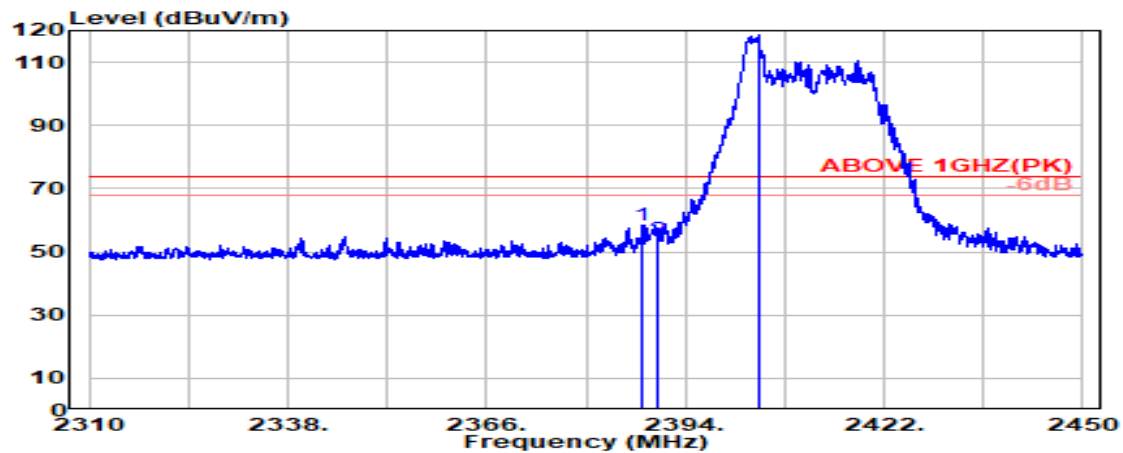

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.050	28.20	5.70	39.88	64.56	58.58	74.00	15.42	Peak
2390.000	28.20	5.70	39.88	59.95	53.97	74.00	20.03	Peak
@ 2404.350	28.21	5.72	39.88	124.61	118.66	---	---	Peak

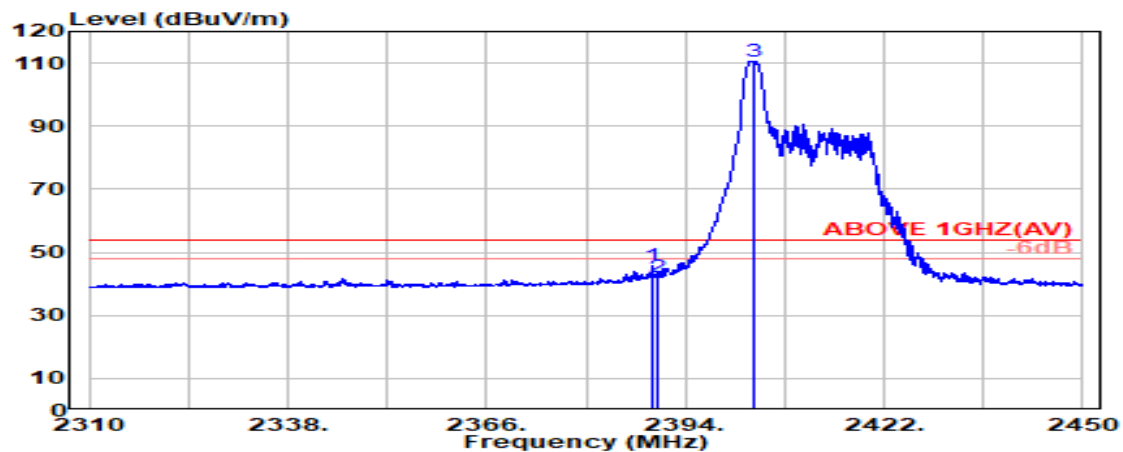

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.20	5.70	39.88	51.74	45.76	54.00	8.24	Average
2390.000	28.20	5.70	39.88	48.29	42.31	54.00	11.69	Average
@ 2403.500	28.21	5.72	39.88	116.59	110.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472 MHz
RU Configuration	26/8		

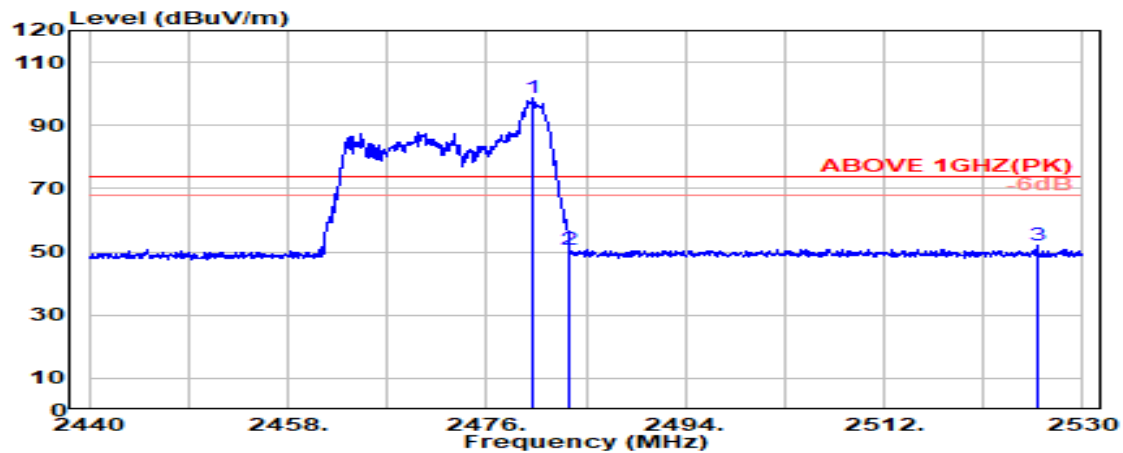

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.42	5.82	39.87	104.33	98.71	---	---	Peak
2483.500	28.43	5.83	39.87	56.44	50.83	74.00	23.17	Peak
2525.850	28.60	5.88	39.88	57.33	51.94	74.00	22.06	Peak

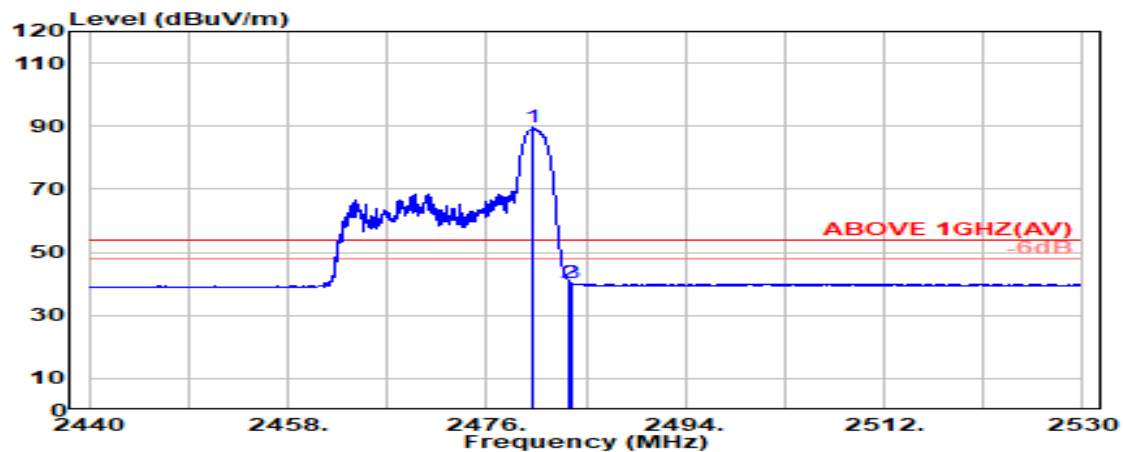

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.42	5.82	39.87	95.18	89.55	---	---	Average
2483.500	28.43	5.83	39.87	46.13	40.52	54.00	13.48	Average
2483.700	28.44	5.83	39.87	45.79	40.18	54.00	13.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472 MHz
RU Configuration	26/8		

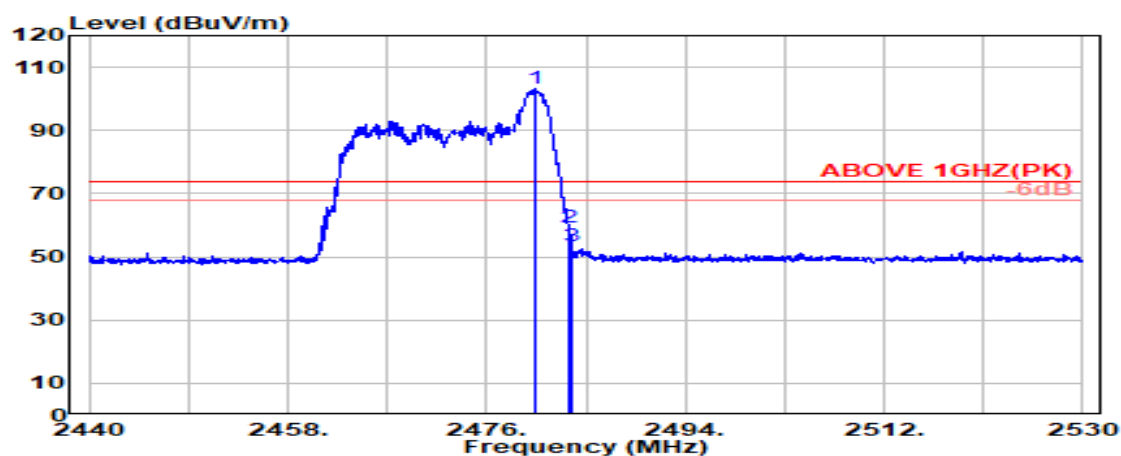

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.42	5.82	39.87	108.67	103.04	---	---	Peak
2483.500	28.43	5.83	39.87	64.90	59.29	74.00	14.71	Peak
2483.700	28.44	5.83	39.87	59.11	53.50	74.00	20.50	Peak

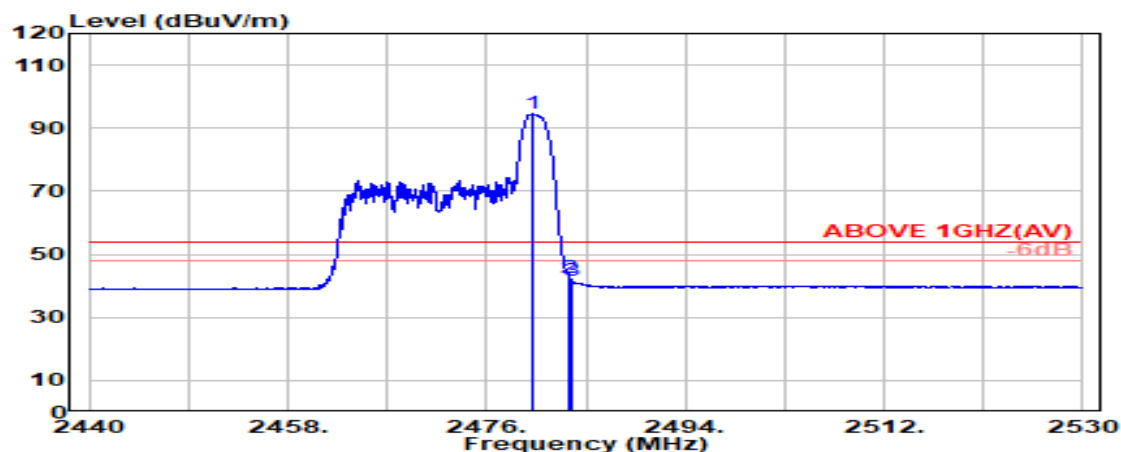

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.42	5.82	39.87	100.21	94.58	---	---	Average
2483.500	28.43	5.83	39.87	48.13	42.53	54.00	11.47	Average
2483.700	28.44	5.83	39.87	47.43	41.83	54.00	12.17	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

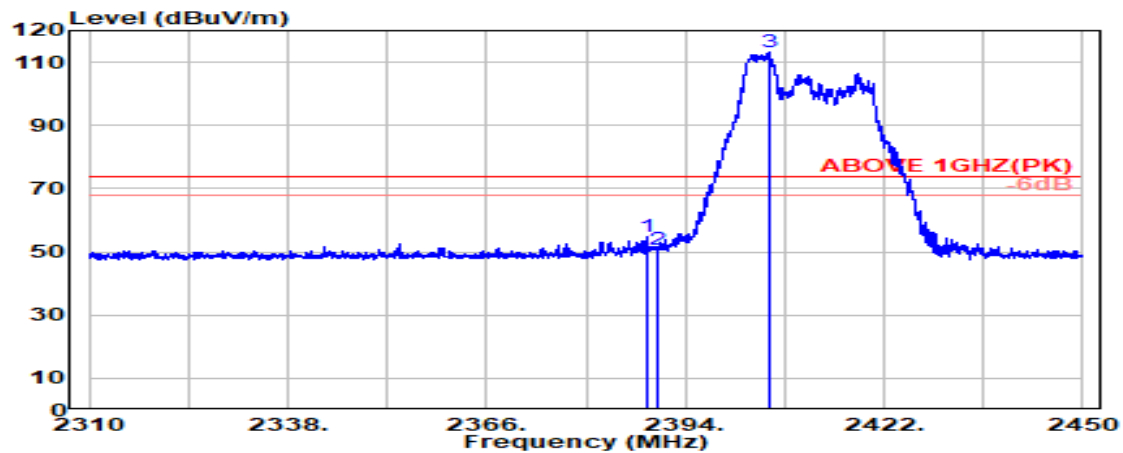

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.500	28.20	5.70	39.88	60.83	54.85	74.00	19.15	Peak
2390.000	28.20	5.70	39.88	56.49	50.51	74.00	23.49	Peak
@ 2405.700	28.21	5.72	39.88	119.06	113.12	---	---	Peak

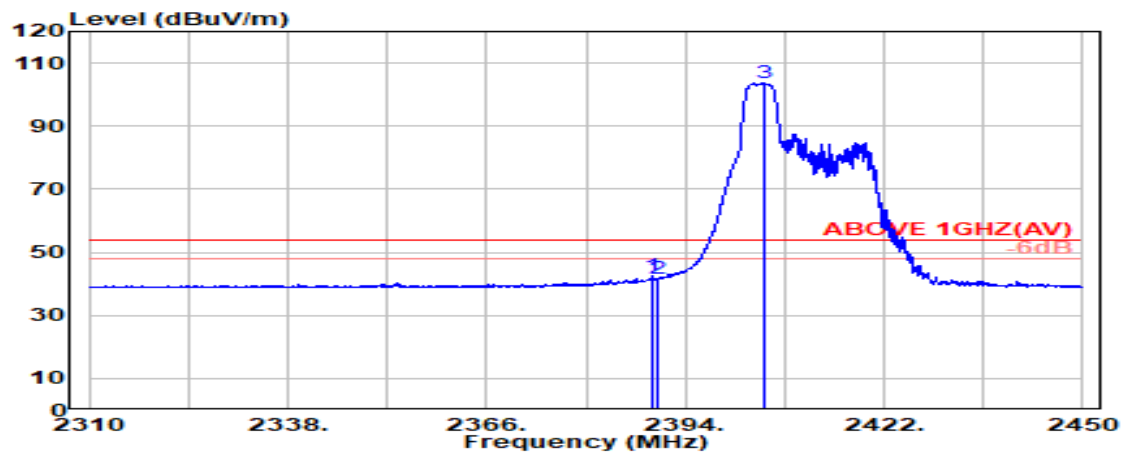

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.20	5.70	39.88	48.56	42.59	54.00	11.41	Average
2390.000	28.20	5.70	39.88	47.52	41.54	54.00	12.46	Average
@ 2405.000	28.21	5.72	39.88	109.60	103.66	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

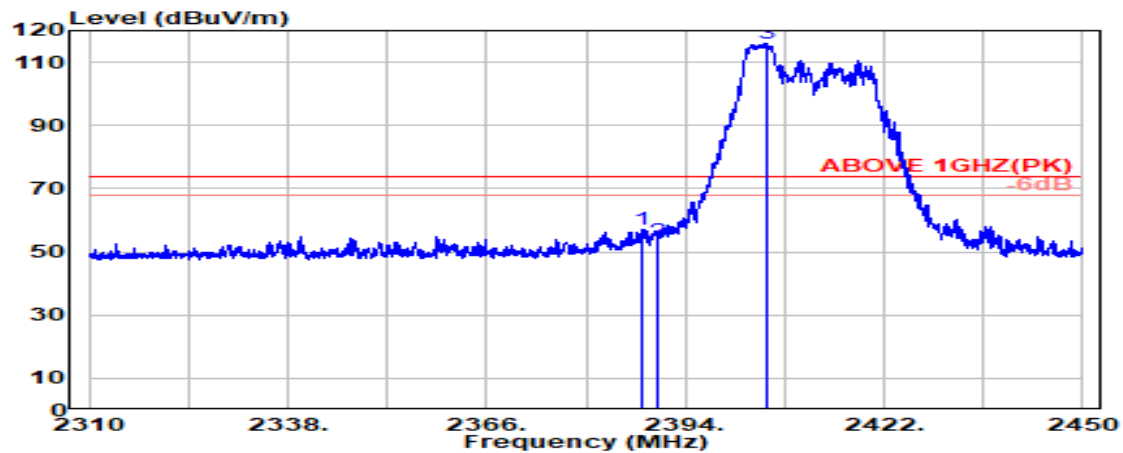

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.050	28.20	5.70	39.88	62.96	56.98	74.00	17.02	Peak
2390.000	28.20	5.70	39.88	59.53	53.56	74.00	20.44	Peak
@ 2405.350	28.21	5.72	39.88	122.05	116.10	---	---	Peak

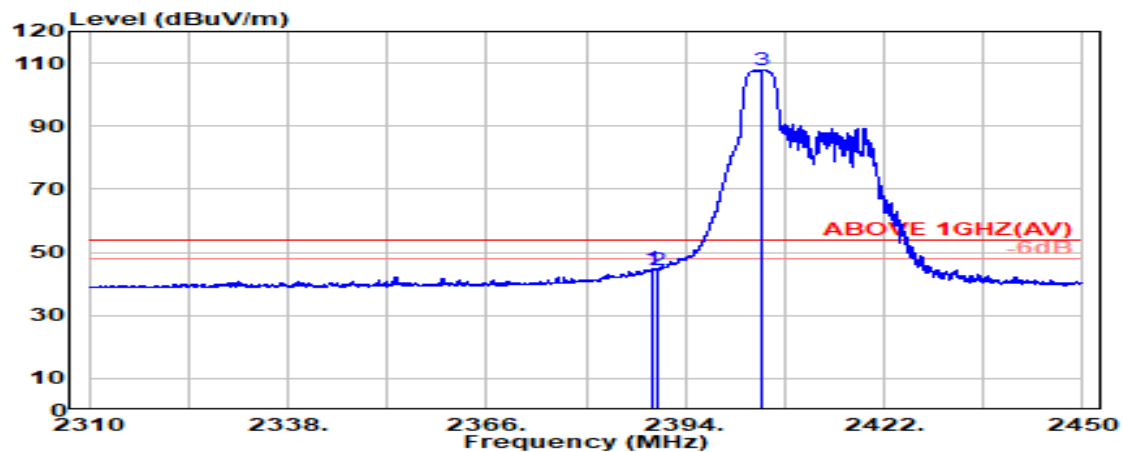

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	5.70	39.88	50.76	44.78	54.00	9.22	Average
2390.000	28.20	5.70	39.88	50.45	44.48	54.00	9.52	Average
@ 2404.850	28.21	5.72	39.88	113.90	107.95	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

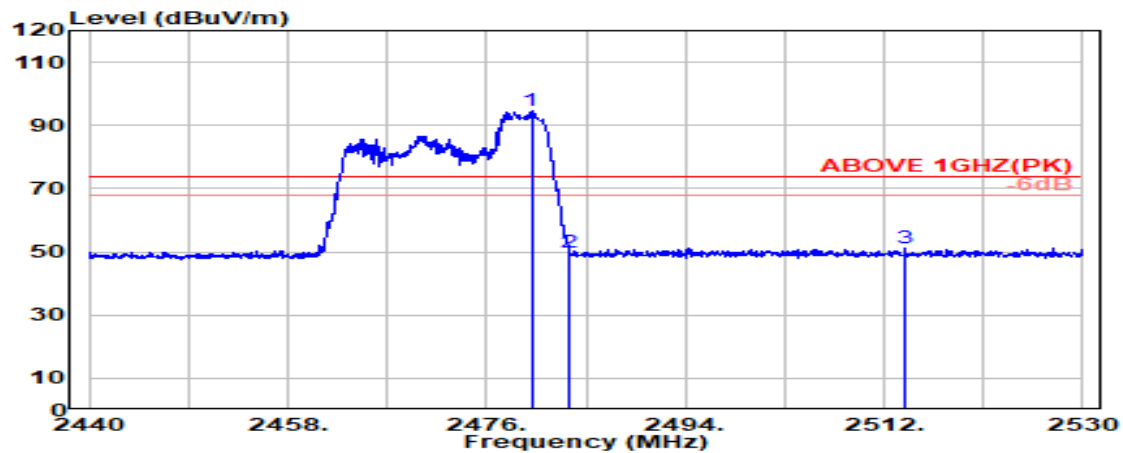

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.42	5.82	39.87	100.34	94.71	---	---	Peak
2483.500	28.43	5.83	39.87	55.22	49.61	74.00	24.39	Peak
2513.950	28.56	5.87	39.87	56.61	51.15	74.00	22.85	Peak

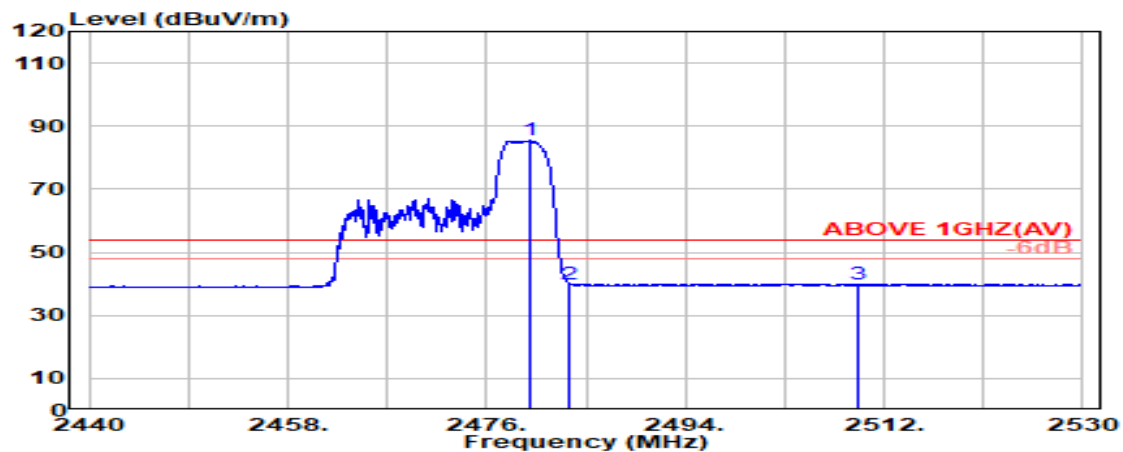

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.850	28.42	5.82	39.87	91.04	85.41	---	---	Average
2483.500	28.43	5.83	39.87	45.65	40.04	54.00	13.96	Average
2509.550	28.54	5.86	39.87	45.46	39.99	54.00	14.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

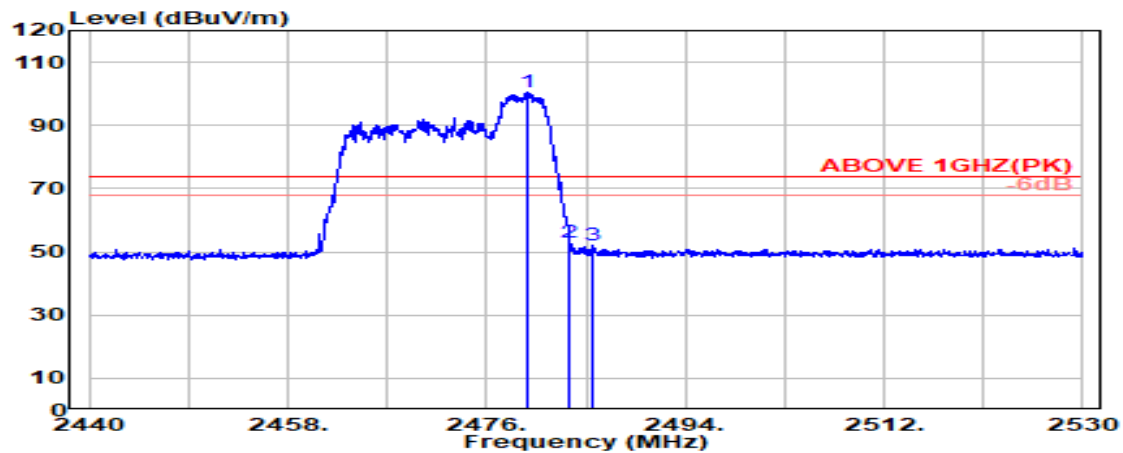

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.600	28.42	5.82	39.87	106.16	100.53	---	---	Peak
2483.500	28.43	5.83	39.87	58.76	53.15	74.00	20.85	Peak
2485.550	28.44	5.83	39.87	57.61	52.02	74.00	21.98	Peak

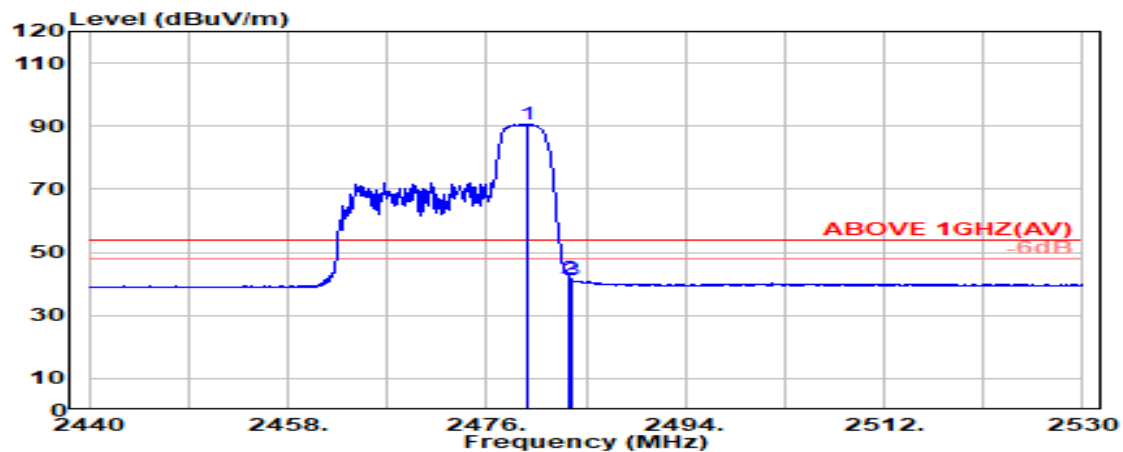

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.750	28.42	5.82	39.87	96.38	90.76	---	---	Average
2483.500	28.43	5.83	39.87	47.46	41.85	54.00	12.15	Average
2483.700	28.44	5.83	39.87	46.79	41.18	54.00	12.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
RU Configuration	106/53		

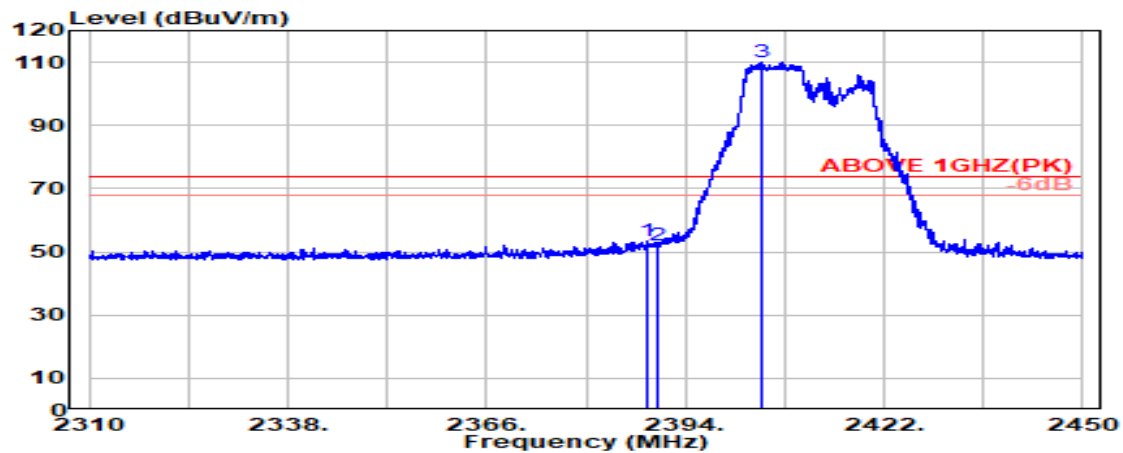

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.500	28.20	5.70	39.88	59.58	53.60	74.00	20.40	Peak
2390.000	28.20	5.70	39.88	57.85	51.88	74.00	22.12	Peak
@ 2404.850	28.21	5.72	39.88	115.99	110.05	---	---	Peak

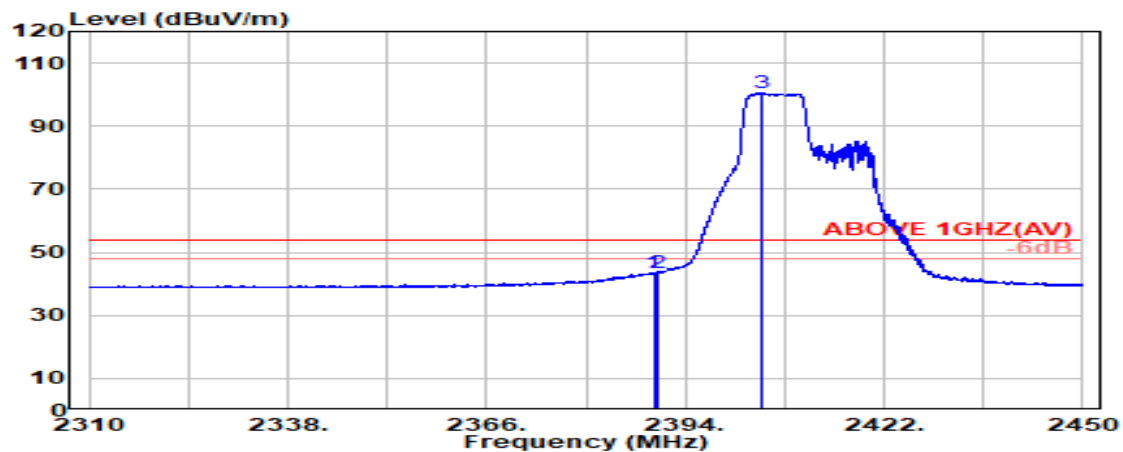

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.20	5.70	39.88	49.56	43.58	54.00	10.42	Average
2390.000	28.20	5.70	39.88	49.46	43.49	54.00	10.51	Average
@ 2404.800	28.21	5.72	39.88	106.48	100.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
RU Configuration	106/53		

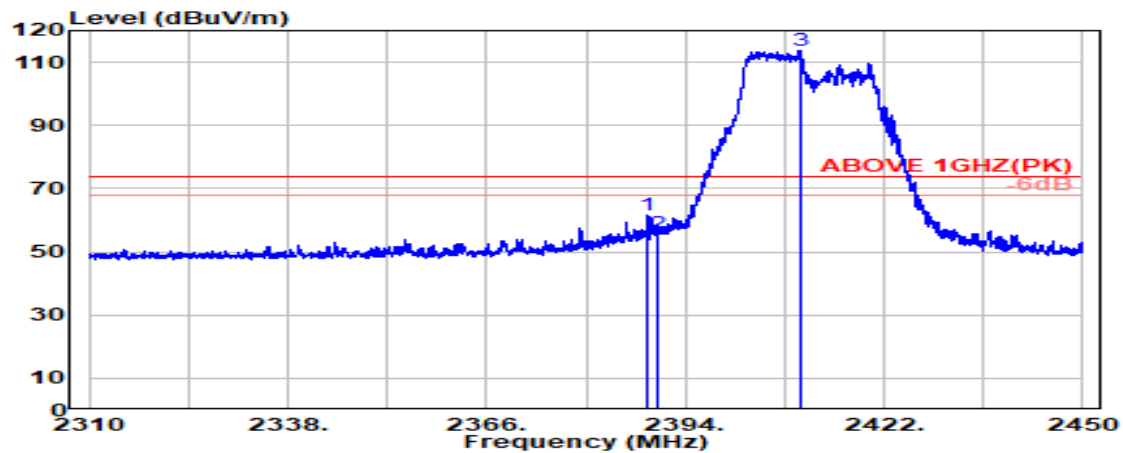

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.750	28.20	5.70	39.88	67.63	61.65	74.00	12.35	Peak
2390.000	28.20	5.70	39.88	61.49	55.52	74.00	18.48	Peak
@ 2410.100	28.22	5.73	39.88	119.66	113.73	---	---	Peak

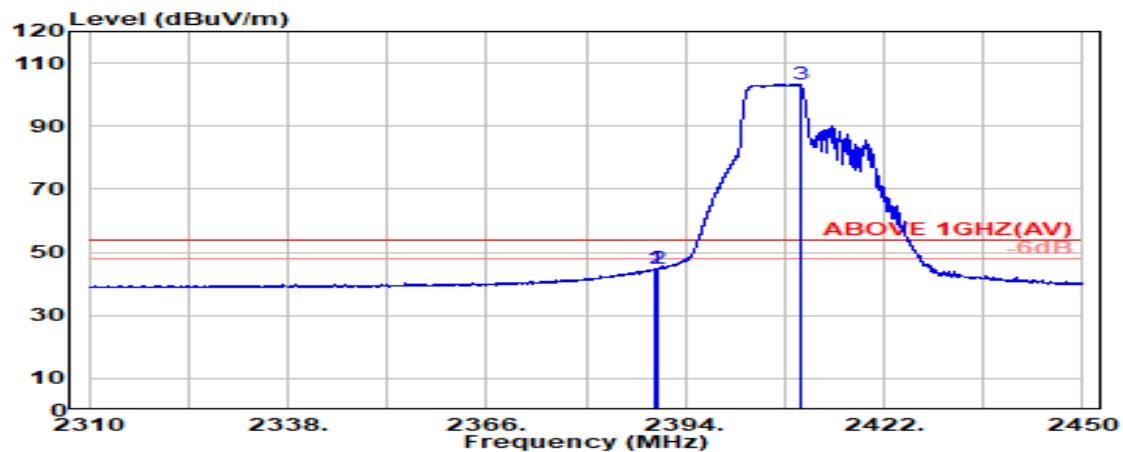

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.88	50.70	44.72	54.00	9.28	Average
2390.000	28.20	5.70	39.88	50.70	44.73	54.00	9.27	Average
@ 2410.150	28.22	5.73	39.88	109.40	103.47	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

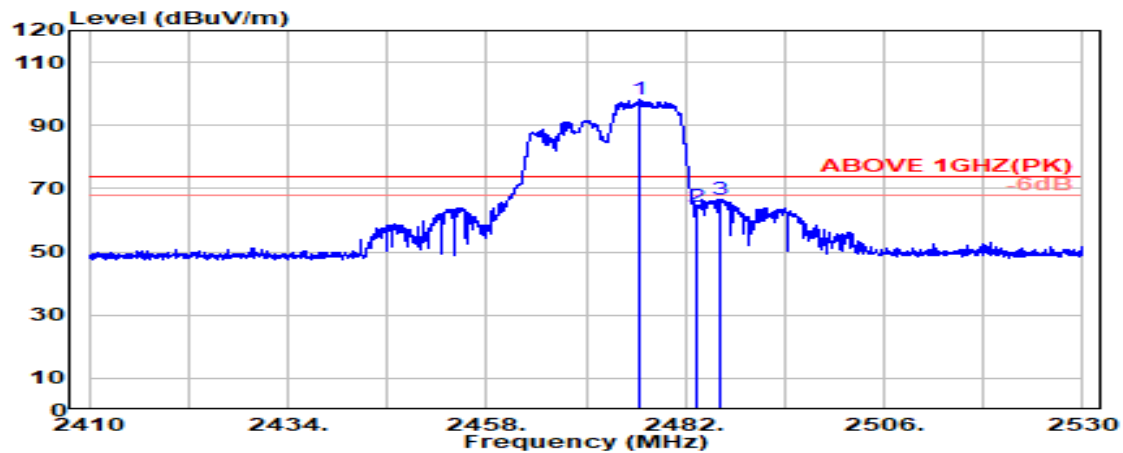

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.440	28.41	5.82	39.87	103.70	98.06	---	---	Peak
2483.500	28.43	5.83	39.87	70.00	64.39	74.00	9.61	Peak
2486.120	28.44	5.83	39.87	72.28	66.68	74.00	7.32	Peak

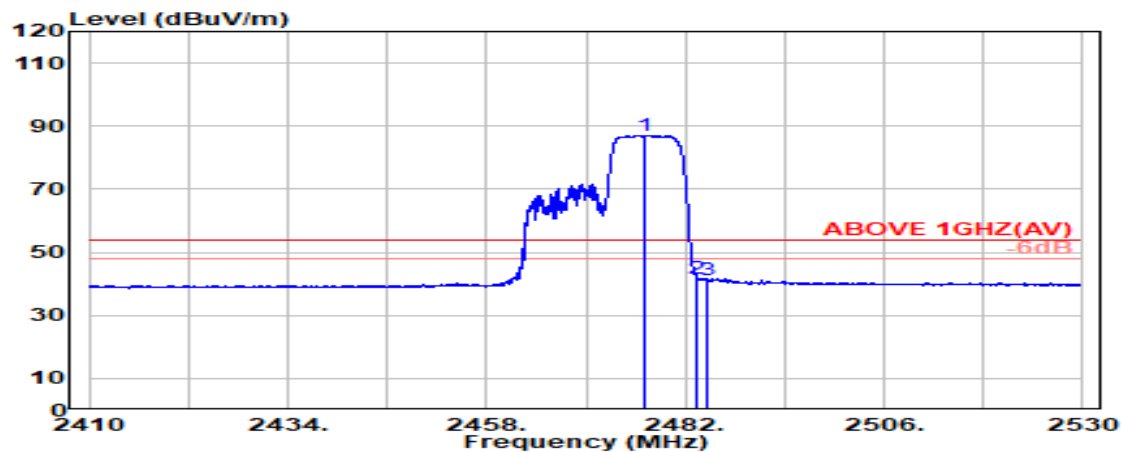

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.000	28.41	5.82	39.87	92.61	86.96	---	---	Average
2483.500	28.43	5.83	39.87	47.30	41.69	54.00	12.31	Average
2484.720	28.44	5.83	39.87	46.86	41.26	54.00	12.74	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

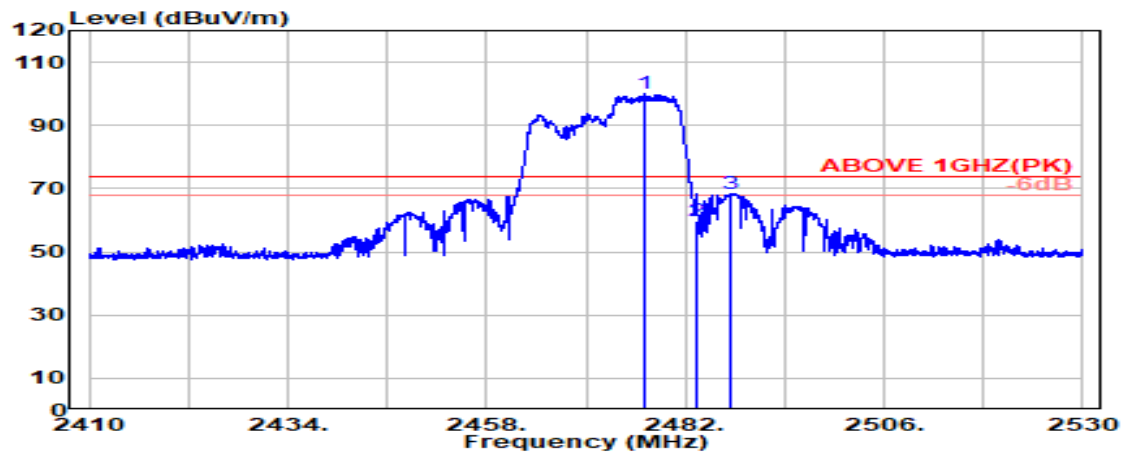

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.960	28.41	5.82	39.87	105.54	99.90	---	---	Peak
2483.500	28.43	5.83	39.87	65.30	59.70	74.00	14.30	Peak
2487.600	28.45	5.83	39.87	74.07	68.48	74.00	5.52	Peak

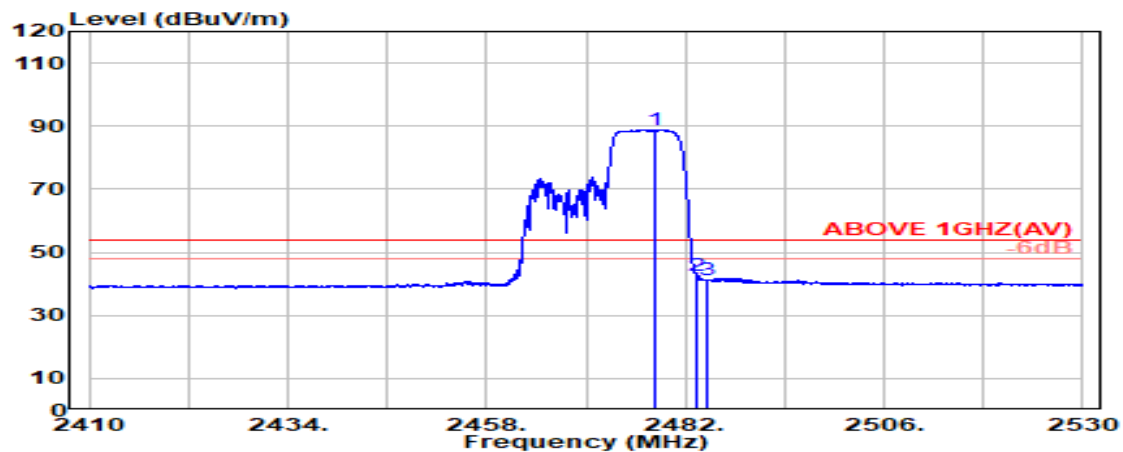

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.280	28.41	5.82	39.87	94.50	88.86	---	---	Average
2483.500	28.43	5.83	39.87	48.05	42.44	54.00	11.56	Average
2484.720	28.44	5.83	39.87	46.88	41.28	54.00	12.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

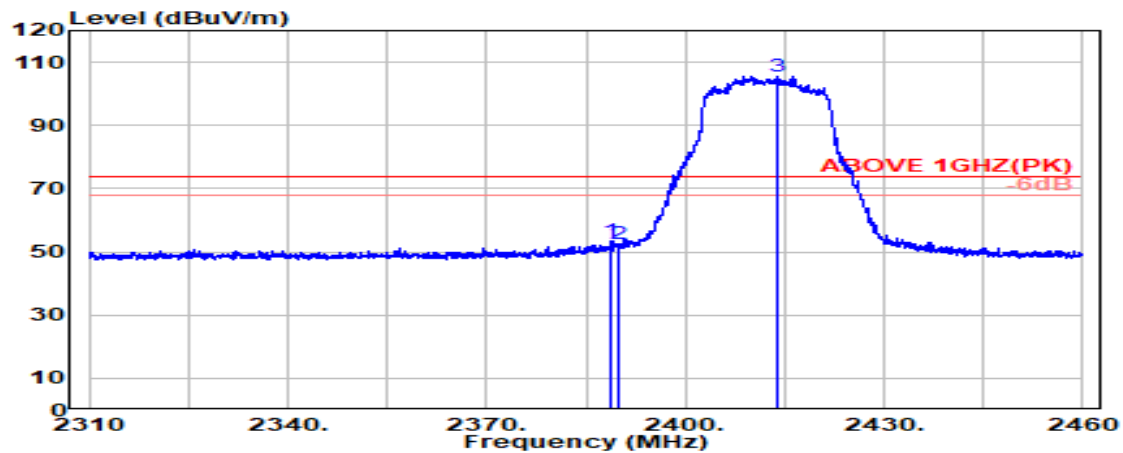

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.650	28.20	5.70	39.88	59.44	53.47	74.00	20.53	Peak
2389.800	28.20	5.70	39.88	58.57	52.59	74.00	21.41	Peak
@ 2413.850	28.23	5.74	39.88	111.34	105.42	---	---	Peak

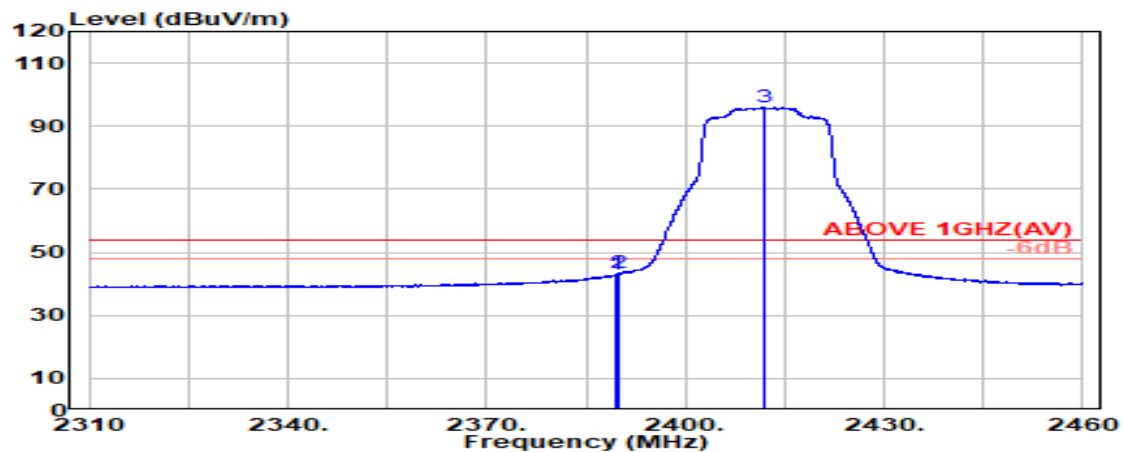

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.88	49.08	43.10	54.00	10.90	Average
2389.800	28.20	5.70	39.88	49.31	43.33	54.00	10.67	Average
@ 2412.050	28.22	5.73	39.88	101.76	95.84	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

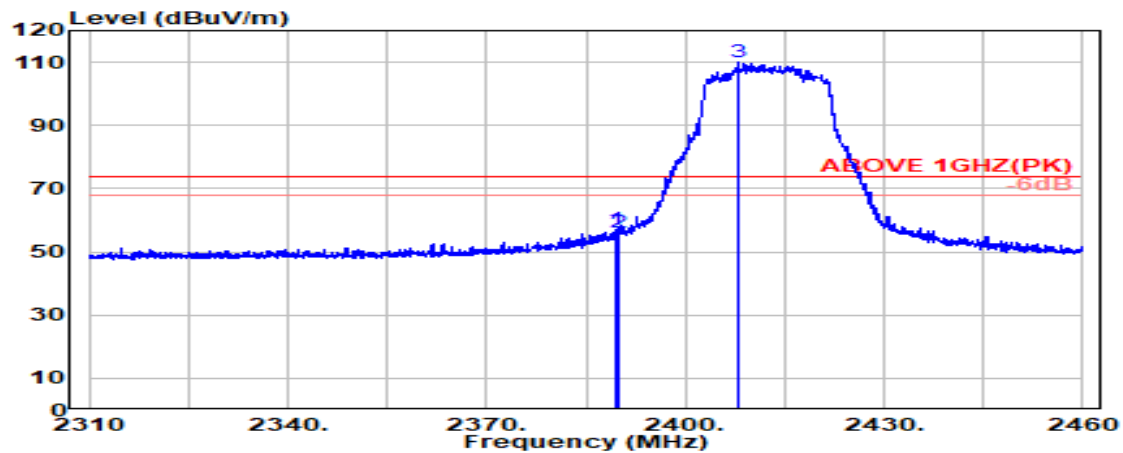

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.20	5.70	39.88	62.89	56.91	74.00	17.09	Peak
2389.800	28.20	5.70	39.88	62.22	56.25	74.00	17.75	Peak
@ 2407.950	28.22	5.73	39.88	115.87	109.94	---	---	Peak

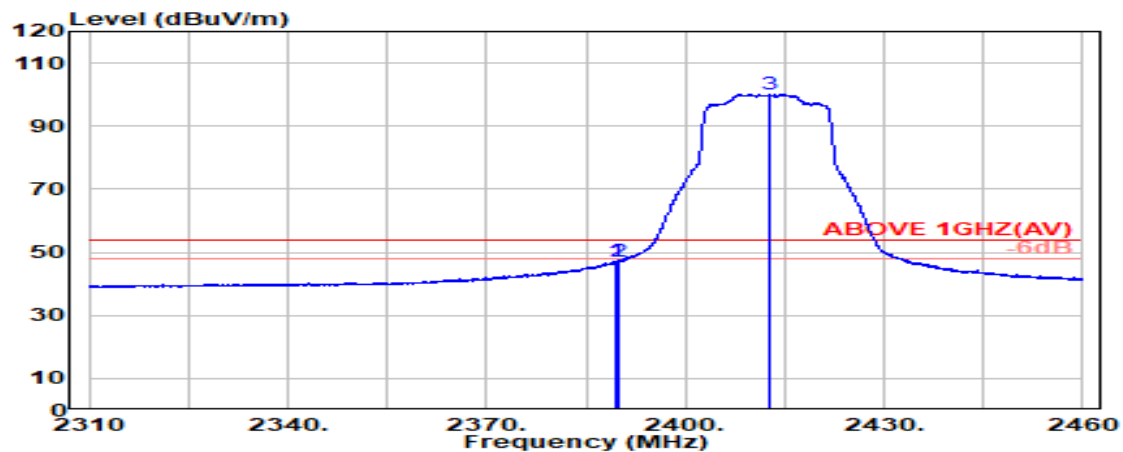

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	5.70	39.88	53.05	47.08	54.00	6.92	Average
2389.800	28.20	5.70	39.88	52.88	46.91	54.00	7.09	Average
@ 2412.750	28.23	5.73	39.88	106.02	100.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

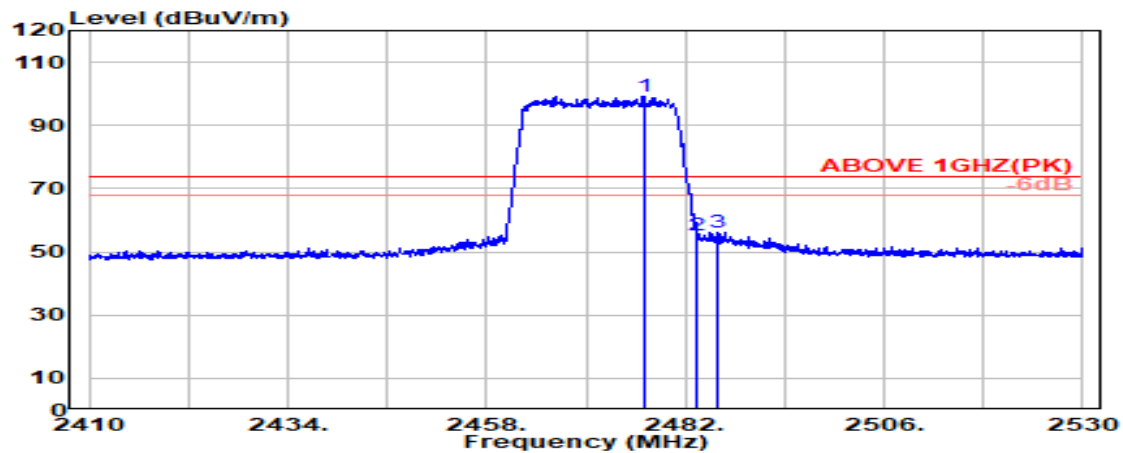

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.950	28.41	5.82	39.87	104.93	99.29	---	---	Peak
2483.500	28.43	5.83	39.87	60.72	55.11	74.00	18.89	Peak
2486.000	28.44	5.83	39.87	61.79	56.20	74.00	17.80	Peak

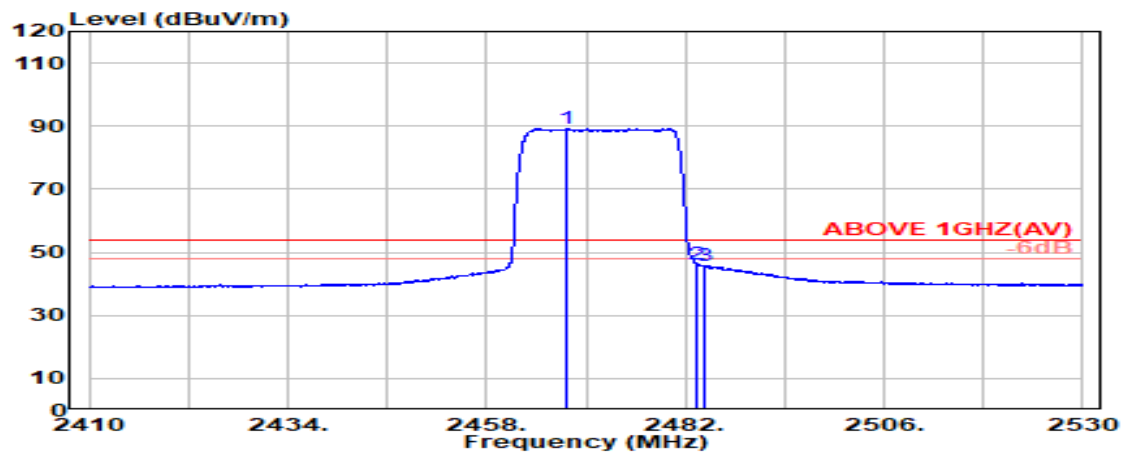

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.750	28.37	5.81	39.87	94.89	89.20	---	---	Average
2483.500	28.43	5.83	39.87	51.74	46.13	54.00	7.87	Average
2484.200	28.44	5.83	39.87	51.38	45.78	54.00	8.22	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

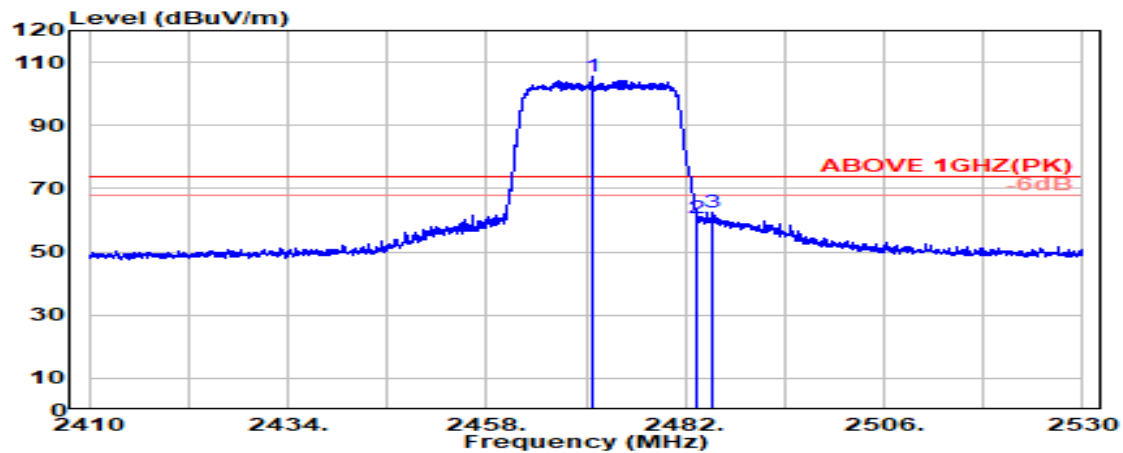

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.650	28.38	5.81	39.87	111.08	105.40	---	---	Peak
2483.500	28.43	5.83	39.87	66.37	60.76	74.00	13.24	Peak
2485.300	28.44	5.83	39.87	68.09	62.49	74.00	11.51	Peak

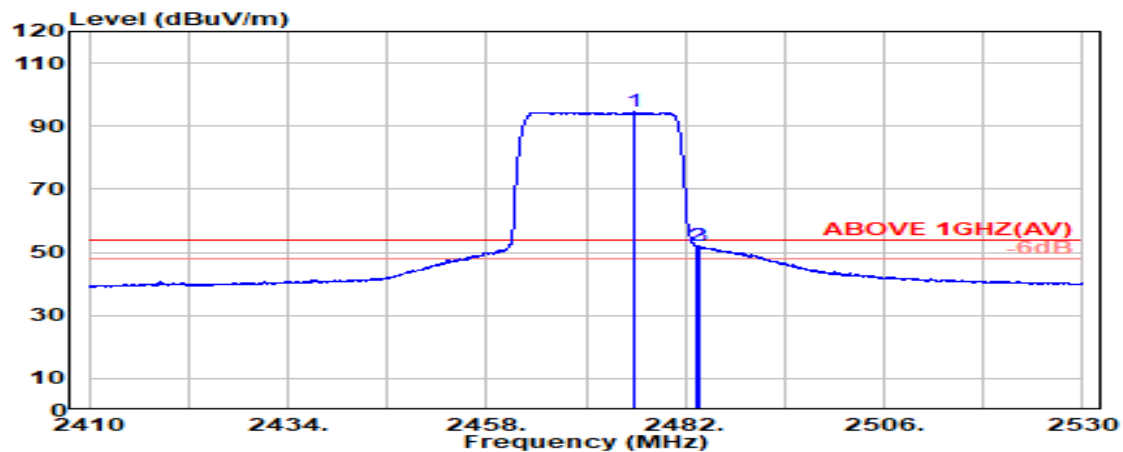

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.950	28.40	5.82	39.87	100.07	94.42	---	---	Average
2483.500	28.43	5.83	39.87	57.46	51.85	54.00	2.15	Average
2483.700	28.44	5.83	39.87	57.54	51.94	54.00	2.06	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


● BLE Mode

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

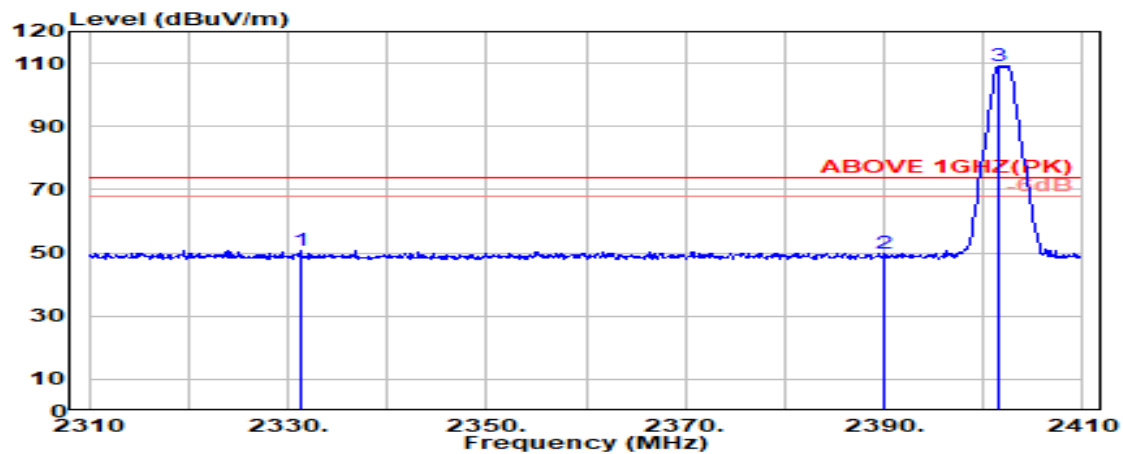

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2331.200	28.13	5.62	39.88	56.87	50.74	74.00	23.26	Peak
2390.000	28.20	5.70	39.88	55.66	49.69	74.00	24.31	Peak
@ 2401.500	28.20	5.72	39.88	115.28	109.33	---	---	Peak

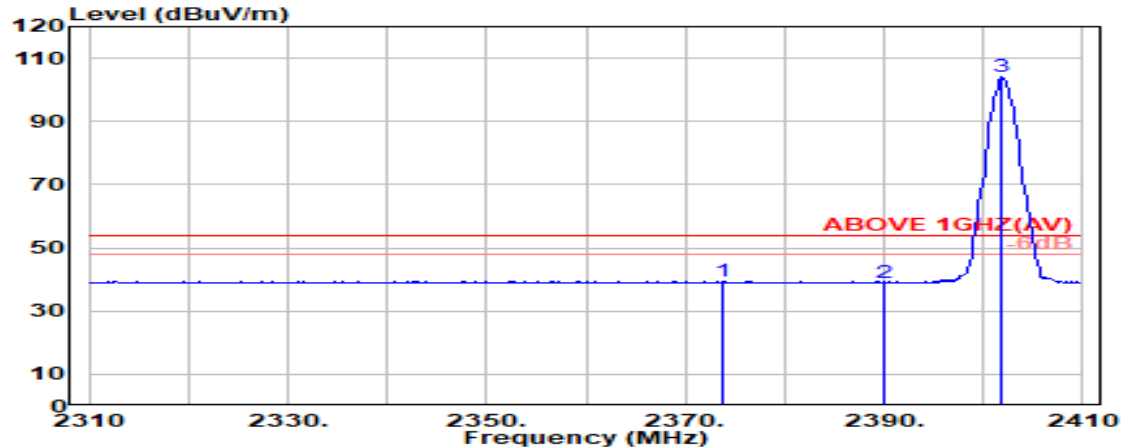

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2373.800	28.20	5.68	39.88	45.43	39.43	54.00	14.57	Average
2390.000	28.20	5.70	39.88	45.01	39.03	54.00	14.97	Average
@ 2401.900	28.20	5.72	39.88	109.98	104.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

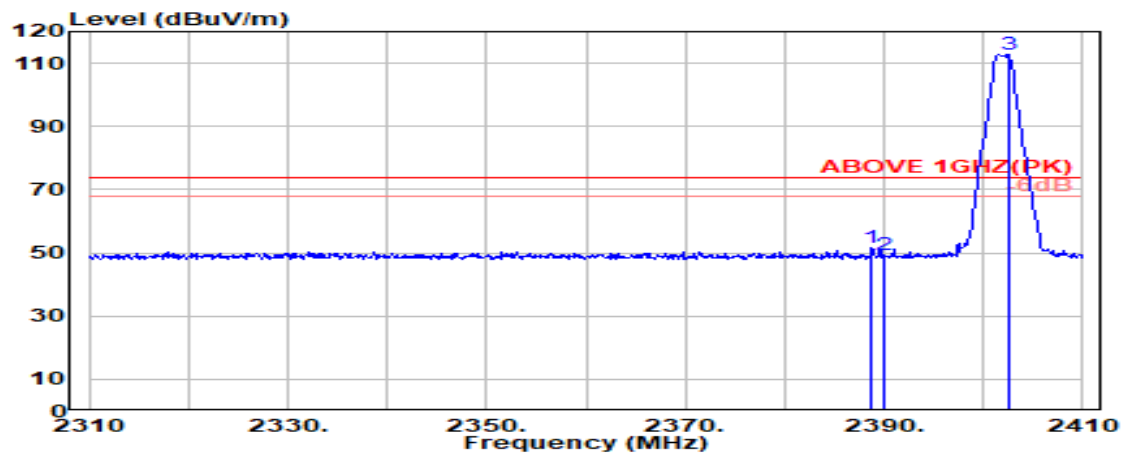

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.800	28.20	5.70	39.88	57.47	51.49	74.00	22.51	Peak
2390.000	28.20	5.70	39.88	55.34	49.36	74.00	24.64	Peak
@ 2402.500	28.21	5.72	39.88	118.86	112.91	---	---	Peak

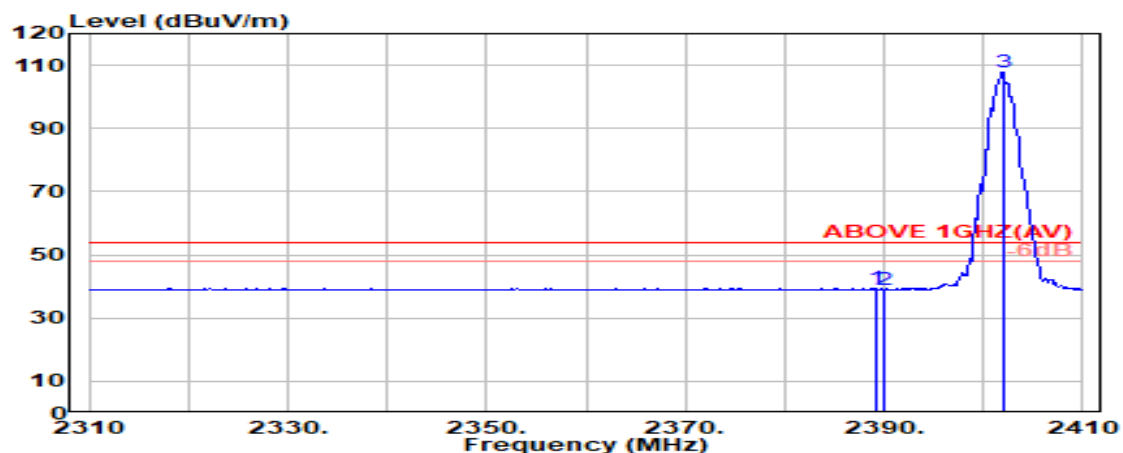

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.200	28.20	5.70	39.88	45.57	39.59	54.00	14.41	Average
2390.000	28.20	5.70	39.88	45.04	39.06	54.00	14.94	Average
@ 2402.000	28.20	5.72	39.88	113.61	107.66	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

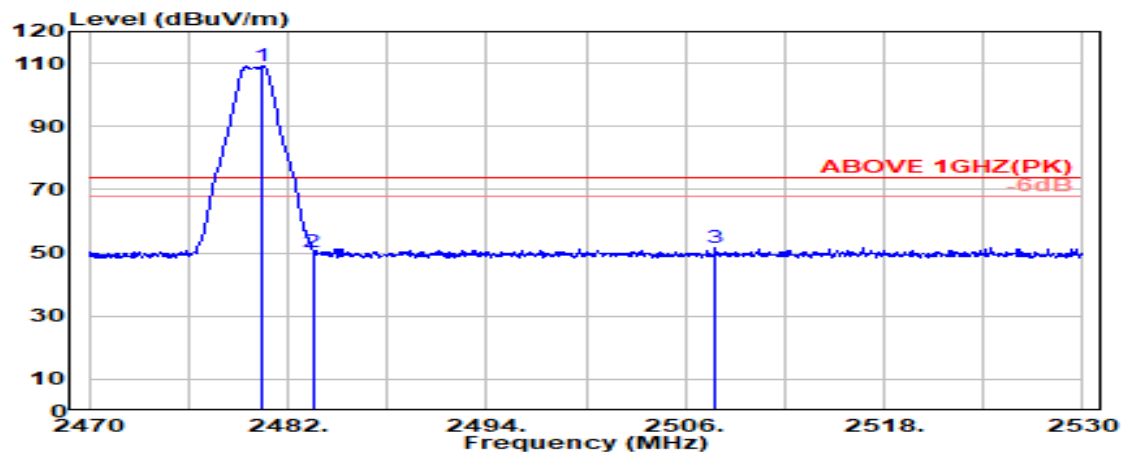

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2480.500	28.42	5.82	39.87	114.67	109.05	---	---	Peak
	2483.500	28.43	5.83	39.87	56.09	50.48	74.00	23.52	Peak
	2507.850	28.53	5.86	39.87	57.08	51.60	74.00	22.40	Peak

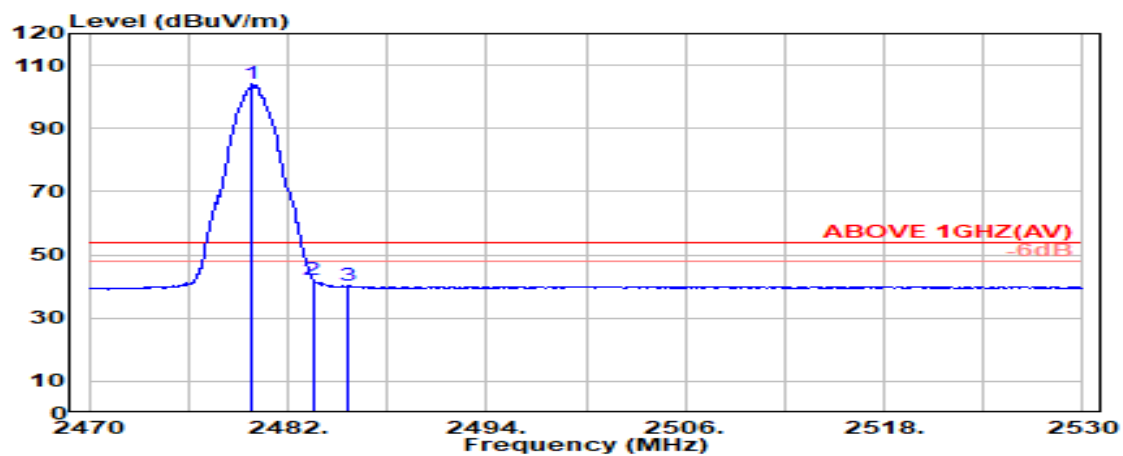

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2479.850	28.42	5.82	39.87	109.63	104.00	---	---	Average
	2483.500	28.43	5.83	39.87	47.76	42.15	54.00	11.85	Average
	2485.550	28.44	5.83	39.87	45.83	40.23	54.00	13.77	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

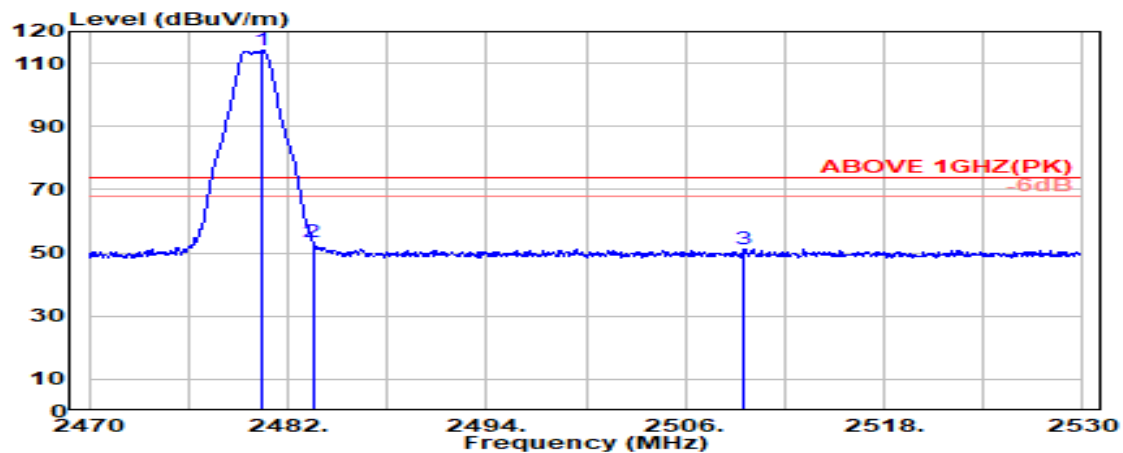

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.42	5.82	39.87	119.60	113.98	---	---	Peak
2483.500	28.43	5.83	39.87	58.83	53.22	74.00	20.78	Peak
2509.550	28.54	5.86	39.87	56.84	51.37	74.00	22.63	Peak

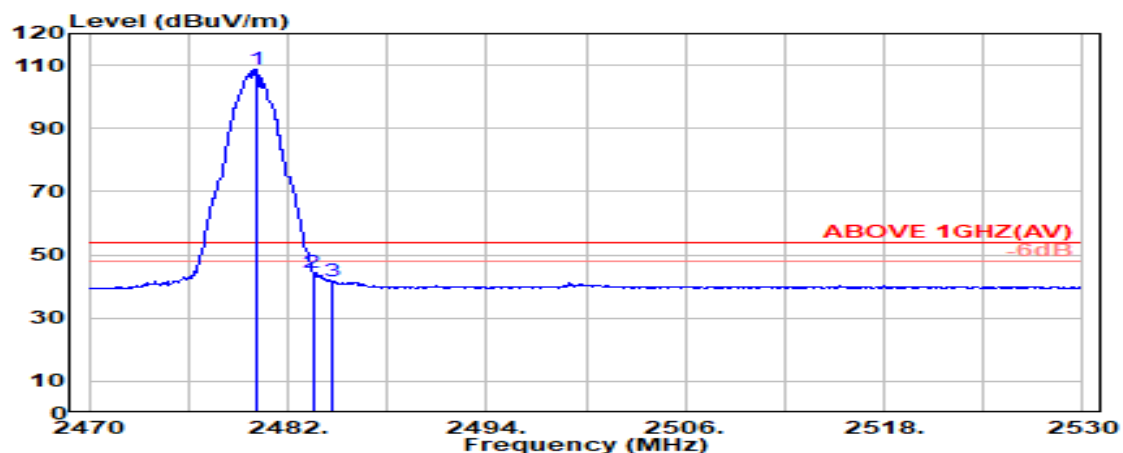

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.42	5.82	39.87	114.29	108.66	---	---	Average
2483.500	28.43	5.83	39.87	50.16	44.55	54.00	9.45	Average
2484.750	28.44	5.83	39.87	47.39	41.79	54.00	12.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

A.2.2 Emissions outside the frequency band

The emissions (up to 25GHz) not reported for there is no emission be found.

The 802.11ax and be were assessed with full RU mode.

● Wireless LAN Mode

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.29	48.50	50.05	54.00	3.95	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.29	51.22	52.77	54.00	1.23	Average
4824.000	32.80	8.04	39.29	53.74	55.29	74.00	18.71	Peak

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.26	48.04	49.89	54.00	4.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.26	50.08	51.94	54.00	2.06	Average
4884.000	33.04	8.08	39.26	52.87	54.73	74.00	19.27	Peak

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.24	44.93	47.01	54.00	6.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.24	47.75	49.82	54.00	4.18	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.29	40.21	41.75	54.00	12.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.29	45.14	46.68	54.00	7.32	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.26	40.59	42.44	54.00	11.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.26	48.84	50.69	54.00	3.31	Peak

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.24	41.31	43.38	54.00	10.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.24	40.55	42.62	54.00	11.38	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.29	39.85	41.39	54.00	12.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.29	45.52	47.06	54.00	6.94	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.26	39.64	41.49	54.00	12.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.26	42.04	43.90	54.00	10.10	Peak

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.24	39.22	41.29	54.00	12.71	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.24	40.12	42.19	54.00	11.81	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.28	39.52	41.17	54.00	12.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.28	40.76	42.41	54.00	11.59	Peak

Mode	802.11n-HT40	Frequency	TX 2442 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.26	39.53	41.39	54.00	12.61	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.26	40.68	42.53	54.00	11.47	Peak

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.24	39.90	41.91	54.00	12.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.24	41.09	43.11	54.00	10.89	Peak

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.29	40.31	41.85	54.00	12.15	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.29	44.00	45.55	54.00	8.45	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.26	40.64	42.49	54.00	11.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.26	40.25	42.10	54.00	11.90	Peak

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.24	40.43	42.50	54.00	11.50	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.24	40.74	42.81	54.00	11.19	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.28	40.85	42.50	54.00	11.50	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.28	39.74	41.38	54.00	12.62	Peak

Mode	802.11ax-HE40	Frequency	TX 2442 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.26	40.36	42.21	54.00	11.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.26	39.93	41.79	54.00	12.21	Peak

Mode	802.11ax-HE40	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.24	39.60	41.61	54.00	12.39	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.24	38.97	40.98	54.00	13.02	Peak

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.29	42.01	43.56	54.00	10.44	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.29	40.92	42.47	54.00	11.53	Peak

Mode	802.11be-EHT20	Frequency	TX 2442 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.26	40.20	42.06	54.00	11.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.26	42.25	44.10	54.00	9.90	Peak

Mode	802.11be-EHT20	Frequency	TX 2472 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.24	39.59	41.66	54.00	12.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.24	40.91	42.99	54.00	11.01	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.28	39.80	41.45	54.00	12.55	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.28	41.18	42.83	54.00	11.17	Peak

Mode	802.11be-EHT40	Frequency	TX 2442 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.26	39.28	41.14	54.00	12.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.26	39.88	41.74	54.00	12.26	Peak

Mode	802.11be-EHT40	Frequency	TX 2462 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.24	39.04	41.05	54.00	12.95	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.24	38.77	40.78	54.00	13.22	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● **BLE Mode**

Mode	BLE (PHY Coded S2)	Frequency	TX 2402MHz
------	--------------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.72	8.02	39.30	40.23	41.67	54.00	12.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.72	8.02	39.30	39.43	40.87	54.00	13.13	Peak

Mode	BLE (PHY Coded S2)	Frequency	TX 2440MHz
------	--------------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.02	8.08	39.27	40.13	41.97	54.00	12.03	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.02	8.08	39.27	39.50	41.34	54.00	12.66	Peak

Mode	BLE (PHY Coded S2)	Frequency	TX 2480MHz
------	--------------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.22	8.13	39.23	41.57	43.70	54.00	10.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.22	8.13	39.23	39.44	41.56	54.00	12.44	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.3 DTS/OCCUPIED BANDWIDTH

Test Date	2025/09/16~17	Temp./Hum.	23~24°C/55~62%
Cable Loss	1.50dB	Tested By	Hua Wu
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 DTS/Occupied Bandwidth Result

Mode	Centre Frequency (MHz)	DTS (6dB) Bandwidth (MHz)		Occupied (99%) Bandwidth (MHz)		Limit
		AUX	Main	AUX	Main	
802.11b	2412	9.123	9.115	13.495	13.479	>500kHz
	2442	9.120	9.114	13.526	13.490	
	2462	9.122	9.111	13.543	13.437	
	2472	9.121	9.116	13.487	13.501	
802.11g	2412	16.20	16.34	17.011	17.085	
	2442	16.04	16.00	16.874	16.802	
	2462	16.01	16.09	16.871	16.746	
	2472	16.44	16.46	16.403	16.390	
802.11n-HT20	2412	17.30	17.51	17.849	17.808	
	2442	17.24	17.18	17.832	17.896	
	2462	17.21	17.26	17.815	17.840	
	2472	17.66	17.72	17.570	17.587	
802.11n-HT40	2422	36.14	35.51	36.073	35.934	
	2442	36.03	35.72	36.064	35.940	
	2452	36.08	35.53	36.093	35.941	
	2462	36.48	36.49	36.146	36.060	
802.11ax-HE20	2412	18.86	18.87	18.975	18.995	
	2442	18.85	18.90	19.002	19.034	
	2462	18.88	18.89	18.968	18.995	
	2472	18.92	18.88	18.766	18.774	
802.11ax-HE40	2422	37.65	37.60	37.534	37.528	
	2442	37.03	37.14	37.523	37.492	
	2452	37.69	37.45	37.535	37.522	
	2462	37.94	37.71	37.562	37.545	
802.11be-EHT20	2412	18.91	18.87	18.987	18.995	
	2442	18.78	18.87	18.978	19.029	
	2462	18.91	18.93	18.991	19.012	
	2472	18.88	18.94	18.756	18.773	
802.11be-EHT40	2422	37.73	37.63	37.530	37.530	
	2442	37.14	37.50	37.504	37.501	
	2452	37.56	37.45	37.523	37.502	
	2462	37.96	37.73	37.569	37.550	

Note: We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	DTS (6dB) Bandwidth (MHz)		Occupied (99%) Bandwidth (MHz)		Limit
		AUX	Main	AUX	Main	
BLE (1Mbps)	2402	0.7090	0.7167	1.0290	1.0300	>500kHz
	2440	0.7127	0.7132	1.0302	1.0299	
	2480	0.7098	0.6990	1.0282	1.0217	
BLE (2Mbps)	2402	1.173	1.240	2.0662	2.0703	
	2440	1.174	1.240	2.0617	2.0724	
	2480	1.173	1.172	2.0639	2.0639	
BLE (PHY Coded S2)	2402	0.6576	0.6601	1.0193	1.0233	
	2440	0.6560	0.6595	1.0163	1.0219	
	2480	0.6579	0.6607	1.0171	1.0183	
BLE (PHY Coded S8)	2402	0.6843	0.6953	1.0497	1.0536	
	2440	0.6882	0.6888	1.0511	1.0520	
	2480	0.6902	0.6786	1.0524	1.0423	


Note: We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


A.3.2 Measurement Plots

● DTS (6dB) Bandwidth

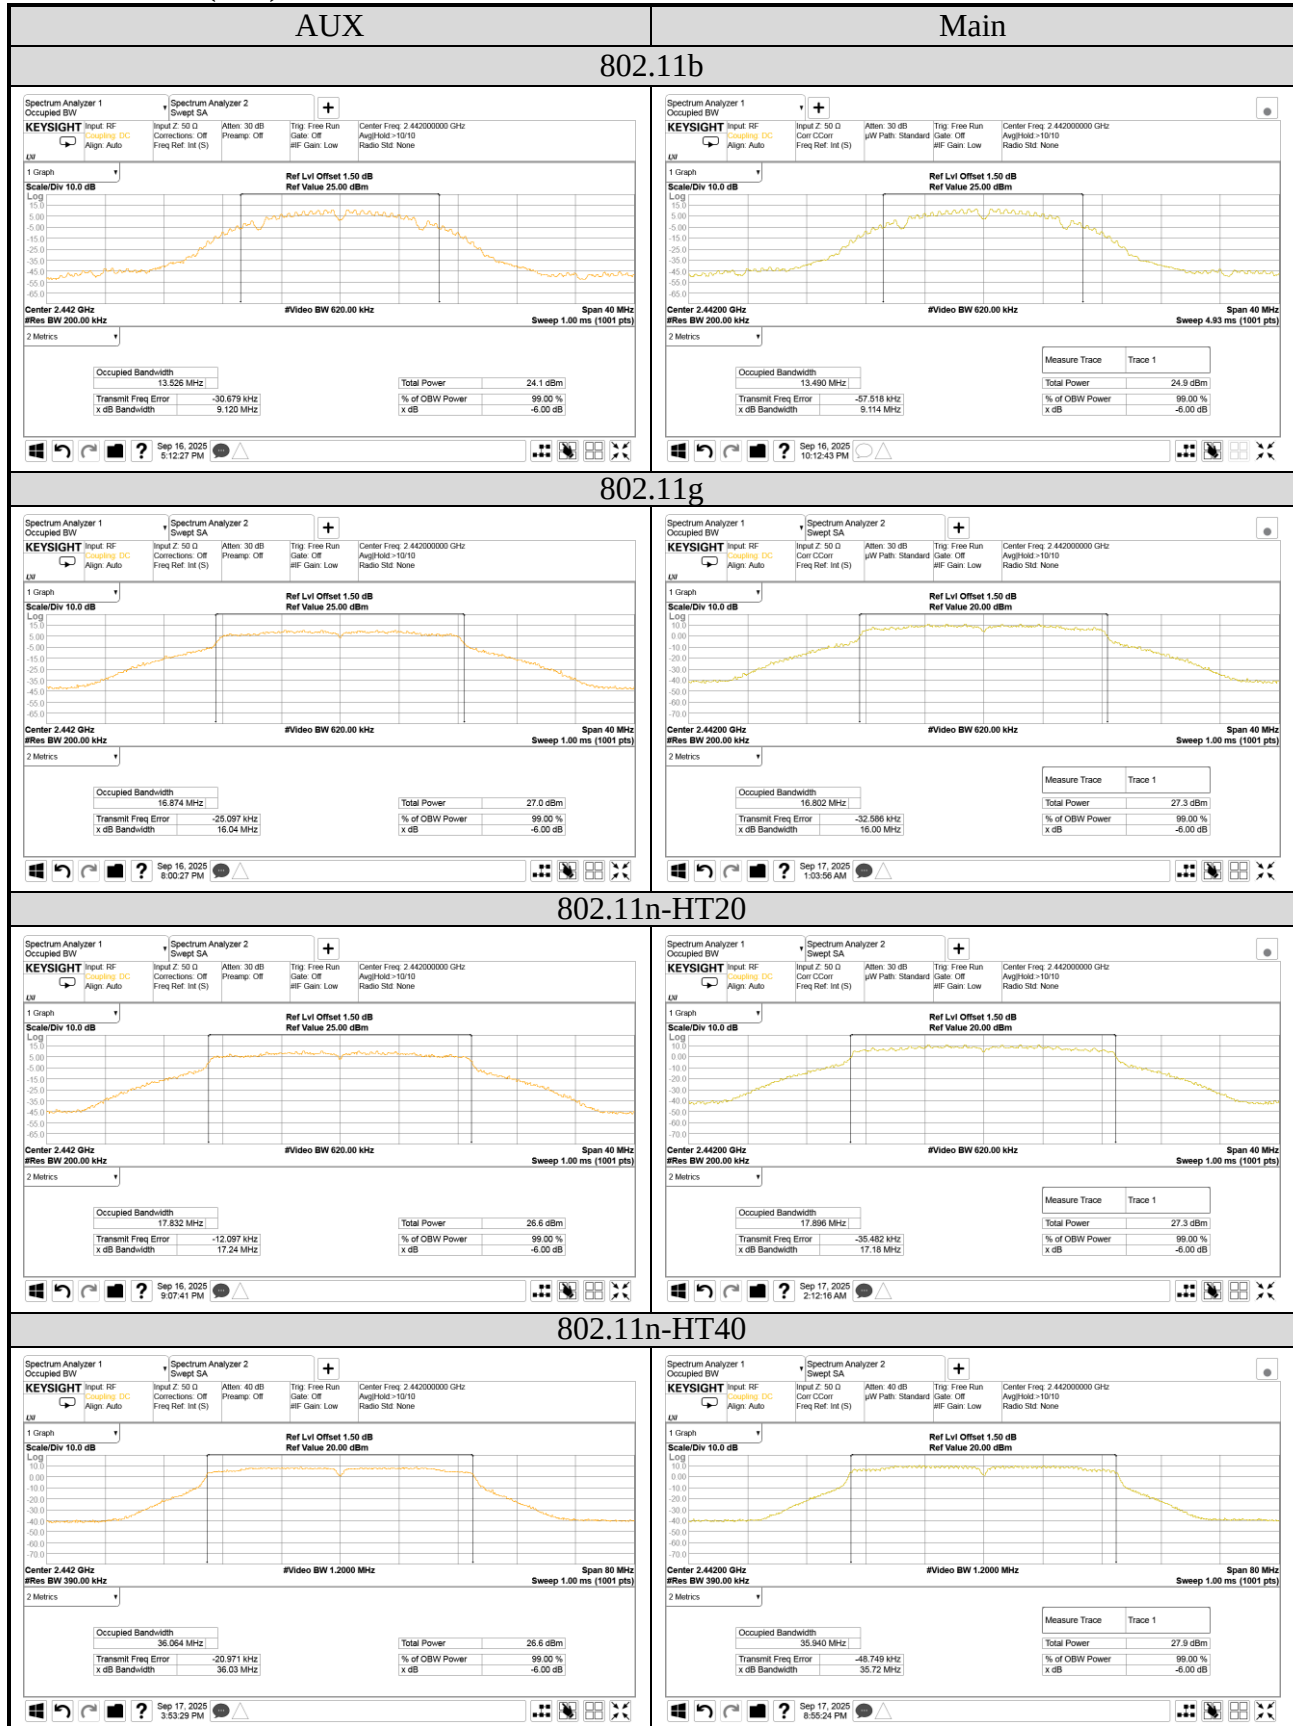


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

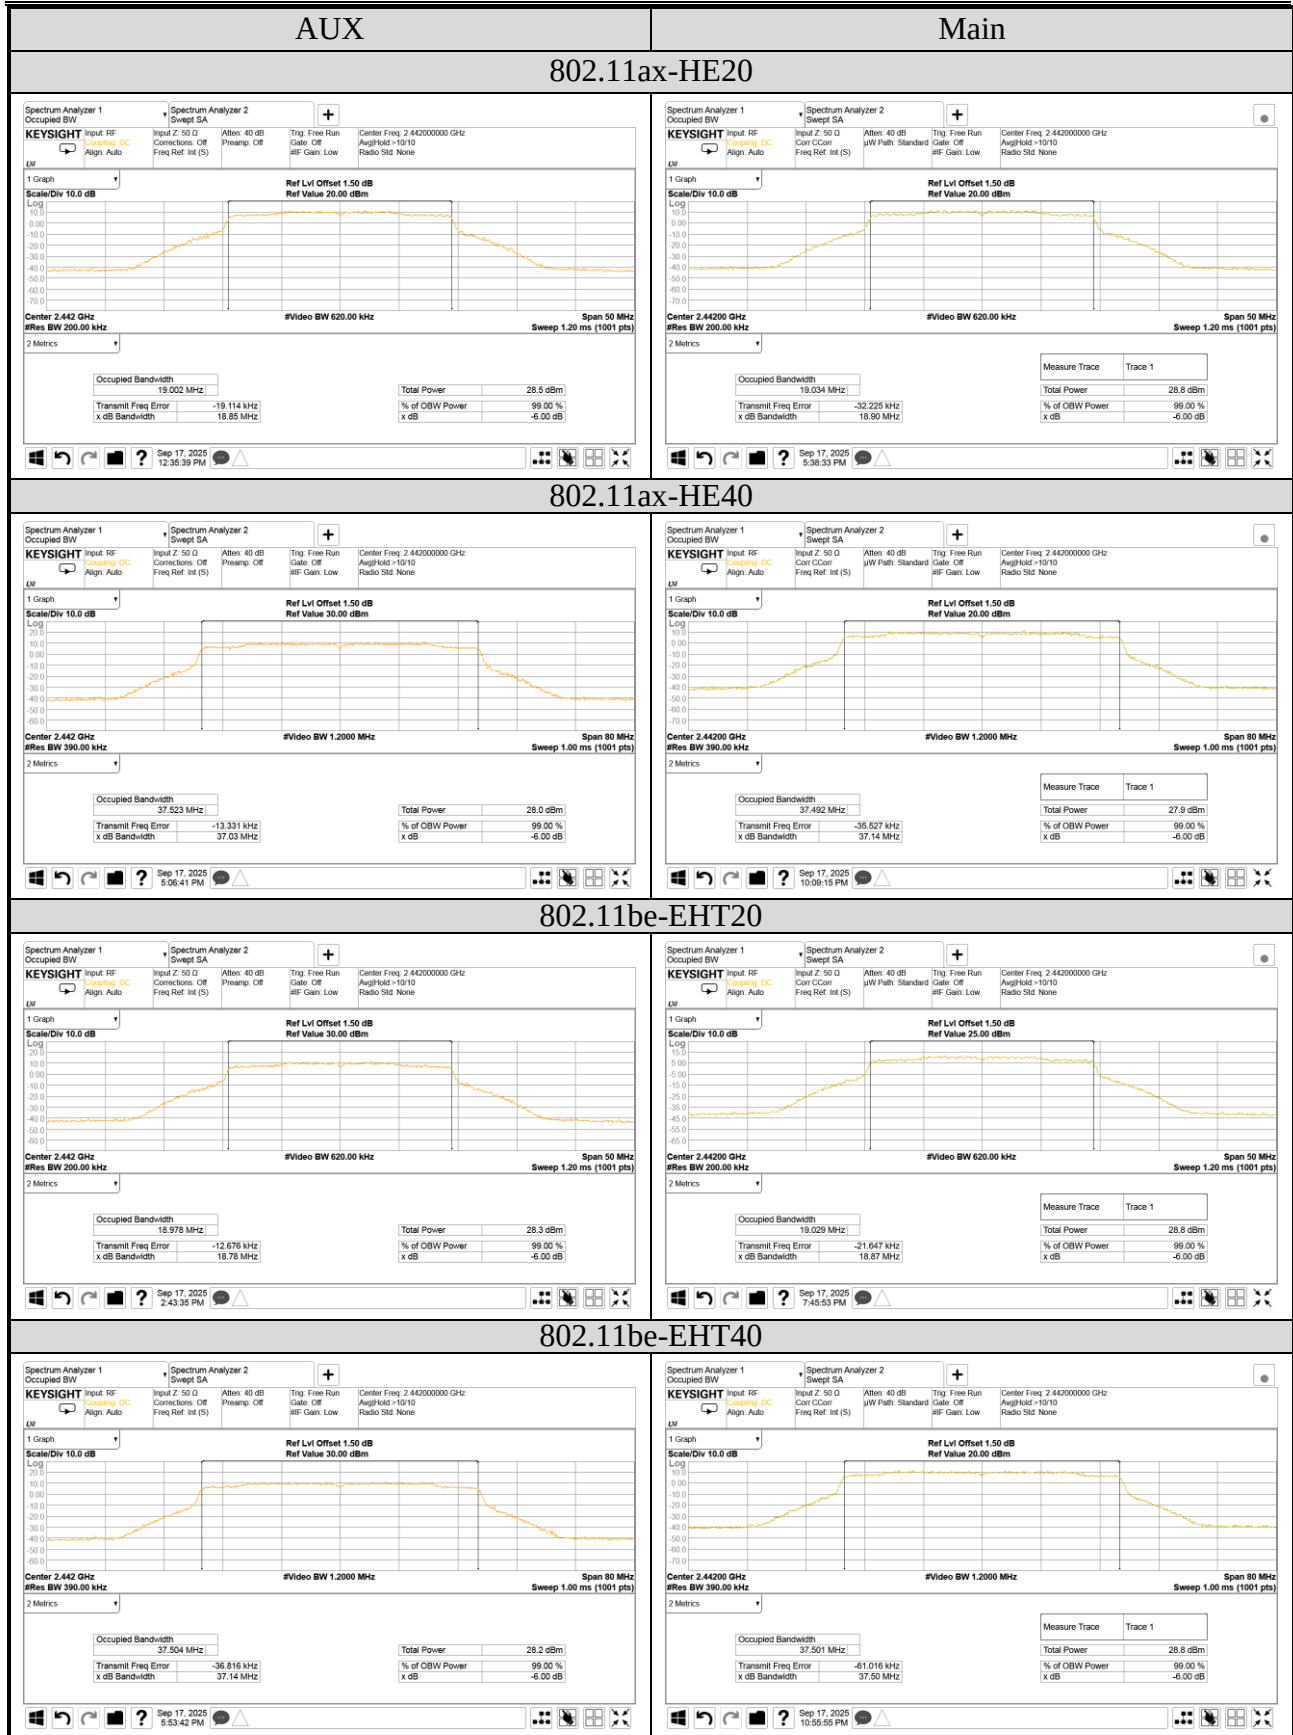

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

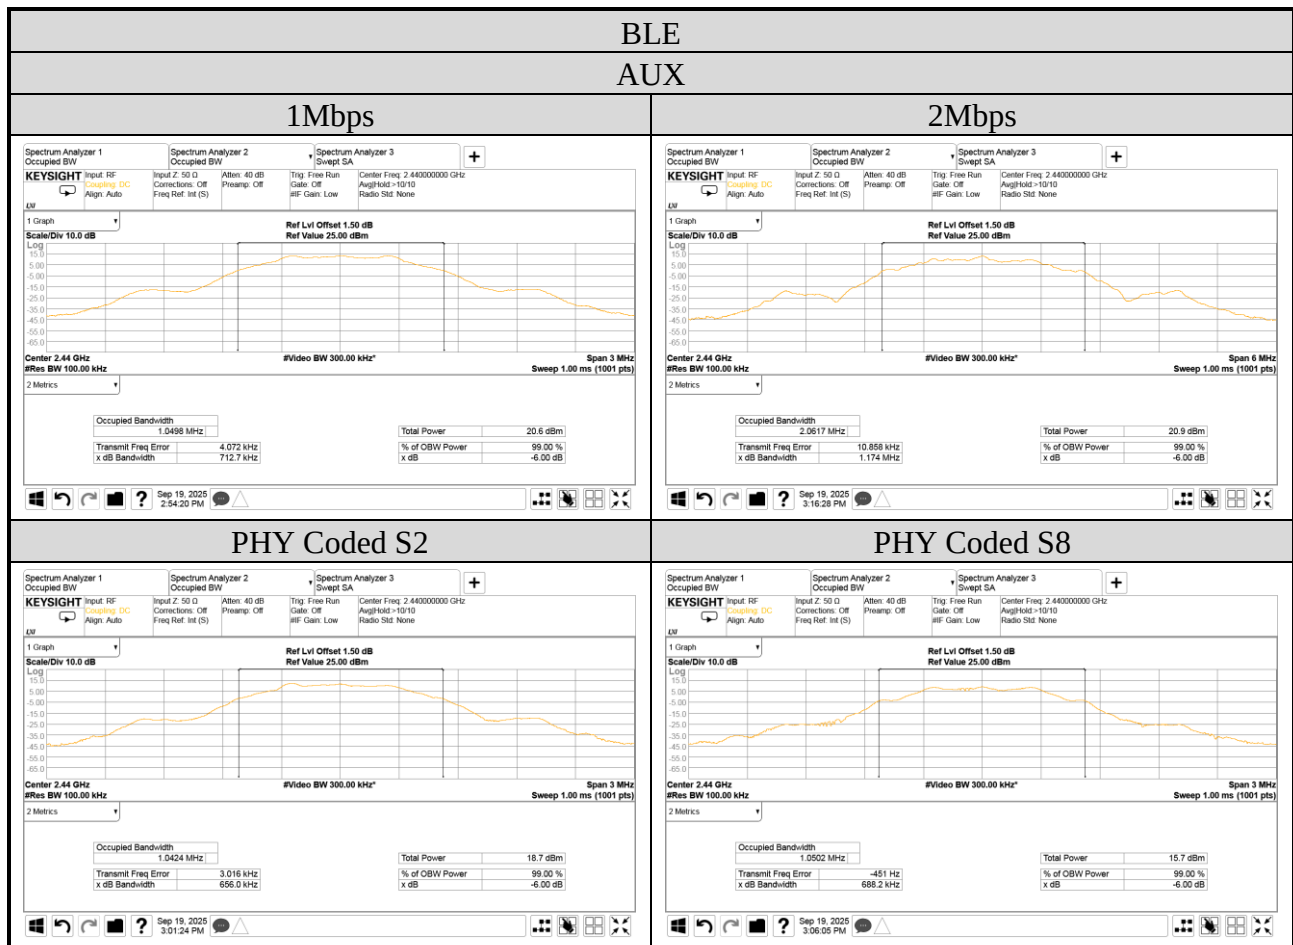

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


● Occupied (99%) Bandwidth

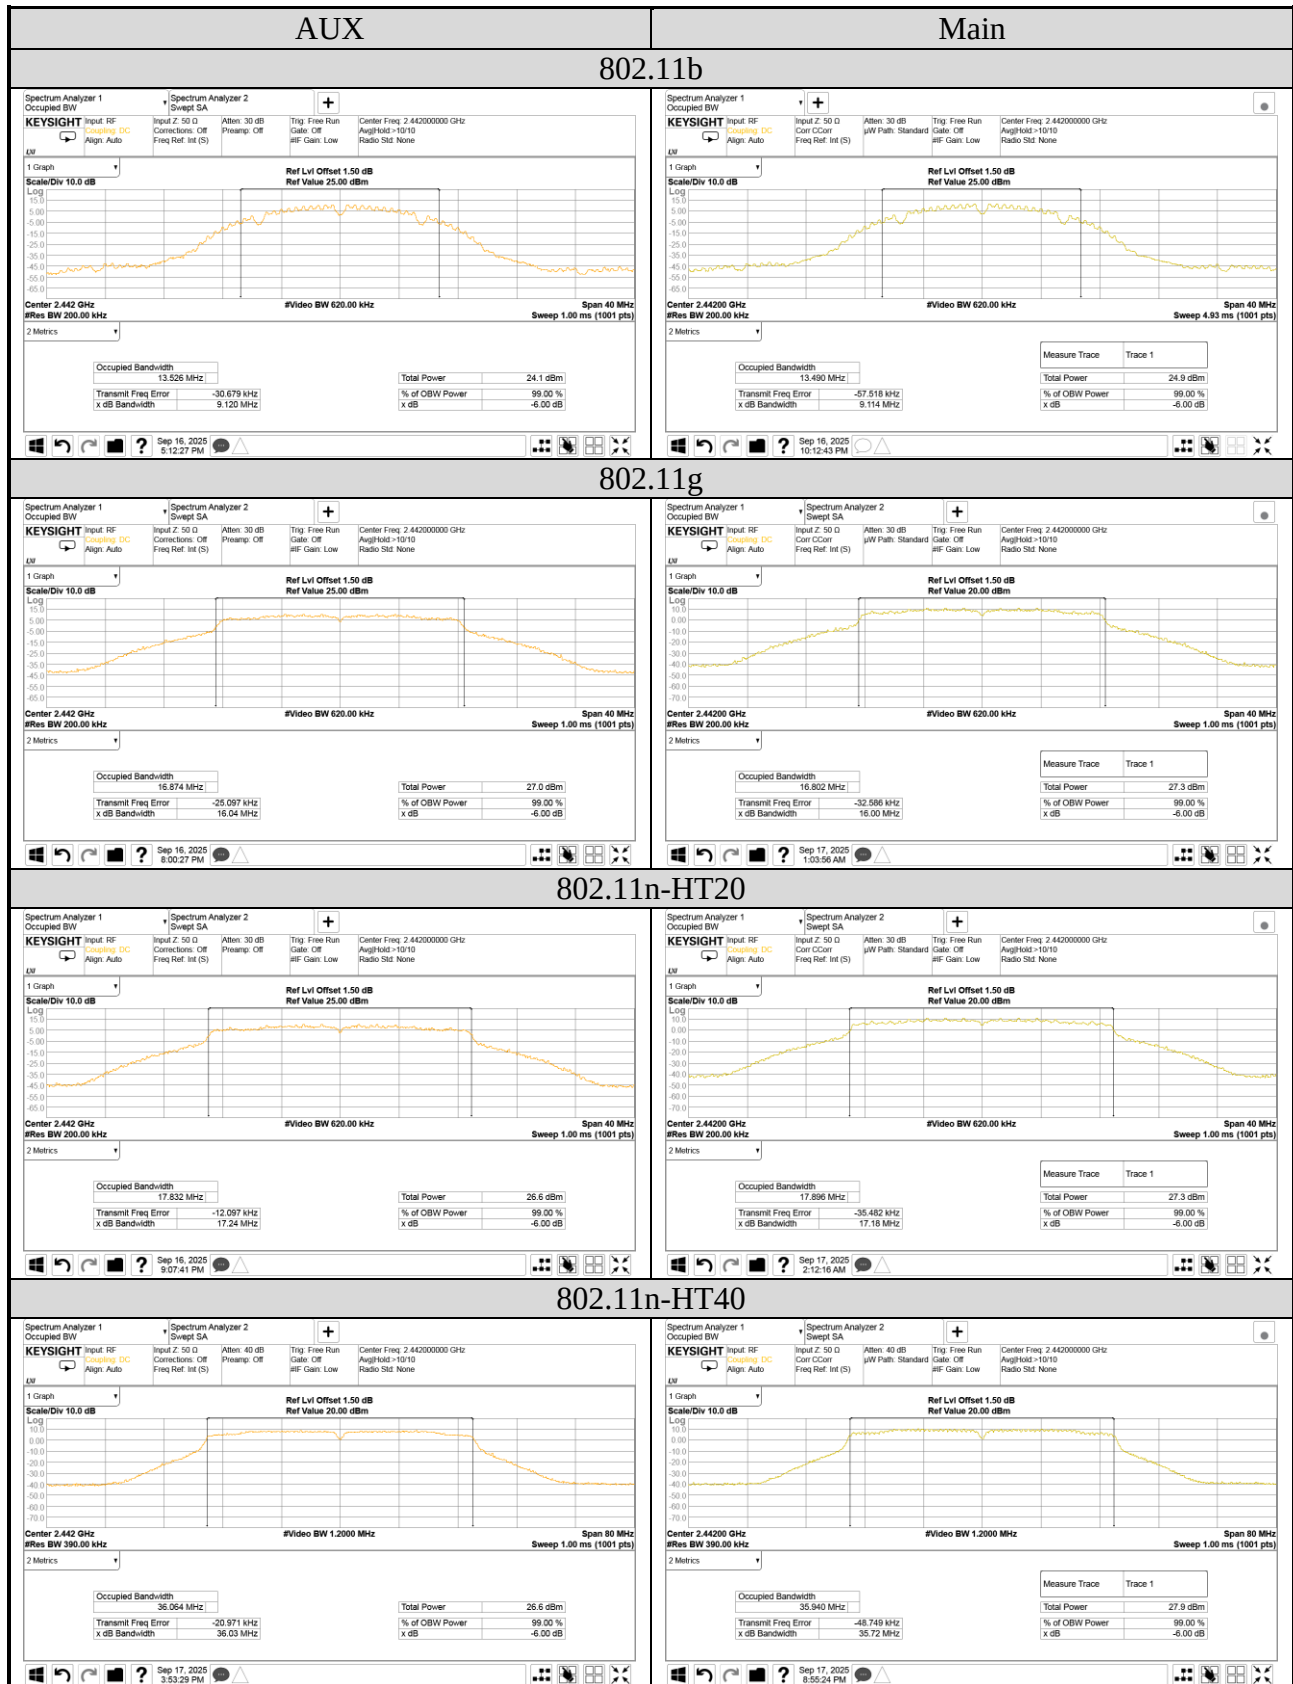




Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

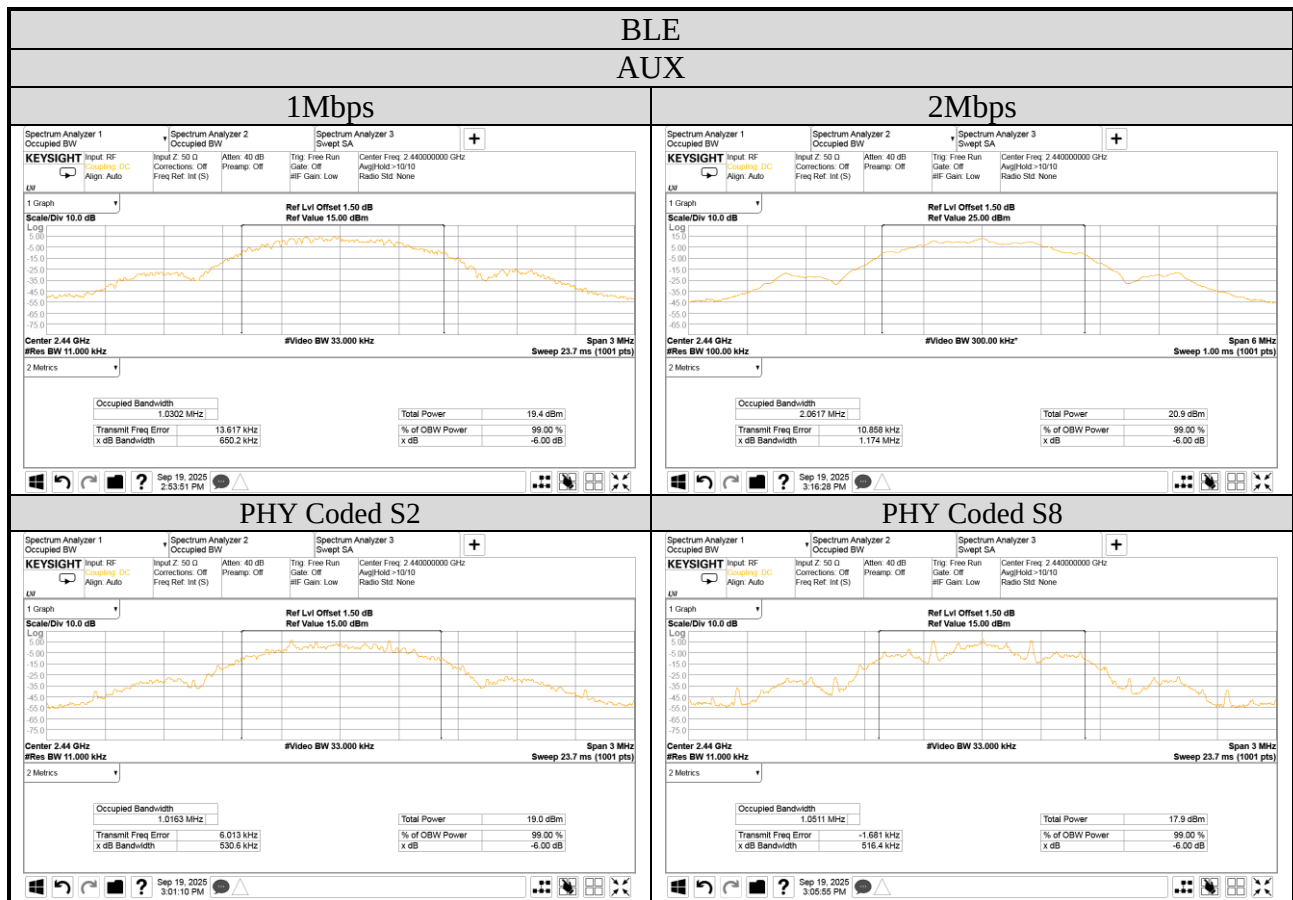

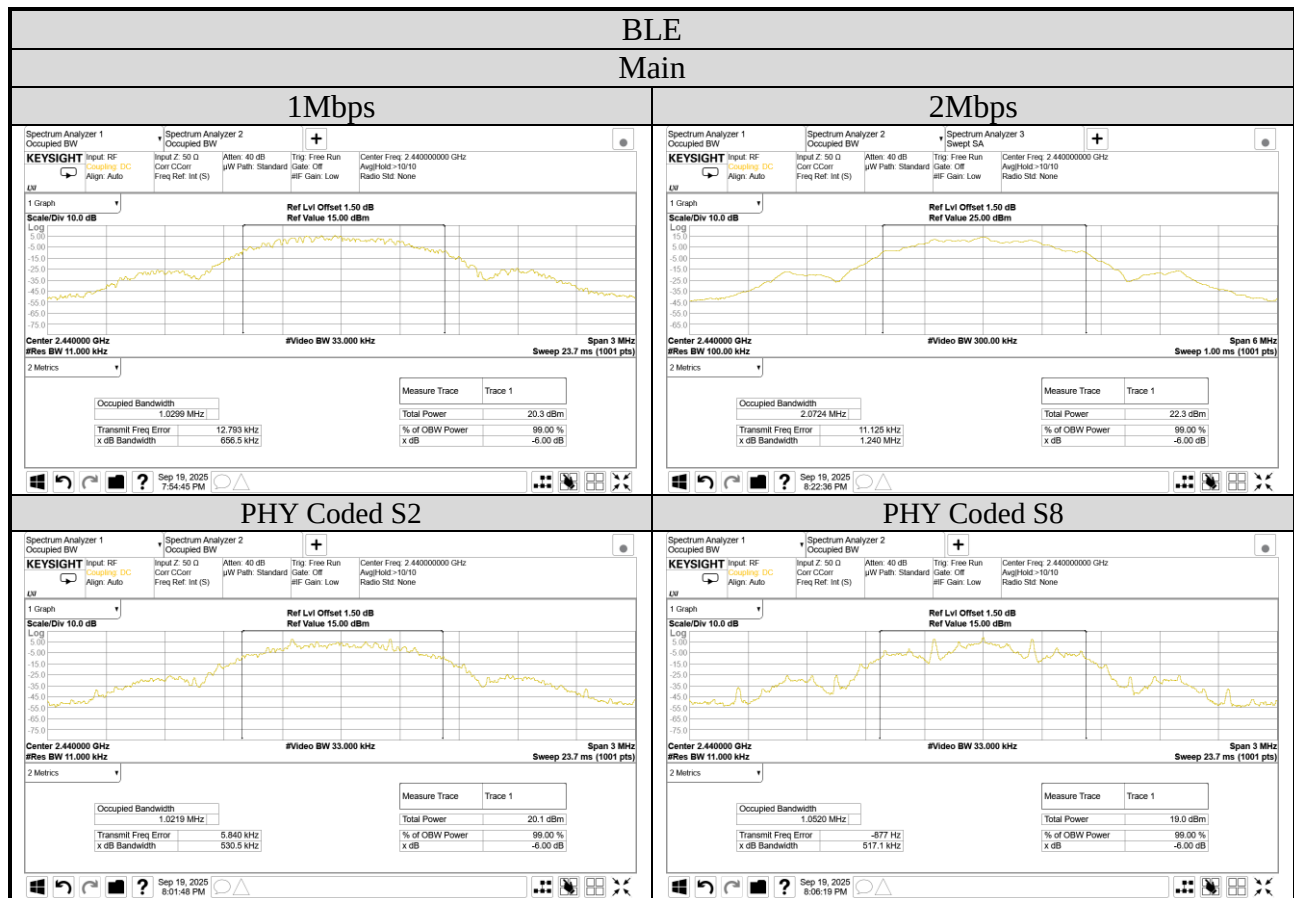

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.4 MAXIMUM PEAK OUTPUT POWER

Test Date	2025/09/04~09	Temp./Hum.	23~24°C/54~57%
Cable Loss	---	Tested By	Sam Chang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.4.1 Peak Output Power

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max Peak Output Power		Antenna Gain (dBi)		E.I.R.P. ^{Note 2}		Limit
		Aux	Main	(dBm)	(W)	Aux	Main	(dBm)	(W)	
802.11b	2412	19.07	21.51	21.51	0.142	2.00	2.15	23.66	0.232	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P.)
	2417	19.38	21.66	21.66	0.147	2.00	2.15	23.81	0.240	
	2422	20.14	21.71	21.71	0.148	2.00	2.15	23.86	0.243	
	2442	21.47	21.81	21.81	0.152	2.00	2.15	23.96	0.249	
	2467	21.75	21.71	21.75	0.150	2.00	2.15	23.86	0.243	
	2472	19.64	20.47	20.47	0.111	2.00	2.15	22.62	0.183	
802.11g	2412	23.66	24.04	24.04	0.254	2.00	2.15	26.19	0.416	
	2417	24.13	24.21	24.21	0.264	2.00	2.15	26.36	0.433	
	2442	24.27	24.42	24.42	0.277	2.00	2.15	26.57	0.454	
	2462	24.46	24.31	24.46	0.279	2.00	2.15	26.46	0.443	
	2467	20.13	21.11	21.11	0.129	2.00	2.15	23.26	0.212	
	2472	23.99	24.67	24.67	0.293	2.00	2.15	26.82	0.481	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Max. of Peak Output Power (AUX or Main)(dBm)+ Antenna Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power ^{Note 2}		Directional Gain ^{Note 3} (dBi)	E.I.R.P ^{Note 4}		Limit
		Aux	Main	(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	22.52	22.46	25.50	0.355	2.08	27.58	0.573	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2417	24.17	24.22	27.21	0.525	2.08	29.29	0.848	
	2442	24.12	24.26	27.20	0.525	2.08	29.28	0.847	
	2462	23.63	23.42	26.54	0.450	2.08	28.62	0.727	
	2467	18.62	18.39	21.52	0.142	2.08	23.60	0.229	
	2472	23.64	23.61	26.64	0.461	2.08	28.72	0.744	
802.11n-HT40	2422	23.19	23.23	26.22	0.419	2.08	28.30	0.676	
	2427	24.01	23.95	26.99	0.500	2.08	29.07	0.807	
	2432	24.28	24.35	27.33	0.540	2.08	29.41	0.872	
	2437	24.21	24.17	27.20	0.525	2.08	29.28	0.847	
	2442	23.86	24.07	26.98	0.498	2.08	29.06	0.805	
	2447	23.36	23.52	26.45	0.442	2.08	28.53	0.713	
	2452	23.16	23.38	26.28	0.425	2.08	28.36	0.686	
	2462	23.21	23.18	26.21	0.417	2.08	28.29	0.674	
802.11ax-HE20	2412	22.41	22.47	25.45	0.351	2.08	27.53	0.566	
	2417	24.17	24.29	27.24	0.530	2.08	29.32	0.855	
	2442	24.39	24.27	27.34	0.542	2.08	29.42	0.875	
	2462	23.66	23.53	26.61	0.458	2.08	28.69	0.739	
	2467	18.67	18.55	21.62	0.145	2.08	23.70	0.234	
	2472	23.24	23.16	26.21	0.418	2.08	28.29	0.675	
802.11ax-HE40	2422	23.13	23.20	26.18	0.415	2.08	28.26	0.669	
	2427	23.95	24.01	26.99	0.500	2.08	29.07	0.807	
	2432	24.23	24.41	27.33	0.541	2.08	29.41	0.873	
	2437	24.07	24.14	27.12	0.515	2.08	29.20	0.831	
	2442	24.11	24.18	27.16	0.519	2.08	29.24	0.839	
	2447	23.46	23.22	26.35	0.432	2.08	28.43	0.697	
	2452	23.33	23.26	26.31	0.427	2.08	28.39	0.690	
	2462	23.47	23.45	26.47	0.444	2.08	28.55	0.716	
802.11be-EHT20	2412	22.43	22.39	25.42	0.348	2.08	27.50	0.562	
	2417	24.22	24.18	27.21	0.526	2.08	29.29	0.849	
	2442	24.07	24.32	27.21	0.526	2.08	29.29	0.849	
	2462	23.76	23.54	26.66	0.464	2.08	28.74	0.748	
	2467	18.78	18.61	21.71	0.148	2.08	23.79	0.239	
	2472	23.14	23.01	26.09	0.406	2.08	28.17	0.656	
802.11be-EHT40	2422	23.16	23.23	26.21	0.417	2.08	28.29	0.674	
	2427	24.07	24.01	27.05	0.507	2.08	29.13	0.819	
	2432	24.25	24.31	27.29	0.536	2.08	29.37	0.865	
	2437	24.26	24.17	27.23	0.528	2.08	29.31	0.852	
	2442	23.89	24.17	27.04	0.506	2.08	29.12	0.817	
	2447	23.26	23.53	26.41	0.437	2.08	28.49	0.706	
	2452	23.28	23.36	26.33	0.430	2.08	28.41	0.694	
	2462	23.45	23.25	26.36	0.433	2.08	28.44	0.698	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{2.15/10} + 10^{2/10})/2] = 2.08$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	RU Configuration	Peak Output Power (dBm)		Total Peak Output Power ^{Note 2}		Directional Gain ^{Note 3} (dBi)	E.I.R.P ^{Note 4}		Limit
			Aux	Main	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	26/0	23.44	23.27	26.37	0.433	2.08	28.45	0.699	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
		52/37	23.52	23.25	26.40	0.436	2.08	28.48	0.704	
		106/53	23.63	23.43	26.54	0.451	2.08	28.62	0.728	
	2472	26/8	16.77	16.46	19.63	0.092	2.08	21.71	0.148	
		52/40	15.77	15.48	18.64	0.073	2.08	20.72	0.118	
		106/54	20.08	20.11	23.11	0.204	2.08	25.19	0.330	
802.11ax-HE40	2422	242/61	22.54	22.46	25.51	0.356	2.08	27.59	0.574	
	2462	242/62	25.70	25.62	28.67	0.736	2.08	30.75	1.189	
802.11be-EHT20	2412	26/0	23.79	23.35	26.59	0.456	2.08	28.67	0.736	
		52/37	23.46	23.35	26.42	0.438	2.08	28.50	0.707	
		106/53	23.44	23.41	26.44	0.440	2.08	28.52	0.710	
	2472	26/8	17.32	17.06	20.20	0.105	2.08	22.28	0.169	
		52/40	16.34	16.04	19.20	0.083	2.08	21.28	0.134	
		106/54	19.96	20.16	23.07	0.203	2.08	25.15	0.327	
802.11be-EHT40	2422	242/61	22.65	22.59	25.63	0.366	2.08	27.71	0.590	
	2462	242/62	24.18	24.49	27.35	0.543	2.08	29.43	0.877	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{2.15/10} + 10^{2/10})/2] = 2.08$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power ^{Note 2}		Directional Gain ^{Note 3} (dBi)	E.I.R.P. ^{Note 2}		Limit
		Aux	Main	(dBm)	(W)		(dBm)	(W)	
BLE (1Mbps)	2402	14.94	15.01	17.99	0.063	2.08	20.07	0.102	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2440	15.11	15.39	18.26	0.067	2.08	20.34	0.108	
	2480	15.50	15.52	18.52	0.071	2.08	20.60	0.115	
BLE (2Mbps)	2402	14.97	15.06	18.03	0.063	2.08	20.11	0.102	
	2440	15.40	15.64	18.53	0.071	2.08	20.61	0.115	
	2480	15.40	15.52	18.47	0.070	2.08	20.55	0.114	
BLE (PHY Coded S2)	2402	13.43	13.38	16.42	0.044	2.08	18.50	0.071	
	2440	13.34	13.63	16.50	0.045	2.08	18.58	0.072	
	2480	13.51	13.56	16.55	0.045	2.08	18.63	0.073	
BLE (PHY Coded S8)	2402	13.41	13.35	16.39	0.044	2.08	18.47	0.070	
	2440	13.33	13.56	16.46	0.044	2.08	18.54	0.071	
	2480	13.49	13.53	16.52	0.045	2.08	18.60	0.072	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{2.15/10} + 10^{2/10})/2] = 2.08$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.4.2 Average Output Power (Reporting only)

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Duty cycle factor (dB) $10 \log (1/x)$	Max Average Output Power		Antenna Gain (dBi)		E.I.R.P. ^{Note 2}		Limit
		Aux	Main		(dBm)	(W)	Aux	Main	(dBm)	(W)	
802.11b	2412	16.92	19.32	N/A	19.32	0.086	2.00	2.15	21.47	0.140	<30dBm (Maximum Peak Output Power)
	2417	17.24	19.48	N/A	19.48	0.089	2.00	2.15	21.63	0.146	
	2422	18.04	19.53	N/A	19.53	0.090	2.00	2.15	21.68	0.147	
	2442	19.29	19.64	N/A	19.64	0.092	2.00	2.15	21.79	0.151	
	2467	19.61	19.52	N/A	19.61	0.091	2.00	2.15	21.67	0.147	
	2472	17.51	18.31	N/A	18.31	0.068	2.00	2.15	20.46	0.111	
802.11g	2412	18.78	19.31	N/A	19.31	0.085	2.00	2.15	21.46	0.140	<36dBm (E.I.R.P.)
	2417	19.32	19.43	N/A	19.43	0.088	2.00	2.15	21.58	0.144	
	2442	19.39	19.56	N/A	19.56	0.090	2.00	2.15	21.71	0.148	
	2462	19.61	19.38	N/A	19.61	0.091	2.00	2.15	21.61	0.145	
	2467	15.23	16.05	N/A	16.05	0.040	2.00	2.15	18.20	0.066	
	2472	13.68	14.51	N/A	14.51	0.028	2.00	2.15	16.66	0.046	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Max. of Peak Output Power (AUX or Main)(dBm)+ Antenna Gain (dBi).

3. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Duty cycle factor (dB) 10 log (1/x)	Total Average Output Power ^{Note 2}		Directional Gain ^{Note 3} (dBi)	E.I.R.P ^{Note 4}		Limit
		Aux	Main		(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	17.44	17.49	N/A	20.48	0.112	2.08	22.56	0.180	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2417	19.18	19.26	N/A	22.23	0.167	2.08	24.31	0.270	
	2442	19.16	19.38	N/A	22.28	0.169	2.08	24.36	0.273	
	2462	18.71	18.42	N/A	21.58	0.144	2.08	23.66	0.232	
	2467	13.63	13.43	N/A	16.54	0.045	2.08	18.62	0.073	
	2472	12.69	12.47	N/A	15.59	0.036	2.08	17.67	0.059	
802.11n-HT40	2422	17.43	17.53	N/A	20.49	0.112	2.08	22.57	0.181	
	2427	18.27	18.37	N/A	21.33	0.136	2.08	23.41	0.219	
	2432	18.47	18.61	N/A	21.55	0.143	2.08	23.63	0.231	
	2437	18.44	18.38	N/A	21.42	0.139	2.08	23.50	0.224	
	2442	18.23	18.29	N/A	21.27	0.134	2.08	23.35	0.216	
	2447	17.58	17.65	N/A	20.63	0.115	2.08	22.71	0.186	
	2452	17.58	17.61	N/A	20.61	0.115	2.08	22.69	0.186	
	2462	12.85	12.75	N/A	15.81	0.038	2.08	17.89	0.062	
802.11ax-HE20	2412	17.37	17.39	N/A	20.39	0.109	2.08	22.47	0.177	
	2417	19.08	19.19	N/A	22.15	0.164	2.08	24.23	0.265	
	2442	19.13	19.28	N/A	22.22	0.167	2.08	24.30	0.269	
	2462	18.62	18.35	N/A	21.50	0.141	2.08	23.58	0.228	
	2467	13.49	13.37	N/A	16.44	0.044	2.08	18.52	0.071	
	2472	12.58	12.44	N/A	15.52	0.036	2.08	17.60	0.058	
802.11ax-HE40	2422	17.28	17.45	N/A	20.38	0.109	2.08	22.46	0.176	
	2427	18.11	18.26	N/A	21.20	0.132	2.08	23.28	0.213	
	2432	18.33	18.51	N/A	21.43	0.139	2.08	23.51	0.224	
	2437	18.29	18.31	N/A	21.31	0.135	2.08	23.39	0.218	
	2442	18.12	18.23	N/A	21.19	0.131	2.08	23.27	0.212	
	2447	17.39	17.52	N/A	20.47	0.111	2.08	22.55	0.180	
	2452	17.45	17.53	N/A	20.50	0.112	2.08	22.58	0.181	
	2462	12.76	12.70	N/A	15.74	0.038	2.08	17.82	0.061	
802.11be-EHT20	2412	17.34	17.36	N/A	20.36	0.109	2.08	22.44	0.175	
	2417	19.04	19.18	N/A	22.12	0.163	2.08	24.20	0.263	
	2442	19.01	19.23	N/A	22.13	0.163	2.08	24.21	0.264	
	2462	18.53	18.34	N/A	21.45	0.140	2.08	23.53	0.225	
	2467	13.49	13.35	N/A	16.43	0.044	2.08	18.51	0.071	
	2472	12.58	12.41	N/A	15.51	0.036	2.08	17.59	0.057	
802.11be-EHT40	2422	17.26	17.41	N/A	20.35	0.108	2.08	22.43	0.175	
	2427	18.16	18.27	N/A	21.23	0.133	2.08	23.31	0.214	
	2432	18.39	18.52	N/A	21.47	0.140	2.08	23.55	0.226	
	2437	18.29	18.27	N/A	21.29	0.135	2.08	23.37	0.217	
	2442	18.07	18.18	N/A	21.14	0.130	2.08	23.22	0.210	
	2447	17.44	17.54	N/A	20.50	0.112	2.08	22.58	0.181	
	2452	17.49	17.55	N/A	20.53	0.113	2.08	22.61	0.182	
	2462	12.79	12.70	N/A	15.76	0.038	2.08	17.84	0.061	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.15/10} + 10^{2./10})/2] = 2.08 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Average Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	RU Configuration	Average Output Power (dBm)		Duty cycle factor (dB) 10log (1/x)	Total Average Output Power ^{Note 2}		Directional Gain ^{Note 3} (dBi)	E.I.R.P ^{Note 4}		Limit
			Aux	Main		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	26/0	19.16	19.04	0	22.11	0.163	2.08	24.19	0.262	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
		52/37	19.34	19.21	0	22.29	0.169	2.08	24.37	0.273	
		106/53	19.33	19.23	0	22.29	0.169	2.08	24.37	0.274	
	2472	26/8	2.93	2.53	0	5.74	0.004	2.08	7.82	0.006	
		52/40	2.32	1.92	0	5.13	0.003	2.08	7.21	0.005	
		106/54	8.40	8.08	0	11.25	0.013	2.08	13.33	0.022	
802.11ax-HE40	2422	242/61	17.53	17.44	0	20.50	0.112	2.08	22.58	0.181	
	2462	242/62	12.78	12.47	0	15.64	0.037	2.08	17.72	0.059	
802.11be-EHT20	2412	26/0	19.13	19.03	0	22.09	0.162	2.08	24.17	0.261	
		52/37	19.32	19.19	0	22.27	0.168	2.08	24.35	0.272	
		106/53	19.31	19.20	0	22.27	0.168	2.08	24.35	0.272	
	2472	26/8	2.91	2.51	0	5.72	0.004	2.08	7.80	0.006	
		52/40	2.31	1.92	0	5.13	0.003	2.08	7.21	0.005	
		106/54	8.39	8.07	0	11.24	0.013	2.08	13.32	0.021	
802.11be-EHT40	2422	242/61	17.57	17.45	0	20.52	0.113	2.08	22.60	0.182	
	2462	242/62	12.77	12.47	0	15.63	0.037	2.08	17.71	0.059	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{2.15/10} + 10^{2/10})/2] = 2.08$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Average Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Duty cycle factor (dB) 10log (1/Δ)	Total Average Output Power ^{Note 2}		Directional Gain ^{Note 3} (dBi)	E.I.R.P. ^{Note 4}		Limit
		Aux	Main		(dBm)	(W)		(dBm)	(W)	
BLE (1Mbps)	2402	12.72	12.77	2.14	17.90	0.062	2.08	19.98	0.099	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2440	12.86	13.16	2.14	18.16	0.066	2.08	20.24	0.106	
	2480	13.27	13.29	2.14	18.43	0.070	2.08	20.51	0.112	
BLE (2Mbps)	2402	9.83	9.93	5.045	17.94	0.062	2.08	20.02	0.100	
	2440	10.26	10.74	5.045	18.56	0.072	2.08	20.64	0.116	
	2480	10.22	10.49	5.045	18.41	0.069	2.08	20.49	0.112	
BLE (PHY Coded S2)	2402	10.87	10.82	2.464	16.32	0.043	2.08	18.40	0.069	
	2440	10.79	11.10	2.464	16.42	0.044	2.08	18.50	0.071	
	2480	10.94	11.14	2.464	16.52	0.045	2.08	18.60	0.072	
BLE (PHY Coded S8)	2402	12.48	12.38	0.841	16.28	0.042	2.08	18.36	0.069	
	2440	12.42	12.58	0.841	16.35	0.043	2.08	18.43	0.070	
	2480	12.60	12.74	0.841	16.52	0.045	2.08	18.60	0.072	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.15/10} + 10^{2.10/10})/2] = 2.08 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).


4. E.I.R.P.= The Total Average Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.5 EMISSION LIMITATIONS

Test Date	2025/09/16~19	Temp./Hum.	23~24°C/56~62%
Cable Loss	1.50dB	Tested By	Hua Wu
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

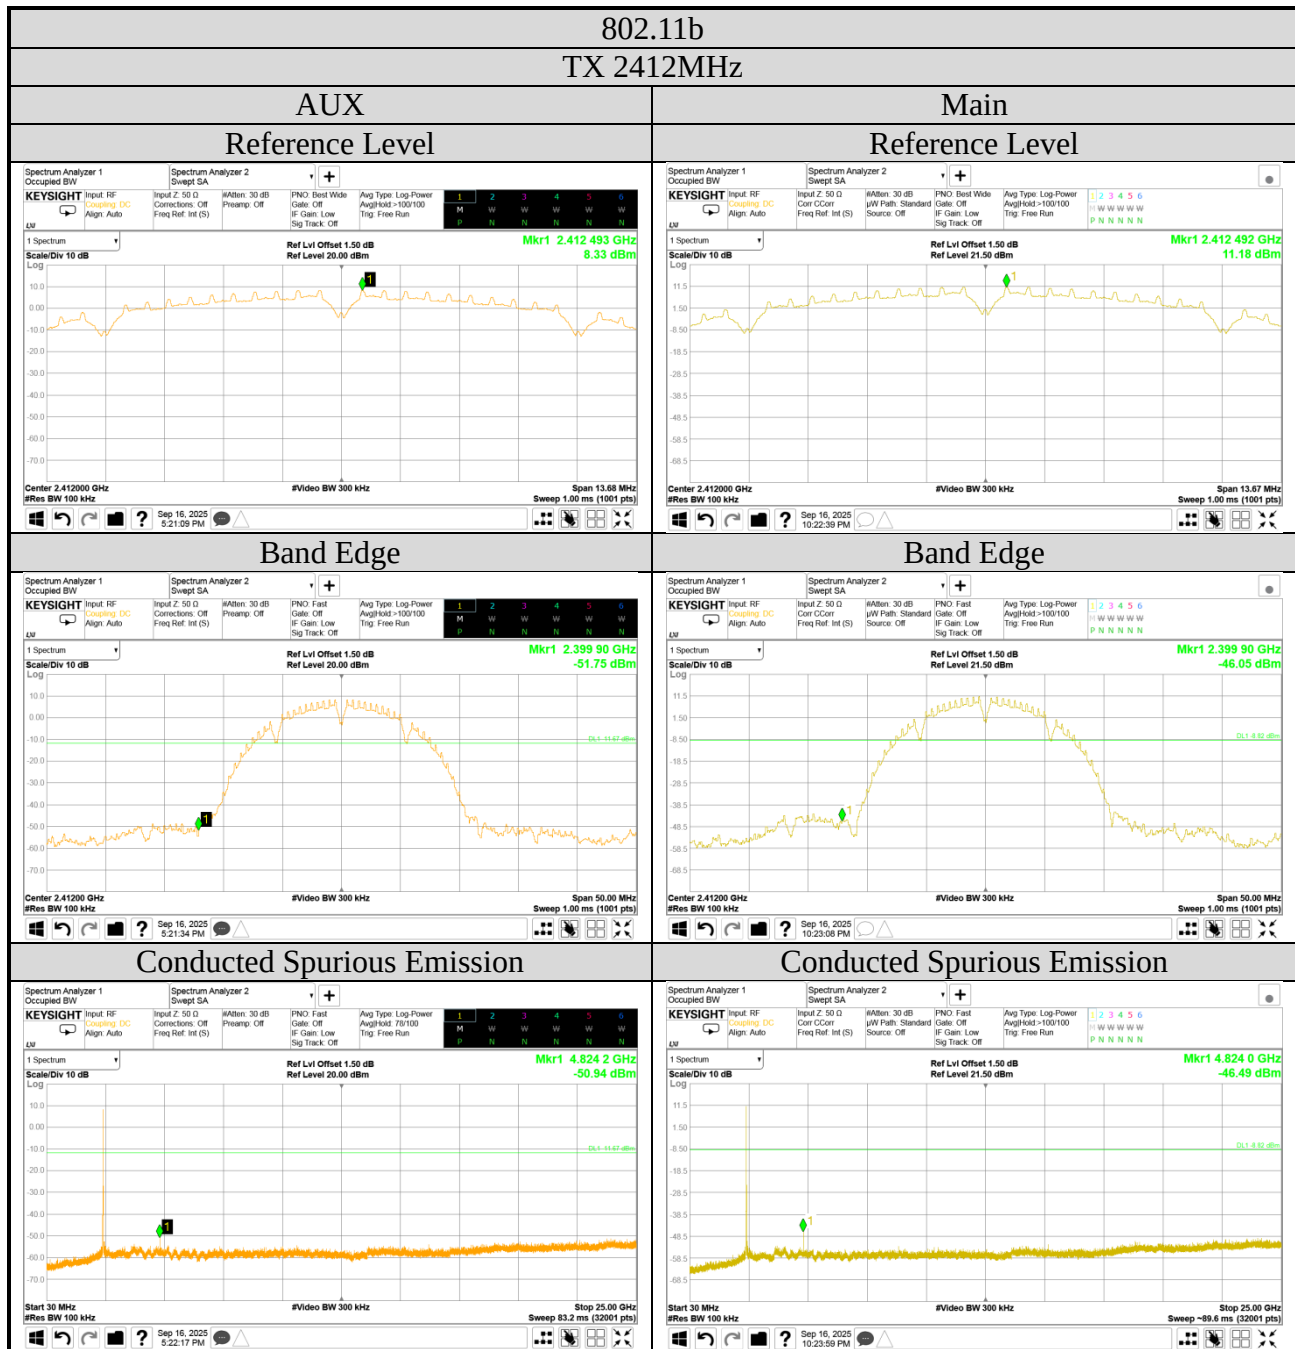

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

