

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	237
A.2.3 Emissions in Non-restricted Frequency Bands.....	280
A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH.....	281
A.3.1 Average Output Power and Emission/Occupied Bandwidth.....	281
A.3.2 Measurement Plots	307
A.4 POWER SPECTRAL DENSITY	356
A.4.1 Power Spectral Density Result	356
A.4.2 Measurement Plots	377
A.5 FREQUENCY STABILITY	404
A.5.1 Frequency stability Result	404
A.6 BAND EDGE	405

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2025/09/05	Temp./Hum.	25°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du

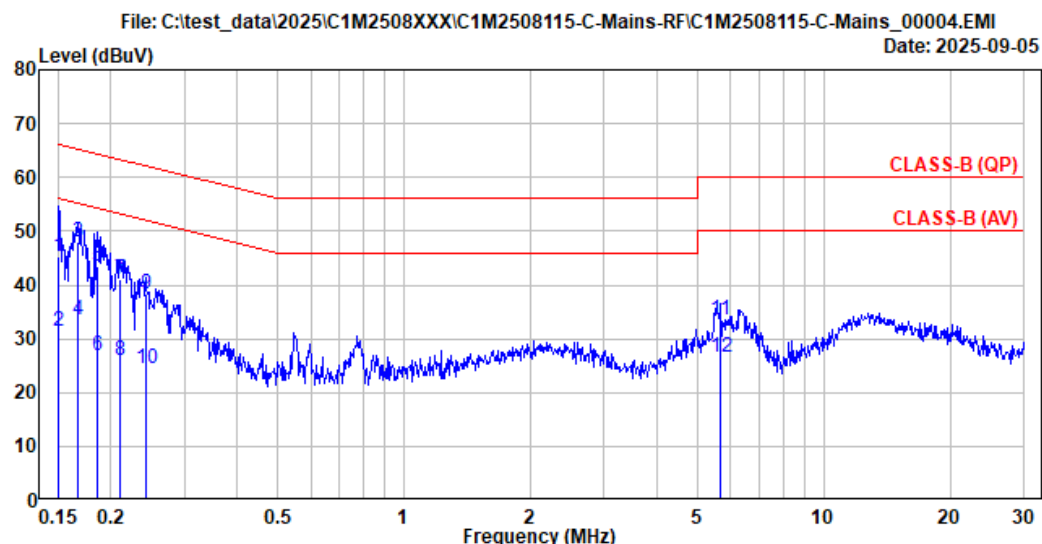

Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 25°C/52%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90U	Engineer	: Nick Du
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBUV)	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.151	10.34	0.03	9.85	25.11	45.33	65.96	20.63	QP
2	0.151	10.34	0.03	9.85	11.18	31.40	55.96	24.56	Average
3	0.167	10.33	0.03	9.85	27.72	47.93	65.09	17.16	QP
4	0.167	10.33	0.03	9.85	13.31	33.52	55.09	21.57	Average
5	0.186	10.33	0.03	9.85	23.30	43.51	64.22	20.71	QP
6	0.186	10.33	0.03	9.85	6.53	26.74	54.22	27.48	Average
7	0.211	10.32	0.03	9.85	20.90	41.10	63.18	22.08	QP
8	0.211	10.32	0.03	9.85	5.62	25.82	53.18	27.36	Average
9	0.242	10.32	0.03	9.85	18.02	38.22	62.03	23.81	QP
10	0.242	10.32	0.03	9.85	4.24	24.44	52.03	27.59	Average
11	5.677	10.49	0.10	9.87	13.07	33.53	60.00	26.47	QP
12	5.677	10.49	0.10	9.87	6.11	26.57	50.00	23.43	Average

Remarks: 1. Emission Level(dBUV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBUV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2025/09/05	Temp./Hum.	25°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du

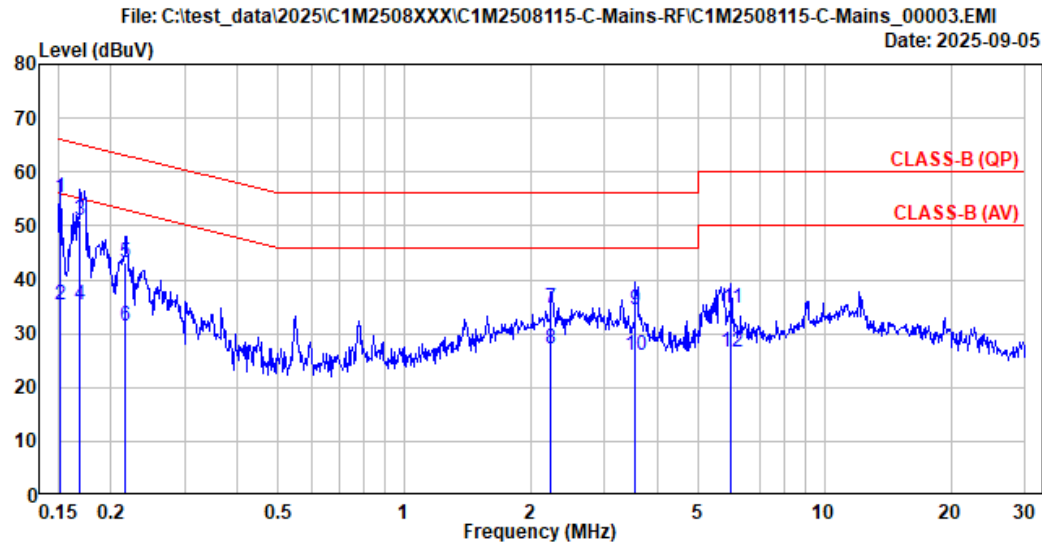

Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 25°C/52%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90U	Engineer	: Nick Du
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.34	0.03	9.85	35.12	55.34	65.92	10.58	QP
2	0.152	10.34	0.03	9.85	15.16	35.38	55.92	20.54	Average
3	0.169	10.34	0.03	9.85	30.75	50.97	65.01	14.04	QP
4	0.169	10.34	0.03	9.85	15.17	35.39	55.01	19.62	Average
5	0.217	10.33	0.03	9.85	22.82	43.03	62.94	19.91	QP
6	0.217	10.33	0.03	9.85	11.32	31.53	52.94	21.41	Average
7	2.235	10.34	0.06	9.86	14.40	34.66	56.00	21.34	QP
8	2.235	10.34	0.06	9.86	6.99	27.25	46.00	18.75	Average
9	3.553	10.36	0.08	9.86	14.09	34.39	56.00	21.61	QP
10	3.553	10.36	0.08	9.86	5.62	25.92	46.00	20.08	Average
11	5.997	10.44	0.10	9.87	14.29	34.70	60.00	25.30	QP
12	5.997	10.44	0.10	9.87	6.27	26.68	50.00	23.32	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2025/08/26~09/09	Temp./Hum.	24~26°C/51~55%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Harry Huang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.000	23.22	1.42	26.47	39.12	37.30	40.00	2.70	Peak
148.500	16.57	3.17	26.00	39.80	33.55	43.50	9.95	Peak
456.500	22.42	6.58	26.81	34.80	37.00	46.00	9.00	Peak
594.000	24.23	7.12	27.36	33.42	37.40	46.00	8.60	Peak
921.500	26.57	8.95	26.93	27.98	36.56	46.00	9.44	Peak
976.500	26.96	9.25	26.77	28.01	37.46	54.00	16.54	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.000	23.22	1.42	26.47	38.89	37.07	40.00	2.93	Peak
148.500	16.57	3.17	26.00	39.82	33.56	43.50	9.94	Peak
456.500	22.42	6.58	26.81	35.06	37.25	46.00	8.75	Peak
594.000	24.23	7.12	27.36	34.04	38.03	46.00	7.97	Peak
947.000	26.75	9.09	26.86	27.94	36.93	46.00	9.07	Peak
974.000	26.94	9.24	26.78	27.66	37.06	54.00	16.94	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

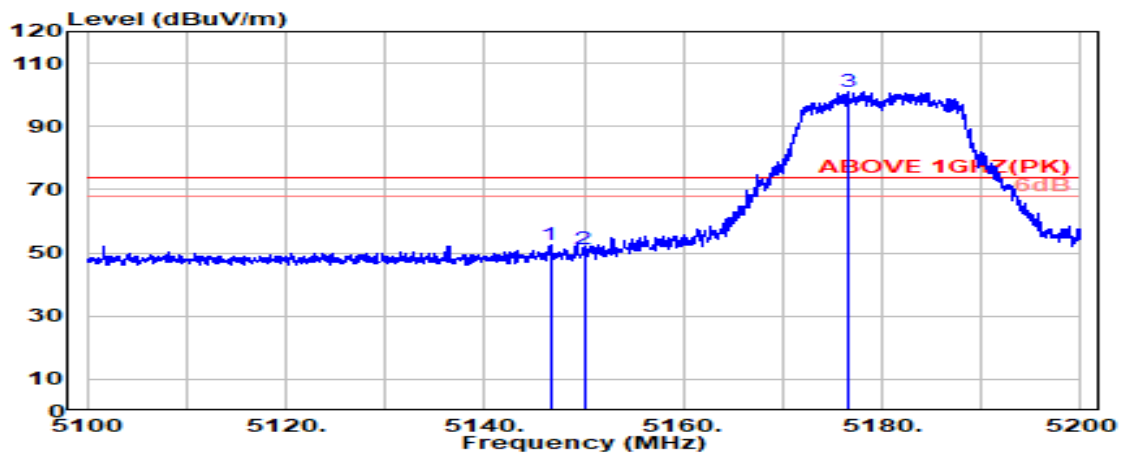

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.600	33.59	8.32	39.19	49.74	52.47	74.00	21.53	Peak
5150.000	33.60	8.33	39.19	48.28	51.02	74.00	22.98	Peak
@ 5176.500	33.60	8.36	39.19	98.30	101.06	---	---	Peak

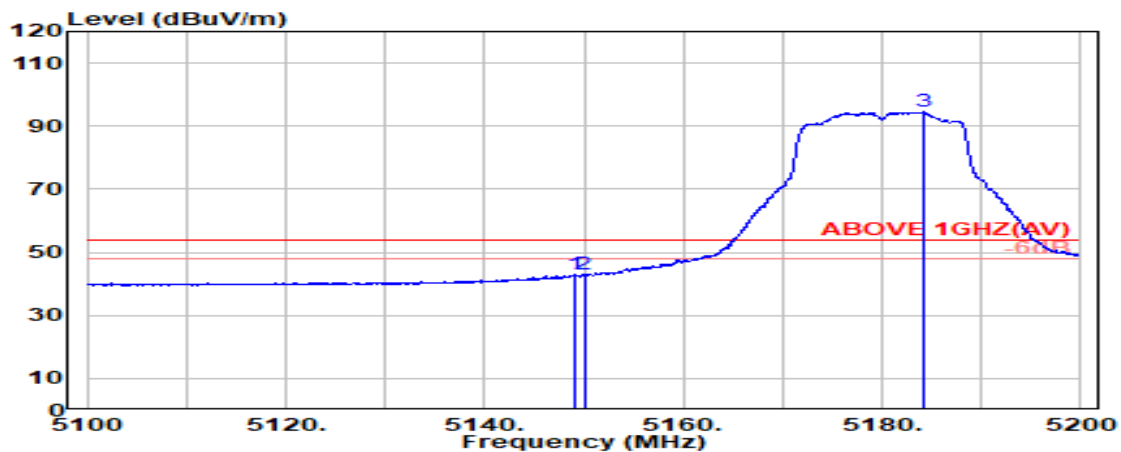


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.60	8.33	39.19	40.07	42.81	54.00	11.19	Average
5150.000	33.60	8.33	39.19	40.10	42.84	54.00	11.16	Average
@ 5184.150	33.60	8.36	39.19	91.68	94.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

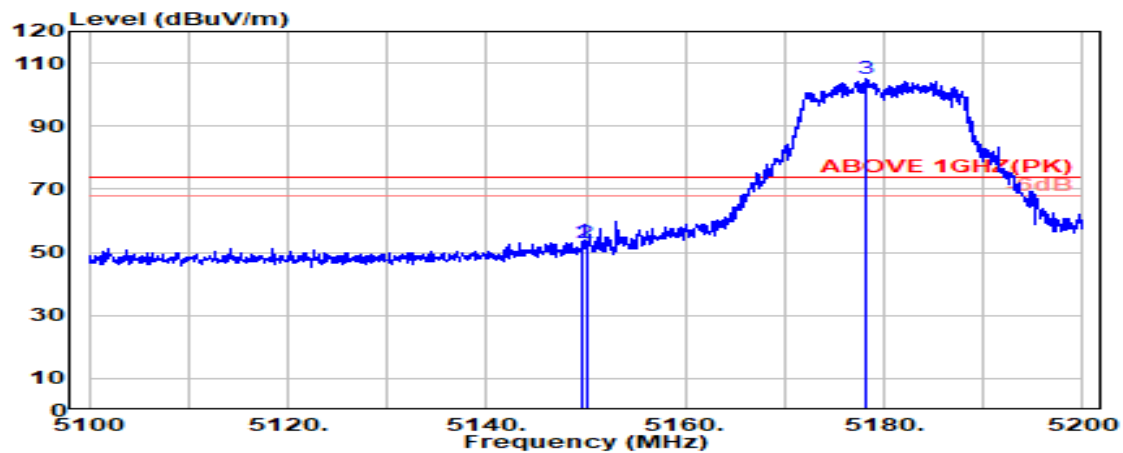

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	33.60	8.33	39.19	50.83	53.57	74.00	20.43	Peak
5150.000	33.60	8.33	39.19	50.43	53.16	74.00	20.84	Peak
@ 5178.150	33.60	8.36	39.19	102.22	104.99	---	---	Peak

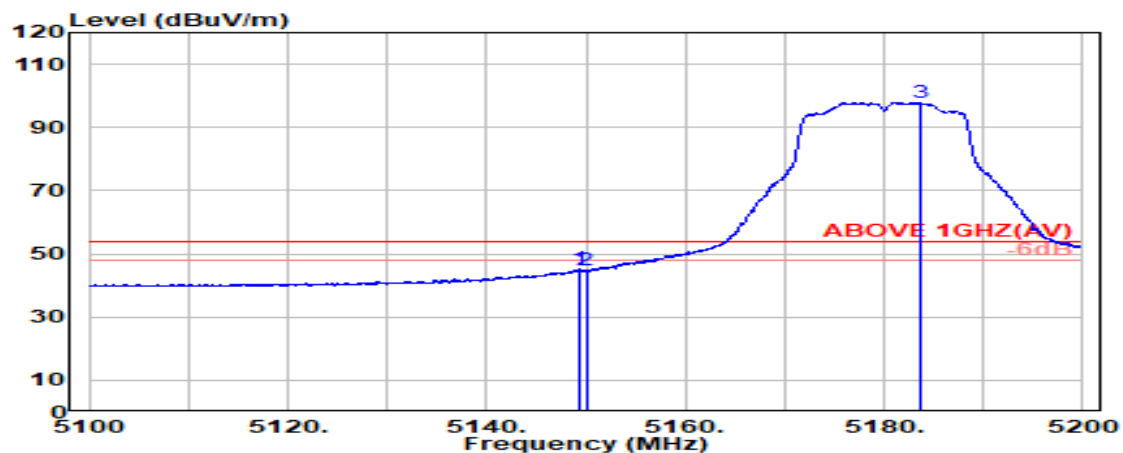

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.60	8.33	39.19	42.46	45.19	54.00	8.81	Average
5150.000	33.60	8.33	39.19	42.17	44.91	54.00	9.09	Average
@ 5183.550	33.60	8.36	39.19	95.09	97.86	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

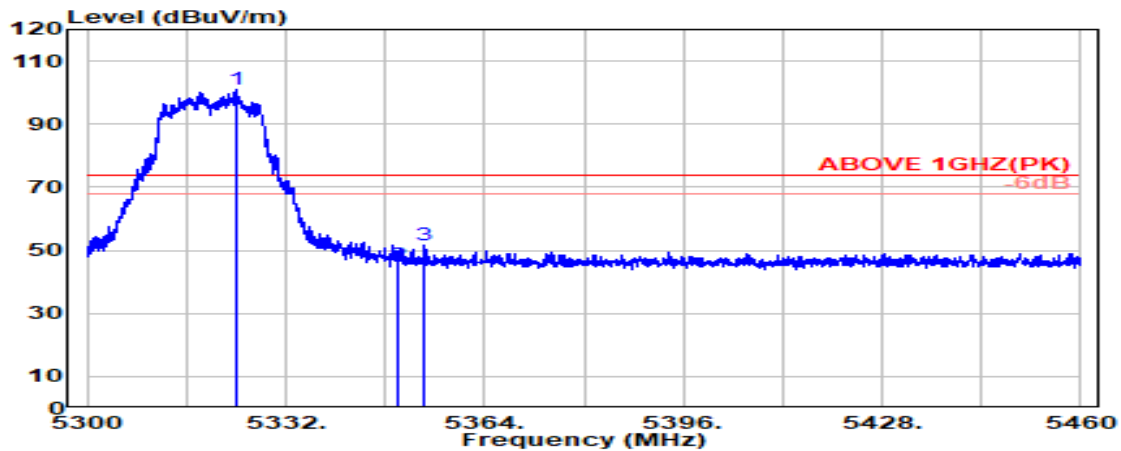

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.050	33.65	8.51	39.17	97.82	100.82	---	---	Peak
5350.000	33.70	8.54	39.17	42.11	45.18	74.00	28.82	Peak
5354.350	33.73	8.55	39.17	48.63	51.74	74.00	22.26	Peak

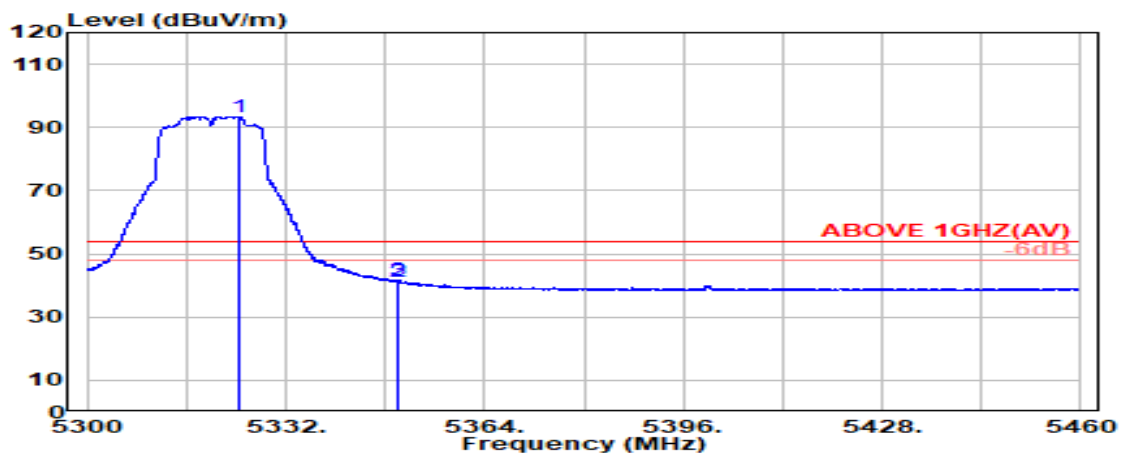

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.350	33.65	8.52	39.17	90.47	93.46	---	---	Average
5350.000	33.70	8.54	39.17	38.11	41.19	54.00	12.81	Average
5350.200	33.70	8.54	39.17	38.46	41.54	54.00	12.46	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

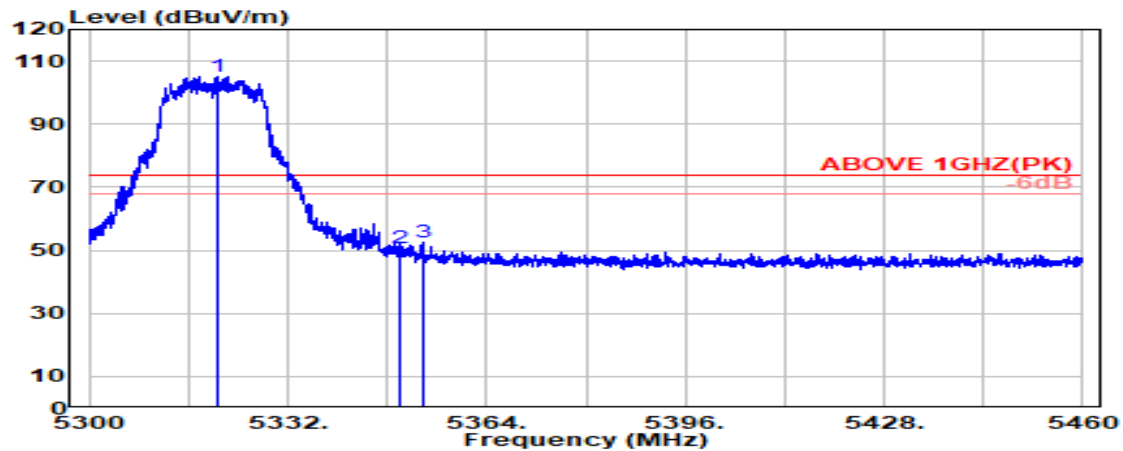

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.500	33.64	8.51	39.17	102.01	105.00	---	---	Peak
5350.000	33.70	8.54	39.17	47.82	50.90	74.00	23.10	Peak
5353.750	33.72	8.55	39.17	49.50	52.60	74.00	21.40	Peak

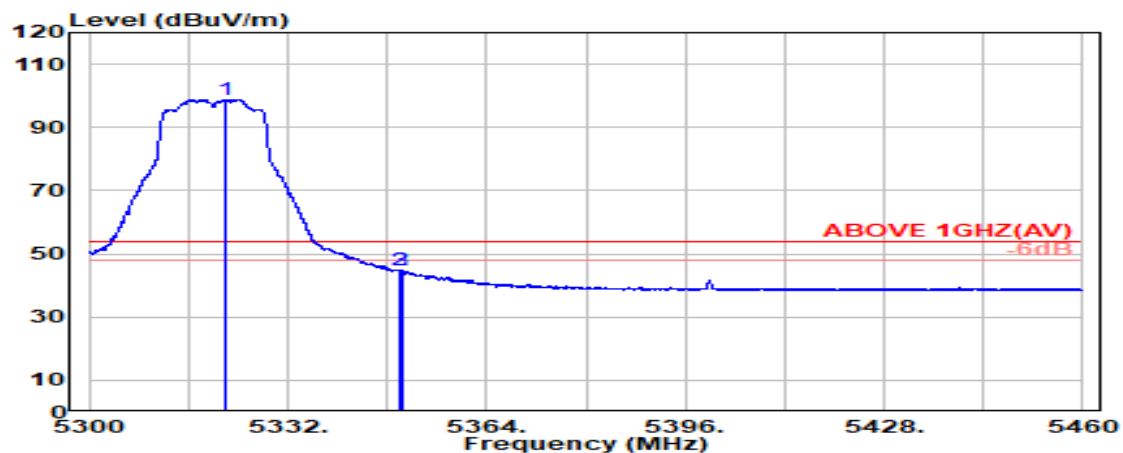

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.800	33.64	8.51	39.17	95.77	98.75	---	---	Average
5350.000	33.70	8.54	39.17	41.76	44.84	54.00	9.16	Average
5350.250	33.70	8.54	39.17	41.81	44.89	54.00	9.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

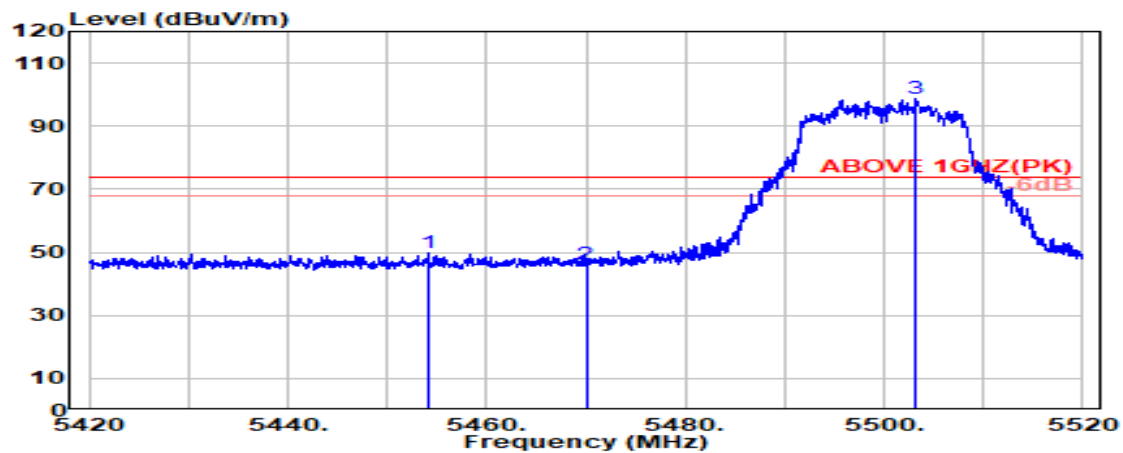

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.100	34.10	8.65	39.16	46.01	49.61	74.00	24.39	Peak
5470.000	34.10	8.67	39.15	42.74	46.36	74.00	27.64	Peak
@ 5503.150	34.09	8.70	39.15	94.98	98.63	---	---	Peak

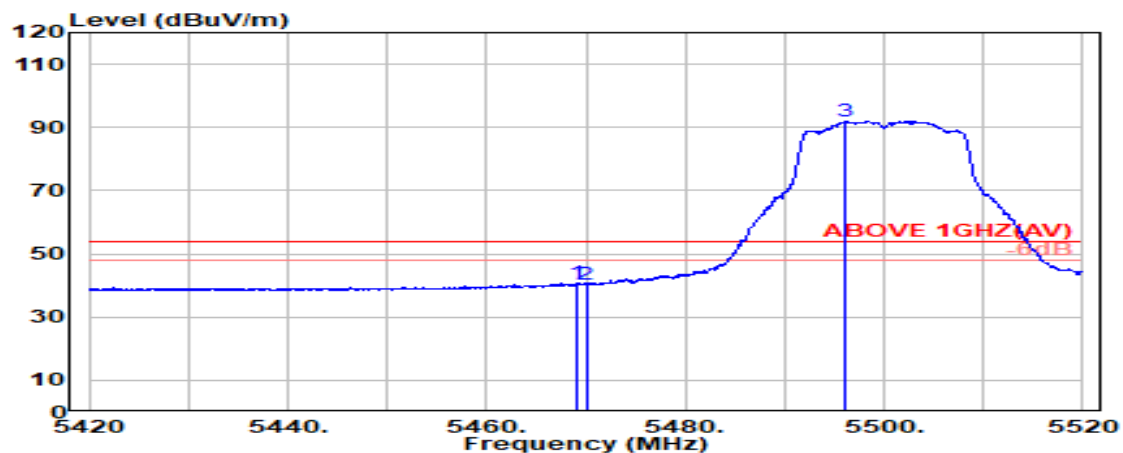


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.200	34.10	8.67	39.15	37.11	40.73	54.00	13.27	Average
5470.000	34.10	8.67	39.15	36.76	40.38	54.00	13.62	Average
@ 5496.100	34.10	8.69	39.15	88.27	91.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

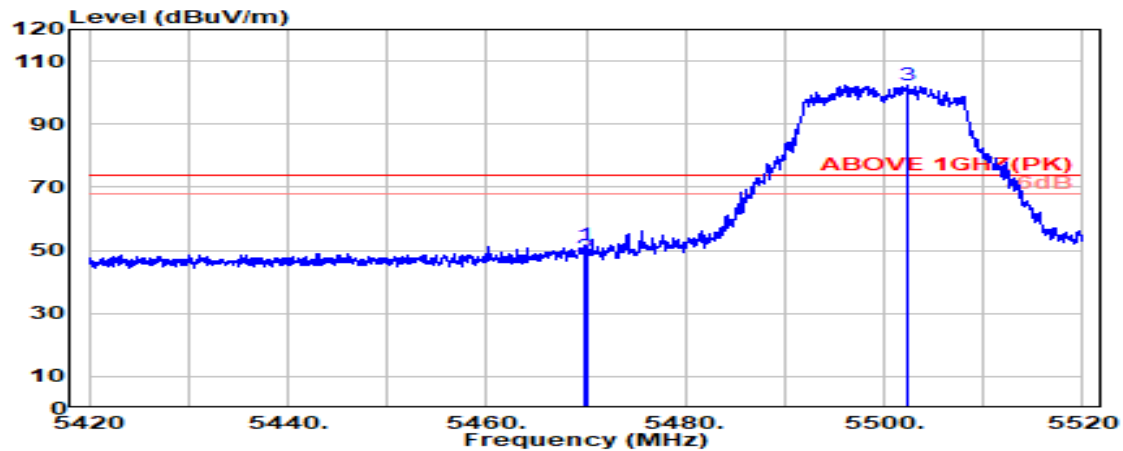

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.10	8.67	39.15	48.23	51.84	74.00	22.16	Peak
5470.000	34.10	8.67	39.15	44.53	48.14	74.00	25.86	Peak
@ 5502.300	34.10	8.70	39.15	98.65	102.29	---	---	Peak

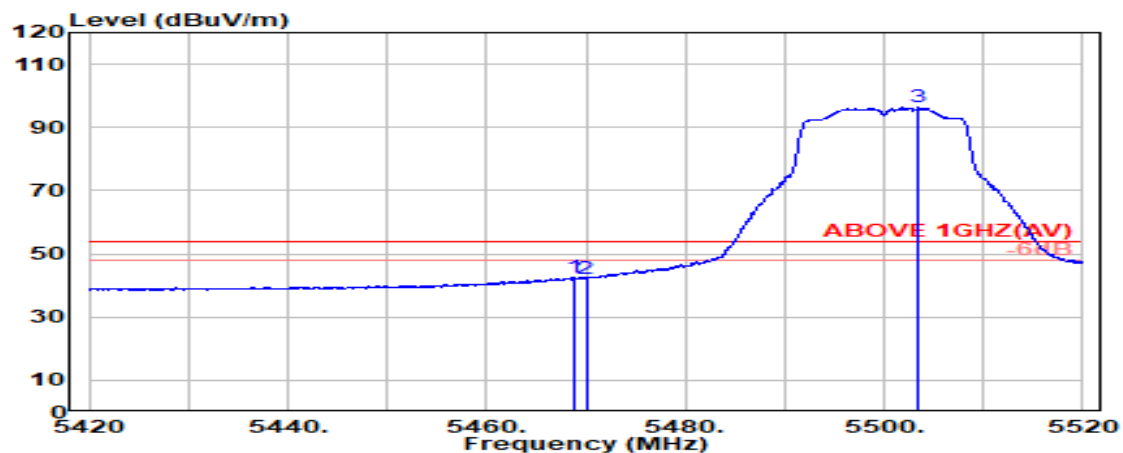


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.10	8.67	39.15	39.04	42.65	54.00	11.35	Average
5470.000	34.10	8.67	39.15	38.70	42.31	54.00	11.69	Average
@ 5503.450	34.09	8.70	39.15	92.67	96.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

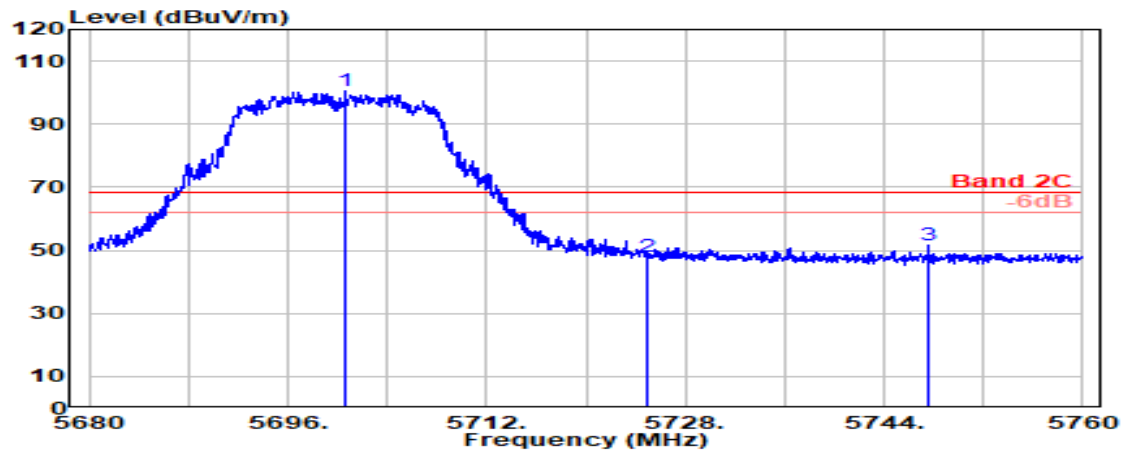

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.650	33.41	8.90	39.19	97.57	100.69	---	---	Peak
5725.000	33.60	8.92	39.20	44.67	48.00	68.20	20.20	Peak
5747.600	33.78	8.95	39.20	47.89	51.42	68.20	16.78	Peak

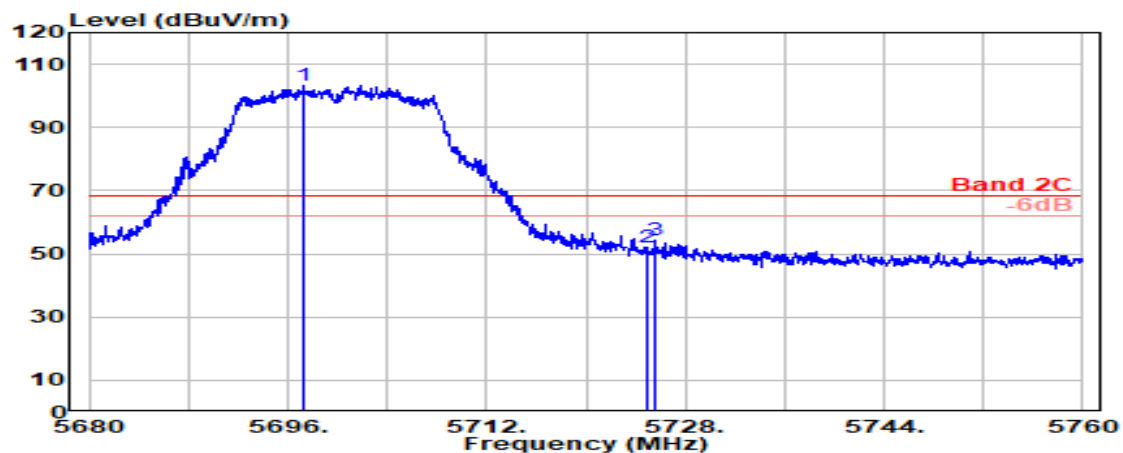


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.300	33.42	8.90	39.19	100.32	103.44	---	---	Peak
5725.000	33.60	8.92	39.20	48.60	51.93	68.20	16.27	Peak
5725.550	33.60	8.93	39.20	50.98	54.31	68.20	13.89	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

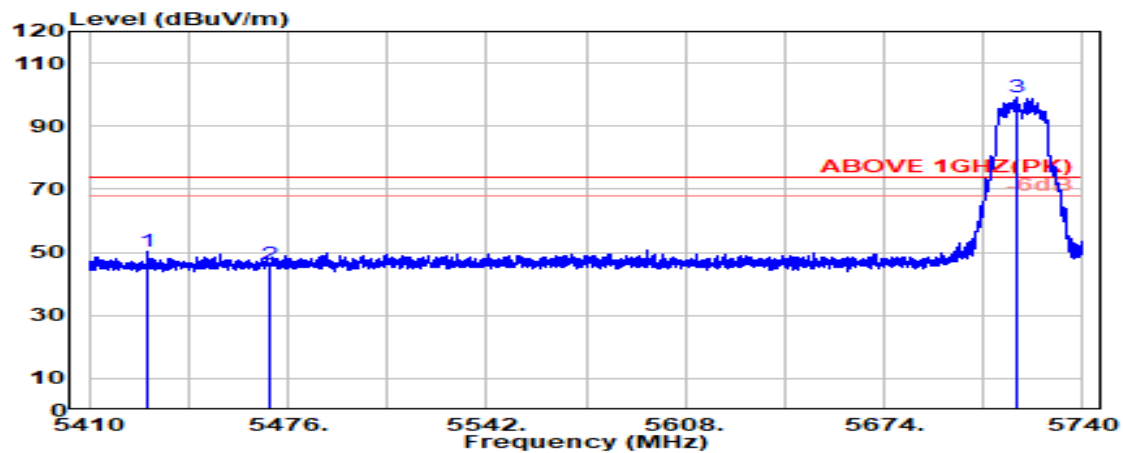

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5429.250	34.06	8.63	39.16	46.54	50.06	74.00	23.94	Peak
5470.000	34.10	8.67	39.15	42.55	46.17	74.00	27.83	Peak
@ 5718.250	33.55	8.92	39.19	95.71	98.98	---	---	Peak

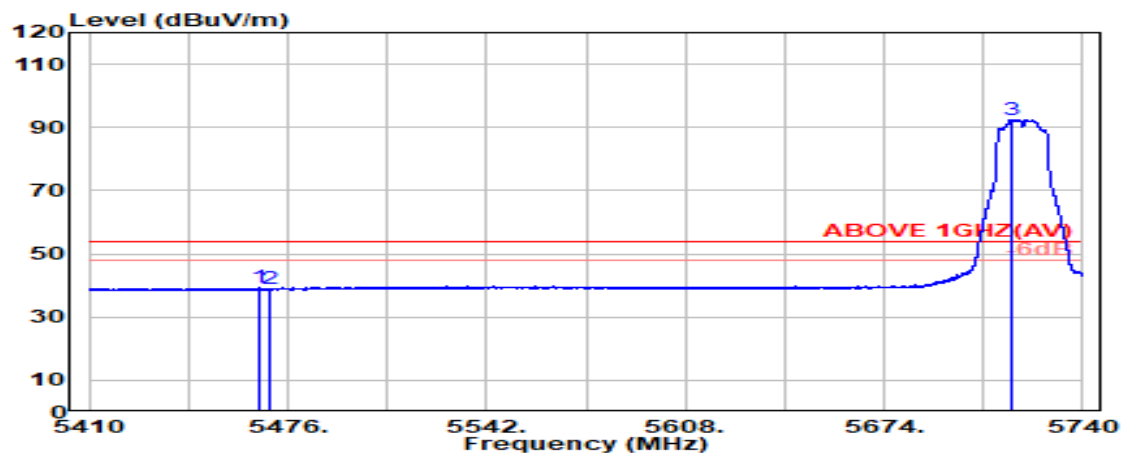


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.10	8.66	39.15	35.58	39.19	54.00	14.81	Average
5470.000	34.10	8.67	39.15	35.17	38.78	54.00	15.22	Average
@ 5716.350	33.53	8.92	39.19	89.30	92.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

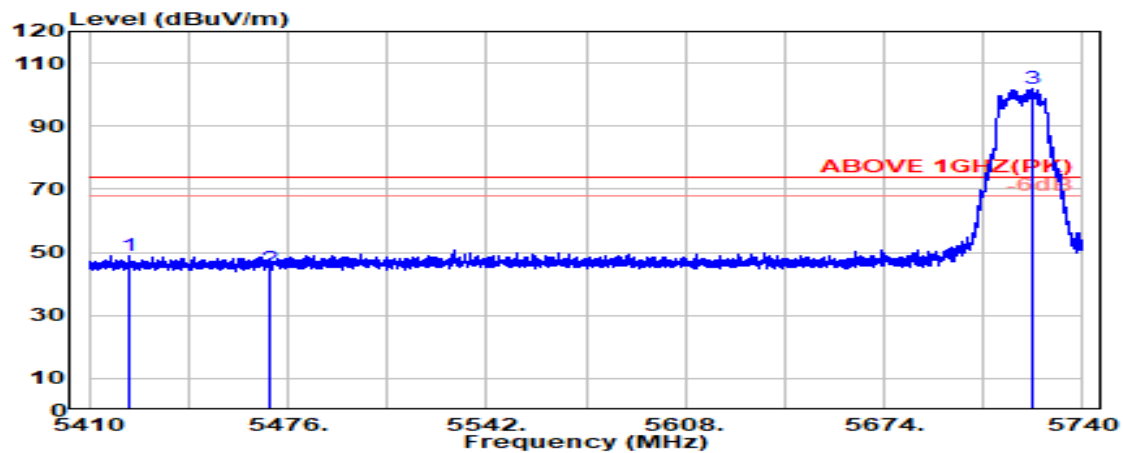

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5423.550	34.05	8.62	39.16	45.62	49.13	74.00	24.87	Peak
5470.000	34.10	8.67	39.15	41.40	45.01	74.00	28.99	Peak
@ 5723.000	33.58	8.92	39.20	98.80	102.11	---	---	Peak

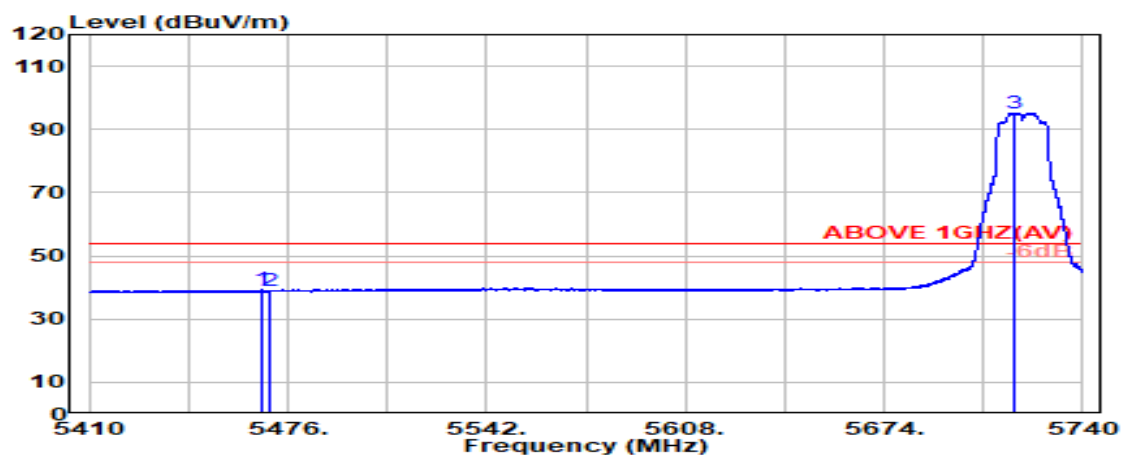


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.10	8.66	39.15	35.61	39.22	54.00	14.78	Average
5470.000	34.10	8.67	39.15	35.28	38.90	54.00	15.10	Average
@ 5717.150	33.54	8.92	39.19	91.98	95.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

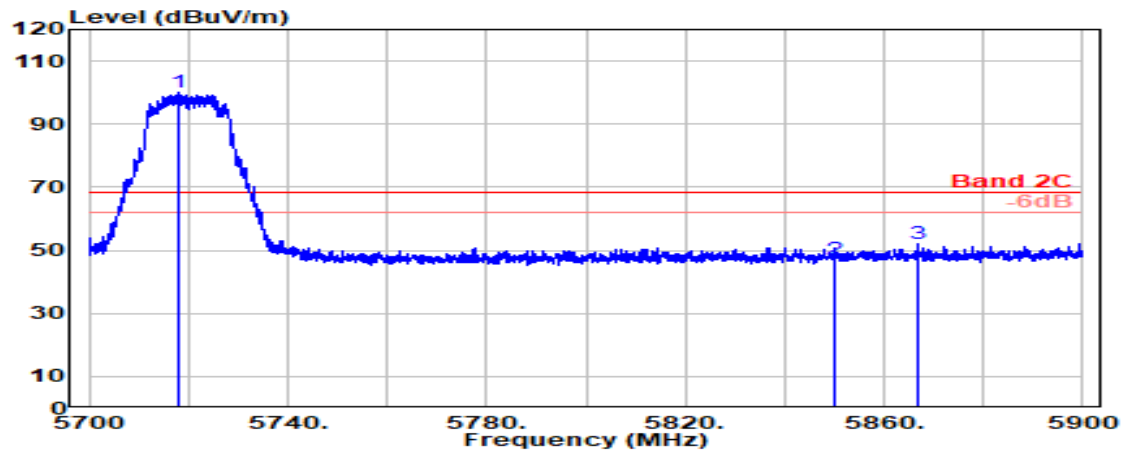

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.100	33.55	8.92	39.19	96.79	100.06	---	---	Peak
5850.000	33.90	9.05	39.22	43.32	47.04	68.20	21.16	Peak
5866.650	34.00	9.06	39.22	48.12	51.96	68.20	16.24	Peak

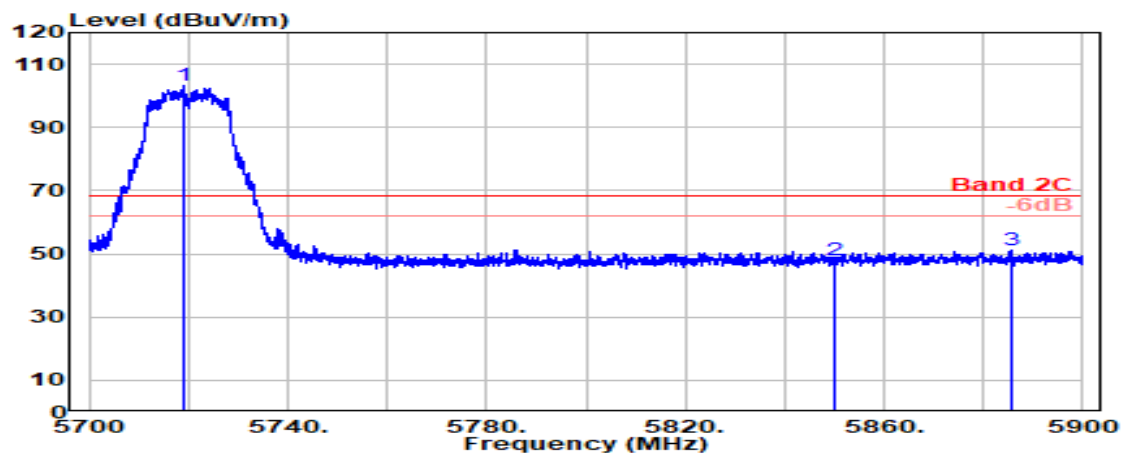

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.850	33.55	8.92	39.19	100.10	103.38	---	---	Peak
5850.000	33.90	9.05	39.22	44.24	47.97	68.20	20.23	Peak
5885.450	34.11	9.08	39.23	47.02	50.99	68.20	17.21	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

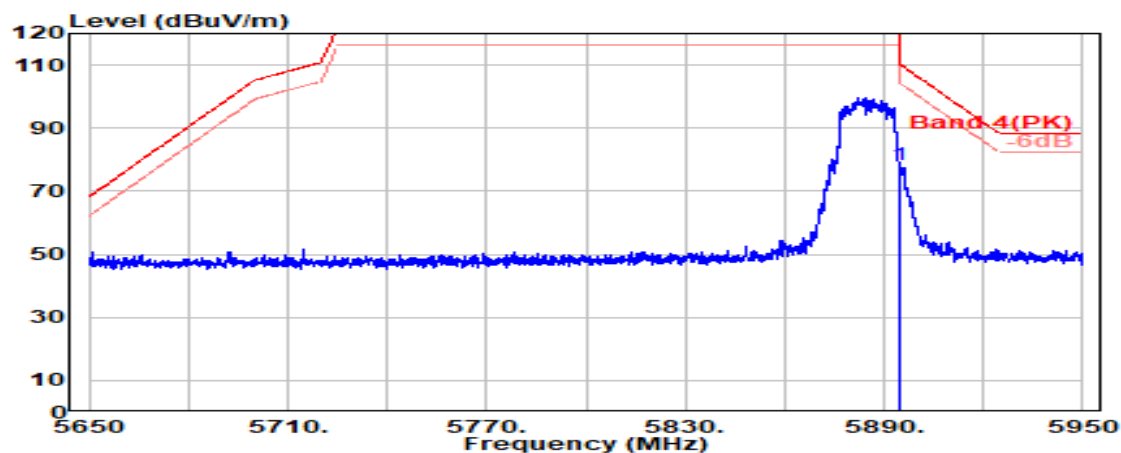

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	74.17	78.20	110.20	32.00	Peak

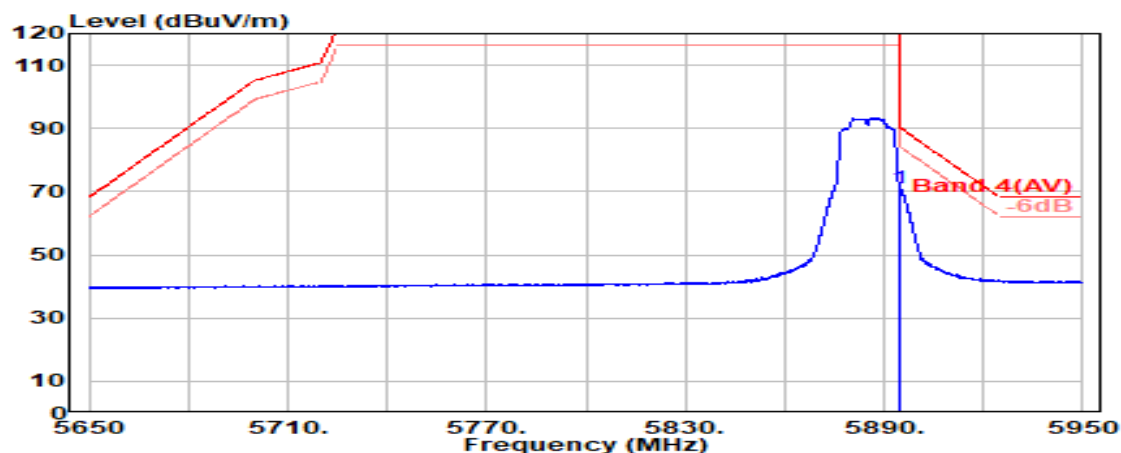

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	66.93	70.96	90.20	19.24	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

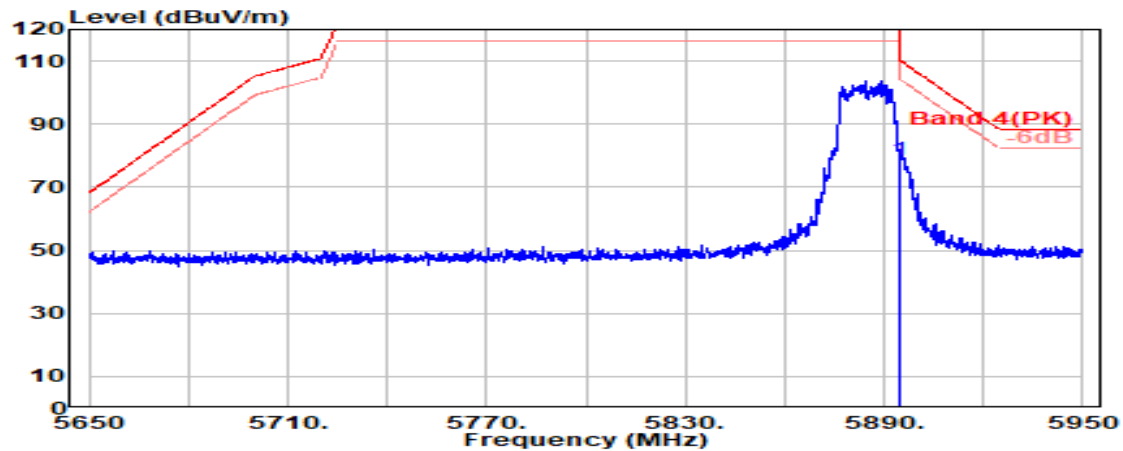

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	74.83	78.86	110.20	31.34	Peak

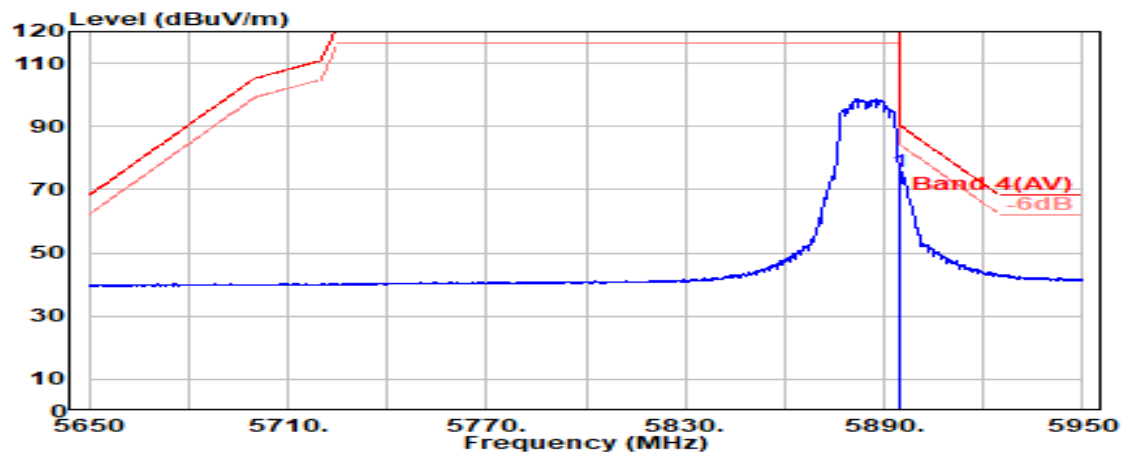


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	71.82	75.85	90.20	14.35	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

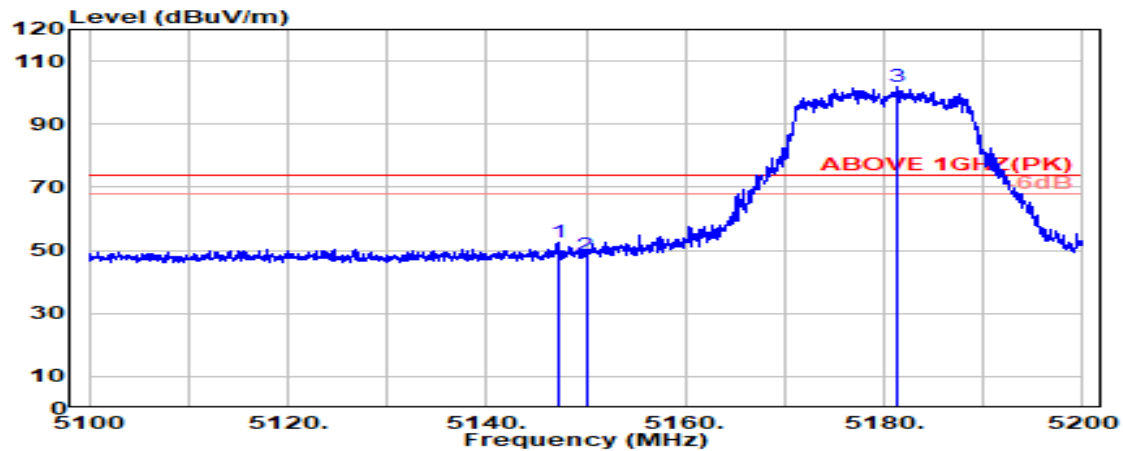

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.300	33.59	8.32	39.19	49.85	52.57	74.00	21.43	Peak
5150.000	33.60	8.33	39.19	45.82	48.56	74.00	25.44	Peak
@ 5181.400	33.60	8.36	39.19	99.12	101.89	---	---	Peak

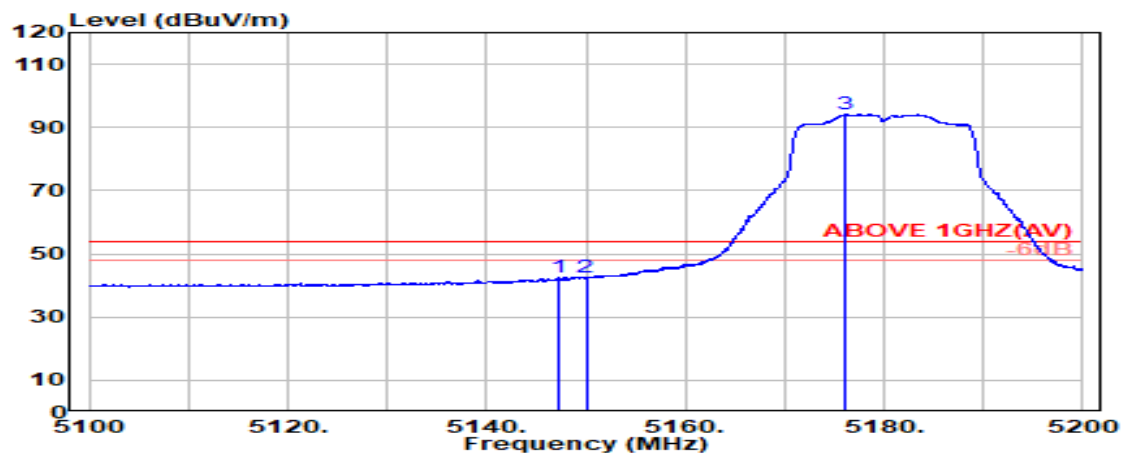


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.200	33.59	8.32	39.19	39.91	42.64	54.00	11.36	Average
5150.000	33.60	8.33	39.19	39.78	42.51	54.00	11.49	Average
@ 5176.000	33.60	8.36	39.19	91.55	94.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

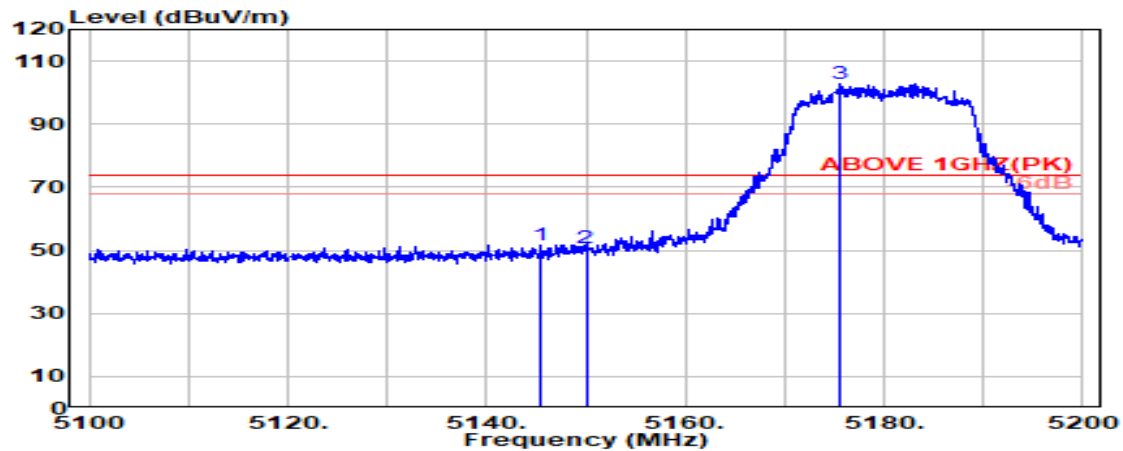

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.450	33.59	8.32	39.19	49.02	51.74	74.00	22.26	Peak
5150.000	33.60	8.33	39.19	47.90	50.63	74.00	23.37	Peak
@ 5175.650	33.60	8.36	39.19	100.22	102.98	---	---	Peak

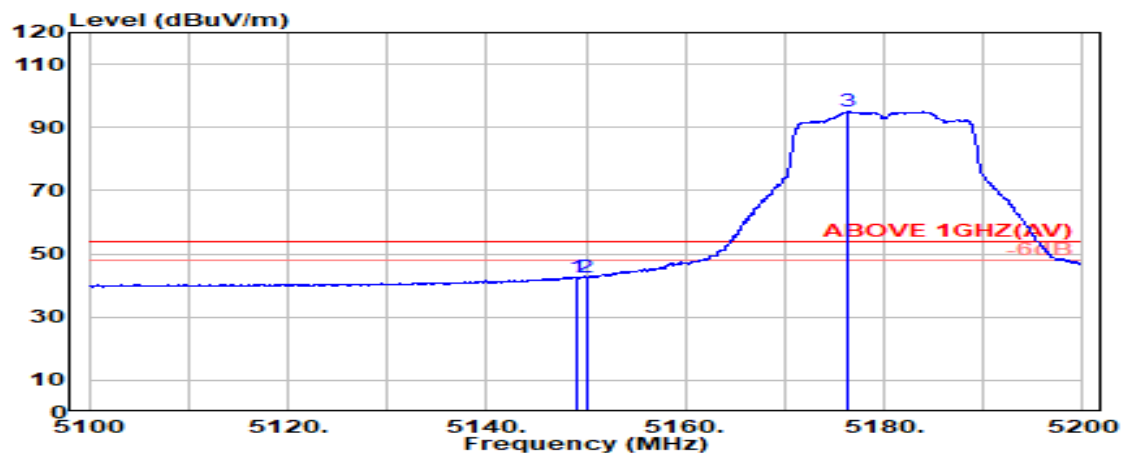

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.60	8.33	39.19	40.01	42.74	54.00	11.26	Average
5150.000	33.60	8.33	39.19	39.96	42.69	54.00	11.31	Average
@ 5176.450	33.60	8.36	39.19	92.15	94.92	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

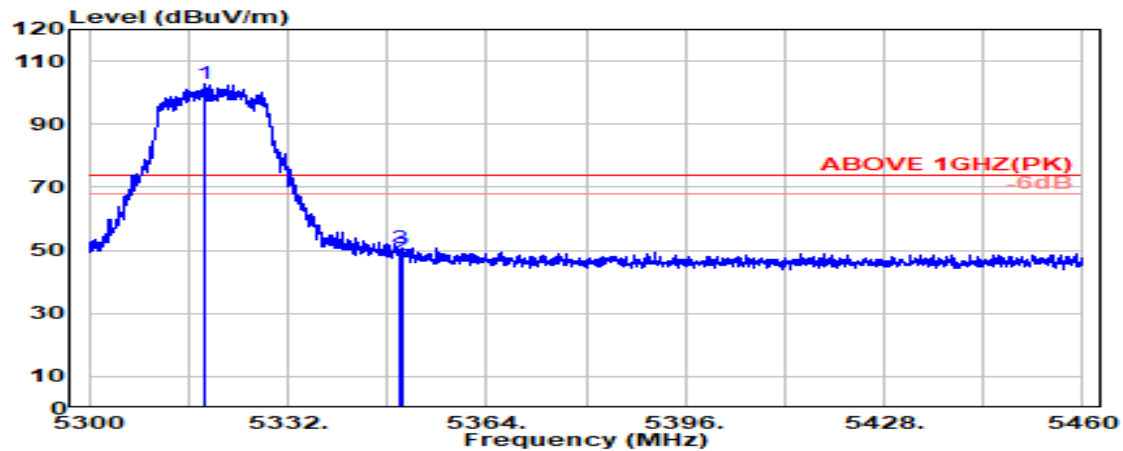

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.600	33.64	8.51	39.17	99.89	102.86	---	---	Peak
5350.000	33.70	8.54	39.17	45.47	48.54	74.00	25.46	Peak
5350.250	33.70	8.54	39.17	47.83	50.91	74.00	23.09	Peak

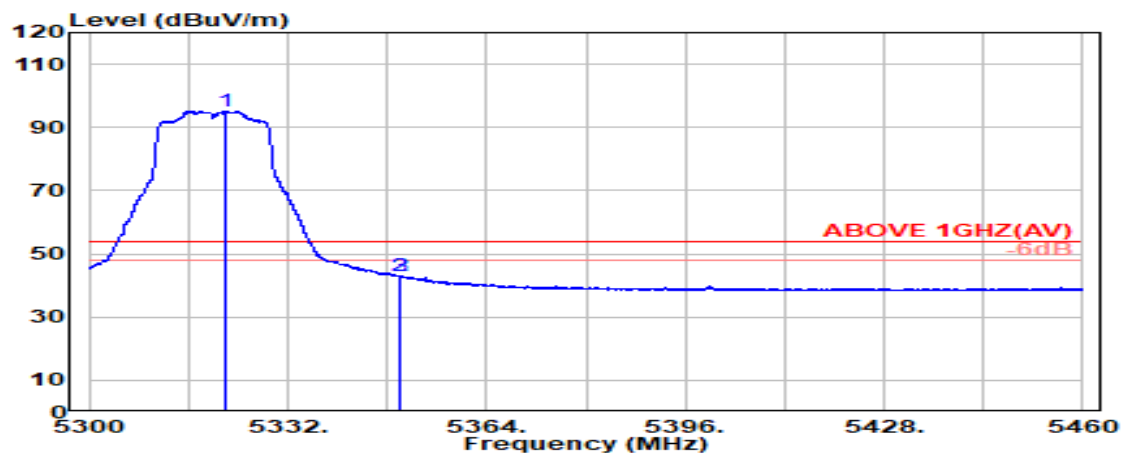

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.050	33.64	8.51	39.17	92.20	95.19	---	---	Average
5350.000	33.70	8.54	39.17	39.83	42.90	54.00	11.10	Average
5350.200	33.70	8.54	39.17	39.79	42.87	54.00	11.13	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

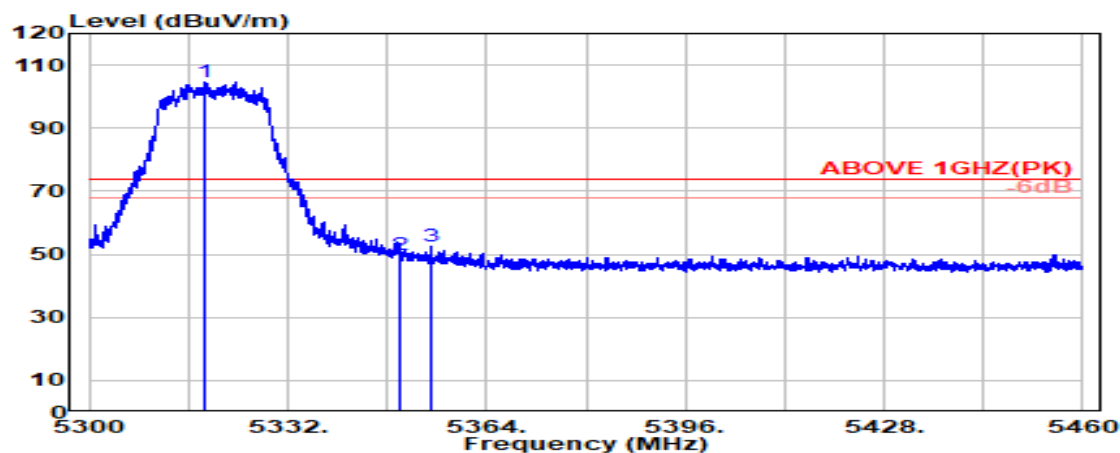

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.750	33.64	8.51	39.17	101.81	104.78	---	---	Peak
5350.000	33.70	8.54	39.17	46.67	49.75	74.00	24.25	Peak
5355.150	33.73	8.55	39.17	49.55	52.67	74.00	21.33	Peak

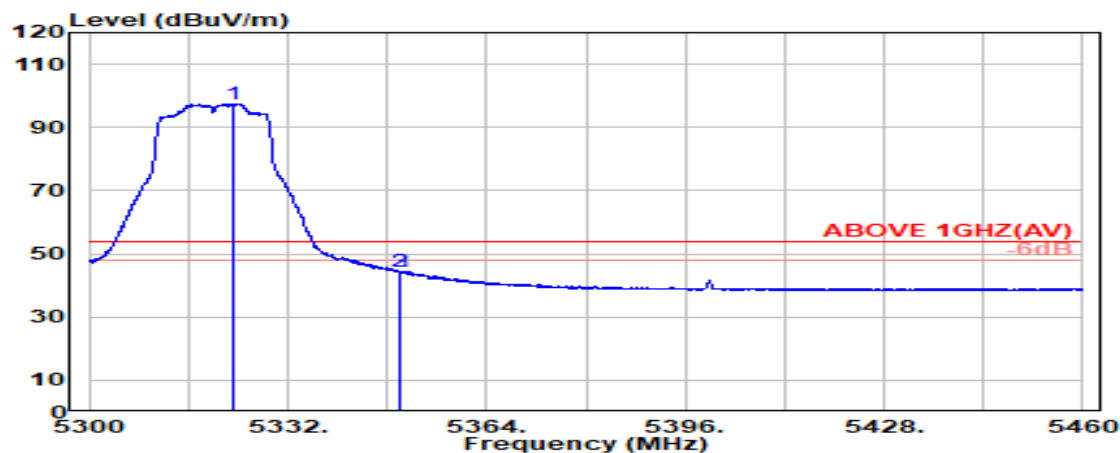

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.200	33.65	8.51	39.17	94.51	97.50	---	---	Average
5350.000	33.70	8.54	39.17	41.47	44.54	54.00	9.46	Average
5350.200	33.70	8.54	39.17	41.45	44.52	54.00	9.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

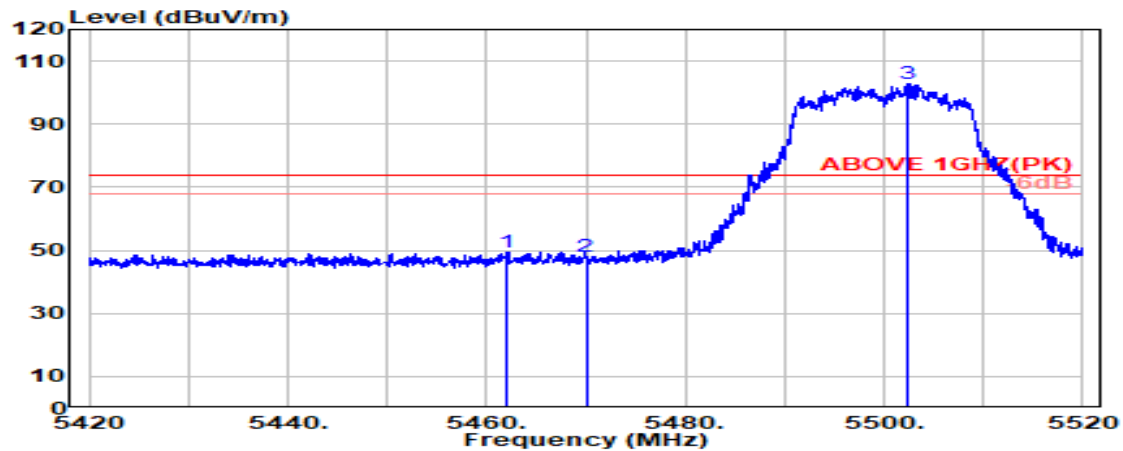

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.100	34.10	8.66	39.15	45.82	49.42	74.00	24.58	Peak
5470.000	34.10	8.67	39.15	44.46	48.08	74.00	25.92	Peak
@ 5502.250	34.10	8.70	39.15	99.18	102.83	---	---	Peak

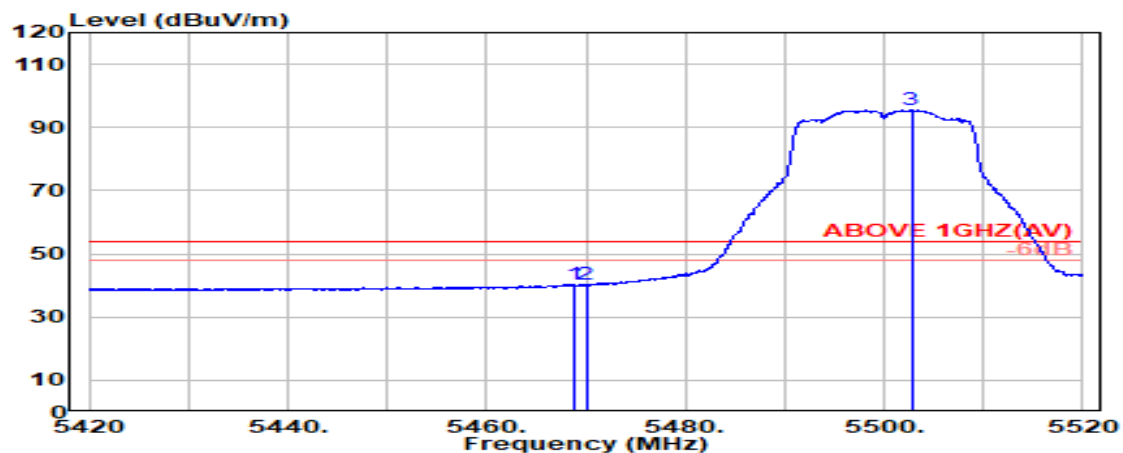


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.10	8.67	39.15	36.76	40.37	54.00	13.63	Average
5470.000	34.10	8.67	39.15	36.52	40.13	54.00	13.87	Average
@ 5502.750	34.09	8.70	39.15	91.79	95.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

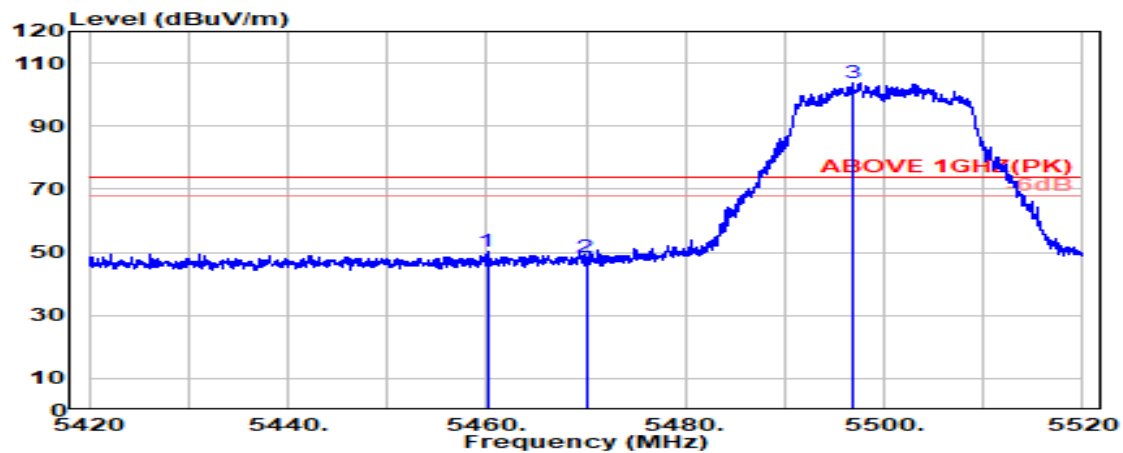

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.050	34.10	8.66	39.15	46.71	50.31	74.00	23.69	Peak
5470.000	34.10	8.67	39.15	44.92	48.53	74.00	25.47	Peak
@ 5496.750	34.10	8.70	39.15	99.99	103.63	---	---	Peak

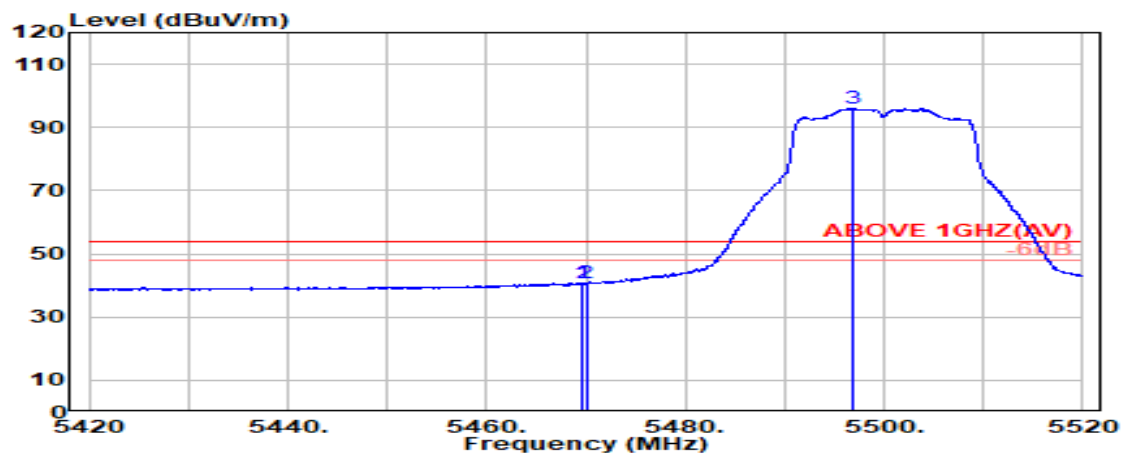

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.650	34.10	8.67	39.15	37.24	40.85	54.00	13.15	Average
5470.000	34.10	8.67	39.15	37.09	40.71	54.00	13.29	Average
@ 5496.950	34.10	8.70	39.15	92.48	96.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

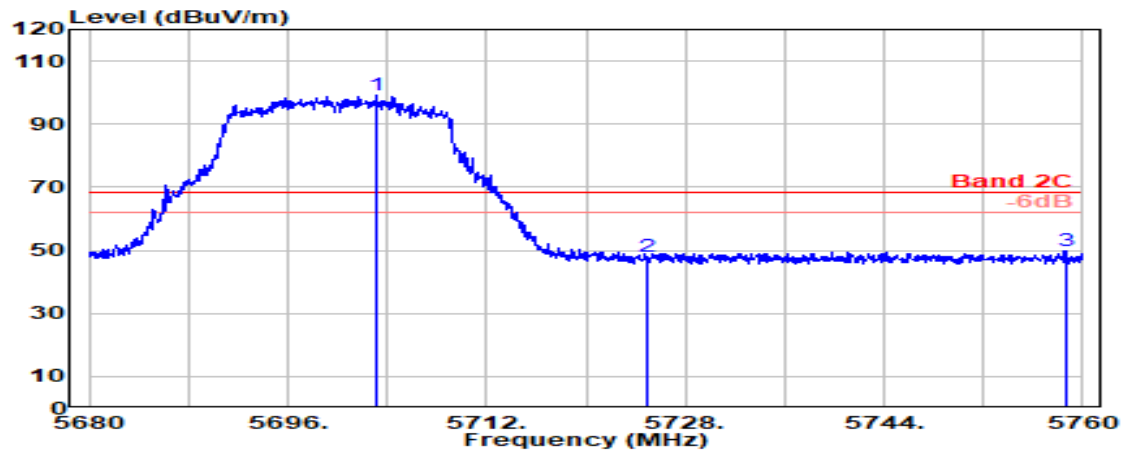

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.100	33.42	8.90	39.19	95.82	98.95	---	---	Peak
5725.000	33.60	8.92	39.20	44.88	48.21	68.20	19.99	Peak
5758.600	33.82	8.96	39.20	46.38	49.95	68.20	18.25	Peak

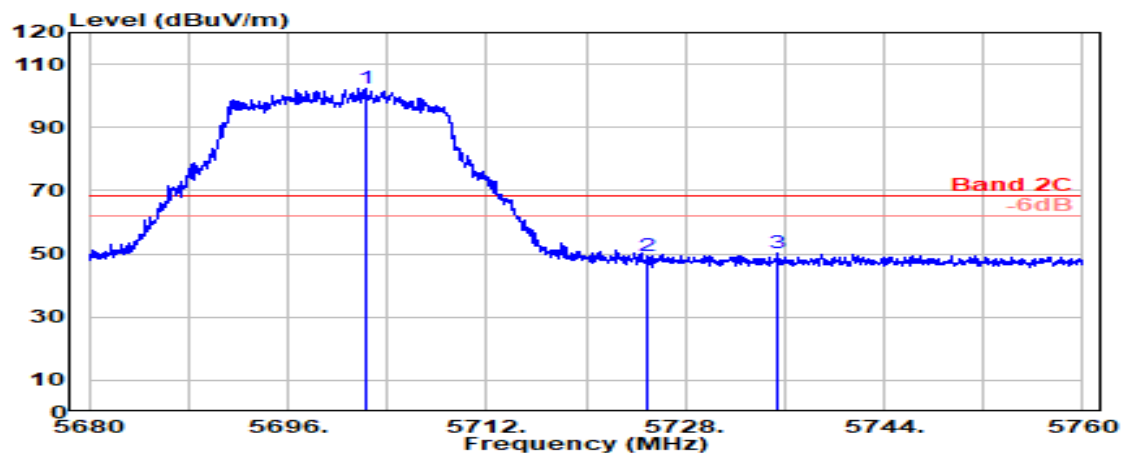

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.300	33.42	8.90	39.19	99.20	102.33	---	---	Peak
5725.000	33.60	8.92	39.20	45.94	49.27	68.20	18.93	Peak
5735.500	33.68	8.94	39.20	46.94	50.36	68.20	17.84	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

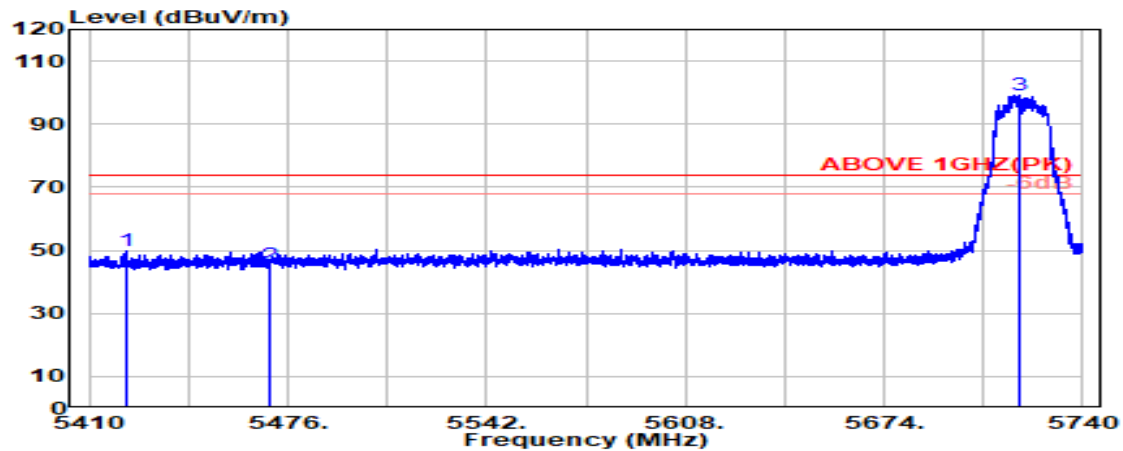

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.650	34.05	8.62	39.16	46.17	49.68	74.00	24.32	Peak
5470.000	34.10	8.67	39.15	41.84	45.46	74.00	28.54	Peak
@ 5719.100	33.55	8.92	39.19	96.01	99.29	---	---	Peak

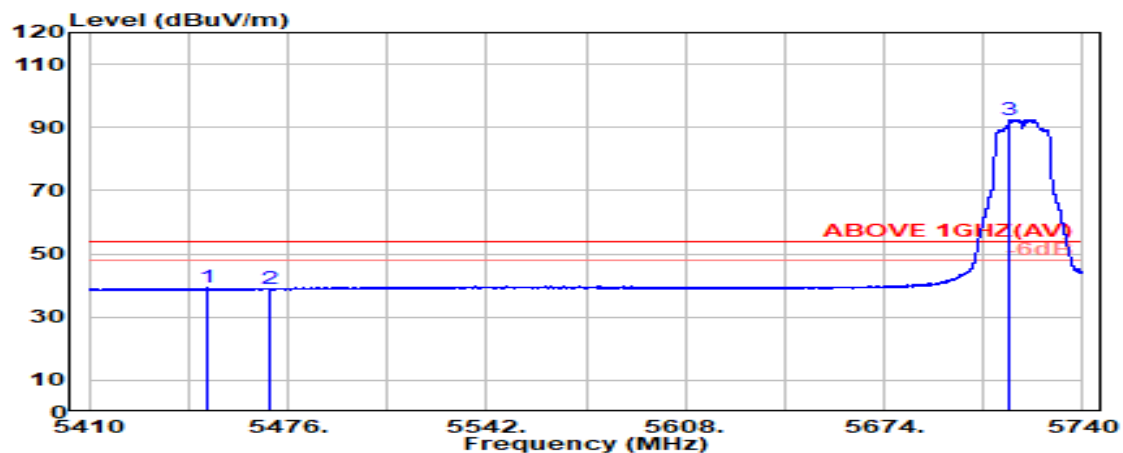

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.900	34.10	8.65	39.16	35.62	39.20	54.00	14.80	Average
5470.000	34.10	8.67	39.15	35.25	38.87	54.00	15.13	Average
@ 5715.700	33.53	8.92	39.19	89.17	92.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

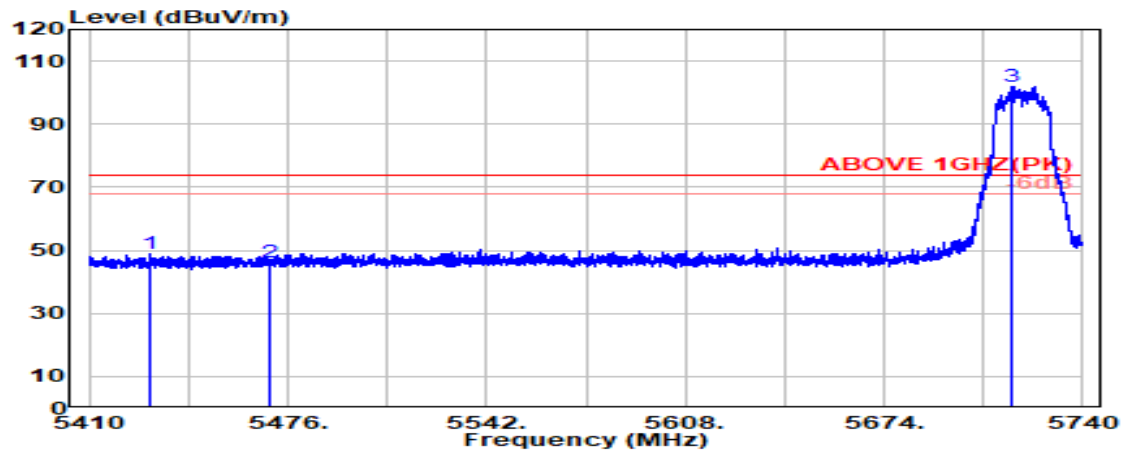

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.100	34.06	8.63	39.16	45.25	48.78	74.00	25.22	Peak
5470.000	34.10	8.67	39.15	42.57	46.18	74.00	27.82	Peak
@ 5716.550	33.53	8.92	39.19	98.75	102.00	---	---	Peak

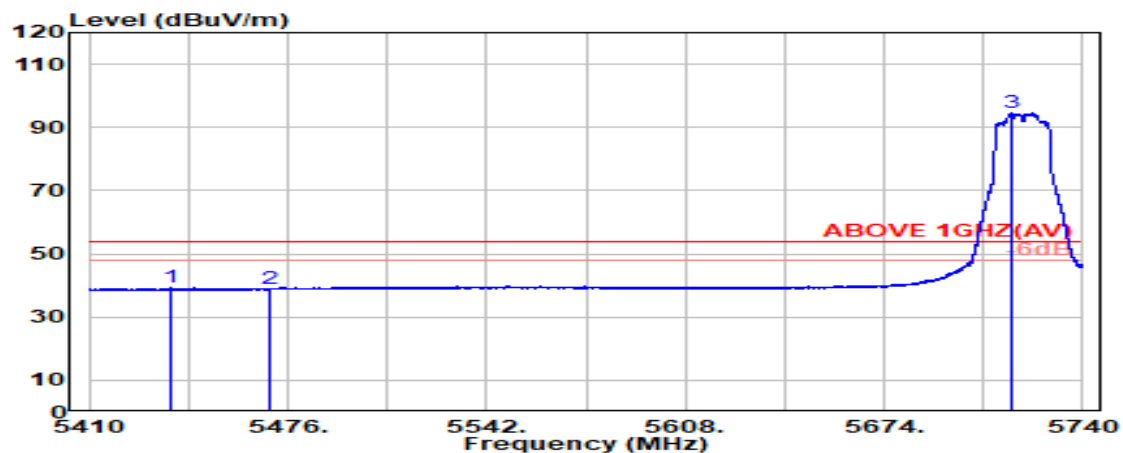

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.200	34.07	8.63	39.16	35.68	39.23	54.00	14.77	Average
5470.000	34.10	8.67	39.15	35.21	38.83	54.00	15.17	Average
@ 5716.500	33.53	8.92	39.19	91.29	94.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

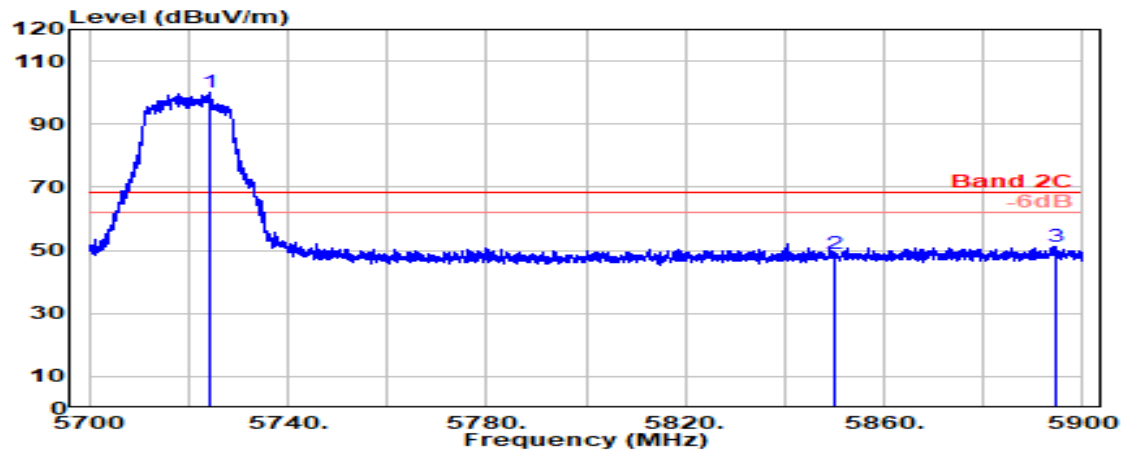

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.100	33.59	8.92	39.20	96.72	100.04	---	---	Peak
5850.000	33.90	9.05	39.22	45.01	48.74	68.20	19.46	Peak
5894.400	34.17	9.09	39.23	47.35	51.38	68.20	16.82	Peak

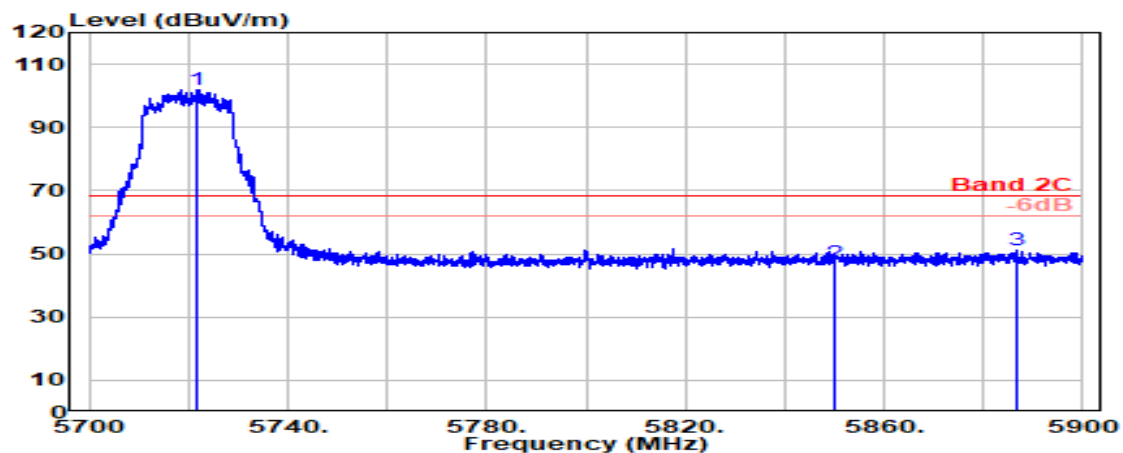

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.700	33.57	8.92	39.20	98.56	101.86	---	---	Peak
5850.000	33.90	9.05	39.22	43.23	46.95	68.20	21.25	Peak
5886.500	34.12	9.08	39.23	47.06	51.04	68.20	17.16	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

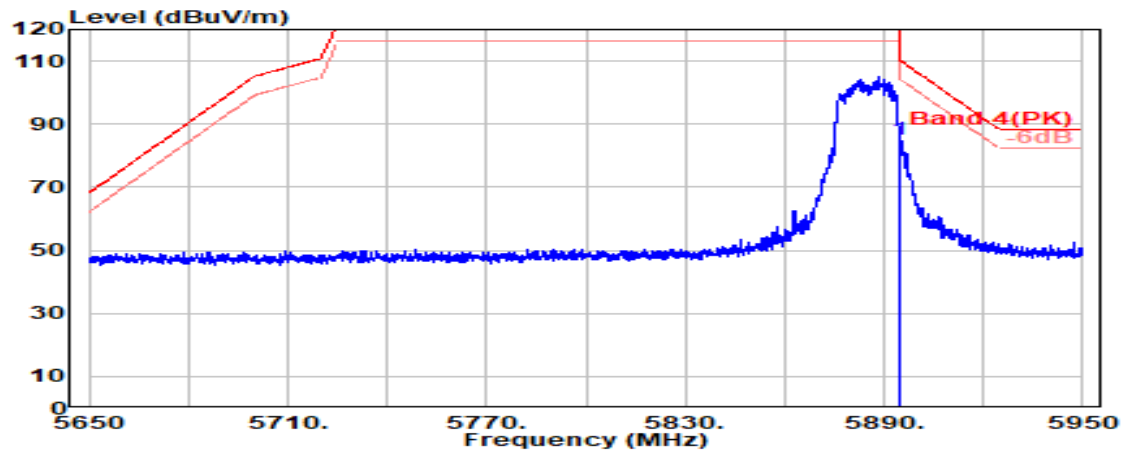

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	80.99	85.02	110.20	25.18	Peak

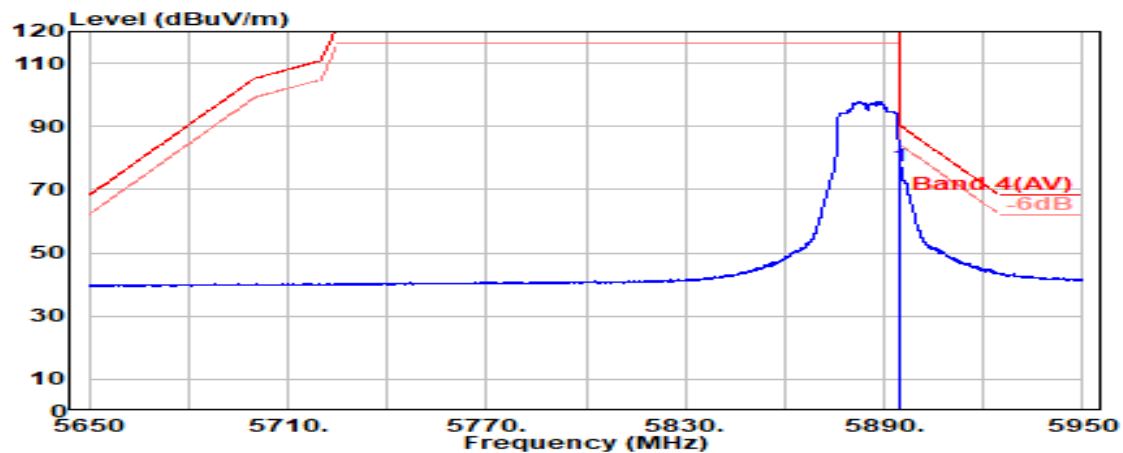


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	73.22	77.25	90.20	12.95	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

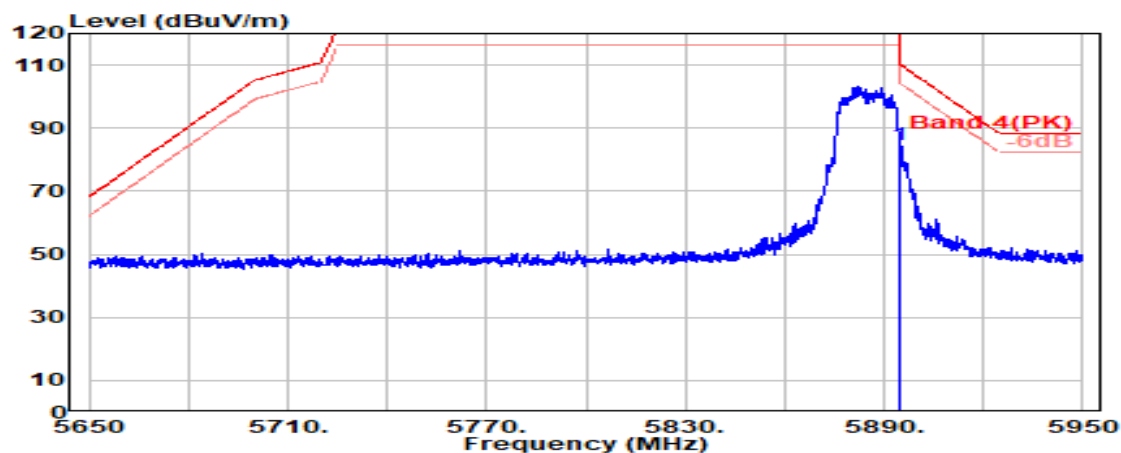

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	80.66	84.70	110.20	25.50	Peak

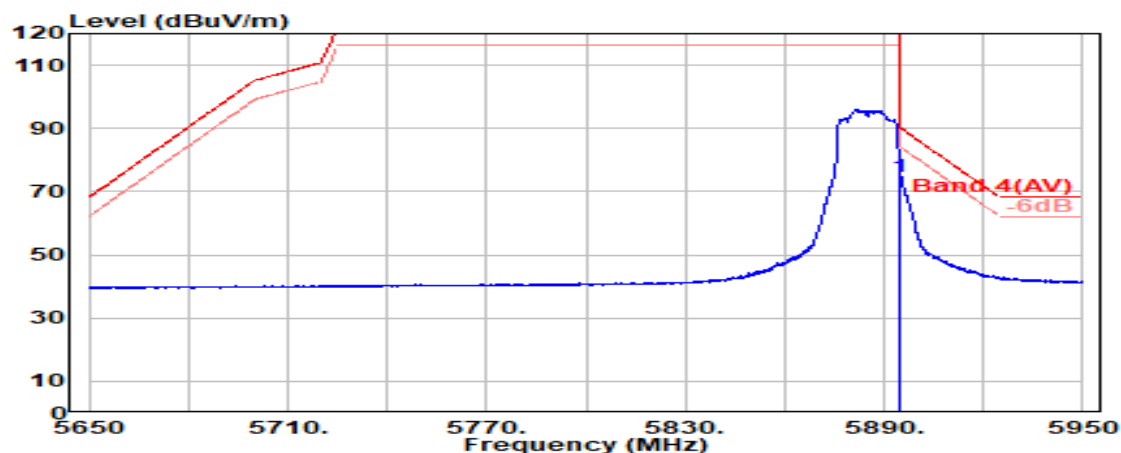


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	70.68	74.71	90.20	15.49	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

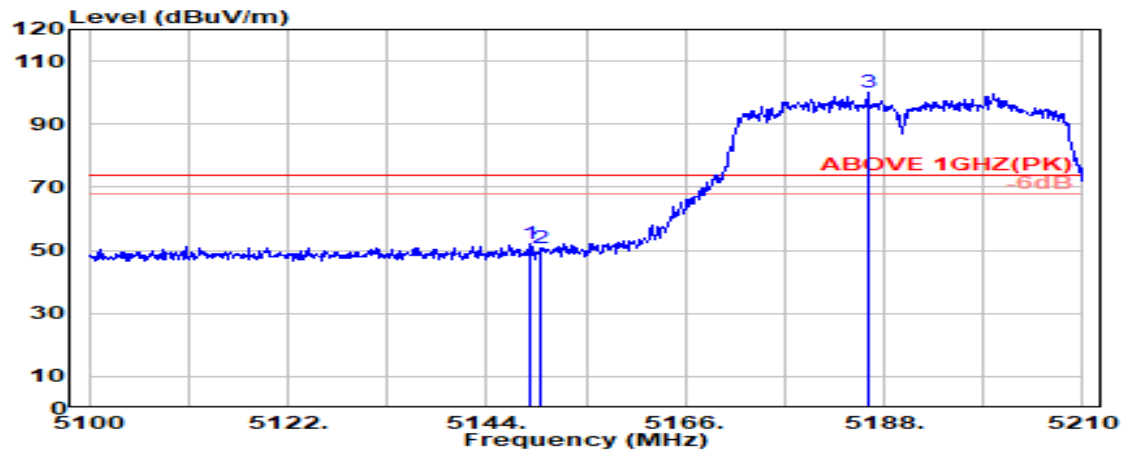

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.840	33.60	8.33	39.19	49.54	52.28	74.00	21.72	Peak
5150.000	33.60	8.33	39.19	47.78	50.52	74.00	23.48	Peak
@ 5186.240	33.60	8.37	39.19	97.51	100.29	---	---	Peak

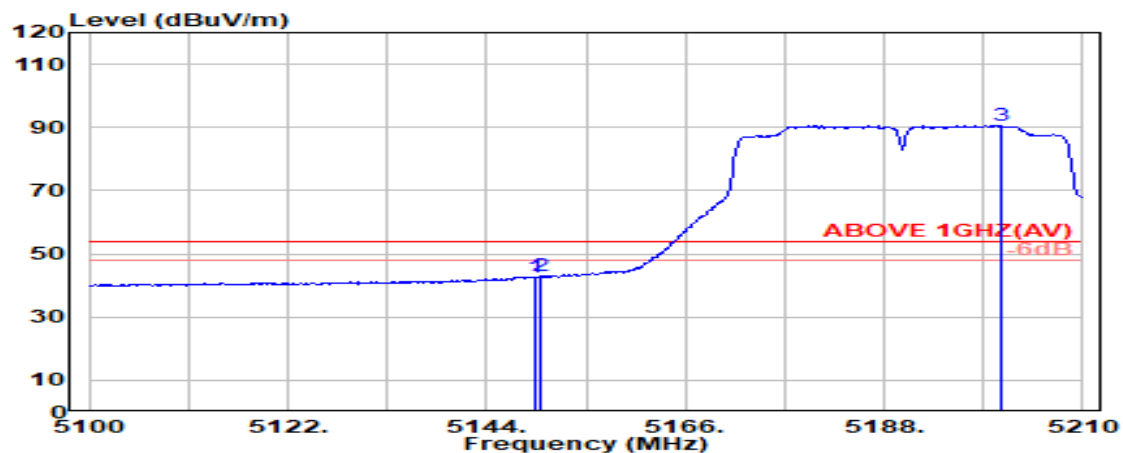

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	33.60	8.33	39.19	39.99	42.72	54.00	11.28	Average
5150.000	33.60	8.33	39.19	40.11	42.85	54.00	11.15	Average
@ 5200.980	33.60	8.38	39.19	87.80	90.60	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

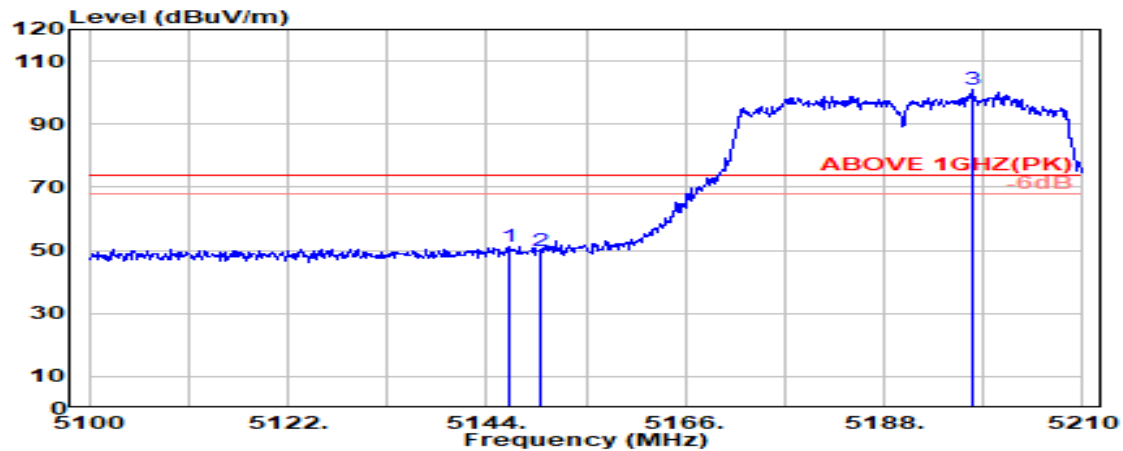

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.530	33.59	8.32	39.19	48.58	51.31	74.00	22.69	Peak
5150.000	33.60	8.33	39.19	47.25	49.99	74.00	24.01	Peak
@ 5197.680	33.60	8.38	39.19	98.27	101.06	---	---	Peak

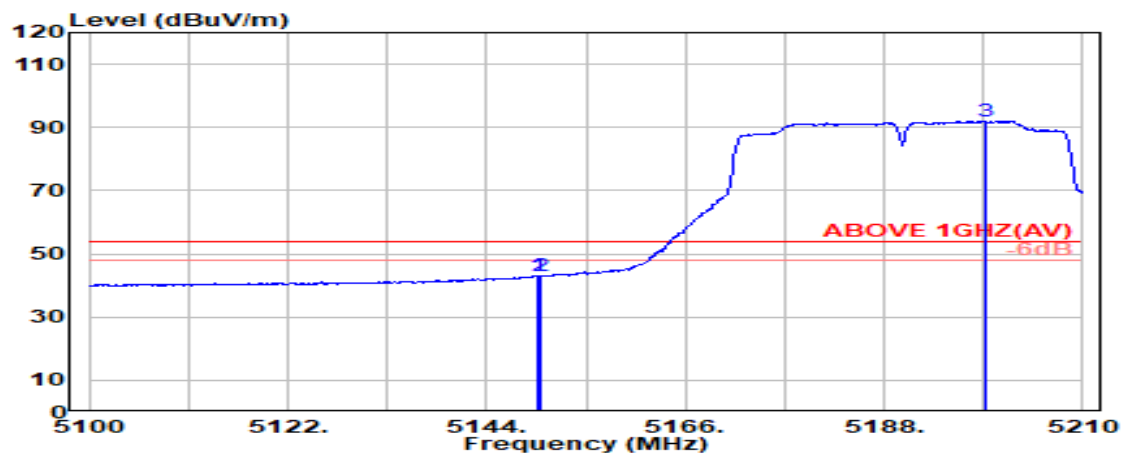

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	33.60	8.33	39.19	40.29	43.02	54.00	10.98	Average
5150.000	33.60	8.33	39.19	40.21	42.95	54.00	11.05	Average
@ 5199.110	33.60	8.38	39.19	89.35	92.15	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

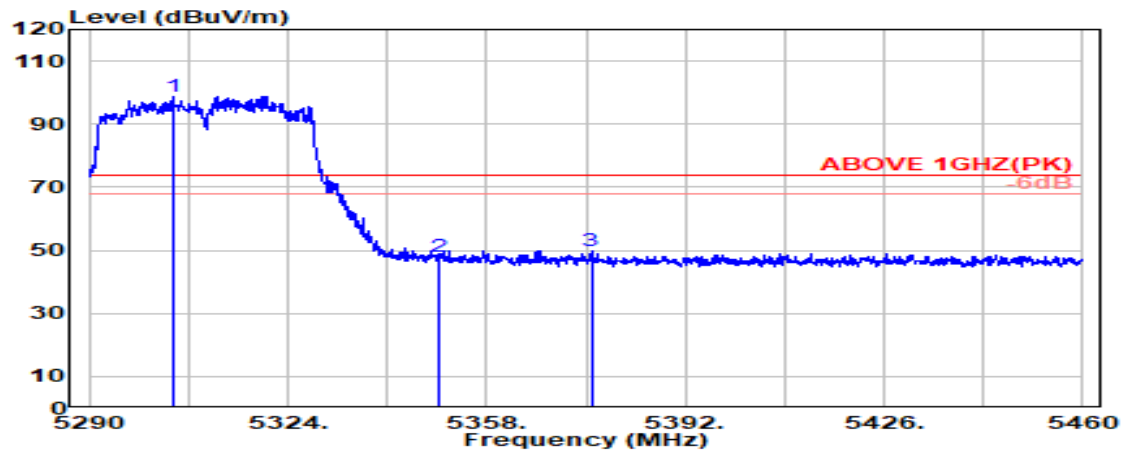

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.400	33.61	8.49	39.17	95.99	98.92	---	---	Peak
5350.000	33.70	8.54	39.17	44.94	48.01	74.00	25.99	Peak
5375.900	33.86	8.57	39.16	46.47	49.73	74.00	24.27	Peak

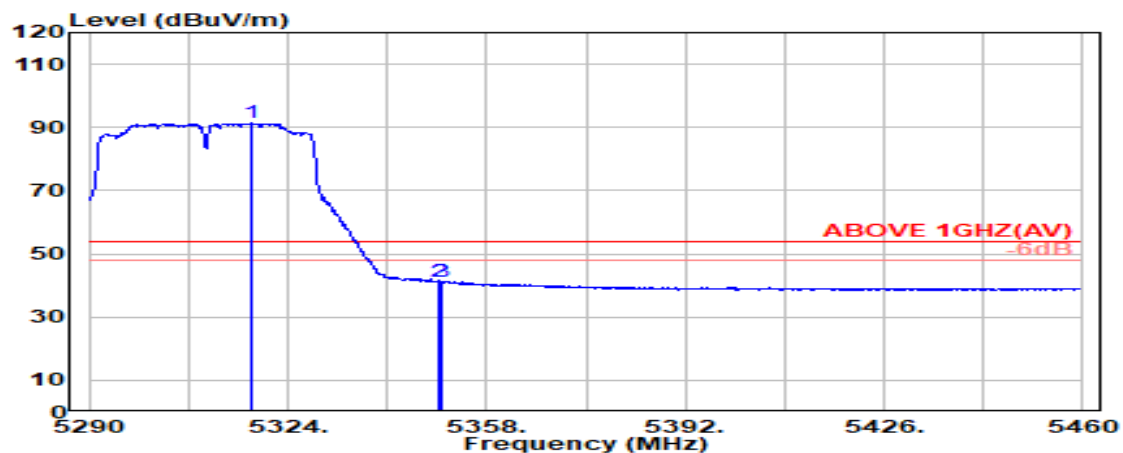

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.900	33.64	8.51	39.17	88.31	91.28	---	---	Average
5350.000	33.70	8.54	39.17	38.12	41.19	54.00	12.81	Average
5350.300	33.70	8.54	39.17	38.10	41.18	54.00	12.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

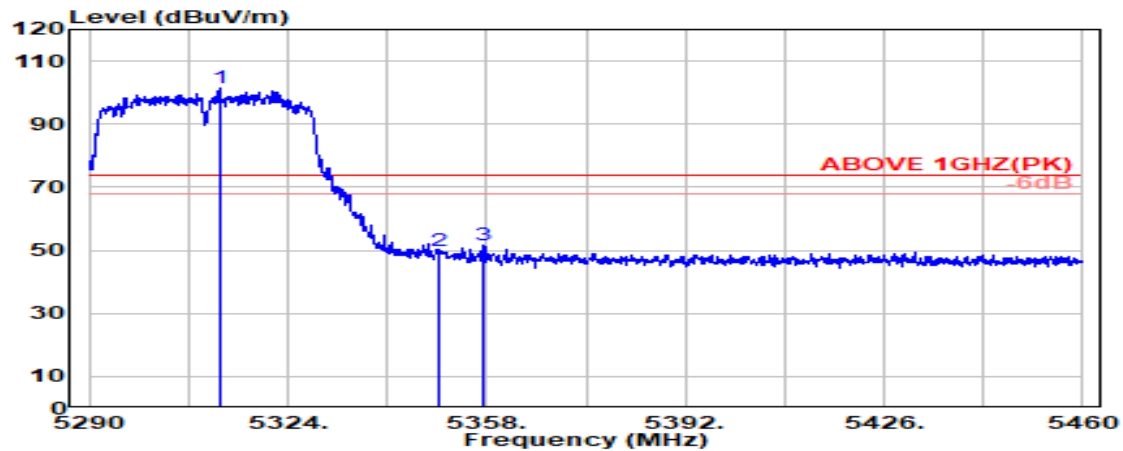

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.300	33.62	8.50	39.17	98.37	101.33	---	---	Peak
5350.000	33.70	8.54	39.17	46.62	49.69	74.00	24.31	Peak
5357.600	33.75	8.55	39.17	48.31	51.44	74.00	22.56	Peak

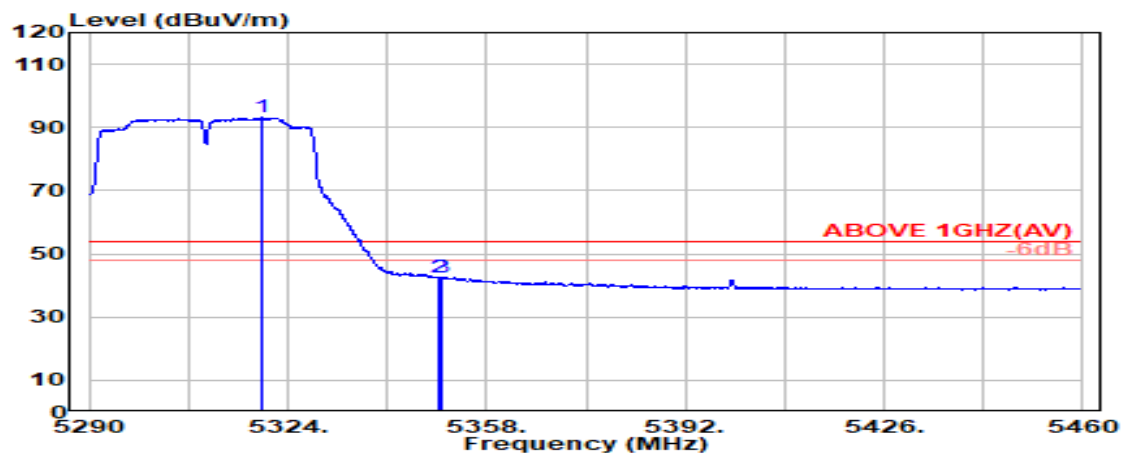

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.400	33.64	8.51	39.17	90.24	93.22	---	---	Average
5350.000	33.70	8.54	39.17	39.63	42.70	54.00	11.30	Average
5350.300	33.70	8.54	39.17	39.67	42.74	54.00	11.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

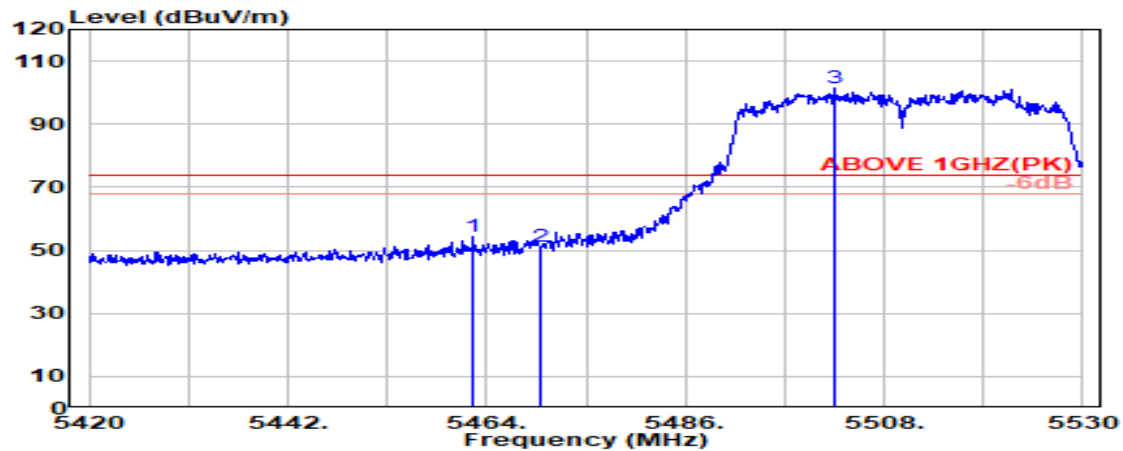

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.500	34.10	8.66	39.15	50.60	54.21	74.00	19.79	Peak
5470.000	34.10	8.67	39.15	47.52	51.13	74.00	22.87	Peak
@ 5502.500	34.09	8.70	39.15	97.75	101.40	---	---	Peak

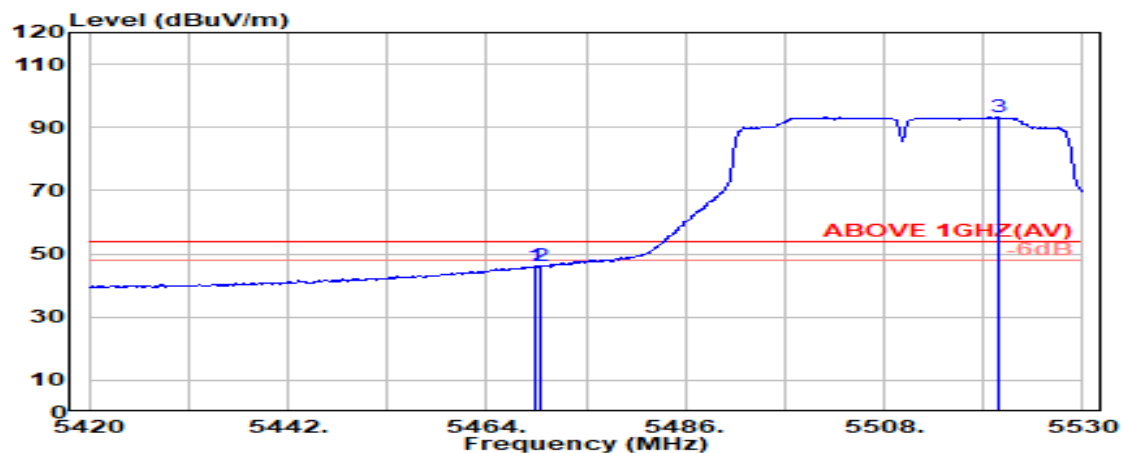

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.500	34.10	8.67	39.15	42.73	46.34	54.00	7.66	Average
5470.000	34.10	8.67	39.15	42.62	46.23	54.00	7.77	Average
@ 5520.700	34.06	8.72	39.15	89.58	93.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

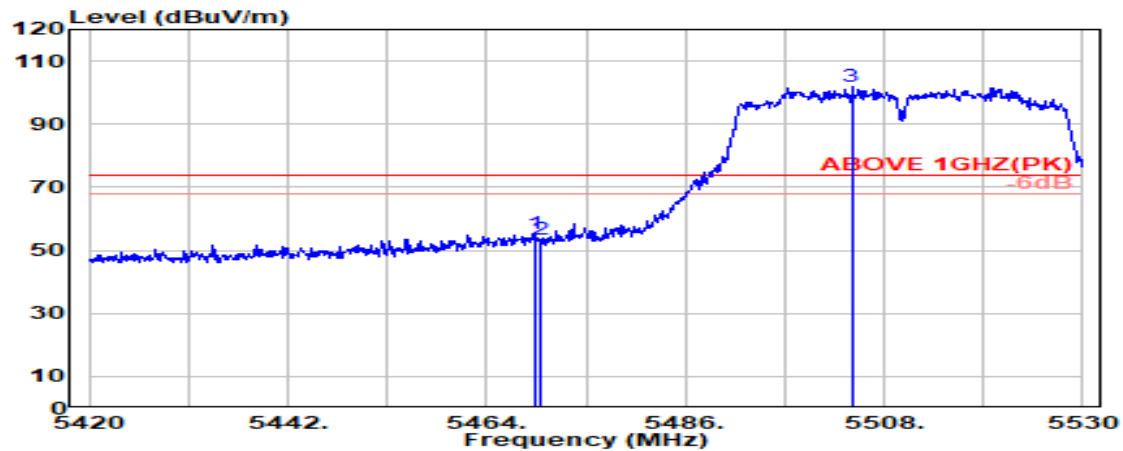

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.300	34.10	8.67	39.15	51.49	55.10	74.00	18.90	Peak
5470.000	34.10	8.67	39.15	49.79	53.40	74.00	20.60	Peak
@ 5504.400	34.09	8.70	39.15	98.04	101.68	---	---	Peak

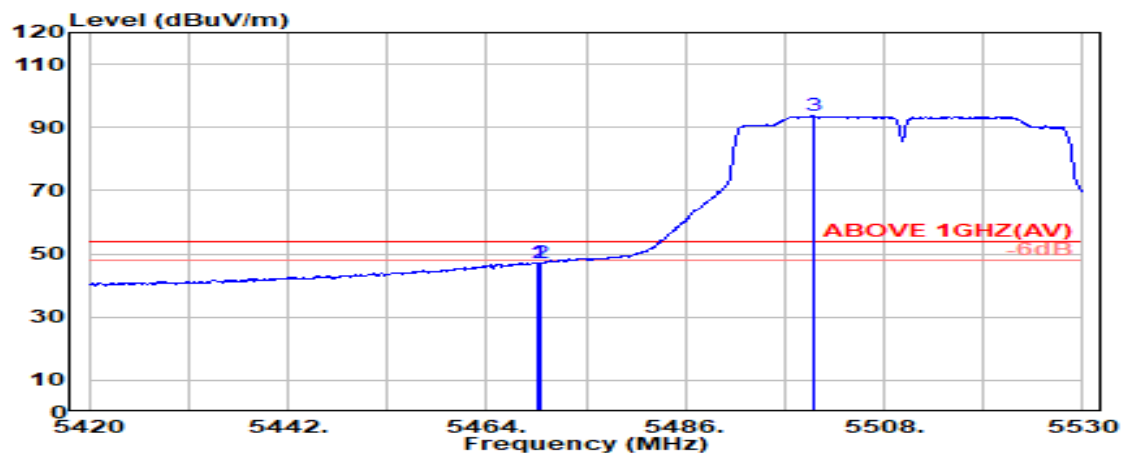

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.700	34.10	8.67	39.15	43.71	47.32	54.00	6.68	Average
5470.000	34.10	8.67	39.15	43.53	47.14	54.00	6.86	Average
@ 5500.300	34.10	8.70	39.15	90.01	93.66	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

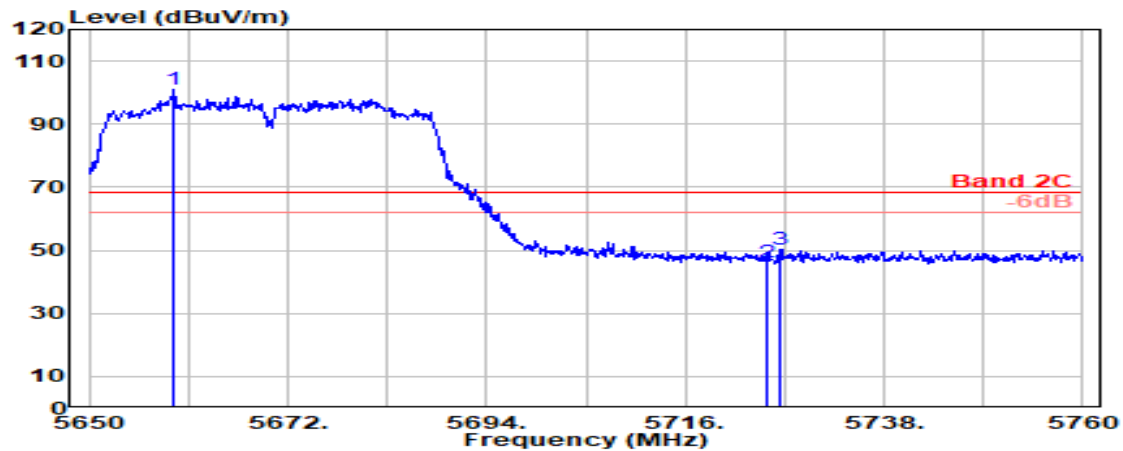

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5659.300	33.64	8.86	39.18	97.72	101.04	---	---	Peak
5725.000	33.60	8.92	39.20	42.99	46.32	68.20	21.88	Peak
5726.600	33.61	8.93	39.20	46.83	50.17	68.20	18.03	Peak

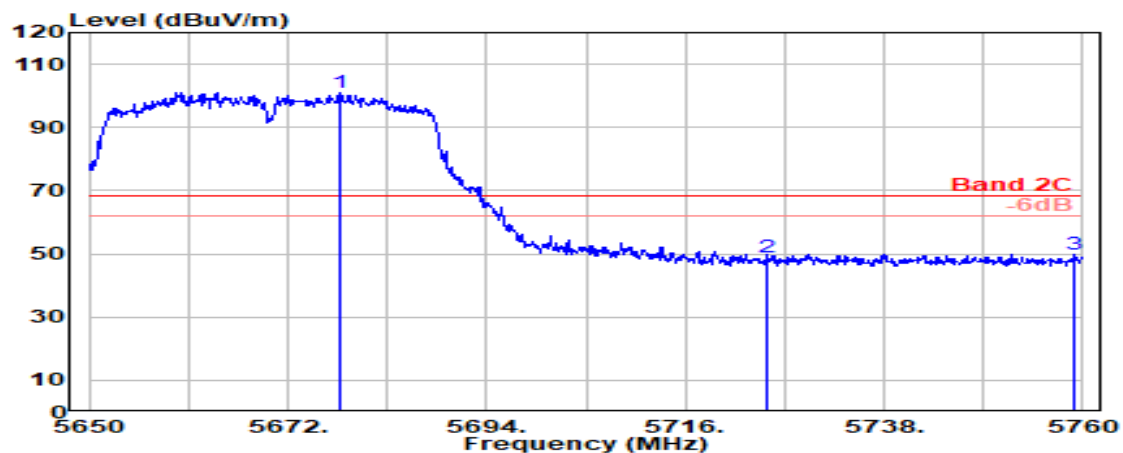

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.700	33.53	8.88	39.19	97.94	101.16	---	---	Peak
5725.000	33.60	8.92	39.20	45.42	48.75	68.20	19.45	Peak
5759.100	33.82	8.96	39.20	46.15	49.73	68.20	18.47	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

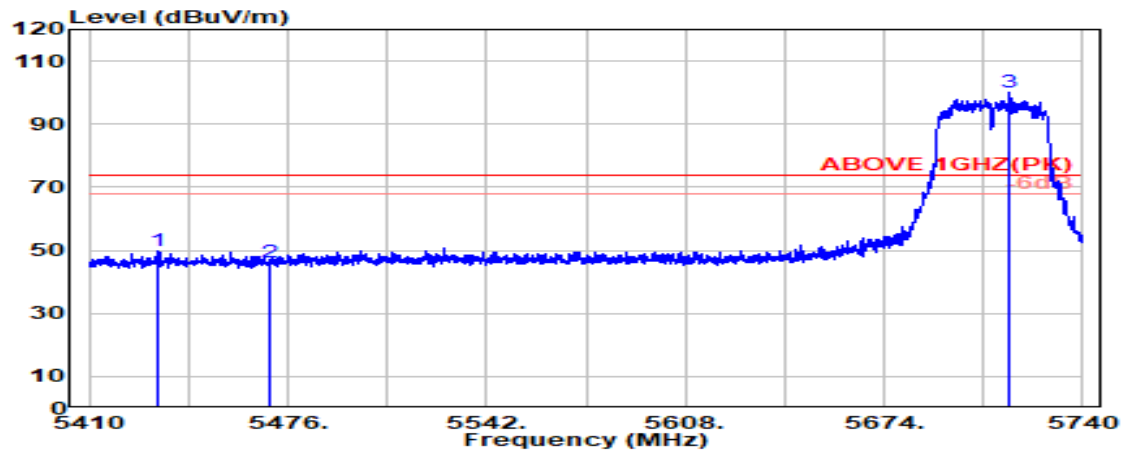

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.200	34.07	8.63	39.16	46.40	49.94	74.00	24.06	Peak
5470.000	34.10	8.67	39.15	42.63	46.25	74.00	27.75	Peak
@ 5715.600	33.53	8.92	39.19	96.89	100.13	---	---	Peak

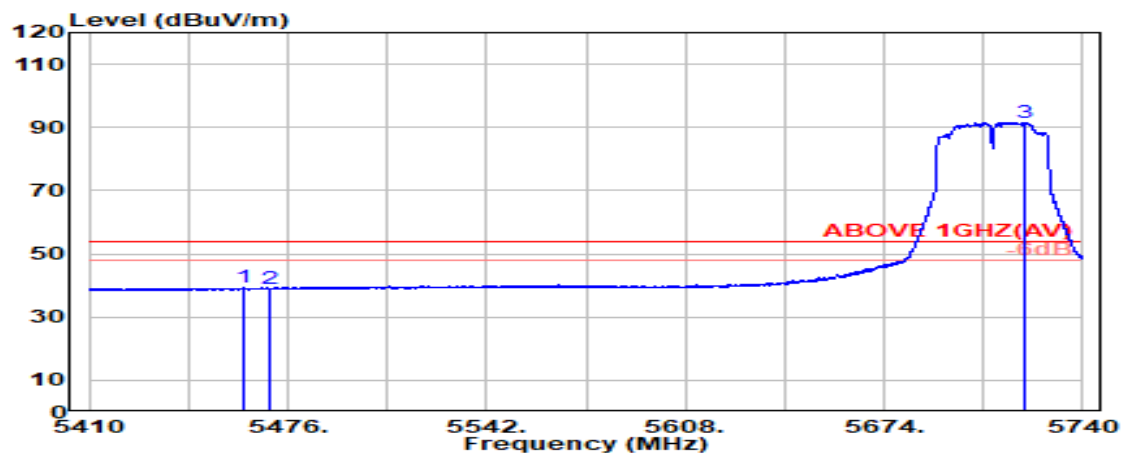


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.300	34.10	8.66	39.15	35.76	39.36	54.00	14.64	Average
5470.000	34.10	8.67	39.15	35.41	39.02	54.00	14.98	Average
@ 5721.000	33.57	8.92	39.20	88.38	91.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

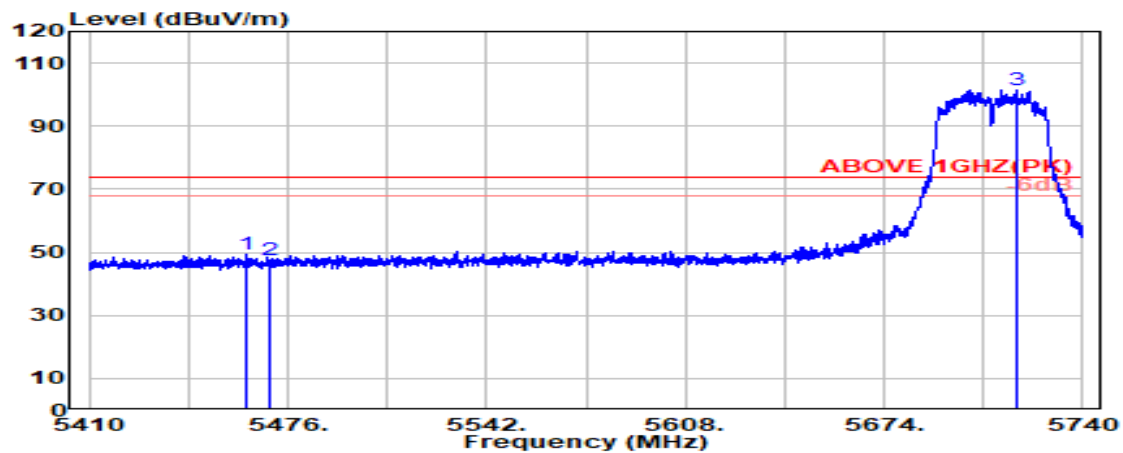

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.100	34.10	8.66	39.15	45.92	49.52	74.00	24.48	Peak
5470.000	34.10	8.67	39.15	43.90	47.51	74.00	26.49	Peak
@ 5718.100	33.55	8.92	39.19	98.28	101.55	---	---	Peak

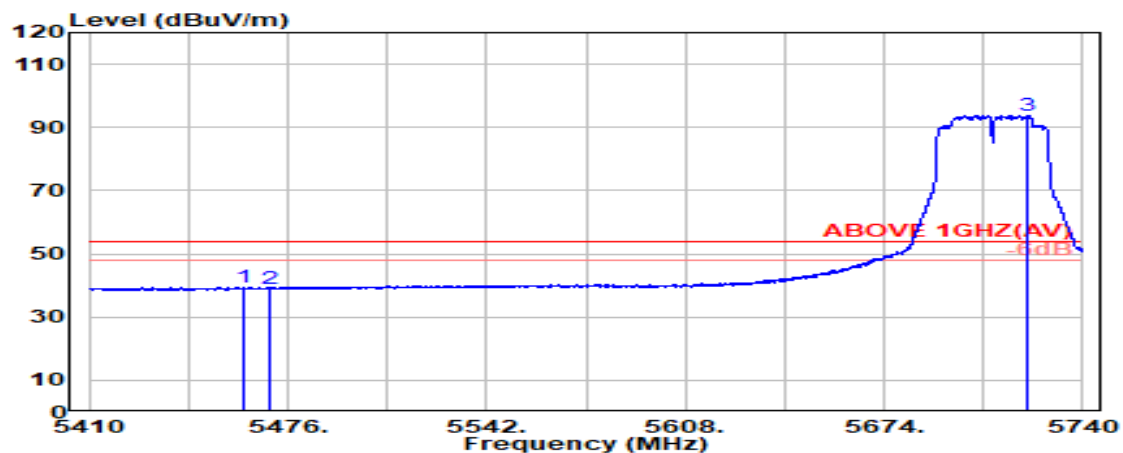

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.600	34.10	8.66	39.15	35.84	39.45	54.00	14.55	Average
5470.000	34.10	8.67	39.15	35.50	39.11	54.00	14.89	Average
@ 5721.200	33.57	8.92	39.20	90.48	93.77	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

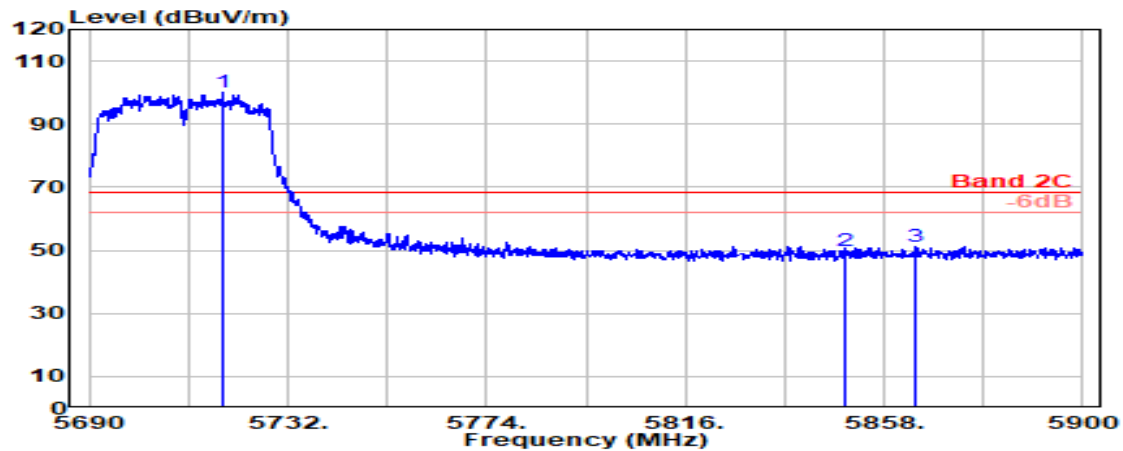

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.300	33.55	8.92	39.19	96.71	99.99	---	---	Peak
5850.000	33.90	9.05	39.22	46.04	49.77	68.20	18.43	Peak
5864.700	33.99	9.06	39.22	47.56	51.38	68.20	16.82	Peak

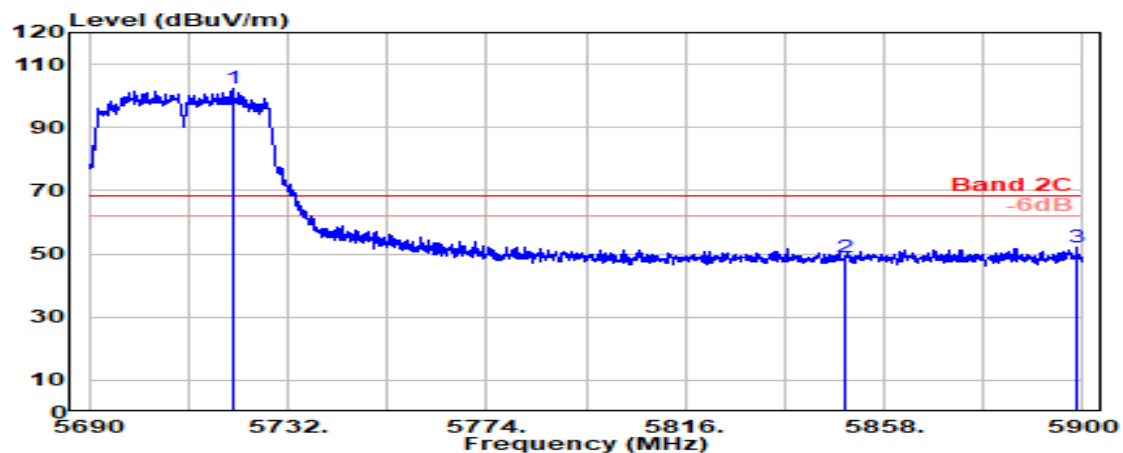

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.400	33.56	8.92	39.20	99.11	102.40	---	---	Peak
5850.000	33.90	9.05	39.22	45.30	49.03	68.20	19.17	Peak
5898.800	34.19	9.09	39.23	47.90	51.95	68.20	16.25	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

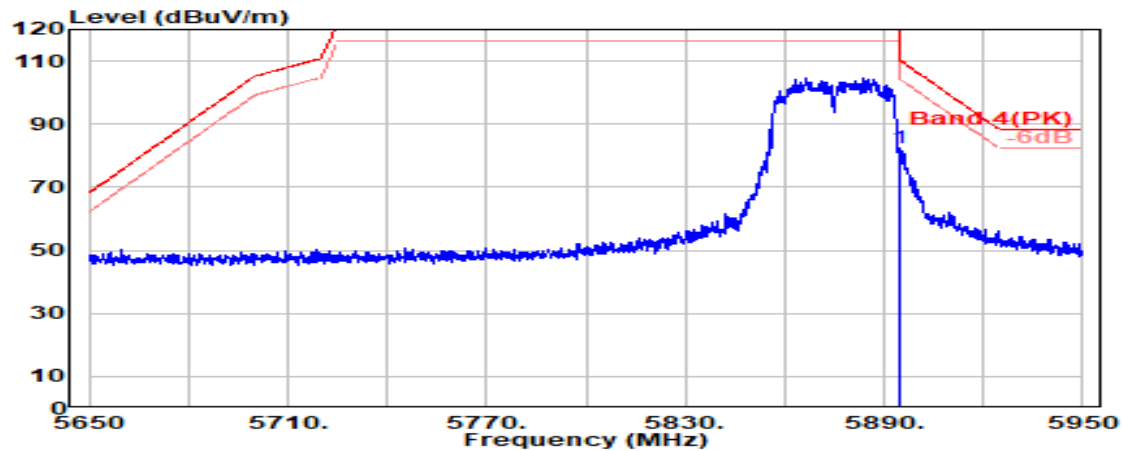

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	78.22	82.25	110.20	27.95	Peak

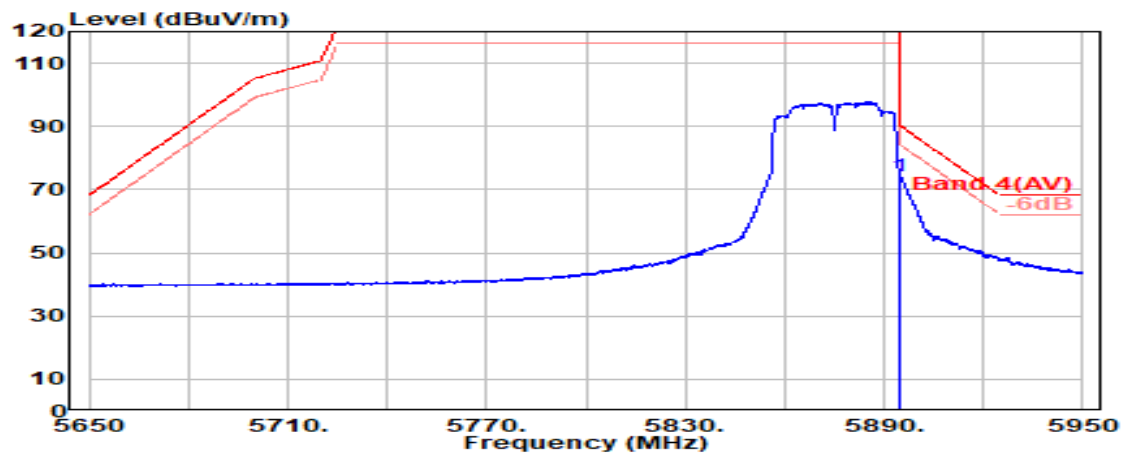

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	70.02	74.06	90.20	16.14	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

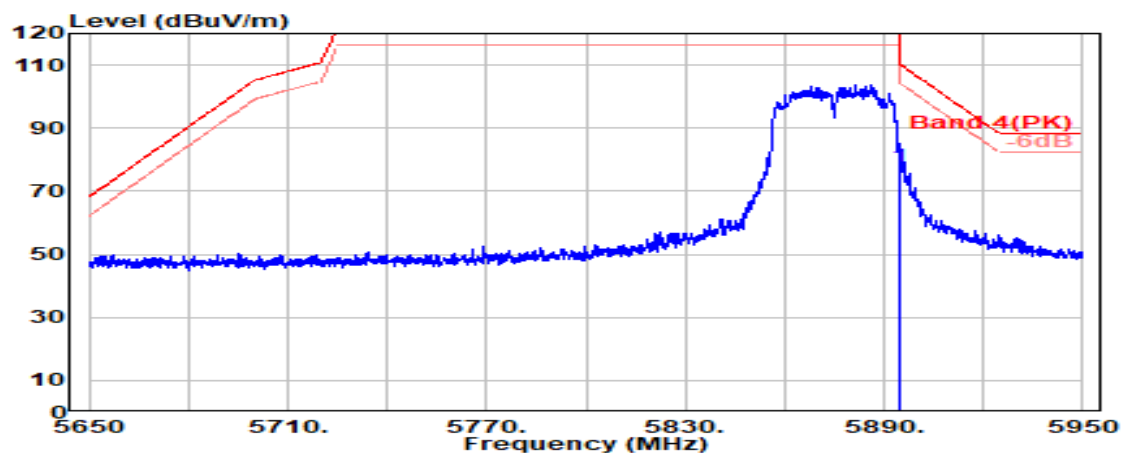

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	73.88	77.91	110.20	32.29	Peak

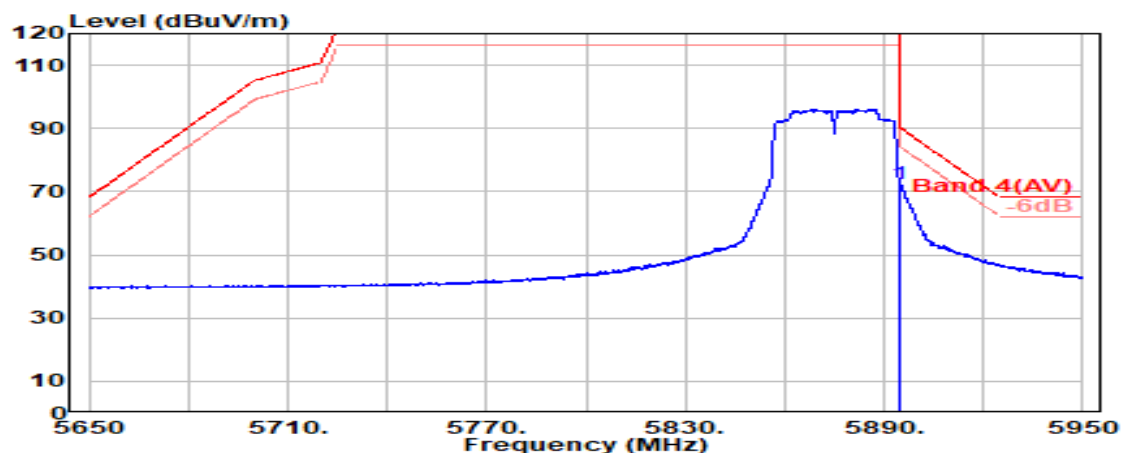

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	68.30	72.33	90.20	17.87	Average

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

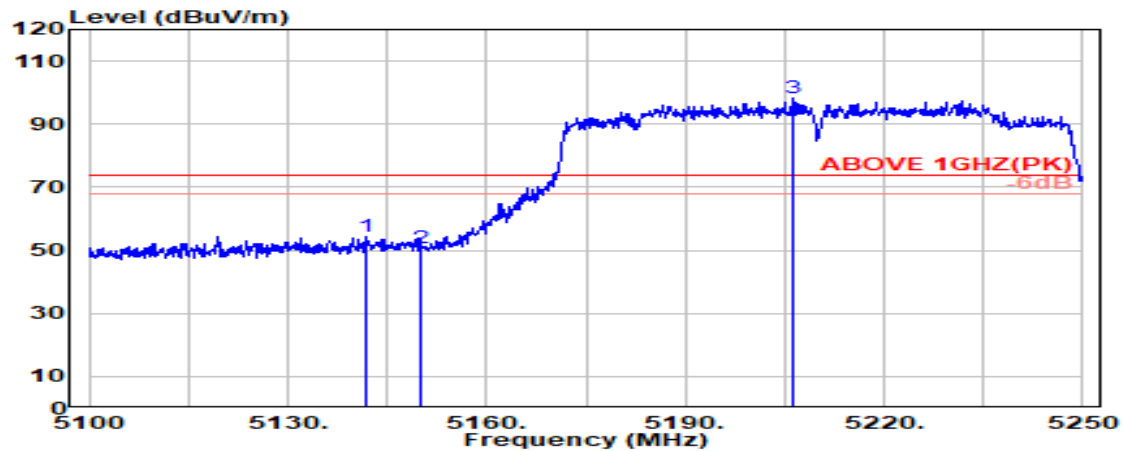

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.700	33.58	8.32	39.19	51.71	54.42	74.00	19.58	Peak
5150.000	33.60	8.33	39.19	48.16	50.89	74.00	23.11	Peak
@ 5206.400	33.61	8.39	39.18	95.58	98.40	---	---	Peak

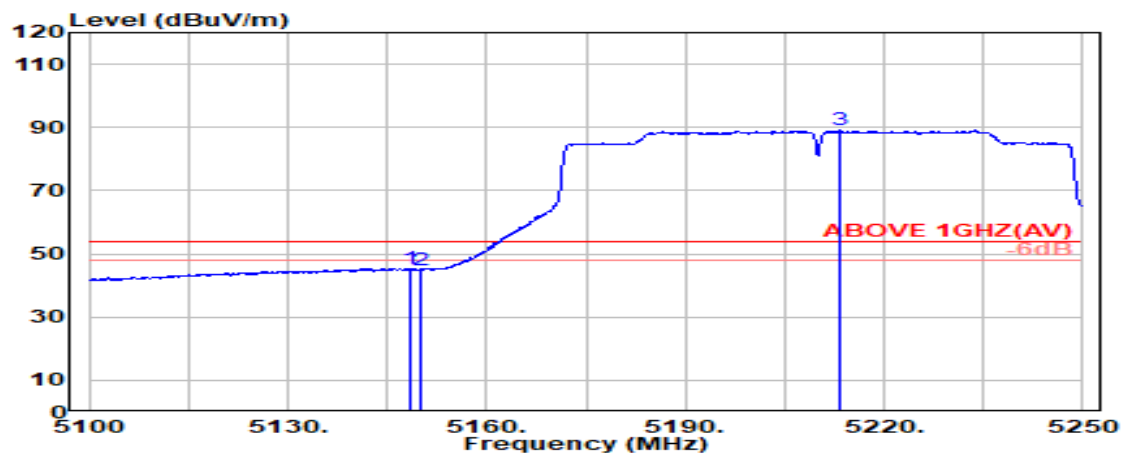

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	33.60	8.33	39.19	42.76	45.49	54.00	8.51	Average
5150.000	33.60	8.33	39.19	42.30	45.04	54.00	8.96	Average
@ 5213.300	33.63	8.40	39.18	86.33	89.17	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

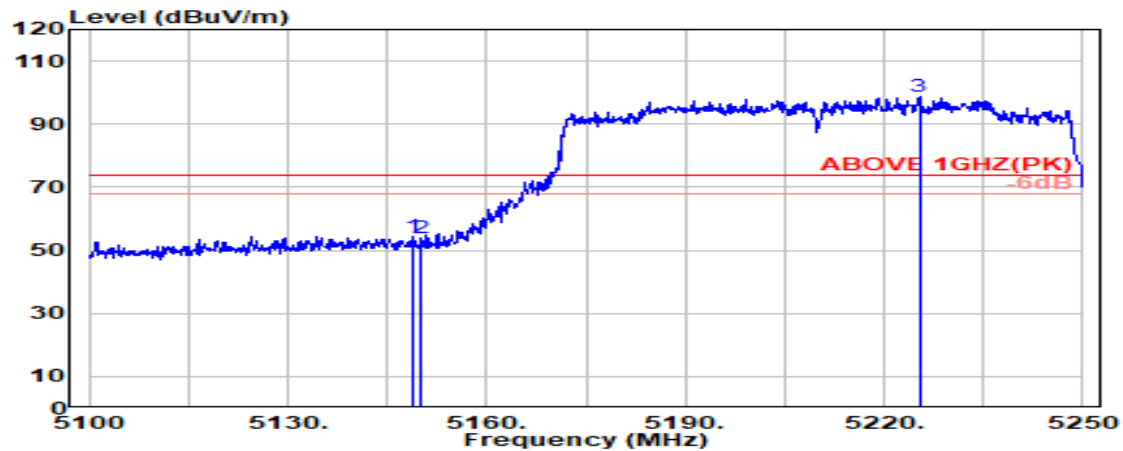

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.60	8.33	39.19	51.48	54.21	74.00	19.79	Peak
5150.000	33.60	8.33	39.19	51.08	53.81	74.00	20.19	Peak
@ 5225.300	33.65	8.41	39.18	95.77	98.64	---	---	Peak

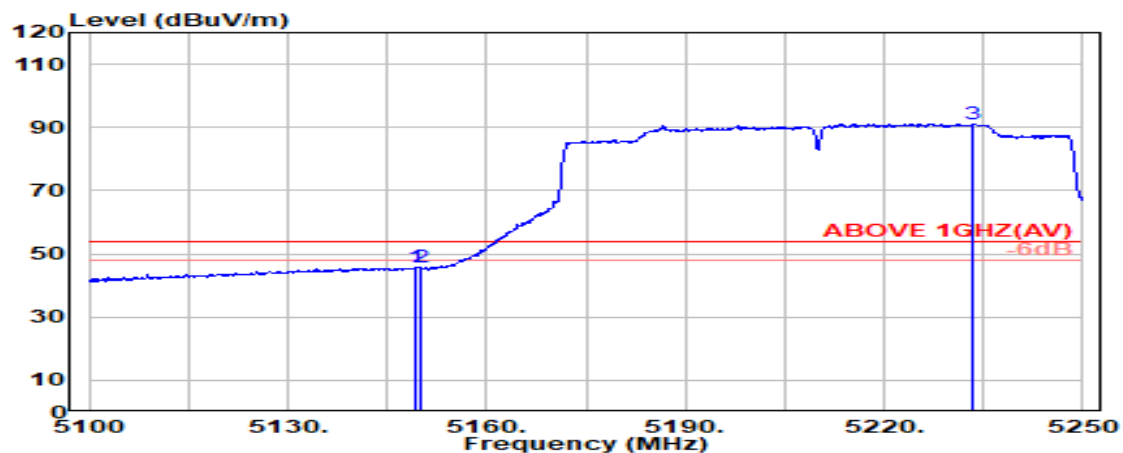

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.60	8.33	39.19	42.96	45.69	54.00	8.31	Average
5150.000	33.60	8.33	39.19	42.82	45.56	54.00	8.44	Average
@ 5233.500	33.67	8.42	39.18	88.28	91.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

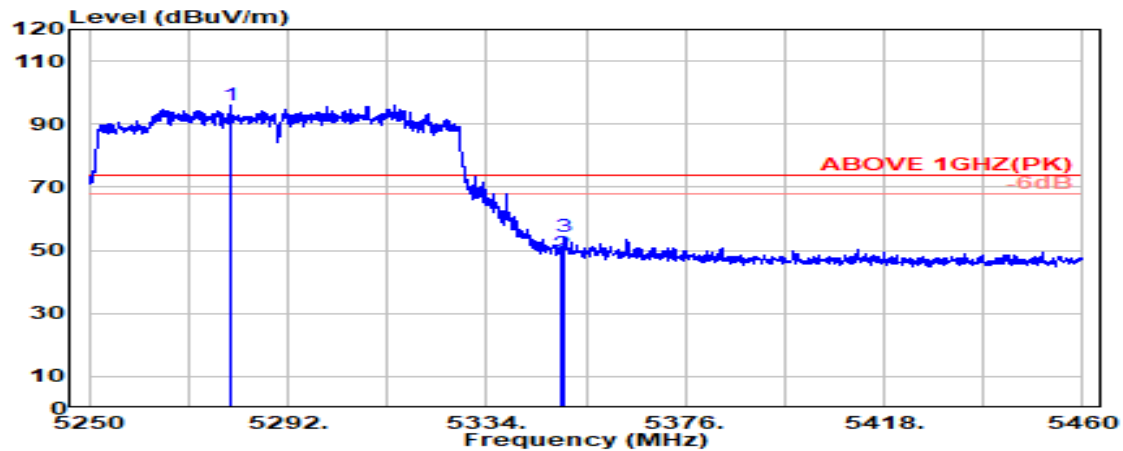

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5279.800	33.64	8.47	39.18	93.11	96.04	---	---	Peak
5350.000	33.70	8.54	39.17	45.76	48.84	74.00	25.16	Peak
5350.400	33.70	8.54	39.17	51.08	54.15	74.00	19.85	Peak

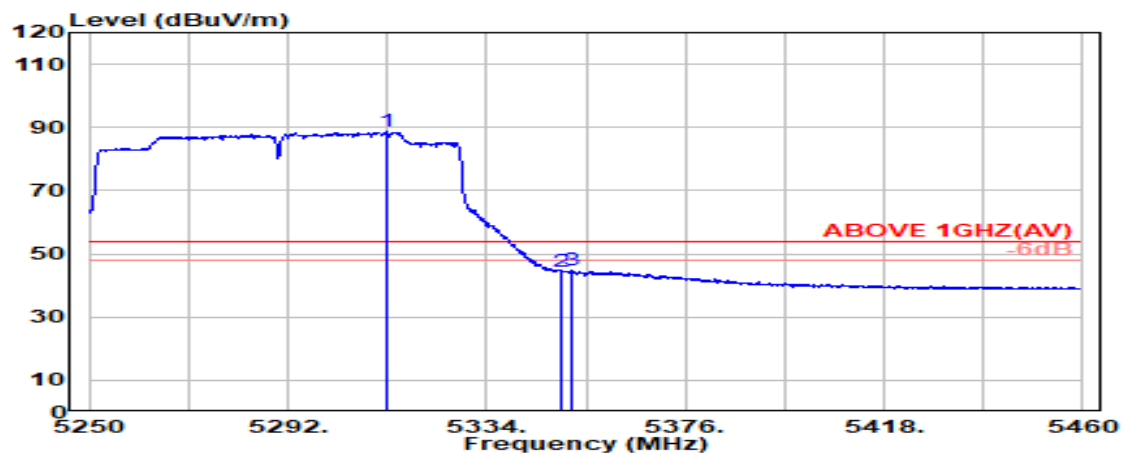

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.800	33.63	8.50	39.17	85.59	88.55	---	---	Average
5350.000	33.70	8.54	39.17	41.47	44.54	54.00	9.46	Average
5352.100	33.71	8.54	39.17	41.70	44.79	54.00	9.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

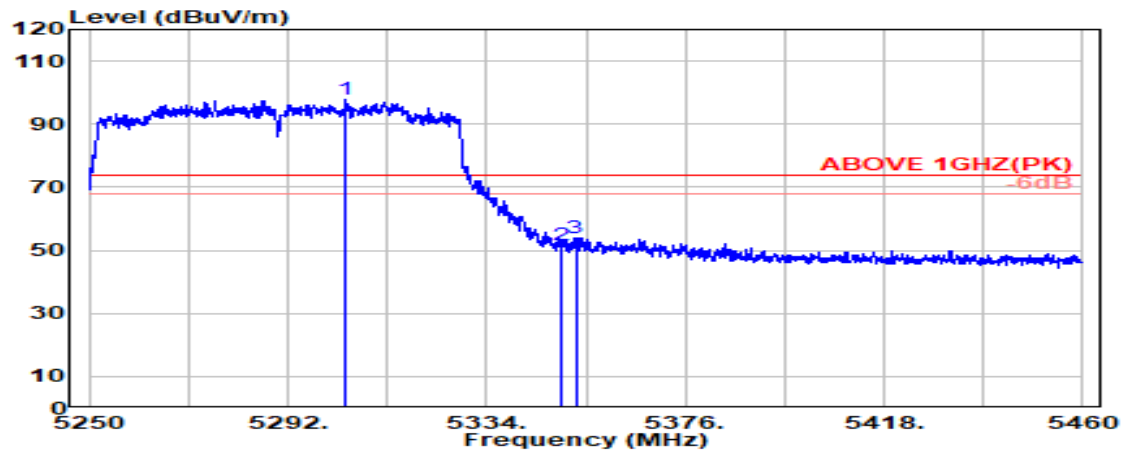

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.000	33.61	8.49	39.17	94.86	97.79	---	---	Peak
5350.000	33.70	8.54	39.17	48.42	51.50	74.00	22.50	Peak
5352.800	33.72	8.55	39.17	50.74	53.83	74.00	20.17	Peak

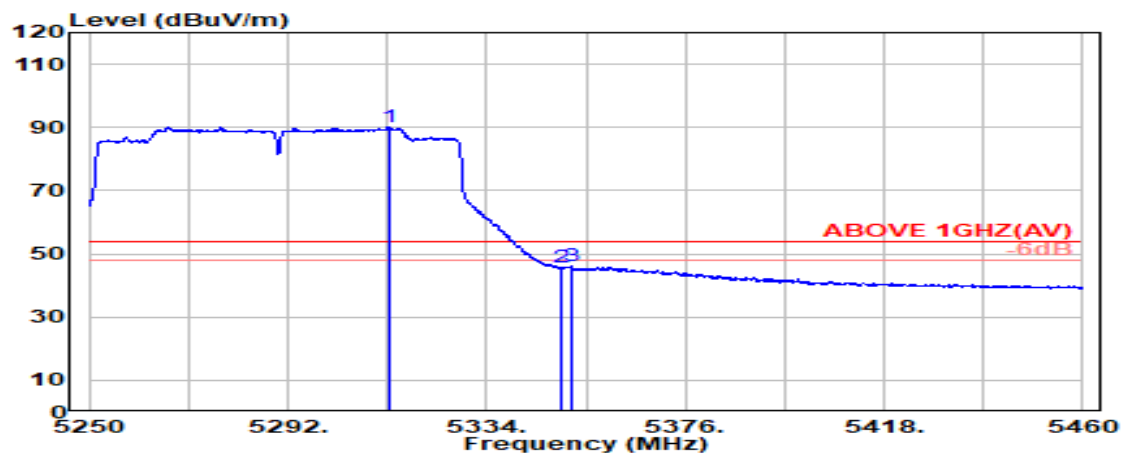


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.600	33.63	8.50	39.17	87.25	90.21	---	---	Average
5350.000	33.70	8.54	39.17	42.69	45.77	54.00	8.23	Average
5351.800	33.71	8.54	39.17	42.91	46.00	54.00	8.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

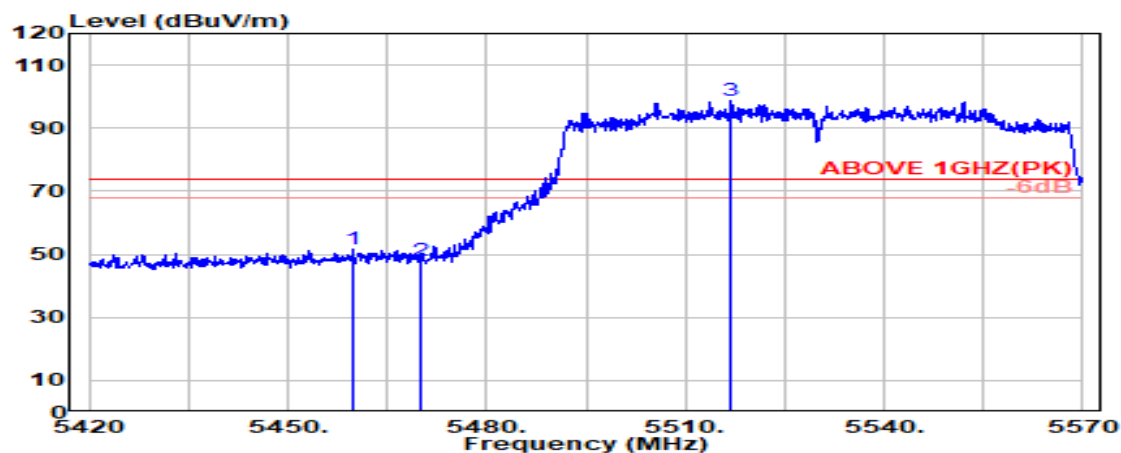

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.800	34.10	8.66	39.15	48.06	51.66	74.00	22.34	Peak
5470.000	34.10	8.67	39.15	44.48	48.09	74.00	25.91	Peak
@ 5517.000	34.07	8.72	39.15	94.98	98.61	---	---	Peak

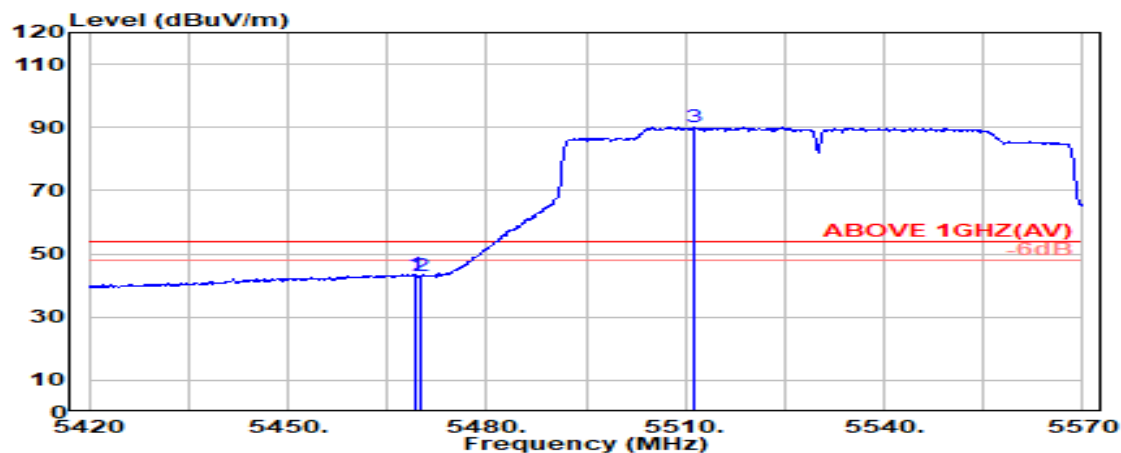

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.300	34.10	8.67	39.15	39.81	43.42	54.00	10.58	Average
5470.000	34.10	8.67	39.15	39.32	42.94	54.00	11.06	Average
@ 5511.300	34.08	8.71	39.15	86.38	90.01	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

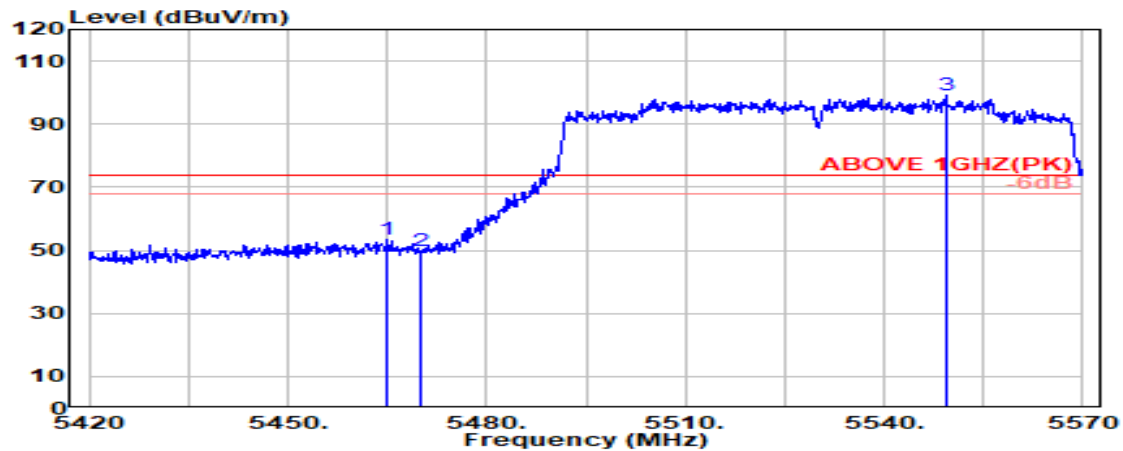

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.000	34.10	8.66	39.15	49.92	53.53	74.00	20.47	Peak
5470.000	34.10	8.67	39.15	46.29	49.90	74.00	24.10	Peak
@ 5549.300	34.00	8.75	39.16	95.39	98.98	---	---	Peak

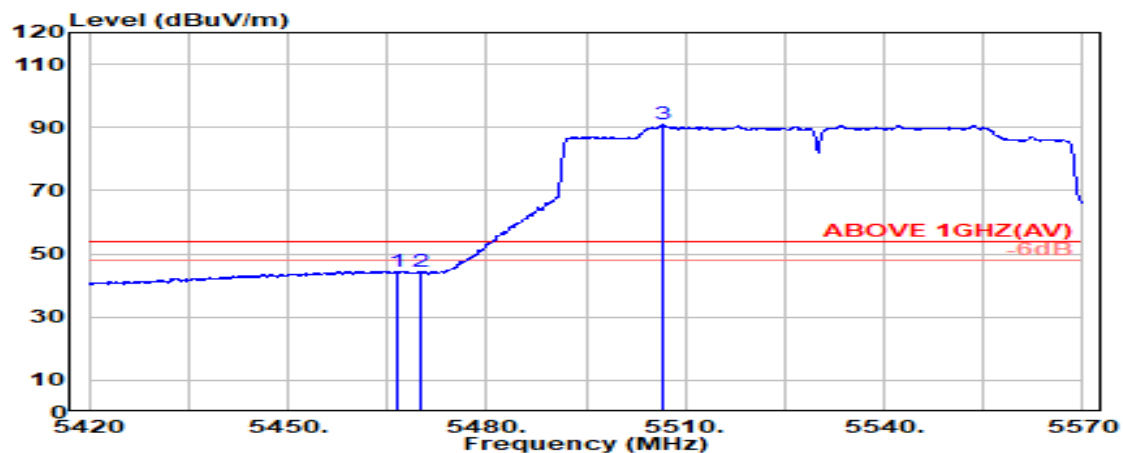

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.10	8.66	39.15	40.99	44.60	54.00	9.40	Average
5470.000	34.10	8.67	39.15	40.69	44.30	54.00	9.70	Average
@ 5506.600	34.09	8.71	39.15	87.20	90.84	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

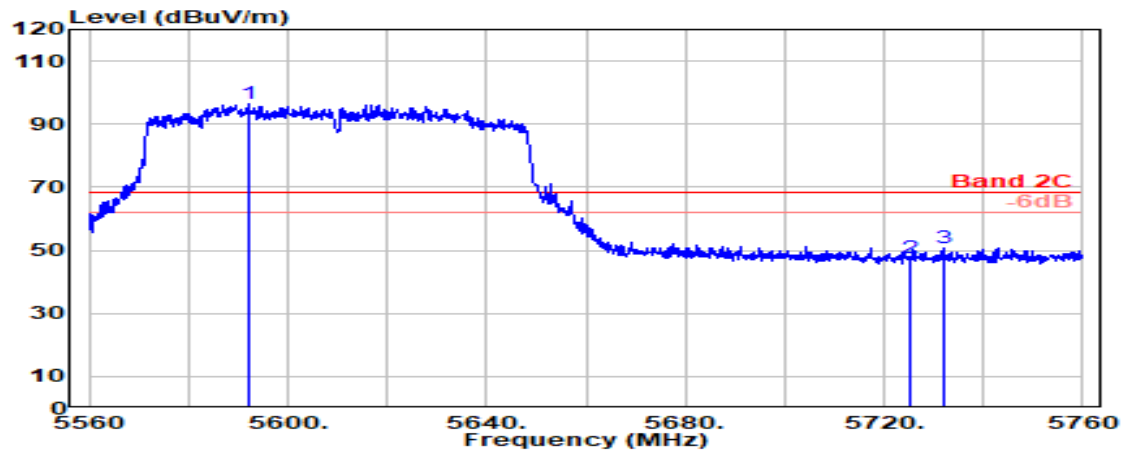

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5592.000	33.83	8.79	39.17	93.03	96.49	---	---	Peak
	5725.000	33.60	8.92	39.20	44.03	47.36	68.20	20.84	Peak
	5732.100	33.66	8.93	39.20	47.46	50.85	68.20	17.35	Peak

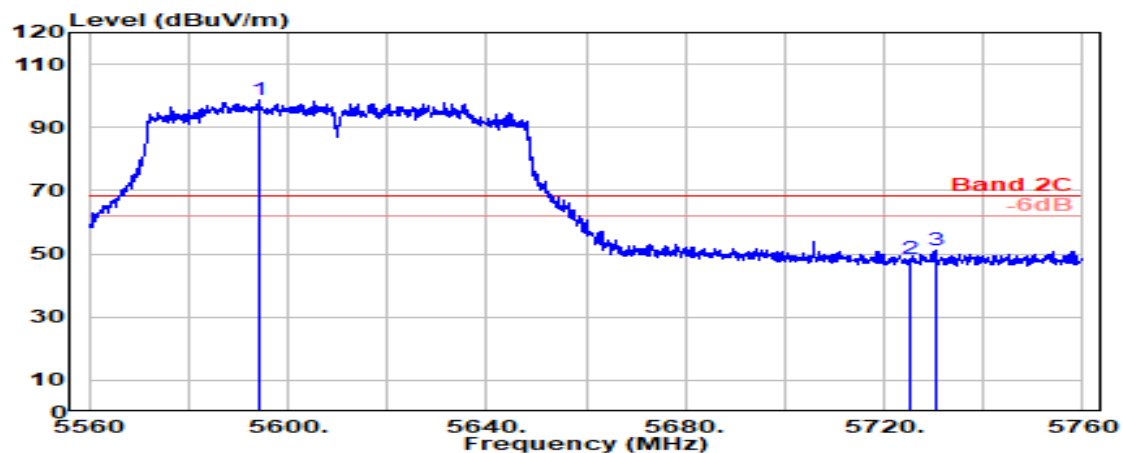

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5594.200	33.82	8.79	39.17	95.05	98.50	---	---	Peak
	5725.000	33.60	8.92	39.20	45.32	48.65	68.20	19.55	Peak
	5730.600	33.65	8.93	39.20	47.67	51.05	68.20	17.15	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

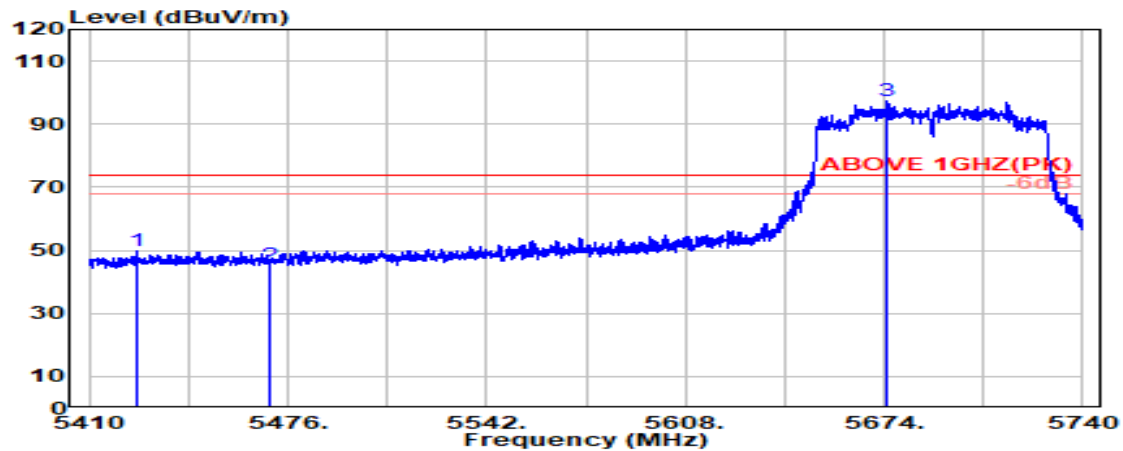

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.700	34.05	8.62	39.16	46.32	49.84	74.00	24.16	Peak
5470.000	34.10	8.67	39.15	41.88	45.49	74.00	28.51	Peak
@ 5675.200	33.55	8.88	39.19	93.94	97.17	---	---	Peak

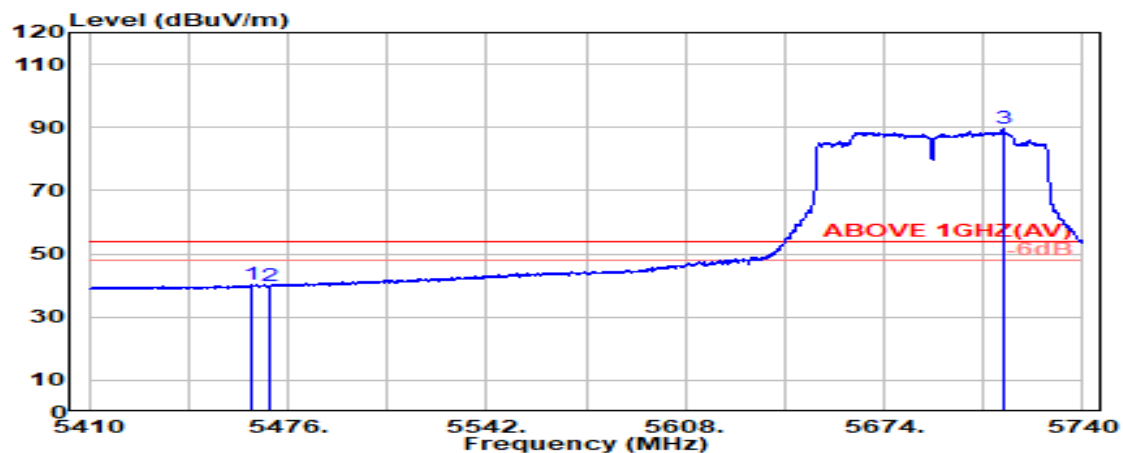


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.800	34.10	8.66	39.15	36.58	40.19	54.00	13.81	Average
5470.000	34.10	8.67	39.15	36.13	39.74	54.00	14.26	Average
@ 5713.400	33.51	8.91	39.19	86.22	89.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

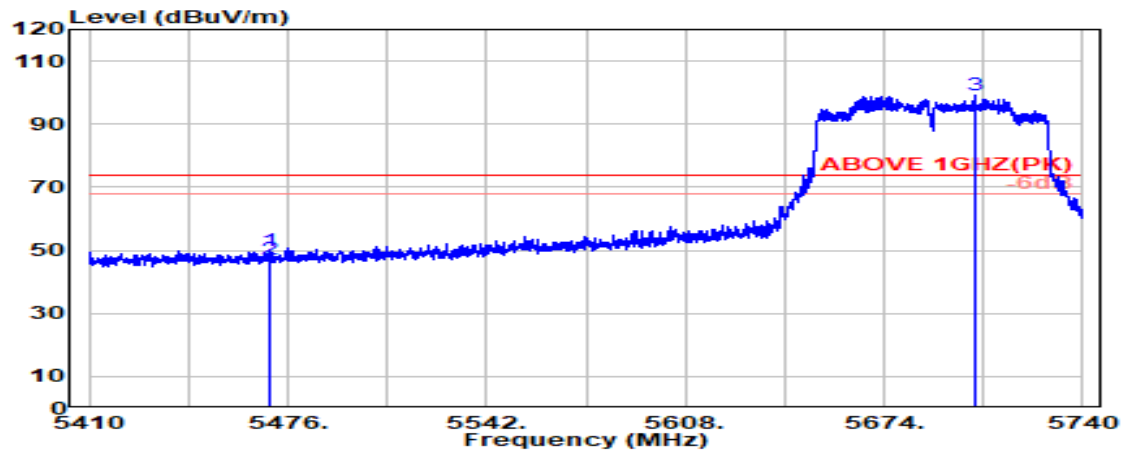

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.10	8.67	39.15	46.27	49.88	74.00	24.12	Peak
5470.000	34.10	8.67	39.15	43.65	47.26	74.00	26.74	Peak
@ 5704.400	33.44	8.90	39.19	95.96	99.10	---	---	Peak

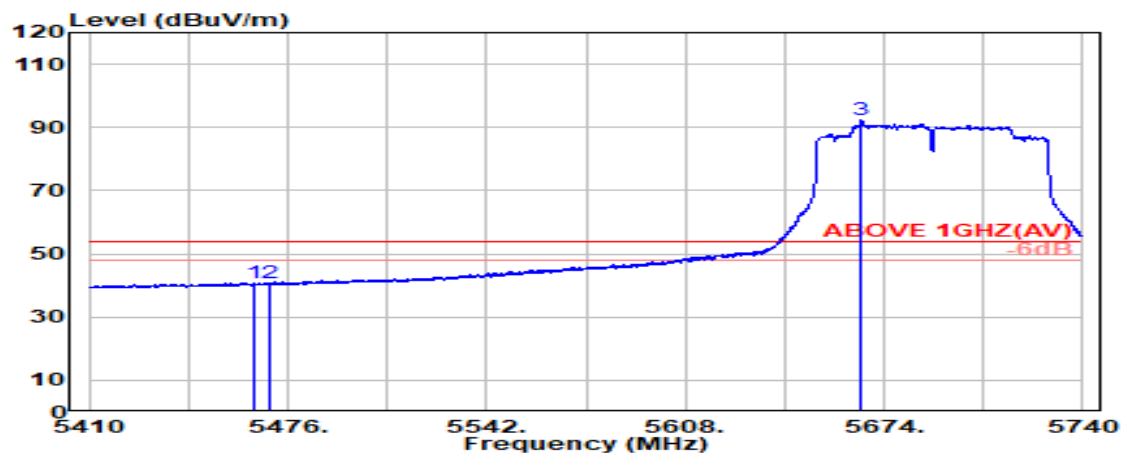

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.900	34.10	8.66	39.15	37.21	40.82	54.00	13.18	Average
5470.000	34.10	8.67	39.15	37.02	40.63	54.00	13.37	Average
@ 5666.600	33.60	8.87	39.18	88.90	92.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

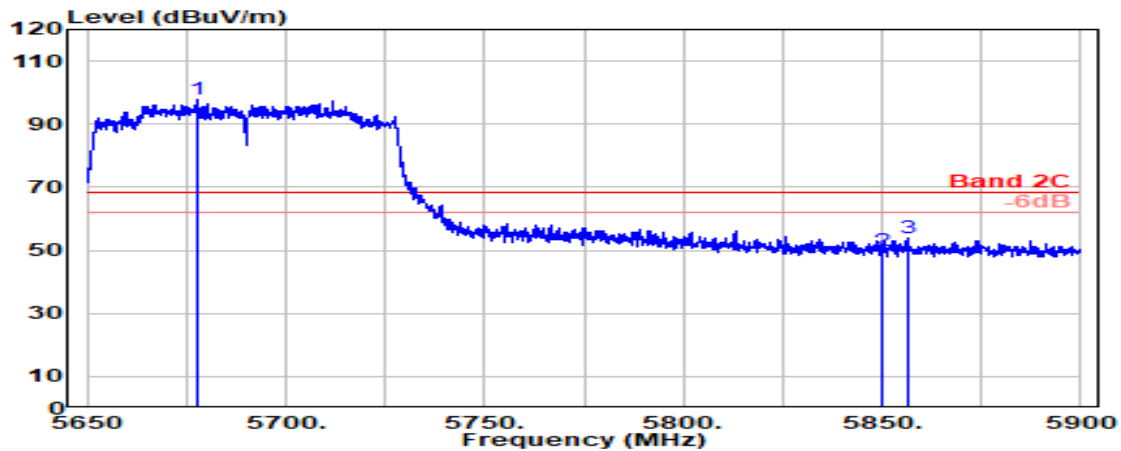

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.700	33.53	8.88	39.19	94.44	97.66	---	---	Peak
5850.000	33.90	9.05	39.22	46.27	50.00	68.20	18.20	Peak
5856.300	33.94	9.05	39.22	50.12	53.88	68.20	14.32	Peak

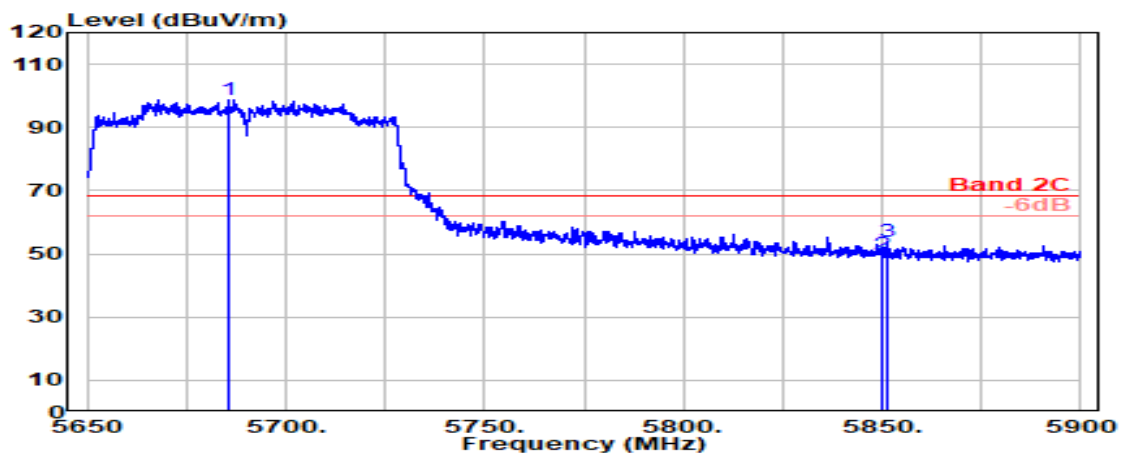

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5685.500	33.49	8.89	39.19	95.73	98.92	---	---	Peak
5850.000	33.90	9.05	39.22	46.01	49.74	68.20	18.46	Peak
5851.500	33.91	9.05	39.22	50.11	53.84	68.20	14.36	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

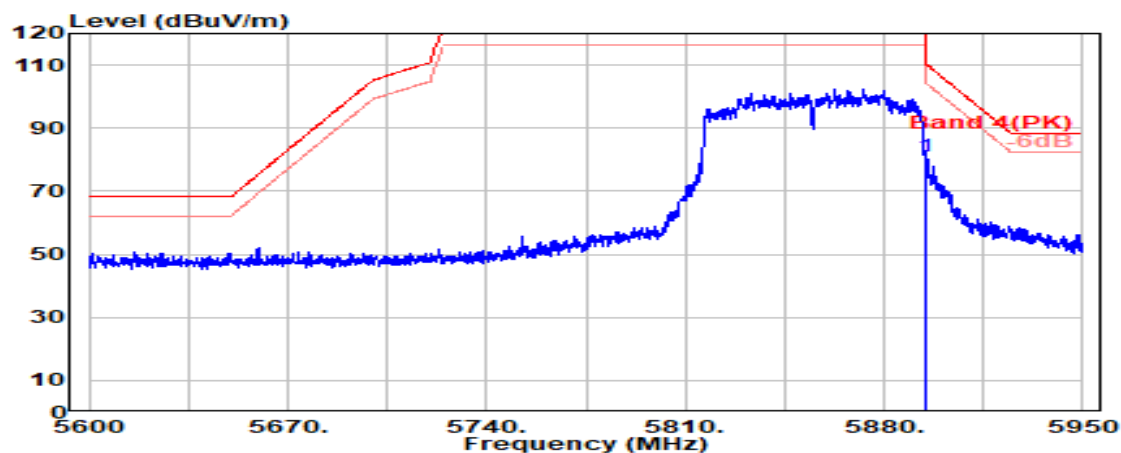

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	76.81	80.84	110.16	29.33	Peak

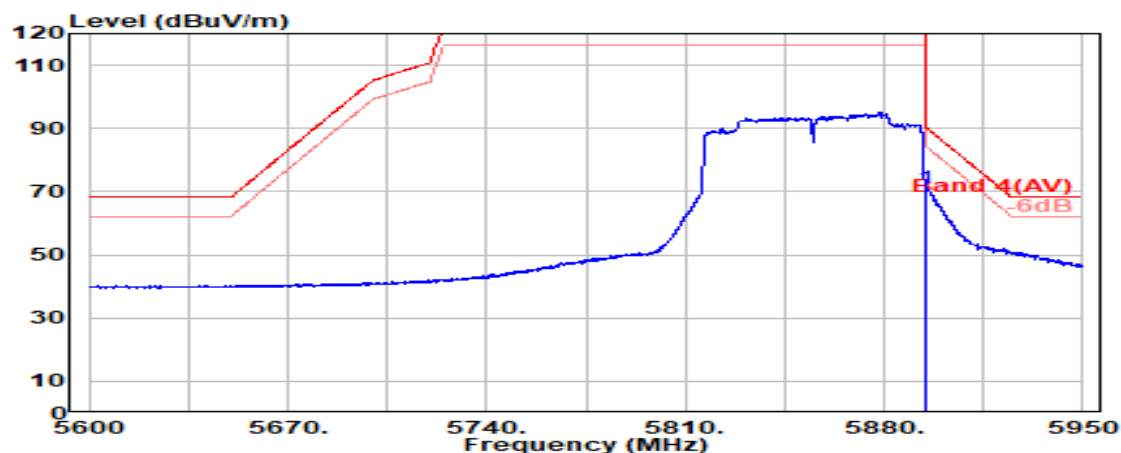

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	67.09	71.12	90.16	19.04	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

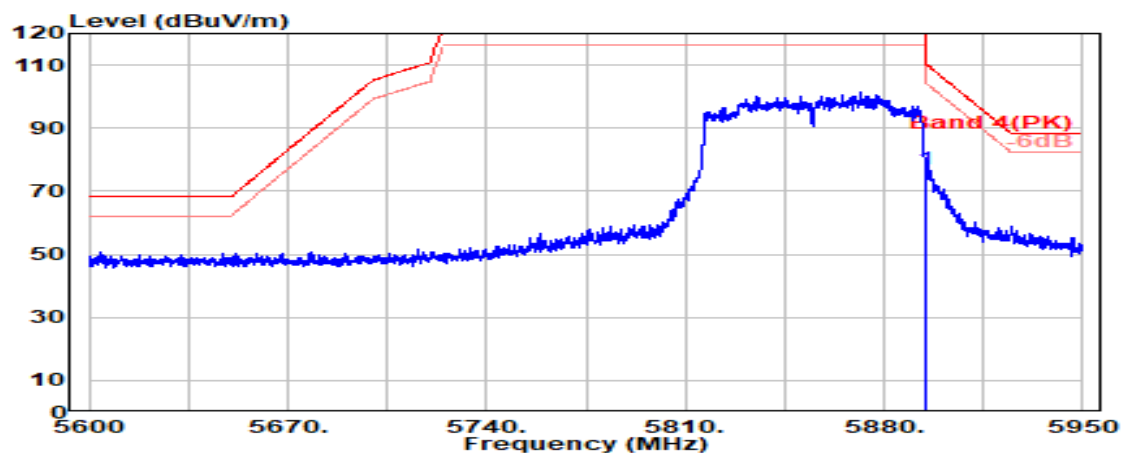

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	72.79	76.82	110.16	33.34	Peak

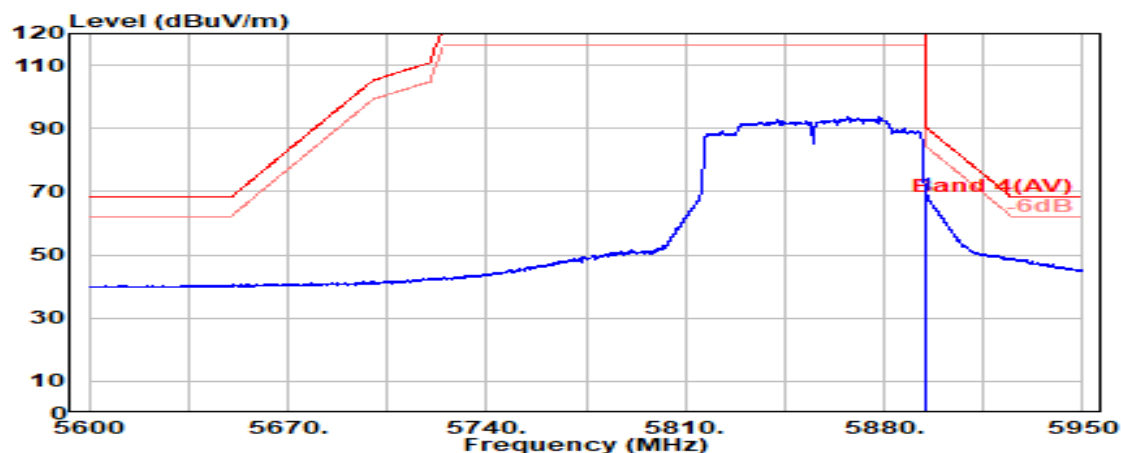

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	64.98	69.01	90.16	21.15	Average

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

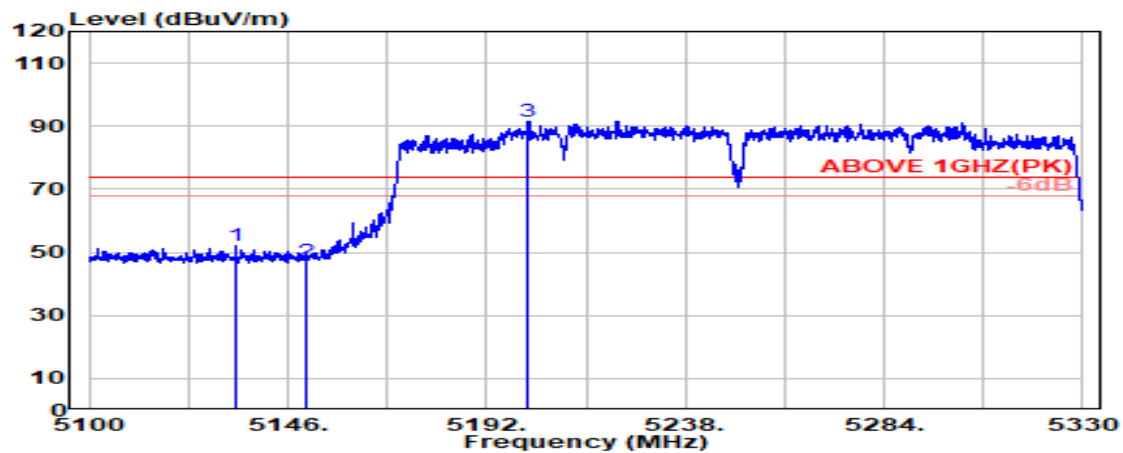

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.900	33.57	8.31	39.19	49.61	52.29	74.00	21.71	Peak
5150.000	33.60	8.33	39.19	44.42	47.16	74.00	26.84	Peak
@ 5201.700	33.60	8.38	39.19	88.65	91.45	---	---	Peak

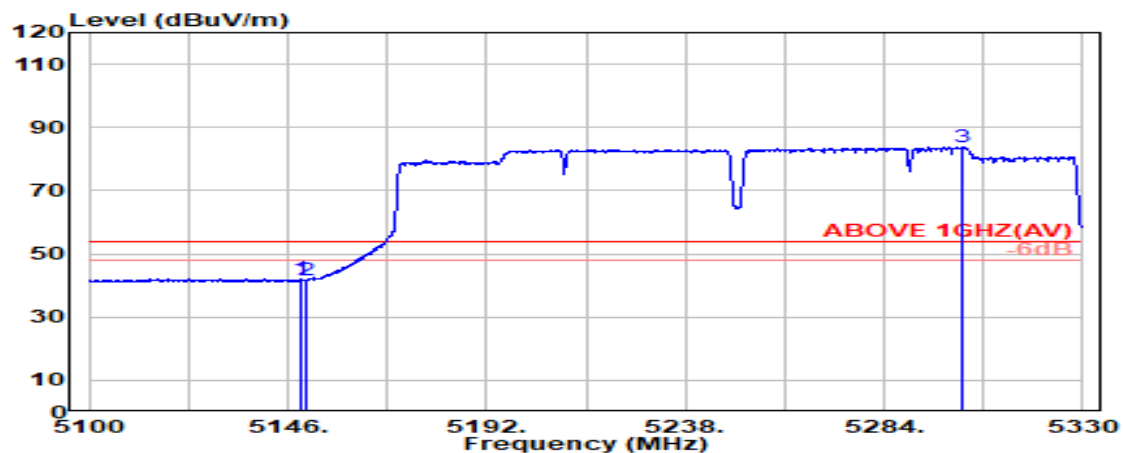


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.60	8.33	39.19	39.28	42.01	54.00	11.99	Average
5150.000	33.60	8.33	39.19	38.95	41.68	54.00	12.32	Average
@ 5301.900	33.60	8.49	39.17	81.03	83.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

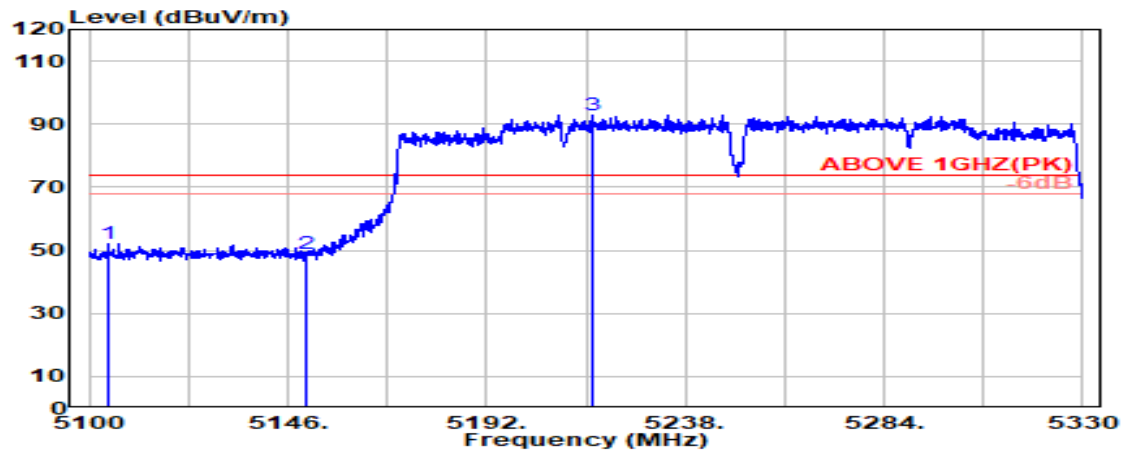

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5104.300	33.51	8.28	39.20	49.44	52.03	74.00	21.97	Peak
5150.000	33.60	8.33	39.19	45.97	48.70	74.00	25.30	Peak
@ 5216.500	33.63	8.40	39.18	89.87	92.72	---	---	Peak

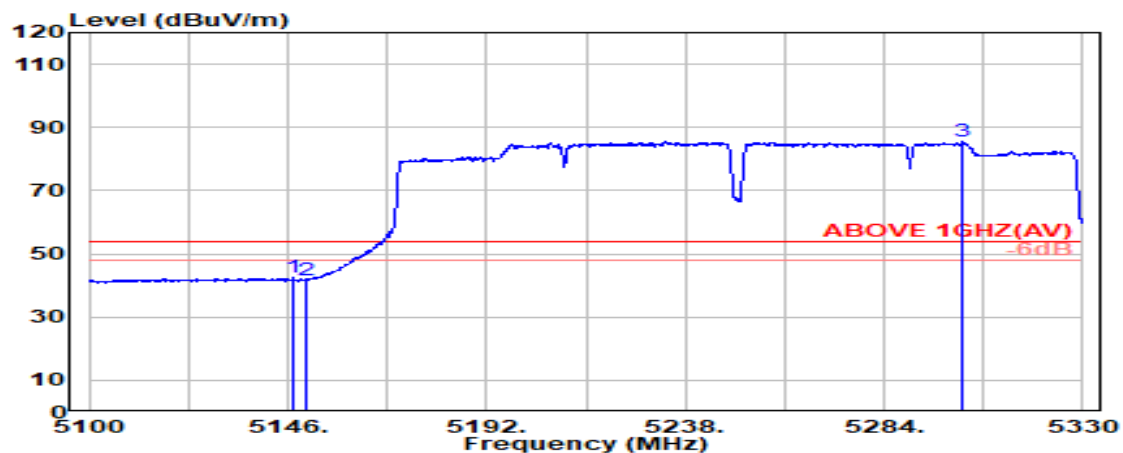

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.300	33.59	8.32	39.19	39.65	42.37	54.00	11.63	Average
5150.000	33.60	8.33	39.19	38.99	41.72	54.00	12.28	Average
@ 5302.200	33.60	8.49	39.17	82.88	85.80	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

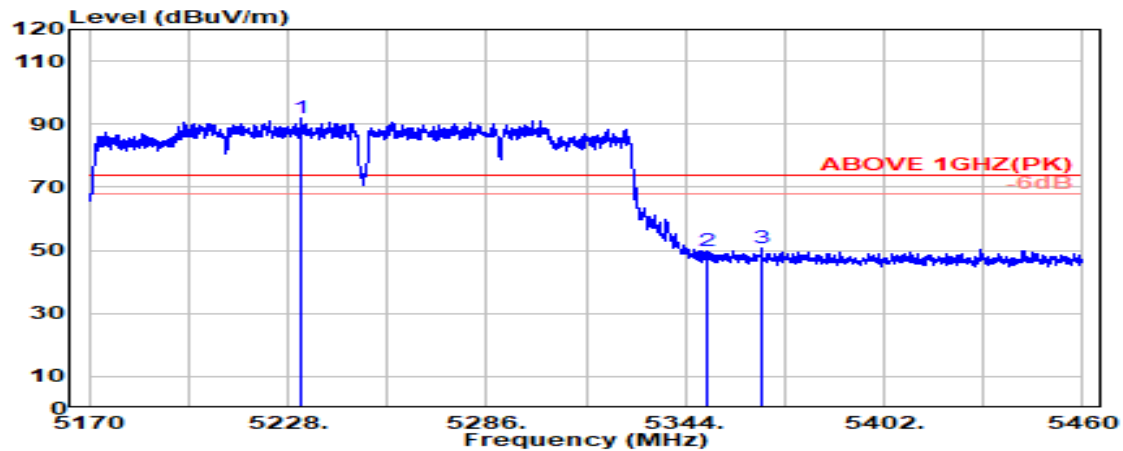

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5231.800	33.66	8.42	39.18	88.90	91.80	---	---	Peak
5350.000	33.70	8.54	39.17	46.96	50.04	74.00	23.96	Peak
5366.100	33.80	8.56	39.17	47.56	50.75	74.00	23.25	Peak

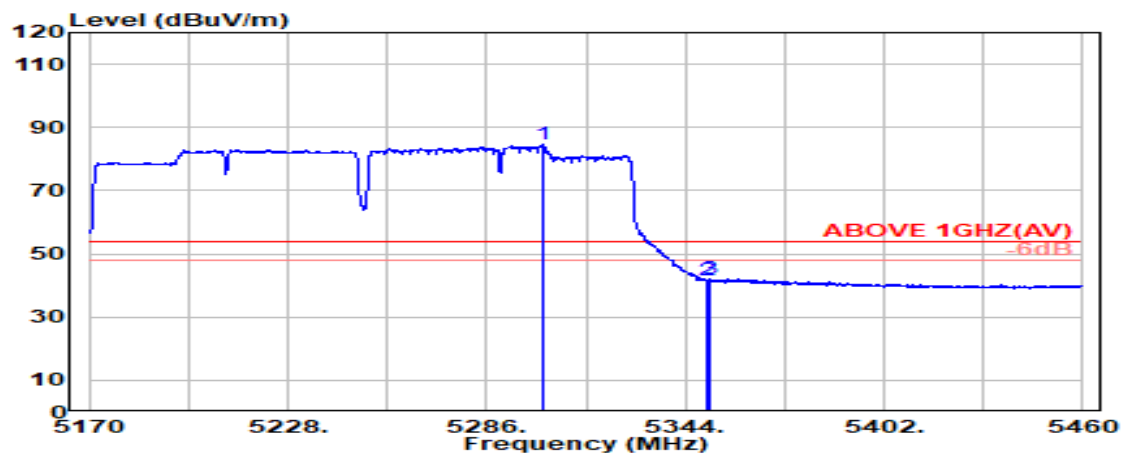

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.300	33.60	8.49	39.17	81.53	84.46	---	---	Average
5350.000	33.70	8.54	39.17	38.72	41.80	54.00	12.20	Average
5351.000	33.71	8.54	39.17	39.01	42.10	54.00	11.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

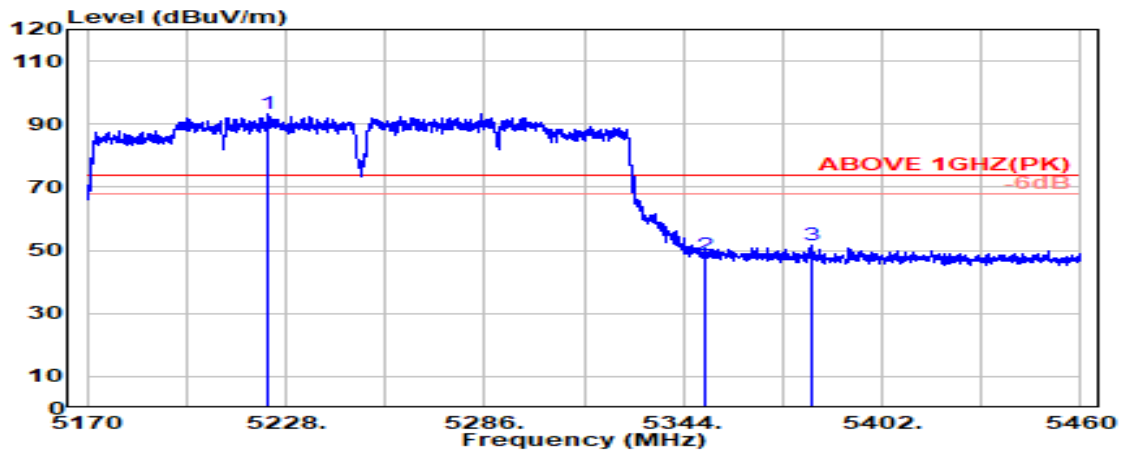

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5222.900	33.65	8.41	39.18	90.22	93.09	---	---	Peak
5350.000	33.70	8.54	39.17	45.22	48.29	74.00	25.71	Peak
5381.300	33.89	8.58	39.16	48.42	51.72	74.00	22.28	Peak

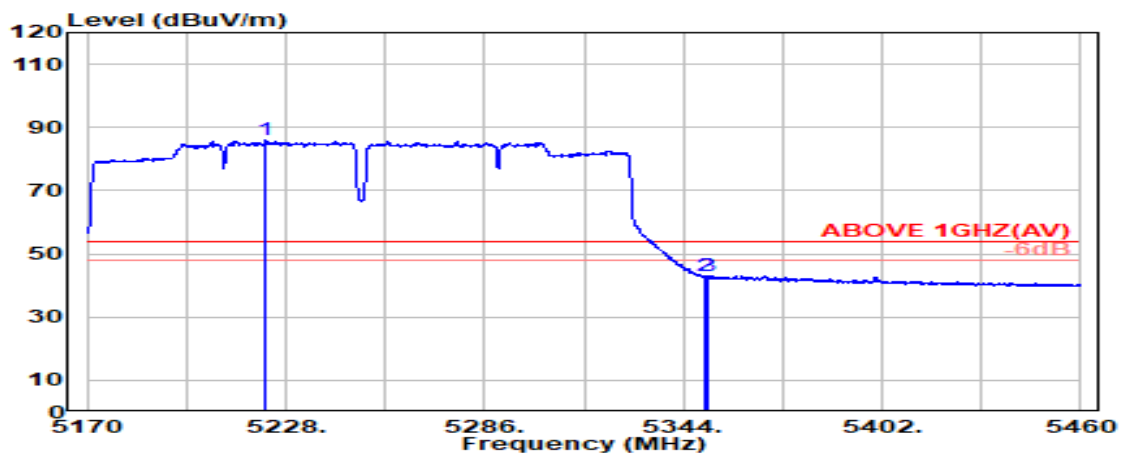

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5222.200	33.64	8.41	39.18	83.06	85.92	---	---	Average
5350.000	33.70	8.54	39.17	39.76	42.83	54.00	11.17	Average
5351.200	33.71	8.54	39.17	40.15	43.24	54.00	10.76	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

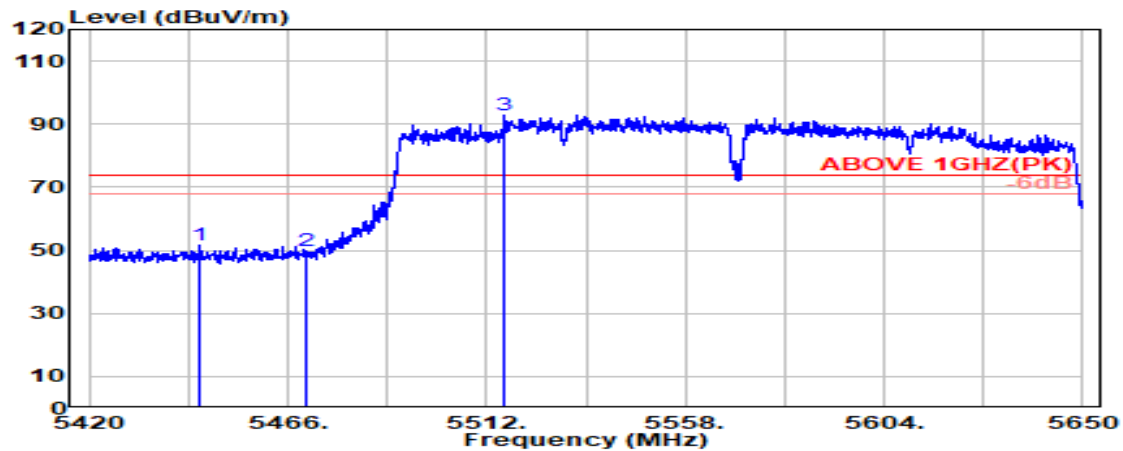

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.500	34.09	8.64	39.16	47.91	51.48	74.00	22.52	Peak
5470.000	34.10	8.67	39.15	46.27	49.88	74.00	24.12	Peak
@ 5516.300	34.07	8.72	39.15	89.31	92.94	---	---	Peak

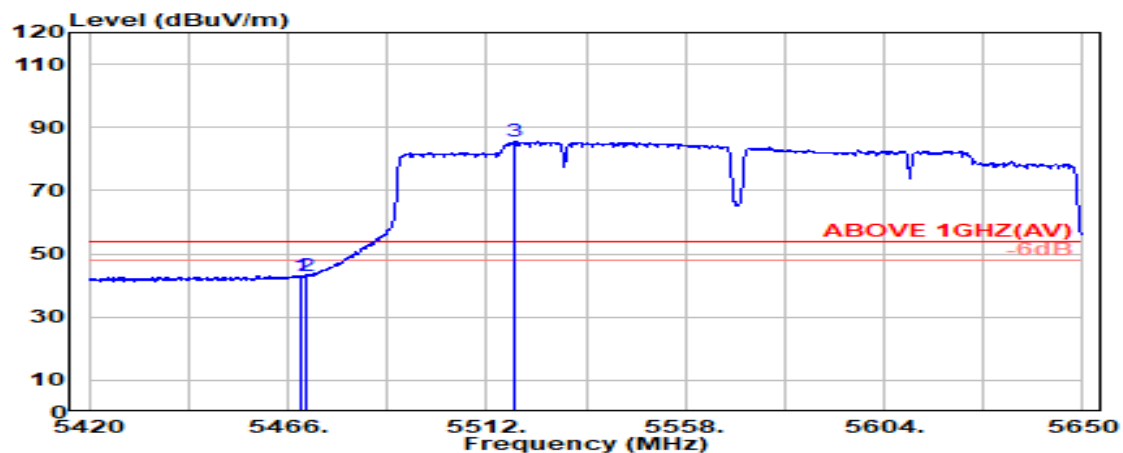

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.10	8.67	39.15	39.62	43.23	54.00	10.77	Average
5470.000	34.10	8.67	39.15	39.37	42.98	54.00	11.02	Average
@ 5518.700	34.06	8.72	39.15	81.82	85.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

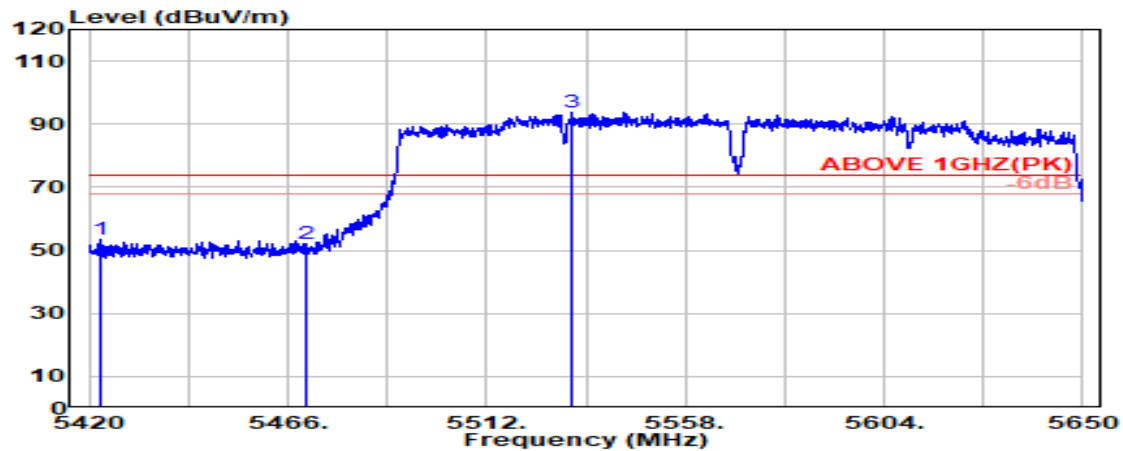

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.500	34.05	8.62	39.16	49.74	53.25	74.00	20.75	Peak
5470.000	34.10	8.67	39.15	48.32	51.94	74.00	22.06	Peak
@ 5531.800	34.04	8.73	39.16	90.13	93.74	---	---	Peak

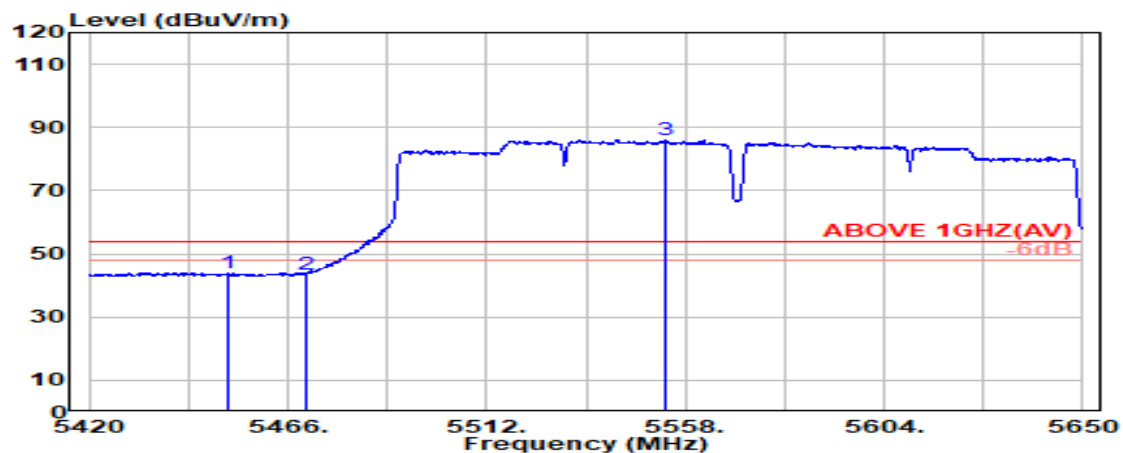

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.300	34.10	8.65	39.16	40.35	43.94	54.00	10.06	Average
5470.000	34.10	8.67	39.15	39.87	43.49	54.00	10.51	Average
@ 5553.500	33.99	8.75	39.16	82.50	86.08	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

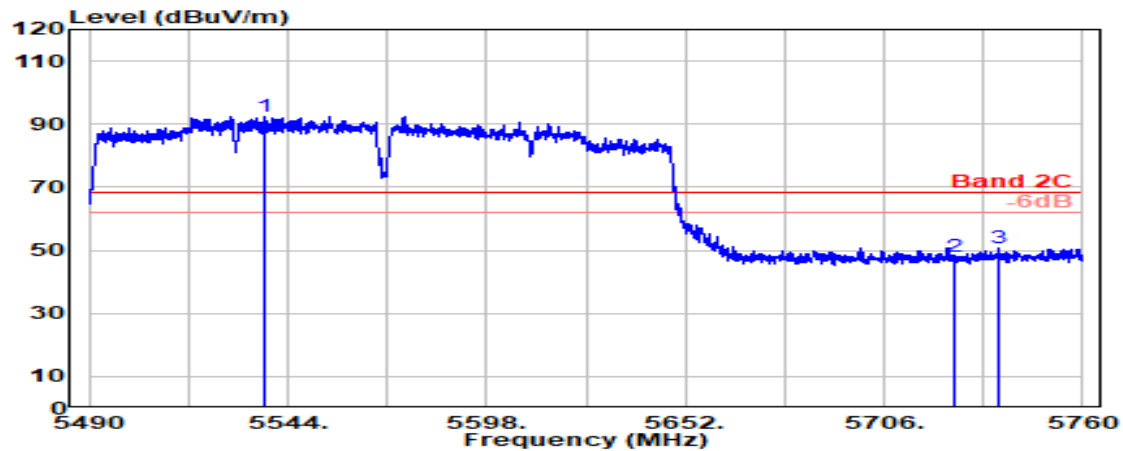

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5537.900	34.02	8.74	39.16	88.89	92.49	---	---	Peak
5725.000	33.60	8.92	39.20	44.46	47.79	68.20	20.41	Peak
5737.300	33.70	8.94	39.20	47.29	50.73	68.20	17.47	Peak

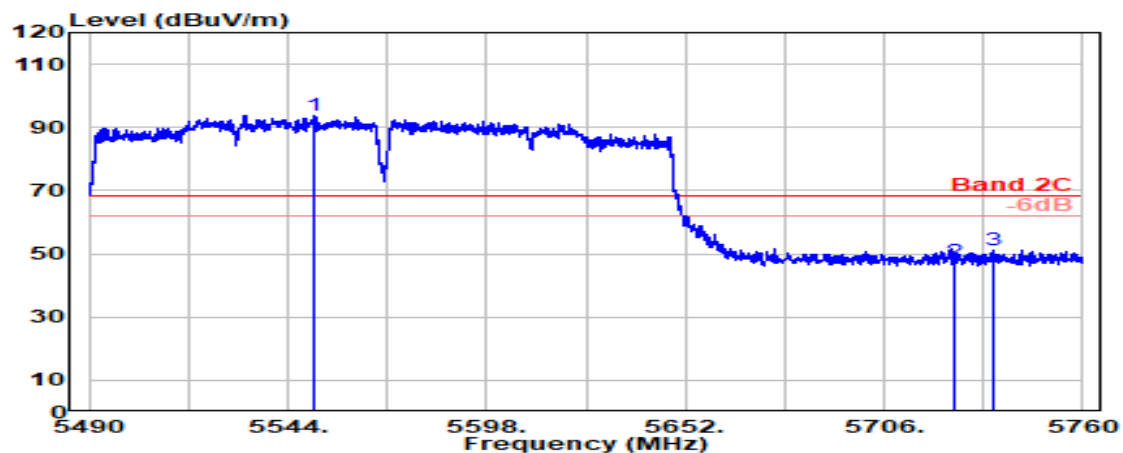

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5551.400	33.99	8.75	39.16	90.23	93.81	---	---	Peak
5725.000	33.60	8.92	39.20	44.38	47.71	68.20	20.49	Peak
5735.900	33.69	8.94	39.20	47.86	51.29	68.20	16.91	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

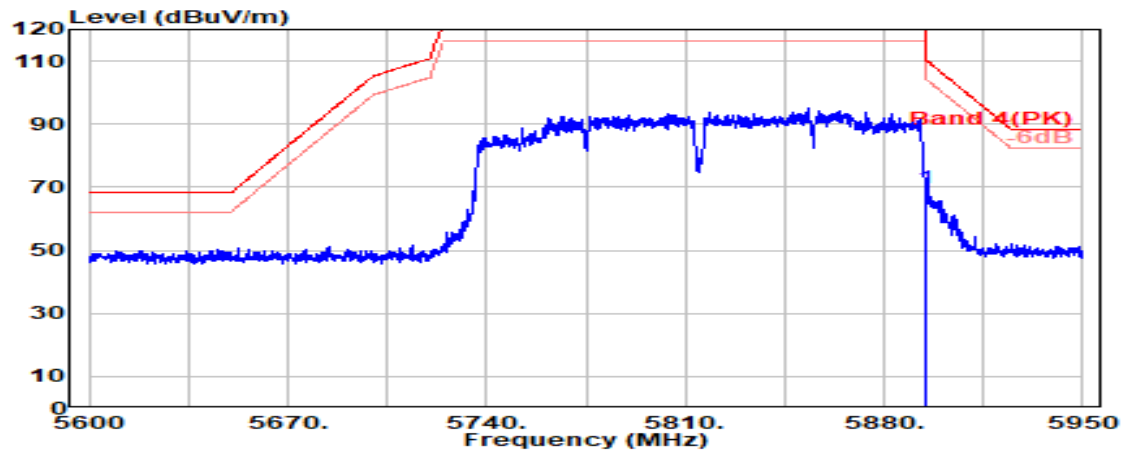

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	65.60	69.63	110.16	40.54	Peak

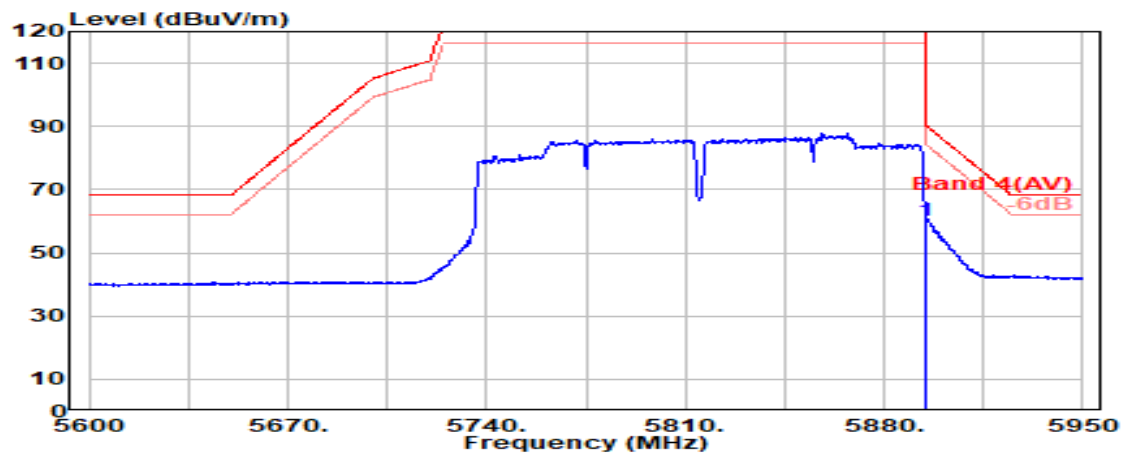

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	56.15	60.18	90.16	29.98	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

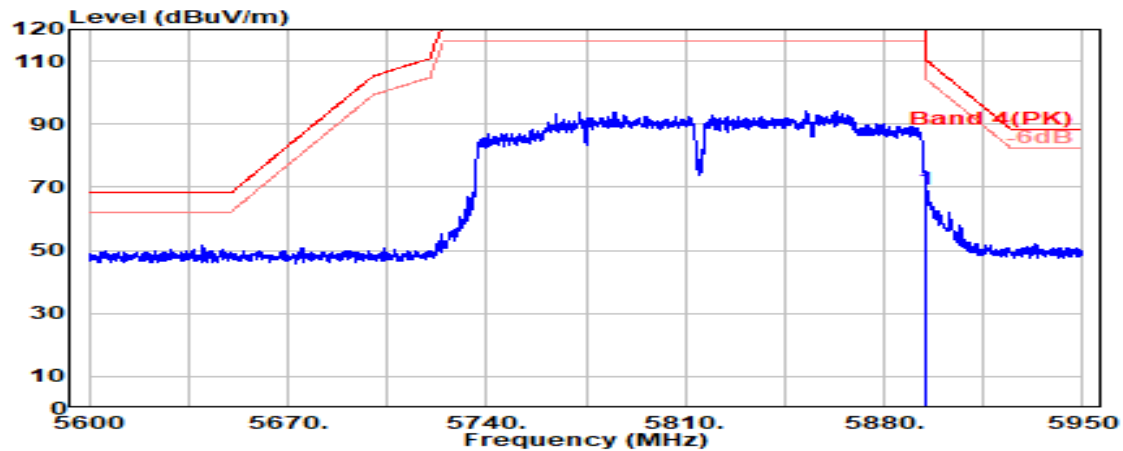

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	65.10	69.13	110.16	41.04	Peak

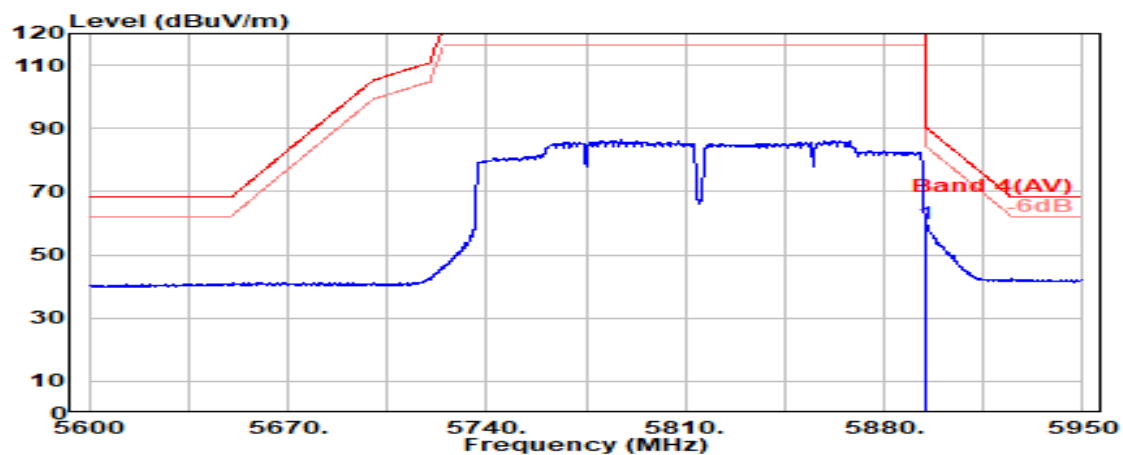

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	55.77	59.80	90.16	30.36	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

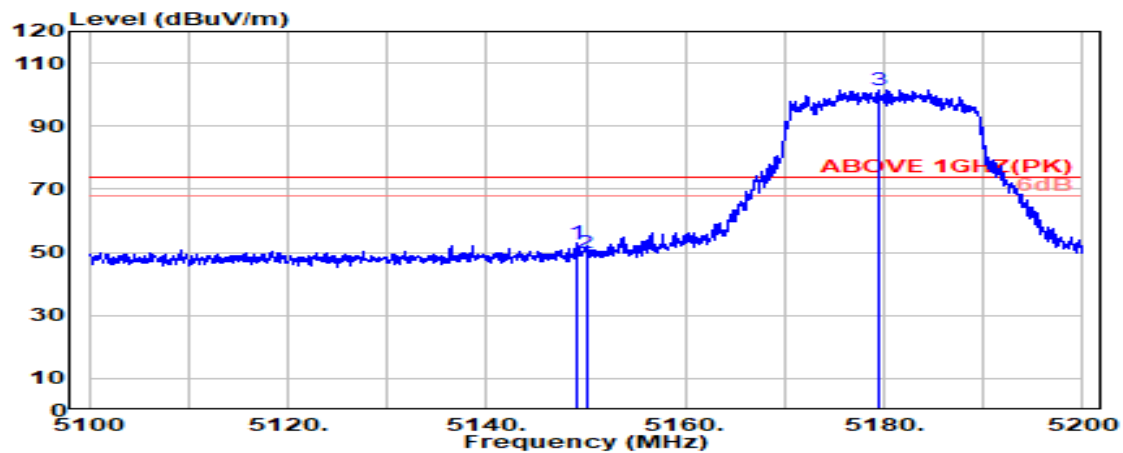

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	33.60	8.33	39.19	50.17	52.90	74.00	21.10	Peak
5150.000	33.60	8.33	39.19	47.27	50.01	74.00	23.99	Peak
@ 5179.500	33.60	8.36	39.19	98.80	101.57	---	---	Peak

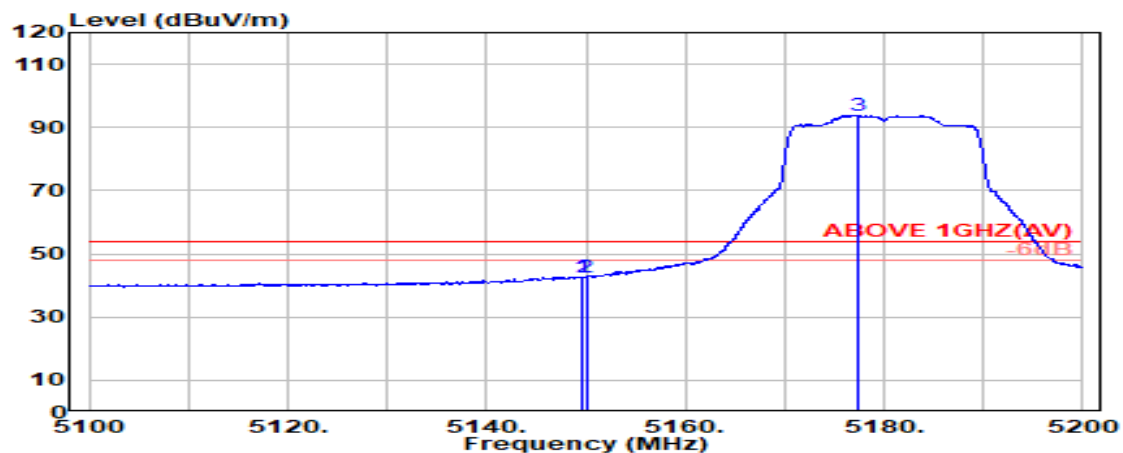

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.550	33.60	8.33	39.19	40.01	42.75	54.00	11.25	Average
5150.000	33.60	8.33	39.19	40.01	42.74	54.00	11.26	Average
@ 5177.500	33.60	8.36	39.19	90.99	93.76	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

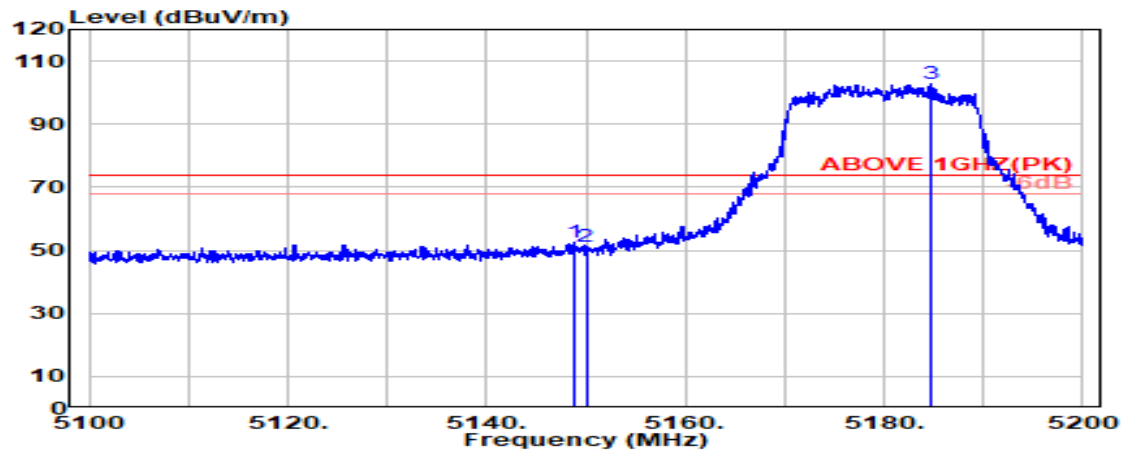

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.60	8.33	39.19	49.84	52.57	74.00	21.43	Peak
5150.000	33.60	8.33	39.19	48.58	51.32	74.00	22.68	Peak
@ 5184.600	33.60	8.36	39.19	99.82	102.60	---	---	Peak

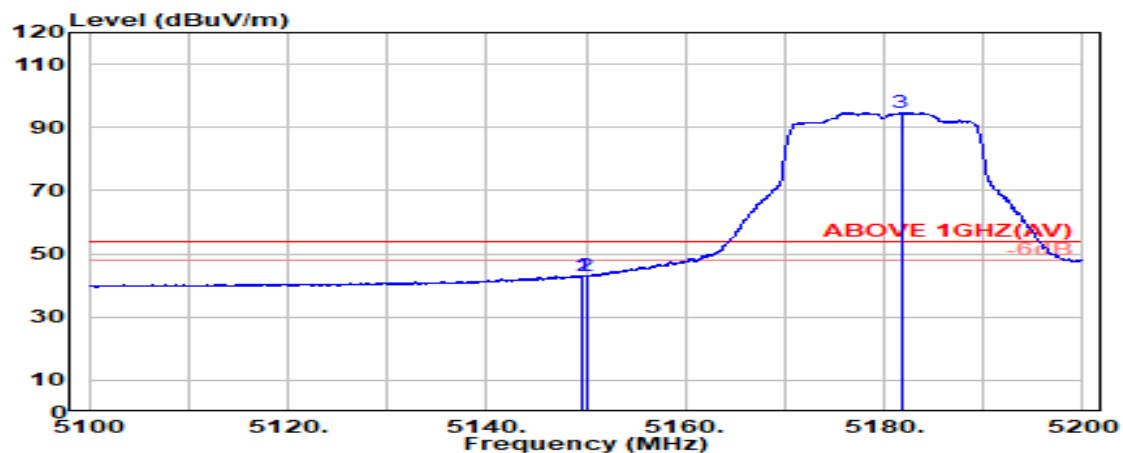

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.550	33.60	8.33	39.19	40.36	43.09	54.00	10.91	Average
5150.000	33.60	8.33	39.19	40.11	42.84	54.00	11.16	Average
@ 5181.700	33.60	8.36	39.19	91.87	94.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

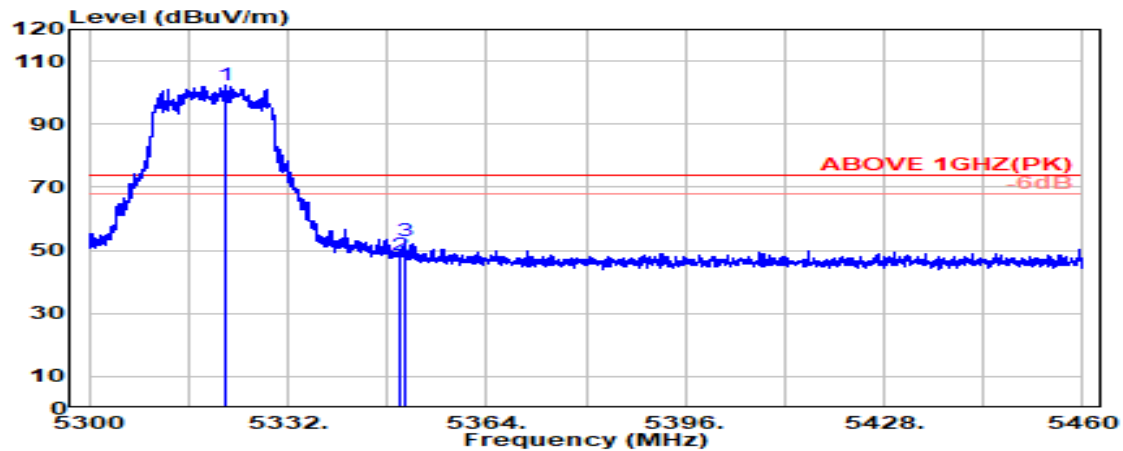

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.800	33.64	8.51	39.17	99.57	102.55	---	---	Peak
5350.000	33.70	8.54	39.17	45.23	48.30	74.00	25.70	Peak
5350.850	33.71	8.54	39.17	50.07	53.15	74.00	20.85	Peak

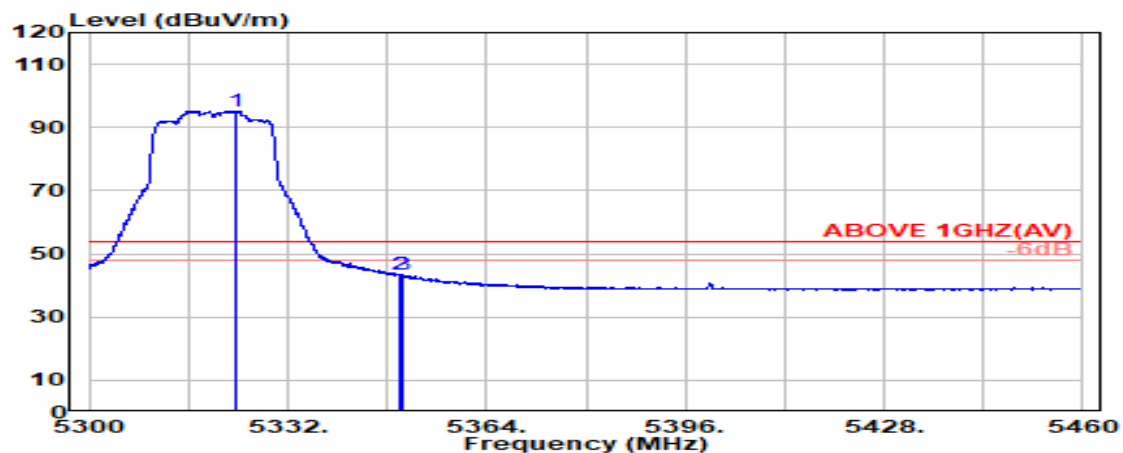

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.550	33.65	8.51	39.17	92.22	95.21	---	---	Average
5350.000	33.70	8.54	39.17	40.31	43.38	54.00	10.62	Average
5350.600	33.70	8.54	39.17	40.18	43.26	54.00	10.74	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

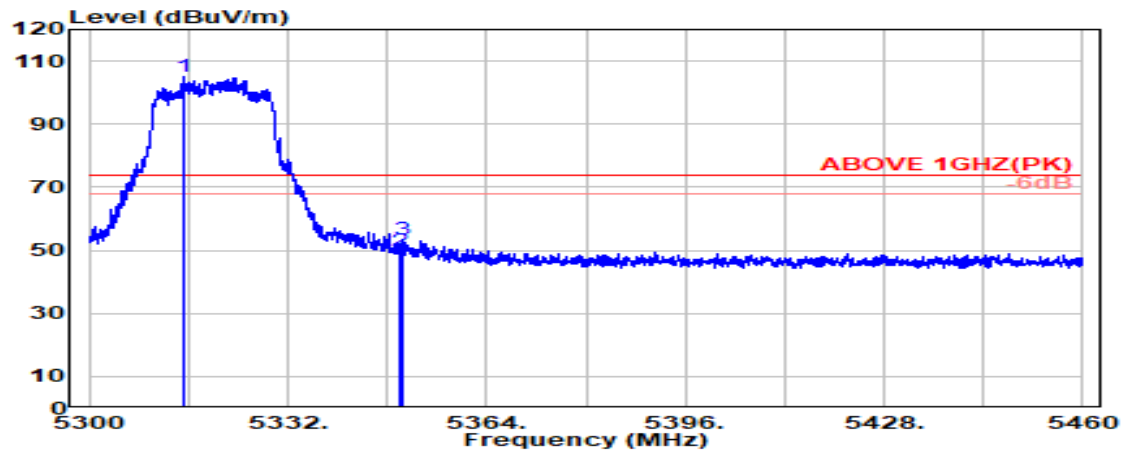

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.350	33.63	8.51	39.17	102.13	105.09	---	---	Peak
5350.000	33.70	8.54	39.17	46.76	49.83	74.00	24.17	Peak
5350.300	33.70	8.54	39.17	50.48	53.56	74.00	20.44	Peak

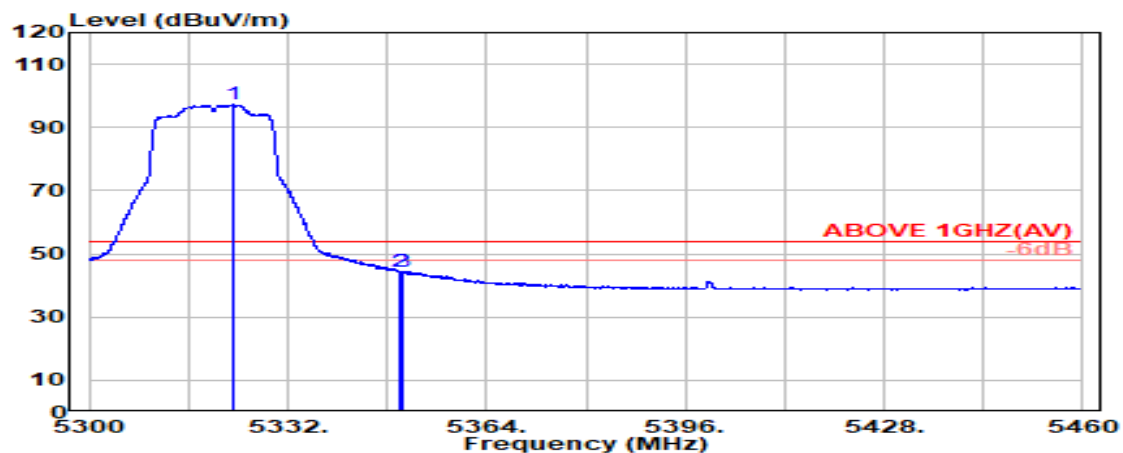

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.100	33.65	8.51	39.17	94.22	97.21	---	---	Average
5350.000	33.70	8.54	39.17	41.23	44.30	54.00	9.70	Average
5350.350	33.70	8.54	39.17	41.48	44.56	54.00	9.44	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

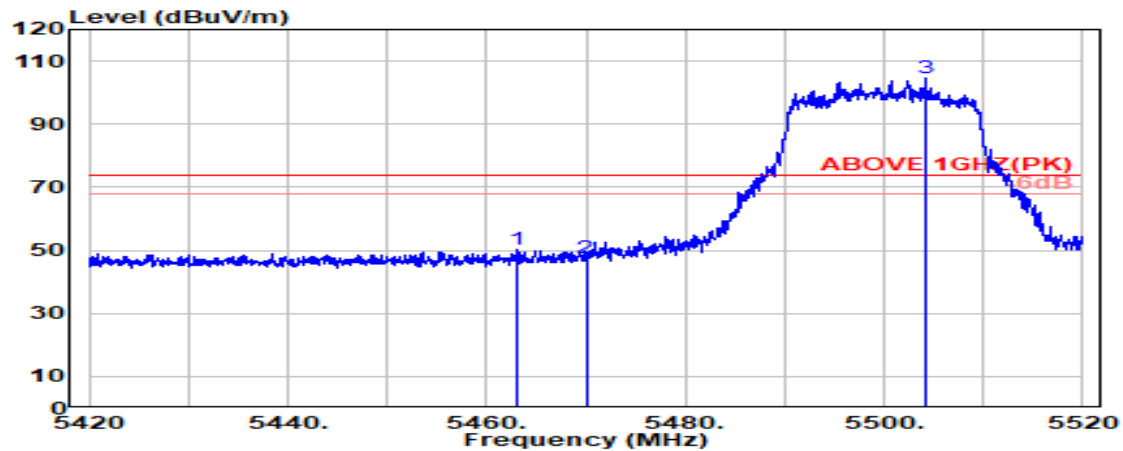

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.950	34.10	8.66	39.15	46.58	50.19	74.00	23.81	Peak
5470.000	34.10	8.67	39.15	43.82	47.43	74.00	26.57	Peak
@ 5504.150	34.09	8.70	39.15	101.10	104.75	---	---	Peak

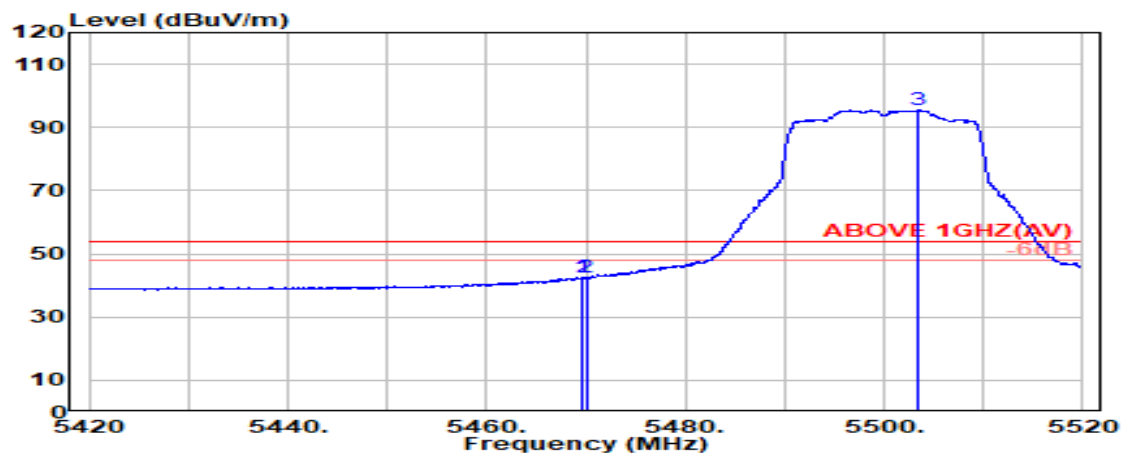

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.500	34.10	8.67	39.15	38.98	42.60	54.00	11.40	Average
5470.000	34.10	8.67	39.15	38.97	42.59	54.00	11.41	Average
@ 5503.500	34.09	8.70	39.15	91.70	95.34	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

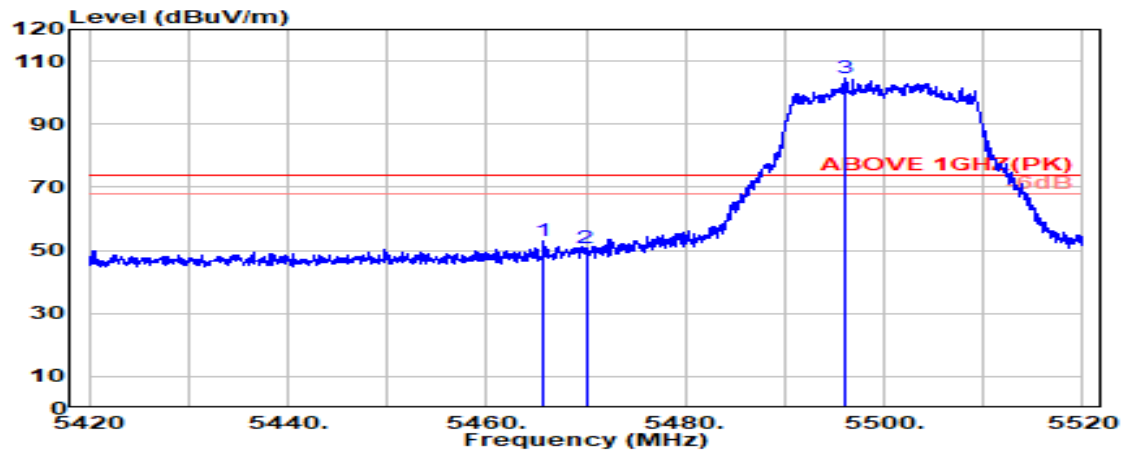

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.750	34.10	8.66	39.15	49.15	52.76	74.00	21.24	Peak
5470.000	34.10	8.67	39.15	46.95	50.57	74.00	23.43	Peak
@ 5496.150	34.10	8.69	39.15	100.98	104.62	---	---	Peak

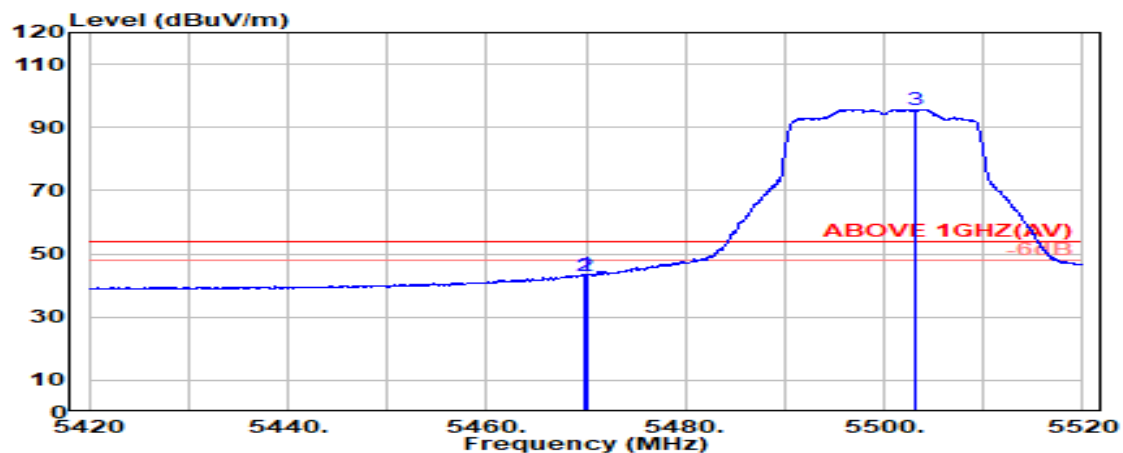

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.750	34.10	8.67	39.15	39.89	43.50	54.00	10.50	Average
5470.000	34.10	8.67	39.15	39.61	43.22	54.00	10.78	Average
@ 5503.250	34.09	8.70	39.15	92.04	95.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

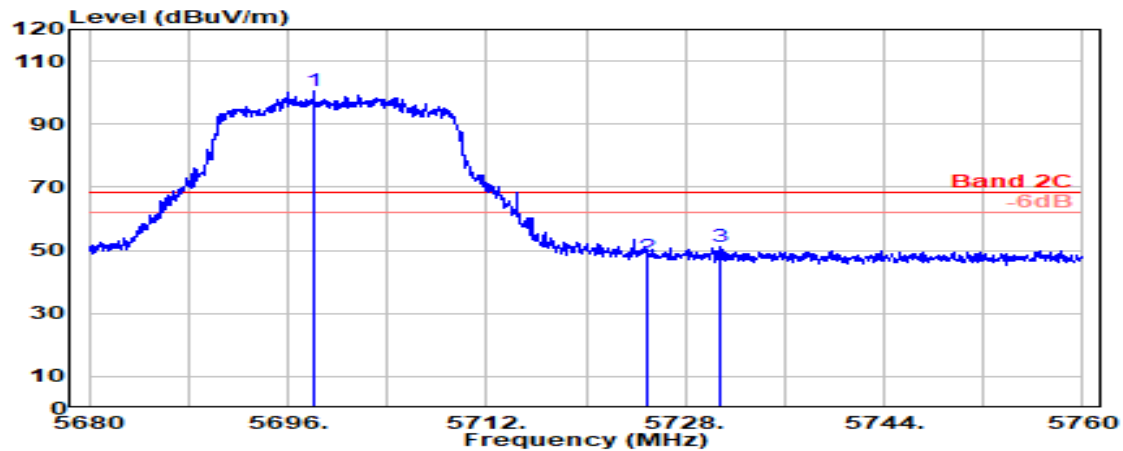

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.150	33.41	8.90	39.19	97.38	100.50	---	---	Peak
5725.000	33.60	8.92	39.20	44.70	48.03	68.20	20.17	Peak
5730.750	33.65	8.93	39.20	47.82	51.20	68.20	17.00	Peak

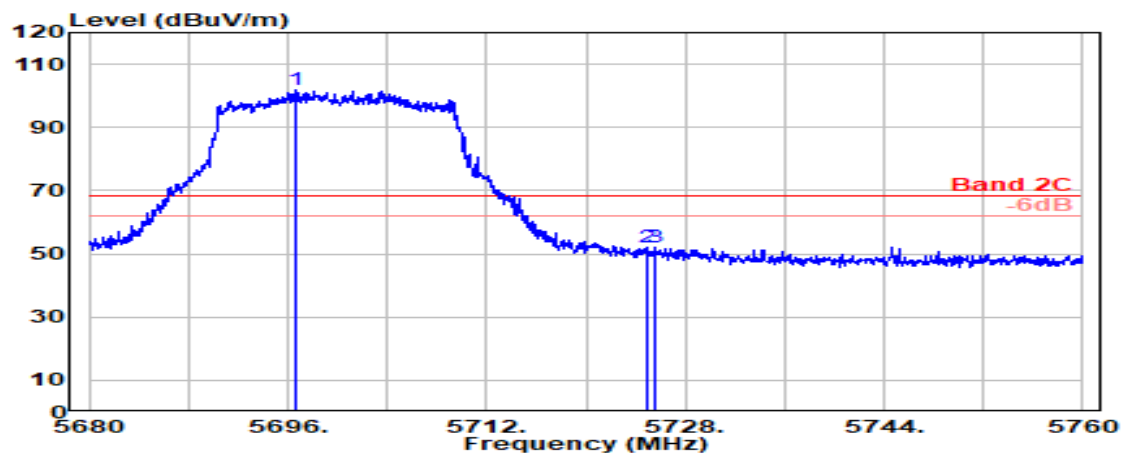

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.700	33.42	8.90	39.19	98.61	101.74	---	---	Peak
5725.000	33.60	8.92	39.20	48.60	51.93	68.20	16.27	Peak
5725.600	33.61	8.93	39.20	48.63	51.97	68.20	16.23	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

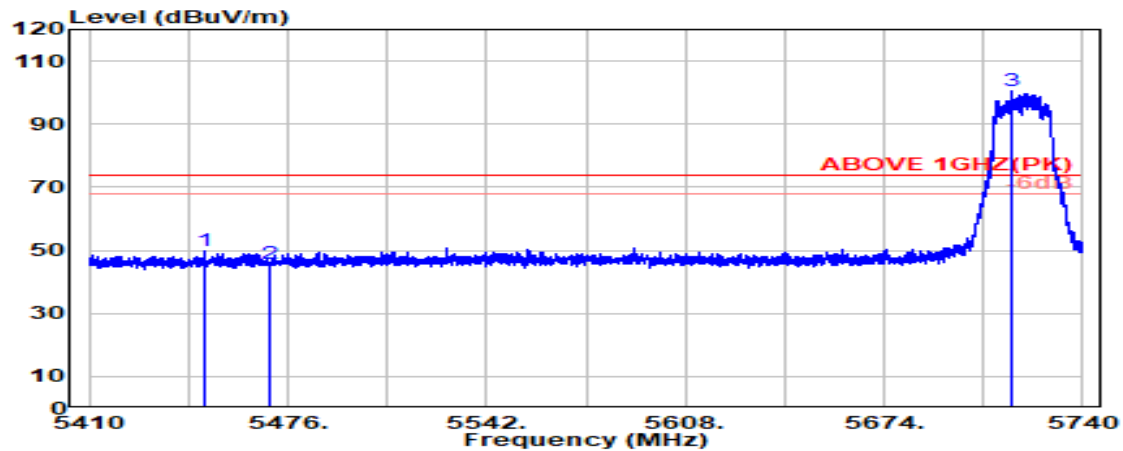

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.550	34.10	8.65	39.16	46.11	49.70	74.00	24.30	Peak
5470.000	34.10	8.67	39.15	42.04	45.66	74.00	28.34	Peak
@ 5716.250	33.53	8.92	39.19	97.07	100.32	---	---	Peak

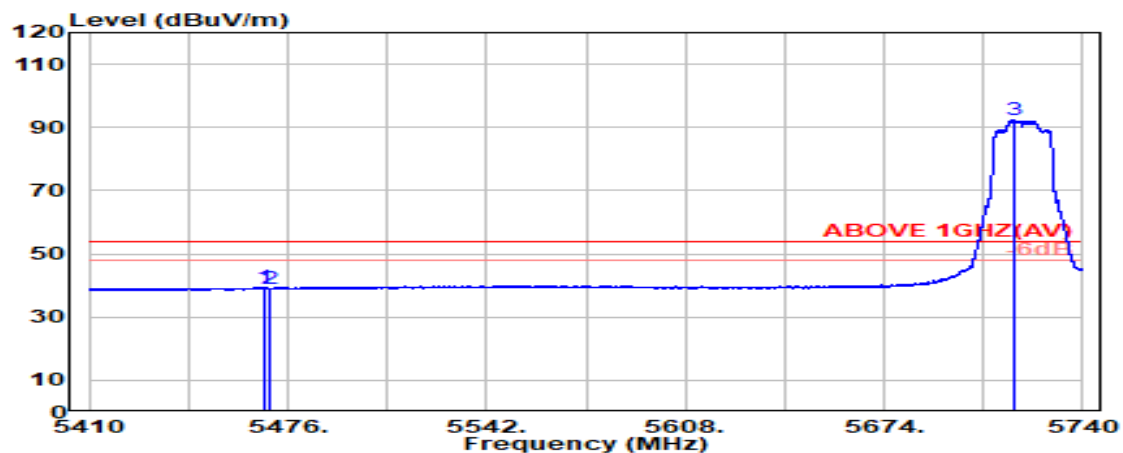


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.10	8.67	39.15	35.67	39.29	54.00	14.71	Average
5470.000	34.10	8.67	39.15	35.30	38.91	54.00	15.09	Average
@ 5717.500	33.54	8.92	39.19	88.95	92.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

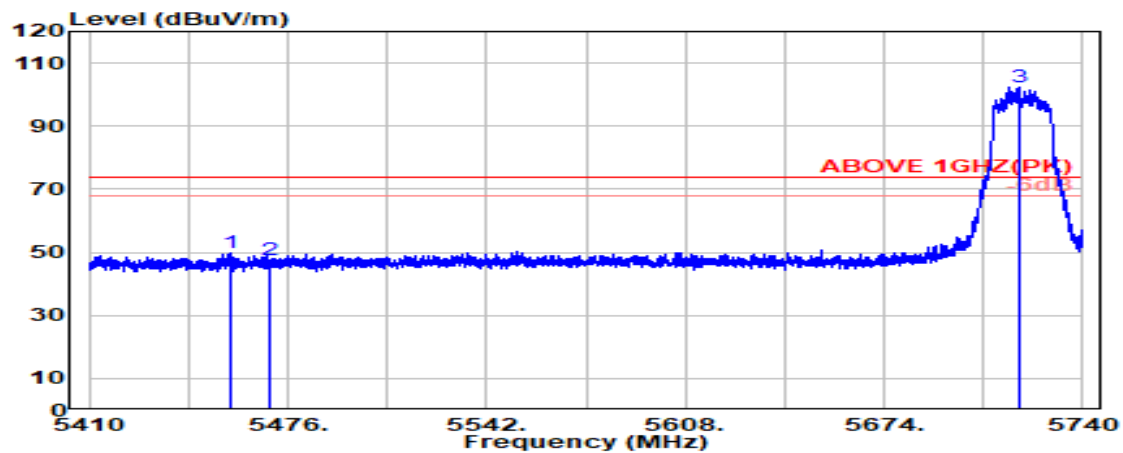

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.650	34.10	8.65	39.15	46.41	50.01	74.00	23.99	Peak
5470.000	34.10	8.67	39.15	44.03	47.64	74.00	26.36	Peak
@ 5718.550	33.55	8.92	39.19	99.21	102.48	---	---	Peak

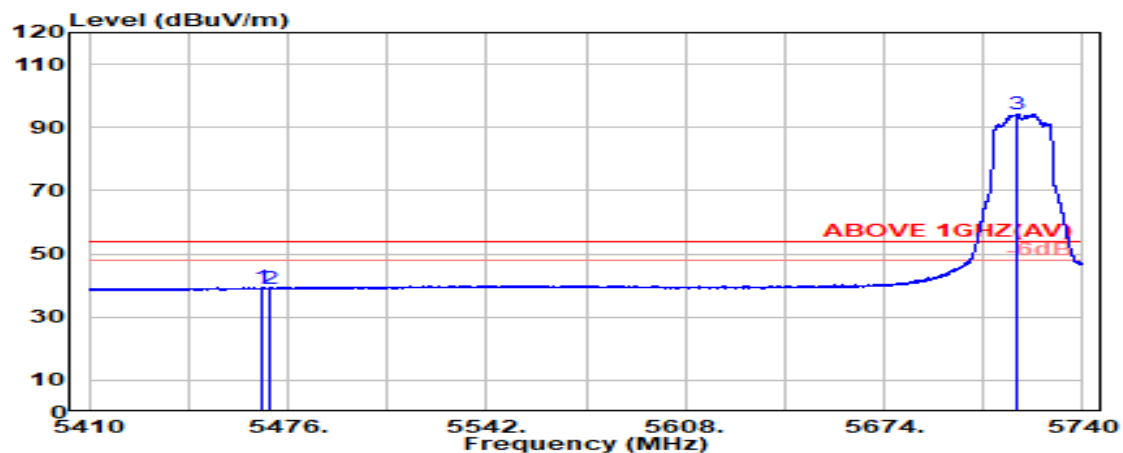

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	34.10	8.66	39.15	35.71	39.32	54.00	14.68	Average
5470.000	34.10	8.67	39.15	35.48	39.10	54.00	14.90	Average
@ 5718.000	33.54	8.92	39.19	90.94	94.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

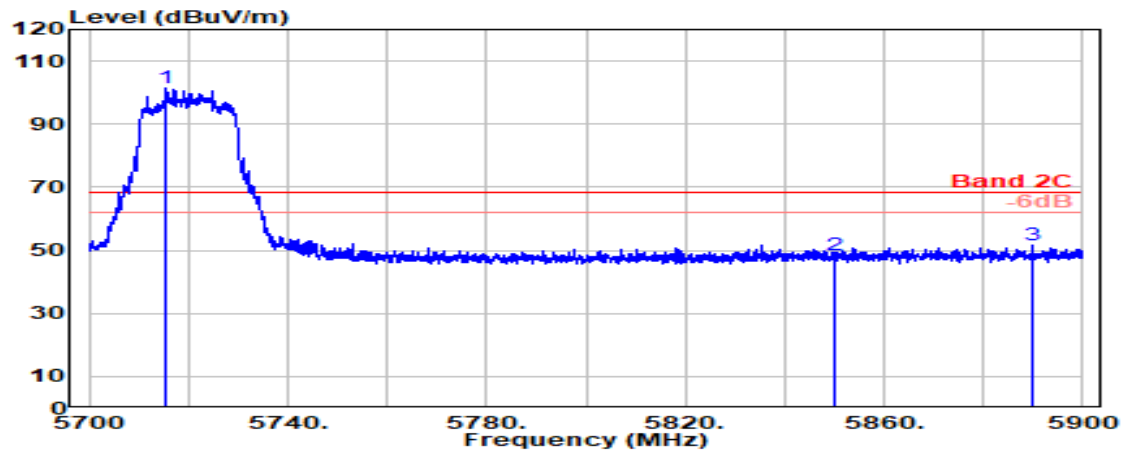

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5715.550	33.52	8.92	39.19	98.23	101.48	---	---	Peak
	5850.000	33.90	9.05	39.22	44.52	48.24	68.20	19.96	Peak
	5889.900	34.14	9.09	39.23	47.70	51.70	68.20	16.50	Peak

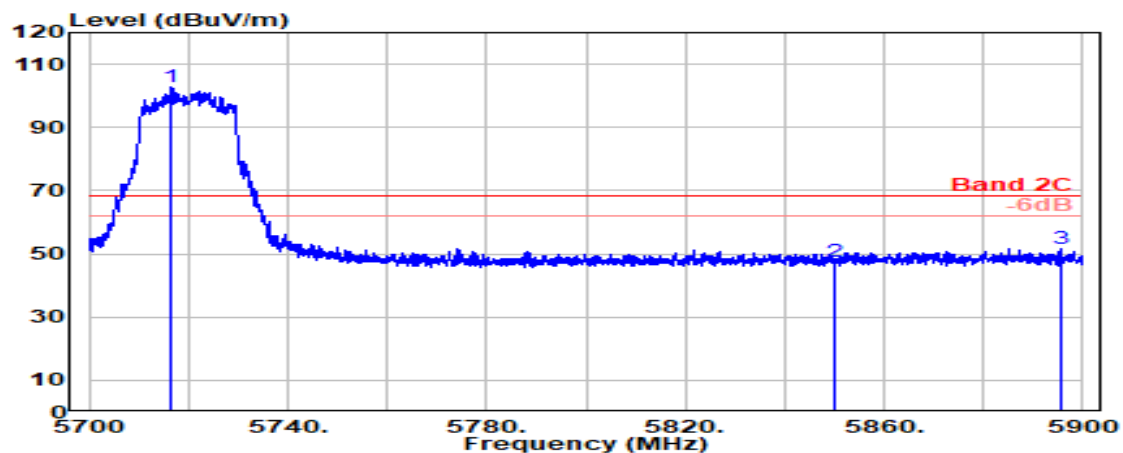

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5716.650	33.53	8.92	39.19	99.33	102.58	---	---	Peak
	5850.000	33.90	9.05	39.22	43.96	47.69	68.20	20.51	Peak
	5895.450	34.17	9.09	39.23	47.63	51.66	68.20	16.54	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

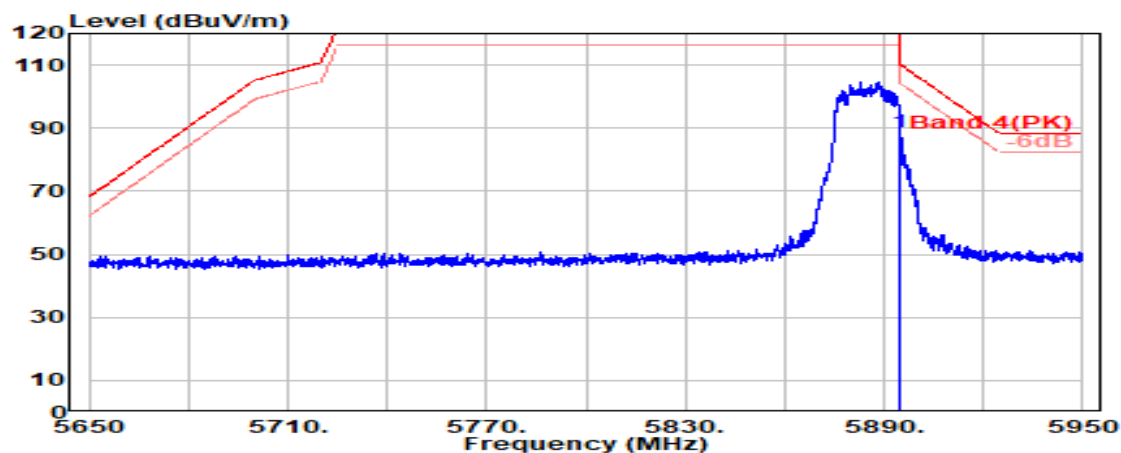

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	84.63	88.66	110.20	21.54	Peak

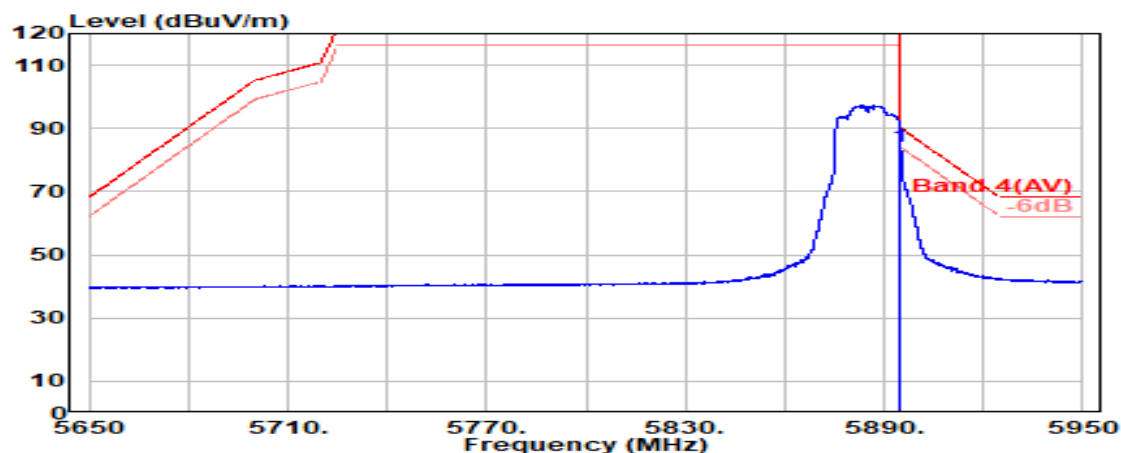


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	80.11	84.14	90.20	6.06	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

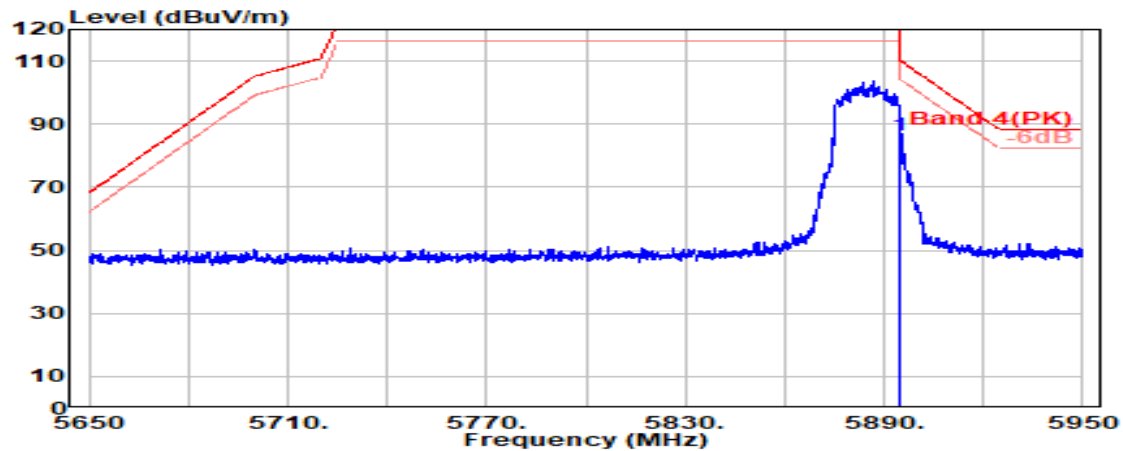

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	82.62	86.66	110.20	23.54	Peak

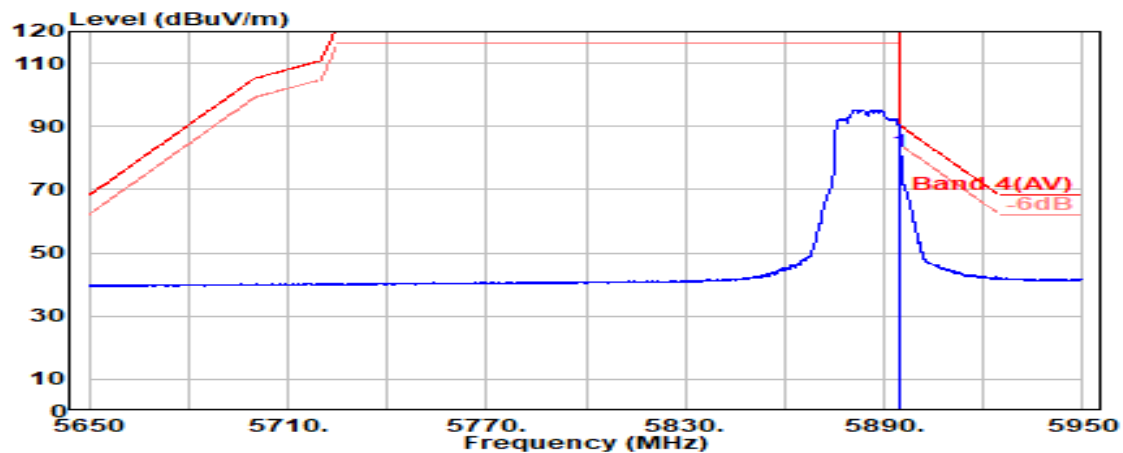


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	78.06	82.09	90.20	8.11	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

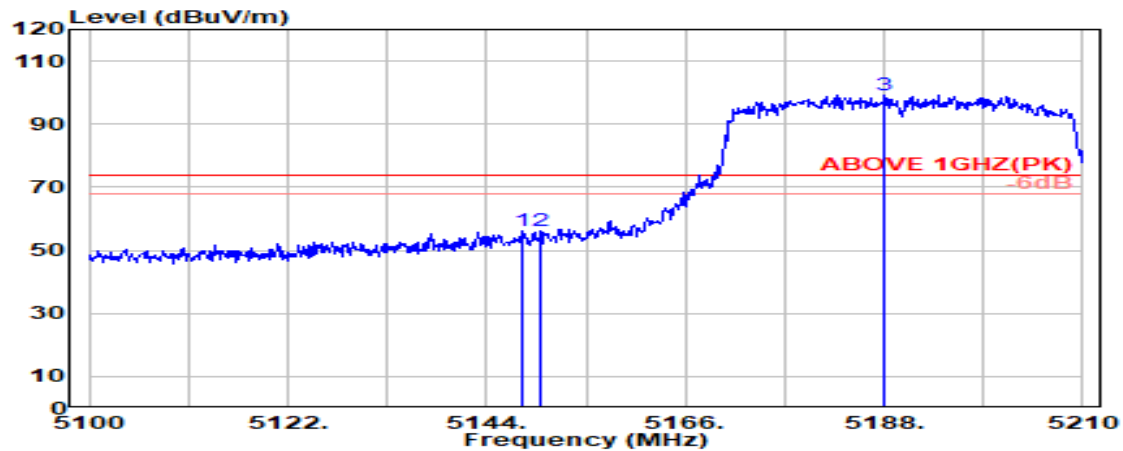

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.070	33.60	8.32	39.19	53.51	56.24	74.00	17.76	Peak
5150.000	33.60	8.33	39.19	53.50	56.24	74.00	17.76	Peak
@ 5188.000	33.60	8.37	39.19	96.60	99.38	---	---	Peak

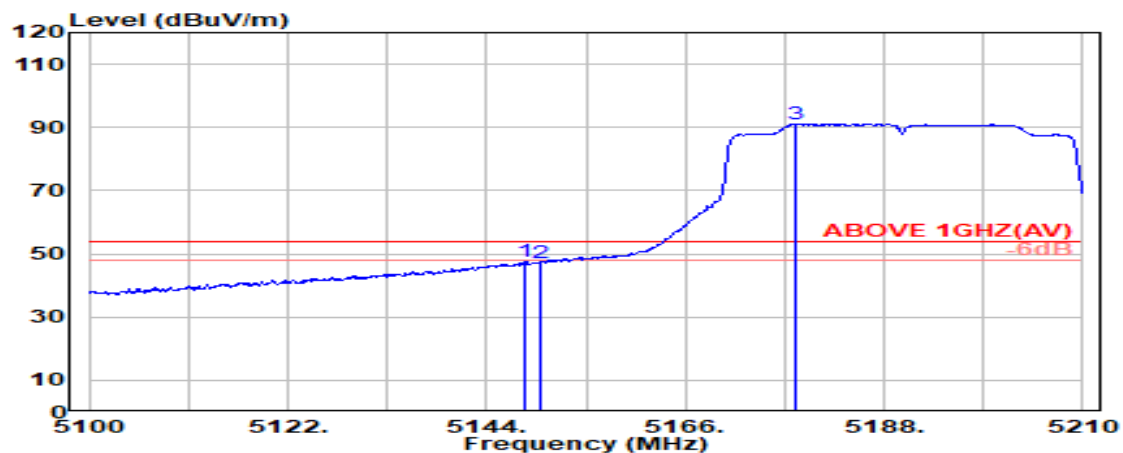

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.290	33.60	8.33	39.19	44.89	47.62	54.00	6.38	Average
5150.000	33.60	8.33	39.19	44.52	47.26	54.00	6.74	Average
@ 5178.210	33.60	8.36	39.19	88.26	91.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

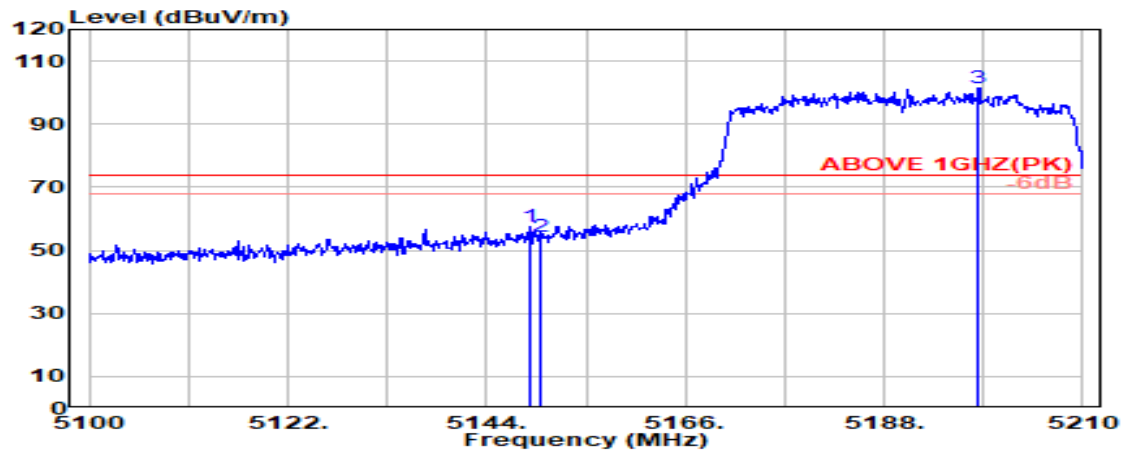

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.840	33.60	8.33	39.19	54.84	57.57	74.00	16.43	Peak
5150.000	33.60	8.33	39.19	51.79	54.52	74.00	19.48	Peak
@ 5198.450	33.60	8.38	39.19	98.57	101.37	---	---	Peak

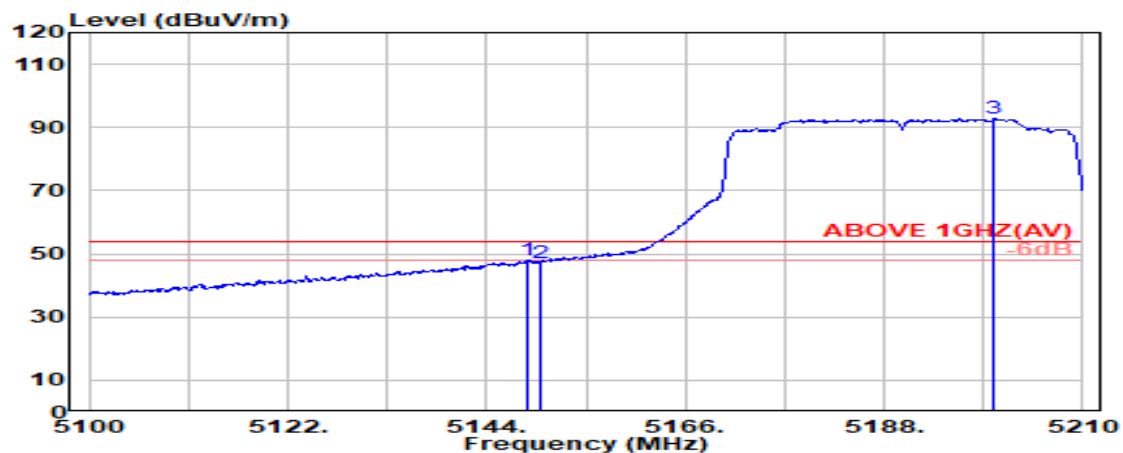

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.510	33.60	8.33	39.19	45.24	47.97	54.00	6.03	Average
5150.000	33.60	8.33	39.19	44.56	47.29	54.00	6.71	Average
@ 5200.210	33.60	8.38	39.19	89.96	92.76	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

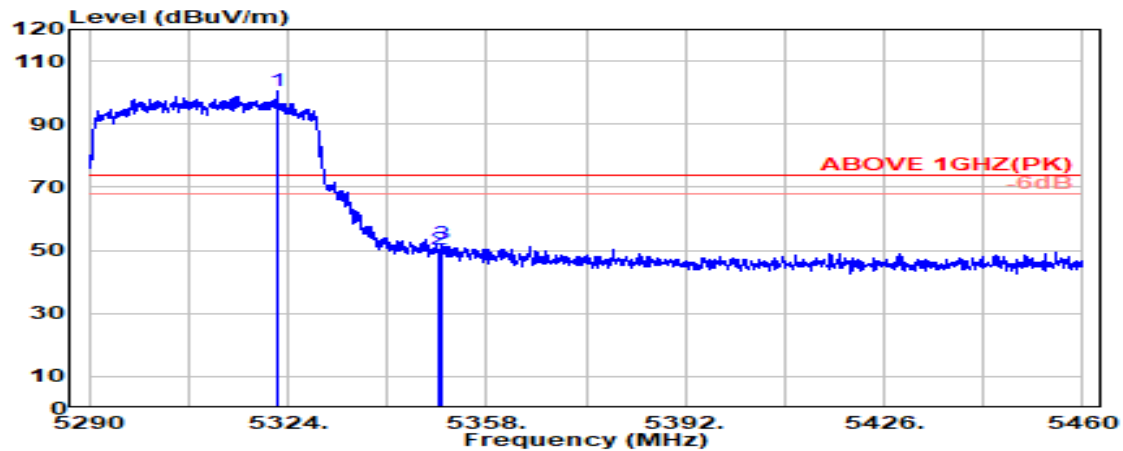

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.200	33.64	8.51	39.17	97.37	100.36	---	---	Peak
5350.000	33.70	8.54	39.17	47.38	50.46	74.00	23.54	Peak
5350.200	33.70	8.54	39.17	48.78	51.85	74.00	22.15	Peak

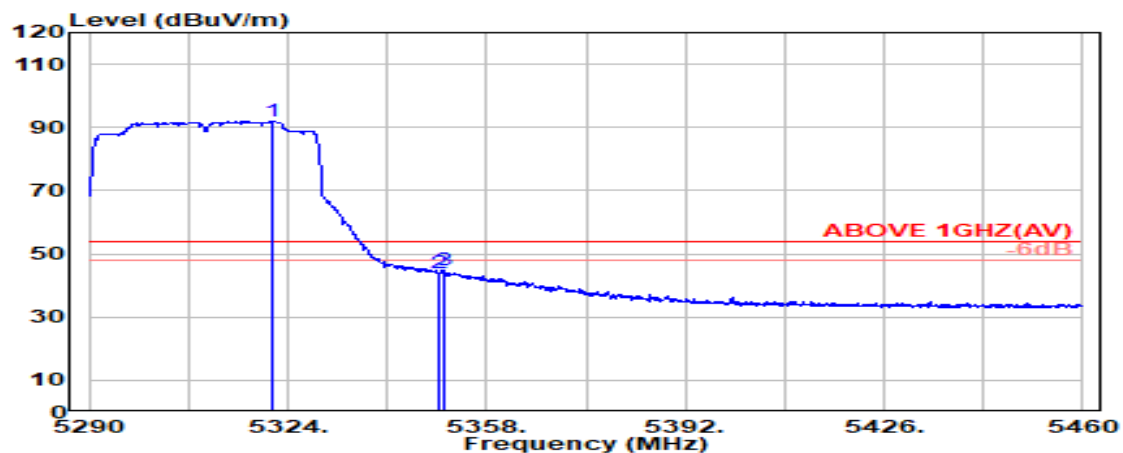

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.500	33.64	8.51	39.17	88.93	91.91	---	---	Average
5350.000	33.70	8.54	39.17	40.85	43.93	54.00	10.07	Average
5350.600	33.70	8.54	39.17	41.72	44.79	54.00	9.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

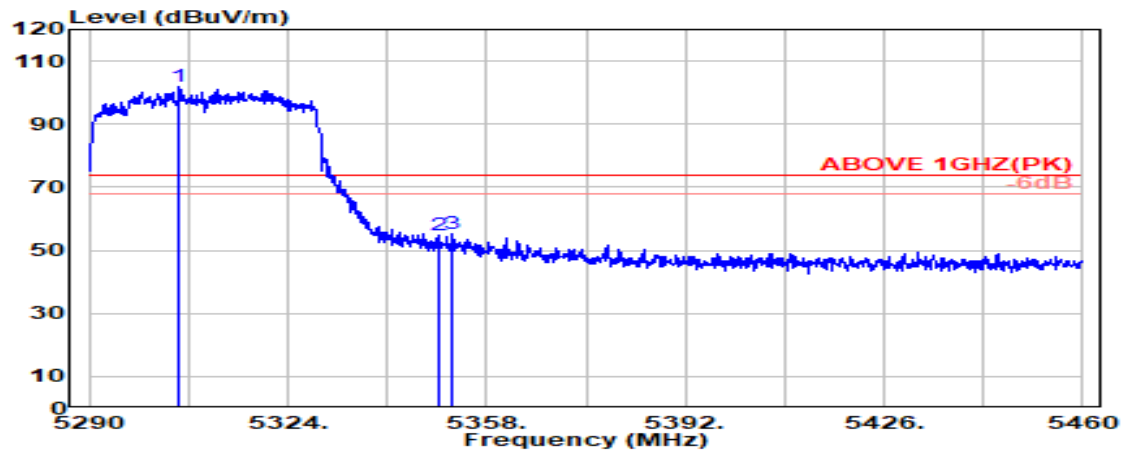

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.500	33.61	8.50	39.17	98.75	101.69	---	---	Peak
5350.000	33.70	8.54	39.17	51.60	54.67	74.00	19.33	Peak
5352.000	33.71	8.54	39.17	52.09	55.18	74.00	18.82	Peak

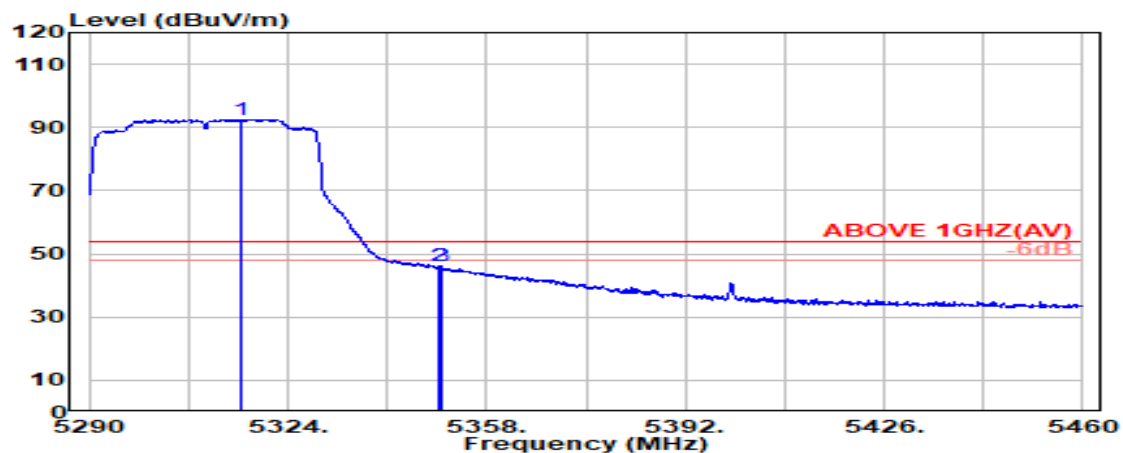

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.100	33.63	8.51	39.17	89.62	92.59	---	---	Average
5350.000	33.70	8.54	39.17	42.92	46.00	54.00	8.00	Average
5350.400	33.70	8.54	39.17	42.92	46.00	54.00	8.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

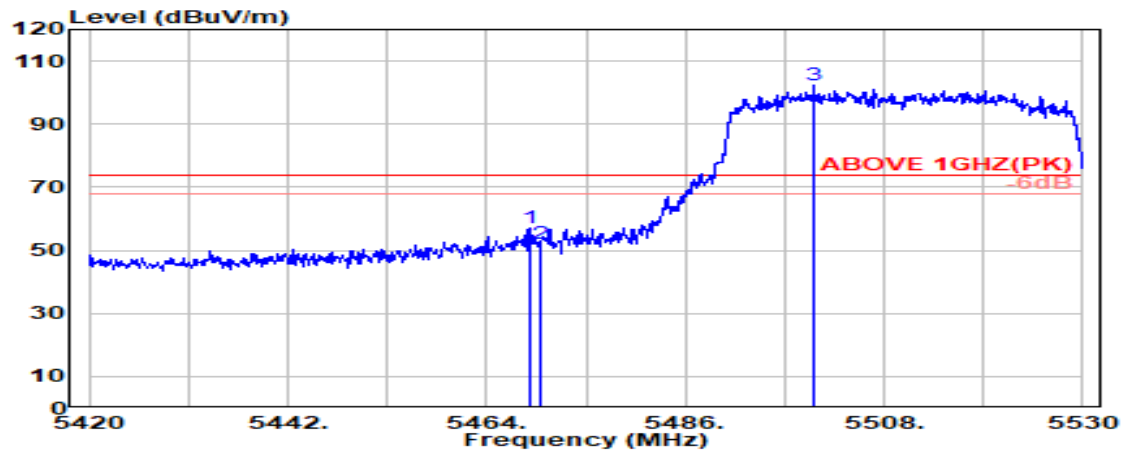

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.10	8.67	39.15	53.61	57.22	74.00	16.78	Peak
5470.000	34.10	8.67	39.15	48.51	52.12	74.00	21.88	Peak
@ 5500.200	34.10	8.70	39.15	98.51	102.16	---	---	Peak

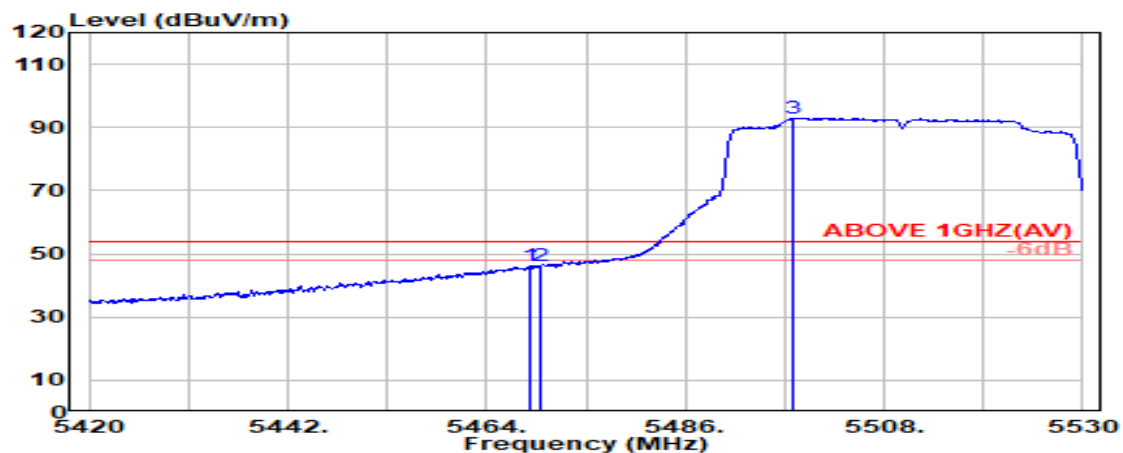

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.10	8.67	39.15	42.63	46.24	54.00	7.76	Average
5470.000	34.10	8.67	39.15	42.46	46.08	54.00	7.92	Average
@ 5497.900	34.10	8.70	39.15	89.40	93.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

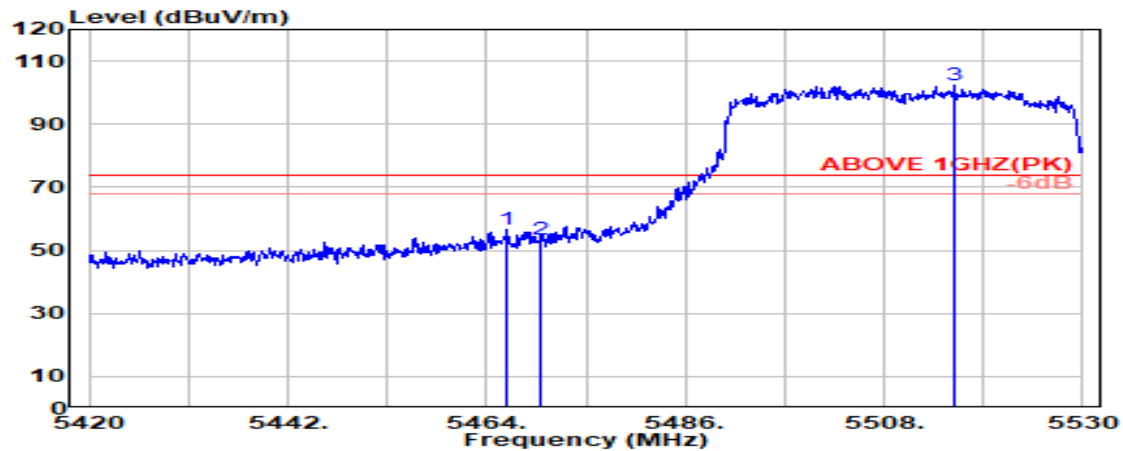

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.10	8.66	39.15	52.87	56.48	74.00	17.52	Peak
5470.000	34.10	8.67	39.15	49.97	53.59	74.00	20.41	Peak
@ 5515.800	34.07	8.71	39.15	98.57	102.20	---	---	Peak

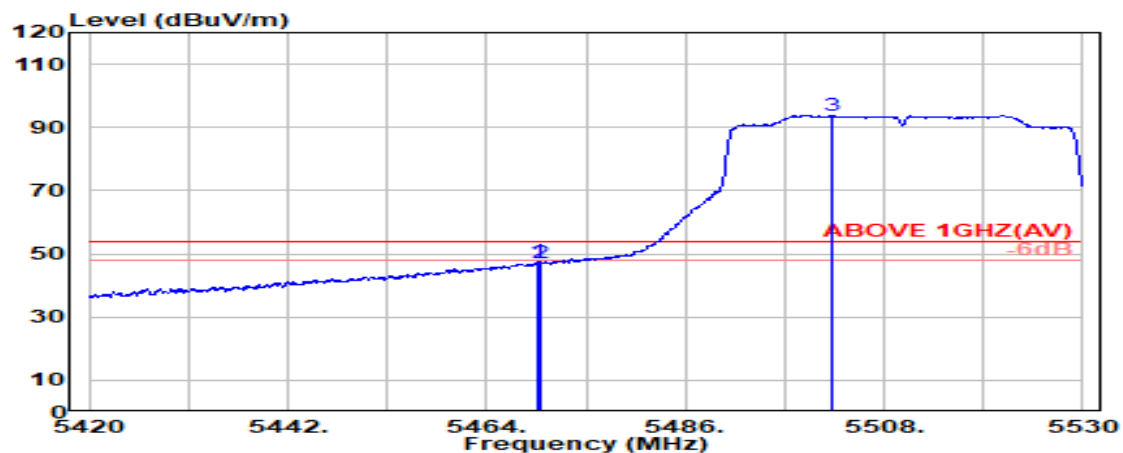

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.10	8.67	39.15	43.93	47.54	54.00	6.46	Average
5470.000	34.10	8.67	39.15	43.37	46.99	54.00	7.01	Average
@ 5502.200	34.10	8.70	39.15	90.19	93.84	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

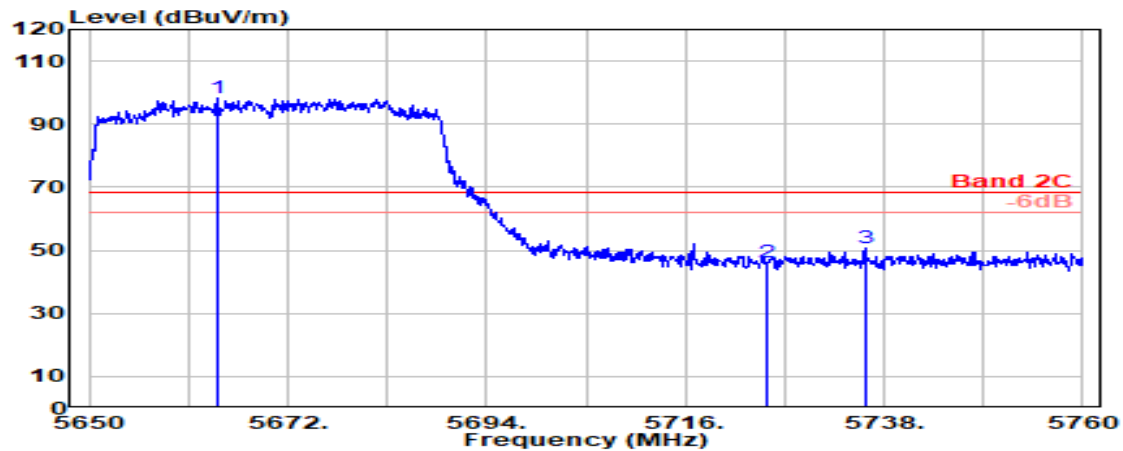

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5664.100	33.62	8.86	39.18	94.90	98.19	---	---	Peak
5725.000	33.60	8.92	39.20	42.65	45.98	68.20	22.22	Peak
5735.900	33.69	8.94	39.20	47.15	50.57	68.20	17.63	Peak

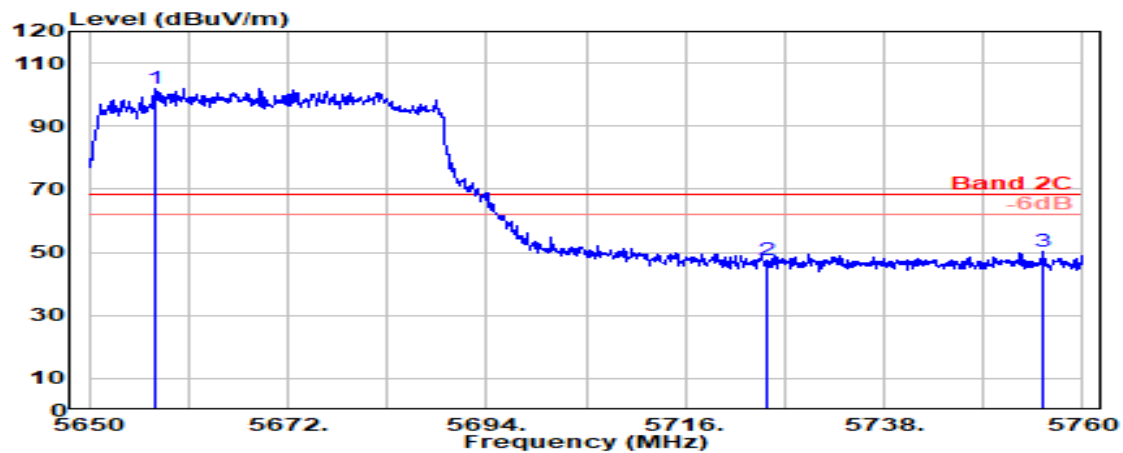

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5657.200	33.66	8.86	39.18	98.52	101.86	---	---	Peak
5725.000	33.60	8.92	39.20	44.30	47.63	68.20	20.57	Peak
5755.500	33.81	8.95	39.20	46.51	50.08	68.20	18.12	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

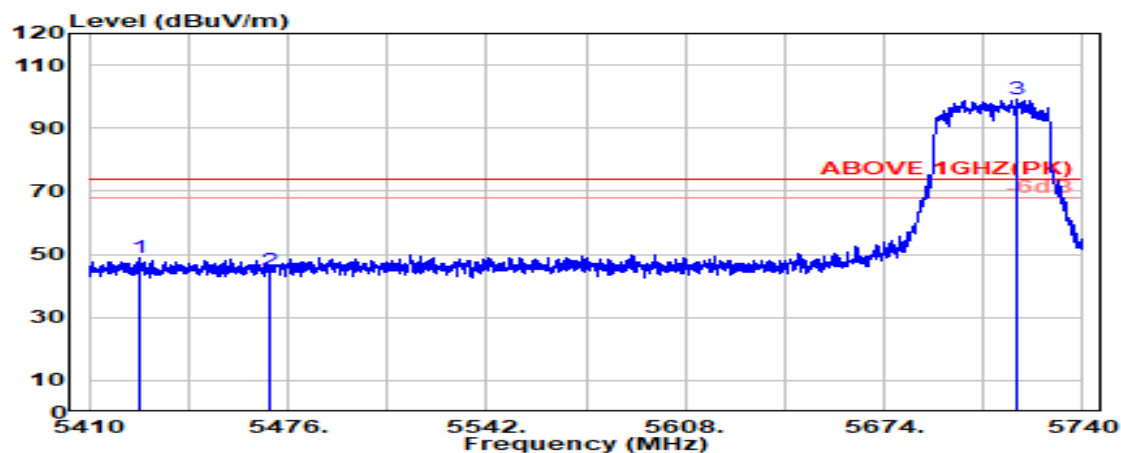

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.000	34.05	8.62	39.16	45.25	48.77	74.00	25.23	Peak
5470.000	34.10	8.67	39.15	41.31	44.92	74.00	29.08	Peak
@ 5717.900	33.54	8.92	39.19	96.09	99.36	---	---	Peak

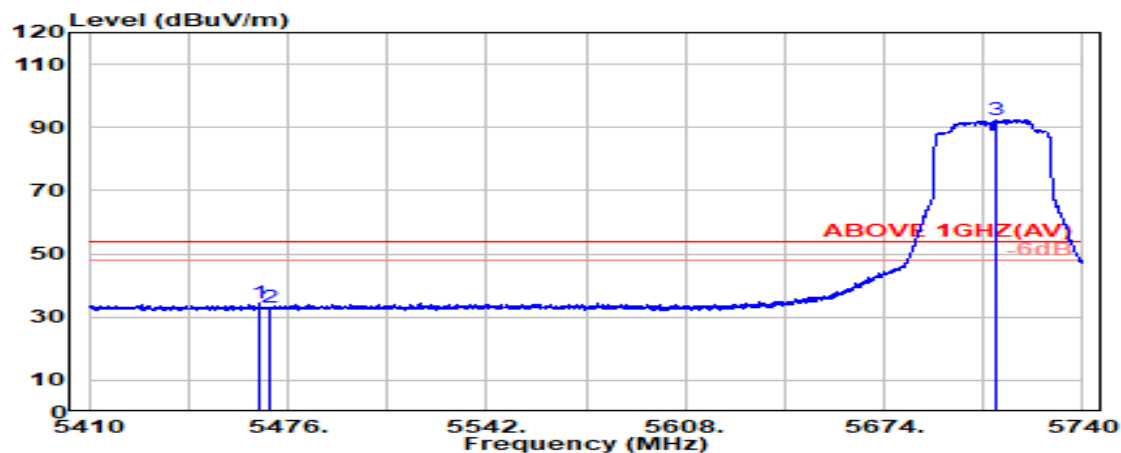

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.10	8.66	39.15	30.59	34.20	54.00	19.80	Average
5470.000	34.10	8.67	39.15	29.34	32.95	54.00	21.05	Average
@ 5710.800	33.49	8.91	39.19	89.34	92.55	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

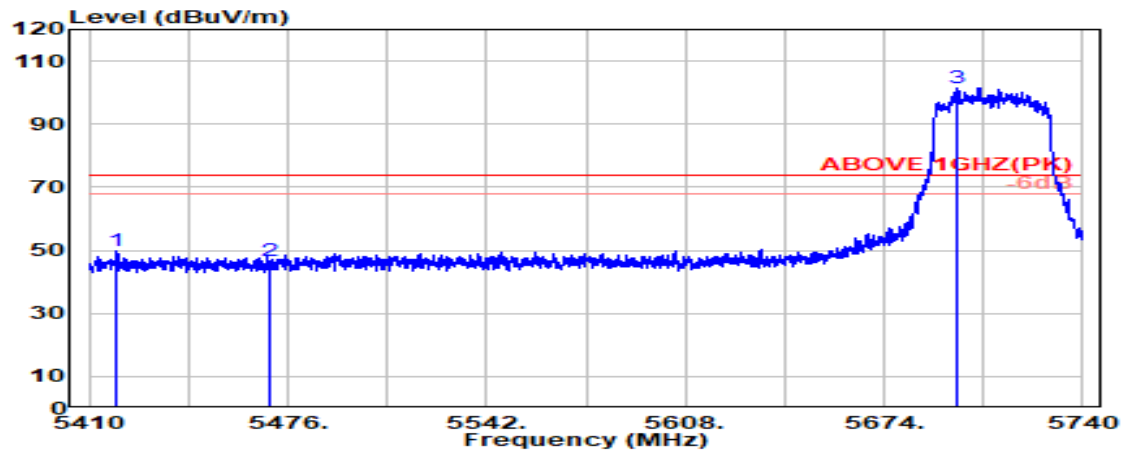

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5419.300	34.04	8.61	39.16	46.30	49.80	74.00	24.20	Peak
5470.000	34.10	8.67	39.15	43.12	46.74	74.00	27.26	Peak
@ 5698.100	33.41	8.90	39.19	98.48	101.60	---	---	Peak

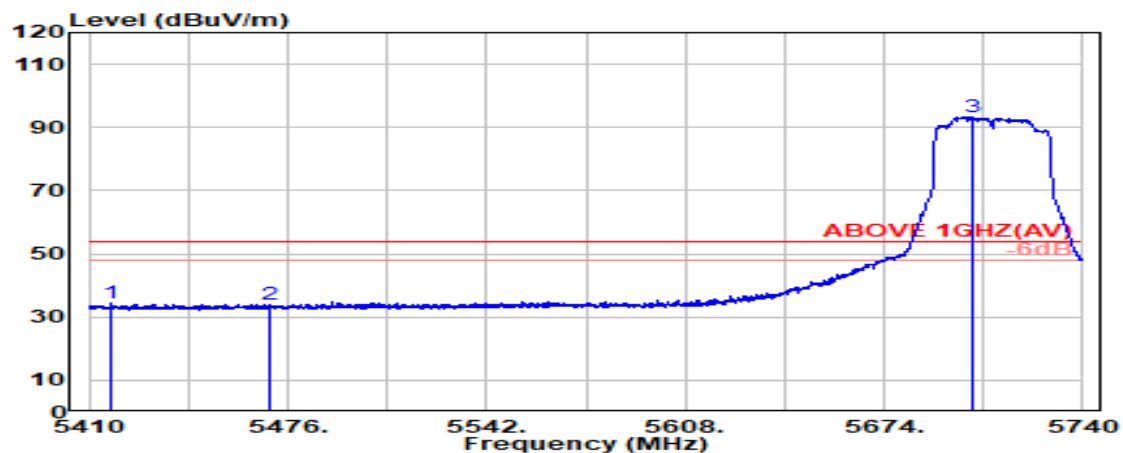

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5417.400	34.03	8.61	39.16	30.72	34.20	54.00	19.80	Average
5470.000	34.10	8.67	39.15	30.31	33.92	54.00	20.08	Average
@ 5703.000	33.42	8.90	39.19	90.31	93.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

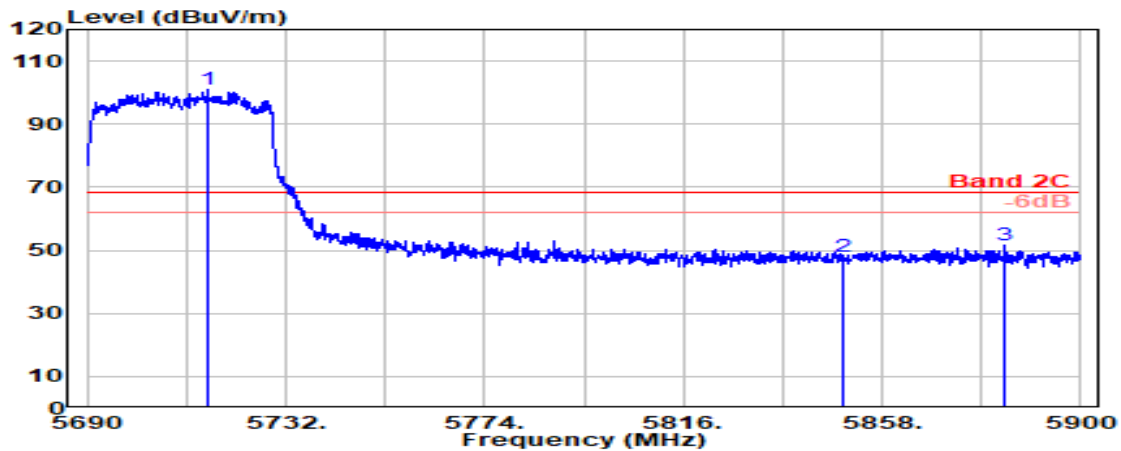

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.400	33.52	8.92	39.19	97.61	100.86	---	---	Peak
5850.000	33.90	9.05	39.22	44.19	47.92	68.20	20.28	Peak
5883.900	34.10	9.08	39.23	47.60	51.55	68.20	16.65	Peak

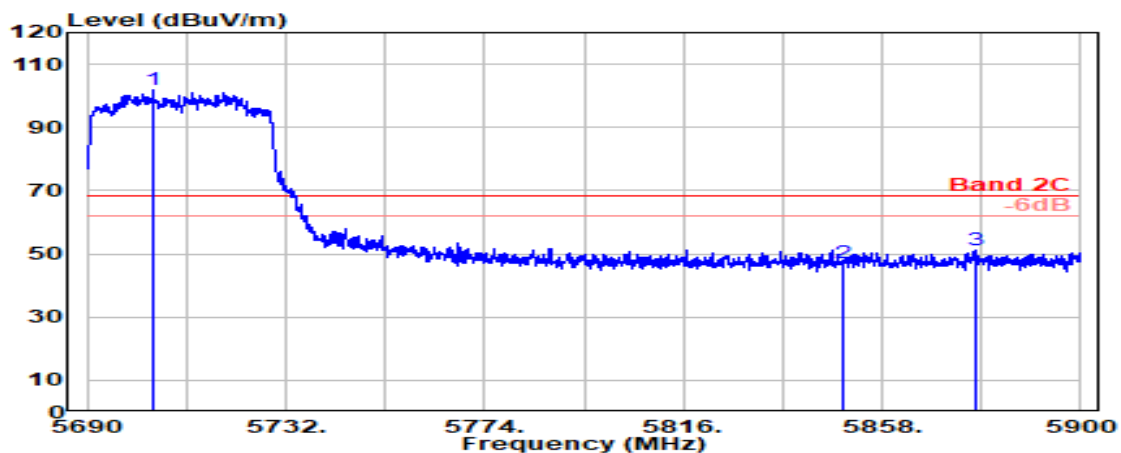

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.900	33.43	8.90	39.19	98.67	101.81	---	---	Peak
5850.000	33.90	9.05	39.22	43.37	47.10	68.20	21.10	Peak
5877.600	34.07	9.07	39.23	47.07	50.98	68.20	17.22	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

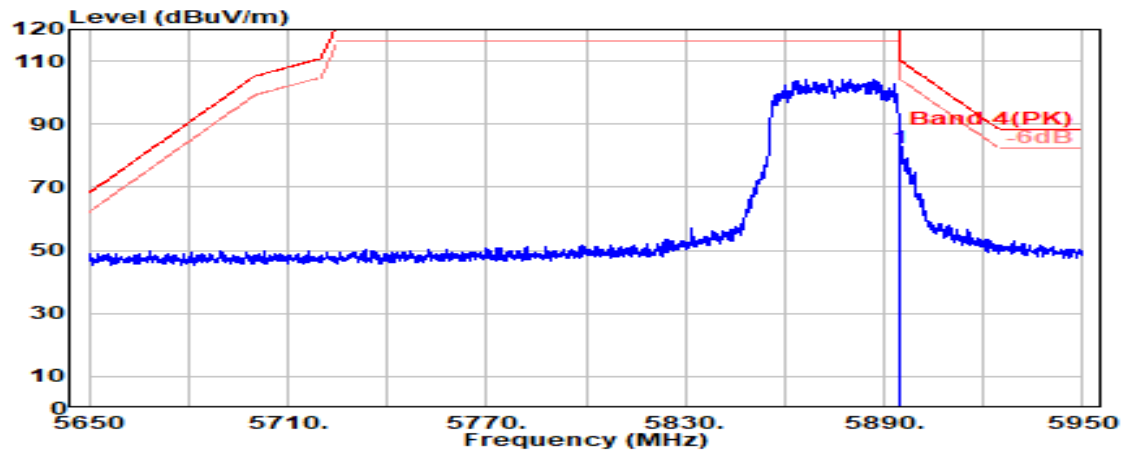

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	78.46	82.49	110.20	27.71	Peak

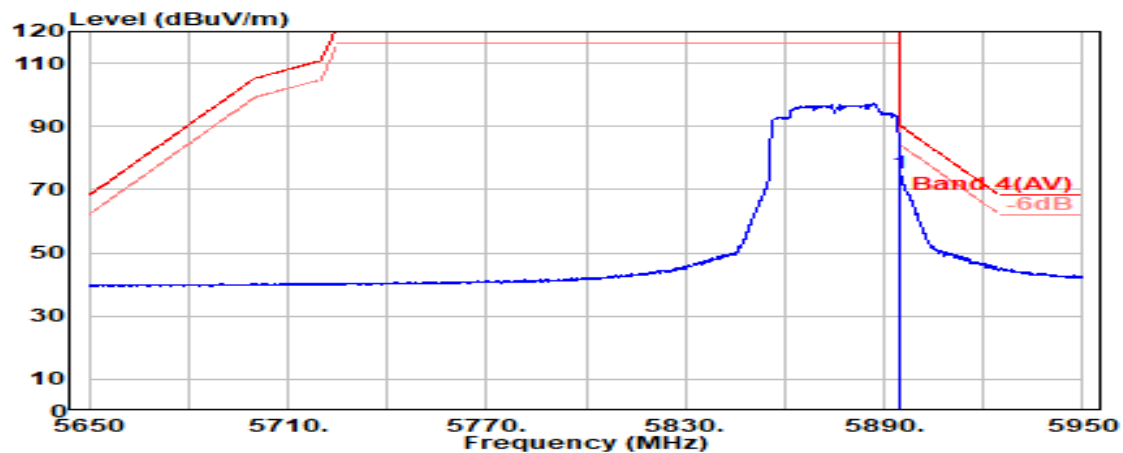

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	71.20	75.23	90.20	14.97	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

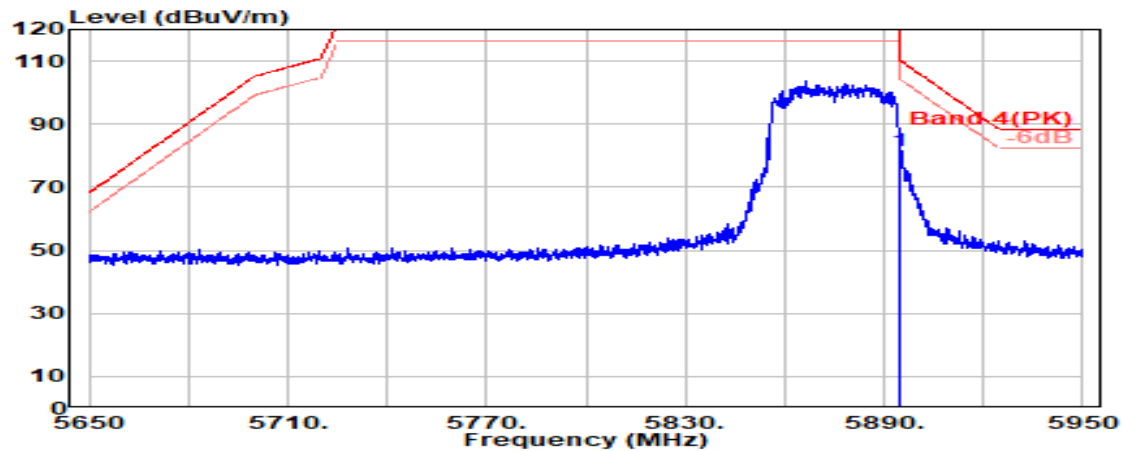

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	77.43	81.46	110.20	28.74	Peak

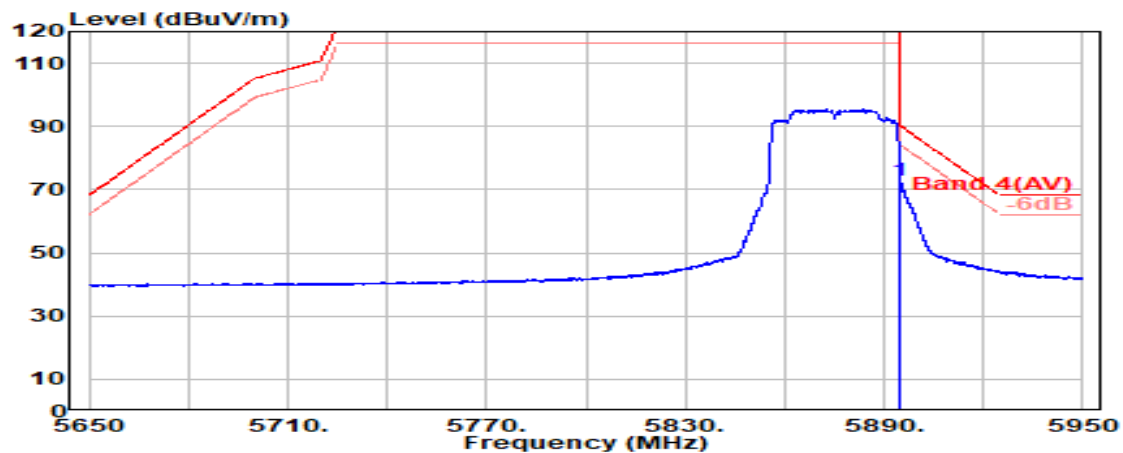


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	68.94	72.97	90.20	17.23	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

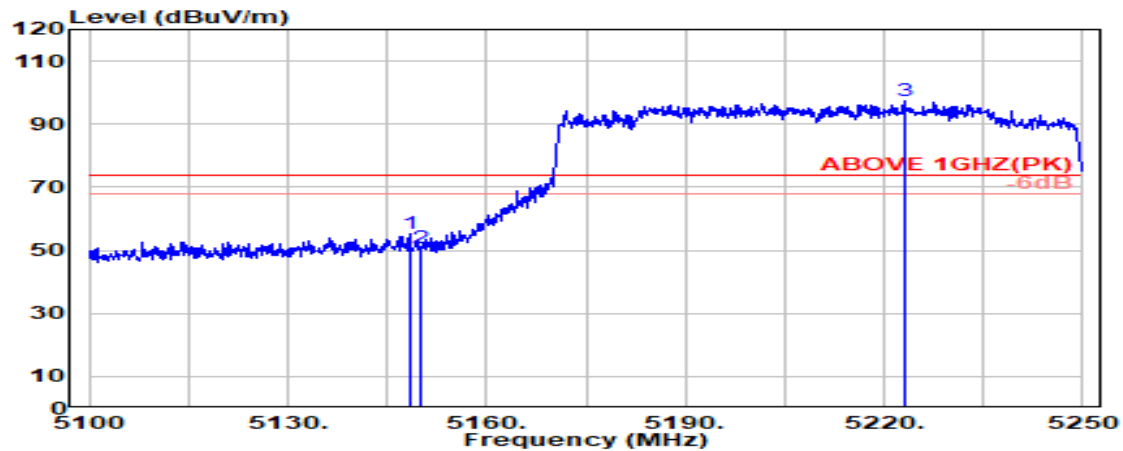

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	33.60	8.33	39.19	52.47	55.21	74.00	18.79	Peak
5150.000	33.60	8.33	39.19	47.96	50.70	74.00	23.30	Peak
@ 5223.000	33.65	8.41	39.18	94.65	97.52	---	---	Peak

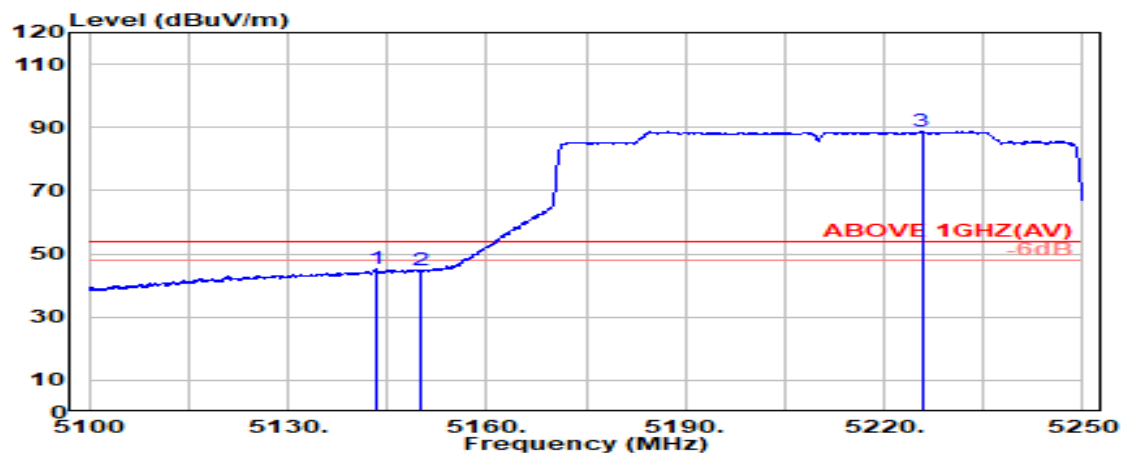


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.300	33.59	8.32	39.19	42.51	45.22	54.00	8.78	Average
5150.000	33.60	8.33	39.19	42.20	44.94	54.00	9.06	Average
@ 5225.700	33.65	8.41	39.18	85.83	88.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

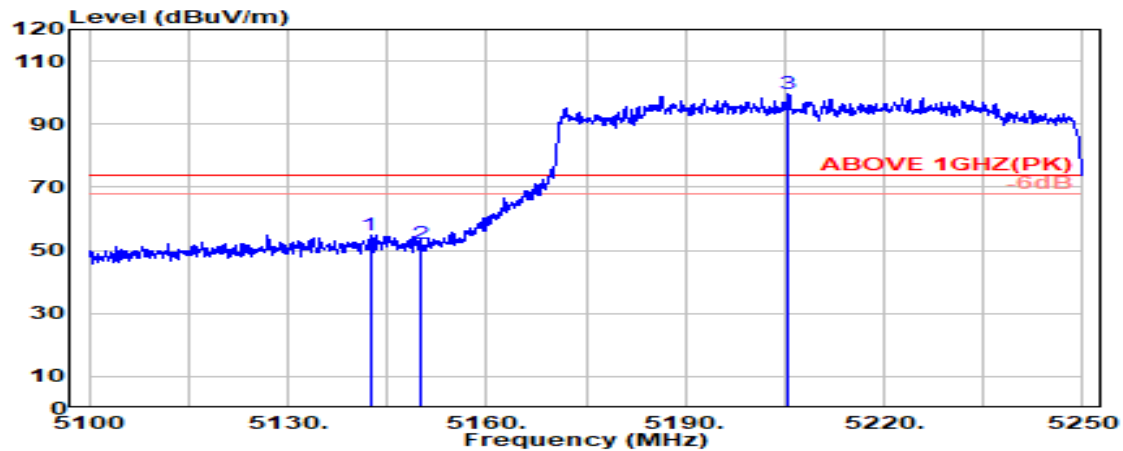

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.400	33.58	8.32	39.19	51.93	54.64	74.00	19.36	Peak
5150.000	33.60	8.33	39.19	49.25	51.99	74.00	22.01	Peak
@ 5205.600	33.61	8.39	39.18	96.67	99.49	---	---	Peak

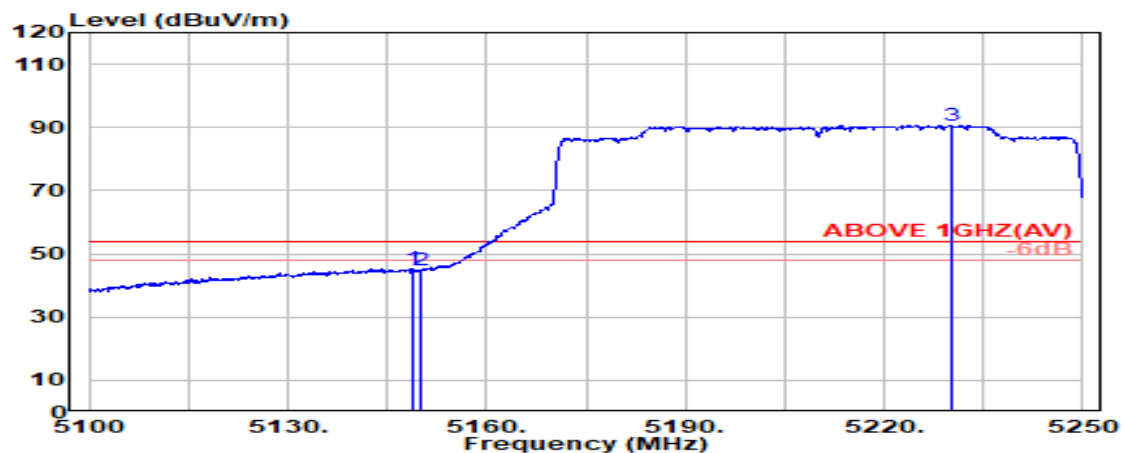

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.700	33.60	8.33	39.19	42.50	45.23	54.00	8.77	Average
5150.000	33.60	8.33	39.19	42.03	44.76	54.00	9.24	Average
@ 5230.300	33.66	8.41	39.18	87.68	90.58	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

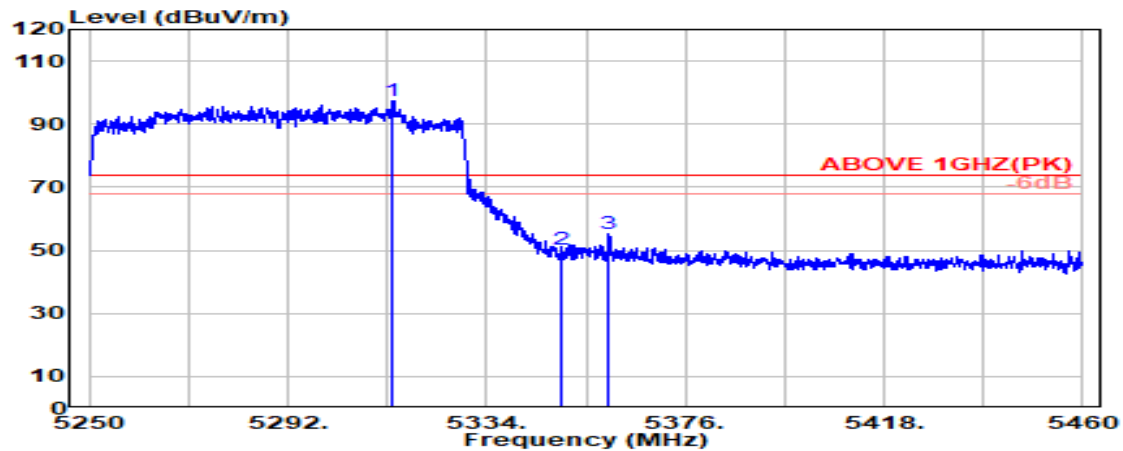

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.200	33.63	8.50	39.17	94.53	97.49	---	---	Peak
5350.000	33.70	8.54	39.17	47.20	50.28	74.00	23.72	Peak
5359.900	33.76	8.55	39.17	51.88	55.03	74.00	18.97	Peak

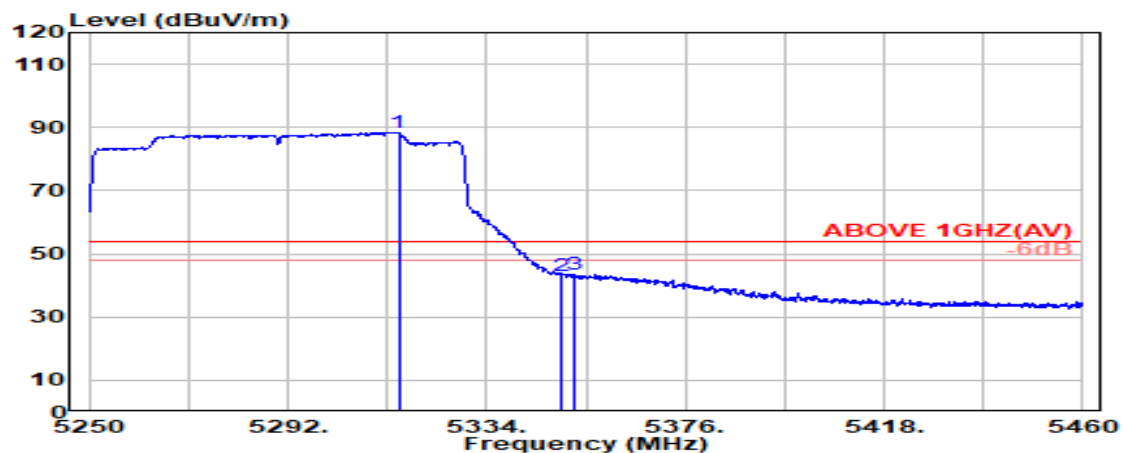

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.400	33.63	8.51	39.17	85.51	88.48	---	---	Average
5350.000	33.70	8.54	39.17	40.11	43.19	54.00	10.81	Average
5352.400	33.71	8.54	39.17	40.44	43.53	54.00	10.47	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

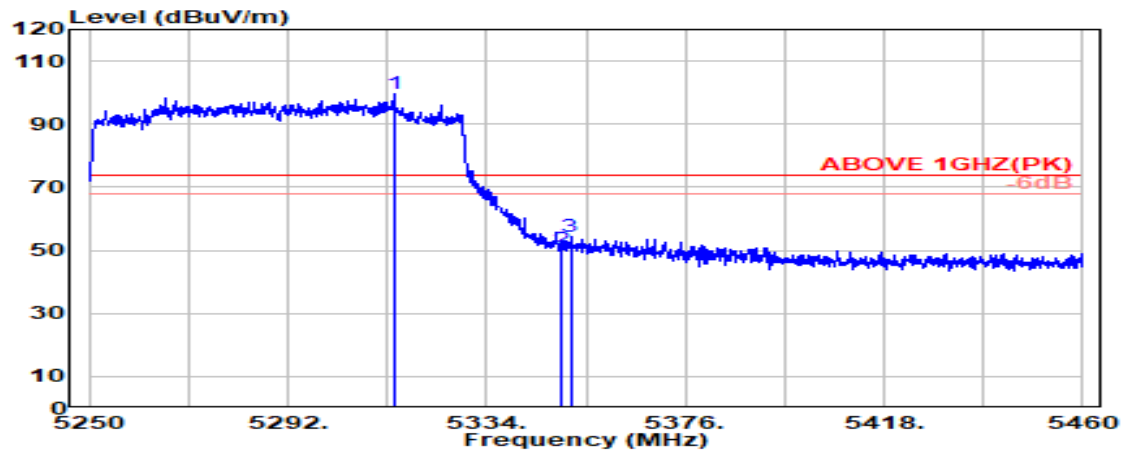

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.600	33.63	8.50	39.17	96.66	99.62	---	---	Peak
5350.000	33.70	8.54	39.17	47.16	50.23	74.00	23.77	Peak
5351.700	33.71	8.54	39.17	51.10	54.19	74.00	19.81	Peak

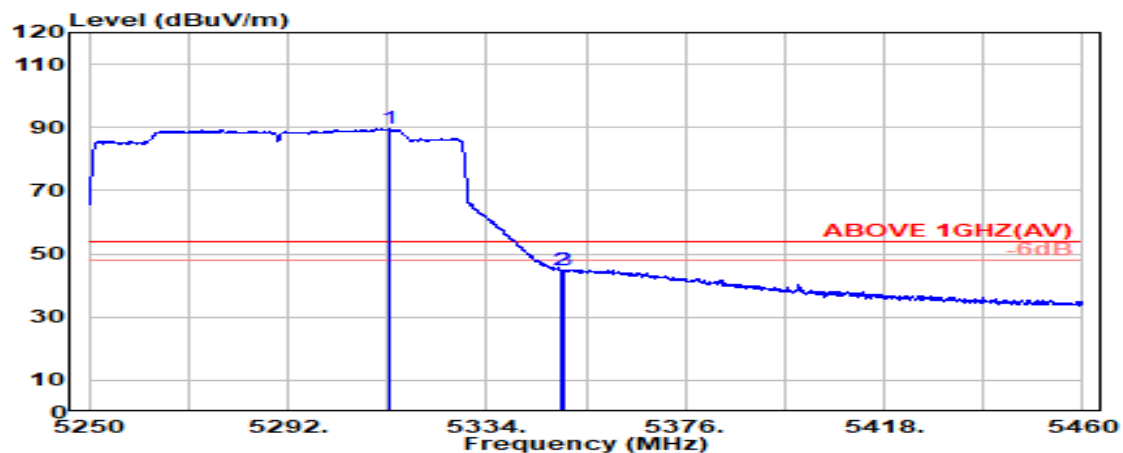

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.300	33.63	8.50	39.17	86.78	89.74	---	---	Average
5350.000	33.70	8.54	39.17	41.71	44.79	54.00	9.21	Average
5350.500	33.70	8.54	39.17	41.90	44.98	54.00	9.02	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

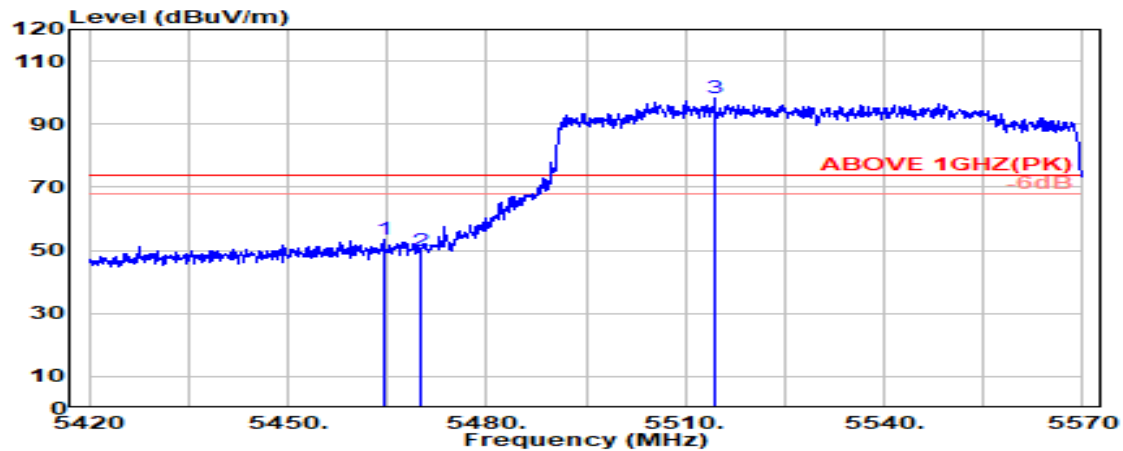

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.500	34.10	8.66	39.15	49.72	53.33	74.00	20.67	Peak
5470.000	34.10	8.67	39.15	46.15	49.76	74.00	24.24	Peak
@ 5514.400	34.07	8.71	39.15	94.70	98.34	---	---	Peak

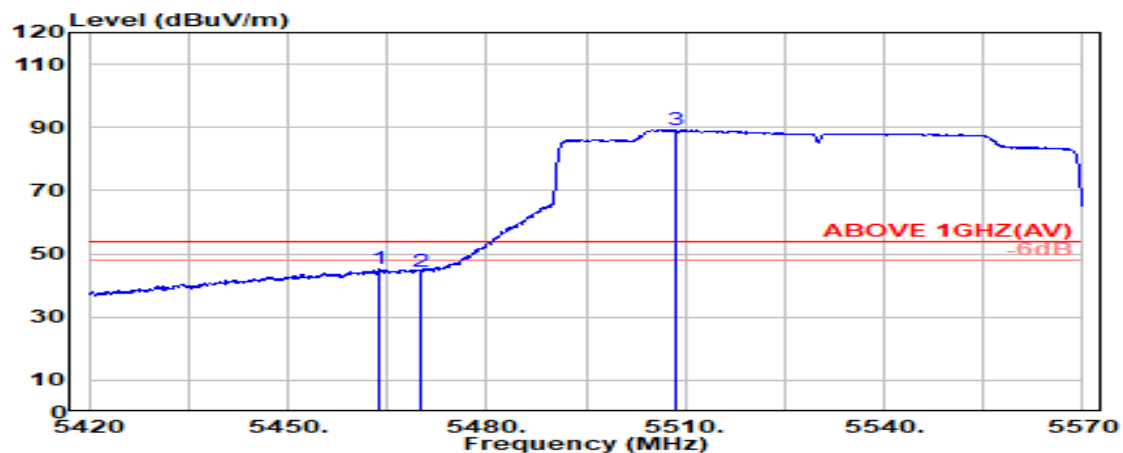


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.900	34.10	8.66	39.15	41.45	45.06	54.00	8.94	Average
5470.000	34.10	8.67	39.15	40.90	44.51	54.00	9.49	Average
@ 5508.600	34.08	8.71	39.15	85.59	89.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

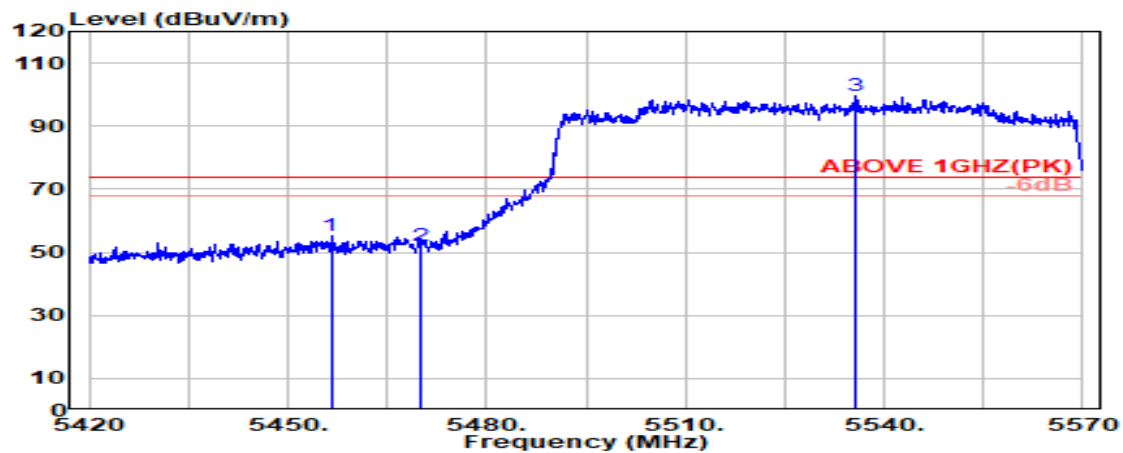

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.500	34.10	8.65	39.16	51.54	55.14	74.00	18.86	Peak
5470.000	34.10	8.67	39.15	48.28	51.90	74.00	22.10	Peak
@ 5535.600	34.03	8.73	39.16	96.00	99.61	---	---	Peak

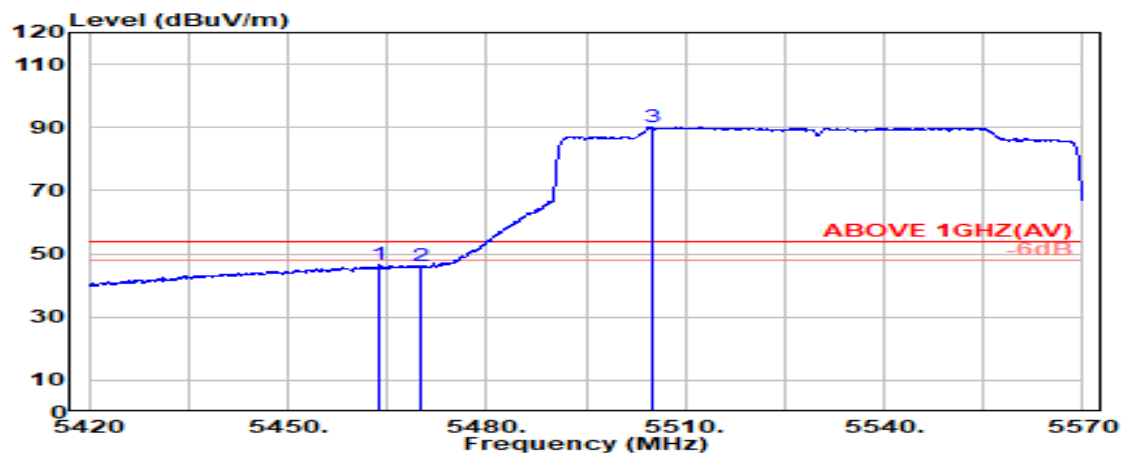

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.800	34.10	8.66	39.15	42.98	46.58	54.00	7.42	Average
5470.000	34.10	8.67	39.15	42.38	46.00	54.00	8.00	Average
@ 5504.900	34.09	8.70	39.15	86.61	90.25	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

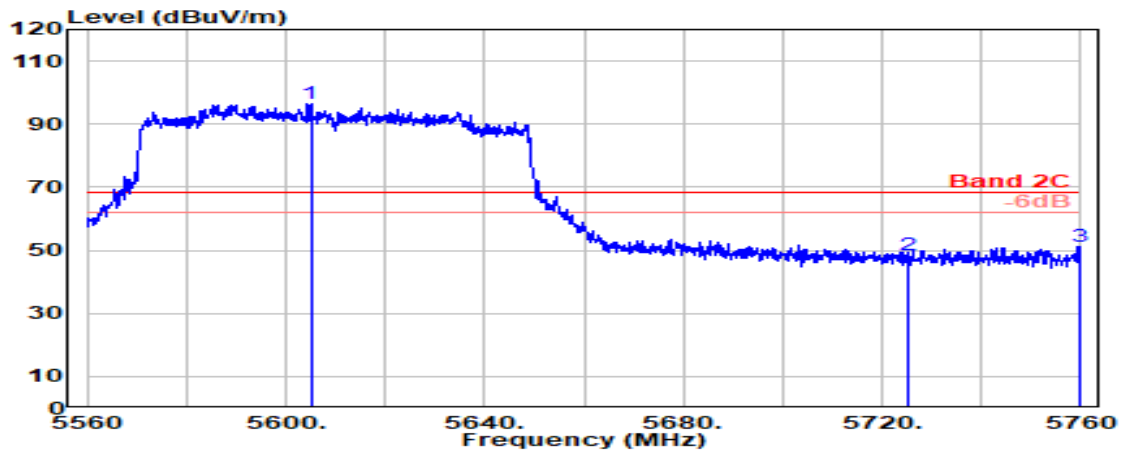

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5605.000	33.79	8.81	39.17	92.85	96.27	---	---	Peak
5725.000	33.60	8.92	39.20	44.92	48.25	68.20	19.95	Peak
5759.600	33.82	8.96	39.20	47.47	51.04	68.20	17.16	Peak

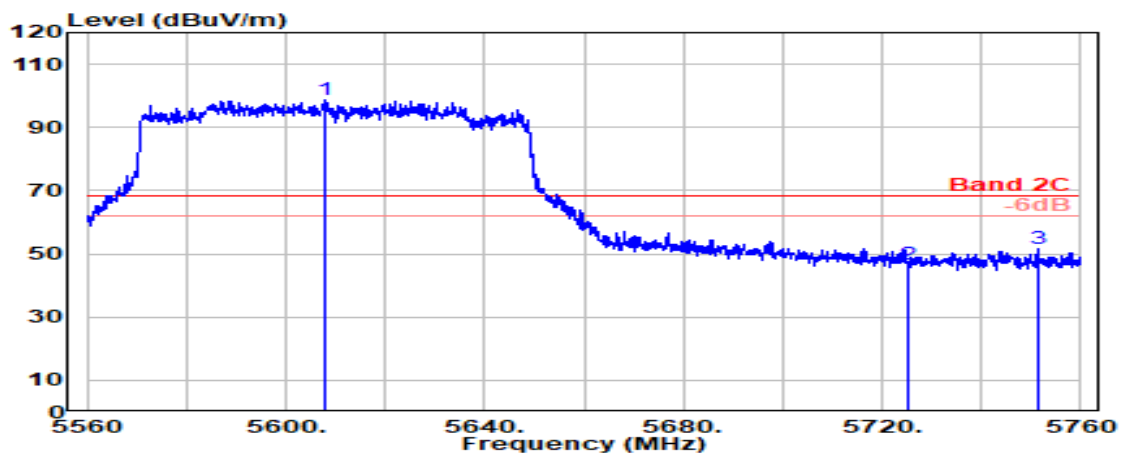

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5607.900	33.78	8.81	39.17	95.39	98.81	---	---	Peak
5725.000	33.60	8.92	39.20	43.51	46.84	68.20	21.36	Peak
5751.400	33.80	8.95	39.20	48.06	51.61	68.20	16.59	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

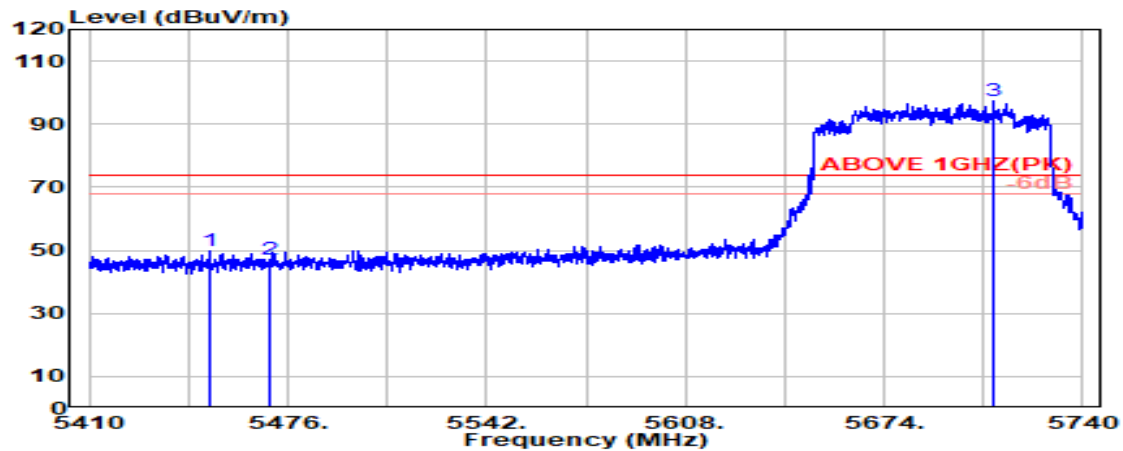

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.200	34.10	8.65	39.16	46.18	49.77	74.00	24.23	Peak
5470.000	34.10	8.67	39.15	43.61	47.22	74.00	26.78	Peak
@ 5710.600	33.49	8.91	39.19	93.95	97.15	---	---	Peak

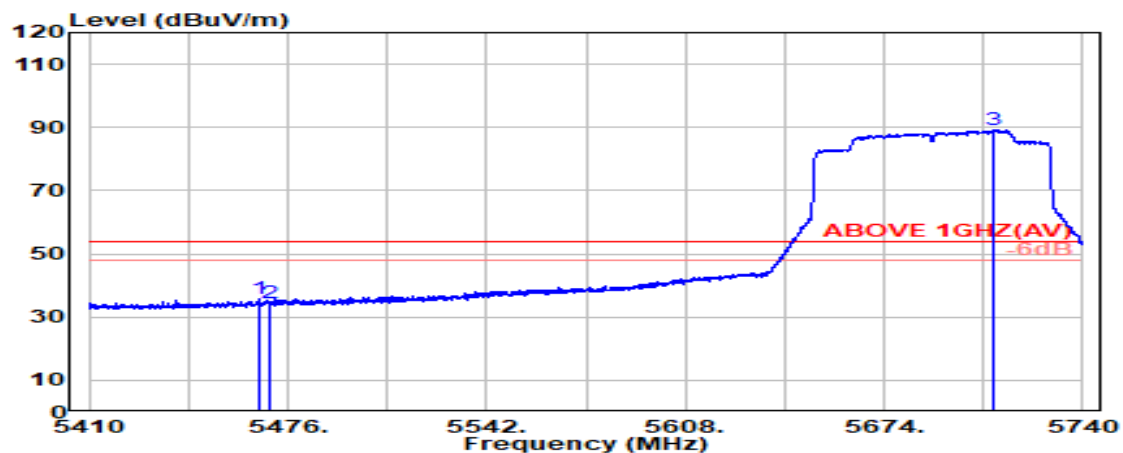


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.300	34.10	8.66	39.15	32.04	35.65	54.00	18.35	Average
5470.000	34.10	8.67	39.15	31.01	34.63	54.00	19.37	Average
@ 5710.500	33.48	8.91	39.19	85.97	89.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

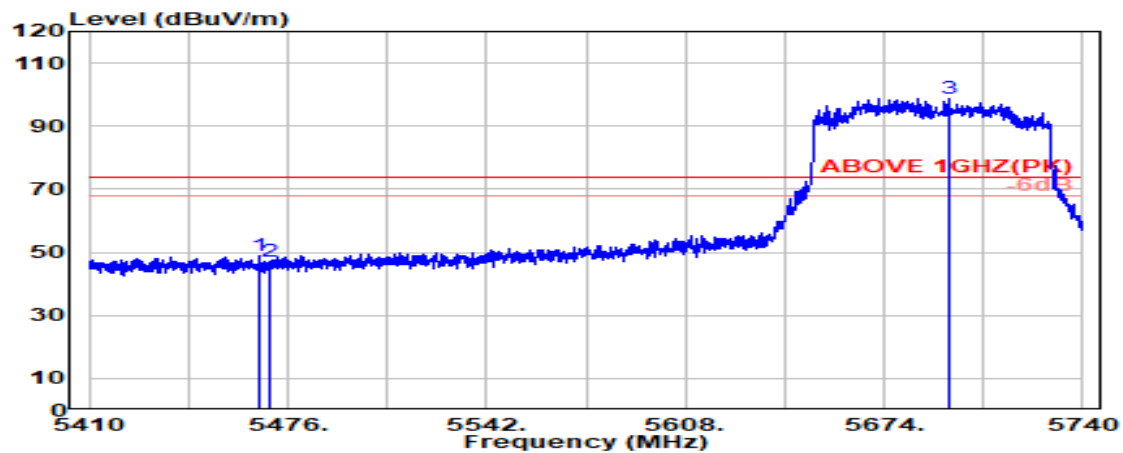

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.10	8.66	39.15	45.36	48.97	74.00	25.03	Peak
5470.000	34.10	8.67	39.15	43.31	46.93	74.00	27.07	Peak
@ 5695.500	33.43	8.90	39.19	95.53	98.66	---	---	Peak

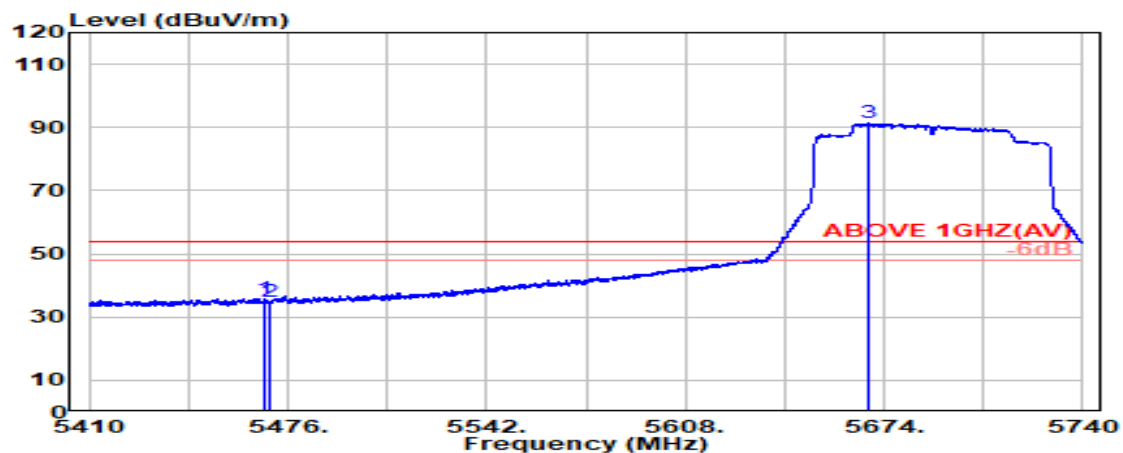

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.10	8.67	39.15	32.33	35.95	54.00	18.05	Average
5470.000	34.10	8.67	39.15	31.25	34.87	54.00	19.13	Average
@ 5669.100	33.59	8.87	39.18	88.42	91.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

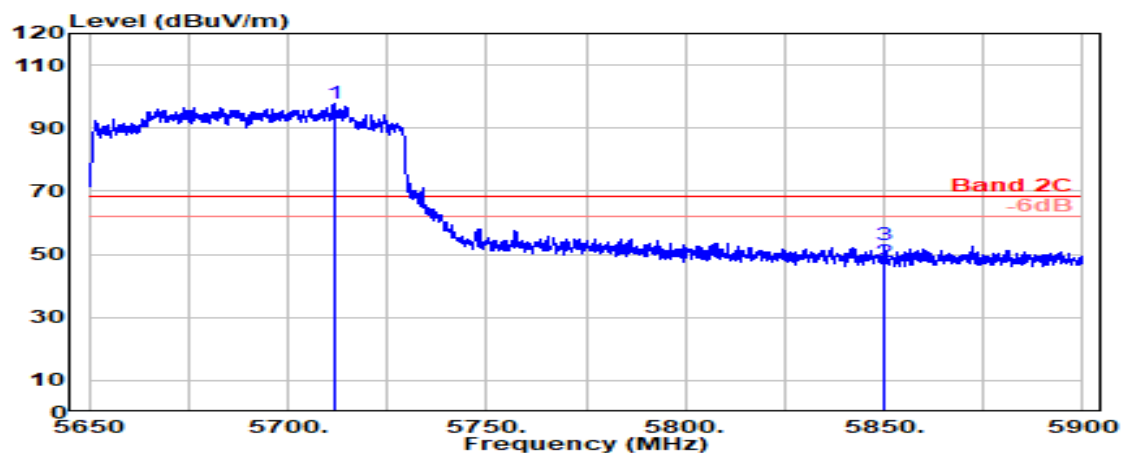

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5712.000	33.50	8.91	39.19	94.57	97.79	---	---	Peak
	5850.000	33.90	9.05	39.22	43.62	47.35	68.20	20.85	Peak
	5850.300	33.90	9.05	39.22	49.33	53.06	68.20	15.14	Peak

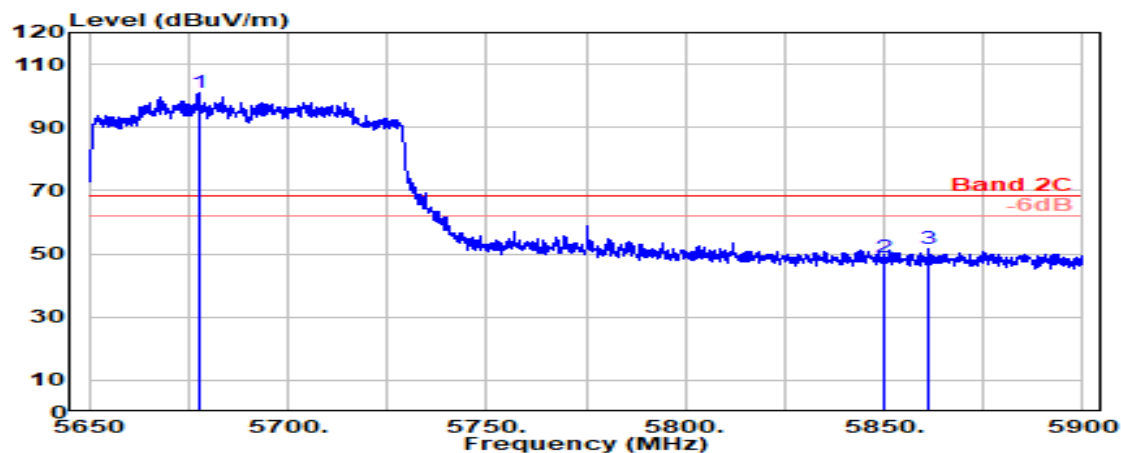

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5677.500	33.53	8.88	39.19	97.87	101.09	---	---	Peak
	5850.000	33.90	9.05	39.22	45.34	49.06	68.20	19.14	Peak
	5861.300	33.97	9.06	39.22	47.69	51.49	68.20	16.71	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

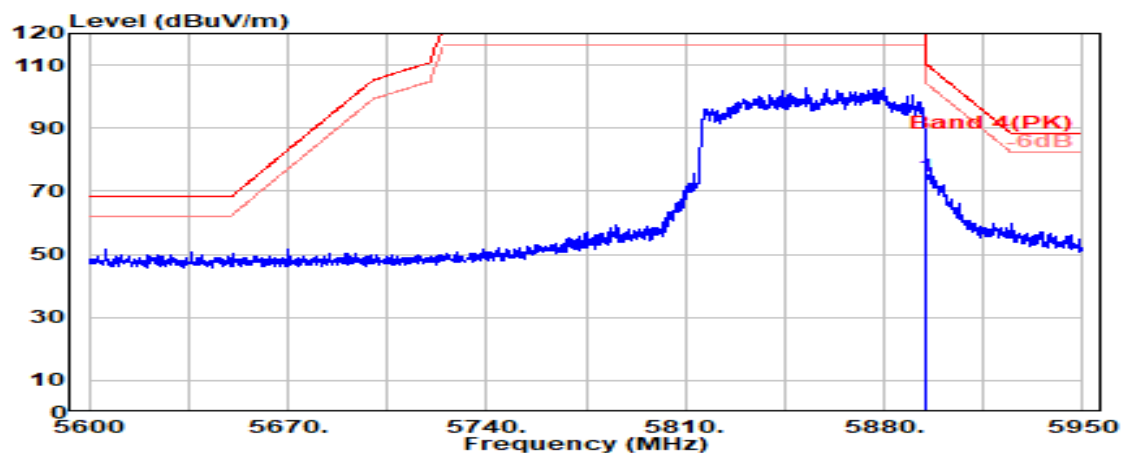

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	70.53	74.56	110.16	35.60	Peak

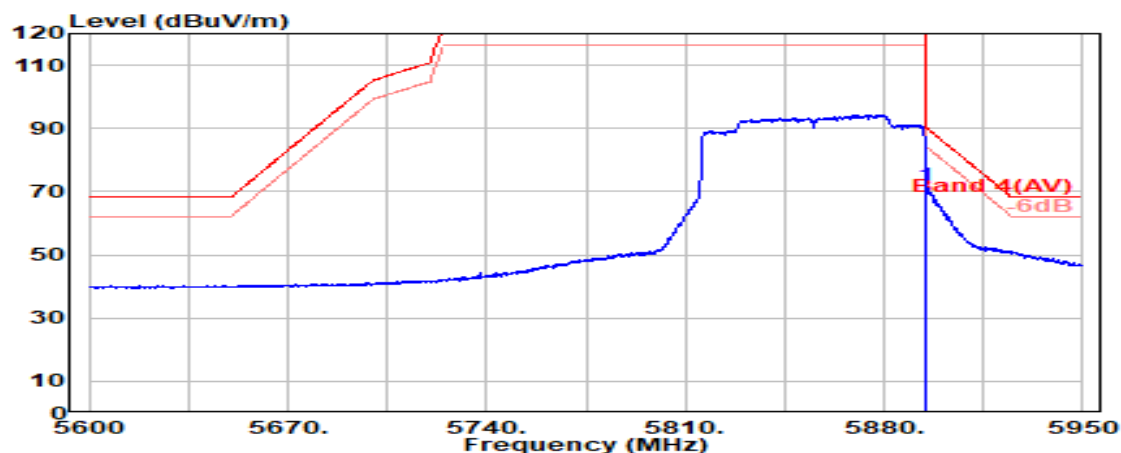


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	67.95	71.98	90.16	18.18	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

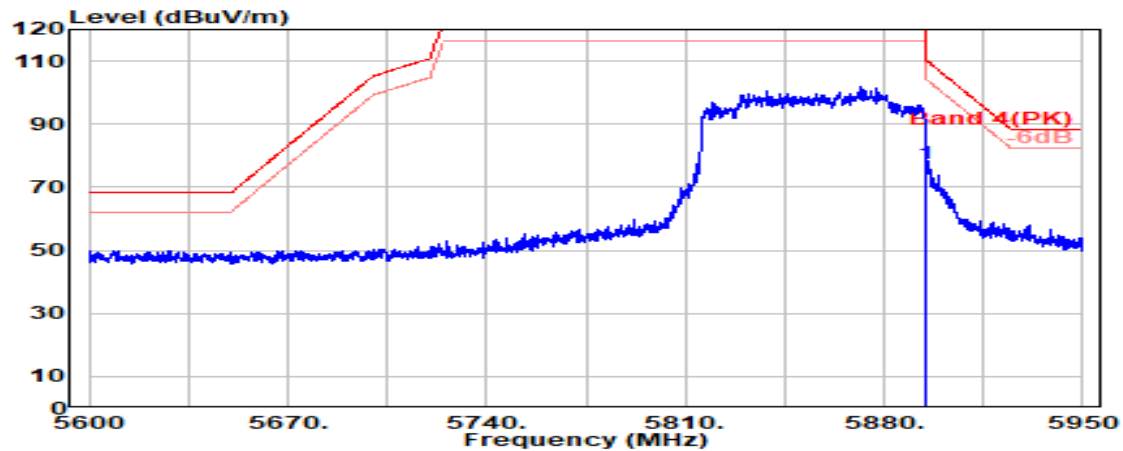

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	73.53	77.56	110.16	32.60	Peak

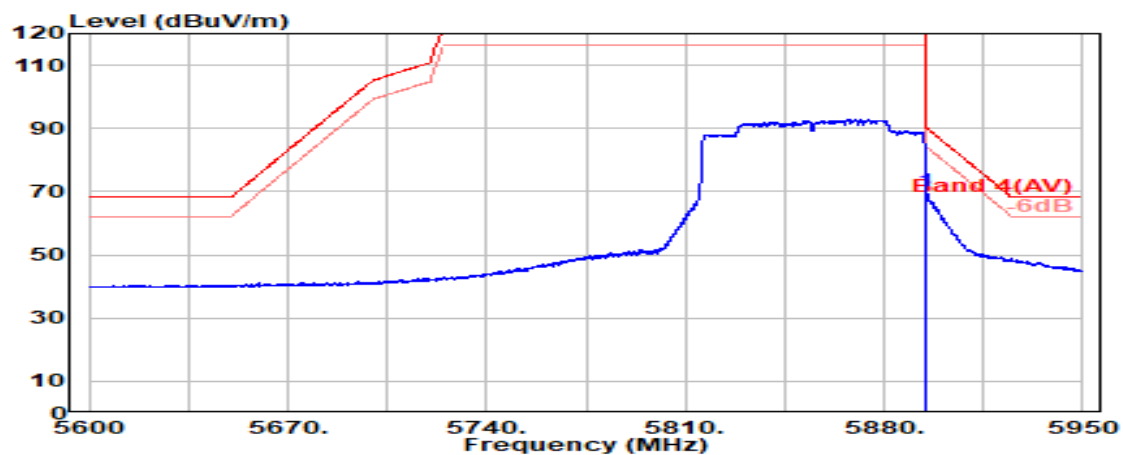


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	66.19	70.22	90.16	19.94	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

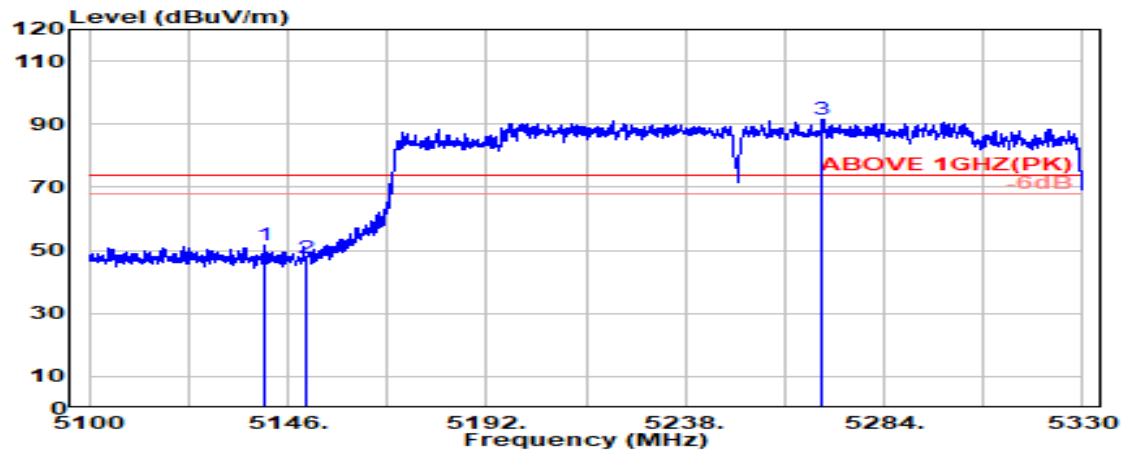

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.400	33.58	8.32	39.19	48.71	51.42	74.00	22.58	Peak
5150.000	33.60	8.33	39.19	44.83	47.56	74.00	26.44	Peak
@ 5269.500	33.66	8.46	39.18	88.57	91.51	---	---	Peak

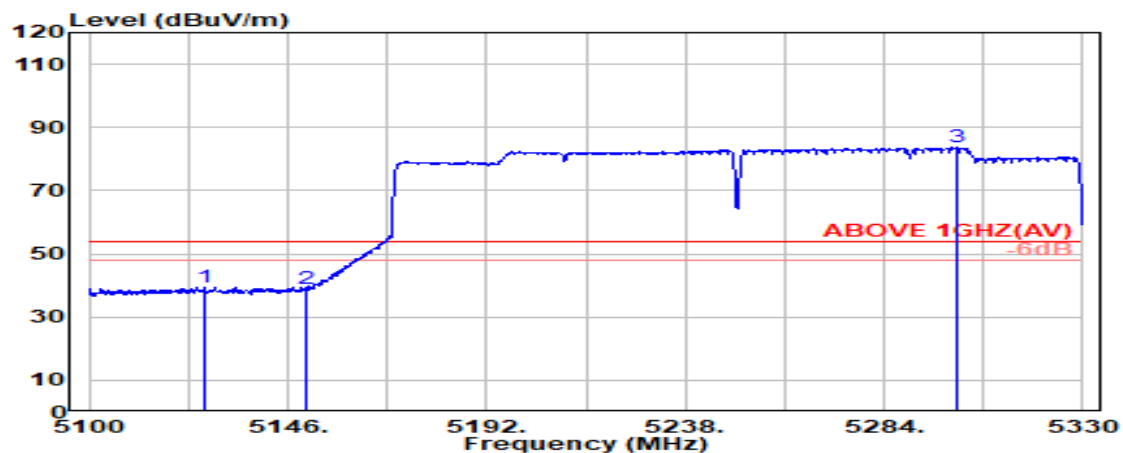

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.500	33.55	8.30	39.19	36.82	39.48	54.00	14.52	Average
5150.000	33.60	8.33	39.19	36.29	39.03	54.00	14.97	Average
@ 5300.800	33.60	8.49	39.17	80.68	83.60	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

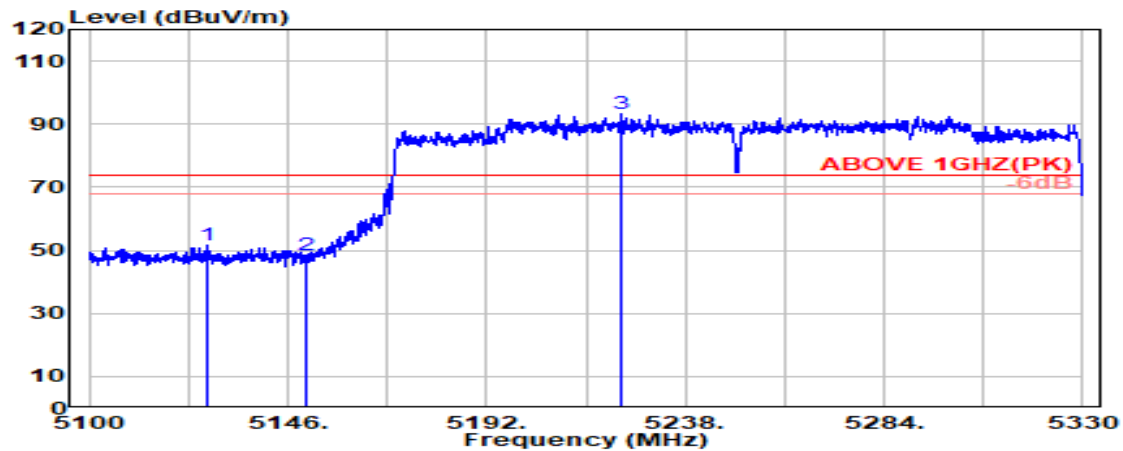

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.500	33.56	8.30	39.19	48.94	51.60	74.00	22.40	Peak
5150.000	33.60	8.33	39.19	45.76	48.50	74.00	25.50	Peak
@ 5223.200	33.65	8.41	39.18	90.21	93.08	---	---	Peak

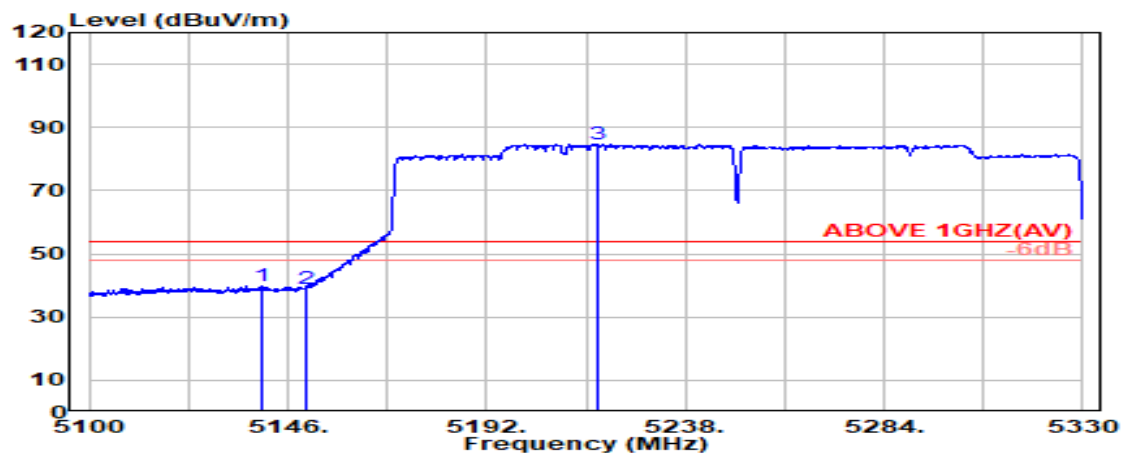

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.200	33.58	8.32	39.19	37.15	39.85	54.00	14.15	Average
5150.000	33.60	8.33	39.19	36.36	39.09	54.00	14.91	Average
@ 5217.500	33.64	8.40	39.18	81.75	84.60	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

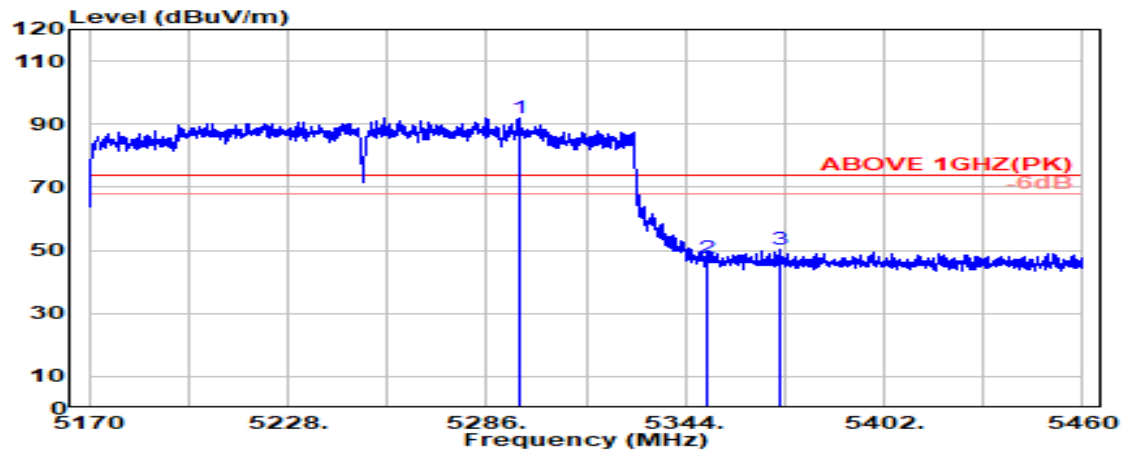

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5295.300	33.61	8.48	39.17	88.88	91.80	---	---	Peak
5350.000	33.70	8.54	39.17	44.36	47.44	74.00	26.56	Peak
5371.800	33.83	8.57	39.16	47.21	50.44	74.00	23.56	Peak

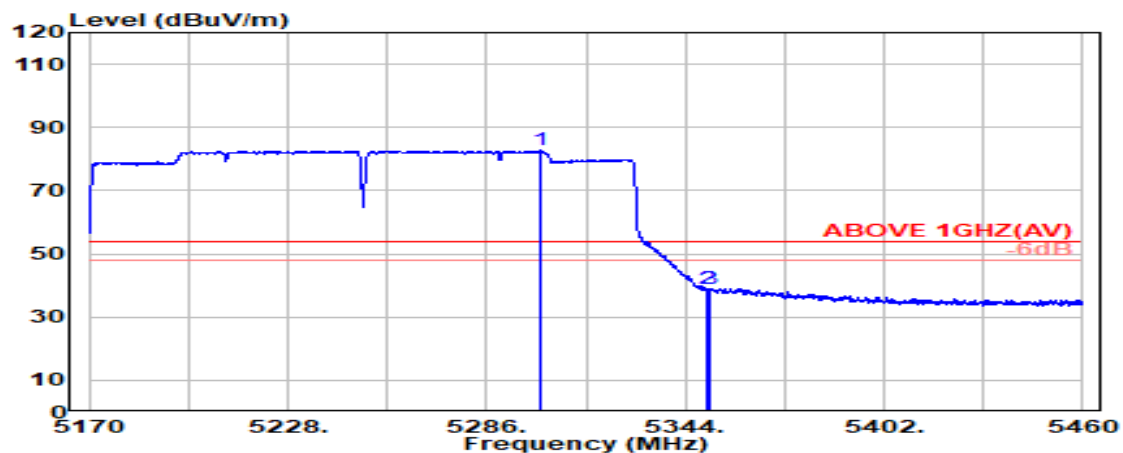

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.000	33.60	8.49	39.17	79.78	82.70	---	---	Average
5350.000	33.70	8.54	39.17	35.76	38.83	54.00	15.17	Average
5351.000	33.71	8.54	39.17	35.95	39.03	54.00	14.97	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

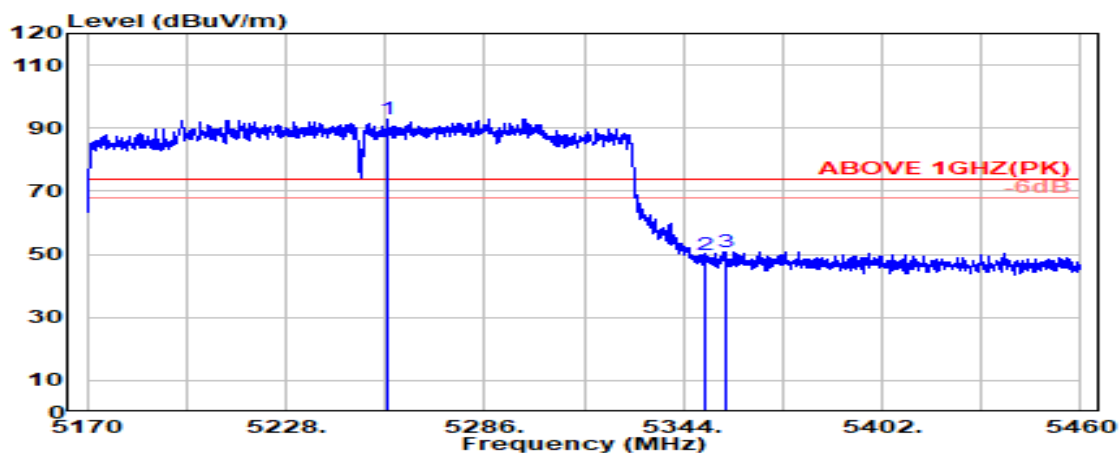

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5257.700	33.68	8.44	39.18	89.93	92.88	---	---	Peak
5350.000	33.70	8.54	39.17	46.58	49.65	74.00	24.35	Peak
5356.100	33.74	8.55	39.17	47.70	50.82	74.00	23.18	Peak

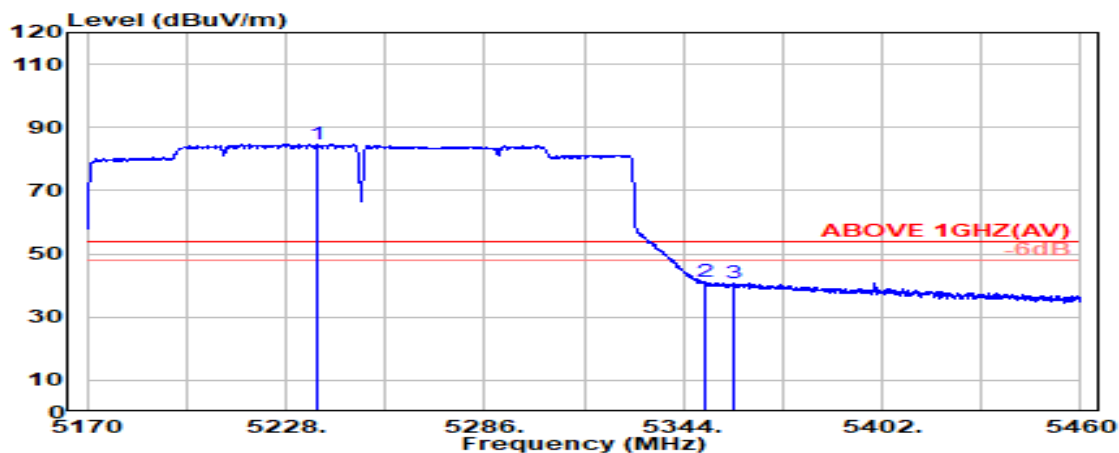

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5237.000	33.67	8.42	39.18	81.75	84.66	---	---	Average
5350.000	33.70	8.54	39.17	38.14	41.22	54.00	12.78	Average
5359.000	33.75	8.55	39.17	37.76	40.90	54.00	13.10	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

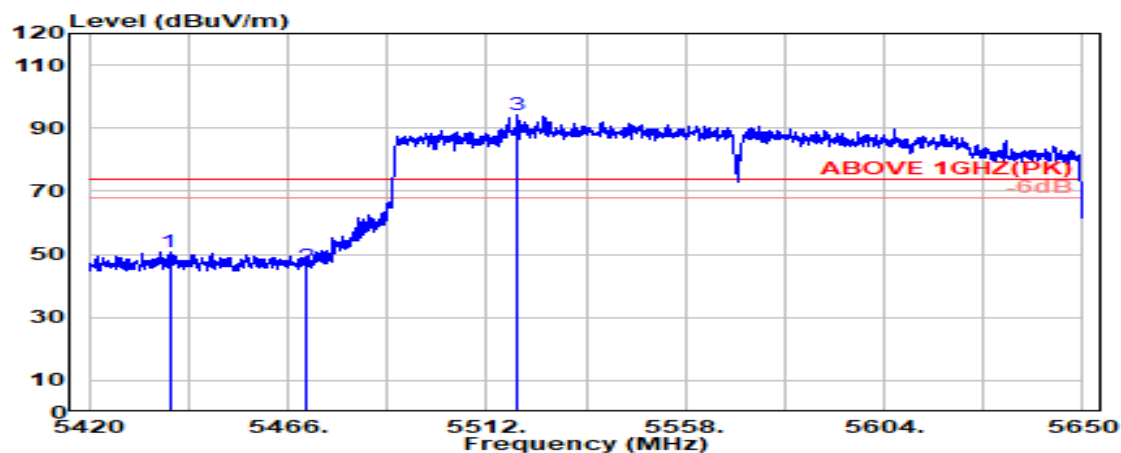

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.600	34.08	8.64	39.16	47.15	50.71	74.00	23.29	Peak
5470.000	34.10	8.67	39.15	42.76	46.37	74.00	27.63	Peak
@ 5519.200	34.06	8.72	39.15	90.68	94.31	---	---	Peak

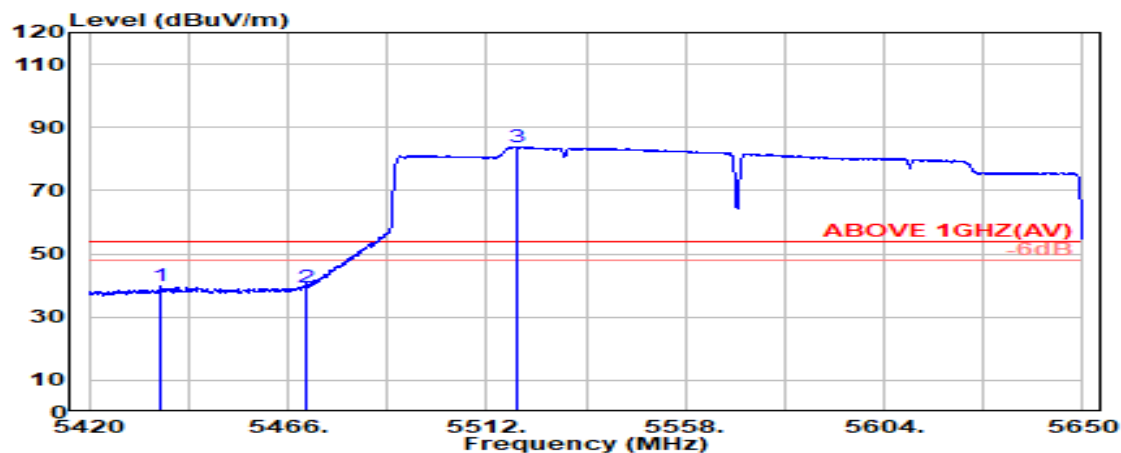

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.400	34.07	8.63	39.16	36.35	39.90	54.00	14.10	Average
5470.000	34.10	8.67	39.15	35.81	39.42	54.00	14.58	Average
@ 5519.000	34.06	8.72	39.15	80.19	83.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

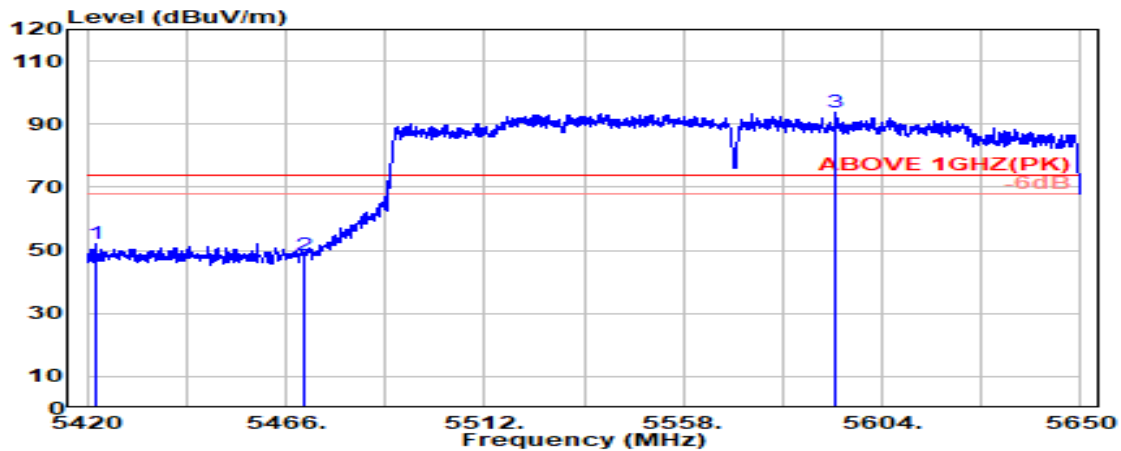

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.000	34.04	8.62	39.16	48.62	52.13	74.00	21.87	Peak
5470.000	34.10	8.67	39.15	44.67	48.28	74.00	25.72	Peak
@ 5593.400	33.83	8.79	39.17	90.10	93.55	---	---	Peak

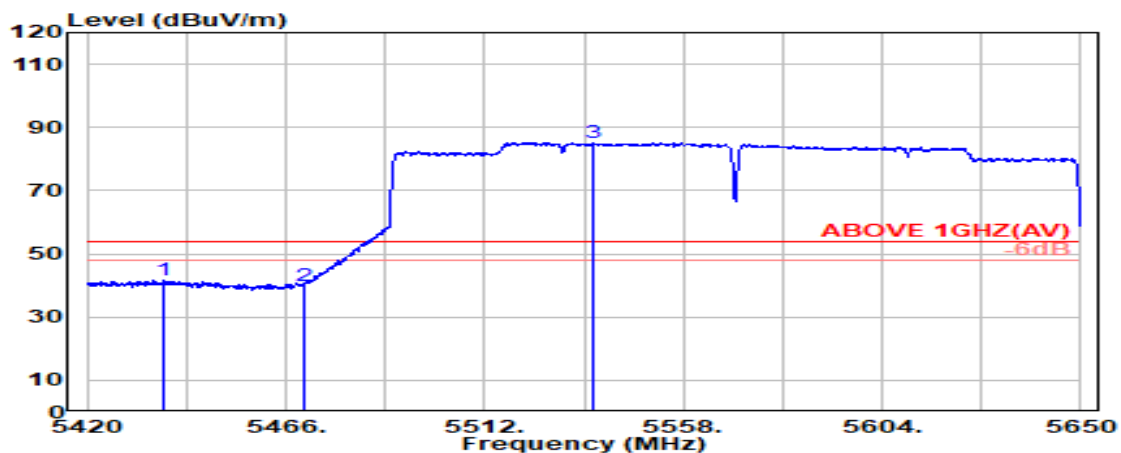

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.700	34.08	8.63	39.16	38.08	41.63	54.00	12.37	Average
5470.000	34.10	8.67	39.15	36.21	39.83	54.00	14.17	Average
@ 5537.300	34.03	8.74	39.16	81.71	85.32	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

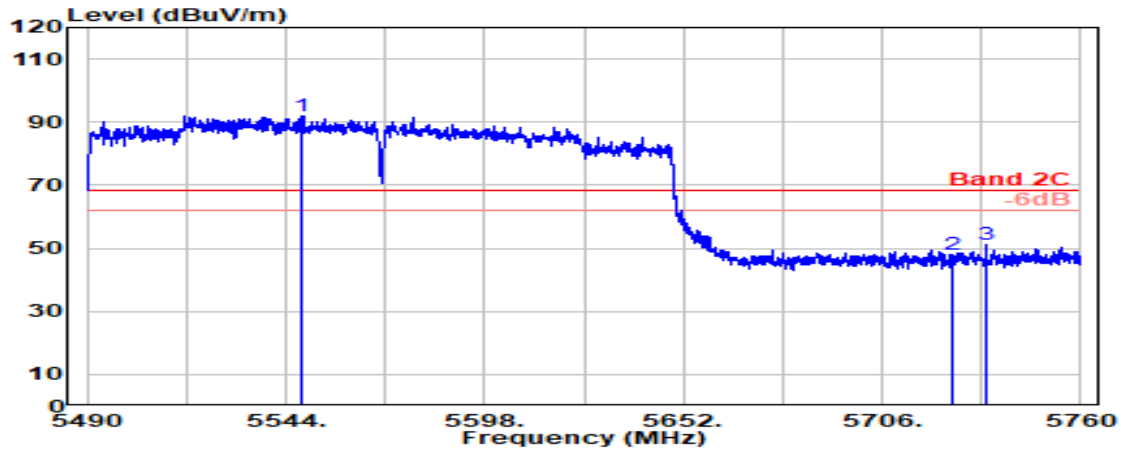

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5548.600	34.00	8.75	39.16	88.47	92.06	---	---	Peak
5725.000	33.60	8.92	39.20	44.78	48.11	68.20	20.09	Peak
5734.100	33.67	8.93	39.20	47.75	51.16	68.20	17.04	Peak

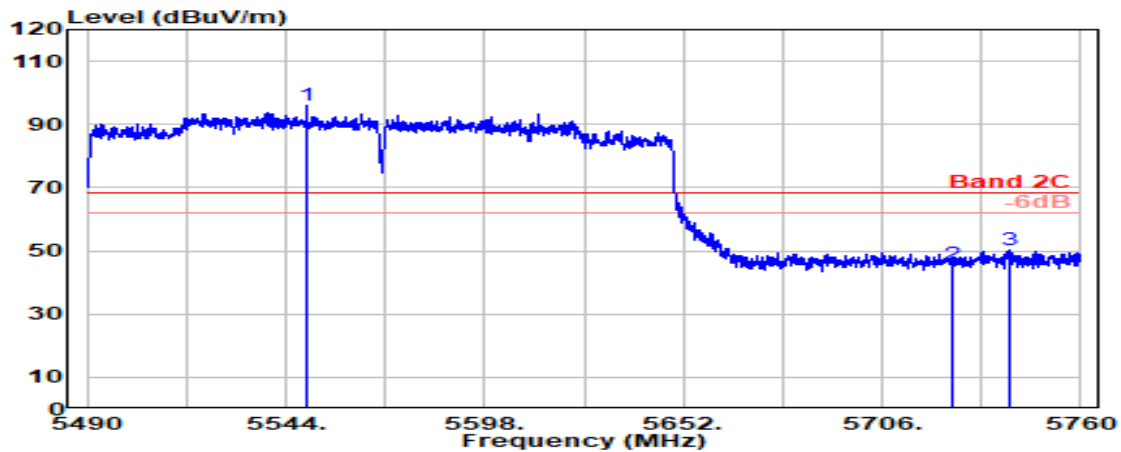

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5549.700	34.00	8.75	39.16	92.44	96.02	---	---	Peak
5725.000	33.60	8.92	39.20	42.57	45.90	68.20	22.30	Peak
5740.500	33.72	8.94	39.20	46.97	50.44	68.20	17.76	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

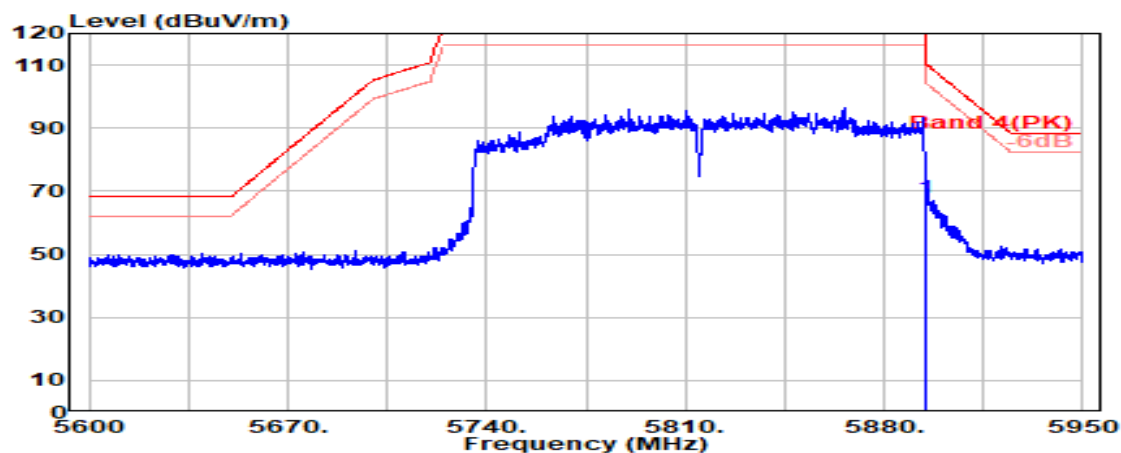

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	63.97	68.00	110.16	42.16	Peak

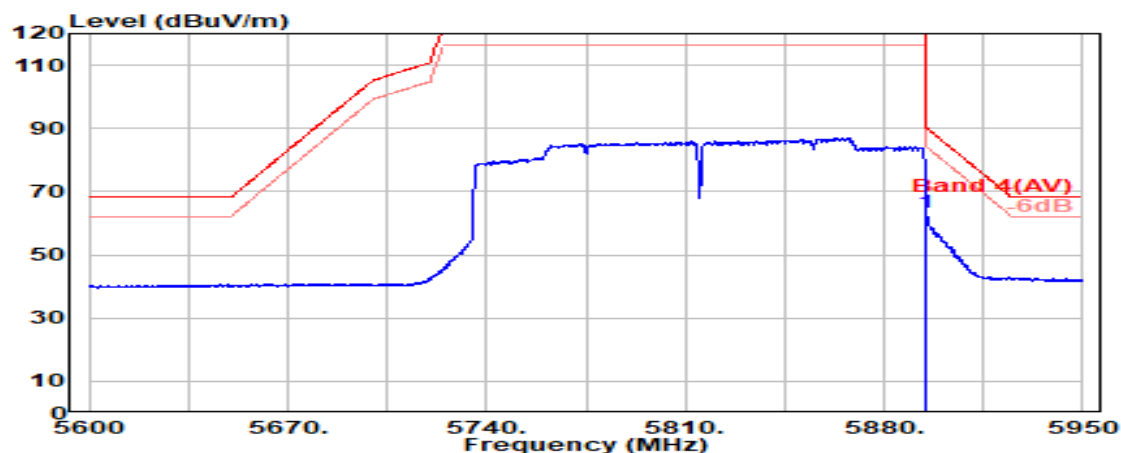

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	59.42	63.45	90.16	26.71	Average

Mode	802.11ax-HE160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

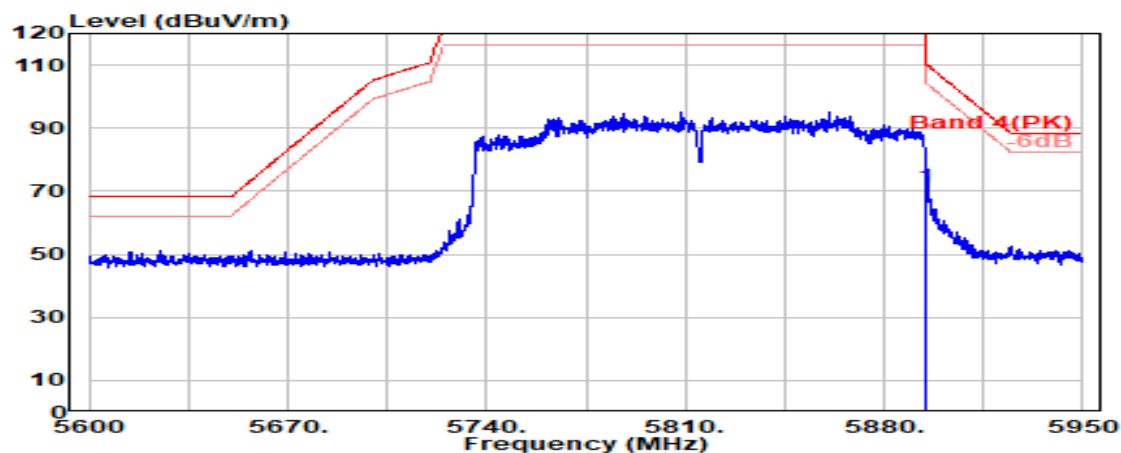

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	67.44	71.48	110.16	38.69	Peak

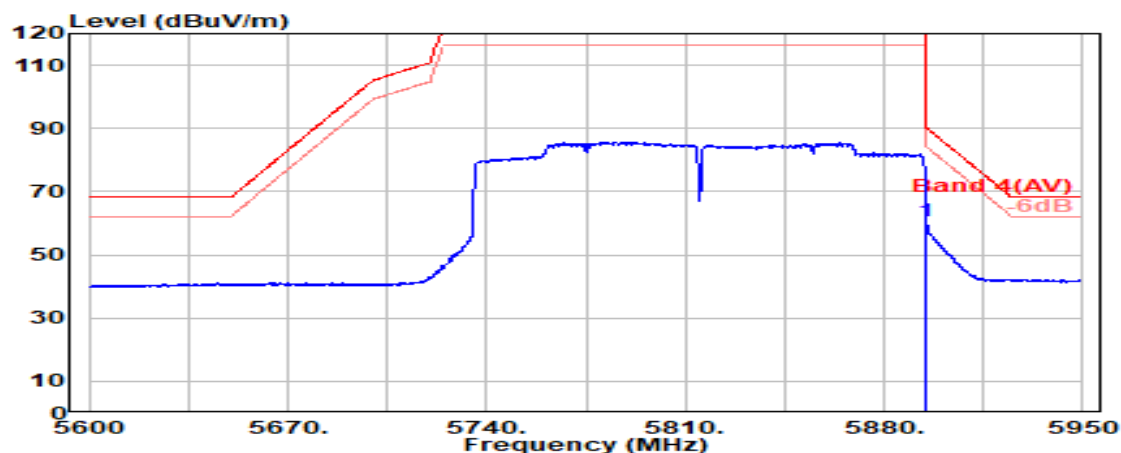


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	56.73	60.76	90.16	29.41	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

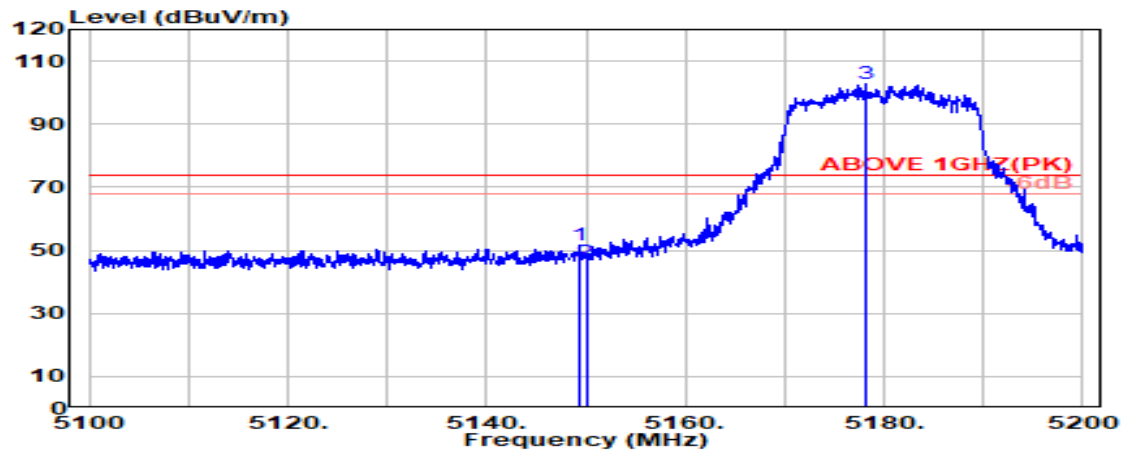

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.60	8.33	39.19	48.94	51.67	74.00	22.33	Peak
5150.000	33.60	8.33	39.19	43.60	46.33	74.00	27.67	Peak
@ 5178.150	33.60	8.36	39.19	100.20	102.97	---	---	Peak

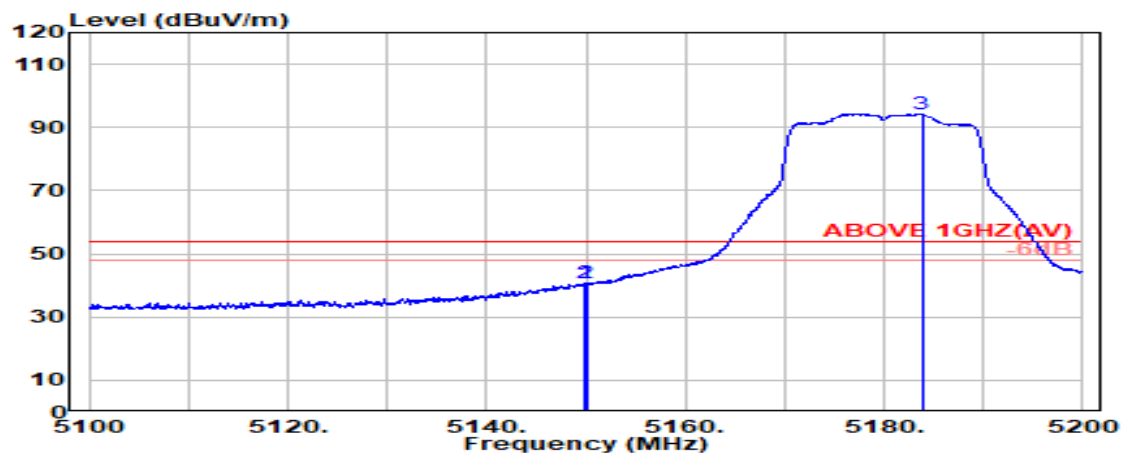

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.800	33.60	8.33	39.19	38.15	40.88	54.00	13.12	Average
5150.000	33.60	8.33	39.19	38.17	40.91	54.00	13.09	Average
@ 5183.800	33.60	8.36	39.19	91.57	94.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

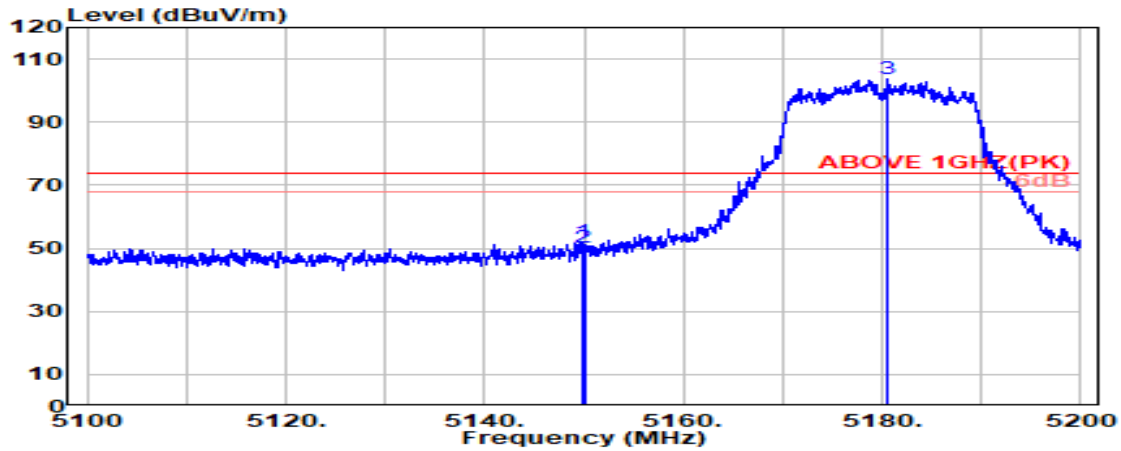

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.750	33.60	8.33	39.19	49.16	51.90	74.00	22.10	Peak
5150.000	33.60	8.33	39.19	47.31	50.05	74.00	23.95	Peak
@ 5180.450	33.60	8.36	39.19	100.75	103.52	---	---	Peak

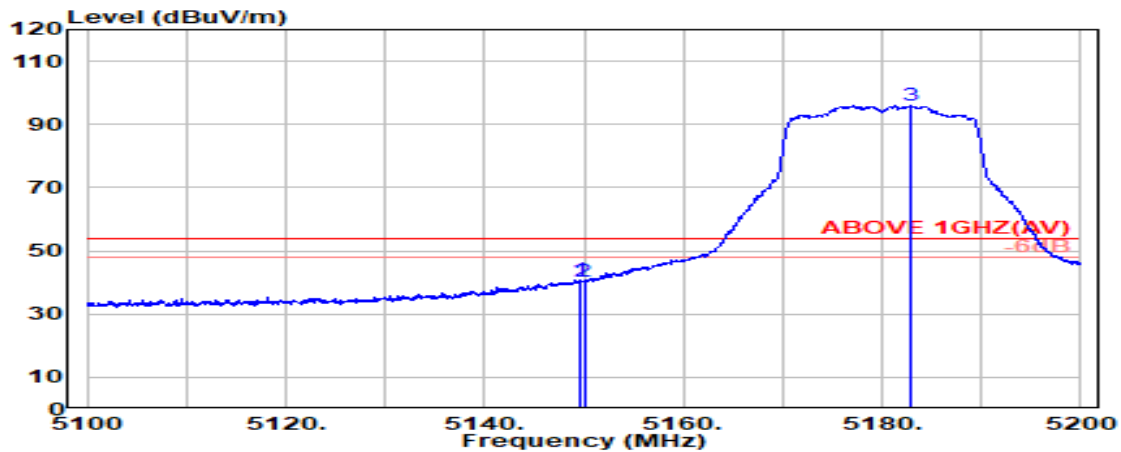

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	33.60	8.33	39.19	38.15	40.88	54.00	13.12	Average
5150.000	33.60	8.33	39.19	37.70	40.43	54.00	13.57	Average
@ 5182.850	33.60	8.36	39.19	93.09	95.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

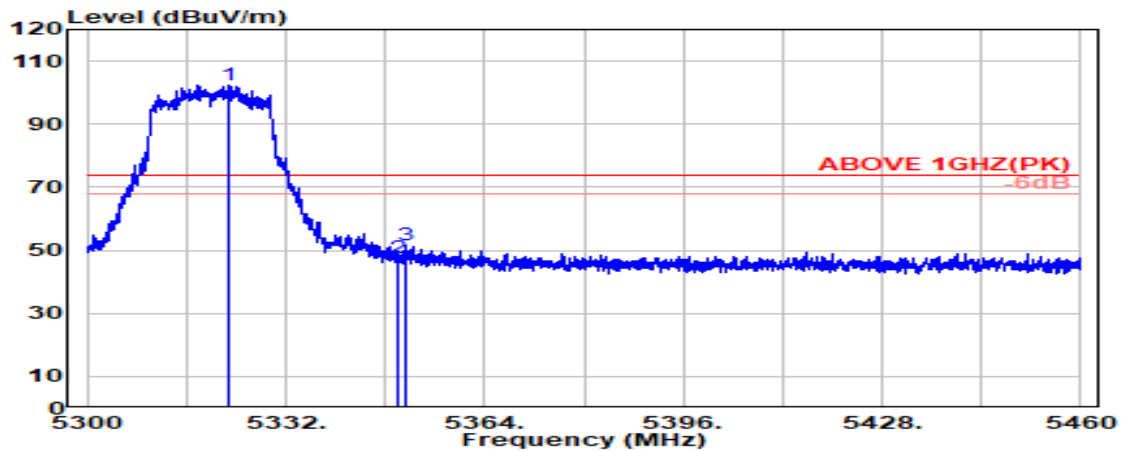

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.750	33.65	8.51	39.17	99.30	102.29	---	---	Peak
5350.000	33.70	8.54	39.17	44.43	47.51	74.00	26.49	Peak
5351.400	33.71	8.54	39.17	48.49	51.57	74.00	22.43	Peak

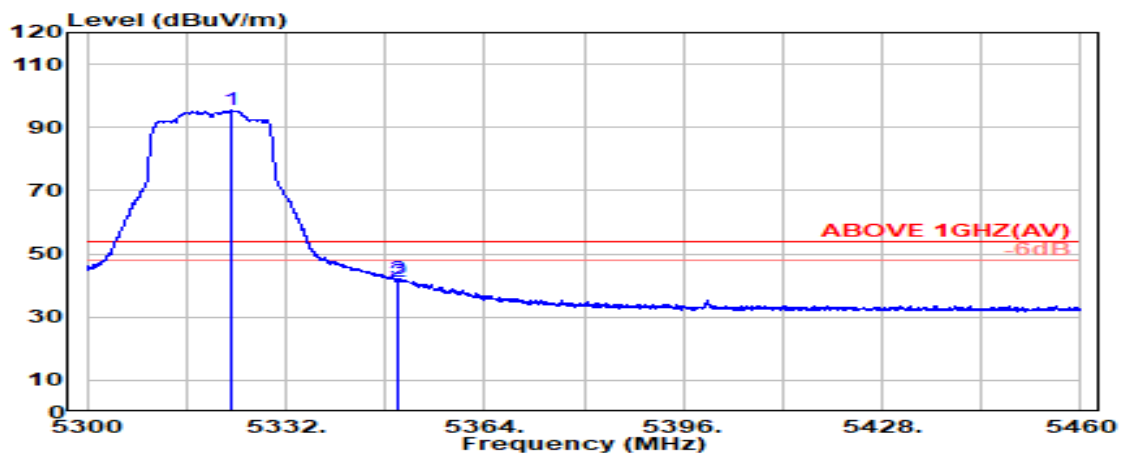

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.250	33.65	8.51	39.17	92.34	95.33	---	---	Average
5350.000	33.70	8.54	39.17	38.29	41.37	54.00	12.63	Average
5350.200	33.70	8.54	39.17	38.90	41.97	54.00	12.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

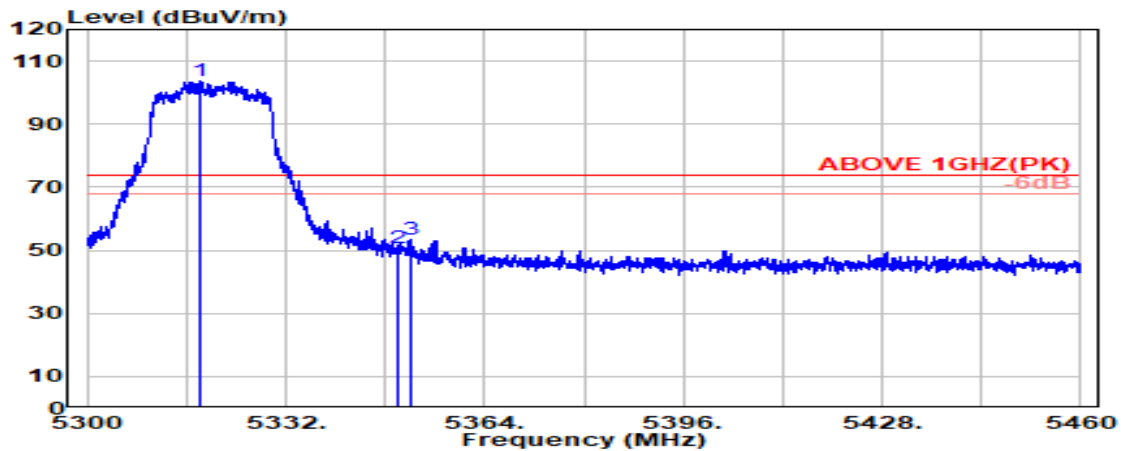

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.050	33.64	8.51	39.17	100.54	103.51	---	---	Peak
5350.000	33.70	8.54	39.17	47.47	50.54	74.00	23.46	Peak
5352.200	33.71	8.54	39.17	50.17	53.26	74.00	20.74	Peak

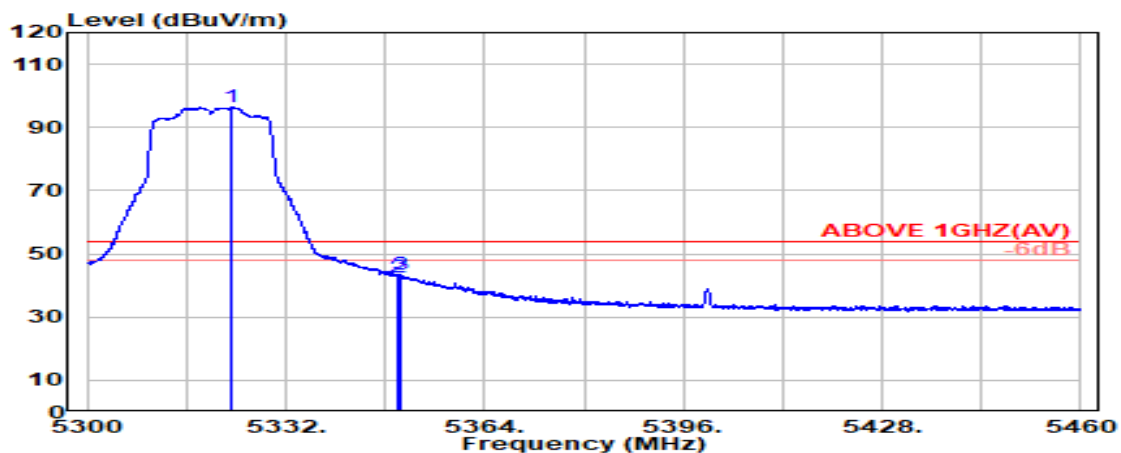


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.350	33.65	8.51	39.17	93.46	96.45	---	---	Average
5350.000	33.70	8.54	39.17	39.49	42.56	54.00	11.44	Average
5350.500	33.70	8.54	39.17	40.22	43.30	54.00	10.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

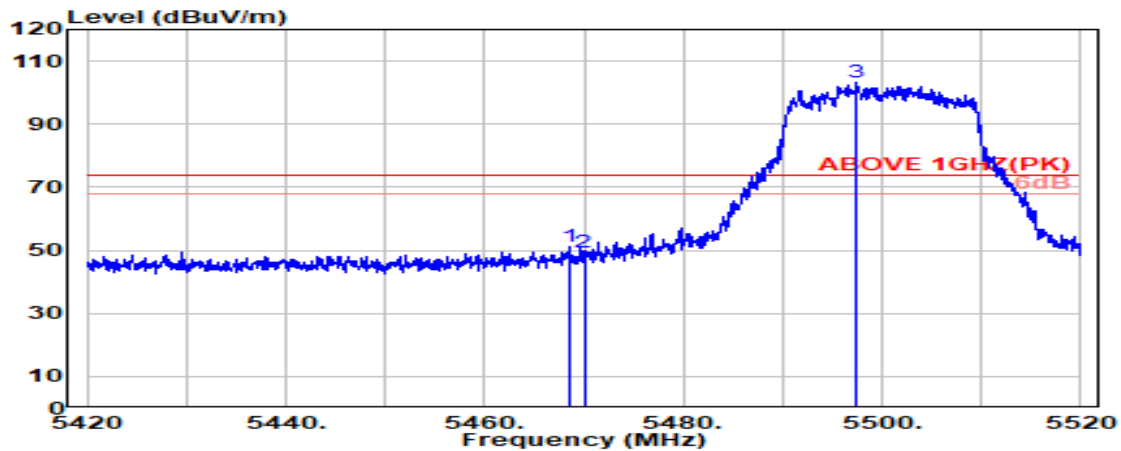

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.10	8.67	39.15	47.69	51.30	74.00	22.70	Peak
5470.000	34.10	8.67	39.15	45.75	49.36	74.00	24.64	Peak
@ 5497.300	34.10	8.70	39.15	99.76	103.40	---	---	Peak

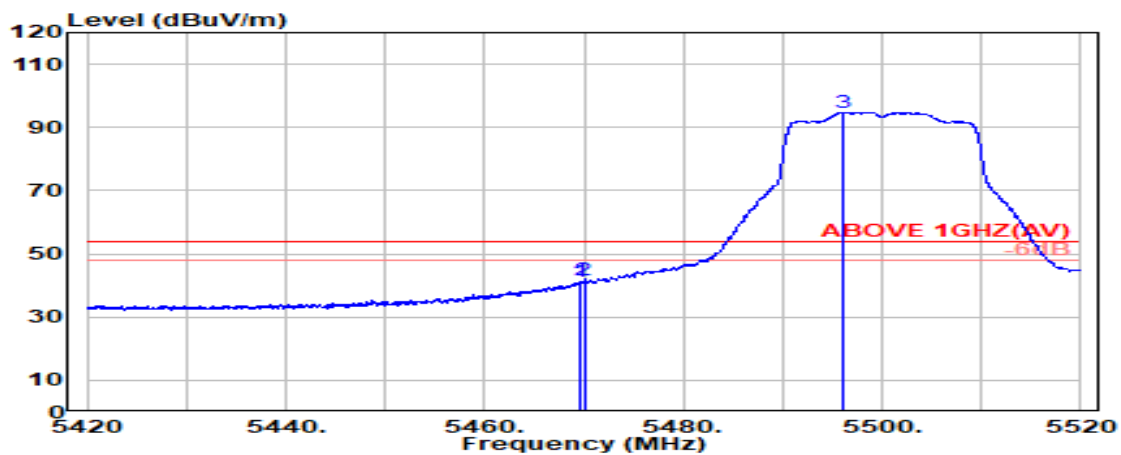

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.700	34.10	8.67	39.15	37.60	41.21	54.00	12.79	Average
5470.000	34.10	8.67	39.15	38.21	41.82	54.00	12.18	Average
@ 5496.150	34.10	8.69	39.15	91.18	94.82	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

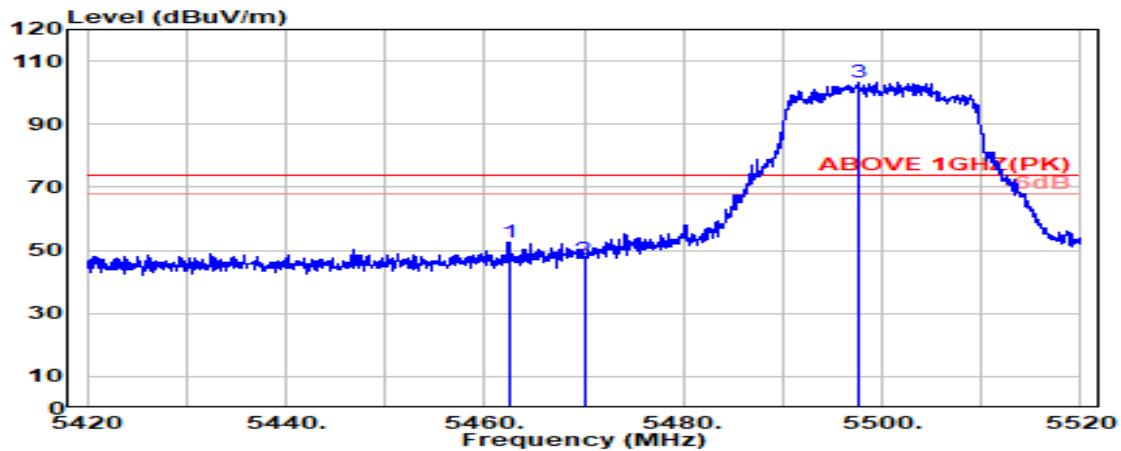

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.450	34.10	8.66	39.15	49.04	52.64	74.00	21.36	Peak
5470.000	34.10	8.67	39.15	43.56	47.17	74.00	26.83	Peak
@ 5497.600	34.10	8.70	39.15	99.76	103.40	---	---	Peak

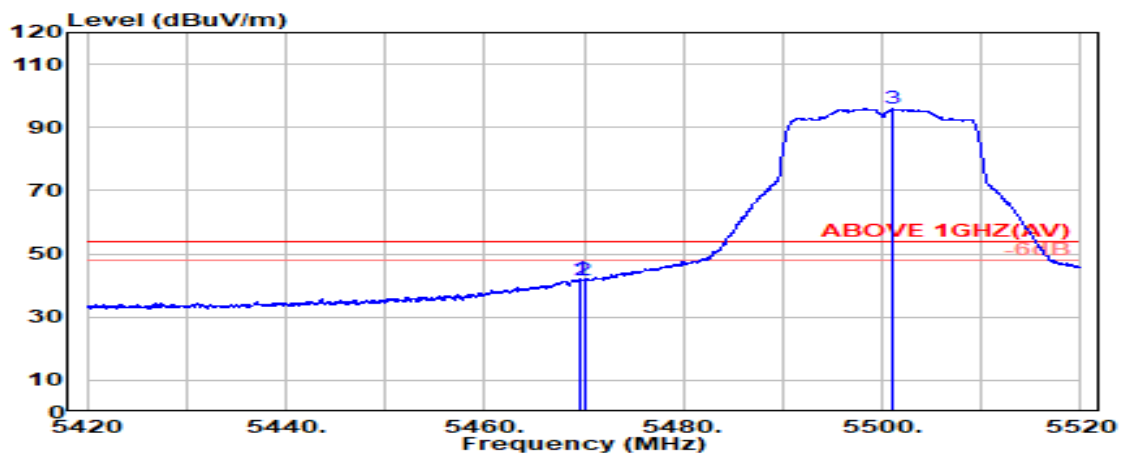

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.550	34.10	8.67	39.15	38.38	42.00	54.00	12.00	Average
5470.000	34.10	8.67	39.15	37.83	41.45	54.00	12.55	Average
@ 5501.150	34.10	8.70	39.15	92.27	95.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

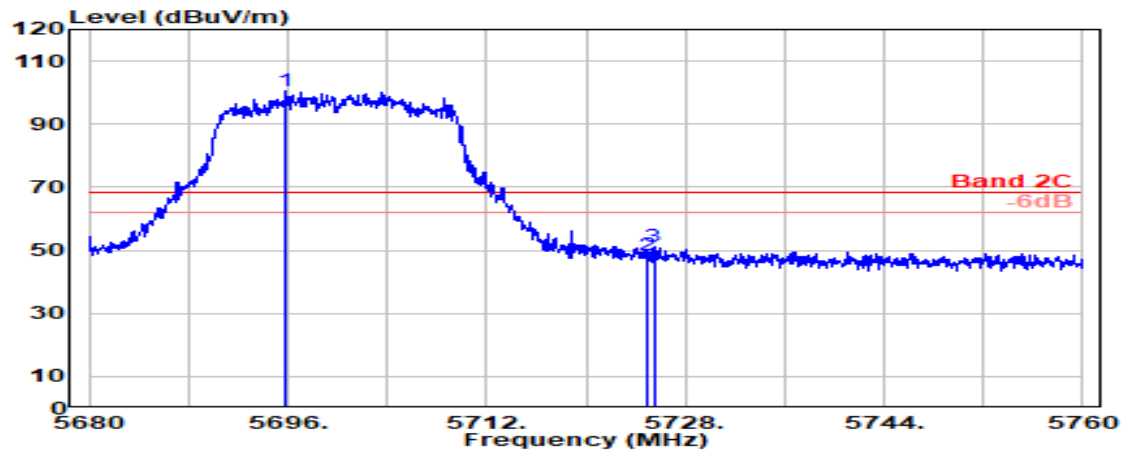

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5695.800	33.43	8.90	39.19	97.25	100.38	---	---	Peak
5725.000	33.60	8.92	39.20	45.17	48.50	68.20	19.70	Peak
5725.450	33.60	8.93	39.20	48.06	51.40	68.20	16.80	Peak

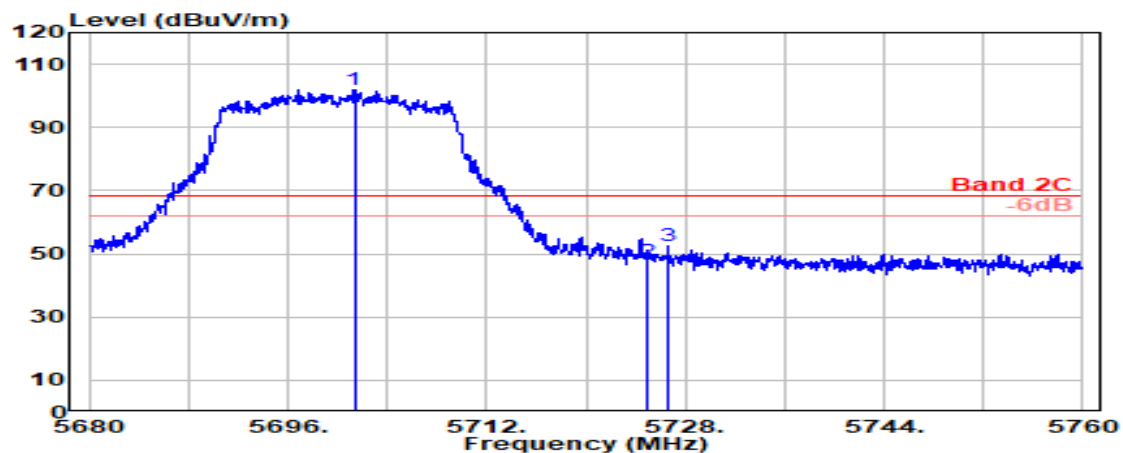

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.350	33.41	8.90	39.19	98.81	101.93	---	---	Peak
5725.000	33.60	8.92	39.20	44.00	47.33	68.20	20.87	Peak
5726.600	33.61	8.93	39.20	49.20	52.55	68.20	15.65	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

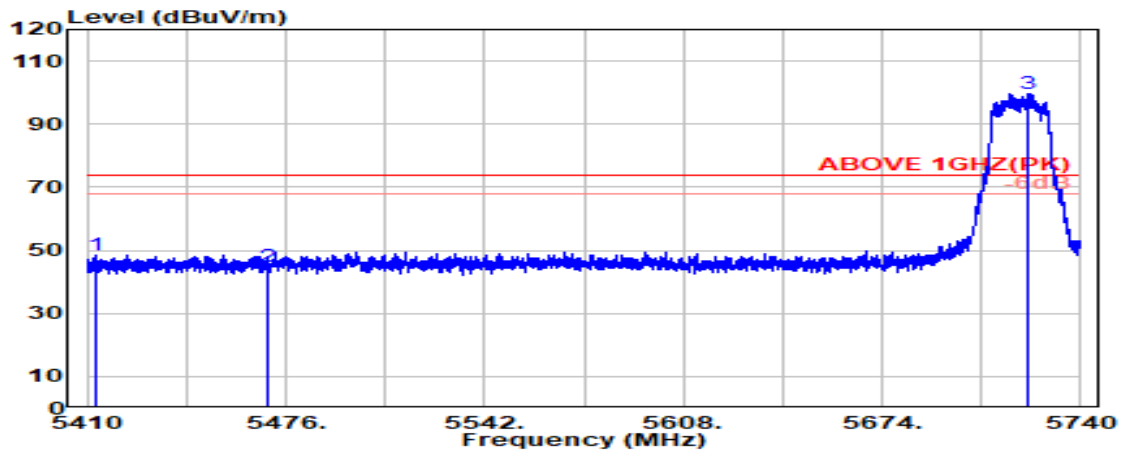

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5412.800	34.03	8.61	39.16	44.90	48.37	74.00	25.63	Peak
5470.000	34.10	8.67	39.15	41.09	44.70	74.00	29.30	Peak
@ 5722.800	33.58	8.92	39.20	96.51	99.82	---	---	Peak

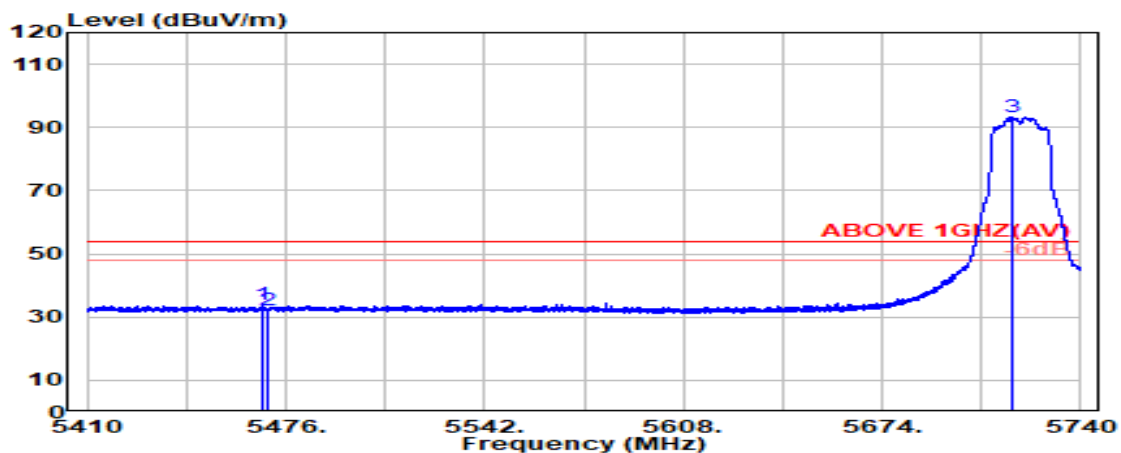


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.10	8.67	39.15	30.32	33.94	54.00	20.06	Average
5470.000	34.10	8.67	39.15	28.52	32.13	54.00	21.87	Average
@ 5716.850	33.54	8.92	39.19	90.00	93.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

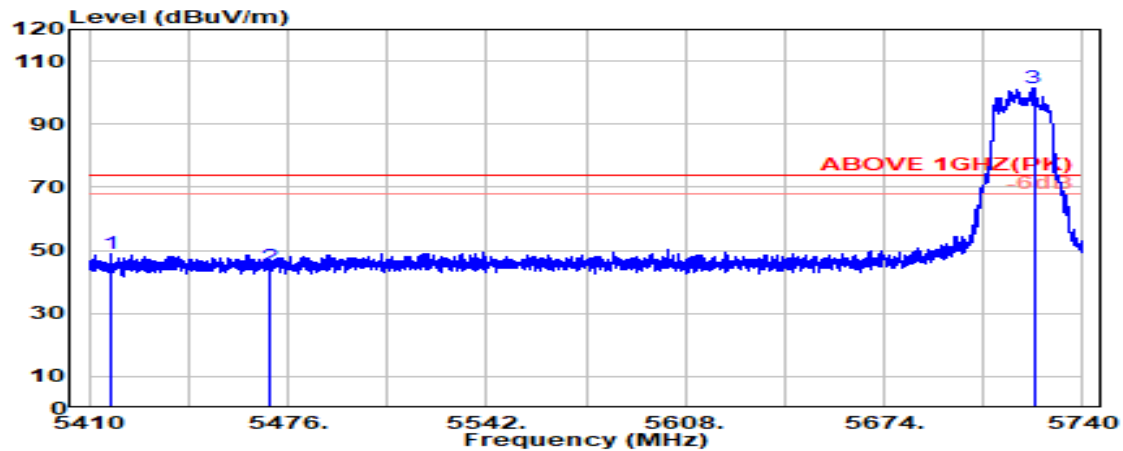

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5417.350	34.03	8.61	39.16	45.46	48.94	74.00	25.06	Peak
5470.000	34.10	8.67	39.15	41.15	44.76	74.00	29.24	Peak
@ 5723.700	33.59	8.92	39.20	97.96	101.28	---	---	Peak

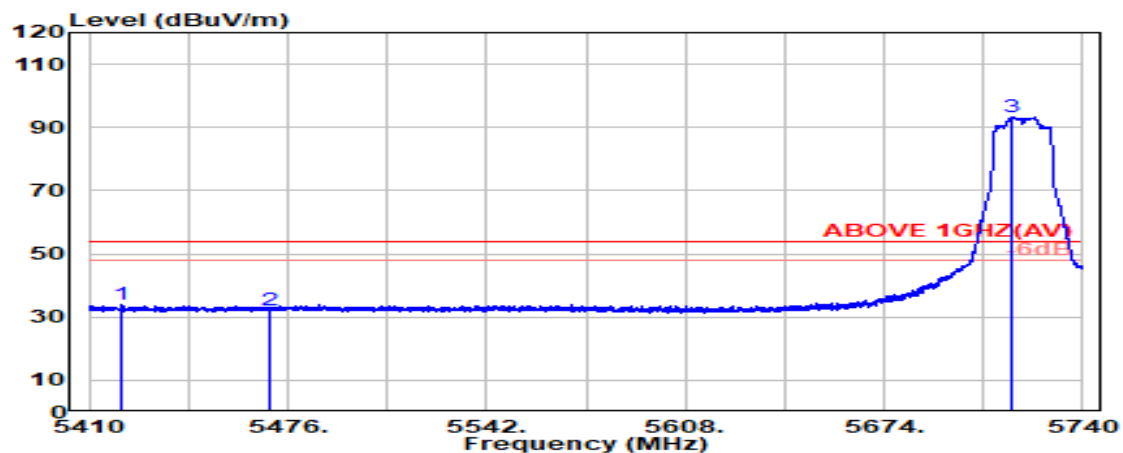


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.850	34.04	8.62	39.16	30.25	33.75	54.00	20.25	Average
5470.000	34.10	8.67	39.15	28.57	32.19	54.00	21.81	Average
@ 5716.200	33.53	8.92	39.19	90.07	93.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

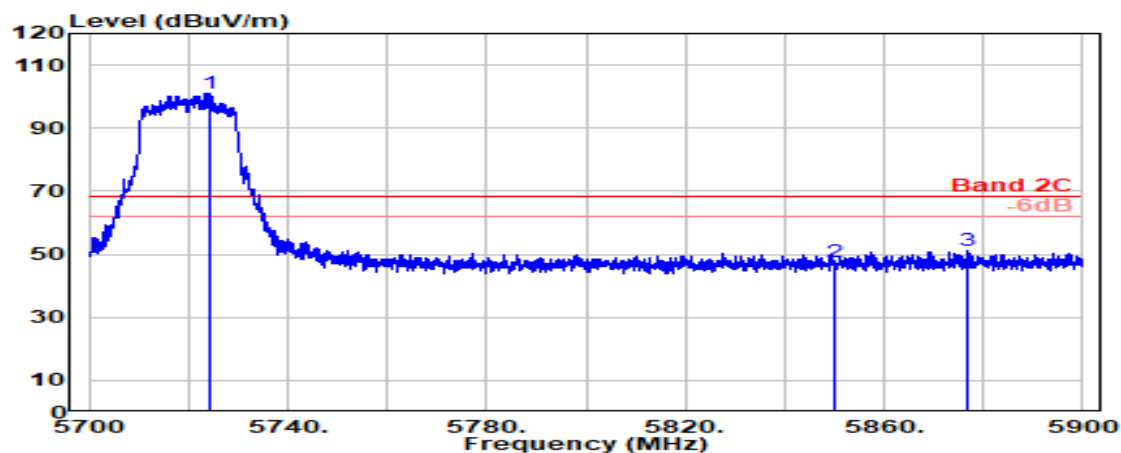

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5724.100	33.59	8.92	39.20	97.77	101.09	---	---	Peak
5850.000	33.90	9.05	39.22	43.66	47.39	68.20	20.81	Peak
5876.950	34.06	9.07	39.23	47.28	51.19	68.20	17.01	Peak

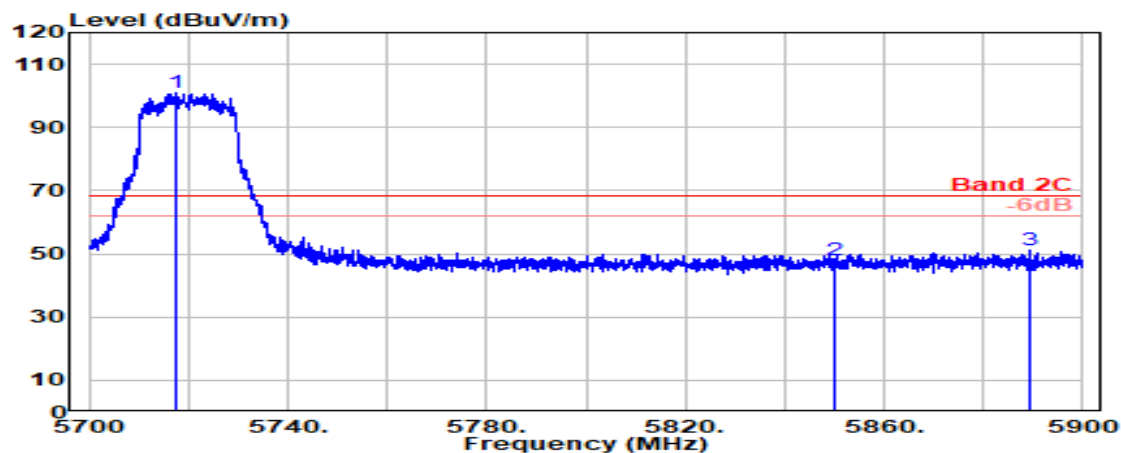

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.350	33.54	8.92	39.19	97.85	101.11	---	---	Peak
5850.000	33.90	9.05	39.22	44.38	48.10	68.20	20.10	Peak
5889.400	34.14	9.08	39.23	47.34	51.34	68.20	16.86	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

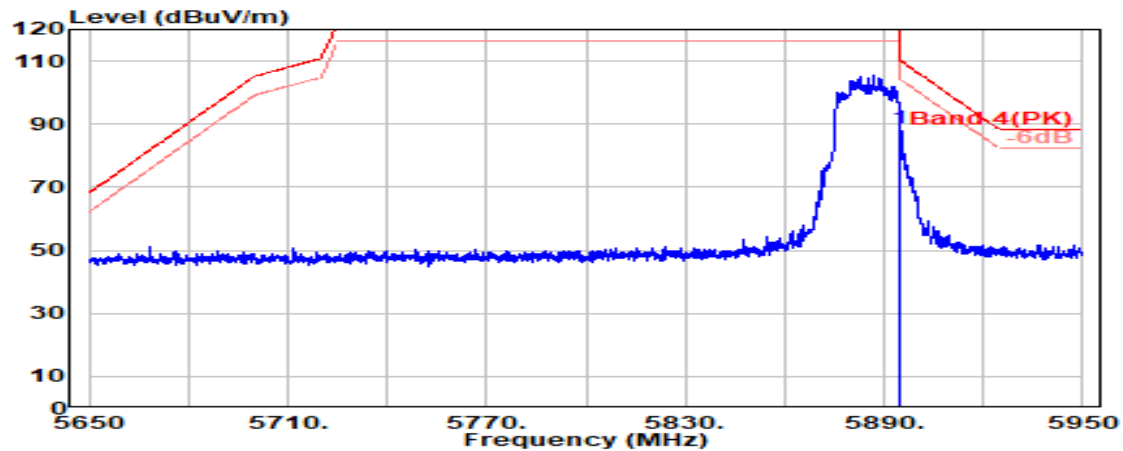

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	84.84	88.87	110.20	21.33	Peak

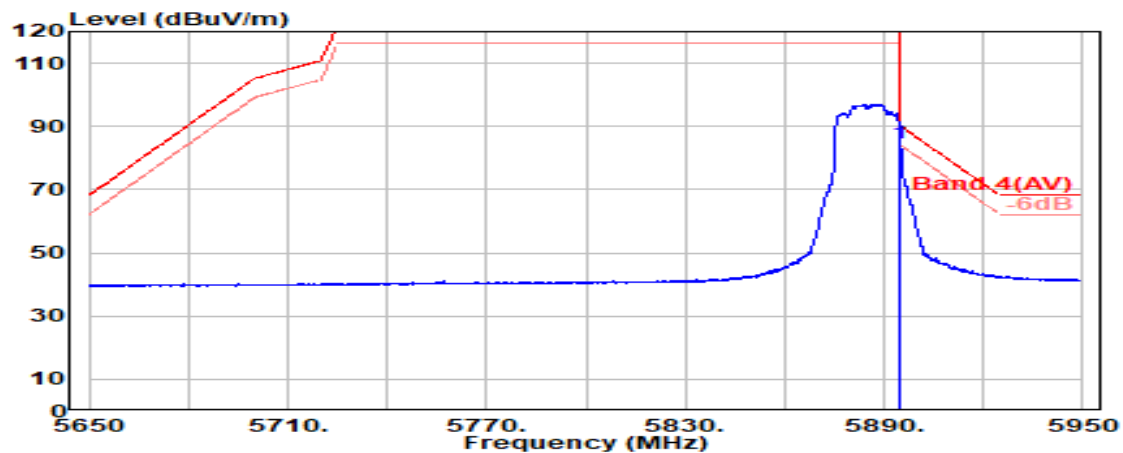


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	80.86	84.89	90.20	5.31	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

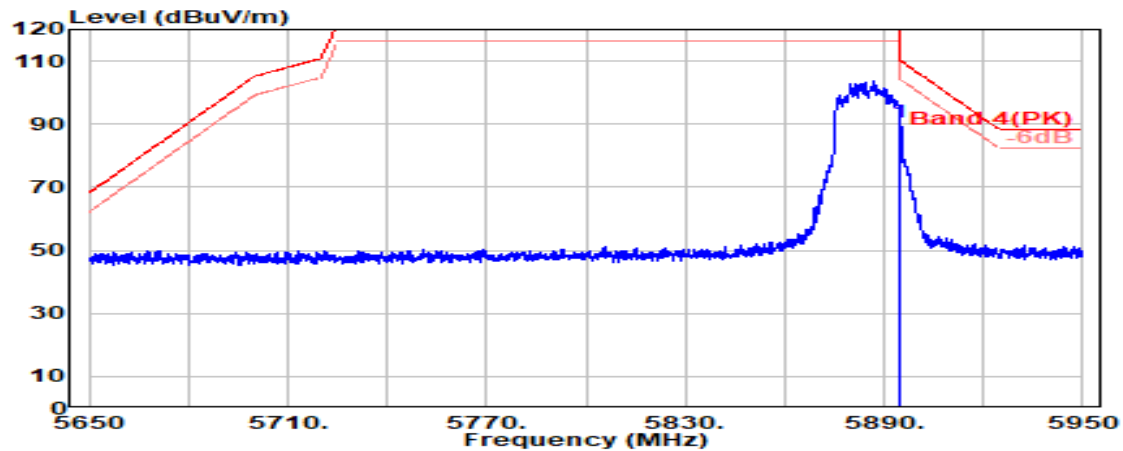

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	86.37	90.40	110.20	19.80	Peak

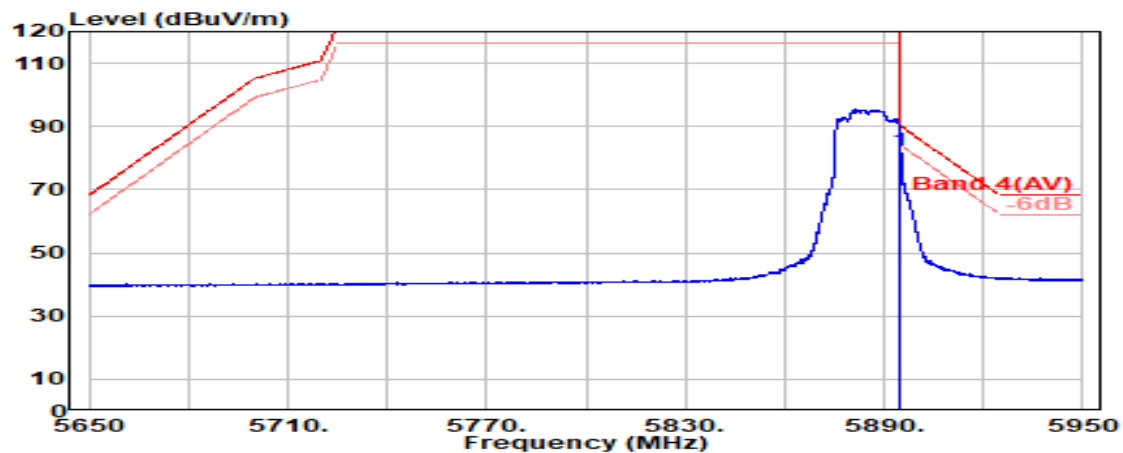


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	78.27	82.30	90.20	7.90	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

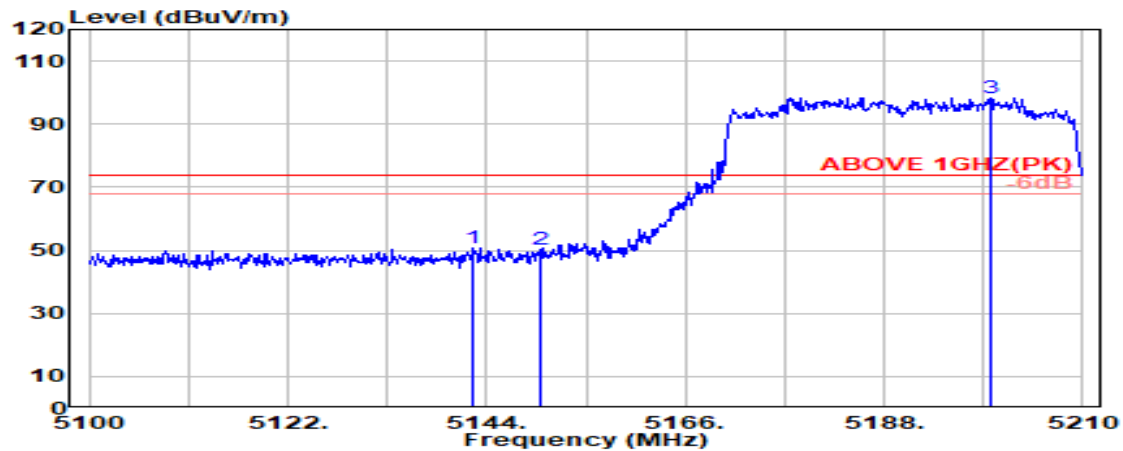

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.460	33.58	8.32	39.19	47.95	50.66	74.00	23.34	Peak
5150.000	33.60	8.33	39.19	47.38	50.11	74.00	23.89	Peak
@ 5199.770	33.60	8.38	39.19	95.61	98.40	---	---	Peak

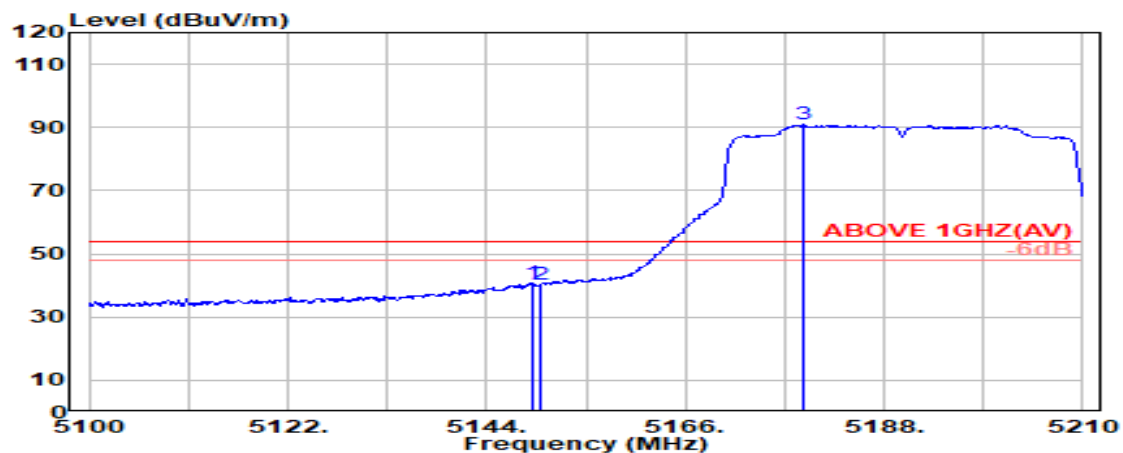

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.060	33.60	8.33	39.19	38.08	40.81	54.00	13.19	Average
5150.000	33.60	8.33	39.19	37.36	40.10	54.00	13.90	Average
@ 5178.980	33.60	8.36	39.19	88.07	90.84	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

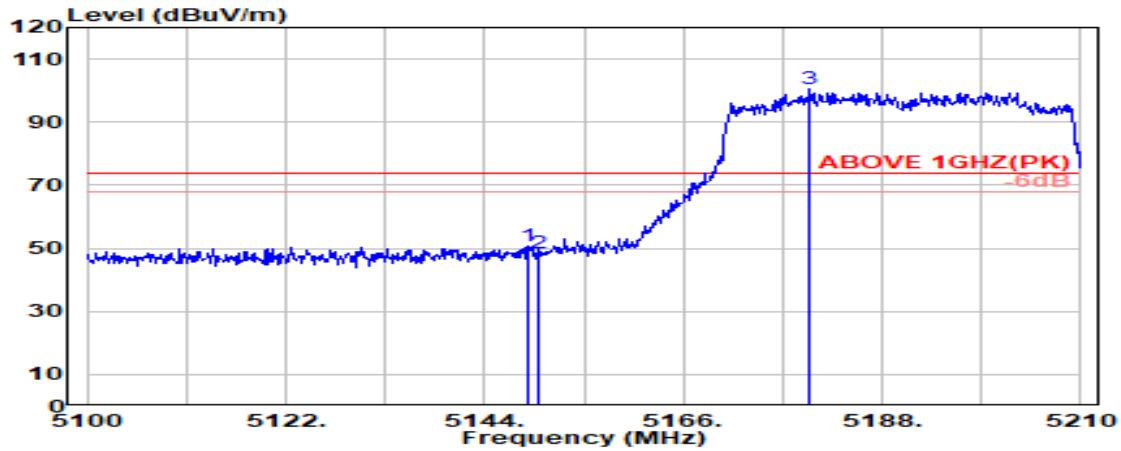

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.840	33.60	8.33	39.19	48.21	50.94	74.00	23.06	Peak
5150.000	33.60	8.33	39.19	45.65	48.38	74.00	25.62	Peak
@ 5179.970	33.60	8.36	39.19	97.56	100.33	---	---	Peak

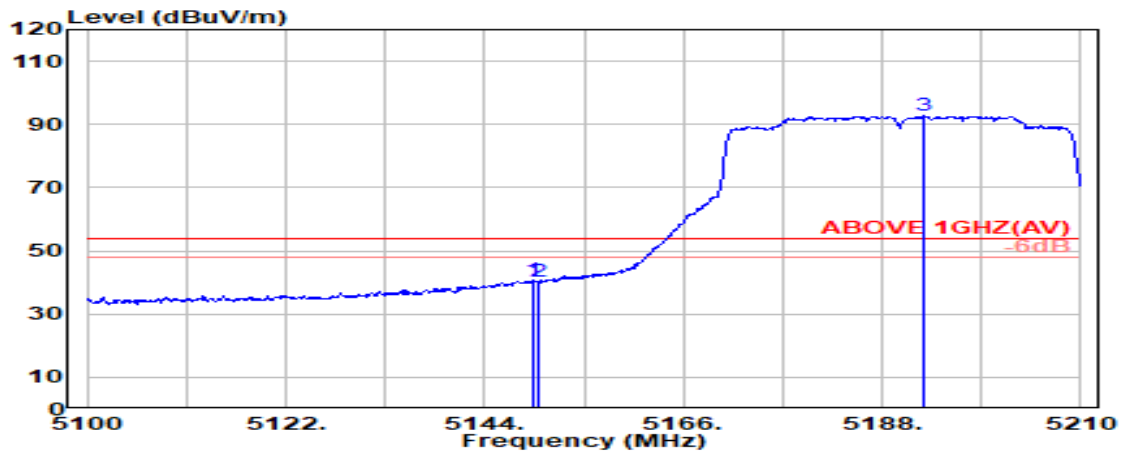

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	33.60	8.33	39.19	37.90	40.63	54.00	13.37	Average
5150.000	33.60	8.33	39.19	37.48	40.21	54.00	13.79	Average
@ 5192.510	33.60	8.37	39.19	89.83	92.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

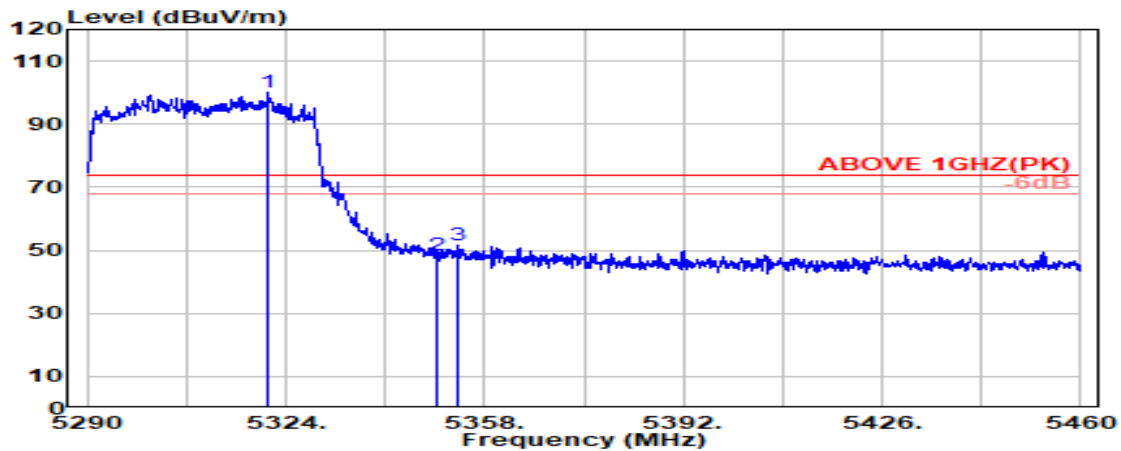

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.900	33.64	8.51	39.17	96.90	99.88	---	---	Peak
5350.000	33.70	8.54	39.17	45.53	48.61	74.00	25.39	Peak
5353.500	33.72	8.55	39.17	48.41	51.51	74.00	22.49	Peak

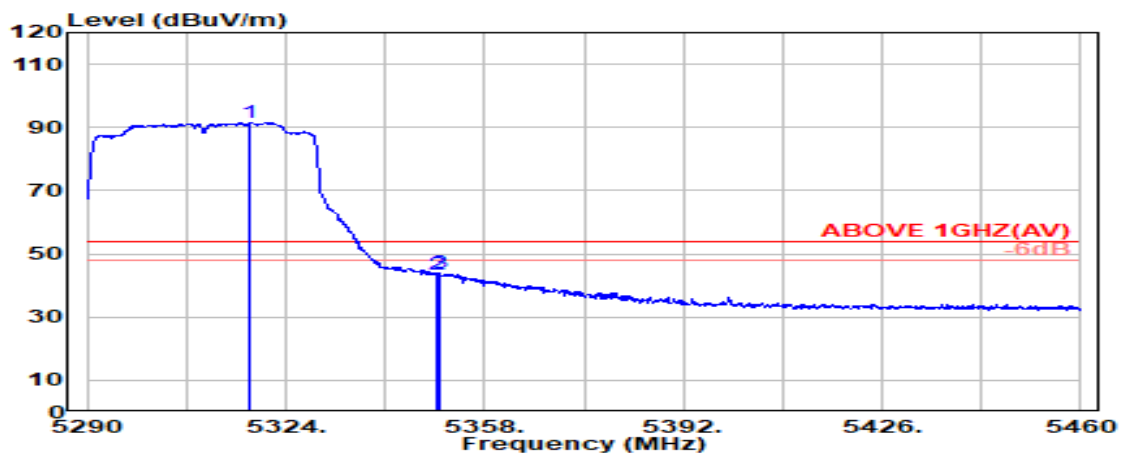

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.800	33.64	8.51	39.17	88.46	91.44	---	---	Average
5350.000	33.70	8.54	39.17	40.55	43.63	54.00	10.37	Average
5350.400	33.70	8.54	39.17	41.03	44.11	54.00	9.89	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

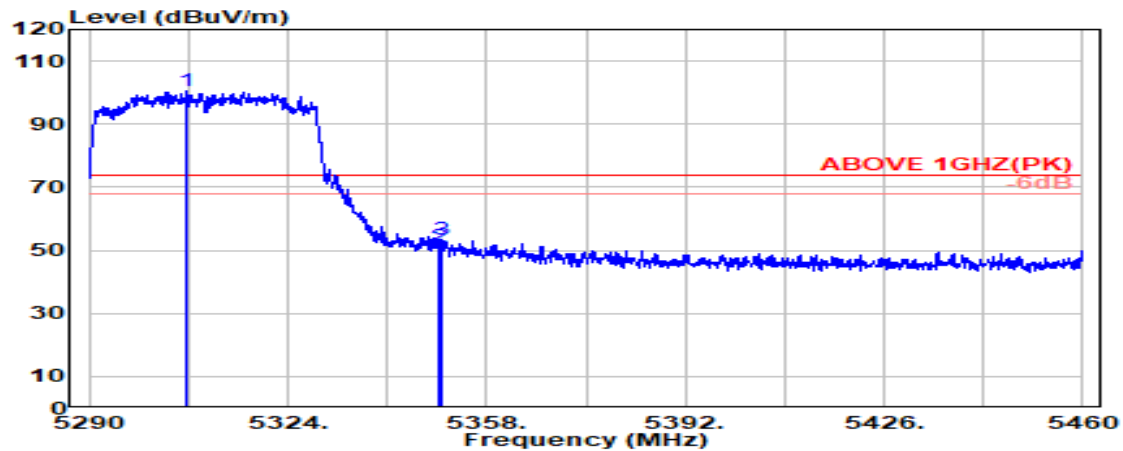

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5306.600	33.61	8.50	39.17	97.47	100.41	---	---	Peak
5350.000	33.70	8.54	39.17	48.20	51.28	74.00	22.72	Peak
5350.500	33.70	8.54	39.17	50.54	53.61	74.00	20.39	Peak

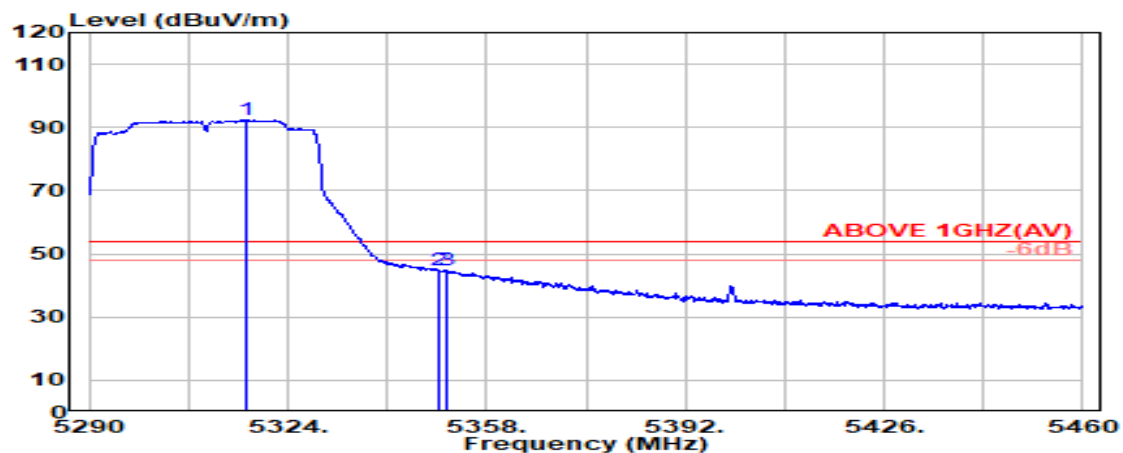

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5316.900	33.63	8.51	39.17	89.52	92.49	---	---	Average
5350.000	33.70	8.54	39.17	41.69	44.76	54.00	9.24	Average
5351.200	33.71	8.54	39.17	41.70	44.78	54.00	9.22	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

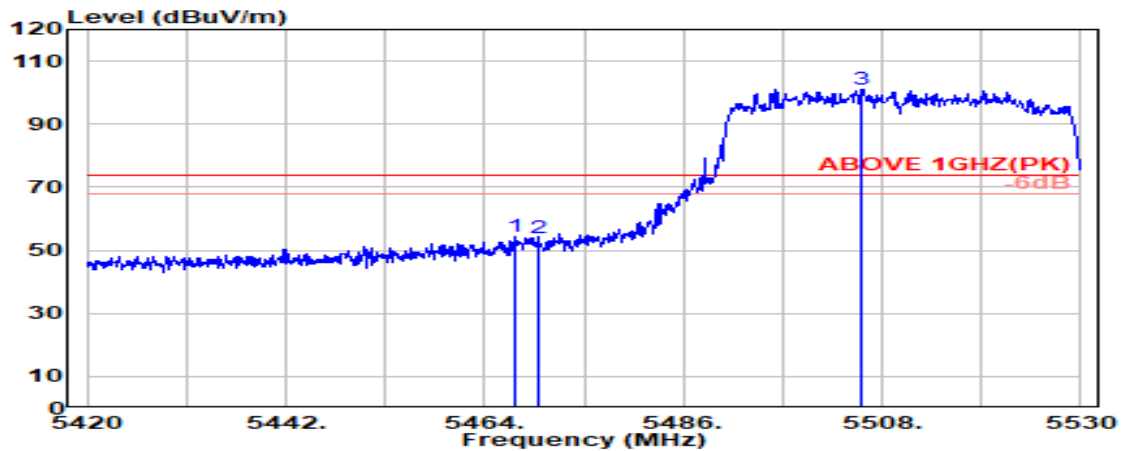

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	34.10	8.66	39.15	50.84	54.45	74.00	19.55	Peak
5470.000	34.10	8.67	39.15	50.29	53.90	74.00	20.10	Peak
@ 5505.800	34.09	8.70	39.15	97.41	101.05	---	---	Peak

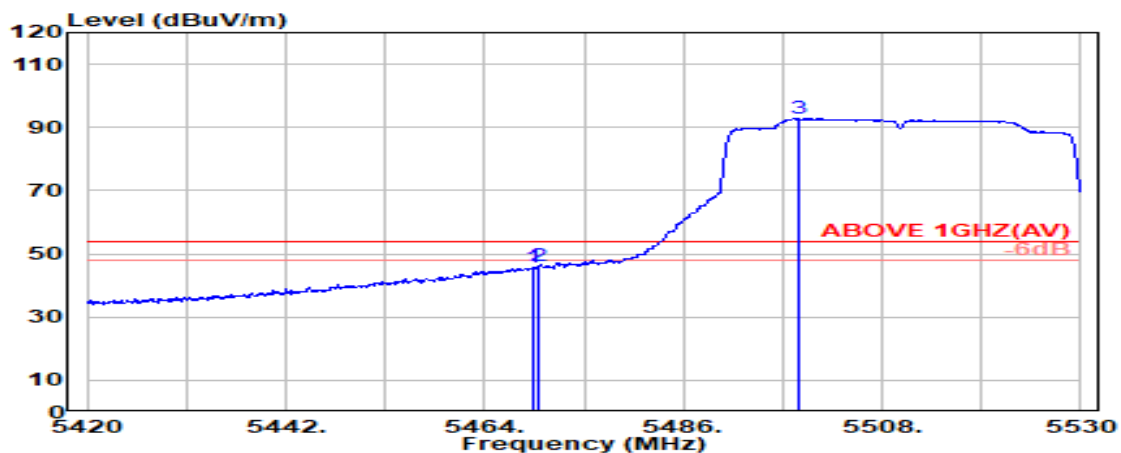

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.400	34.10	8.67	39.15	42.25	45.86	54.00	8.14	Average
5470.000	34.10	8.67	39.15	42.40	46.01	54.00	7.99	Average
@ 5498.700	34.10	8.70	39.15	89.20	92.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

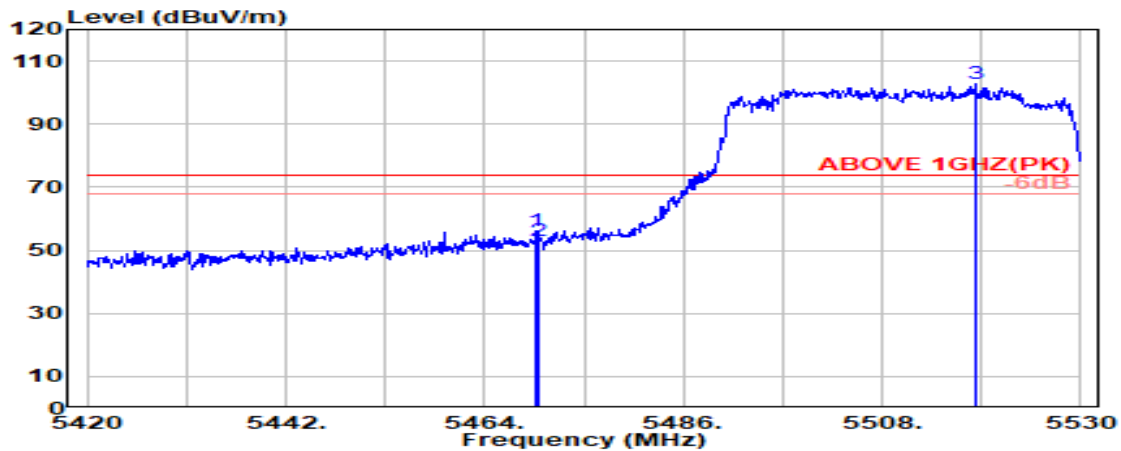

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.10	8.67	39.15	52.53	56.15	74.00	17.85	Peak
5470.000	34.10	8.67	39.15	49.39	53.01	74.00	20.99	Peak
@ 5518.400	34.06	8.72	39.15	99.02	102.65	---	---	Peak

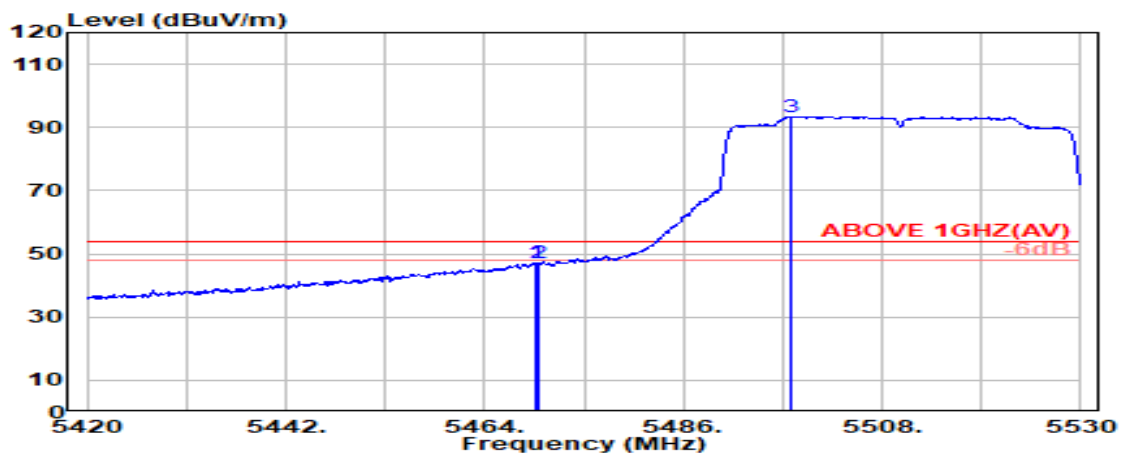

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.10	8.67	39.15	43.37	46.98	54.00	7.02	Average
5470.000	34.10	8.67	39.15	43.46	47.07	54.00	6.93	Average
@ 5497.900	34.10	8.70	39.15	89.86	93.51	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

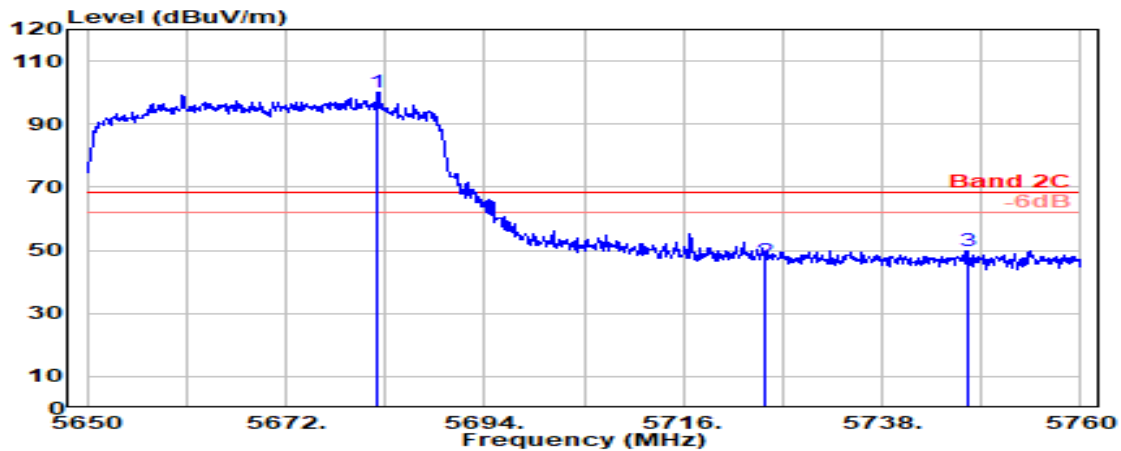

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5682.200	33.51	8.88	39.19	96.96	100.17	---	---	Peak
5725.000	33.60	8.92	39.20	43.30	46.63	68.20	21.57	Peak
5747.600	33.78	8.95	39.20	46.33	49.85	68.20	18.35	Peak

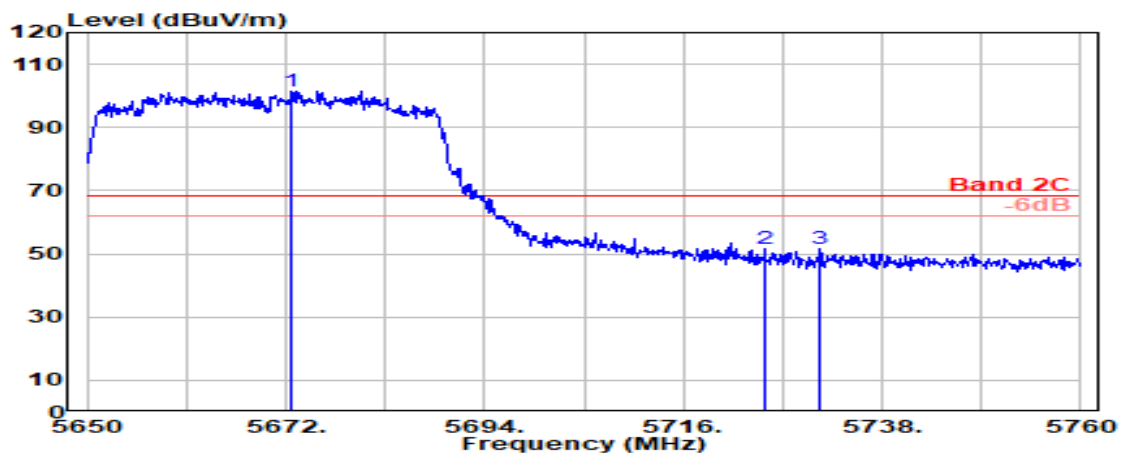


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.700	33.56	8.87	39.19	98.23	101.48	---	---	Peak
5725.000	33.60	8.92	39.20	48.11	51.44	68.20	16.76	Peak
5731.200	33.65	8.93	39.20	48.12	51.51	68.20	16.69	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

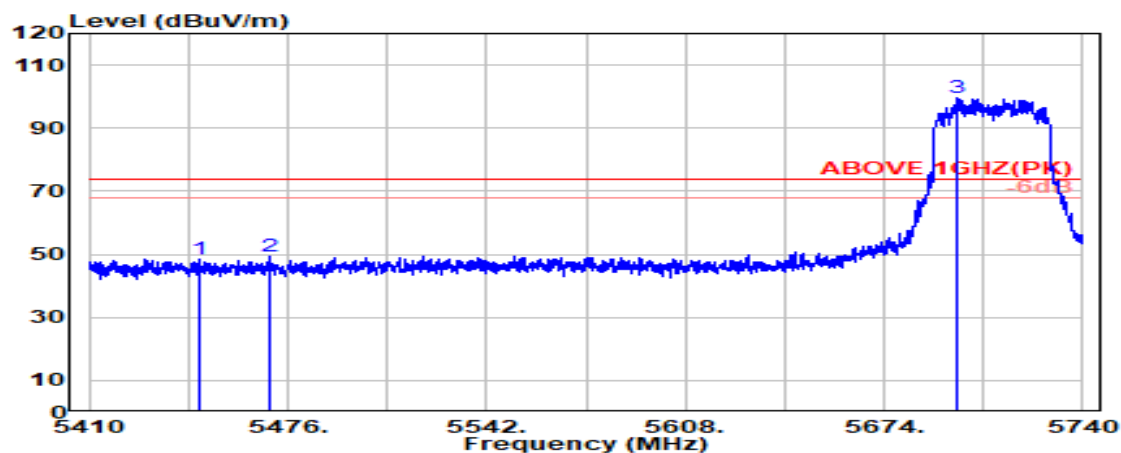

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.700	34.09	8.64	39.16	44.85	48.43	74.00	25.57	Peak
5470.000	34.10	8.67	39.15	45.87	49.48	74.00	24.52	Peak
@ 5698.300	33.41	8.90	39.19	96.38	99.50	---	---	Peak

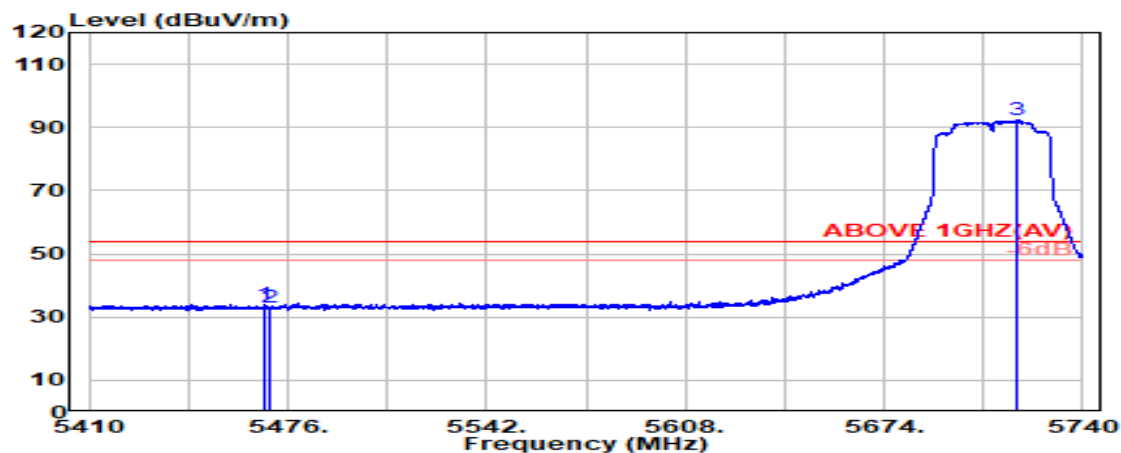


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.10	8.67	39.15	30.46	34.07	54.00	19.93	Average
5470.000	34.10	8.67	39.15	29.27	32.88	54.00	21.12	Average
@ 5718.400	33.55	8.92	39.19	89.06	92.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

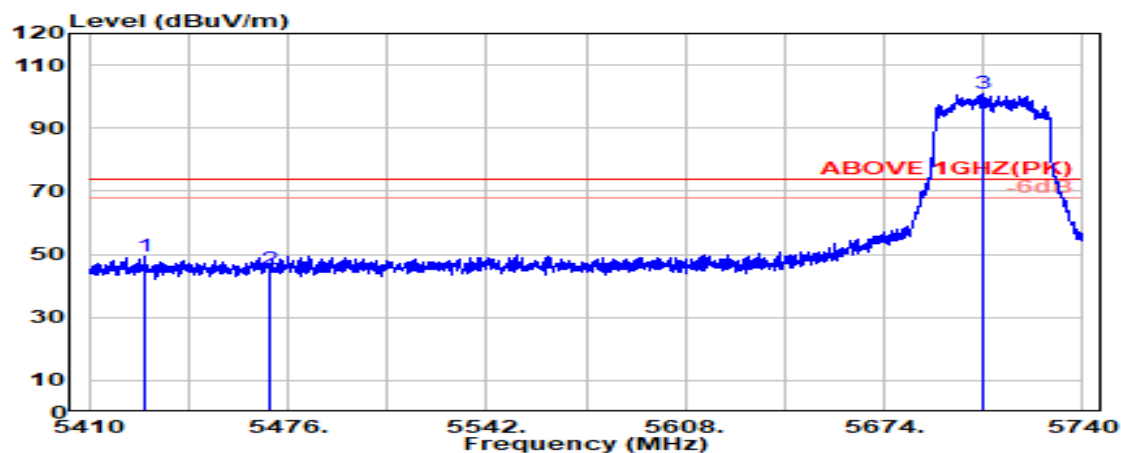

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.200	34.06	8.62	39.16	45.87	49.39	74.00	24.61	Peak
5470.000	34.10	8.67	39.15	41.50	45.11	74.00	28.89	Peak
@ 5706.800	33.45	8.91	39.19	97.87	101.04	---	---	Peak

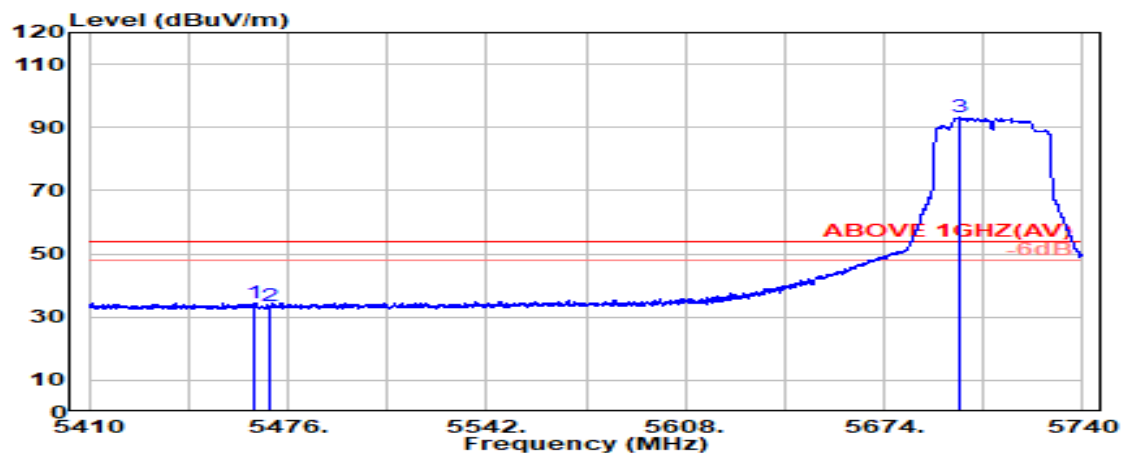

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.500	34.10	8.66	39.15	30.66	34.26	54.00	19.74	Average
5470.000	34.10	8.67	39.15	29.73	33.35	54.00	20.65	Average
@ 5698.800	33.41	8.90	39.19	90.06	93.17	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

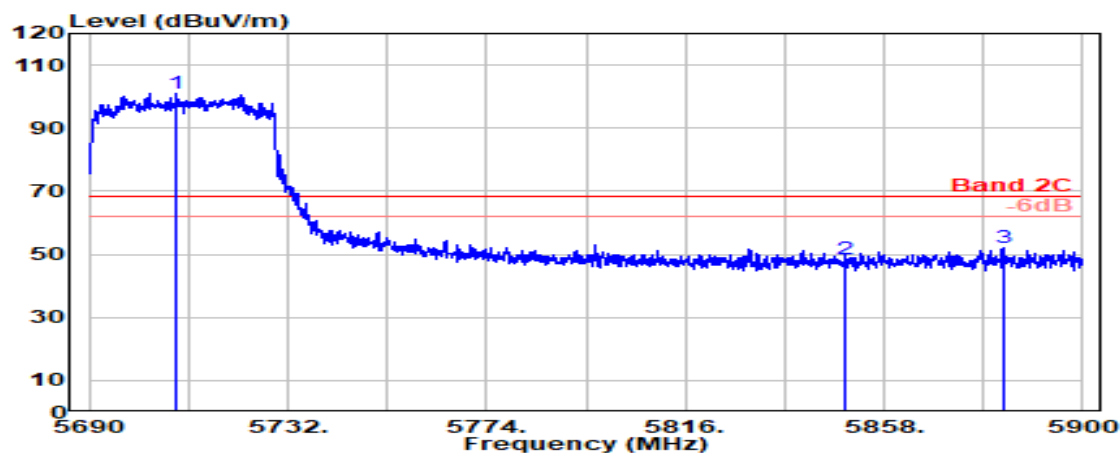

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.300	33.47	8.91	39.19	97.70	100.89	---	---	Peak
5850.000	33.90	9.05	39.22	44.91	48.64	68.20	19.56	Peak
5883.100	34.10	9.08	39.23	47.92	51.87	68.20	16.33	Peak

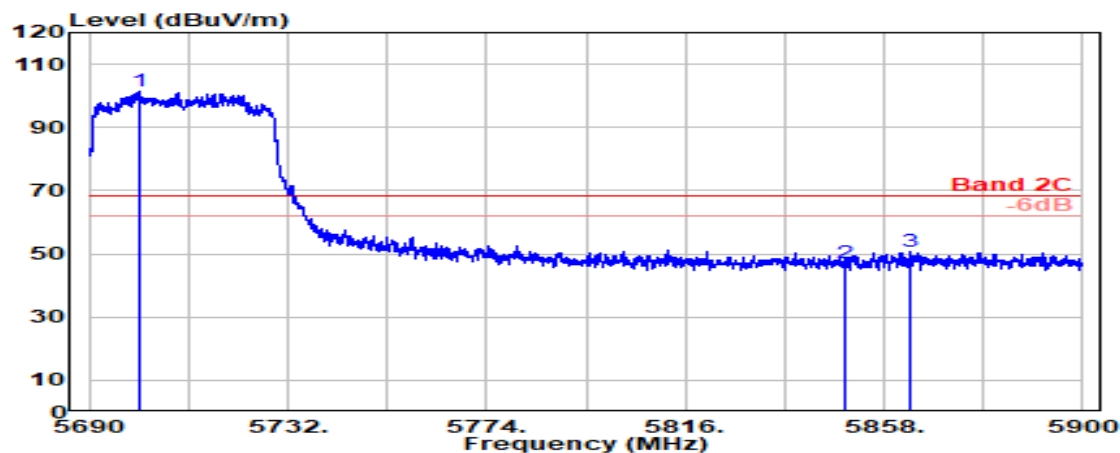

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.700	33.41	8.90	39.19	98.21	101.33	---	---	Peak
5850.000	33.90	9.05	39.22	43.46	47.19	68.20	21.01	Peak
5863.700	33.98	9.06	39.22	46.88	50.70	68.20	17.50	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

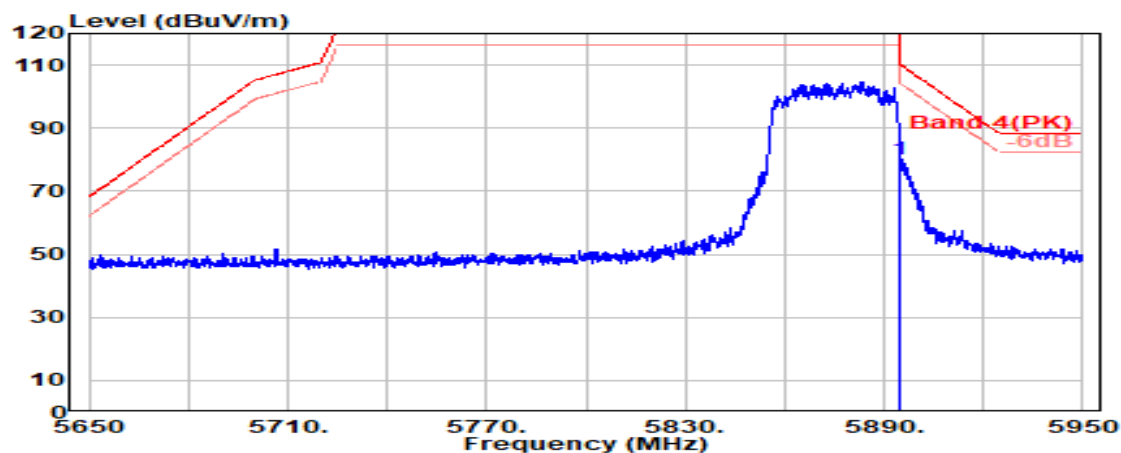

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	76.15	80.18	110.20	30.02	Peak

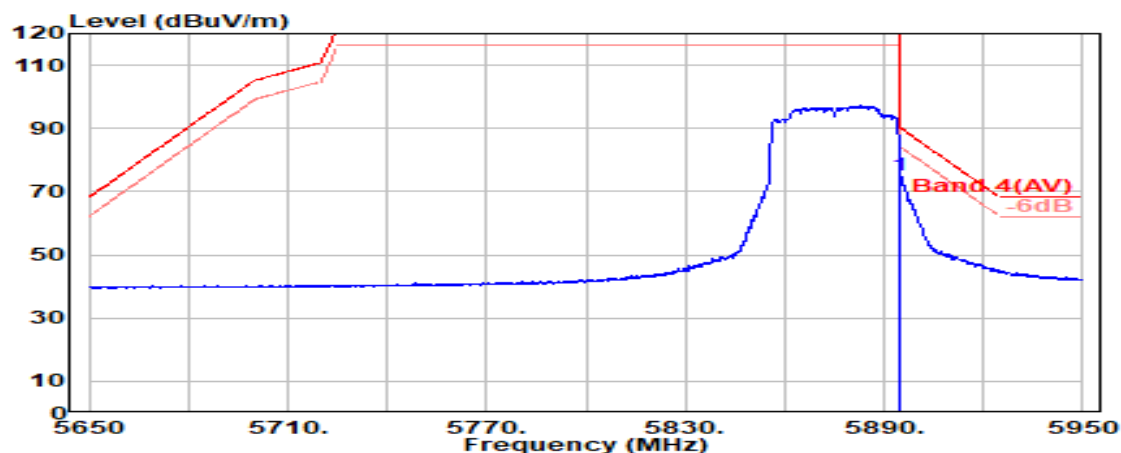


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	71.33	75.36	90.20	14.84	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

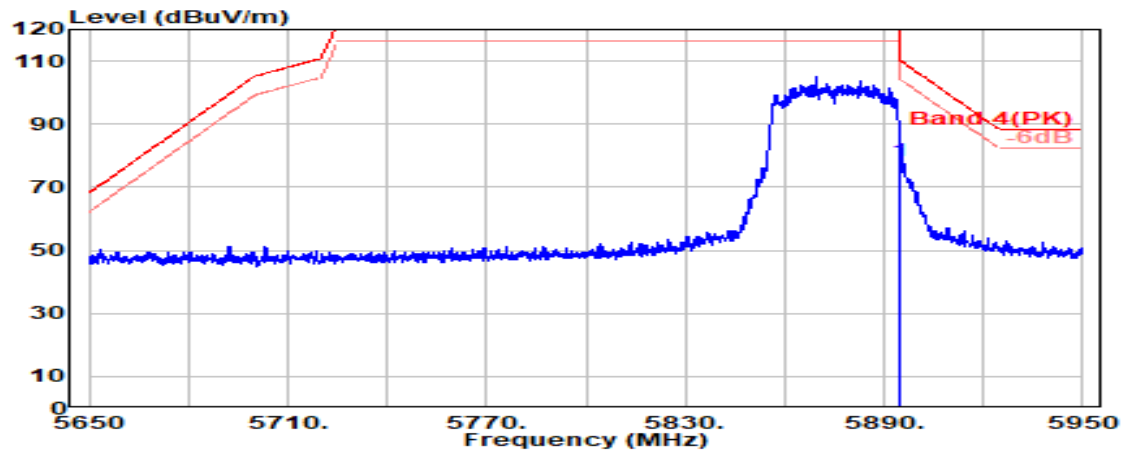

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	74.25	78.28	110.20	31.92	Peak

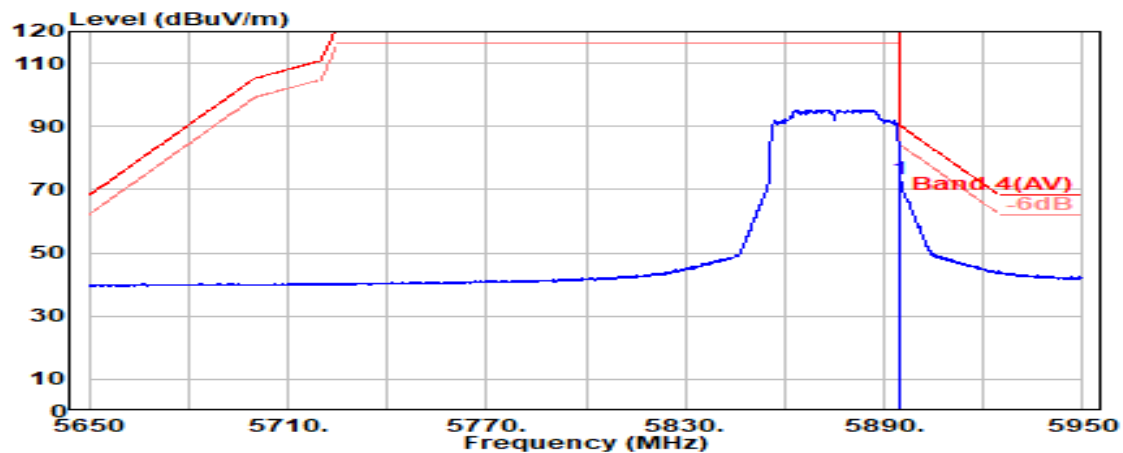


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.23	69.17	73.20	90.20	17.00	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

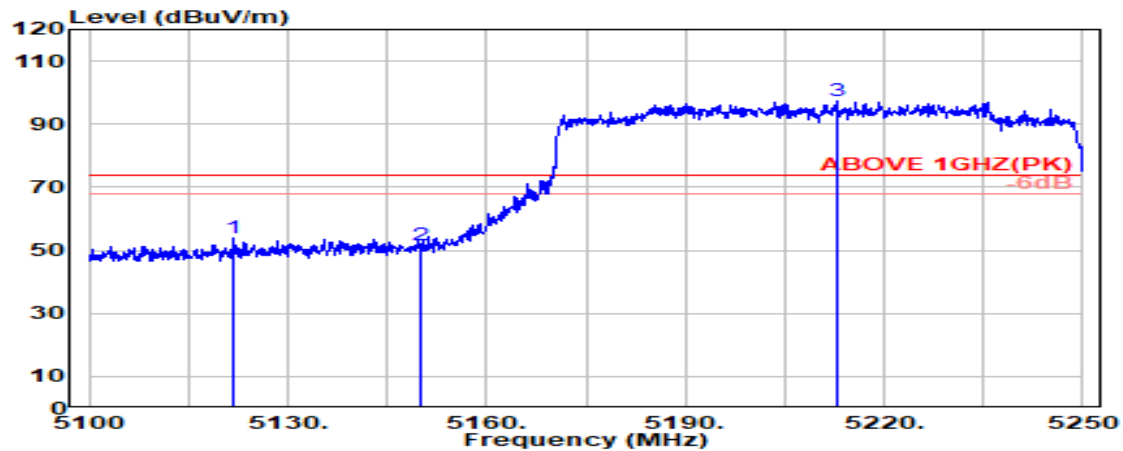

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.800	33.54	8.30	39.19	51.16	53.81	74.00	20.19	Peak
5150.000	33.60	8.33	39.19	49.02	51.76	74.00	22.24	Peak
@ 5213.000	33.63	8.40	39.18	94.32	97.16	---	---	Peak

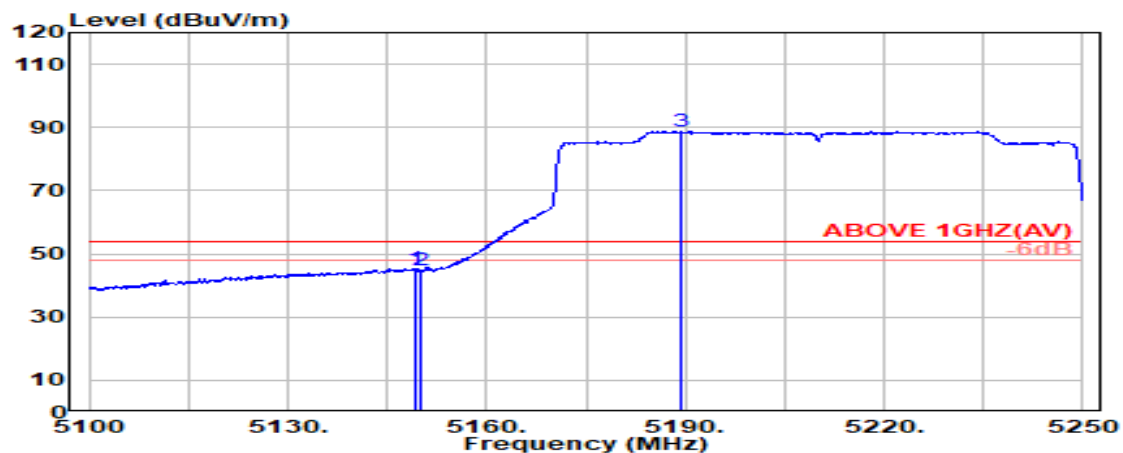

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.60	8.33	39.19	42.76	45.49	54.00	8.51	Average
5150.000	33.60	8.33	39.19	41.90	44.63	54.00	9.37	Average
@ 5189.300	33.60	8.37	39.19	85.95	88.73	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

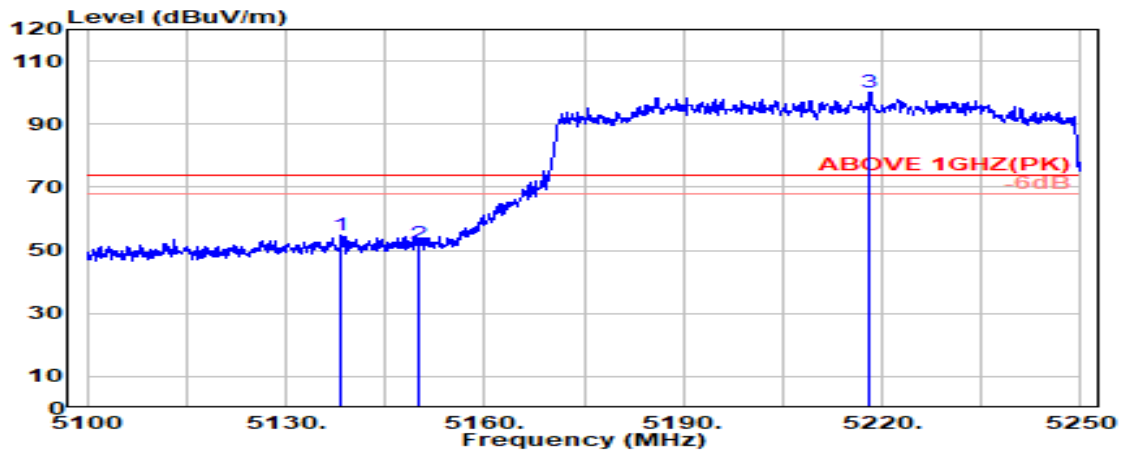

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.400	33.58	8.31	39.19	51.87	54.57	74.00	19.43	Peak
5150.000	33.60	8.33	39.19	49.18	51.92	74.00	22.08	Peak
@ 5218.200	33.64	8.40	39.18	97.07	99.93	---	---	Peak

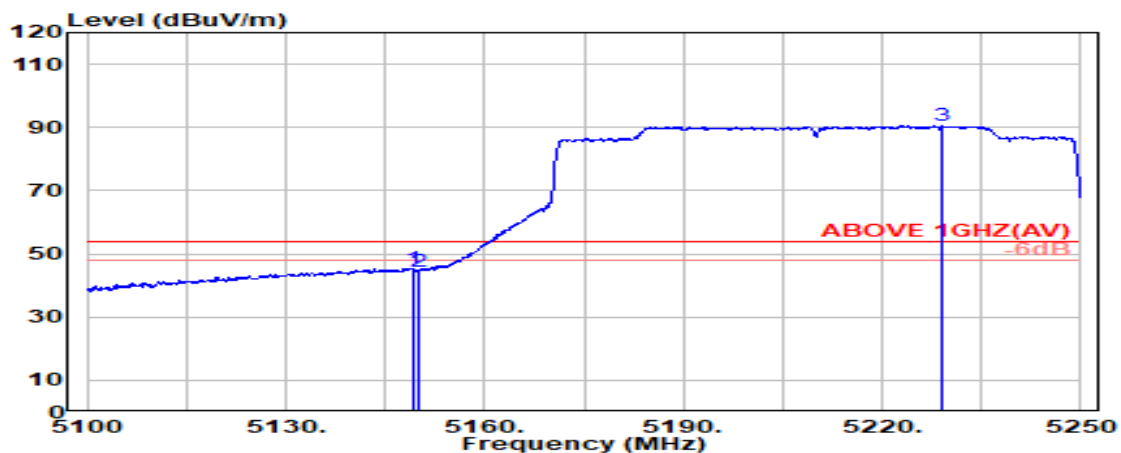

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.60	8.33	39.19	42.68	45.42	54.00	8.58	Average
5150.000	33.60	8.33	39.19	41.82	44.56	54.00	9.44	Average
@ 5229.100	33.66	8.41	39.18	87.55	90.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

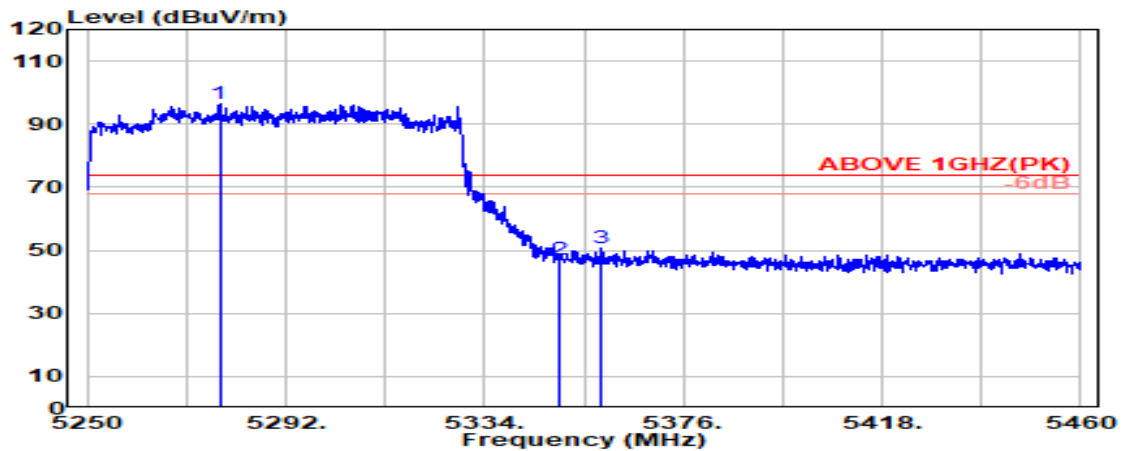

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5278.000	33.64	8.47	39.18	93.40	96.33	---	---	Peak
5350.000	33.70	8.54	39.17	43.87	46.95	74.00	27.05	Peak
5358.600	33.75	8.55	39.17	47.38	50.52	74.00	23.48	Peak

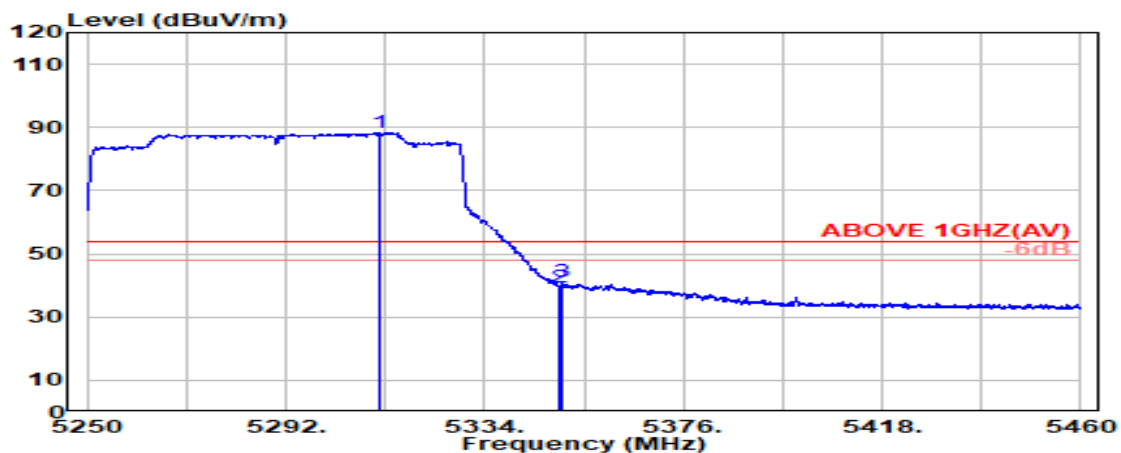

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.700	33.62	8.50	39.17	85.46	88.41	---	---	Average
5350.000	33.70	8.54	39.17	36.36	39.43	54.00	14.57	Average
5350.400	33.70	8.54	39.17	38.01	41.09	54.00	12.91	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

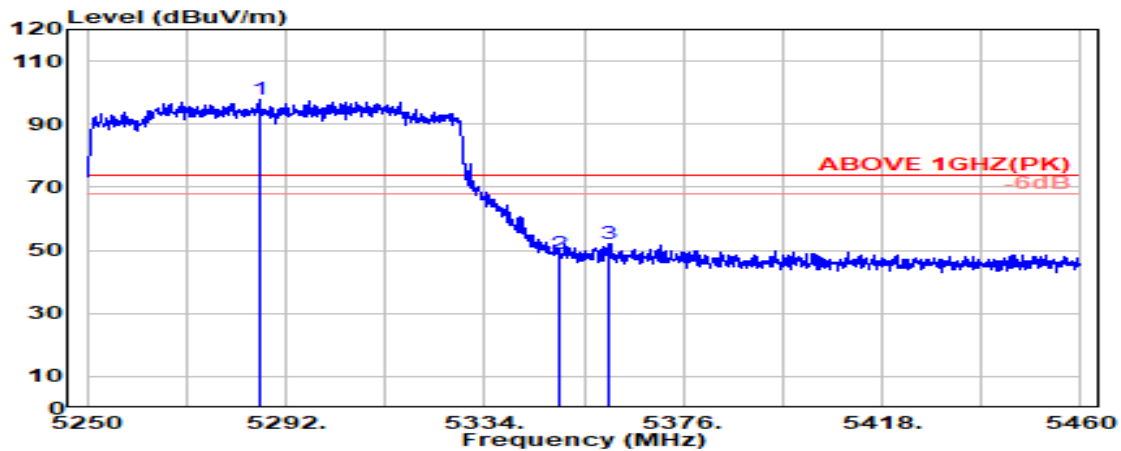

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.400	33.63	8.47	39.17	95.01	97.94	---	---	Peak
5350.000	33.70	8.54	39.17	45.67	48.75	74.00	25.25	Peak
5360.200	33.76	8.55	39.17	48.87	52.02	74.00	21.98	Peak

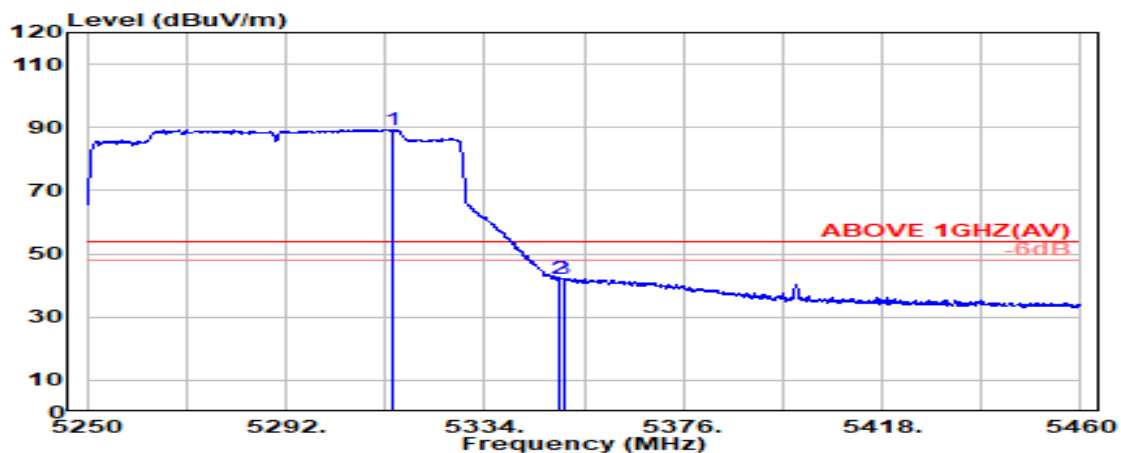

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.700	33.63	8.50	39.17	86.39	89.36	---	---	Average
5350.000	33.70	8.54	39.17	38.95	42.03	54.00	11.97	Average
5350.600	33.70	8.54	39.17	39.07	42.15	54.00	11.85	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

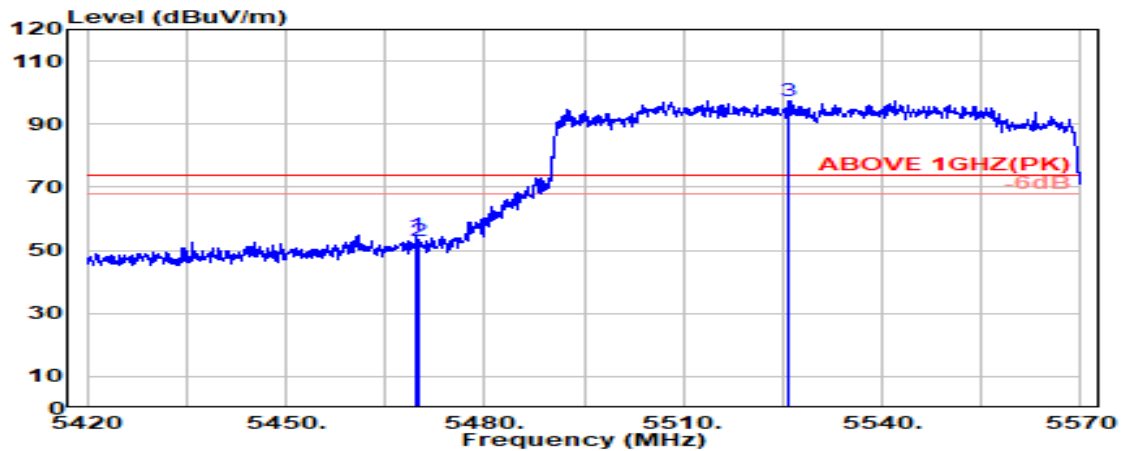

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.600	34.10	8.67	39.15	51.33	54.94	74.00	19.06	Peak
5470.000	34.10	8.67	39.15	49.16	52.78	74.00	21.22	Peak
@ 5526.000	34.05	8.73	39.16	93.62	97.24	---	---	Peak

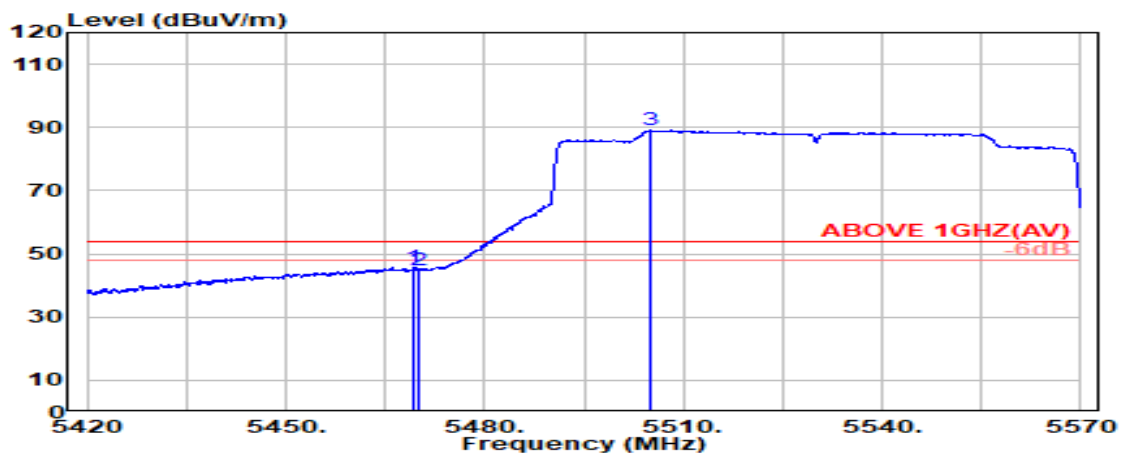

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.300	34.10	8.67	39.15	42.30	45.91	54.00	8.09	Average
5470.000	34.10	8.67	39.15	41.04	44.65	54.00	9.35	Average
@ 5505.000	34.09	8.70	39.15	85.56	89.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

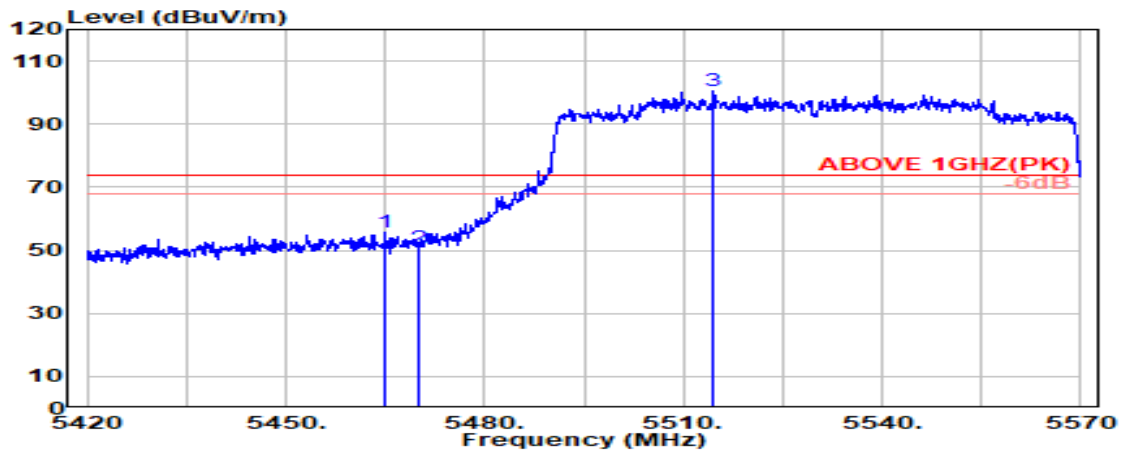

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.000	34.10	8.66	39.15	52.02	55.63	74.00	18.37	Peak
5470.000	34.10	8.67	39.15	47.17	50.78	74.00	23.22	Peak
@ 5514.600	34.07	8.71	39.15	96.68	100.31	---	---	Peak

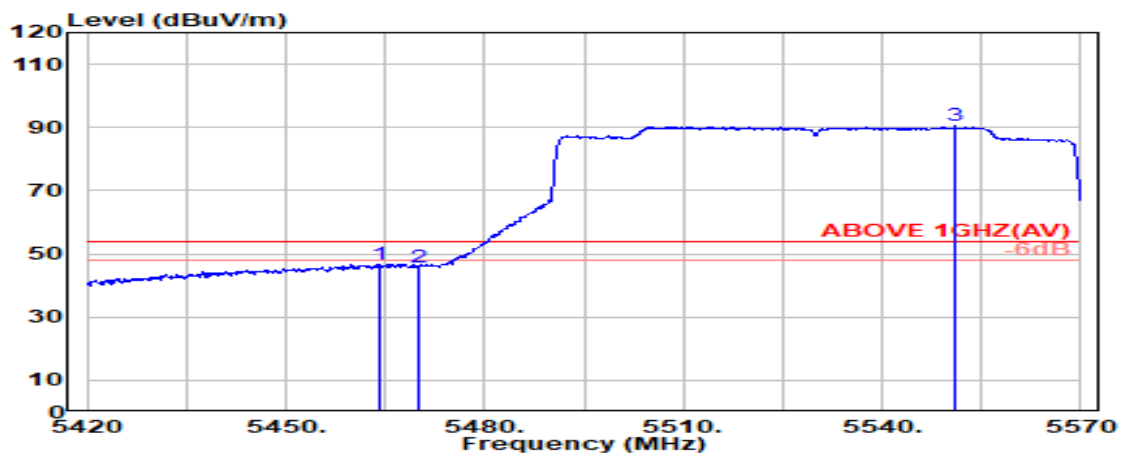

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.200	34.10	8.66	39.15	43.05	46.66	54.00	7.34	Average
5470.000	34.10	8.67	39.15	42.32	45.94	54.00	8.06	Average
@ 5551.000	34.00	8.75	39.16	86.76	90.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

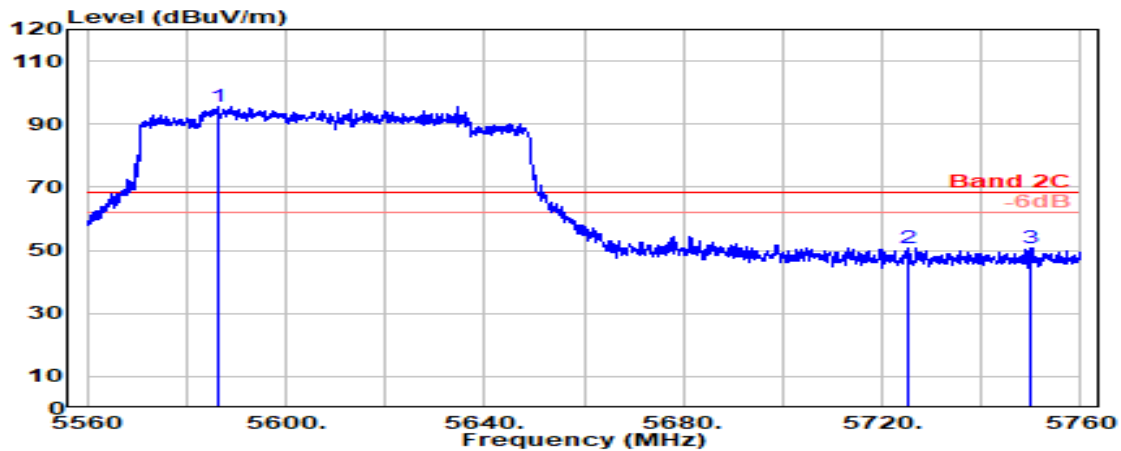

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5586.200	33.86	8.79	39.17	92.11	95.59	---	---	Peak
	5725.000	33.60	8.92	39.20	47.23	50.56	68.20	17.64	Peak
	5750.000	33.80	8.95	39.20	47.30	50.85	68.20	17.35	Peak

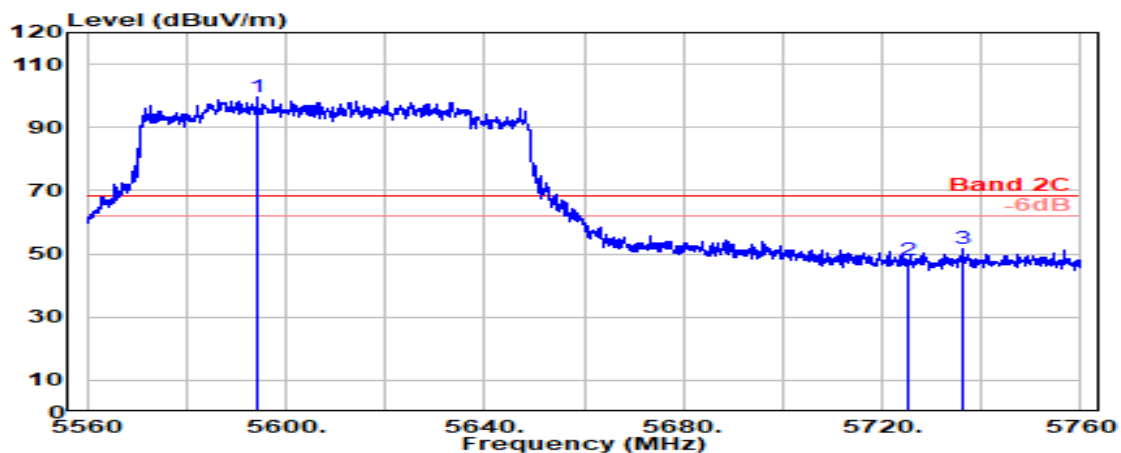

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5594.300	33.82	8.79	39.17	96.17	99.61	---	---	Peak
	5725.000	33.60	8.92	39.20	44.52	47.85	68.20	20.35	Peak
	5736.300	33.69	8.94	39.20	48.07	51.50	68.20	16.70	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

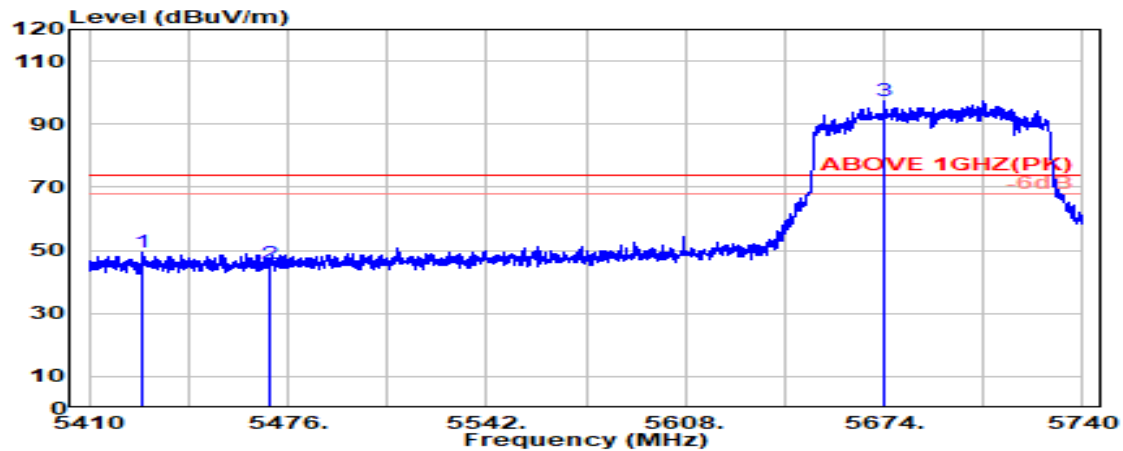

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.400	34.05	8.62	39.16	45.79	49.31	74.00	24.69	Peak
5470.000	34.10	8.67	39.15	42.26	45.88	74.00	28.12	Peak
@ 5673.800	33.56	8.87	39.19	93.97	97.22	---	---	Peak

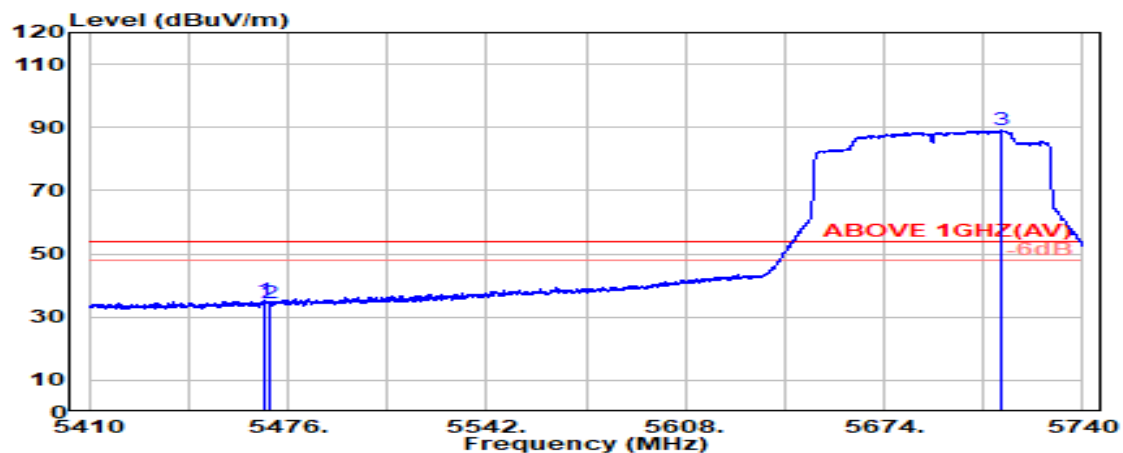

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.10	8.67	39.15	31.62	35.23	54.00	18.77	Average
5470.000	34.10	8.67	39.15	30.83	34.45	54.00	19.55	Average
@ 5713.200	33.51	8.91	39.19	85.82	89.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

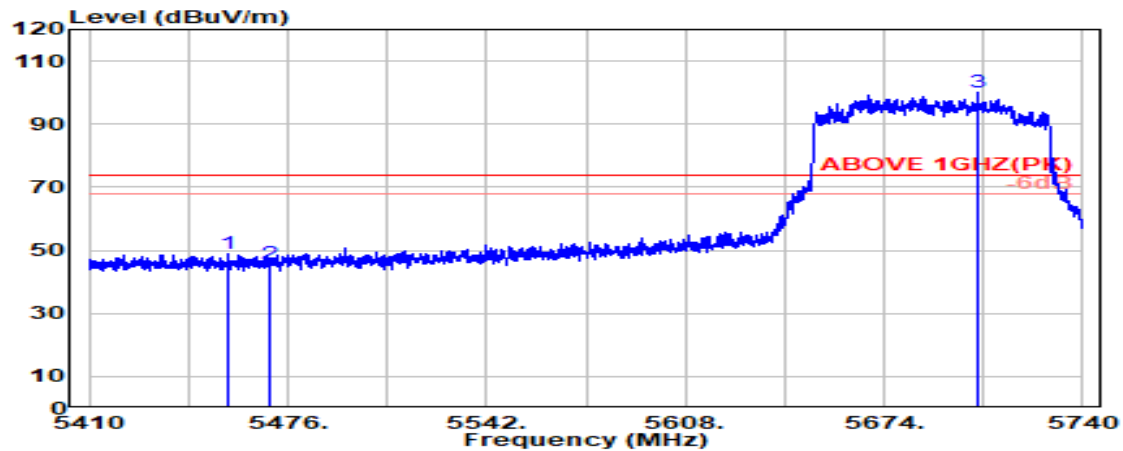

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.200	34.10	8.65	39.16	45.14	48.74	74.00	25.26	Peak
5470.000	34.10	8.67	39.15	41.92	45.53	74.00	28.47	Peak
@ 5705.300	33.44	8.91	39.19	96.94	100.10	---	---	Peak

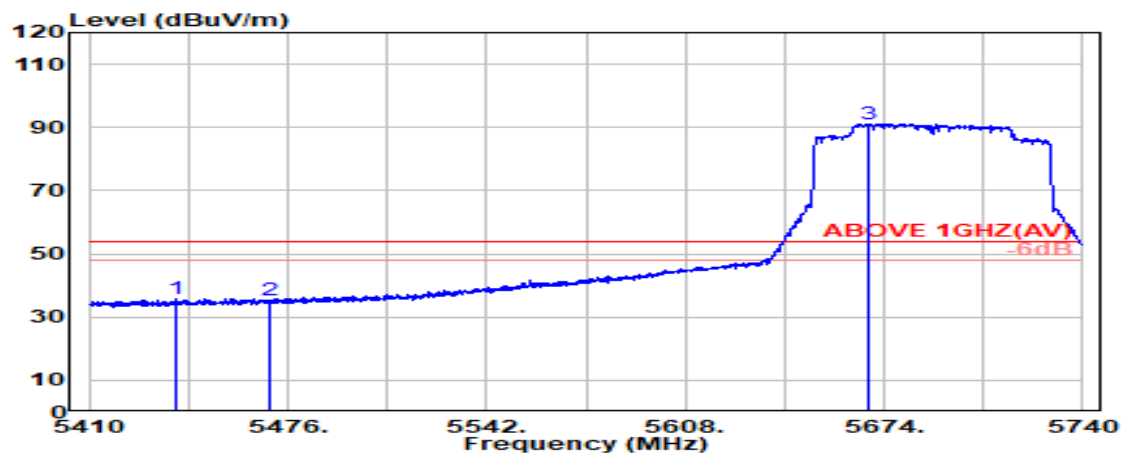

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.600	34.08	8.64	39.16	32.28	35.84	54.00	18.16	Average
5470.000	34.10	8.67	39.15	31.64	35.25	54.00	18.75	Average
@ 5668.900	33.59	8.87	39.18	87.87	91.14	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

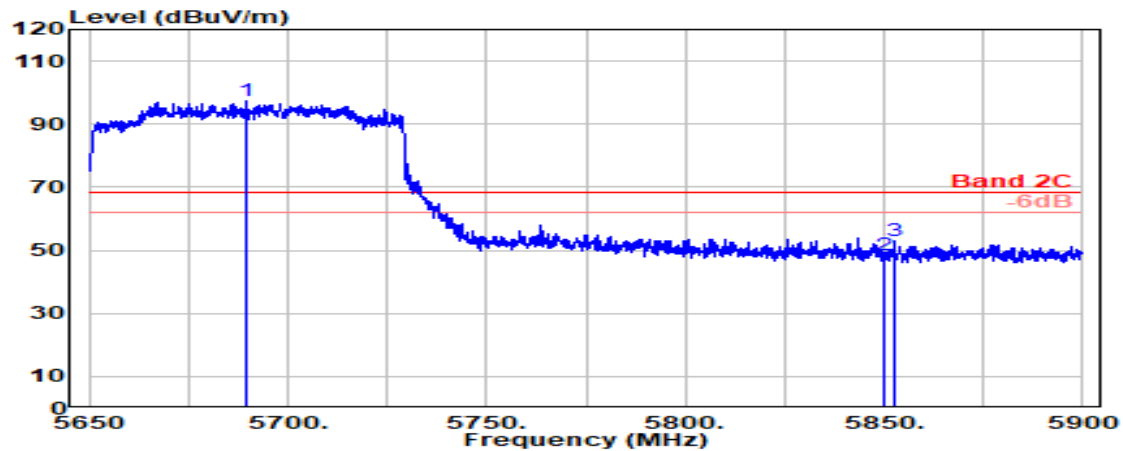

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5689.700	33.46	8.89	39.19	94.37	97.53	---	---	Peak
5850.000	33.90	9.05	39.22	44.59	48.32	68.20	19.88	Peak
5852.700	33.92	9.05	39.22	49.20	52.94	68.20	15.26	Peak

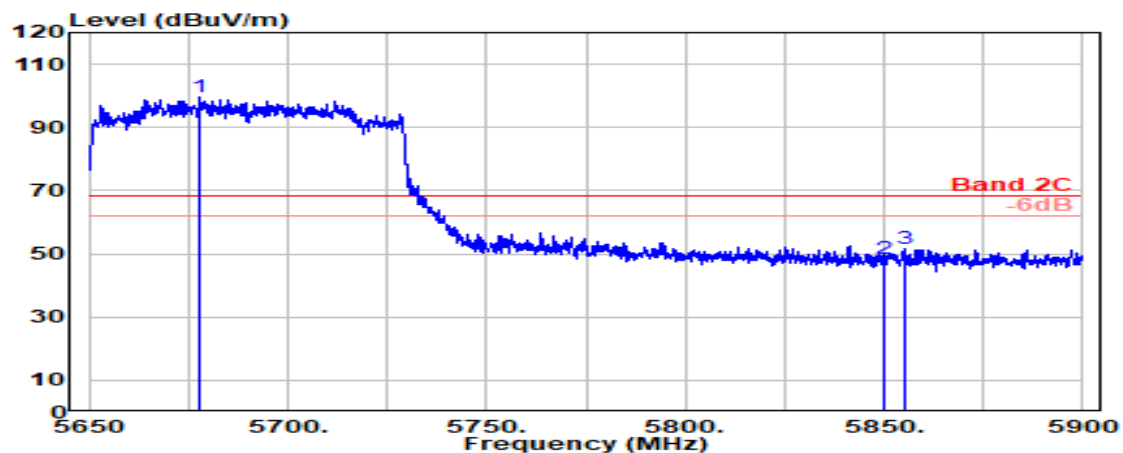


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.900	33.53	8.88	39.19	96.27	99.50	---	---	Peak
5850.000	33.90	9.05	39.22	44.59	48.31	68.20	19.89	Peak
5855.400	33.93	9.05	39.22	47.66	51.42	68.20	16.78	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

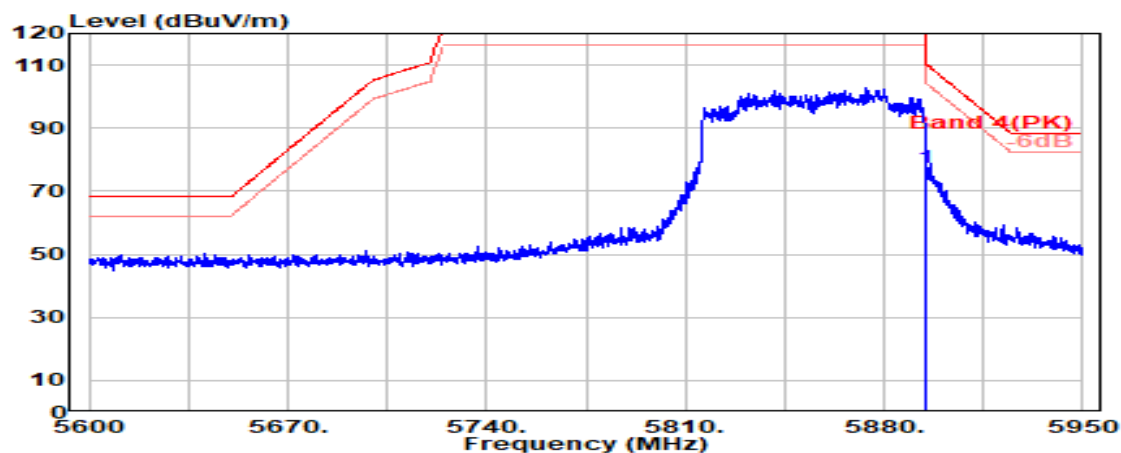

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	73.39	77.42	110.16	32.74	Peak

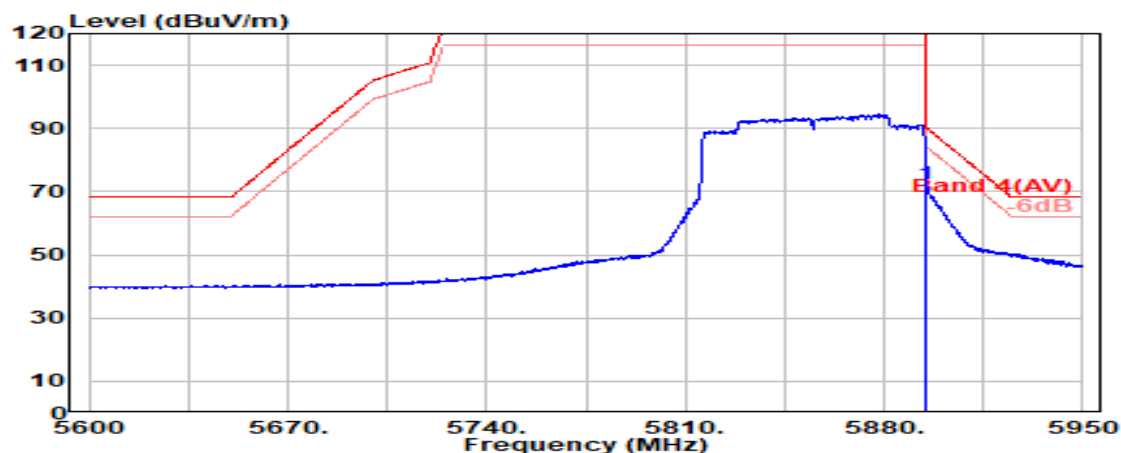

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	68.46	72.49	90.16	17.67	Average

Mode	802.11be-EHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

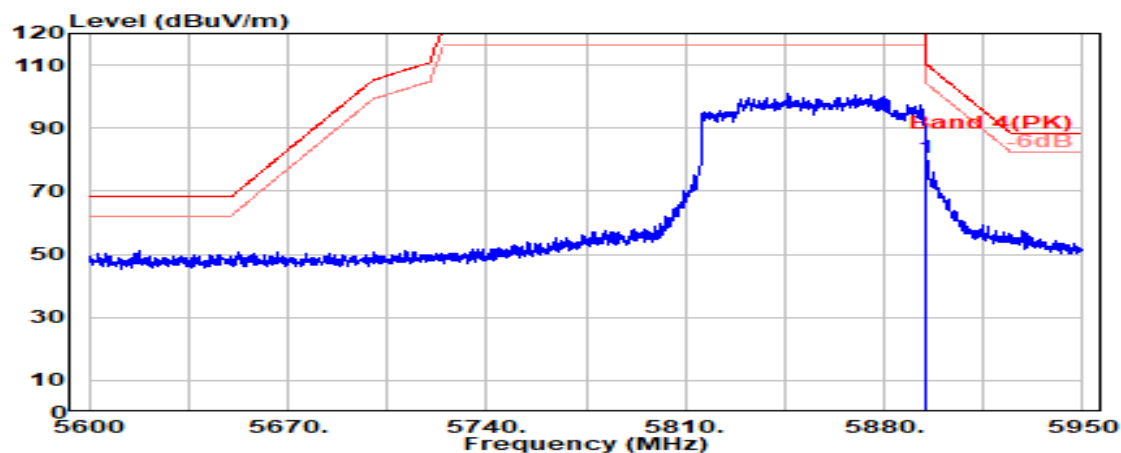

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	76.73	80.76	110.16	29.40	Peak

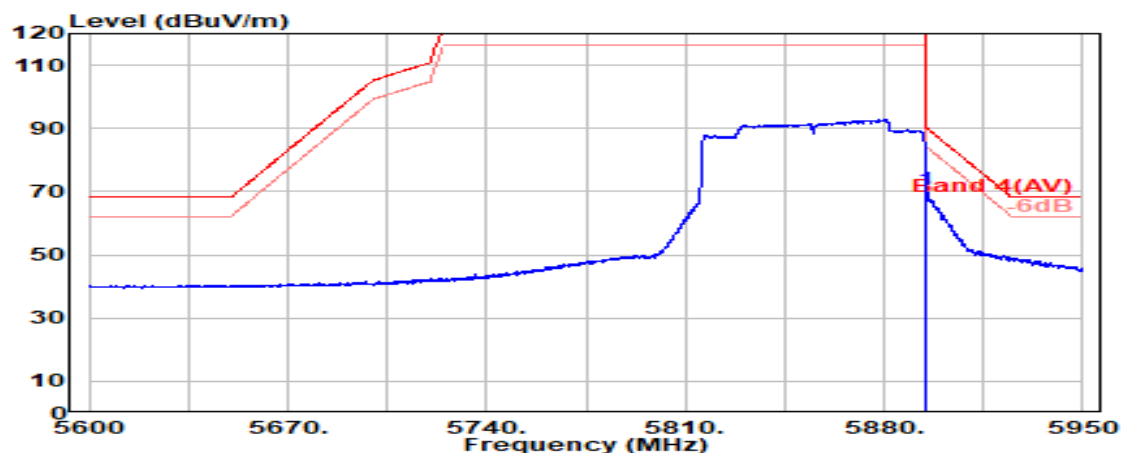


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	66.84	70.87	90.16	19.30	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

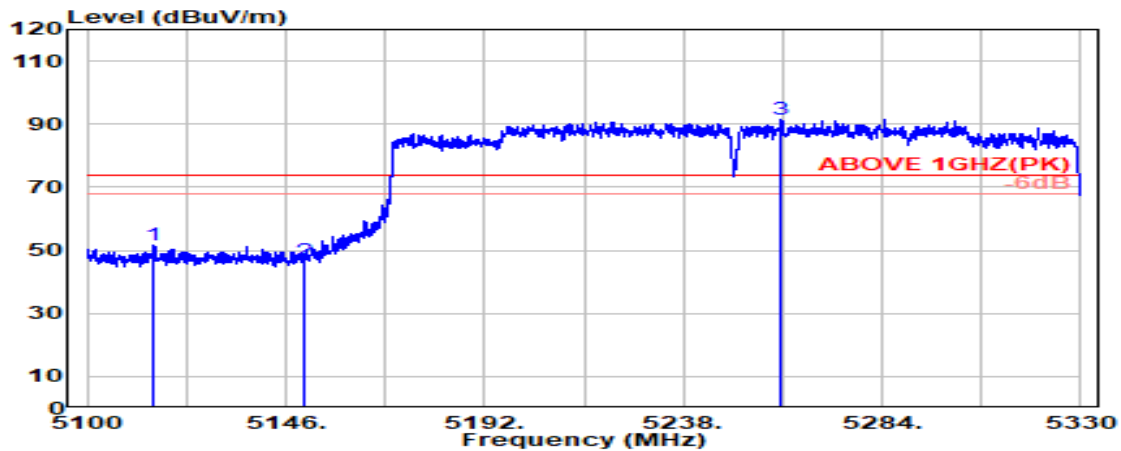

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5115.200	33.53	8.29	39.20	48.90	51.53	74.00	22.47	Peak
5150.000	33.60	8.33	39.19	43.78	46.52	74.00	27.48	Peak
@ 5260.500	33.68	8.45	39.18	88.36	91.31	---	---	Peak

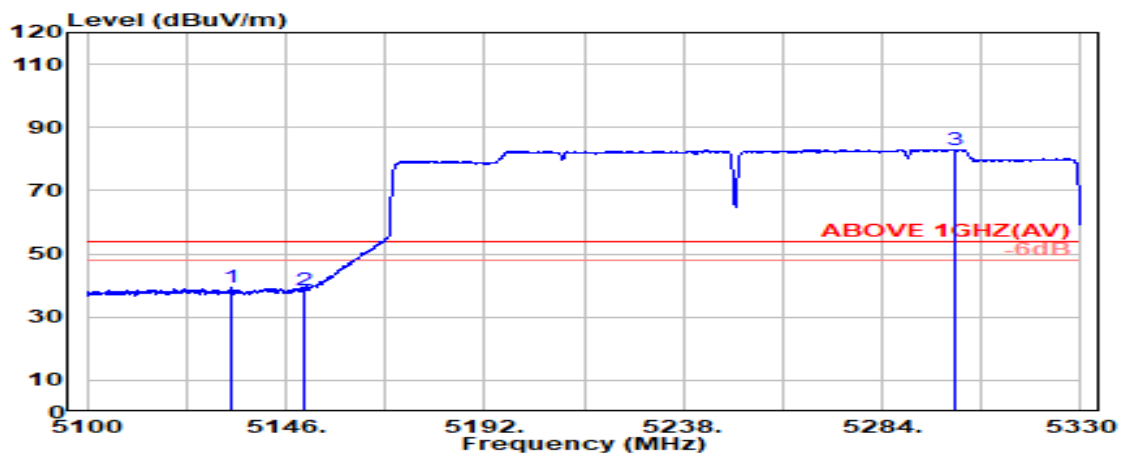

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.200	33.57	8.31	39.19	36.64	39.33	54.00	14.67	Average
5150.000	33.60	8.33	39.19	35.63	38.37	54.00	15.63	Average
@ 5300.700	33.60	8.49	39.17	80.12	83.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

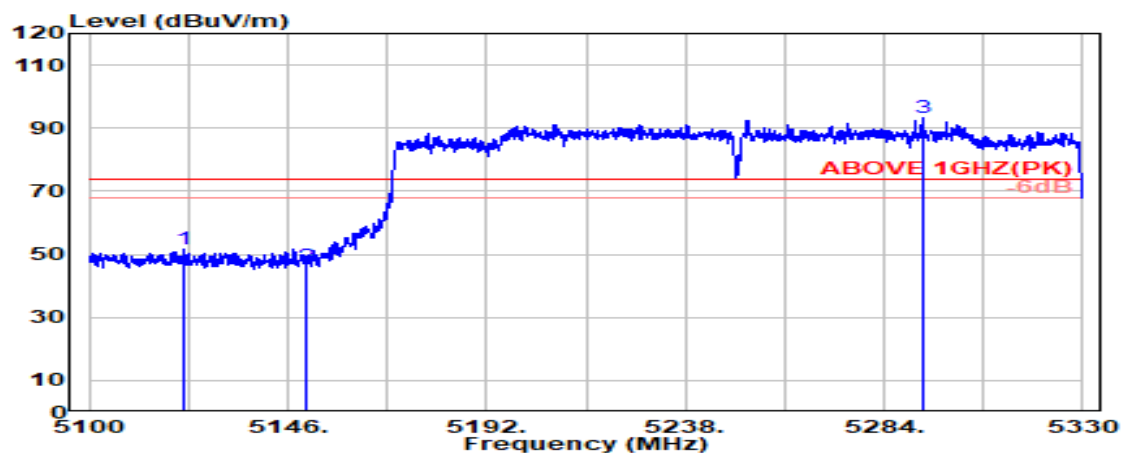

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5122.000	33.54	8.30	39.19	48.95	51.60	74.00	22.40	Peak
5150.000	33.60	8.33	39.19	43.35	46.08	74.00	27.92	Peak
@ 5293.200	33.61	8.48	39.17	90.30	93.22	---	---	Peak

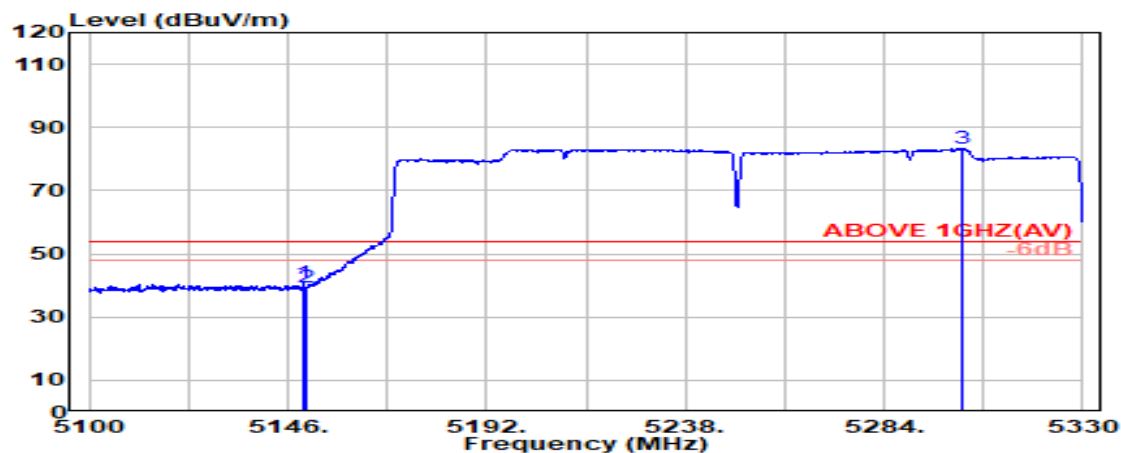

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.60	8.33	39.19	38.01	40.74	54.00	13.26	Average
5150.000	33.60	8.33	39.19	36.55	39.28	54.00	14.72	Average
@ 5301.900	33.60	8.49	39.17	80.45	83.38	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

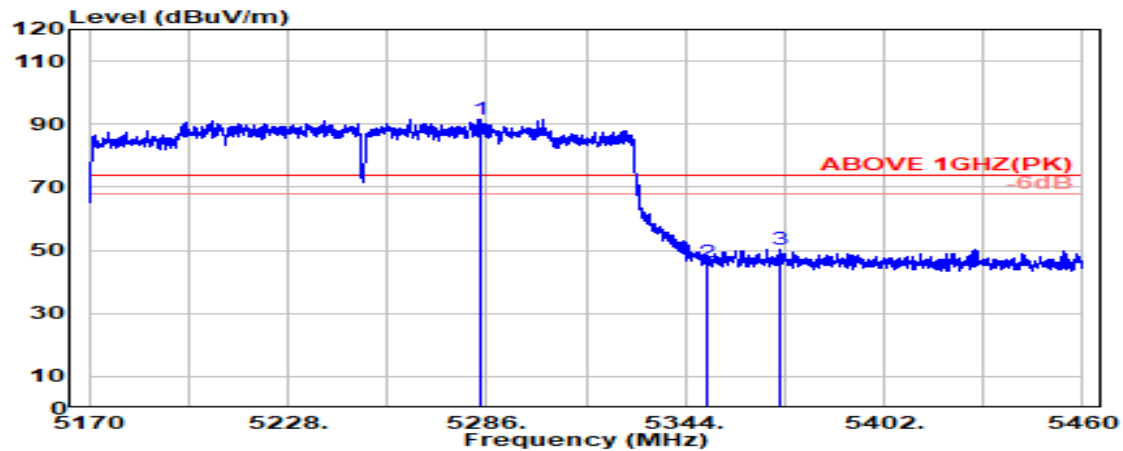

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5283.900	33.63	8.47	39.18	88.75	91.68	---	---	Peak
5350.000	33.70	8.54	39.17	43.05	46.12	74.00	27.88	Peak
5371.500	33.83	8.56	39.16	47.16	50.39	74.00	23.61	Peak

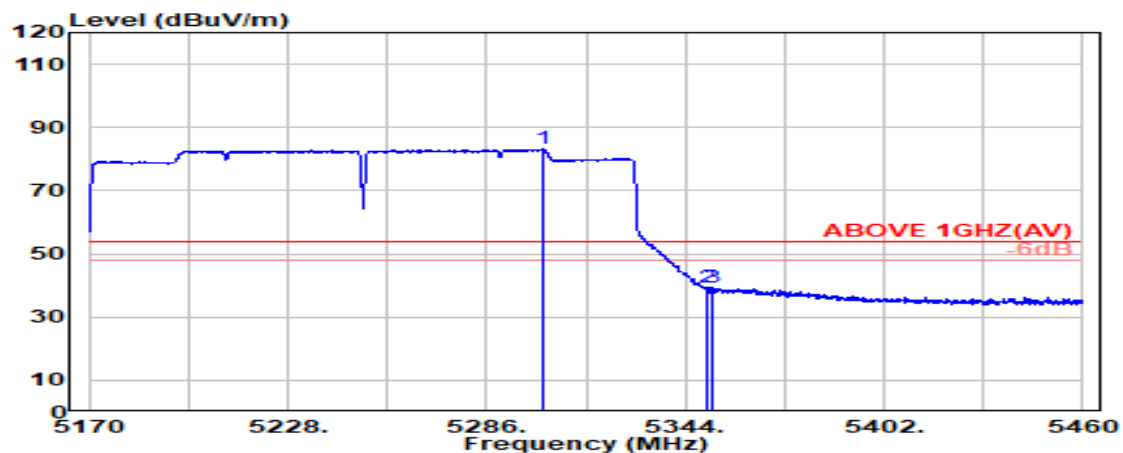


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.700	33.61	8.49	39.17	80.35	83.28	---	---	Average
5350.000	33.70	8.54	39.17	36.32	39.40	54.00	14.60	Average
5351.900	33.71	8.54	39.17	36.37	39.46	54.00	14.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

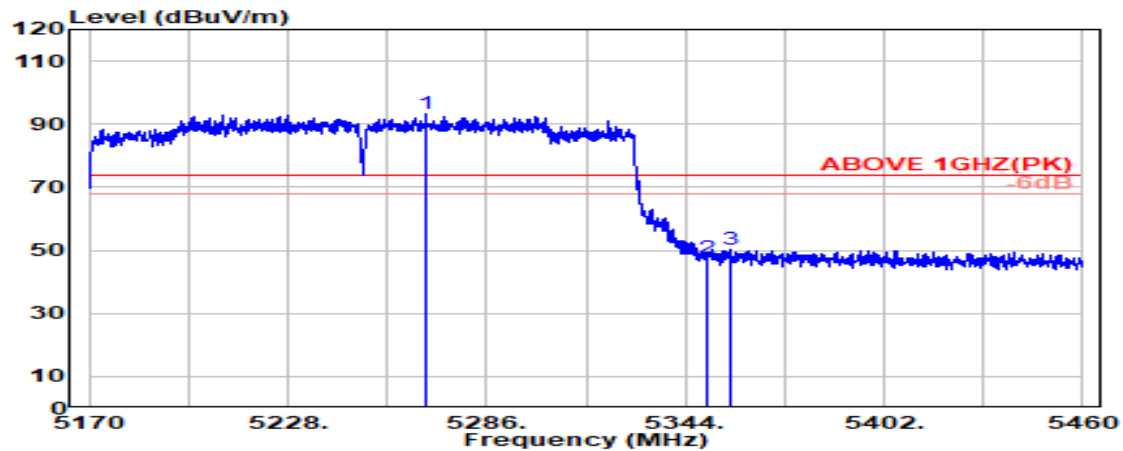

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5268.300	33.66	8.46	39.18	90.16	93.11	---	---	Peak
5350.000	33.70	8.54	39.17	44.63	47.70	74.00	26.30	Peak
5357.400	33.74	8.55	39.17	47.36	50.48	74.00	23.52	Peak

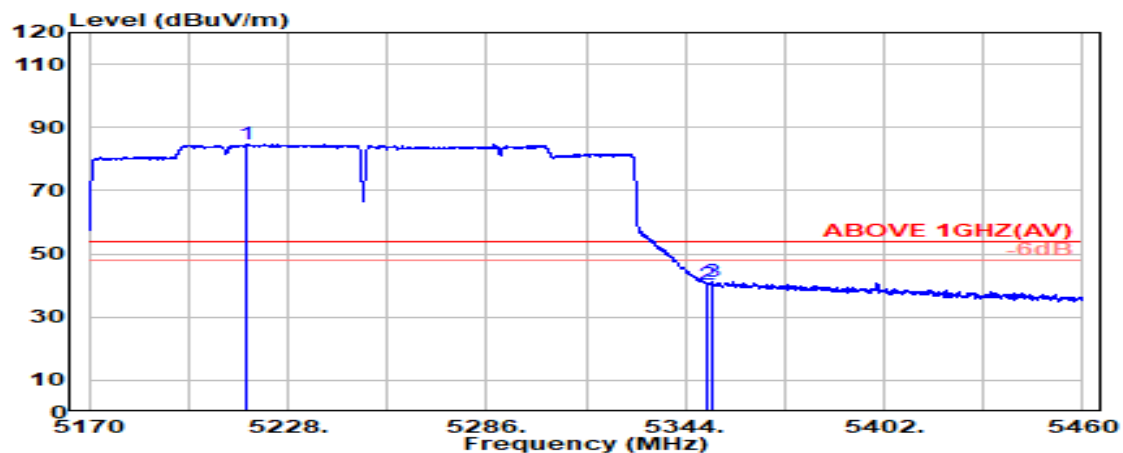

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5216.200	33.63	8.40	39.18	81.93	84.78	---	---	Average
5350.000	33.70	8.54	39.17	37.28	40.36	54.00	13.64	Average
5351.800	33.71	8.54	39.17	38.24	41.33	54.00	12.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

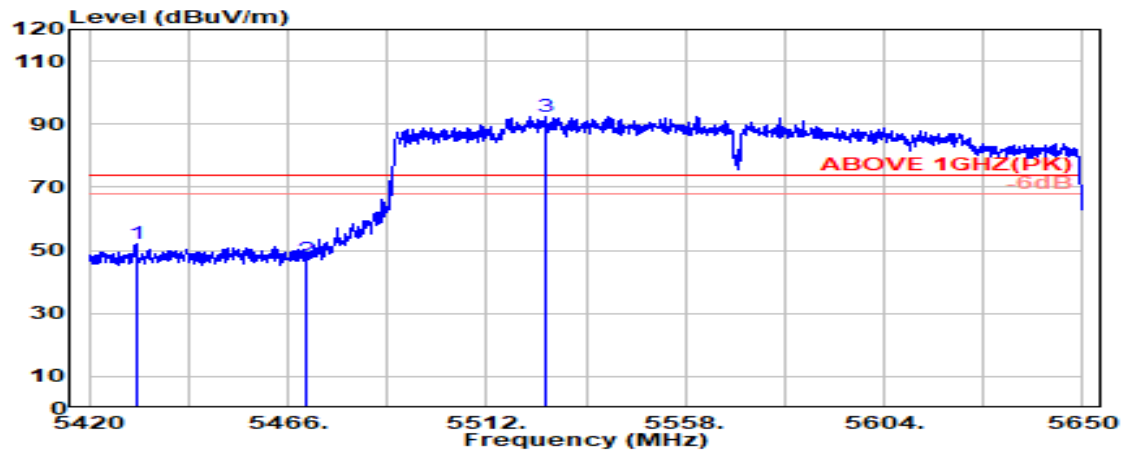

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.800	34.06	8.63	39.16	48.51	52.04	74.00	21.96	Peak
5470.000	34.10	8.67	39.15	43.48	47.09	74.00	26.91	Peak
@ 5525.800	34.05	8.72	39.16	88.86	92.48	---	---	Peak

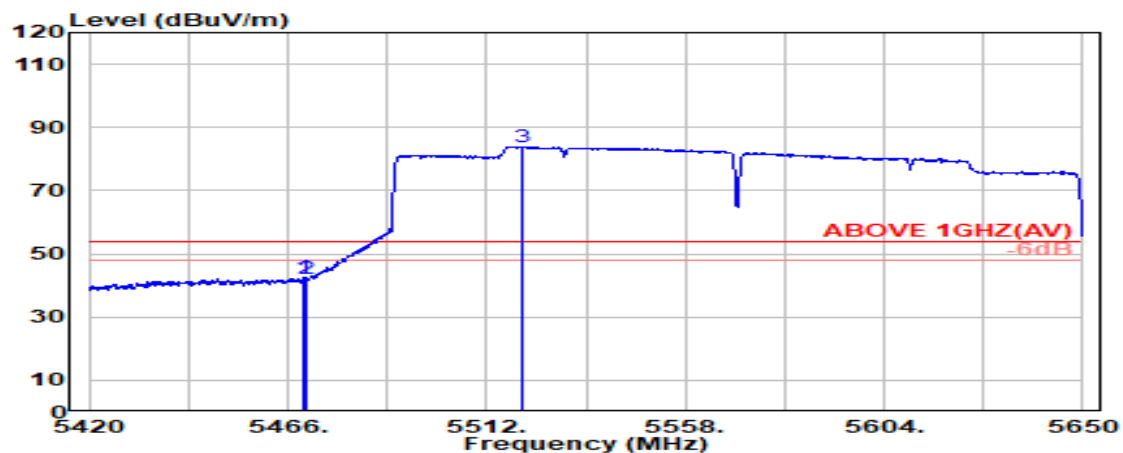

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.700	34.10	8.67	39.15	38.75	42.36	54.00	11.64	Average
5470.000	34.10	8.67	39.15	38.43	42.05	54.00	11.95	Average
@ 5520.000	34.06	8.72	39.15	80.33	83.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

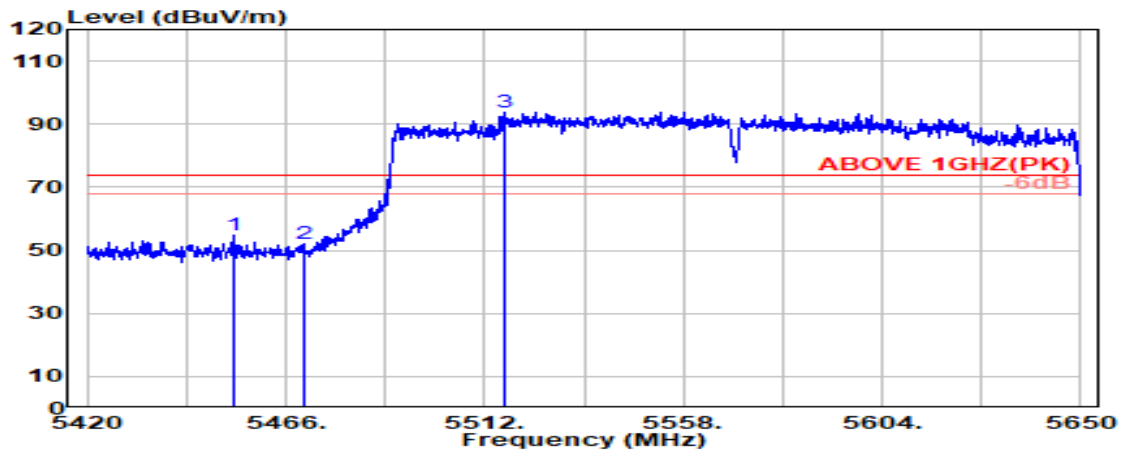

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.800	34.10	8.65	39.16	51.08	54.68	74.00	19.32	Peak
5470.000	34.10	8.67	39.15	48.49	52.11	74.00	21.89	Peak
@ 5516.800	34.07	8.72	39.15	90.21	93.84	---	---	Peak

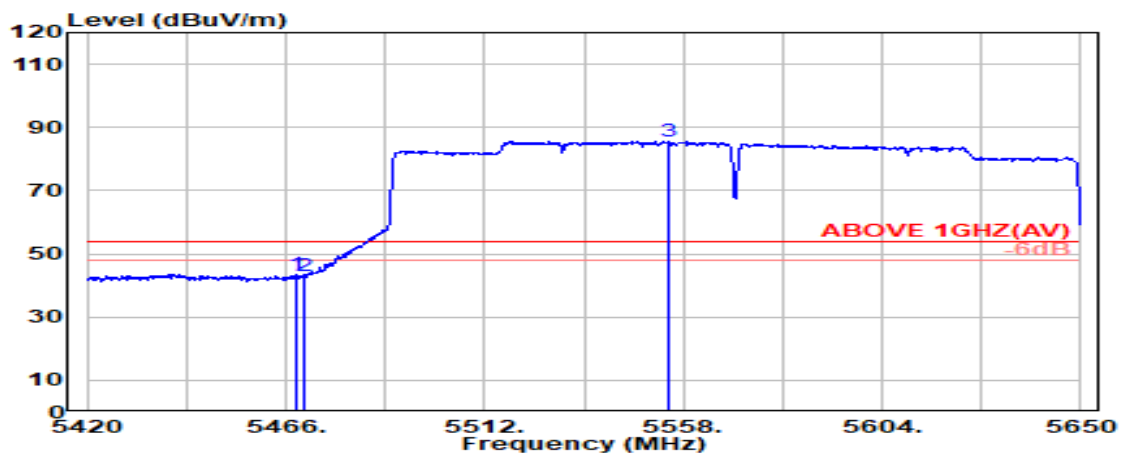

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.10	8.67	39.15	39.84	43.45	54.00	10.55	Average
5470.000	34.10	8.67	39.15	39.36	42.97	54.00	11.03	Average
@ 5554.400	33.98	8.75	39.16	82.03	85.60	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

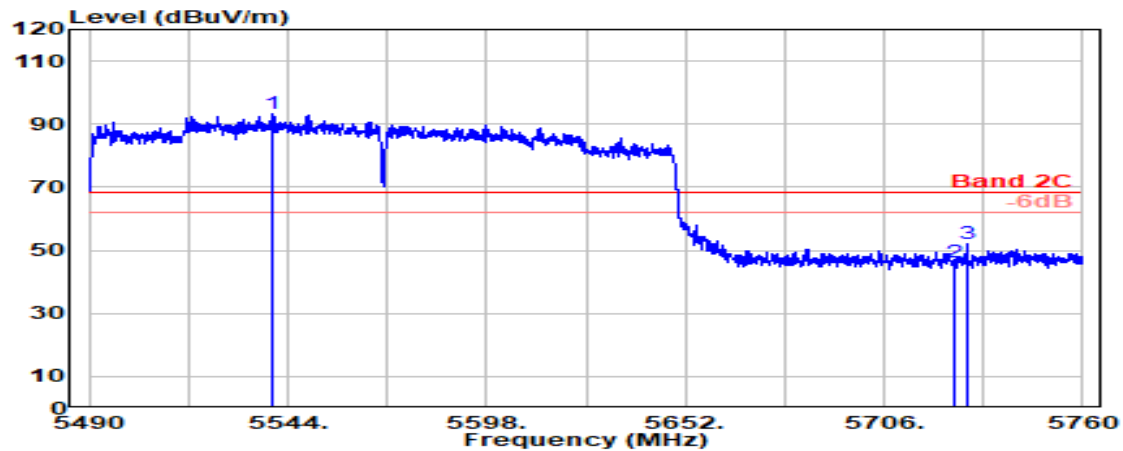

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5540.100	34.02	8.74	39.16	89.65	93.25	---	---	Peak
5725.000	33.60	8.92	39.20	43.04	46.37	68.20	21.83	Peak
5728.500	33.63	8.93	39.20	48.64	52.00	68.20	16.20	Peak

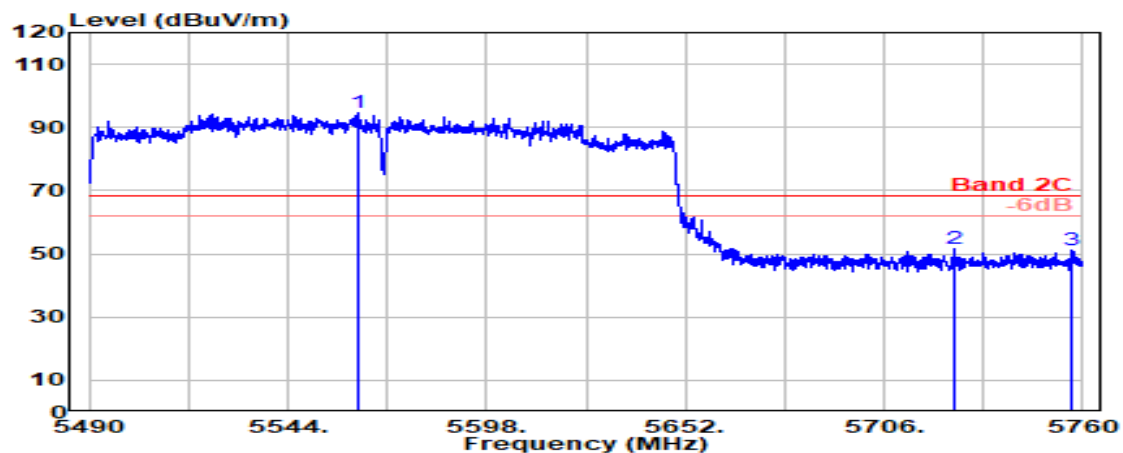

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5562.900	33.95	8.76	39.16	91.06	94.61	---	---	Peak
5725.000	33.60	8.92	39.20	48.27	51.59	68.20	16.61	Peak
5757.200	33.81	8.96	39.20	47.40	50.97	68.20	17.23	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

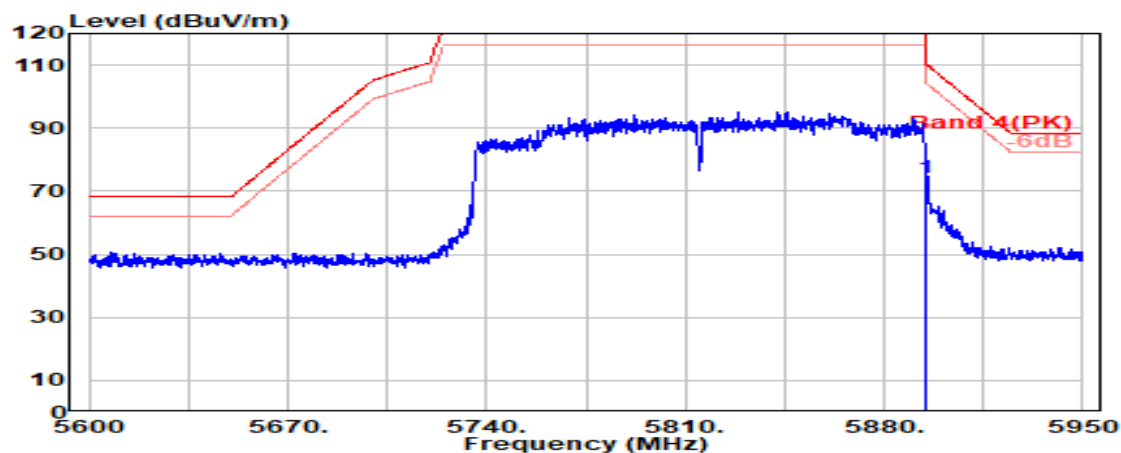

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	70.27	74.30	110.16	35.87	Peak

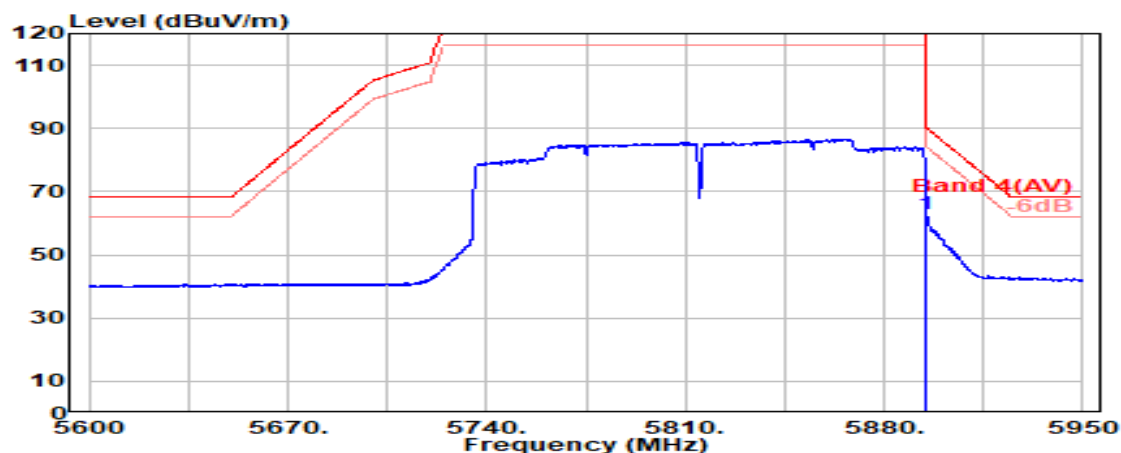

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	58.79	62.82	90.16	27.34	Average

Mode	802.11be-EHT160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

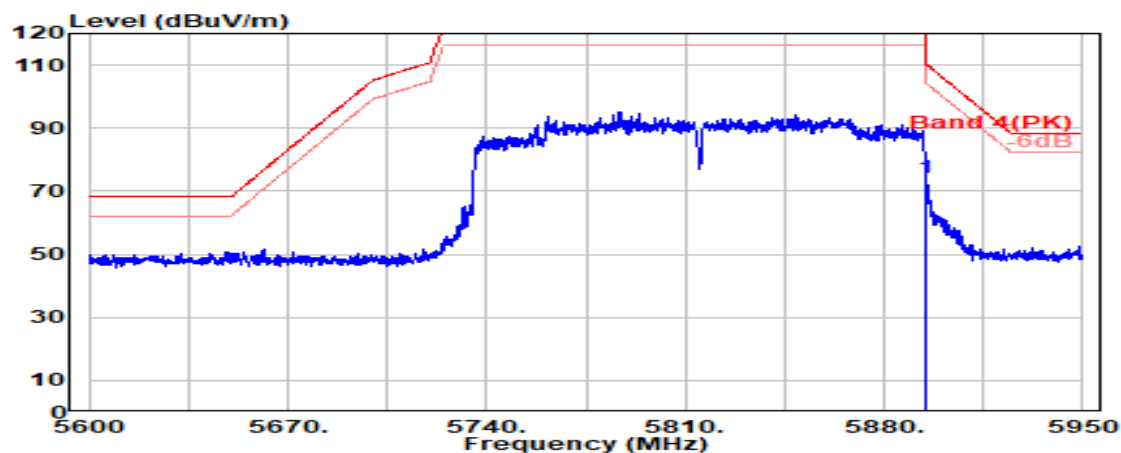

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	70.05	74.08	110.16	36.09	Peak

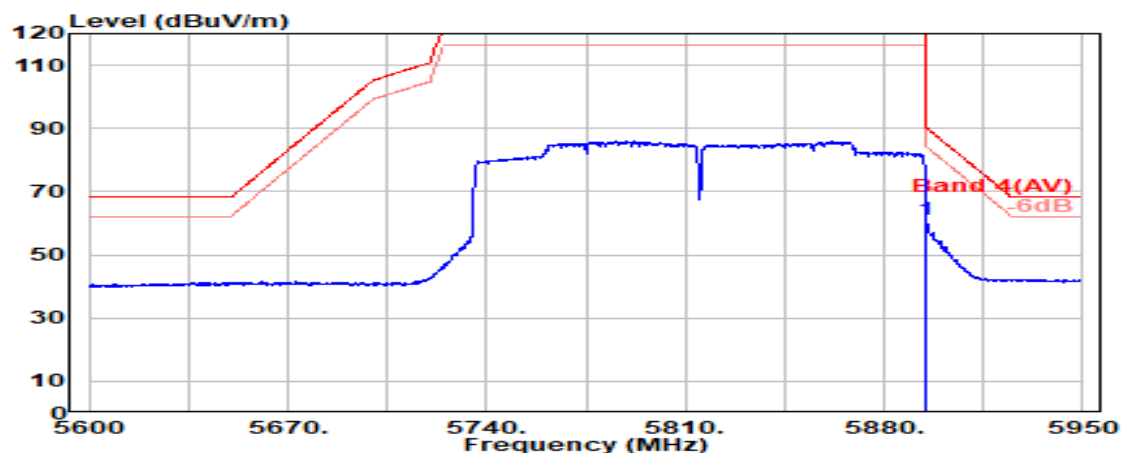

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.23	57.25	61.28	90.16	28.89	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

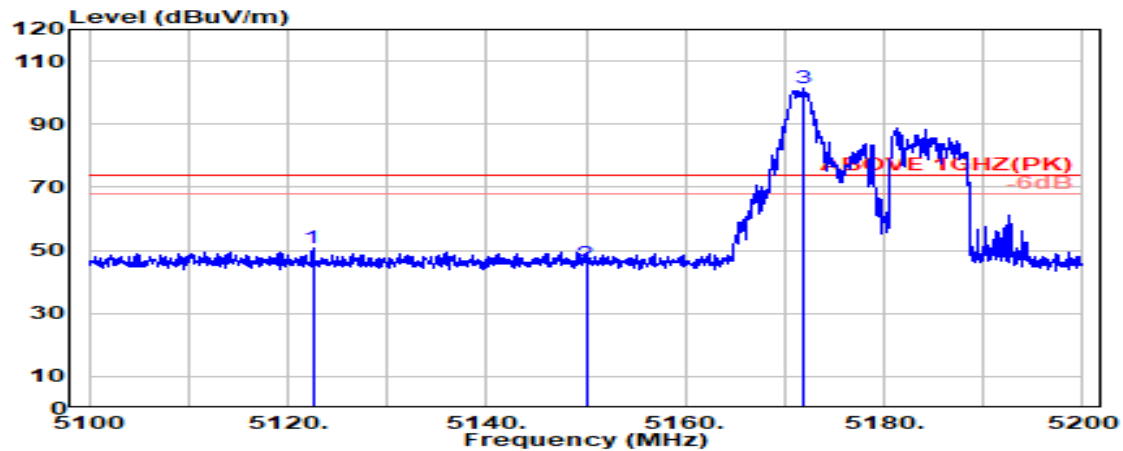

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5122.500	33.55	8.30	39.19	48.25	50.90	74.00	23.10	Peak
5150.000	33.60	8.33	39.19	43.21	45.95	74.00	28.05	Peak
@ 5171.800	33.60	8.35	39.19	98.53	101.29	---	---	Peak

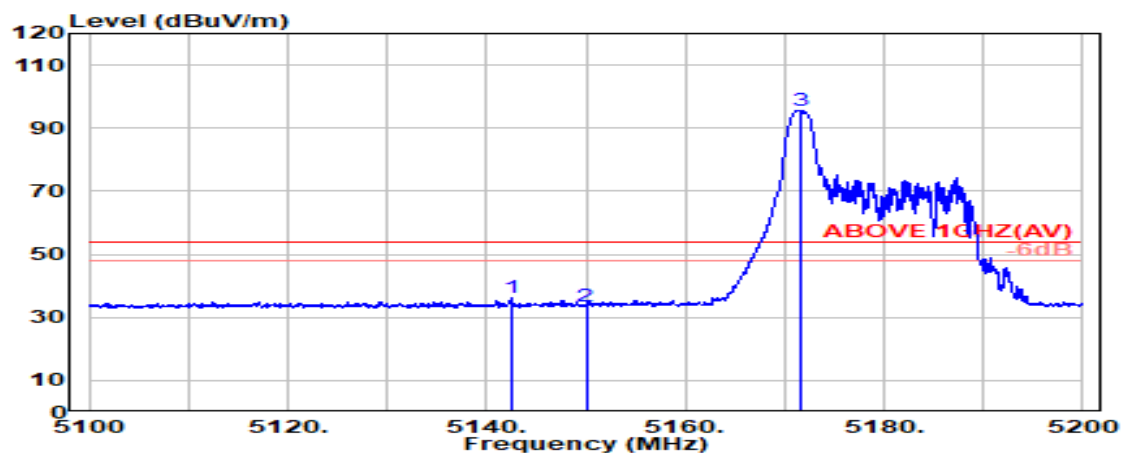

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.500	33.59	8.32	39.19	33.30	36.01	54.00	17.99	Average
5150.000	33.60	8.33	39.19	30.92	33.66	54.00	20.34	Average
@ 5171.700	33.60	8.35	39.19	92.72	95.49	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

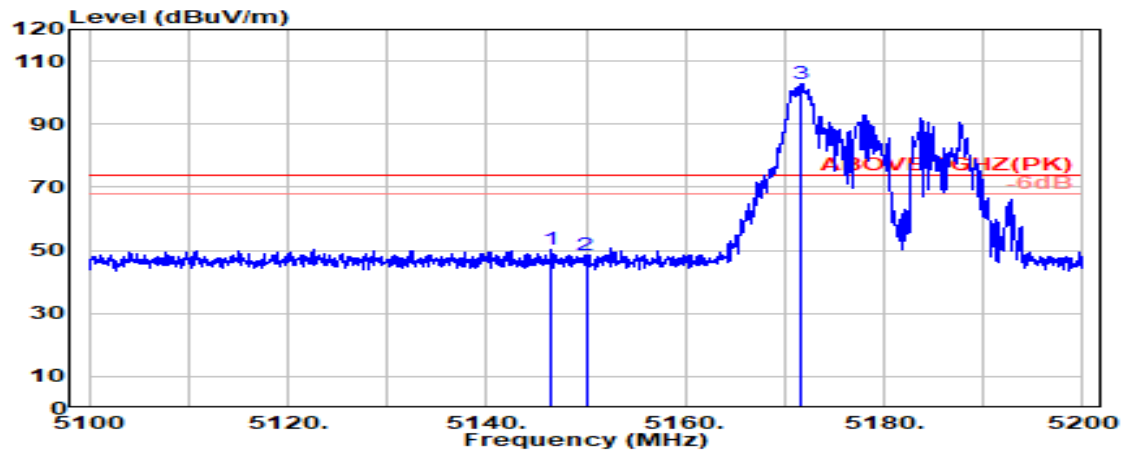

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.450	33.59	8.32	39.19	47.73	50.46	74.00	23.54	Peak
5150.000	33.60	8.33	39.19	45.50	48.23	74.00	25.77	Peak
@ 5171.700	33.60	8.35	39.19	100.19	102.96	---	---	Peak

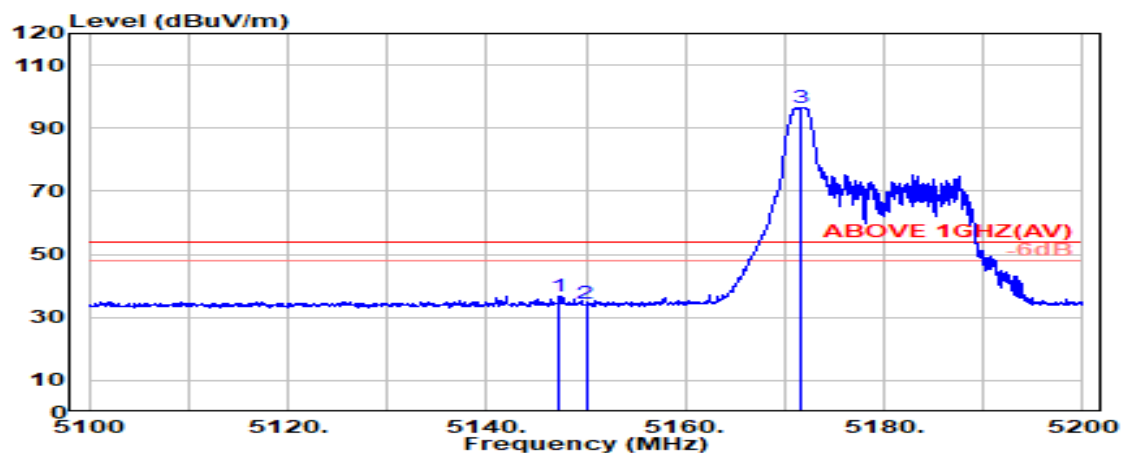

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.350	33.59	8.32	39.19	33.95	36.68	54.00	17.32	Average
5150.000	33.60	8.33	39.19	31.74	34.47	54.00	19.53	Average
@ 5171.550	33.60	8.35	39.19	93.78	96.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

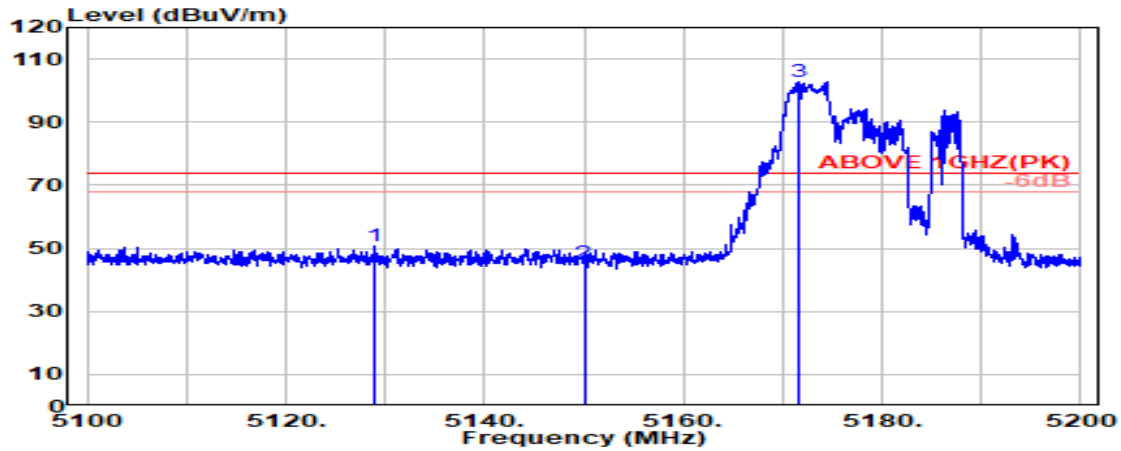

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.850	33.56	8.30	39.19	47.88	50.55	74.00	23.45	Peak
5150.000	33.60	8.33	39.19	42.63	45.36	74.00	28.64	Peak
@ 5171.500	33.60	8.35	39.19	99.90	102.66	---	---	Peak

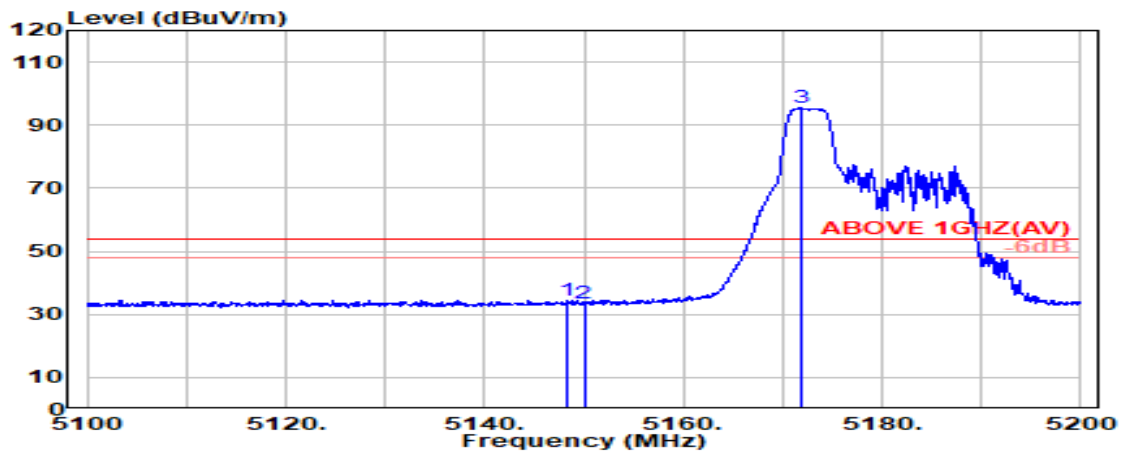

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.350	33.60	8.33	39.19	31.88	34.61	54.00	19.39	Average
5150.000	33.60	8.33	39.19	30.84	33.57	54.00	20.43	Average
@ 5171.850	33.60	8.35	39.19	92.78	95.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

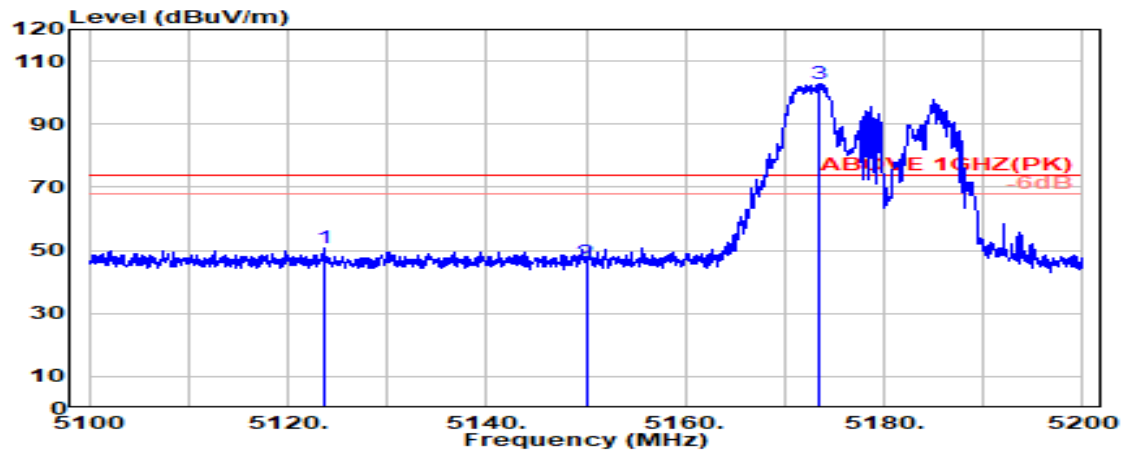

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.600	33.55	8.30	39.19	48.13	50.78	74.00	23.22	Peak
5150.000	33.60	8.33	39.19	43.49	46.23	74.00	27.77	Peak
@ 5173.550	33.60	8.35	39.19	100.14	102.90	---	---	Peak

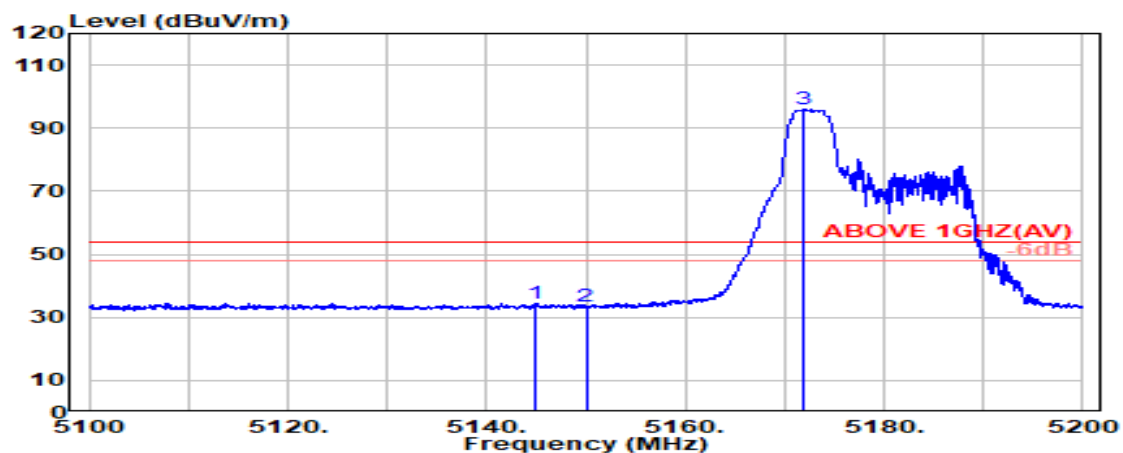

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.000	33.59	8.32	39.19	31.73	34.45	54.00	19.55	Average
5150.000	33.60	8.33	39.19	30.74	33.48	54.00	20.52	Average
@ 5172.000	33.60	8.35	39.19	93.17	95.93	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

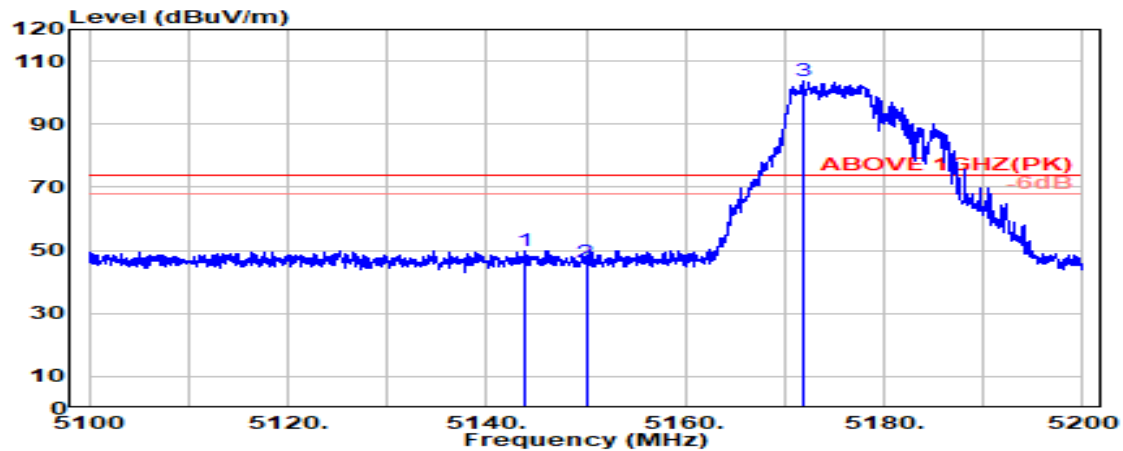

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.950	33.59	8.32	39.19	47.09	49.81	74.00	24.19	Peak
5150.000	33.60	8.33	39.19	43.41	46.14	74.00	27.86	Peak
@ 5171.800	33.60	8.35	39.19	100.86	103.63	---	---	Peak

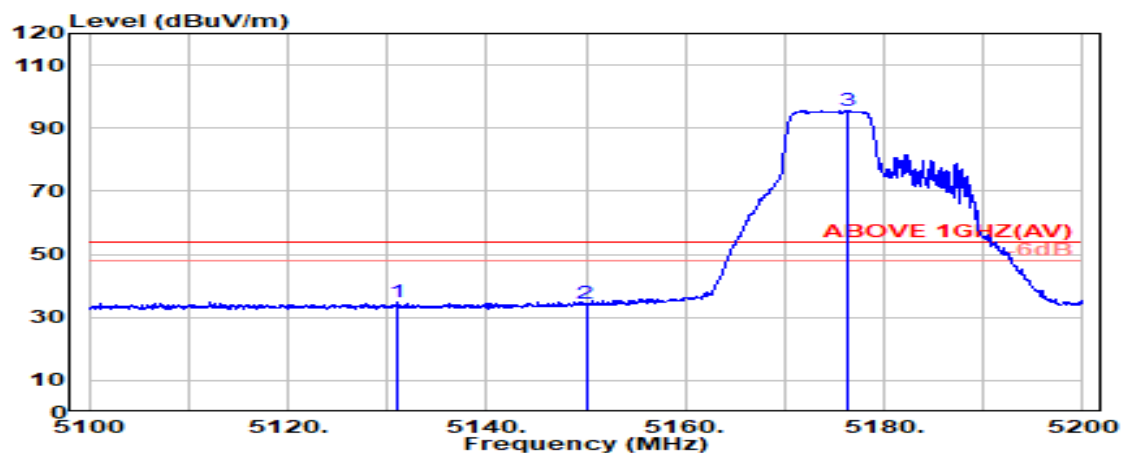

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.900	33.56	8.31	39.19	32.36	35.04	54.00	18.96	Average
5150.000	33.60	8.33	39.19	31.48	34.21	54.00	19.79	Average
@ 5176.350	33.60	8.36	39.19	92.82	95.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

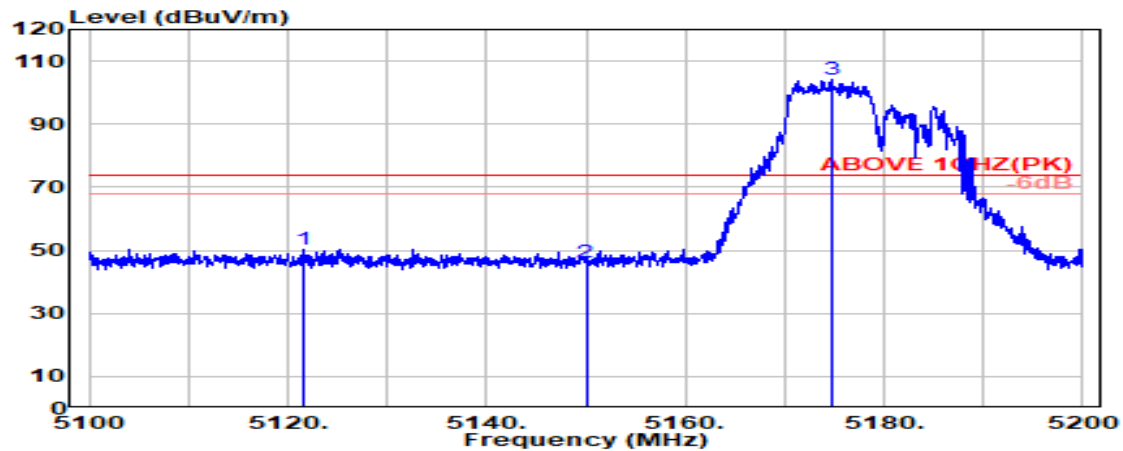

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.650	33.54	8.30	39.19	47.46	50.11	74.00	23.89	Peak
5150.000	33.60	8.33	39.19	43.65	46.38	74.00	27.62	Peak
@ 5174.650	33.60	8.35	39.19	101.44	104.21	---	---	Peak

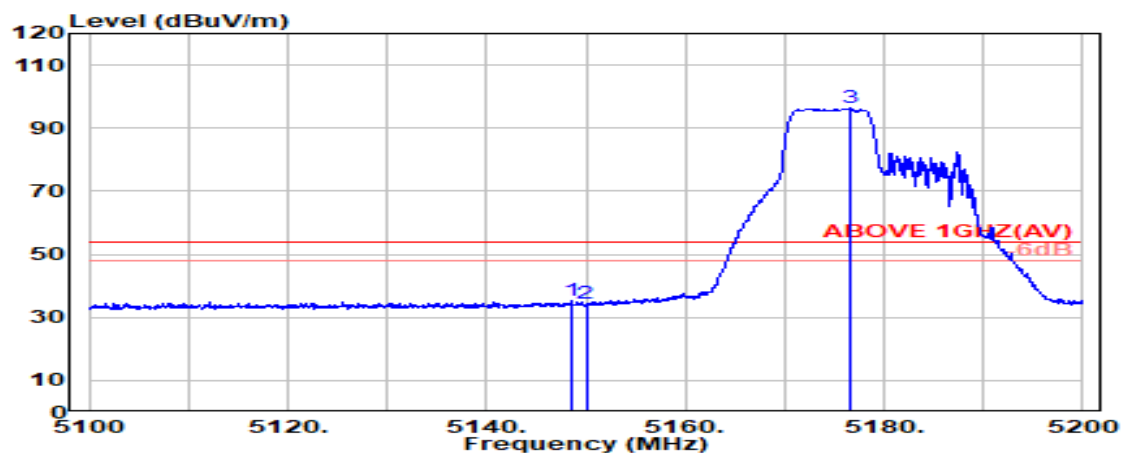

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	33.60	8.33	39.19	32.56	35.29	54.00	18.71	Average
5150.000	33.60	8.33	39.19	31.87	34.61	54.00	19.39	Average
@ 5176.500	33.60	8.36	39.19	93.61	96.38	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

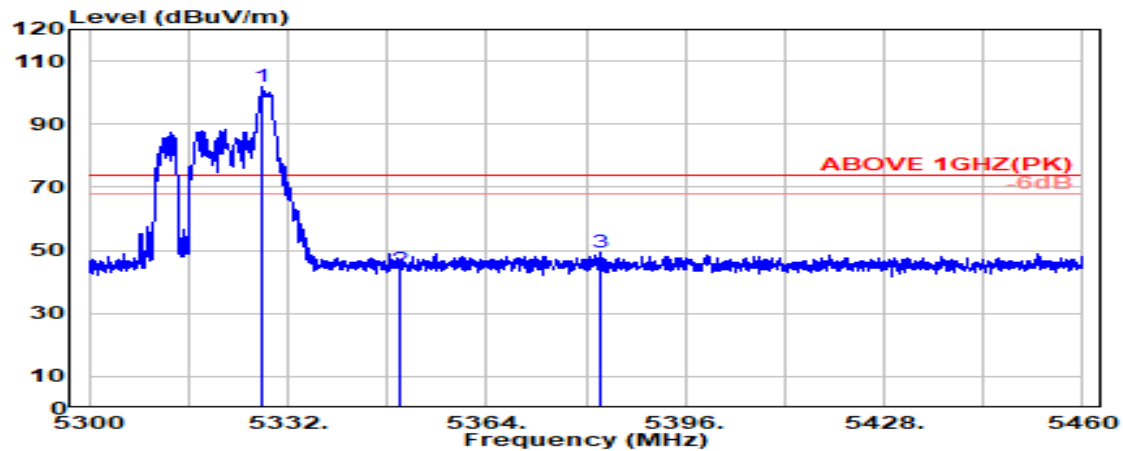

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.850	33.66	8.52	39.17	98.85	101.85	---	---	Peak
5350.000	33.70	8.54	39.17	41.06	44.14	74.00	29.86	Peak
5382.450	33.90	8.58	39.16	45.85	49.16	74.00	24.84	Peak

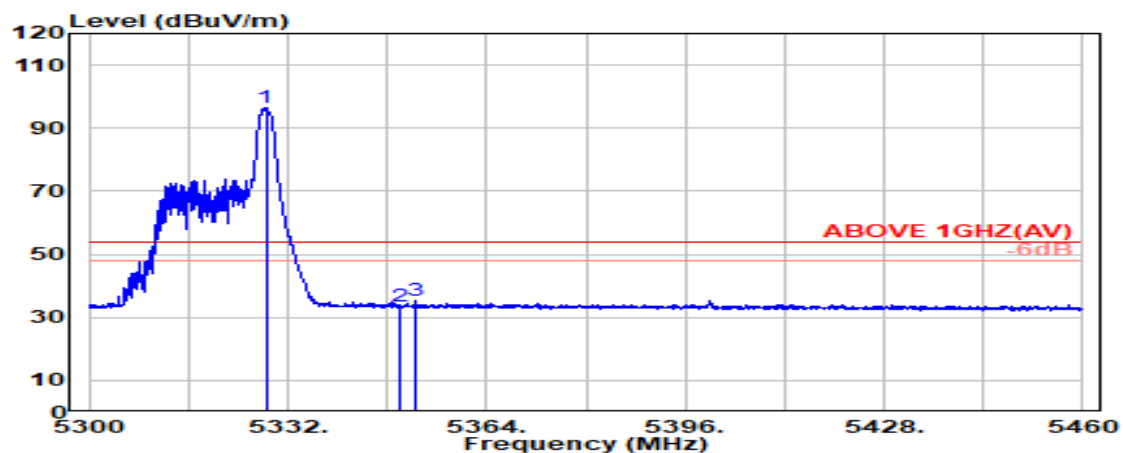

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.450	33.66	8.52	39.17	93.39	96.40	---	---	Average
5350.000	33.70	8.54	39.17	30.46	33.53	54.00	20.47	Average
5352.550	33.72	8.54	39.17	32.44	35.53	54.00	18.47	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

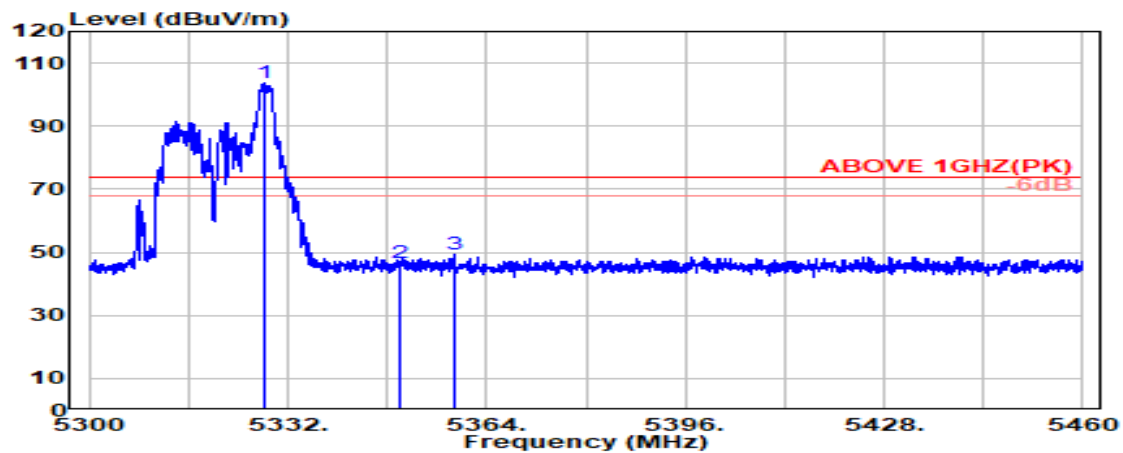

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.050	33.66	8.52	39.17	100.61	103.62	---	---	Peak
5350.000	33.70	8.54	39.17	43.51	46.58	74.00	27.42	Peak
5358.800	33.75	8.55	39.17	46.10	49.24	74.00	24.77	Peak

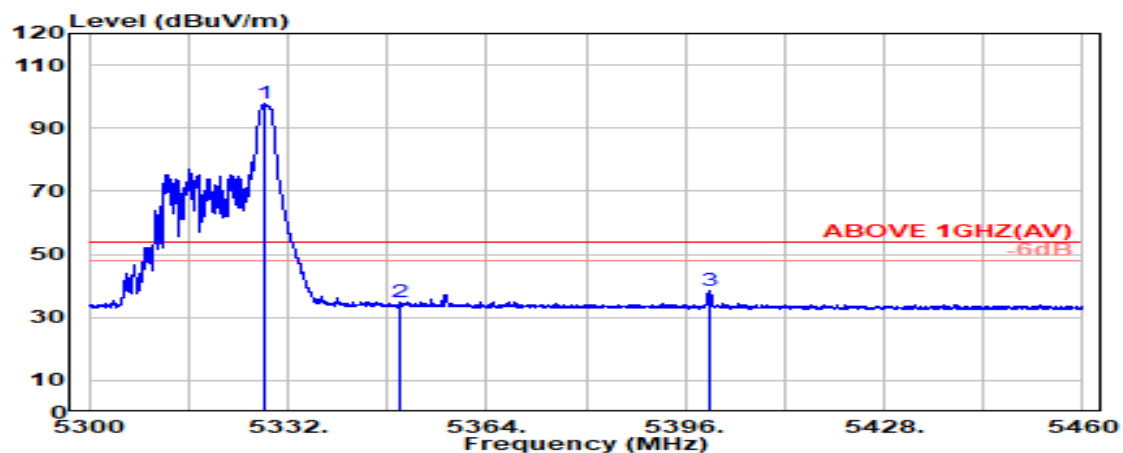

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	33.66	8.52	39.17	94.77	97.78	---	---	Average
5350.000	33.70	8.54	39.17	31.71	34.79	54.00	19.21	Average
5399.850	34.00	8.59	39.16	35.09	38.52	54.00	15.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

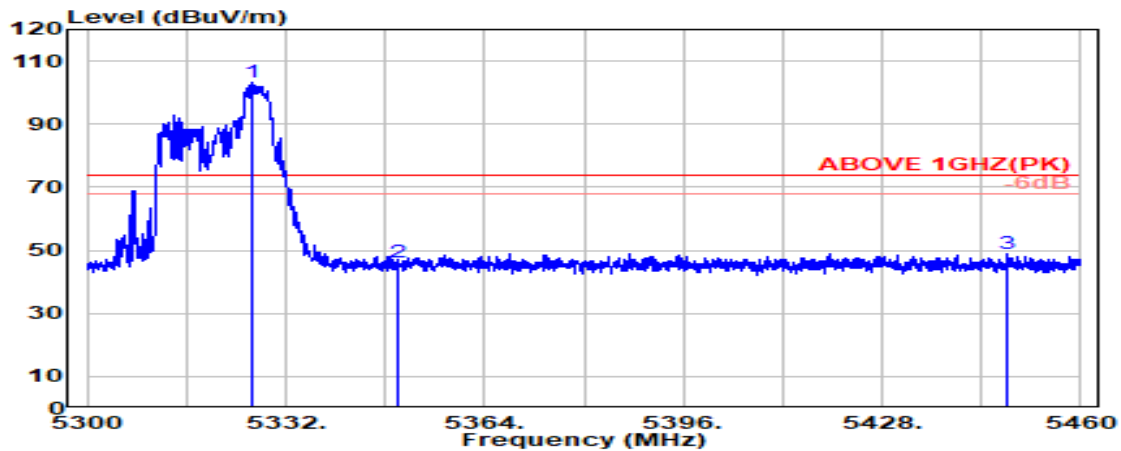

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.700	33.65	8.52	39.17	100.04	103.04	---	---	Peak
5350.000	33.70	8.54	39.17	43.06	46.14	74.00	27.86	Peak
5448.150	34.10	8.64	39.16	45.39	48.97	74.00	25.03	Peak

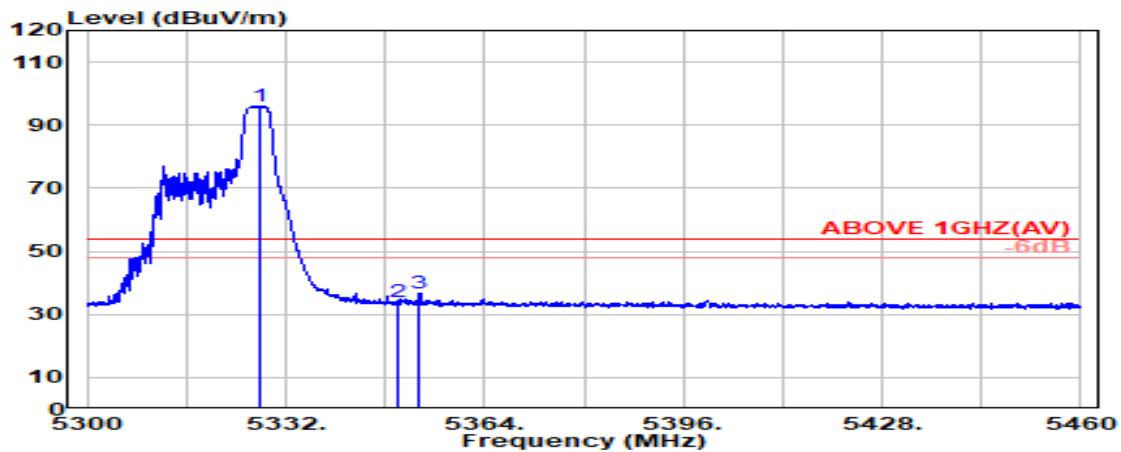

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.850	33.66	8.52	39.17	93.10	96.10	---	---	Average
5350.000	33.70	8.54	39.17	30.89	33.97	54.00	20.03	Average
5353.450	33.72	8.55	39.17	33.64	36.74	54.00	17.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

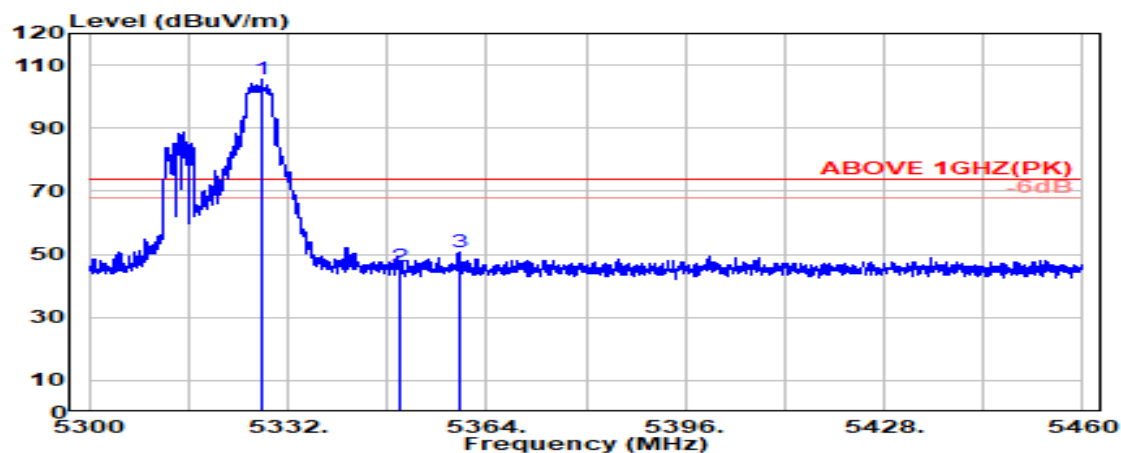

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.700	33.66	8.52	39.17	102.69	105.69	---	---	Peak
5350.000	33.70	8.54	39.17	42.90	45.97	74.00	28.03	Peak
5359.500	33.76	8.55	39.17	47.49	50.63	74.00	23.37	Peak

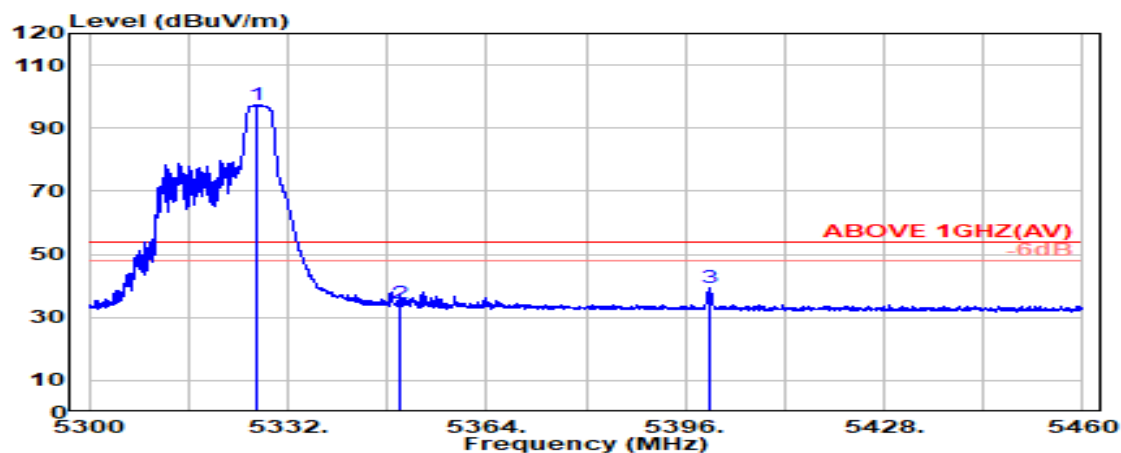

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.050	33.65	8.52	39.17	94.52	97.52	---	---	Average
5350.000	33.70	8.54	39.17	31.34	34.41	54.00	19.59	Average
5399.850	34.00	8.59	39.16	36.06	39.49	54.00	14.51	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

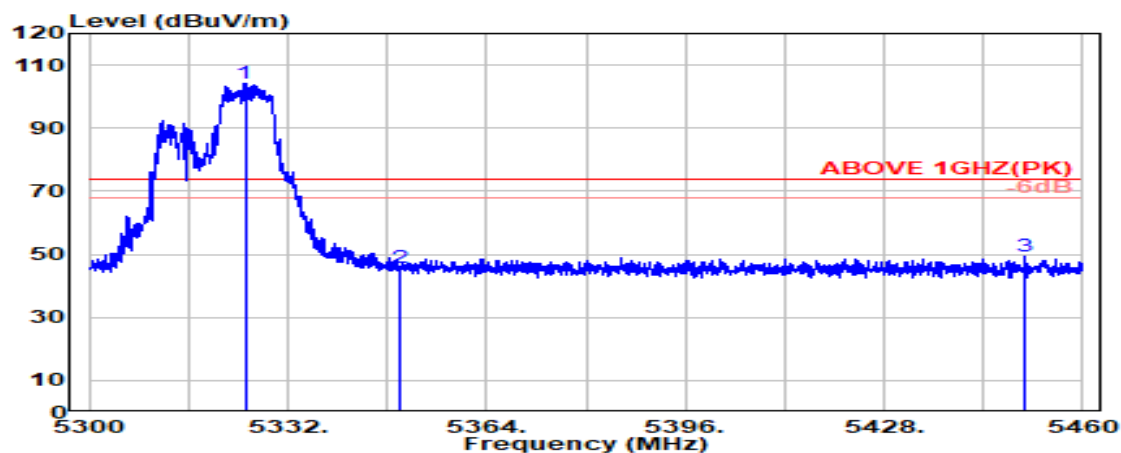

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.100	33.65	8.52	39.17	101.22	104.21	---	---	Peak
5350.000	33.70	8.54	39.17	42.67	45.74	74.00	28.26	Peak
5450.650	34.10	8.65	39.16	45.59	49.18	74.00	24.82	Peak

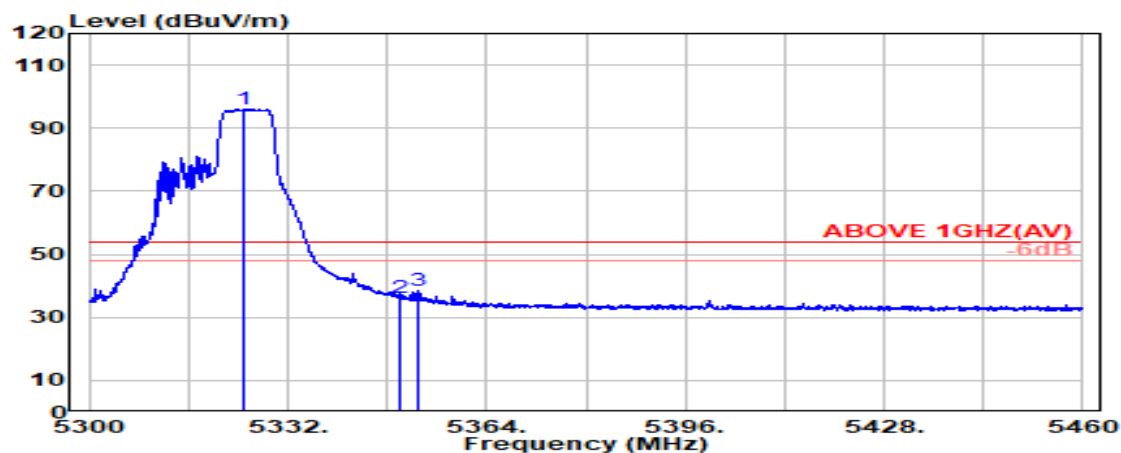

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.900	33.65	8.52	39.17	93.11	96.10	---	---	Average
5350.000	33.70	8.54	39.17	33.16	36.24	54.00	17.76	Average
5352.950	33.72	8.55	39.17	35.20	38.30	54.00	15.70	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

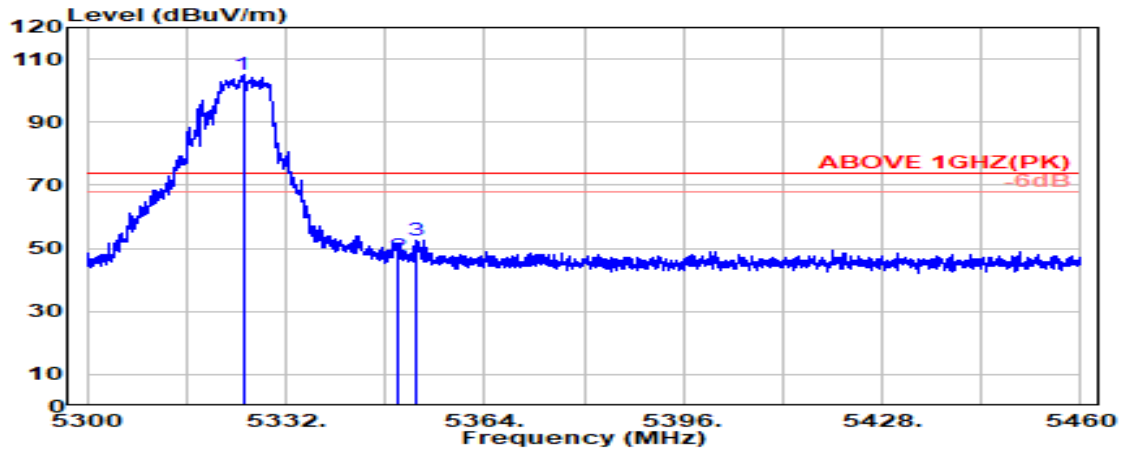

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.100	33.65	8.52	39.17	101.86	104.86	---	---	Peak
5350.000	33.70	8.54	39.17	44.25	47.32	74.00	26.68	Peak
5353.150	33.72	8.55	39.17	49.42	52.51	74.00	21.49	Peak

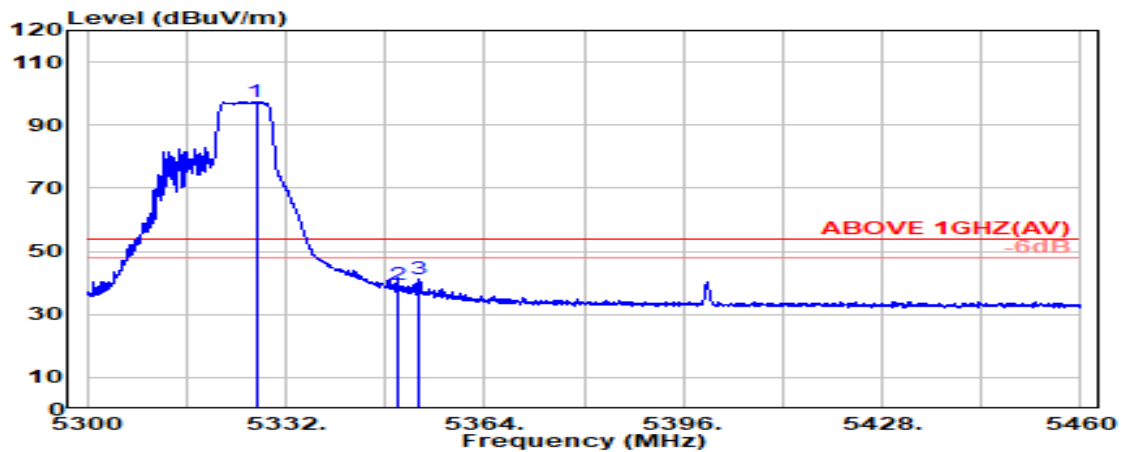

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	33.65	8.52	39.17	94.49	97.49	---	---	Average
5350.000	33.70	8.54	39.17	36.51	39.59	54.00	14.41	Average
5353.300	33.72	8.55	39.17	38.28	41.37	54.00	12.63	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

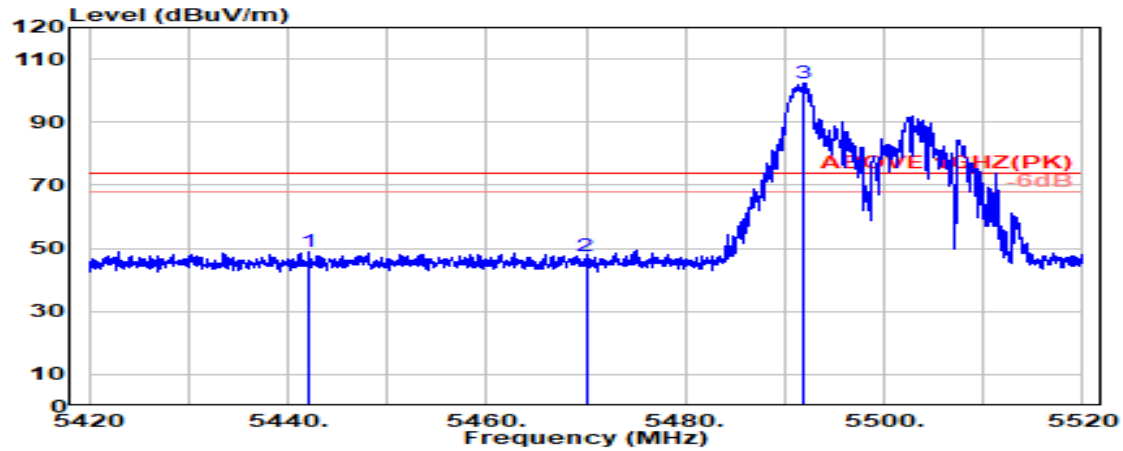

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.150	34.08	8.64	39.16	45.56	49.12	74.00	24.88	Peak
5470.000	34.10	8.67	39.15	44.16	47.77	74.00	26.23	Peak
@ 5492.000	34.10	8.69	39.15	98.65	102.29	---	---	Peak

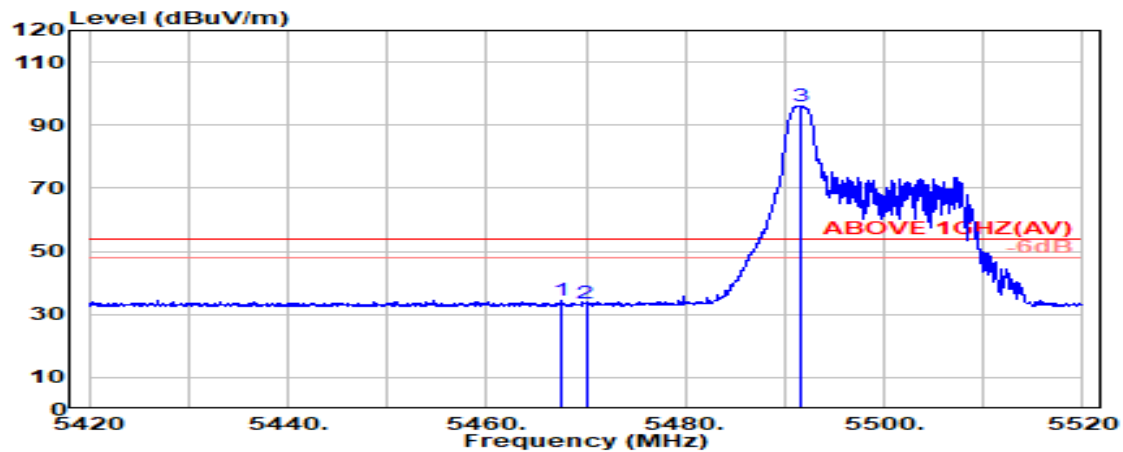

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.450	34.10	8.66	39.15	30.86	34.47	54.00	19.53	Average
5470.000	34.10	8.67	39.15	29.69	33.31	54.00	20.69	Average
@ 5491.700	34.10	8.69	39.15	92.51	96.15	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

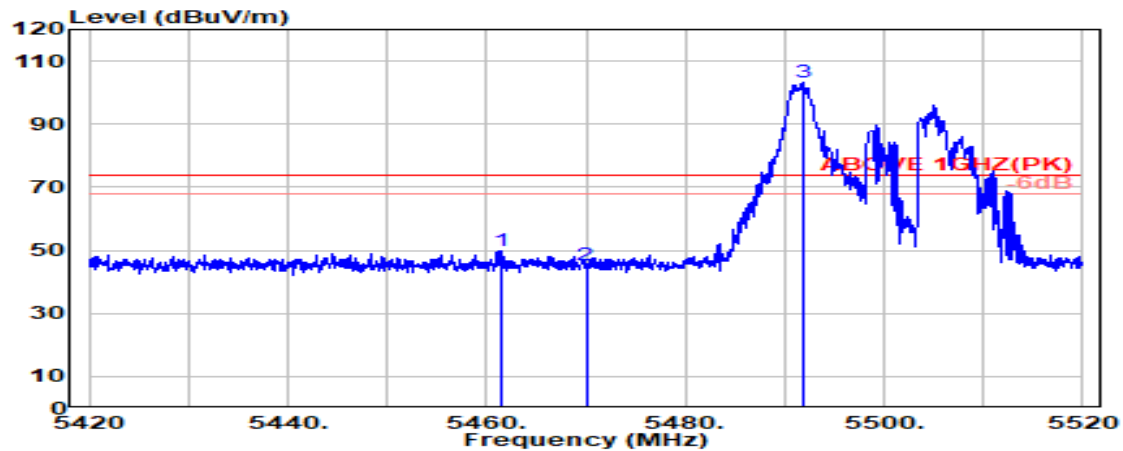

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.450	34.10	8.66	39.15	46.03	49.63	74.00	24.37	Peak
5470.000	34.10	8.67	39.15	41.76	45.37	74.00	28.63	Peak
@ 5491.950	34.10	8.69	39.15	99.49	103.13	---	---	Peak

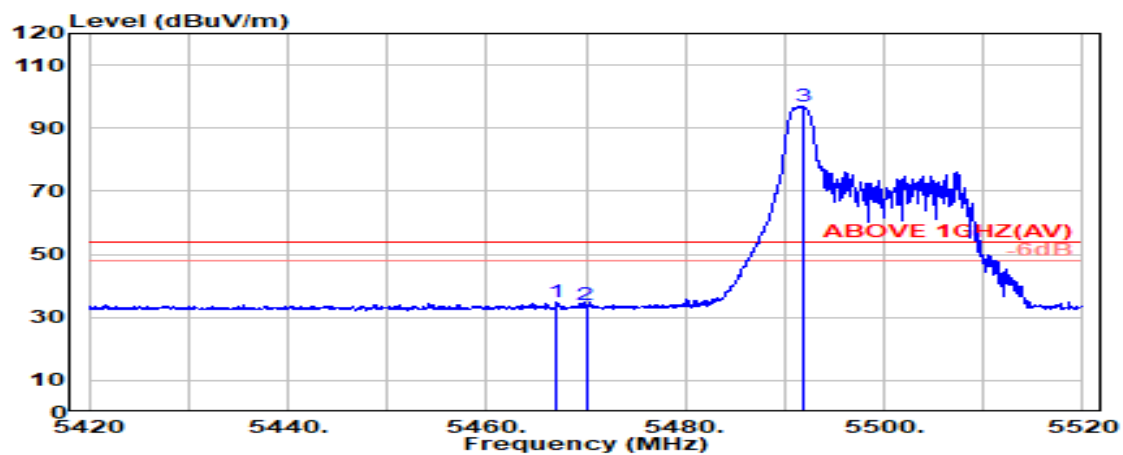

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.050	34.10	8.66	39.15	31.37	34.98	54.00	19.02	Average
5470.000	34.10	8.67	39.15	30.51	34.12	54.00	19.88	Average
@ 5491.900	34.10	8.69	39.15	93.44	97.08	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

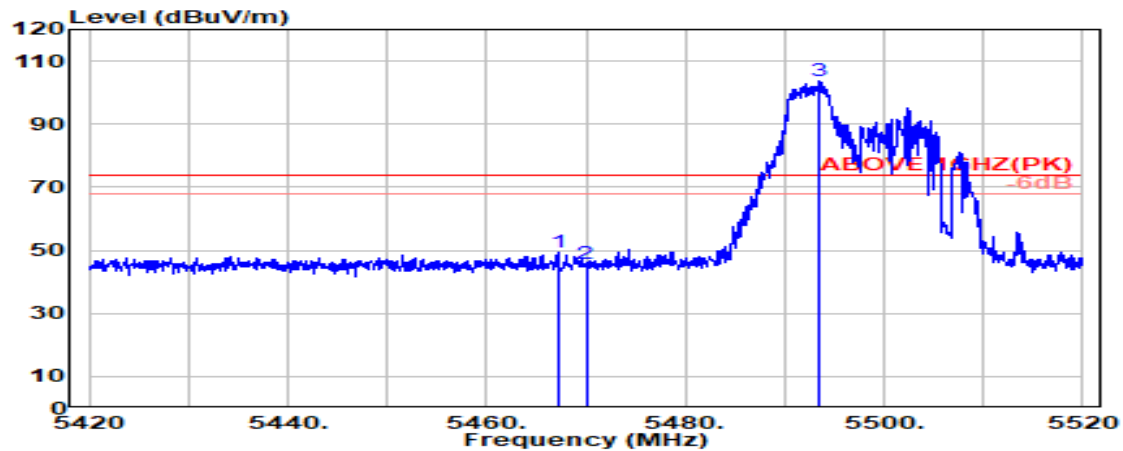

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.250	34.10	8.66	39.15	45.60	49.21	74.00	24.79	Peak
5470.000	34.10	8.67	39.15	42.30	45.91	74.00	28.09	Peak
@ 5493.550	34.10	8.69	39.15	99.94	103.58	---	---	Peak

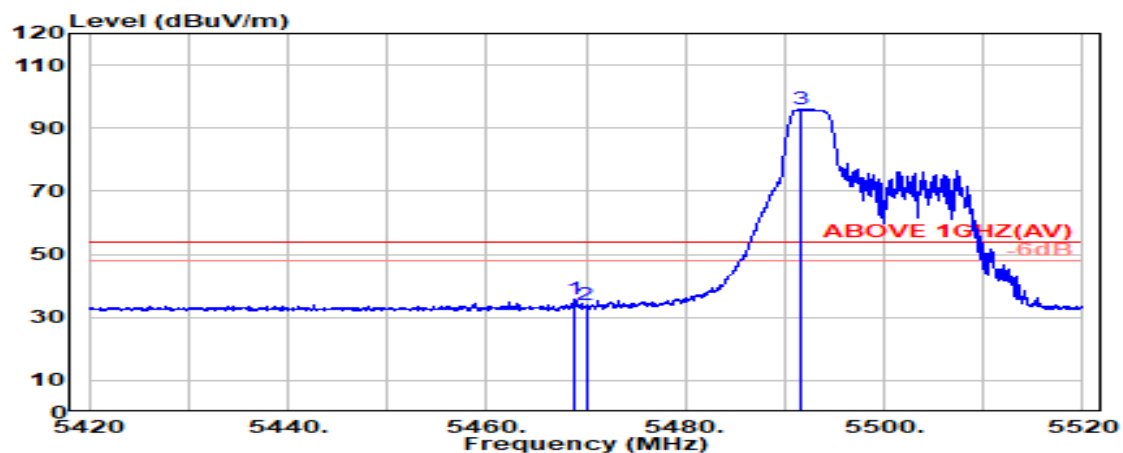

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.10	8.67	39.15	31.95	35.56	54.00	18.44	Average
5470.000	34.10	8.67	39.15	30.53	34.14	54.00	19.86	Average
@ 5491.650	34.10	8.69	39.15	92.37	96.01	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

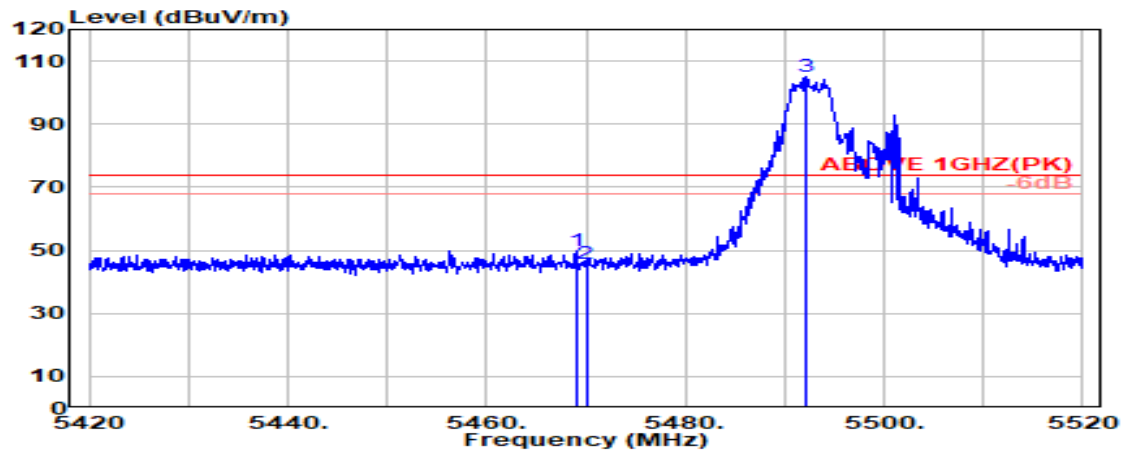

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.10	8.67	39.15	46.36	49.97	74.00	24.03	Peak
5470.000	34.10	8.67	39.15	41.96	45.58	74.00	28.42	Peak
@ 5492.050	34.10	8.69	39.15	101.35	104.99	---	---	Peak

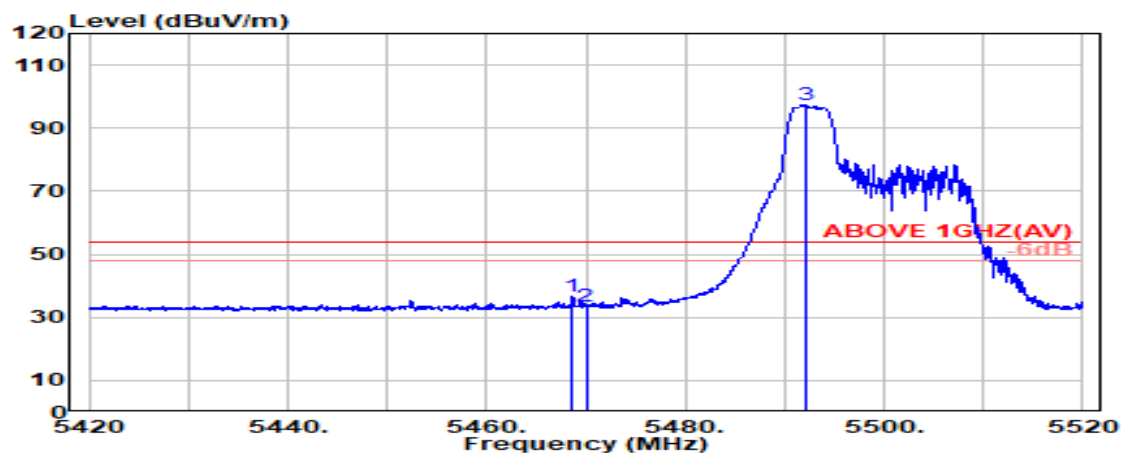

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.650	34.10	8.67	39.15	32.98	36.60	54.00	17.40	Average
5470.000	34.10	8.67	39.15	29.88	33.50	54.00	20.50	Average
@ 5492.050	34.10	8.69	39.15	93.58	97.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

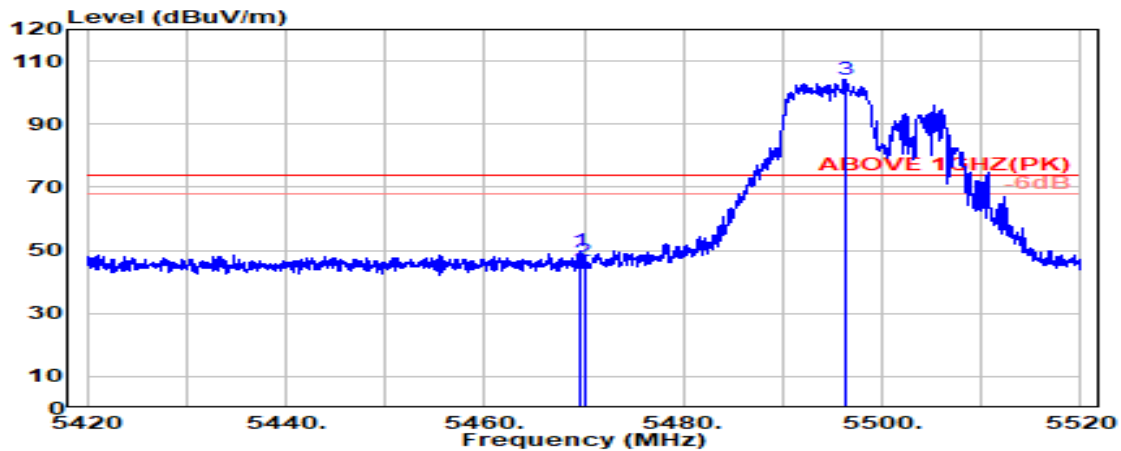

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.550	34.10	8.67	39.15	46.14	49.75	74.00	24.25	Peak
5470.000	34.10	8.67	39.15	42.87	46.48	74.00	27.52	Peak
@ 5496.250	34.10	8.69	39.15	100.65	104.30	---	---	Peak

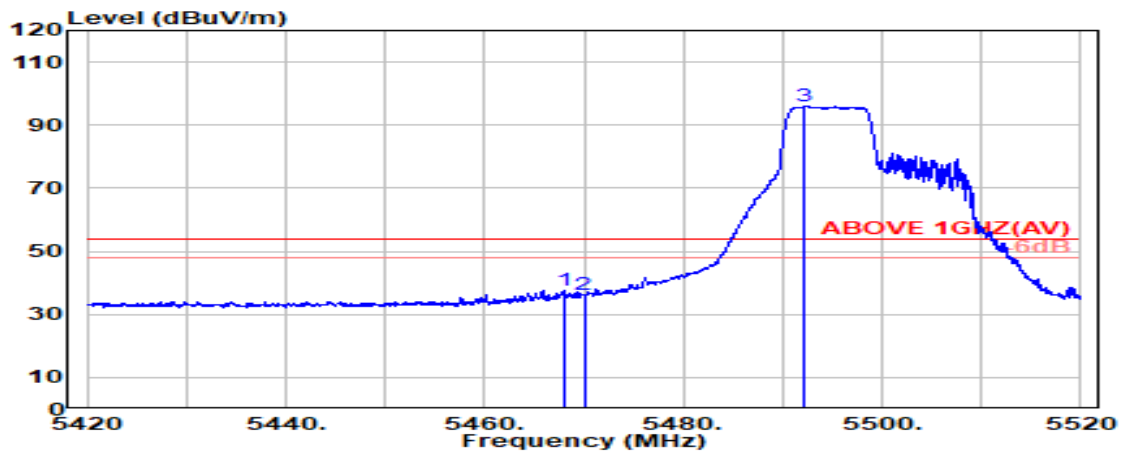

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.050	34.10	8.67	39.15	34.04	37.65	54.00	16.35	Average
5470.000	34.10	8.67	39.15	32.48	36.10	54.00	17.90	Average
@ 5492.250	34.10	8.69	39.15	92.32	95.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

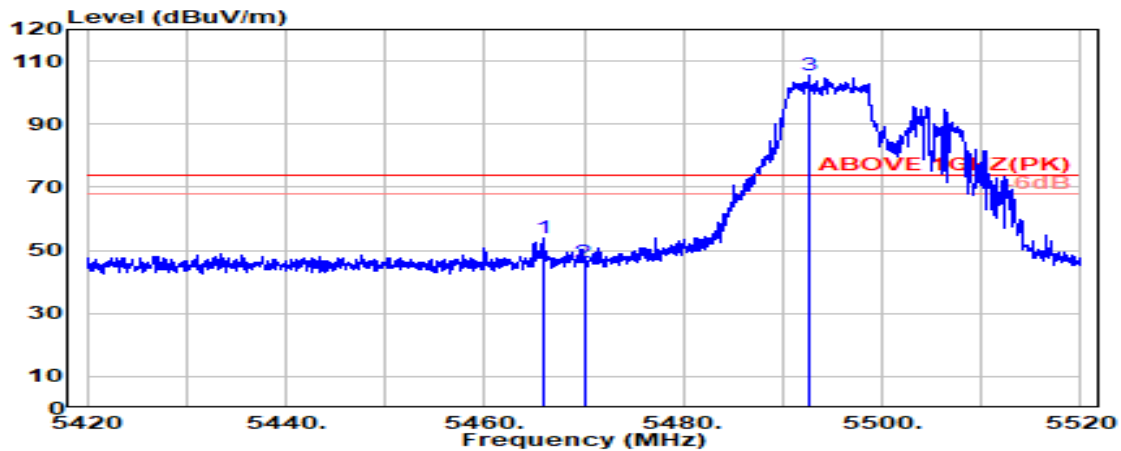

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.850	34.10	8.66	39.15	50.22	53.83	74.00	20.17	Peak
5470.000	34.10	8.67	39.15	42.41	46.02	74.00	27.98	Peak
@ 5492.600	34.10	8.69	39.15	102.06	105.70	---	---	Peak

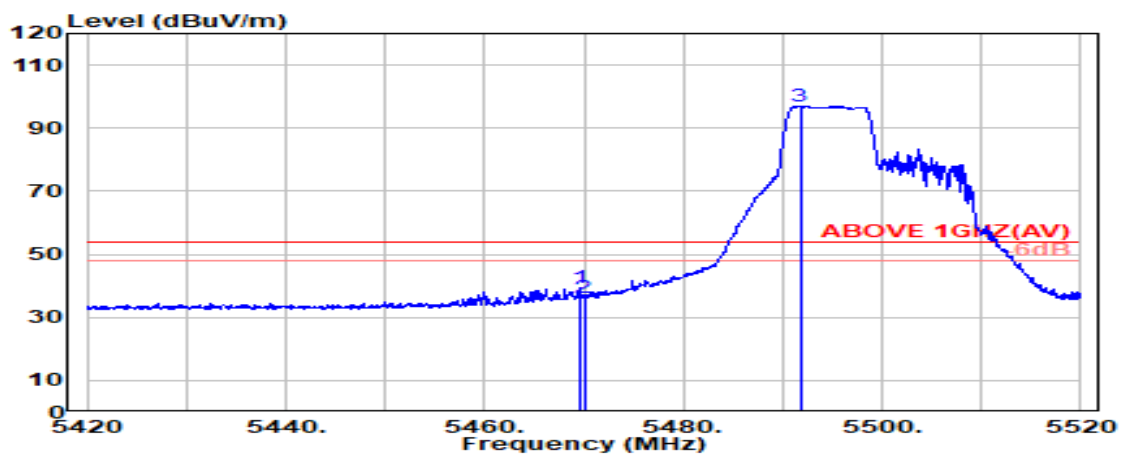

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.550	34.10	8.67	39.15	35.74	39.36	54.00	14.64	Average
5470.000	34.10	8.67	39.15	32.70	36.31	54.00	17.69	Average
@ 5491.750	34.10	8.69	39.15	93.46	97.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

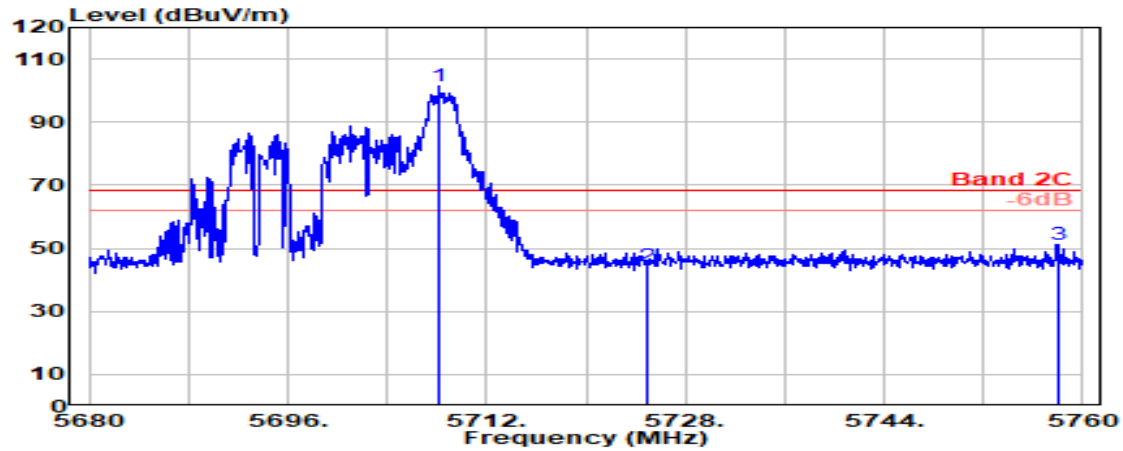

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.150	33.47	8.91	39.19	98.32	101.50	---	---	Peak
	5725.000	33.60	8.92	39.20	41.24	44.57	68.20	23.63	Peak
	5757.950	33.82	8.96	39.20	47.48	51.06	68.20	17.14	Peak

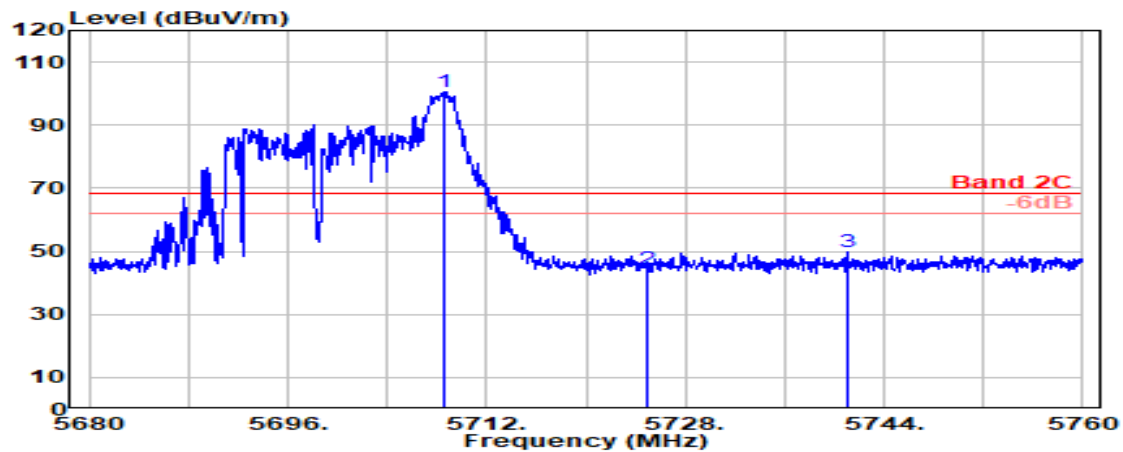

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.550	33.47	8.91	39.19	97.56	100.74	---	---	Peak
	5725.000	33.60	8.92	39.20	40.97	44.30	68.20	23.90	Peak
	5741.000	33.73	8.94	39.20	46.19	49.66	68.20	18.54	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

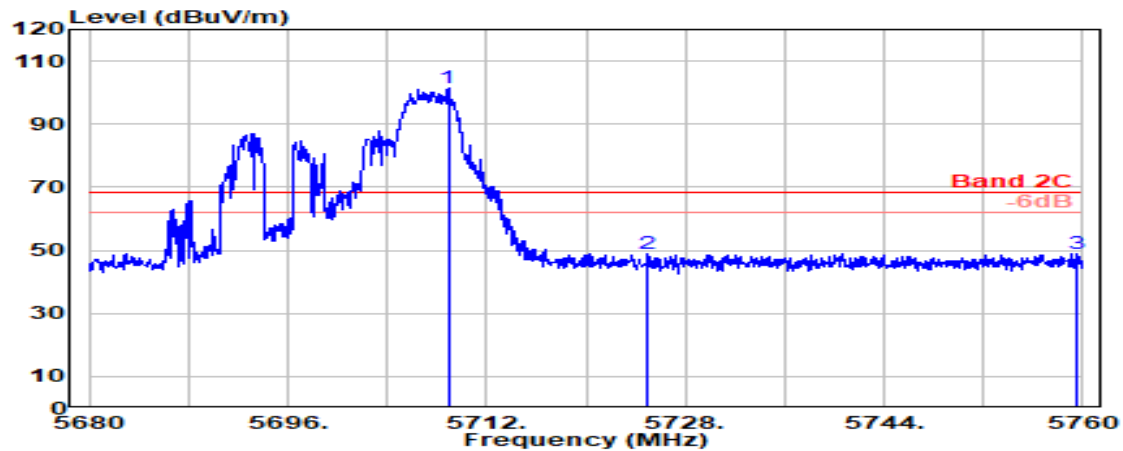

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.900	33.47	8.91	39.19	98.21	101.40	---	---	Peak
	5725.000	33.60	8.92	39.20	45.58	48.91	68.20	19.29	Peak
	5759.500	33.82	8.96	39.20	45.47	49.04	68.20	19.16	Peak

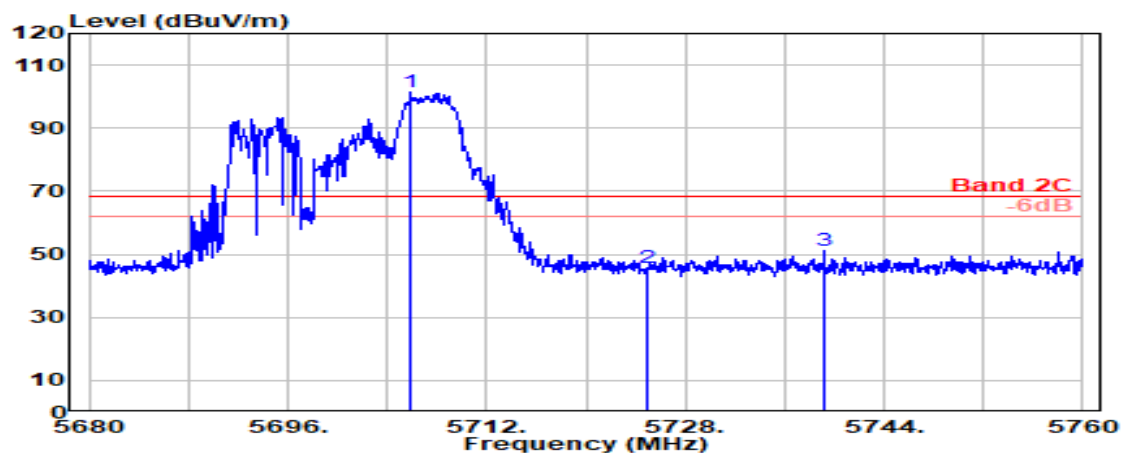

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5705.900	33.45	8.91	39.19	98.47	101.63	---	---	Peak
	5725.000	33.60	8.92	39.20	42.20	45.53	68.20	22.67	Peak
	5739.150	33.71	8.94	39.20	47.66	51.11	68.20	17.09	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

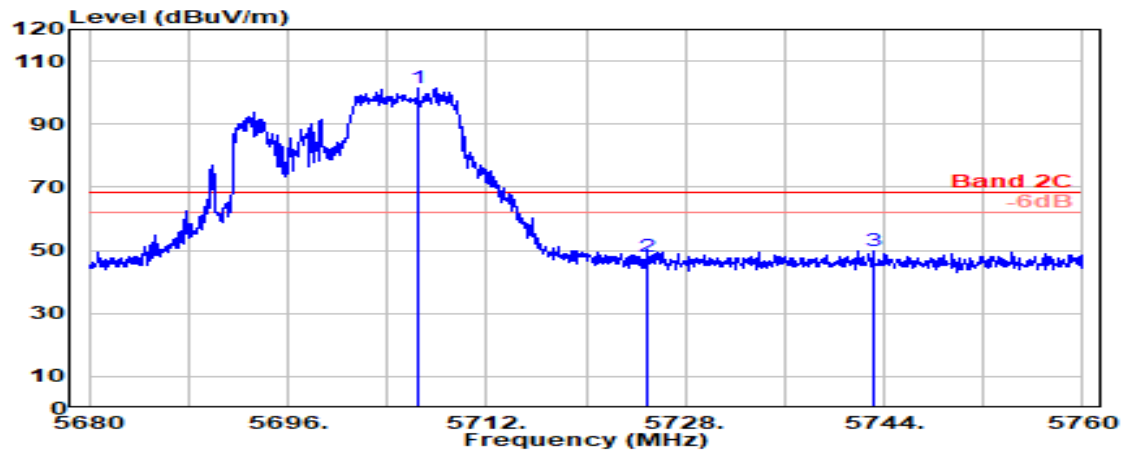

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.450	33.45	8.91	39.19	98.49	101.65	---	---	Peak
5725.000	33.60	8.92	39.20	44.63	47.96	68.20	20.24	Peak
5743.150	33.75	8.94	39.20	46.39	49.88	68.20	18.32	Peak

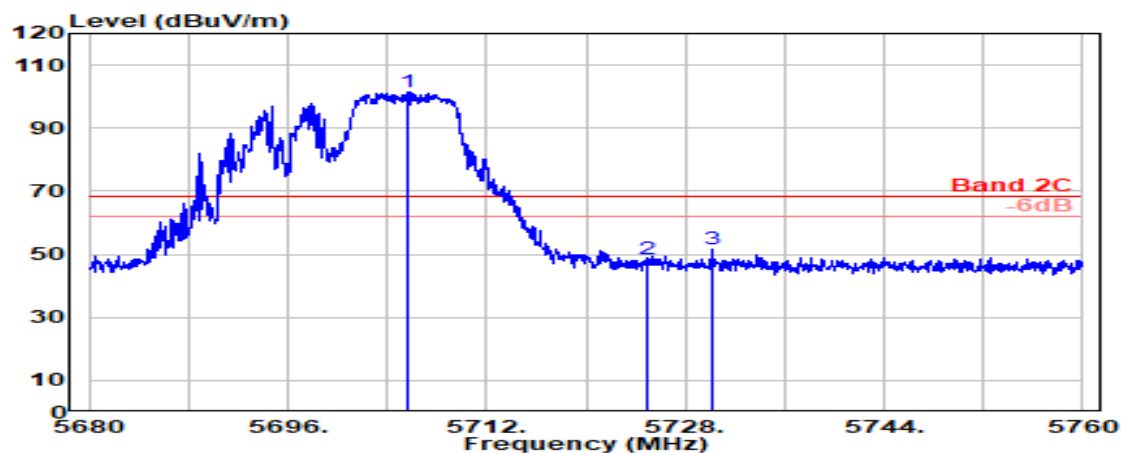

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.700	33.45	8.91	39.19	98.49	101.65	---	---	Peak
5725.000	33.60	8.92	39.20	45.03	48.35	68.20	19.85	Peak
5730.100	33.64	8.93	39.20	48.22	51.60	68.20	16.60	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

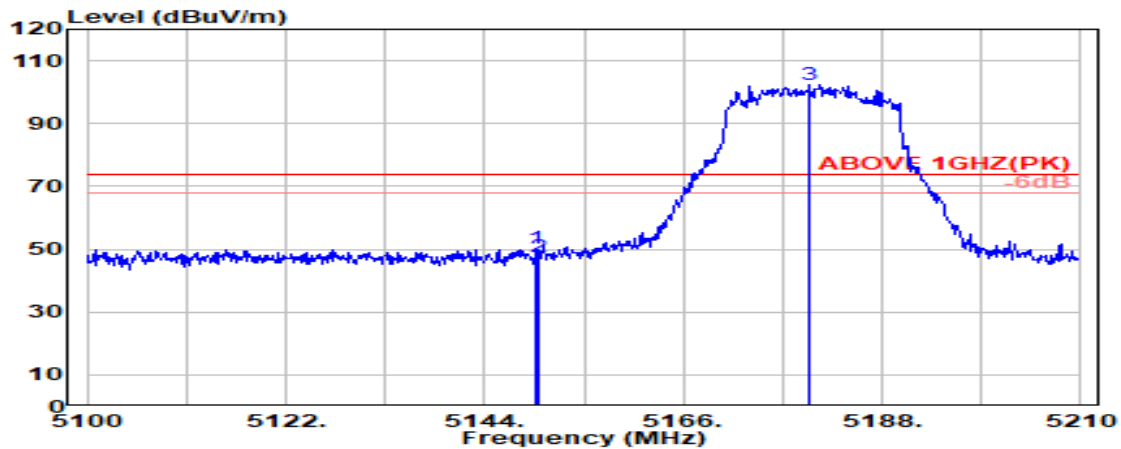

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	33.60	8.33	39.19	47.62	50.36	74.00	23.64	Peak
5150.000	33.60	8.33	39.19	44.68	47.42	74.00	26.58	Peak
@ 5179.970	33.60	8.36	39.19	99.65	102.42	---	---	Peak

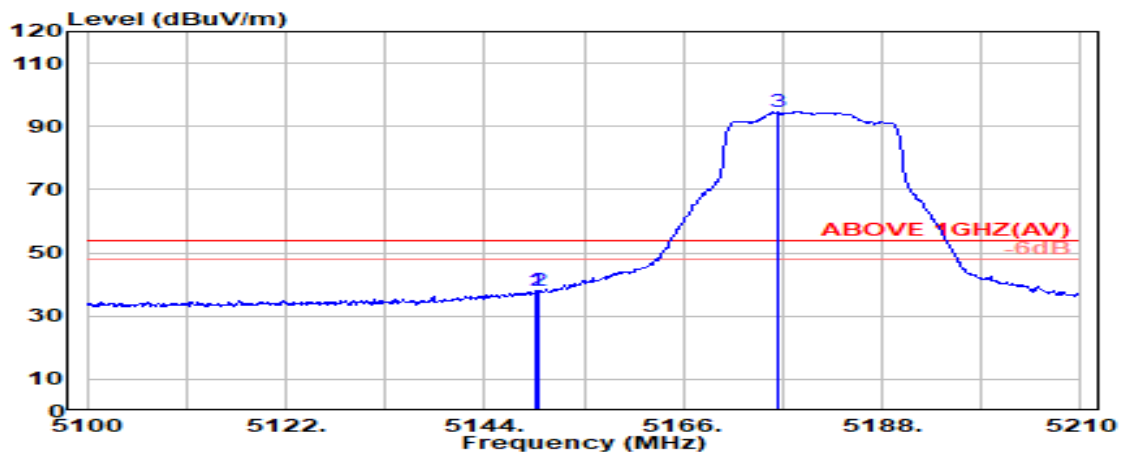

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	33.60	8.33	39.19	35.22	37.95	54.00	16.05	Average
5150.000	33.60	8.33	39.19	35.40	38.14	54.00	15.86	Average
@ 5176.450	33.60	8.36	39.19	91.80	94.57	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

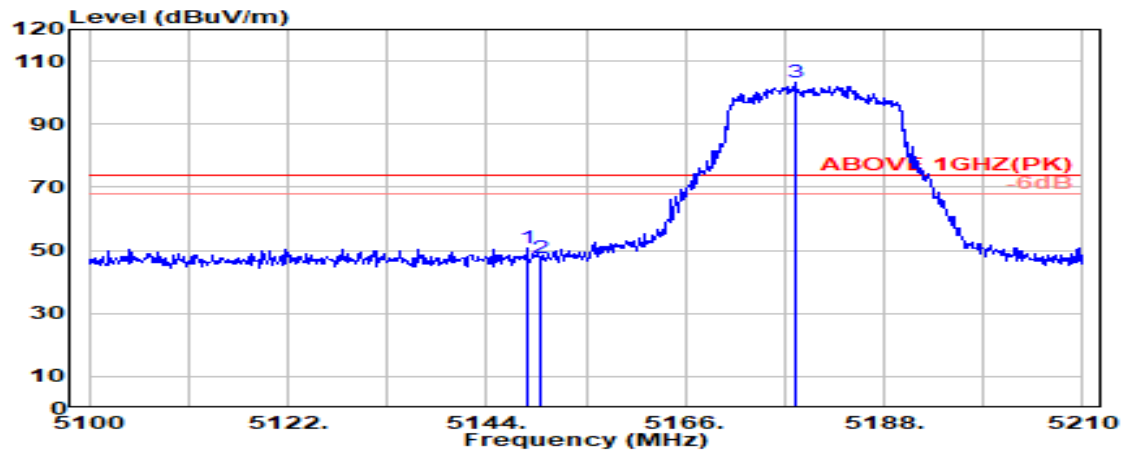

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.510	33.60	8.33	39.19	47.93	50.66	74.00	23.34	Peak
5150.000	33.60	8.33	39.19	44.79	47.52	74.00	26.48	Peak
@ 5178.100	33.60	8.36	39.19	100.43	103.20	---	---	Peak

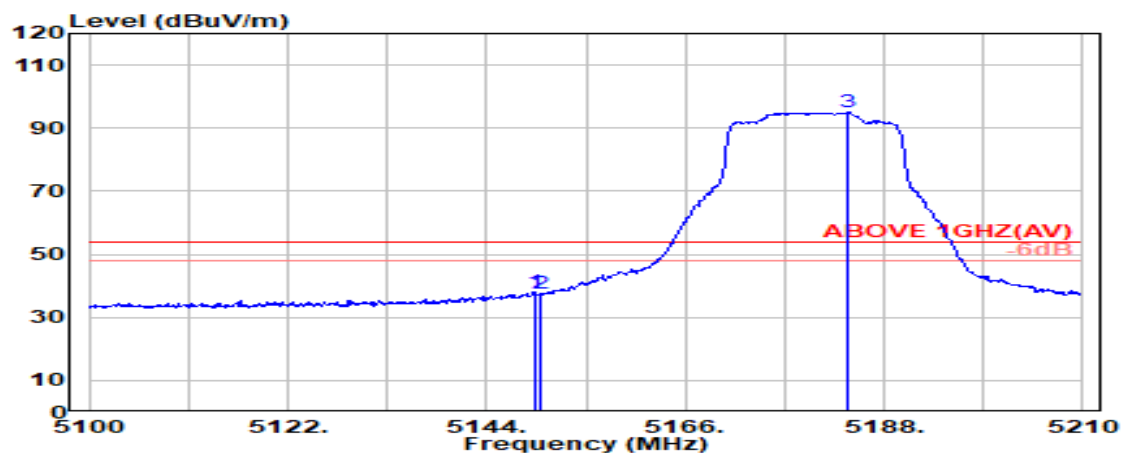

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.280	33.60	8.33	39.19	35.24	37.98	54.00	16.02	Average
5150.000	33.60	8.33	39.19	34.83	37.56	54.00	16.44	Average
@ 5183.930	33.60	8.36	39.19	92.18	94.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

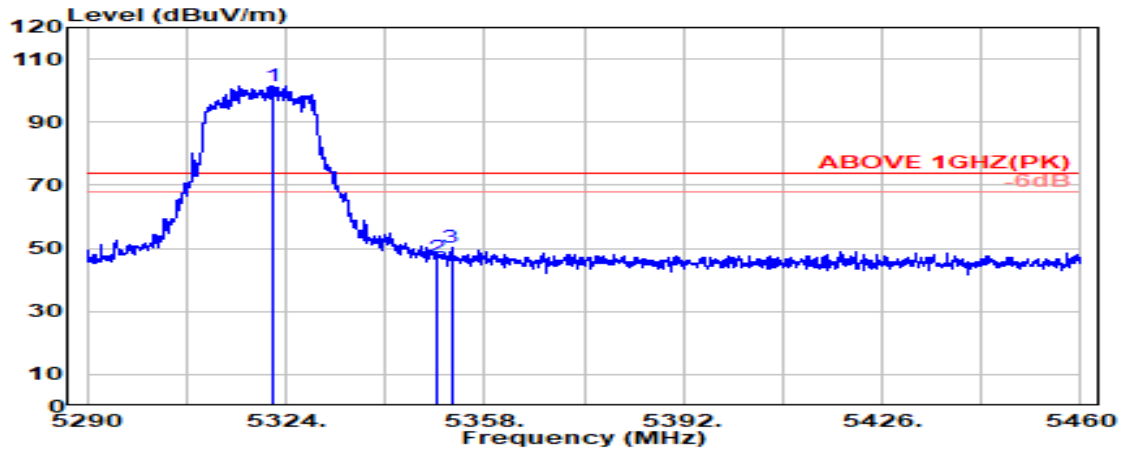

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.900	33.64	8.51	39.17	98.51	101.49	---	---	Peak
5350.000	33.70	8.54	39.17	43.99	47.06	74.00	26.94	Peak
5352.300	33.71	8.54	39.17	46.97	50.06	74.00	23.94	Peak

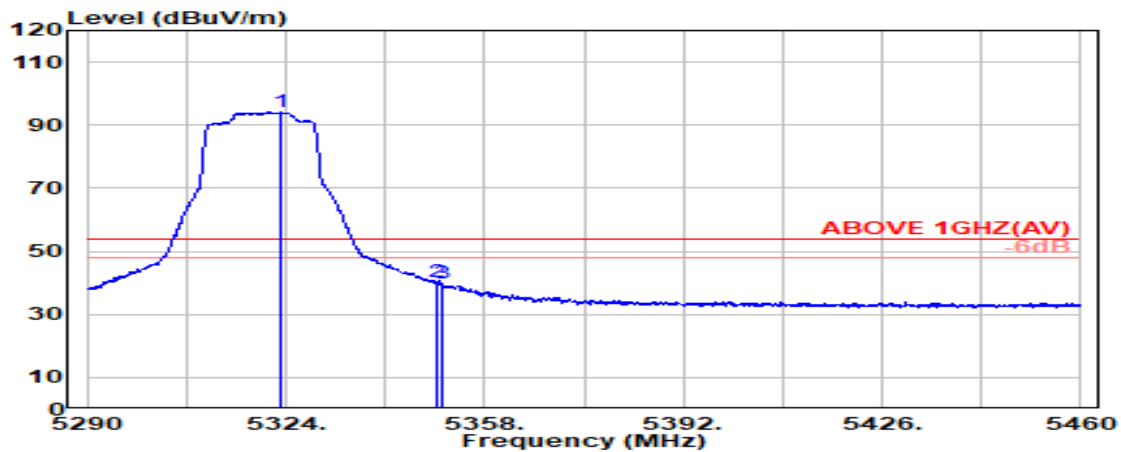

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.200	33.65	8.51	39.17	91.19	94.18	---	---	Average
5350.000	33.70	8.54	39.17	37.19	40.27	54.00	13.73	Average
5350.700	33.70	8.54	39.17	36.77	39.85	54.00	14.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

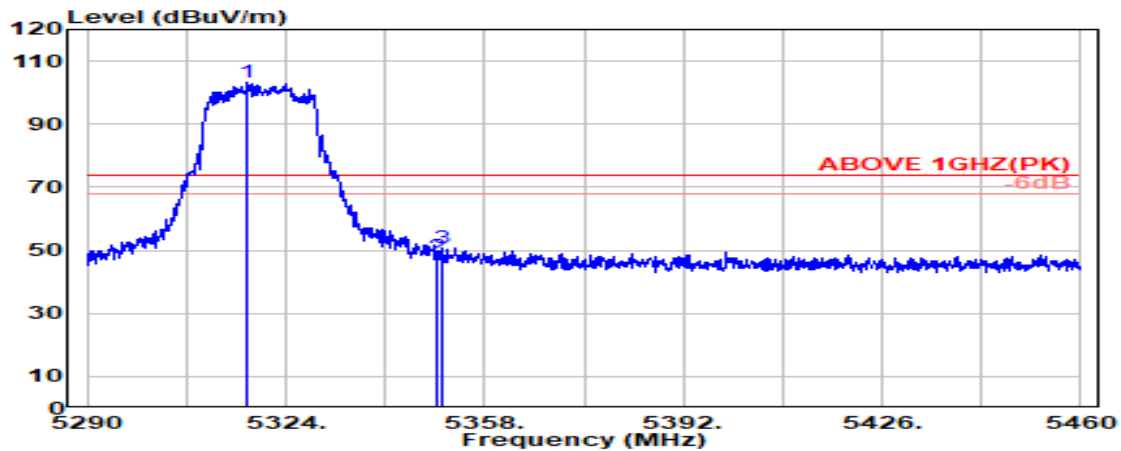

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.500	33.64	8.51	39.17	100.27	103.24	---	---	Peak
5350.000	33.70	8.54	39.17	44.76	47.83	74.00	26.17	Peak
5350.700	33.70	8.54	39.17	47.65	50.73	74.00	23.27	Peak

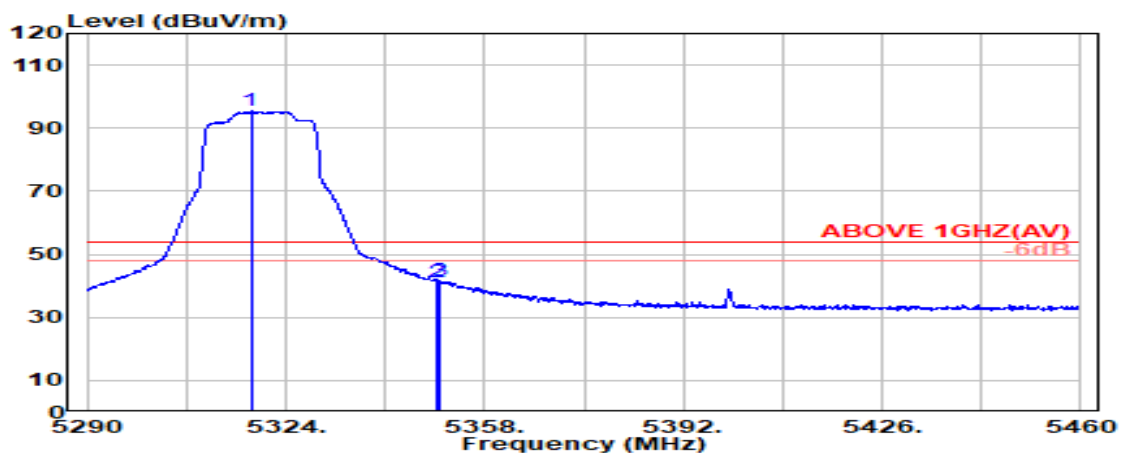

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.000	33.64	8.51	39.17	92.50	95.47	---	---	Average
5350.000	33.70	8.54	39.17	38.32	41.39	54.00	12.61	Average
5350.400	33.70	8.54	39.17	38.49	41.57	54.00	12.43	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

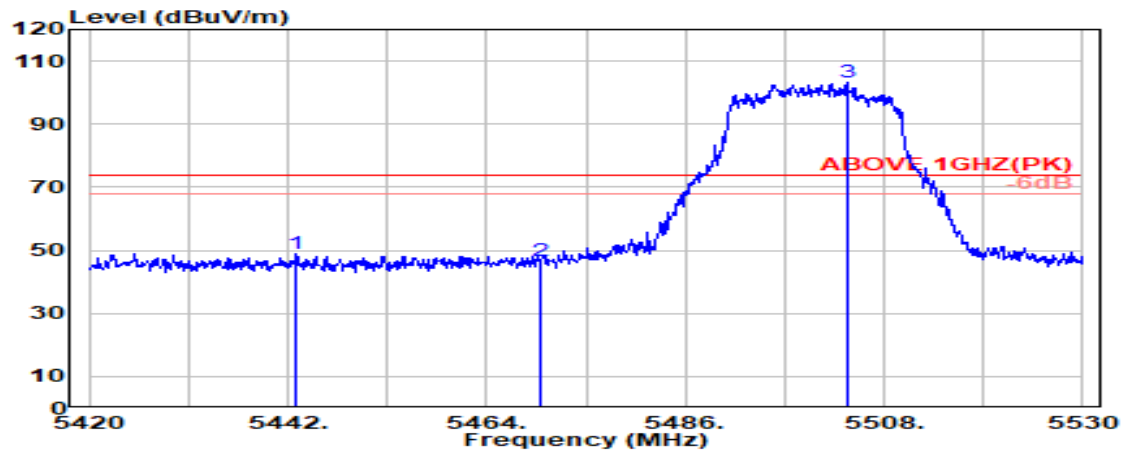

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.000	34.09	8.64	39.16	45.45	49.02	74.00	24.98	Peak
5470.000	34.10	8.67	39.15	42.99	46.61	74.00	27.39	Peak
@ 5504.000	34.09	8.70	39.15	99.65	103.29	---	---	Peak

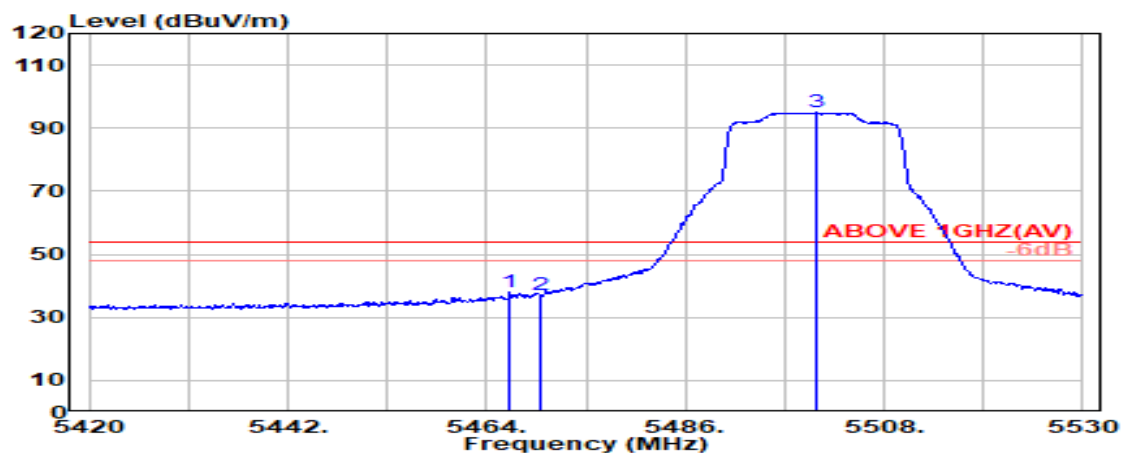

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.600	34.10	8.66	39.15	34.20	37.81	54.00	16.19	Average
5470.000	34.10	8.67	39.15	33.66	37.27	54.00	16.73	Average
@ 5500.600	34.10	8.70	39.15	91.25	94.89	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

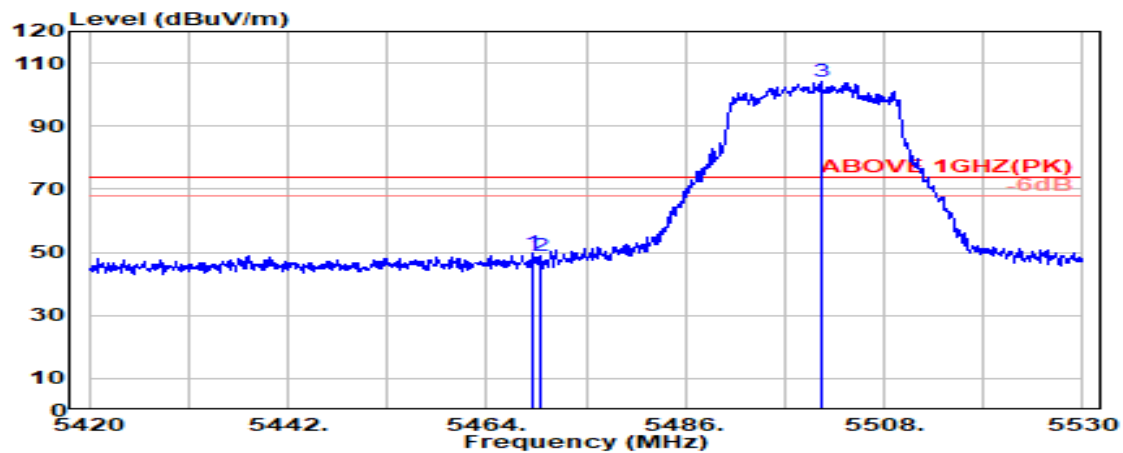

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.200	34.10	8.67	39.15	46.41	50.02	74.00	23.98	Peak
5470.000	34.10	8.67	39.15	45.31	48.92	74.00	25.08	Peak
@ 5501.100	34.10	8.70	39.15	100.56	104.21	---	---	Peak

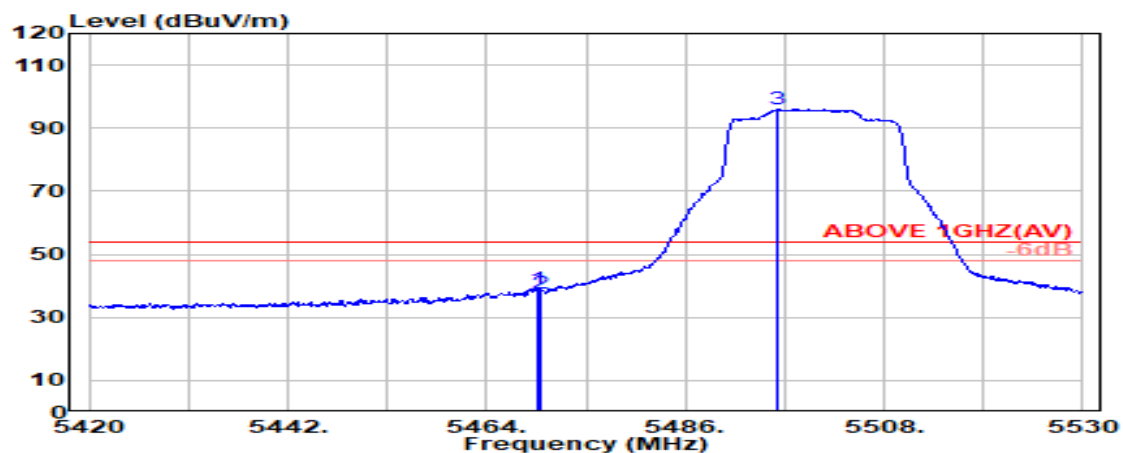

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.600	34.10	8.67	39.15	35.34	38.96	54.00	15.04	Average
5470.000	34.10	8.67	39.15	34.05	37.66	54.00	16.34	Average
@ 5496.300	34.10	8.69	39.15	92.31	95.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5670MHz

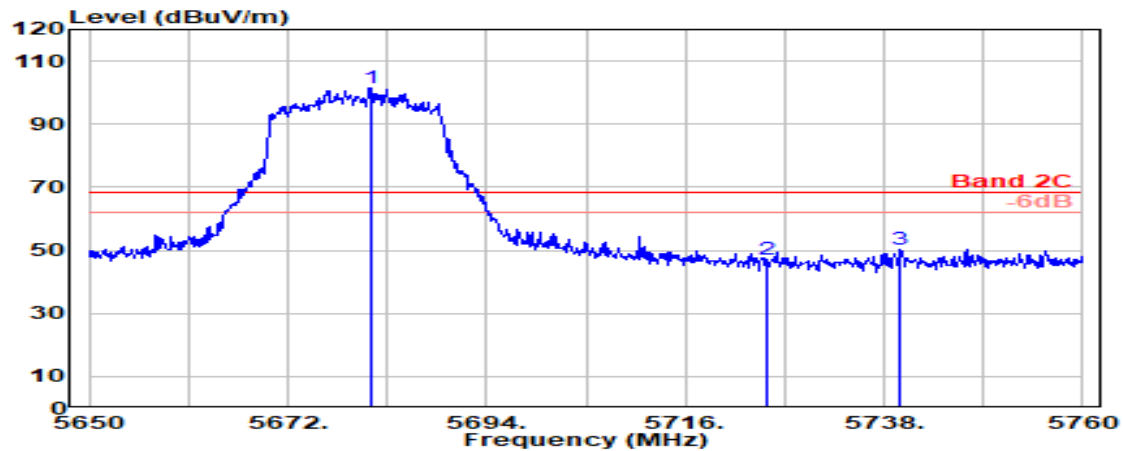

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5681.100	33.51	8.88	39.19	98.33	101.54	---	---	Peak
5725.000	33.60	8.92	39.20	43.74	47.07	68.20	21.13	Peak
5739.800	33.72	8.94	39.20	46.62	50.08	68.20	18.12	Peak

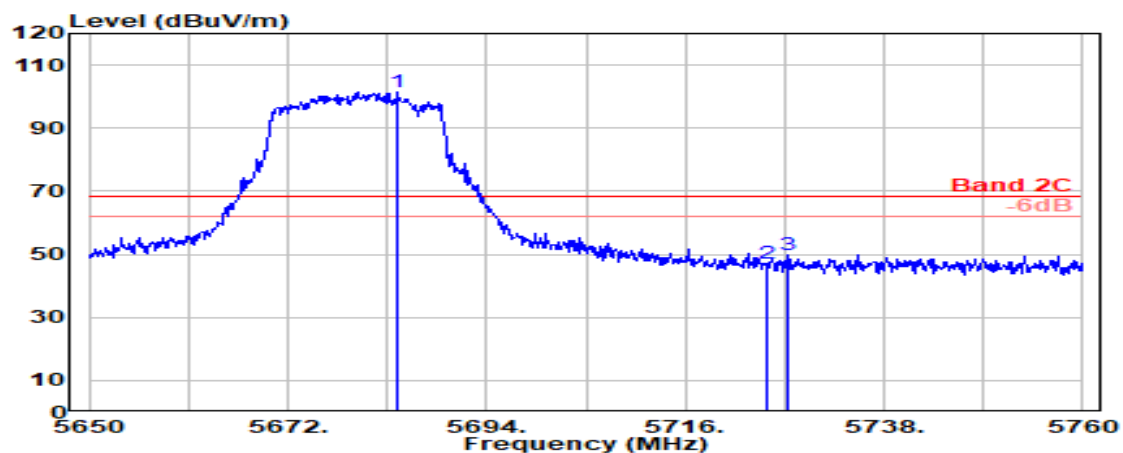

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5684.100	33.50	8.88	39.19	98.45	101.64	---	---	Peak
5725.000	33.60	8.92	39.20	43.82	47.15	68.20	21.05	Peak
5727.300	33.62	8.93	39.20	46.46	49.81	68.20	18.39	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

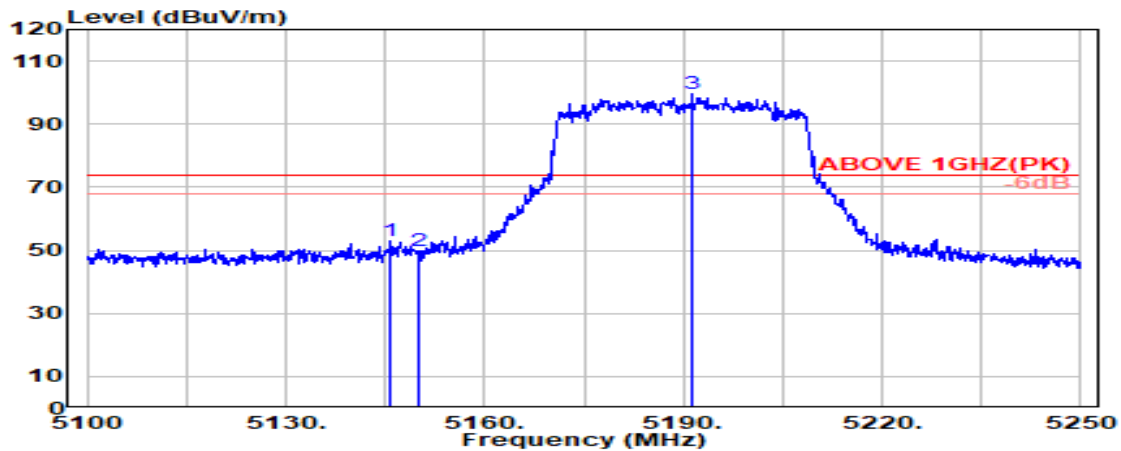

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.900	33.59	8.32	39.19	50.36	53.09	74.00	20.91	Peak
5150.000	33.60	8.33	39.19	47.03	49.77	74.00	24.23	Peak
@ 5191.400	33.60	8.37	39.19	96.86	99.65	---	---	Peak

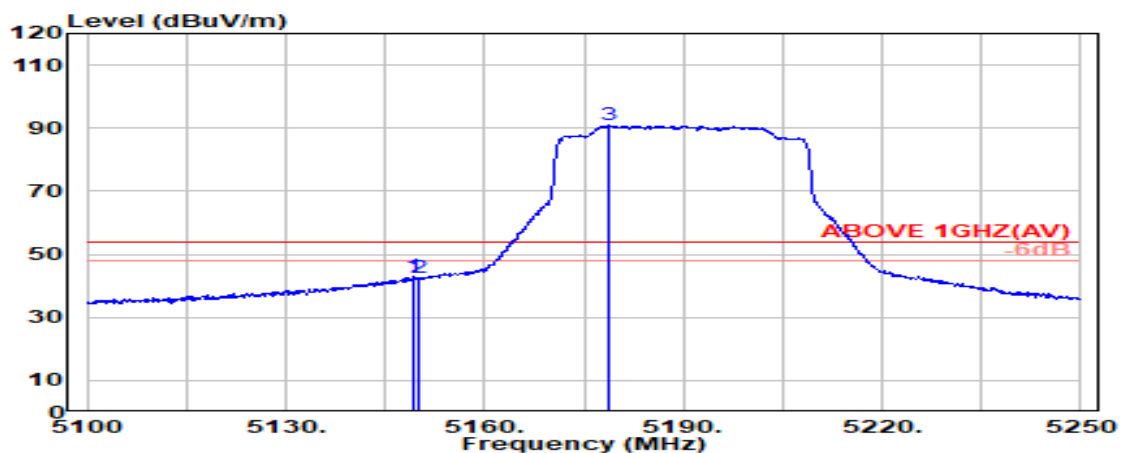

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.100	33.60	8.33	39.19	40.15	42.88	54.00	11.12	Average
5150.000	33.60	8.33	39.19	40.01	42.75	54.00	11.25	Average
@ 5178.900	33.60	8.36	39.19	88.05	90.82	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

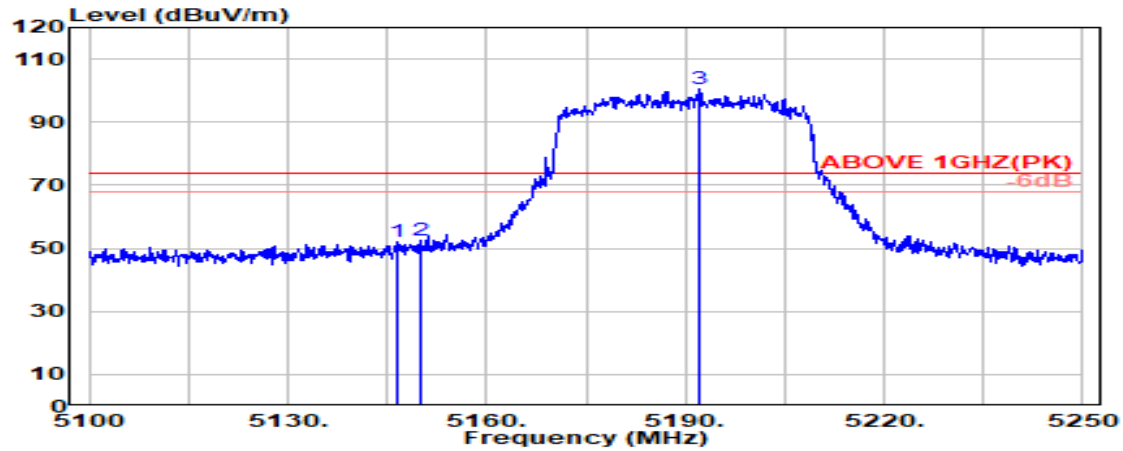

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.600	33.59	8.32	39.19	49.25	51.98	74.00	22.02	Peak
5150.000	33.60	8.33	39.19	49.69	52.42	74.00	21.58	Peak
@ 5192.100	33.60	8.37	39.19	97.60	100.39	---	---	Peak

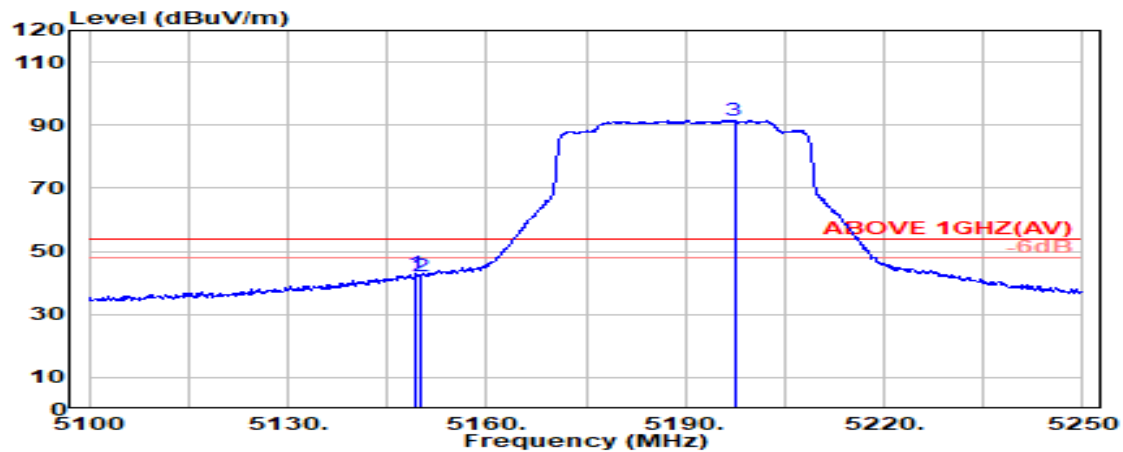

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.60	8.33	39.19	40.09	42.82	54.00	11.18	Average
5150.000	33.60	8.33	39.19	39.45	42.18	54.00	11.82	Average
@ 5197.400	33.60	8.38	39.19	88.83	91.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

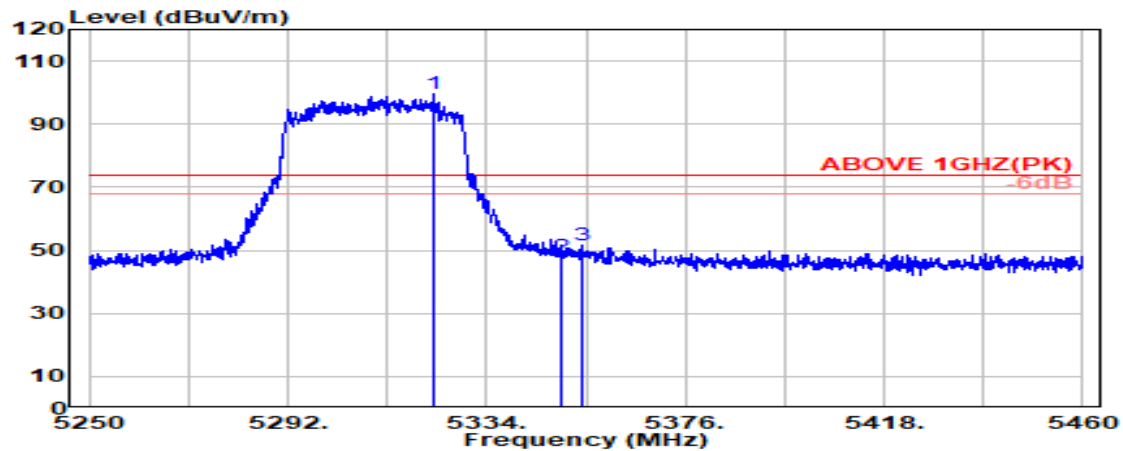

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.700	33.65	8.51	39.17	96.49	99.47	---	---	Peak
5350.000	33.70	8.54	39.17	45.11	48.18	74.00	25.82	Peak
5354.000	33.72	8.55	39.17	48.34	51.45	74.00	22.55	Peak

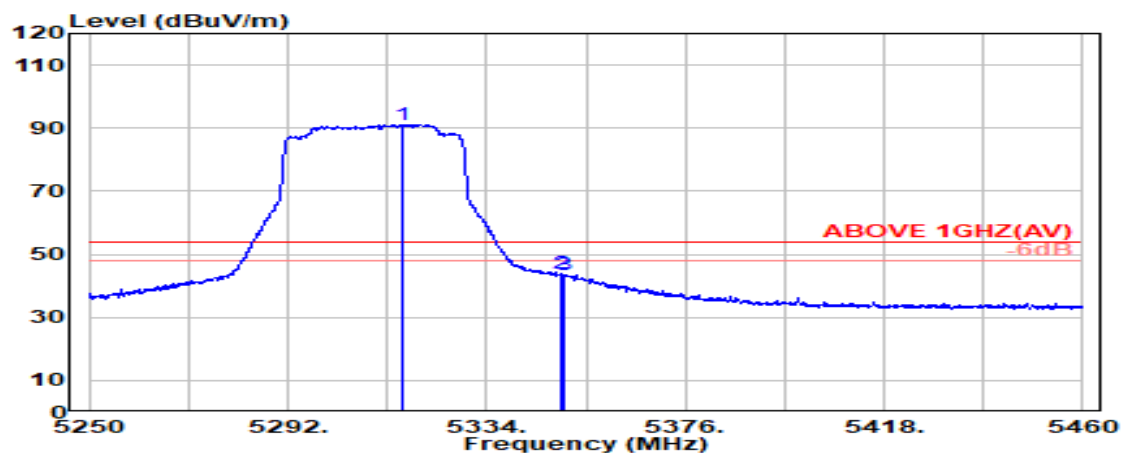


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.000	33.63	8.51	39.17	88.25	91.21	---	---	Average
5350.000	33.70	8.54	39.17	40.71	43.78	54.00	10.22	Average
5350.200	33.70	8.54	39.17	40.55	43.63	54.00	10.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

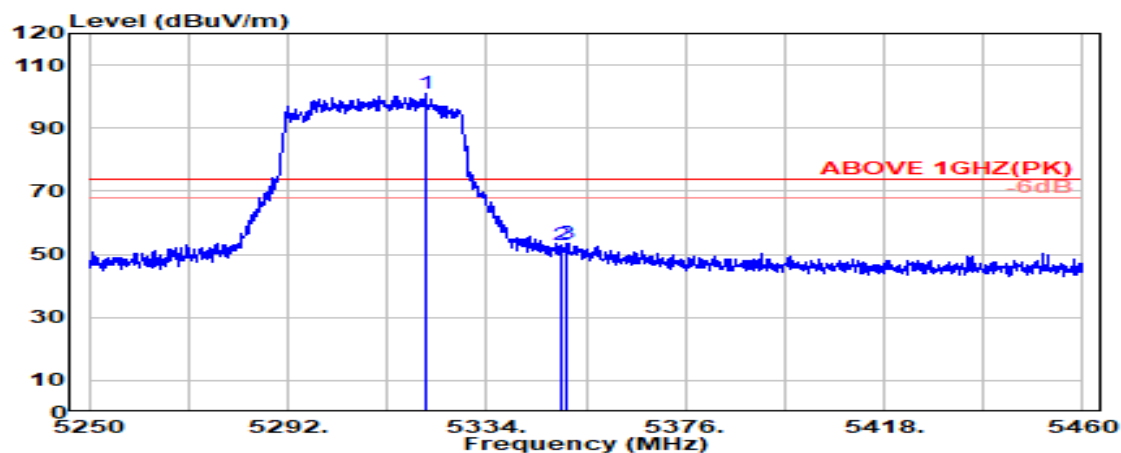

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.100	33.64	8.51	39.17	97.94	100.92	---	---	Peak
5350.000	33.70	8.54	39.17	49.99	53.06	74.00	20.94	Peak
5350.700	33.70	8.54	39.17	50.55	53.63	74.00	20.37	Peak

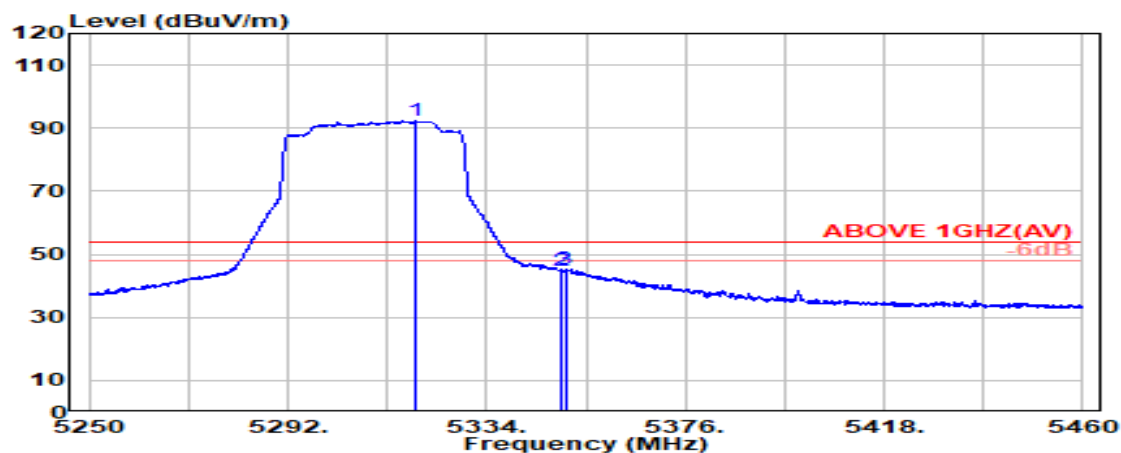

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.200	33.64	8.51	39.17	89.38	92.36	---	---	Average
5350.000	33.70	8.54	39.17	41.80	44.88	54.00	9.12	Average
5350.600	33.70	8.54	39.17	42.30	45.38	54.00	8.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

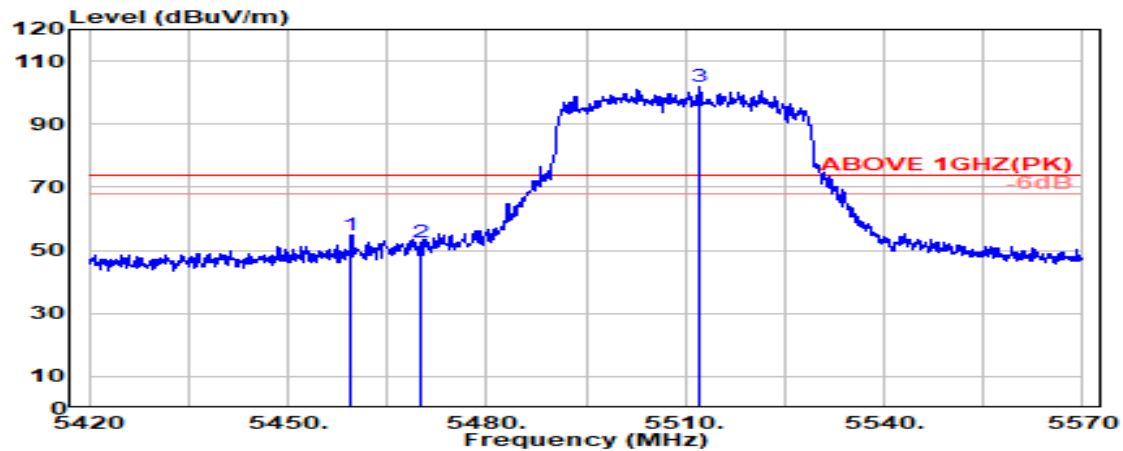

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.600	34.10	8.66	39.15	51.39	54.99	74.00	19.01	Peak
5470.000	34.10	8.67	39.15	48.83	52.45	74.00	21.55	Peak
@ 5512.000	34.08	8.71	39.15	98.29	101.92	---	---	Peak

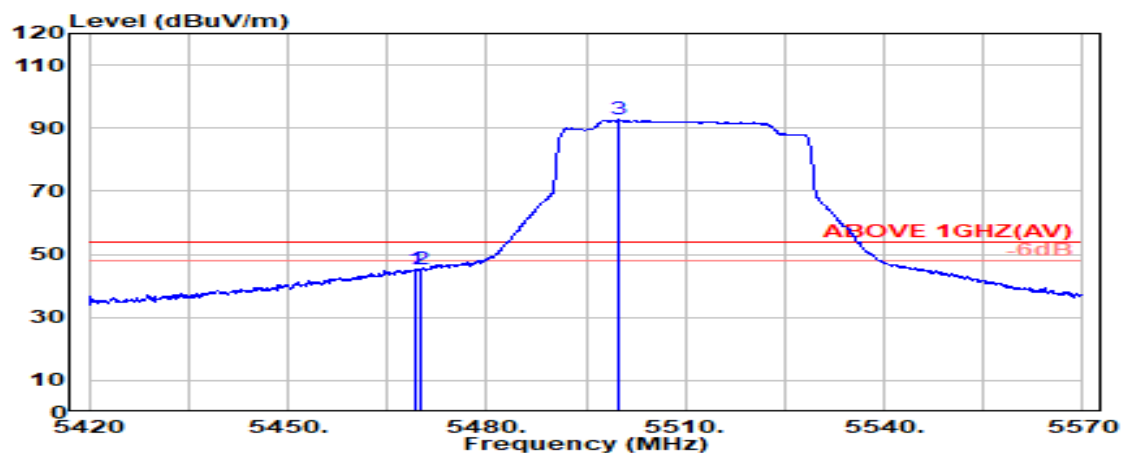

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.400	34.10	8.67	39.15	41.61	45.22	54.00	8.78	Average
5470.000	34.10	8.67	39.15	41.53	45.15	54.00	8.85	Average
@ 5500.000	34.10	8.70	39.15	88.98	92.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

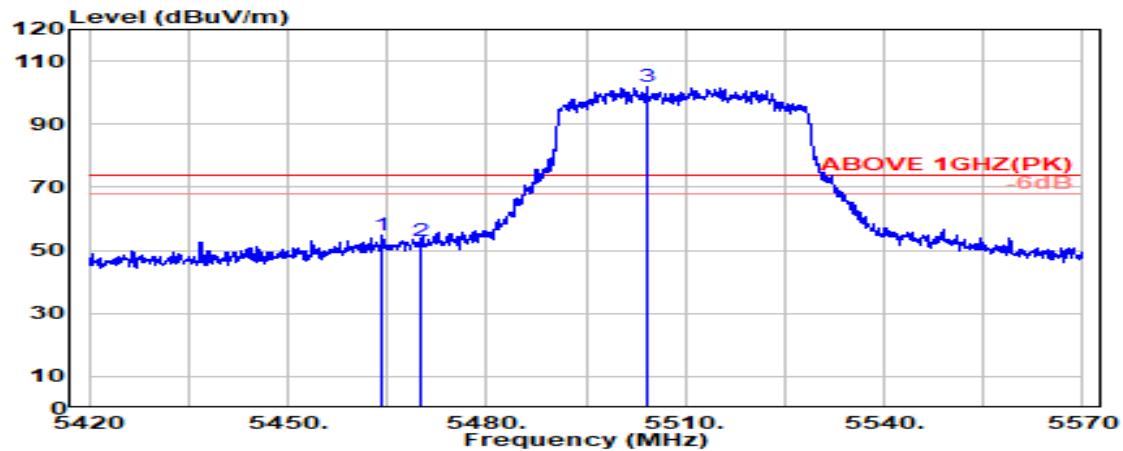

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.300	34.10	8.66	39.15	51.02	54.62	74.00	19.38	Peak
5470.000	34.10	8.67	39.15	49.30	52.92	74.00	21.08	Peak
@ 5504.200	34.09	8.70	39.15	98.12	101.77	---	---	Peak

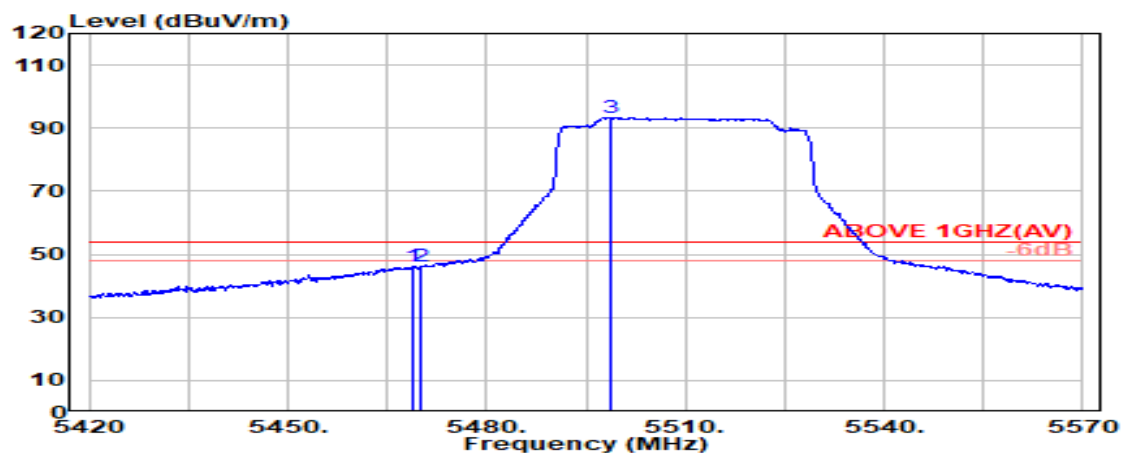


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.10	8.67	39.15	42.71	46.33	54.00	7.67	Average
5470.000	34.10	8.67	39.15	42.57	46.18	54.00	7.82	Average
@ 5498.600	34.10	8.70	39.15	89.78	93.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/66	Frequency	TX 5610MHz

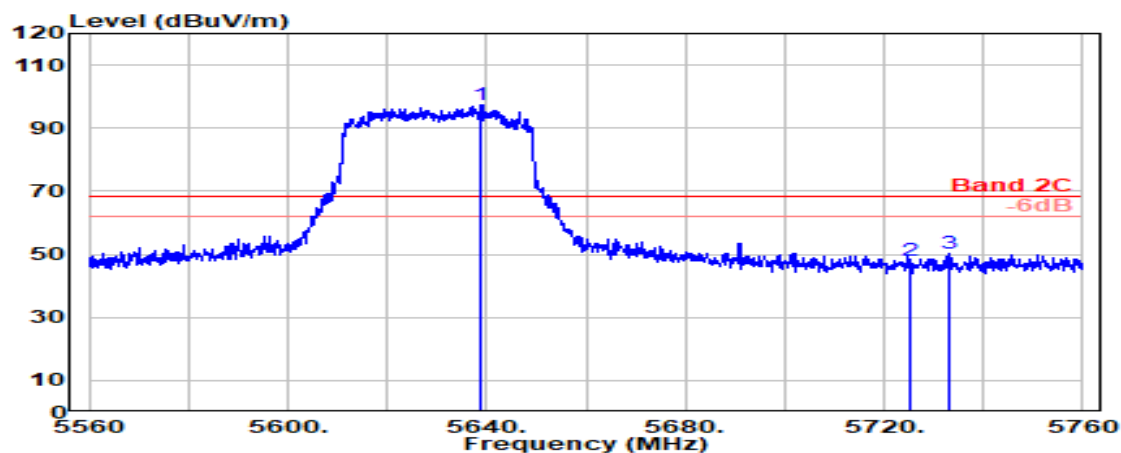

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5639.000	33.72	8.84	39.18	93.92	97.31	---	---	Peak
	5725.000	33.60	8.92	39.20	44.82	48.15	68.20	20.05	Peak
	5733.000	33.66	8.93	39.20	47.09	50.49	68.20	17.71	Peak

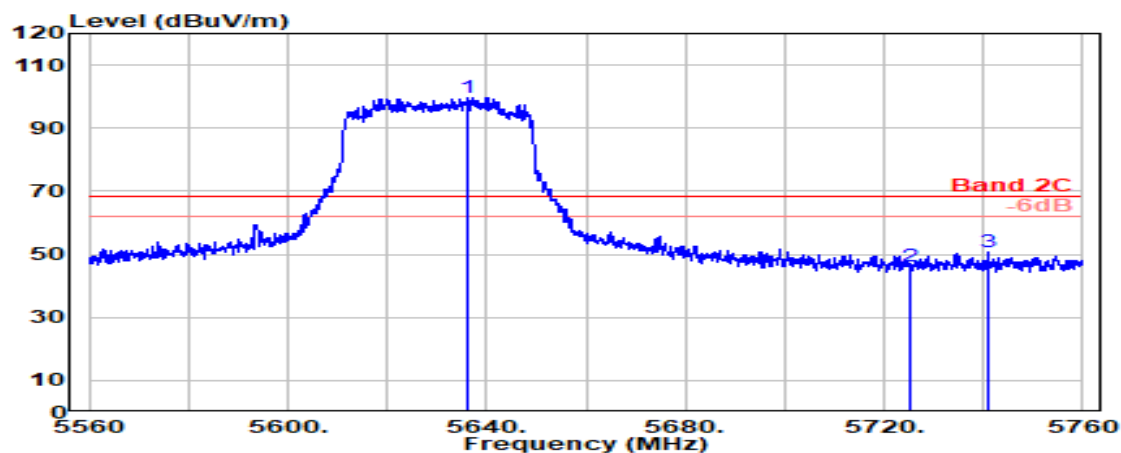

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5636.300	33.73	8.84	39.18	96.36	99.75	---	---	Peak
	5725.000	33.60	8.92	39.20	43.08	46.41	68.20	21.79	Peak
	5740.800	33.73	8.94	39.20	47.09	50.56	68.20	17.64	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/67	Frequency	TX 5250MHz

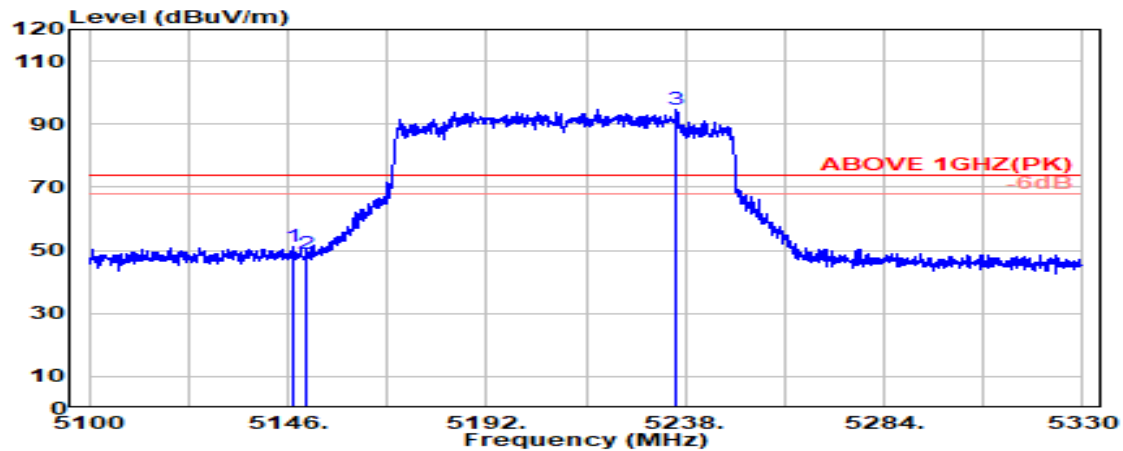

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.400	33.59	8.32	39.19	48.40	51.12	74.00	22.88	Peak
5150.000	33.60	8.33	39.19	45.96	48.70	74.00	25.30	Peak
@ 5235.900	33.67	8.42	39.18	91.94	94.85	---	---	Peak

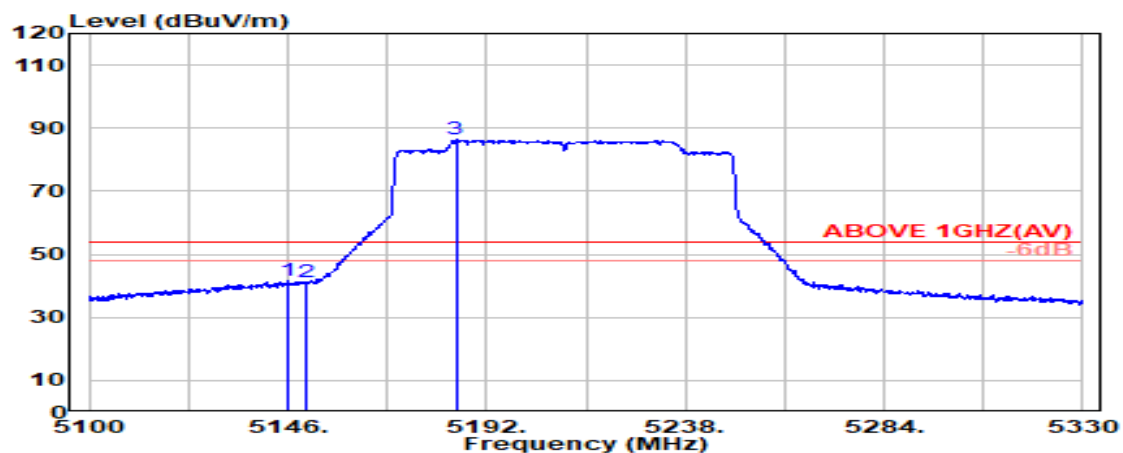

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.000	33.59	8.32	39.19	38.92	41.64	54.00	12.36	Average
5150.000	33.60	8.33	39.19	38.48	41.21	54.00	12.79	Average
@ 5184.900	33.60	8.37	39.19	83.51	86.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/67	Frequency	TX 5250MHz

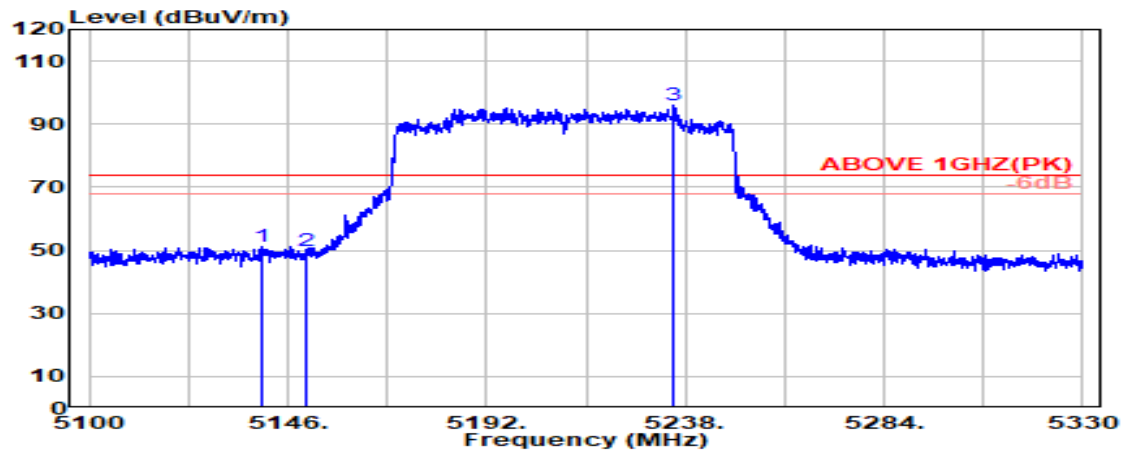

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.000	33.58	8.32	39.19	48.40	51.10	74.00	22.90	Peak
5150.000	33.60	8.33	39.19	47.29	50.02	74.00	23.98	Peak
@ 5235.400	33.67	8.42	39.18	93.31	96.22	---	---	Peak

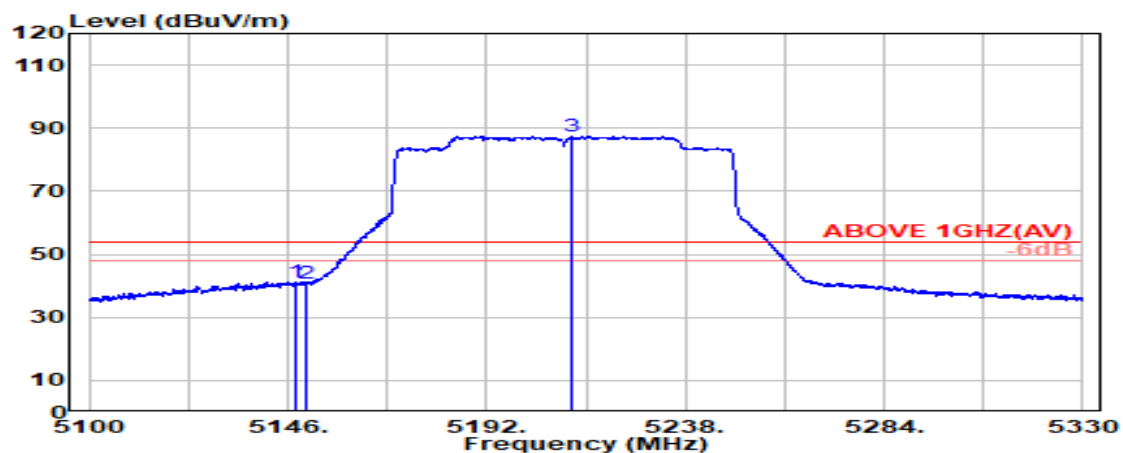

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.900	33.60	8.32	39.19	38.59	41.32	54.00	12.68	Average
5150.000	33.60	8.33	39.19	37.98	40.71	54.00	13.29	Average
@ 5211.600	33.62	8.39	39.18	84.53	87.37	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/S67	Frequency	TX 5250MHz

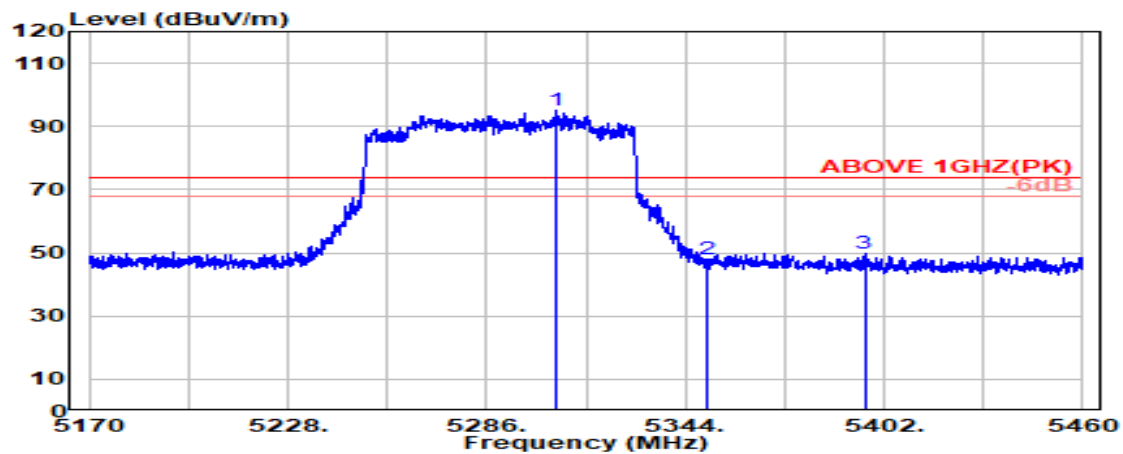

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5306.200	33.61	8.50	39.17	92.04	94.97	---	---	Peak
5350.000	33.70	8.54	39.17	44.94	48.01	74.00	25.99	Peak
5396.300	33.98	8.59	39.16	46.22	49.63	74.00	24.37	Peak

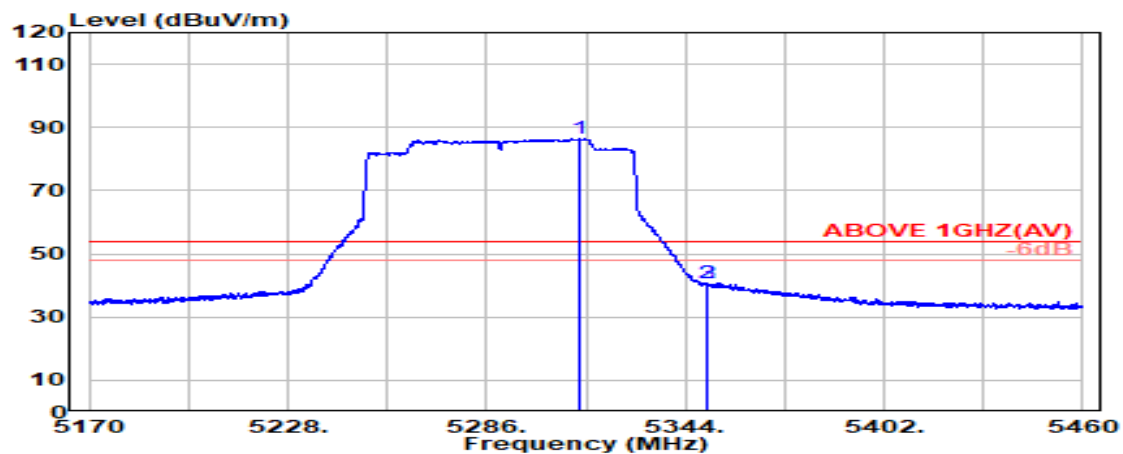

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.000	33.63	8.50	39.17	83.40	86.36	---	---	Average
5350.000	33.70	8.54	39.17	37.63	40.71	54.00	13.29	Average
5350.200	33.70	8.54	39.17	37.85	40.93	54.00	13.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/S67	Frequency	TX 5250MHz

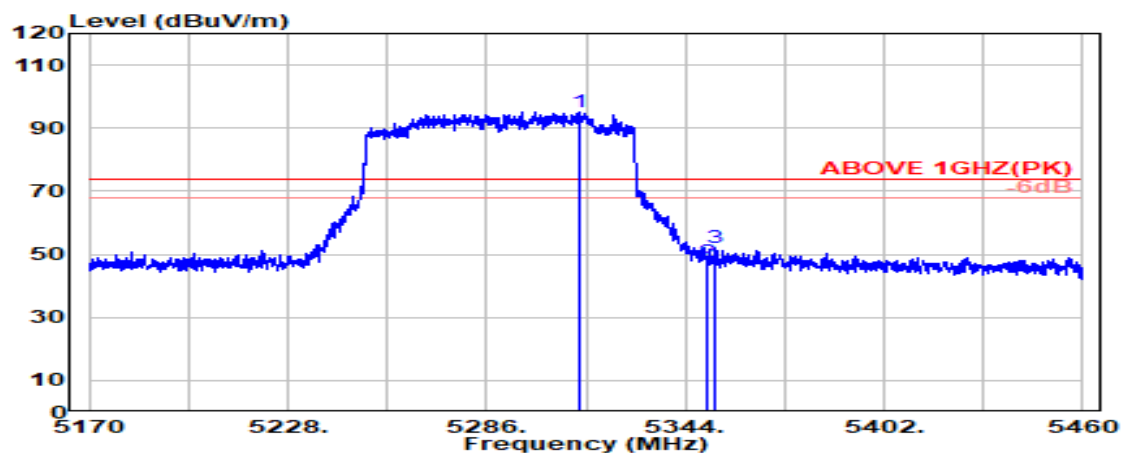

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.900	33.63	8.50	39.17	92.27	95.23	---	---	Peak
5350.000	33.70	8.54	39.17	44.67	47.74	74.00	26.26	Peak
5352.700	33.72	8.55	39.17	48.90	51.99	74.00	22.01	Peak

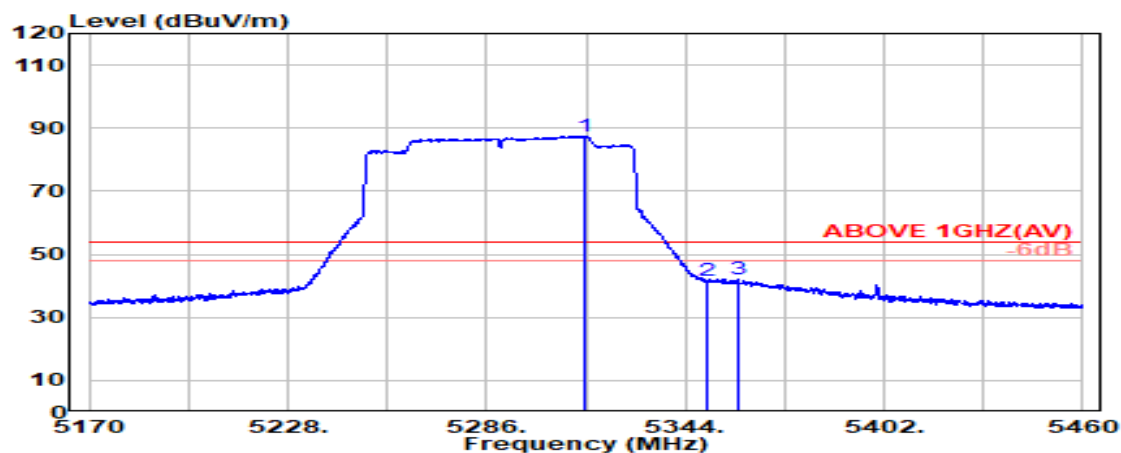

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.500	33.63	8.50	39.17	84.51	87.47	---	---	Average
5350.000	33.70	8.54	39.17	38.65	41.73	54.00	12.27	Average
5359.100	33.75	8.55	39.17	39.05	42.19	54.00	11.81	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

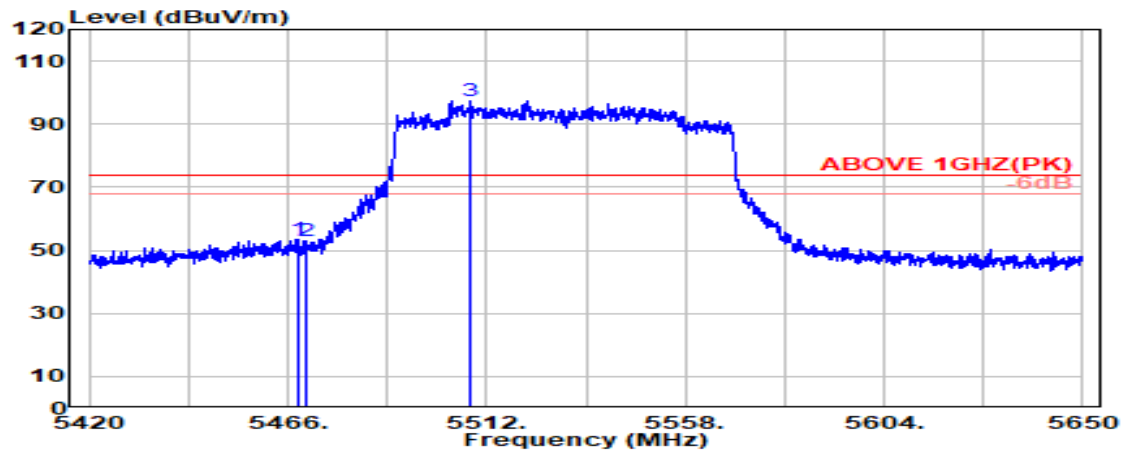

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.10	8.67	39.15	49.90	53.52	74.00	20.48	Peak
5470.000	34.10	8.67	39.15	49.43	53.05	74.00	20.95	Peak
@ 5508.300	34.08	8.71	39.15	93.74	97.37	---	---	Peak

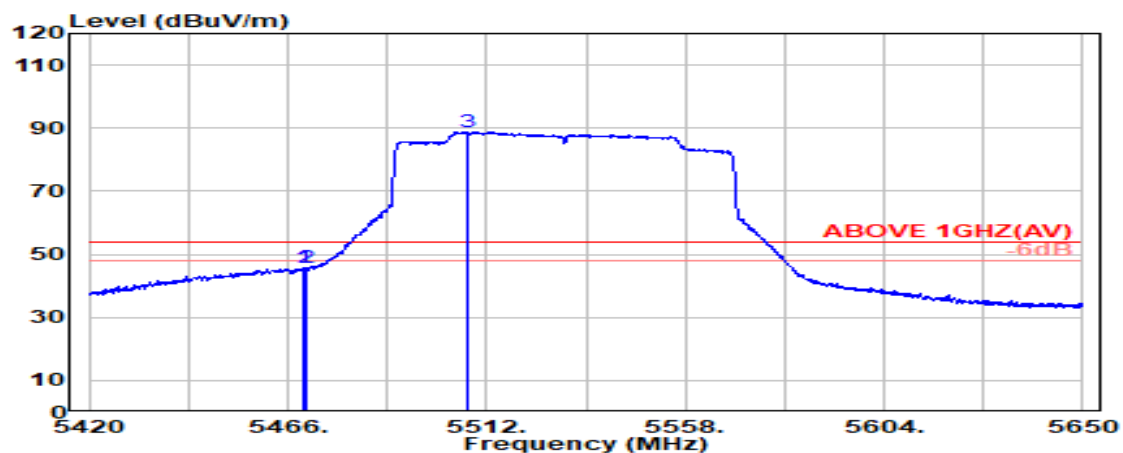

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.400	34.10	8.67	39.15	42.16	45.77	54.00	8.23	Average
5470.000	34.10	8.67	39.15	42.11	45.72	54.00	8.28	Average
@ 5507.600	34.08	8.71	39.15	85.16	88.80	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

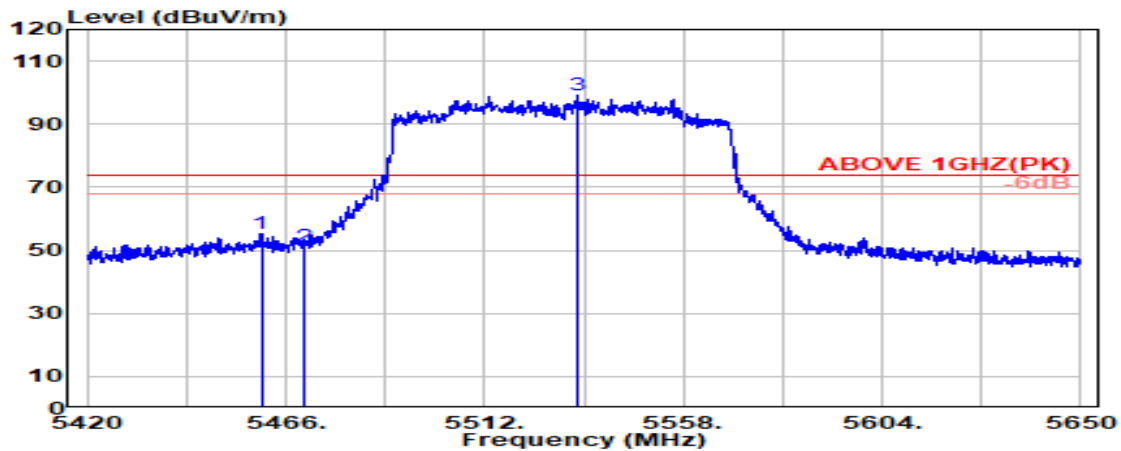

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.300	34.10	8.66	39.15	51.73	55.33	74.00	18.67	Peak
5470.000	34.10	8.67	39.15	47.76	51.38	74.00	22.62	Peak
@ 5533.600	34.03	8.73	39.16	95.57	99.18	---	---	Peak

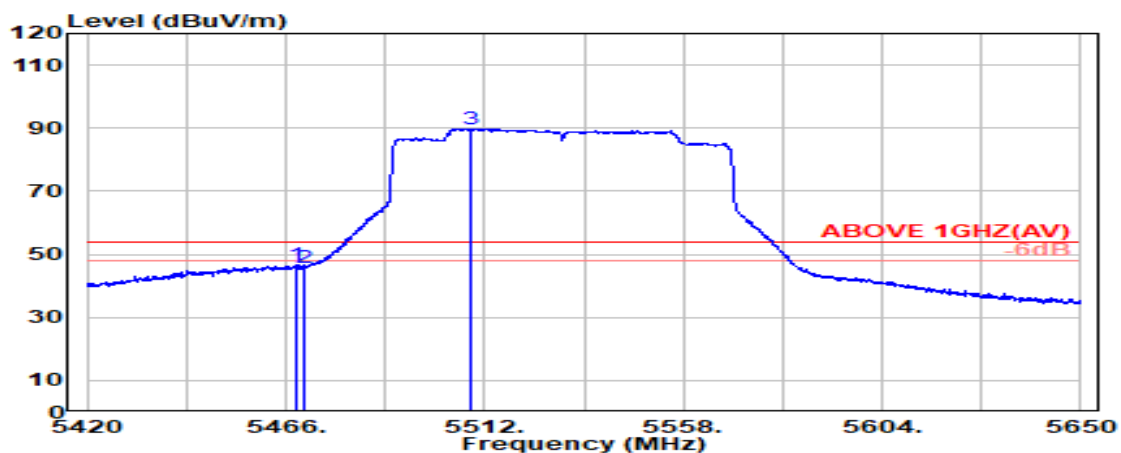

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.10	8.67	39.15	43.03	46.64	54.00	7.36	Average
5470.000	34.10	8.67	39.15	42.17	45.78	54.00	8.22	Average
@ 5508.700	34.08	8.71	39.15	86.24	89.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/S67	Frequency	TX 5570MHz

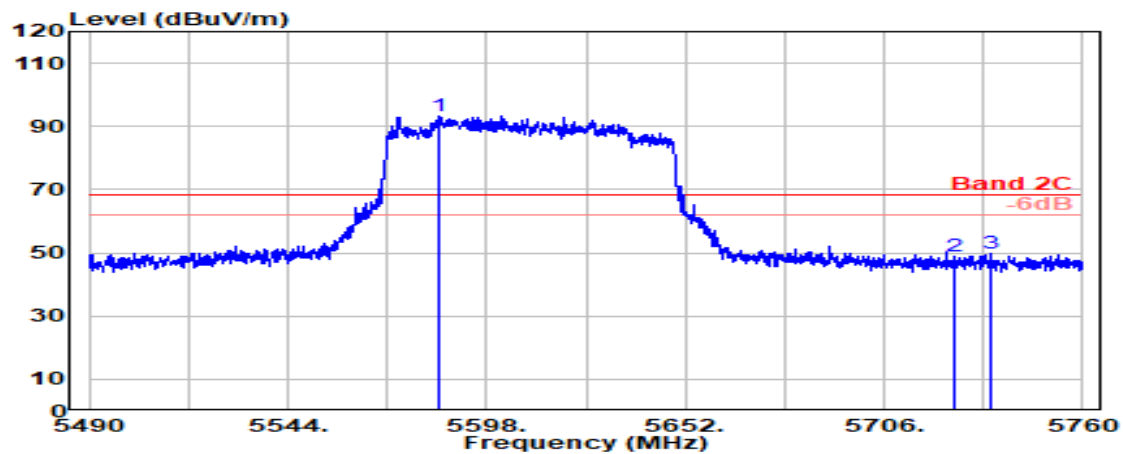

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5585.200	33.86	8.79	39.17	89.88	93.36	---	---	Peak
5725.000	33.60	8.92	39.20	45.37	48.70	68.20	19.50	Peak
5734.800	33.68	8.93	39.20	46.35	49.77	68.20	18.43	Peak

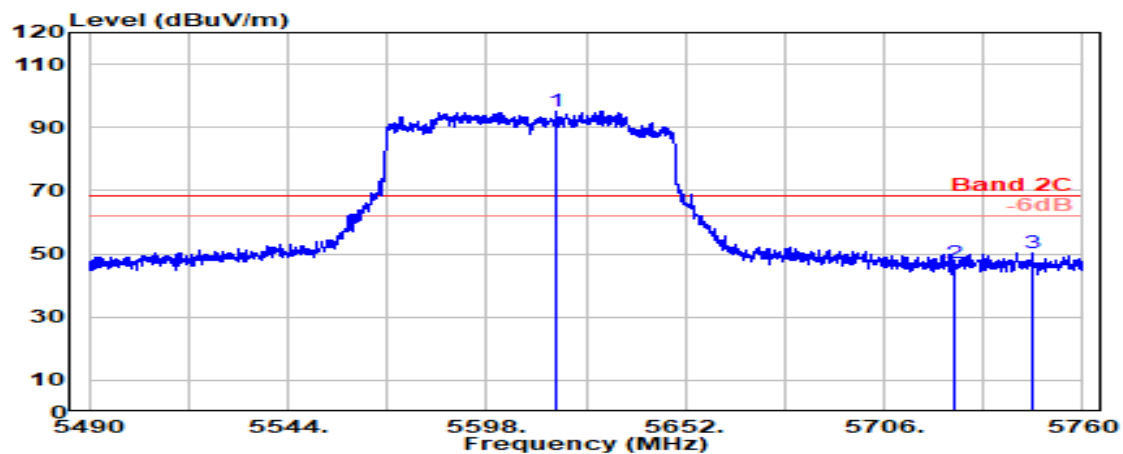

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5616.700	33.77	8.82	39.17	91.63	95.04	---	---	Peak
5725.000	33.60	8.92	39.20	43.63	46.96	68.20	21.24	Peak
5746.400	33.77	8.95	39.20	46.96	50.47	68.20	17.73	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

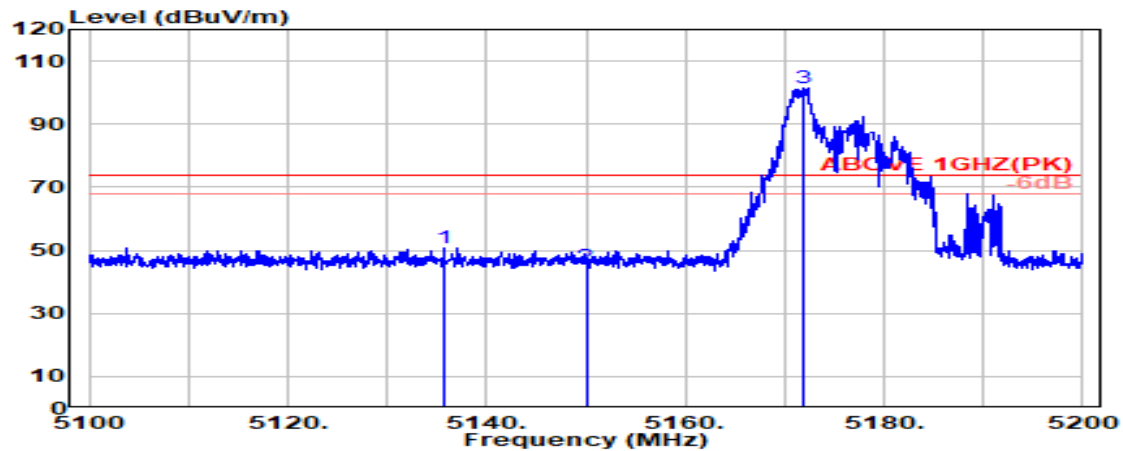

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.700	33.57	8.31	39.19	48.19	50.88	74.00	23.12	Peak
5150.000	33.60	8.33	39.19	42.27	45.01	74.00	28.99	Peak
@ 5171.950	33.60	8.35	39.19	98.58	101.34	---	---	Peak

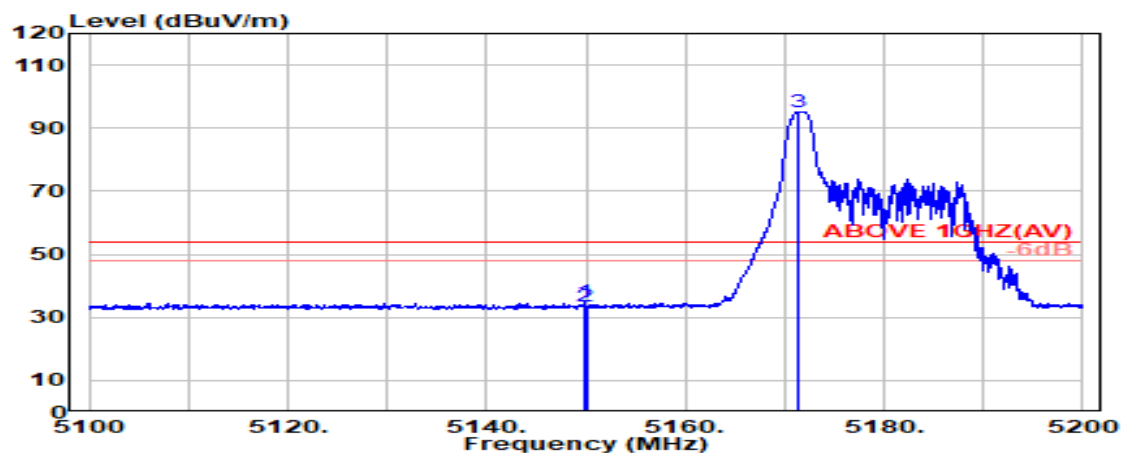

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.800	33.60	8.33	39.19	32.01	34.75	54.00	19.25	Average
5150.000	33.60	8.33	39.19	30.81	33.54	54.00	20.46	Average
@ 5171.350	33.60	8.35	39.19	92.48	95.24	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

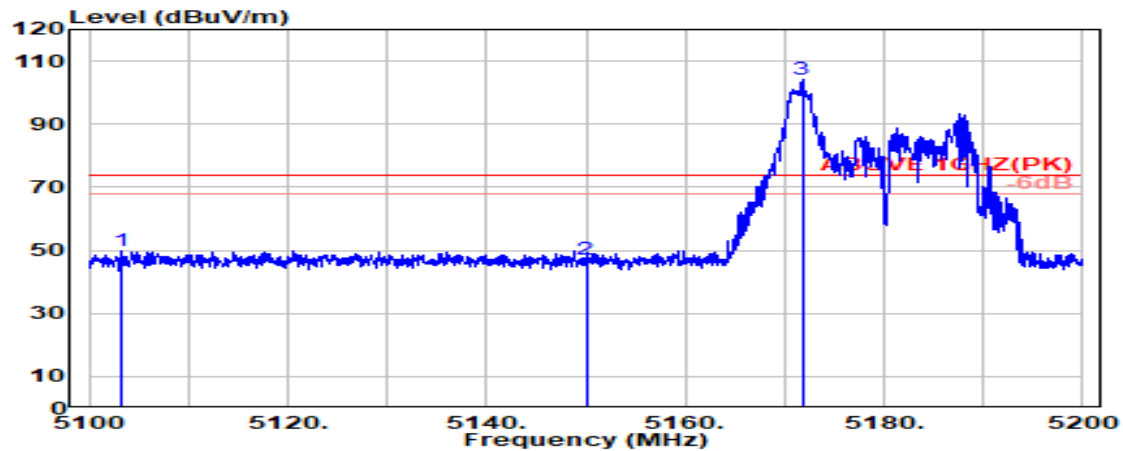

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5103.200	33.51	8.28	39.20	47.11	49.69	74.00	24.31	Peak
5150.000	33.60	8.33	39.19	44.24	46.98	74.00	27.02	Peak
@ 5171.750	33.60	8.35	39.19	101.38	104.14	---	---	Peak

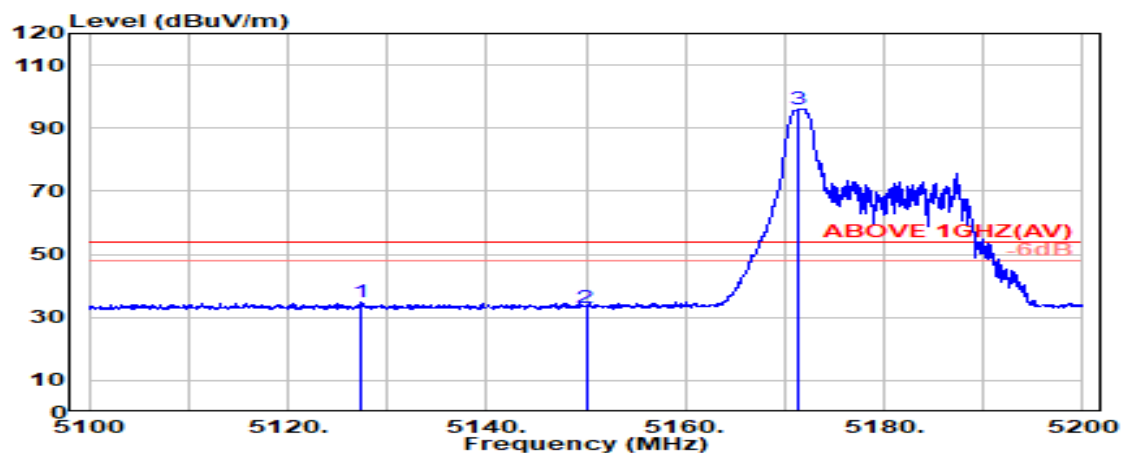

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.450	33.56	8.30	39.19	31.99	34.66	54.00	19.34	Average
5150.000	33.60	8.33	39.19	30.43	33.17	54.00	20.83	Average
@ 5171.400	33.60	8.35	39.19	93.45	96.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

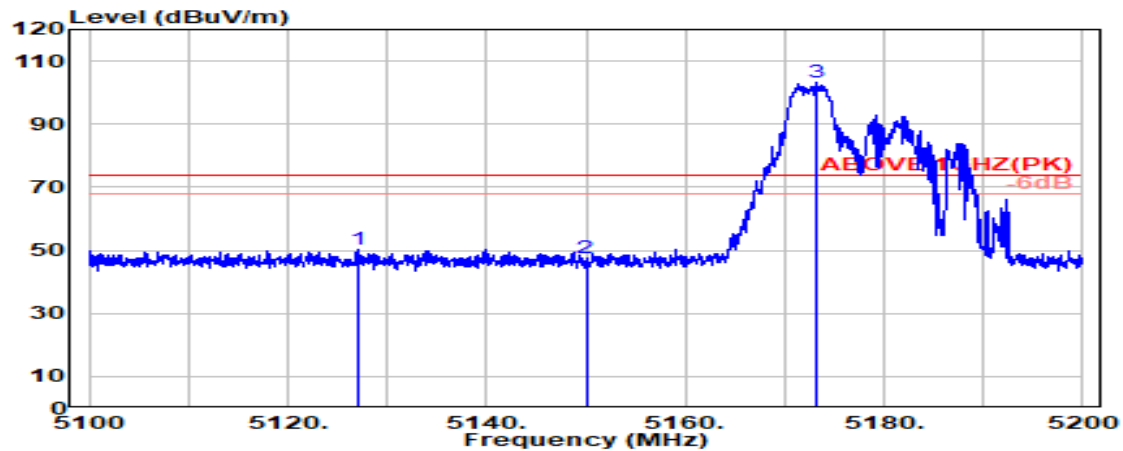

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.150	33.55	8.30	39.19	47.65	50.32	74.00	23.68	Peak
5150.000	33.60	8.33	39.19	44.81	47.55	74.00	26.45	Peak
@ 5173.200	33.60	8.35	39.19	100.38	103.14	---	---	Peak

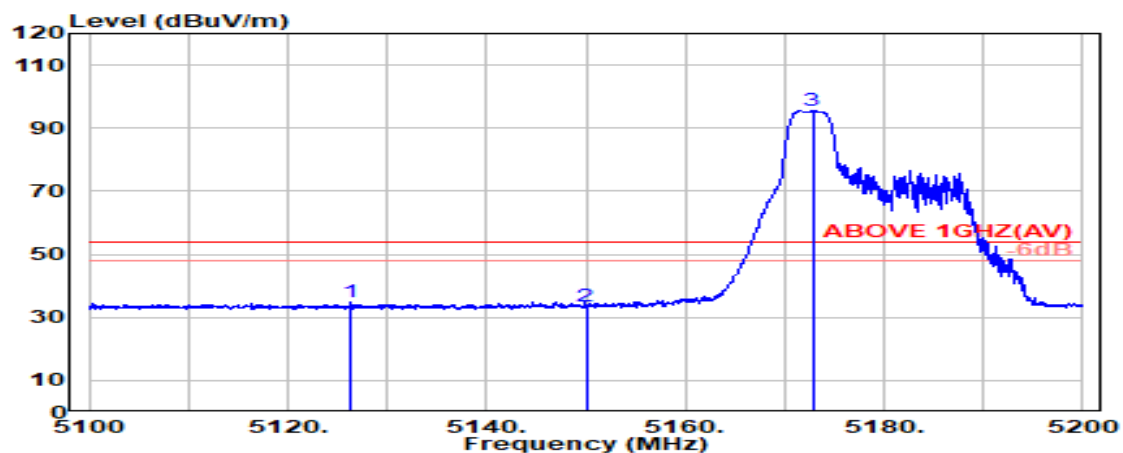

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.300	33.55	8.30	39.19	32.07	34.73	54.00	19.27	Average
5150.000	33.60	8.33	39.19	30.92	33.66	54.00	20.34	Average
@ 5172.800	33.60	8.35	39.19	92.73	95.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

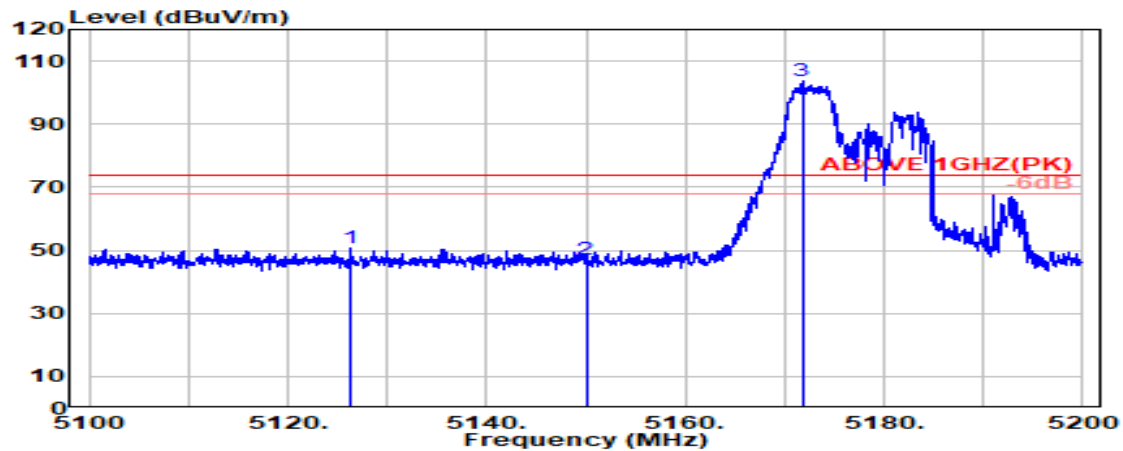

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.250	33.55	8.30	39.19	48.16	50.82	74.00	23.18	Peak
5150.000	33.60	8.33	39.19	44.38	47.12	74.00	26.88	Peak
@ 5171.750	33.60	8.35	39.19	100.98	103.74	---	---	Peak

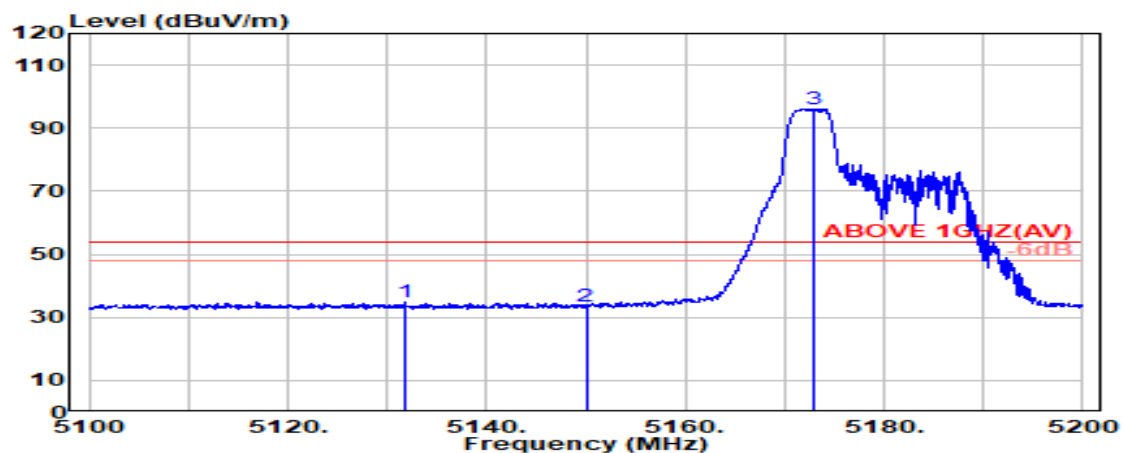

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.750	33.56	8.31	39.19	32.00	34.68	54.00	19.32	Average
5150.000	33.60	8.33	39.19	30.80	33.54	54.00	20.46	Average
@ 5172.950	33.60	8.35	39.19	93.45	96.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

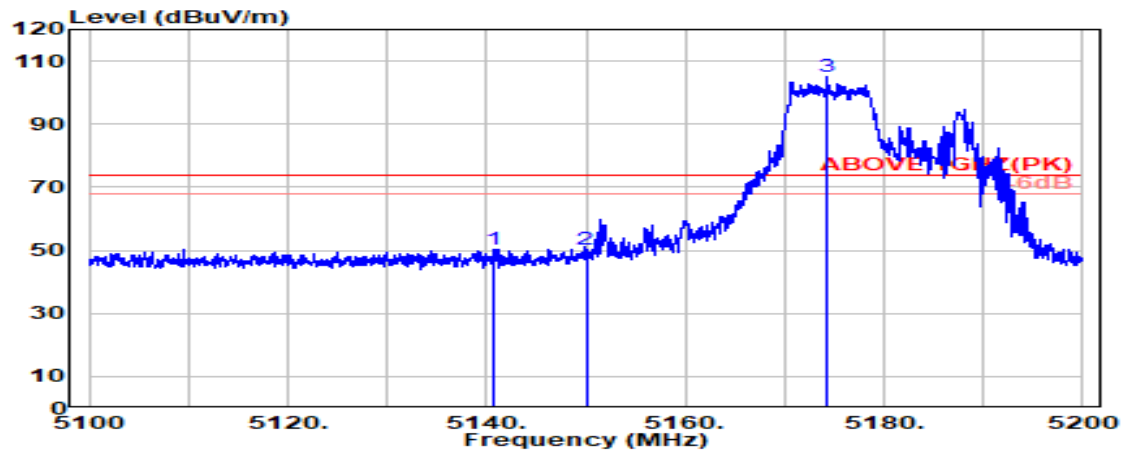

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.750	33.58	8.32	39.19	47.71	50.41	74.00	23.59	Peak
5150.000	33.60	8.33	39.19	47.35	50.08	74.00	23.92	Peak
@ 5174.300	33.60	8.35	39.19	102.21	104.97	---	---	Peak

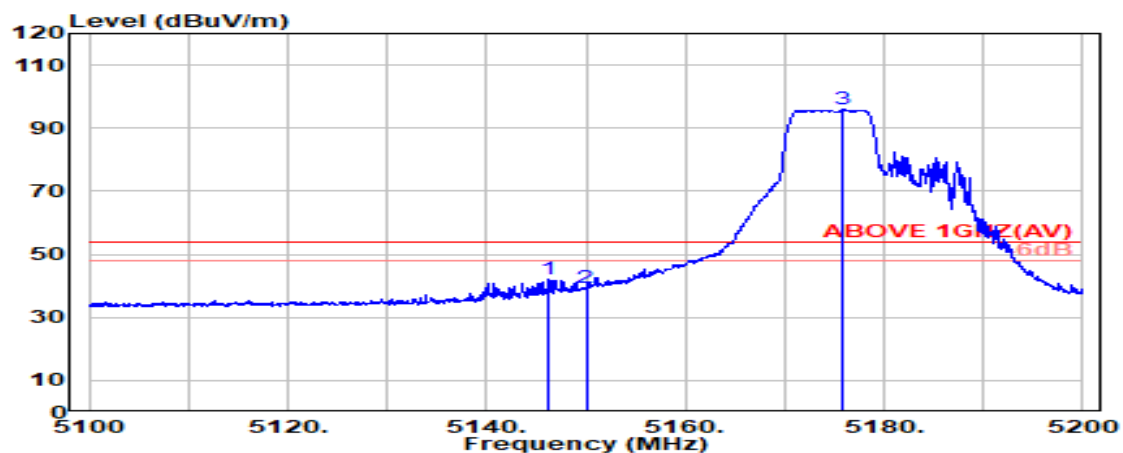

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.300	33.59	8.32	39.19	39.21	41.93	54.00	12.07	Average
5150.000	33.60	8.33	39.19	36.75	39.48	54.00	14.52	Average
@ 5175.900	33.60	8.36	39.19	93.11	95.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

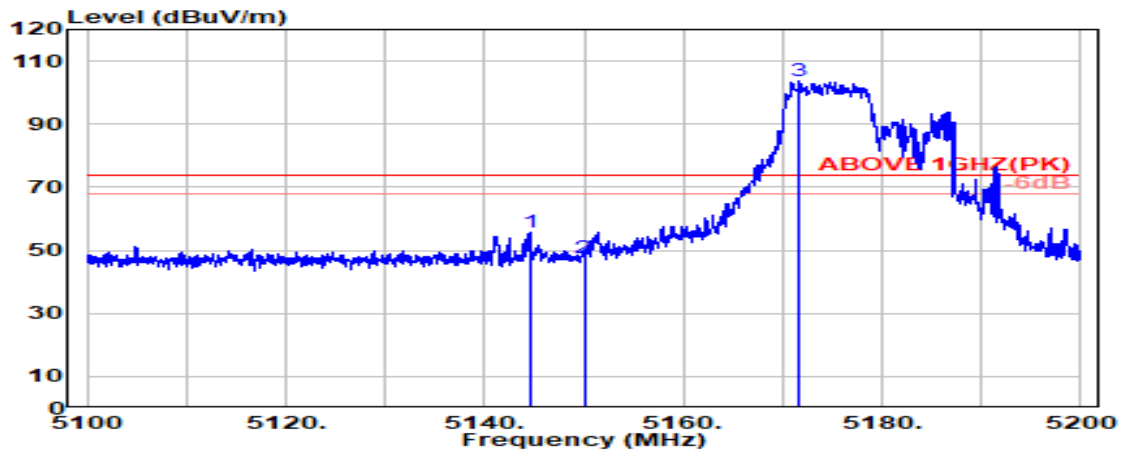

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.550	33.59	8.32	39.19	52.78	55.50	74.00	18.50	Peak
5150.000	33.60	8.33	39.19	44.83	47.56	74.00	26.44	Peak
@ 5171.700	33.60	8.35	39.19	100.82	103.58	---	---	Peak

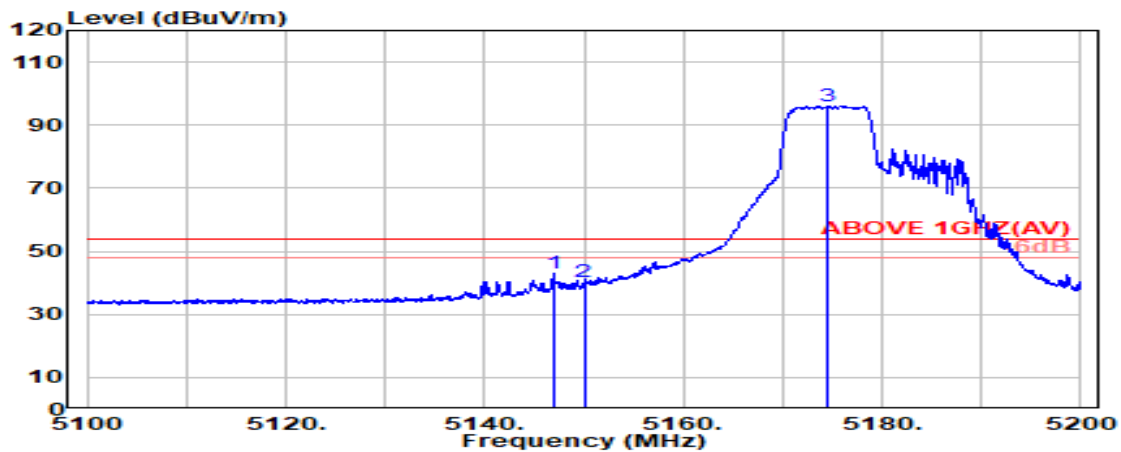

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.000	33.59	8.32	39.19	40.19	42.91	54.00	11.09	Average
5150.000	33.60	8.33	39.19	37.68	40.42	54.00	13.58	Average
@ 5174.600	33.60	8.35	39.19	93.36	96.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

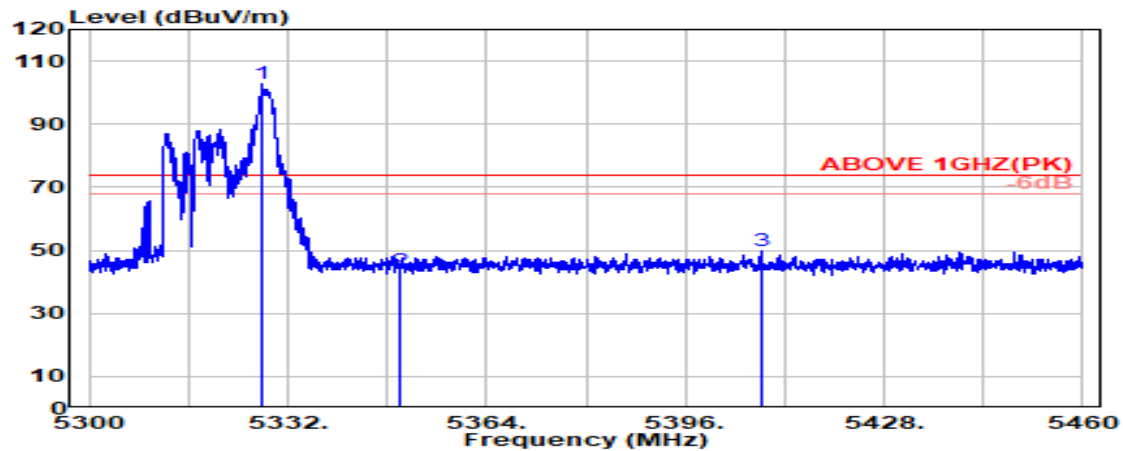

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.850	33.66	8.52	39.17	99.74	102.74	---	---	Peak
5350.000	33.70	8.54	39.17	40.21	43.28	74.00	30.72	Peak
5408.200	34.02	8.60	39.16	46.31	49.77	74.00	24.23	Peak

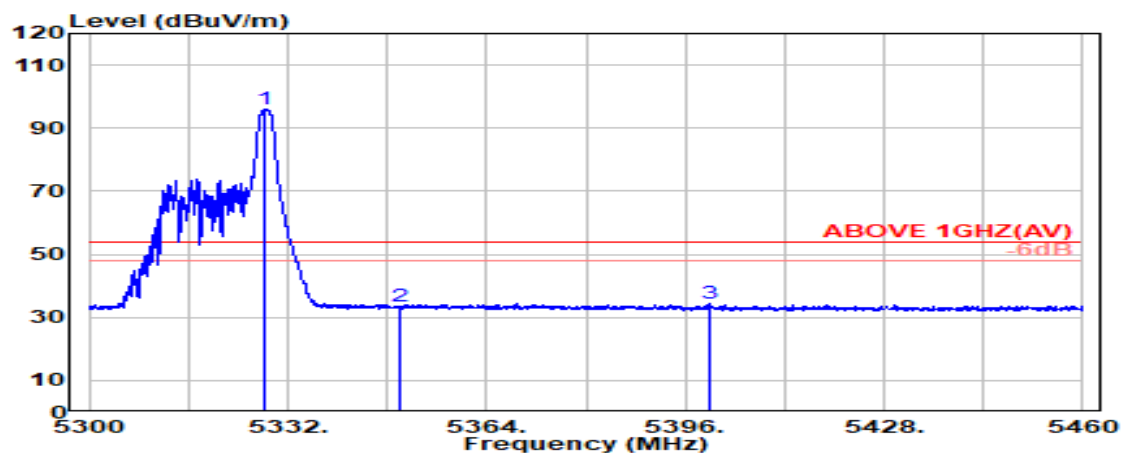

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.250	33.66	8.52	39.17	92.93	95.93	---	---	Average
5350.000	33.70	8.54	39.17	30.23	33.31	54.00	20.69	Average
5399.800	34.00	8.59	39.16	31.18	34.61	54.00	19.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

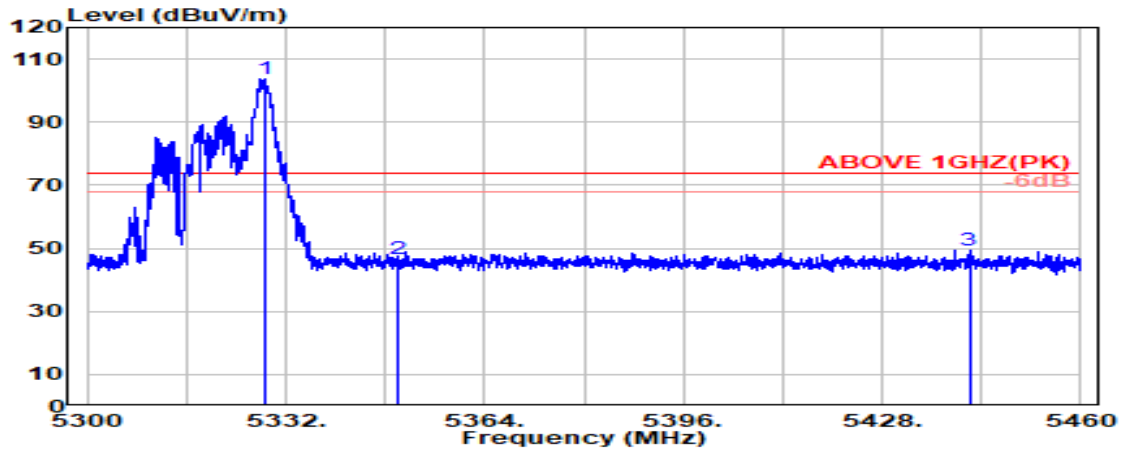

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.650	33.66	8.52	39.17	100.59	103.60	---	---	Peak
5350.000	33.70	8.54	39.17	43.73	46.81	74.00	27.19	Peak
5442.050	34.08	8.64	39.16	45.71	49.28	74.00	24.72	Peak

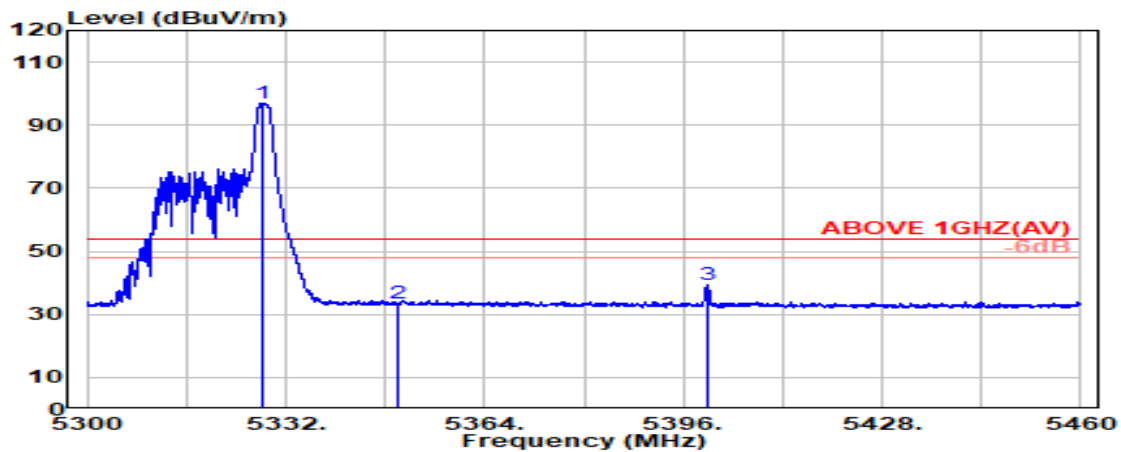

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	33.66	8.52	39.17	94.08	97.08	---	---	Average
5350.000	33.70	8.54	39.17	30.31	33.38	54.00	20.62	Average
5399.900	34.00	8.59	39.16	35.93	39.36	54.00	14.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

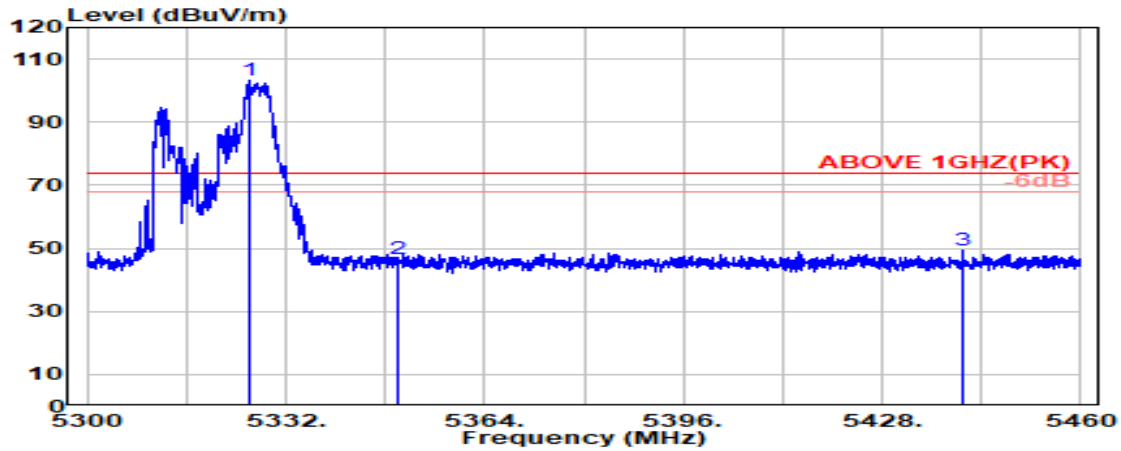

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.100	33.65	8.52	39.17	100.06	103.06	---	---	Peak
5350.000	33.70	8.54	39.17	43.55	46.63	74.00	27.37	Peak
5441.000	34.08	8.64	39.16	45.65	49.22	74.00	24.78	Peak

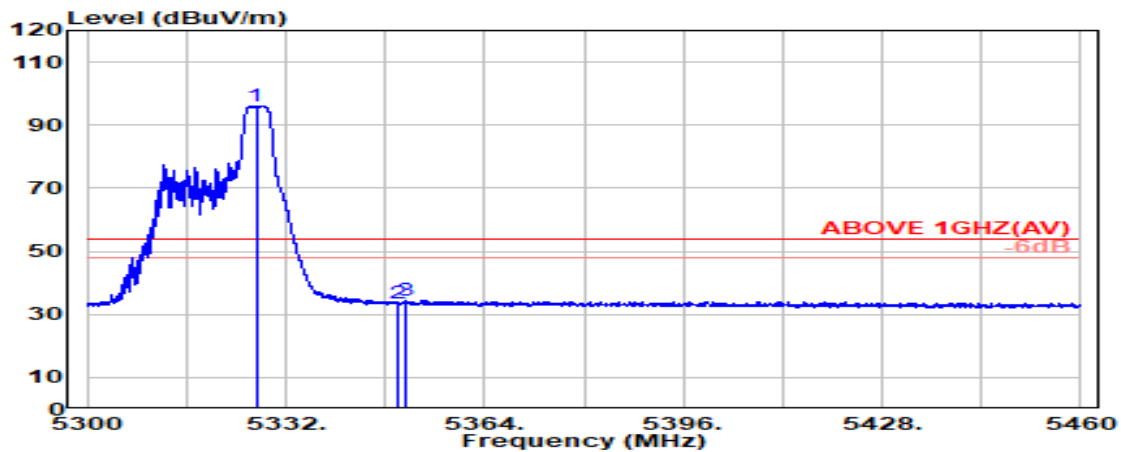

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	33.65	8.52	39.17	93.04	96.05	---	---	Average
5350.000	33.70	8.54	39.17	30.37	33.44	54.00	20.56	Average
5351.450	33.71	8.54	39.17	31.39	34.48	54.00	19.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

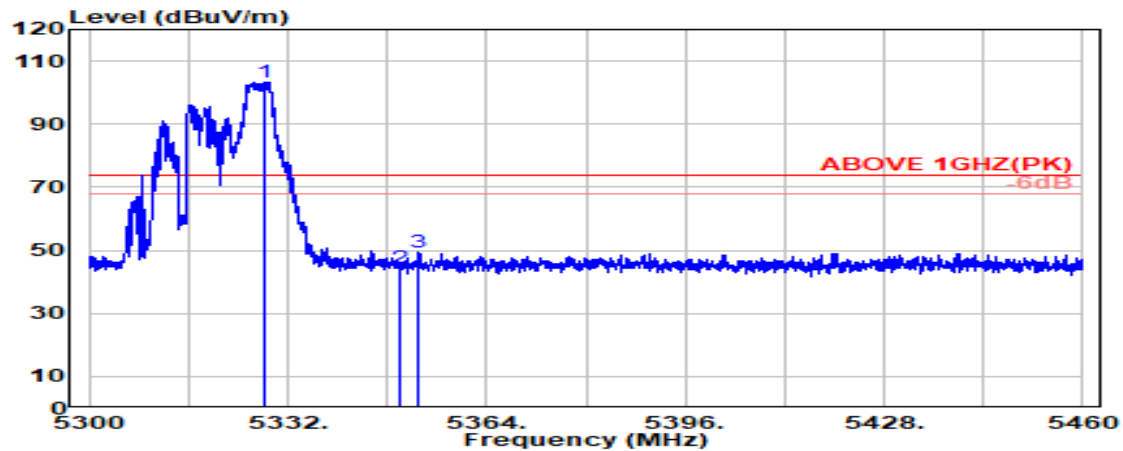

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.350	33.66	8.52	39.17	100.45	103.46	---	---	Peak
5350.000	33.70	8.54	39.17	41.27	44.34	74.00	29.66	Peak
5353.150	33.72	8.55	39.17	46.10	49.20	74.00	24.80	Peak

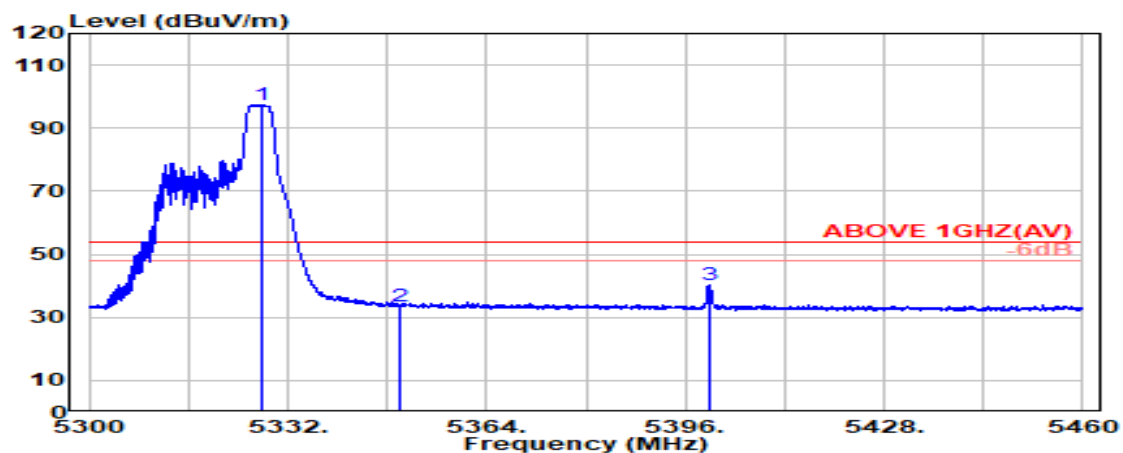

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.950	33.66	8.52	39.17	94.49	97.49	---	---	Average
5350.000	33.70	8.54	39.17	30.49	33.56	54.00	20.44	Average
5399.950	34.00	8.59	39.16	36.74	40.17	54.00	13.83	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

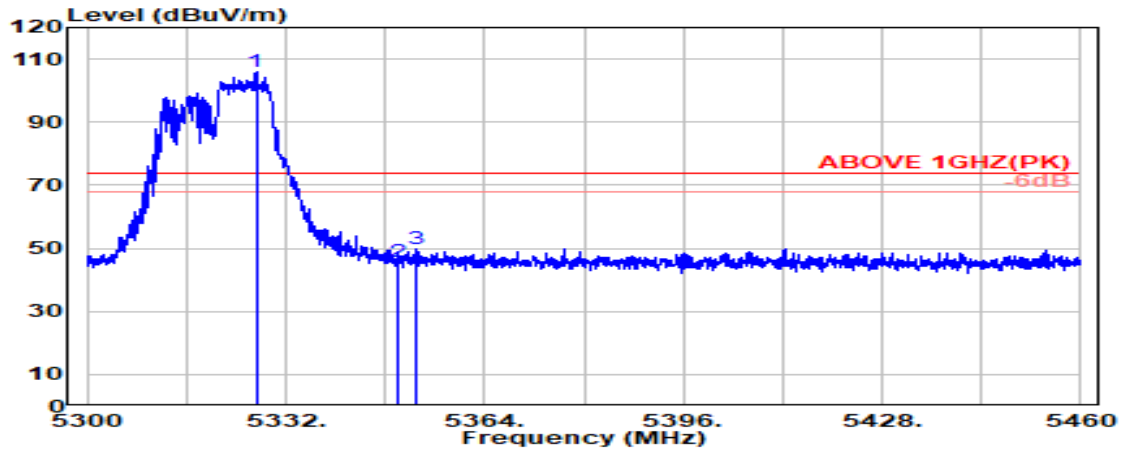

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	33.65	8.52	39.17	102.96	105.96	---	---	Peak
5350.000	33.70	8.54	39.17	42.66	45.74	74.00	28.26	Peak
5352.950	33.72	8.55	39.17	46.90	50.00	74.00	24.00	Peak

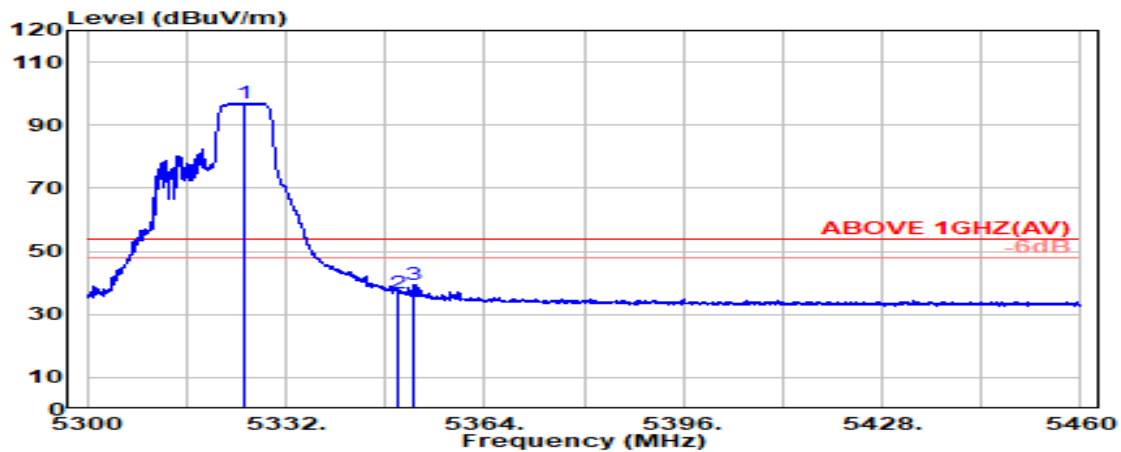

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.400	33.65	8.52	39.17	94.06	97.06	---	---	Average
5350.000	33.70	8.54	39.17	33.42	36.49	54.00	17.51	Average
5352.750	33.72	8.55	39.17	36.24	39.33	54.00	14.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

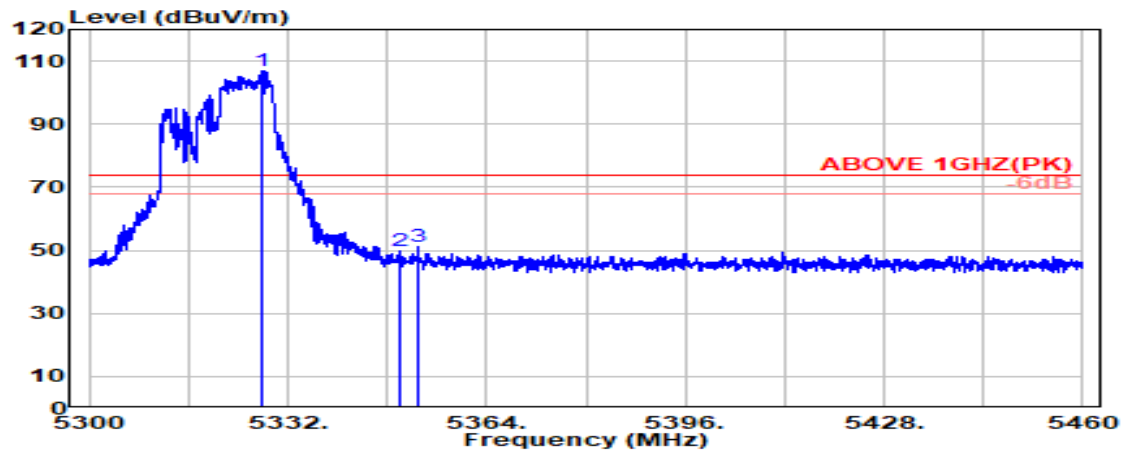

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	33.66	8.52	39.17	103.92	106.93	---	---	Peak
5350.000	33.70	8.54	39.17	46.92	49.99	74.00	24.01	Peak
5353.000	33.72	8.55	39.17	48.02	51.11	74.00	22.89	Peak

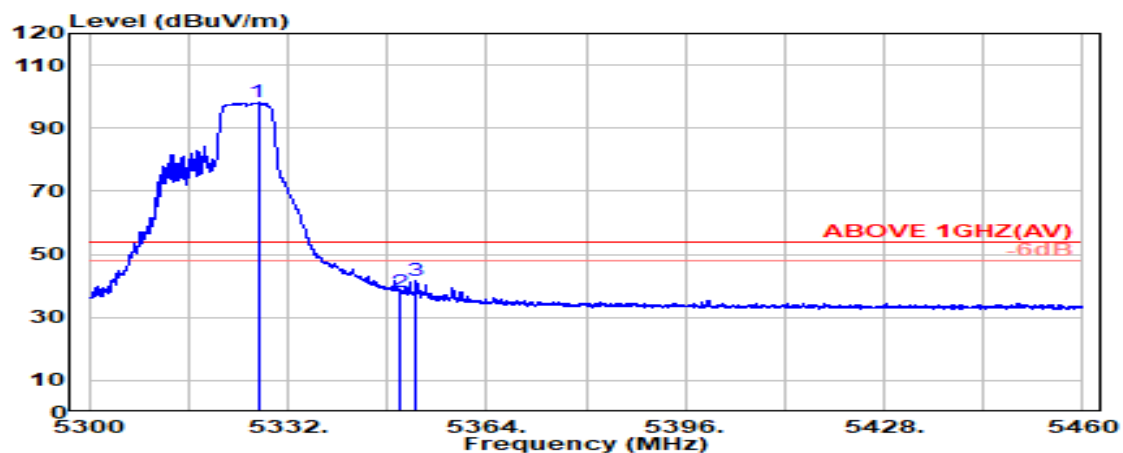

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	33.65	8.52	39.17	95.05	98.05	---	---	Average
5350.000	33.70	8.54	39.17	34.93	38.00	54.00	16.00	Average
5352.750	33.72	8.55	39.17	38.45	41.55	54.00	12.45	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

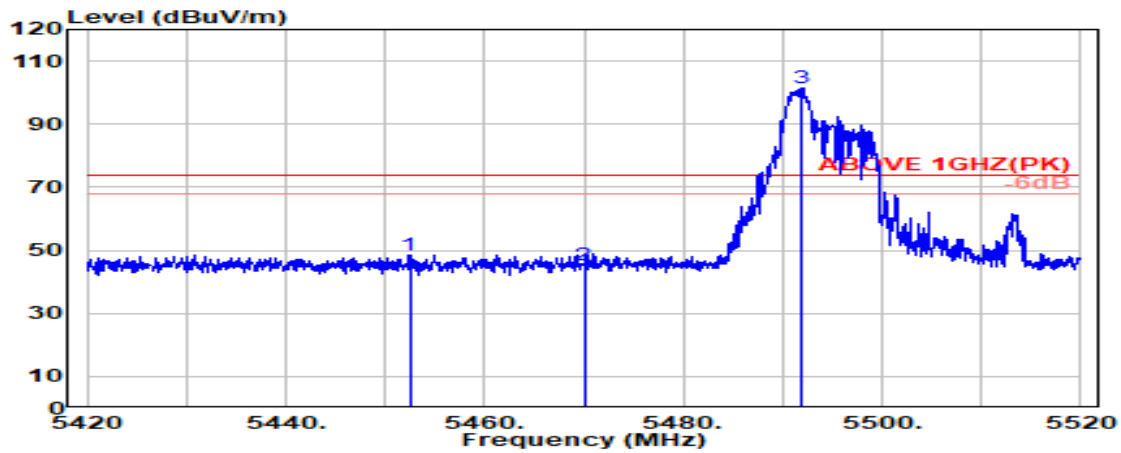

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.450	34.10	8.65	39.16	45.07	48.67	74.00	25.33	Peak
5470.000	34.10	8.67	39.15	41.73	45.35	74.00	28.65	Peak
@ 5491.800	34.10	8.69	39.15	97.97	101.61	---	---	Peak

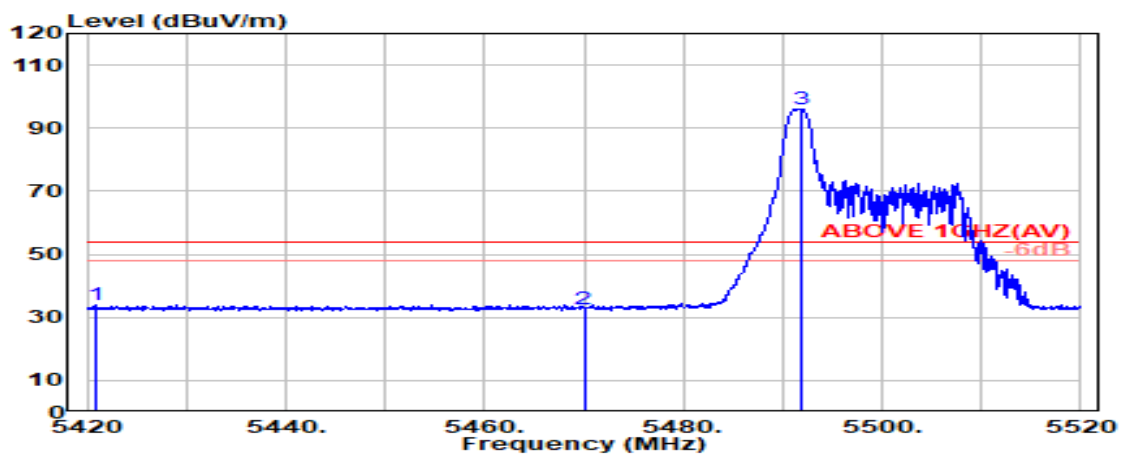

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.800	34.04	8.62	39.16	30.68	34.18	54.00	19.82	Average
5470.000	34.10	8.67	39.15	29.18	32.79	54.00	21.21	Average
@ 5491.800	34.10	8.69	39.15	92.46	96.09	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.