

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION.....	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	116
A.2.3 Emissions in Non-restricted Frequency Bands:.....	124
A.3 DTS/OCCUPIED BANDWIDTH.....	125
A.3.1 DTS/Occupied Bandwidth Result.....	125
A.3.2 Measurement Plots	127
A.4 MAXIMUM PEAK OUTPUT POWER	133
A.4.1 Peak Output Power	133
A.4.2 Average Output Power (Reporting only).....	137
A.5 EMISSION LIMITATIONS	143
A.6 POWER SPECTRAL DENSITY	177
A.6.1 Power Spectral Density Result	177
A.6.2 Measurement Plots	180

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2025/10/08	Temp./Hum.	25°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du

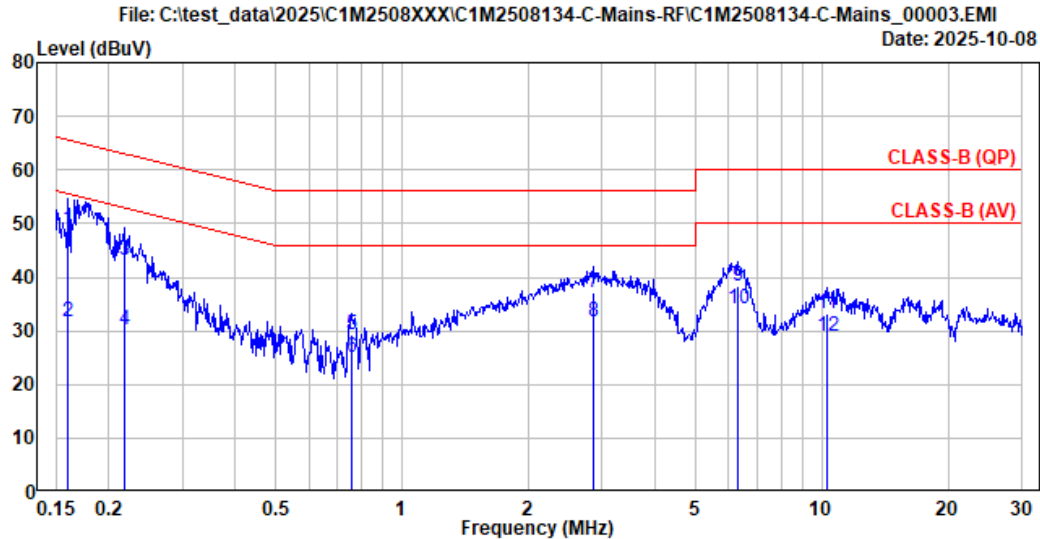

Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 25°C/52%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z95U	Engineer	: Nick Du
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.160	10.32	0.03	9.85	28.80	49.00	65.46	16.46	QP
2	0.160	10.32	0.03	9.85	11.48	31.68	55.46	23.78	Average
3	0.218	10.31	0.03	9.85	22.86	43.05	62.90	19.85	QP
4	0.218	10.31	0.03	9.85	9.88	30.07	52.90	22.83	Average
5	0.762	10.31	0.04	9.85	9.09	29.29	56.00	26.71	QP
6	0.762	10.31	0.04	9.85	4.86	25.06	46.00	20.94	Average
7	2.854	10.36	0.07	9.86	16.83	37.12	56.00	18.88	QP
8	2.854	10.36	0.07	9.86	11.47	31.76	46.00	14.24	Average
9	6.335	10.50	0.10	9.87	17.75	38.22	60.00	21.78	QP
10	6.335	10.50	0.10	9.87	13.55	34.02	50.00	15.98	Average
11	10.274	10.63	0.14	9.89	12.42	33.08	60.00	26.92	QP
12	10.274	10.63	0.14	9.89	8.30	28.96	50.00	21.04	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2025/10/08	Temp./Hum.	25°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du

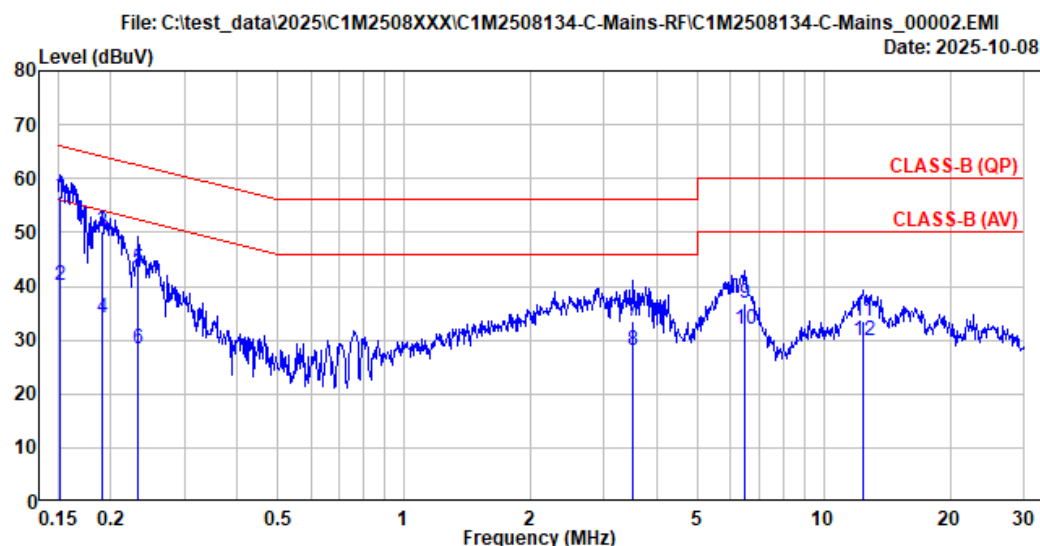

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 25°C/52%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z95U	Engineer	: Nick Du
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.34	0.03	9.85	36.41	56.63	65.92	9.29	QP
2	0.152	10.34	0.03	9.85	20.07	40.29	55.92	15.63	Average
3	0.191	10.33	0.03	9.85	29.77	49.98	64.01	14.03	QP
4	0.191	10.33	0.03	9.85	13.84	34.05	54.01	19.96	Average
5	0.233	10.33	0.03	9.85	22.85	43.06	62.36	19.30	QP
6	0.233	10.33	0.03	9.85	8.22	28.43	52.36	23.93	Average
7	3.518	10.36	0.08	9.86	13.23	33.53	56.00	22.47	QP
8	3.518	10.36	0.08	9.86	7.81	28.11	46.00	17.89	Average
9	6.495	10.45	0.11	9.87	16.40	36.83	60.00	23.17	QP
10	6.495	10.45	0.11	9.87	11.56	31.99	50.00	18.01	Average
11	12.416	10.57	0.15	9.90	13.01	33.63	60.00	26.37	QP
12	12.416	10.57	0.15	9.90	9.17	29.79	50.00	20.21	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2025/09/22~10/03	Temp./Hum.	23~24°C/56~57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Harry Huang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.2 Frequency Below 1GHz

● Wireless LAN Mode

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
86.500	13.83	2.40	26.31	39.73	29.65	40.00	10.35	Peak
177.500	15.22	3.49	25.87	37.49	30.33	43.50	13.17	Peak
272.500	18.81	4.42	25.65	36.08	33.66	46.00	12.34	Peak
588.000	24.16	7.11	27.35	32.71	36.63	46.00	9.37	Peak
612.000	24.31	7.20	27.38	34.82	38.95	46.00	7.05	Peak
966.000	26.88	9.20	26.80	28.32	37.60	54.00	16.40	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
64.500	11.97	2.10	26.38	42.66	30.34	40.00	9.66	Peak
86.500	13.83	2.40	26.31	43.59	33.51	40.00	6.49	Peak
116.500	17.77	2.81	26.16	39.87	34.29	43.50	9.21	Peak
227.500	17.08	3.96	25.73	37.75	33.06	46.00	12.94	Peak
497.000	23.06	6.92	27.06	32.15	35.07	46.00	10.93	Peak
967.500	26.89	9.20	26.79	27.37	36.67	54.00	17.33	Peak

● BLE Mode

Mode	BLE (1Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
88.000	14.11	2.42	26.30	38.16	28.39	40.00	11.61	Peak
230.500	17.26	3.99	25.72	37.51	33.04	46.00	12.96	Peak
432.500	22.01	6.37	26.64	35.66	37.39	46.00	8.61	Peak
696.500	24.55	7.62	27.41	35.19	39.96	46.00	6.04	Peak
936.500	26.68	9.03	26.89	30.50	39.32	46.00	6.68	Peak
993.500	27.08	9.35	26.72	28.93	38.63	54.00	15.37	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
64.000	11.97	2.09	26.39	45.86	33.53	40.00	6.47	Peak
87.000	13.94	2.41	26.31	44.57	34.61	40.00	5.39	Peak
116.000	17.74	2.80	26.17	40.97	35.35	43.50	8.15	Peak
231.000	17.29	4.00	25.72	37.61	33.18	46.00	12.82	Peak
533.500	23.54	7.01	27.19	33.36	36.72	46.00	9.28	Peak
991.000	27.05	9.33	26.73	27.83	37.49	54.00	16.51	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


● Wireless LAN Mode

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

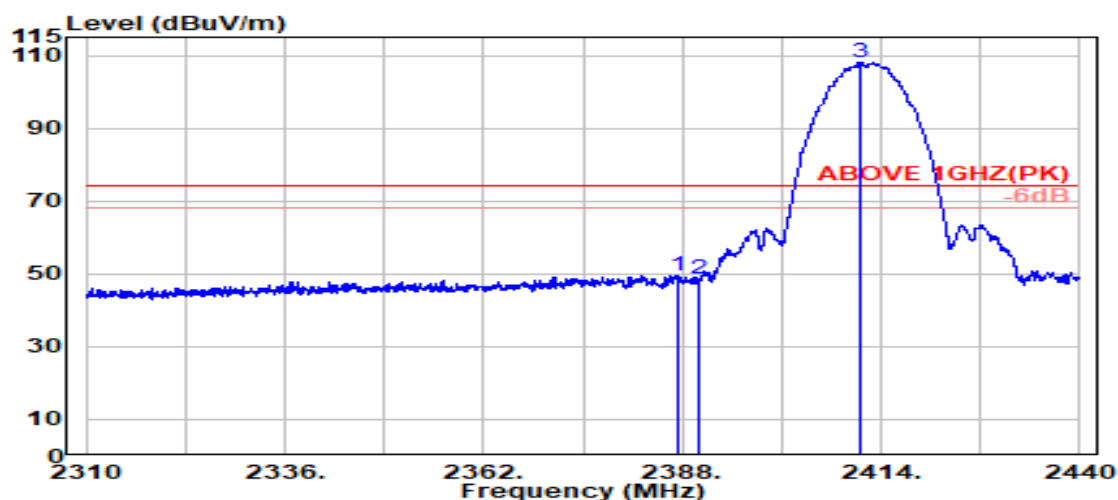

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.404	28.20	5.70	39.92	55.62	49.60	74.00	24.40	Peak
2390.000	28.20	5.70	39.92	54.53	48.52	74.00	25.48	Peak
@ 2411.183	28.22	5.73	39.92	114.11	108.15	---	---	Peak

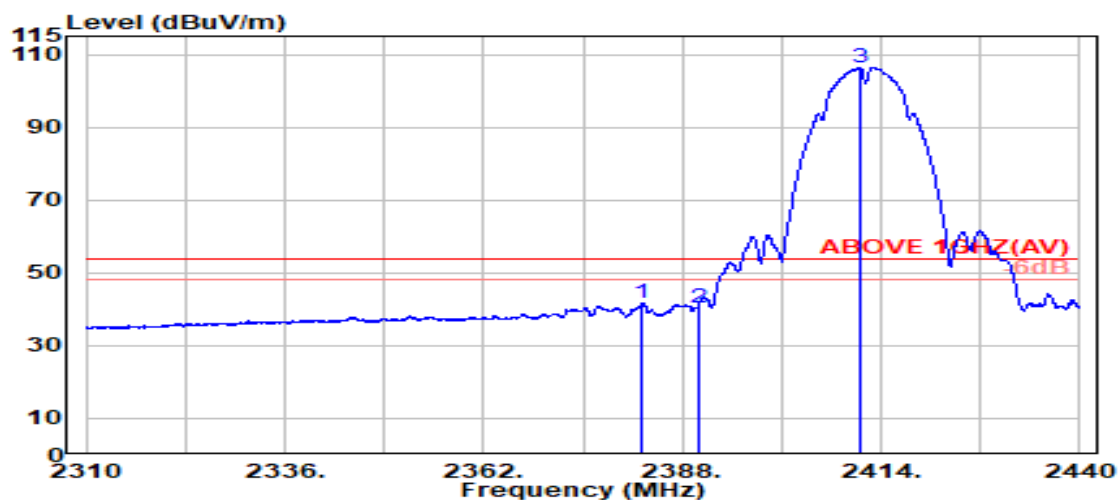

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.746	28.20	5.69	39.92	47.84	41.81	54.00	12.19	Average
2390.000	28.20	5.70	39.92	46.56	40.54	54.00	13.46	Average
@ 2411.238	28.22	5.73	39.92	112.46	106.49	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

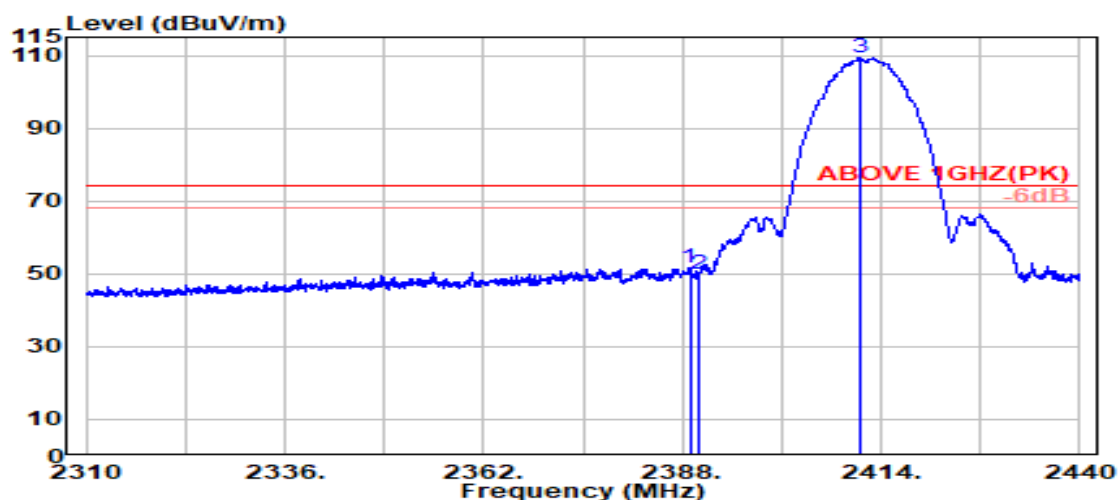

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.975	28.20	5.70	39.92	57.75	51.73	74.00	22.27	Peak
2390.000	28.20	5.70	39.92	55.73	49.71	74.00	24.29	Peak
@ 2411.83	28.22	5.73	39.92	115.38	109.41	---	---	Peak

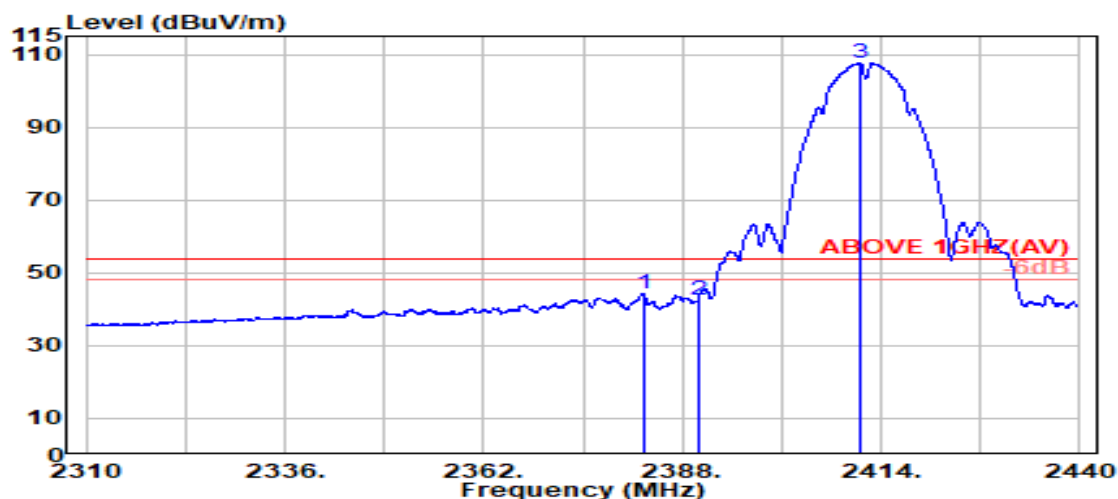

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.908	28.20	5.69	39.92	50.27	44.24	54.00	9.76	Average
2390.000	28.20	5.70	39.92	48.71	42.70	54.00	11.30	Average
@ 2411.292	28.22	5.73	39.92	113.59	107.63	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

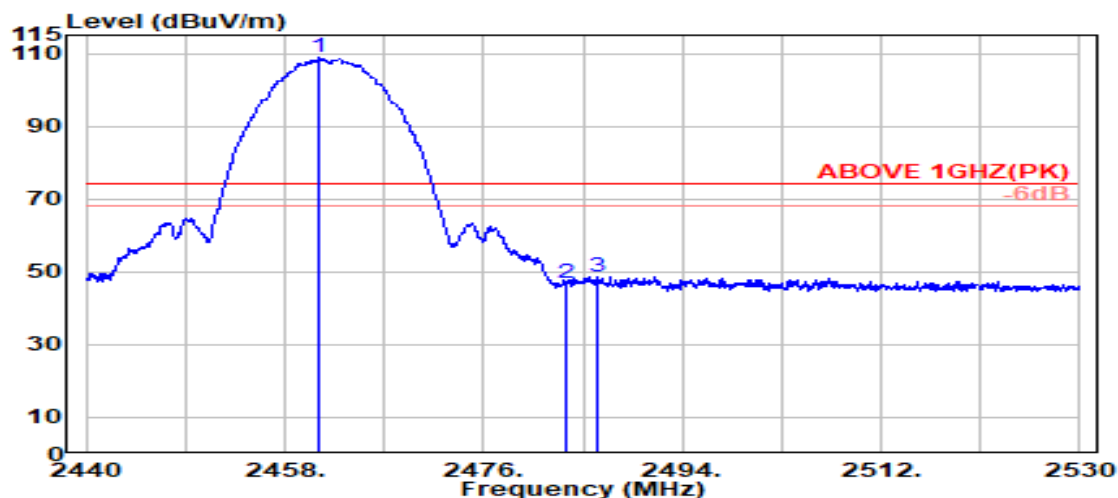

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.150	28.34	5.80	39.92	114.49	108.71	---	---	Peak
2483.500	28.43	5.83	39.92	52.73	47.07	74.00	26.93	Peak
2486.200	28.45	5.83	39.92	54.41	48.76	74.00	25.24	Peak

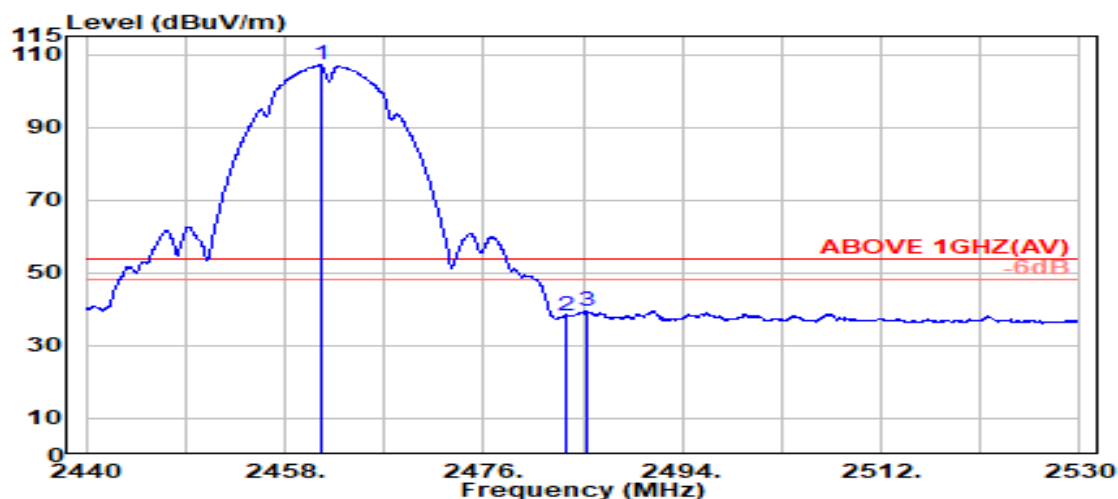

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.250	28.35	5.80	39.92	112.76	106.99	---	---	Average
2483.500	28.43	5.83	39.92	43.93	38.27	54.00	15.73	Average
2485.300	28.44	5.83	39.92	45.16	39.51	54.00	14.49	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

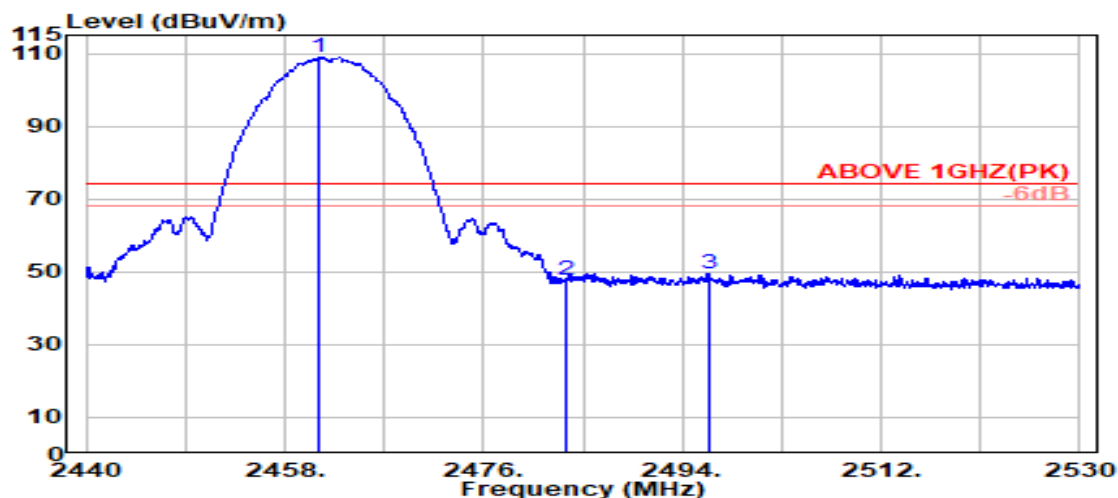

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.150	28.34	5.80	39.92	114.85	109.07	---	---	Peak
	2483.500	28.43	5.83	39.92	53.50	47.84	74.00	26.16	Peak
	2496.350	28.49	5.85	39.92	55.14	49.55	74.00	24.45	Peak

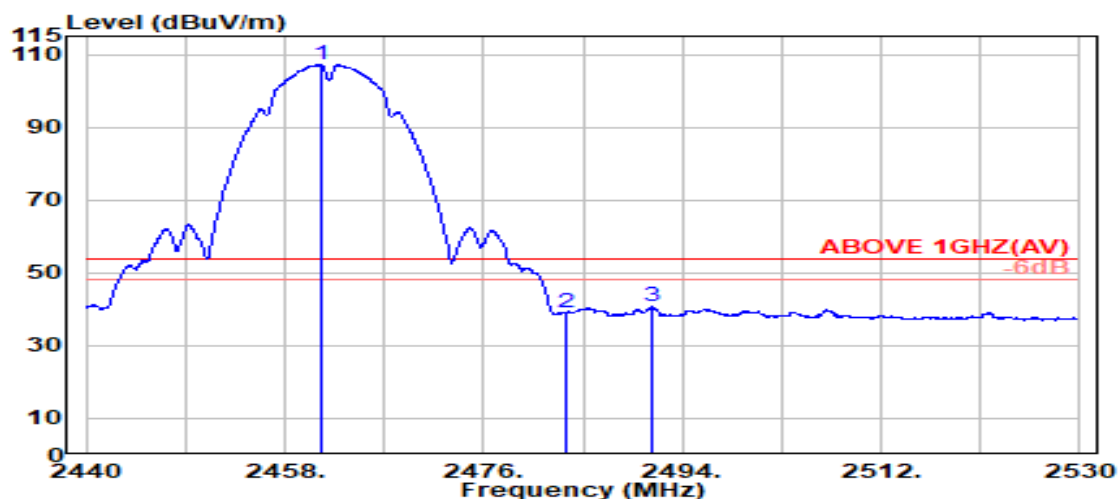


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.300	28.35	5.80	39.92	113.05	107.28	---	---	Average
	2483.500	28.43	5.83	39.92	44.81	39.16	54.00	14.84	Average
	2491.250	28.47	5.84	39.92	46.22	40.60	54.00	13.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

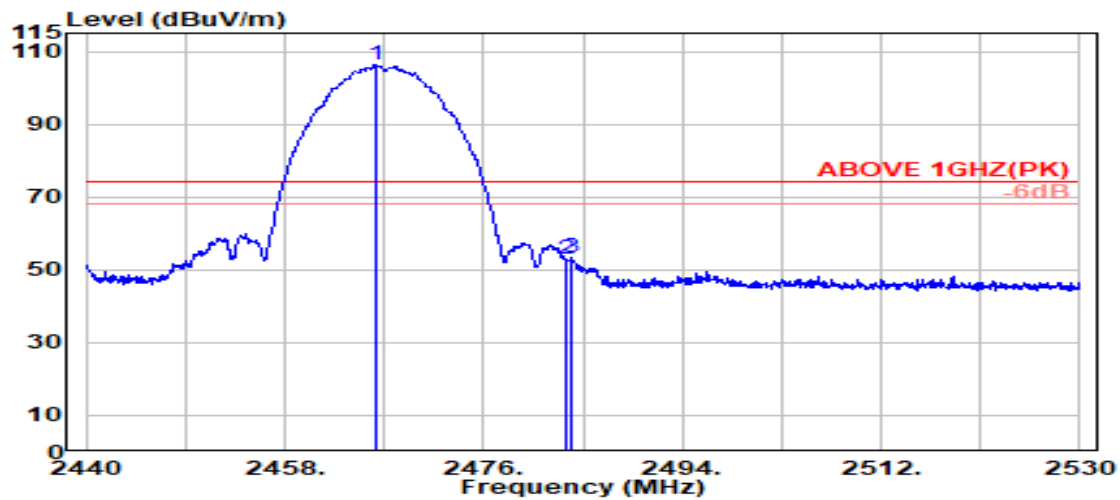

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.150	28.37	5.81	39.92	111.96	106.21	---	---	Peak
2483.500	28.43	5.83	39.92	58.50	52.84	74.00	21.16	Peak
2483.900	28.44	5.83	39.92	58.92	53.27	74.00	20.73	Peak

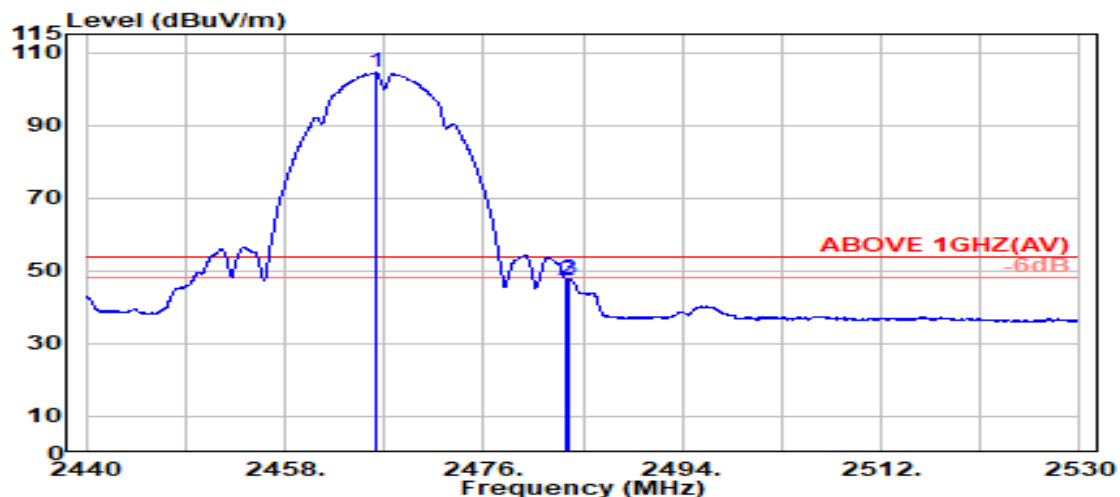


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.350	28.37	5.81	39.92	110.12	104.37	---	---	Average
2483.500	28.43	5.83	39.92	53.12	47.47	54.00	6.53	Average
2483.750	28.44	5.83	39.92	53.45	47.80	54.00	6.20	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

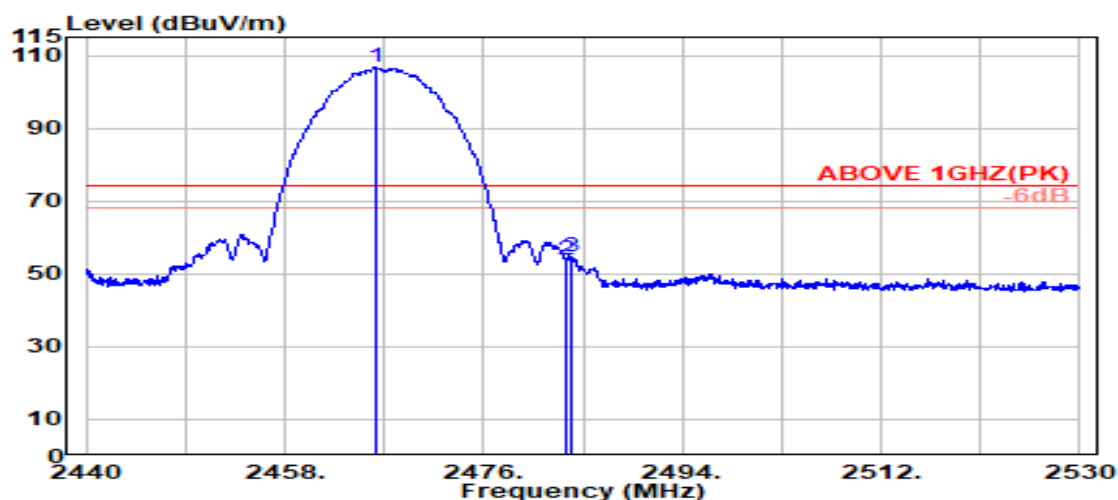

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.150	28.37	5.81	39.92	112.53	106.79	---	---	Peak
2483.500	28.43	5.83	39.92	59.55	53.89	74.00	20.11	Peak
2483.900	28.44	5.83	39.92	60.29	54.64	74.00	19.36	Peak

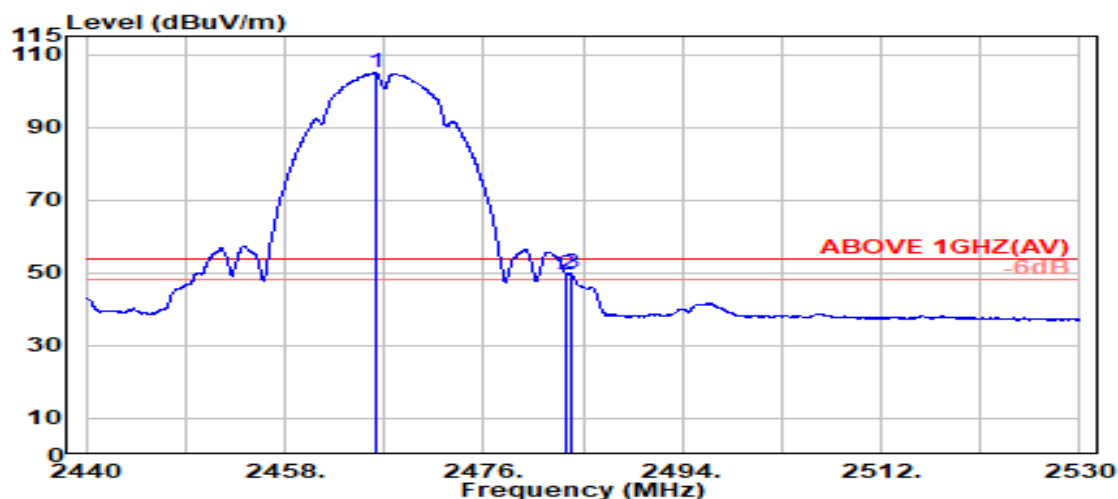

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.250	28.37	5.81	39.92	110.71	104.96	---	---	Average
2483.500	28.43	5.83	39.92	55.10	49.45	54.00	4.55	Average
2483.850	28.44	5.83	39.92	55.40	49.75	54.00	4.25	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

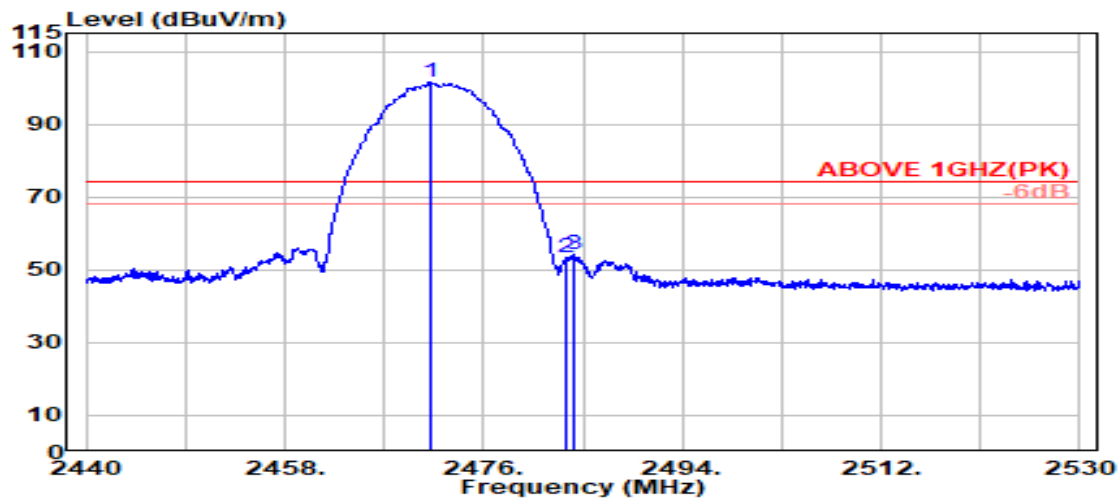

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.150	28.39	5.81	39.92	107.23	101.51	---	---	Peak
2483.500	28.43	5.83	39.92	59.04	53.39	74.00	20.61	Peak
2484.150	28.44	5.83	39.92	60.02	54.37	74.00	19.63	Peak

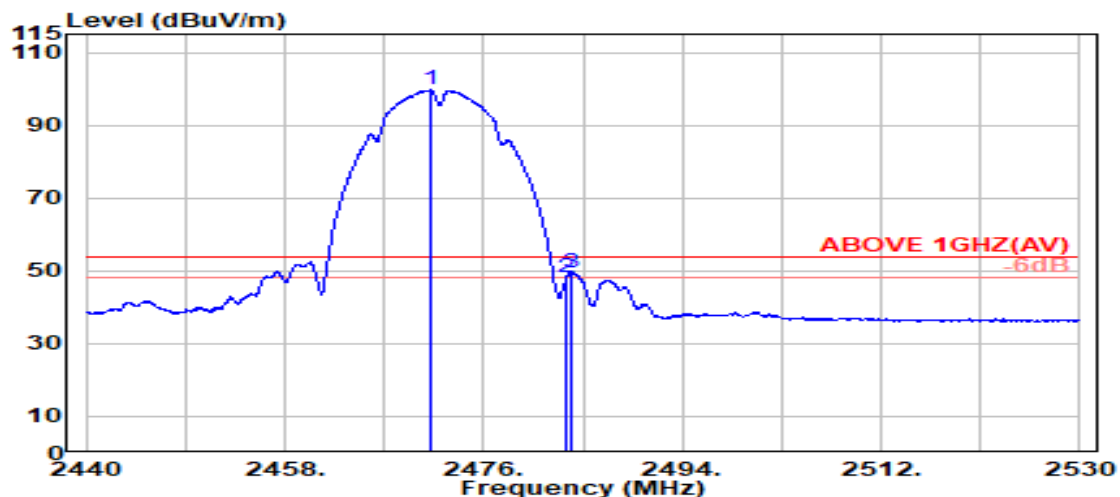

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.250	28.39	5.81	39.92	105.38	99.65	---	---	Average
2483.500	28.43	5.83	39.92	53.74	48.08	54.00	5.92	Average
2483.850	28.44	5.83	39.92	55.04	49.39	54.00	4.61	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

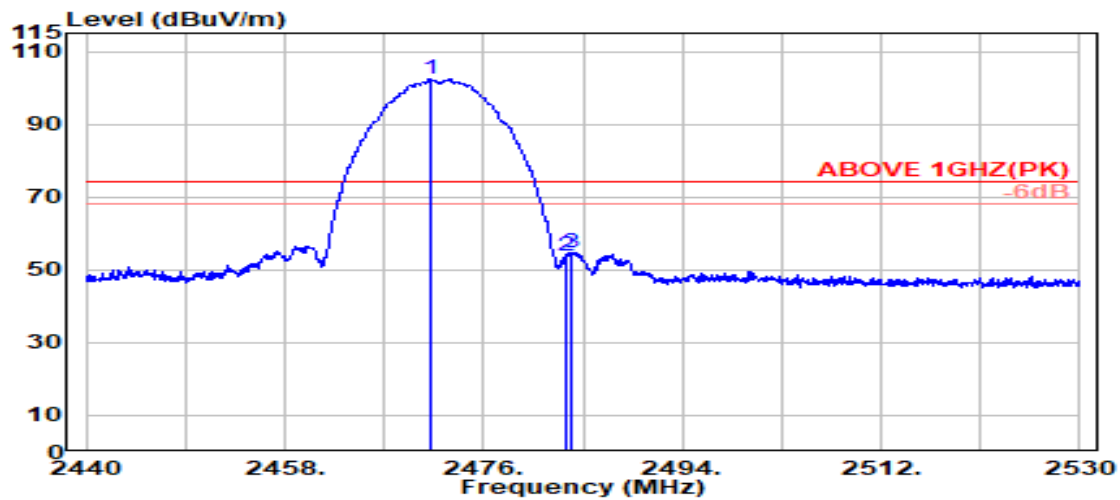

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.150	28.39	5.81	39.92	108.18	102.46	---	---	Peak
2483.500	28.43	5.83	39.92	59.46	53.80	74.00	20.20	Peak
2484.000	28.44	5.83	39.92	60.54	54.88	74.00	19.12	Peak

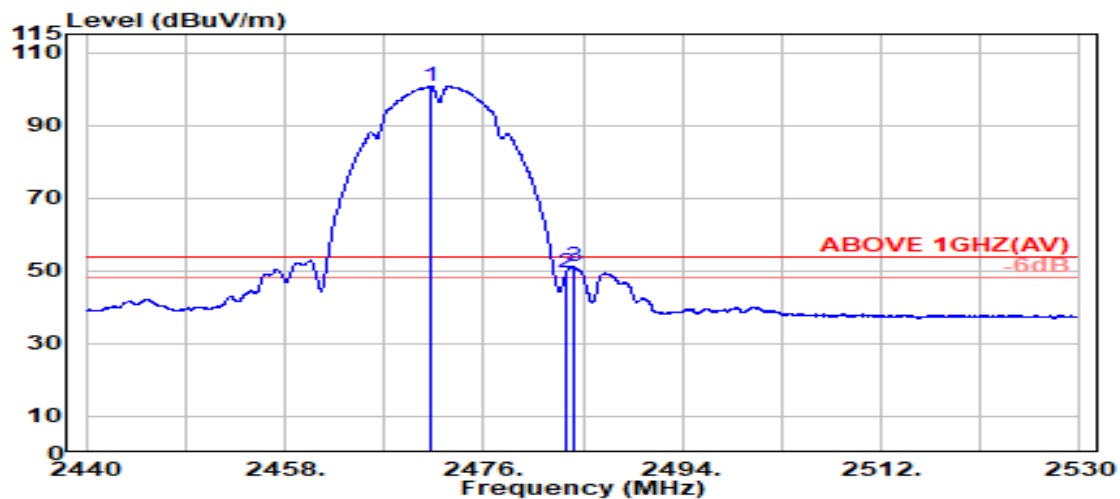

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.250	28.39	5.81	39.92	106.40	100.68	---	---	Average
2483.500	28.43	5.83	39.92	55.29	49.64	54.00	4.36	Average
2484.100	28.44	5.83	39.92	56.83	51.17	54.00	2.83	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

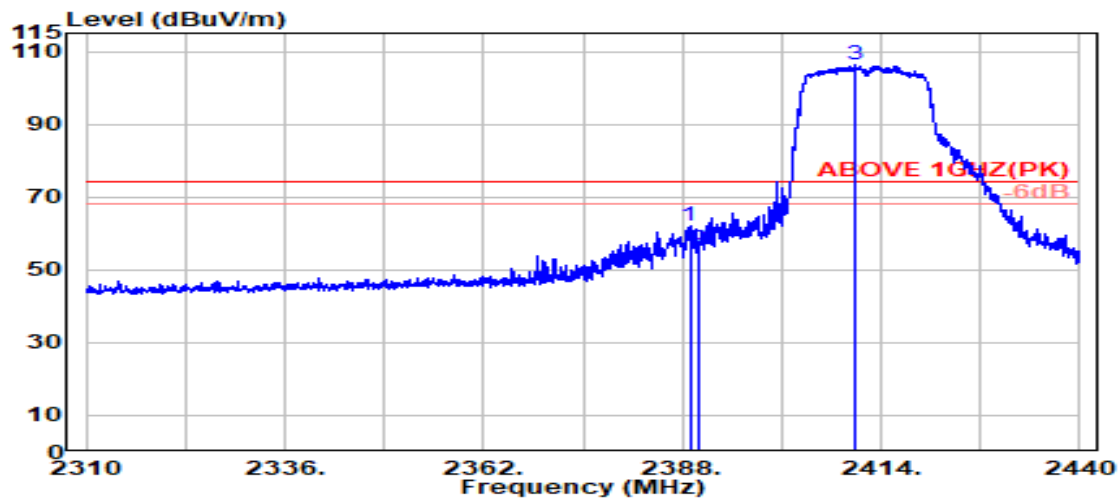

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.975	28.20	5.70	39.92	68.23	62.21	74.00	11.79	Peak
2390.000	28.20	5.70	39.92	61.37	55.35	74.00	18.65	Peak
@ 2410.533	28.22	5.73	39.92	112.07	106.11	---	---	Peak

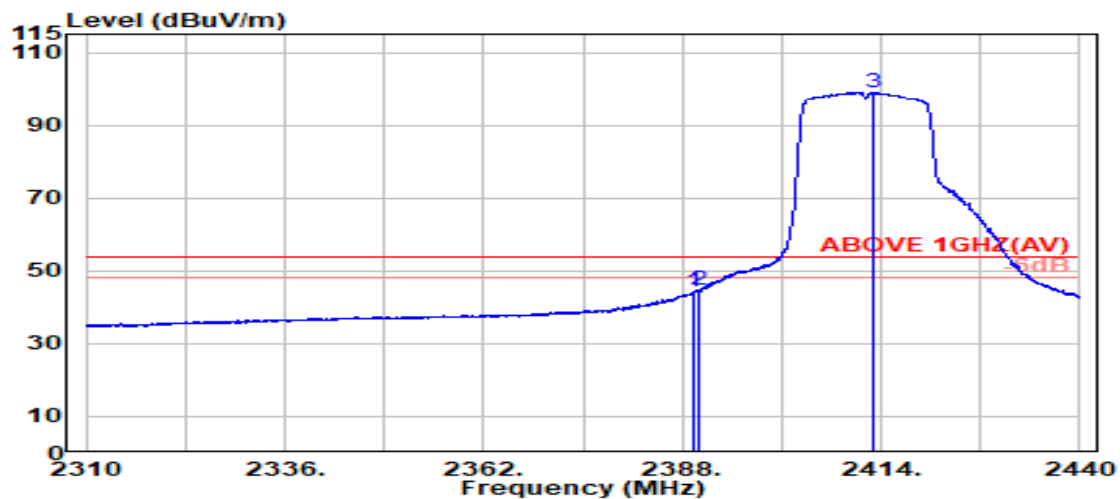

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	28.20	5.70	39.92	50.10	44.09	54.00	9.91	Average
2390.000	28.20	5.70	39.92	50.64	44.63	54.00	9.37	Average
@ 2412.971	28.23	5.73	39.92	105.04	99.08	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

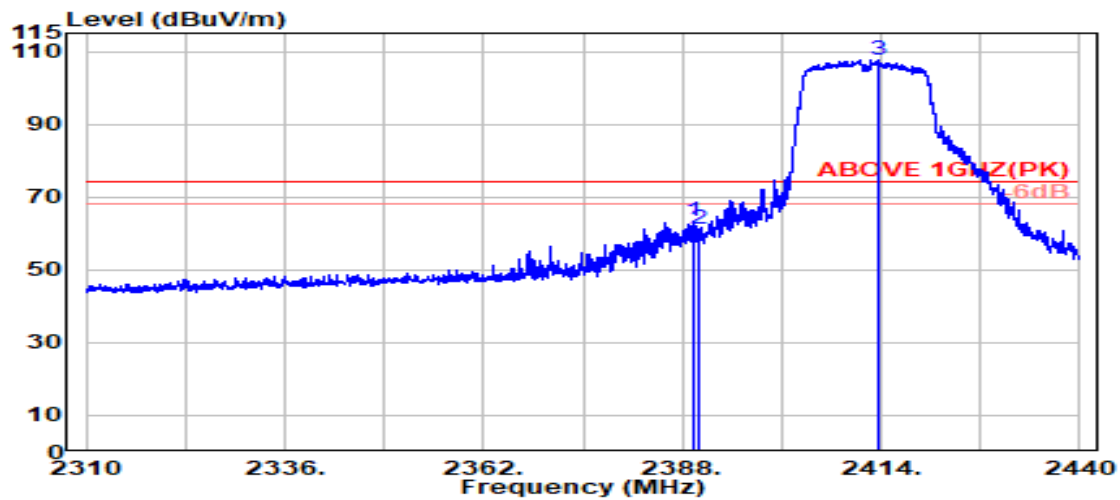

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.408	28.20	5.70	39.92	69.48	63.47	74.00	10.53	Peak
2390.000	28.20	5.70	39.92	67.09	61.08	74.00	12.92	Peak
@ 2413.783	28.23	5.74	39.92	113.69	107.73	---	---	Peak

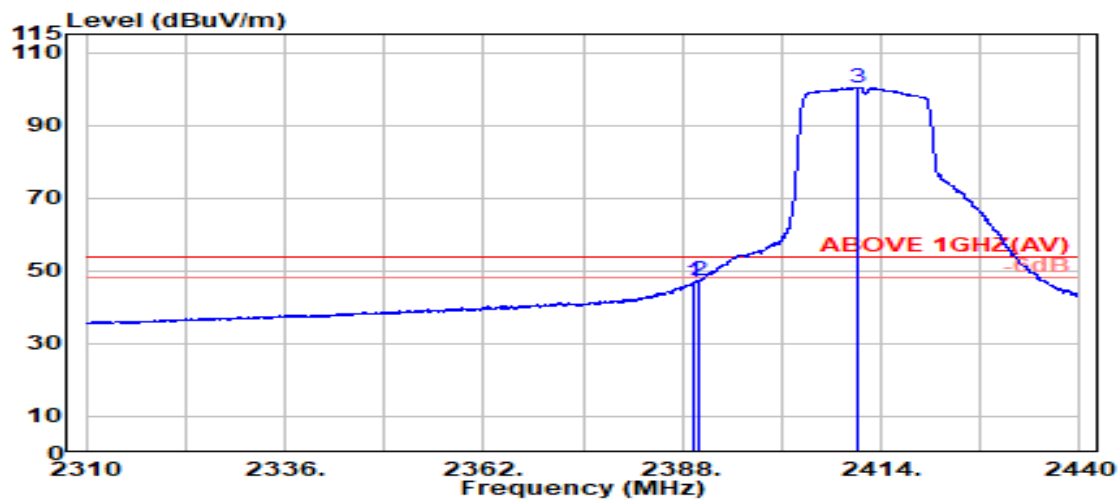

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.625	28.20	5.70	39.92	52.87	46.85	54.00	7.15	Average
2390.000	28.20	5.70	39.92	53.42	47.41	54.00	6.59	Average
@ 2411.075	28.22	5.73	39.92	106.27	100.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462 MHz
------	---------	-----------	-------------

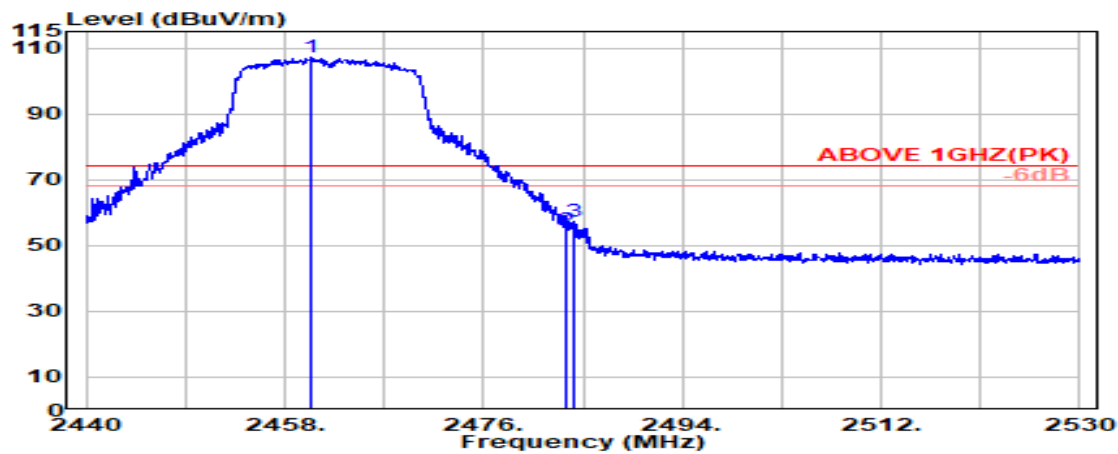

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.350	28.34	5.80	39.92	112.83	107.05	---	---	Peak
2483.500	28.43	5.83	39.92	60.38	54.73	74.00	19.27	Peak
2484.250	28.44	5.83	39.92	62.81	57.15	74.00	16.85	Peak

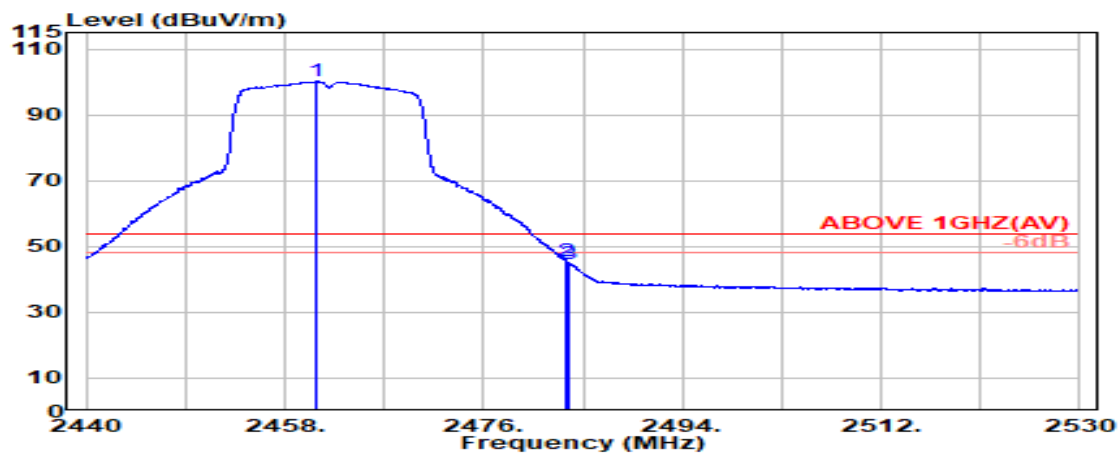


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.950	28.34	5.80	39.92	105.86	100.08	---	---	Average
2483.500	28.43	5.83	39.92	51.20	45.54	54.00	8.46	Average
2483.700	28.44	5.83	39.92	50.53	44.87	54.00	9.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462 MHz
------	---------	-----------	-------------

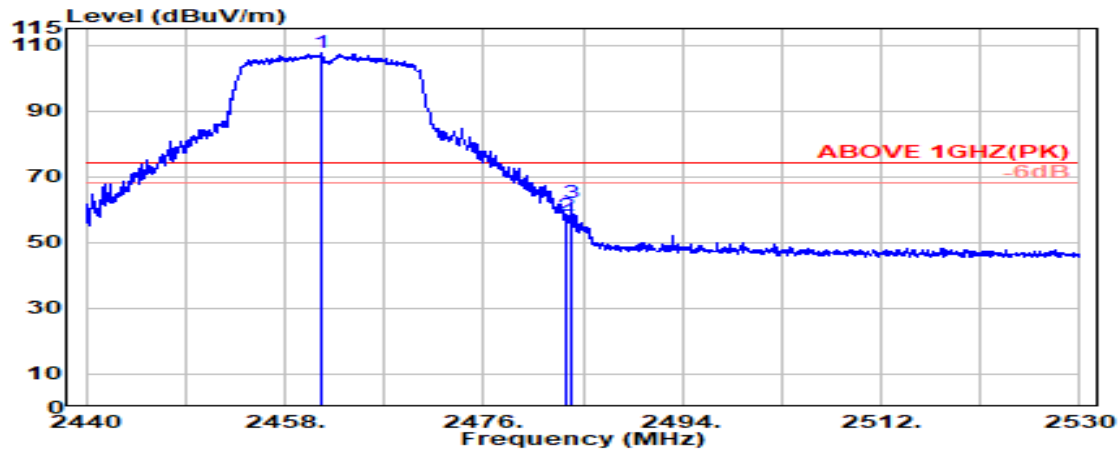

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.350	28.35	5.80	39.92	113.22	107.45	---	---	Peak
	2483.500	28.43	5.83	39.92	64.00	58.34	74.00	15.66	Peak
	2483.900	28.44	5.83	39.92	67.83	62.18	74.00	11.82	Peak

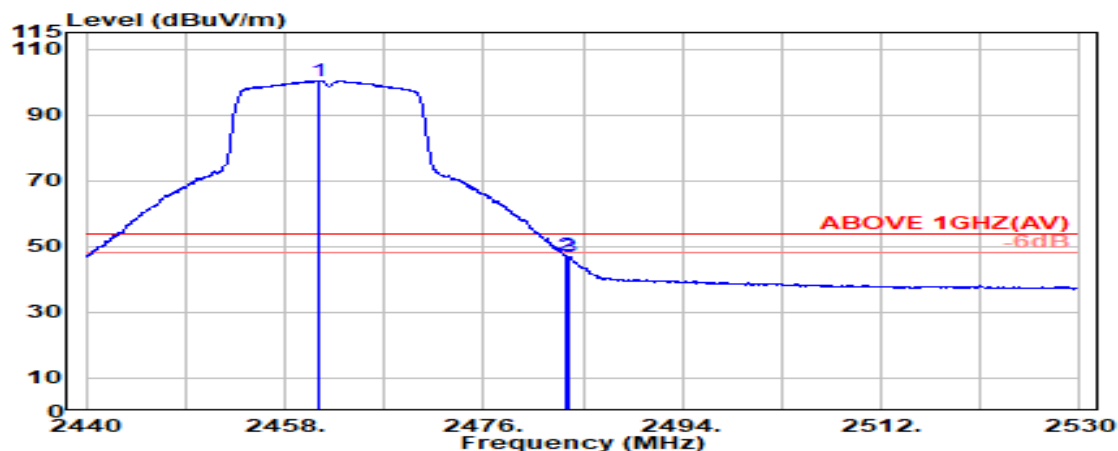

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	28.34	5.80	39.92	106.15	100.37	---	---	Average
2483.500	28.43	5.83	39.92	52.86	47.20	54.00	6.80	Average
2483.800	28.44	5.83	39.92	52.54	46.89	54.00	7.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

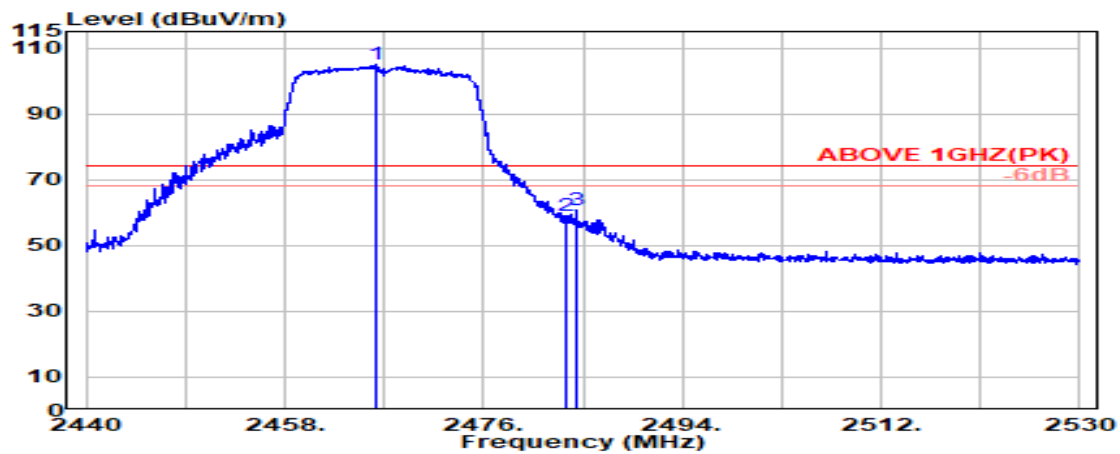

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.200	28.37	5.81	39.92	110.61	104.86	---	---	Peak
2483.500	28.43	5.83	39.92	64.64	58.99	74.00	15.01	Peak
2484.400	28.44	5.83	39.92	66.28	60.62	74.00	13.38	Peak

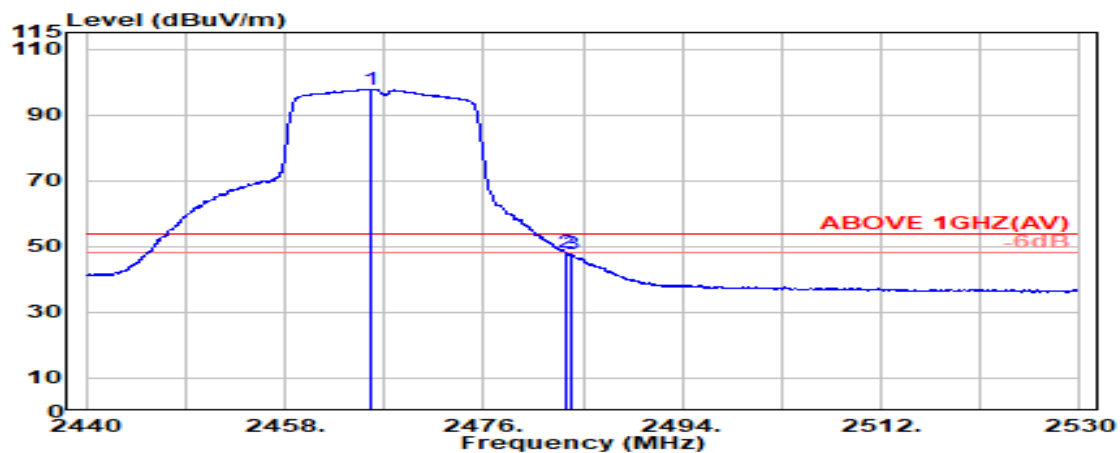

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.800	28.36	5.80	39.92	103.54	97.79	---	---	Average
2483.500	28.43	5.83	39.92	53.69	48.03	54.00	5.97	Average
2483.900	28.44	5.83	39.92	53.23	47.57	54.00	6.43	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

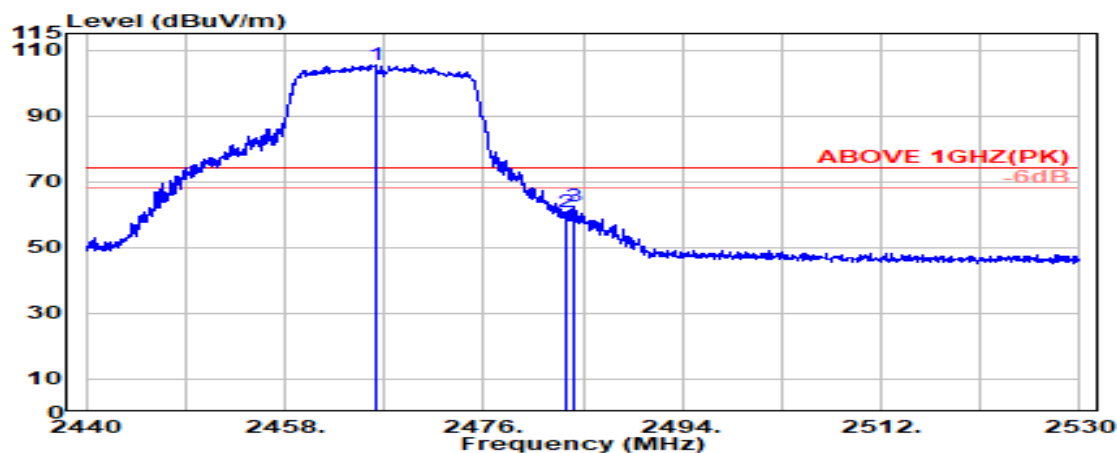

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.150	28.37	5.81	39.92	111.21	105.46	---	---	Peak
2483.500	28.43	5.83	39.92	66.24	60.58	74.00	13.42	Peak
2484.150	28.44	5.83	39.92	67.94	62.29	74.00	11.71	Peak

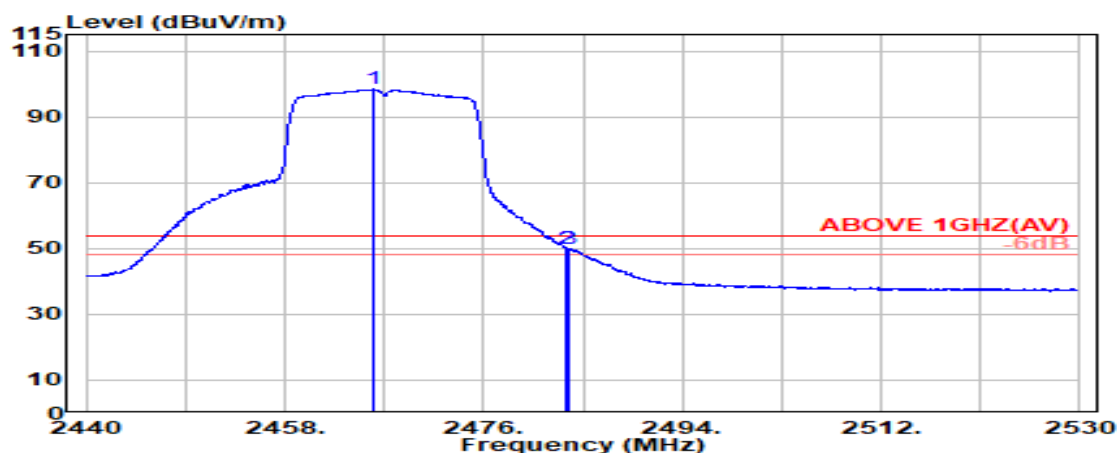

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.050	28.36	5.81	39.92	104.06	98.31	---	---	Average
2483.500	28.43	5.83	39.92	55.76	50.10	54.00	3.90	Average
2483.700	28.44	5.83	39.92	55.71	50.06	54.00	3.94	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

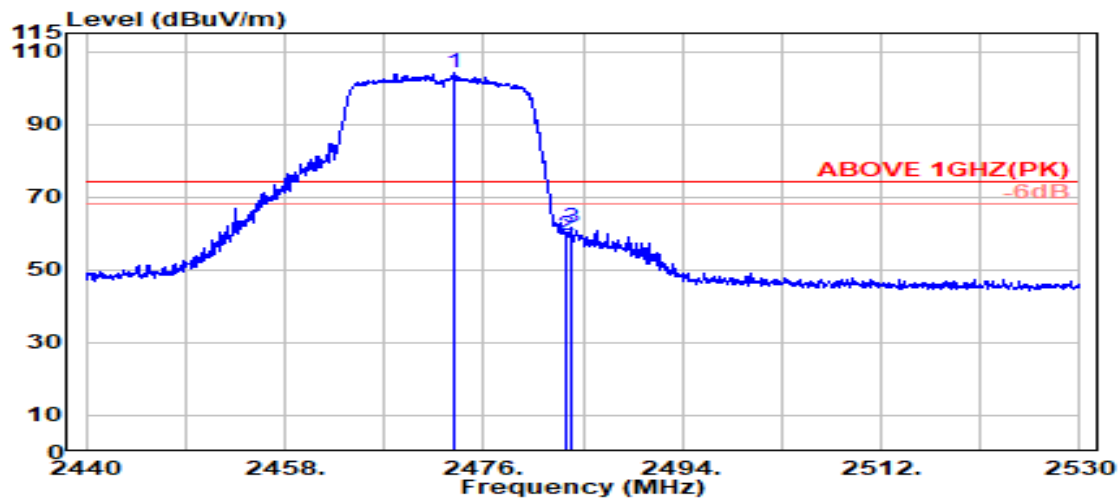

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.400	28.39	5.82	39.92	109.74	104.03	---	---	Peak
2483.500	28.43	5.83	39.92	65.29	59.63	74.00	14.37	Peak
2483.850	28.44	5.83	39.92	67.33	61.68	74.00	12.32	Peak

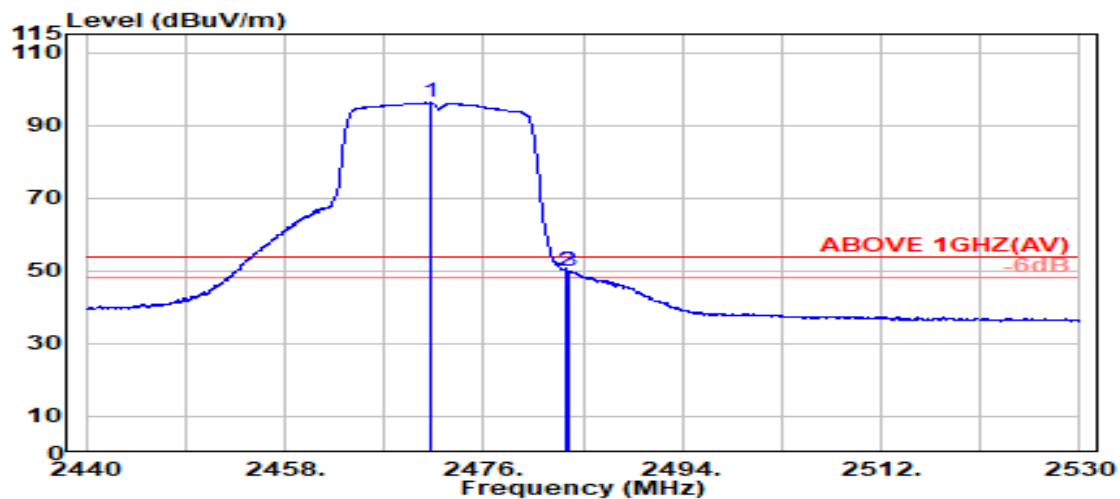

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	28.39	5.81	39.92	101.86	96.13	---	---	Average
2483.500	28.43	5.83	39.92	55.53	49.88	54.00	4.12	Average
2483.750	28.44	5.83	39.92	55.50	49.84	54.00	4.16	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

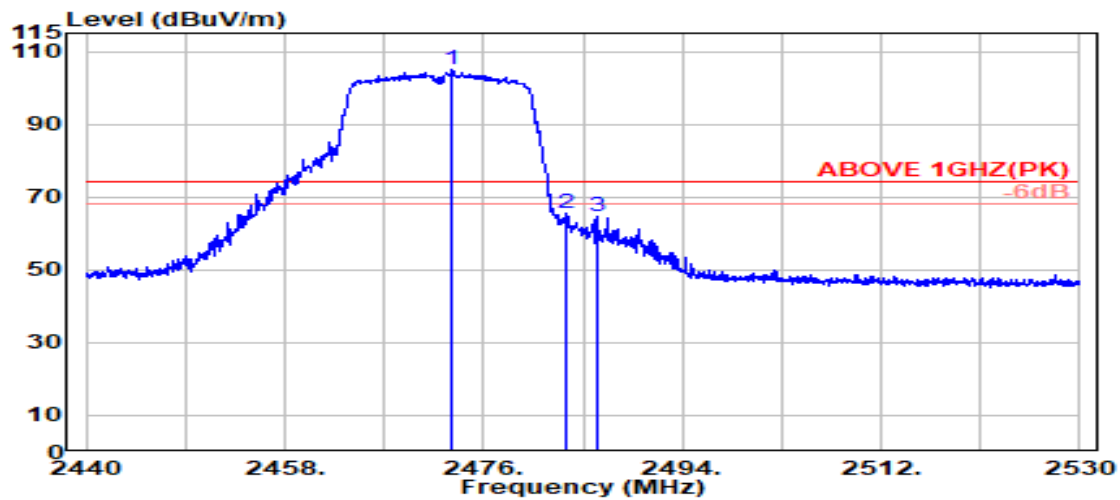

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.200	28.39	5.81	39.92	110.72	105.01	---	---	Peak
2483.500	28.43	5.83	39.92	71.14	65.48	74.00	8.52	Peak
2486.200	28.45	5.83	39.92	70.46	64.82	74.00	9.18	Peak

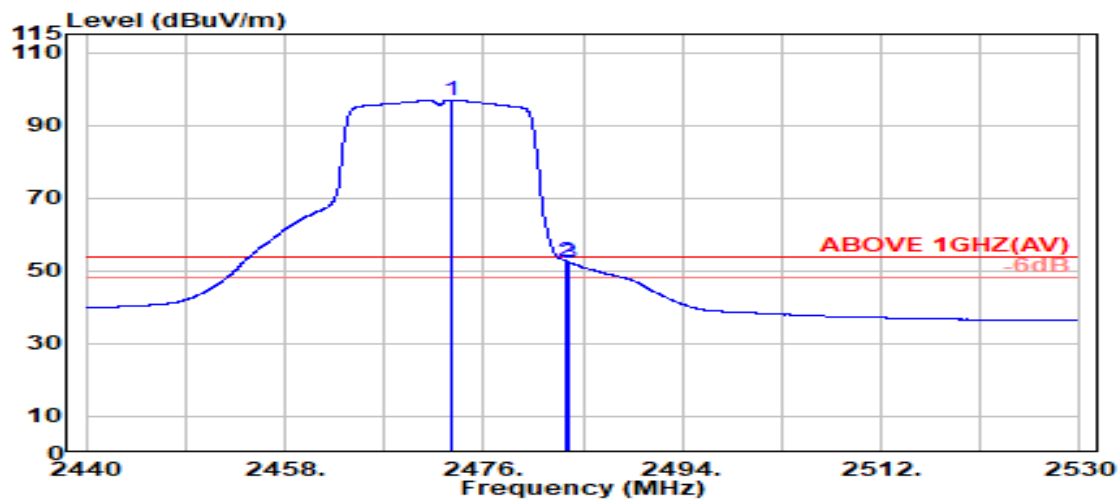

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.000	28.39	5.81	39.92	102.64	96.93	---	---	Average
2483.500	28.43	5.83	39.92	58.24	52.59	54.00	1.41	Average
2483.800	28.44	5.83	39.92	57.89	52.24	54.00	1.76	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

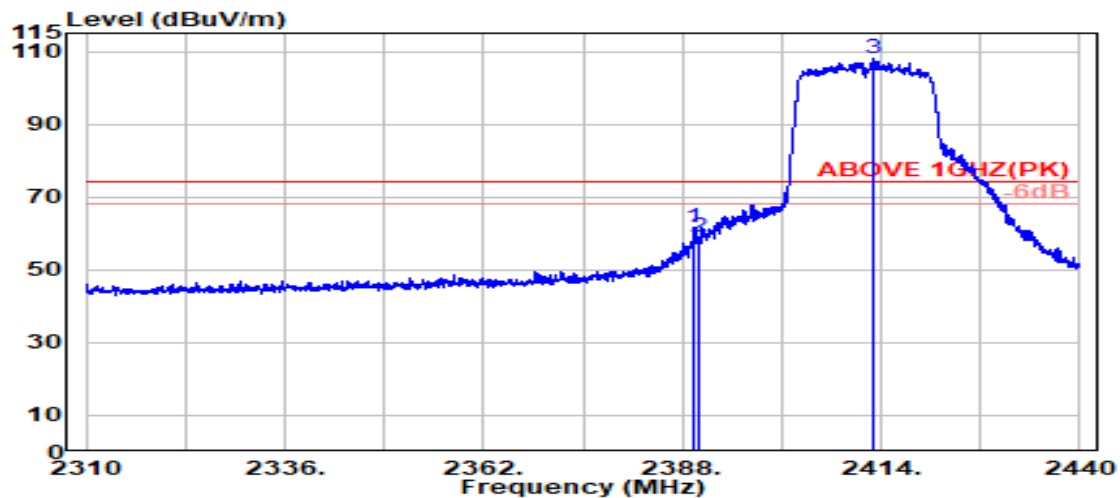

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	28.20	5.70	39.92	67.69	61.67	74.00	12.33	Peak
2390.000	28.20	5.70	39.92	65.18	59.17	74.00	14.83	Peak
@ 2413.133	28.23	5.73	39.92	113.87	107.91	---	---	Peak

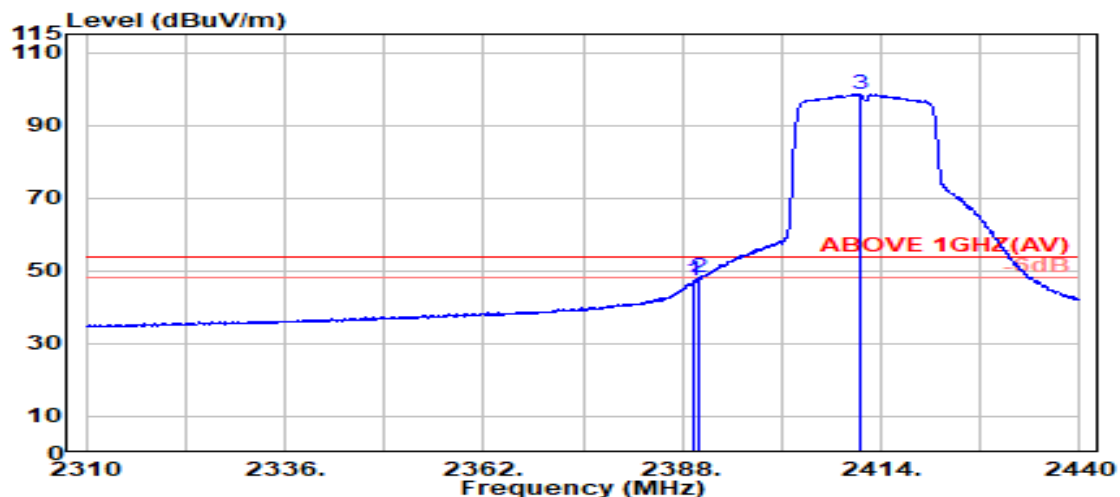

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.517	28.20	5.70	39.92	53.20	47.18	54.00	6.82	Average
2390.000	28.20	5.70	39.92	53.99	47.97	54.00	6.03	Average
@ 2411.346	28.22	5.73	39.92	104.66	98.70	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

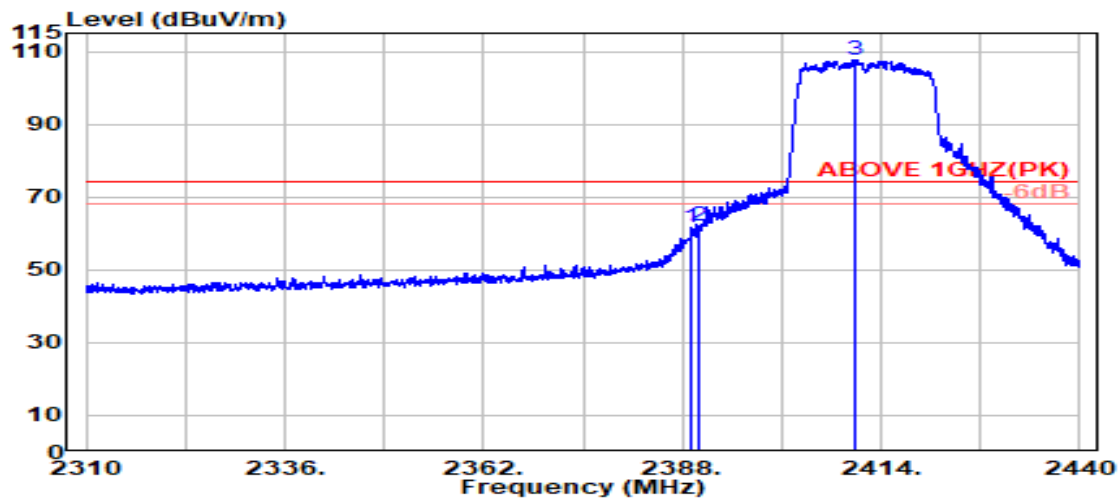

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.029	28.20	5.70	39.92	67.51	61.50	74.00	12.50	Peak
2390.000	28.20	5.70	39.92	67.93	61.92	74.00	12.08	Peak
@ 2410.587	28.22	5.73	39.92	113.56	107.59	---	---	Peak

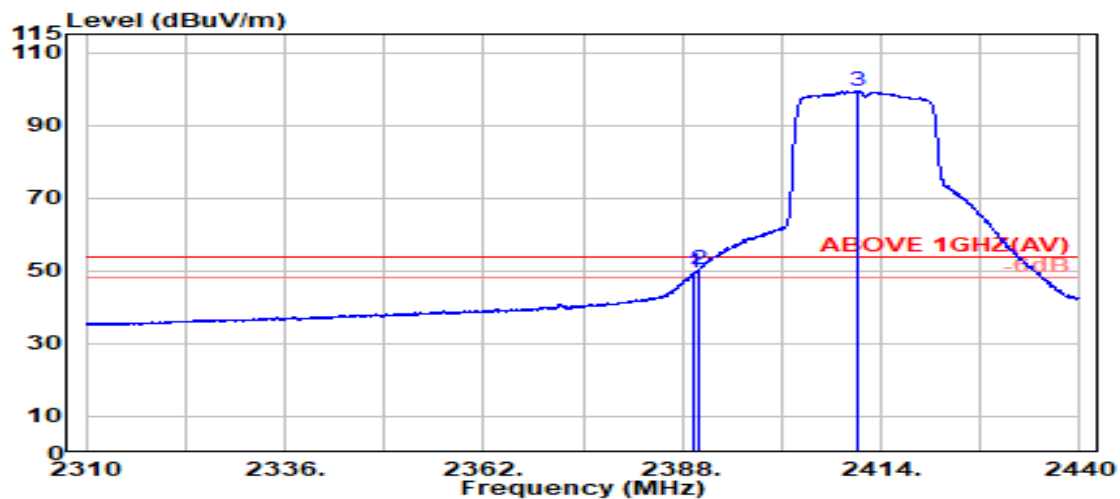

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	28.20	5.70	39.92	55.62	49.60	54.00	4.40	Average
2390.000	28.20	5.70	39.92	56.21	50.20	54.00	3.80	Average
@ 2411.021	28.22	5.73	39.92	105.30	99.34	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

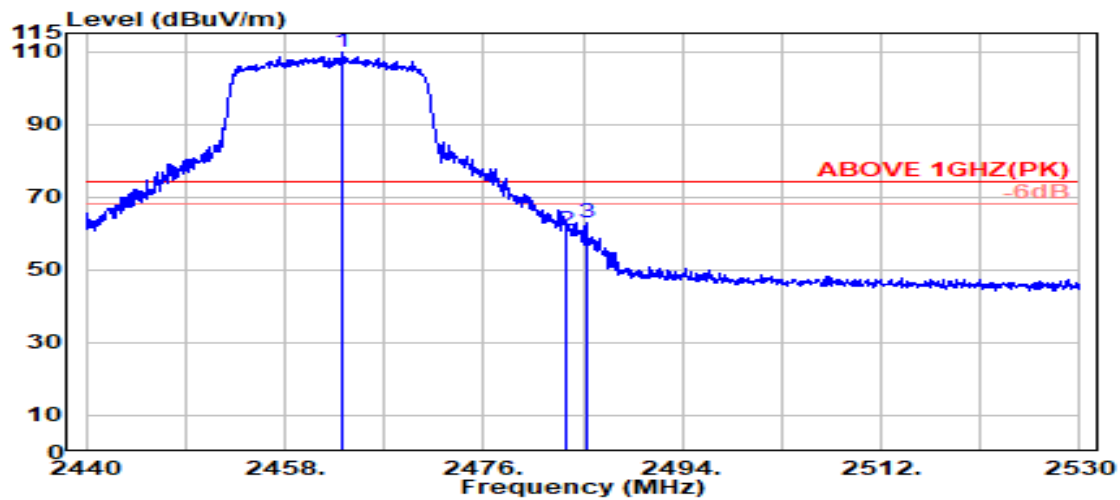

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.250	28.35	5.80	39.92	115.62	109.86	---	---	Peak
2483.500	28.43	5.83	39.92	66.37	60.71	74.00	13.29	Peak
2485.400	28.44	5.83	39.92	68.74	63.10	74.00	10.90	Peak

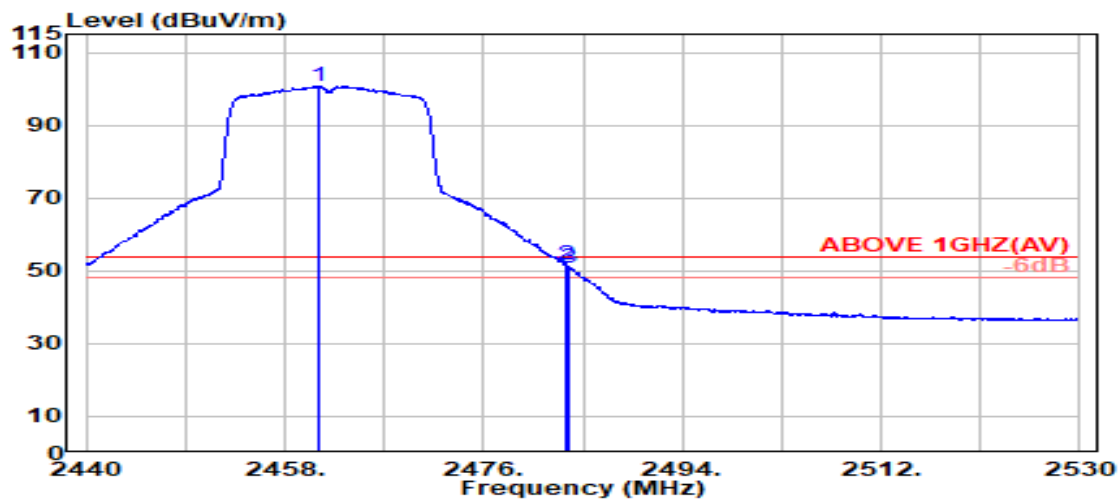

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	28.34	5.80	39.92	106.51	100.73	---	---	Average
2483.500	28.43	5.83	39.92	57.19	51.53	54.00	2.47	Average
2483.750	28.44	5.83	39.92	56.49	50.84	54.00	3.16	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

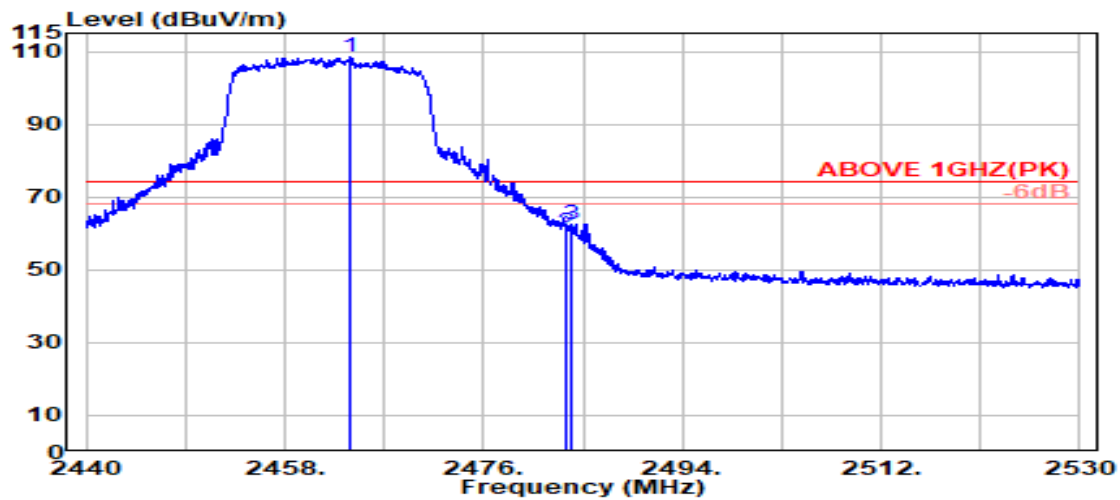

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.800	28.36	5.80	39.92	114.05	108.29	---	---	Peak
2483.500	28.43	5.83	39.92	66.13	60.48	74.00	13.52	Peak
2484.000	28.44	5.83	39.92	68.30	62.64	74.00	11.36	Peak

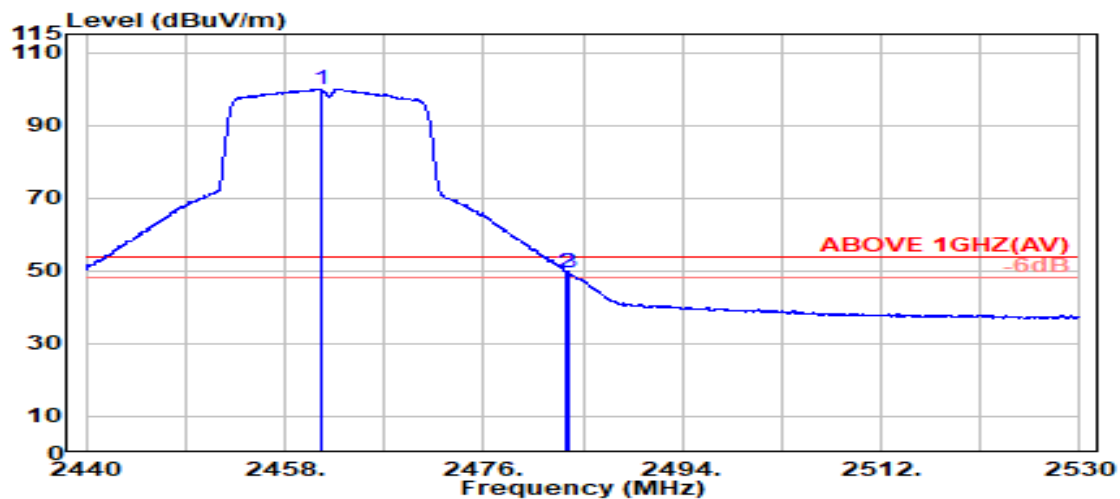

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	28.35	5.80	39.92	105.73	99.96	---	---	Average
2483.500	28.43	5.83	39.92	55.28	49.62	54.00	4.38	Average
2483.700	28.44	5.83	39.92	54.94	49.29	54.00	4.71	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

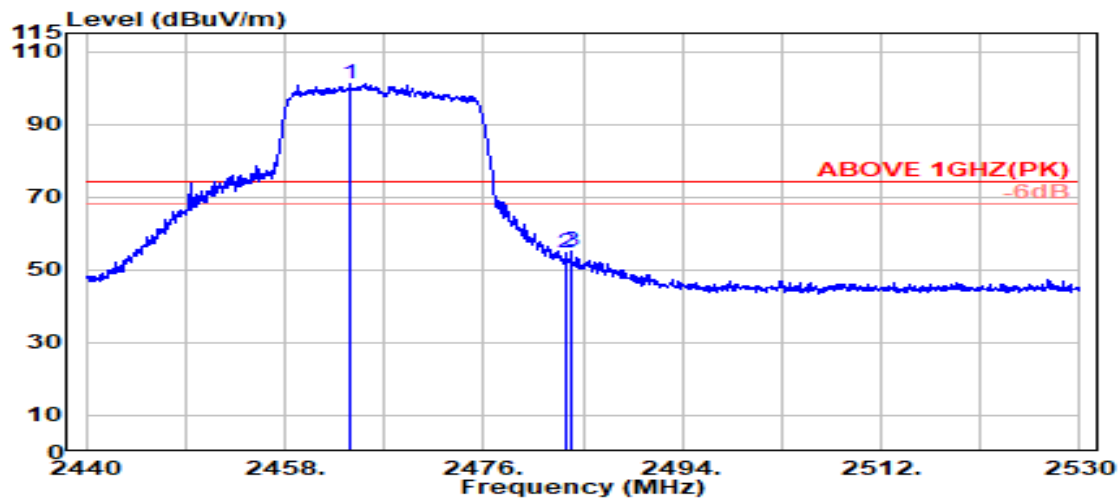

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.950	28.36	5.80	39.92	106.73	100.97	---	---	Peak
2483.500	28.43	5.83	39.92	60.28	54.62	74.00	19.38	Peak
2484.000	28.44	5.83	39.92	60.71	55.06	74.00	18.94	Peak

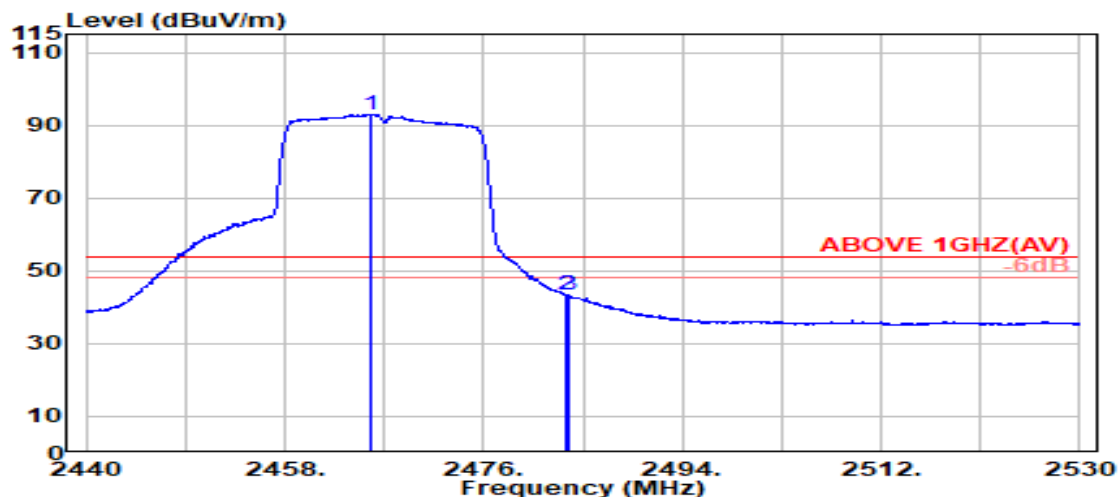

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.700	28.36	5.80	39.92	98.65	92.89	---	---	Average
2483.500	28.43	5.83	39.92	49.18	43.52	54.00	10.48	Average
2483.700	28.44	5.83	39.92	48.89	43.23	54.00	10.77	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

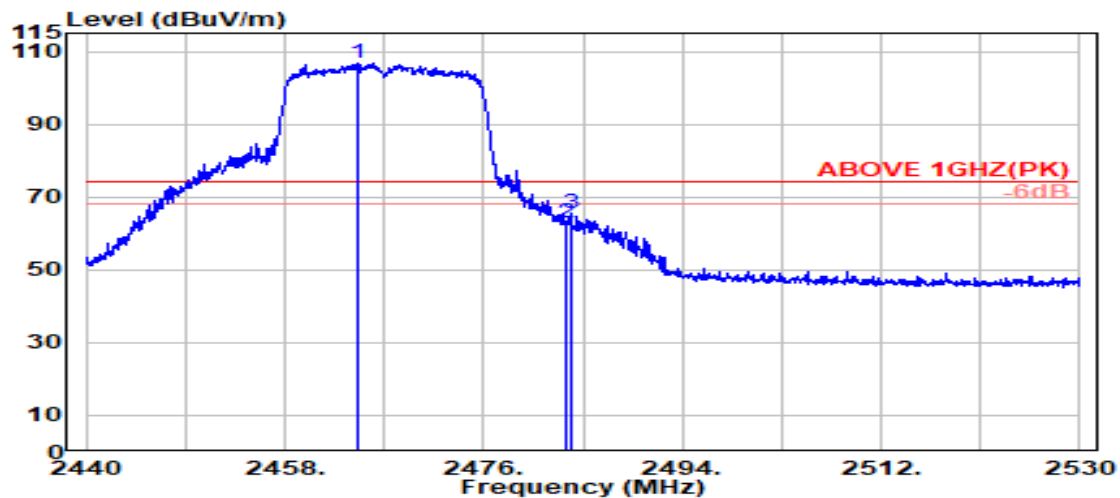

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.700	28.36	5.80	39.92	112.44	106.69	---	---	Peak
2483.500	28.43	5.83	39.92	68.37	62.71	74.00	11.29	Peak
2484.000	28.44	5.83	39.92	71.20	65.54	74.00	8.46	Peak

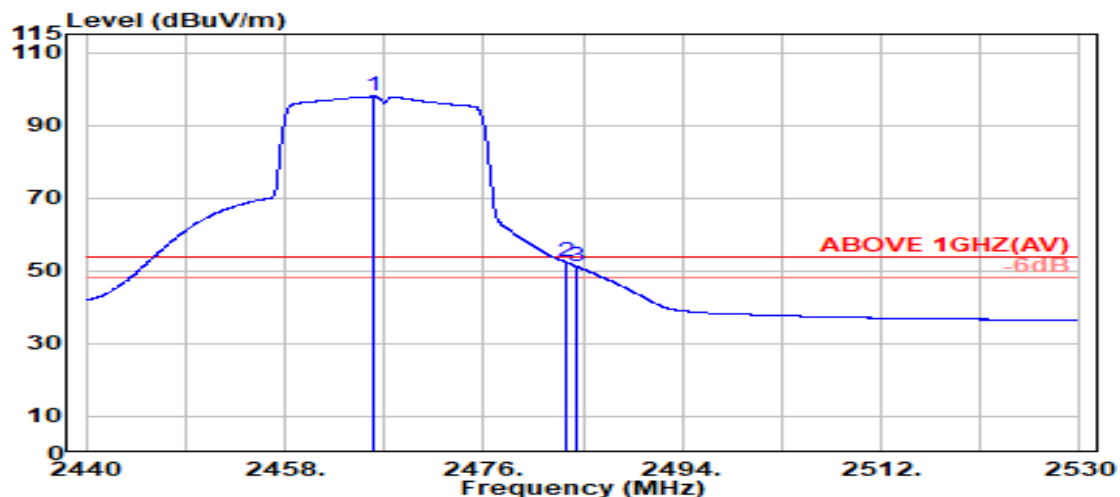

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.050	28.36	5.81	39.92	103.66	97.92	---	---	Average
2483.500	28.43	5.83	39.92	57.96	52.30	54.00	1.70	Average
2484.400	28.44	5.83	39.92	56.89	51.24	54.00	2.76	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

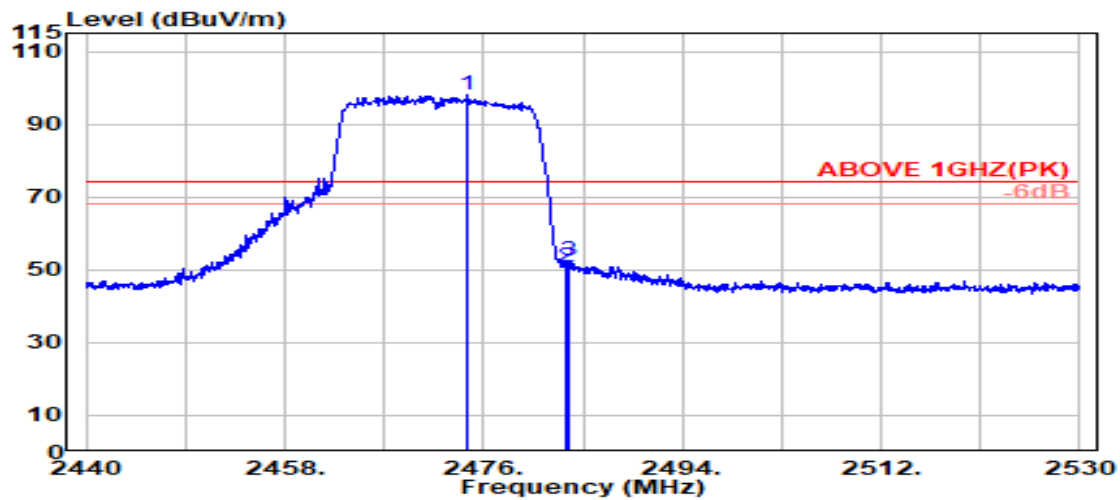

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.450	28.40	5.82	39.92	103.67	97.97	---	---	Peak
2483.500	28.43	5.83	39.92	56.64	50.99	74.00	23.01	Peak
2483.800	28.44	5.83	39.92	58.28	52.62	74.00	21.38	Peak

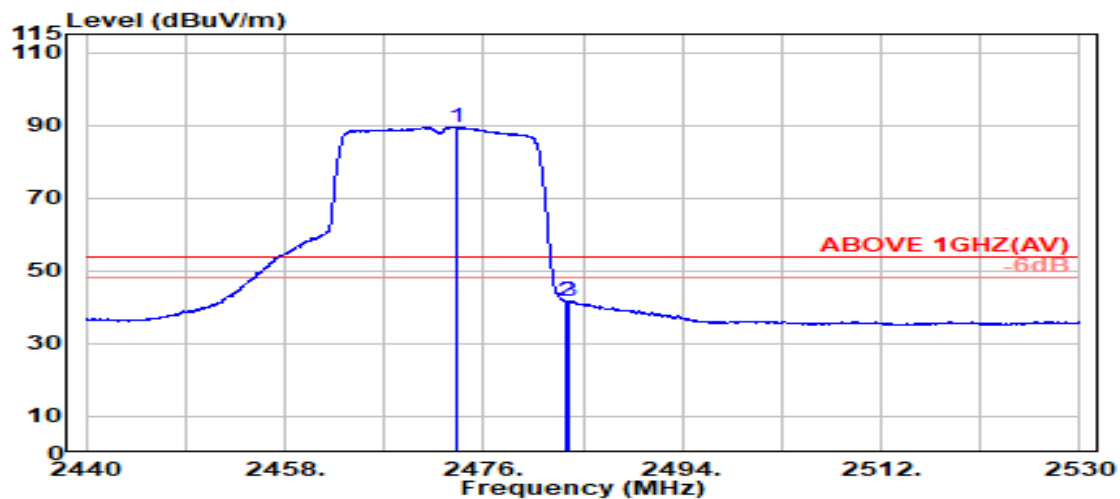

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.650	28.40	5.82	39.92	95.15	89.44	---	---	Average
2483.500	28.43	5.83	39.92	47.15	41.50	54.00	12.50	Average
2483.700	28.44	5.83	39.92	47.50	41.84	54.00	12.16	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

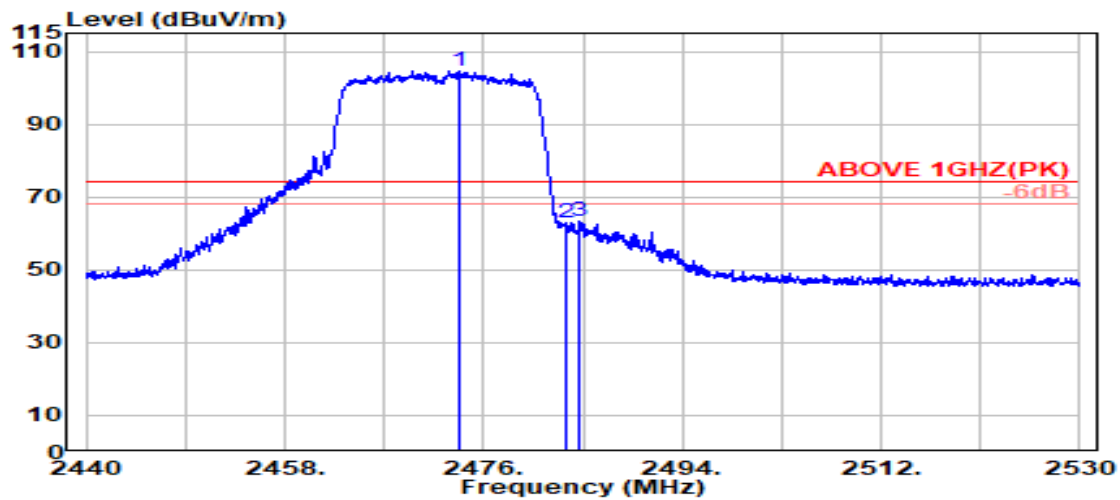

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.800	28.40	5.82	39.92	110.30	104.59	---	---	Peak
2483.500	28.43	5.83	39.92	68.48	62.83	74.00	11.17	Peak
2484.750	28.44	5.83	39.92	69.18	63.53	74.00	10.47	Peak

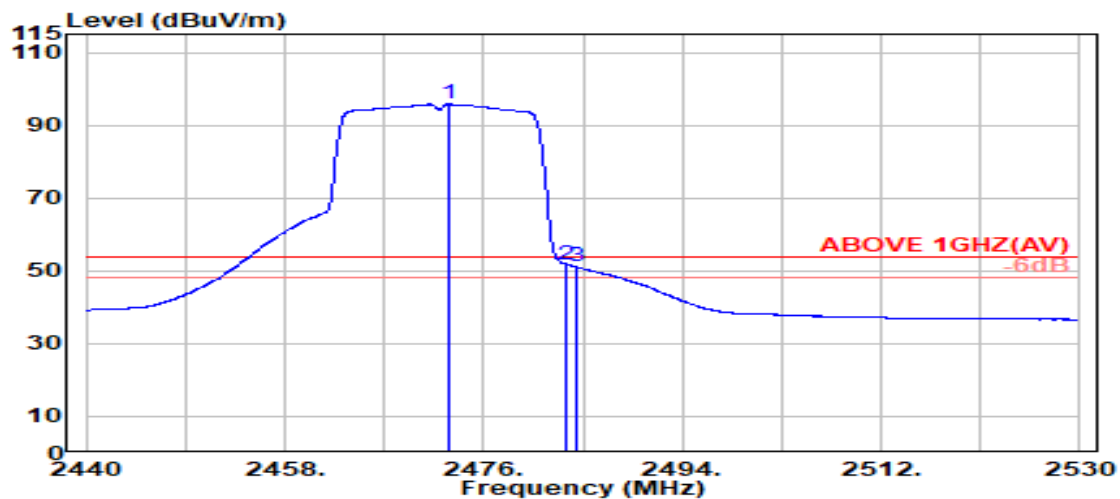

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.950	28.39	5.81	39.92	101.47	95.75	---	---	Average
2483.500	28.43	5.83	39.92	57.44	51.78	54.00	2.22	Average
2484.400	28.44	5.83	39.92	56.71	51.06	54.00	2.94	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

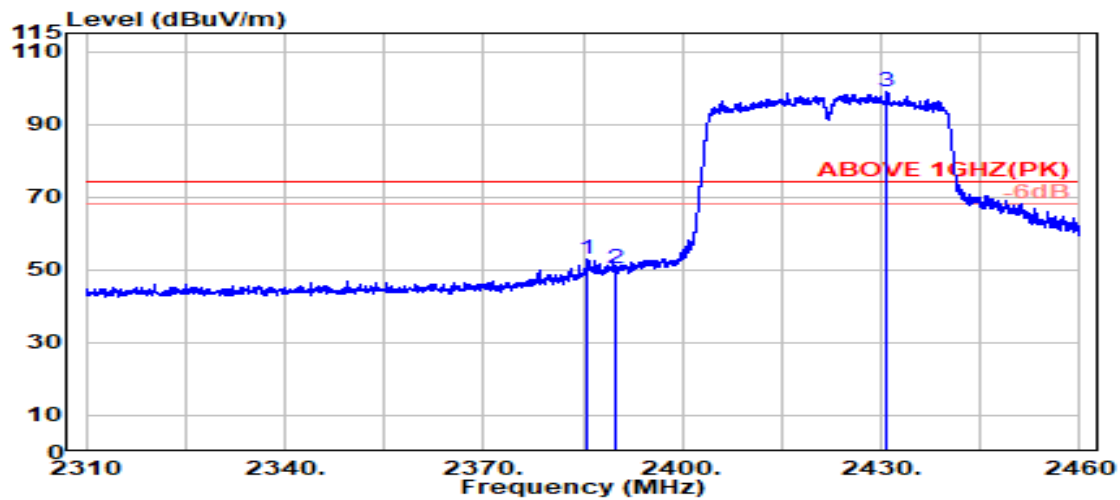

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.600	28.20	5.70	39.92	59.03	53.01	74.00	20.99	Peak
2389.800	28.20	5.70	39.92	56.19	50.18	74.00	23.82	Peak
@ 2430.950	28.26	5.76	39.92	104.76	98.86	---	---	Peak

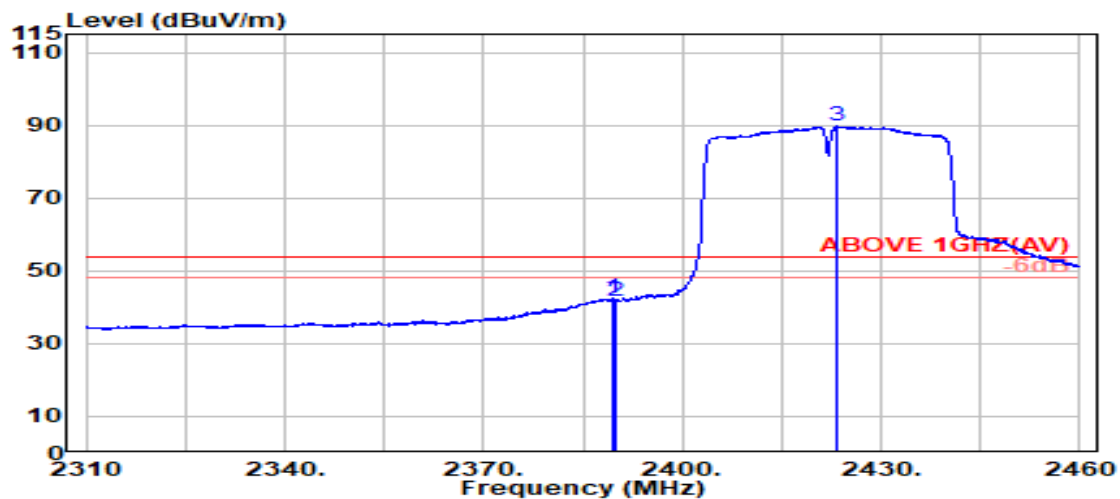


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	5.70	39.92	48.34	42.32	54.00	11.68	Average
2389.800	28.20	5.70	39.92	47.80	41.79	54.00	12.21	Average
@ 2423.300	28.25	5.75	39.92	95.63	89.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

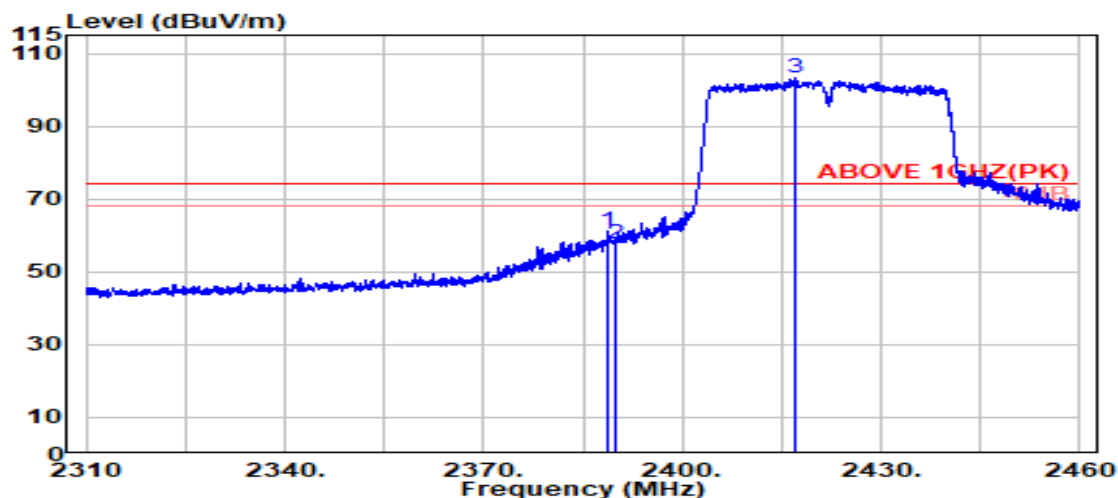

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.20	5.70	39.92	67.20	61.19	74.00	12.81	Peak
2389.800	28.20	5.70	39.92	63.57	57.55	74.00	16.45	Peak
@ 2417.150	28.23	5.74	39.92	109.27	103.33	---	---	Peak

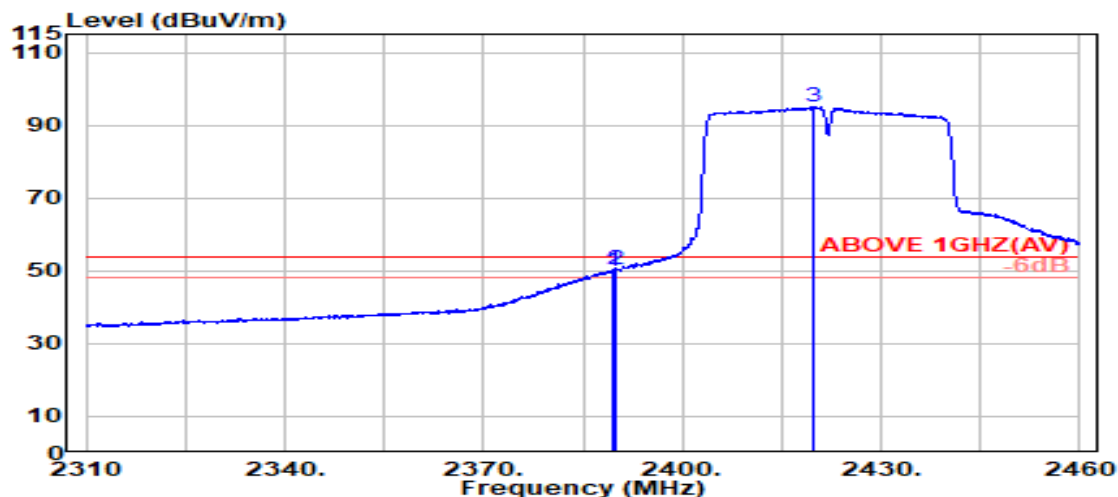

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	5.70	39.92	56.13	50.12	54.00	3.88	Average
2389.800	28.20	5.70	39.92	56.33	50.31	54.00	3.69	Average
@ 2419.600	28.24	5.74	39.92	100.93	94.99	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2447 MHz
------	--------------	-----------	-------------

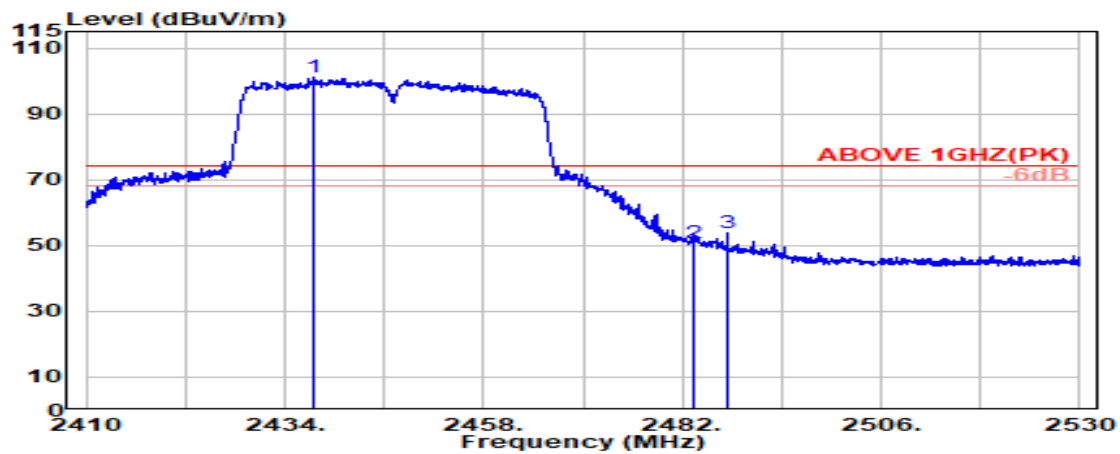

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2437.400	28.27	5.77	39.92	106.90	101.02	---	---	Peak
2483.500	28.43	5.83	39.92	56.54	50.88	74.00	23.12	Peak
@ 2487.400	28.45	5.83	39.92	59.37	53.74	74.00	20.26	Peak

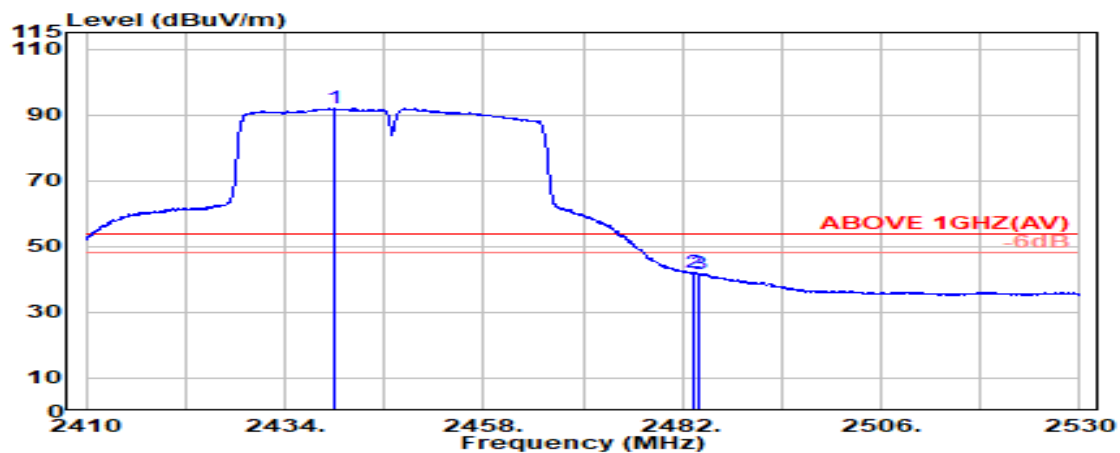

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2439.900	28.28	5.77	39.92	97.72	91.85	---	---	Average
2483.500	28.43	5.83	39.92	47.59	41.93	54.00	12.07	Average
@ 2483.900	28.44	5.83	39.92	47.32	41.67	54.00	12.33	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2447 MHz
------	--------------	-----------	-------------

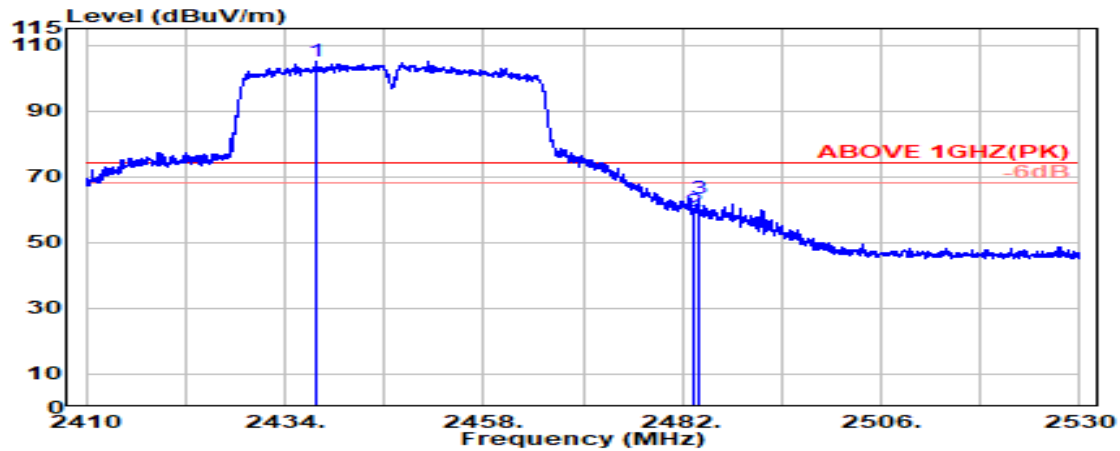

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2437.700	28.28	5.77	39.92	110.84	104.97	---	---	Peak
2483.500	28.43	5.83	39.92	64.98	59.33	74.00	14.67	Peak
@ 2483.950	28.44	5.83	39.92	68.82	63.16	74.00	10.84	Peak

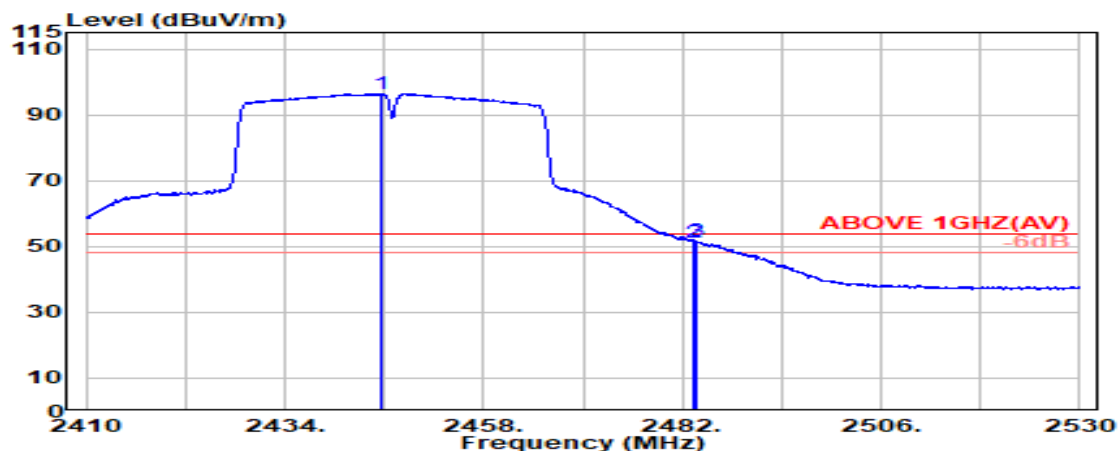

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2445.700	28.29	5.78	39.92	102.38	96.53	---	---	Average
2483.500	28.43	5.83	39.92	56.99	51.34	54.00	2.66	Average
@ 2483.700	28.44	5.83	39.92	57.32	51.66	54.00	2.34	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

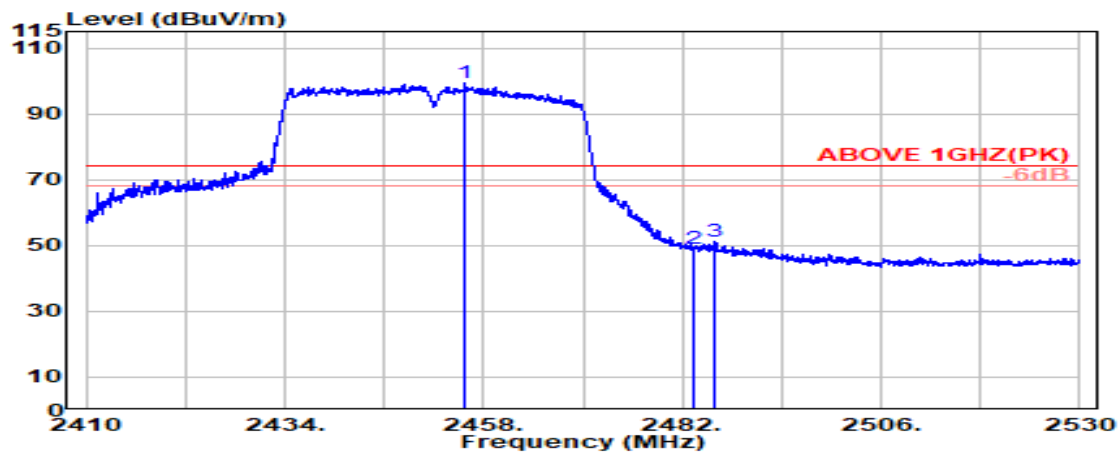

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2455.750	28.32	5.79	39.92	104.99	99.18	---	---	Peak
2483.500	28.43	5.83	39.92	54.69	49.04	74.00	24.96	Peak
2485.800	28.44	5.83	39.92	56.83	51.19	74.00	22.81	Peak

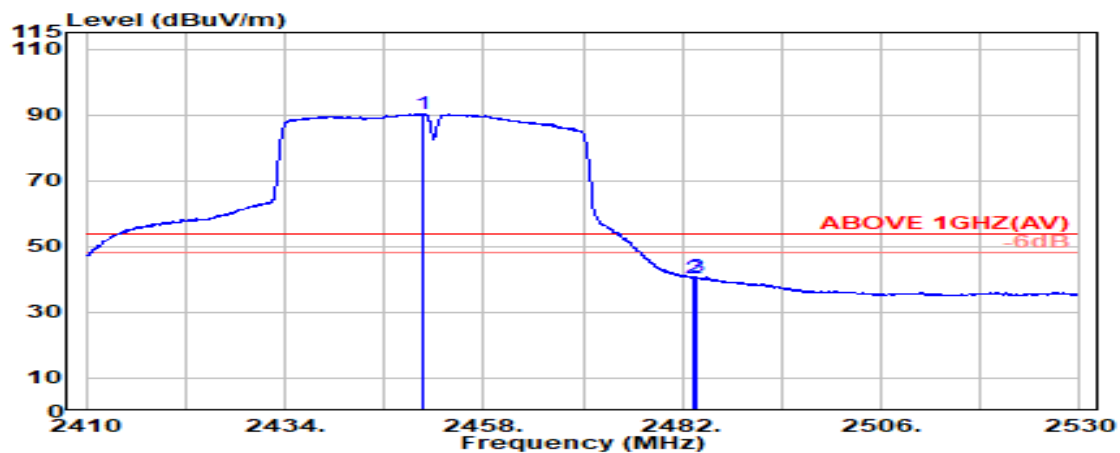

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2450.550	28.30	5.78	39.92	96.23	90.40	---	---	Average
2483.500	28.43	5.83	39.92	46.15	40.50	54.00	13.50	Average
2483.800	28.44	5.83	39.92	46.39	40.73	54.00	13.27	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------



Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2455.100	28.32	5.79	39.92	109.98	104.17	---	---	Peak
2483.500	28.43	5.83	39.92	65.49	59.84	74.00	14.16	Peak
2483.900	28.44	5.83	39.92	68.97	63.32	74.00	10.68	Peak

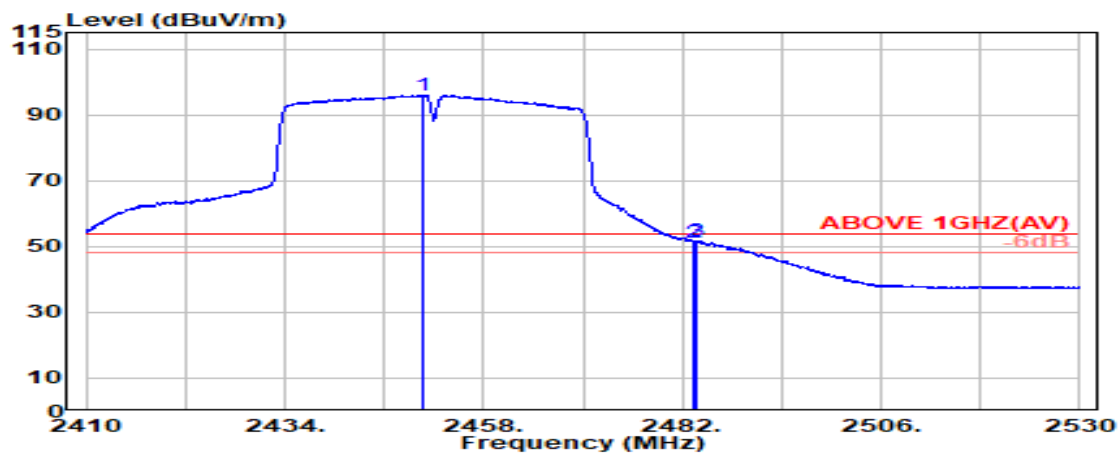

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2450.600	28.30	5.78	39.92	101.76	95.93	---	---	Average
2483.500	28.43	5.83	39.92	56.74	51.09	54.00	2.91	Average
2483.800	28.44	5.83	39.92	57.32	51.66	54.00	2.34	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

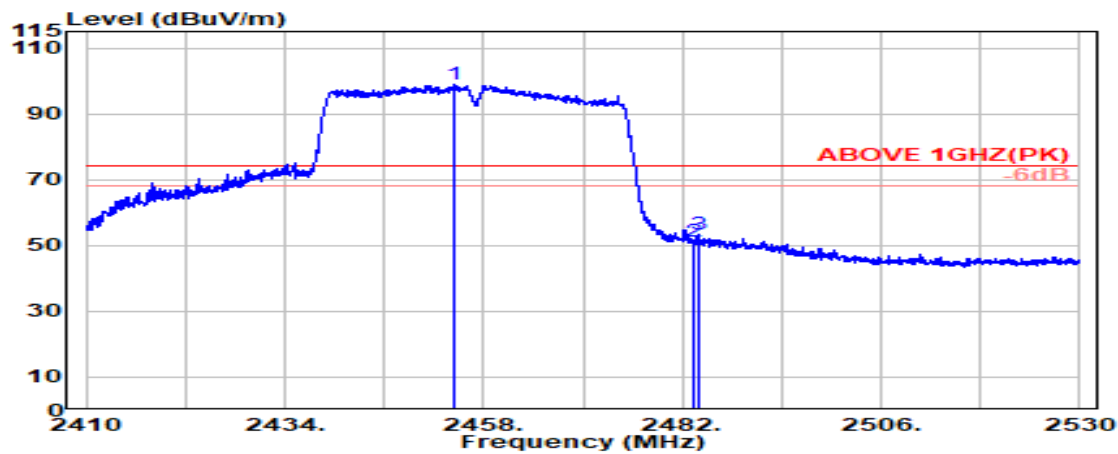

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2454.350	28.32	5.79	39.92	104.61	98.80	---	---	Peak
2483.500	28.43	5.83	39.92	56.79	51.13	74.00	22.87	Peak
2484.050	28.44	5.83	39.92	59.21	53.56	74.00	20.44	Peak

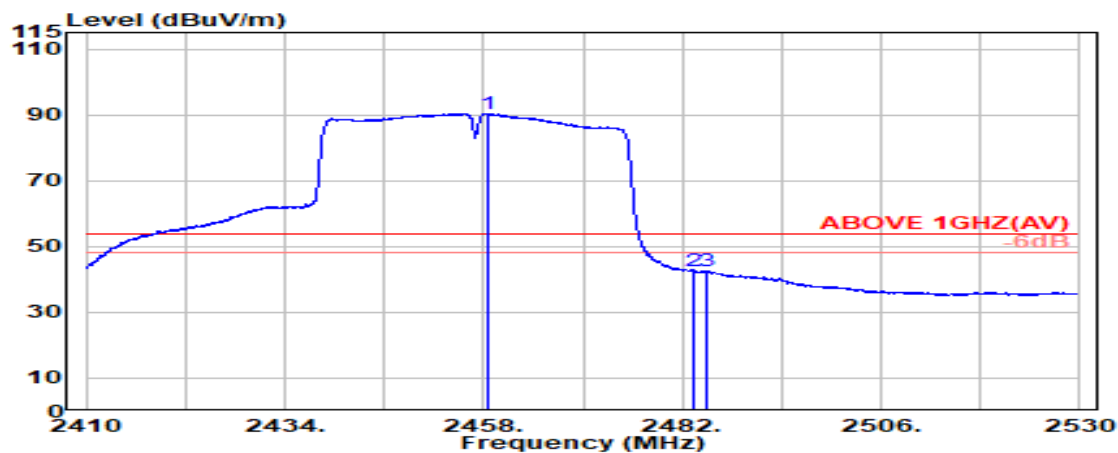

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.550	28.33	5.80	39.92	96.26	90.47	---	---	Average
2483.500	28.43	5.83	39.92	47.97	42.31	54.00	11.69	Average
2484.900	28.44	5.83	39.92	48.18	42.53	54.00	11.47	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

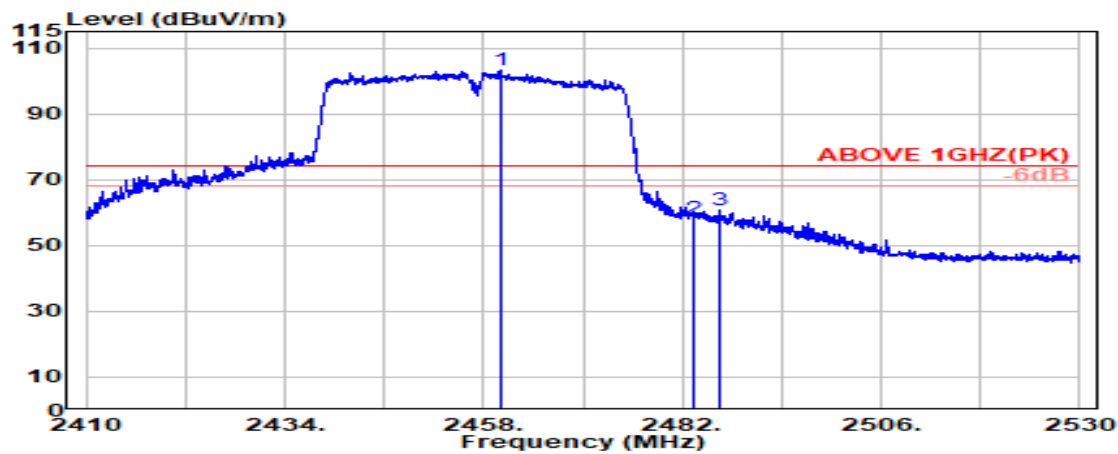

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.050	28.34	5.80	39.92	109.01	103.23	---	---	Peak
2483.500	28.43	5.83	39.92	63.78	58.12	74.00	15.88	Peak
2486.450	28.45	5.83	39.92	66.28	60.64	74.00	13.36	Peak

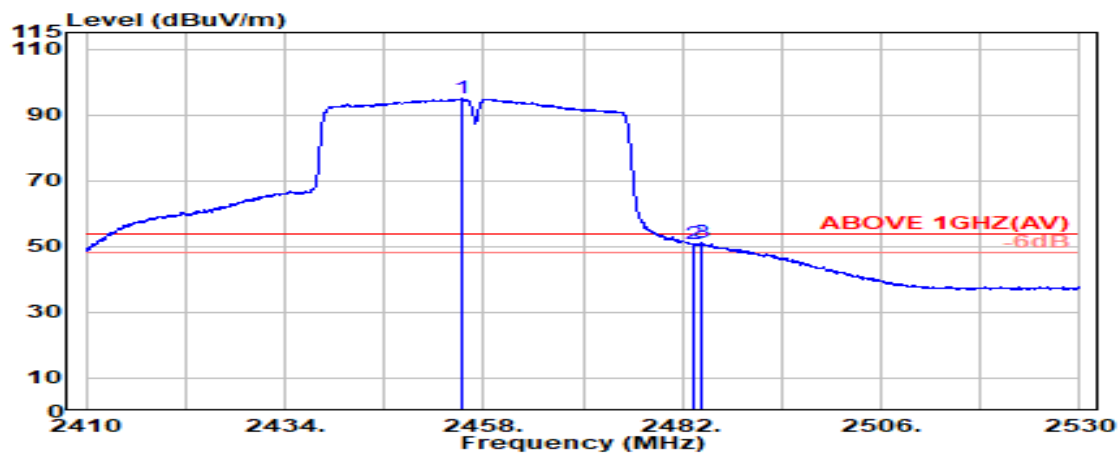

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.450	28.32	5.79	39.92	100.75	94.95	---	---	Average
2483.500	28.43	5.83	39.92	56.50	50.84	54.00	3.16	Average
2484.300	28.44	5.83	39.92	56.80	51.15	54.00	2.85	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

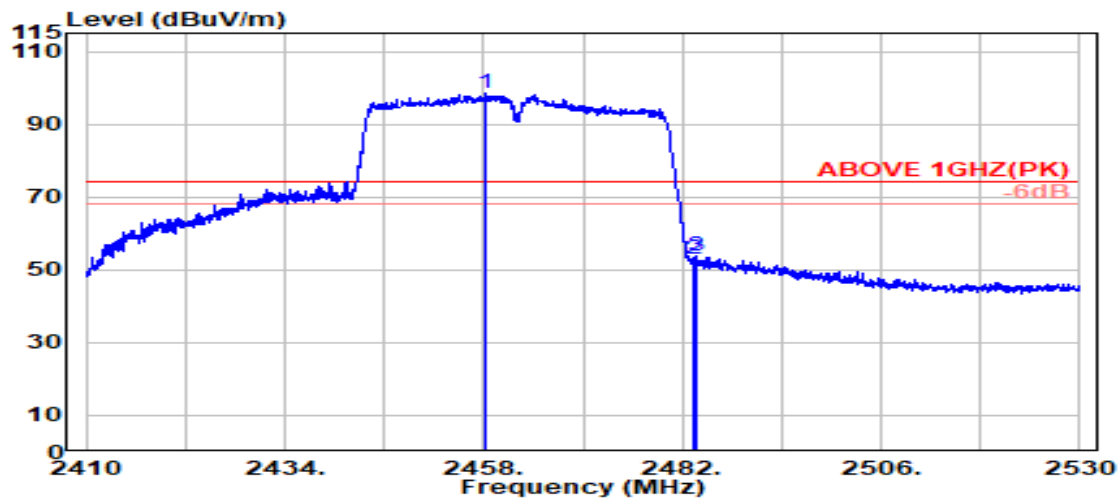

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.350	28.33	5.80	39.92	104.18	98.39	---	---	Peak
2483.500	28.43	5.83	39.92	58.48	52.83	74.00	21.17	Peak
2483.800	28.44	5.83	39.92	59.43	53.77	74.00	20.23	Peak

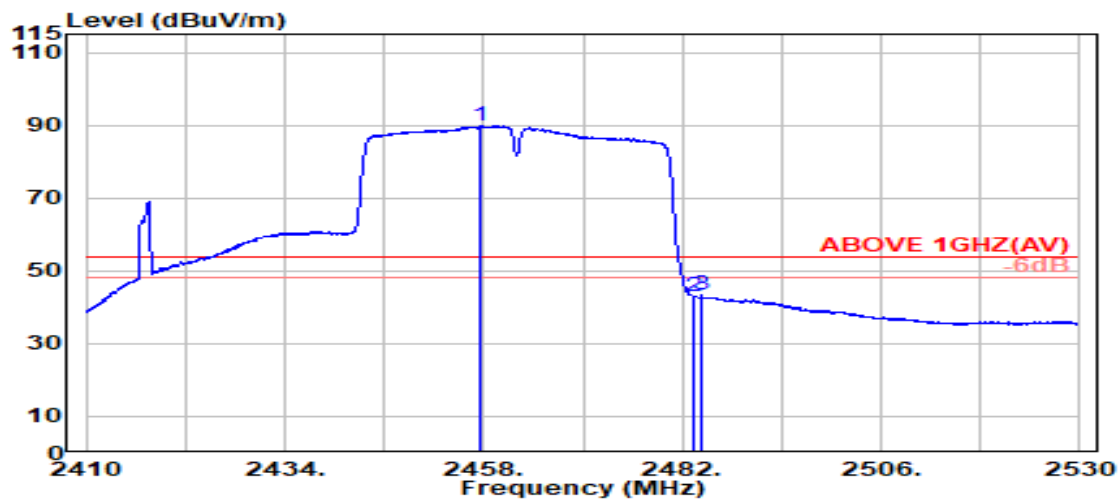

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.650	28.33	5.79	39.92	95.52	89.72	---	---	Average
2483.500	28.43	5.83	39.92	48.79	43.13	54.00	10.87	Average
2484.250	28.44	5.83	39.92	48.99	43.34	54.00	10.66	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

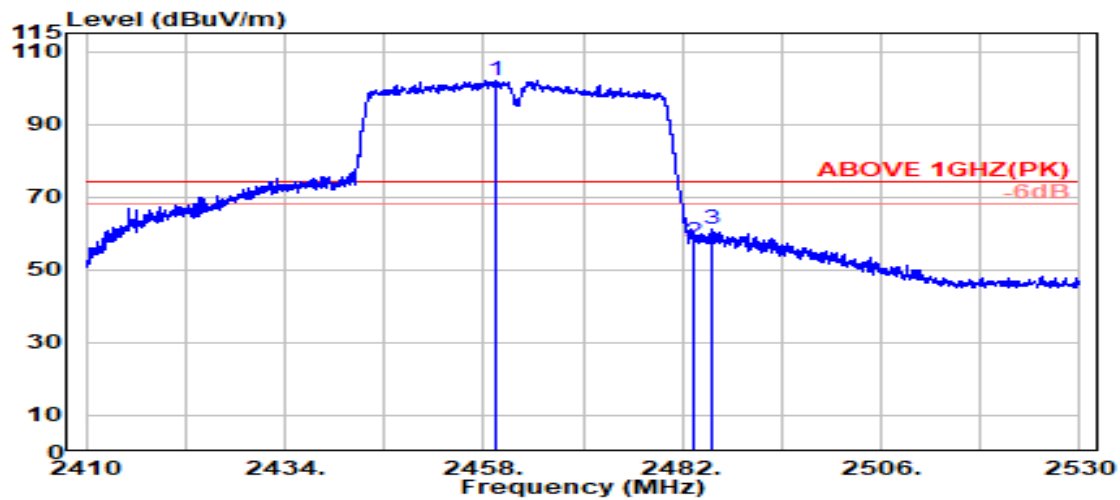

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.400	28.34	5.80	39.92	107.73	101.95	---	---	Peak
2483.500	28.43	5.83	39.92	63.46	57.80	74.00	16.20	Peak
2485.650	28.44	5.83	39.92	67.00	61.35	74.00	12.65	Peak

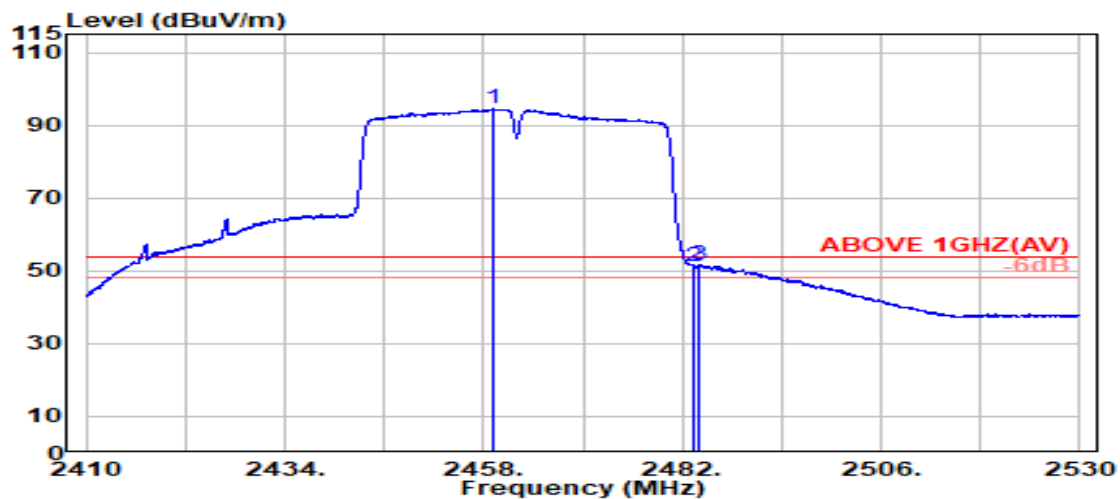

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.250	28.34	5.80	39.92	100.38	94.60	---	---	Average
2483.500	28.43	5.83	39.92	57.08	51.42	54.00	2.58	Average
2484.050	28.44	5.83	39.92	57.22	51.57	54.00	2.43	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

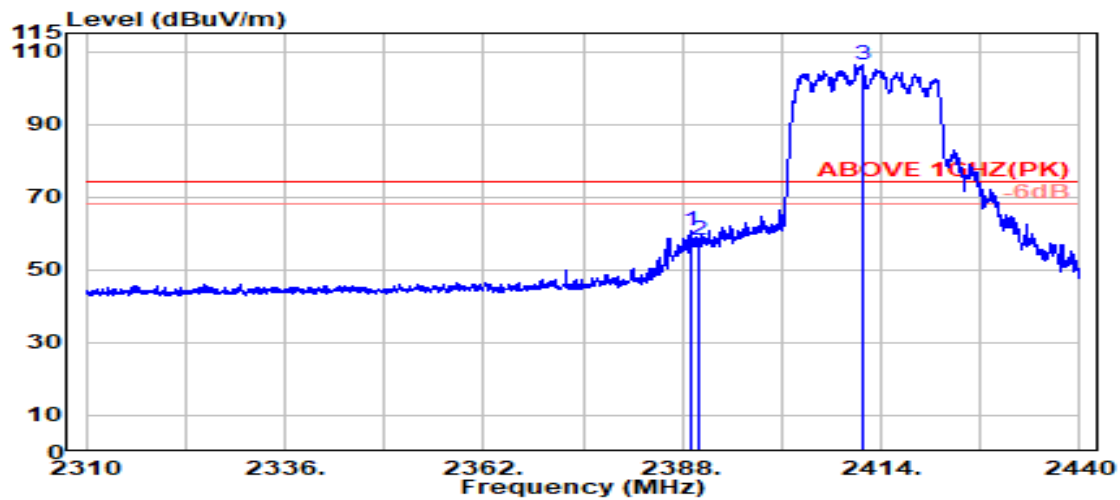

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.029	28.20	5.70	39.92	66.66	60.65	74.00	13.35	Peak
2390.000	28.20	5.70	39.92	64.02	58.01	74.00	15.99	Peak
@ 2411.454	28.22	5.73	39.92	112.18	106.22	---	---	Peak

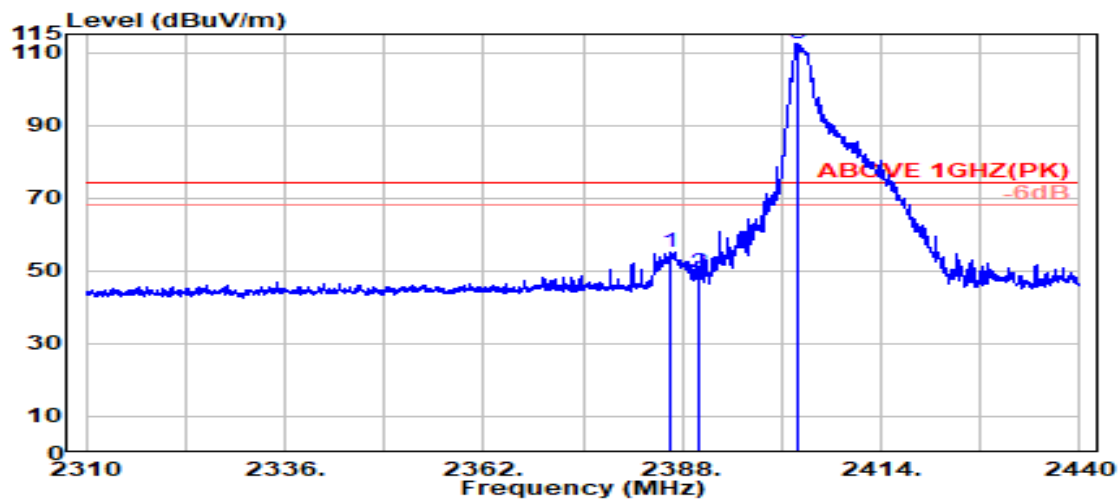

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.483	28.20	5.70	39.92	61.14	55.12	74.00	18.88	Peak
2390.000	28.20	5.70	39.92	55.70	49.69	74.00	24.31	Peak
@ 2403.004	28.21	5.72	39.92	118.57	112.58	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

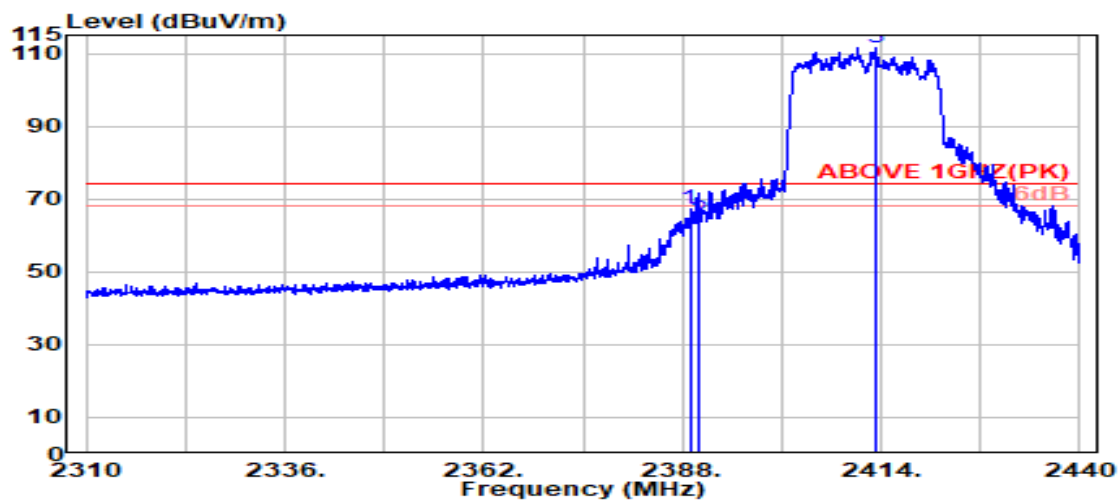

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.975	28.20	5.70	39.92	73.49	67.47	74.00	6.53	Peak
2390.000	28.20	5.70	39.92	70.07	64.06	74.00	9.94	Peak
@ 2413.188	28.23	5.73	39.92	117.60	111.65	---	---	Peak

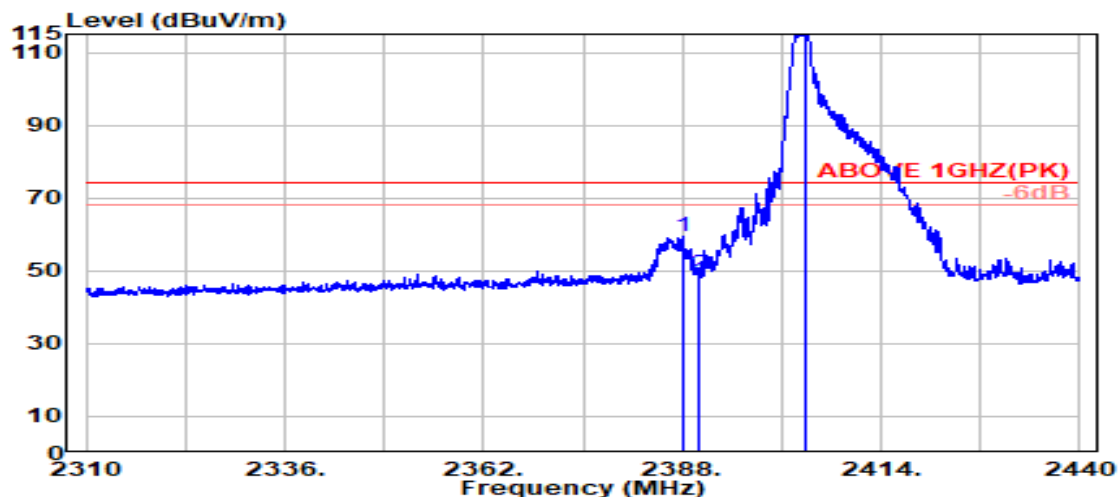

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	28.20	5.70	39.92	65.35	59.33	74.00	14.67	Peak
2390.000	28.20	5.70	39.92	55.17	49.16	74.00	24.84	Peak
@ 2404.142	28.21	5.72	39.92	122.36	116.37	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

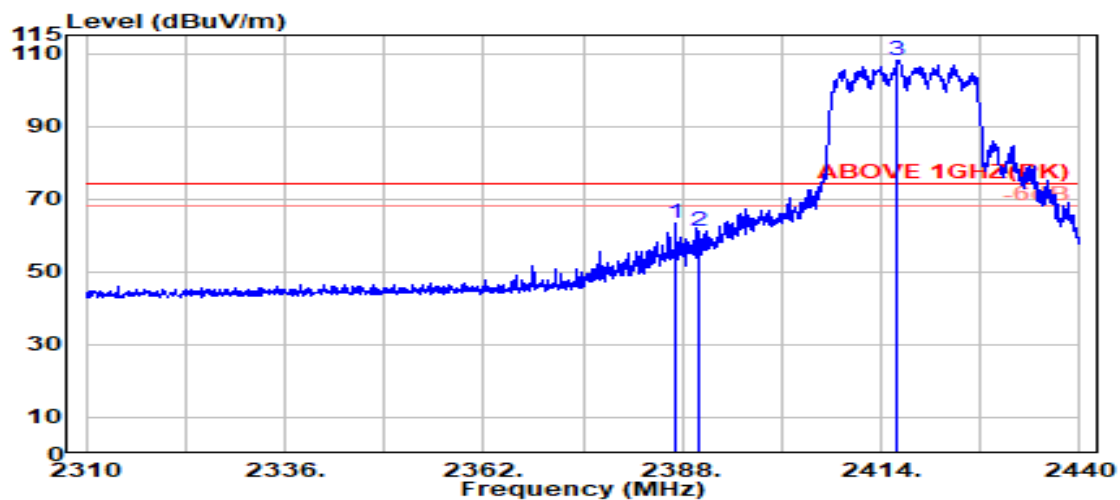

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.188	28.20	5.70	39.92	69.21	63.19	74.00	10.81	Peak
2390.000	28.20	5.70	39.92	67.16	61.14	74.00	12.86	Peak
@ 2416.113	28.23	5.74	39.92	114.12	108.17	---	---	Peak

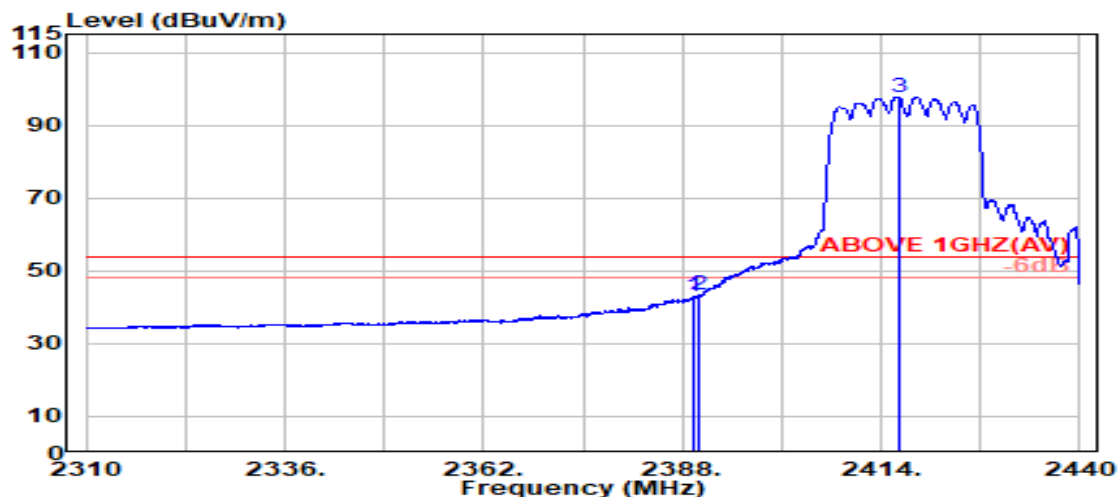

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.571	28.20	5.70	39.92	48.95	42.93	54.00	11.07	Average
2390.000	28.20	5.70	39.92	49.45	43.44	54.00	10.56	Average
@ 2416.275	28.23	5.74	39.92	103.58	97.63	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

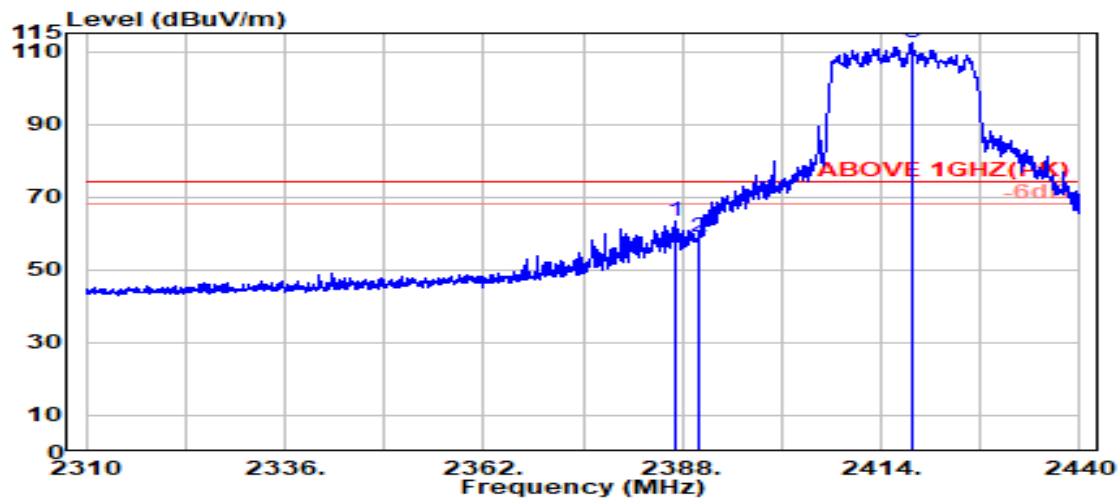

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.133	28.20	5.70	39.92	69.21	63.19	74.00	10.81	Peak
2390.000	28.20	5.70	39.92	65.06	59.04	74.00	14.96	Peak
@ 2417.954	28.24	5.74	39.92	118.43	112.49	---	---	Peak

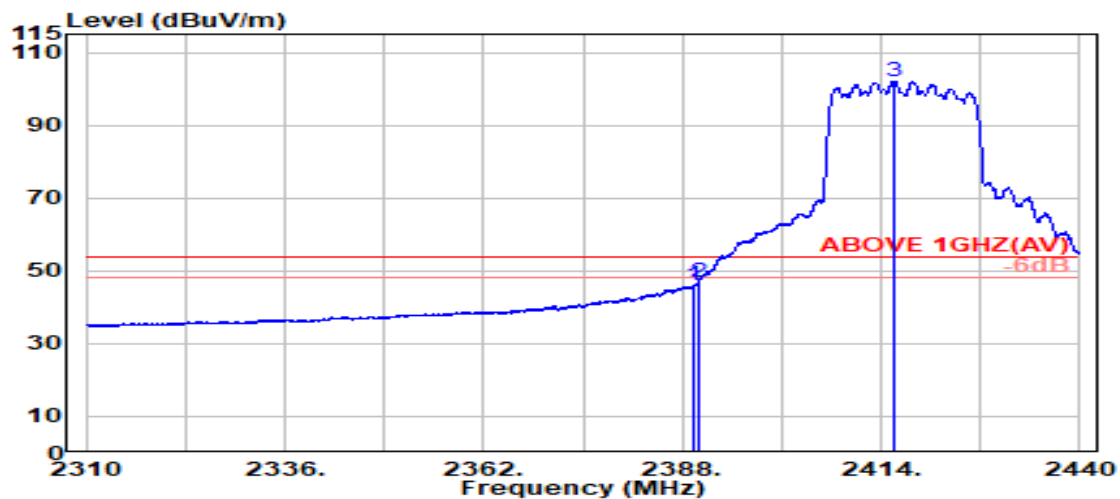

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.354	28.20	5.70	39.92	52.01	45.99	54.00	8.01	Average
2390.000	28.20	5.70	39.92	53.04	47.02	54.00	6.98	Average
@ 2415.733	28.23	5.74	39.92	107.97	102.02	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

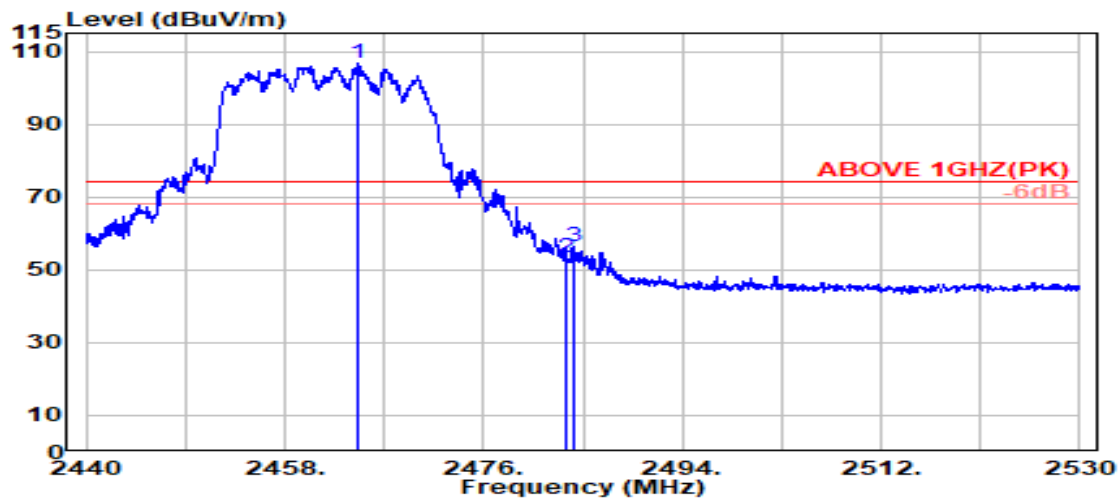

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.550	28.36	5.80	39.92	112.40	106.64	---	---	Peak
2483.500	28.43	5.83	39.92	59.08	53.42	74.00	20.58	Peak
2484.100	28.44	5.83	39.92	61.88	56.23	74.00	17.77	Peak

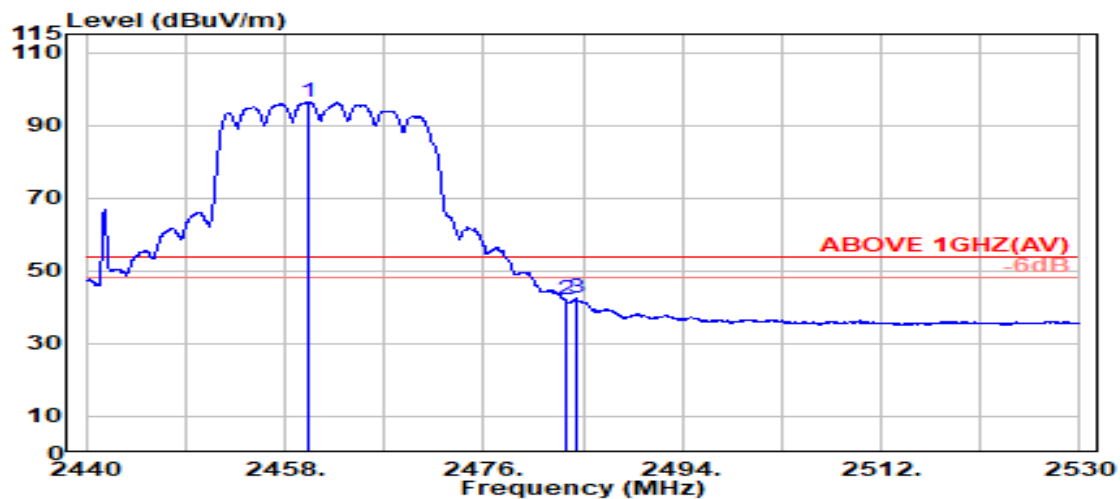

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.100	28.34	5.80	39.92	102.11	96.33	---	---	Average
2483.500	28.43	5.83	39.92	47.66	42.00	54.00	12.00	Average
2484.400	28.44	5.83	39.92	48.06	42.41	54.00	11.59	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

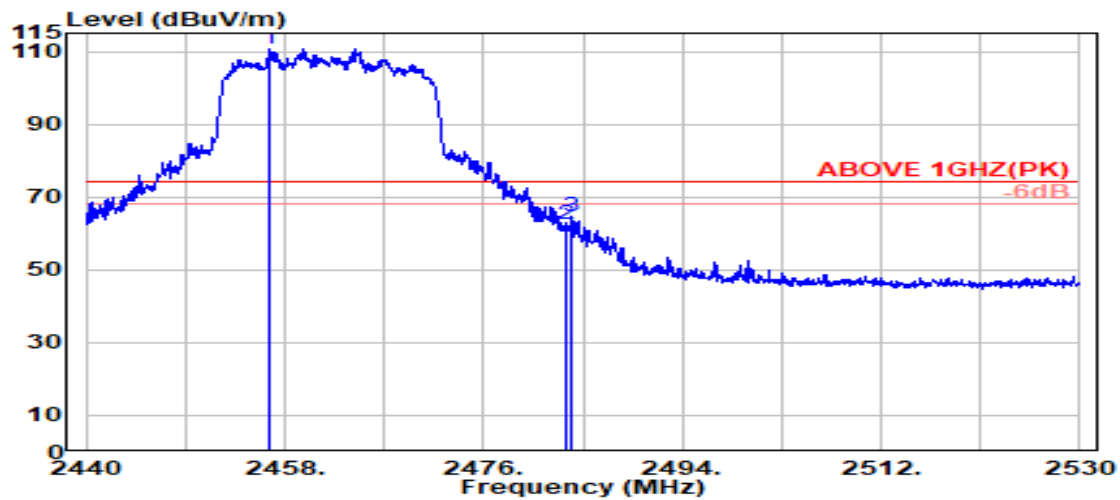

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2456.700	28.33	5.79	39.92	116.61	110.81	---	---	Peak
2483.500	28.43	5.83	39.92	68.09	62.44	74.00	11.56	Peak
2483.950	28.44	5.83	39.92	70.44	64.79	74.00	9.21	Peak

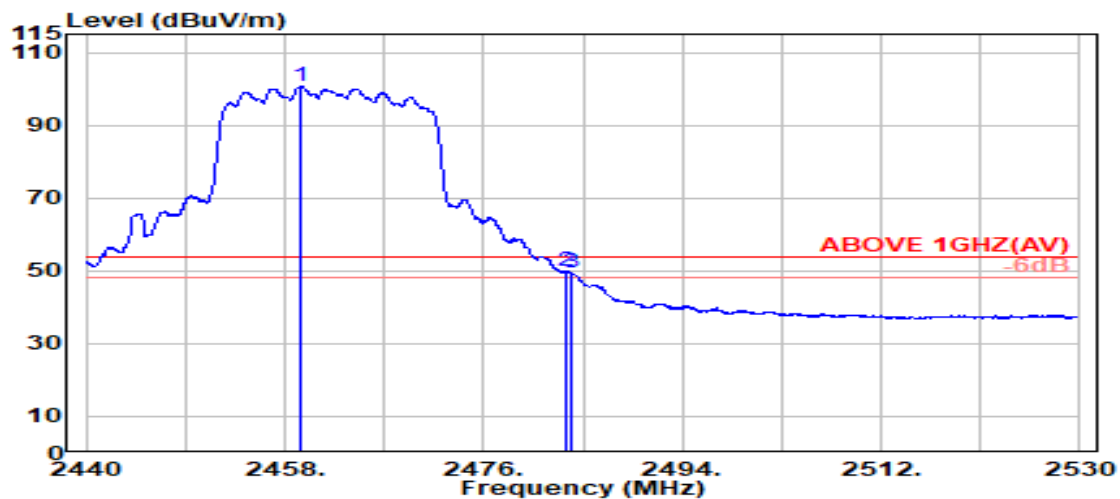

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.400	28.34	5.80	39.92	106.29	100.51	---	---	Average
2483.500	28.43	5.83	39.92	55.38	49.73	54.00	4.27	Average
2483.950	28.44	5.83	39.92	55.30	49.65	54.00	4.35	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

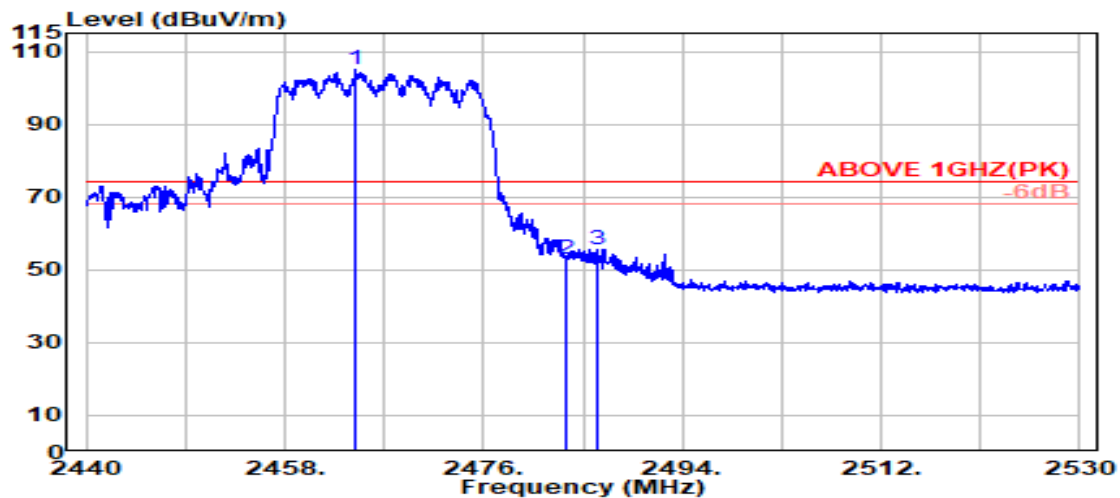

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.400	28.36	5.80	39.92	110.87	105.11	---	---	Peak
2483.500	28.43	5.83	39.92	58.56	52.90	74.00	21.10	Peak
2486.300	28.45	5.83	39.92	61.39	55.75	74.00	18.25	Peak

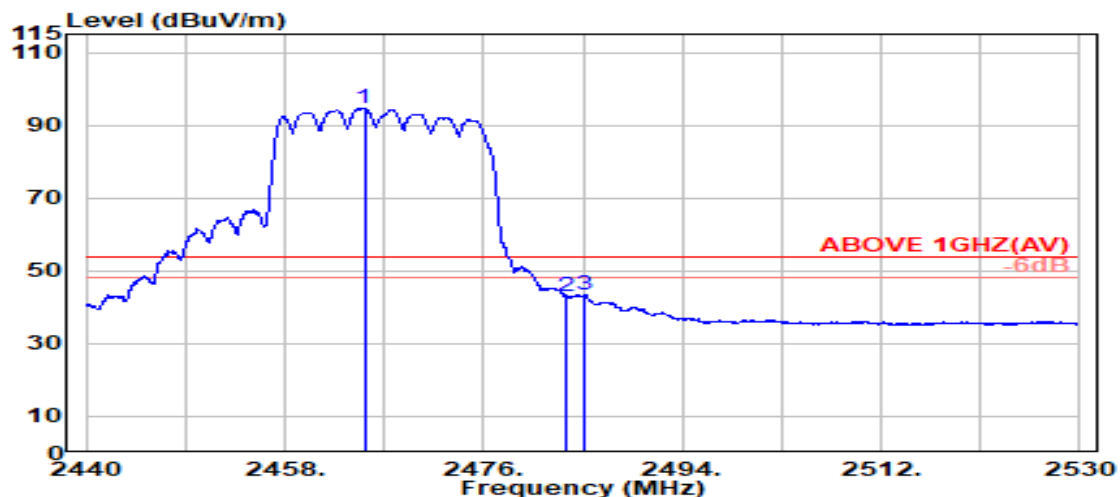

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.200	28.36	5.80	39.92	100.40	94.65	---	---	Average
2483.500	28.43	5.83	39.92	48.79	43.13	54.00	10.87	Average
2485.200	28.44	5.83	39.92	49.09	43.44	54.00	10.56	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

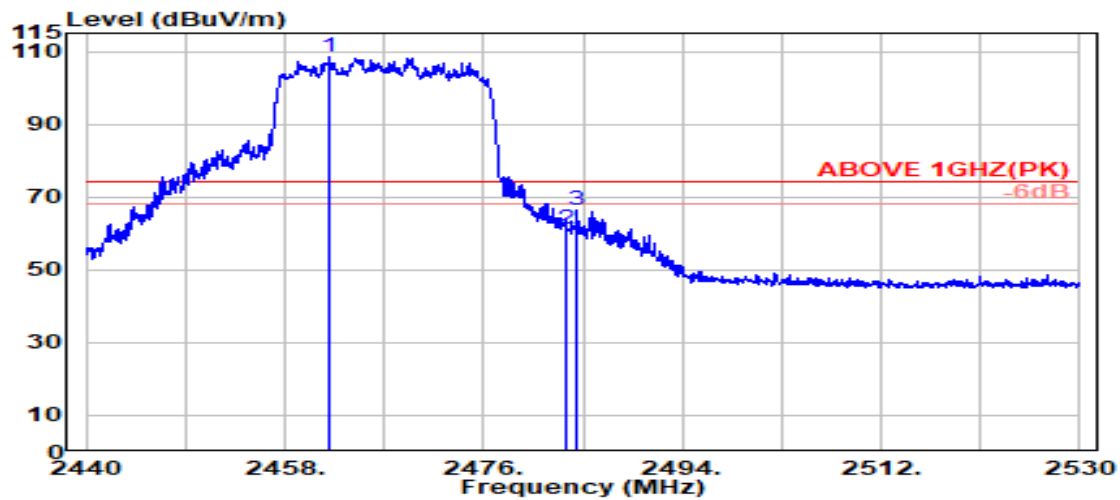

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.000	28.35	5.80	39.92	114.38	108.61	---	---	Peak
2483.500	28.43	5.83	39.92	67.03	61.37	74.00	12.63	Peak
2484.450	28.44	5.83	39.92	72.18	66.53	74.00	7.47	Peak

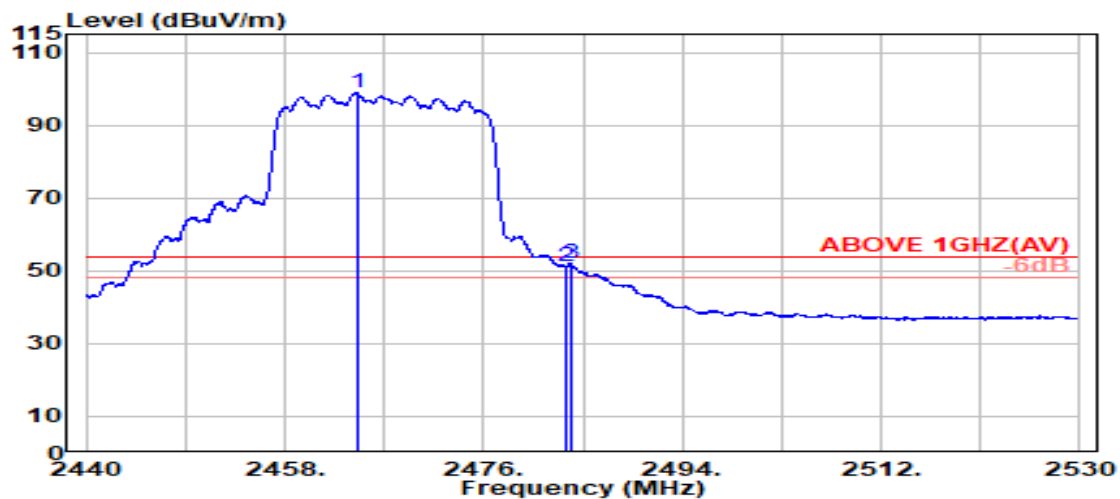

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	28.36	5.80	39.92	104.57	98.82	---	---	Average
2483.500	28.43	5.83	39.92	56.80	51.15	54.00	2.85	Average
2483.900	28.44	5.83	39.92	57.61	51.96	54.00	2.04	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

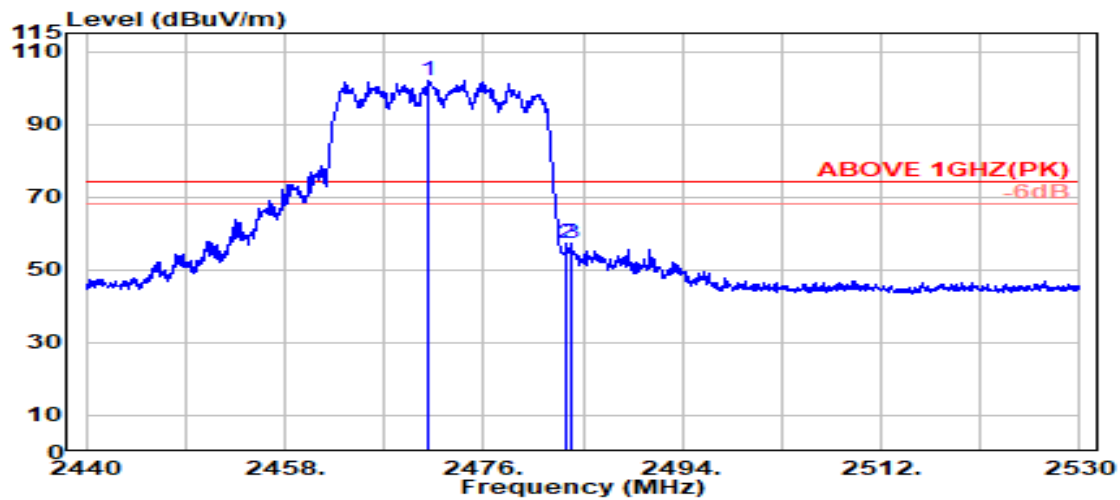

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.950	28.38	5.81	39.92	107.63	101.91	---	---	Peak
2483.500	28.43	5.83	39.92	63.04	57.39	74.00	16.61	Peak
2483.900	28.44	5.83	39.92	62.91	57.26	74.00	16.74	Peak

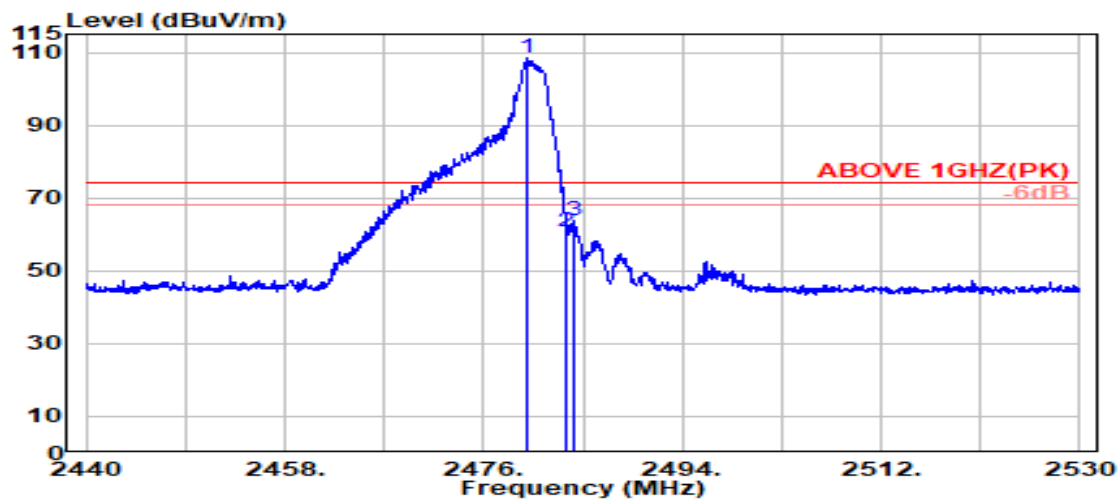

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.42	5.82	39.92	114.21	108.54	---	---	Peak
2483.500	28.43	5.83	39.92	66.41	60.75	74.00	13.25	Peak
2484.200	28.44	5.83	39.92	69.56	63.91	74.00	10.09	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

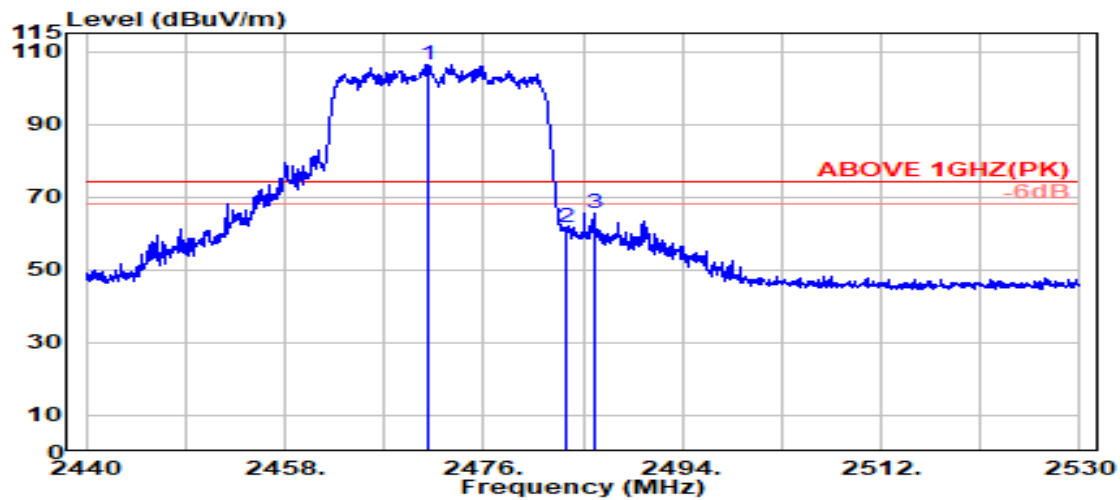

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.900	28.38	5.81	39.92	112.06	106.34	---	---	Peak
2483.500	28.43	5.83	39.92	67.15	61.49	74.00	12.51	Peak
2486.050	28.44	5.83	39.92	71.19	65.55	74.00	8.45	Peak

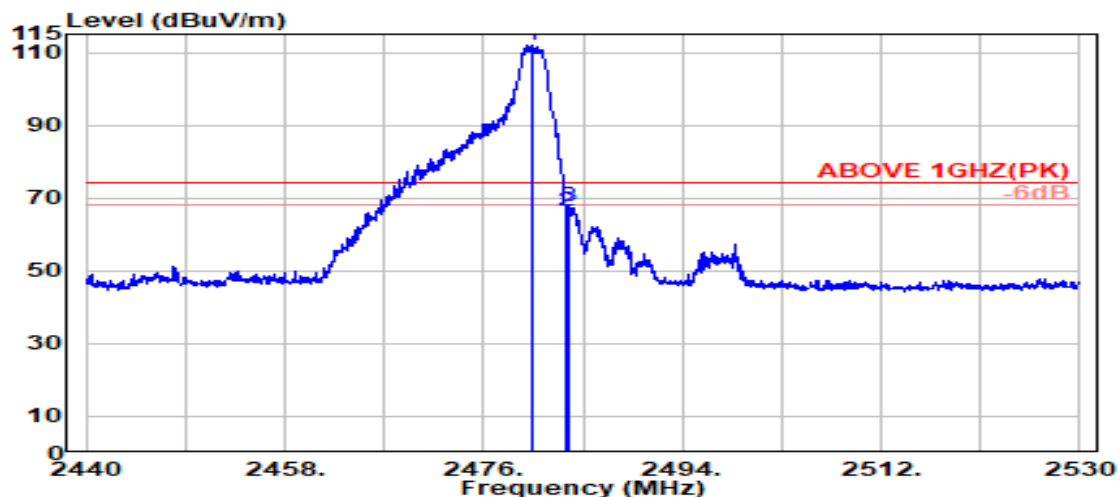

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.42	5.82	39.92	117.47	111.80	---	---	Peak
2483.500	28.43	5.83	39.92	71.87	66.21	74.00	7.79	Peak
2483.750	28.44	5.83	39.92	73.15	67.50	74.00	6.50	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

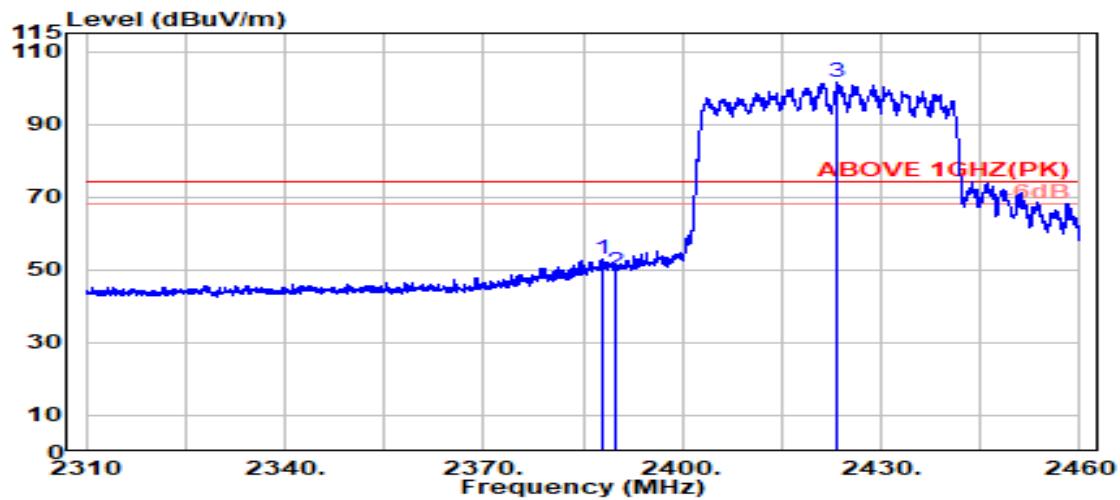

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.800	28.20	5.70	39.92	58.89	52.87	74.00	21.13	Peak
2389.800	28.20	5.70	39.92	55.36	49.35	74.00	24.65	Peak
@ 2423.350	28.25	5.75	39.92	107.32	101.40	---	---	Peak

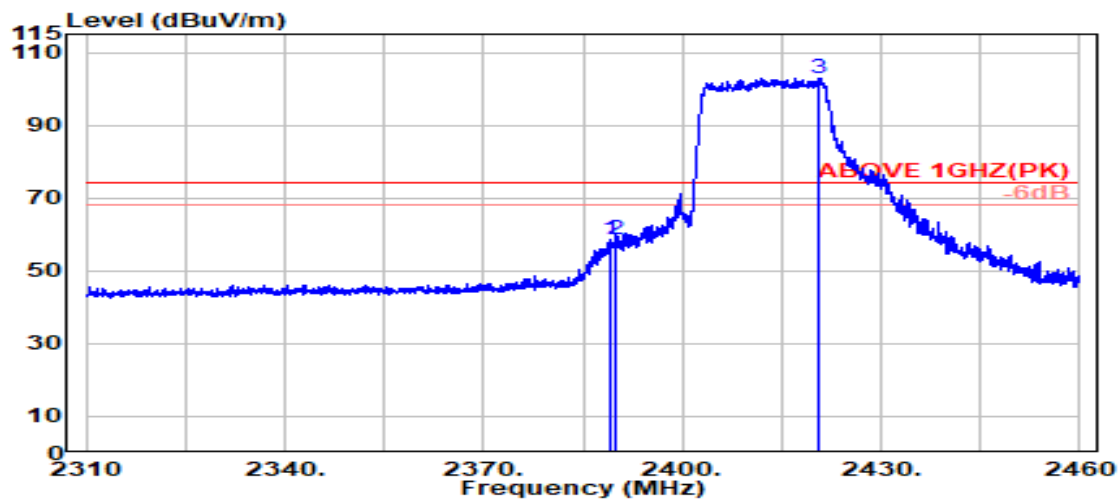

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.20	5.70	39.92	64.80	58.78	74.00	15.22	Peak
2390.000	28.20	5.70	39.92	64.72	58.71	74.00	15.29	Peak
@ 2420.550	28.24	5.74	39.92	108.96	103.03	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

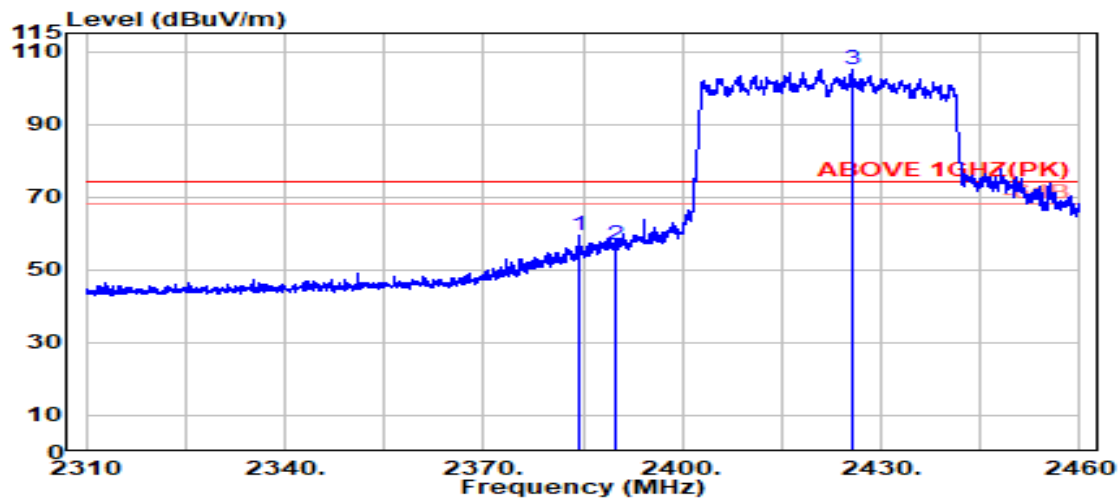

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2384.500	28.20	5.70	39.92	65.38	59.36	74.00	14.64	Peak
2389.800	28.20	5.70	39.92	62.88	56.86	74.00	17.14	Peak
@ 2425.550	28.25	5.75	39.92	111.09	105.18	---	---	Peak

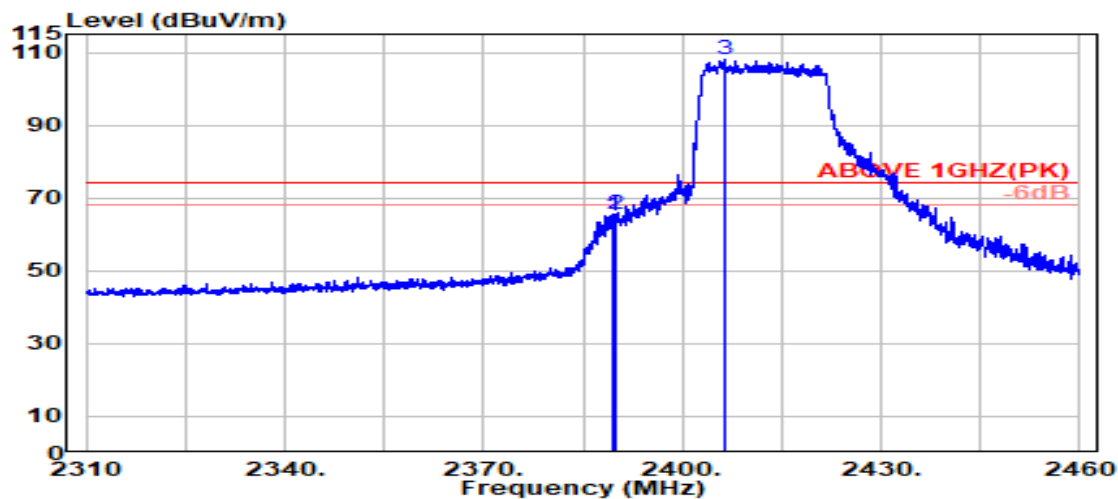

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.92	71.29	65.28	74.00	8.72	Peak
2390.000	28.20	5.70	39.92	71.37	65.36	74.00	8.64	Peak
@ 2406.300	28.21	5.73	39.92	114.23	108.25	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2427 MHz
------	---------------	-----------	-------------

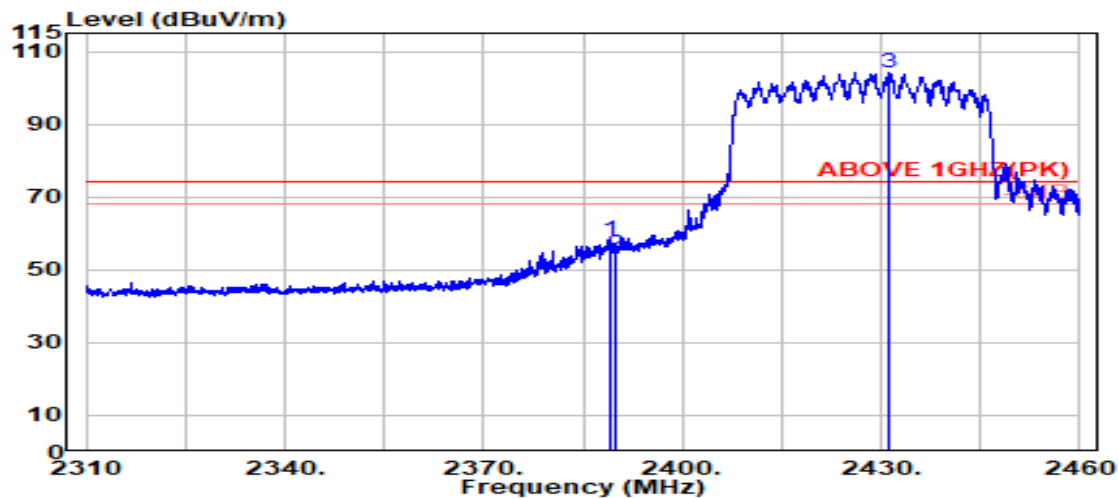

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.150	28.20	5.70	39.92	64.10	58.08	74.00	15.92	Peak
2389.800	28.20	5.70	39.92	60.25	54.23	74.00	19.77	Peak
@ 2431.200	28.26	5.76	39.92	109.92	104.03	---	---	Peak

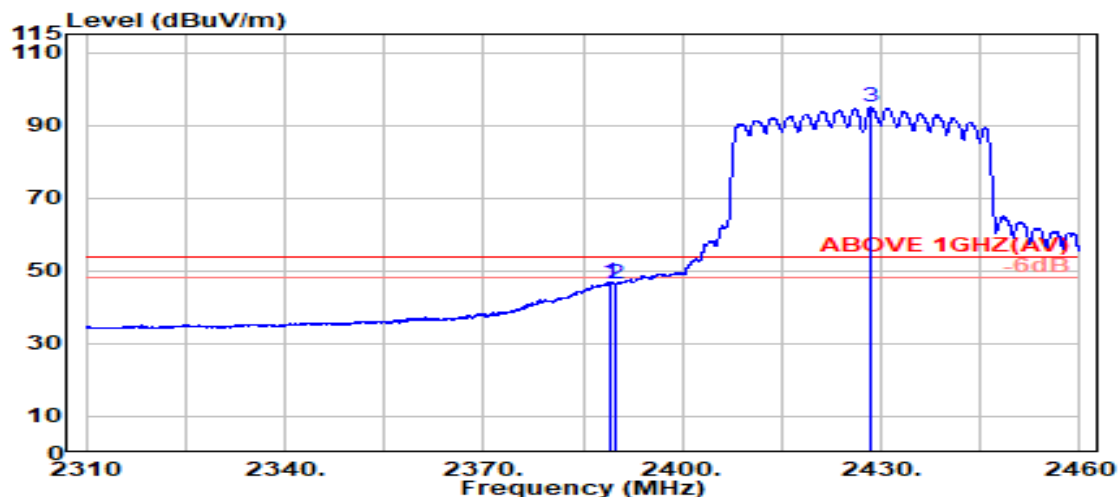

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.150	28.20	5.70	39.92	52.97	46.95	54.00	7.05	Average
2389.800	28.20	5.70	39.92	52.62	46.60	54.00	7.40	Average
@ 2428.450	28.26	5.76	39.92	100.91	95.00	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2427 MHz
------	---------------	-----------	-------------

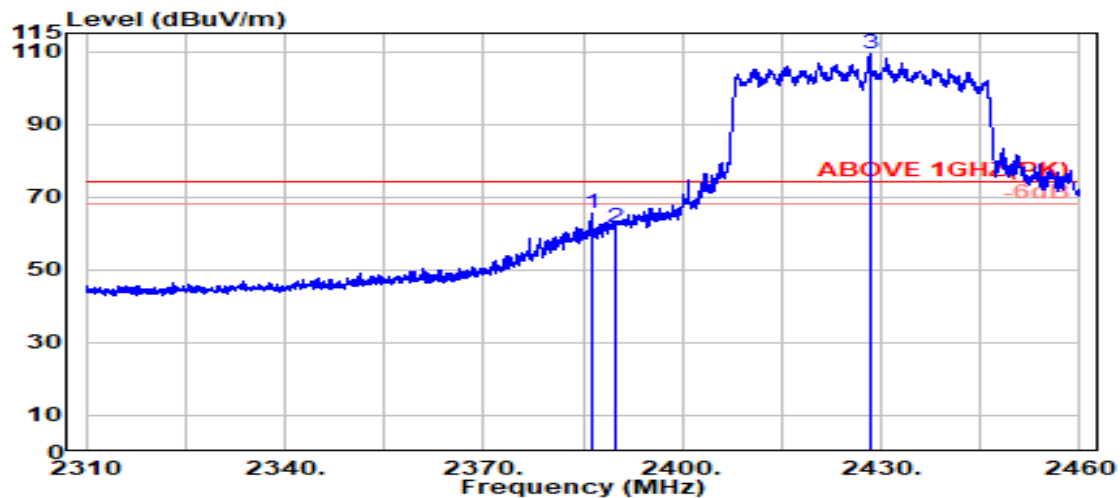

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.250	28.20	5.70	39.92	71.33	65.31	74.00	8.69	Peak
2389.800	28.20	5.70	39.92	67.51	61.50	74.00	12.50	Peak
@ 2428.300	28.26	5.75	39.92	115.30	109.39	---	---	Peak

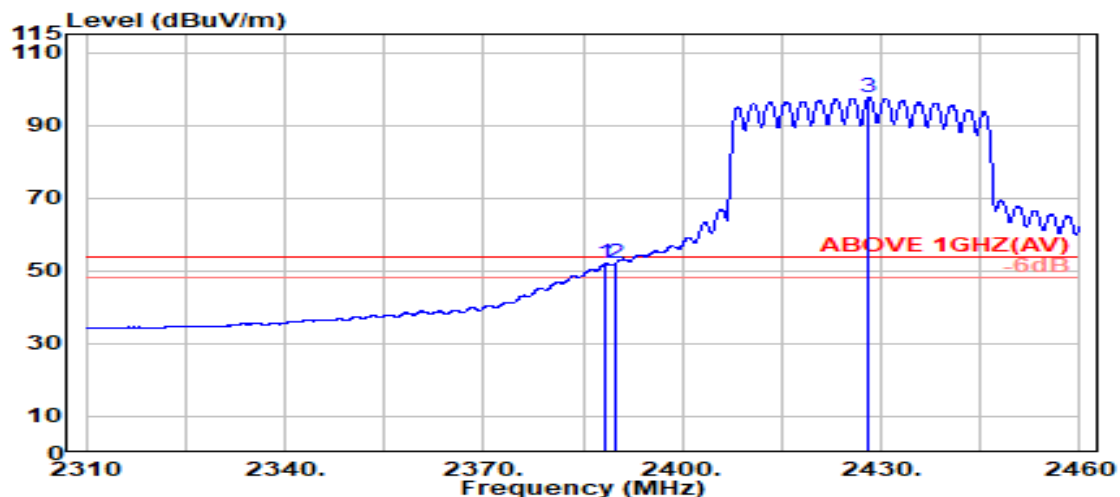

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.500	28.20	5.70	39.92	57.95	51.93	54.00	2.07	Average
2390.000	28.20	5.70	39.92	58.03	52.02	54.00	1.98	Average
@ 2428.200	28.26	5.75	39.92	103.42	97.51	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

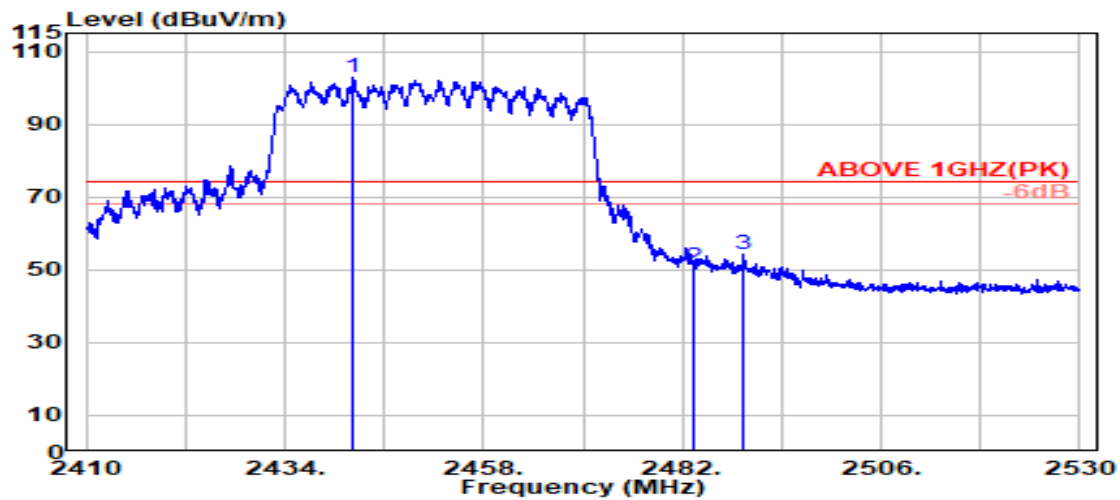

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2442.300	28.28	5.77	39.92	108.52	102.66	---	---	Peak
2483.500	28.43	5.83	39.92	56.59	50.93	74.00	23.07	Peak
2489.400	28.46	5.84	39.92	59.78	54.16	74.00	19.84	Peak

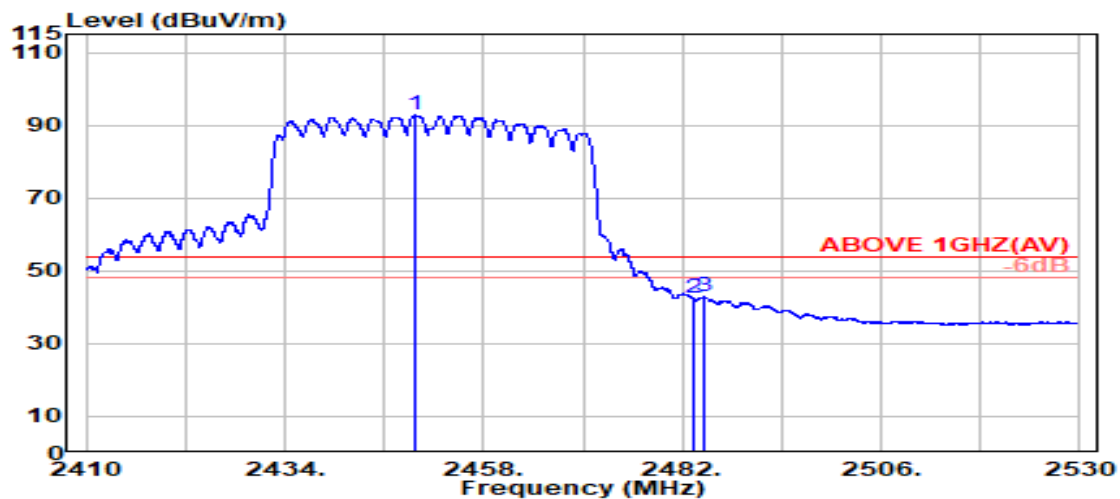

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.750	28.30	5.78	39.92	98.63	92.79	---	---	Average
2483.500	28.43	5.83	39.92	48.05	42.39	54.00	11.61	Average
2484.700	28.44	5.83	39.92	48.67	43.02	54.00	10.98	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

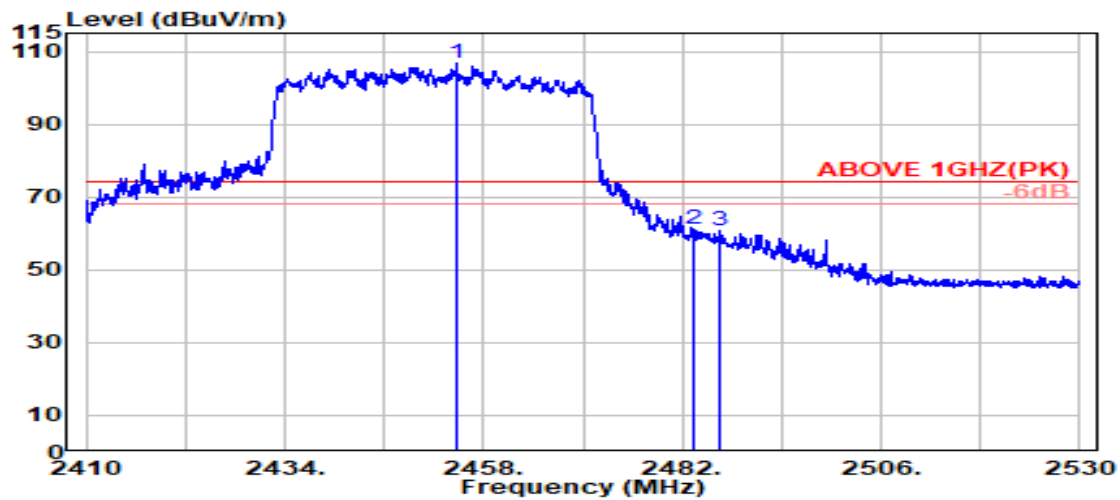

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2454.650	28.32	5.79	39.92	112.37	106.56	---	---	Peak
2483.500	28.43	5.83	39.92	67.00	61.34	74.00	12.66	Peak
2486.600	28.45	5.83	39.92	66.37	60.73	74.00	13.27	Peak

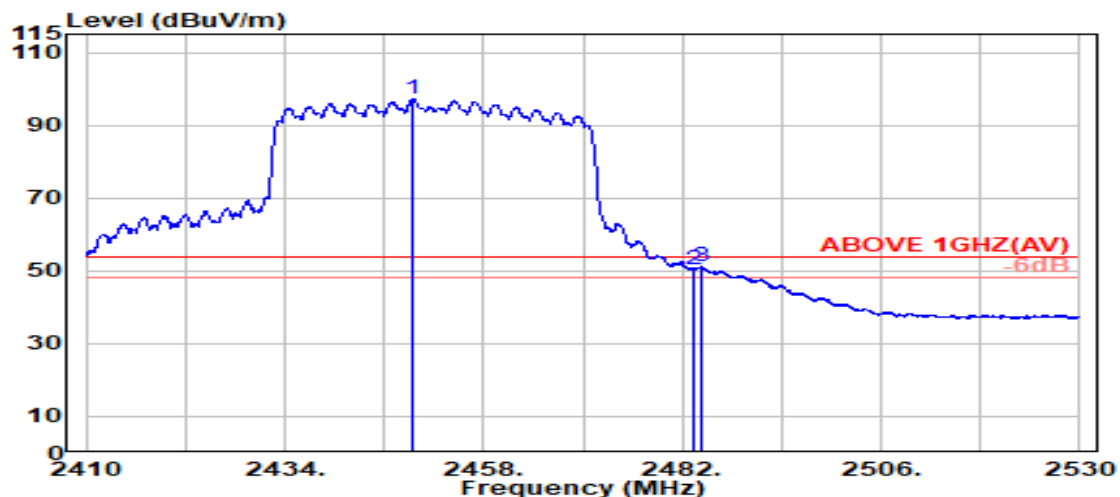

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2449.400	28.30	5.78	39.92	102.87	97.04	---	---	Average
2483.500	28.43	5.83	39.92	56.14	50.48	54.00	3.52	Average
2484.200	28.44	5.83	39.92	56.90	51.24	54.00	2.76	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

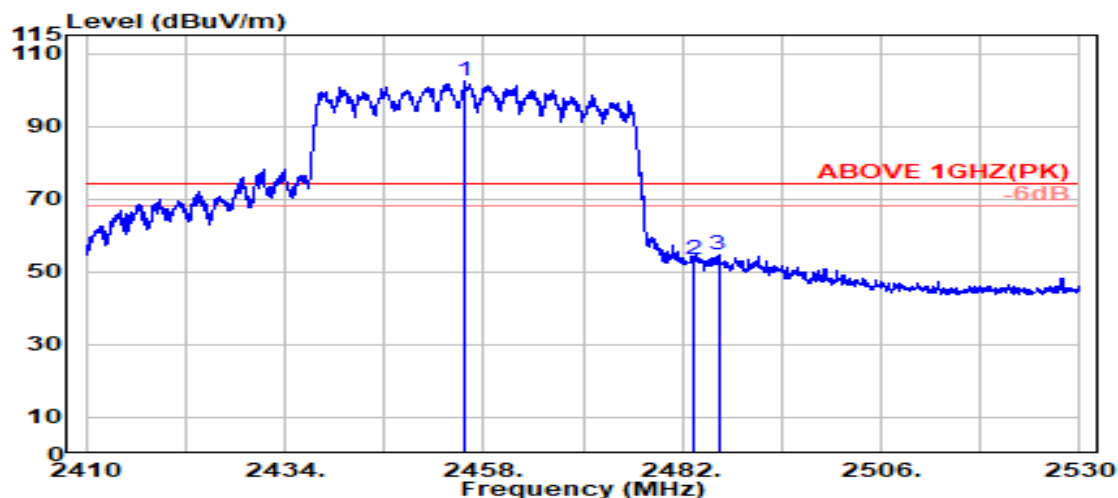

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.750	28.32	5.79	39.92	108.17	102.37	---	---	Peak
2483.500	28.43	5.83	39.92	59.05	53.40	74.00	20.60	Peak
2486.350	28.45	5.83	39.92	60.11	54.47	74.00	19.53	Peak

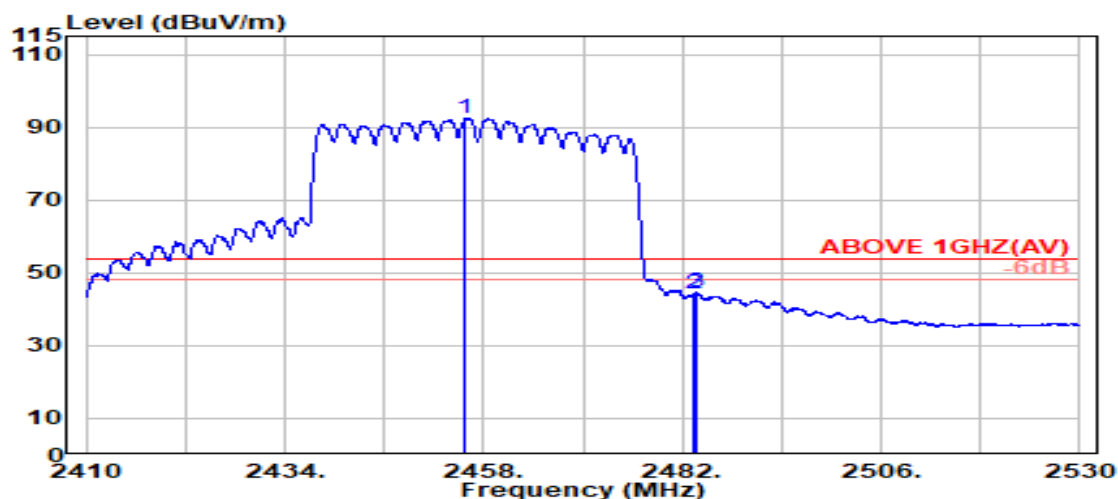

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.850	28.32	5.79	39.92	98.20	92.39	---	---	Average
2483.500	28.43	5.83	39.92	49.82	44.16	54.00	9.84	Average
2483.700	28.44	5.83	39.92	50.30	44.64	54.00	9.36	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

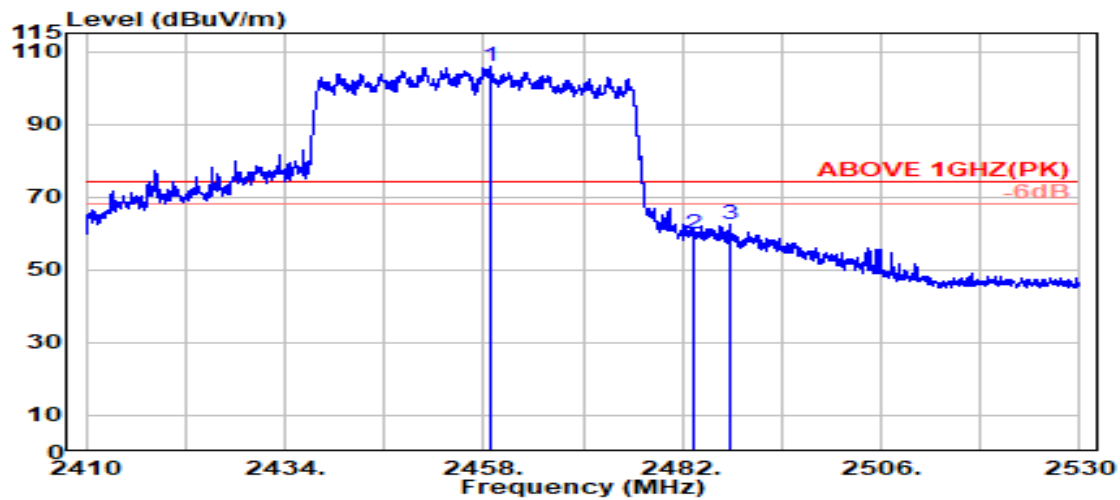

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.750	28.34	5.80	39.92	111.52	105.74	---	---	Peak
2483.500	28.43	5.83	39.92	65.39	59.74	74.00	14.26	Peak
2487.700	28.45	5.83	39.92	68.30	62.67	74.00	11.33	Peak

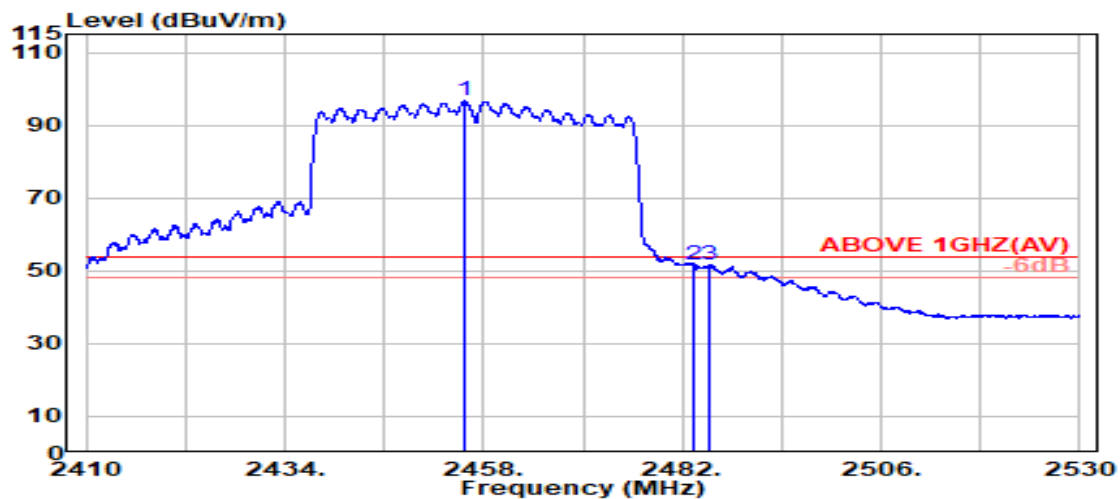

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.800	28.32	5.79	39.92	102.42	96.62	---	---	Average
2483.500	28.43	5.83	39.92	57.23	51.57	54.00	2.43	Average
2485.300	28.44	5.83	39.92	57.27	51.63	54.00	2.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

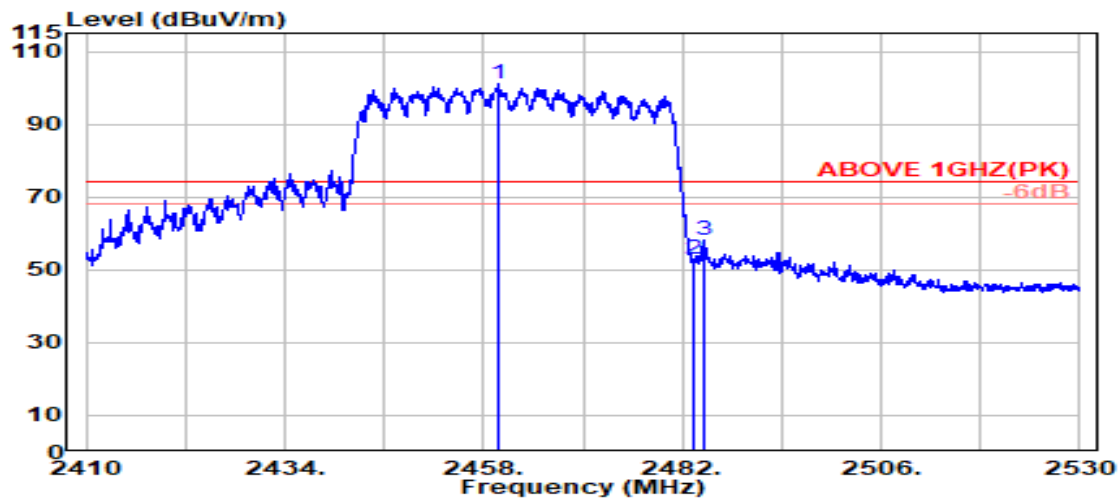

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.700	28.34	5.80	39.92	106.82	101.03	---	---	Peak
2483.500	28.43	5.83	39.92	58.55	52.90	74.00	21.10	Peak
2484.500	28.44	5.83	39.92	63.86	58.21	74.00	15.79	Peak

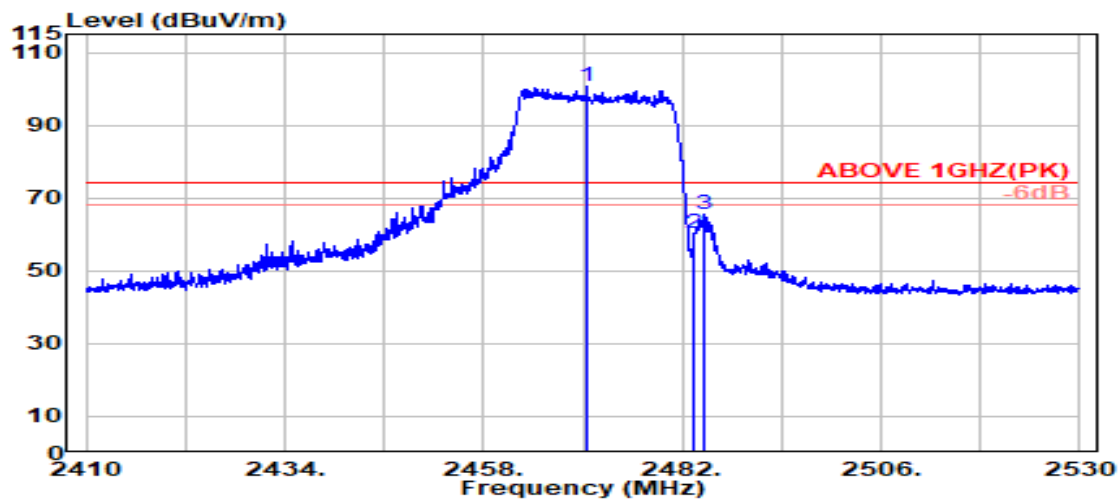

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.450	28.38	5.81	39.92	106.32	100.59	---	---	Peak
2483.500	28.43	5.83	39.92	65.95	60.29	74.00	13.71	Peak
2484.600	28.44	5.83	39.92	71.30	65.65	74.00	8.35	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

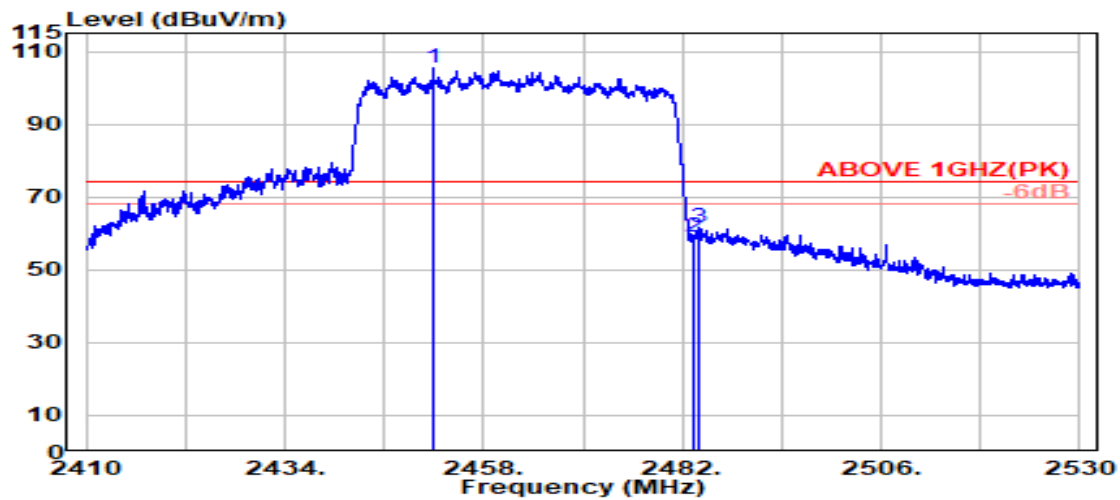

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2451.950	28.31	5.79	39.92	111.09	105.26	---	---	Peak
2483.500	28.43	5.83	39.92	64.84	59.19	74.00	14.81	Peak
2483.900	28.44	5.83	39.92	67.27	61.61	74.00	12.39	Peak

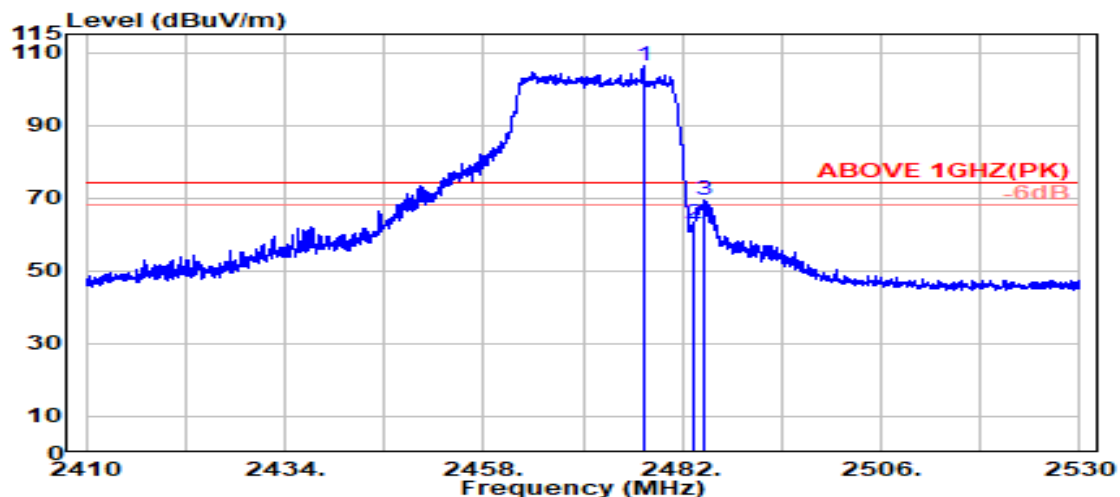

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.250	28.41	5.82	39.92	111.82	106.13	---	---	Peak
2483.500	28.43	5.83	39.92	68.61	62.95	74.00	11.05	Peak
2484.750	28.44	5.83	39.92	74.99	69.34	74.00	4.66	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

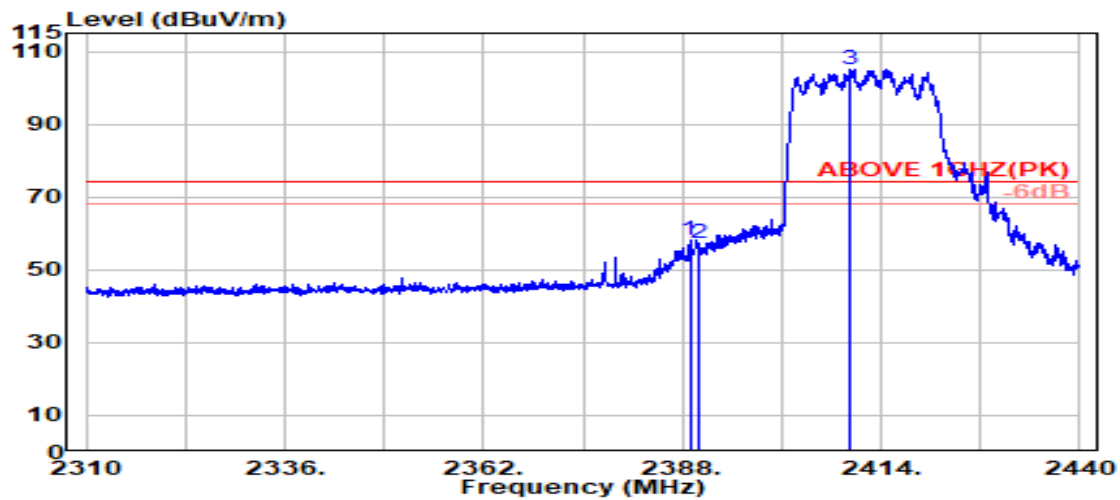

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.975	28.20	5.70	39.92	64.12	58.11	74.00	15.89	Peak
2390.000	28.20	5.70	39.92	63.19	57.18	74.00	16.82	Peak
@ 2409.883	28.22	5.73	39.92	111.00	105.03	---	---	Peak

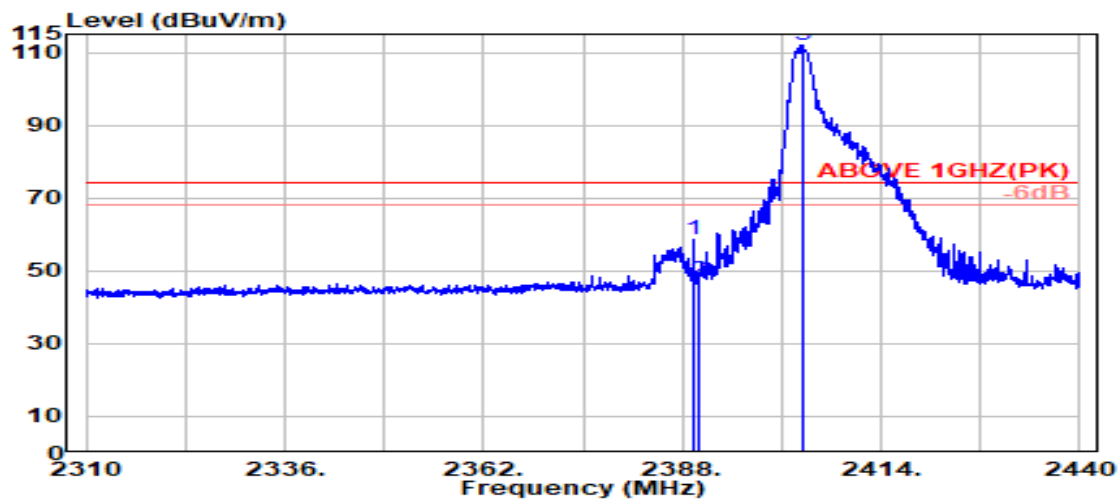

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.517	28.20	5.70	39.92	64.68	58.66	74.00	15.34	Peak
2390.000	28.20	5.70	39.92	53.28	47.26	74.00	26.74	Peak
@ 2403.654	28.21	5.72	39.92	118.00	112.01	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

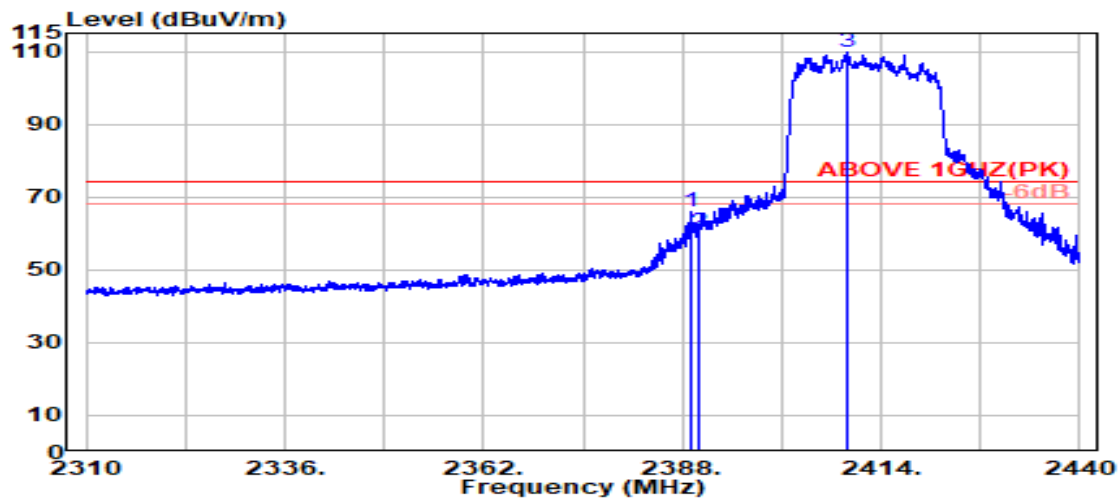

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.029	28.20	5.70	39.92	71.81	65.80	74.00	8.20	Peak
2390.000	28.20	5.70	39.92	66.51	60.49	74.00	13.51	Peak
@ 2409.558	28.22	5.73	39.92	115.71	109.74	---	---	Peak

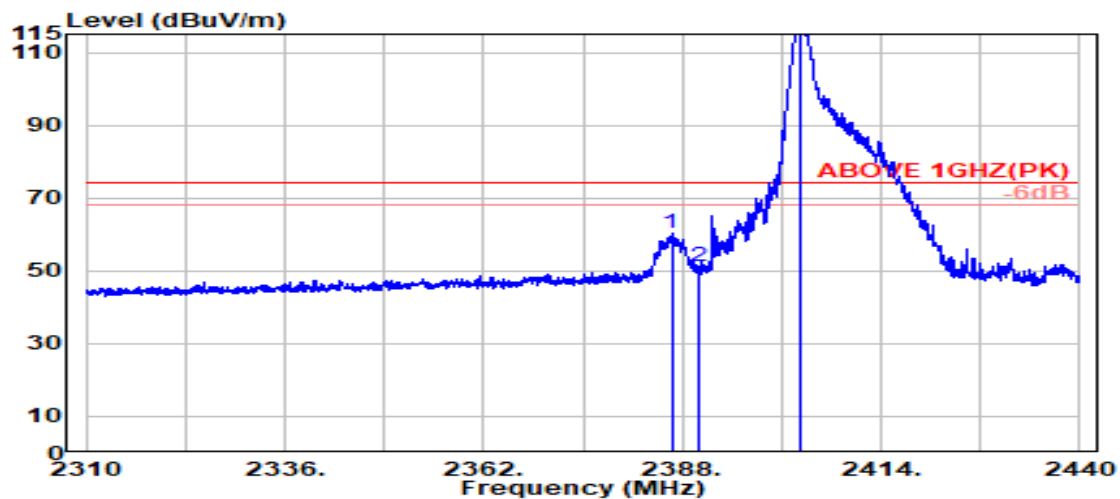

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.592	28.20	5.70	39.92	66.22	60.21	74.00	13.79	Peak
2390.000	28.20	5.70	39.92	57.04	51.02	74.00	22.98	Peak
@ 2403.492	28.21	5.72	39.92	122.99	117.00	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2417MHz
------	----------------	-----------	------------

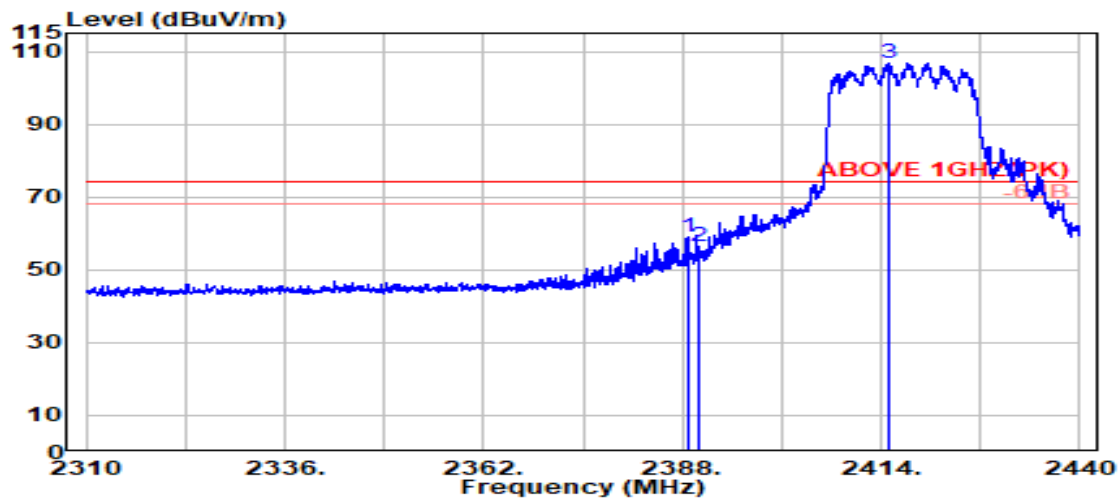

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.650	28.20	5.70	39.92	65.01	58.99	74.00	15.01	Peak
2390.000	28.20	5.70	39.92	62.35	56.34	74.00	17.66	Peak
@ 2414.867	28.23	5.74	39.92	112.65	106.70	---	---	Peak

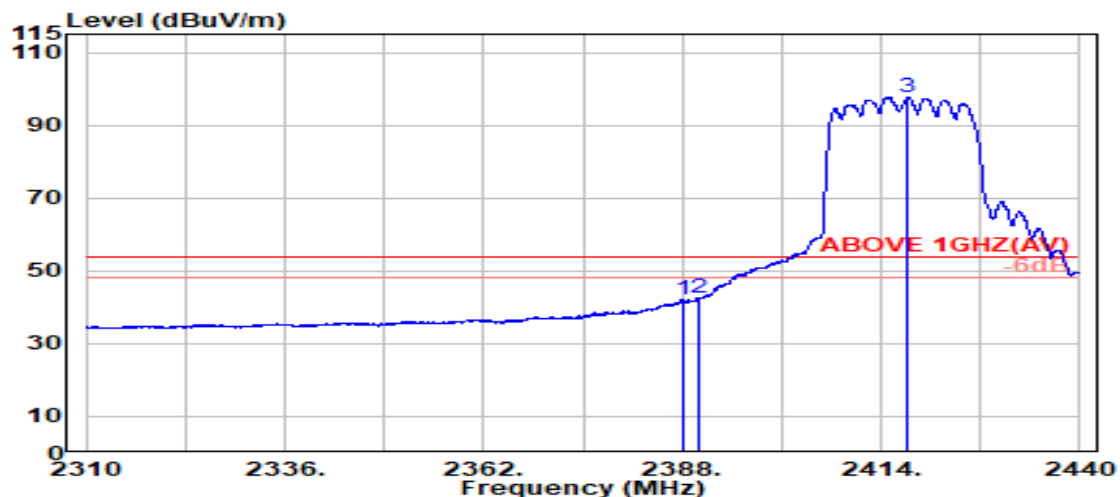

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.108	28.20	5.70	39.92	47.95	41.94	54.00	12.06	Average
2390.000	28.20	5.70	39.92	48.42	42.41	54.00	11.59	Average
@ 2417.521	28.24	5.74	39.92	103.61	97.67	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2417MHz
------	----------------	-----------	------------

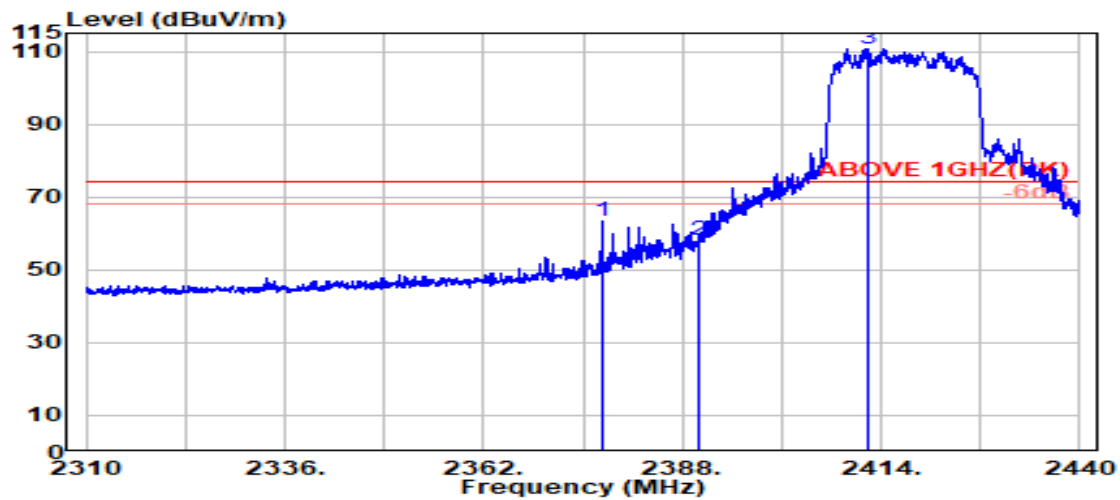

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2377.546	28.20	5.69	39.92	69.56	63.53	74.00	10.47	Peak
2390.000	28.20	5.70	39.92	64.06	58.04	74.00	15.96	Peak
@ 2412.267	28.22	5.73	39.92	116.72	110.76	---	---	Peak

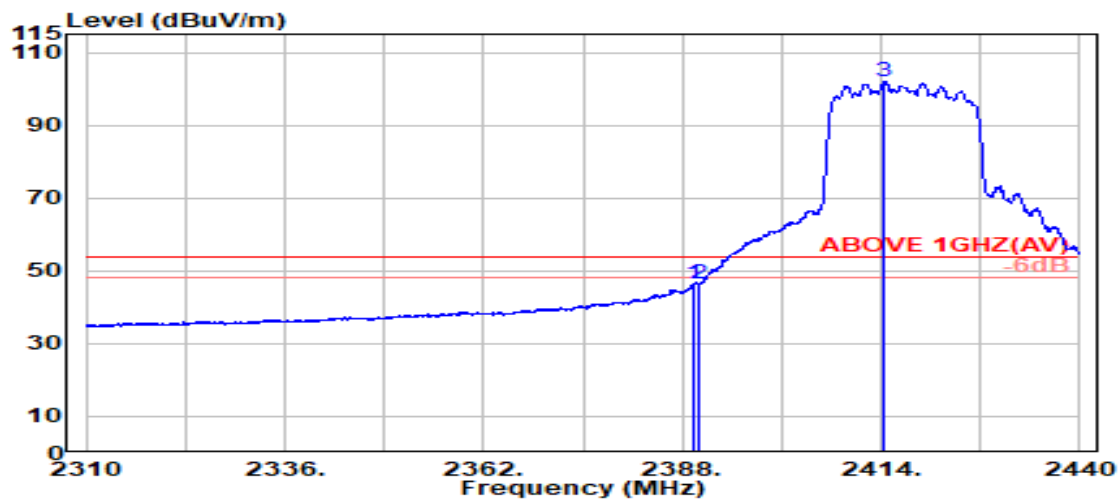

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	28.20	5.70	39.92	52.51	46.50	54.00	7.50	Average
2390.000	28.20	5.70	39.92	52.35	46.33	54.00	7.67	Average
@ 2414.433	28.23	5.74	39.92	107.91	101.95	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

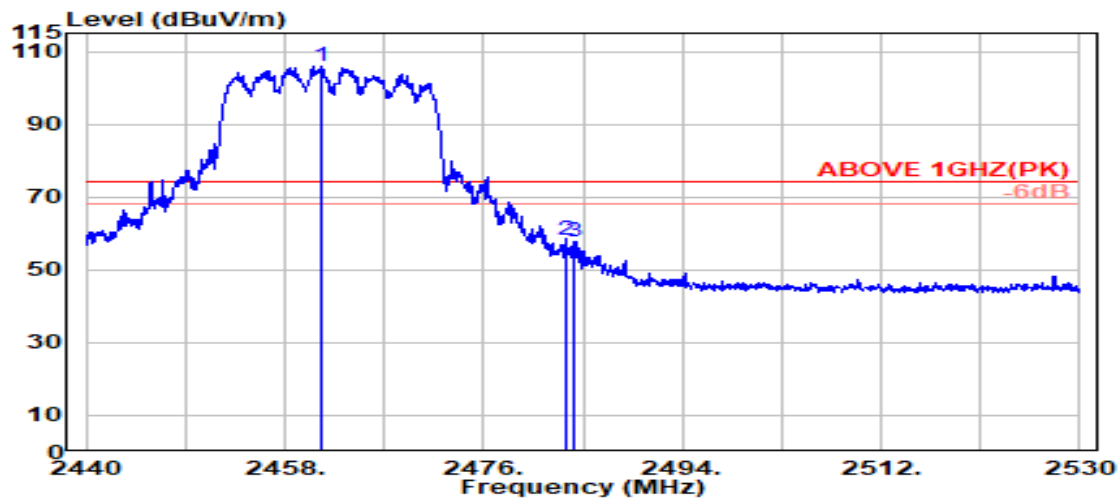

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.200	28.35	5.80	39.92	111.87	106.09	---	---	Peak
2483.500	28.43	5.83	39.92	64.02	58.37	74.00	15.63	Peak
2484.250	28.44	5.83	39.92	63.37	57.72	74.00	16.28	Peak

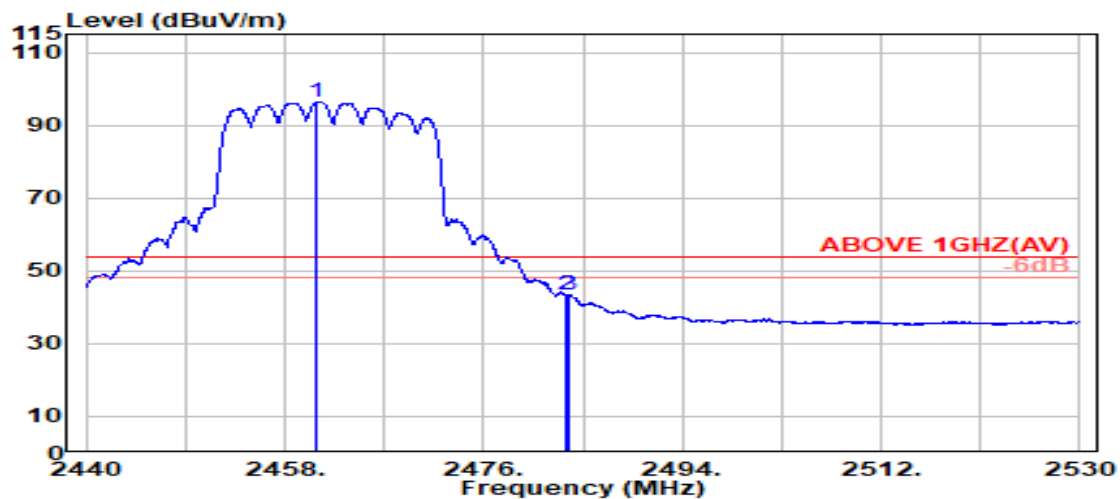

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2460.950	28.34	5.80	39.92	102.18	96.41	---	---	Average
2483.500	28.43	5.83	39.92	49.15	43.49	54.00	10.51	Average
2483.750	28.44	5.83	39.92	49.03	43.37	54.00	10.63	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

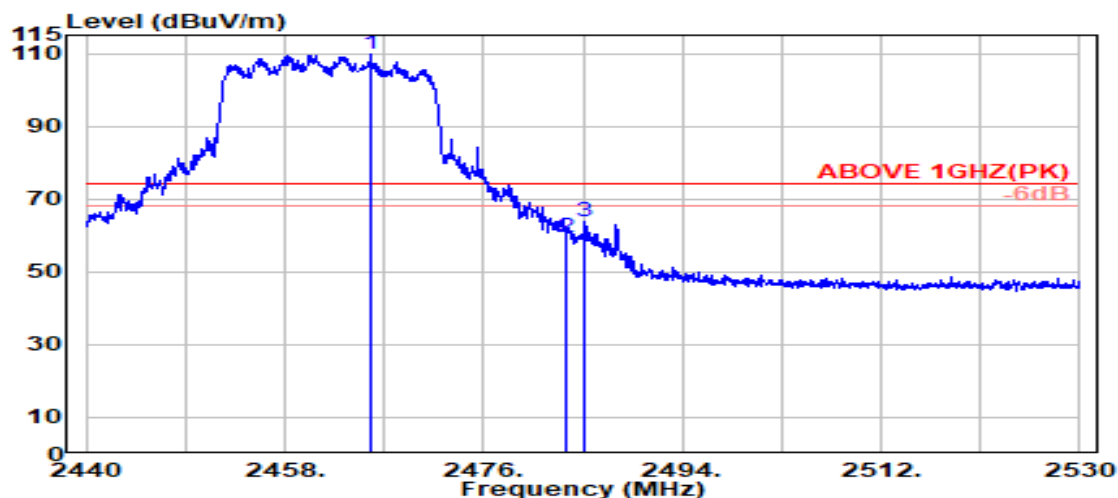

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.850	28.36	5.81	39.92	115.35	109.60	---	---	Peak
2483.500	28.43	5.83	39.92	65.26	59.60	74.00	14.40	Peak
2485.050	28.44	5.83	39.92	69.26	63.61	74.00	10.39	Peak

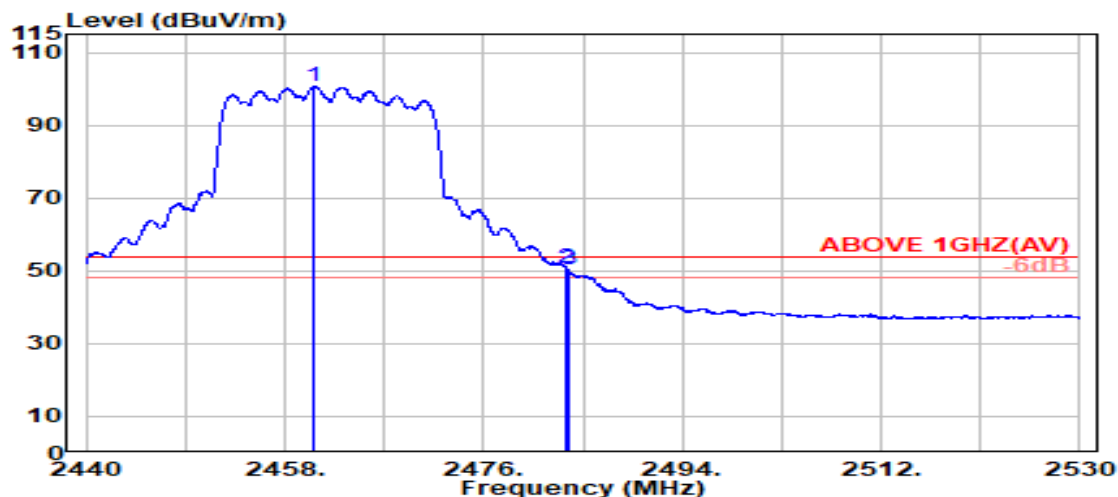

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.700	28.34	5.80	39.92	106.39	100.62	---	---	Average
2483.500	28.43	5.83	39.92	56.31	50.65	54.00	3.35	Average
2483.750	28.44	5.83	39.92	55.96	50.30	54.00	3.70	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467 MHz
------	----------------	-----------	-------------

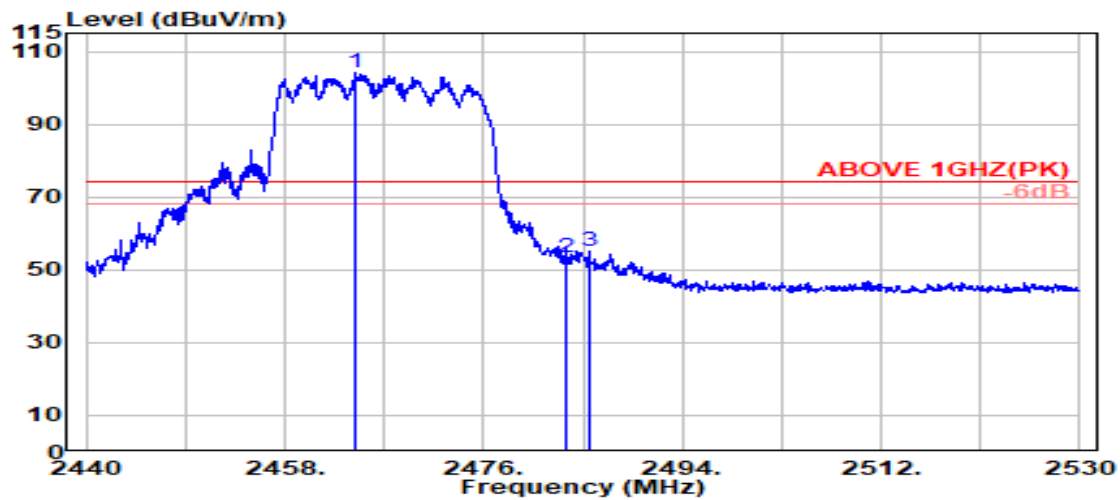

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.350	28.36	5.80	39.92	110.04	104.28	---	---	Peak
2483.500	28.43	5.83	39.92	58.88	53.22	74.00	20.78	Peak
2485.650	28.44	5.83	39.92	60.92	55.27	74.00	18.73	Peak

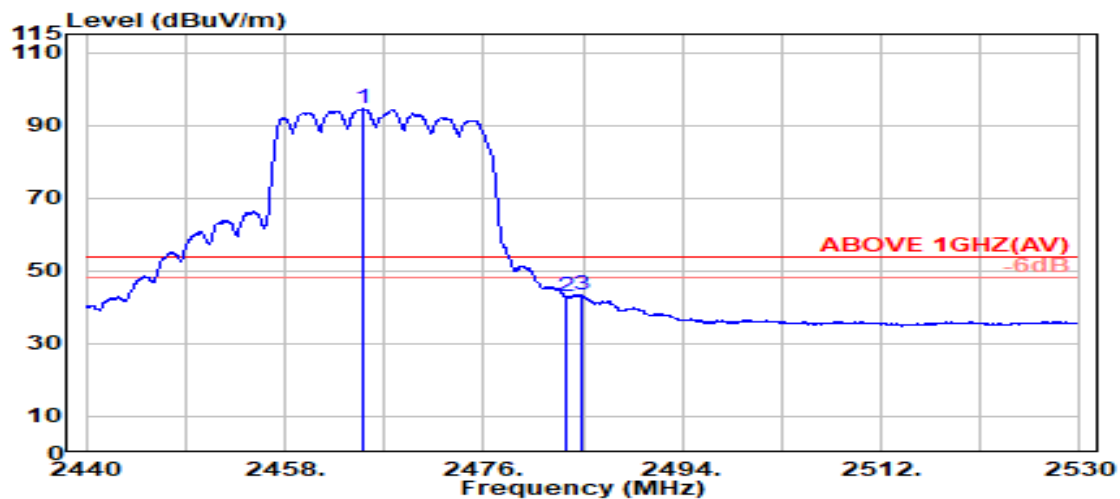


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	28.36	5.80	39.92	100.16	94.40	---	---	Average
2483.500	28.43	5.83	39.92	48.60	42.94	54.00	11.06	Average
2484.800	28.44	5.83	39.92	49.16	43.51	54.00	10.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2467 MHz
------	----------------	-----------	-------------

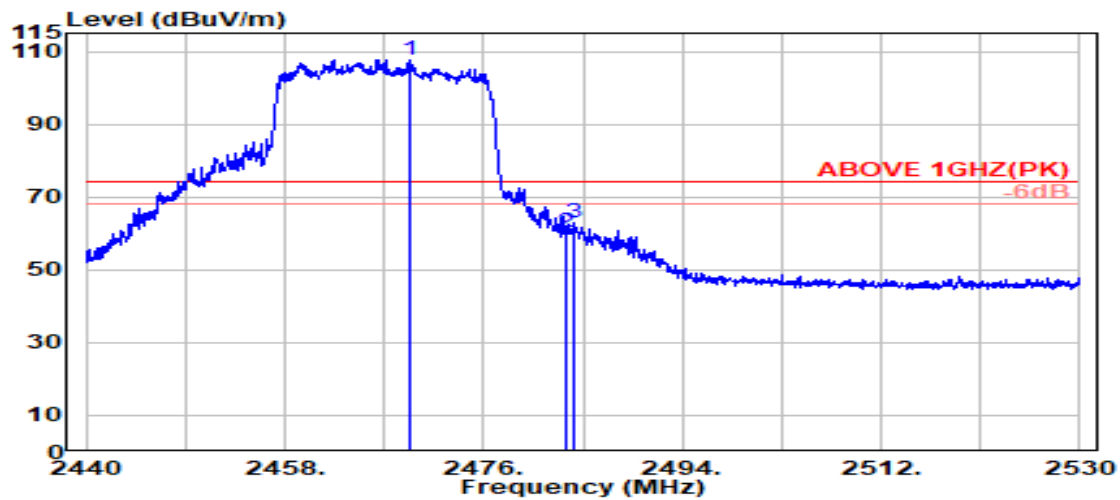

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.300	28.38	5.81	39.92	113.42	107.68	---	---	Peak
2483.500	28.43	5.83	39.92	65.80	60.14	74.00	13.86	Peak
2484.150	28.44	5.83	39.92	68.37	62.71	74.00	11.29	Peak

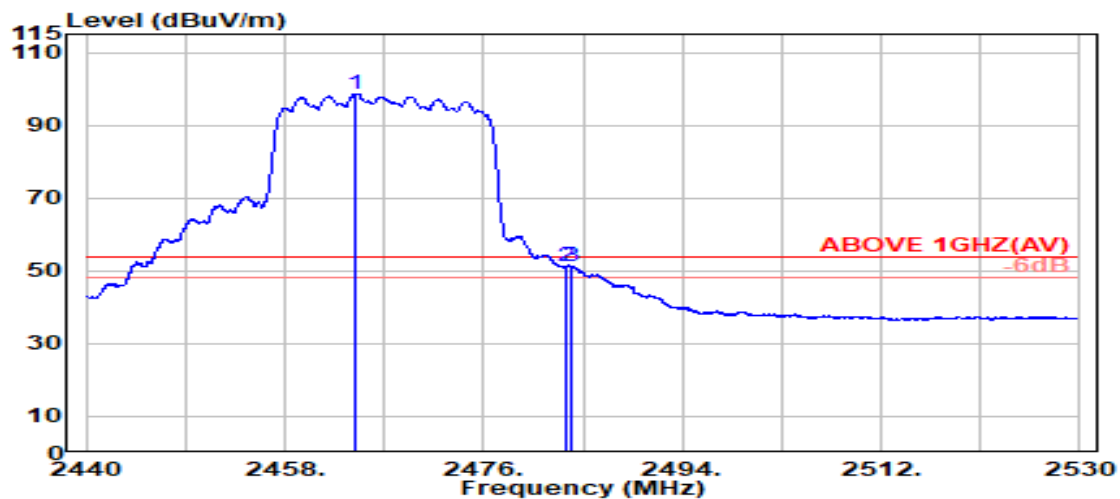

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.400	28.36	5.80	39.92	104.42	98.66	---	---	Average
2483.500	28.43	5.83	39.92	56.82	51.16	54.00	2.84	Average
2484.000	28.44	5.83	39.92	56.99	51.34	54.00	2.66	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

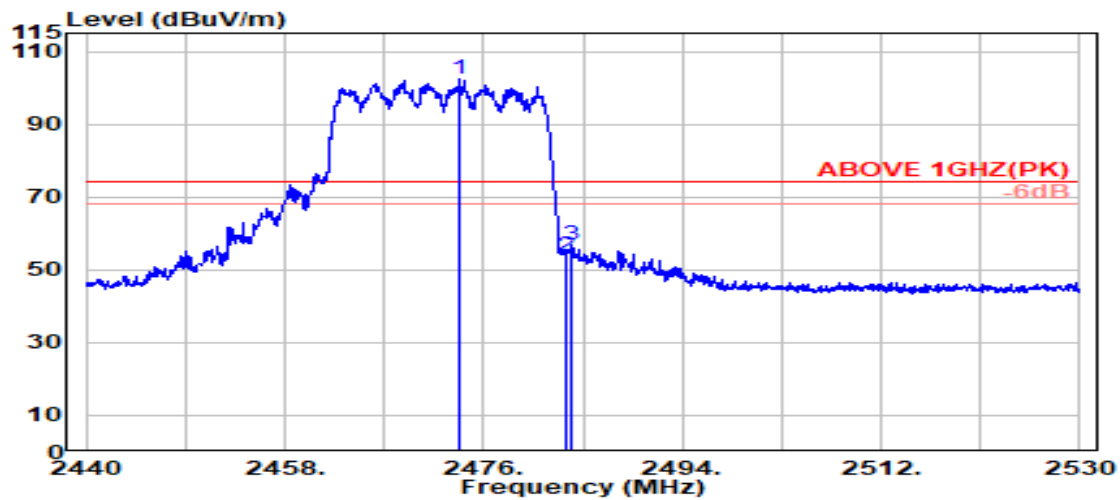

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2473.750	28.40	5.82	39.92	107.91	102.20	---	---	Peak
2483.500	28.43	5.83	39.92	59.57	53.91	74.00	20.09	Peak
2484.000	28.44	5.83	39.92	62.54	56.88	74.00	17.12	Peak

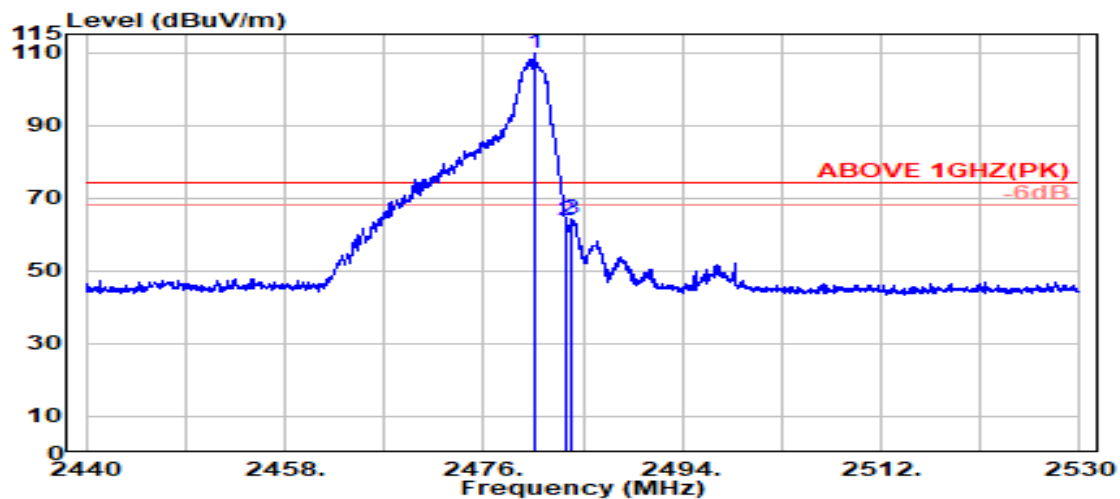

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.600	28.42	5.82	39.92	115.40	109.73	---	---	Peak
2483.500	28.43	5.83	39.92	69.49	63.83	74.00	10.17	Peak
2483.900	28.44	5.83	39.92	70.05	64.40	74.00	9.60	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

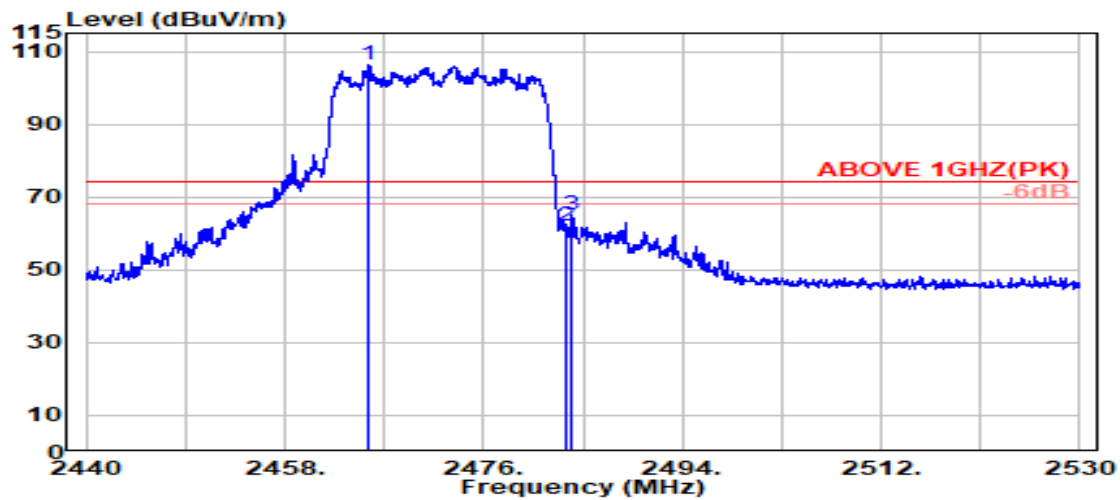

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.650	28.36	5.80	39.92	112.04	106.28	---	---	Peak
2483.500	28.43	5.83	39.92	67.74	62.08	74.00	11.92	Peak
2483.900	28.44	5.83	39.92	70.55	64.89	74.00	9.11	Peak

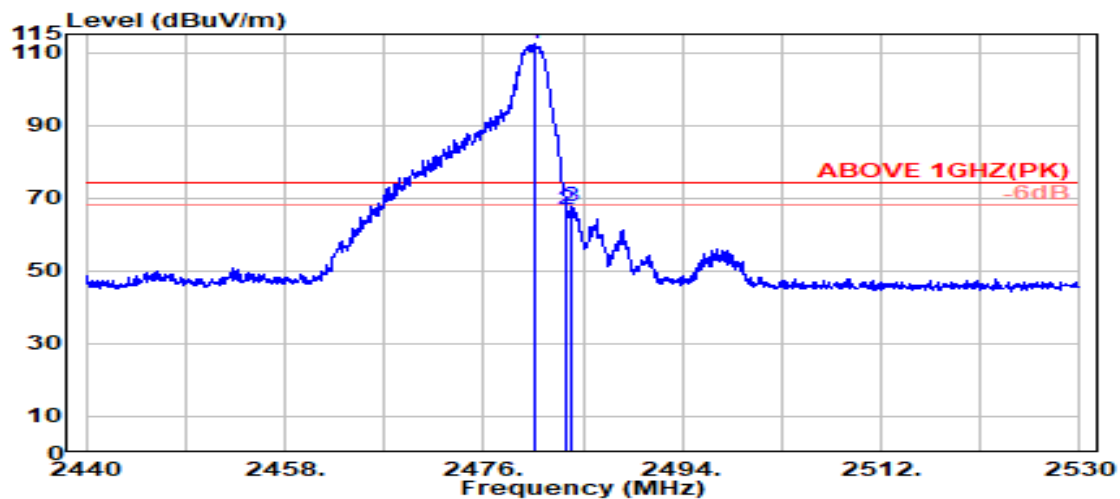

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.600	28.42	5.82	39.92	118.20	112.52	---	---	Peak
2483.500	28.43	5.83	39.92	72.30	66.64	74.00	7.36	Peak
2483.900	28.44	5.83	39.92	73.19	67.54	74.00	6.46	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

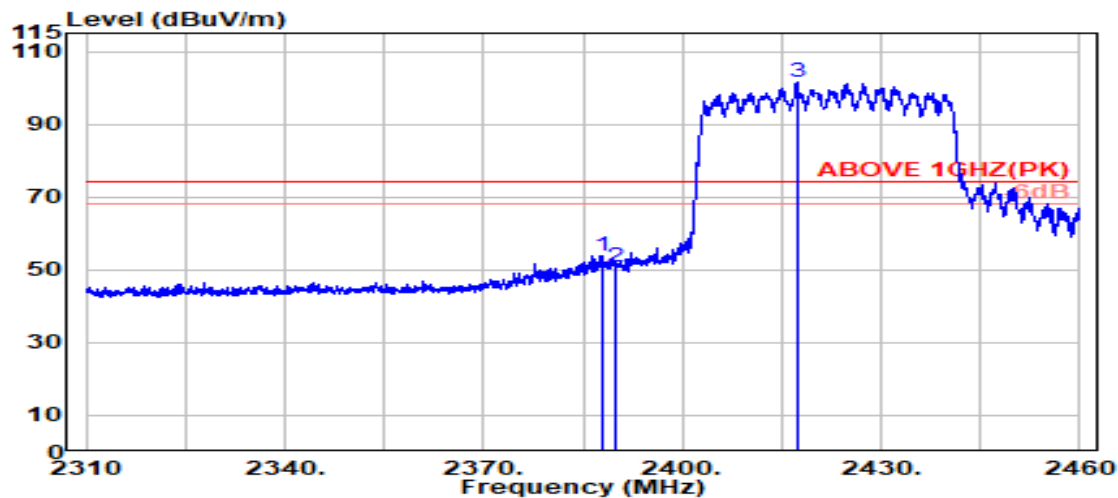

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.950	28.20	5.70	39.92	59.92	53.90	74.00	20.10	Peak
2389.800	28.20	5.70	39.92	57.00	50.99	74.00	23.01	Peak
@ 2417.250	28.23	5.74	39.92	107.34	101.40	---	---	Peak

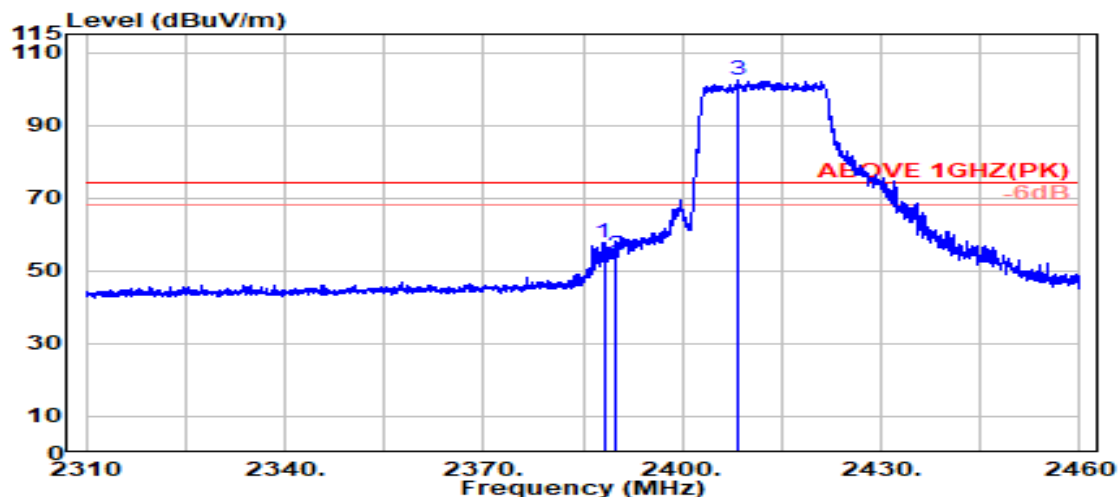

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.150	28.20	5.70	39.92	63.88	57.86	74.00	16.14	Peak
2390.000	28.20	5.70	39.92	60.36	54.35	74.00	19.65	Peak
@ 2408.250	28.22	5.73	39.92	108.49	102.52	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

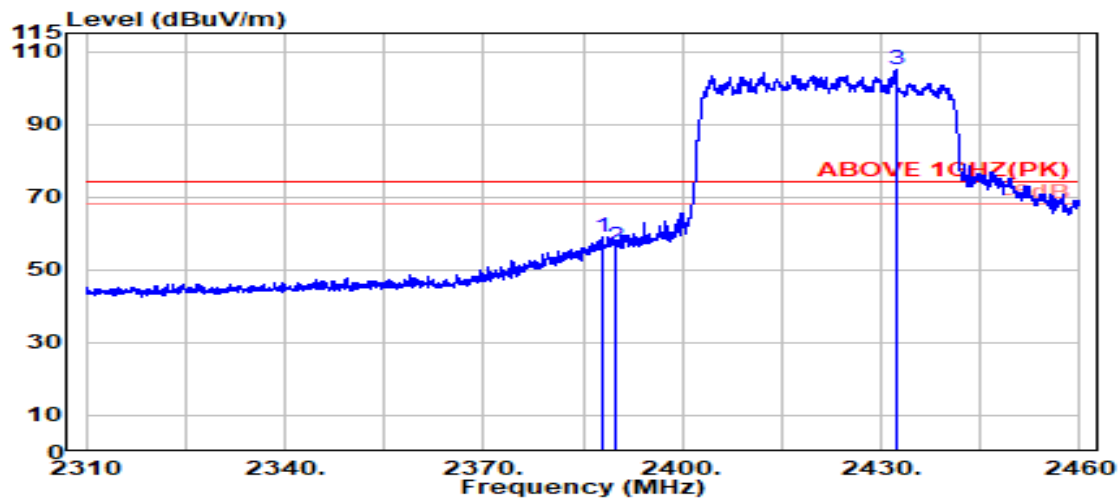

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	28.20	5.70	39.92	64.90	58.88	74.00	15.12	Peak
2389.800	28.20	5.70	39.92	62.47	56.45	74.00	17.55	Peak
@ 2432.200	28.26	5.76	39.92	110.79	104.89	---	---	Peak

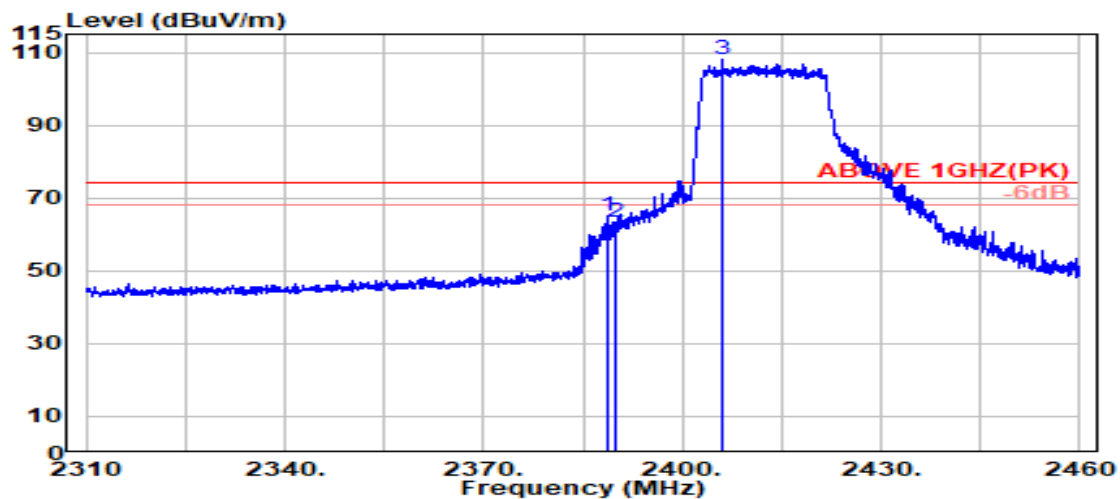

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	28.20	5.70	39.92	71.12	65.10	74.00	8.90	Peak
2390.000	28.20	5.70	39.92	69.36	63.34	74.00	10.66	Peak
@ 2406.000	28.21	5.72	39.92	114.12	108.14	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2427 MHz
------	----------------	-----------	-------------

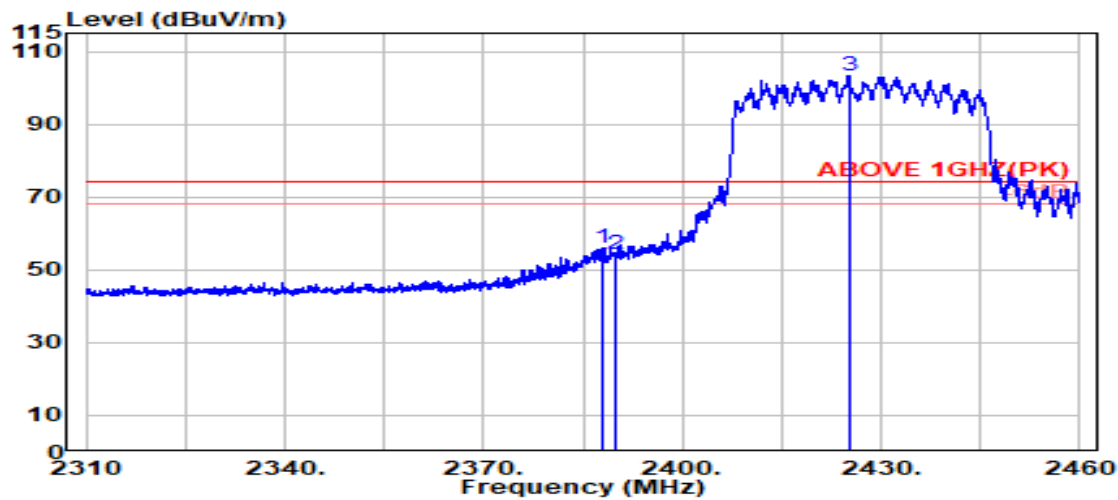

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.950	28.20	5.70	39.92	62.00	55.98	74.00	18.02	Peak
2390.000	28.20	5.70	39.92	60.41	54.39	74.00	19.61	Peak
@ 2425.100	28.25	5.75	39.92	109.12	103.20	---	---	Peak

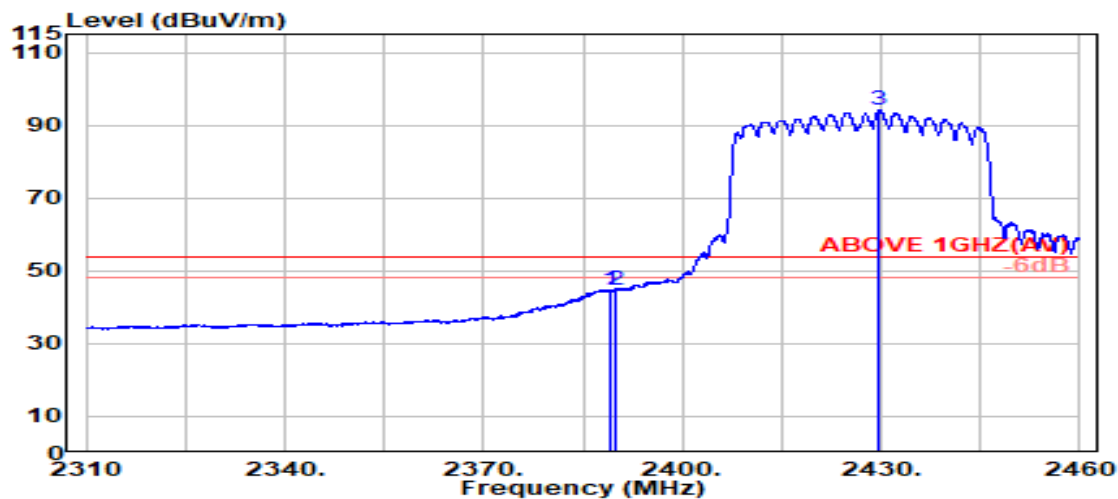

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.20	5.70	39.92	50.92	44.90	54.00	9.10	Average
2390.000	28.20	5.70	39.92	50.91	44.89	54.00	9.11	Average
@ 2429.700	28.26	5.76	39.92	99.91	94.01	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2427 MHz
------	----------------	-----------	-------------

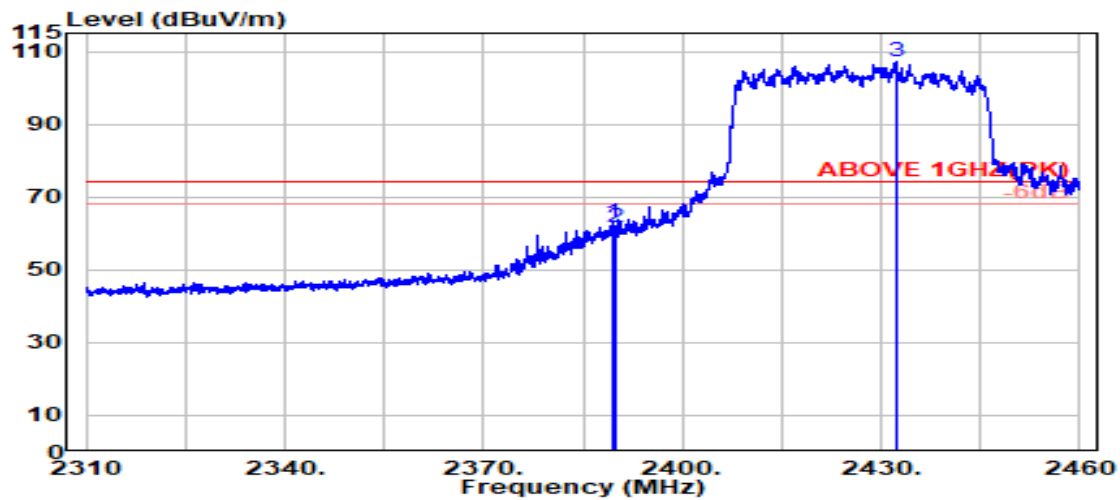

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.20	5.70	39.92	69.00	62.99	74.00	11.01	Peak
2390.000	28.20	5.70	39.92	67.85	61.84	74.00	12.16	Peak
@ 2432.200	28.26	5.76	39.92	112.90	107.01	---	---	Peak

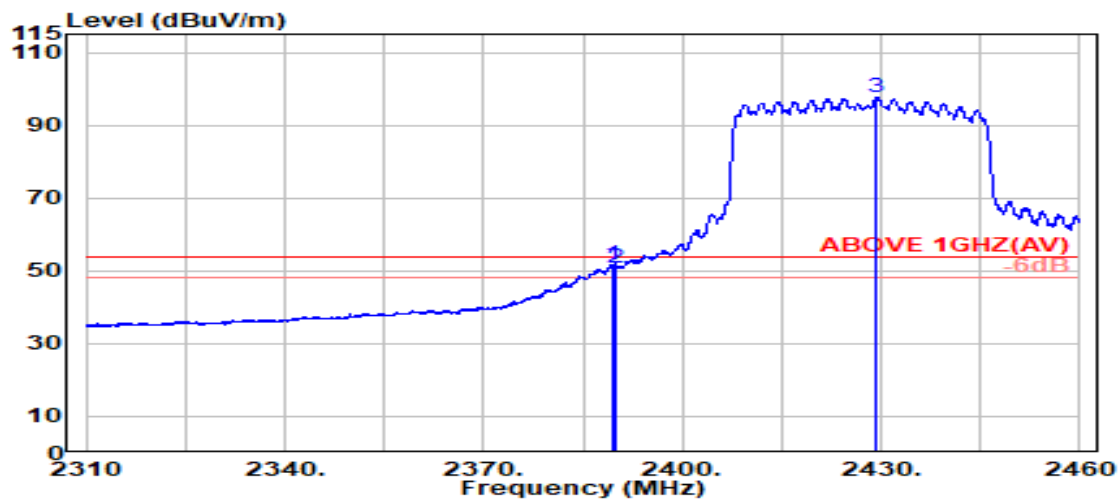

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.20	5.70	39.92	57.81	51.80	54.00	2.20	Average
2390.000	28.20	5.70	39.92	56.96	50.94	54.00	3.06	Average
@ 2429.400	28.26	5.76	39.92	103.41	97.51	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

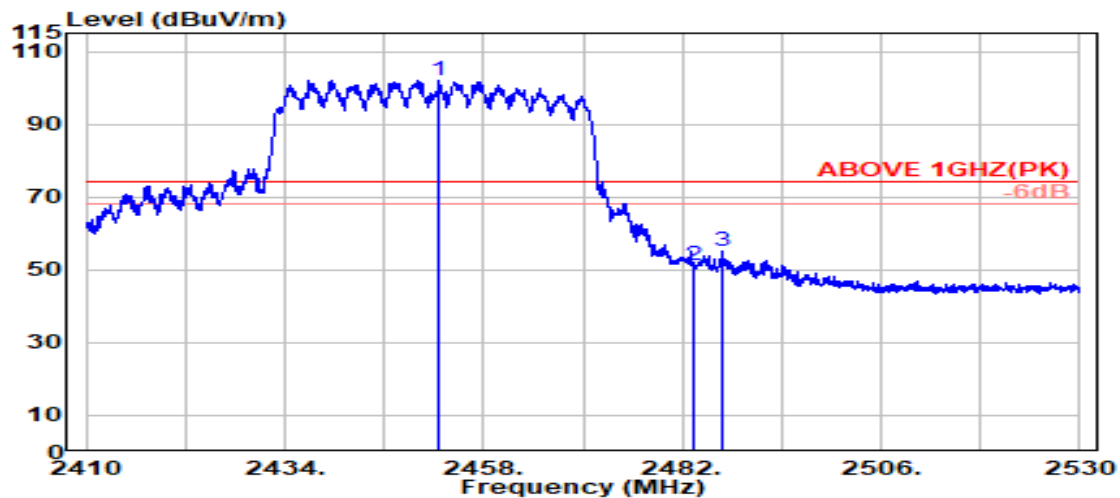

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2452.650	28.31	5.79	39.92	107.98	102.16	---	---	Peak
2483.500	28.43	5.83	39.92	56.85	51.20	74.00	22.80	Peak
2486.850	28.45	5.83	39.92	60.86	55.22	74.00	18.78	Peak

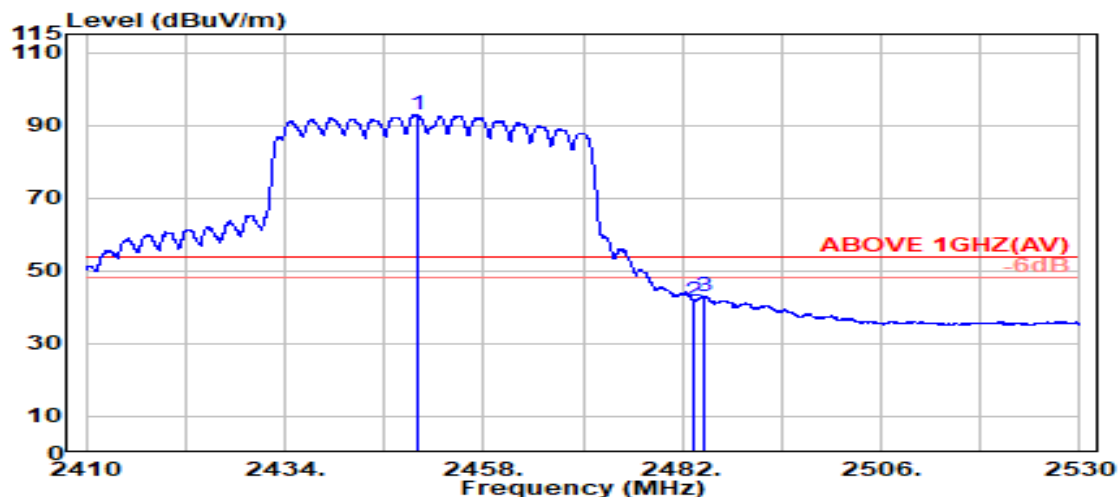

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2450.100	28.30	5.78	39.92	98.64	92.80	---	---	Average
2483.500	28.43	5.83	39.92	47.42	41.76	54.00	12.24	Average
2484.700	28.44	5.83	39.92	48.62	42.97	54.00	11.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

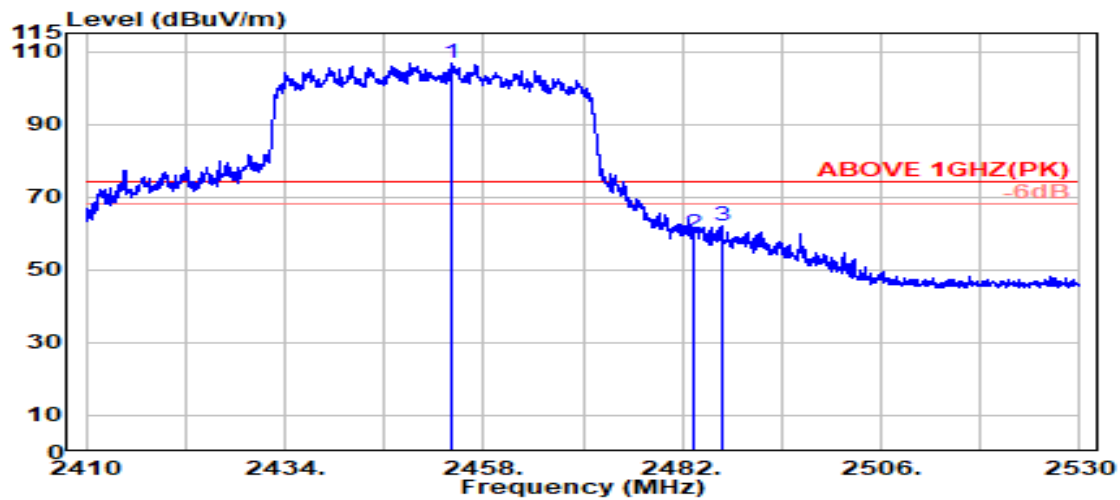

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.200	28.32	5.79	39.92	112.50	106.69	---	---	Peak
2483.500	28.43	5.83	39.92	65.74	60.09	74.00	13.91	Peak
2486.800	28.45	5.83	39.92	67.88	62.24	74.00	11.76	Peak

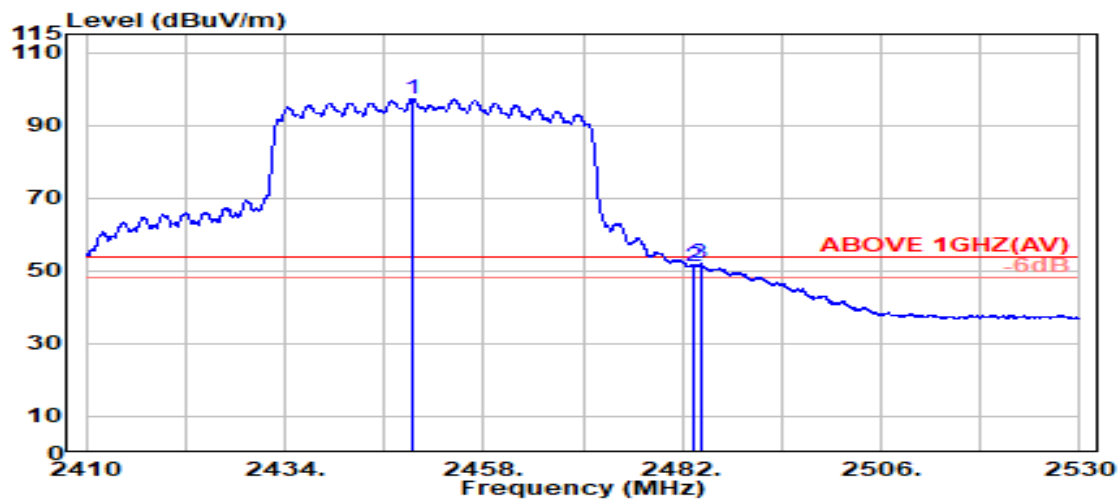

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2449.550	28.30	5.78	39.92	103.13	97.30	---	---	Average
2483.500	28.43	5.83	39.92	56.89	51.23	54.00	2.77	Average
2484.150	28.44	5.83	39.92	57.57	51.91	54.00	2.09	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

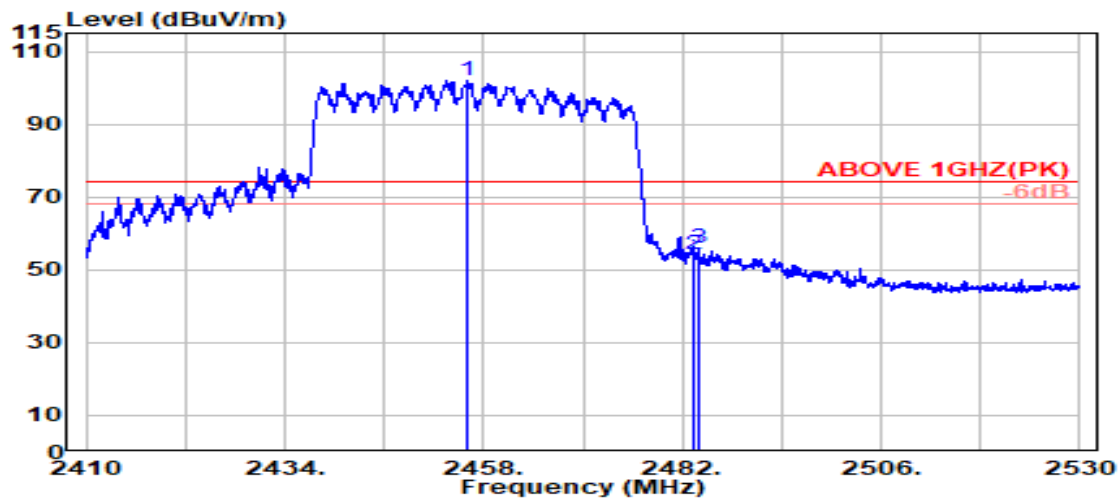

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.100	28.32	5.79	39.92	107.86	102.06	---	---	Peak
2483.500	28.43	5.83	39.92	59.93	54.28	74.00	19.72	Peak
2483.950	28.44	5.83	39.92	61.54	55.89	74.00	18.11	Peak

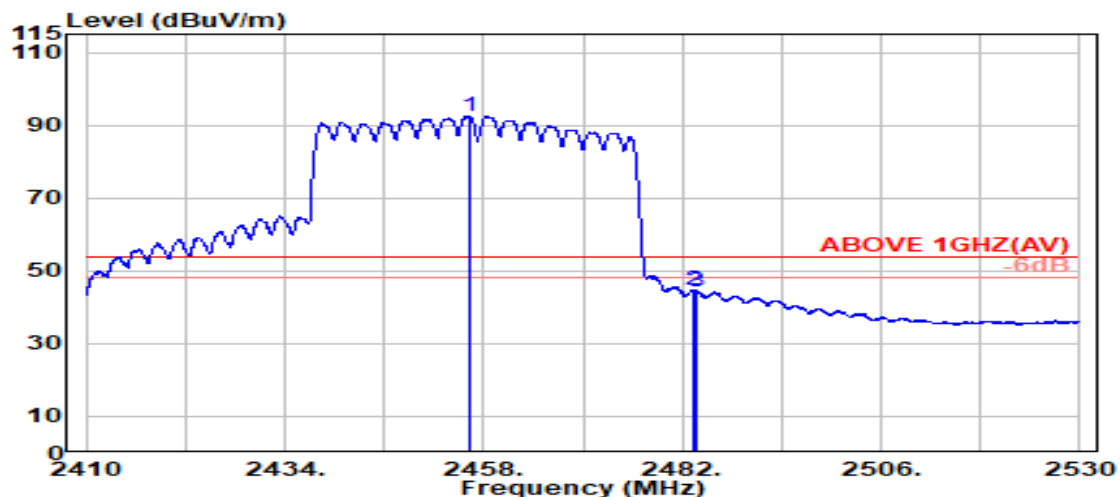

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.250	28.33	5.79	39.92	98.26	92.46	---	---	Average
2483.500	28.43	5.83	39.92	50.24	44.58	54.00	9.42	Average
2483.700	28.44	5.83	39.92	50.11	44.45	54.00	9.55	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

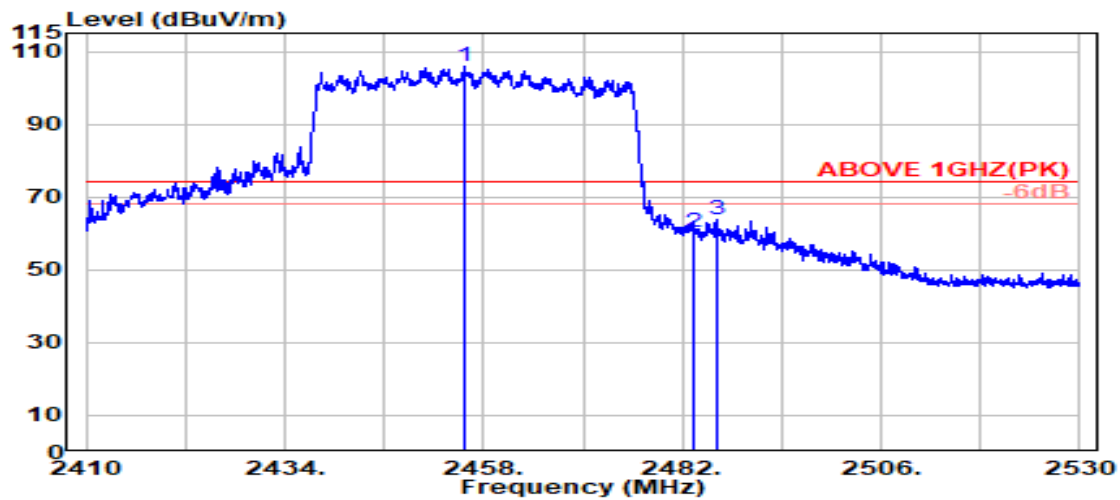

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.750	28.32	5.79	39.92	111.87	106.07	---	---	Peak
2483.500	28.43	5.83	39.92	65.98	60.32	74.00	13.68	Peak
2486.300	28.45	5.83	39.92	69.61	63.97	74.00	10.03	Peak

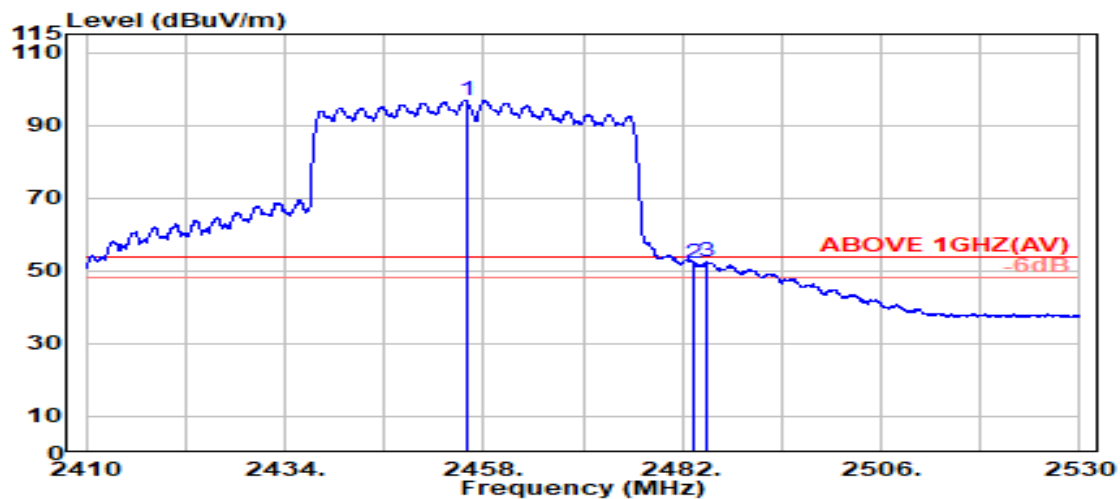

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.900	28.32	5.79	39.92	102.61	96.80	---	---	Average
2483.500	28.43	5.83	39.92	57.66	52.00	54.00	2.00	Average
2484.900	28.44	5.83	39.92	58.10	52.45	54.00	1.55	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

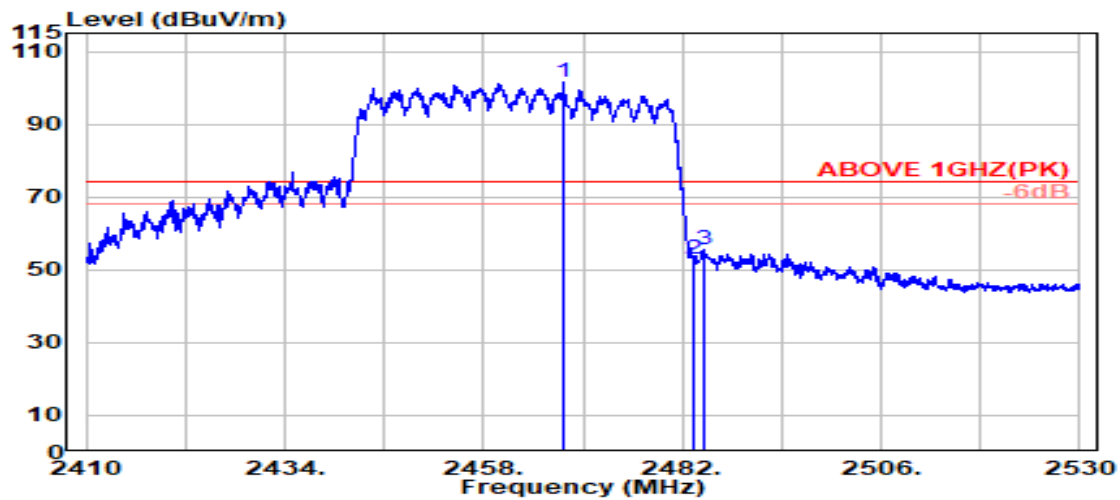

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.600	28.37	5.81	39.92	107.16	101.42	---	---	Peak
2483.500	28.43	5.83	39.92	58.77	53.11	74.00	20.89	Peak
2484.500	28.44	5.83	39.92	61.16	55.51	74.00	18.49	Peak

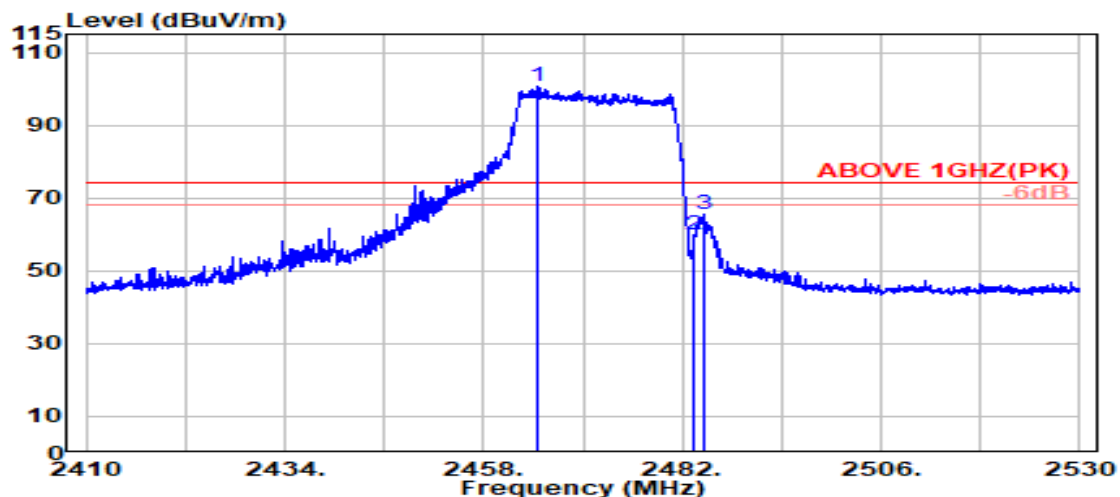

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.600	28.36	5.80	39.92	106.64	100.88	---	---	Peak
2483.500	28.43	5.83	39.92	65.53	59.87	74.00	14.13	Peak
2484.550	28.44	5.83	39.92	71.36	65.71	74.00	8.29	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

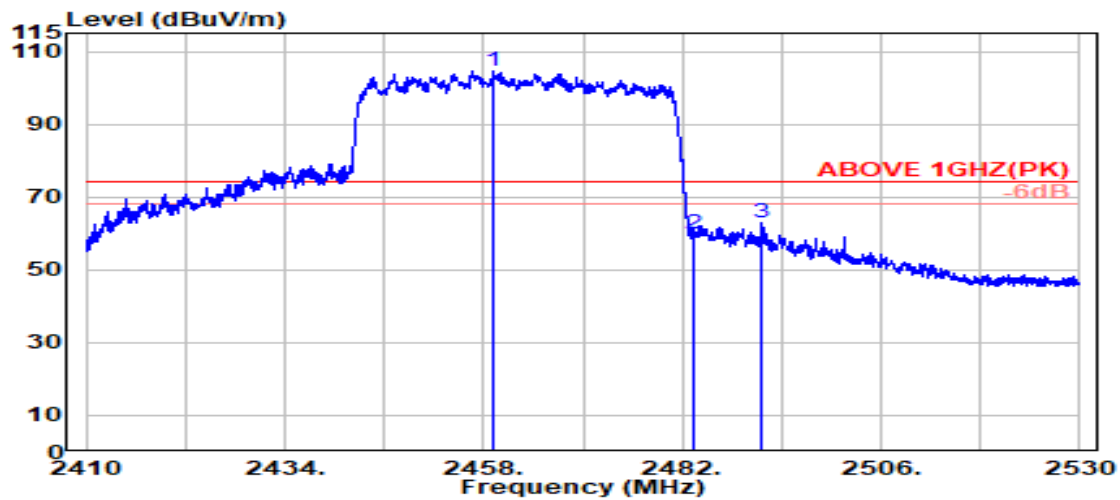

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.200	28.34	5.80	39.92	110.28	104.49	---	---	Peak
2483.500	28.43	5.83	39.92	65.48	59.82	74.00	14.18	Peak
2491.650	28.47	5.84	39.92	68.36	62.74	74.00	11.26	Peak

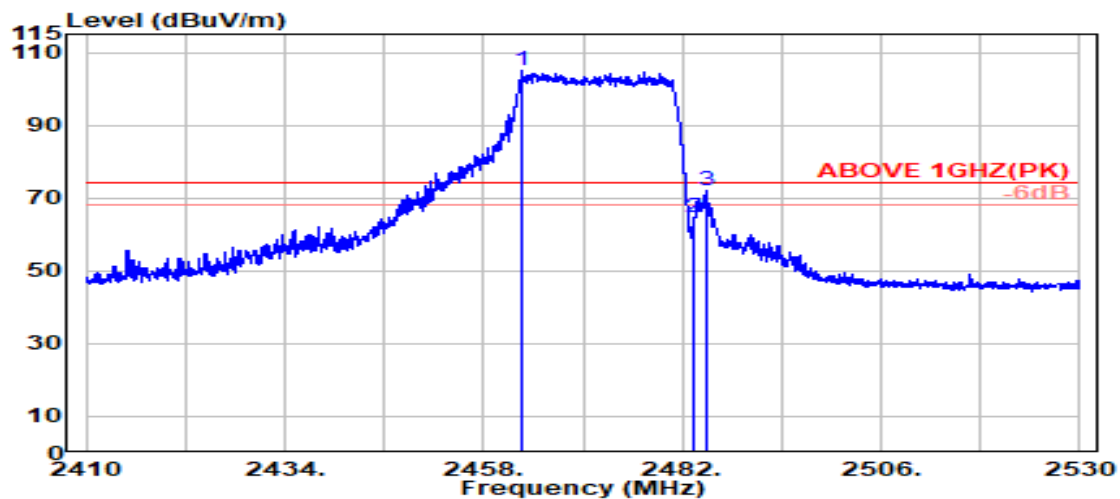

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.650	28.35	5.80	39.92	110.88	105.11	---	---	Peak
2483.500	28.43	5.83	39.92	70.34	64.68	74.00	9.32	Peak
2484.800	28.44	5.83	39.92	77.49	71.84	74.00	2.16	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

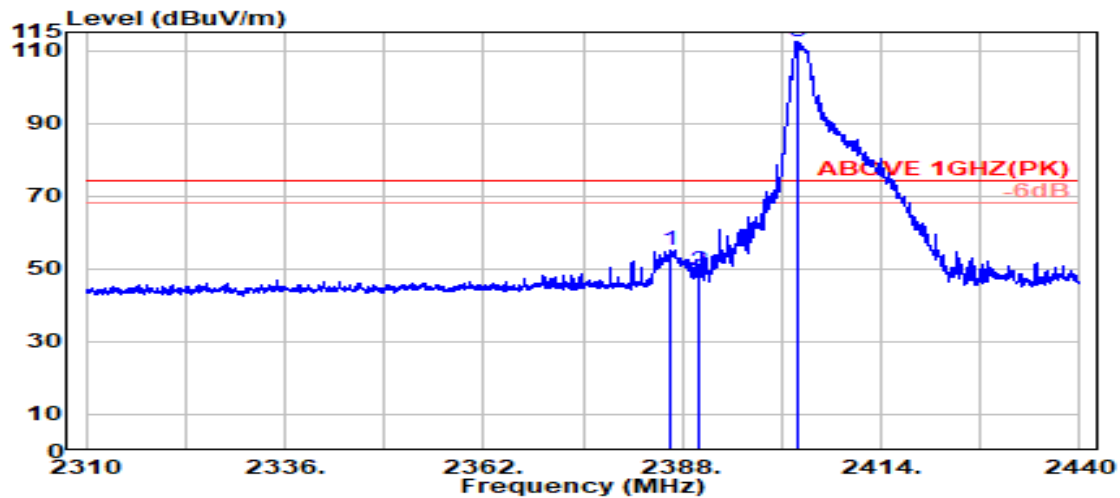

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.483	28.20	5.70	39.92	61.14	55.12	74.00	18.88	Peak
2390.000	28.20	5.70	39.92	55.70	49.69	74.00	24.31	Peak
@ 2403.004	28.21	5.72	39.92	118.57	112.58	---	---	Peak

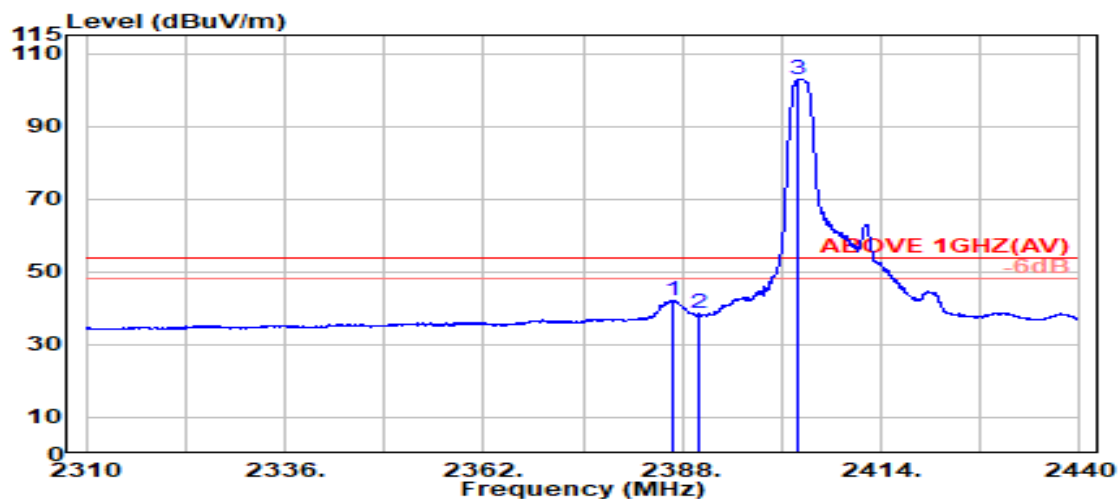

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.808	28.20	5.70	39.92	48.12	42.10	54.00	11.90	Average
2390.000	28.20	5.70	39.92	44.50	38.48	54.00	15.52	Average
@ 2403.167	28.21	5.72	39.92	108.95	102.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

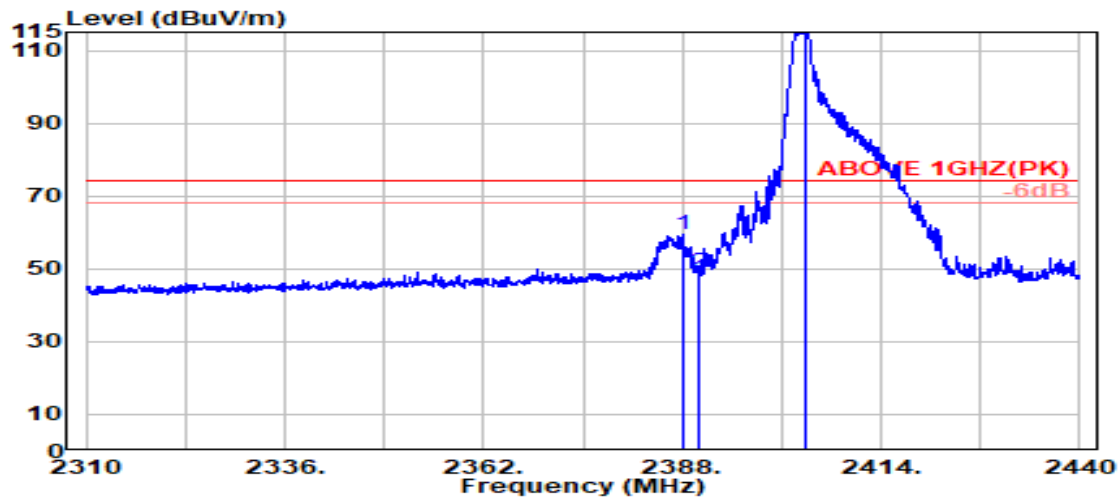

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	28.20	5.70	39.92	65.35	59.33	74.00	14.67	Peak
2390.000	28.20	5.70	39.92	55.17	49.16	74.00	24.84	Peak
@ 2404.142	28.21	5.72	39.92	122.36	116.37	---	---	Peak

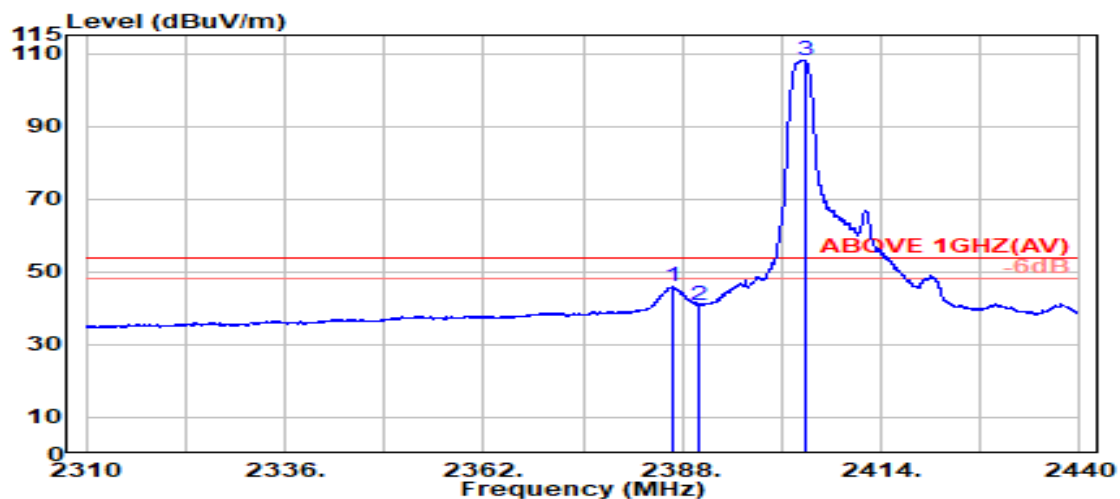

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.646	28.20	5.70	39.92	52.00	45.98	54.00	8.02	Average
2390.000	28.20	5.70	39.92	46.94	40.92	54.00	13.08	Average
@ 2403.979	28.21	5.72	39.92	114.10	108.11	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

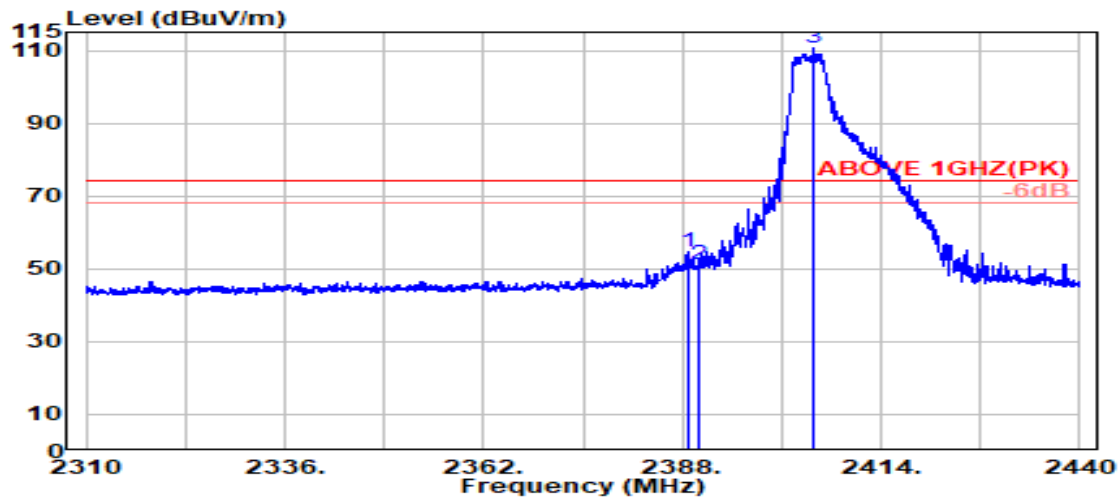

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.704	28.20	5.70	39.92	60.71	54.70	74.00	19.30	Peak
2390.000	28.20	5.70	39.92	57.02	51.00	74.00	23.00	Peak
@ 2405.117	28.21	5.72	39.92	116.48	110.49	---	---	Peak

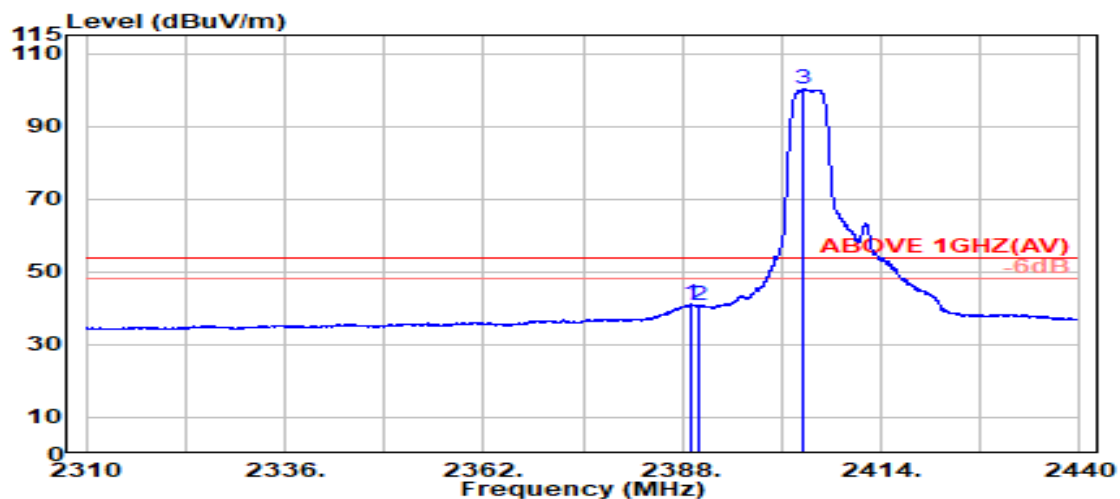

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.029	28.20	5.70	39.92	47.08	41.06	54.00	12.94	Average
2390.000	28.20	5.70	39.92	46.63	40.61	54.00	13.39	Average
@ 2403.817	28.21	5.72	39.92	106.14	100.15	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

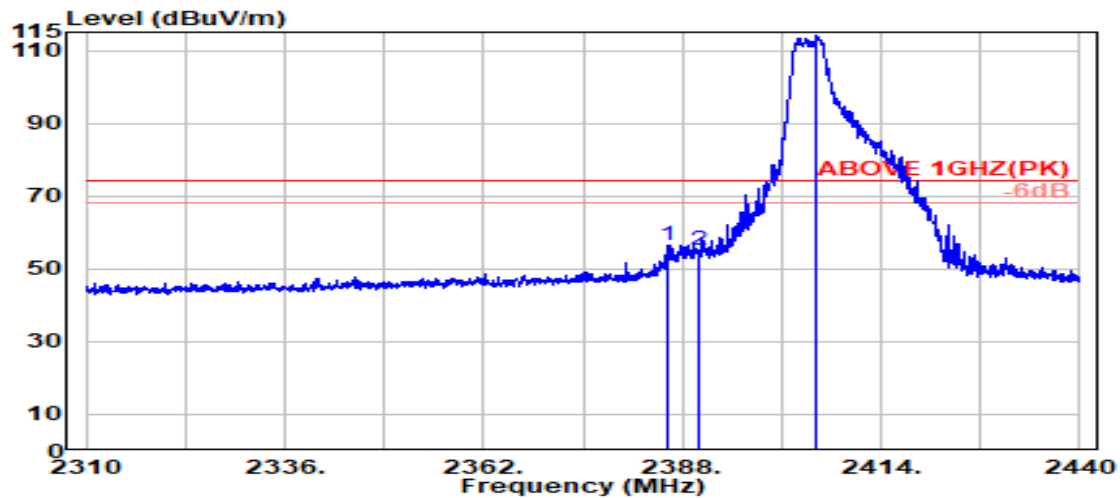

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.212	28.20	5.70	39.92	62.44	56.42	74.00	17.58	Peak
2390.000	28.20	5.70	39.92	61.02	55.01	74.00	18.99	Peak
@ 2405.604	28.21	5.72	39.92	120.32	114.33	---	---	Peak

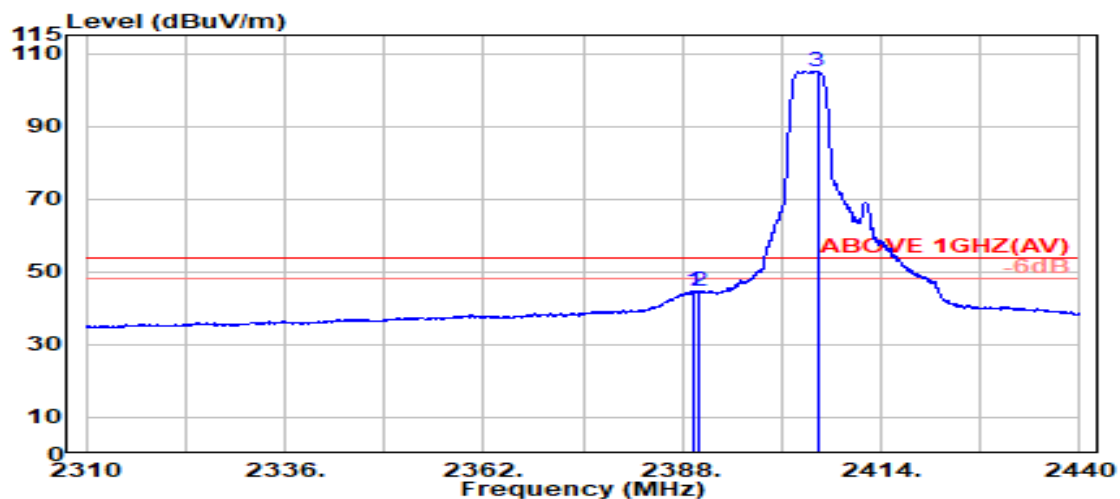

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.625	28.20	5.70	39.92	50.70	44.69	54.00	9.31	Average
2390.000	28.20	5.70	39.92	50.60	44.59	54.00	9.41	Average
@ 2405.658	28.21	5.72	39.92	111.12	105.14	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

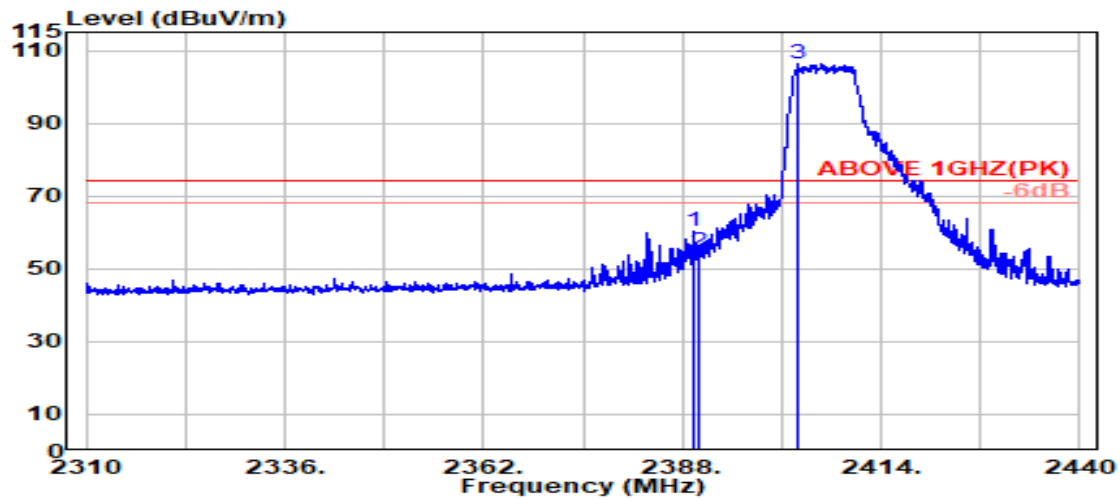

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.462	28.20	5.70	39.92	66.43	60.41	74.00	13.59	Peak
2390.000	28.20	5.70	39.92	60.59	54.57	74.00	19.43	Peak
@ 2403.167	28.21	5.72	39.92	112.32	106.33	---	---	Peak

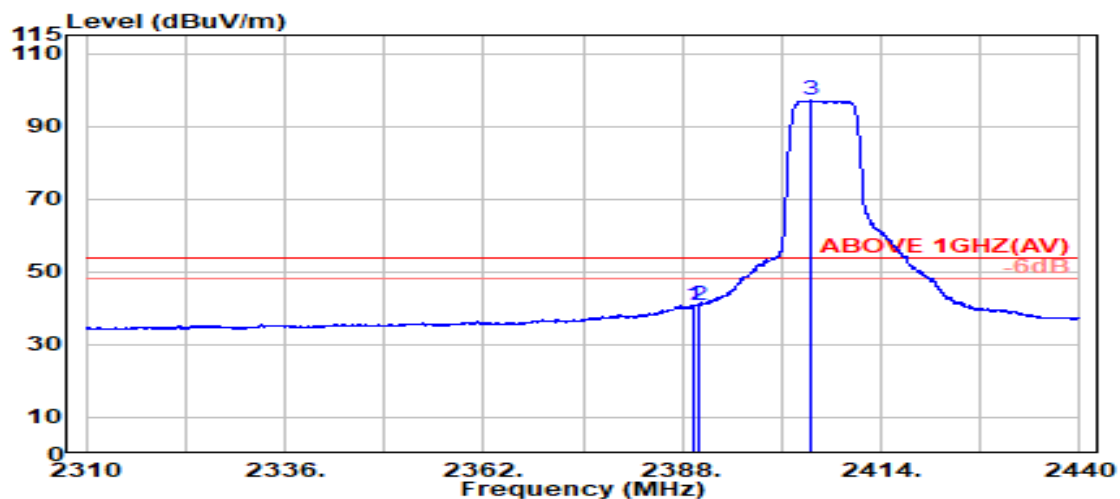

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.462	28.20	5.70	39.92	46.85	40.84	54.00	13.16	Average
2390.000	28.20	5.70	39.92	46.82	40.80	54.00	13.20	Average
@ 2404.846	28.21	5.72	39.92	103.02	97.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

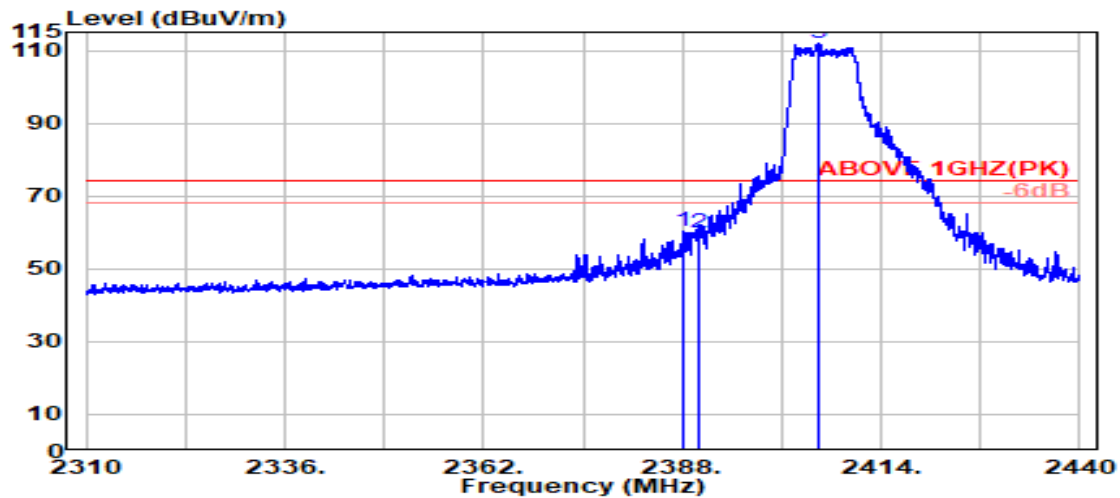

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.271	28.20	5.70	39.92	66.41	60.39	74.00	13.61	Peak
2390.000	28.20	5.70	39.92	65.75	59.73	74.00	14.27	Peak
@ 2405.983	28.21	5.72	39.92	117.96	111.98	---	---	Peak

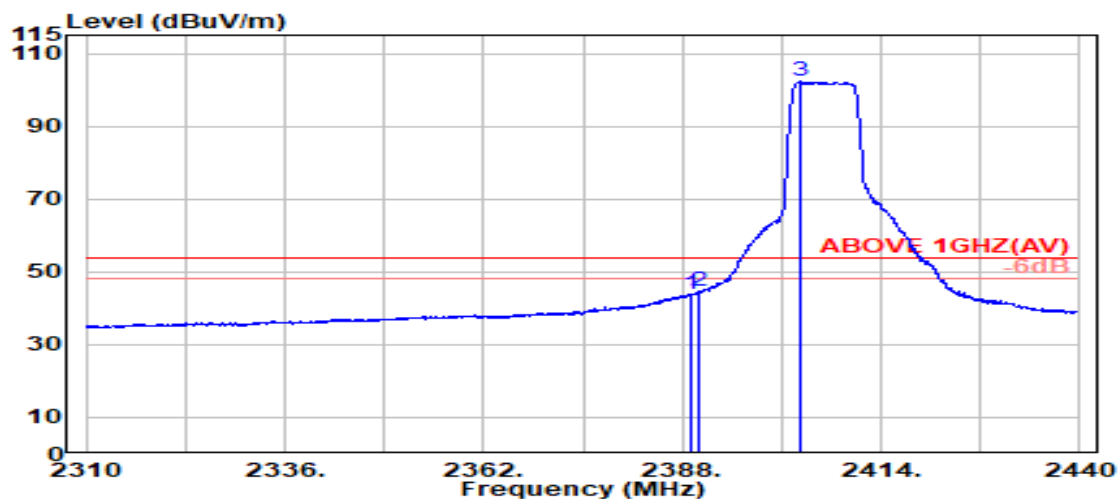

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.029	28.20	5.70	39.92	50.06	44.04	54.00	9.96	Average
2390.000	28.20	5.70	39.92	50.88	44.87	54.00	9.13	Average
@ 2403.329	28.21	5.72	39.92	108.19	102.20	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

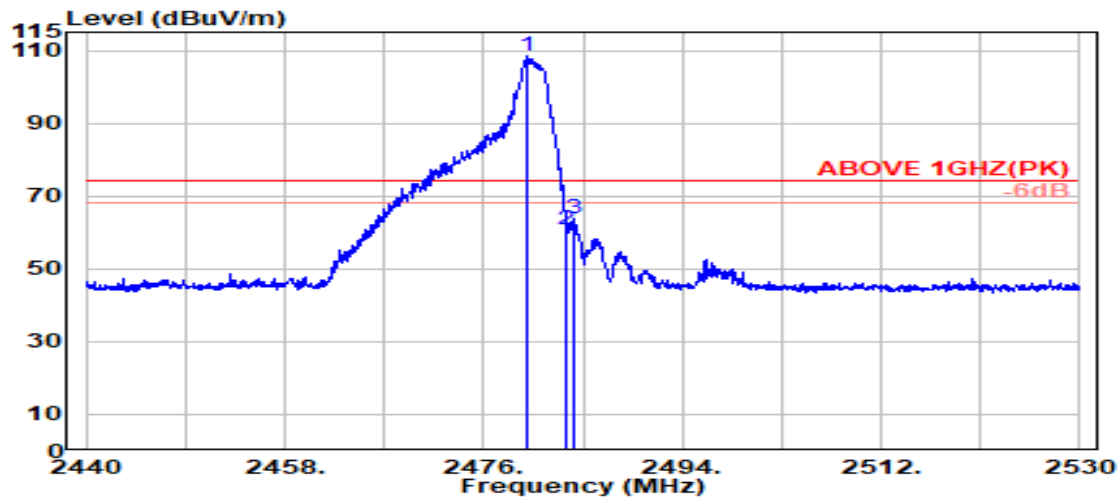

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2480.000	28.42	5.82	39.92	114.21	108.54	---	---	Peak
	2483.500	28.43	5.83	39.92	66.41	60.75	74.00	13.25	Peak
	2484.200	28.44	5.83	39.92	69.56	63.91	74.00	10.09	Peak

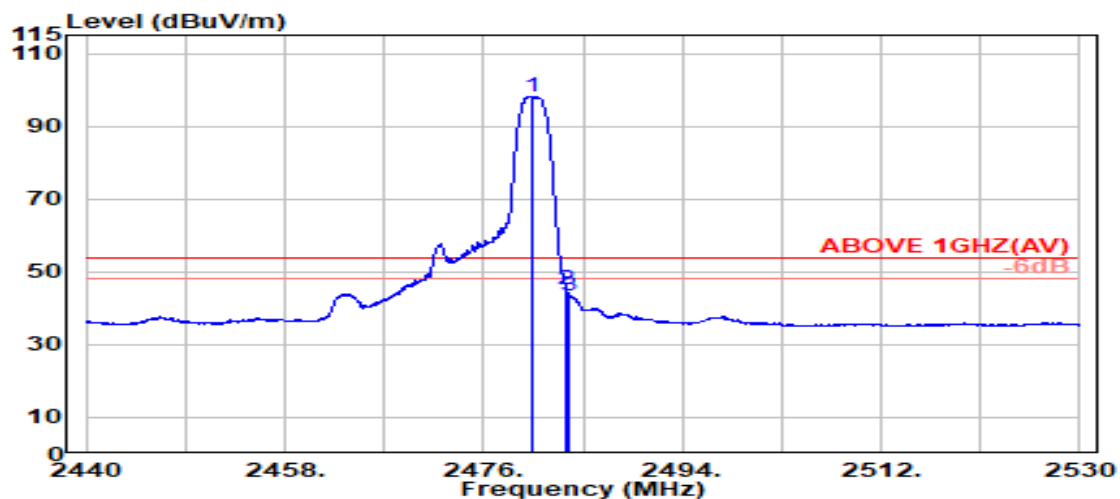

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2480.300	28.42	5.82	39.92	103.86	98.18	---	---	Average
	2483.500	28.43	5.83	39.92	50.78	45.12	54.00	8.88	Average
	2483.700	28.44	5.83	39.92	49.26	43.60	54.00	10.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

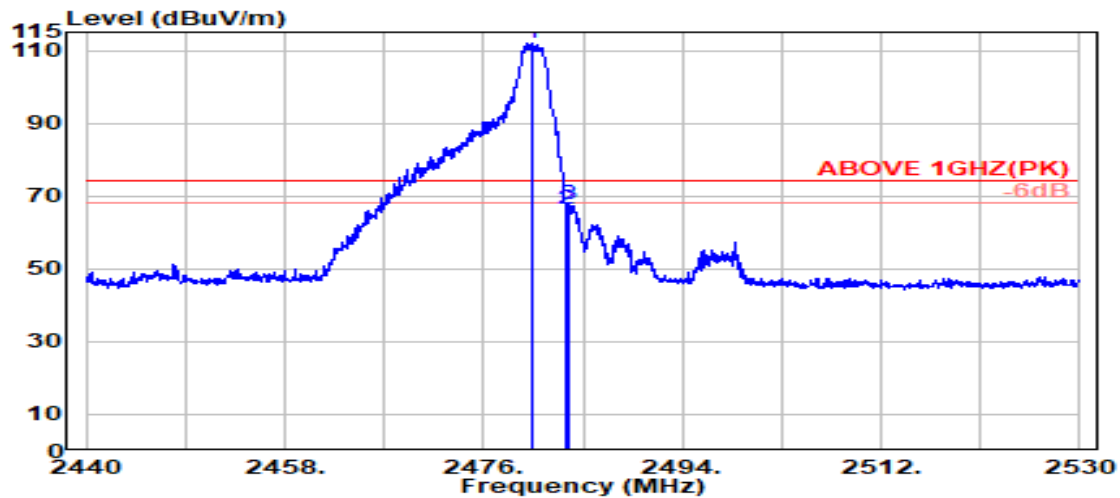

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.42	5.82	39.92	117.47	111.80	---	---	Peak
2483.500	28.43	5.83	39.92	71.87	66.21	74.00	7.79	Peak
2483.750	28.44	5.83	39.92	73.15	67.50	74.00	6.50	Peak

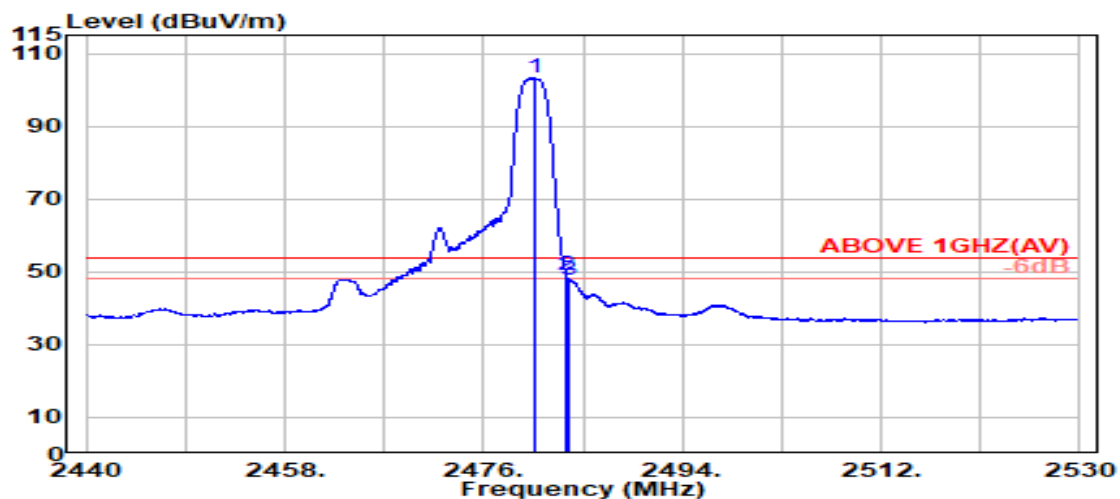

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.550	28.42	5.82	39.92	108.98	103.31	---	---	Average
2483.500	28.43	5.83	39.92	54.61	48.95	54.00	5.05	Average
2483.700	28.44	5.83	39.92	53.61	47.95	54.00	6.05	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

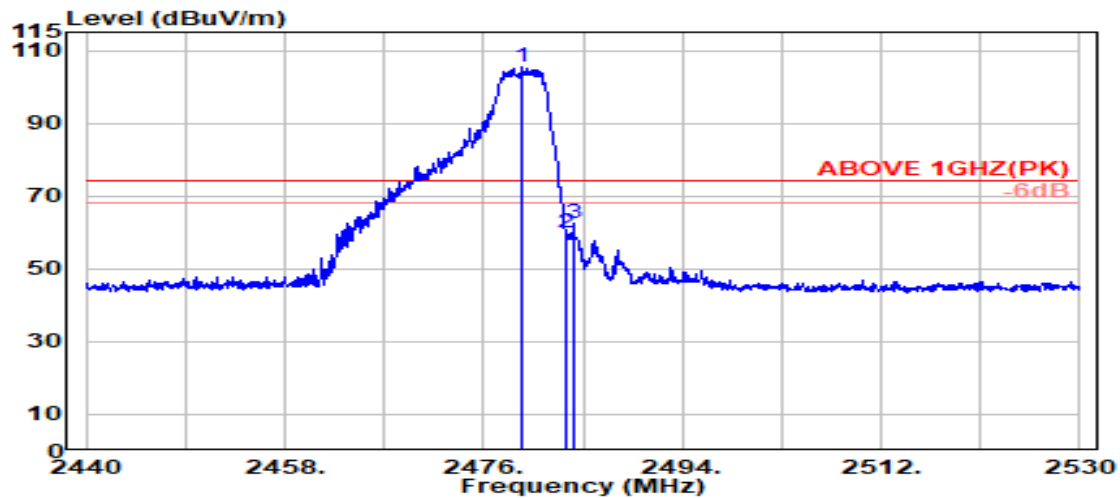

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.42	5.82	39.92	111.29	105.61	---	---	Peak
2483.500	28.43	5.83	39.92	65.39	59.73	74.00	14.27	Peak
2484.200	28.44	5.83	39.92	68.24	62.59	74.00	11.41	Peak

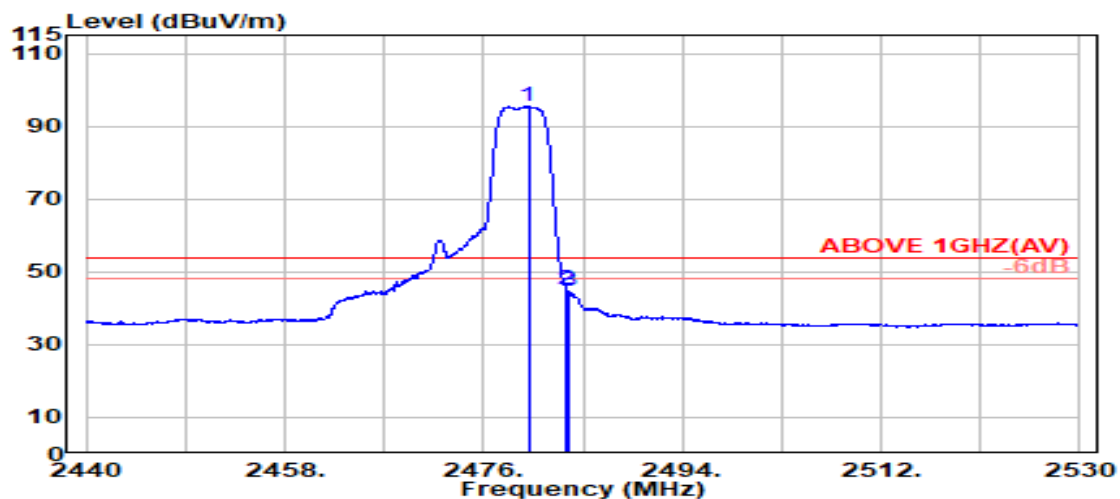

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.42	5.82	39.92	101.10	95.43	---	---	Average
2483.500	28.43	5.83	39.92	50.77	45.11	54.00	8.89	Average
2483.700	28.44	5.83	39.92	50.16	44.50	54.00	9.50	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

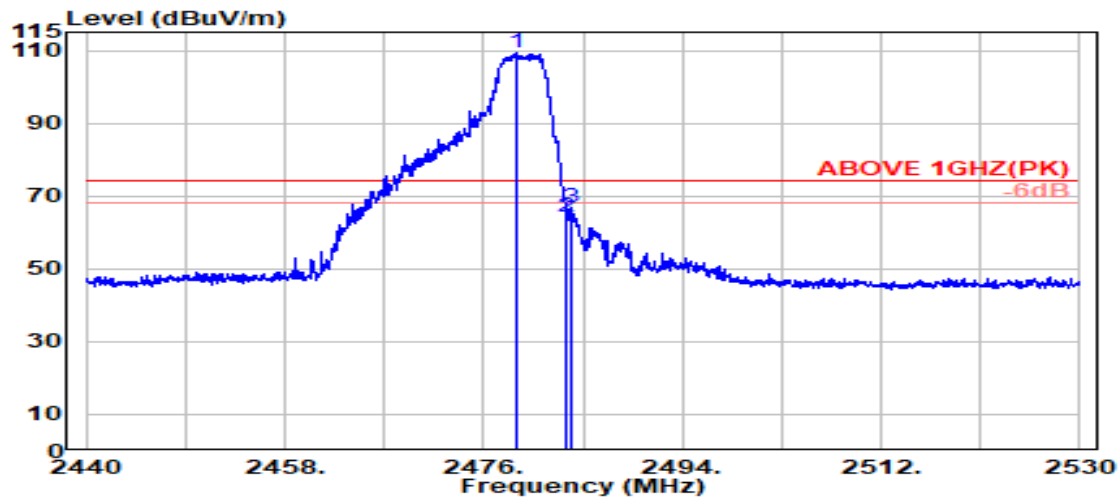

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	28.42	5.82	39.92	114.93	109.25	---	---	Peak
2483.500	28.43	5.83	39.92	69.90	64.24	74.00	9.76	Peak
2483.850	28.44	5.83	39.92	72.50	66.84	74.00	7.16	Peak

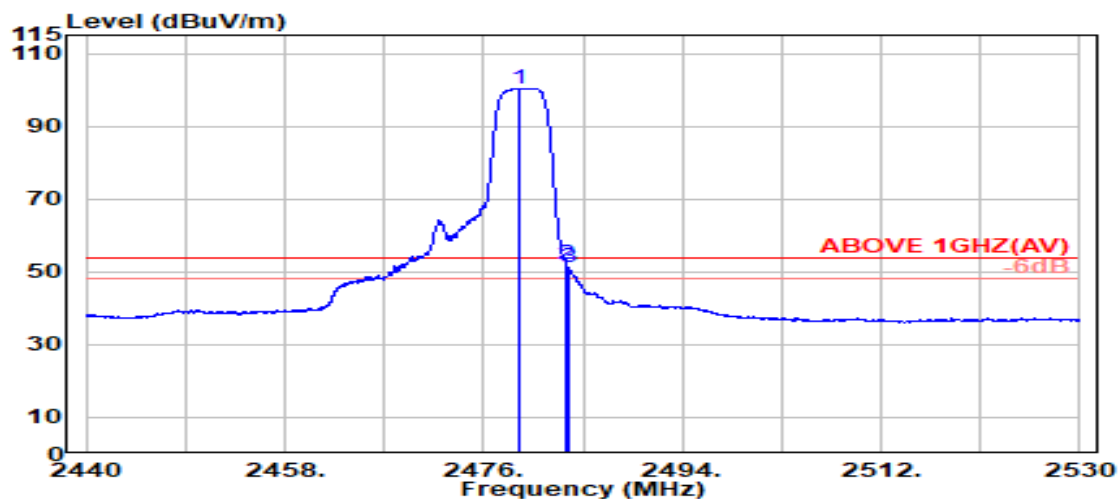

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	28.42	5.82	39.92	106.13	100.46	---	---	Average
2483.500	28.43	5.83	39.92	57.67	52.01	54.00	1.99	Average
2483.700	28.44	5.83	39.92	56.86	51.21	54.00	2.79	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

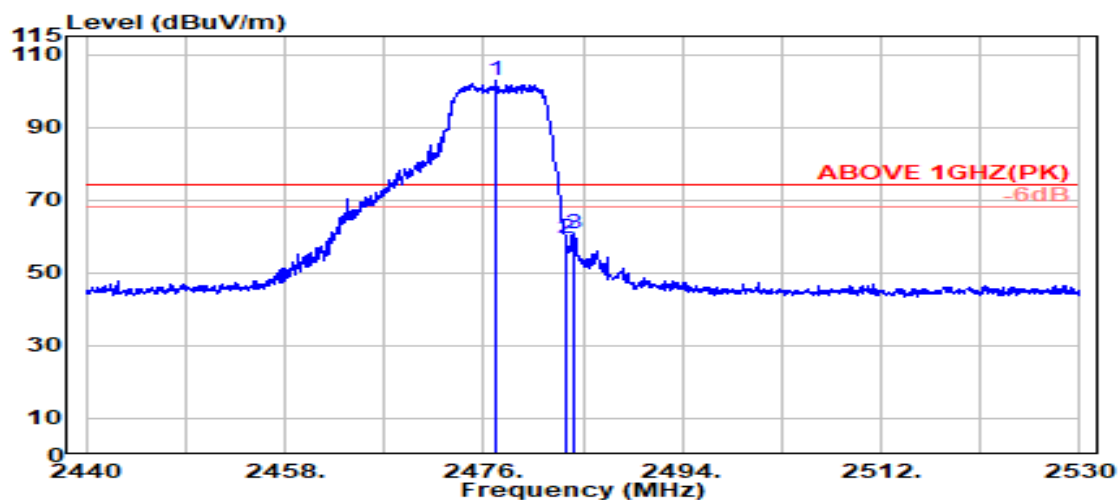

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.150	28.41	5.82	39.92	108.48	102.79	---	---	Peak
2483.500	28.43	5.83	39.92	65.30	59.65	74.00	14.35	Peak
2484.100	28.44	5.83	39.92	66.50	60.85	74.00	13.15	Peak

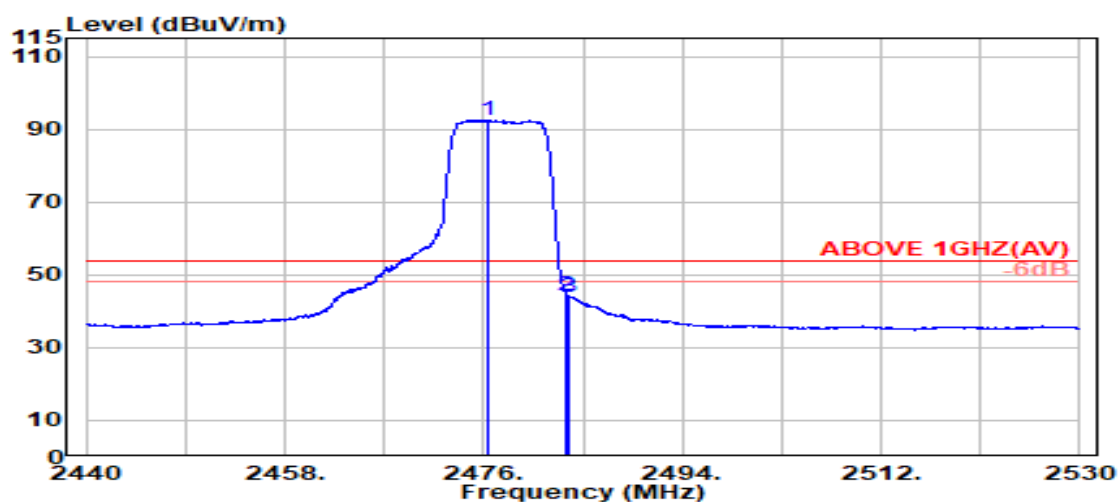

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.300	28.41	5.82	39.92	98.23	92.53	---	---	Average
2483.500	28.43	5.83	39.92	49.99	44.33	54.00	9.67	Average
2483.700	28.44	5.83	39.92	49.59	43.93	54.00	10.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

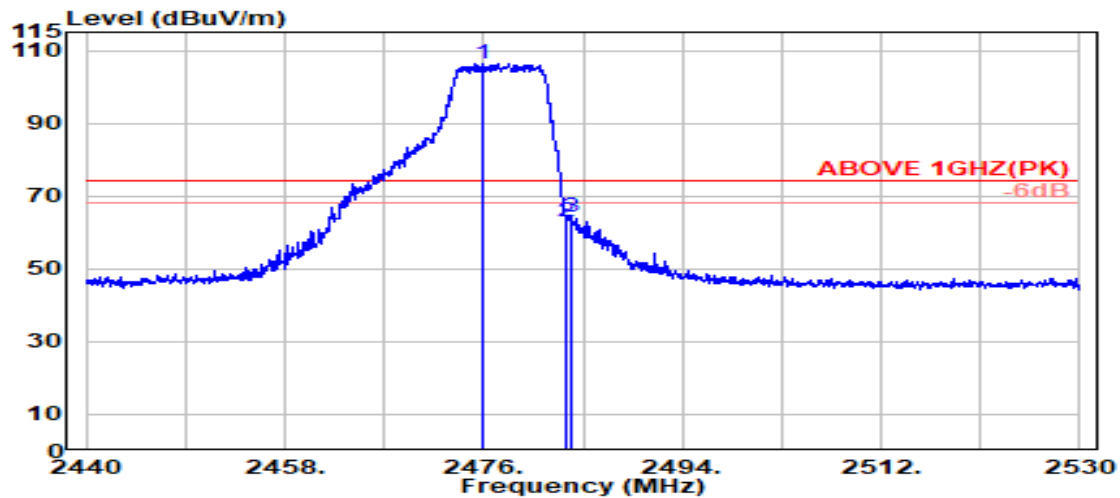

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2475.950	28.40	5.82	39.92	112.23	106.54	---	---	Peak
2483.500	28.43	5.83	39.92	68.74	63.08	74.00	10.92	Peak
2483.900	28.44	5.83	39.92	70.07	64.42	74.00	9.58	Peak

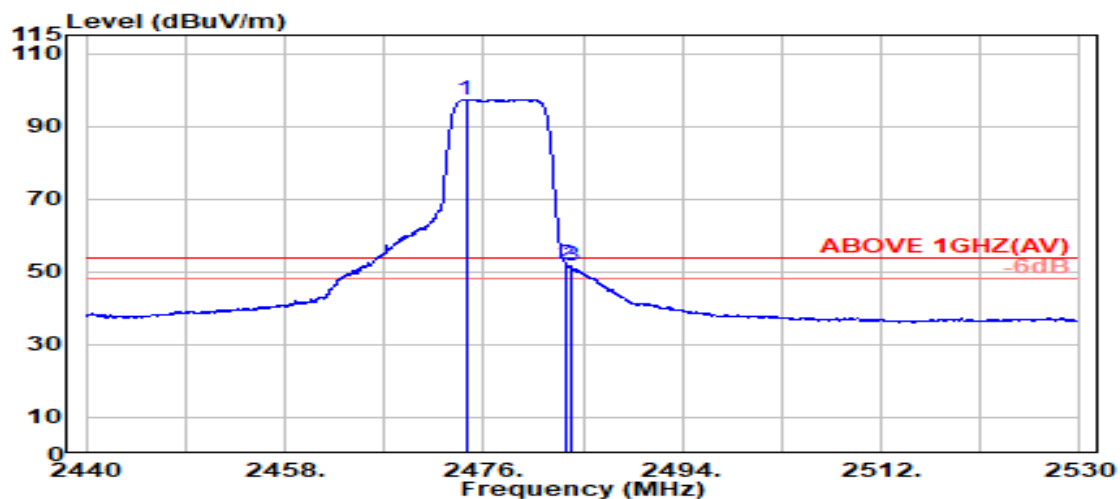

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2474.400	28.40	5.82	39.92	103.11	97.40	---	---	Average
2483.500	28.43	5.83	39.92	57.54	51.88	54.00	2.12	Average
2483.850	28.44	5.83	39.92	57.36	51.71	54.00	2.29	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

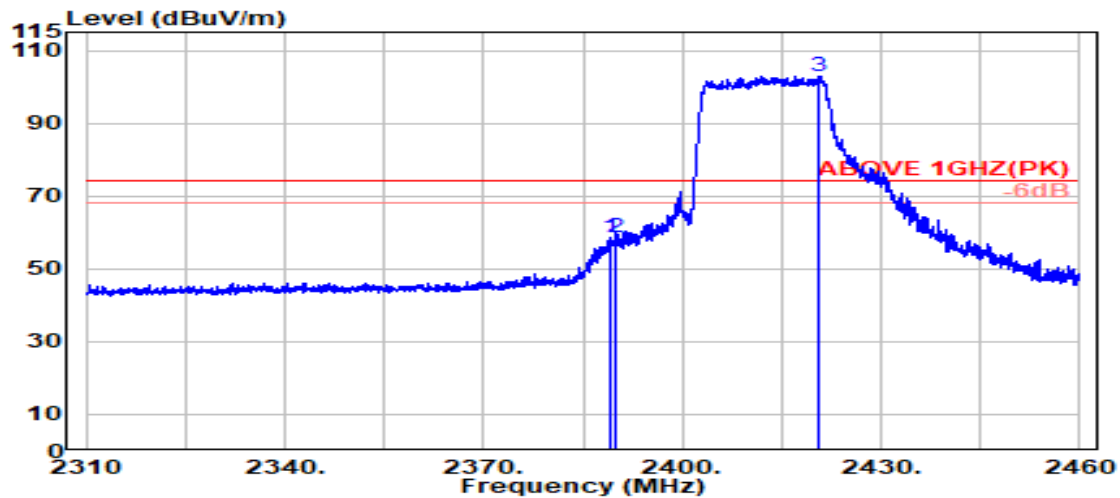

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.20	5.70	39.92	64.80	58.78	74.00	15.22	Peak
2390.000	28.20	5.70	39.92	64.72	58.71	74.00	15.29	Peak
@ 2420.550	28.24	5.74	39.92	108.96	103.03	---	---	Peak

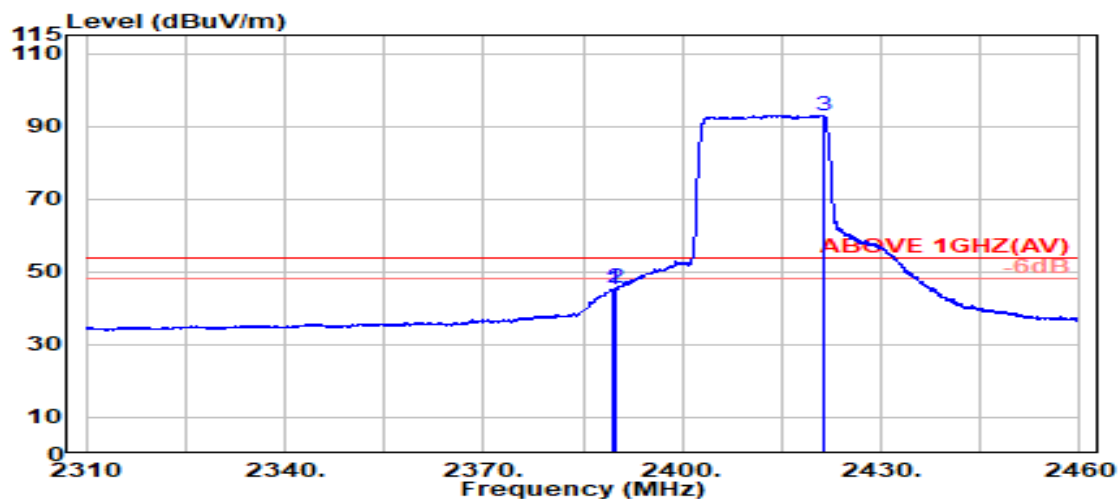

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.20	5.70	39.92	51.20	45.19	54.00	8.81	Average
2390.000	28.20	5.70	39.92	51.73	45.71	54.00	8.29	Average
@ 2421.200	28.24	5.75	39.92	98.94	93.01	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

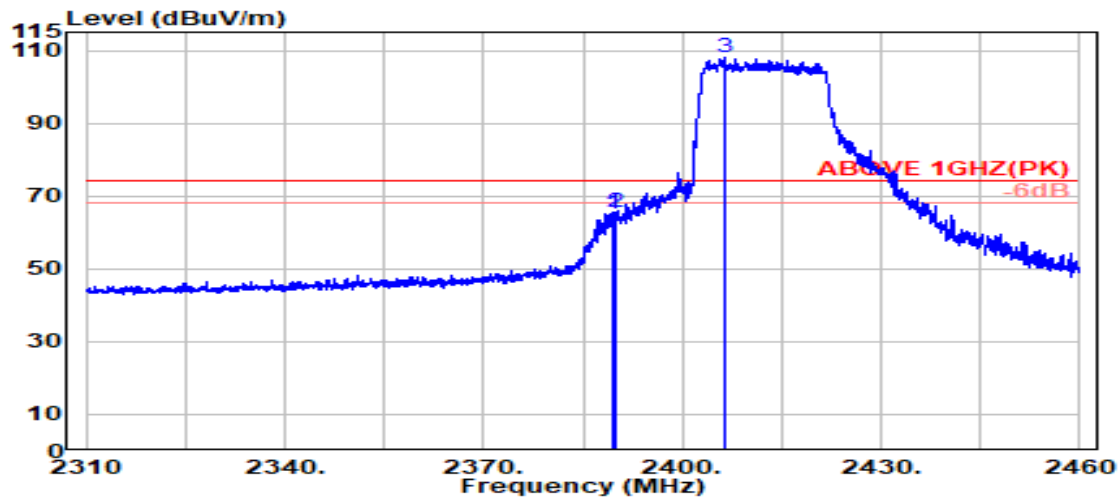

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.92	71.29	65.28	74.00	8.72	Peak
2390.000	28.20	5.70	39.92	71.37	65.36	74.00	8.64	Peak
@ 2406.300	28.21	5.73	39.92	114.23	108.25	---	---	Peak

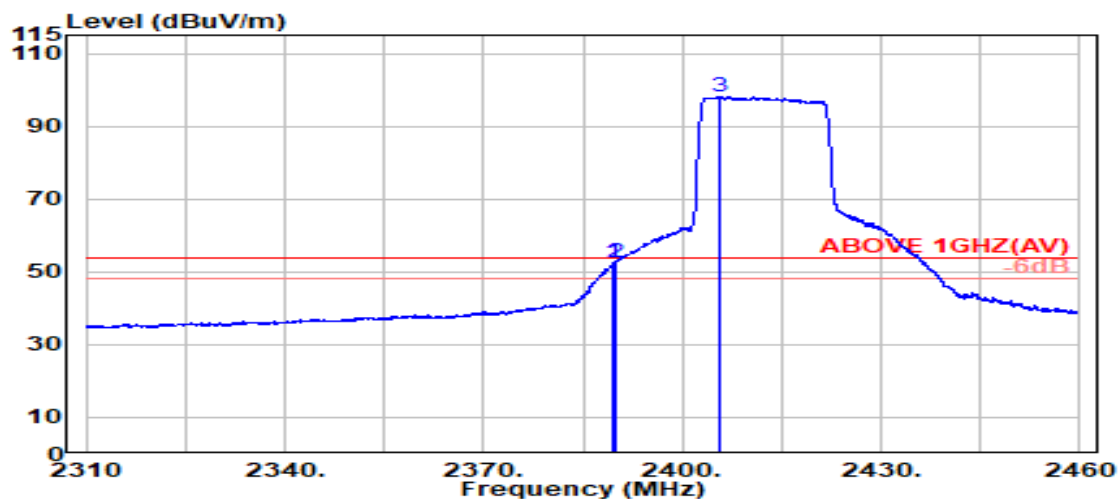

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.92	58.32	52.30	54.00	1.70	Average
2390.000	28.20	5.70	39.92	58.47	52.46	54.00	1.54	Average
@ 2405.750	28.21	5.72	39.92	104.09	98.11	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

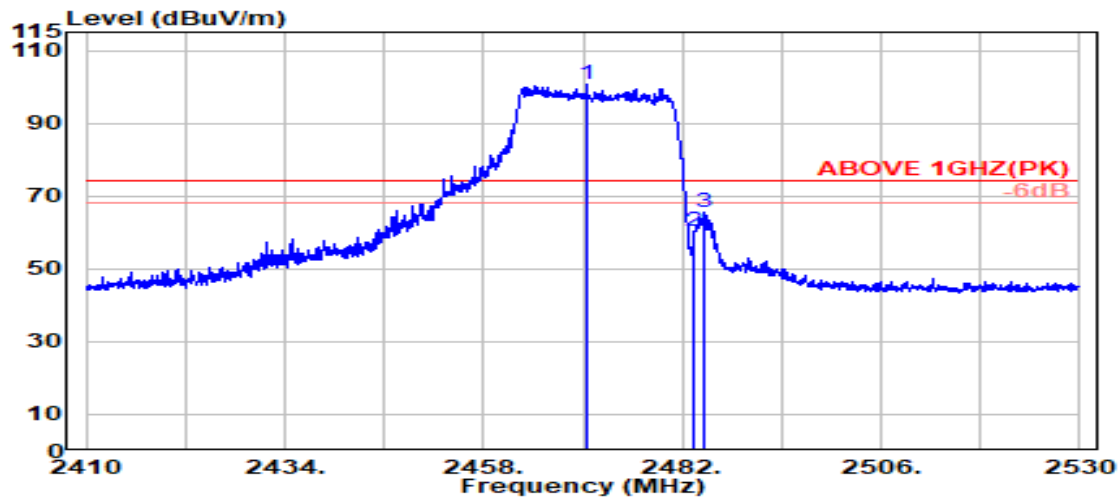

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2470.450	28.38	5.81	39.92	106.32	100.59	---	---	Peak
2483.500	28.43	5.83	39.92	65.95	60.29	74.00	13.71	Peak
2484.600	28.44	5.83	39.92	71.30	65.65	74.00	8.35	Peak

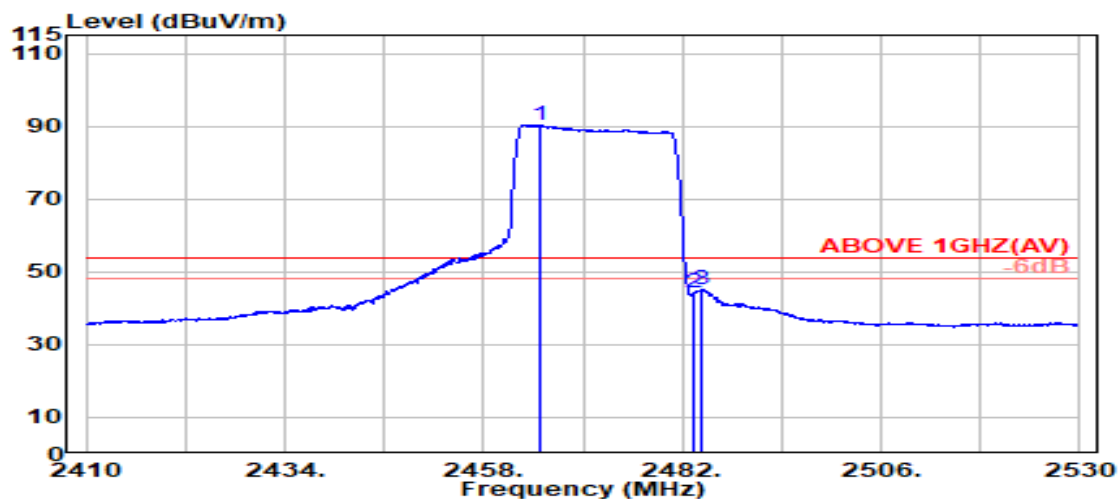

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.750	28.36	5.80	39.92	96.06	90.30	---	---	Average
2483.500	28.43	5.83	39.92	49.96	44.30	54.00	9.70	Average
2484.200	28.44	5.83	39.92	50.84	45.18	54.00	8.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

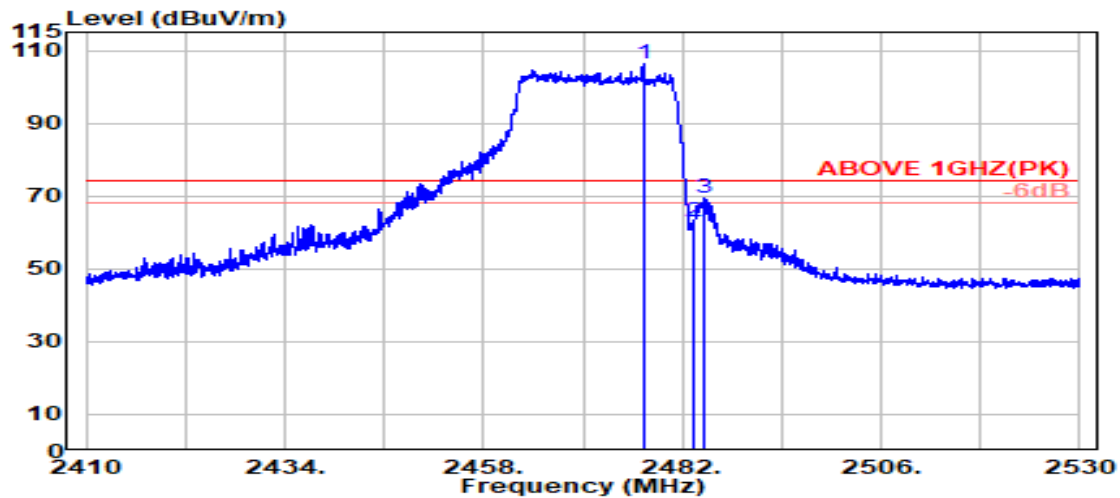

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2477.250	28.41	5.82	39.92	111.82	106.13	---	---	Peak
	2483.500	28.43	5.83	39.92	68.61	62.95	74.00	11.05	Peak
	2484.750	28.44	5.83	39.92	74.99	69.34	74.00	4.66	Peak

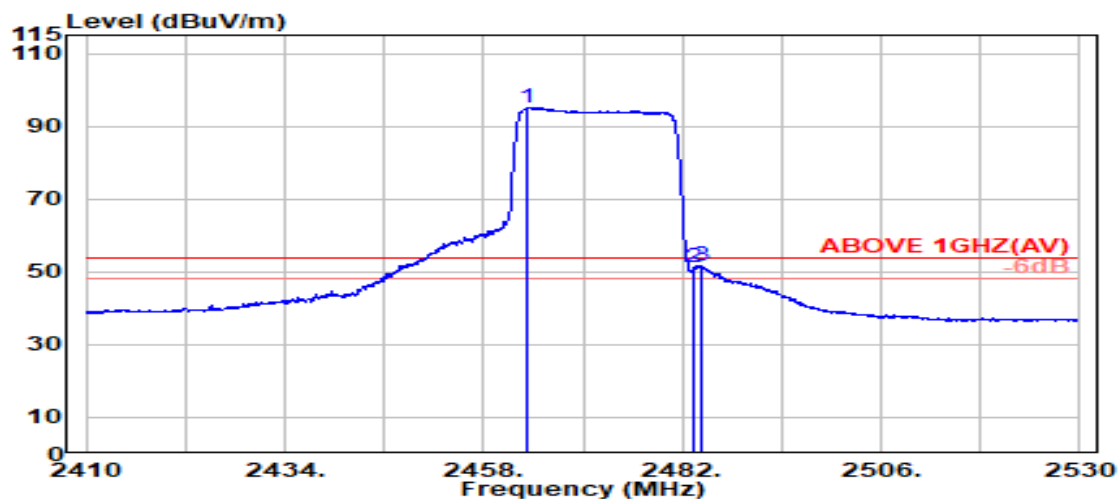

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2463.250	28.35	5.80	39.92	100.94	95.17	---	---	Average
	2483.500	28.43	5.83	39.92	56.67	51.01	54.00	2.99	Average
	2484.450	28.44	5.83	39.92	57.36	51.71	54.00	2.29	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

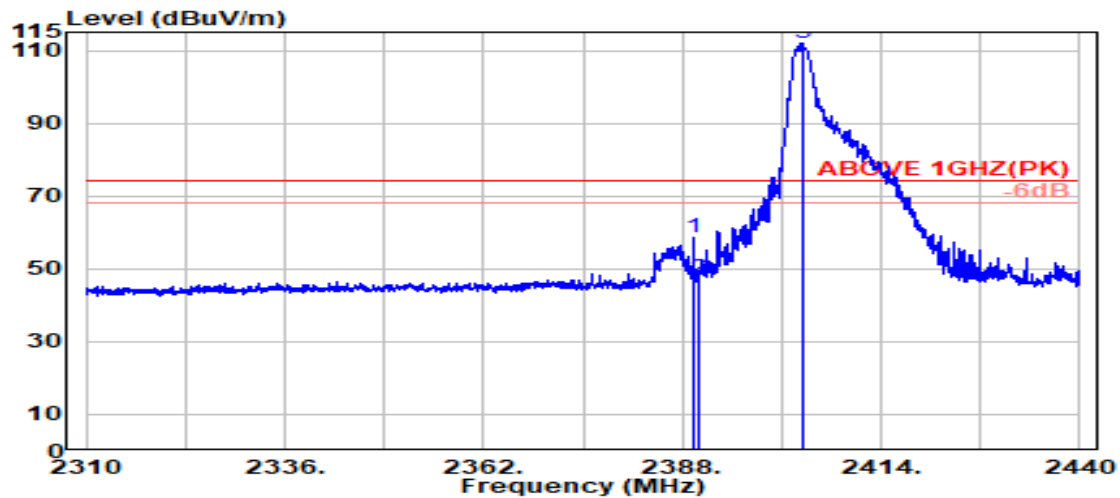

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.517	28.20	5.70	39.92	64.68	58.66	74.00	15.34	Peak
2390.000	28.20	5.70	39.92	53.28	47.26	74.00	26.74	Peak
@ 2403.654	28.21	5.72	39.92	118.00	112.01	---	---	Peak

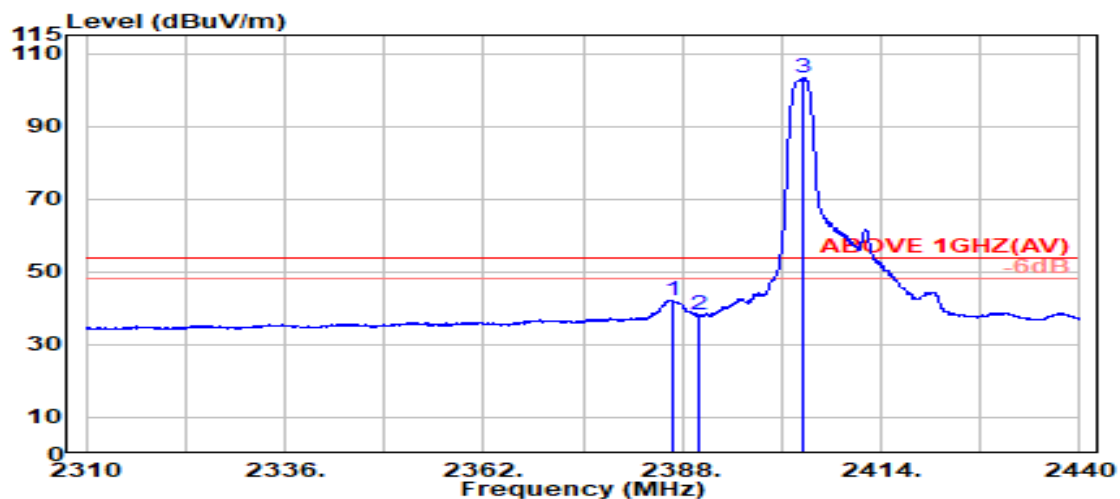

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.700	28.20	5.70	39.92	48.20	42.18	54.00	11.82	Average
2390.000	28.20	5.70	39.92	44.23	38.21	54.00	15.79	Average
@ 2403.925	28.21	5.72	39.92	109.21	103.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

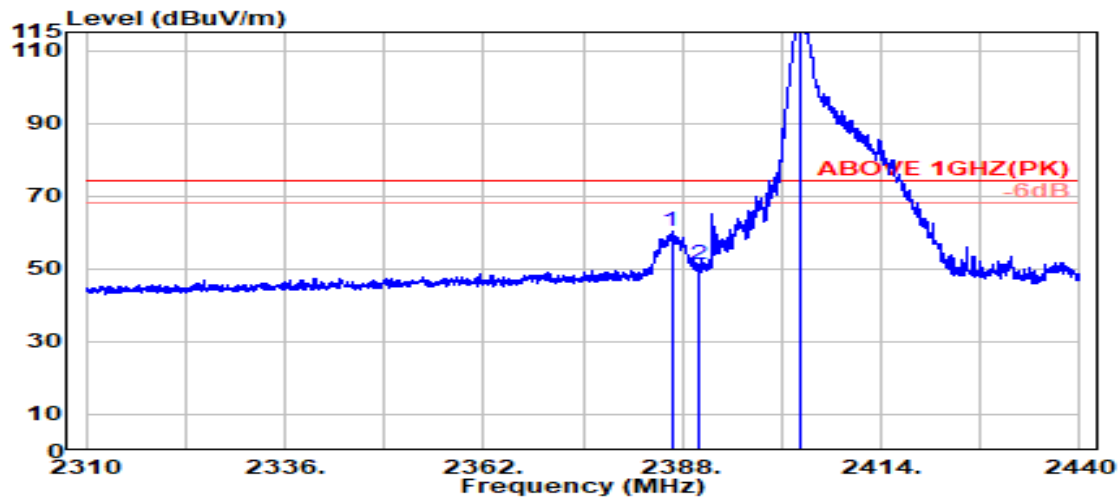

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.592	28.20	5.70	39.92	66.22	60.21	74.00	13.79	Peak
2390.000	28.20	5.70	39.92	57.04	51.02	74.00	22.98	Peak
@ 2403.492	28.21	5.72	39.92	122.99	117.00	---	---	Peak

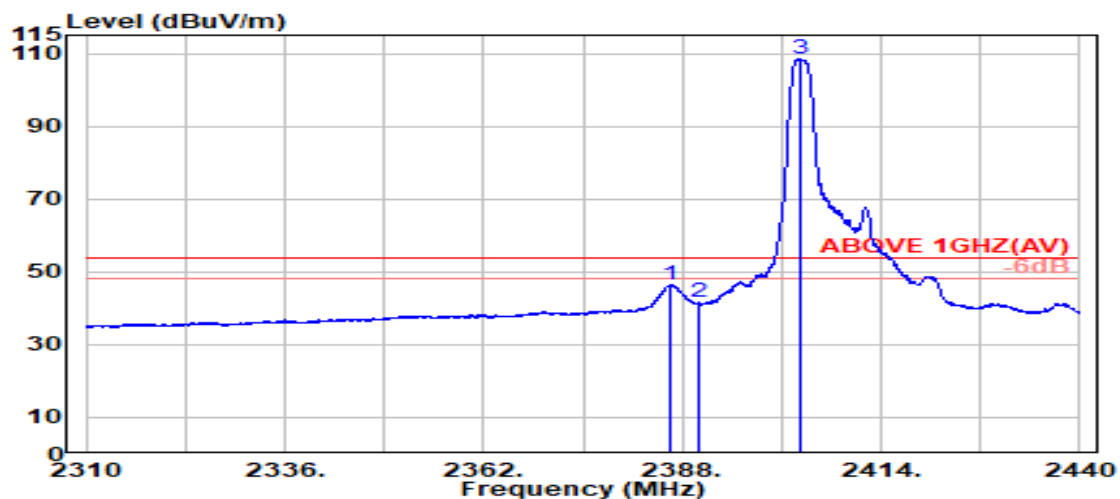

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.375	28.20	5.70	39.92	52.56	46.54	54.00	7.46	Average
2390.000	28.20	5.70	39.92	47.47	41.45	54.00	12.55	Average
@ 2403.546	28.21	5.72	39.92	114.43	108.44	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

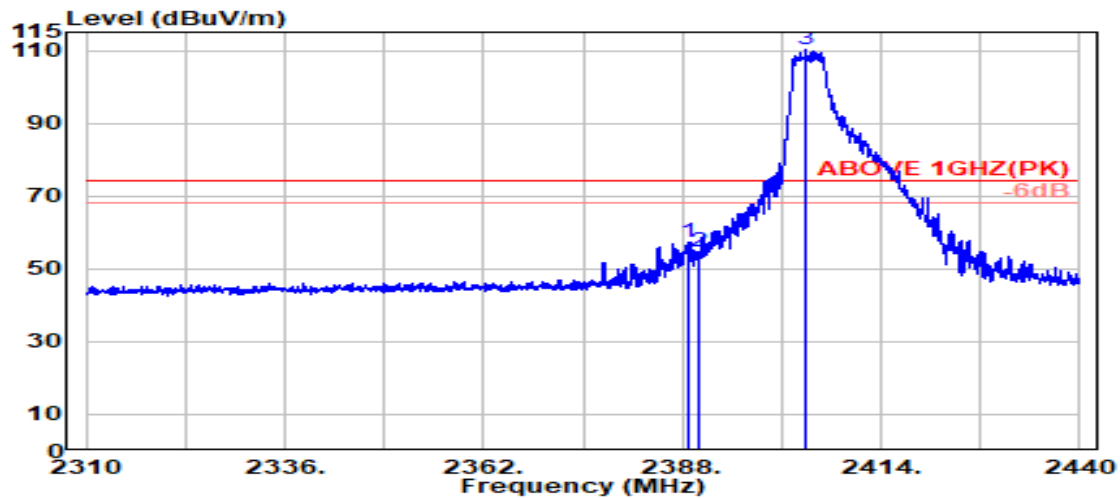

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.921	28.20	5.70	39.92	63.32	57.30	74.00	16.70	Peak
2390.000	28.20	5.70	39.92	60.49	54.48	74.00	19.52	Peak
@ 2404.142	28.21	5.72	39.92	116.24	110.25	---	---	Peak

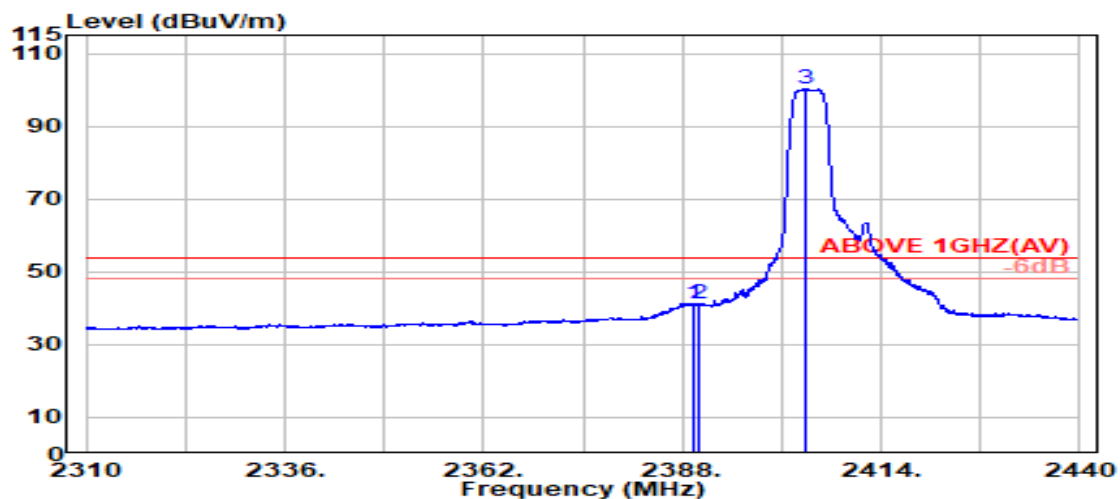

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.517	28.20	5.70	39.92	47.41	41.39	54.00	12.61	Average
2390.000	28.20	5.70	39.92	47.14	41.13	54.00	12.87	Average
@ 2404.033	28.21	5.72	39.92	106.27	100.28	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

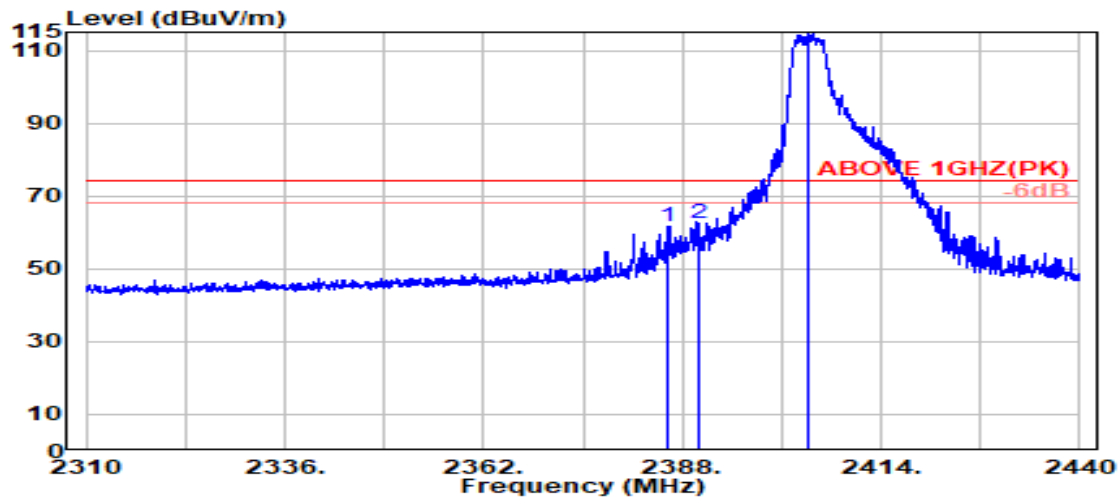

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.212	28.20	5.70	39.92	67.69	61.67	74.00	12.33	Peak
2390.000	28.20	5.70	39.92	68.60	62.59	74.00	11.41	Peak
@ 2404.358	28.21	5.72	39.92	120.69	114.71	---	---	Peak

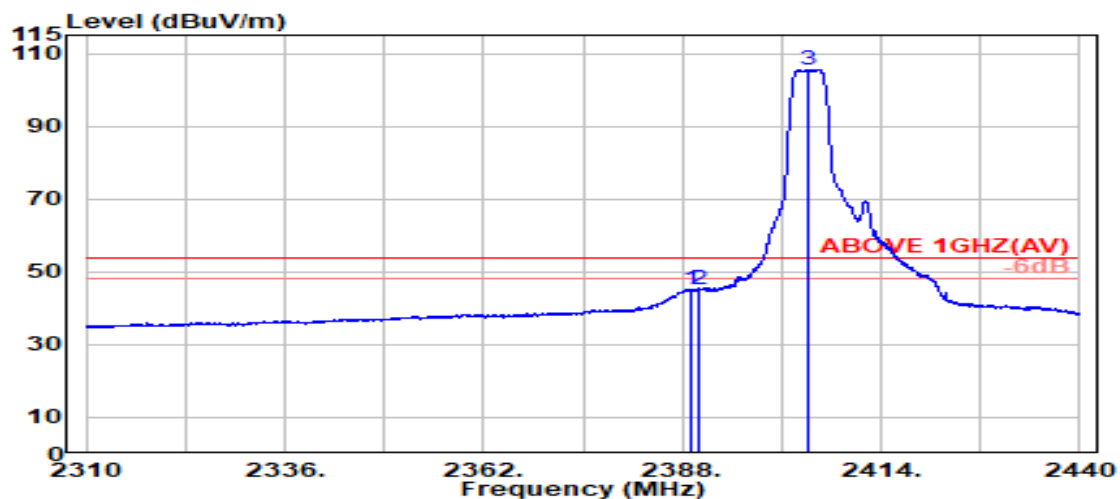

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.192	28.20	5.70	39.92	51.32	45.30	54.00	8.70	Average
2390.000	28.20	5.70	39.92	51.10	45.08	54.00	8.92	Average
@ 2404.467	28.21	5.72	39.92	111.63	105.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

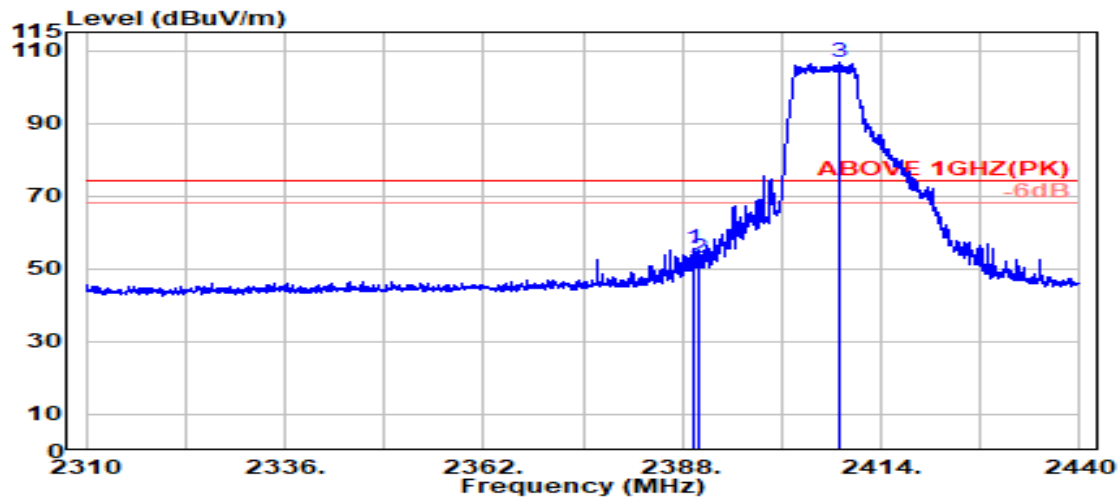

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.625	28.20	5.70	39.92	61.52	55.50	74.00	18.50	Peak
2390.000	28.20	5.70	39.92	59.12	53.10	74.00	20.90	Peak
@ 2408.692	28.22	5.73	39.92	112.57	106.60	---	---	Peak

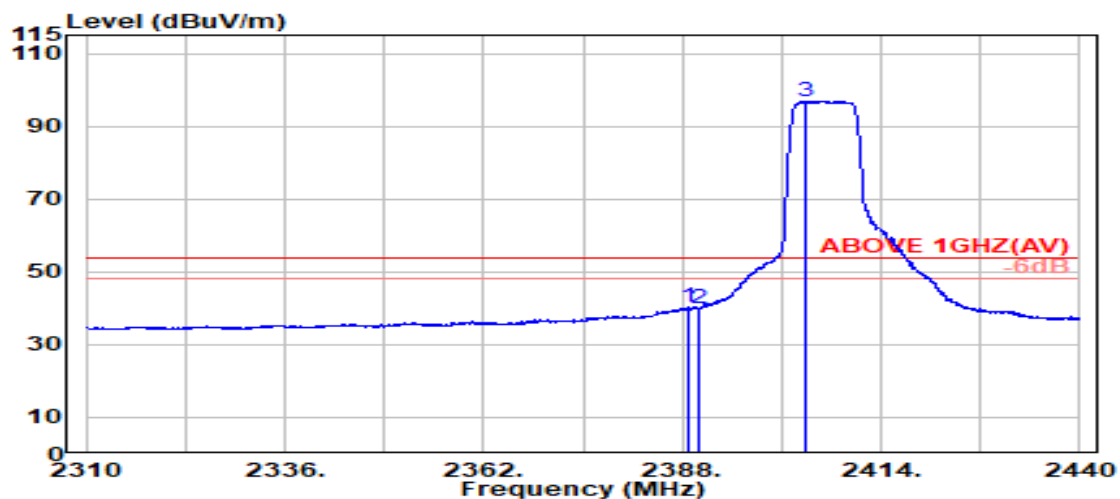

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.650	28.20	5.70	39.92	46.30	40.28	54.00	13.72	Average
2390.000	28.20	5.70	39.92	46.01	39.99	54.00	14.01	Average
@ 2404.250	28.21	5.72	39.92	102.93	96.94	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

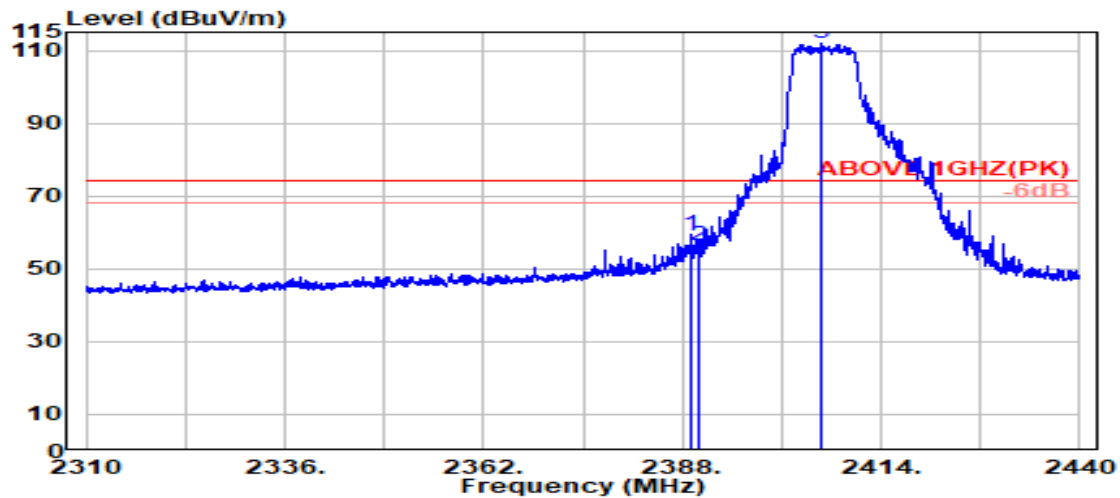

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.083	28.20	5.70	39.92	65.44	59.42	74.00	14.58	Peak
2390.000	28.20	5.70	39.92	62.57	56.55	74.00	17.45	Peak
@ 2406.254	28.21	5.72	39.92	118.05	112.06	---	---	Peak

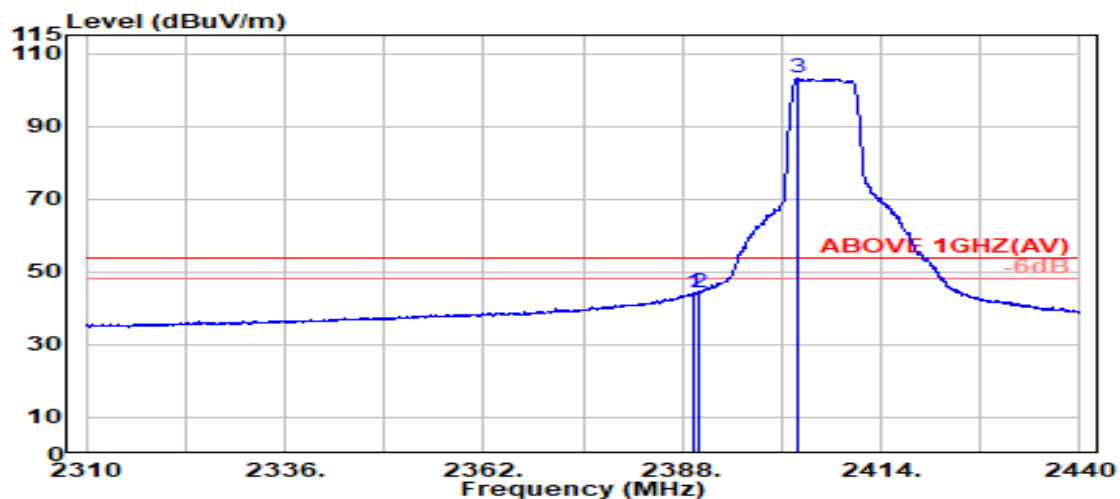

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.571	28.20	5.70	39.92	50.26	44.24	54.00	9.76	Average
2390.000	28.20	5.70	39.92	50.29	44.27	54.00	9.73	Average
@ 2403.113	28.21	5.72	39.92	109.15	103.16	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

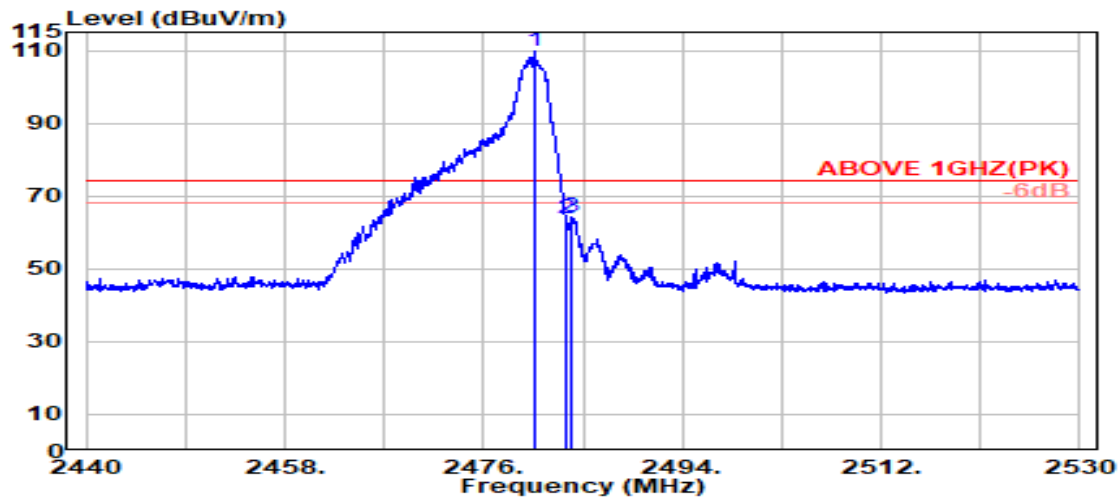

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.600	28.42	5.82	39.92	115.40	109.73	---	---	Peak
2483.500	28.43	5.83	39.92	69.49	63.83	74.00	10.17	Peak
2483.900	28.44	5.83	39.92	70.05	64.40	74.00	9.60	Peak

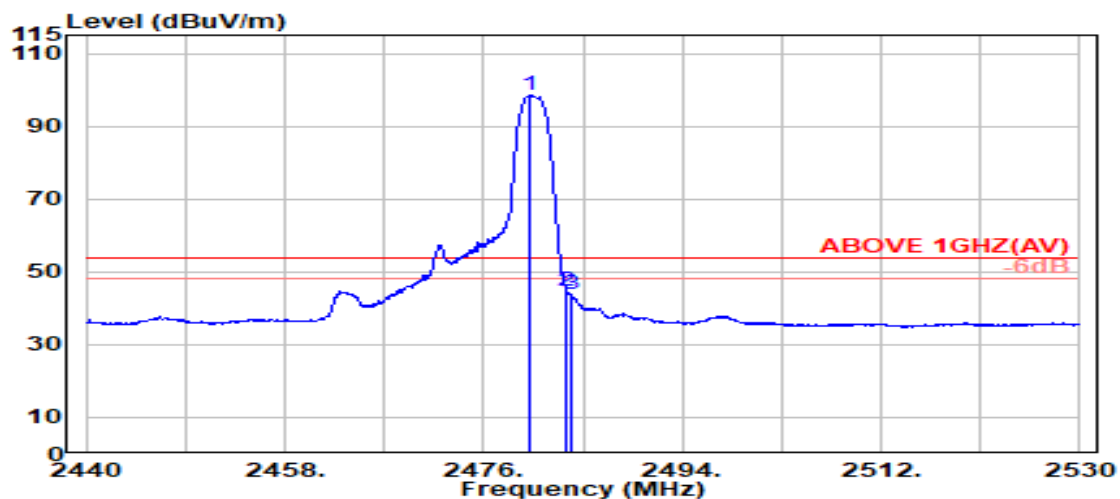

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.250	28.42	5.82	39.92	104.09	98.42	---	---	Average
2483.500	28.43	5.83	39.92	50.26	44.60	54.00	9.40	Average
2484.050	28.44	5.83	39.92	49.38	43.73	54.00	10.27	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

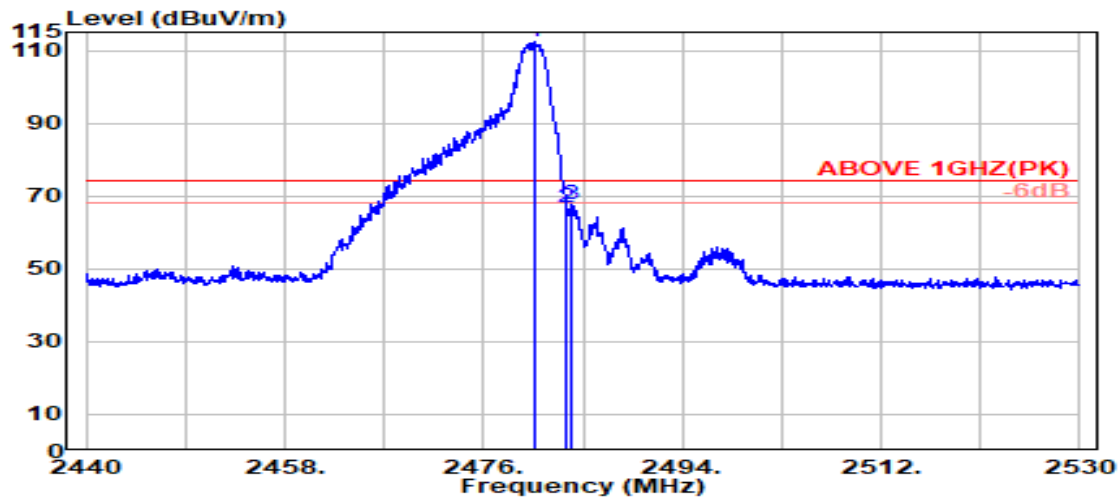

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.600	28.42	5.82	39.92	118.20	112.52	---	---	Peak
2483.500	28.43	5.83	39.92	72.30	66.64	74.00	7.36	Peak
2483.900	28.44	5.83	39.92	73.19	67.54	74.00	6.46	Peak

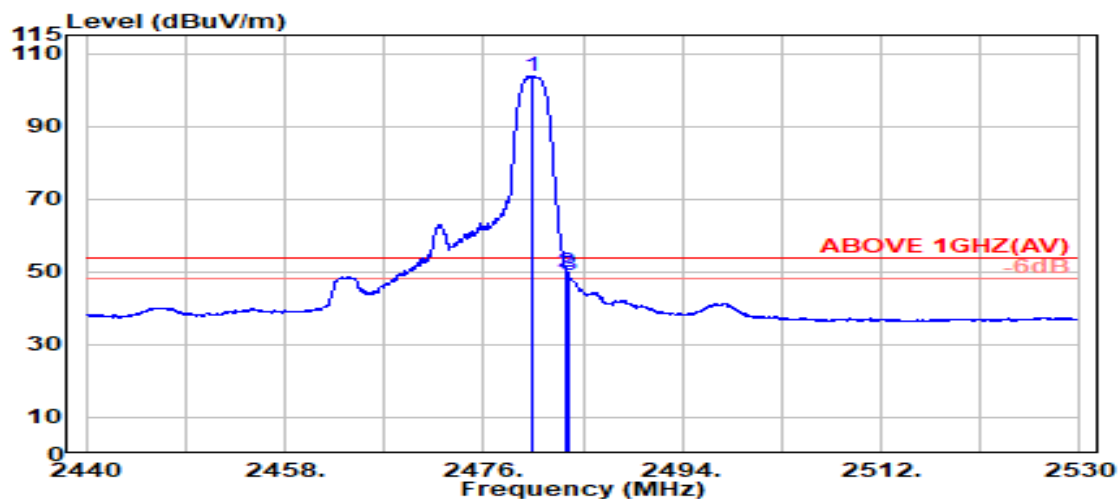

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.450	28.42	5.82	39.92	109.34	103.66	---	---	Average
2483.500	28.43	5.83	39.92	55.41	49.75	54.00	4.25	Average
2483.700	28.44	5.83	39.92	54.65	48.99	54.00	5.01	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

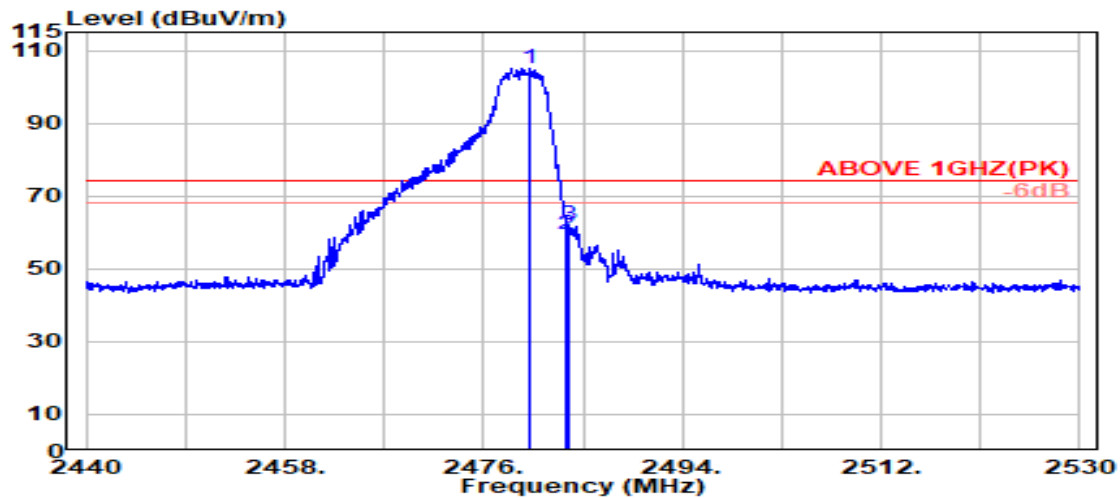

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2480.250	28.42	5.82	39.92	110.70	105.02	---	---	Peak
	2483.500	28.43	5.83	39.92	64.93	59.27	74.00	14.73	Peak
	2483.800	28.44	5.83	39.92	67.91	62.25	74.00	11.75	Peak

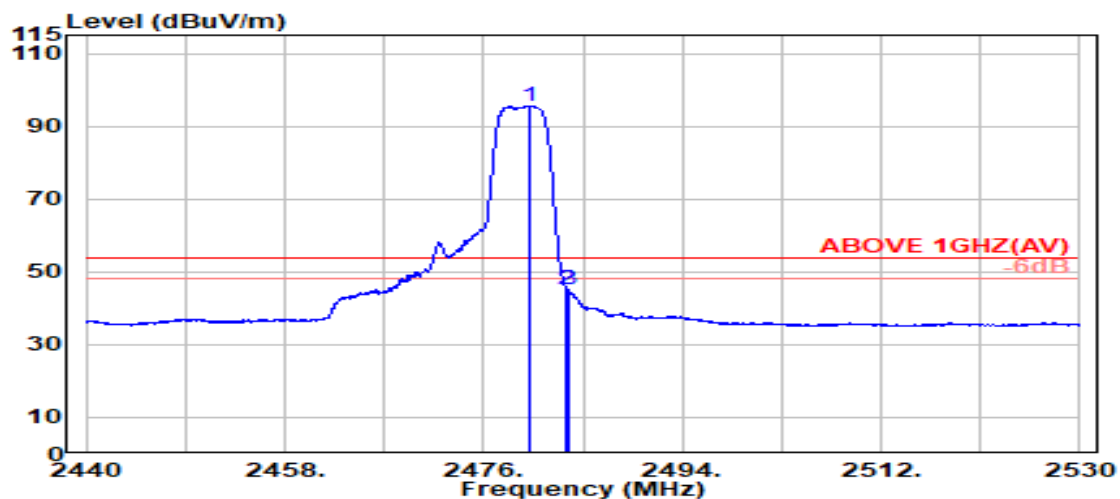

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2480.150	28.42	5.82	39.92	101.25	95.57	---	---	Average
	2483.500	28.43	5.83	39.92	50.95	45.30	54.00	8.70	Average
	2483.700	28.44	5.83	39.92	50.65	44.99	54.00	9.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

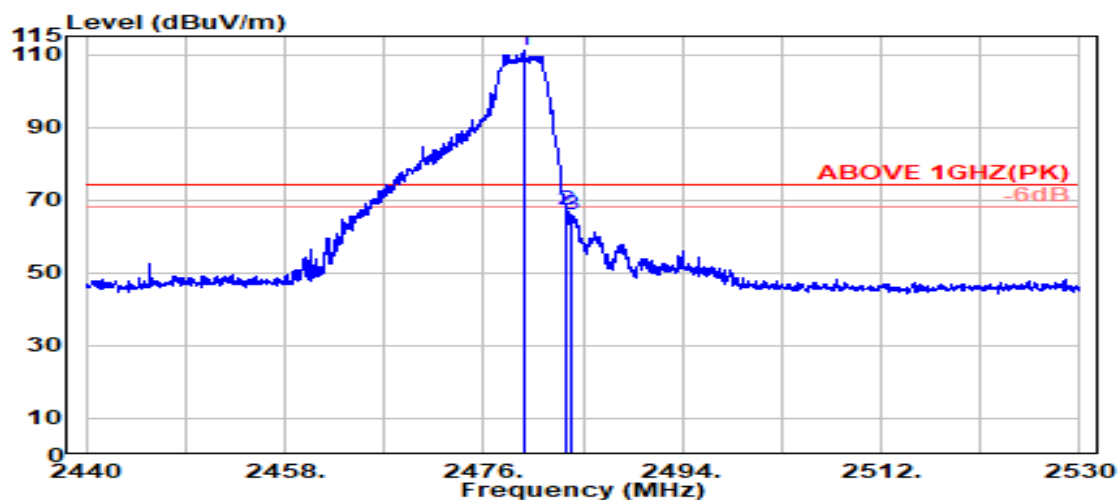

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.600	28.42	5.82	39.92	116.65	110.97	---	---	Peak
2483.500	28.43	5.83	39.92	72.77	67.11	74.00	6.89	Peak
2484.000	28.44	5.83	39.92	71.41	65.75	74.00	8.25	Peak

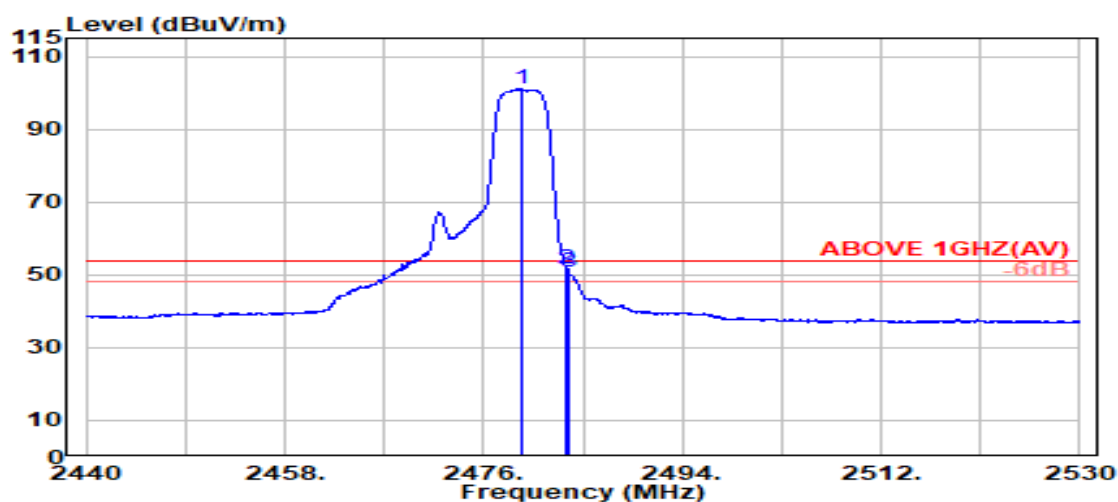


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.400	28.42	5.82	39.92	106.79	101.11	---	---	Average
2483.500	28.43	5.83	39.92	57.35	51.69	54.00	2.31	Average
2483.750	28.44	5.83	39.92	56.47	50.82	54.00	3.18	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

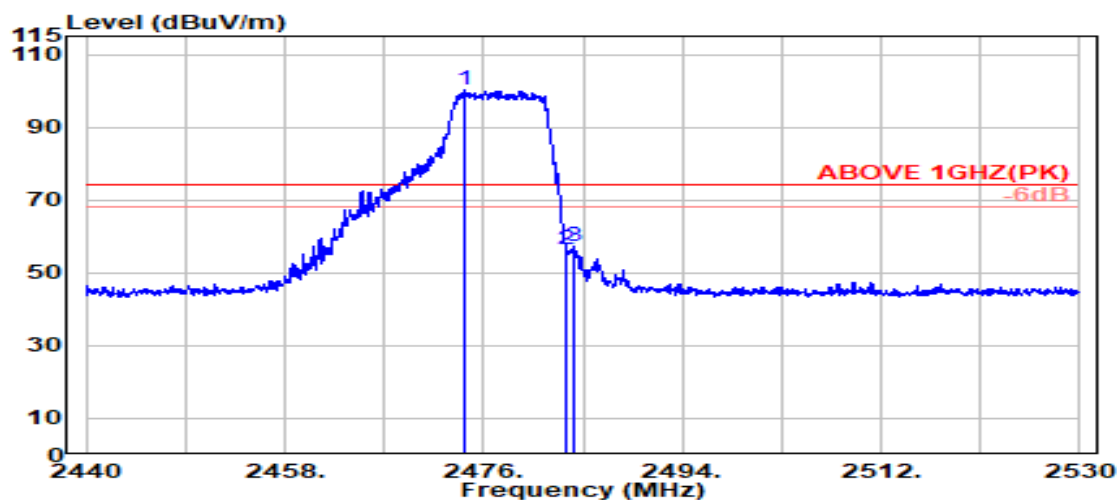

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2474.350	28.40	5.82	39.92	105.89	100.18	---	---	Peak
	2483.500	28.43	5.83	39.92	62.03	56.38	74.00	17.62	Peak
	2484.250	28.44	5.83	39.92	63.08	57.43	74.00	16.57	Peak

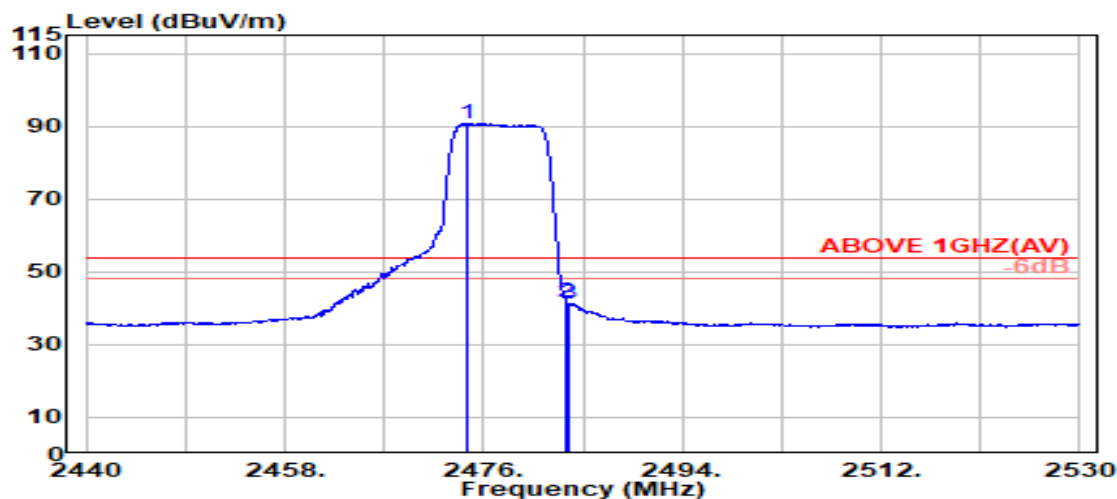

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2474.550	28.40	5.82	39.92	96.50	90.80	---	---	Average
	2483.500	28.43	5.83	39.92	47.19	41.53	54.00	12.47	Average
	2483.750	28.44	5.83	39.92	46.77	41.12	54.00	12.88	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

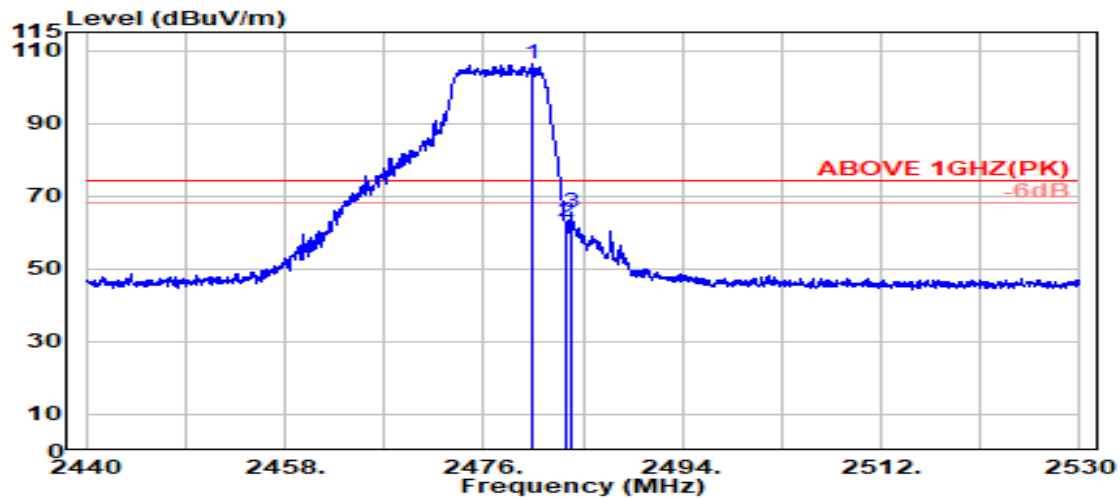

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.350	28.42	5.82	39.92	112.05	106.37	---	---	Peak
	2483.500	28.43	5.83	39.92	68.43	62.77	74.00	11.23	Peak
	2484.000	28.44	5.83	39.92	71.35	65.70	74.00	8.30	Peak

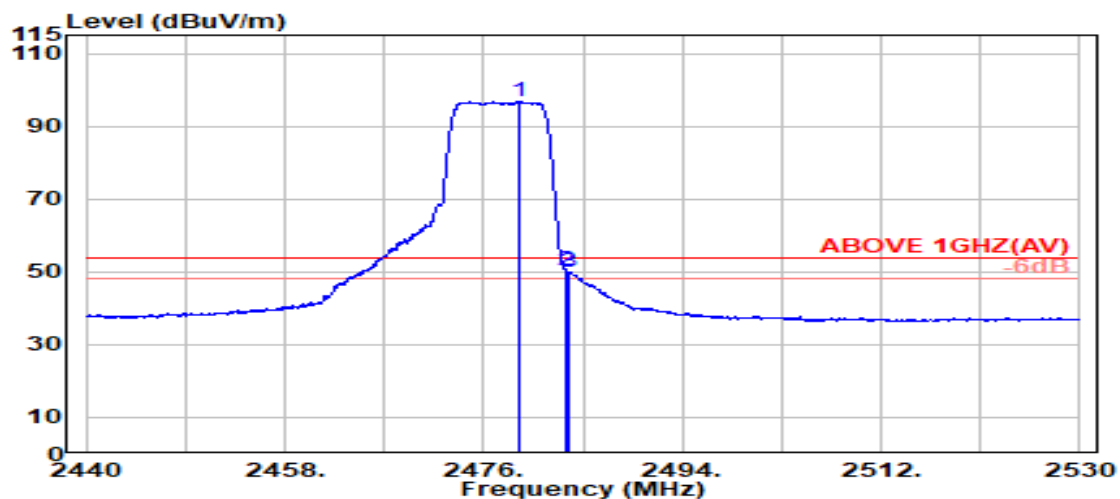

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.200	28.42	5.82	39.92	102.43	96.75	---	---	Average
	2483.500	28.43	5.83	39.92	56.02	50.36	54.00	3.64	Average
	2483.800	28.44	5.83	39.92	55.43	49.78	54.00	4.22	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

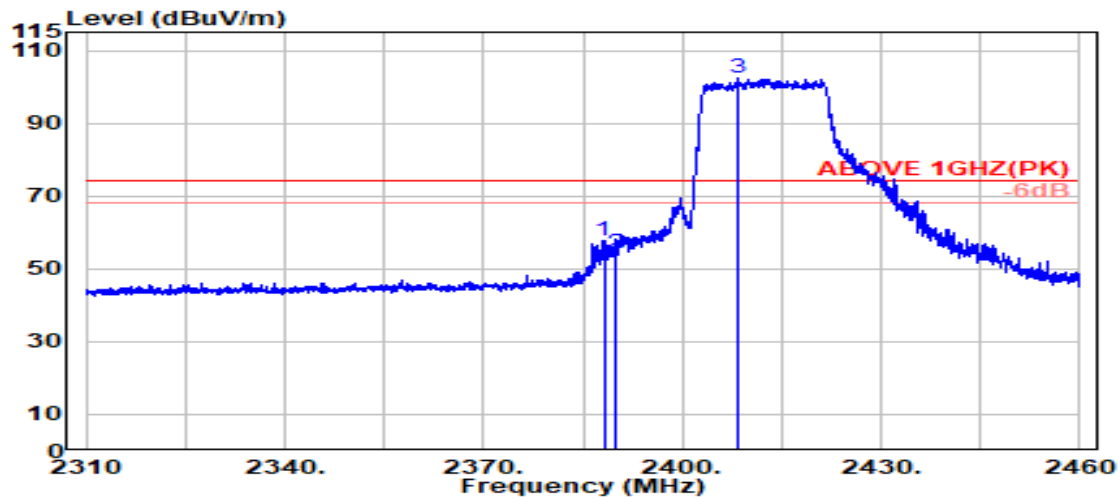

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.150	28.20	5.70	39.92	63.88	57.86	74.00	16.14	Peak
2390.000	28.20	5.70	39.92	60.36	54.35	74.00	19.65	Peak
@ 2408.250	28.22	5.73	39.92	108.49	102.52	---	---	Peak

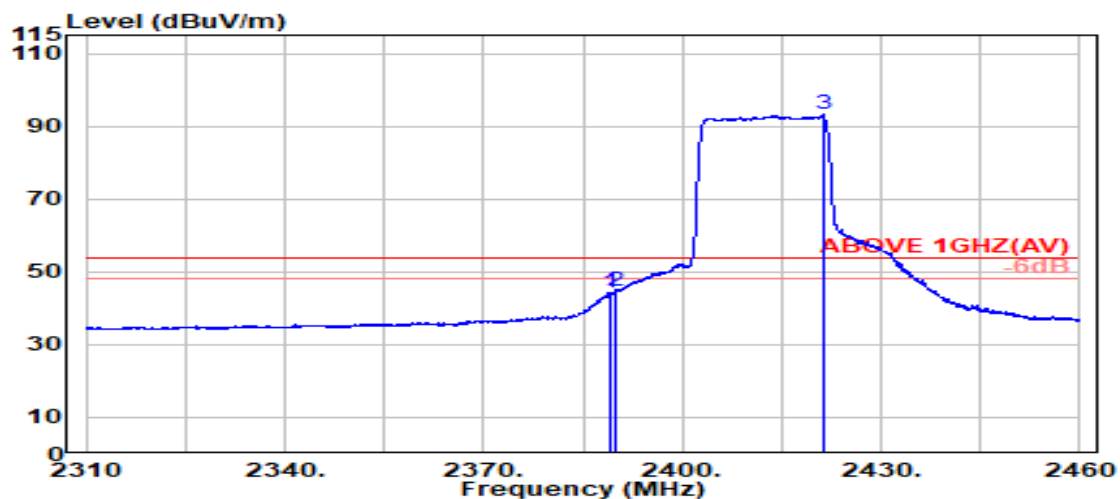

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.20	5.70	39.92	50.25	44.24	54.00	9.76	Average
2390.000	28.20	5.70	39.92	50.63	44.62	54.00	9.38	Average
@ 2421.250	28.24	5.75	39.92	99.07	93.14	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

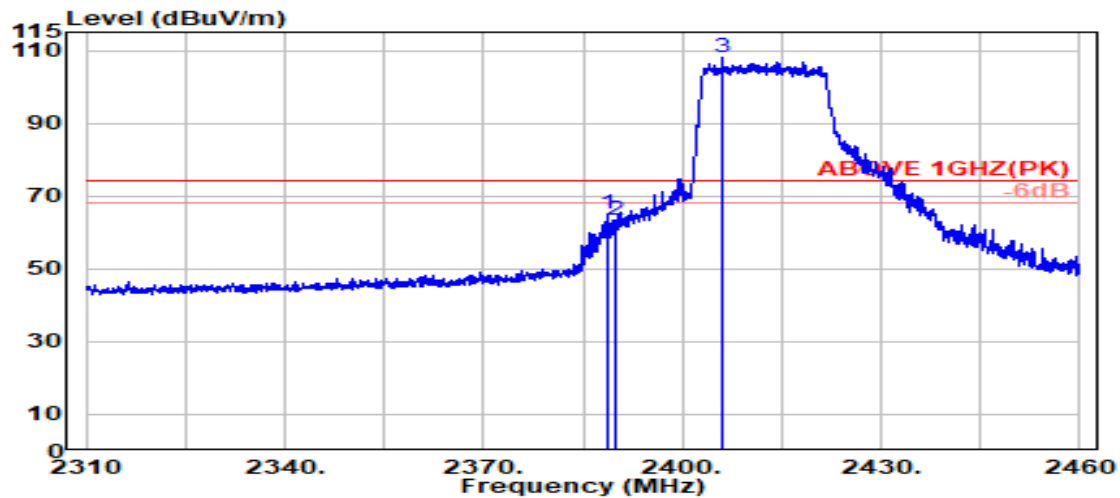

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	28.20	5.70	39.92	71.12	65.10	74.00	8.90	Peak
2390.000	28.20	5.70	39.92	69.36	63.34	74.00	10.66	Peak
@ 2406.000	28.21	5.72	39.92	114.12	108.14	---	---	Peak

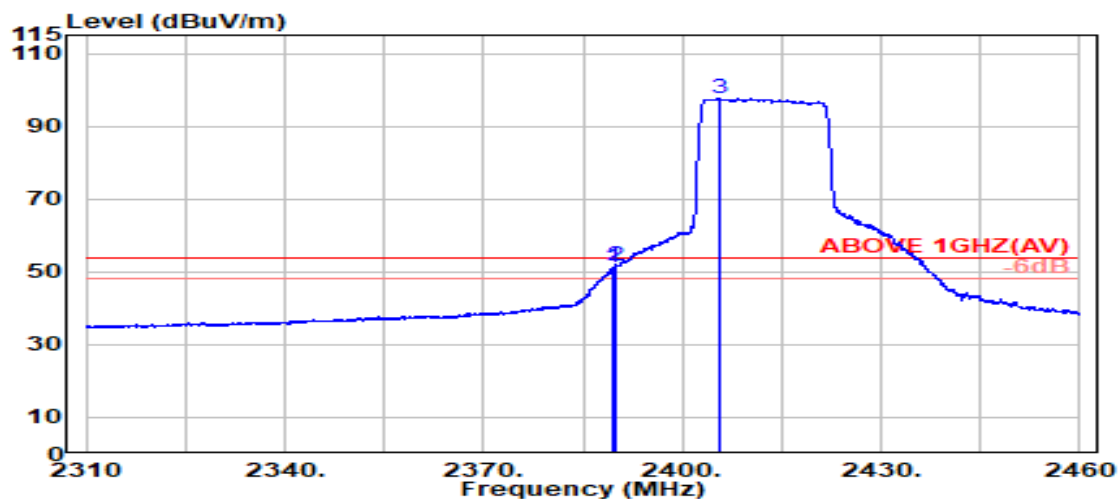

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.92	57.12	51.11	54.00	2.89	Average
2390.000	28.20	5.70	39.92	57.58	51.57	54.00	2.43	Average
@ 2405.750	28.21	5.72	39.92	103.66	97.67	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

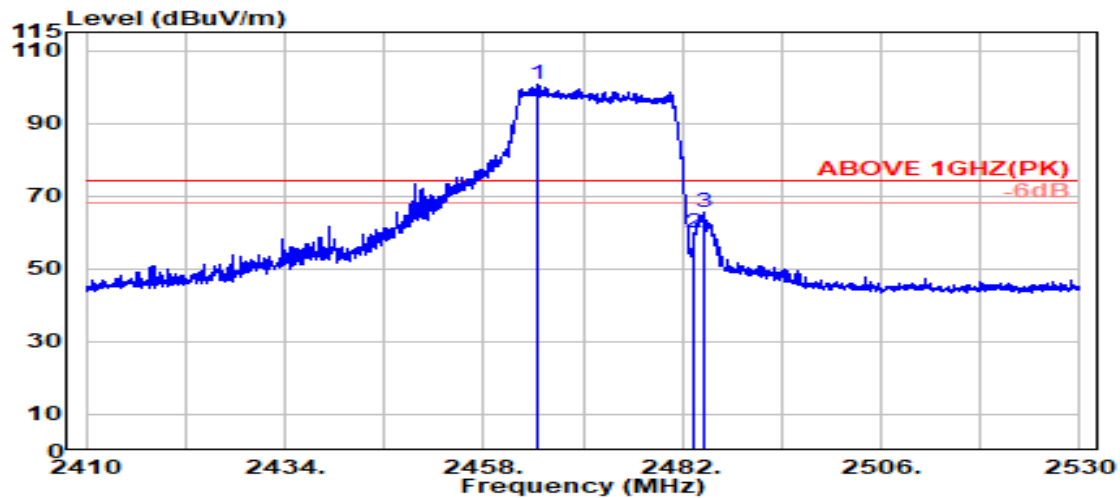

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2464.600	28.36	5.80	39.92	106.64	100.88	---	---	Peak
	2483.500	28.43	5.83	39.92	65.53	59.87	74.00	14.13	Peak
	2484.550	28.44	5.83	39.92	71.36	65.71	74.00	8.29	Peak

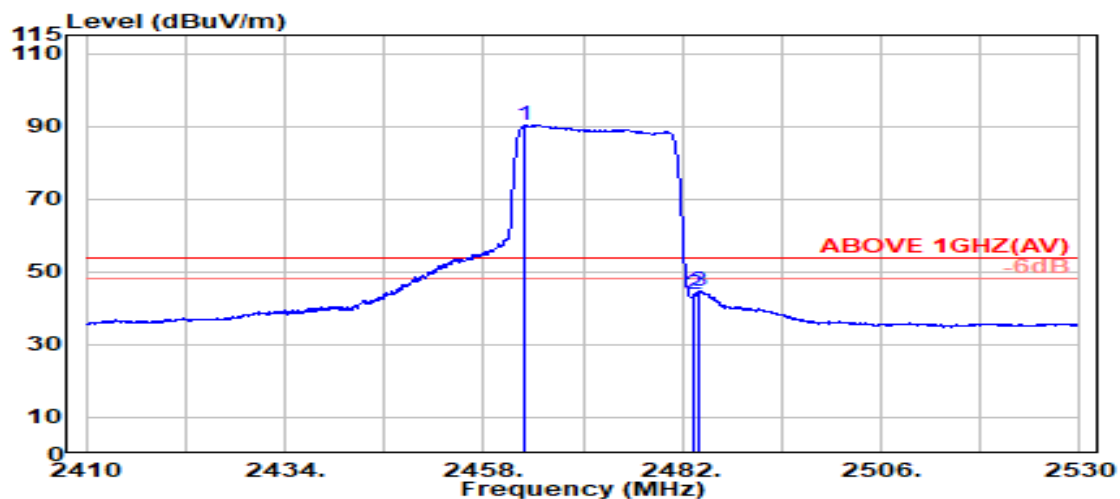

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2462.850	28.35	5.80	39.92	96.09	90.33	---	---	Average
	2483.500	28.43	5.83	39.92	49.30	43.64	54.00	10.36	Average
	2483.900	28.44	5.83	39.92	50.27	44.61	54.00	9.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

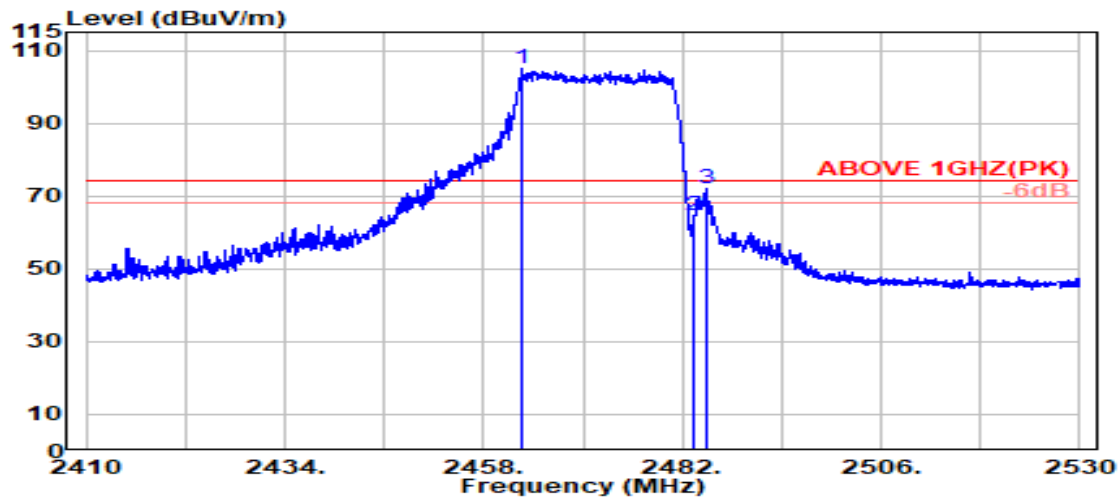

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.650	28.35	5.80	39.92	110.88	105.11	---	---	Peak
2483.500	28.43	5.83	39.92	70.34	64.68	74.00	9.32	Peak
2484.800	28.44	5.83	39.92	77.49	71.84	74.00	2.16	Peak

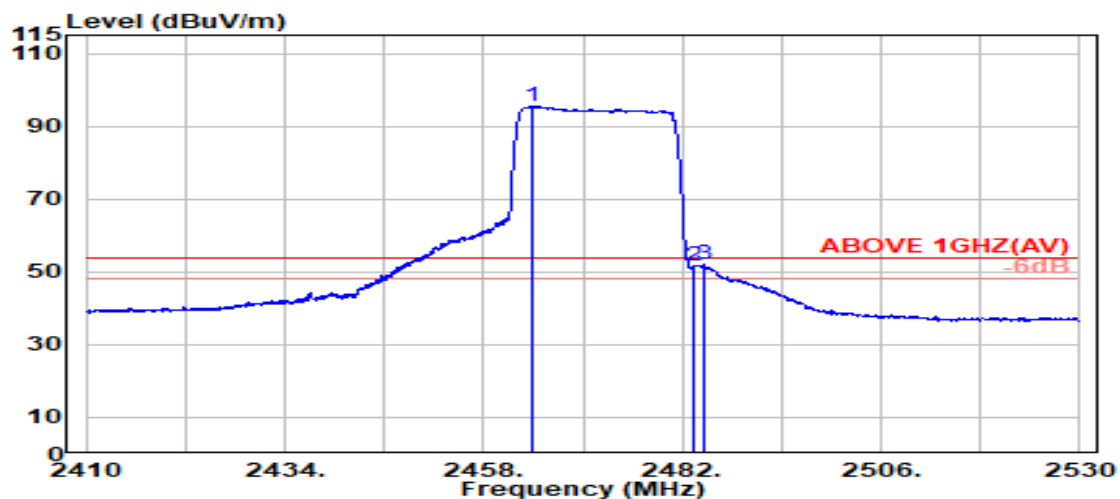

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.850	28.36	5.80	39.92	101.13	95.37	---	---	Average
2483.500	28.43	5.83	39.92	57.34	51.68	54.00	2.32	Average
2484.500	28.44	5.83	39.92	57.56	51.91	54.00	2.09	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


● BLE Mode

● Mode	BLE (2Mbps)	Frequency	TX 2402MHz
--------	-------------	-----------	------------

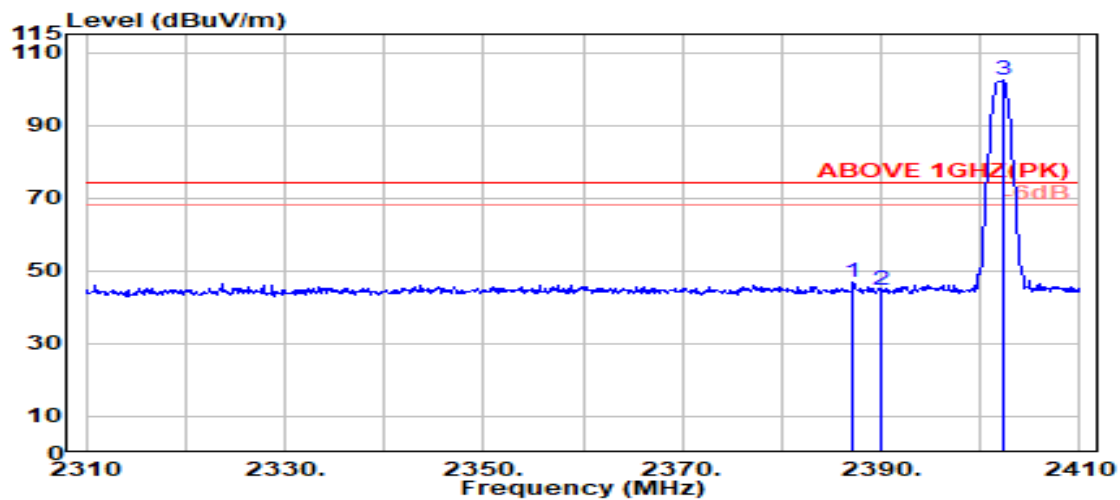

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.100	28.20	5.70	39.92	52.89	46.87	74.00	27.13	Peak
2390.000	28.20	5.70	39.92	50.51	44.49	74.00	29.51	Peak
@ 2402.300	28.20	5.72	39.92	108.21	102.22	---	---	Peak

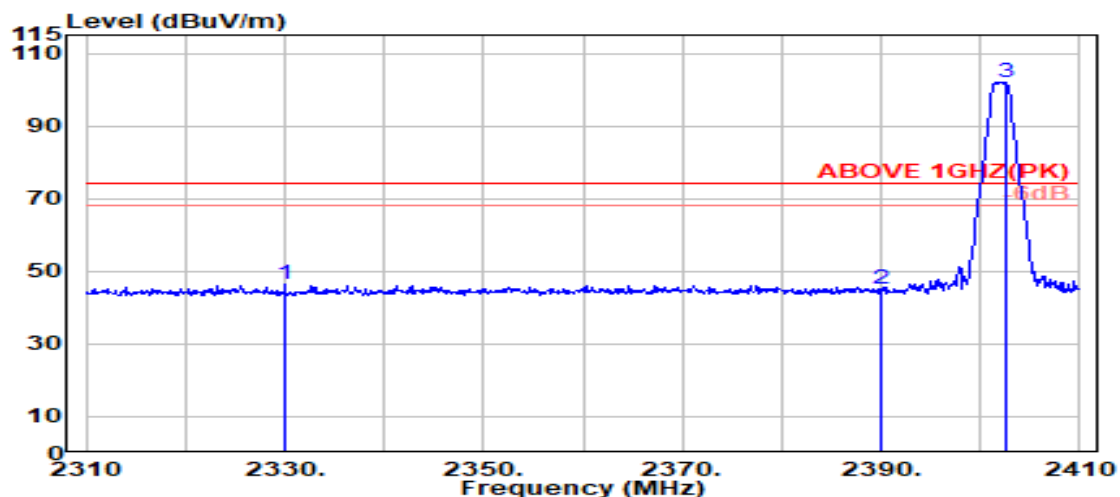

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2330.000	28.12	5.62	39.92	52.79	46.62	74.00	27.38	Peak
2390.000	28.20	5.70	39.92	51.16	45.15	74.00	28.85	Peak
@ 2402.500	28.21	5.72	39.92	108.15	102.15	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

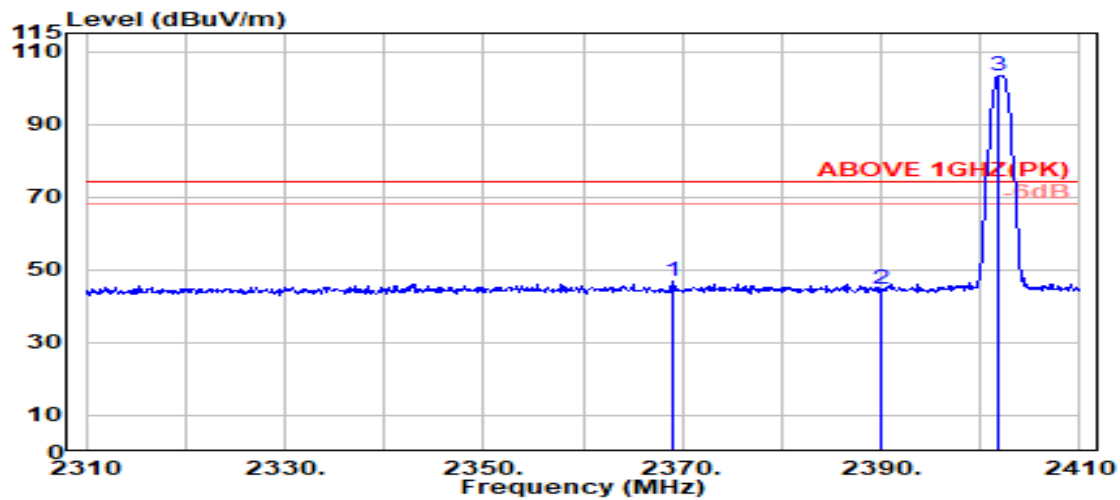

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2369.000	28.20	5.67	39.92	52.95	46.91	74.00	27.09	Peak
2390.000	28.20	5.70	39.92	50.51	44.49	74.00	29.51	Peak
@ 2401.800	28.20	5.72	39.92	109.33	103.33	---	---	Peak

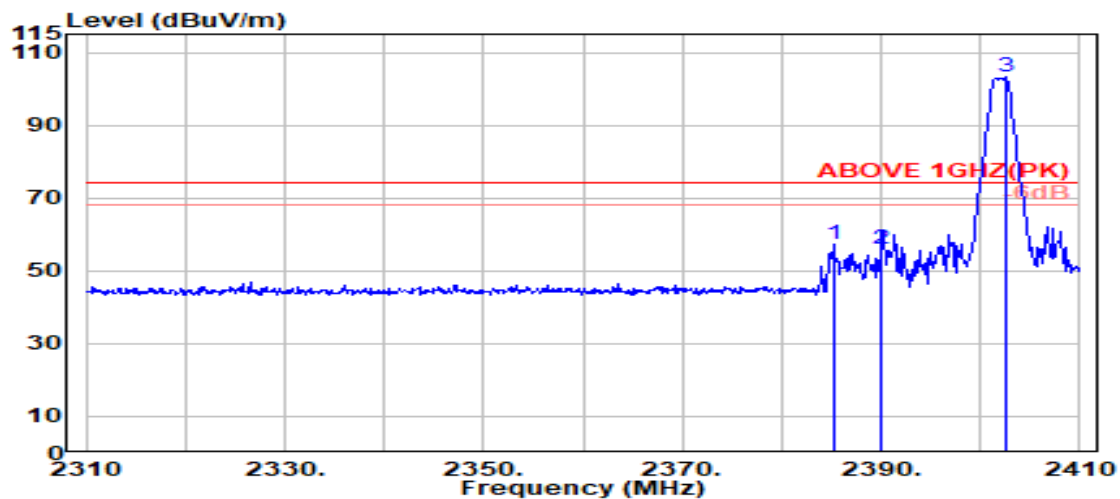

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.200	28.20	5.70	39.92	63.18	57.16	74.00	16.84	Peak
2390.000	28.20	5.70	39.92	62.11	56.09	74.00	17.91	Peak
@ 2402.500	28.21	5.72	39.92	109.08	103.08	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

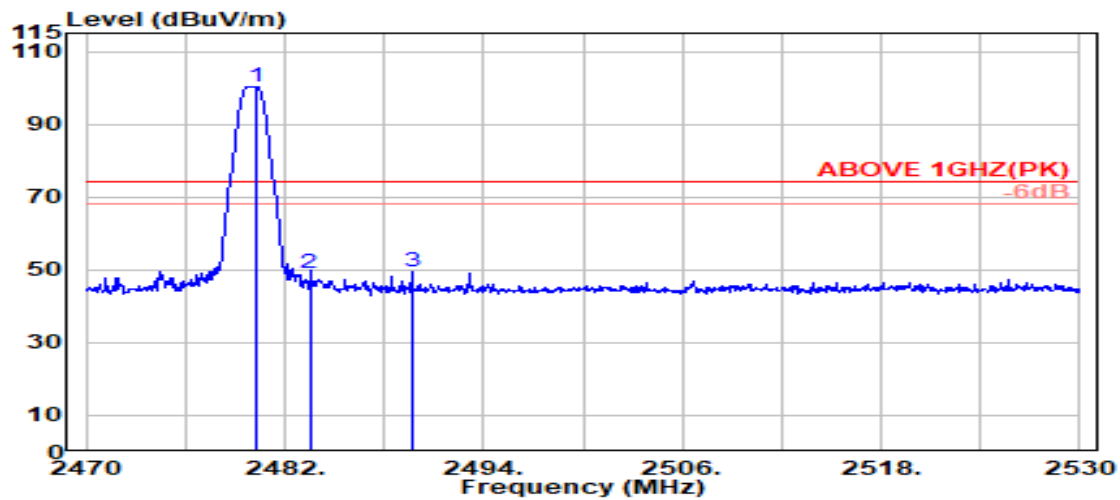

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.255	28.42	5.82	39.92	105.93	100.25	---	---	Peak
2483.500	28.43	5.83	39.92	54.58	48.92	74.00	25.08	Peak
2489.691	28.46	5.84	39.92	54.95	49.33	74.00	24.67	Peak

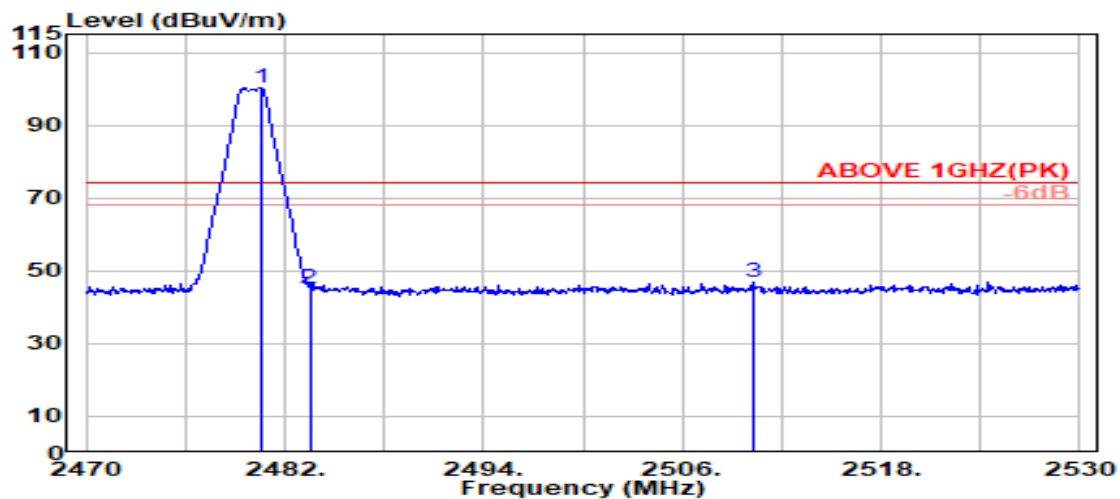


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.582	28.42	5.82	39.92	105.95	100.28	---	---	Peak
2483.500	28.43	5.83	39.92	50.94	45.28	74.00	28.72	Peak
2510.309	28.54	5.86	39.92	52.60	47.08	74.00	26.92	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

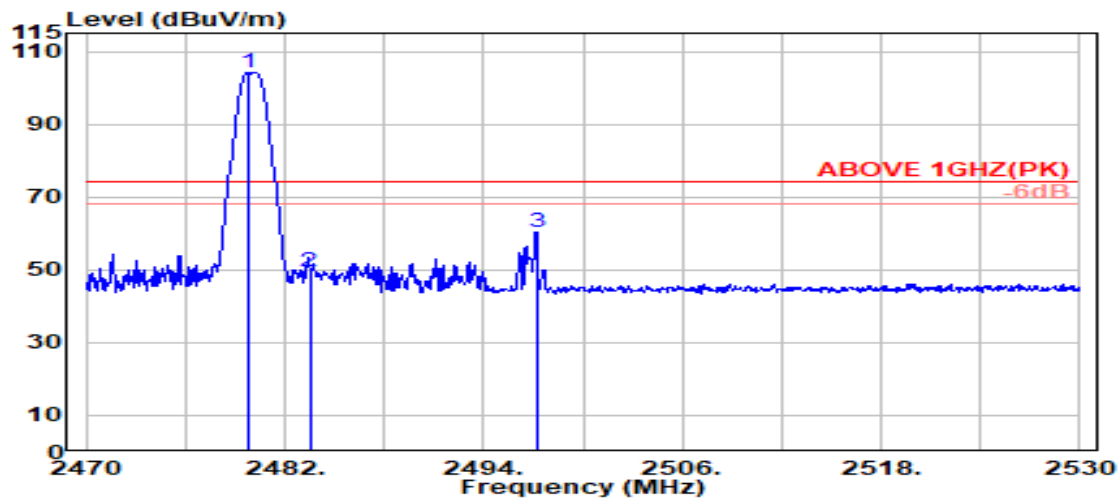

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.764	28.42	5.82	39.92	109.78	104.11	---	---	Peak
2483.500	28.43	5.83	39.92	54.93	49.27	74.00	24.73	Peak
2497.218	28.49	5.85	39.92	65.76	60.18	74.00	13.82	Peak

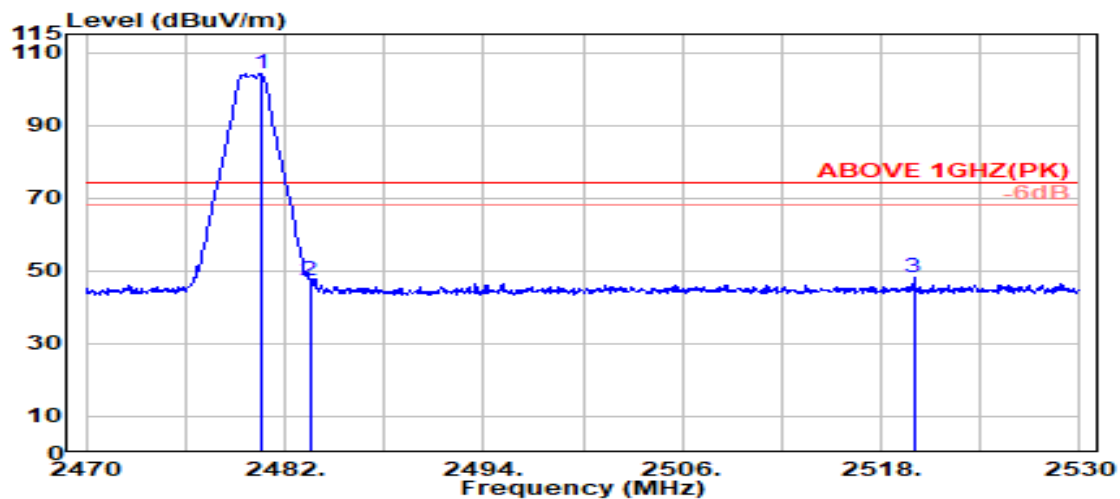

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.527	28.42	5.82	39.92	109.65	103.97	---	---	Peak
2483.500	28.43	5.83	39.92	53.13	47.47	74.00	26.53	Peak
2519.964	28.58	5.87	39.92	53.47	48.00	74.00	26.00	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 25GHz) not reported for there is no emission be found.

The 802.11ax and be were assessed with full RU mode.

● Wireless LAN Mode

● Mode	802.11b	Frequency	TX 2412MHz
--------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	39.33	40.99	54.00	13.01	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	40.70	42.36	54.00	11.64	Peak

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	45.26	47.23	54.00	6.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	44.00	45.97	54.00	8.03	Peak

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	45.14	47.33	54.00	6.67	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	45.21	47.40	54.00	6.60	Peak

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	39.64	41.30	54.00	12.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	38.84	40.50	54.00	13.50	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	40.94	42.91	54.00	11.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	41.25	43.22	54.00	10.78	Peak

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	40.34	42.53	54.00	11.47	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	40.39	42.58	54.00	11.42	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	39.10	40.76	54.00	13.24	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	39.59	41.25	54.00	12.75	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	41.01	42.98	54.00	11.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	40.40	42.37	54.00	11.63	Peak

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	40.18	42.37	54.00	11.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	39.89	42.07	54.00	11.93	Peak

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.16	40.87	42.64	54.00	11.36	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.16	41.39	43.16	54.00	10.84	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	40.82	42.79	54.00	11.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	41.38	43.34	54.00	10.66	Peak

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	40.19	42.31	54.00	11.69	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	40.21	42.33	54.00	11.67	Peak

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	39.18	40.84	54.00	13.16	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	39.33	40.99	54.00	13.01	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	41.30	43.27	54.00	10.73	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	39.80	41.77	54.00	12.23	Peak

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	40.59	42.78	54.00	11.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	40.87	43.06	54.00	10.94	Peak

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.16	40.69	42.46	54.00	11.54	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.16	41.02	42.79	54.00	11.21	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	40.84	42.80	54.00	11.20	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	39.72	41.69	54.00	12.31	Peak

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	40.03	42.15	54.00	11.85	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	40.13	42.26	54.00	11.74	Peak

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	38.79	40.46	54.00	13.54	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	39.30	40.96	54.00	13.04	Peak

Mode	802.11be-EHT20	Frequency	TX 2442MHz
------	----------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	40.84	42.81	54.00	11.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	41.45	43.42	54.00	10.58	Peak

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	40.45	42.63	54.00	11.37	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	41.38	43.57	54.00	10.43	Peak

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.16	40.20	41.96	54.00	12.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.16	42.80	44.56	54.00	9.44	Peak

Mode	802.11be-EHT40	Frequency	TX 2442MHz
------	----------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	41.23	43.20	54.00	10.80	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	41.81	43.78	54.00	10.22	Peak

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	40.27	42.40	54.00	11.60	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	40.40	42.52	54.00	11.48	Peak

● **BLE Mode**

Mode	BLE (1Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.72	8.02	39.18	39.96	41.52	54.00	12.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.72	8.02	39.18	39.07	40.63	54.00	13.37	Peak

Mode	BLE (1Mbps)	Frequency	TX 2440MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.02	8.08	39.15	39.01	40.96	54.00	13.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.02	8.08	39.15	39.91	41.85	54.00	12.15	Peak

Mode	BLE (1Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.22	8.13	39.12	41.70	43.93	54.00	10.07	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.22	8.13	39.12	40.97	43.21	54.00	10.79	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.