

## TABLE OF CONTENTS


|                                                         |            |
|---------------------------------------------------------|------------|
| <b>A.1 CONDUCTED EMISSION.....</b>                      | <b>2</b>   |
| <b>A.2 RADIATED EMISSION .....</b>                      | <b>4</b>   |
| A.2.1 Emissions within Restricted Frequency Bands.....  | 4          |
| A.2.2 Emissions outside the frequency band.....         | 124        |
| A.2.3 Emissions in Non-restricted Frequency Bands:..... | 132        |
| <b>A.3 DTS/OCCUPIED BANDWIDTH.....</b>                  | <b>133</b> |
| A.3.1 DTS/Occupied Bandwidth Result.....                | 133        |
| A.3.2 Measurement Plots .....                           | 135        |
| <b>A.4 MAXIMUM PEAK OUTPUT POWER .....</b>              | <b>141</b> |
| A.4.1 Peak Output Power .....                           | 141        |
| A.4.2 Average Output Power (Reporting only).....        | 144        |
| <b>A.5 EMISSION LIMITATIONS .....</b>                   | <b>147</b> |
| <b>A.6 POWER SPECTRAL DENSITY .....</b>                 | <b>182</b> |
| A.6.1 Power Spectral Density Result .....               | 182        |
| A.6.2 Measurement Plots .....                           | 185        |

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

Tel: +886 2 26099301  
Fax: +886 2 26099303

## A.1 CONDUCTED EMISSION

|              |                               |            |          |
|--------------|-------------------------------|------------|----------|
| Test Date    | 2025/09/09                    | Temp./Hum. | 25°C/52% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By  | Nick Du  |

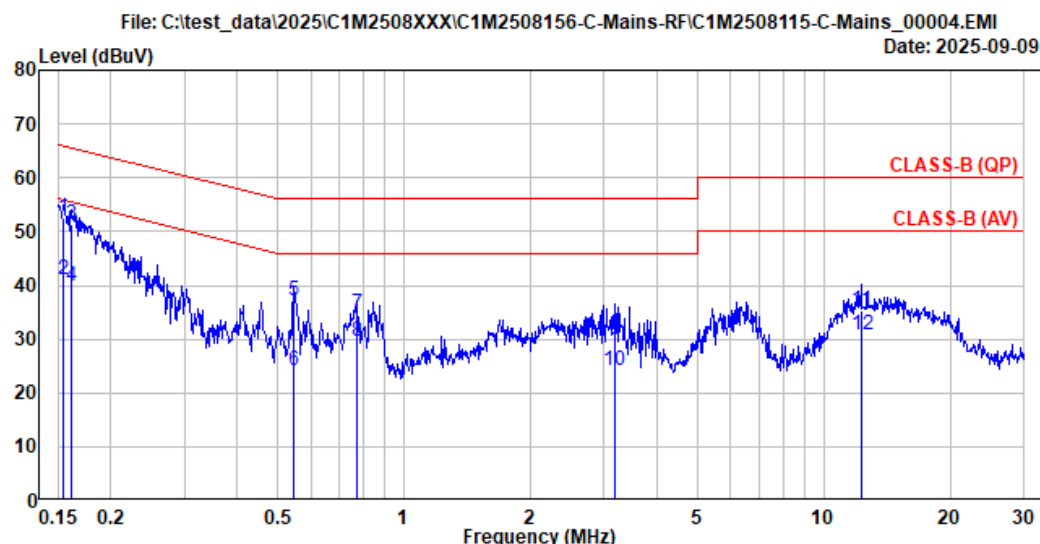

Site No. : No.8 Shielded Room  
Instrument 1 : Receiver ESR(774)  
Instrument 2 : ENV432 (567)(A)|CE-08|ESH3-Z2 (354)  
Limit : CLASS-B (QP)  
Environment : 25°C/52%  
EUT Model : 17Z90U  
Test Mode : Operating

Data No. : 4  
Phase : Neutral  
Test Rating : 120Vac/60Hz  
Engineer : Nick Du


|    | Freq.<br>(MHz) | AMN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Pulse<br>Att.<br>(dB) | Reading<br>(dBμV) | Emission<br>Level<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark  |
|----|----------------|-----------------------|-----------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.154          | 10.32                 | 0.03                  | 9.85                  | 32.37             | 52.57                       | 65.79            | 13.22          | QP      |
| 2  | 0.154          | 10.32                 | 0.03                  | 9.85                  | 20.92             | 41.12                       | 55.79            | 14.67          | Average |
| 3  | 0.161          | 10.32                 | 0.03                  | 9.85                  | 31.08             | 51.28                       | 65.42            | 14.14          | QP      |
| 4  | 0.161          | 10.32                 | 0.03                  | 9.85                  | 19.60             | 39.80                       | 55.42            | 15.62          | Average |
| 5  | 0.548          | 10.31                 | 0.03                  | 9.85                  | 16.88             | 37.07                       | 56.00            | 18.93          | QP      |
| 6  | 0.548          | 10.31                 | 0.03                  | 9.85                  | 3.92              | 24.11                       | 46.00            | 21.89          | Average |
| 7  | 0.769          | 10.31                 | 0.04                  | 9.85                  | 14.56             | 34.76                       | 56.00            | 21.24          | QP      |
| 8  | 0.769          | 10.31                 | 0.04                  | 9.85                  | 9.34              | 29.54                       | 46.00            | 16.46          | Average |
| 9  | 3.169          | 10.37                 | 0.07                  | 9.86                  | 9.70              | 30.00                       | 56.00            | 26.00          | QP      |
| 10 | 3.169          | 10.37                 | 0.07                  | 9.86                  | 3.76              | 24.06                       | 46.00            | 21.94          | Average |
| 11 | 12.293         | 10.72                 | 0.15                  | 9.90                  | 14.58             | 35.35                       | 60.00            | 24.65          | QP      |
| 12 | 12.293         | 10.72                 | 0.15                  | 9.90                  | 10.07             | 30.84                       | 50.00            | 19.16          | Average |

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

|              |                               |            |          |
|--------------|-------------------------------|------------|----------|
| Test Date    | 2025/09/09                    | Temp./Hum. | 25°C/52% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By  | Nick Du  |

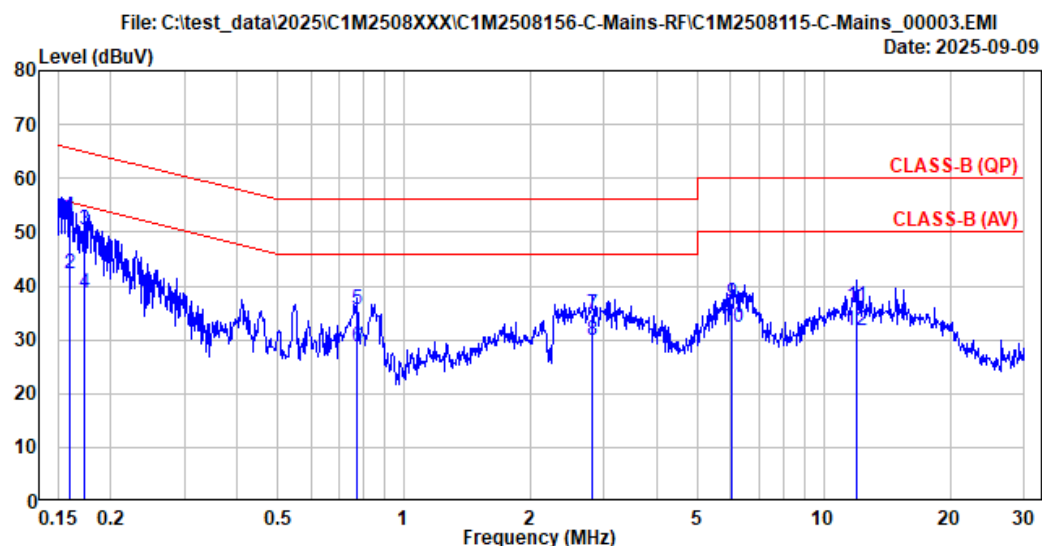

|              |                                       |             |               |
|--------------|---------------------------------------|-------------|---------------|
| Site No.     | : No.8 Shielded Room                  | Data No.    | : 3           |
| Instrument 1 | : Receiver ESR(774)                   |             |               |
| Instrument 2 | : ENV432 (567)(A) CE-08 ESH3-Z2 (354) |             |               |
| Limit        | : CLASS-B (QP)                        | Phase       | : Line        |
| Environment  | : 25°C/52%                            | Test Rating | : 120Vac/60Hz |
| EUT Model    | : 17Z90U                              | Engineer    | : Nick Du     |
| Test Mode    | : Operating                           |             |               |

|    | Freq.<br>(MHz) | AMN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Pulse<br>Att.<br>(dB) | Reading<br>(dBμV) | Emission<br>Level<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark  |
|----|----------------|-----------------------|-----------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.159          | 10.34                 | 0.03                  | 9.85                  | 32.75             | 52.97                       | 65.50            | 12.53          | QP      |
| 2  | 0.159          | 10.34                 | 0.03                  | 9.85                  | 21.96             | 42.18                       | 55.50            | 13.32          | Average |
| 3  | 0.172          | 10.34                 | 0.03                  | 9.85                  | 30.22             | 50.44                       | 64.84            | 14.40          | QP      |
| 4  | 0.172          | 10.34                 | 0.03                  | 9.85                  | 18.53             | 38.75                       | 54.84            | 16.09          | Average |
| 5  | 0.769          | 10.33                 | 0.04                  | 9.85                  | 15.43             | 35.65                       | 56.00            | 20.35          | QP      |
| 6  | 0.769          | 10.33                 | 0.04                  | 9.85                  | 8.51              | 28.73                       | 46.00            | 17.27          | Average |
| 7  | 2.811          | 10.35                 | 0.07                  | 9.86                  | 14.42             | 34.70                       | 56.00            | 21.30          | QP      |
| 8  | 2.811          | 10.35                 | 0.07                  | 9.86                  | 9.71              | 29.99                       | 46.00            | 16.01          | Average |
| 9  | 6.027          | 10.44                 | 0.10                  | 9.87                  | 16.37             | 36.78                       | 60.00            | 23.22          | QP      |
| 10 | 6.027          | 10.44                 | 0.10                  | 9.87                  | 11.93             | 32.34                       | 50.00            | 17.66          | Average |
| 11 | 11.931         | 10.56                 | 0.15                  | 9.90                  | 15.76             | 36.37                       | 60.00            | 23.63          | QP      |
| 12 | 11.931         | 10.56                 | 0.15                  | 9.90                  | 11.09             | 31.70                       | 50.00            | 18.30          | Average |

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

## A.2 RADIATED EMISSION

|              |                               |            |             |
|--------------|-------------------------------|------------|-------------|
| Test Date    | 2025/09/04                    | Temp./Hum. | 20°C/56%    |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By  | Martin Chen |

### A.2.1 Emissions within Restricted Frequency Bands

#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

### A.2.1.2 Frequency Below 1GHz

#### ● Wireless LAN Mode

| Mode | 802.11ax-HE20 | Frequency | TX 2442MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 36.000                   | 20.89                 | 1.50            | 26.46                  | 30.08                | 26.01                   | 40.00           | 13.99       | Peak     |
| 142.500                  | 17.03                 | 3.11            | 26.02                  | 38.80                | 32.92                   | 43.50           | 10.58       | Peak     |
| 282.000                  | 18.95                 | 4.51            | 25.63                  | 36.98                | 34.81                   | 46.00           | 11.19       | Peak     |
| 343.000                  | 20.23                 | 5.32            | 25.98                  | 32.25                | 31.82                   | 46.00           | 14.18       | Peak     |
| 493.000                  | 23.01                 | 6.88            | 27.04                  | 29.93                | 32.79                   | 46.00           | 13.21       | Peak     |
| 970.000                  | 26.90                 | 9.22            | 26.79                  | 27.14                | 36.47                   | 54.00           | 17.53       | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 35.500                   | 21.18                 | 1.49            | 26.46                  | 35.29                | 31.51                   | 40.00           | 8.49        | Peak     |
| 142.500                  | 17.03                 | 3.11            | 26.02                  | 40.55                | 34.66                   | 43.50           | 8.84        | Peak     |
| 284.000                  | 18.98                 | 4.53            | 25.63                  | 44.10                | 41.98                   | 46.00           | 4.02        | Peak     |
| 352.500                  | 20.45                 | 5.45            | 26.05                  | 40.41                | 40.25                   | 46.00           | 5.75        | Peak     |
| 487.000                  | 22.93                 | 6.84            | 27.00                  | 38.17                | 40.94                   | 46.00           | 5.06        | Peak     |
| 897.000                  | 26.36                 | 8.80            | 27.01                  | 28.14                | 36.30                   | 46.00           | 9.70        | Peak     |

#### ● BLE Mode

| Mode | BLE (2Mbps) | Frequency | TX 2480MHz |
|------|-------------|-----------|------------|
|------|-------------|-----------|------------|

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 33.500                   | 22.10                 | 1.46            | 26.46                  | 28.35                | 25.45                   | 40.00           | 14.55       | Peak     |
| 142.500                  | 17.03                 | 3.11            | 26.02                  | 37.67                | 31.78                   | 43.50           | 11.72       | Peak     |
| 275.500                  | 18.85                 | 4.45            | 25.64                  | 37.90                | 35.55                   | 46.00           | 10.45       | Peak     |
| 367.500                  | 20.76                 | 5.65            | 26.17                  | 31.28                | 31.52                   | 46.00           | 14.48       | Peak     |
| 621.000                  | 24.34                 | 7.24            | 27.39                  | 29.31                | 33.51                   | 46.00           | 12.49       | Peak     |
| 967.500                  | 26.89                 | 9.20            | 26.79                  | 27.27                | 36.57                   | 54.00           | 17.43       | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 142.500                  | 17.03                 | 3.11            | 26.02                  | 40.90                | 35.01                   | 43.50           | 8.49        | Peak     |
| 275.500                  | 18.85                 | 4.45            | 25.64                  | 43.44                | 41.10                   | 46.00           | 4.90        | Peak     |
| 356.500                  | 20.53                 | 5.51            | 26.09                  | 39.38                | 39.34                   | 46.00           | 6.66        | Peak     |
| 485.500                  | 22.91                 | 6.82            | 26.99                  | 38.17                | 40.91                   | 46.00           | 5.09        | Peak     |
| 830.000                  | 25.23                 | 8.36            | 27.14                  | 30.58                | 37.03                   | 46.00           | 8.97        | Peak     |
| 983.000                  | 27.00                 | 9.29            | 26.75                  | 28.16                | 37.70                   | 54.00           | 16.30       | Peak     |


Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan

Tel: +886 2 26099301  
Fax: +886 2 26099303

### A.2.1.3 Frequency Above 1 GHz to 10<sup>th</sup> harmonics


#### ● Wireless LAN Mode

| Mode | 802.11b | Frequency | TX 2412MHz |
|------|---------|-----------|------------|
|------|---------|-----------|------------|

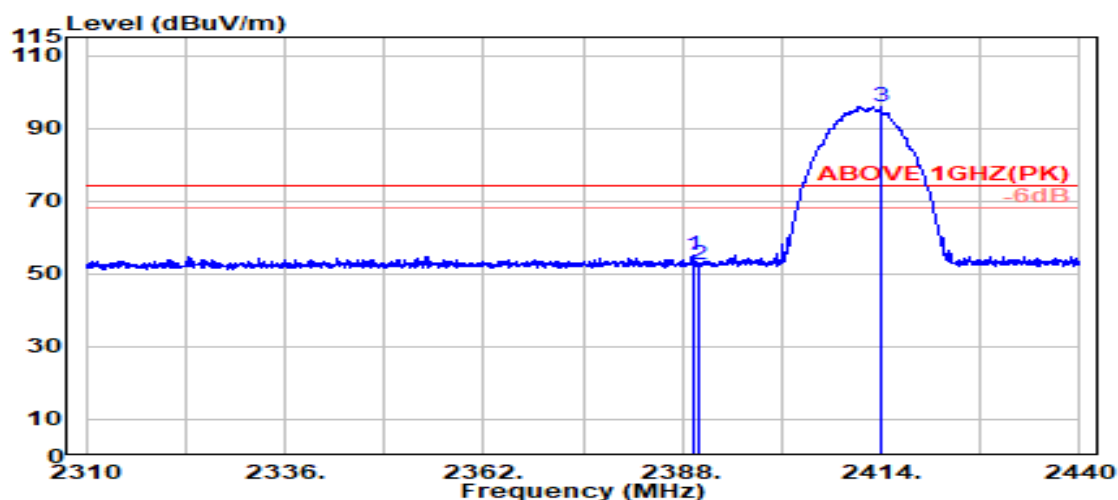

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.354                 | 28.20                 | 5.70            | 39.92                  | 60.94             | 54.92                   | 74.00           | 19.08       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 58.69             | 52.68                   | 74.00           | 21.32       | Peak     |
| @ 2413.946               | 28.23                 | 5.74            | 39.92                  | 101.81            | 95.85                   | ---             | ---         | Peak     |

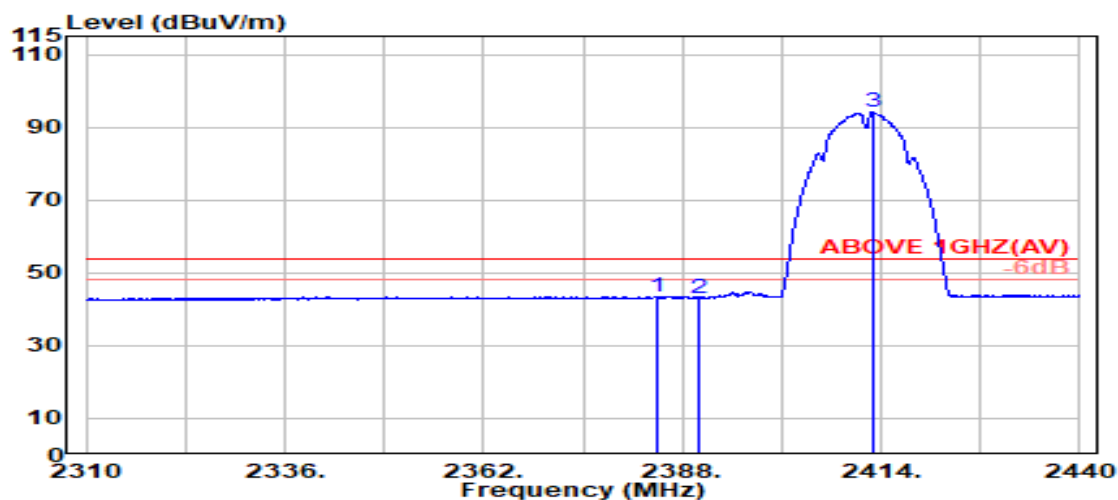

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2384.858                 | 28.20                 | 5.70            | 39.92                  | 49.56             | 43.54                   | 54.00           | 10.46       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 49.04             | 43.02                   | 54.00           | 10.98       | Average  |
| @ 2412.863               | 28.23                 | 5.73            | 39.92                  | 100.06            | 94.10                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11b | Frequency | TX 2412MHz |
|------|---------|-----------|------------|
|------|---------|-----------|------------|

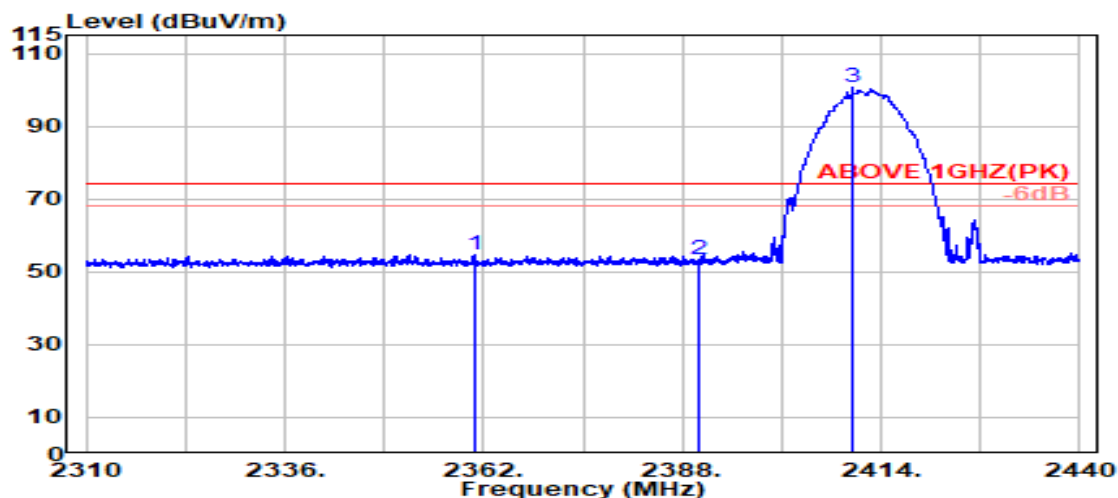

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2360.754                 | 28.20                 | 5.66            | 39.92                  | 60.65             | 54.60                   | 74.00           | 19.40       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 59.31             | 53.29                   | 74.00           | 20.71       | Peak     |
| @ 2410.208               | 28.22                 | 5.73            | 39.92                  | 106.70            | 100.73                  | ---             | ---         | Peak     |

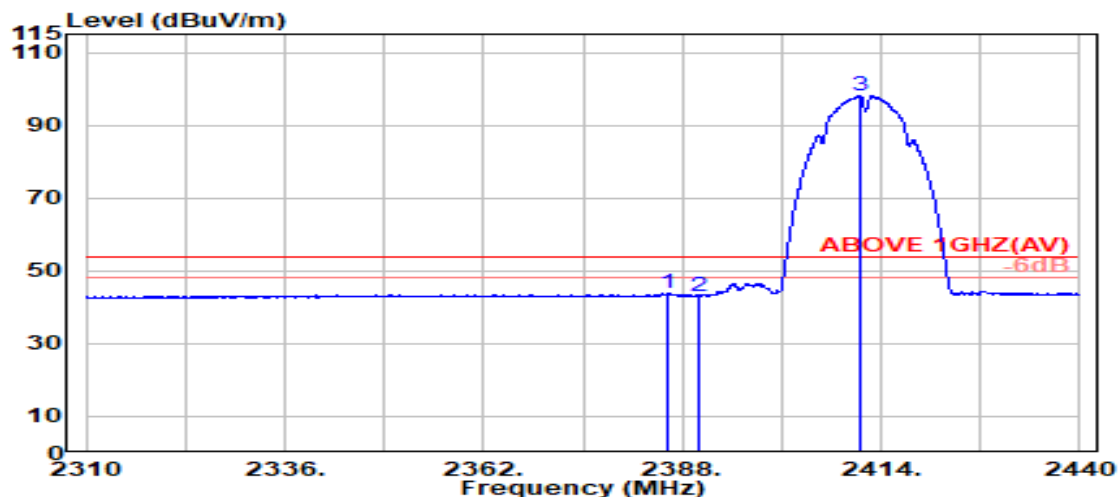

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2386.158                 | 28.20                 | 5.70            | 39.92                  | 49.74             | 43.72                   | 54.00           | 10.28       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 49.10             | 43.09                   | 54.00           | 10.91       | Average  |
| @ 2411.292               | 28.22                 | 5.73            | 39.92                  | 104.01            | 98.05                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |         |           |            |
|------|---------|-----------|------------|
| Mode | 802.11b | Frequency | TX 2462MHz |
|------|---------|-----------|------------|

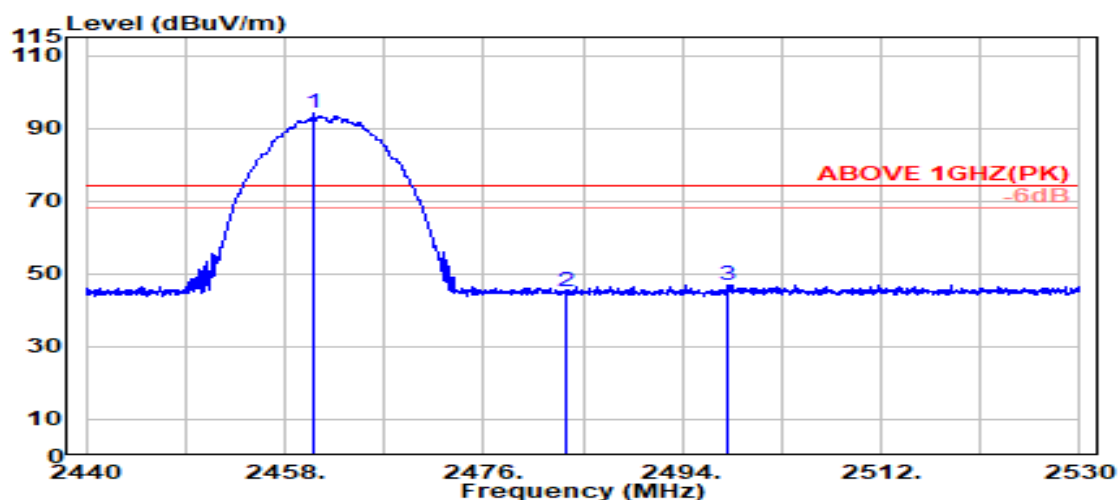

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2460.550               | 28.34                 | 5.80            | 39.92                  | 99.75             | 93.97                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 50.57             | 44.92                   | 74.00           | 29.08       | Peak     |
| 2498.200                 | 28.49                 | 5.85            | 39.92                  | 52.65             | 47.07                   | 74.00           | 26.93       | Peak     |

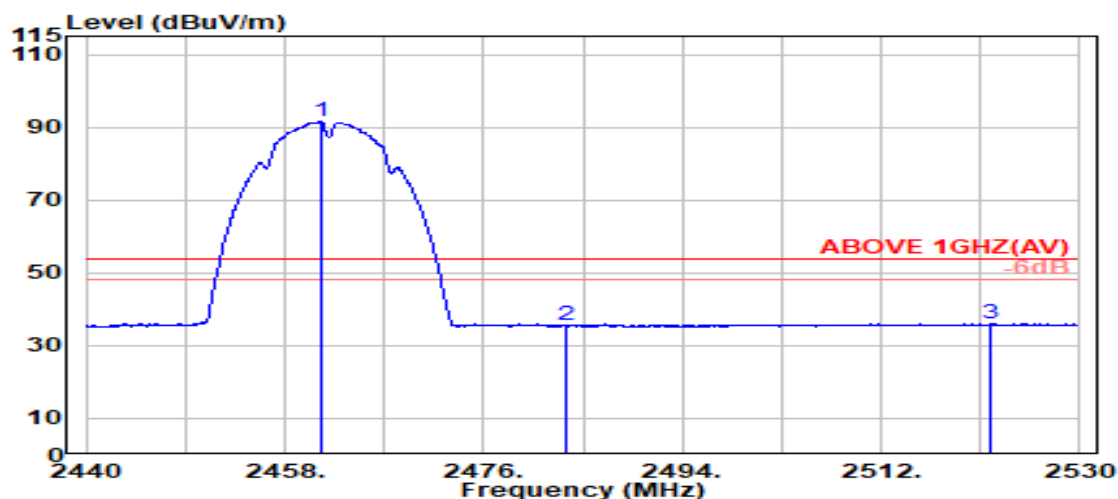

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2461.200               | 28.35                 | 5.80            | 39.92                  | 97.22             | 91.45                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 41.13             | 35.48                   | 54.00           | 18.52       | Average  |
| 2521.850                 | 28.59                 | 5.87            | 39.92                  | 41.47             | 36.01                   | 54.00           | 17.99       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11b | Frequency | TX 2462MHz |
|------|---------|-----------|------------|
|------|---------|-----------|------------|

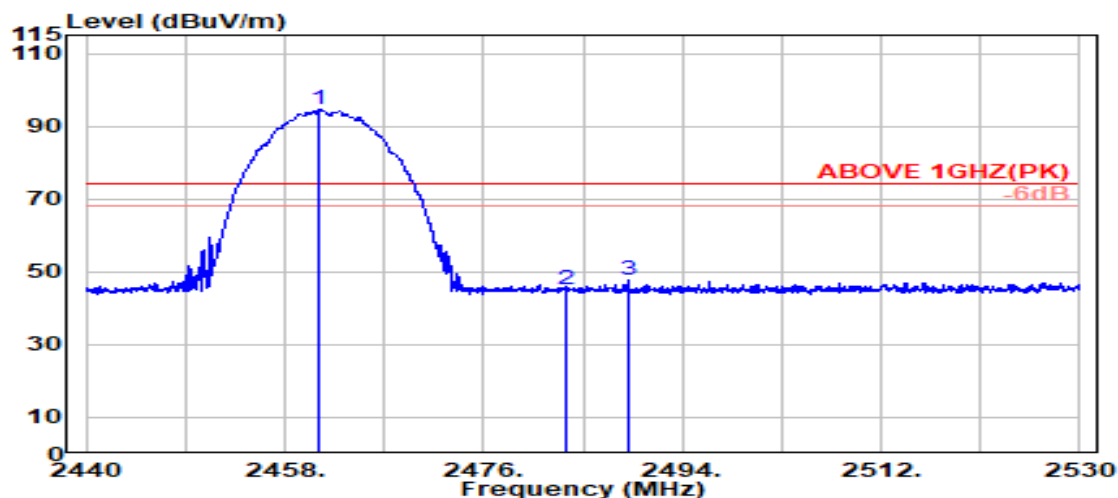

Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2461.150                 | 28.34                 | 5.80            | 39.92                  | 100.36            | 94.59                   | ---             | ---         | Peak     |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92                  | 50.68             | 45.02                   | 74.00           | 28.98       | Peak     |
|   | 2489.100                 | 28.46                 | 5.84            | 39.92                  | 53.16             | 47.53                   | 74.00           | 26.47       | Peak     |

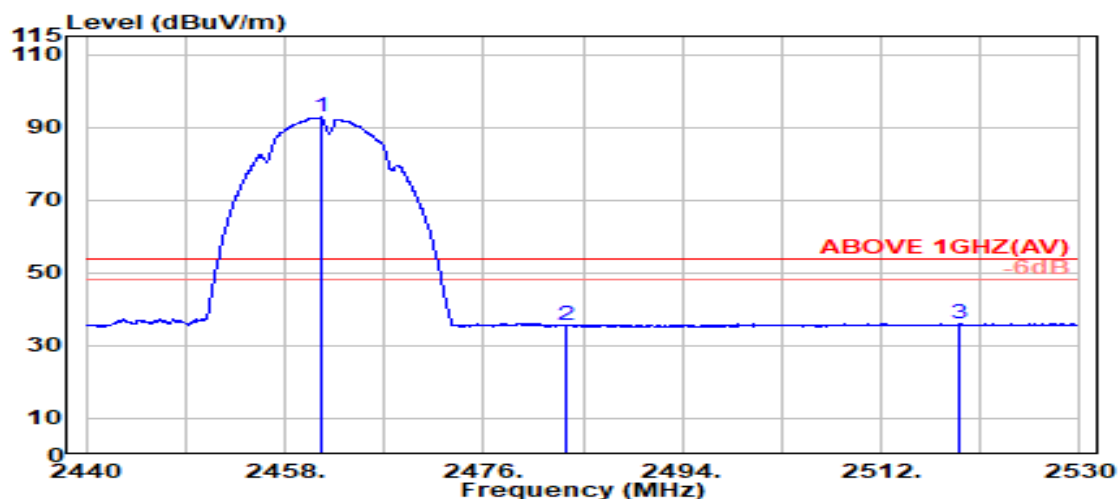

Antenna at Vertical Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2461.250                 | 28.35                 | 5.80            | 39.92                  | 98.45             | 92.67                   | ---             | ---         | Average  |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92                  | 41.03             | 35.37                   | 54.00           | 18.63       | Average  |
|   | 2519.150                 | 28.58                 | 5.87            | 39.92                  | 41.56             | 36.08                   | 54.00           | 17.92       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11b | Frequency | TX 2467 MHz |
|------|---------|-----------|-------------|
|------|---------|-----------|-------------|

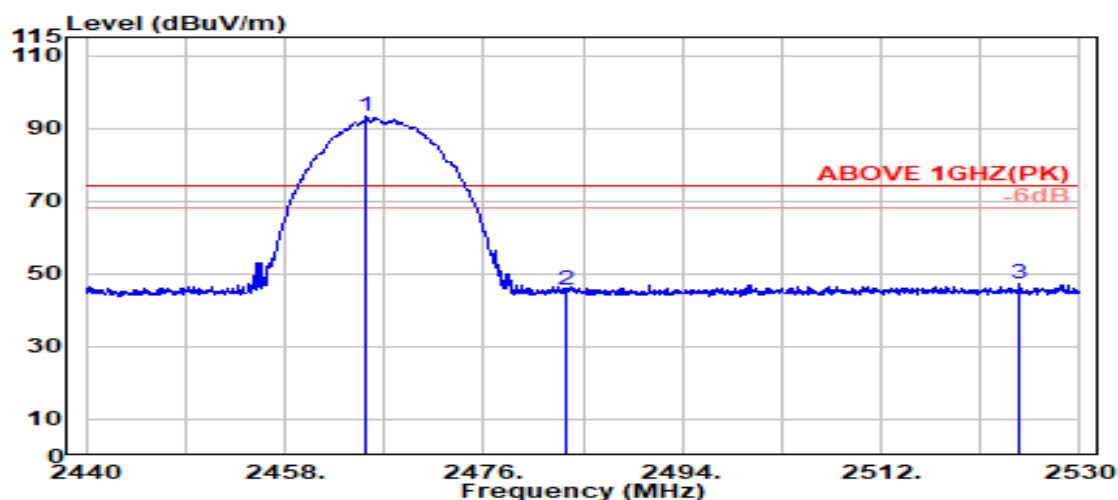

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2465.400               | 28.36                 | 5.80            | 39.92                  | 98.86             | 93.11                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 51.26             | 45.60                   | 74.00           | 28.40       | Peak     |
| 2524.550                 | 28.60                 | 5.88            | 39.92                  | 52.88             | 47.43                   | 74.00           | 26.57       | Peak     |

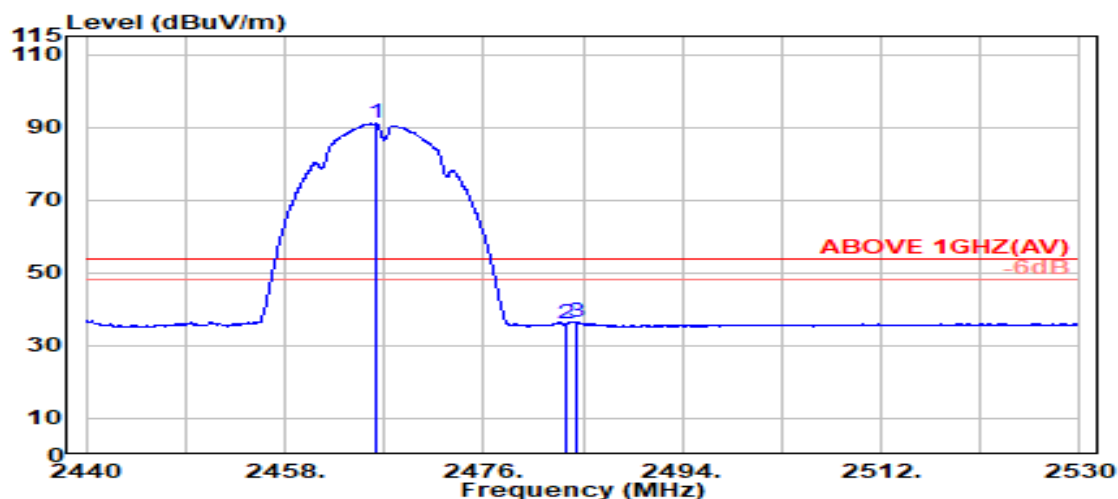


#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2466.200               | 28.37                 | 5.81            | 39.92                  | 96.71             | 90.96                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 41.57             | 35.91                   | 54.00           | 18.09       | Average  |
| 2484.350                 | 28.44                 | 5.83            | 39.92                  | 42.31             | 36.65                   | 54.00           | 17.35       | Average  |


Remark: The "@" means fundamental frequency, it is ignored in this section.

| Mode | 802.11b | Frequency | TX 2467 MHz |
|------|---------|-----------|-------------|
|------|---------|-----------|-------------|

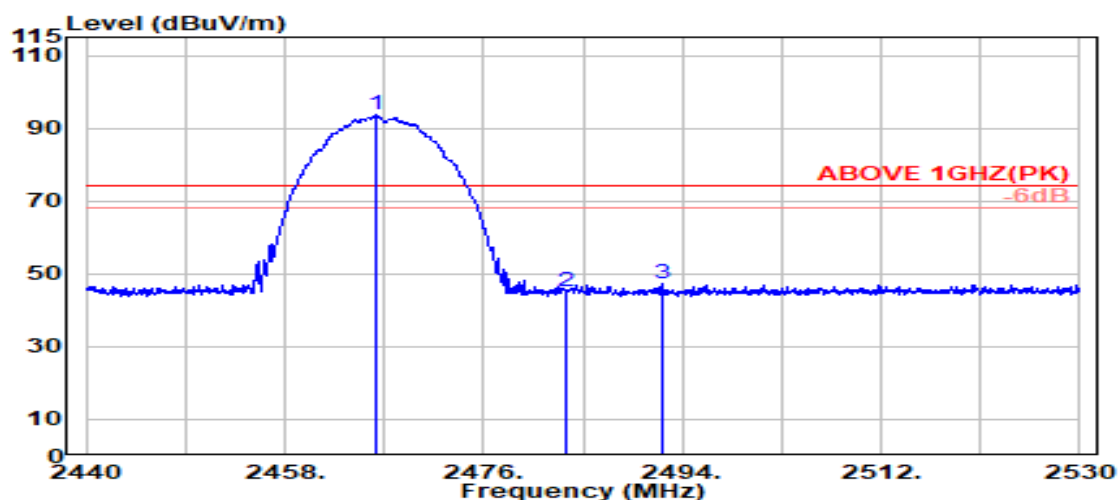

## Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2466.200                 | 28.37                 | 5.81            | 39.92                  | 99.56             | 93.81                   | ---             | ---         | Peak     |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92                  | 50.71             | 45.06                   | 74.00           | 28.94       | Peak     |
|   | 2492.100                 | 28.47                 | 5.84            | 39.92                  | 52.98             | 47.36                   | 74.00           | 26.64       | Peak     |

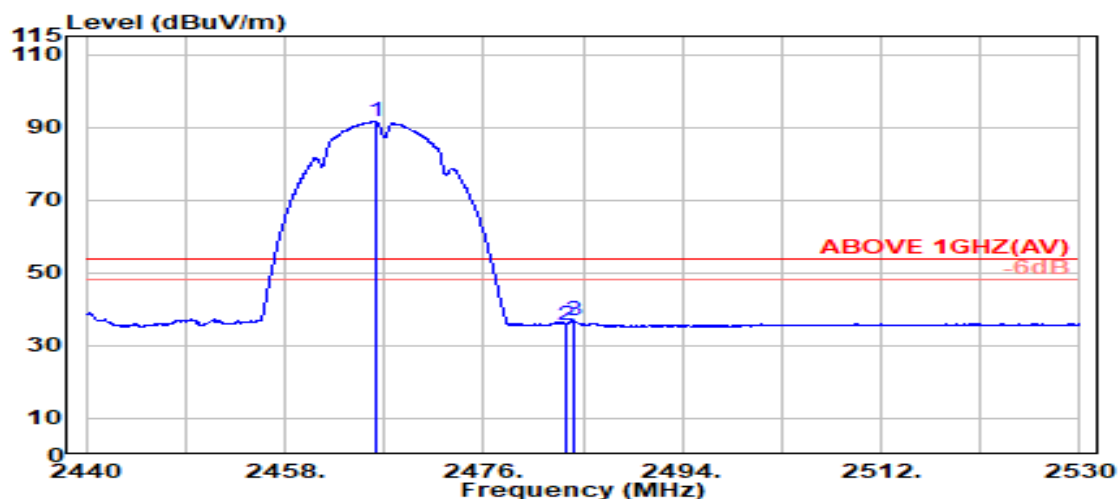

## Antenna at Vertical Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2466.200                 | 28.37                 | 5.81            | 39.92                  | 97.38             | 91.63                   | ---             | ---         | Average  |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92                  | 41.28             | 35.63                   | 54.00           | 18.37       | Average  |
|   | 2484.100                 | 28.44                 | 5.83            | 39.92                  | 42.46             | 36.81                   | 54.00           | 17.19       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |         |           |             |
|------|---------|-----------|-------------|
| Mode | 802.11b | Frequency | TX 2472 MHz |
|------|---------|-----------|-------------|

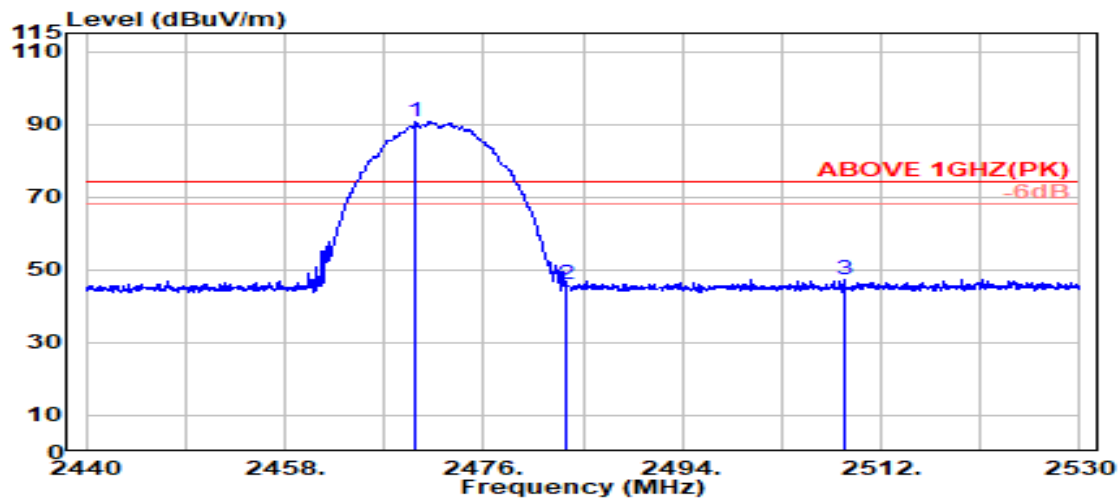

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2469.800               | 28.38                 | 5.81            | 39.92                  | 96.64             | 90.91                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 51.77             | 46.11                   | 74.00           | 27.89       | Peak     |
| 2508.600                 | 28.53                 | 5.86            | 39.92                  | 52.79             | 47.26                   | 74.00           | 26.74       | Peak     |

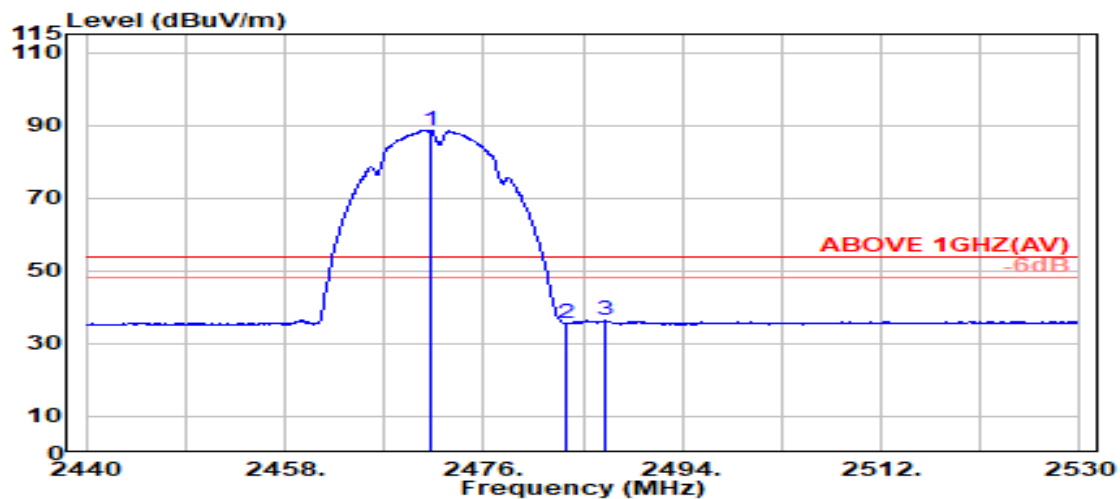


#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2471.250               | 28.39                 | 5.81            | 39.92                  | 94.44             | 88.72                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 41.30             | 35.64                   | 54.00           | 18.36       | Average  |
| 2487.000                 | 28.45                 | 5.83            | 39.92                  | 42.29             | 36.65                   | 54.00           | 17.35       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| Mode | 802.11b | Frequency | TX 2472 MHz |
|------|---------|-----------|-------------|
|------|---------|-----------|-------------|

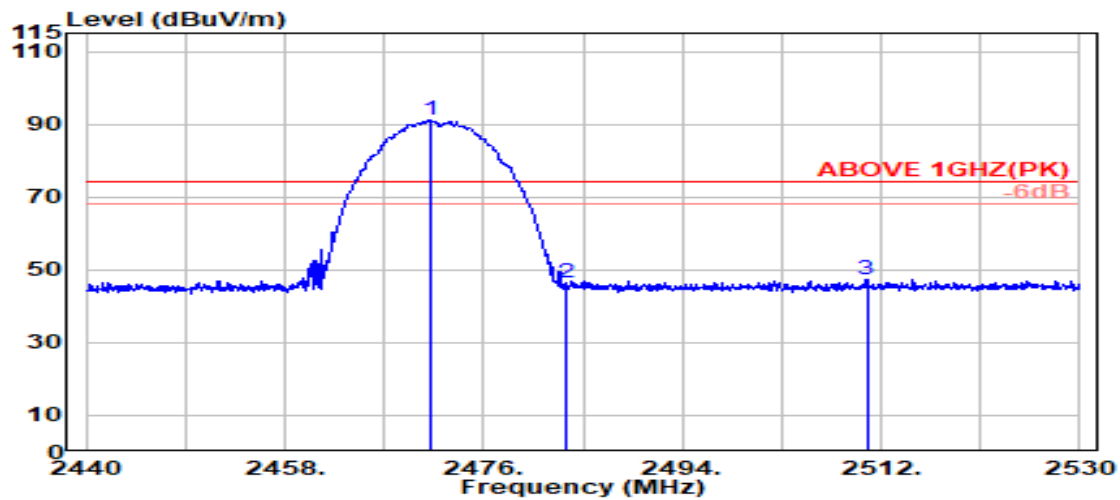

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2471.150               | 28.39                 | 5.81            | 39.92                  | 96.95             | 91.22                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 52.10             | 46.44                   | 74.00           | 27.56       | Peak     |
| 2510.700                 | 28.54                 | 5.86            | 39.92                  | 52.77             | 47.26                   | 74.00           | 26.74       | Peak     |

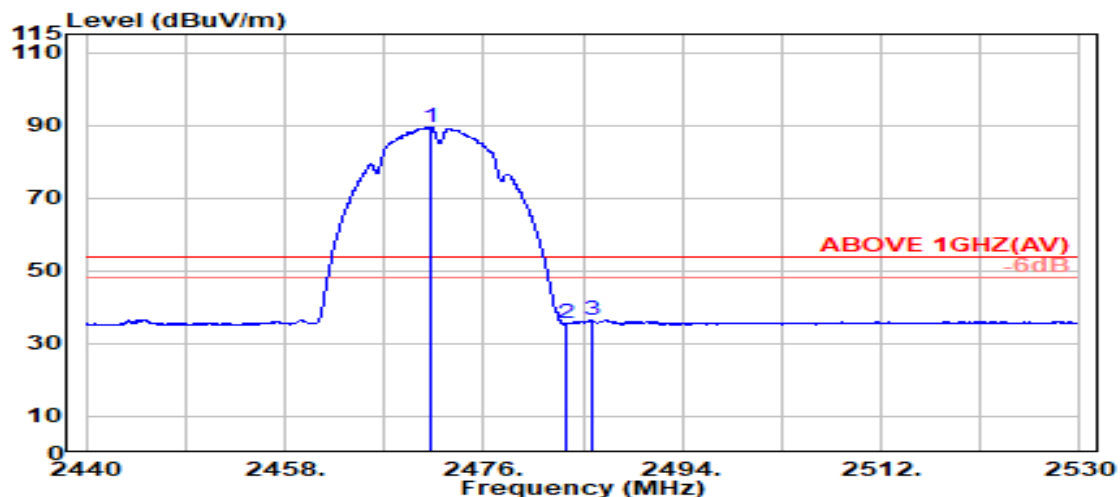

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2471.250               | 28.39                 | 5.81            | 39.92                  | 95.12             | 89.40                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 41.11             | 35.45                   | 54.00           | 18.55       | Average  |
| 2485.750                 | 28.44                 | 5.83            | 39.92                  | 42.10             | 36.45                   | 54.00           | 17.55       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11g | Frequency | TX 2412MHz |
|------|---------|-----------|------------|
|------|---------|-----------|------------|

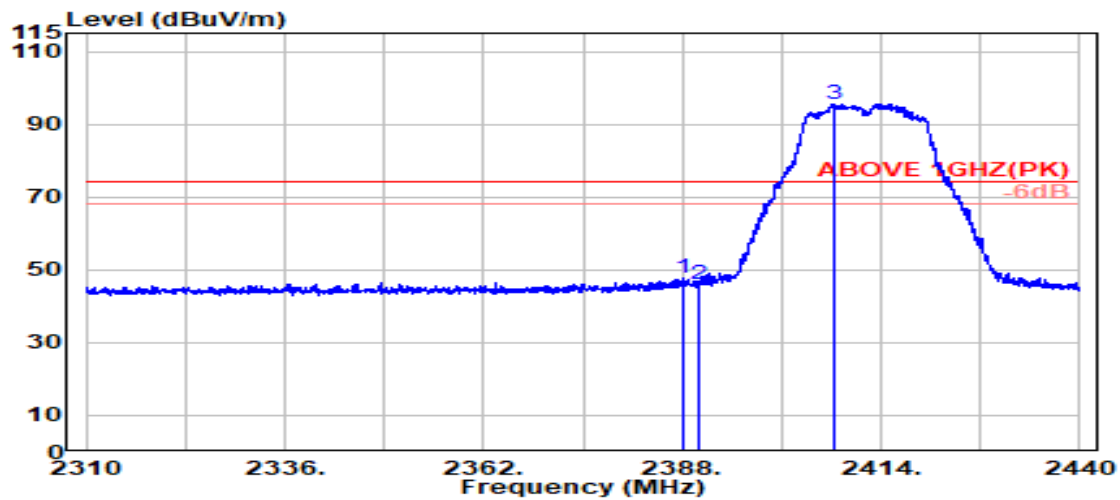

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.054                 | 28.20                 | 5.70            | 39.92                  | 53.57             | 47.56                   | 74.00           | 26.44       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 52.11             | 46.10                   | 74.00           | 27.90       | Peak     |
| @ 2407.825               | 28.22                 | 5.73            | 39.92                  | 101.52            | 95.54                   | ---             | ---         | Peak     |

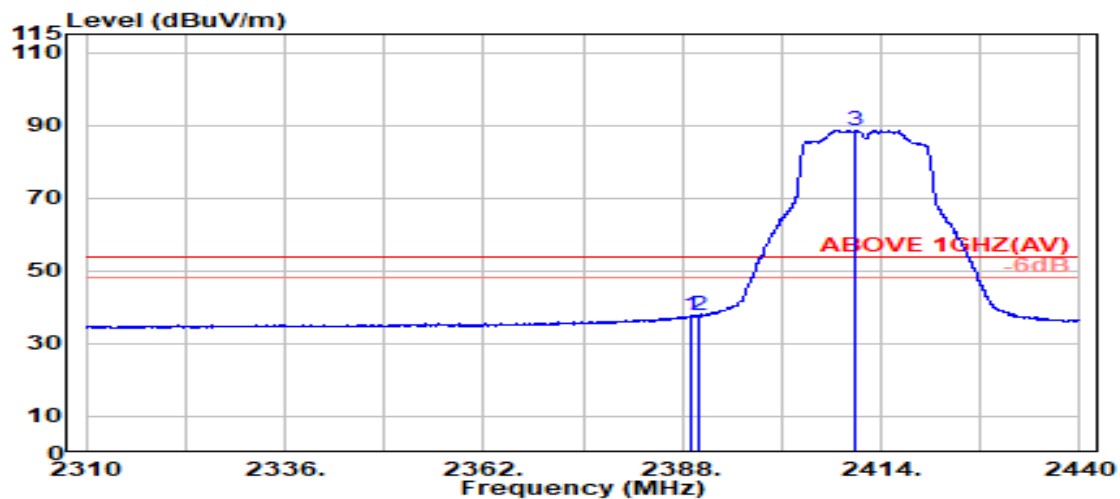

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.137                 | 28.20                 | 5.70            | 39.92                  | 43.83             | 37.81                   | 54.00           | 16.19       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 43.75             | 37.74                   | 54.00           | 16.26       | Average  |
| @ 2410.642               | 28.22                 | 5.73            | 39.92                  | 94.53             | 88.56                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11g | Frequency | TX 2412MHz |
|------|---------|-----------|------------|
|------|---------|-----------|------------|

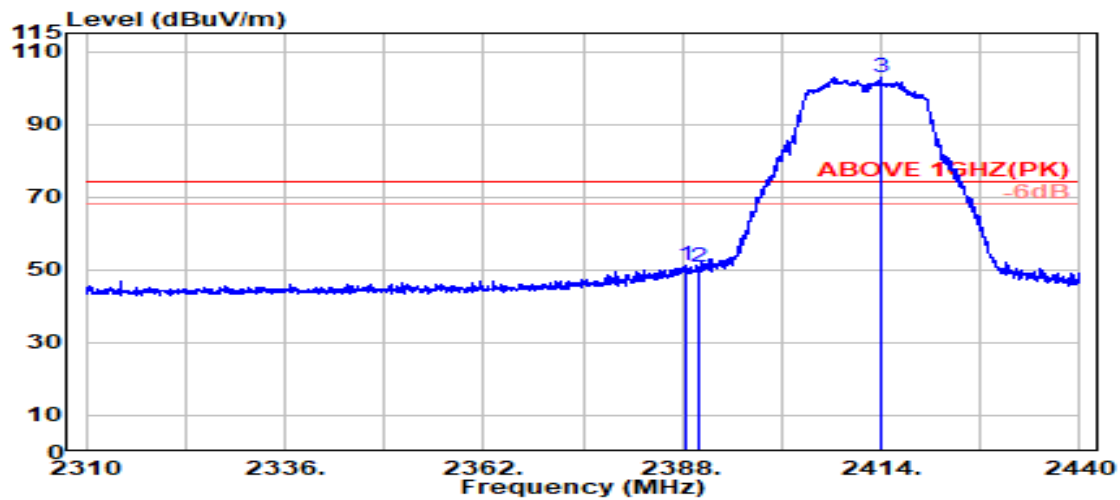

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.325                 | 28.20                 | 5.70            | 39.92                  | 57.15             | 51.13                   | 74.00           | 22.87       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 56.77             | 50.76                   | 74.00           | 23.24       | Peak     |
| @ 2414.000               | 28.23                 | 5.74            | 39.92                  | 108.90            | 102.94                  | ---             | ---         | Peak     |

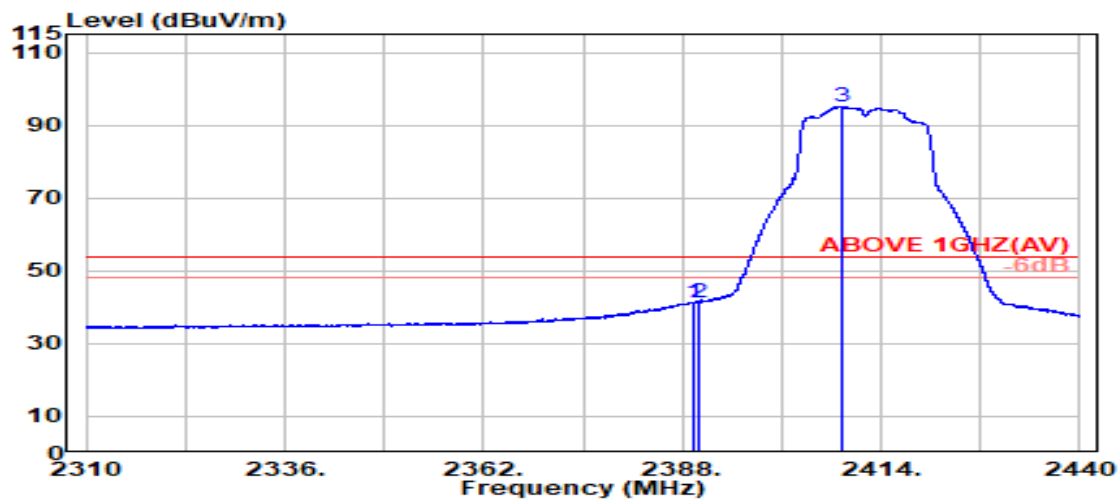

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.571                 | 28.20                 | 5.70            | 39.92                  | 47.26             | 41.24                   | 54.00           | 12.76       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 47.38             | 41.37                   | 54.00           | 12.63       | Average  |
| @ 2408.746               | 28.22                 | 5.73            | 39.92                  | 101.00            | 95.02                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |         |           |             |
|------|---------|-----------|-------------|
| Mode | 802.11g | Frequency | TX 2462 MHz |
|------|---------|-----------|-------------|

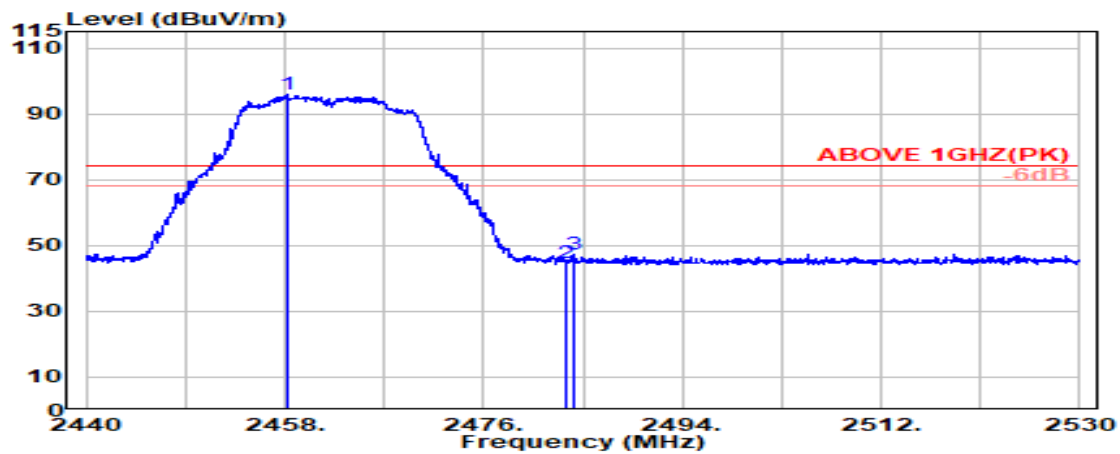

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2458.250               | 28.33                 | 5.79            | 39.92            | 101.68            | 95.89                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 50.52             | 44.86                   | 74.00           | 29.14       | Peak     |
| 2484.100                 | 28.44                 | 5.83            | 39.92            | 53.06             | 47.41                   | 74.00           | 26.59       | Peak     |

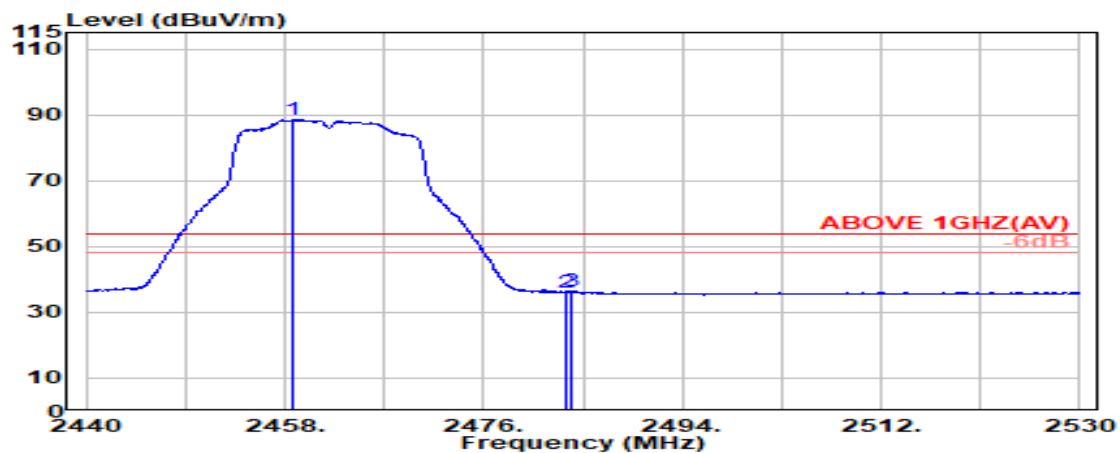

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2458.800               | 28.34                 | 5.80            | 39.92            | 94.32             | 88.53                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 41.84             | 36.18                   | 54.00           | 17.82       | Average  |
| 2483.850                 | 28.44                 | 5.83            | 39.92            | 42.11             | 36.46                   | 54.00           | 17.54       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |         |           |             |
|------|---------|-----------|-------------|
| Mode | 802.11g | Frequency | TX 2462 MHz |
|------|---------|-----------|-------------|

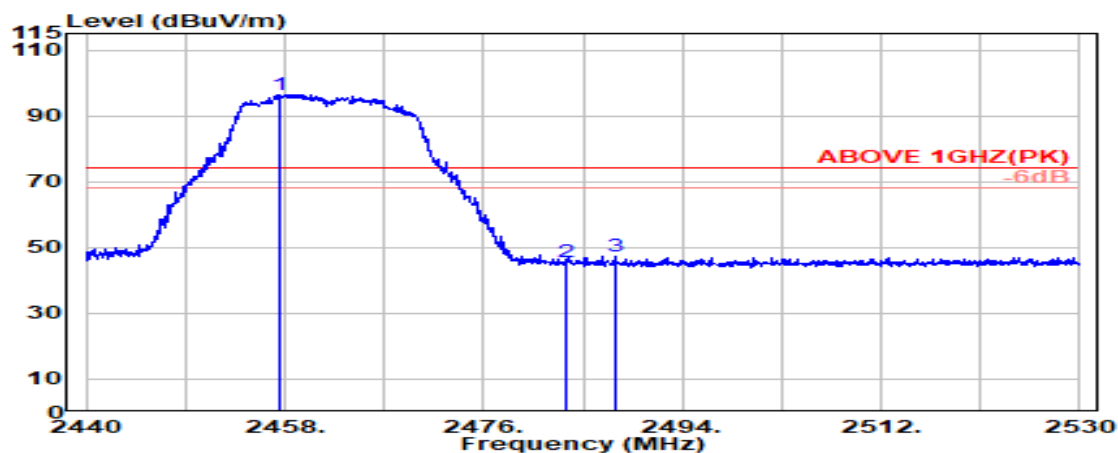

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2457.600               | 28.33                 | 5.79            | 39.92            | 102.34            | 96.55                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 51.22             | 45.57                   | 74.00           | 28.43       | Peak     |
| 2487.850                 | 28.45                 | 5.83            | 39.92            | 52.85             | 47.22                   | 74.00           | 26.78       | Peak     |

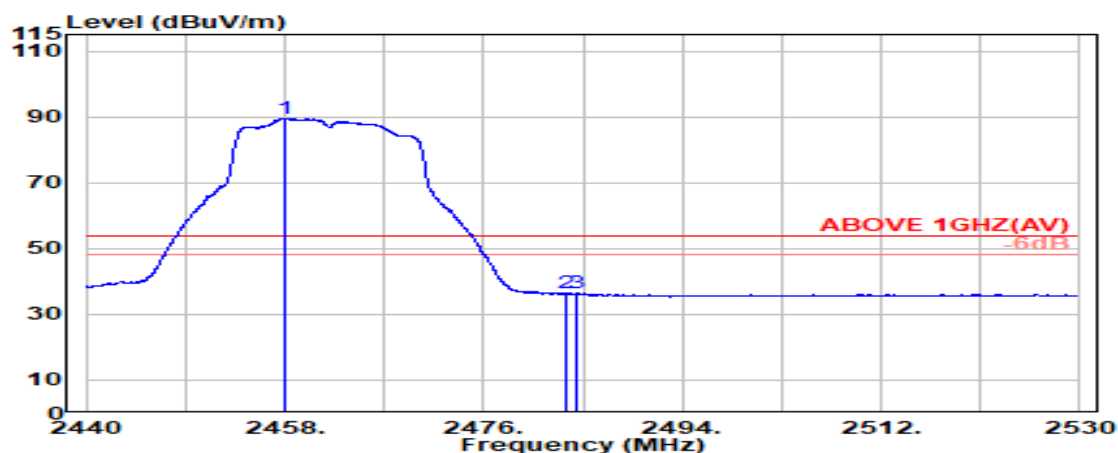


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2458.050               | 28.33                 | 5.79            | 39.92            | 95.25             | 89.46                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 42.13             | 36.47                   | 54.00           | 17.53       | Average  |
| 2484.500                 | 28.44                 | 5.83            | 39.92            | 42.06             | 36.41                   | 54.00           | 17.59       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |         |           |             |
|------|---------|-----------|-------------|
| Mode | 802.11g | Frequency | TX 2467 MHz |
|------|---------|-----------|-------------|

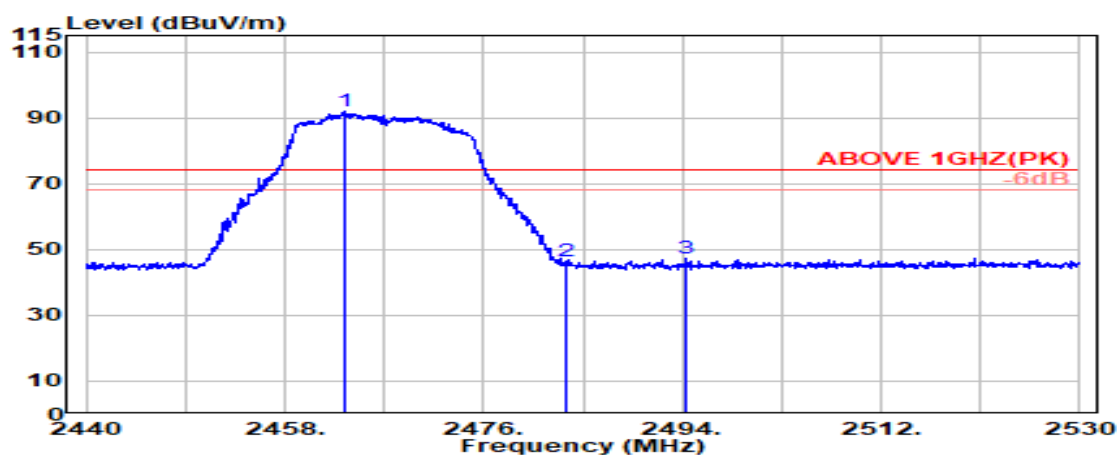

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2463.500               | 28.35                 | 5.80            | 39.92            | 97.69             | 91.93                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 52.03             | 46.38                   | 74.00           | 27.62       | Peak     |
| 2494.350                 | 28.48                 | 5.84            | 39.92            | 52.74             | 47.14                   | 74.00           | 26.86       | Peak     |

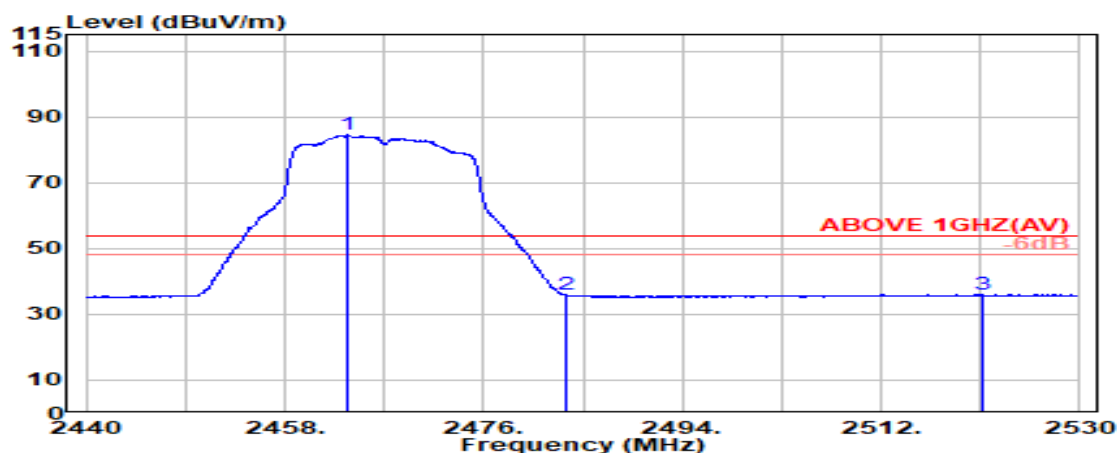


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2463.750               | 28.36                 | 5.80            | 39.92            | 90.22             | 84.46                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 41.51             | 35.85                   | 54.00           | 18.15       | Average  |
| 2521.150                 | 28.59                 | 5.87            | 39.92            | 41.44             | 35.98                   | 54.00           | 18.02       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |         |           |             |
|------|---------|-----------|-------------|
| Mode | 802.11g | Frequency | TX 2467 MHz |
|------|---------|-----------|-------------|

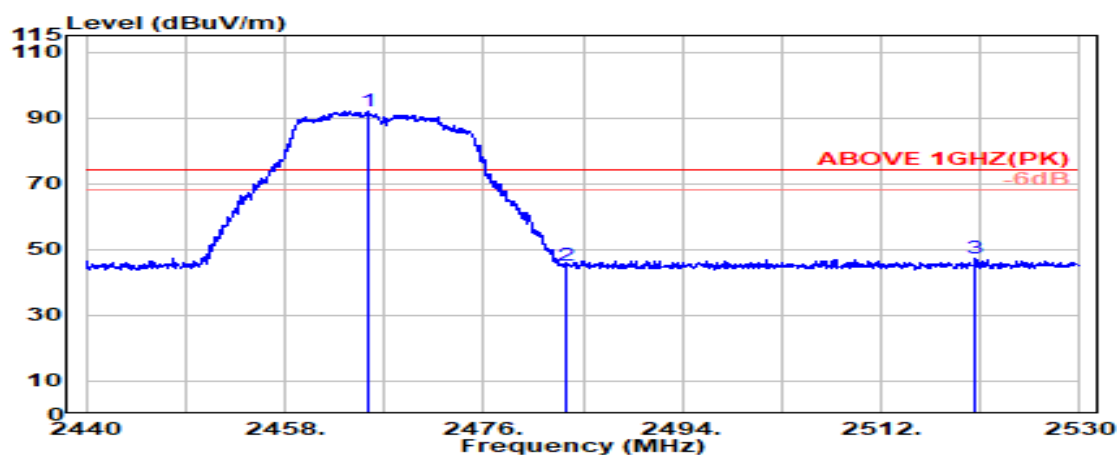

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2465.600               | 28.36                 | 5.80            | 39.92            | 97.79             | 92.04                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 50.89             | 45.23                   | 74.00           | 28.77       | Peak     |
| 2520.600                 | 28.58                 | 5.87            | 39.92            | 52.62             | 47.15                   | 74.00           | 26.85       | Peak     |

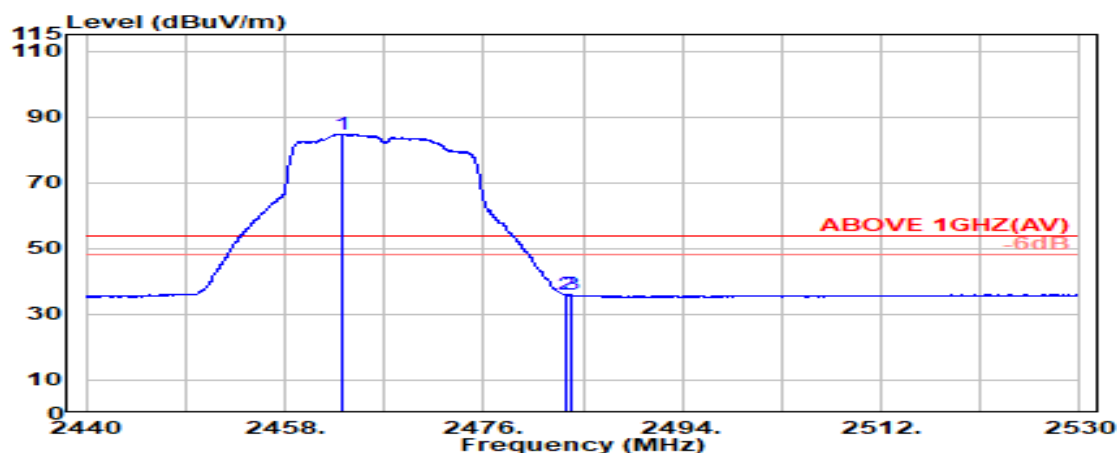

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2463.150               | 28.35                 | 5.80            | 39.92            | 90.56             | 84.79                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 41.55             | 35.89                   | 54.00           | 18.11       | Average  |
| 2483.850                 | 28.44                 | 5.83            | 39.92            | 41.73             | 36.08                   | 54.00           | 17.92       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |         |           |             |
|------|---------|-----------|-------------|
| Mode | 802.11g | Frequency | TX 2472 MHz |
|------|---------|-----------|-------------|

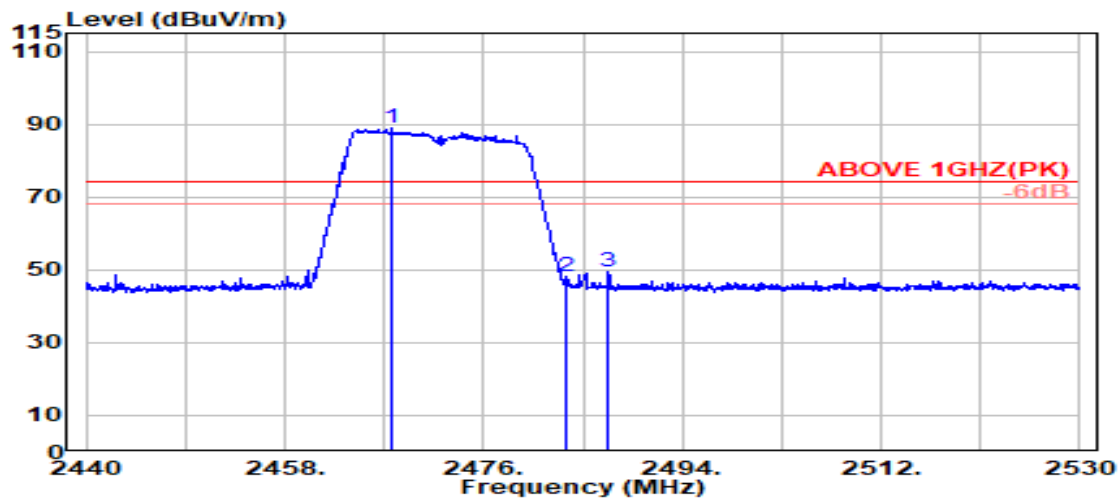

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2467.700               | 28.37                 | 5.81            | 39.92                  | 94.90             | 89.16                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 53.82             | 48.16                   | 74.00           | 25.84       | Peak     |
| 2487.350                 | 28.45                 | 5.83            | 39.92                  | 54.94             | 49.31                   | 74.00           | 24.69       | Peak     |

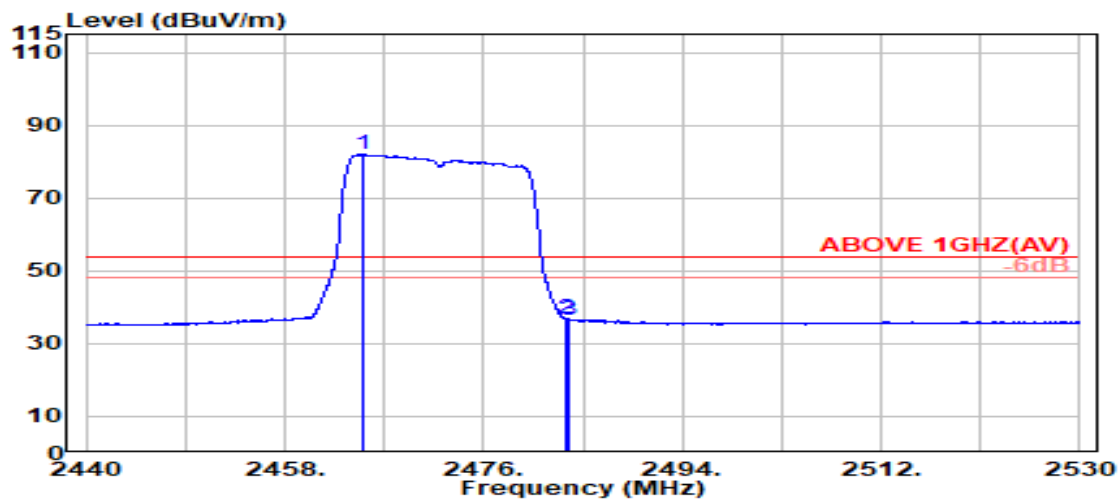

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2465.050               | 28.36                 | 5.80            | 39.92                  | 87.85             | 82.09                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 42.41             | 36.76                   | 54.00           | 17.24       | Average  |
| 2483.750                 | 28.44                 | 5.83            | 39.92                  | 42.32             | 36.67                   | 54.00           | 17.33       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11g | Frequency | TX 2472 MHz |
|------|---------|-----------|-------------|
|------|---------|-----------|-------------|

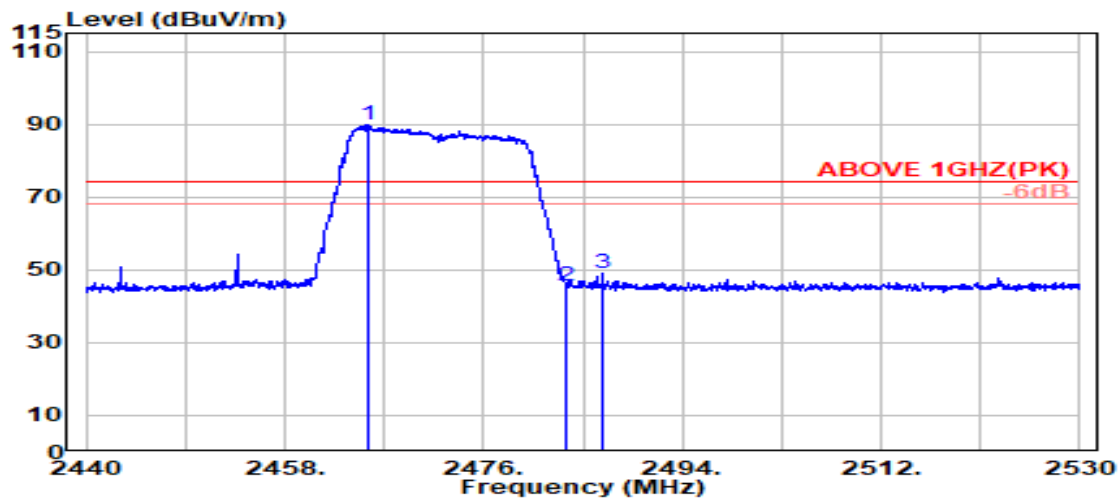

#### Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2465.450                 | 28.36                 | 5.80            | 39.92                  | 95.50             | 89.75                   | ---             | ---         | Peak     |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92                  | 51.03             | 45.37                   | 74.00           | 28.63       | Peak     |
|   | 2486.800                 | 28.45                 | 5.83            | 39.92                  | 54.68             | 49.04                   | 74.00           | 24.96       | Peak     |

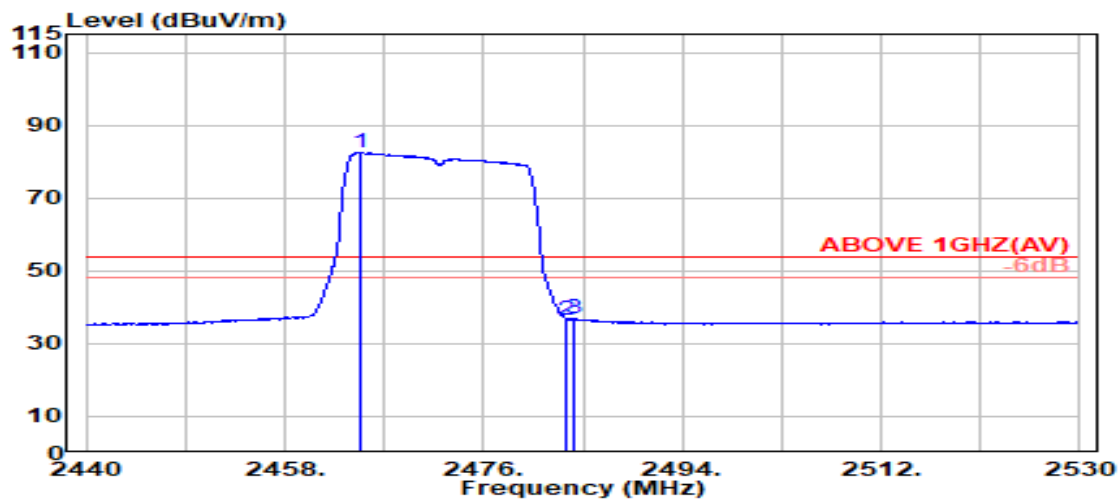

#### Antenna at Vertical Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2464.850                 | 28.36                 | 5.80            | 39.92                  | 88.28             | 82.52                   | ---             | ---         | Average  |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92                  | 42.25             | 36.59                   | 54.00           | 17.41       | Average  |
|   | 2484.250                 | 28.44                 | 5.83            | 39.92                  | 42.60             | 36.95                   | 54.00           | 17.05       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11n-HT20 | Frequency | TX 2412MHz |
|------|--------------|-----------|------------|
|------|--------------|-----------|------------|

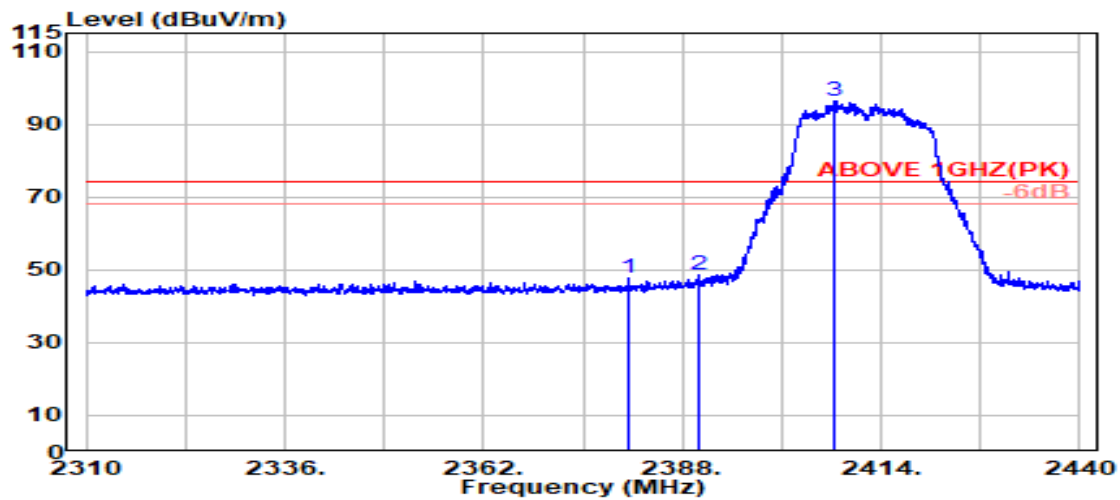

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2381.067                 | 28.20                 | 5.69            | 39.92                  | 53.64             | 47.62                   | 74.00           | 26.38       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 54.65             | 48.64                   | 74.00           | 25.36       | Peak     |
| @ 2407.933               | 28.22                 | 5.73            | 39.92                  | 102.33            | 96.36                   | ---             | ---         | Peak     |

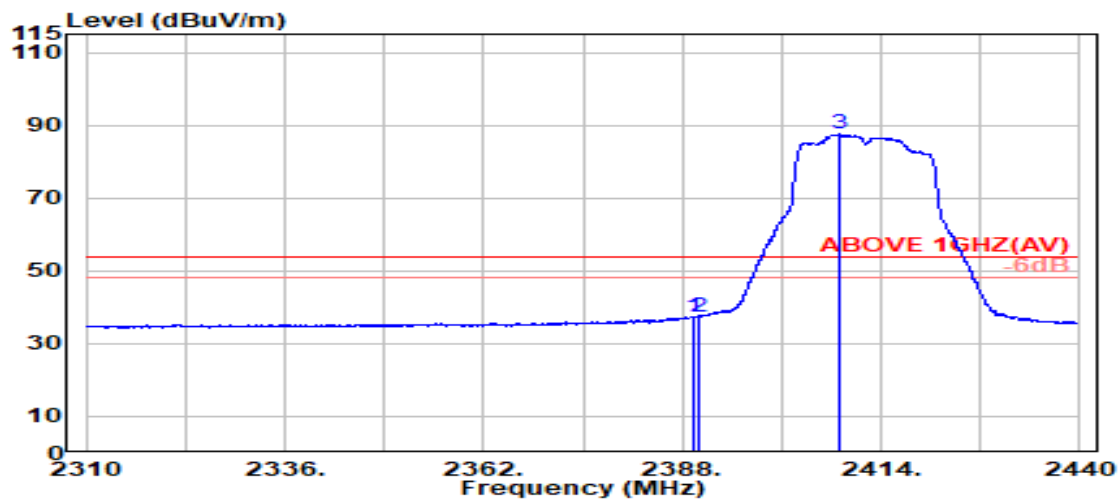

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.625                 | 28.20                 | 5.70            | 39.92                  | 43.54             | 37.53                   | 54.00           | 16.47       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 43.27             | 37.25                   | 54.00           | 16.75       | Average  |
| @ 2408.421               | 28.22                 | 5.73            | 39.92                  | 93.46             | 87.49                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11n-HT20 | Frequency | TX 2412MHz |
|------|--------------|-----------|------------|
|------|--------------|-----------|------------|

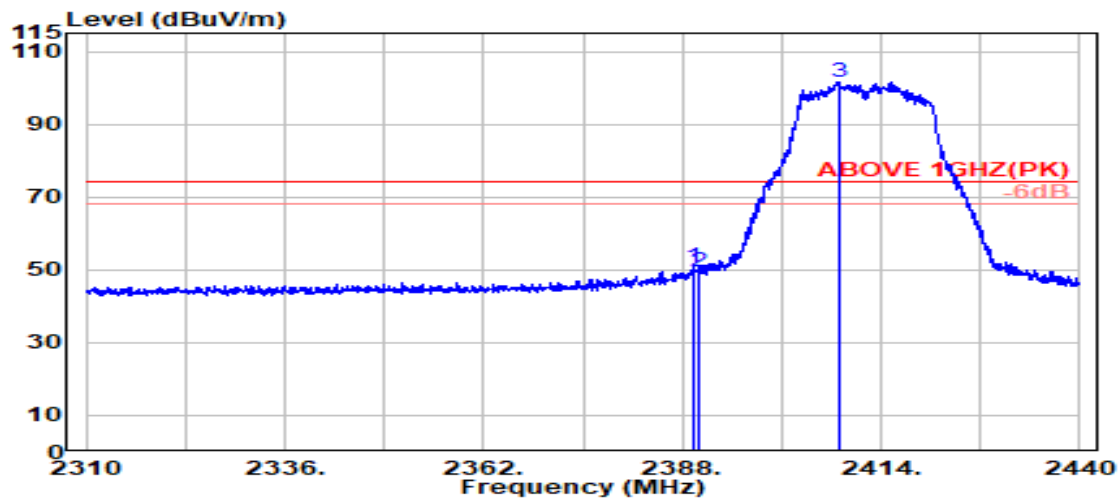

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.517                 | 28.20                 | 5.70            | 39.92                  | 56.96             | 50.95                   | 74.00           | 23.05       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 55.32             | 49.31                   | 74.00           | 24.69       | Peak     |
| @ 2408.421               | 28.22                 | 5.73            | 39.92                  | 107.63            | 101.66                  | ---             | ---         | Peak     |

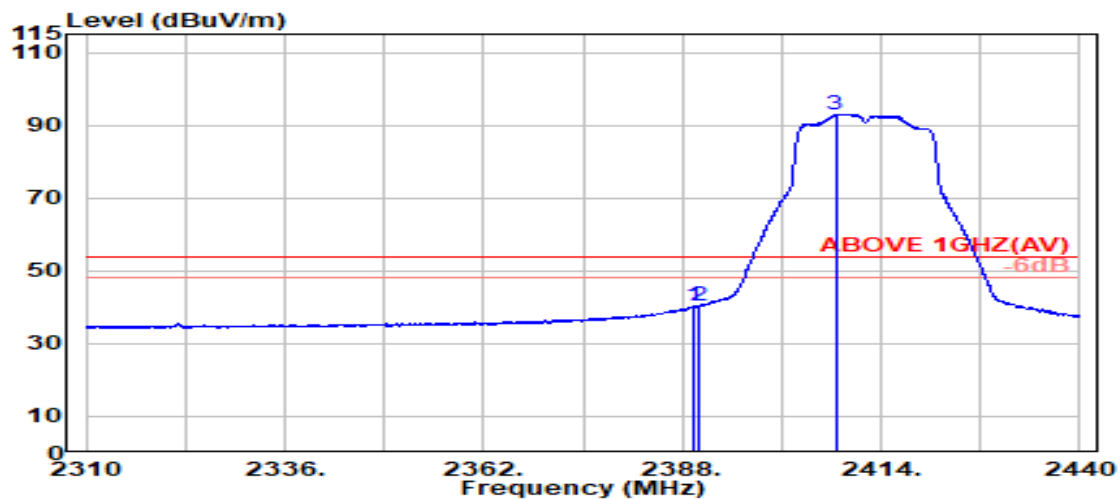

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.571                 | 28.20                 | 5.70            | 39.92                  | 46.45             | 40.43                   | 54.00           | 13.57       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 46.31             | 40.29                   | 54.00           | 13.71       | Average  |
| @ 2408.042               | 28.22                 | 5.73            | 39.92                  | 99.03             | 93.06                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11n-HT20 | Frequency | TX 2417MHz |
|------|--------------|-----------|------------|
|------|--------------|-----------|------------|

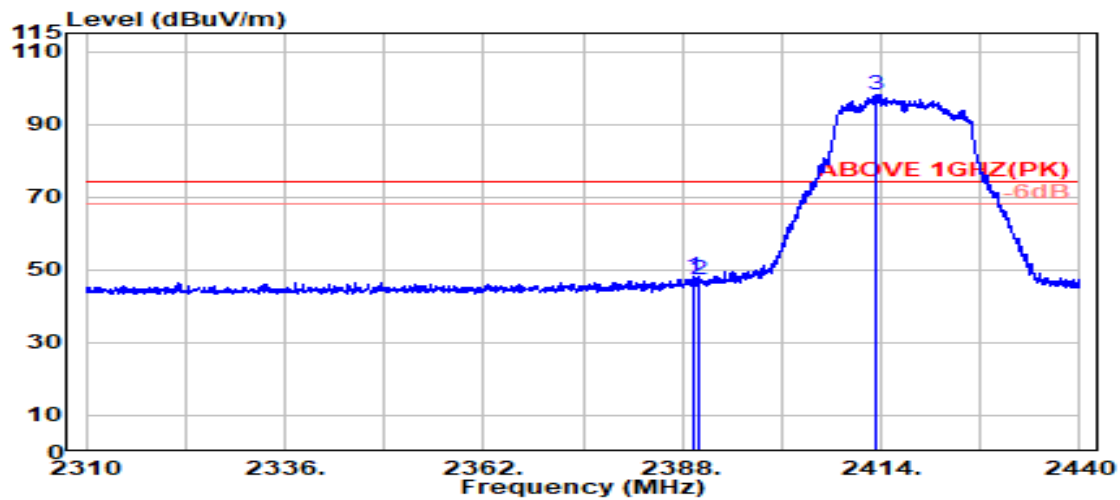

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.408                 | 28.20                 | 5.70            | 39.92                  | 54.23             | 48.21                   | 74.00           | 25.79       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 53.52             | 47.50                   | 74.00           | 26.50       | Peak     |
| @ 2413.458               | 28.23                 | 5.73            | 39.92                  | 104.12            | 98.17                   | ---             | ---         | Peak     |

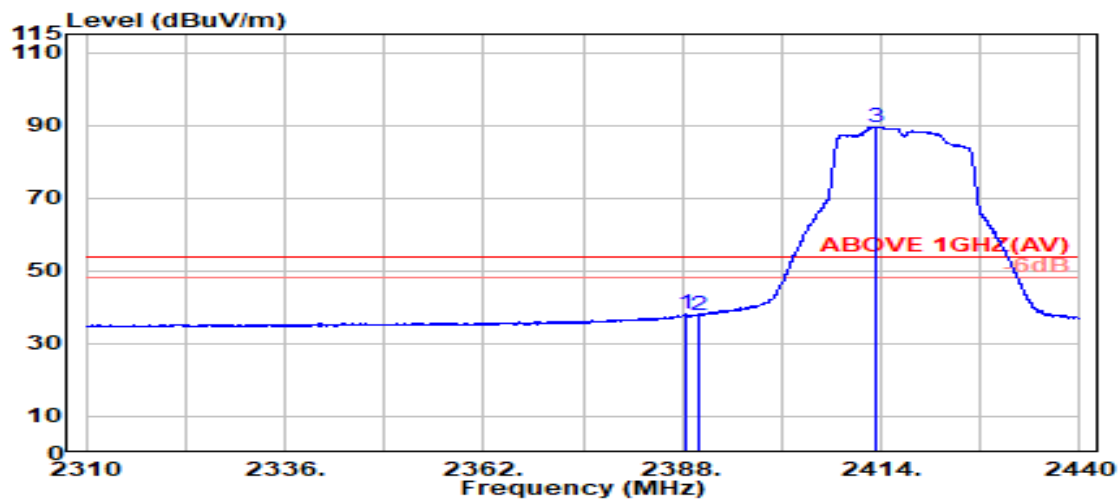

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.325                 | 28.20                 | 5.70            | 39.92                  | 44.14             | 38.12                   | 54.00           | 15.88       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 43.92             | 37.90                   | 54.00           | 16.10       | Average  |
| @ 2413.350               | 28.23                 | 5.73            | 39.92                  | 95.56             | 89.60                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11n-HT20 | Frequency | TX 2417MHz |
|------|--------------|-----------|------------|
|------|--------------|-----------|------------|

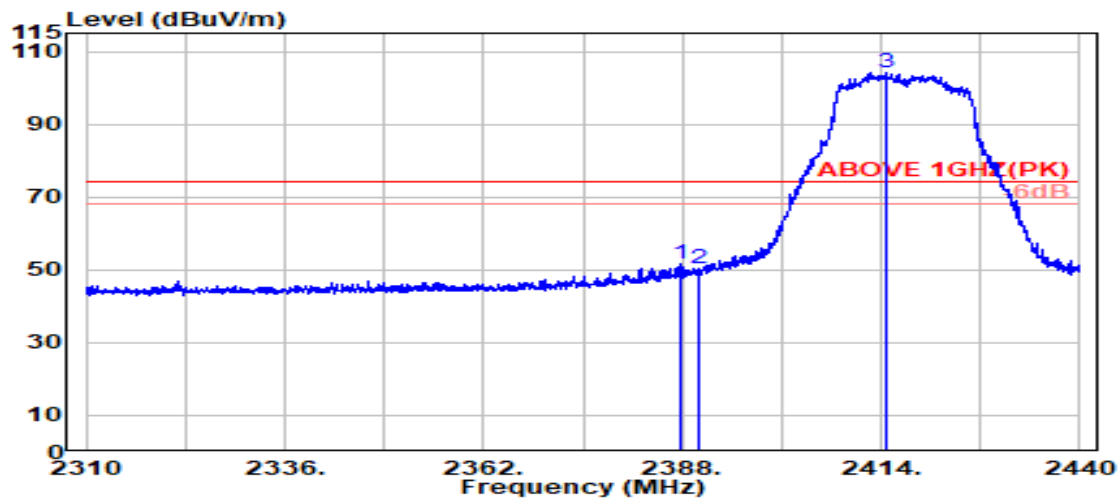

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2387.892                 | 28.20                 | 5.70            | 39.92                  | 57.55             | 51.53                   | 74.00           | 22.47       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 56.23             | 50.21                   | 74.00           | 23.79       | Peak     |
| @ 2414.596               | 28.23                 | 5.74            | 39.92                  | 110.29            | 104.33                  | ---             | ---         | Peak     |

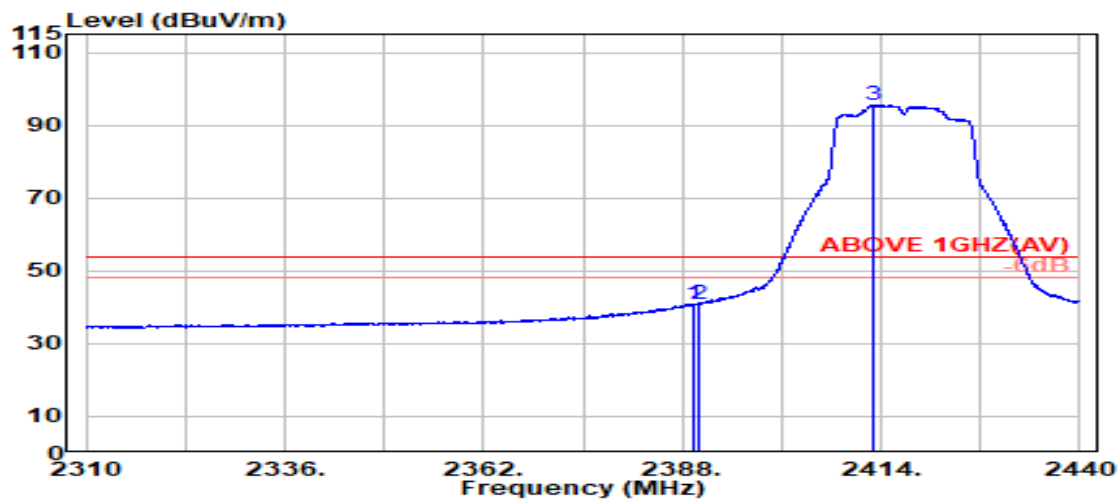

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.462                 | 28.20                 | 5.70            | 39.92                  | 46.79             | 40.77                   | 54.00           | 13.23       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 46.98             | 40.96                   | 54.00           | 13.04       | Average  |
| @ 2413.079               | 28.23                 | 5.73            | 39.92                  | 101.46            | 95.50                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |              |           |            |
|------|--------------|-----------|------------|
| Mode | 802.11n-HT20 | Frequency | TX 2457MHz |
|------|--------------|-----------|------------|

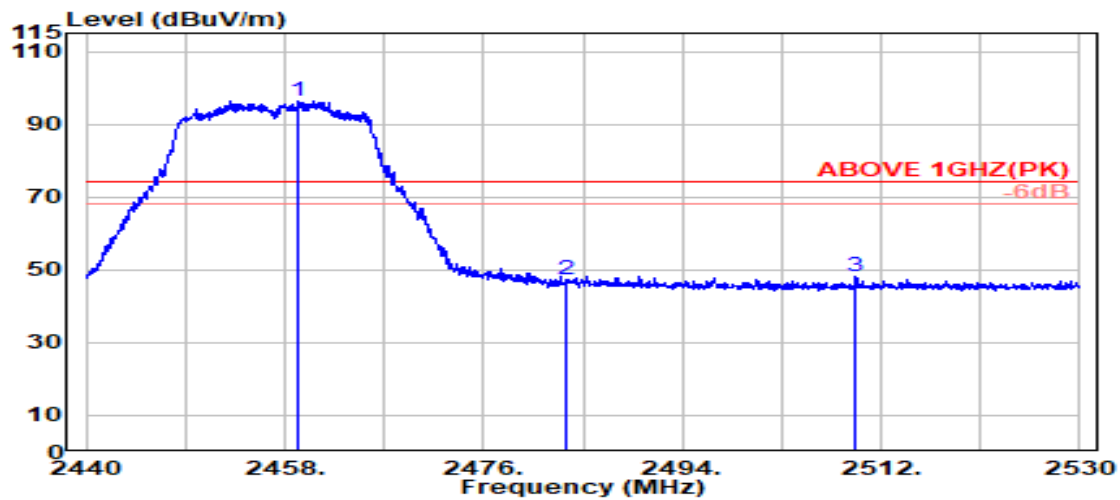

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2459.250               | 28.34                 | 5.80            | 39.92            | 102.19            | 96.41                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 53.05             | 47.40                   | 74.00           | 26.60       | Peak     |
| 2509.750                 | 28.54                 | 5.86            | 39.92            | 53.52             | 48.00                   | 74.00           | 26.00       | Peak     |

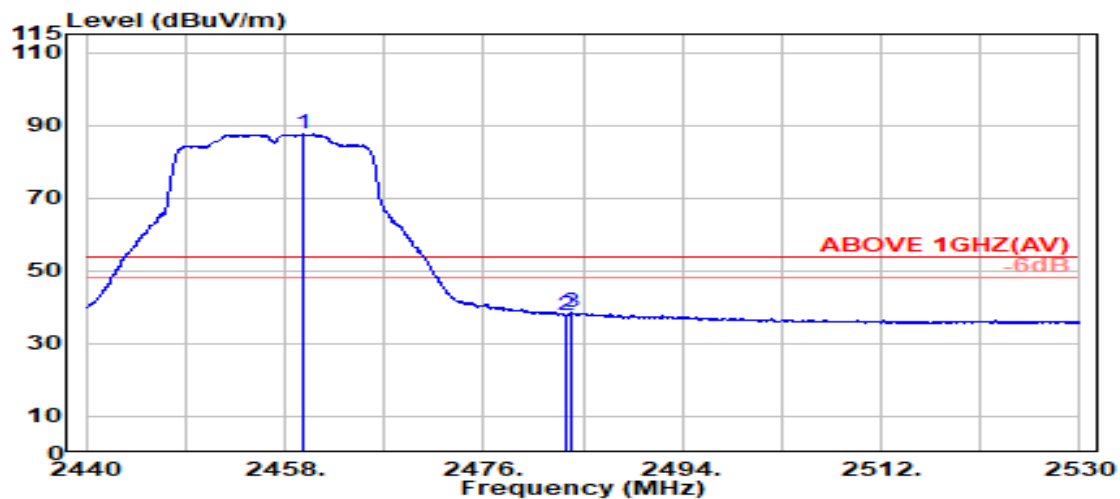

## Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2459.700               | 28.34                 | 5.80            | 39.92            | 93.36             | 87.58                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 43.48             | 37.82                   | 54.00           | 16.18       | Average  |
| 2484.050                 | 28.44                 | 5.83            | 39.92            | 44.11             | 38.45                   | 54.00           | 15.55       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11n-HT20 | Frequency | TX 2457MHz |
|------|--------------|-----------|------------|
|------|--------------|-----------|------------|

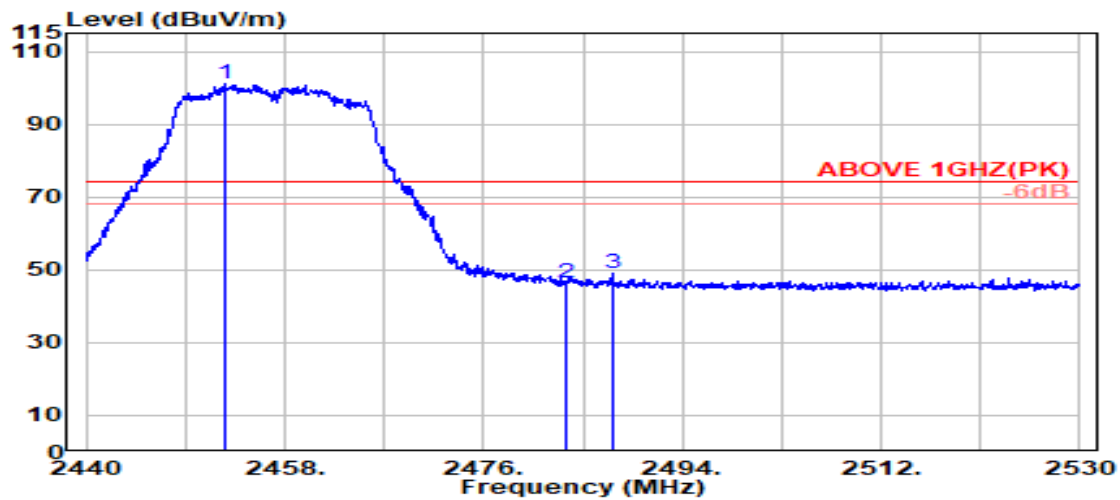

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2452.600               | 28.31                 | 5.79            | 39.92                  | 106.96            | 101.14                  | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 51.98             | 46.32                   | 74.00           | 27.68       | Peak     |
| 2487.650                 | 28.45                 | 5.83            | 39.92                  | 54.67             | 49.04                   | 74.00           | 24.96       | Peak     |

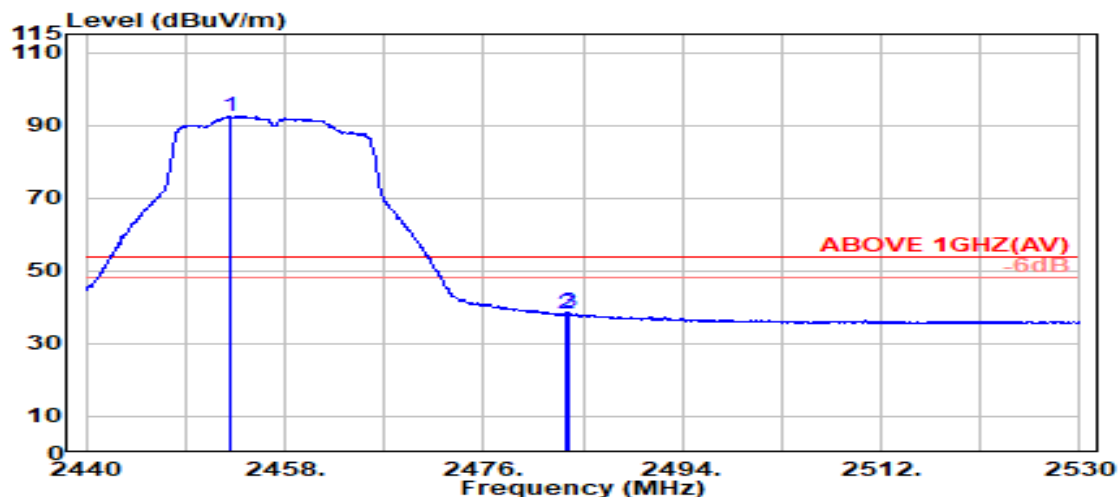

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2453.100               | 28.31                 | 5.79            | 39.92                  | 98.39             | 92.57                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 43.94             | 38.28                   | 54.00           | 15.72       | Average  |
| 2483.700                 | 28.44                 | 5.83            | 39.92                  | 44.10             | 38.44                   | 54.00           | 15.56       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11n-HT20 | Frequency | TX 2462MHz |
|------|--------------|-----------|------------|
|------|--------------|-----------|------------|

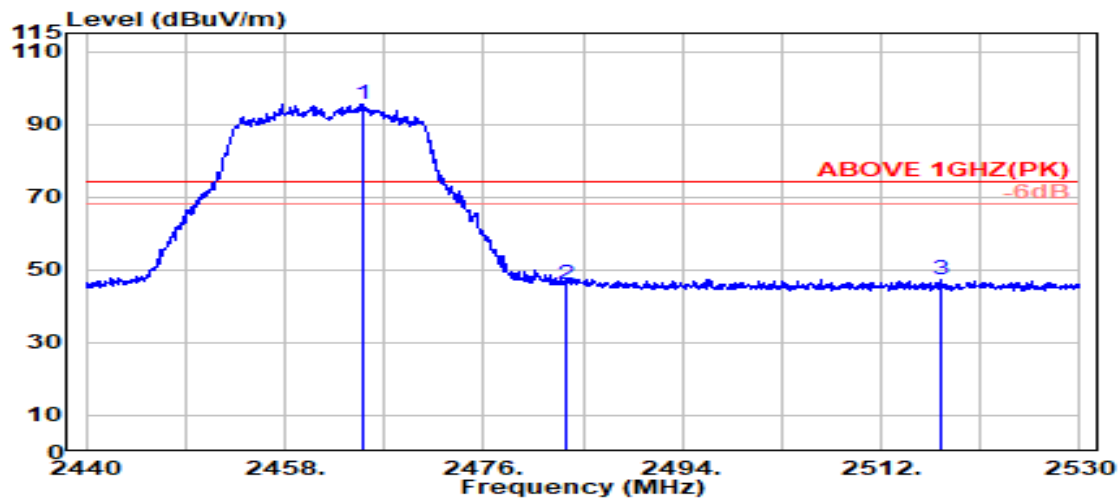

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2465.000               | 28.36                 | 5.80            | 39.92                  | 101.22            | 95.46                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 51.73             | 46.07                   | 74.00           | 27.93       | Peak     |
| 2517.350                 | 28.57                 | 5.87            | 39.92                  | 52.94             | 47.46                   | 74.00           | 26.54       | Peak     |

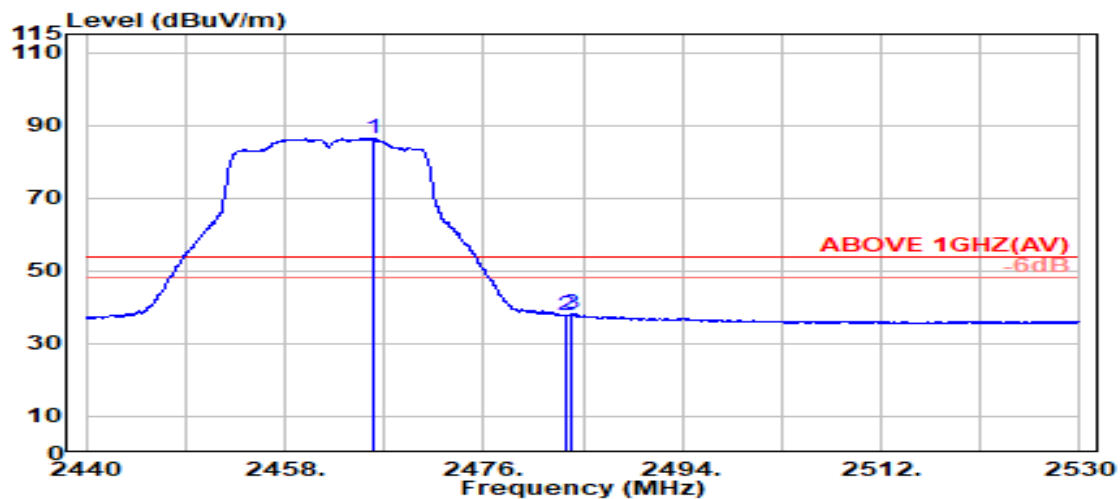

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2466.050               | 28.36                 | 5.81            | 39.92                  | 92.15             | 86.40                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 43.42             | 37.76                   | 54.00           | 16.24       | Average  |
| 2484.000                 | 28.44                 | 5.83            | 39.92                  | 43.87             | 38.21                   | 54.00           | 15.79       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11n-HT20 | Frequency | TX 2462MHz |
|------|--------------|-----------|------------|
|------|--------------|-----------|------------|

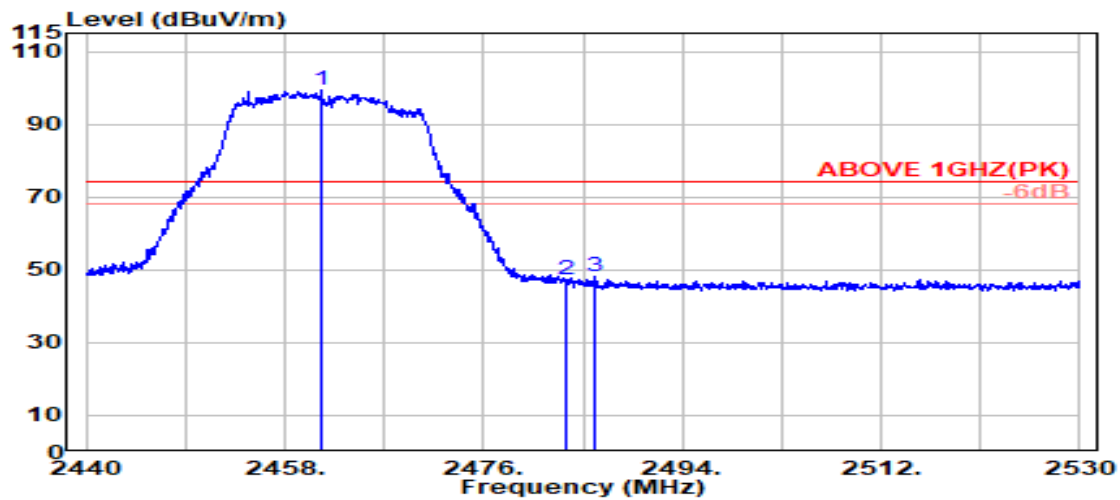

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2461.300               | 28.35                 | 5.80            | 39.92                  | 104.98            | 99.20                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 53.13             | 47.47                   | 74.00           | 26.53       | Peak     |
| 2486.050                 | 28.44                 | 5.83            | 39.92                  | 53.85             | 48.21                   | 74.00           | 25.79       | Peak     |

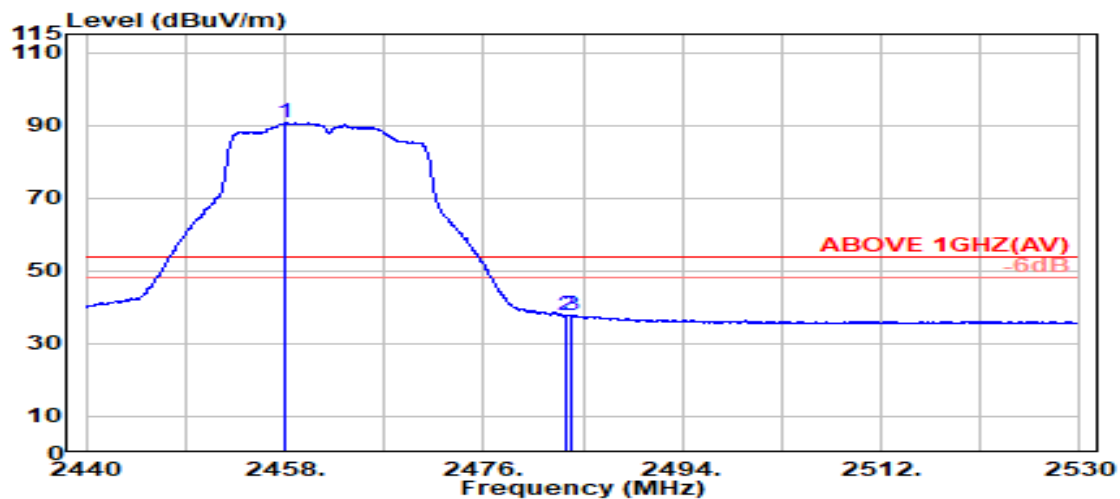

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2458.000               | 28.33                 | 5.79            | 39.92                  | 96.48             | 90.69                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 43.24             | 37.59                   | 54.00           | 16.41       | Average  |
| 2483.850                 | 28.44                 | 5.83            | 39.92                  | 43.58             | 37.92                   | 54.00           | 16.08       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11n-HT20 | Frequency | TX 2467 MHz |
|------|--------------|-----------|-------------|
|------|--------------|-----------|-------------|

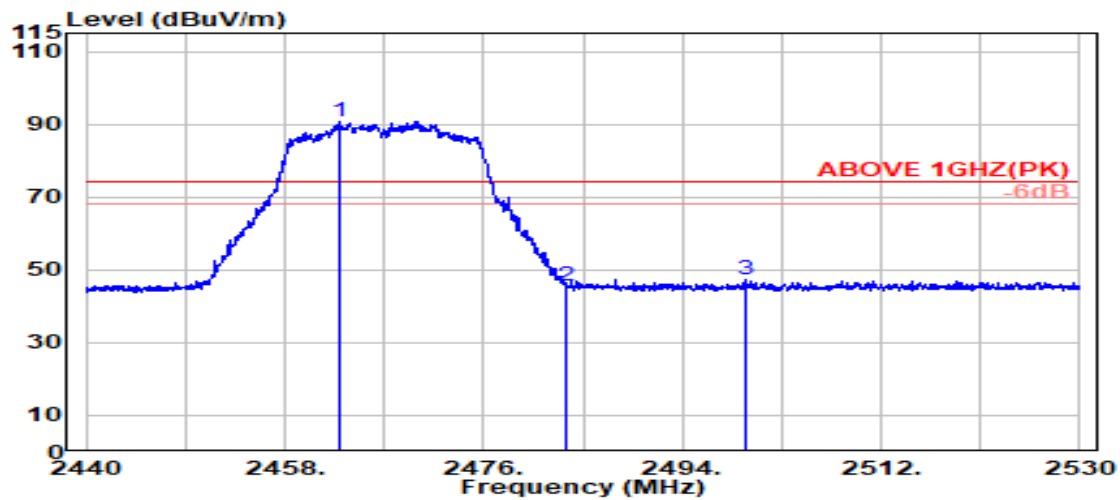

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2463.050               | 28.35                 | 5.80            | 39.92                  | 96.63             | 90.87                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 51.22             | 45.56                   | 74.00           | 28.44       | Peak     |
| 2499.700                 | 28.50                 | 5.85            | 39.92                  | 52.89             | 47.31                   | 74.00           | 26.69       | Peak     |

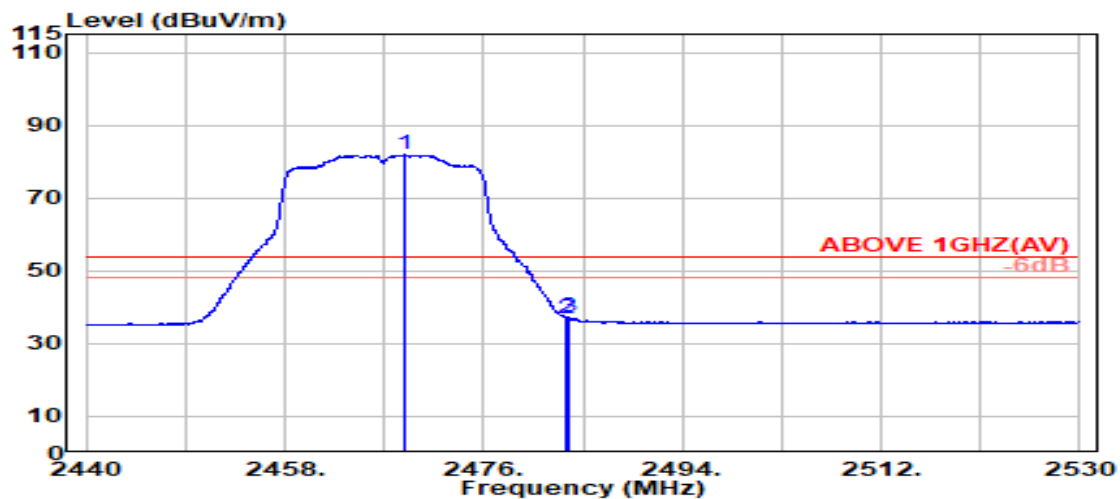

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2468.750               | 28.38                 | 5.81            | 39.92                  | 87.57             | 81.83                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 42.51             | 36.85                   | 54.00           | 17.15       | Average  |
| 2483.750                 | 28.44                 | 5.83            | 39.92                  | 42.83             | 37.18                   | 54.00           | 16.82       | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11n-HT20 | Frequency | TX 2467 MHz |
|------|--------------|-----------|-------------|
|------|--------------|-----------|-------------|

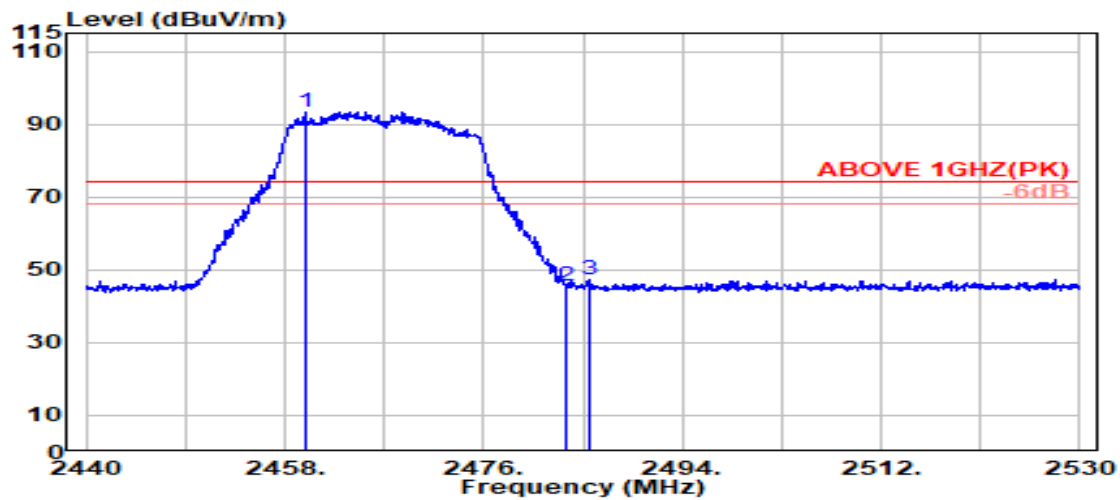

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2459.950               | 28.34                 | 5.80            | 39.92                  | 99.25             | 93.47                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 51.07             | 45.41                   | 74.00           | 28.59       | Peak     |
| 2485.500                 | 28.44                 | 5.83            | 39.92                  | 52.92             | 47.27                   | 74.00           | 26.73       | Peak     |

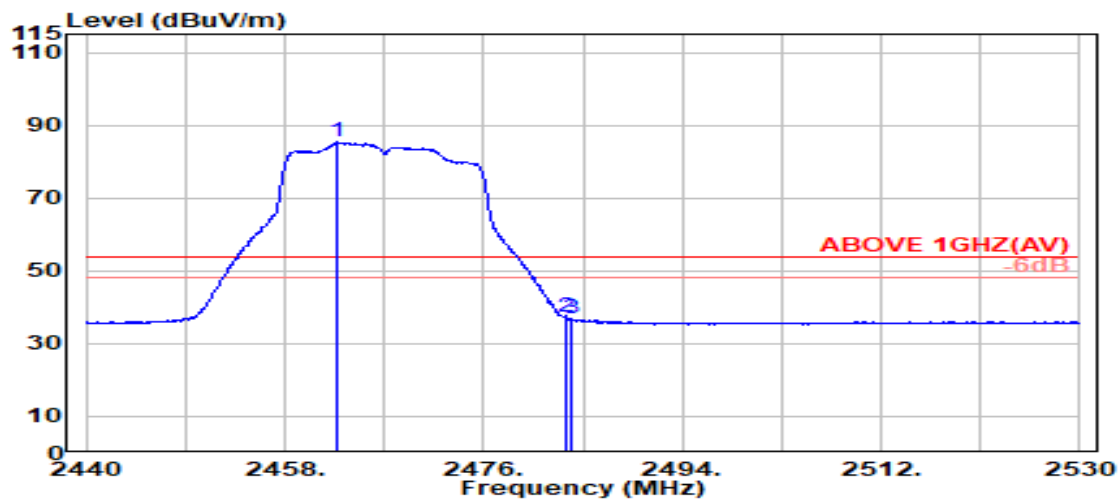

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2462.750               | 28.35                 | 5.80            | 39.92                  | 91.05             | 85.28                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 43.17             | 37.52                   | 54.00           | 16.48       | Average  |
| 2483.950                 | 28.44                 | 5.83            | 39.92                  | 42.49             | 36.83                   | 54.00           | 17.17       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11n-HT20 | Frequency | TX 2472 MHz |
|------|--------------|-----------|-------------|
|------|--------------|-----------|-------------|

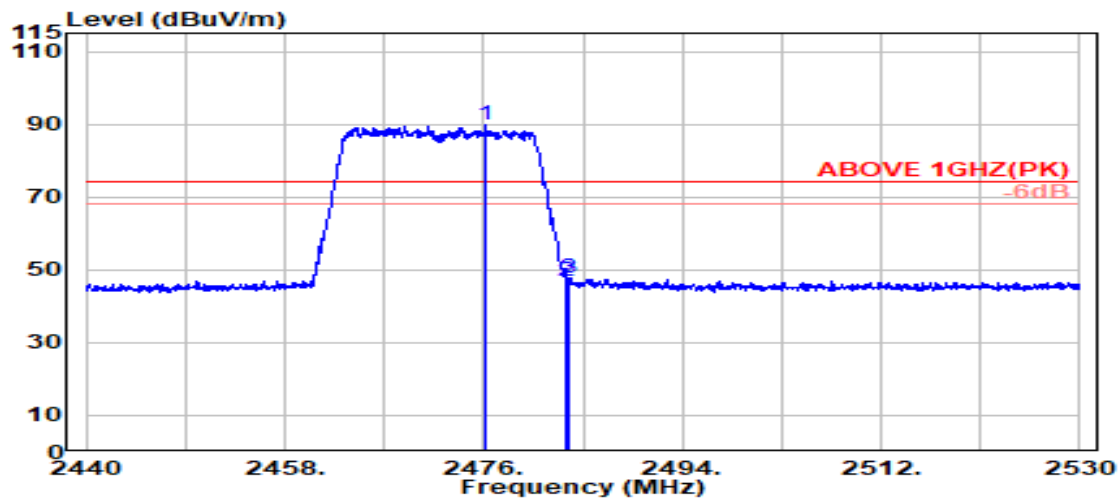

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2476.200               | 28.41                 | 5.82            | 39.92                  | 95.39             | 89.70                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 52.35             | 46.69                   | 74.00           | 27.31       | Peak     |
| 2483.800                 | 28.44                 | 5.83            | 39.92                  | 53.45             | 47.79                   | 74.00           | 26.21       | Peak     |

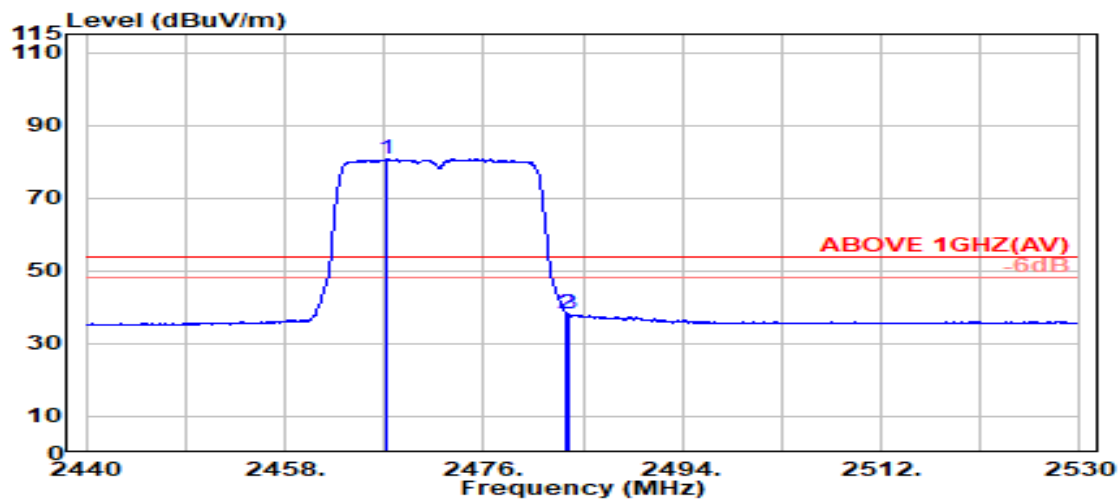

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2467.100               | 28.37                 | 5.81            | 39.92                  | 86.44             | 80.70                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 43.94             | 38.29                   | 54.00           | 15.71       | Average  |
| 2483.700                 | 28.44                 | 5.83            | 39.92                  | 43.89             | 38.24                   | 54.00           | 15.76       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11n-HT20 | Frequency | TX 2472 MHz |
|------|--------------|-----------|-------------|
|------|--------------|-----------|-------------|

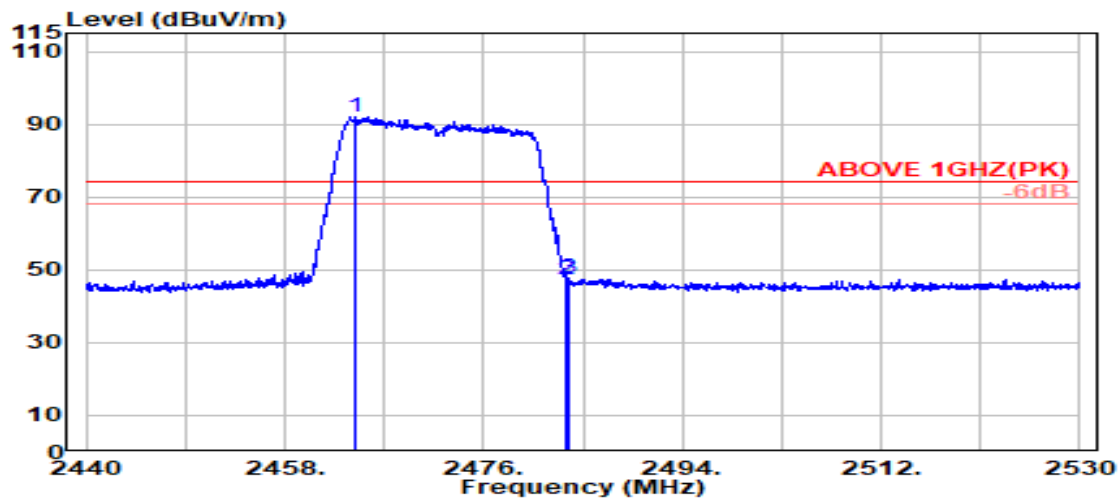

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2464.400               | 28.36                 | 5.80            | 39.92                  | 97.89             | 92.14                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 52.84             | 47.19                   | 74.00           | 26.81       | Peak     |
| 2483.700                 | 28.44                 | 5.83            | 39.92                  | 53.51             | 47.85                   | 74.00           | 26.15       | Peak     |

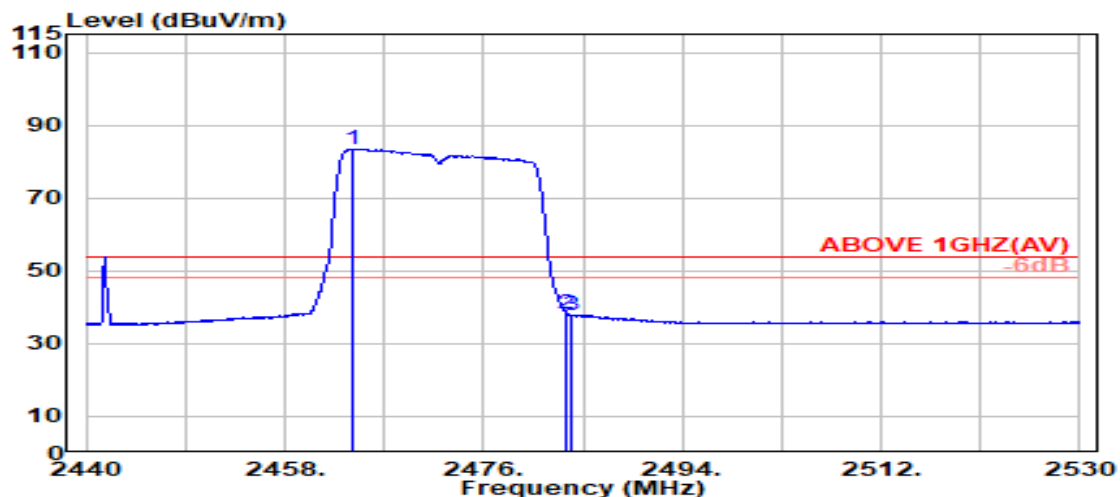

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2464.050               | 28.36                 | 5.80            | 39.92                  | 89.23             | 83.47                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 43.92             | 38.26                   | 54.00           | 15.74       | Average  |
| 2483.850                 | 28.44                 | 5.83            | 39.92                  | 43.59             | 37.93                   | 54.00           | 16.07       | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11n-HT40 | Frequency | TX 2422 MHz |
|------|--------------|-----------|-------------|
|------|--------------|-----------|-------------|

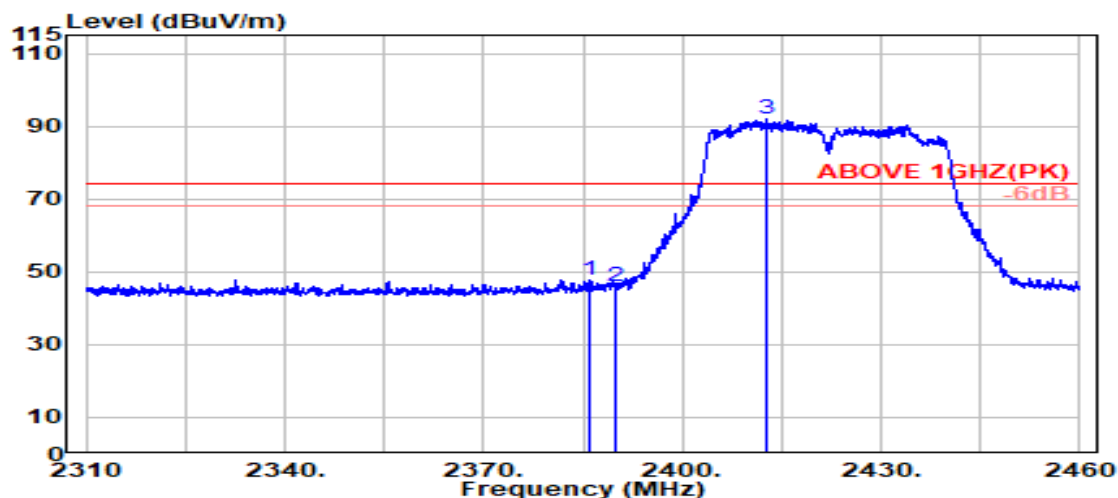

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2386.100                 | 28.20                 | 5.70            | 39.92            | 53.79             | 47.77                   | 74.00           | 26.23       | Peak     |
| 2389.800                 | 28.20                 | 5.70            | 39.92            | 52.14             | 46.12                   | 74.00           | 27.88       | Peak     |
| @ 2412.800               | 28.23                 | 5.73            | 39.92            | 97.94             | 91.98                   | ---             | ---         | Peak     |

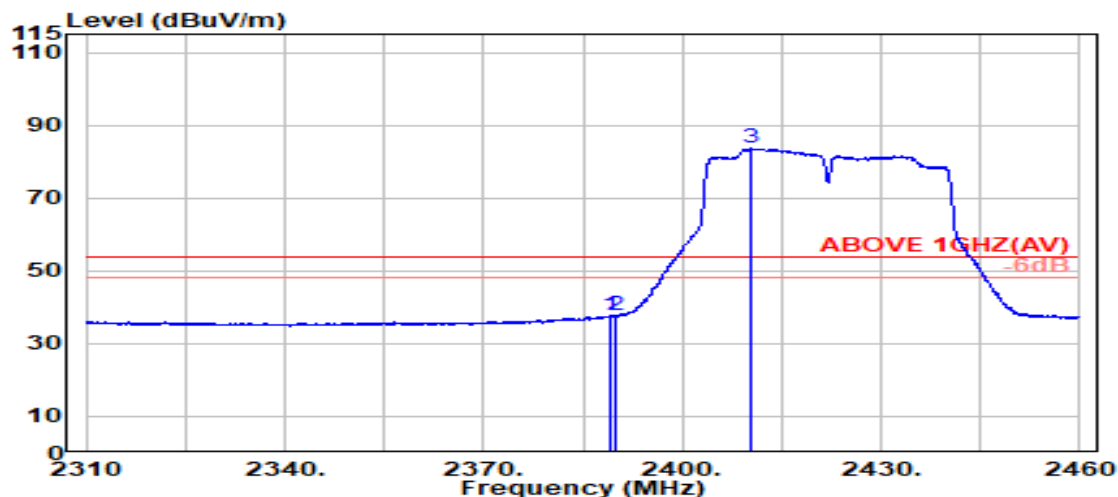

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.100                 | 28.20                 | 5.70            | 39.92            | 43.66             | 37.64                   | 54.00           | 16.36       | Average  |
| 2389.800                 | 28.20                 | 5.70            | 39.92            | 43.74             | 37.73                   | 54.00           | 16.27       | Average  |
| @ 2410.450               | 28.22                 | 5.73            | 39.92            | 89.74             | 83.77                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11n-HT40 | Frequency | TX 2422 MHz |
|------|--------------|-----------|-------------|
|------|--------------|-----------|-------------|

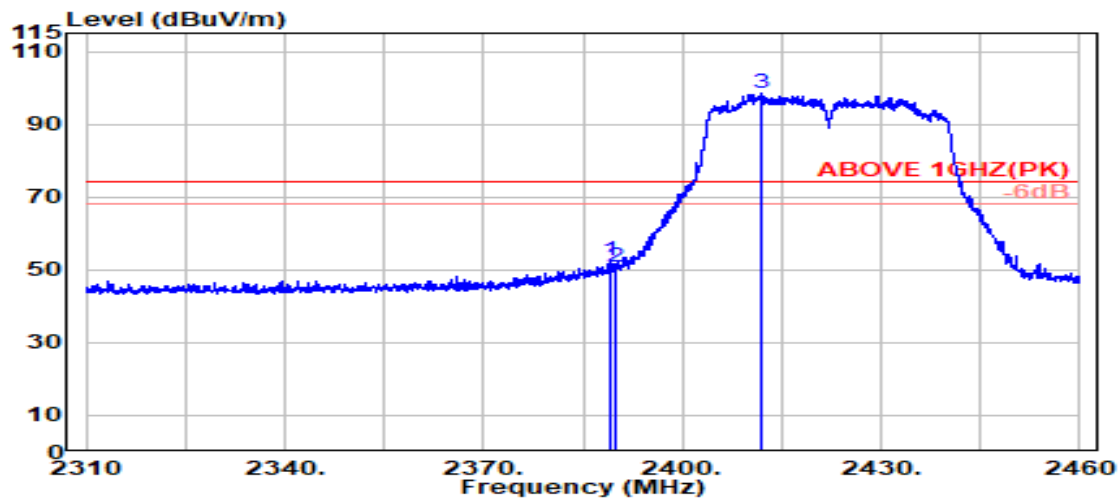

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.950                 | 28.20                 | 5.70            | 39.92                  | 58.53             | 52.52                   | 74.00           | 21.48       | Peak     |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 56.61             | 50.60                   | 74.00           | 23.40       | Peak     |
| @ 2412.000               | 28.22                 | 5.73            | 39.92                  | 104.54            | 98.58                   | ---             | ---         | Peak     |

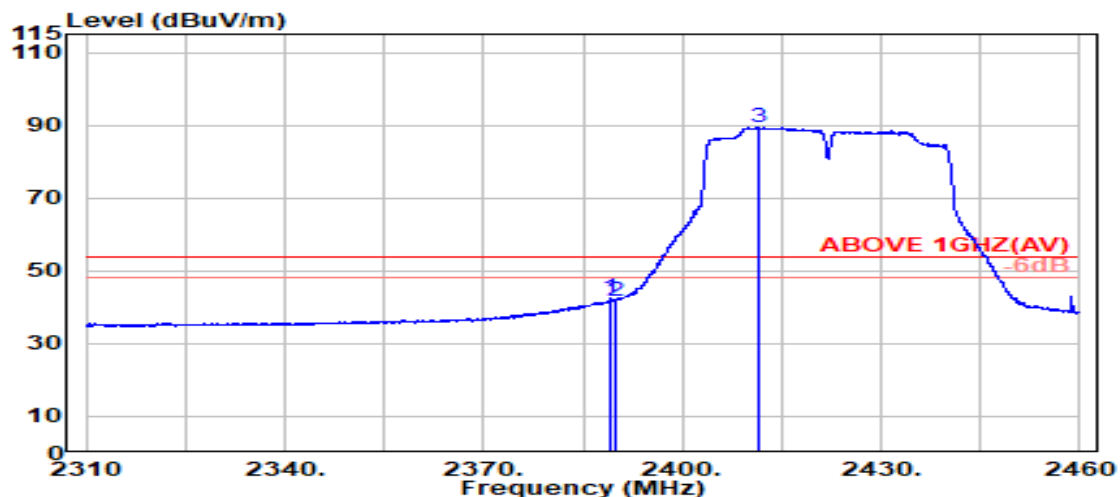

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.100                 | 28.20                 | 5.70            | 39.92                  | 48.36             | 42.34                   | 54.00           | 11.66       | Average  |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 47.70             | 41.68                   | 54.00           | 12.32       | Average  |
| @ 2411.400               | 28.22                 | 5.73            | 39.92                  | 95.27             | 89.30                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |              |           |             |
|------|--------------|-----------|-------------|
| Mode | 802.11n-HT40 | Frequency | TX 2427 MHz |
|------|--------------|-----------|-------------|

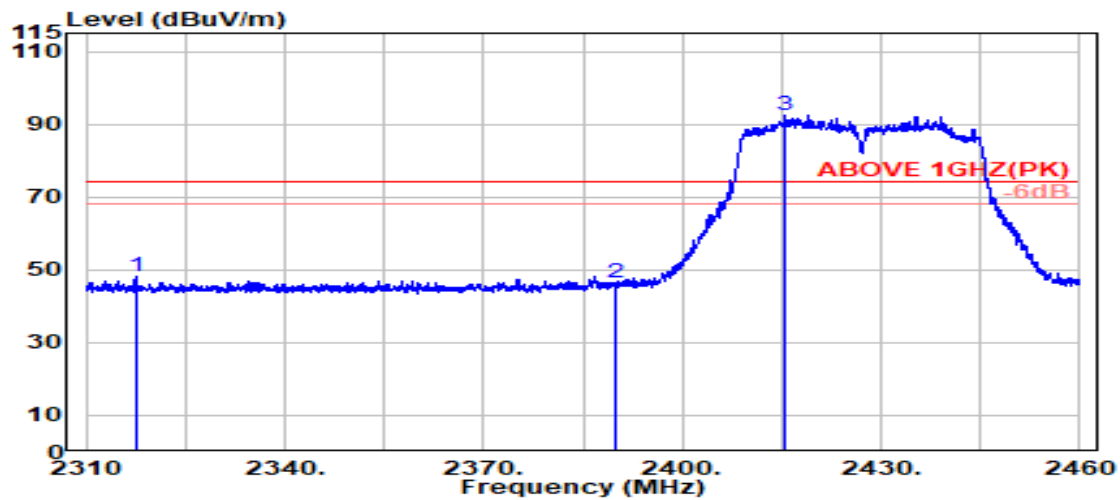

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2317.500                 | 28.07                 | 5.60            | 39.92            | 54.61             | 48.37                   | 74.00           | 25.63       | Peak     |
| 2389.800                 | 28.20                 | 5.70            | 39.92            | 52.36             | 46.35                   | 74.00           | 27.65       | Peak     |
| @ 2415.550               | 28.23                 | 5.74            | 39.92            | 98.33             | 92.38                   | ---             | ---         | Peak     |

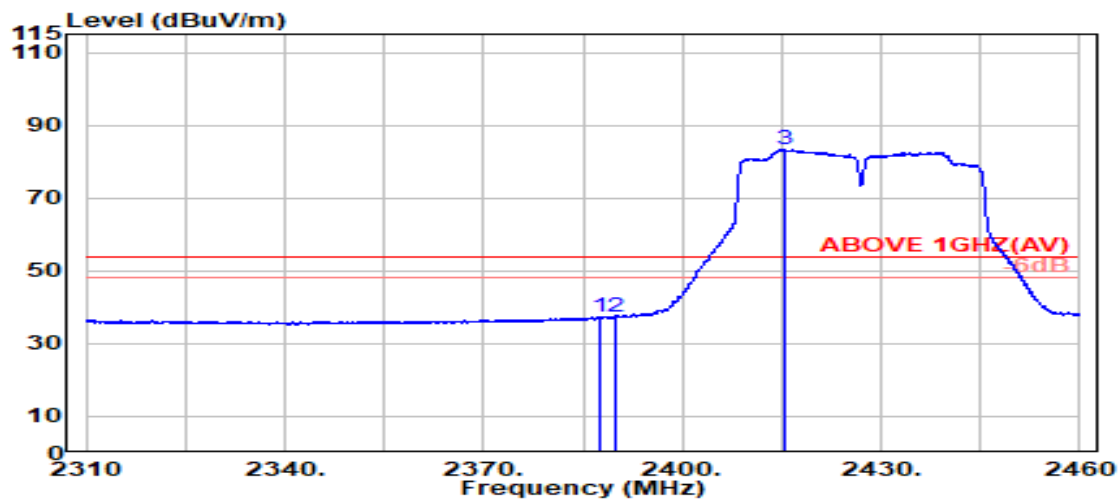

## Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2387.650                 | 28.20                 | 5.70            | 39.92            | 43.51             | 37.49                   | 54.00           | 16.51       | Average  |
| 2389.800                 | 28.20                 | 5.70            | 39.92            | 43.50             | 37.49                   | 54.00           | 16.51       | Average  |
| @ 2415.350               | 28.23                 | 5.74            | 39.92            | 89.37             | 83.42                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11n-HT40 | Frequency | TX 2427 MHz |
|------|--------------|-----------|-------------|
|------|--------------|-----------|-------------|

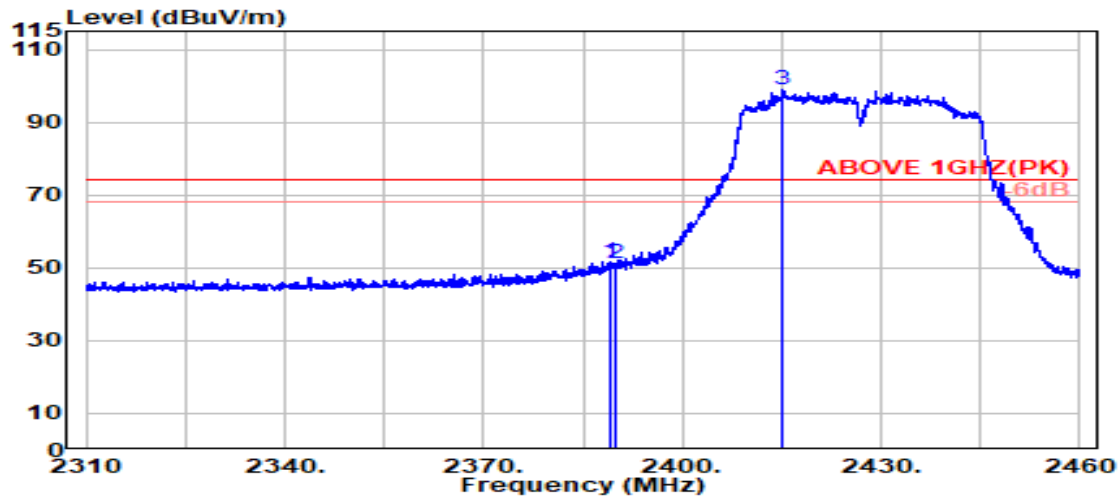

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.200                 | 28.20                 | 5.70            | 39.92                  | 57.61             | 51.59                   | 74.00           | 22.41       | Peak     |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 57.23             | 51.21                   | 74.00           | 22.79       | Peak     |
| @ 2415.150               | 28.23                 | 5.74            | 39.92                  | 104.83            | 98.88                   | ---             | ---         | Peak     |

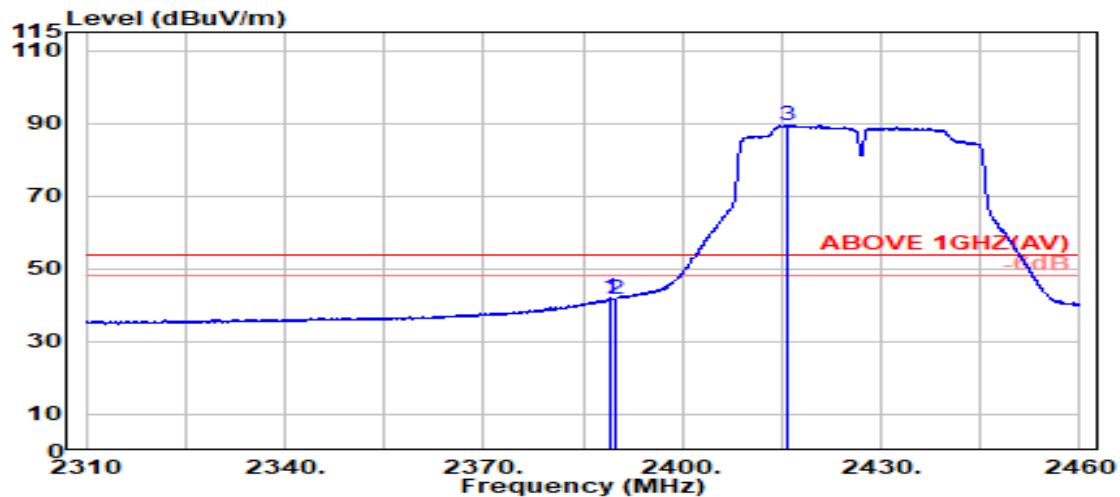

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.150                 | 28.20                 | 5.70            | 39.92                  | 48.21             | 42.20                   | 54.00           | 11.81       | Average  |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 47.80             | 41.78                   | 54.00           | 12.22       | Average  |
| @ 2415.900               | 28.23                 | 5.74            | 39.92                  | 95.25             | 89.30                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |              |           |             |
|------|--------------|-----------|-------------|
| Mode | 802.11n-HT40 | Frequency | TX 2452 MHz |
|------|--------------|-----------|-------------|

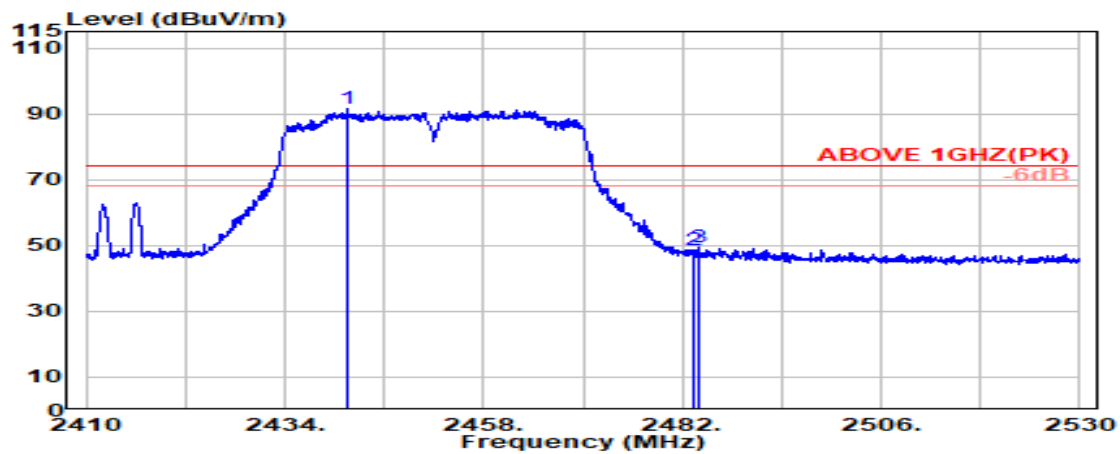

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2441.550               | 28.28                 | 5.77            | 39.92            | 97.48             | 91.61                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 54.37             | 48.71                   | 74.00           | 25.29       | Peak     |
| 2484.000                 | 28.44                 | 5.83            | 39.92            | 55.01             | 49.35                   | 74.00           | 24.65       | Peak     |

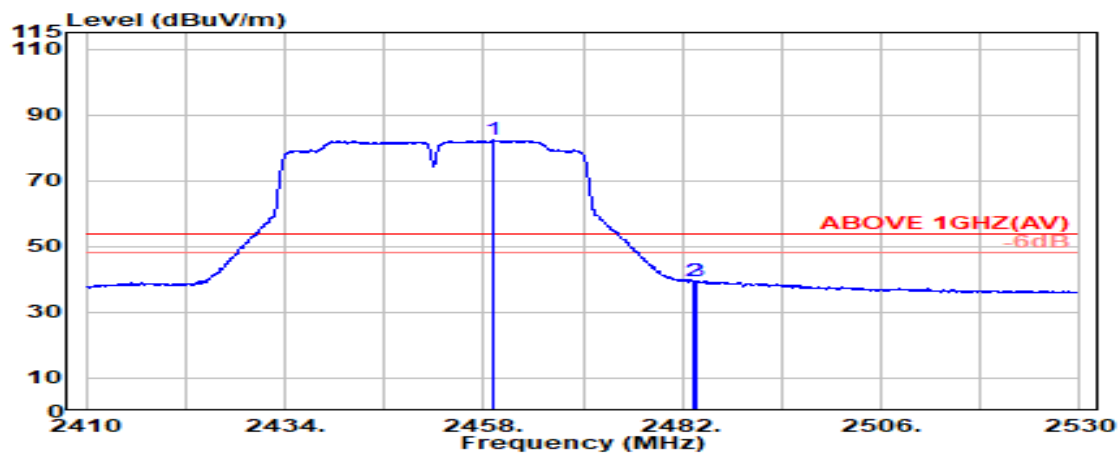


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2459.200               | 28.34                 | 5.80            | 39.92            | 88.13             | 82.35                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 45.02             | 39.37                   | 54.00           | 14.63       | Average  |
| 2483.750                 | 28.44                 | 5.83            | 39.92            | 45.20             | 39.55                   | 54.00           | 14.45       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |              |           |             |
|------|--------------|-----------|-------------|
| Mode | 802.11n-HT40 | Frequency | TX 2452 MHz |
|------|--------------|-----------|-------------|

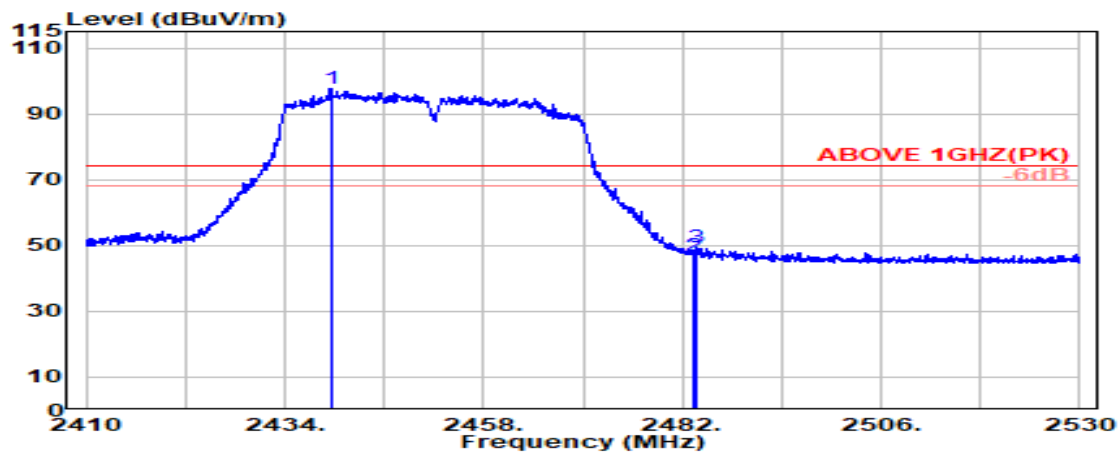

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2439.550               | 28.28                 | 5.77            | 39.92            | 103.51            | 97.64                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 52.62             | 46.97                   | 74.00           | 27.03       | Peak     |
| 2483.750                 | 28.44                 | 5.83            | 39.92            | 55.16             | 49.50                   | 74.00           | 24.50       | Peak     |

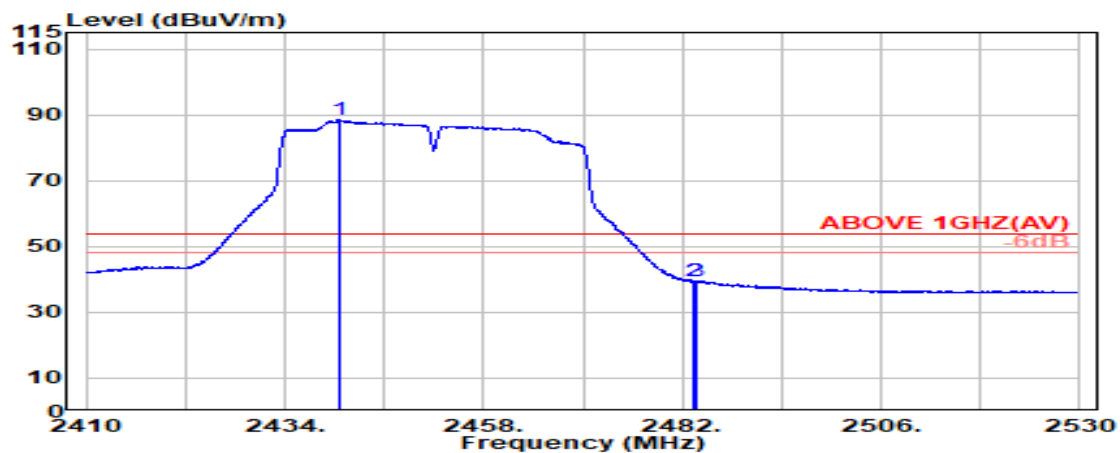


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2440.500               | 28.28                 | 5.77            | 39.92            | 94.20             | 88.34                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 45.09             | 39.43                   | 54.00           | 14.57       | Average  |
| 2483.750                 | 28.44                 | 5.83            | 39.92            | 45.23             | 39.57                   | 54.00           | 14.43       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |              |           |             |
|------|--------------|-----------|-------------|
| Mode | 802.11n-HT40 | Frequency | TX 2457 MHz |
|------|--------------|-----------|-------------|

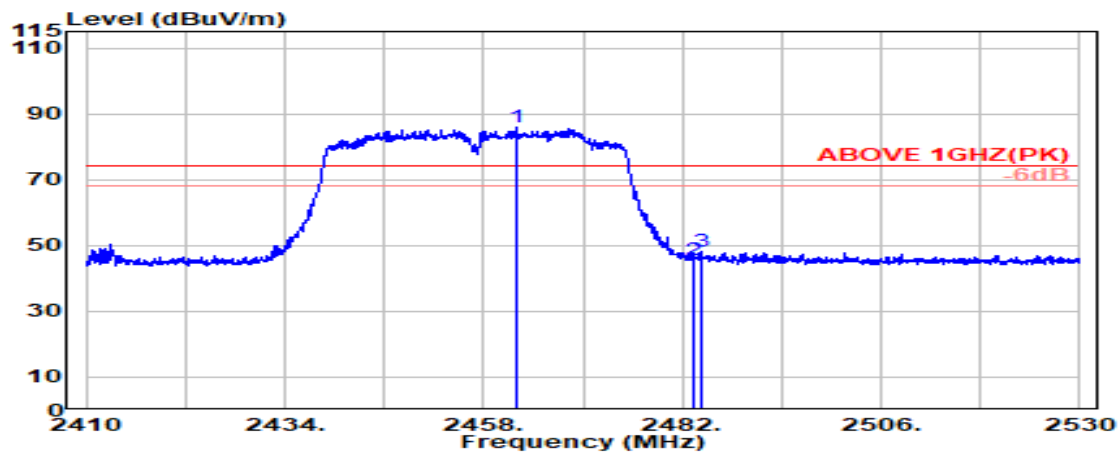

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2462.050               | 28.35                 | 5.80            | 39.92            | 91.80             | 86.03                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 51.22             | 45.56                   | 74.00           | 28.44       | Peak     |
| 2484.200                 | 28.44                 | 5.83            | 39.92            | 53.86             | 48.20                   | 74.00           | 25.80       | Peak     |

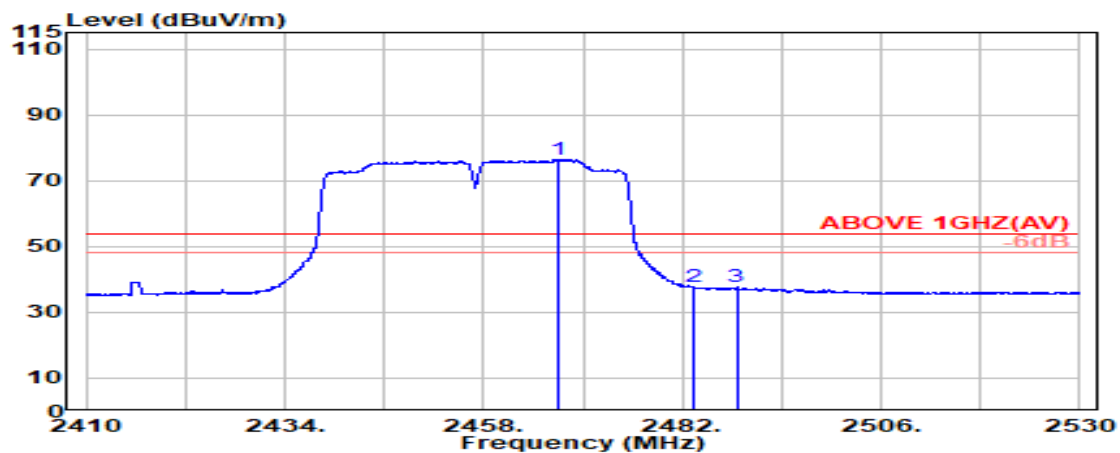


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2467.050               | 28.37                 | 5.81            | 39.92            | 82.14             | 76.40                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 43.37             | 37.71                   | 54.00           | 16.29       | Average  |
| 2488.550                 | 28.45                 | 5.83            | 39.92            | 43.27             | 37.64                   | 54.00           | 16.36       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|      |              |           |             |
|------|--------------|-----------|-------------|
| Mode | 802.11n-HT40 | Frequency | TX 2457 MHz |
|------|--------------|-----------|-------------|

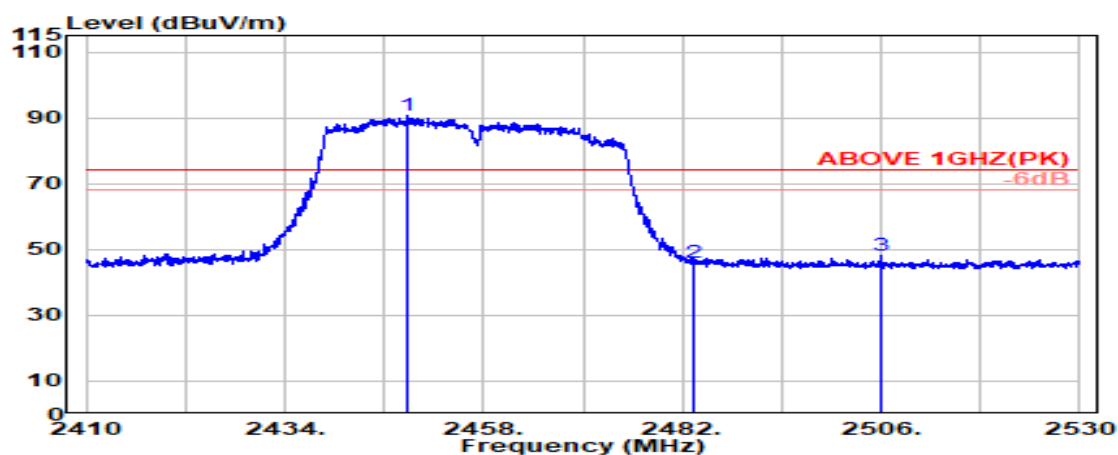

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2448.800               | 28.30                 | 5.78            | 39.92            | 96.38             | 90.54                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 51.71             | 46.05                   | 74.00           | 27.95       | Peak     |
| 2506.050                 | 28.52                 | 5.86            | 39.92            | 53.83             | 48.29                   | 74.00           | 25.71       | Peak     |

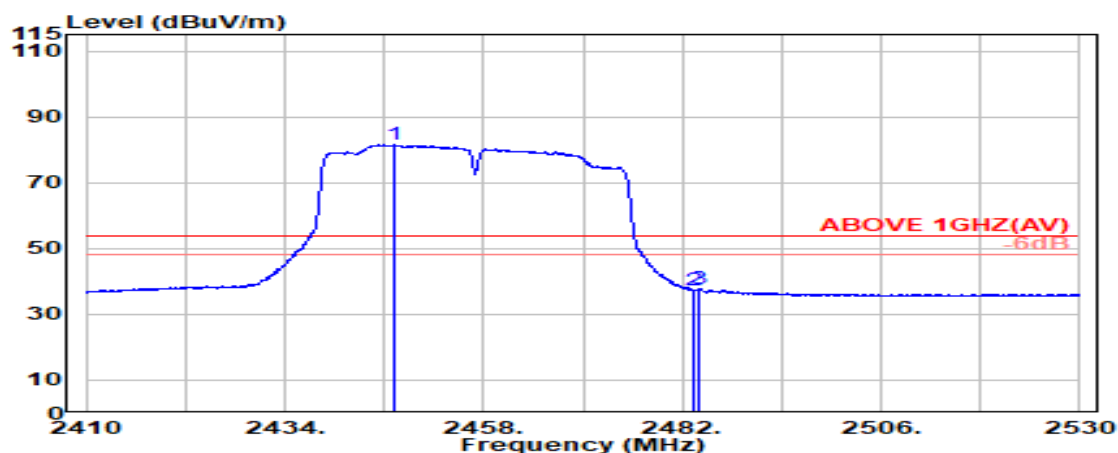


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2447.200               | 28.29                 | 5.78            | 39.92            | 87.33             | 81.49                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 43.11             | 37.45                   | 54.00           | 16.55       | Average  |
| 2484.100                 | 28.44                 | 5.83            | 39.92            | 43.25             | 37.60                   | 54.00           | 16.40       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| Mode | 802.11n-HT40 | Frequency | TX 2462 MHz |
|------|--------------|-----------|-------------|
|------|--------------|-----------|-------------|

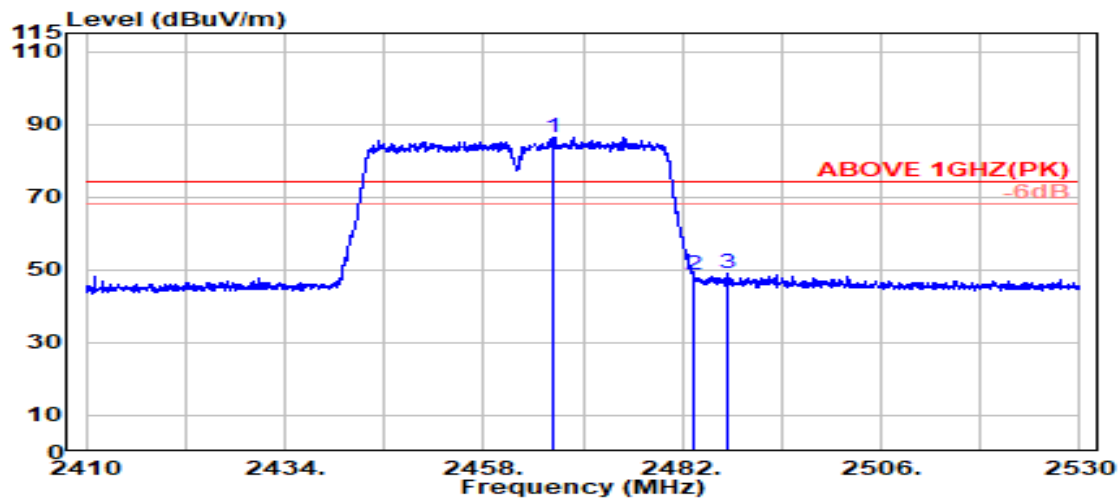

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2466.500               | 28.37                 | 5.81            | 39.92                  | 92.31             | 86.56                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 54.37             | 48.72                   | 74.00           | 25.28       | Peak     |
| 2487.400                 | 28.45                 | 5.83            | 39.92                  | 54.84             | 49.21                   | 74.00           | 24.79       | Peak     |

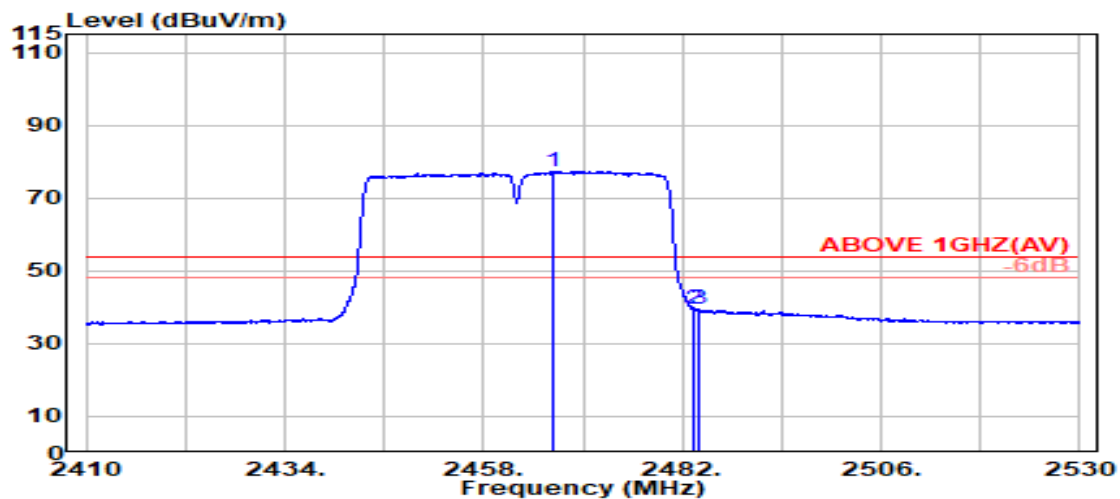

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2466.350               | 28.37                 | 5.81            | 39.92                  | 83.14             | 77.39                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 44.94             | 39.28                   | 54.00           | 14.72       | Average  |
| 2483.950                 | 28.44                 | 5.83            | 39.92                  | 45.03             | 39.37                   | 54.00           | 14.63       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11n-HT40 | Frequency | TX 2462 MHz |
|------|--------------|-----------|-------------|
|------|--------------|-----------|-------------|

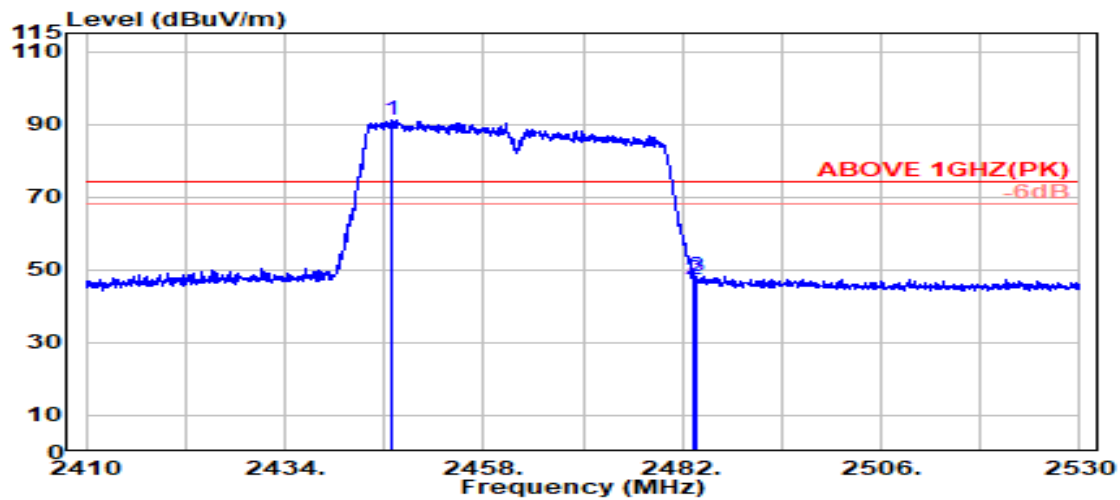

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2447.050               | 28.29                 | 5.78            | 39.92                  | 97.13             | 91.28                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 52.82             | 47.17                   | 74.00           | 26.83       | Peak     |
| 2483.750                 | 28.44                 | 5.83            | 39.92                  | 53.91             | 48.25                   | 74.00           | 25.75       | Peak     |

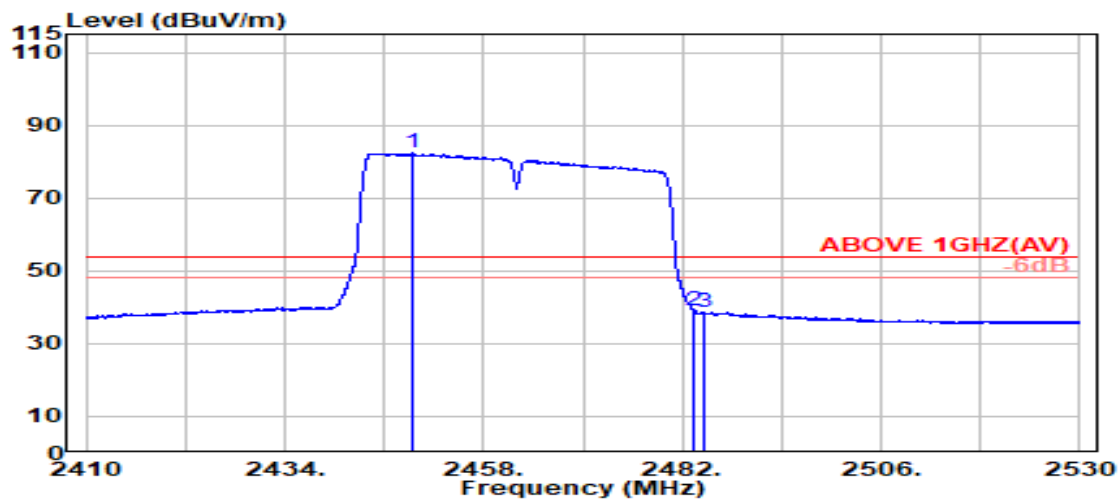

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2449.350               | 28.30                 | 5.78            | 39.92                  | 88.14             | 82.30                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 44.68             | 39.02                   | 54.00           | 14.98       | Average  |
| 2484.500                 | 28.44                 | 5.83            | 39.92                  | 44.28             | 38.62                   | 54.00           | 15.38       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11ax-HE20 | Frequency | TX 2412 MHz |
|------|---------------|-----------|-------------|
|------|---------------|-----------|-------------|

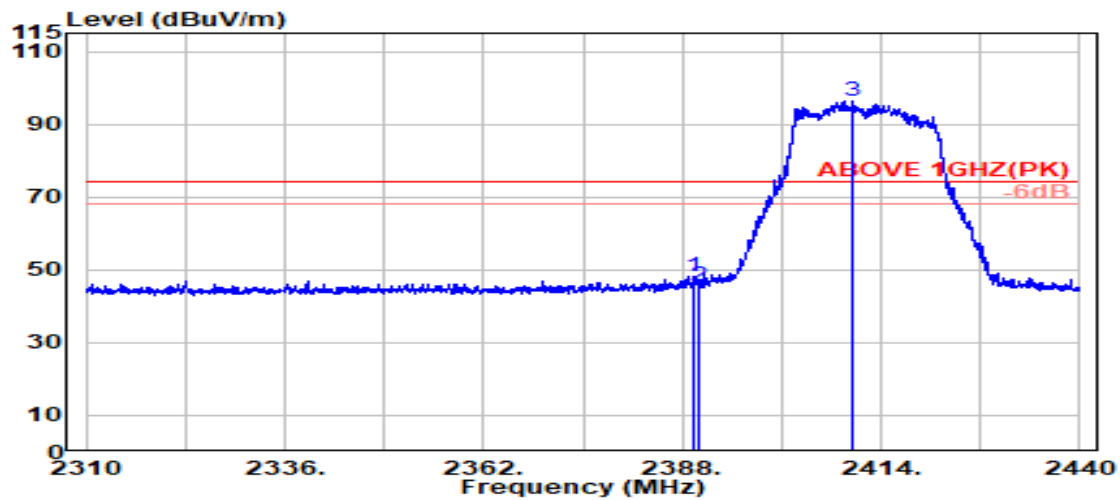

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.625                 | 28.20                 | 5.70            | 39.92                  | 54.36             | 48.34                   | 74.00           | 25.66       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 51.76             | 45.75                   | 74.00           | 28.25       | Peak     |
| @ 2410.262               | 28.22                 | 5.73            | 39.92                  | 102.38            | 96.41                   | ---             | ---         | Peak     |

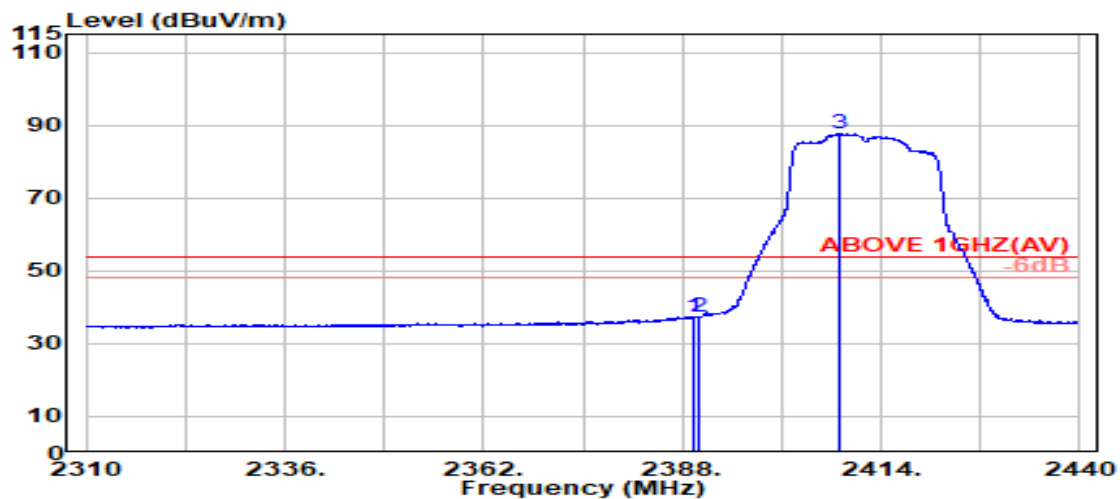

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.462                 | 28.20                 | 5.70            | 39.92                  | 43.34             | 37.32                   | 54.00           | 16.68       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 43.46             | 37.44                   | 54.00           | 16.56       | Average  |
| @ 2408.475               | 28.22                 | 5.73            | 39.92                  | 93.71             | 87.73                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11ax-HE20 | Frequency | TX 2412 MHz |
|------|---------------|-----------|-------------|
|------|---------------|-----------|-------------|

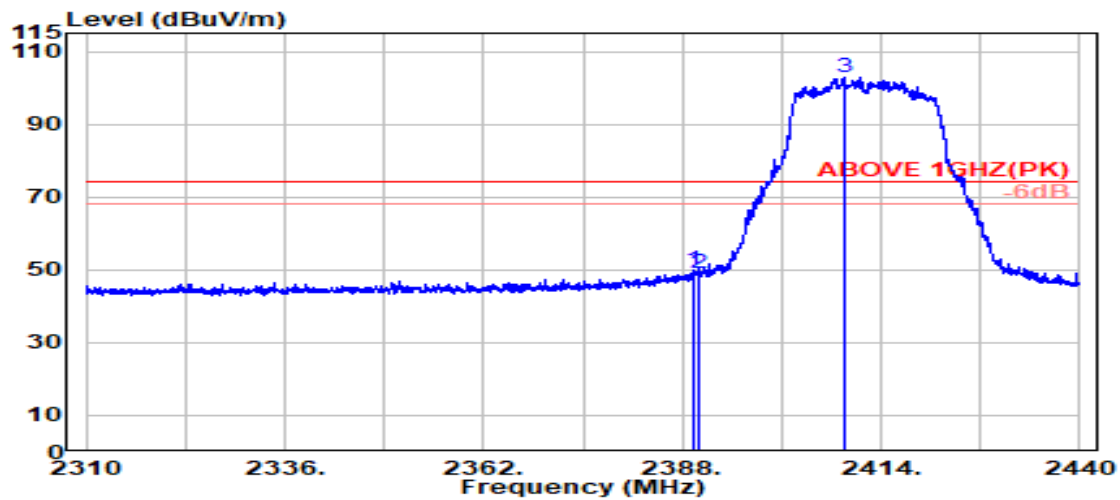

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.571                 | 28.20                 | 5.70            | 39.92                  | 55.99             | 49.98                   | 74.00           | 24.02       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 55.00             | 48.99                   | 74.00           | 25.01       | Peak     |
| @ 2409.071               | 28.22                 | 5.73            | 39.92                  | 108.92            | 102.95                  | ---             | ---         | Peak     |

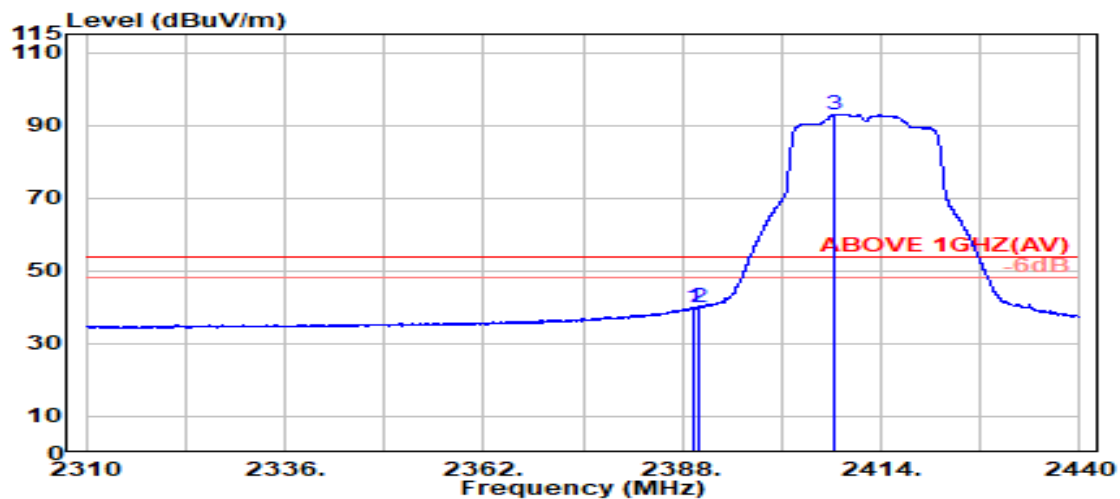

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.571                 | 28.20                 | 5.70            | 39.92                  | 46.00             | 39.99                   | 54.00           | 14.01       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 45.81             | 39.79                   | 54.00           | 14.21       | Average  |
| @ 2407.988               | 28.22                 | 5.73            | 39.92                  | 99.04             | 93.07                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11ax-HE20 | Frequency | TX 2417 MHz |
|------|---------------|-----------|-------------|
|------|---------------|-----------|-------------|

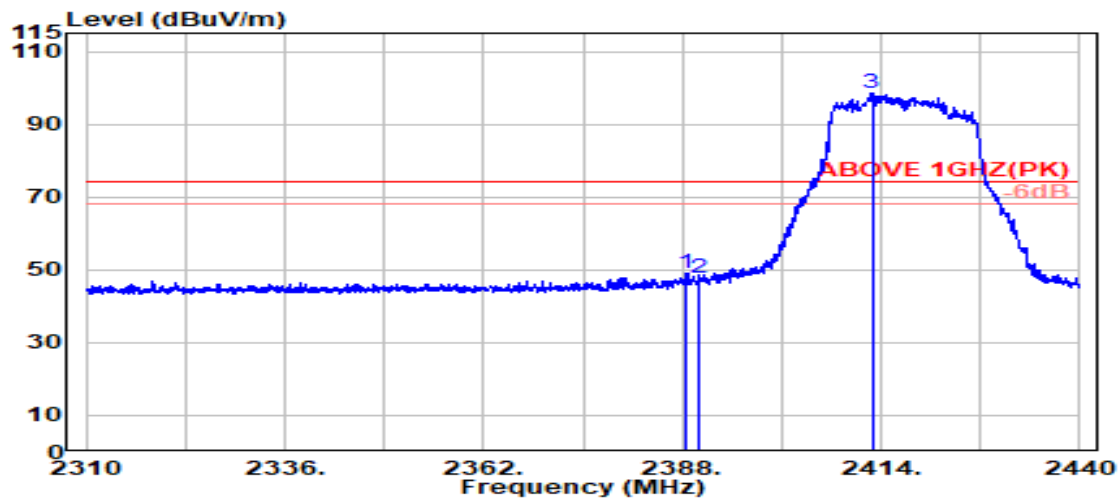

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.596                 | 28.20                 | 5.70            | 39.92                  | 55.24             | 49.22                   | 74.00           | 24.78       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 53.60             | 47.59                   | 74.00           | 26.41       | Peak     |
| @ 2412.808               | 28.23                 | 5.73            | 39.92                  | 104.40            | 98.45                   | ---             | ---         | Peak     |

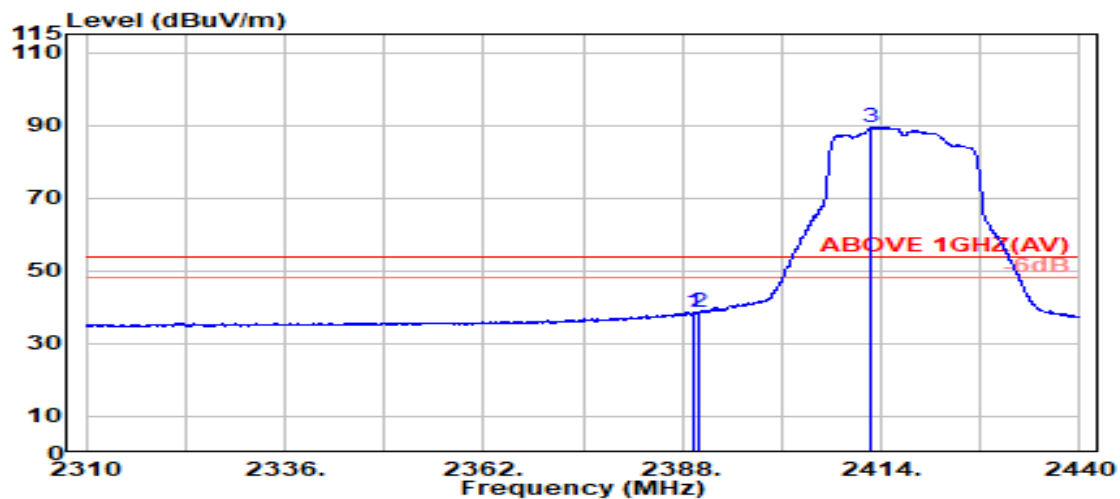

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.625                 | 28.20                 | 5.70            | 39.92                  | 44.60             | 38.58                   | 54.00           | 15.42       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 44.42             | 38.41                   | 54.00           | 15.59       | Average  |
| @ 2412.592               | 28.23                 | 5.73            | 39.92                  | 95.32             | 89.36                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |               |           |             |
|------|---------------|-----------|-------------|
| Mode | 802.11ax-HE20 | Frequency | TX 2417 MHz |
|------|---------------|-----------|-------------|

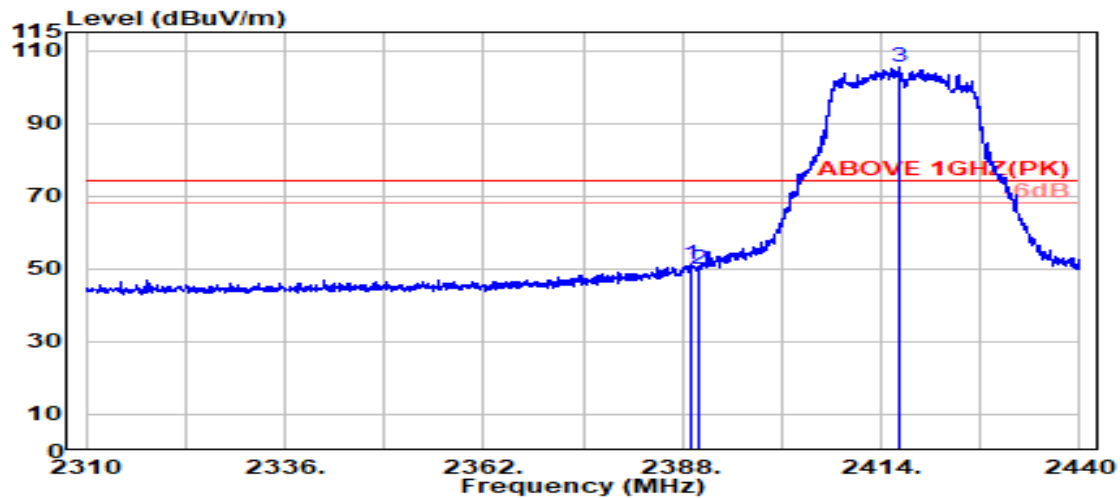

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.083                 | 28.20                 | 5.70            | 39.92                  | 57.15             | 51.14                   | 74.00           | 22.86       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 55.86             | 49.85                   | 74.00           | 24.15       | Peak     |
| @ 2416.383               | 28.23                 | 5.74            | 39.92                  | 111.19            | 105.24                  | ---             | ---         | Peak     |

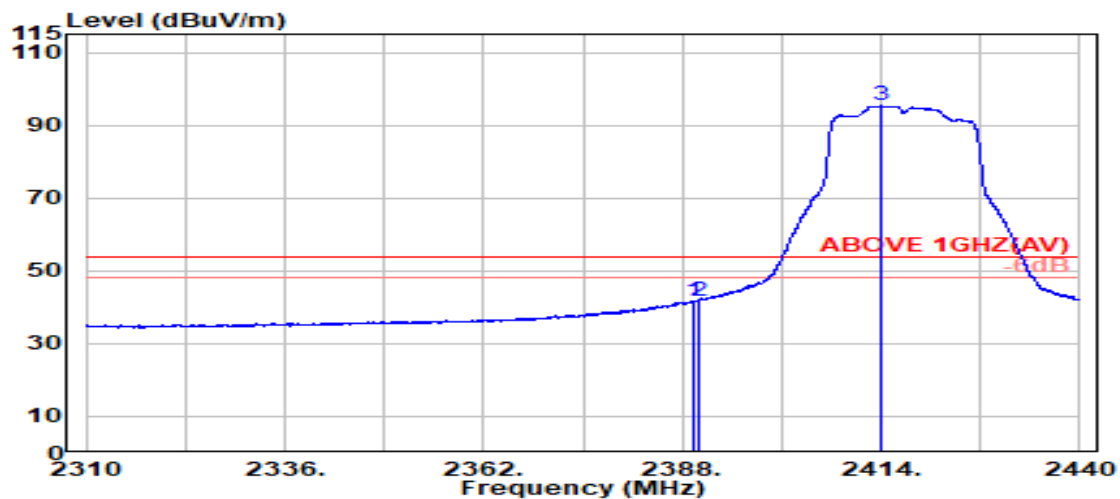

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.625                 | 28.20                 | 5.70            | 39.92                  | 47.84             | 41.83                   | 54.00           | 12.17       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 47.68             | 41.67                   | 54.00           | 12.33       | Average  |
| @ 2414.054               | 28.23                 | 5.74            | 39.92                  | 101.23            | 95.27                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |               |           |             |
|------|---------------|-----------|-------------|
| Mode | 802.11ax-HE20 | Frequency | TX 2457 MHz |
|------|---------------|-----------|-------------|

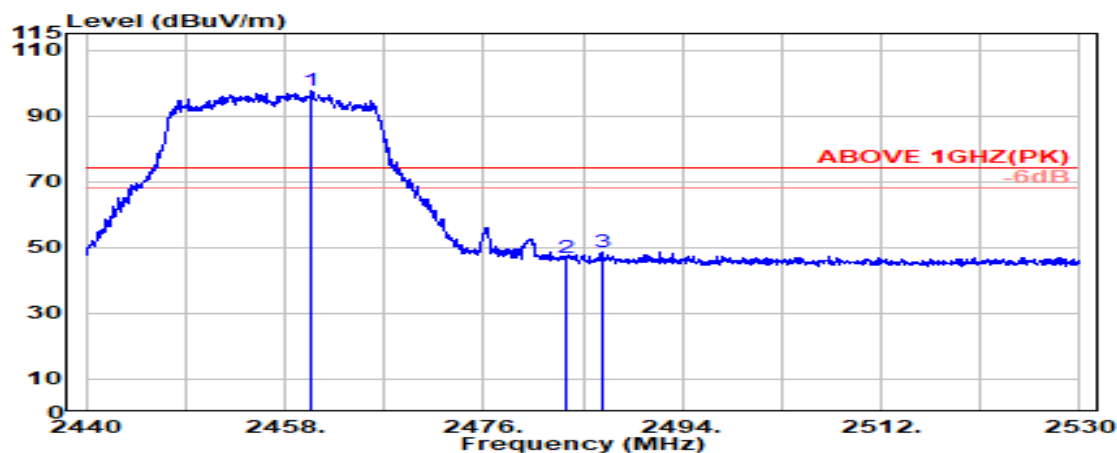

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2460.450               | 28.34                 | 5.80            | 39.92            | 103.44            | 97.66                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 52.69             | 47.03                   | 74.00           | 26.97       | Peak     |
| 2486.750                 | 28.45                 | 5.83            | 39.92            | 54.37             | 48.73                   | 74.00           | 25.27       | Peak     |

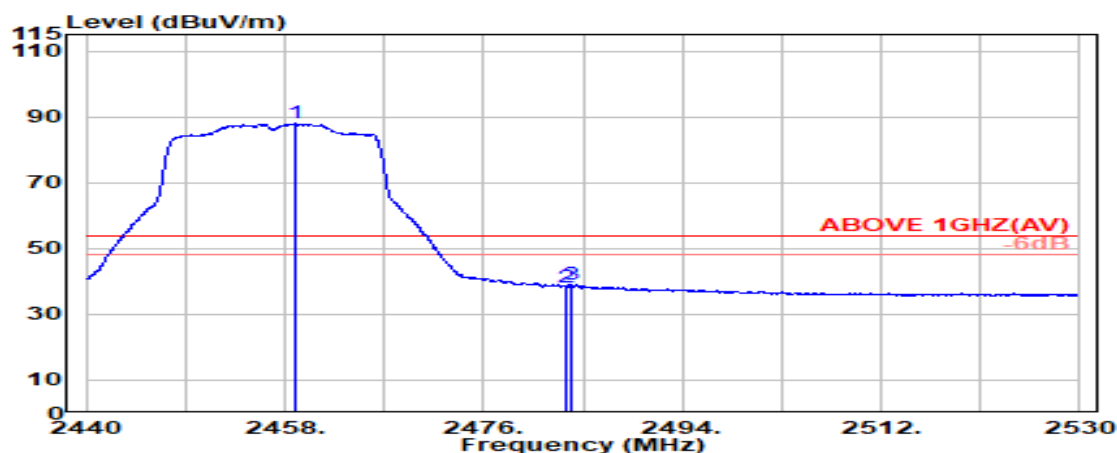


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2458.950               | 28.34                 | 5.80            | 39.92            | 93.67             | 87.88                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 43.84             | 38.18                   | 54.00           | 15.82       | Average  |
| 2483.850                 | 28.44                 | 5.83            | 39.92            | 44.74             | 39.08                   | 54.00           | 14.92       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section

|      |               |           |             |
|------|---------------|-----------|-------------|
| Mode | 802.11ax-HE20 | Frequency | TX 2457 MHz |
|------|---------------|-----------|-------------|

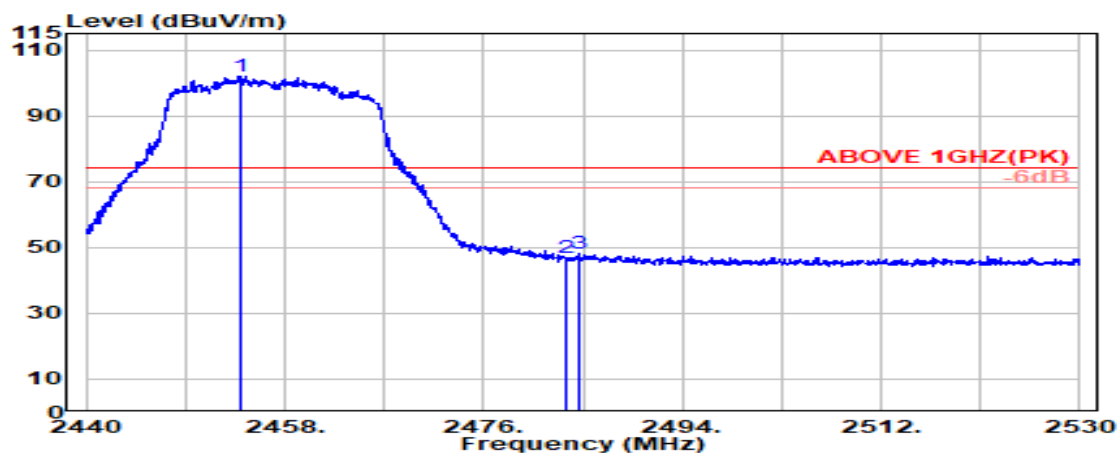

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2453.900               | 28.32                 | 5.79            | 39.92            | 107.97            | 102.16                  | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 52.55             | 46.89                   | 74.00           | 27.11       | Peak     |
| 2484.650                 | 28.44                 | 5.83            | 39.92            | 53.64             | 47.99                   | 74.00           | 26.01       | Peak     |

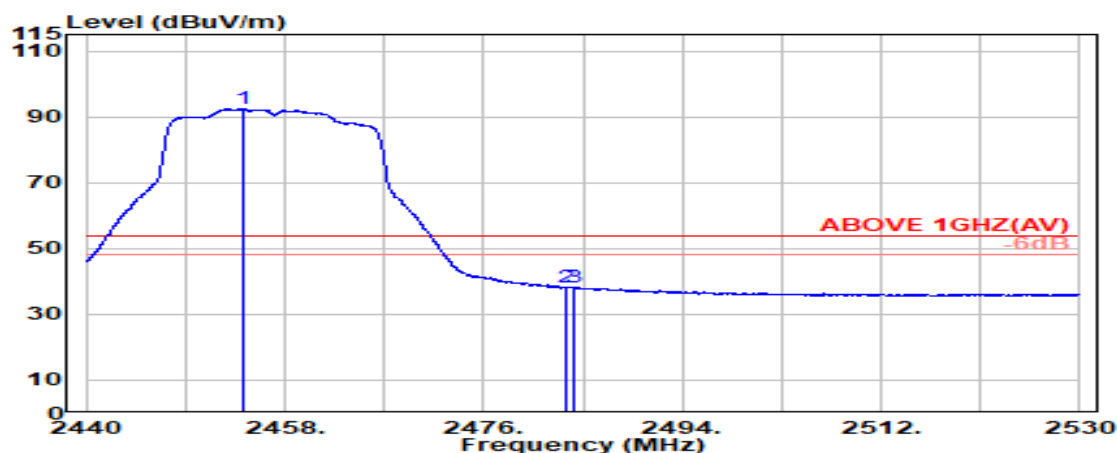

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2454.350               | 28.32                 | 5.79            | 39.92            | 98.46             | 92.65                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 43.87             | 38.22                   | 54.00           | 15.78       | Average  |
| 2484.250                 | 28.44                 | 5.83            | 39.92            | 43.93             | 38.28                   | 54.00           | 15.72       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |               |           |             |
|------|---------------|-----------|-------------|
| Mode | 802.11ax-HE20 | Frequency | TX 2462 MHz |
|------|---------------|-----------|-------------|

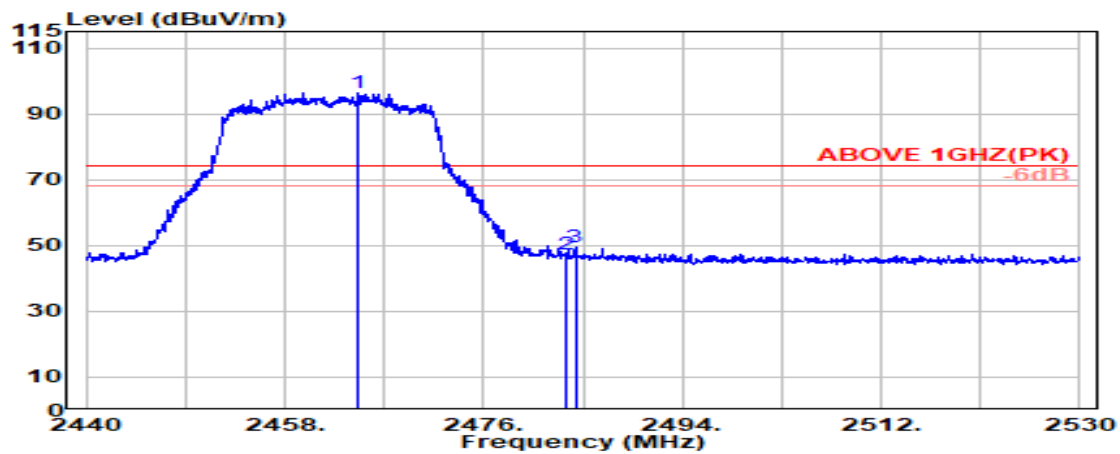

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2464.700               | 28.36                 | 5.80            | 39.92            | 102.25            | 96.49                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 52.94             | 47.28                   | 74.00           | 26.72       | Peak     |
| 2484.300                 | 28.44                 | 5.83            | 39.92            | 54.91             | 49.26                   | 74.00           | 24.74       | Peak     |

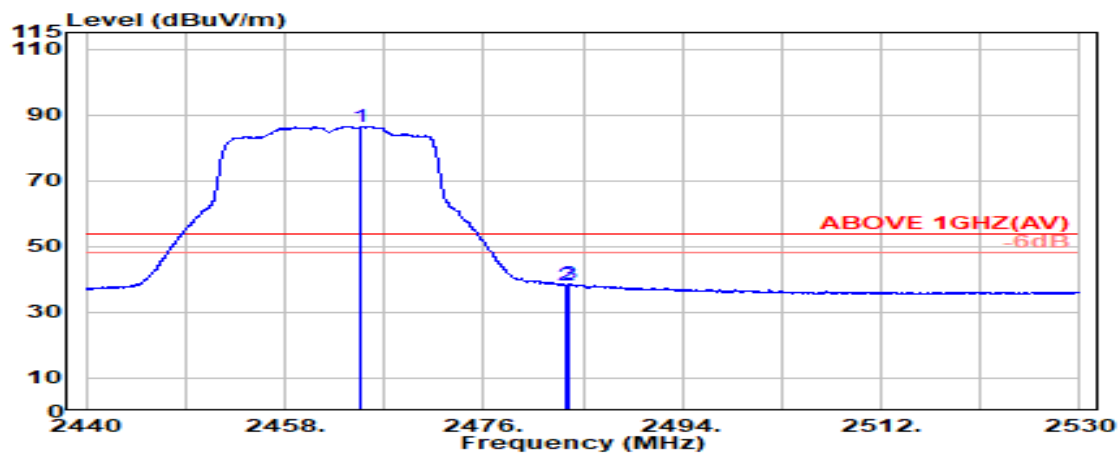

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2464.800               | 28.36                 | 5.80            | 39.92            | 92.26             | 86.50                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 44.00             | 38.34                   | 54.00           | 15.66       | Average  |
| 2483.700                 | 28.44                 | 5.83            | 39.92            | 44.13             | 38.48                   | 54.00           | 15.52       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |               |           |             |
|------|---------------|-----------|-------------|
| Mode | 802.11ax-HE20 | Frequency | TX 2462 MHz |
|------|---------------|-----------|-------------|

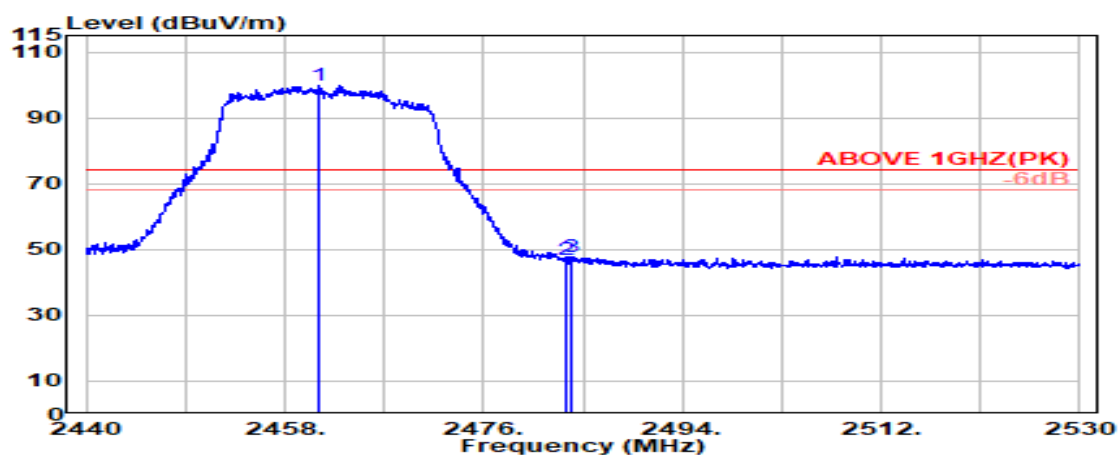

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2461.150               | 28.34                 | 5.80            | 39.92                  | 105.63            | 99.86                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 52.59             | 46.93                   | 74.00           | 27.07       | Peak     |
| 2483.900                 | 28.44                 | 5.83            | 39.92                  | 53.57             | 47.92                   | 74.00           | 26.08       | Peak     |

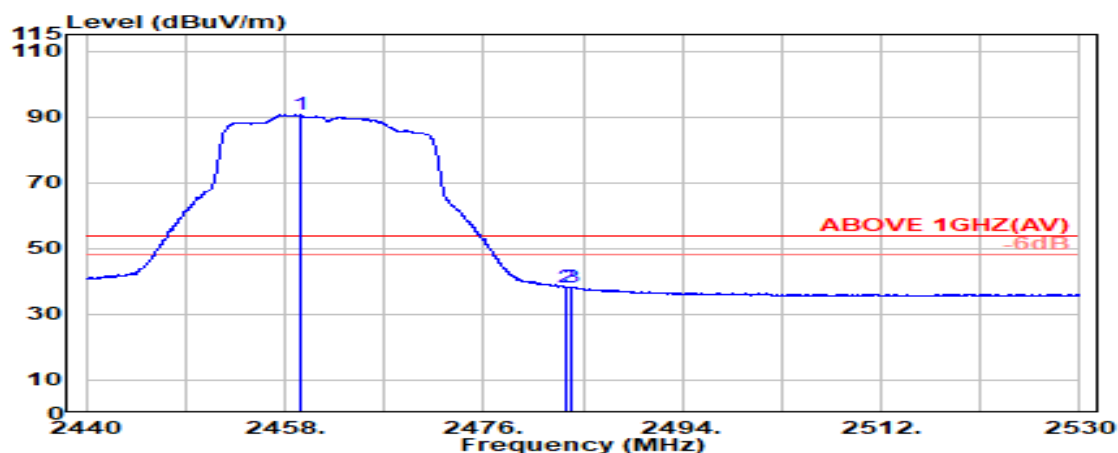

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2459.450               | 28.34                 | 5.80            | 39.92                  | 96.50             | 90.71                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 43.80             | 38.14                   | 54.00           | 15.86       | Average  |
| 2483.850                 | 28.44                 | 5.83            | 39.92                  | 43.96             | 38.31                   | 54.00           | 15.69       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |               |           |             |
|------|---------------|-----------|-------------|
| Mode | 802.11ax-HE20 | Frequency | TX 2467 MHz |
|------|---------------|-----------|-------------|

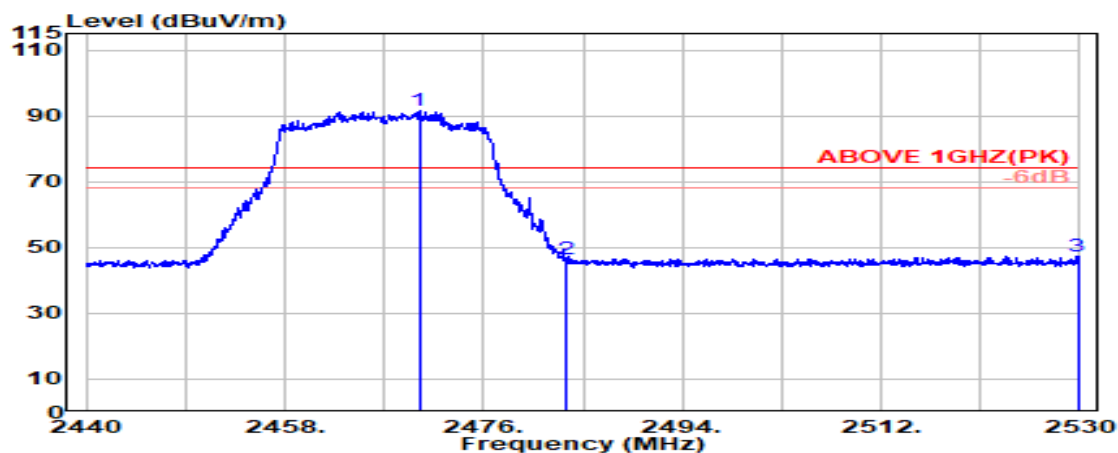

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2470.150               | 28.38                 | 5.81            | 39.92            | 97.32             | 91.59                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 52.09             | 46.43                   | 74.00           | 27.57       | Peak     |
| 2529.800                 | 28.62                 | 5.88            | 39.93            | 52.90             | 47.48                   | 74.00           | 26.52       | Peak     |

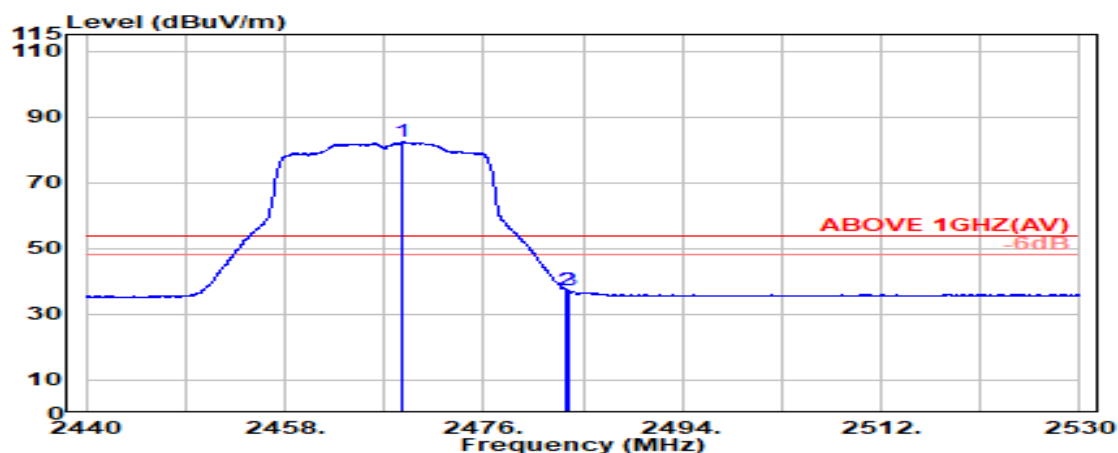

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2468.650               | 28.38                 | 5.81            | 39.92            | 88.06             | 82.32                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 43.15             | 37.49                   | 54.00           | 16.51       | Average  |
| 2483.700                 | 28.44                 | 5.83            | 39.92            | 42.90             | 37.24                   | 54.00           | 16.76       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |               |           |             |
|------|---------------|-----------|-------------|
| Mode | 802.11ax-HE20 | Frequency | TX 2467 MHz |
|------|---------------|-----------|-------------|

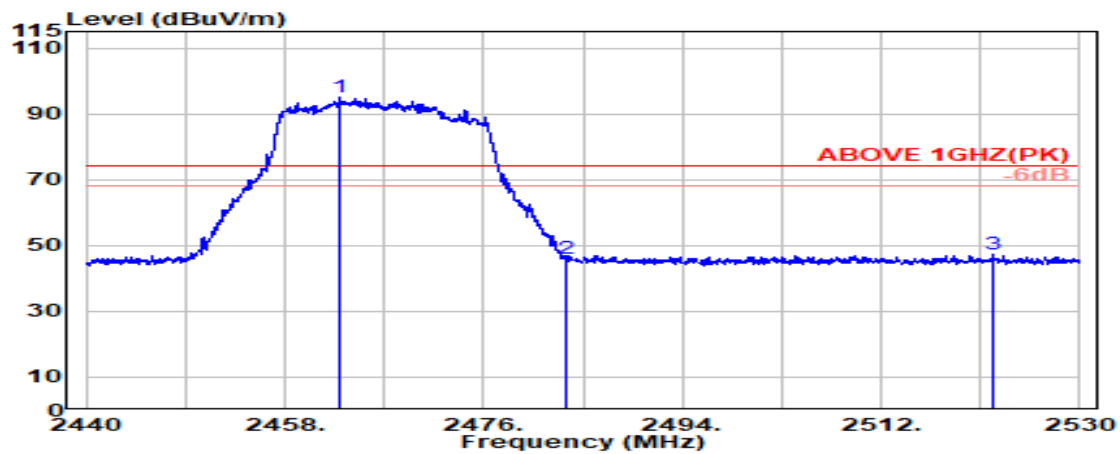

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2462.950               | 28.35                 | 5.80            | 39.92            | 100.77            | 95.01                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 51.55             | 45.90                   | 74.00           | 28.10       | Peak     |
| 2522.250                 | 28.59                 | 5.88            | 39.92            | 52.68             | 47.22                   | 74.00           | 26.78       | Peak     |

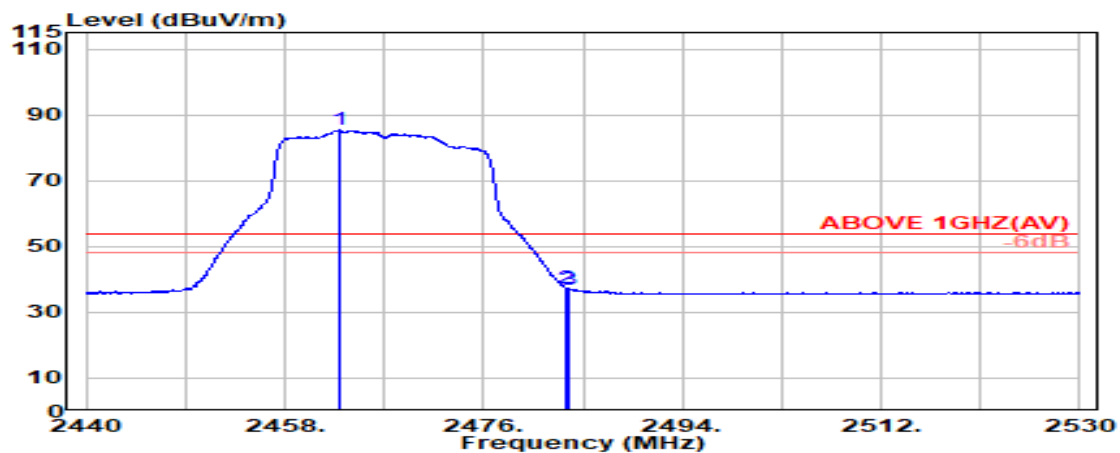

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2462.950               | 28.35                 | 5.80            | 39.92            | 91.09             | 85.32                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 42.98             | 37.33                   | 54.00           | 16.67       | Average  |
| 2483.700                 | 28.44                 | 5.83            | 39.92            | 42.75             | 37.09                   | 54.00           | 16.91       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |               |           |             |
|------|---------------|-----------|-------------|
| Mode | 802.11ax-HE20 | Frequency | TX 2472 MHz |
|------|---------------|-----------|-------------|

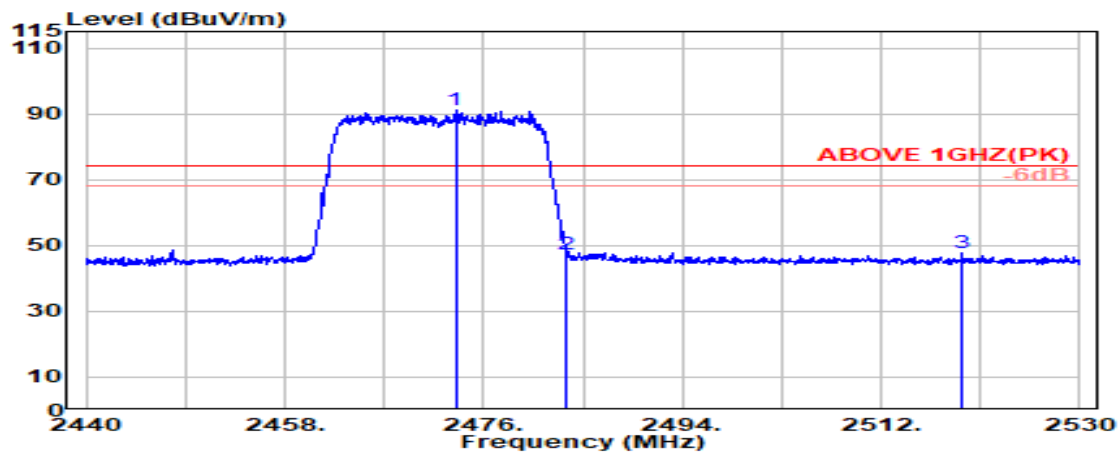

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2473.450               | 28.39                 | 5.82            | 39.92            | 96.67             | 90.96                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 52.82             | 47.16                   | 74.00           | 26.84       | Peak     |
| 2519.350                 | 28.58                 | 5.87            | 39.92            | 53.40             | 47.93                   | 74.00           | 26.07       | Peak     |

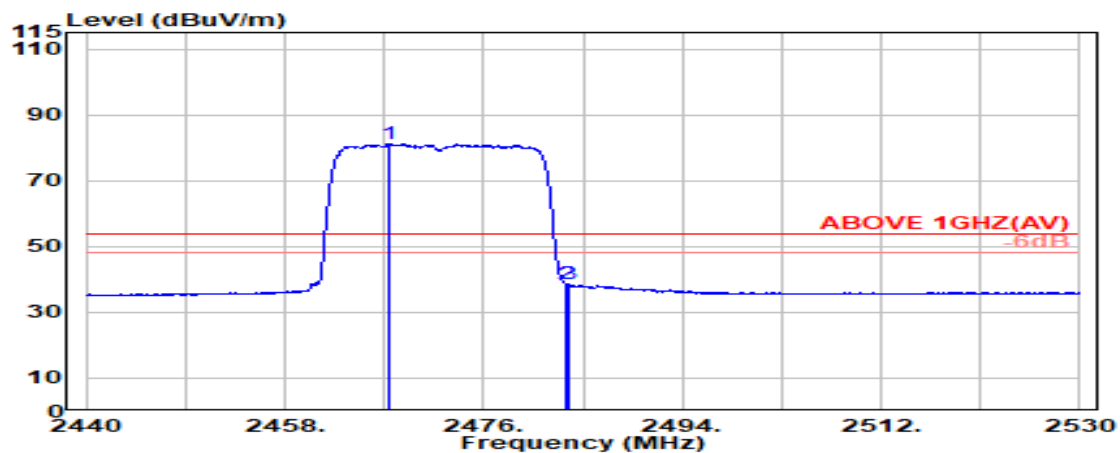


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2467.500               | 28.37                 | 5.81            | 39.92            | 86.89             | 81.15                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 44.37             | 38.71                   | 54.00           | 15.29       | Average  |
| 2483.700                 | 28.44                 | 5.83            | 39.92            | 44.42             | 38.77                   | 54.00           | 15.23       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section

|      |               |           |             |
|------|---------------|-----------|-------------|
| Mode | 802.11ax-HE20 | Frequency | TX 2472 MHz |
|------|---------------|-----------|-------------|

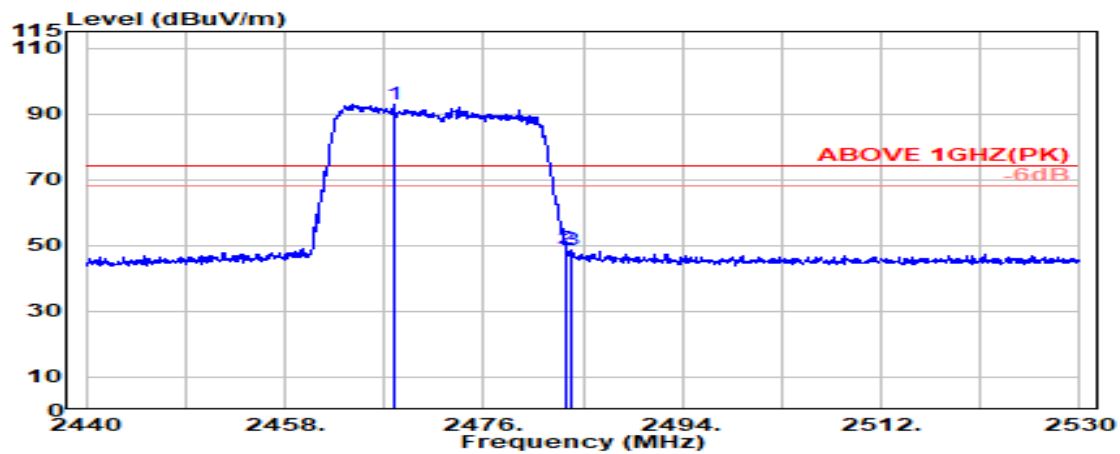

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2467.950               | 28.37                 | 5.81            | 39.92                  | 98.63             | 92.89                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 54.66             | 49.01                   | 74.00           | 24.99       | Peak     |
| 2483.850                 | 28.44                 | 5.83            | 39.92                  | 54.43             | 48.77                   | 74.00           | 25.23       | Peak     |

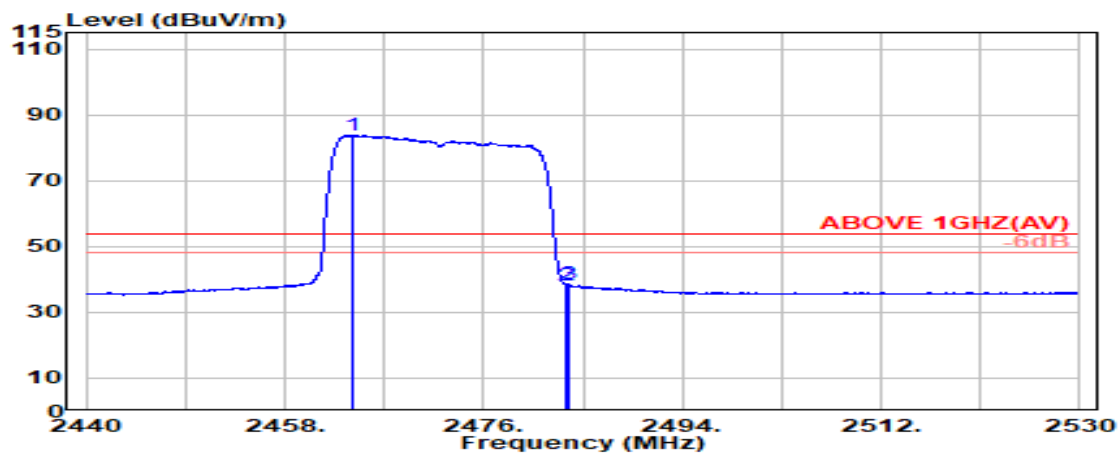

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2464.050               | 28.36                 | 5.80            | 39.92                  | 89.58             | 83.82                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 44.01             | 38.35                   | 54.00           | 15.65       | Average  |
| 2483.700                 | 28.44                 | 5.83            | 39.92                  | 44.23             | 38.58                   | 54.00           | 15.42       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11ax-HE40 | Frequency | TX 2422MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

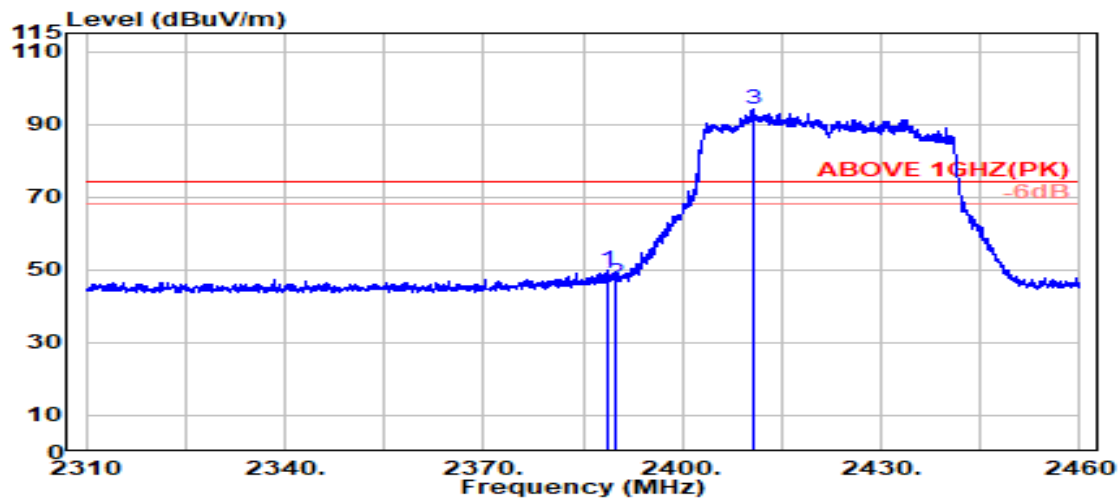

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.600                 | 28.20                 | 5.70            | 39.92                  | 55.79             | 49.78                   | 74.00           | 24.22       | Peak     |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 52.44             | 46.43                   | 74.00           | 27.57       | Peak     |
| @ 2410.700               | 28.22                 | 5.73            | 39.92                  | 100.09            | 94.13                   | ---             | ---         | Peak     |

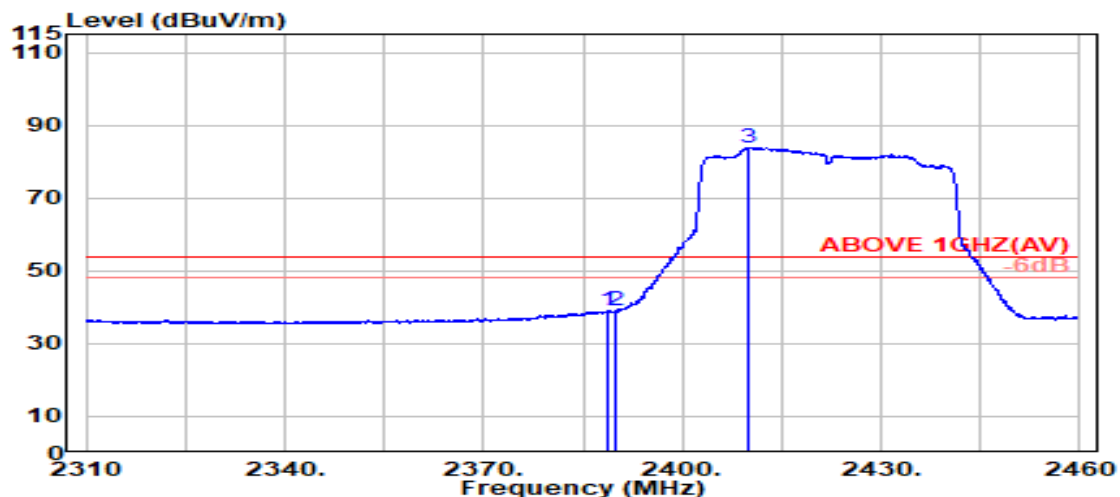

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.700                 | 28.20                 | 5.70            | 39.92                  | 45.06             | 39.04                   | 54.00           | 14.96       | Average  |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 45.07             | 39.06                   | 54.00           | 14.94       | Average  |
| @ 2409.850               | 28.22                 | 5.73            | 39.92                  | 89.93             | 83.96                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11ax-HE40 | Frequency | TX 2422MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

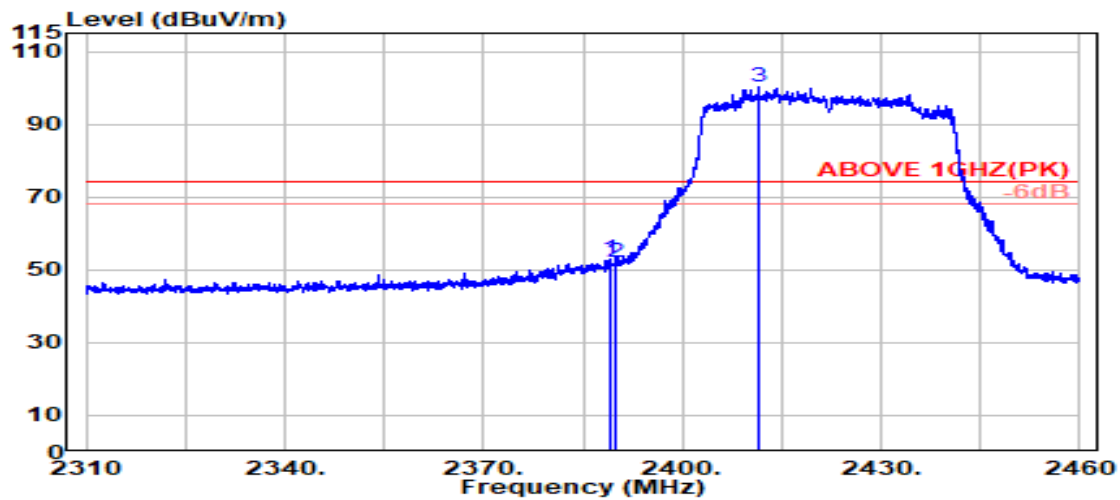

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.950                 | 28.20                 | 5.70            | 39.92                  | 58.74             | 52.73                   | 74.00           | 21.27       | Peak     |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 58.09             | 52.08                   | 74.00           | 21.92       | Peak     |
| @ 2411.500               | 28.22                 | 5.73            | 39.92                  | 106.09            | 100.12                  | ---             | ---         | Peak     |

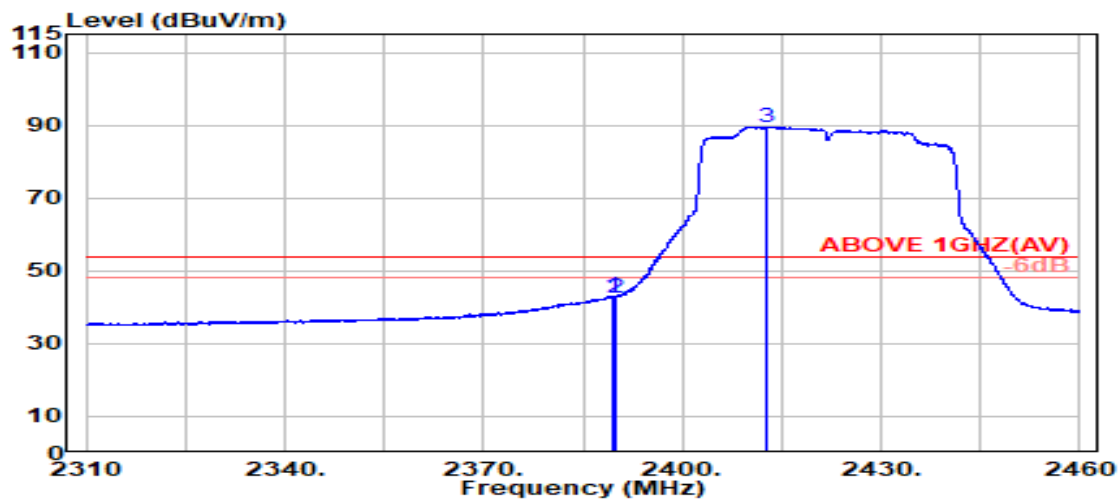

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.650                 | 28.20                 | 5.70            | 39.92                  | 48.88             | 42.86                   | 54.00           | 11.14       | Average  |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 48.67             | 42.66                   | 54.00           | 11.34       | Average  |
| @ 2412.800               | 28.23                 | 5.73            | 39.92                  | 95.57             | 89.61                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |               |           |            |
|------|---------------|-----------|------------|
| Mode | 802.11ax-HE40 | Frequency | TX 2427MHz |
|------|---------------|-----------|------------|

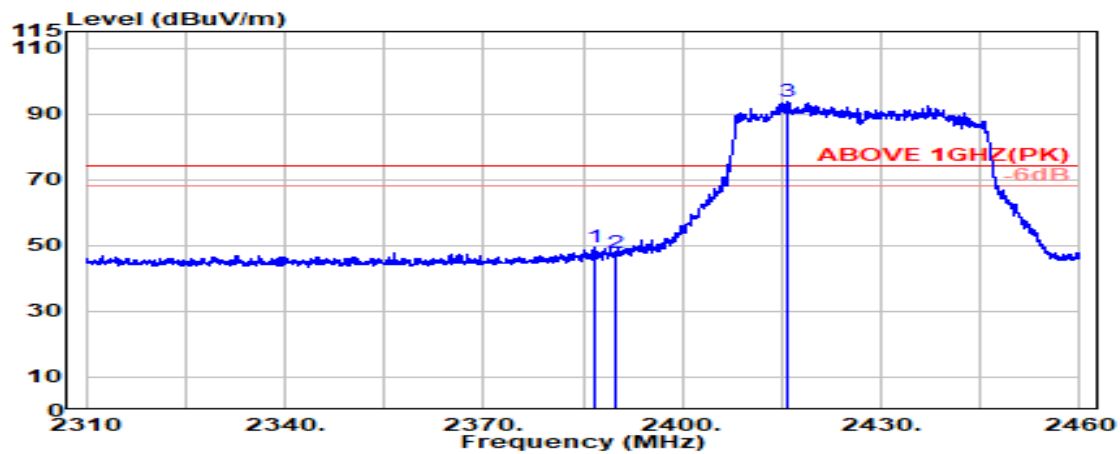

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2386.850                 | 28.20                 | 5.70            | 39.92            | 55.44             | 49.42                   | 74.00           | 24.58       | Peak     |
| 2389.800                 | 28.20                 | 5.70            | 39.92            | 53.65             | 47.64                   | 74.00           | 26.36       | Peak     |
| @ 2416.000               | 28.23                 | 5.74            | 39.92            | 99.63             | 93.69                   | ---             | ---         | Peak     |

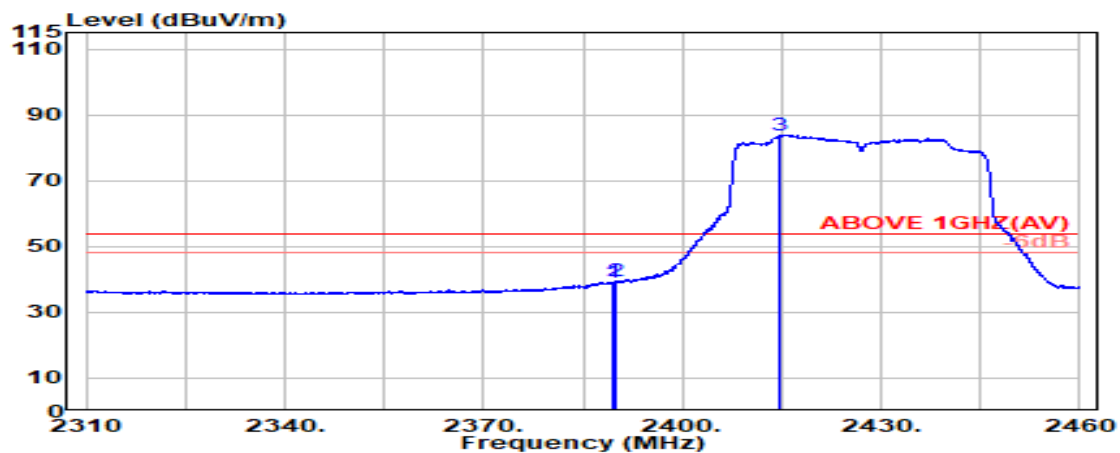

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.600                 | 28.20                 | 5.70            | 39.92            | 45.25             | 39.23                   | 54.00           | 14.77       | Average  |
| 2389.800                 | 28.20                 | 5.70            | 39.92            | 45.31             | 39.30                   | 54.00           | 14.70       | Average  |
| @ 2414.650               | 28.23                 | 5.74            | 39.92            | 89.82             | 83.86                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |               |           |            |
|------|---------------|-----------|------------|
| Mode | 802.11ax-HE40 | Frequency | TX 2427MHz |
|------|---------------|-----------|------------|

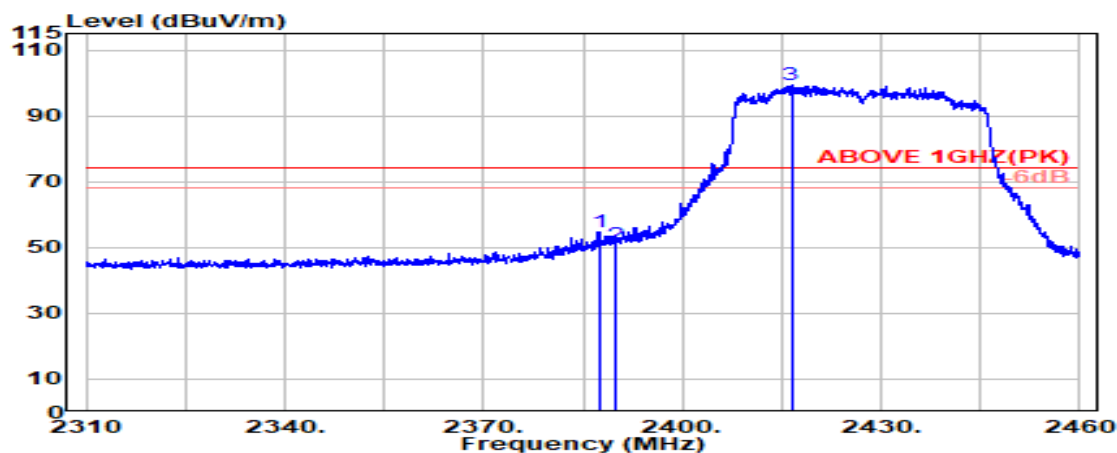

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2387.400                 | 28.20                 | 5.70            | 39.92            | 60.91             | 54.89                   | 74.00           | 19.11       | Peak     |
| 2389.800                 | 28.20                 | 5.70            | 39.92            | 56.92             | 50.90                   | 74.00           | 23.10       | Peak     |
| @ 2416.450               | 28.23                 | 5.74            | 39.92            | 105.13            | 99.19                   | ---             | ---         | Peak     |

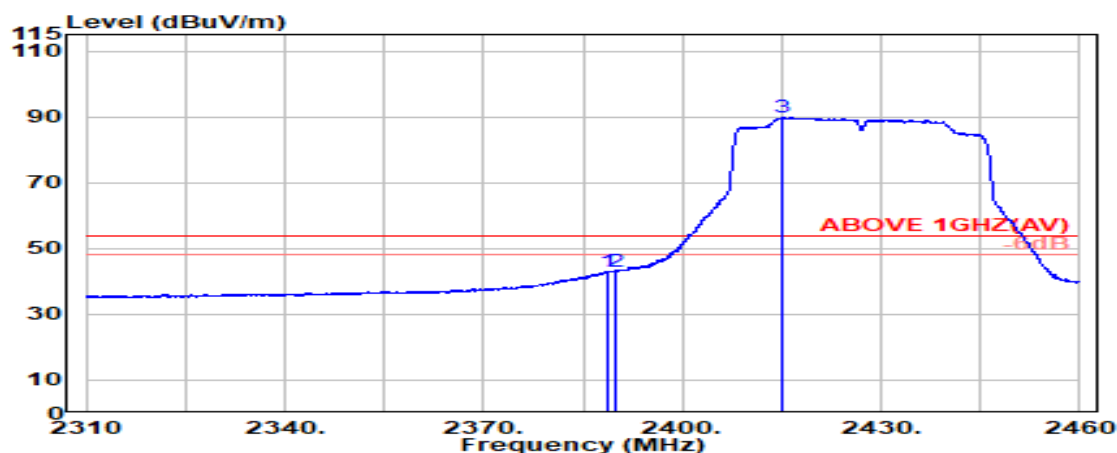

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.900                 | 28.20                 | 5.70            | 39.92            | 49.10             | 43.08                   | 54.00           | 10.92       | Average  |
| 2389.800                 | 28.20                 | 5.70            | 39.92            | 49.02             | 43.00                   | 54.00           | 11.00       | Average  |
| @ 2415.050               | 28.23                 | 5.74            | 39.92            | 95.66             | 89.71                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |               |           |            |
|------|---------------|-----------|------------|
| Mode | 802.11ax-HE40 | Frequency | TX 2452MHz |
|------|---------------|-----------|------------|

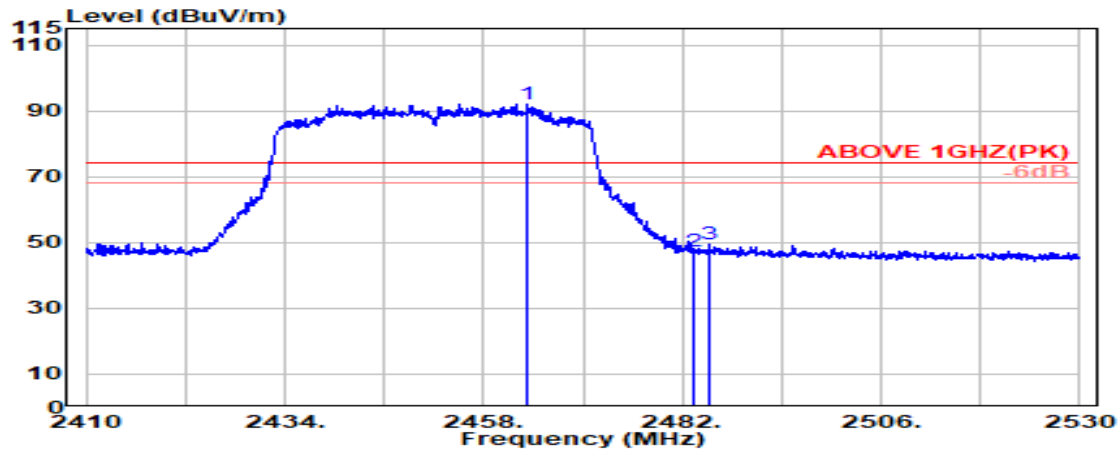

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2463.350               | 28.35                 | 5.80            | 39.92            | 97.75             | 91.99                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 52.98             | 47.32                   | 74.00           | 26.68       | Peak     |
| 2485.200                 | 28.44                 | 5.83            | 39.92            | 55.07             | 49.42                   | 74.00           | 24.58       | Peak     |

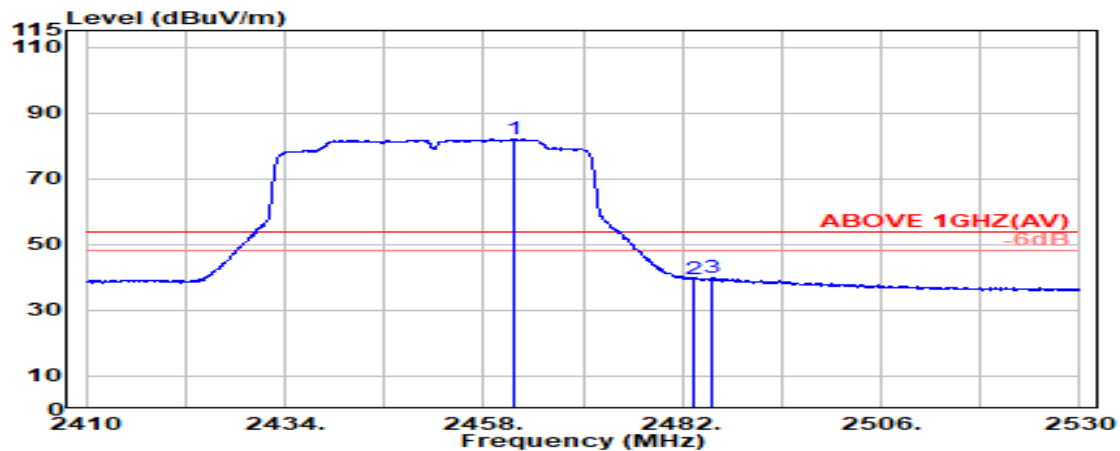


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2461.600               | 28.35                 | 5.80            | 39.92            | 87.82             | 82.05                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 45.17             | 39.52                   | 54.00           | 14.48       | Average  |
| 2485.700                 | 28.44                 | 5.83            | 39.92            | 45.49             | 39.84                   | 54.00           | 14.16       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section

|      |               |           |            |
|------|---------------|-----------|------------|
| Mode | 802.11ax-HE40 | Frequency | TX 2452MHz |
|------|---------------|-----------|------------|

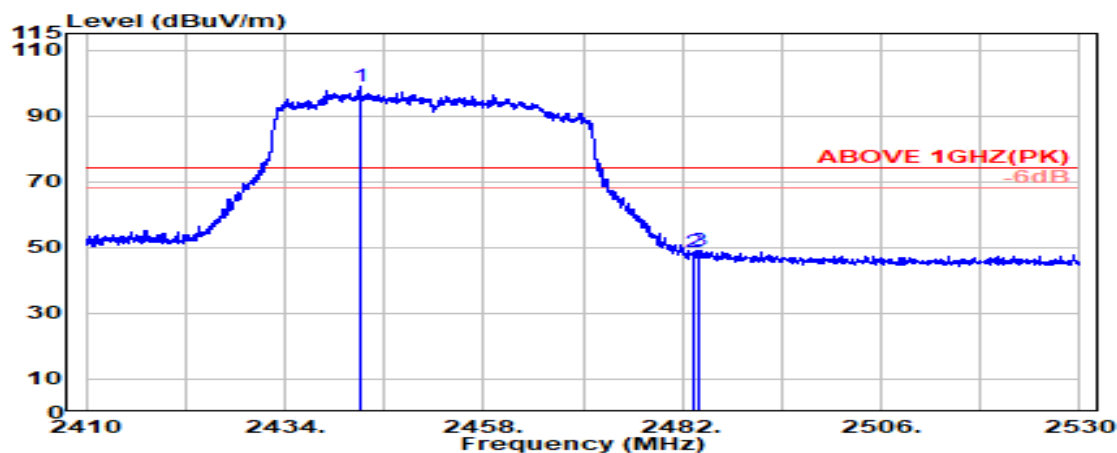

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2443.150               | 28.29                 | 5.77            | 39.92            | 104.59            | 98.73                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 54.24             | 48.58                   | 74.00           | 25.42       | Peak     |
| 2484.100                 | 28.44                 | 5.83            | 39.92            | 54.86             | 49.21                   | 74.00           | 24.79       | Peak     |

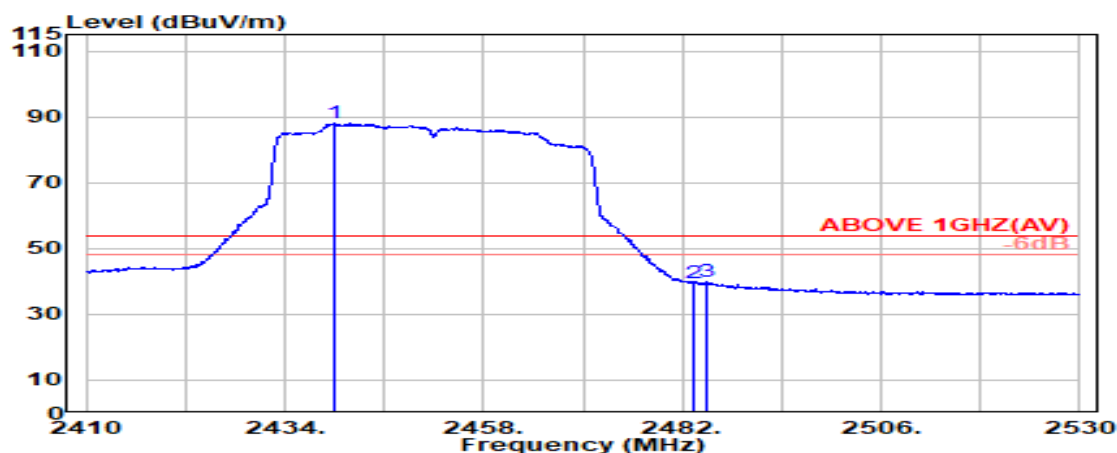


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2439.950               | 28.28                 | 5.77            | 39.92            | 93.79             | 87.92                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 45.11             | 39.46                   | 54.00           | 14.54       | Average  |
| 2485.050                 | 28.44                 | 5.83            | 39.92            | 45.53             | 39.88                   | 54.00           | 14.12       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section

|      |               |           |            |
|------|---------------|-----------|------------|
| Mode | 802.11ax-HE40 | Frequency | TX 2457MHz |
|------|---------------|-----------|------------|

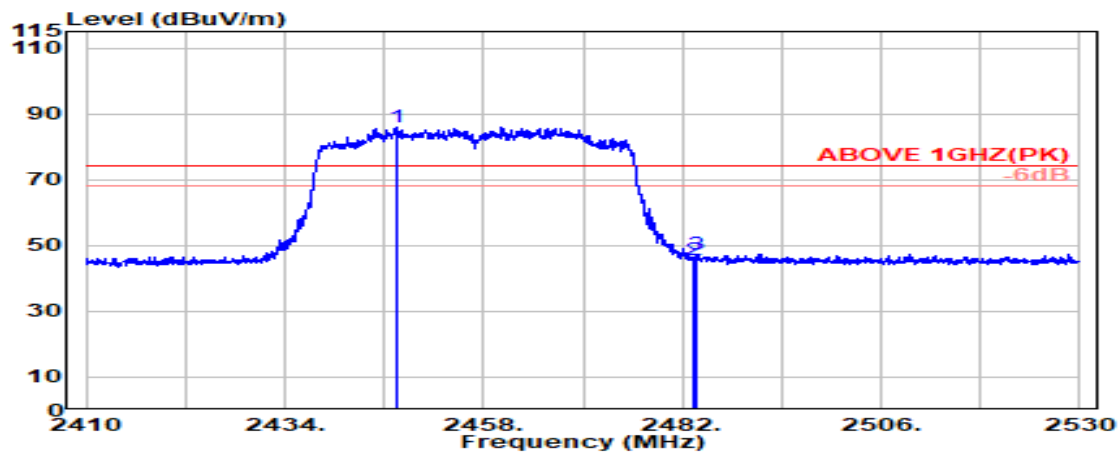

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2447.400               | 28.29                 | 5.78            | 39.92                  | 91.86             | 86.02                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 51.43             | 45.77                   | 74.00           | 28.23       | Peak     |
| 2483.750                 | 28.44                 | 5.83            | 39.92                  | 53.08             | 47.42                   | 74.00           | 26.58       | Peak     |

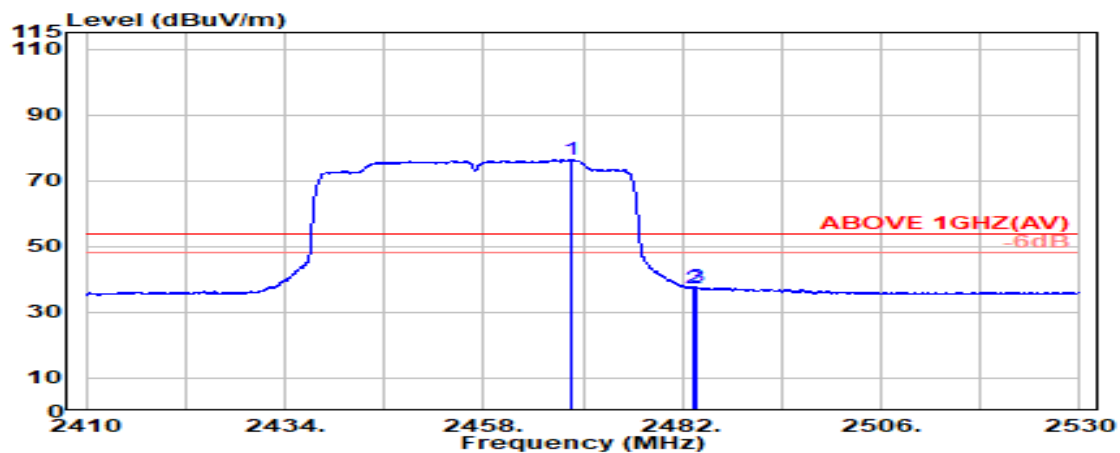

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2468.600               | 28.37                 | 5.81            | 39.92                  | 82.22             | 76.48                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 42.93             | 37.27                   | 54.00           | 16.73       | Average  |
| 2483.700                 | 28.44                 | 5.83            | 39.92                  | 43.22             | 37.56                   | 54.00           | 16.44       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |               |           |            |
|------|---------------|-----------|------------|
| Mode | 802.11ax-HE40 | Frequency | TX 2457MHz |
|------|---------------|-----------|------------|

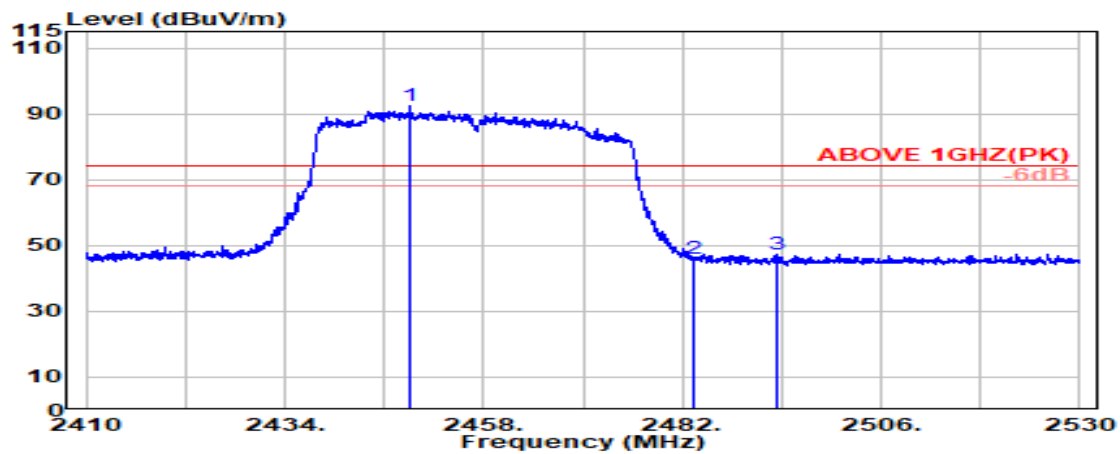

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2449.150               | 28.30                 | 5.78            | 39.92            | 98.32             | 92.48                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 51.83             | 46.17                   | 74.00           | 27.83       | Peak     |
| 2493.350                 | 28.47                 | 5.84            | 39.92            | 53.02             | 47.42                   | 74.00           | 26.58       | Peak     |

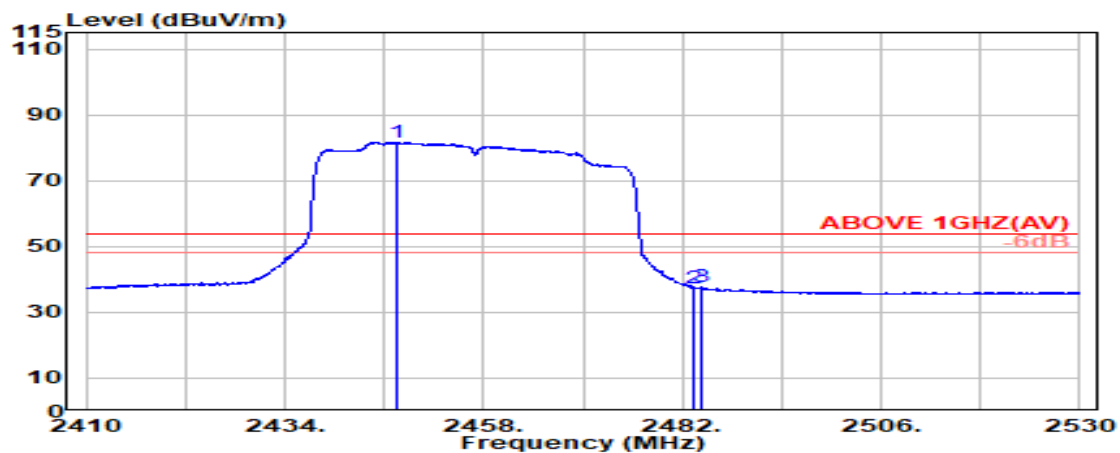


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2447.400               | 28.29                 | 5.78            | 39.92            | 87.59             | 81.75                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 43.19             | 37.53                   | 54.00           | 16.47       | Average  |
| 2484.350                 | 28.44                 | 5.83            | 39.92            | 43.48             | 37.82                   | 54.00           | 16.18       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section

| Mode | 802.11ax-HE40 | Frequency | TX 2462MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

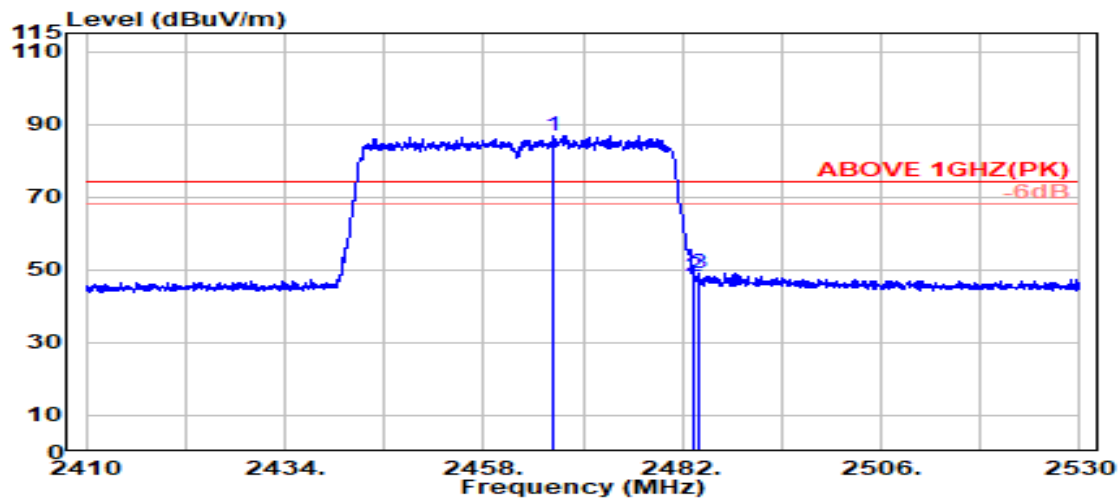

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2466.300               | 28.37                 | 5.81            | 39.92                  | 92.59             | 86.84                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 53.87             | 48.22                   | 74.00           | 25.78       | Peak     |
| 2484.000                 | 28.44                 | 5.83            | 39.92                  | 54.70             | 49.05                   | 74.00           | 24.95       | Peak     |

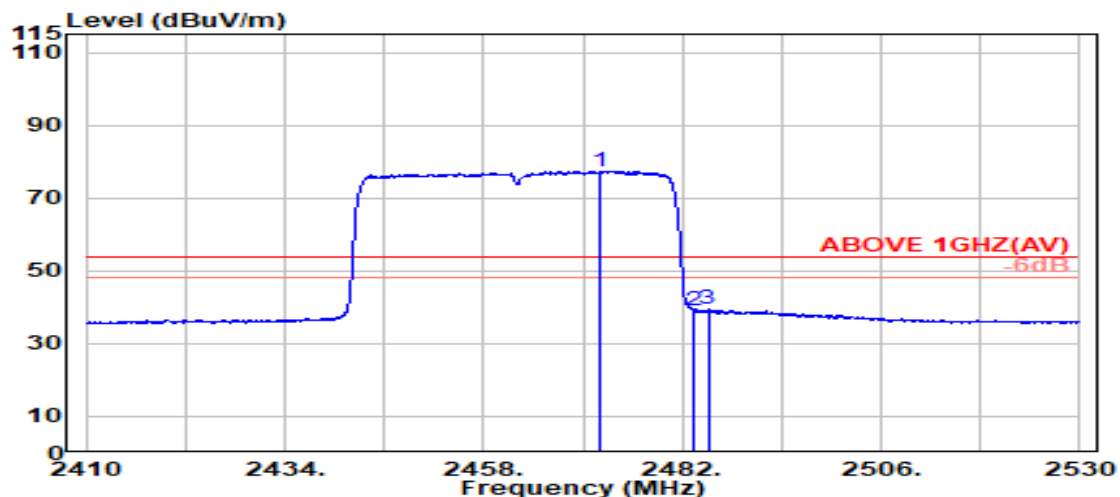


## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2472.000               | 28.39                 | 5.81            | 39.92                  | 83.11             | 77.39                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 44.77             | 39.11                   | 54.00           | 14.89       | Average  |
| 2485.100                 | 28.44                 | 5.83            | 39.92                  | 44.93             | 39.29                   | 54.00           | 14.71       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| Mode | 802.11ax-HE40 | Frequency | TX 2462MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

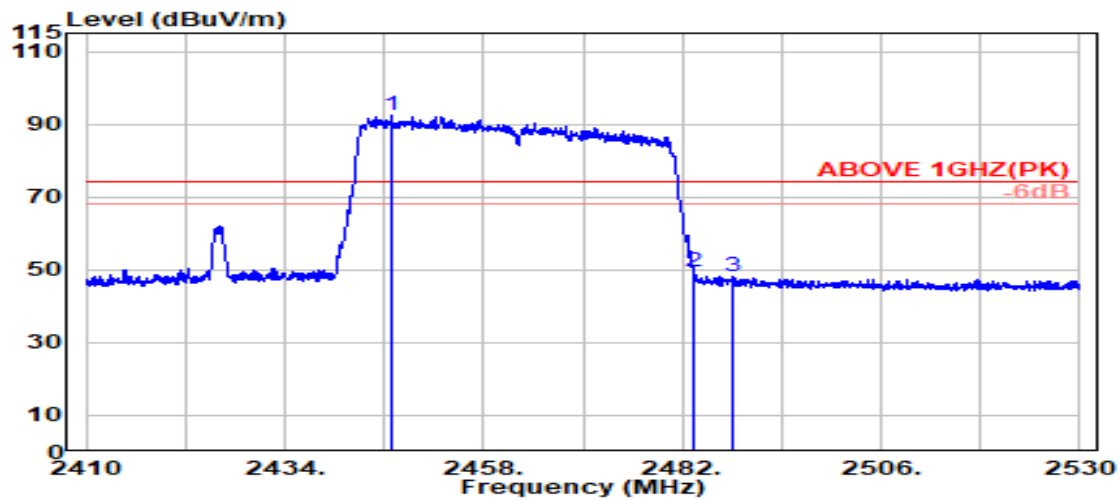

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2446.900               | 28.29                 | 5.78            | 39.92                  | 98.26             | 92.42                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 55.29             | 49.64                   | 74.00           | 24.36       | Peak     |
| 2488.200                 | 28.45                 | 5.83            | 39.92                  | 53.73             | 48.10                   | 74.00           | 25.90       | Peak     |

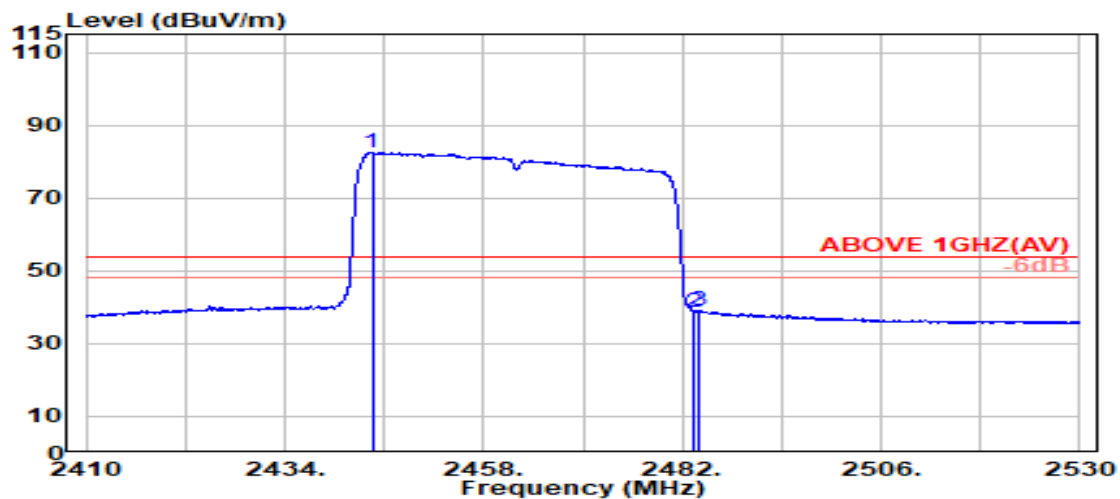

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2444.550               | 28.29                 | 5.78            | 39.92                  | 88.33             | 82.47                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 44.48             | 38.83                   | 54.00           | 15.17       | Average  |
| 2484.050                 | 28.44                 | 5.83            | 39.92                  | 44.88             | 39.23                   | 54.00           | 14.77       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT20 | Frequency | TX 2412MHz |
|------|----------------|-----------|------------|

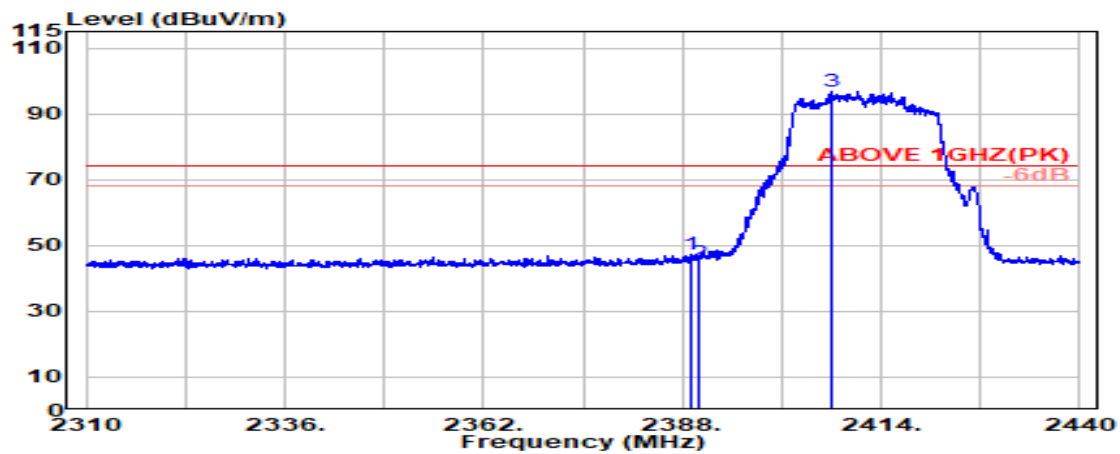

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.137                 | 28.20                 | 5.70            | 39.92            | 53.52             | 47.50                   | 74.00           | 26.50       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 50.69             | 44.68                   | 74.00           | 29.32       | Peak     |
| @ 2407.392               | 28.21                 | 5.73            | 39.92            | 102.81            | 96.83                   | ---             | ---         | Peak     |

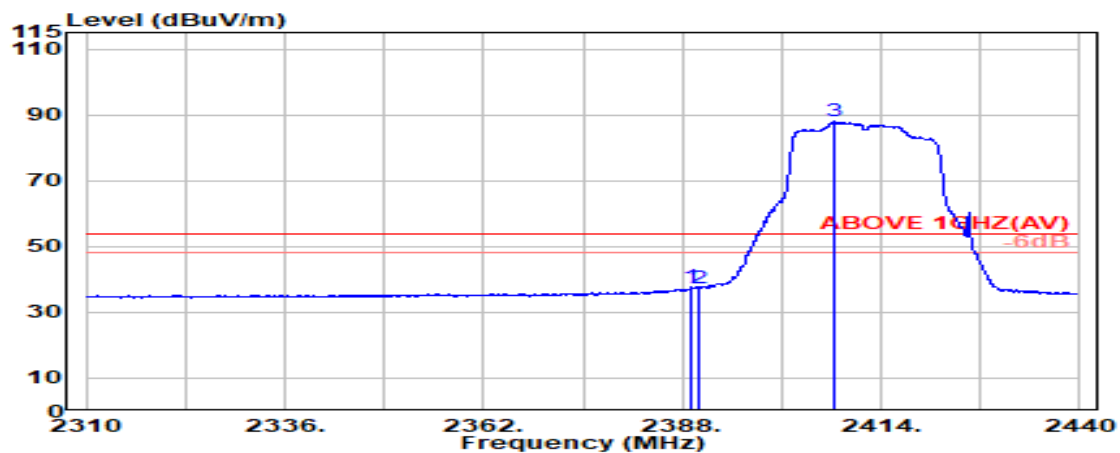


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.300                 | 28.20                 | 5.70            | 39.92            | 43.61             | 37.59                   | 54.00           | 16.41       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 43.49             | 37.47                   | 54.00           | 16.53       | Average  |
| @ 2407.933               | 28.22                 | 5.73            | 39.92            | 93.94             | 87.96                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT20 | Frequency | TX 2412MHz |
|------|----------------|-----------|------------|

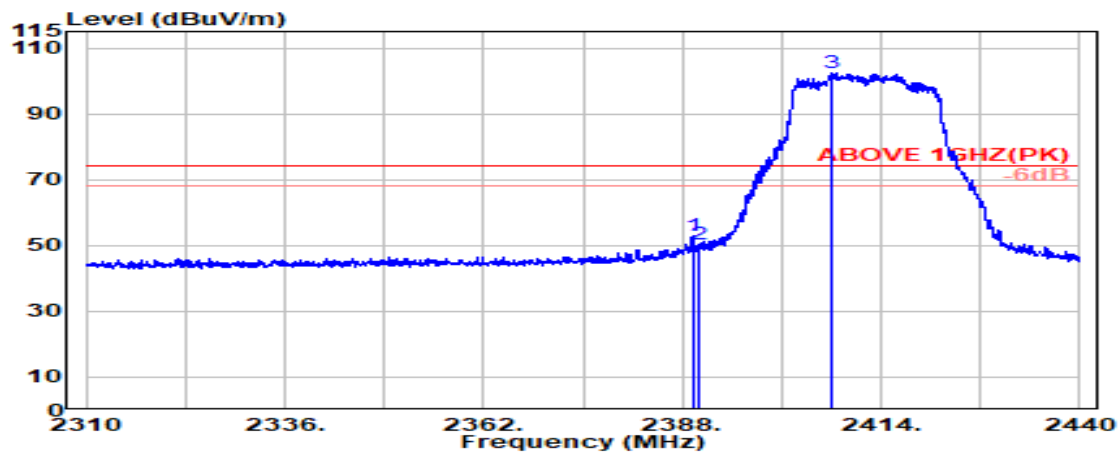

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.354                 | 28.20                 | 5.70            | 39.92                  | 58.89             | 52.87                   | 74.00           | 21.13       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 56.19             | 50.17                   | 74.00           | 23.83       | Peak     |
| @ 2407.446               | 28.22                 | 5.73            | 39.92                  | 108.48            | 102.50                  | ---             | ---         | Peak     |

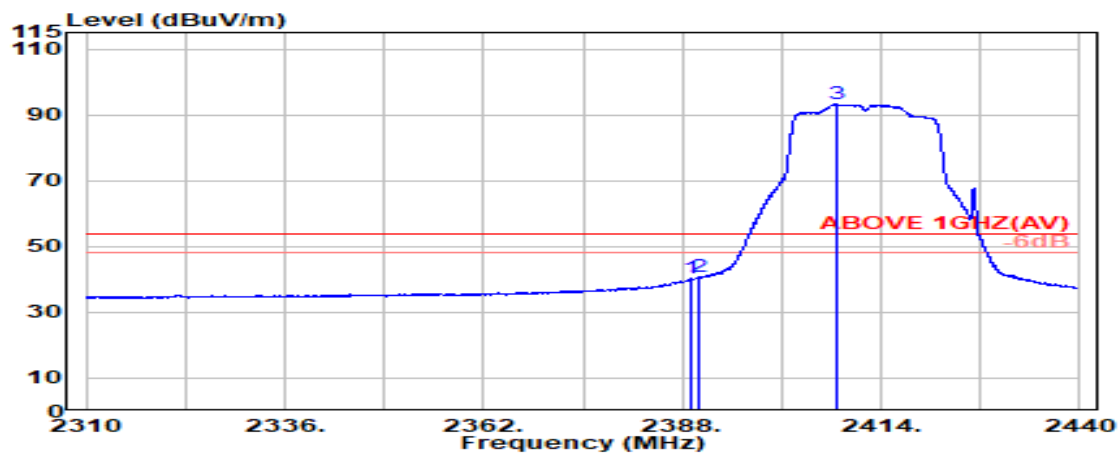

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.300                 | 28.20                 | 5.70            | 39.92                  | 46.22             | 40.21                   | 54.00           | 13.79       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 46.70             | 40.69                   | 54.00           | 13.31       | Average  |
| @ 2408.150               | 28.22                 | 5.73            | 39.92                  | 99.06             | 93.09                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT20 | Frequency | TX 2417MHz |
|------|----------------|-----------|------------|

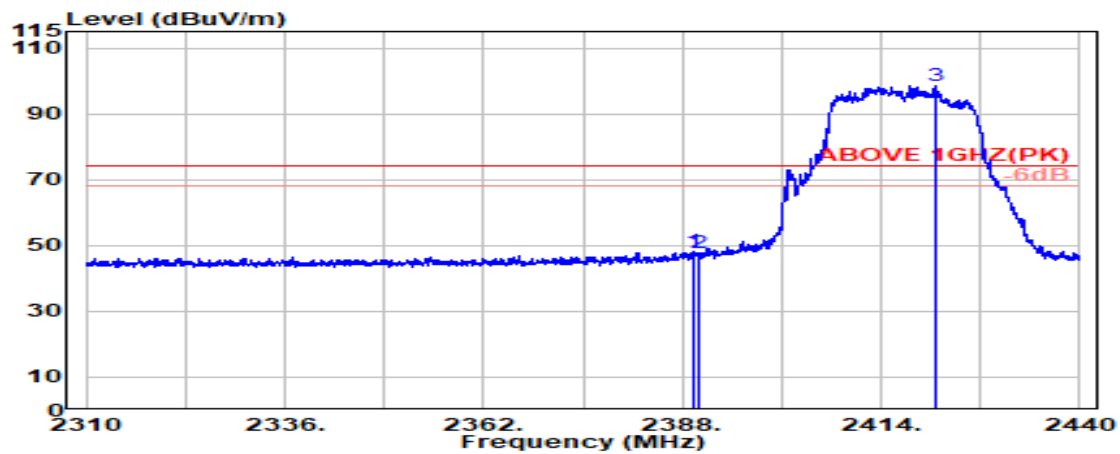

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.625                 | 28.20                 | 5.70            | 39.92            | 54.17             | 48.15                   | 74.00           | 25.85       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 53.73             | 47.72                   | 74.00           | 26.28       | Peak     |
| @ 2421.096               | 28.24                 | 5.75            | 39.92            | 104.41            | 98.48                   | ---             | ---         | Peak     |

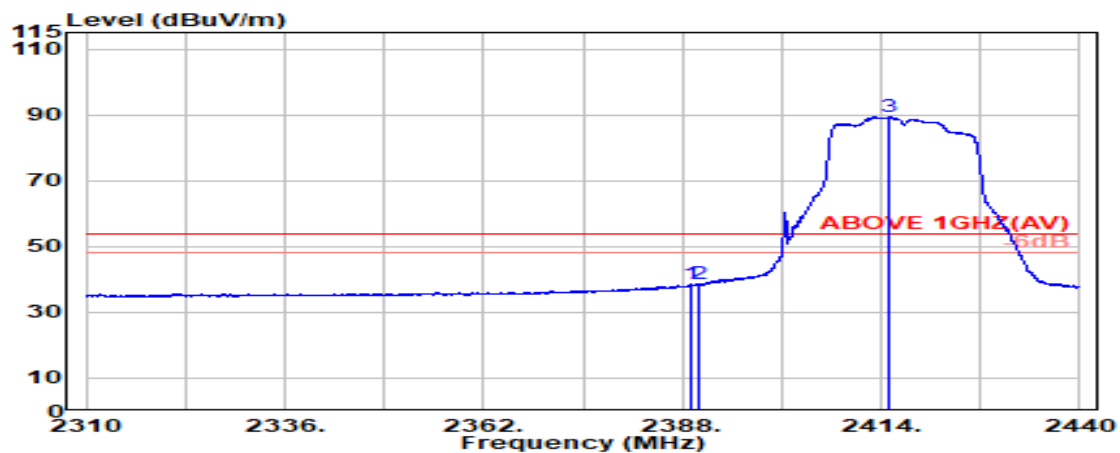


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.192                 | 28.20                 | 5.70            | 39.92            | 44.43             | 38.41                   | 54.00           | 15.59       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 44.71             | 38.70                   | 54.00           | 15.30       | Average  |
| @ 2415.083               | 28.23                 | 5.74            | 39.92            | 95.26             | 89.30                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT20 | Frequency | TX 2417MHz |
|------|----------------|-----------|------------|

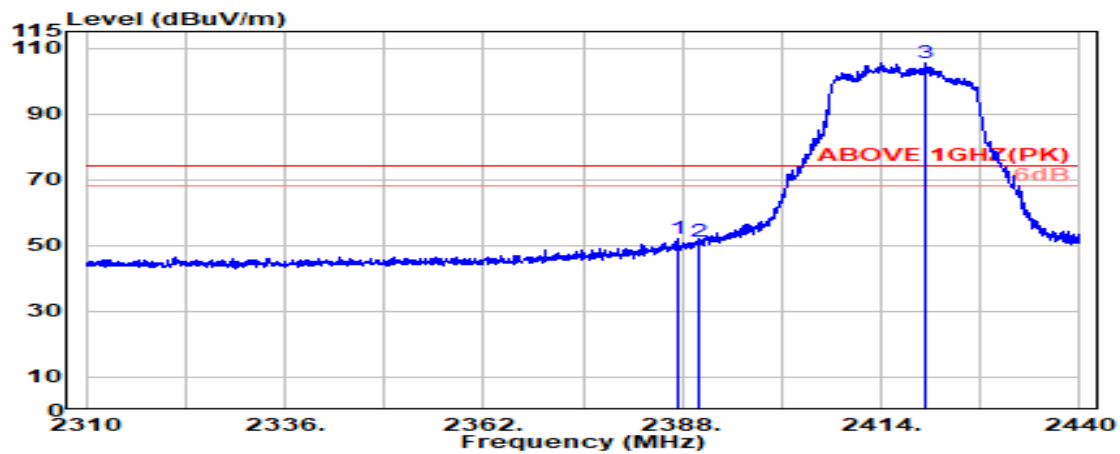

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2387.512                 | 28.20                 | 5.70            | 39.92            | 57.92             | 51.90                   | 74.00           | 22.10       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 57.23             | 51.21                   | 74.00           | 22.79       | Peak     |
| @ 2419.688               | 28.24                 | 5.74            | 39.92            | 111.56            | 105.62                  | ---             | ---         | Peak     |

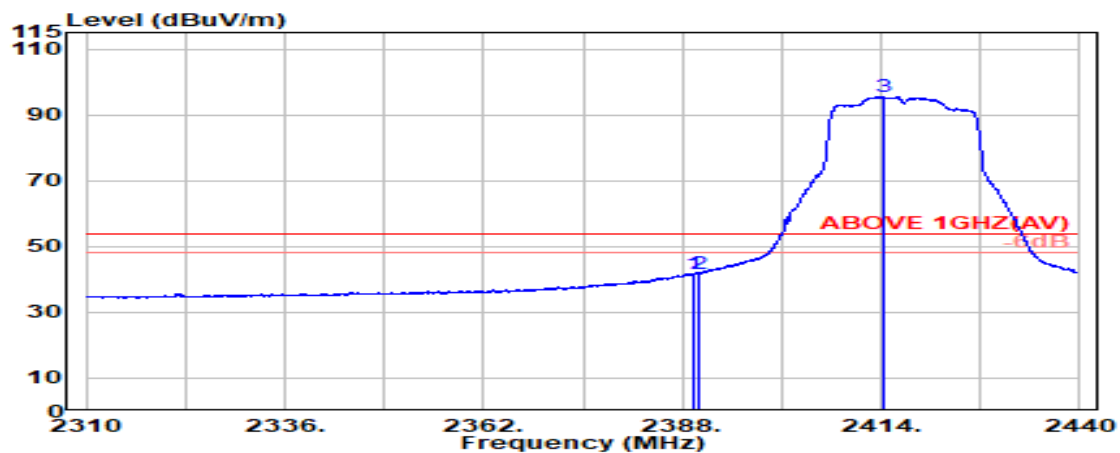


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.517                 | 28.20                 | 5.70            | 39.92            | 47.83             | 41.82                   | 54.00           | 12.18       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 47.70             | 41.68                   | 54.00           | 12.32       | Average  |
| @ 2414.325               | 28.23                 | 5.74            | 39.92            | 101.36            | 95.41                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT20 | Frequency | TX 2457MHz |
|------|----------------|-----------|------------|

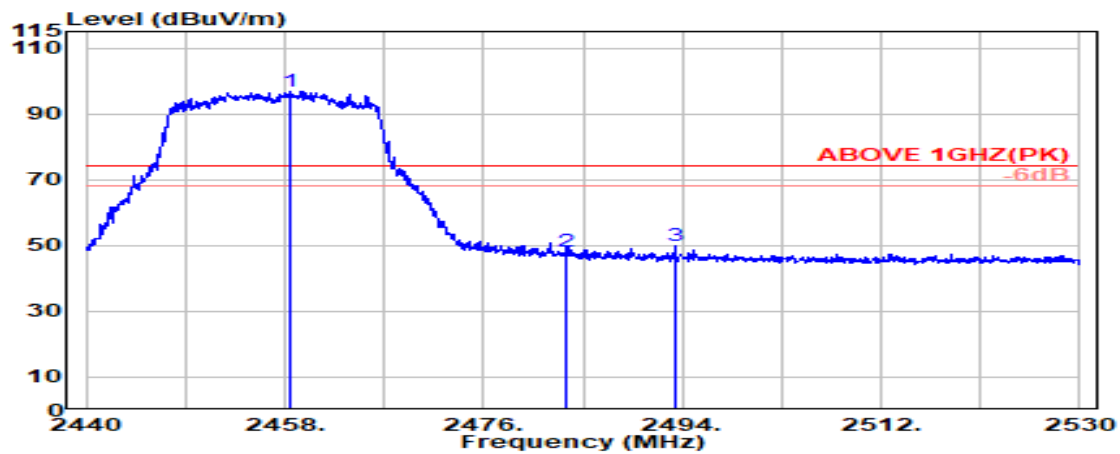

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2458.450               | 28.33                 | 5.80            | 39.92            | 102.64            | 96.85                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 53.73             | 48.07                   | 74.00           | 25.93       | Peak     |
| 2493.350                 | 28.47                 | 5.84            | 39.92            | 55.38             | 49.78                   | 74.00           | 24.22       | Peak     |

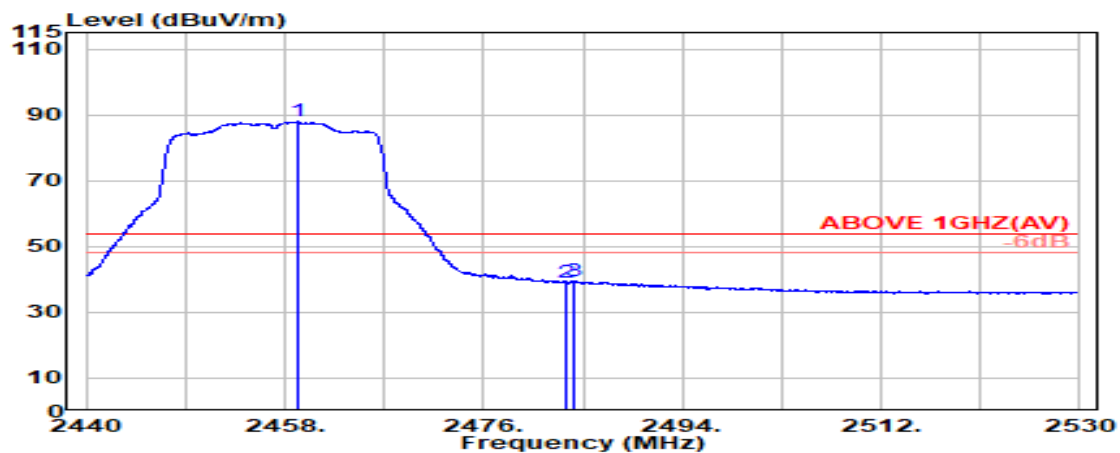

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2459.250               | 28.34                 | 5.80            | 39.92            | 93.81             | 88.03                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 44.79             | 39.14                   | 54.00           | 14.86       | Average  |
| 2484.250                 | 28.44                 | 5.83            | 39.92            | 45.05             | 39.40                   | 54.00           | 14.60       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT20 | Frequency | TX 2457MHz |
|------|----------------|-----------|------------|

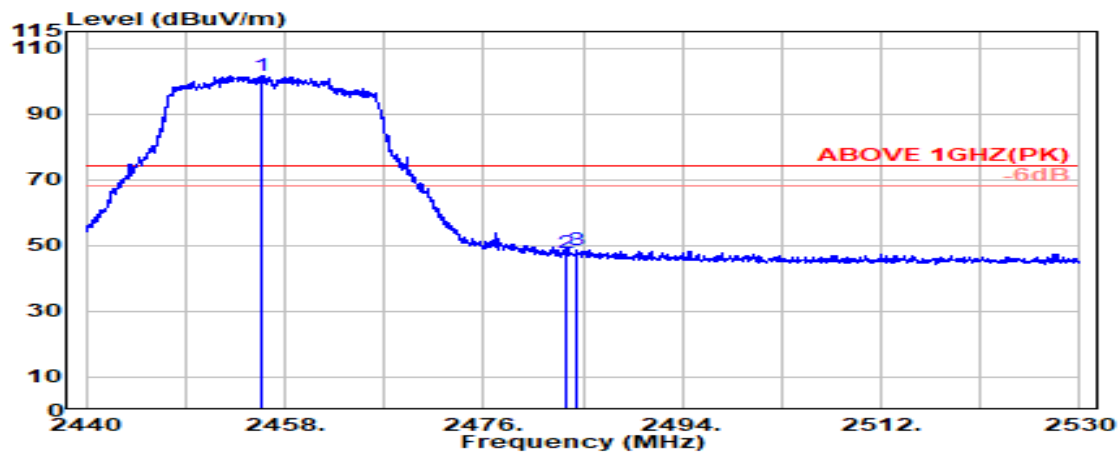

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2456.000               | 28.32                 | 5.79            | 39.92                  | 107.56            | 101.76                  | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 53.19             | 47.53                   | 74.00           | 26.47       | Peak     |
| 2484.350                 | 28.44                 | 5.83            | 39.92                  | 54.20             | 48.54                   | 74.00           | 25.46       | Peak     |

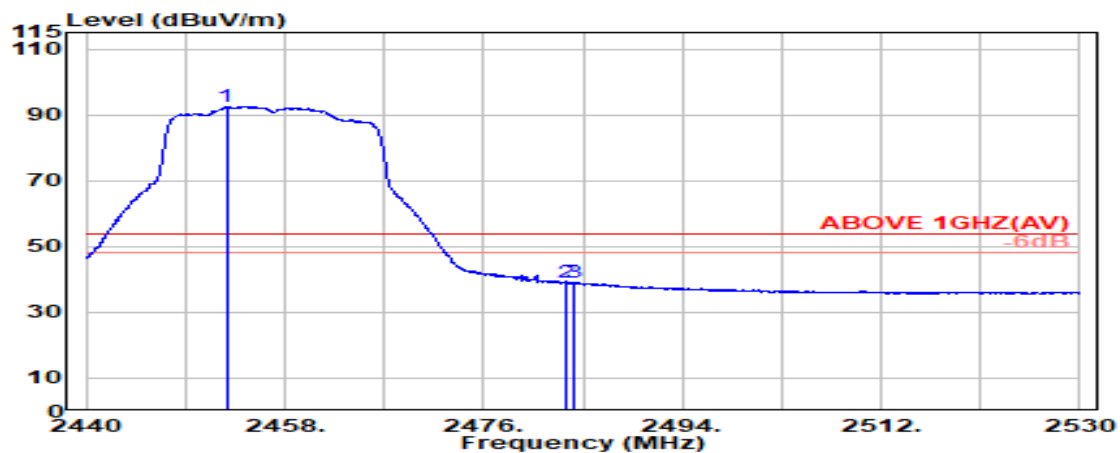

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2452.700               | 28.31                 | 5.79            | 39.92                  | 98.37             | 92.55                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 44.54             | 38.88                   | 54.00           | 15.12       | Average  |
| 2484.250                 | 28.44                 | 5.83            | 39.92                  | 44.74             | 39.09                   | 54.00           | 14.91       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT20 | Frequency | TX 2462MHz |
|------|----------------|-----------|------------|

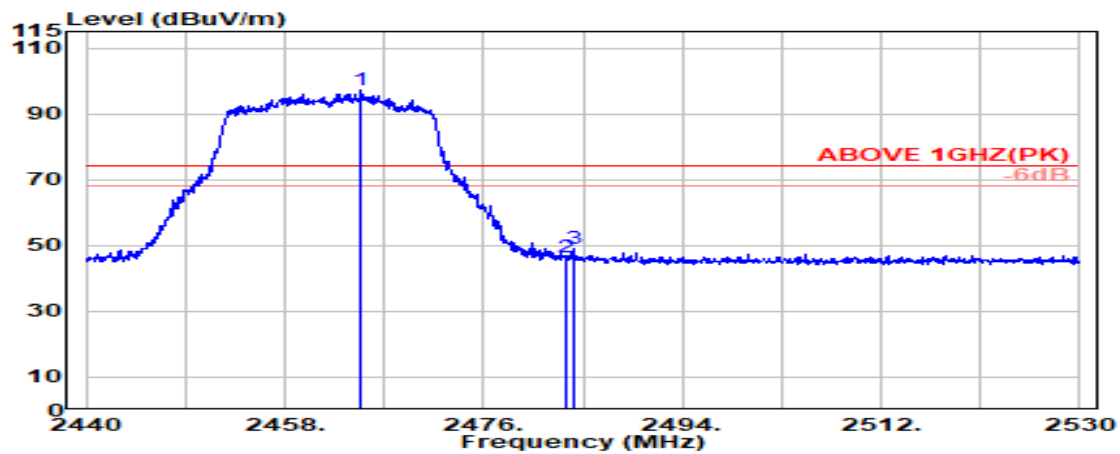

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2464.950               | 28.36                 | 5.80            | 39.92            | 102.88            | 97.12                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 52.03             | 46.37                   | 74.00           | 27.63       | Peak     |
| 2484.200                 | 28.44                 | 5.83            | 39.92            | 54.87             | 49.21                   | 74.00           | 24.79       | Peak     |

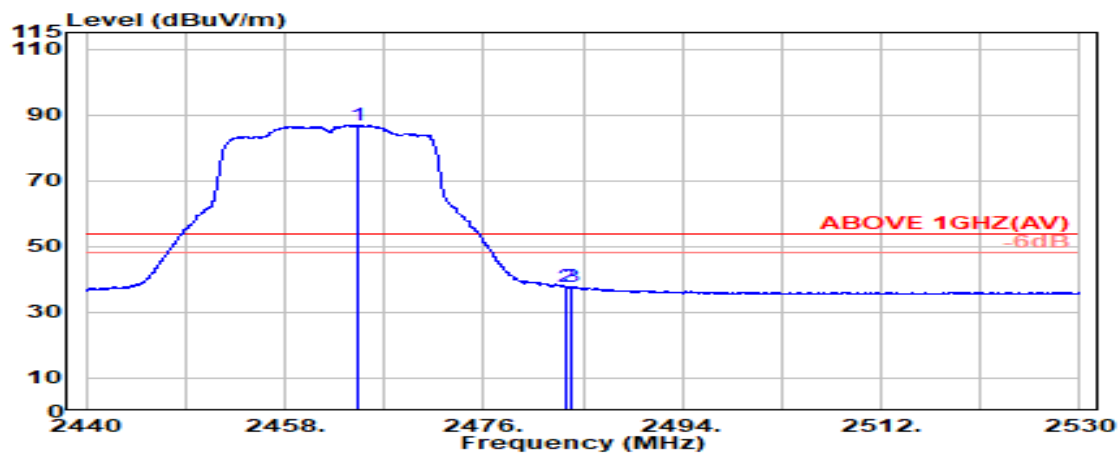

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2464.700               | 28.36                 | 5.80            | 39.92            | 92.57             | 86.82                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 43.51             | 37.86                   | 54.00           | 16.14       | Average  |
| 2484.000                 | 28.44                 | 5.83            | 39.92            | 43.38             | 37.73                   | 54.00           | 16.27       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT20 | Frequency | TX 2462MHz |
|------|----------------|-----------|------------|

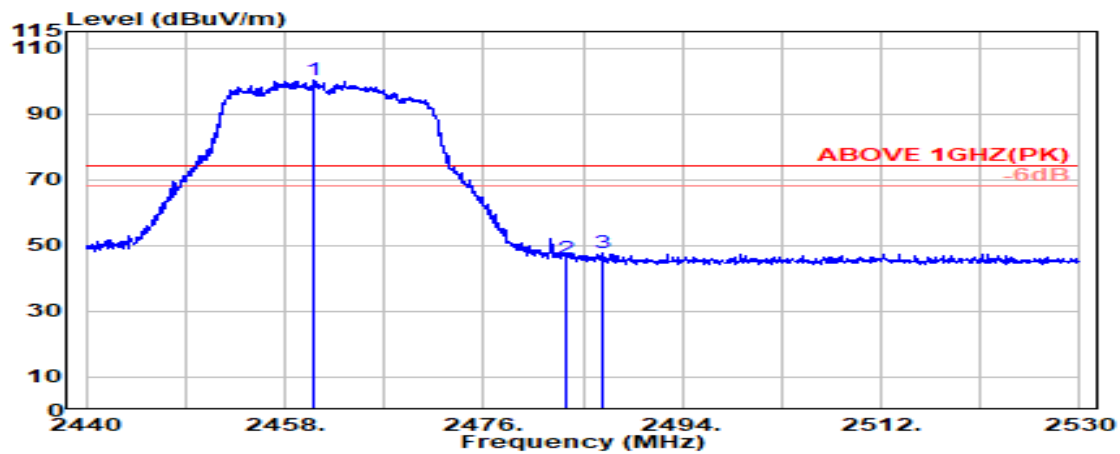

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2460.700               | 28.34                 | 5.80            | 39.92                  | 105.93            | 100.15                  | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 51.64             | 45.98                   | 74.00           | 28.02       | Peak     |
| 2486.700                 | 28.45                 | 5.83            | 39.92                  | 53.43             | 47.79                   | 74.00           | 26.21       | Peak     |

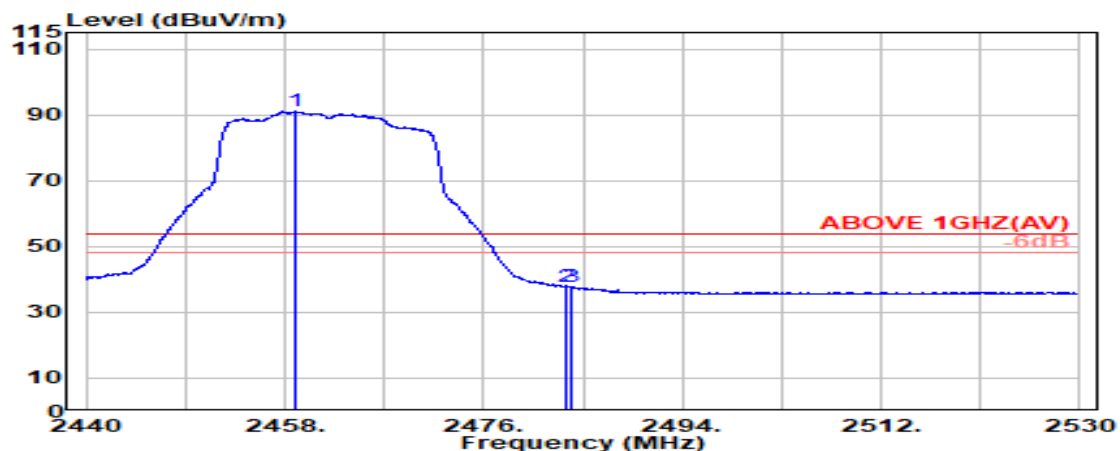

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2458.950               | 28.34                 | 5.80            | 39.92                  | 96.74             | 90.96                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 43.48             | 37.82                   | 54.00           | 16.18       | Average  |
| 2483.850                 | 28.44                 | 5.83            | 39.92                  | 43.47             | 37.81                   | 54.00           | 16.19       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT20 | Frequency | TX 2467MHz |
|------|----------------|-----------|------------|

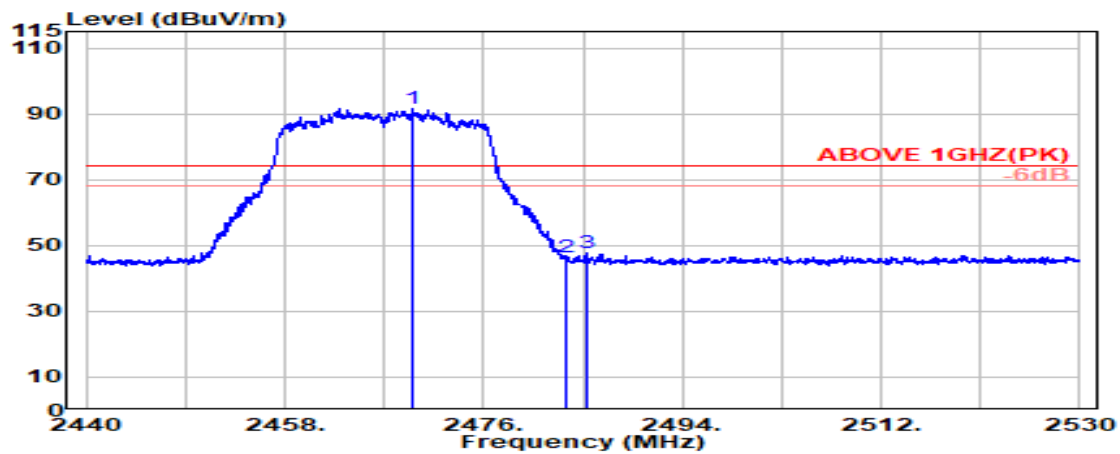

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2469.550               | 28.38                 | 5.81            | 39.92            | 97.34             | 91.61                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 51.91             | 46.25                   | 74.00           | 27.75       | Peak     |
| 2485.250                 | 28.44                 | 5.83            | 39.92            | 53.46             | 47.81                   | 74.00           | 26.19       | Peak     |

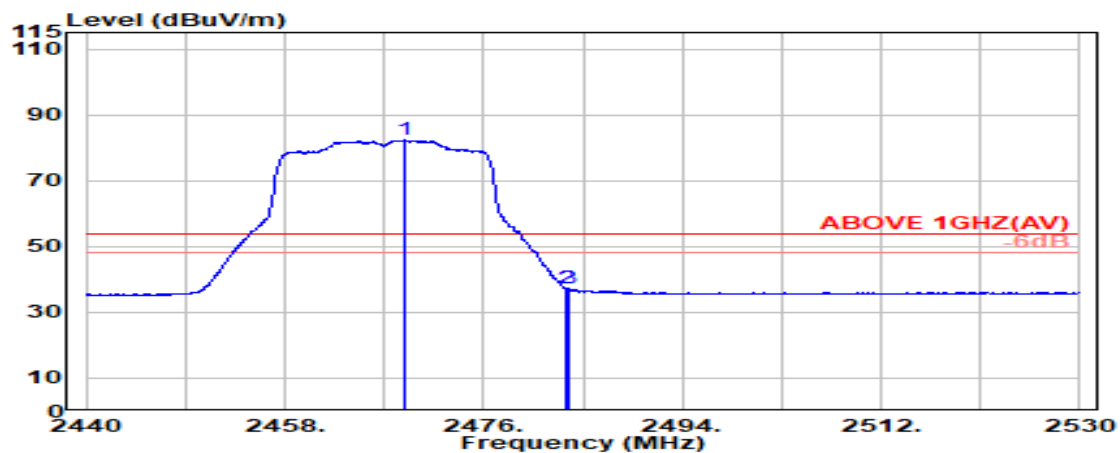

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2468.850               | 28.38                 | 5.81            | 39.92            | 88.16             | 82.43                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 42.98             | 37.32                   | 54.00           | 16.68       | Average  |
| 2483.750                 | 28.44                 | 5.83            | 39.92            | 42.76             | 37.11                   | 54.00           | 16.89       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT20 | Frequency | TX 2467MHz |
|------|----------------|-----------|------------|

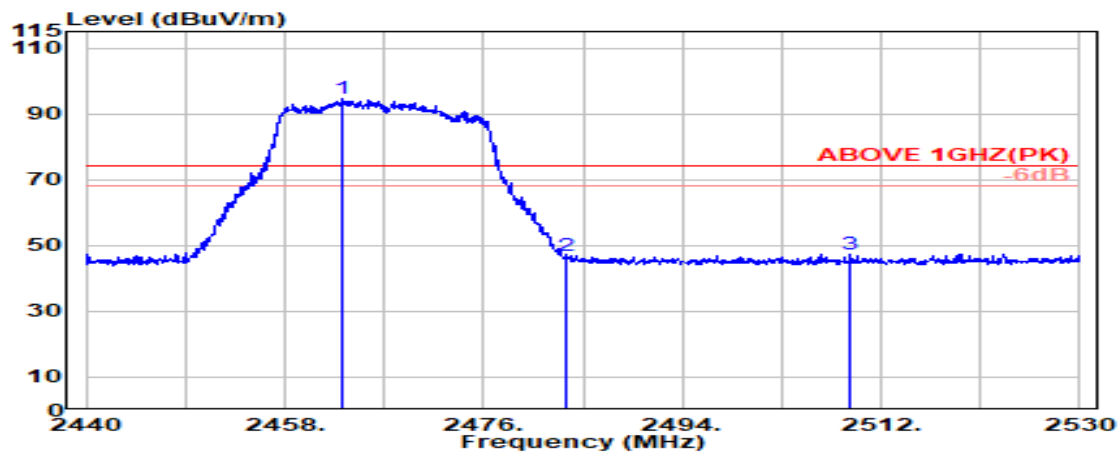

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2463.200               | 28.35                 | 5.80            | 39.92            | 100.28            | 94.52                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 52.55             | 46.90                   | 74.00           | 27.10       | Peak     |
| 2509.150                 | 28.54                 | 5.86            | 39.92            | 52.95             | 47.42                   | 74.00           | 26.58       | Peak     |

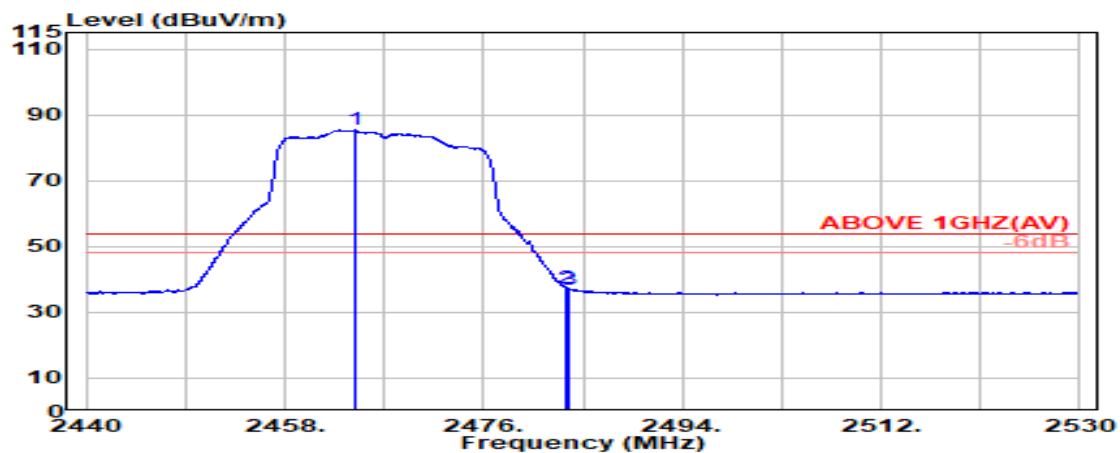

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2464.350               | 28.36                 | 5.80            | 39.92            | 91.08             | 85.32                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 43.01             | 37.35                   | 54.00           | 16.65       | Average  |
| 2483.700                 | 28.44                 | 5.83            | 39.92            | 42.70             | 37.05                   | 54.00           | 16.95       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT20 | Frequency | TX 2472MHz |
|------|----------------|-----------|------------|

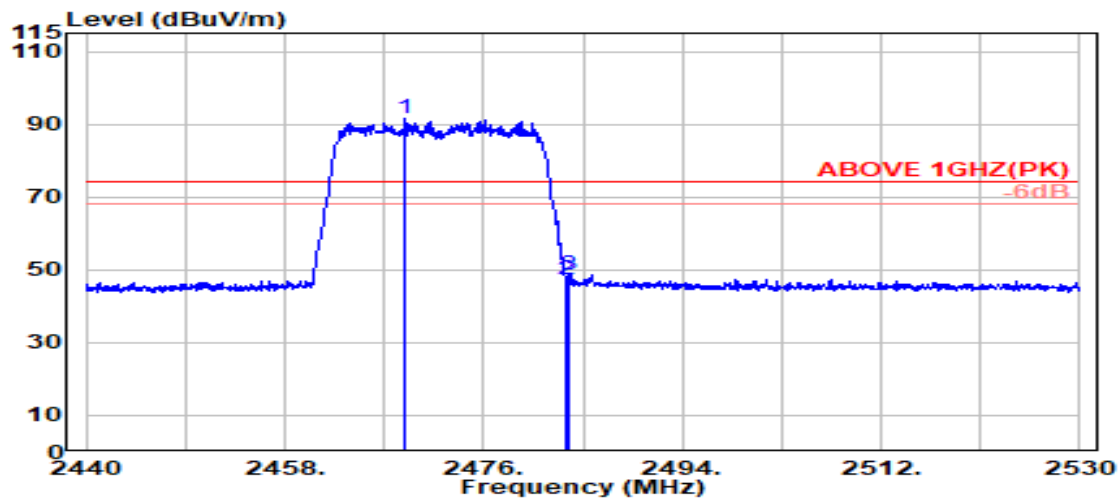

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2468.950               | 28.38                 | 5.81            | 39.92                  | 97.35             | 91.61                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 53.06             | 47.41                   | 74.00           | 26.59       | Peak     |
| 2483.800                 | 28.44                 | 5.83            | 39.92                  | 54.30             | 48.64                   | 74.00           | 25.36       | Peak     |

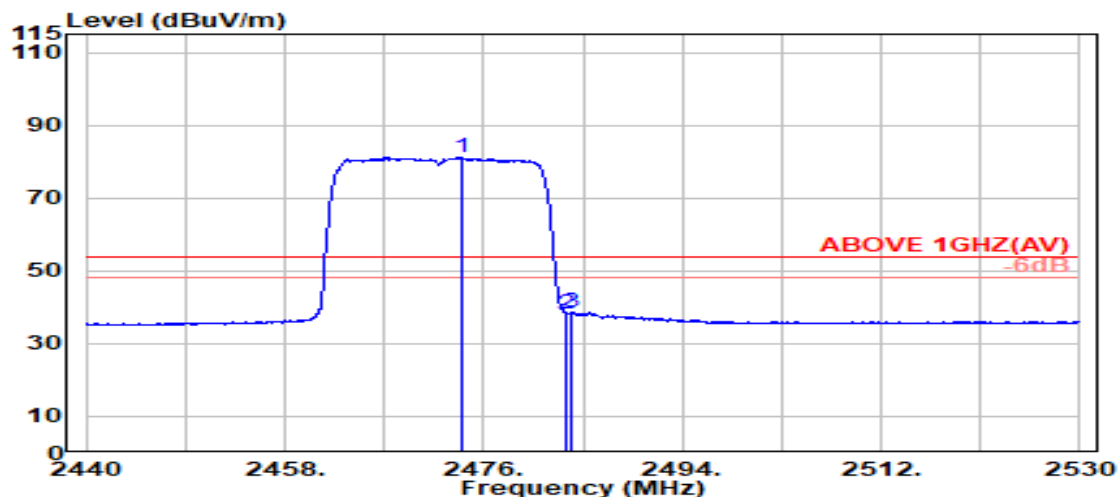

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2474.050               | 28.40                 | 5.82            | 39.92                  | 86.86             | 81.15                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 43.78             | 38.13                   | 54.00           | 15.87       | Average  |
| 2484.000                 | 28.44                 | 5.83            | 39.92                  | 44.20             | 38.55                   | 54.00           | 15.45       | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT20 | Frequency | TX 2472MHz |
|------|----------------|-----------|------------|

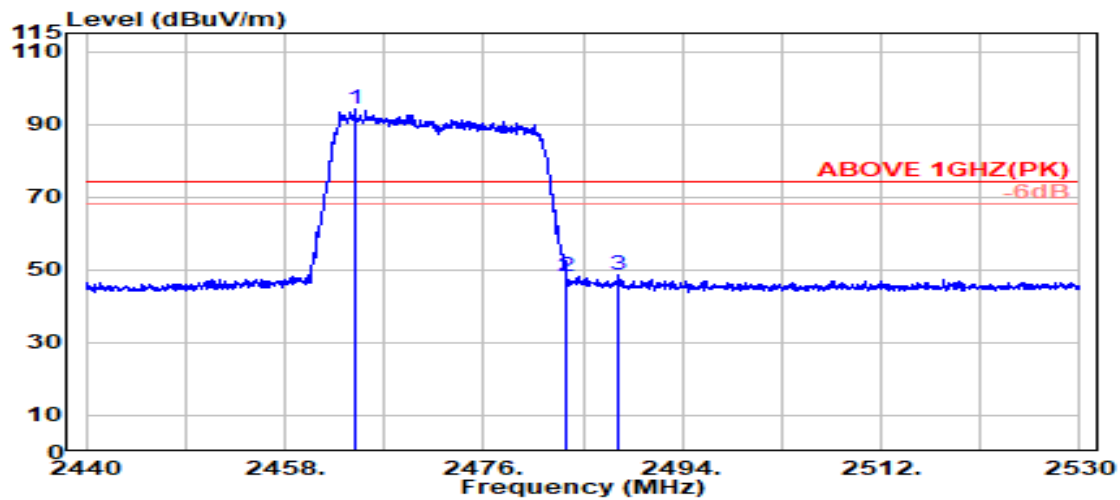

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2464.350               | 28.36                 | 5.80            | 39.92                  | 99.79             | 94.03                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 53.86             | 48.20                   | 74.00           | 25.80       | Peak     |
| 2488.200                 | 28.45                 | 5.83            | 39.92                  | 54.15             | 48.52                   | 74.00           | 25.48       | Peak     |

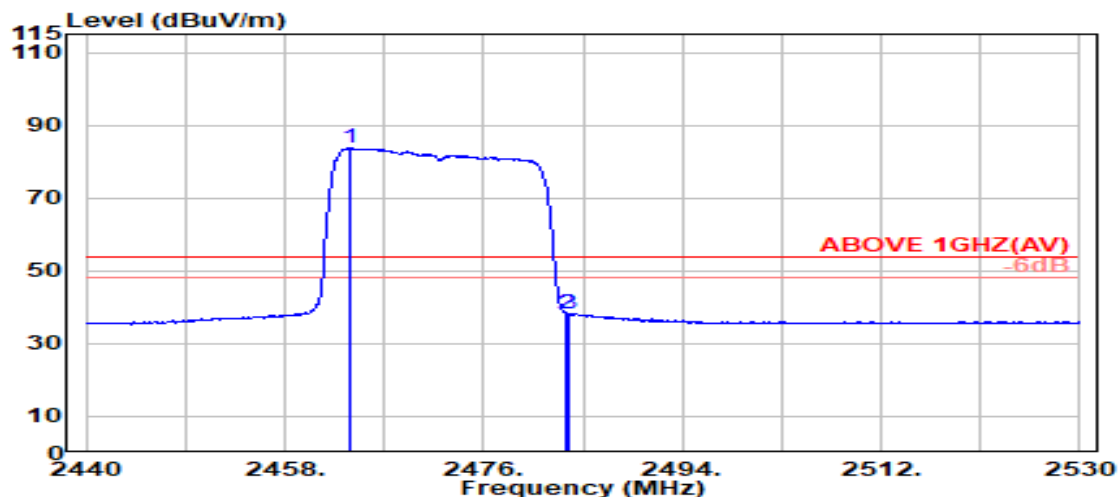

#### Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2463.900               | 28.36                 | 5.80            | 39.92                  | 89.56             | 83.80                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 44.01             | 38.35                   | 54.00           | 15.65       | Average  |
| 2483.800                 | 28.44                 | 5.83            | 39.92                  | 44.01             | 38.35                   | 54.00           | 15.65       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11be-EHT40 | Frequency | TX 2422MHz |
|------|----------------|-----------|------------|
|------|----------------|-----------|------------|

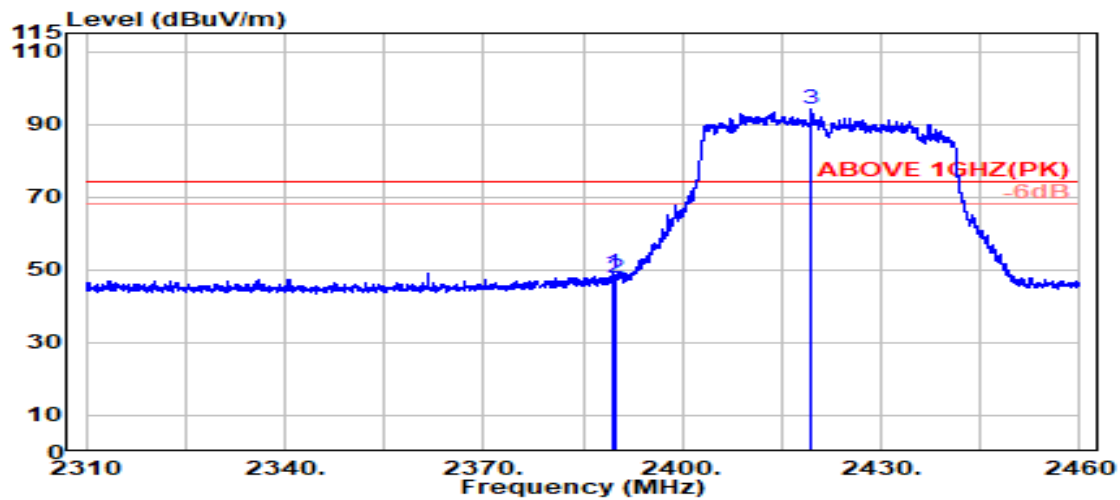

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.600                 | 28.20                 | 5.70            | 39.92                  | 55.25             | 49.23                   | 74.00           | 24.77       | Peak     |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 53.57             | 47.56                   | 74.00           | 26.44       | Peak     |
| @ 2419.550               | 28.24                 | 5.74            | 39.92                  | 99.91             | 93.97                   | ---             | ---         | Peak     |

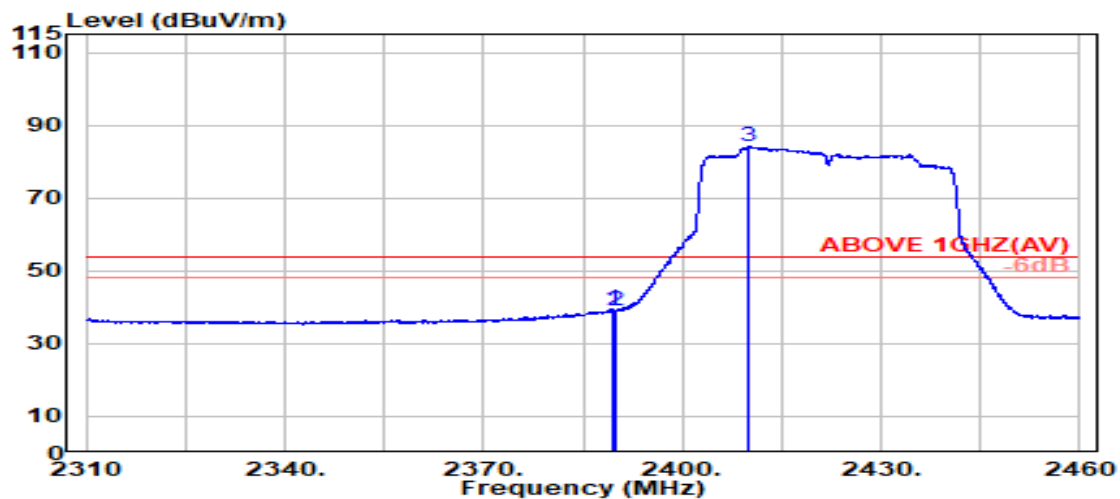

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.350                 | 28.20                 | 5.70            | 39.92                  | 45.46             | 39.45                   | 54.00           | 14.55       | Average  |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 45.04             | 39.03                   | 54.00           | 14.97       | Average  |
| @ 2410.100               | 28.22                 | 5.73            | 39.92                  | 90.04             | 84.08                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | 802.11be-EHT40 | Frequency | TX 2422MHz |
|------|----------------|-----------|------------|
|------|----------------|-----------|------------|

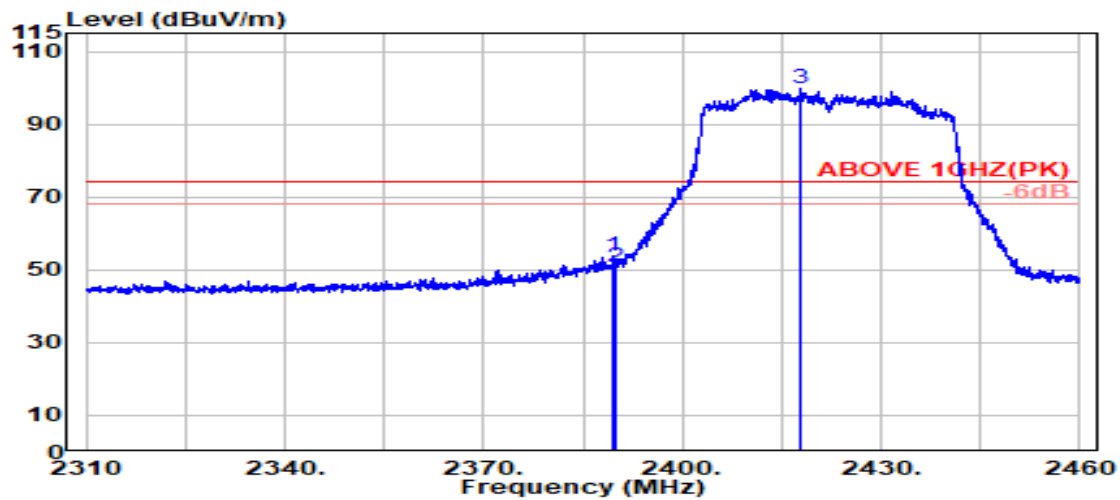

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.600                 | 28.20                 | 5.70            | 39.92                  | 59.93             | 53.91                   | 74.00           | 20.09       | Peak     |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 56.97             | 50.96                   | 74.00           | 23.04       | Peak     |
| @ 2417.750               | 28.24                 | 5.74            | 39.92                  | 105.69            | 99.74                   | ---             | ---         | Peak     |

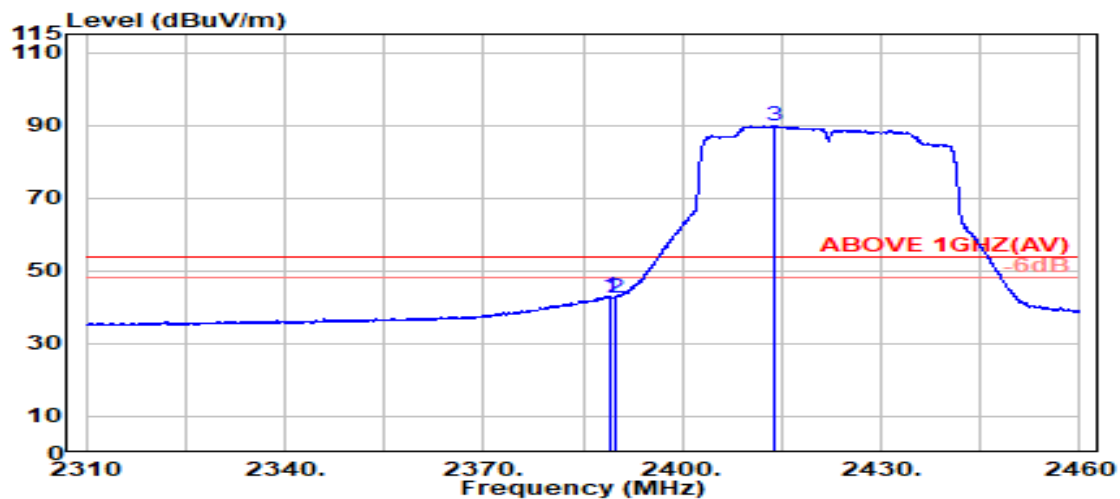

## Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.200                 | 28.20                 | 5.70            | 39.92                  | 48.89             | 42.87                   | 54.00           | 11.13       | Average  |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 48.74             | 42.72                   | 54.00           | 11.28       | Average  |
| @ 2413.750               | 28.23                 | 5.74            | 39.92                  | 95.86             | 89.90                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT40 | Frequency | TX 2427MHz |
|------|----------------|-----------|------------|

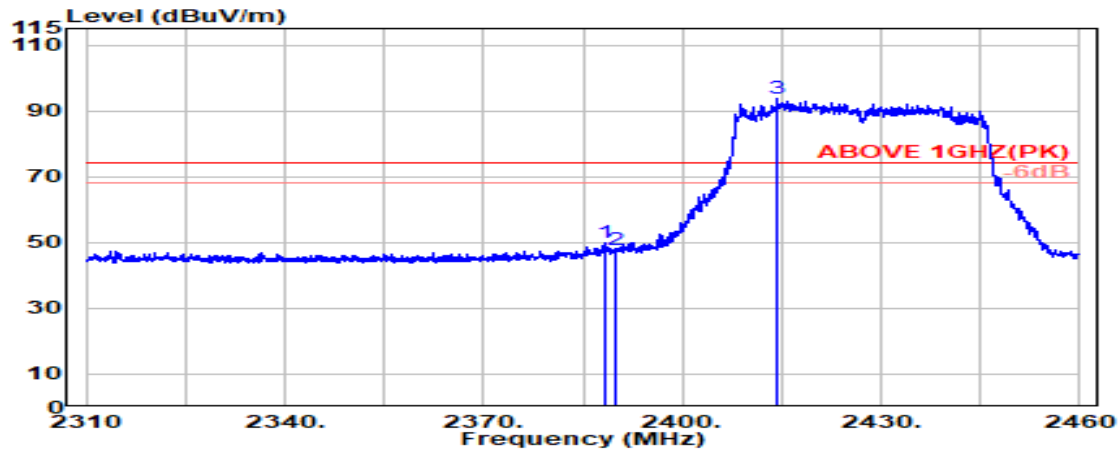

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.250                 | 28.20                 | 5.70            | 39.92            | 55.71             | 49.69                   | 74.00           | 24.31       | Peak     |
| 2389.800                 | 28.20                 | 5.70            | 39.92            | 53.58             | 47.56                   | 74.00           | 26.44       | Peak     |
| @ 2414.400               | 28.23                 | 5.74            | 39.92            | 99.74             | 93.79                   | ---             | ---         | Peak     |

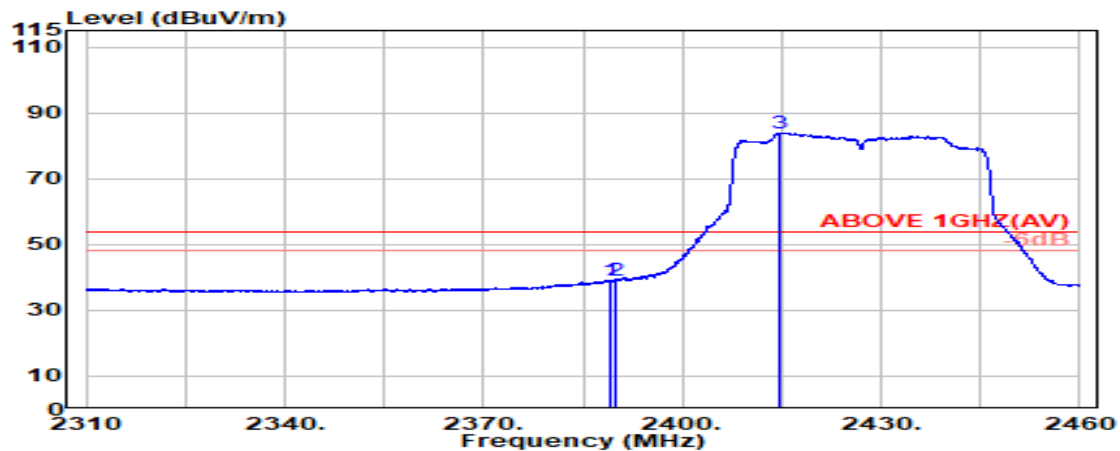

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.250                 | 28.20                 | 5.70            | 39.92            | 45.21             | 39.19                   | 54.00           | 14.81       | Average  |
| 2389.800                 | 28.20                 | 5.70            | 39.92            | 45.29             | 39.27                   | 54.00           | 14.73       | Average  |
| @ 2414.850               | 28.23                 | 5.74            | 39.92            | 89.90             | 83.95                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT40 | Frequency | TX 2427MHz |
|------|----------------|-----------|------------|

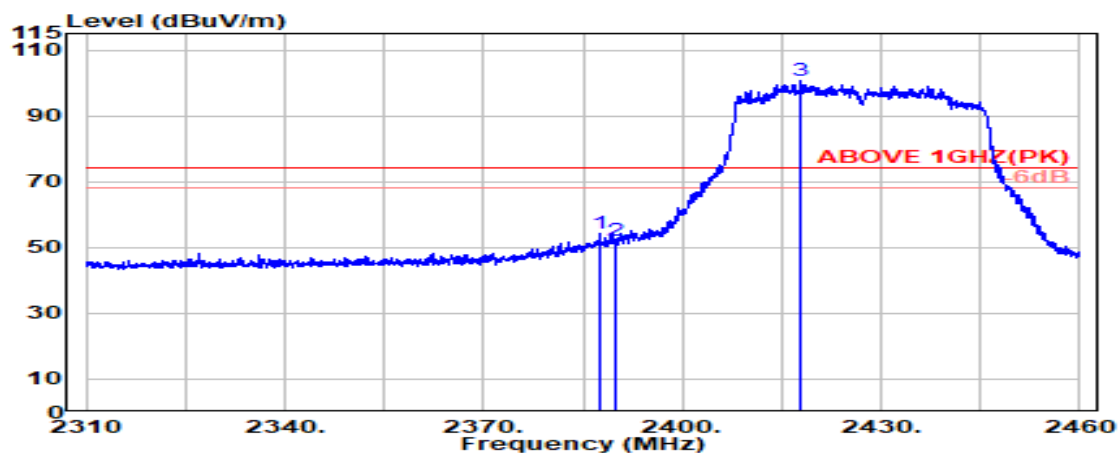

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2387.600                 | 28.20                 | 5.70            | 39.92            | 60.32             | 54.30                   | 74.00           | 19.70       | Peak     |
| 2389.800                 | 28.20                 | 5.70            | 39.92            | 57.90             | 51.88                   | 74.00           | 22.12       | Peak     |
| @ 2417.750               | 28.24                 | 5.74            | 39.92            | 106.77            | 100.83                  | ---             | ---         | Peak     |

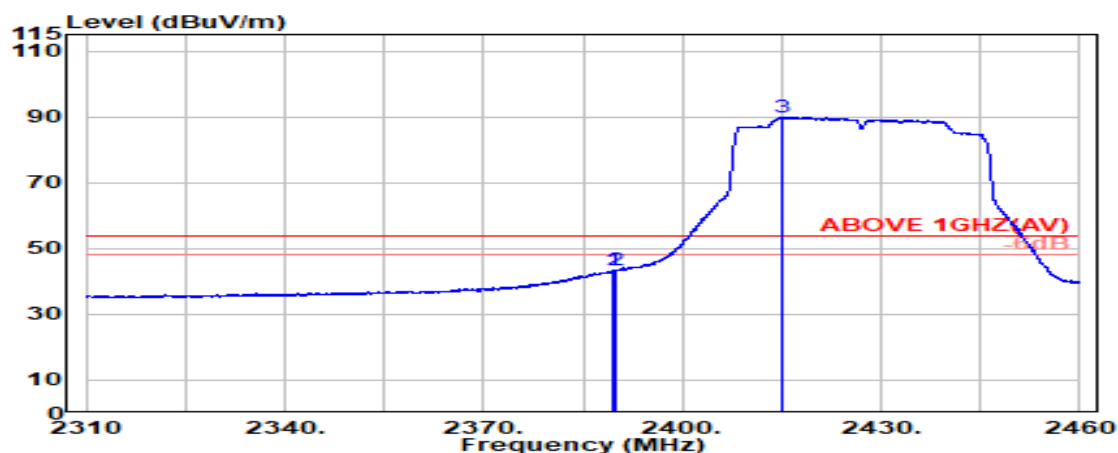

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.400                 | 28.20                 | 5.70            | 39.92            | 49.32             | 43.30                   | 54.00           | 10.70       | Average  |
| 2389.800                 | 28.20                 | 5.70            | 39.92            | 49.26             | 43.25                   | 54.00           | 10.75       | Average  |
| @ 2414.950               | 28.23                 | 5.74            | 39.92            | 95.80             | 89.85                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT40 | Frequency | TX 2452MHz |
|------|----------------|-----------|------------|

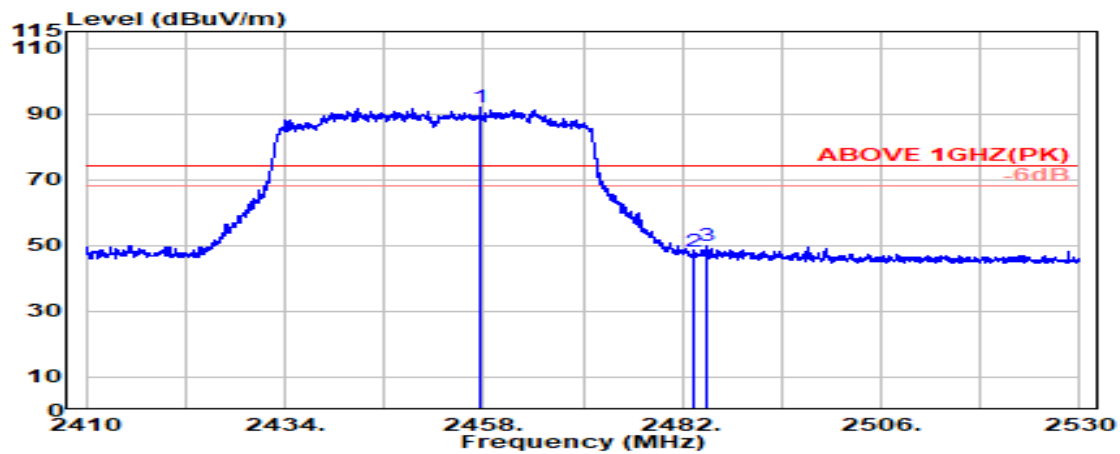

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2457.550               | 28.33                 | 5.79            | 39.92            | 97.71             | 91.92                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 53.62             | 47.96                   | 74.00           | 26.04       | Peak     |
| 2484.950                 | 28.44                 | 5.83            | 39.92            | 55.37             | 49.72                   | 74.00           | 24.28       | Peak     |

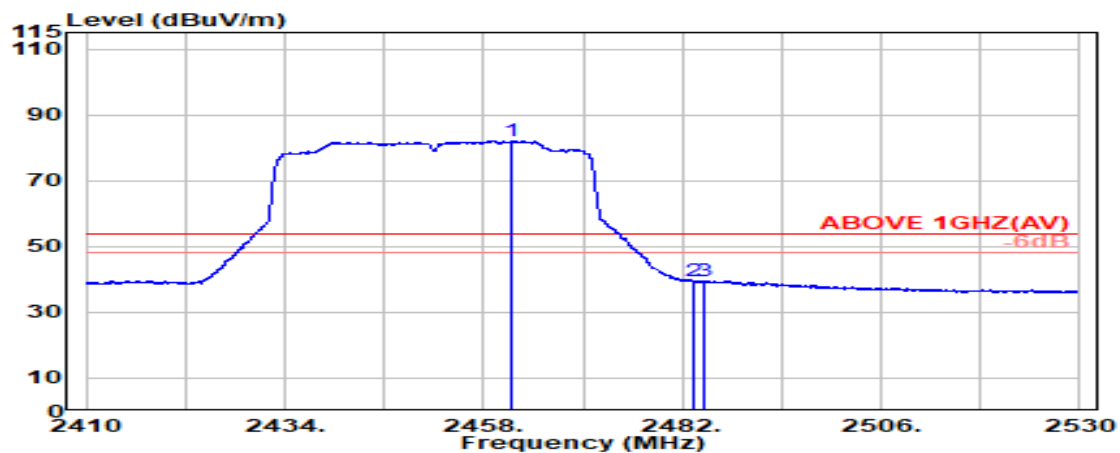


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2461.500               | 28.35                 | 5.80            | 39.92            | 87.87             | 82.10                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 45.00             | 39.34                   | 74.00           | 26.04       | Average  |
| 2484.600                 | 28.44                 | 5.83            | 39.92            | 45.25             | 39.60                   | 54.00           | 14.40       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT40 | Frequency | TX 2452MHz |
|------|----------------|-----------|------------|

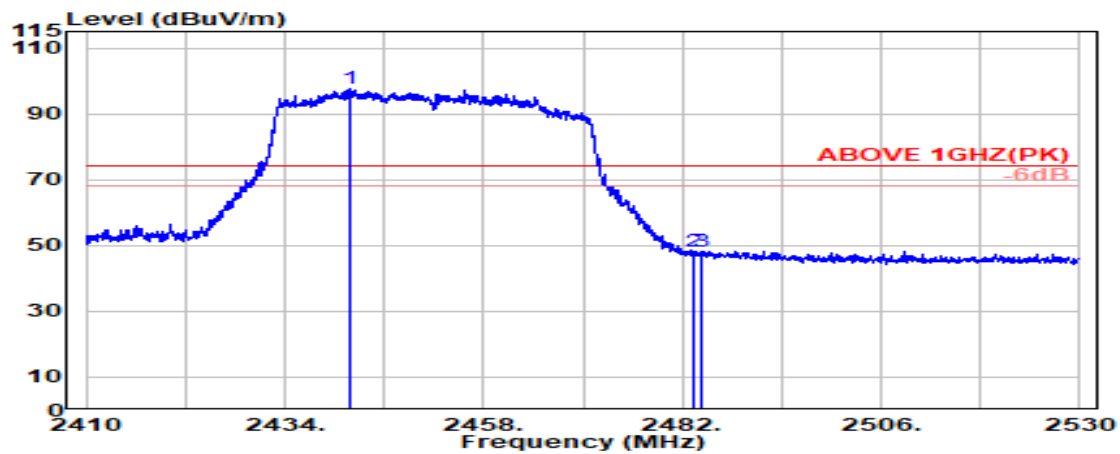

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2441.800               | 28.28                 | 5.77            | 39.92            | 103.46            | 97.60                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 53.73             | 48.08                   | 74.00           | 25.92       | Peak     |
| 2484.250                 | 28.44                 | 5.83            | 39.92            | 53.98             | 48.33                   | 74.00           | 25.67       | Peak     |

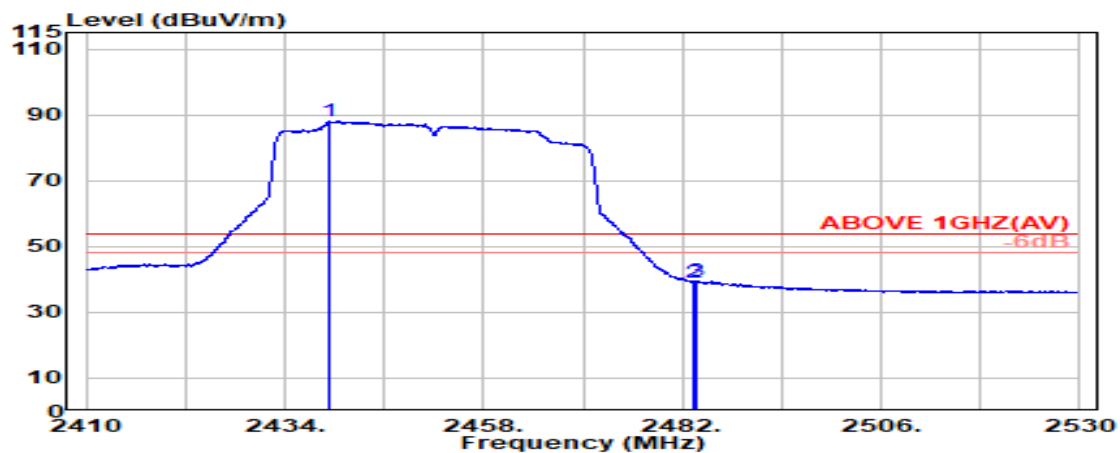

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2439.250               | 28.28                 | 5.77            | 39.92            | 93.89             | 88.02                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 44.85             | 39.19                   | 54.00           | 14.81       | Average  |
| 2483.800                 | 28.44                 | 5.83            | 39.92            | 45.19             | 39.53                   | 54.00           | 14.47       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT40 | Frequency | TX 2457MHz |
|------|----------------|-----------|------------|



Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2462.200               | 28.35                 | 5.80            | 39.92            | 91.51             | 85.74                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 52.16             | 46.50                   | 74.00           | 27.50       | Peak     |
| 2485.450                 | 28.44                 | 5.83            | 39.92            | 53.76             | 48.11                   | 74.00           | 25.89       | Peak     |

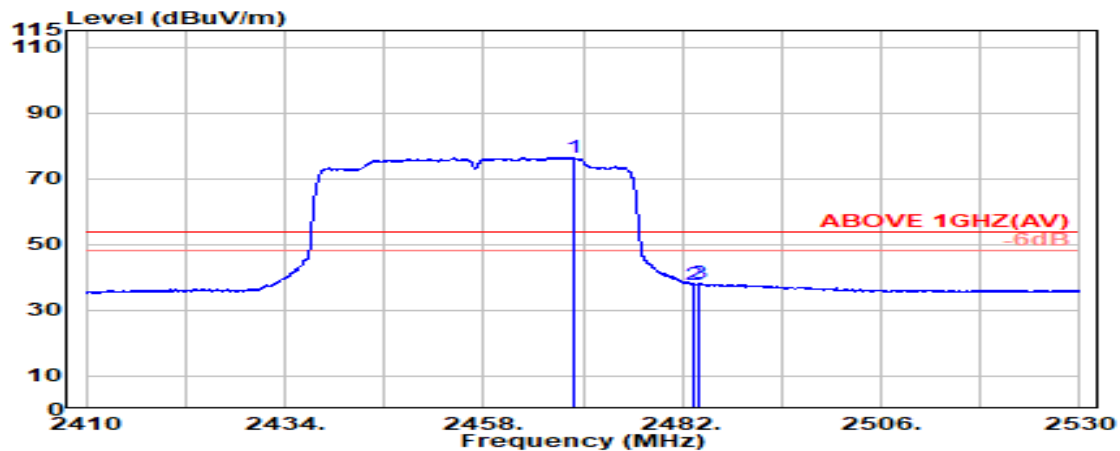

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2468.900               | 28.38                 | 5.81            | 39.92            | 82.30             | 76.57                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 43.52             | 37.87                   | 54.00           | 16.13       | Average  |
| 2483.900                 | 28.44                 | 5.83            | 39.92            | 43.99             | 38.34                   | 54.00           | 15.66       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT40 | Frequency | TX 2457MHz |
|------|----------------|-----------|------------|



Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2449.250               | 28.30                 | 5.78            | 39.92            | 98.90             | 93.07                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 51.86             | 46.20                   | 74.00           | 27.80       | Peak     |
| 2485.000                 | 28.44                 | 5.83            | 39.92            | 54.18             | 48.53                   | 74.00           | 25.47       | Peak     |

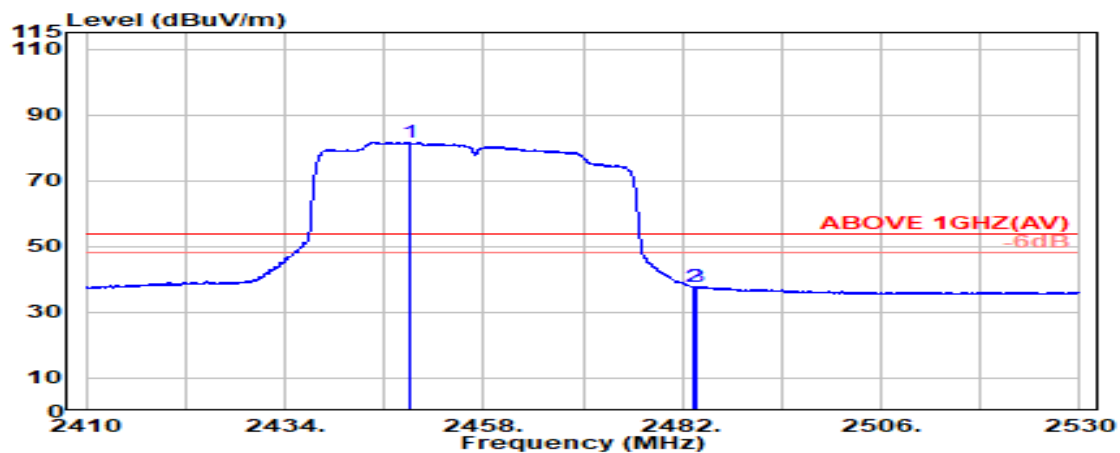

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2449.150               | 28.30                 | 5.78            | 39.92            | 87.56             | 81.73                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 43.56             | 37.90                   | 54.00           | 16.10       | Average  |
| 2483.700                 | 28.44                 | 5.83            | 39.92            | 43.53             | 37.87                   | 54.00           | 16.13       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT40 | Frequency | TX 2462MHz |
|------|----------------|-----------|------------|

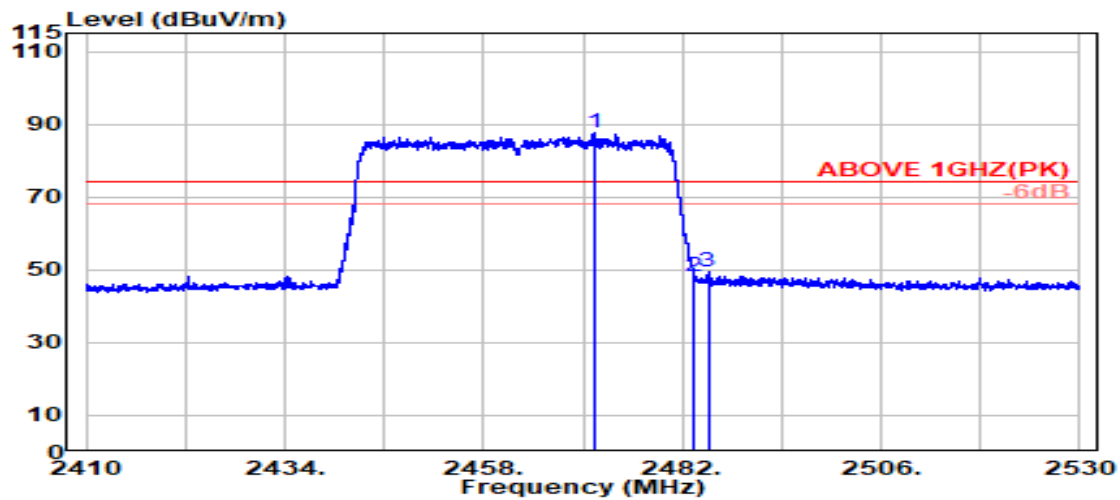

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2471.300               | 28.39                 | 5.81            | 39.92                  | 93.37             | 87.65                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 53.87             | 48.21                   | 74.00           | 25.79       | Peak     |
| 2485.100                 | 28.44                 | 5.83            | 39.92                  | 55.24             | 49.59                   | 74.00           | 24.41       | Peak     |

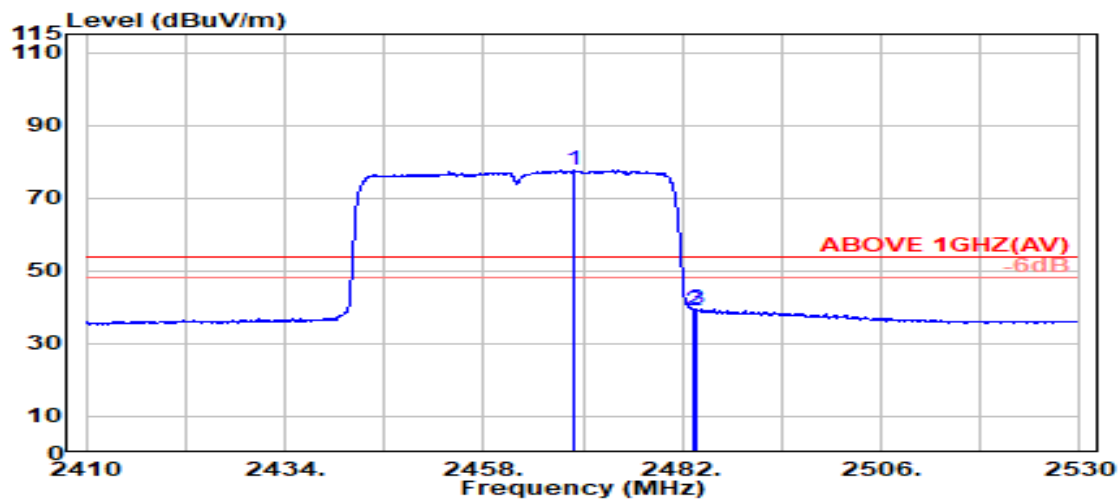

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2468.800               | 28.38                 | 5.81            | 39.92                  | 83.46             | 77.72                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 44.90             | 39.24                   | 54.00           | 14.76       | Average  |
| 2483.700                 | 28.44                 | 5.83            | 39.92                  | 45.02             | 39.37                   | 54.00           | 14.63       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|      |                |           |            |
|------|----------------|-----------|------------|
| Mode | 802.11be-EHT40 | Frequency | TX 2462MHz |
|------|----------------|-----------|------------|

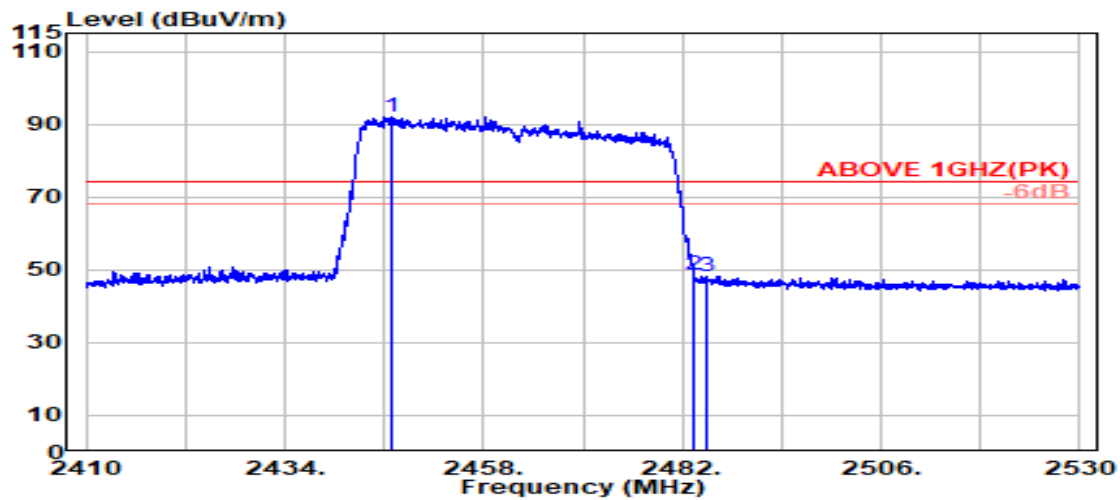

#### Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2447.050                 | 28.29                 | 5.78            | 39.92                  | 97.78             | 91.94                   | ---             | ---         | Peak     |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92                  | 54.23             | 48.57                   | 74.00           | 25.43       | Peak     |
|   | 2485.050                 | 28.44                 | 5.83            | 39.92                  | 54.02             | 48.37                   | 74.00           | 25.63       | Peak     |

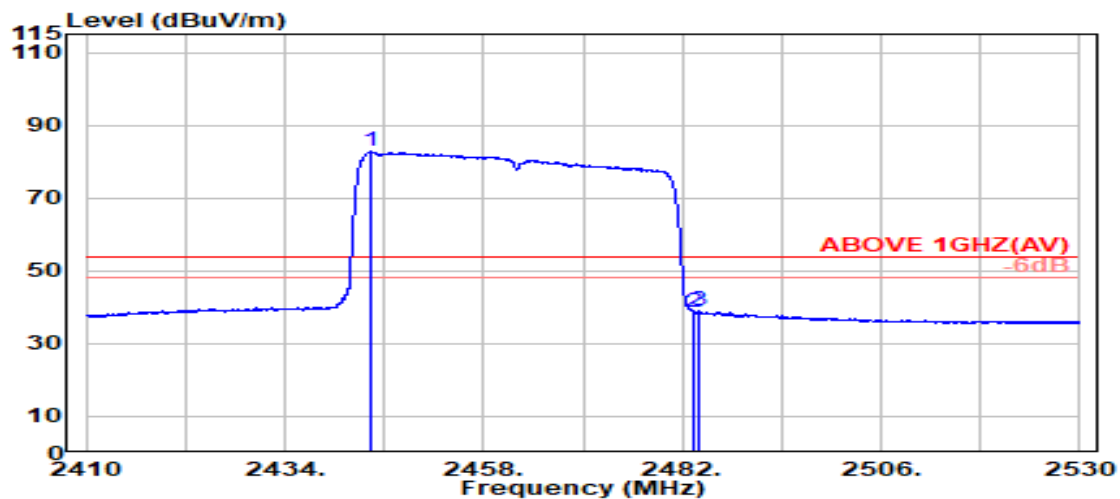

#### Antenna at Vertical Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2444.300                 | 28.29                 | 5.78            | 39.92                  | 88.57             | 82.71                   | ---             | ---         | Average  |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92                  | 44.16             | 38.50                   | 54.00           | 15.50       | Average  |
|   | 2484.000                 | 28.44                 | 5.83            | 39.92                  | 44.54             | 38.89                   | 54.00           | 15.11       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |               |           |             |
|------------------|---------------|-----------|-------------|
| Mode             | 802.11ax-HE20 | Frequency | TX 2412 MHz |
| RU Configuration | 26/0          |           |             |

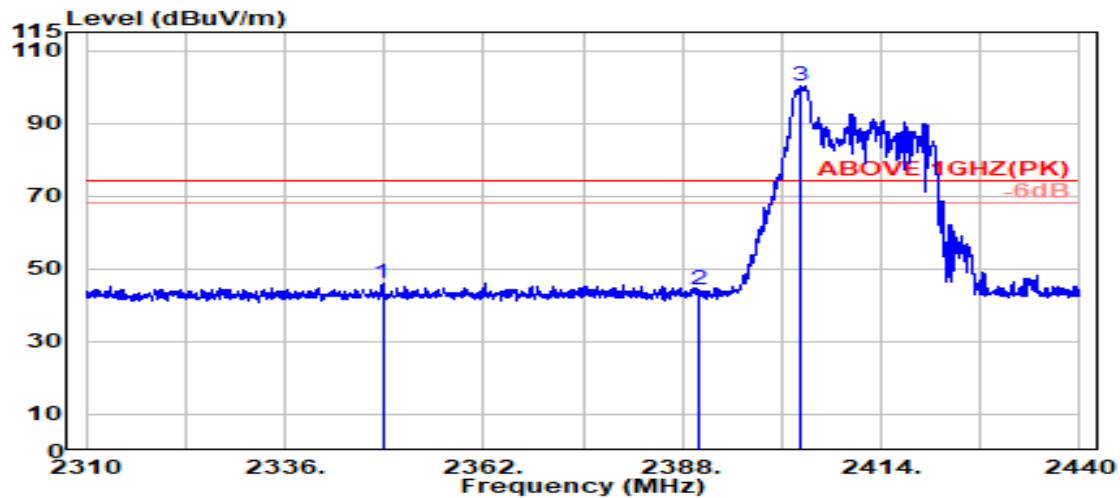

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2348.783                 | 28.20                 | 5.65            | 39.92            | 51.99             | 45.91                   | 74.00           | 28.09       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 50.23             | 44.21                   | 74.00           | 29.79       | Peak     |
| @ 2403.329               | 28.21                 | 5.72            | 39.92            | 106.20            | 100.21                  | ---             | ---         | Peak     |

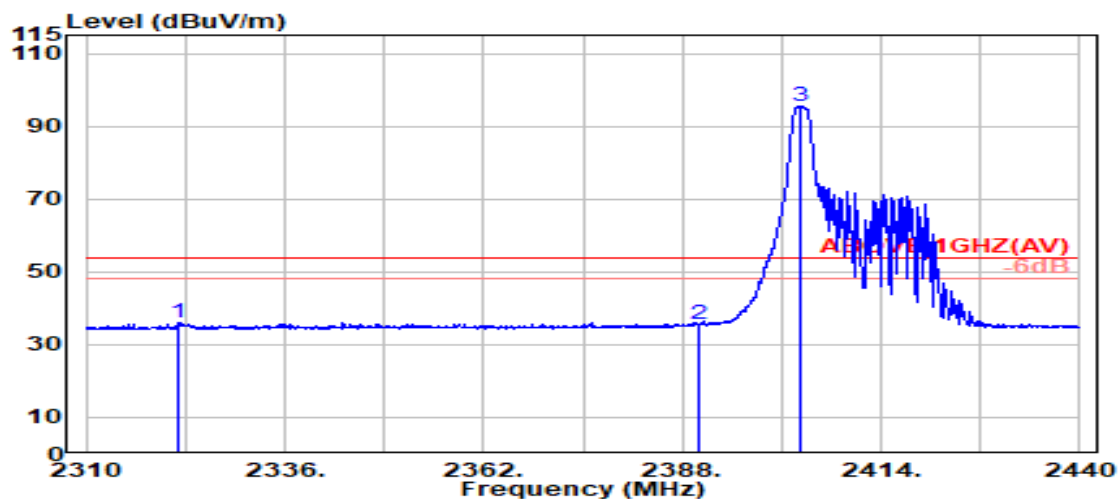

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2322.079                 | 28.09                 | 5.61            | 39.92            | 42.30             | 36.08                   | 54.00           | 17.92       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 41.63             | 35.61                   | 54.00           | 18.39       | Average  |
| @ 2403.383               | 28.21                 | 5.72            | 39.92            | 101.63            | 95.64                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |               |           |             |
|------------------|---------------|-----------|-------------|
| Mode             | 802.11ax-HE20 | Frequency | TX 2412 MHz |
| RU Configuration | 26/0          |           |             |

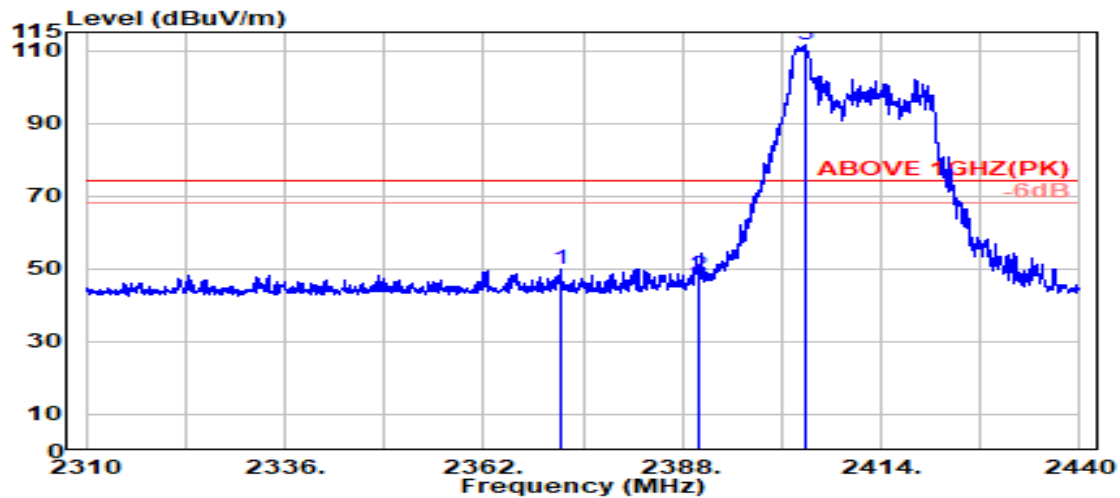

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2372.183                 | 28.20                 | 5.68            | 39.92            | 56.11             | 50.07                   | 74.00           | 23.93       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 54.11             | 48.10                   | 74.00           | 25.90       | Peak     |
| @ 2404.142               | 28.21                 | 5.72            | 39.92            | 117.44            | 111.45                  | ---             | ---         | Peak     |

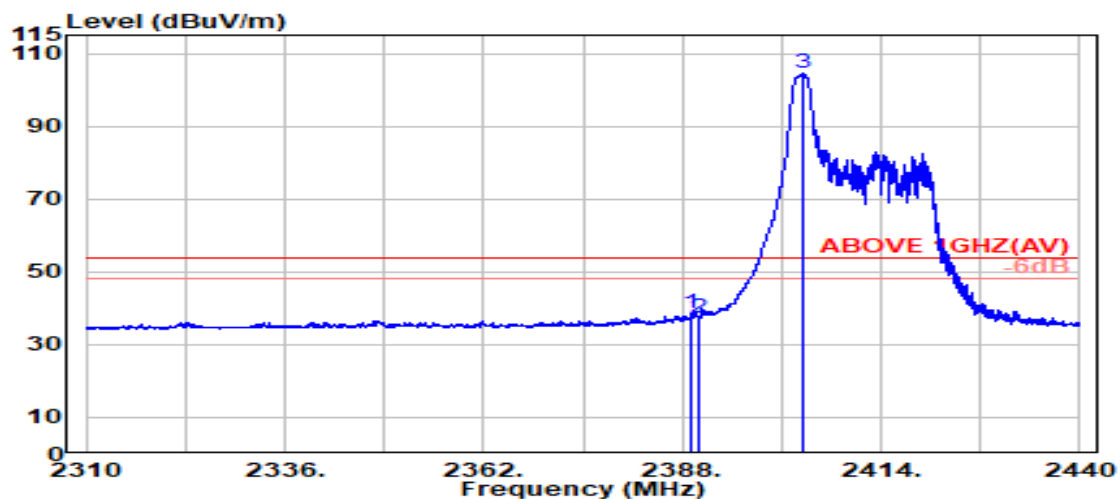

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.300                 | 28.20                 | 5.70            | 39.92            | 44.60             | 38.59                   | 54.00           | 15.41       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 43.26             | 37.24                   | 54.00           | 16.76       | Average  |
| @ 2403.925               | 28.21                 | 5.72            | 39.92            | 110.41            | 104.42                  | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |               |           |             |
|------------------|---------------|-----------|-------------|
| Mode             | 802.11ax-HE20 | Frequency | TX 2412 MHz |
| RU Configuration | 52/37         |           |             |

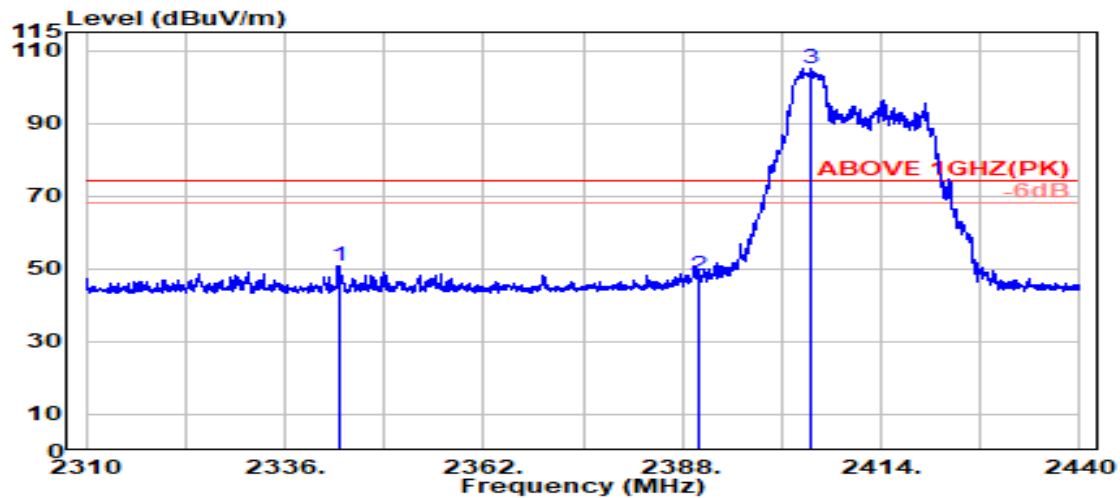

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2343.042                 | 28.17                 | 5.64            | 39.92            | 57.00             | 50.89                   | 74.00           | 23.11       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 54.15             | 48.14                   | 74.00           | 25.86       | Peak     |
| @ 2404.846               | 28.21                 | 5.72            | 39.92            | 110.88            | 104.90                  | ---             | ---         | Peak     |

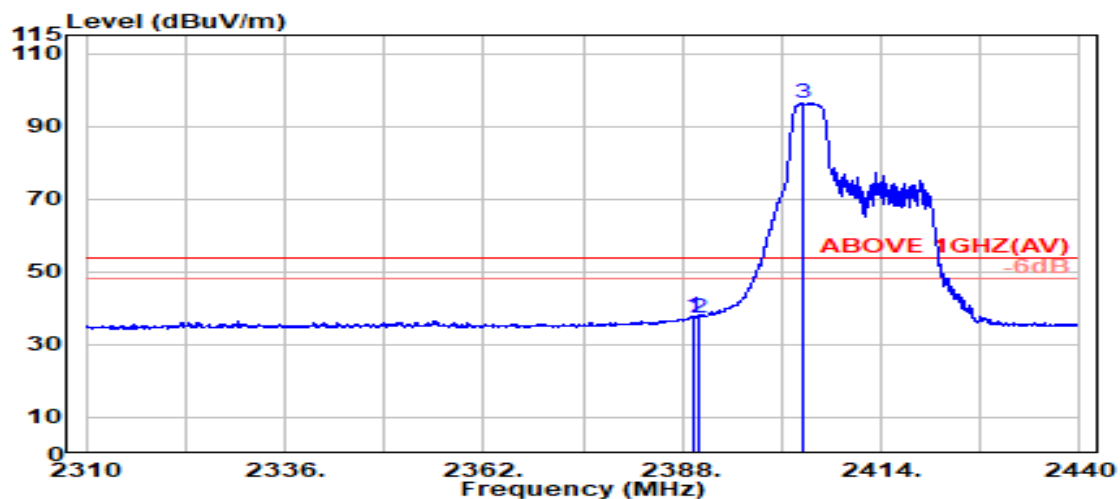

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.571                 | 28.20                 | 5.70            | 39.92            | 43.89             | 37.87                   | 54.00           | 16.13       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 43.49             | 37.48                   | 54.00           | 16.52       | Average  |
| @ 2403.817               | 28.21                 | 5.72            | 39.92            | 102.37            | 96.38                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |               |           |             |
|------------------|---------------|-----------|-------------|
| Mode             | 802.11ax-HE20 | Frequency | TX 2412 MHz |
| RU Configuration | 52/37         |           |             |

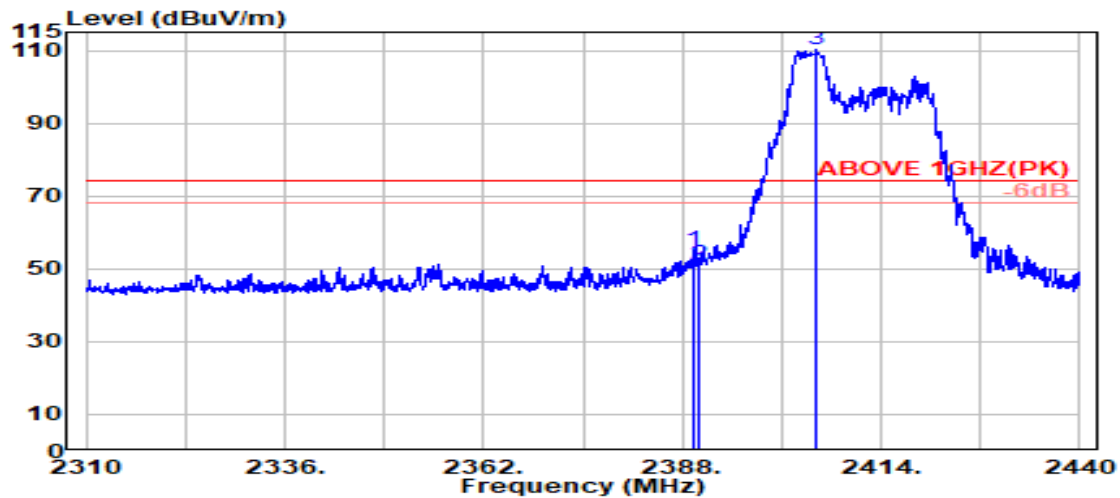

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.408                 | 28.20                 | 5.70            | 39.92                  | 61.10             | 55.08                   | 74.00           | 18.92       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 57.03             | 51.01                   | 74.00           | 22.99       | Peak     |
| @ 2405.604               | 28.21                 | 5.72            | 39.92                  | 116.05            | 110.07                  | ---             | ---         | Peak     |

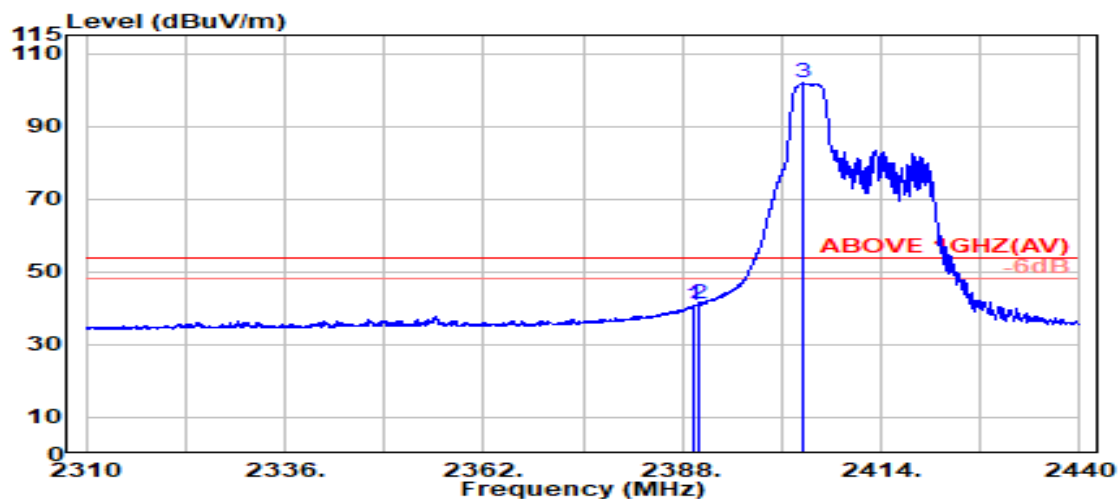

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.571                 | 28.20                 | 5.70            | 39.92                  | 46.81             | 40.80                   | 54.00           | 13.20       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 47.13             | 41.11                   | 54.00           | 12.89       | Average  |
| @ 2403.762               | 28.21                 | 5.72            | 39.92                  | 107.77            | 101.78                  | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |               |           |             |
|------------------|---------------|-----------|-------------|
| Mode             | 802.11ax-HE20 | Frequency | TX 2412 MHz |
| RU Configuration | 106/53        |           |             |

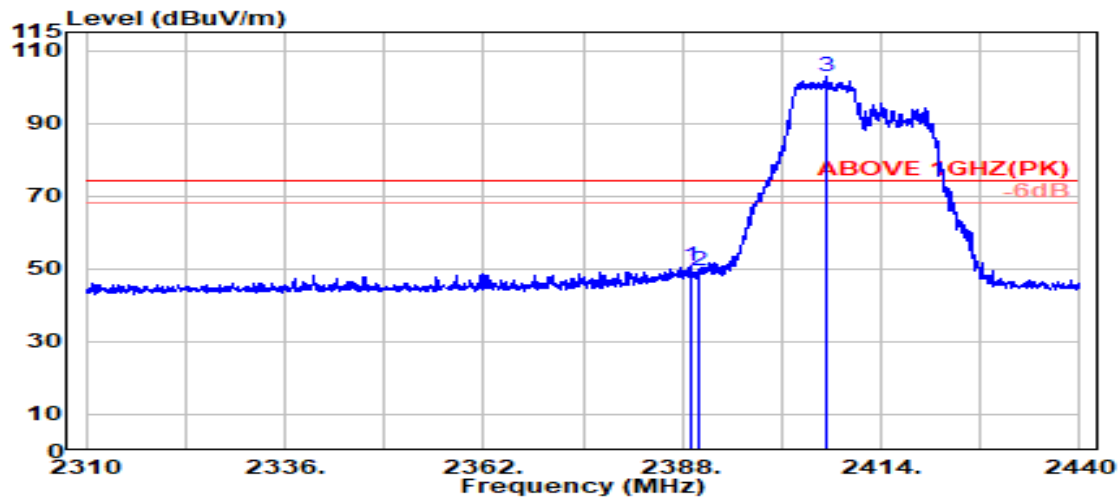

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.192                 | 28.20                 | 5.70            | 39.92            | 56.97             | 50.96                   | 74.00           | 23.04       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 55.39             | 49.37                   | 74.00           | 24.63       | Peak     |
| @ 2406.904               | 28.21                 | 5.73            | 39.92            | 108.77            | 102.79                  | ---             | ---         | Peak     |

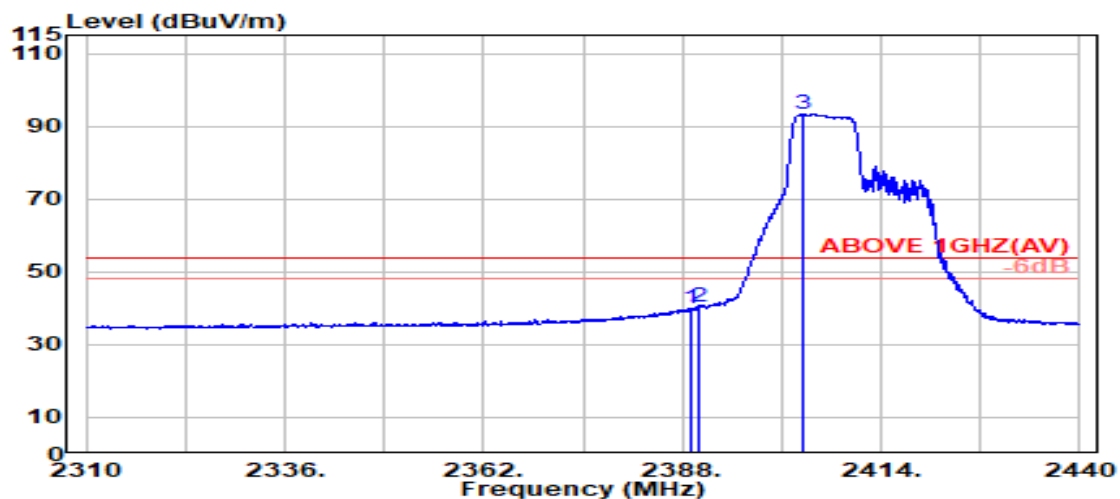

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.192                 | 28.20                 | 5.70            | 39.92            | 45.94             | 39.93                   | 54.00           | 14.07       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 46.40             | 40.39                   | 54.00           | 13.61       | Average  |
| @ 2403.817               | 28.21                 | 5.72            | 39.92            | 99.37             | 93.38                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |               |           |             |
|------------------|---------------|-----------|-------------|
| Mode             | 802.11ax-HE20 | Frequency | TX 2412 MHz |
| RU Configuration | 106/53        |           |             |

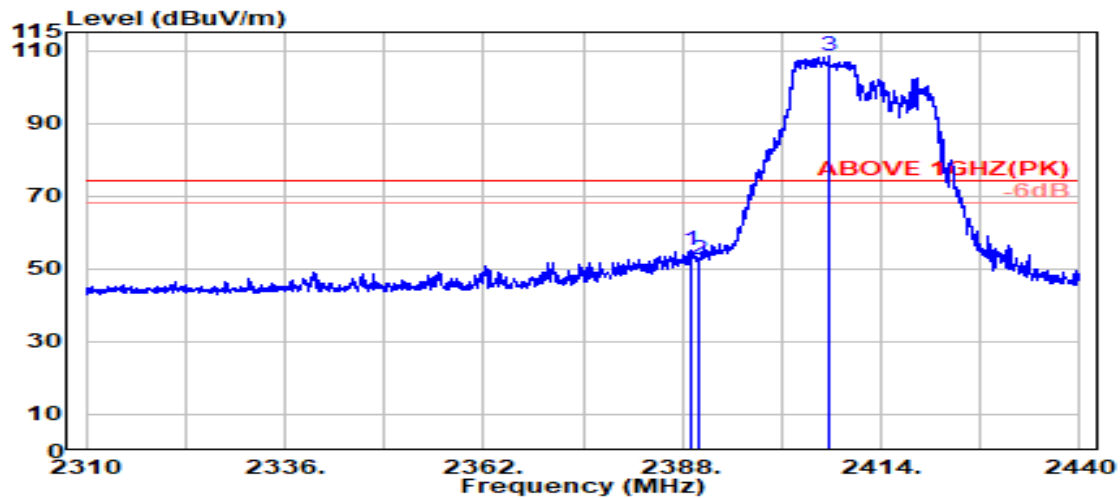

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.300                 | 28.20                 | 5.70            | 39.92            | 61.26             | 55.24                   | 74.00           | 18.76       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 58.59             | 52.58                   | 74.00           | 21.42       | Peak     |
| @ 2407.121               | 28.21                 | 5.73            | 39.92            | 114.40            | 108.43                  | ---             | ---         | Peak     |

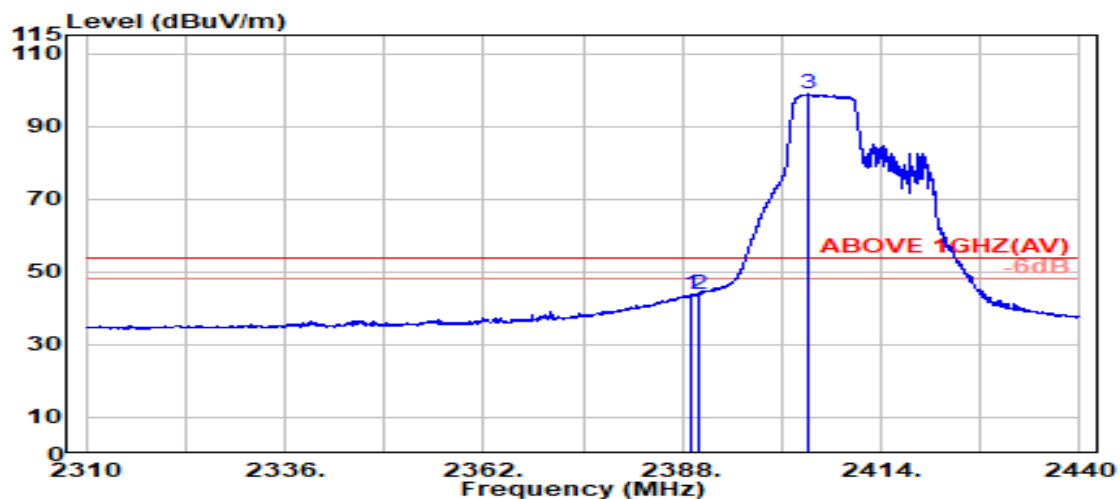

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.246                 | 28.20                 | 5.70            | 39.92            | 49.74             | 43.73                   | 54.00           | 10.27       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 49.99             | 43.98                   | 54.00           | 10.02       | Average  |
| @ 2404.467               | 28.21                 | 5.72            | 39.92            | 104.80            | 98.81                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |               |           |            |
|------------------|---------------|-----------|------------|
| Mode             | 802.11ax-HE20 | Frequency | TX 2472MHz |
| RU Configuration | 26/8          |           |            |

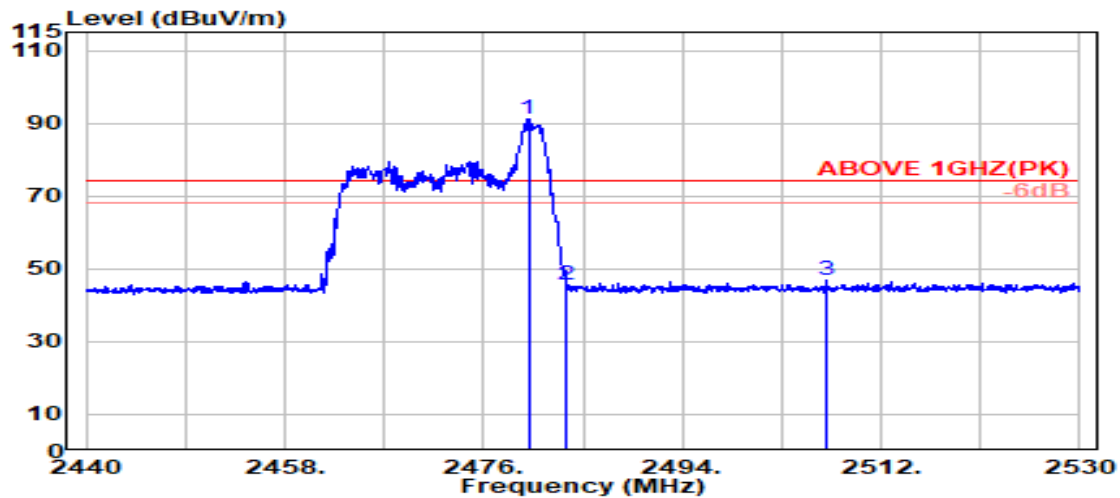

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2480.050                 | 28.42                 | 5.82            | 39.92            | 96.88             | 91.21                   | ---             | ---         | Peak     |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92            | 51.13             | 45.47                   | 74.00           | 28.53       | Peak     |
|   | 2507.000                 | 28.53                 | 5.86            | 39.92            | 52.45             | 46.91                   | 74.00           | 27.09       | Peak     |

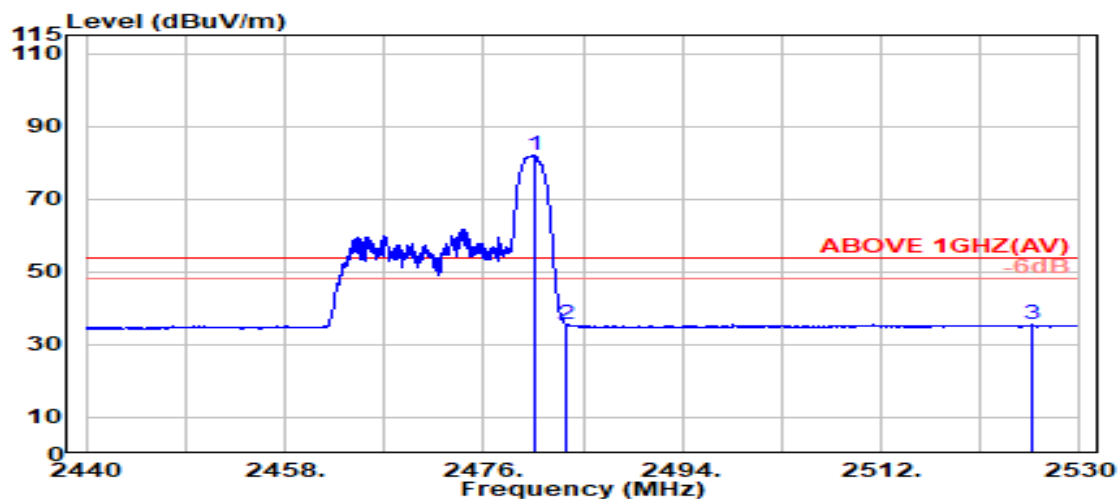

Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2480.600                 | 28.42                 | 5.82            | 39.92            | 87.66             | 81.98                   | ---             | ---         | Average  |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92            | 41.16             | 35.50                   | 54.00           | 18.50       | Average  |
|   | 2525.750                 | 28.60                 | 5.88            | 39.92            | 40.87             | 35.43                   | 54.00           | 18.57       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |           |            |
|------------------|---------------|-----------|------------|
| Mode             | 802.11ax-HE20 | Frequency | TX 2472MHz |
| RU Configuration | 26/8          |           |            |

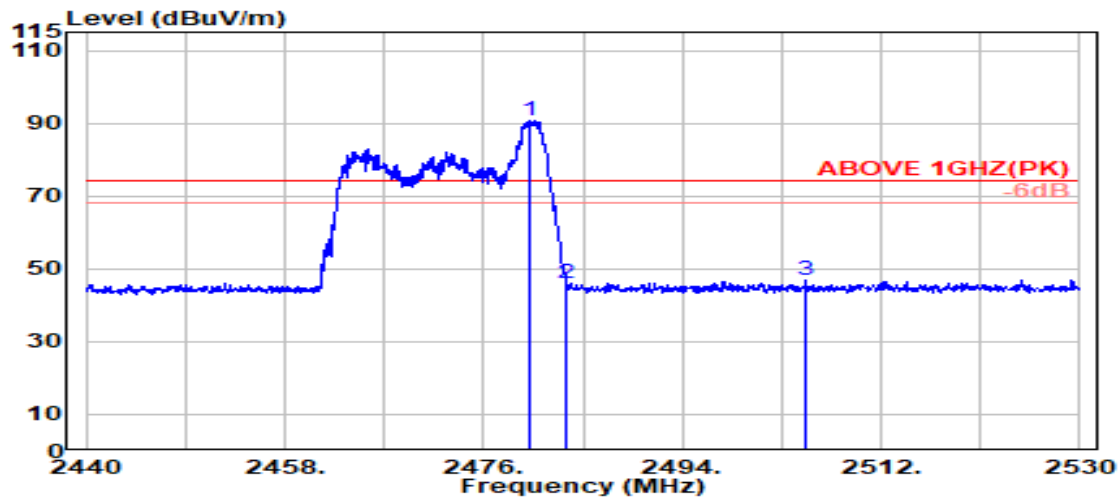

Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2480.250                 | 28.42                 | 5.82            | 39.92            | 96.44             | 90.77                   | ---             | ---         | Peak     |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92            | 51.72             | 46.06                   | 74.00           | 27.94       | Peak     |
|   | 2505.150                 | 28.52                 | 5.86            | 39.92            | 52.42             | 46.88                   | 74.00           | 27.12       | Peak     |

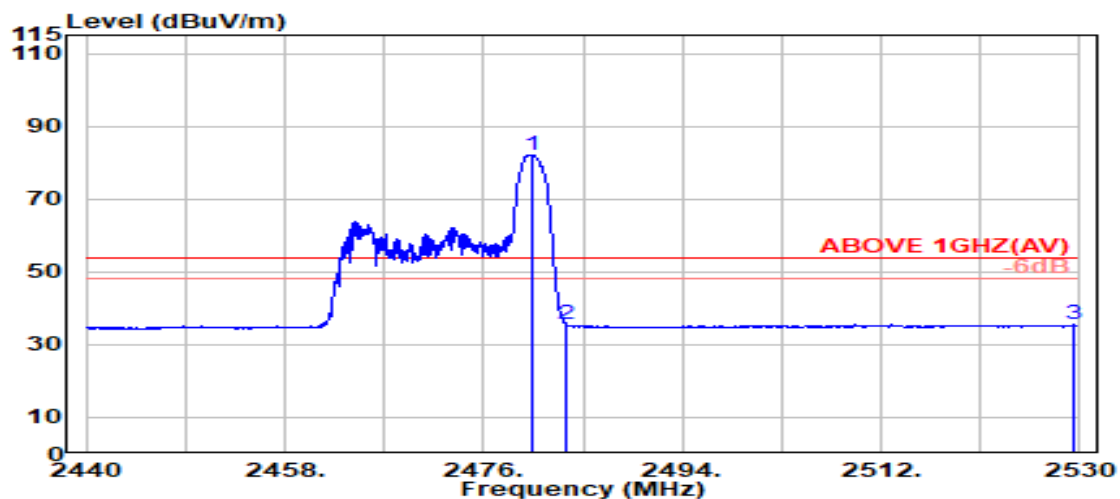

Antenna at Vertical Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2480.350                 | 28.42                 | 5.82            | 39.92            | 87.82             | 82.14                   | ---             | ---         | Average  |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92            | 41.18             | 35.52                   | 54.00           | 18.48       | Average  |
|   | 2529.500                 | 28.62                 | 5.88            | 39.93            | 40.84             | 35.42                   | 54.00           | 18.58       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |               |           |            |
|------------------|---------------|-----------|------------|
| Mode             | 802.11ax-HE20 | Frequency | TX 2472MHz |
| RU Configuration | 52/40         |           |            |

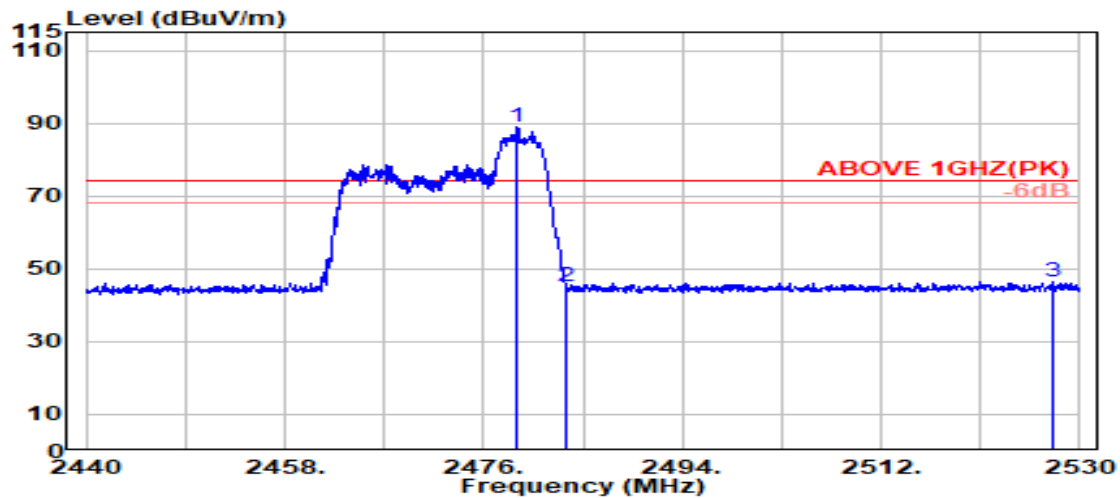

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2479.100               | 28.42                 | 5.82            | 39.92            | 94.83             | 89.15                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 50.68             | 45.02                   | 74.00           | 28.98       | Peak     |
| 2527.500                 | 28.61                 | 5.88            | 39.92            | 51.91             | 46.48                   | 74.00           | 27.52       | Peak     |

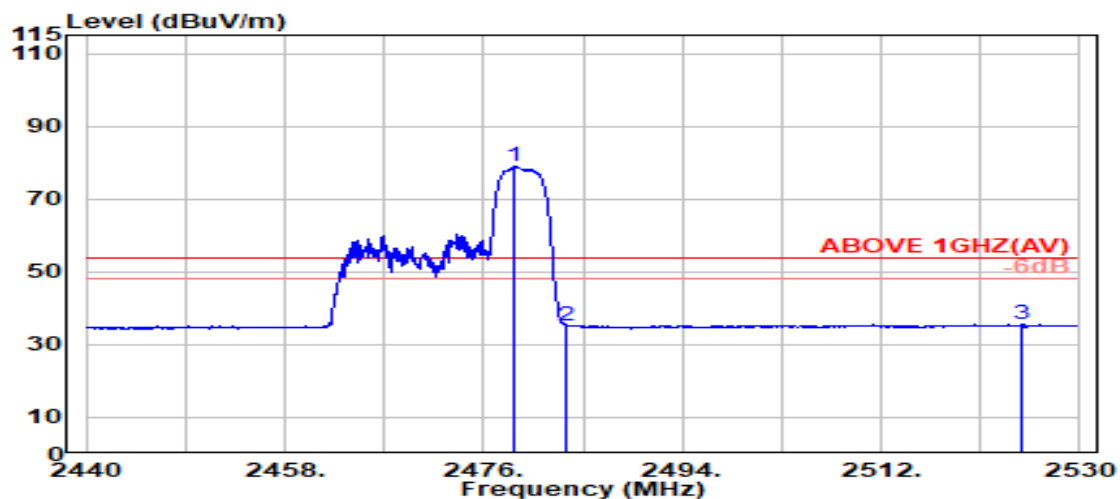

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2478.800               | 28.42                 | 5.82            | 39.92            | 84.74             | 79.06                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 40.75             | 35.09                   | 54.00           | 18.91       | Average  |
| 2524.800                 | 28.60                 | 5.88            | 39.92            | 40.96             | 35.51                   | 54.00           | 18.49       | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |               |           |            |
|------------------|---------------|-----------|------------|
| Mode             | 802.11ax-HE20 | Frequency | TX 2472MHz |
| RU Configuration | 52/40         |           |            |

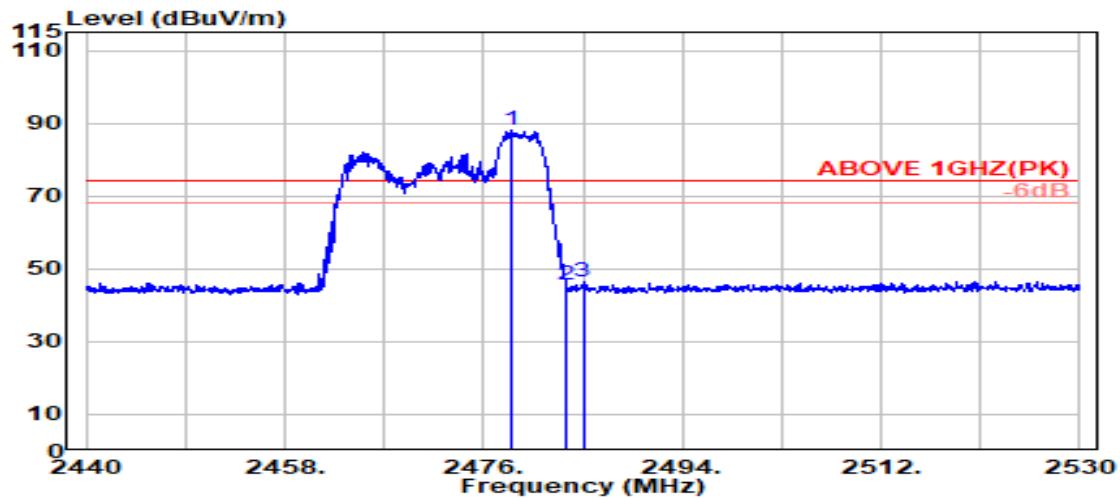

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2478.500               | 28.41                 | 5.82            | 39.92                  | 93.83             | 88.14                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 51.36             | 45.71                   | 74.00           | 28.29       | Peak     |
| 2485.000                 | 28.44                 | 5.83            | 39.92                  | 52.09             | 46.44                   | 74.00           | 27.56       | Peak     |

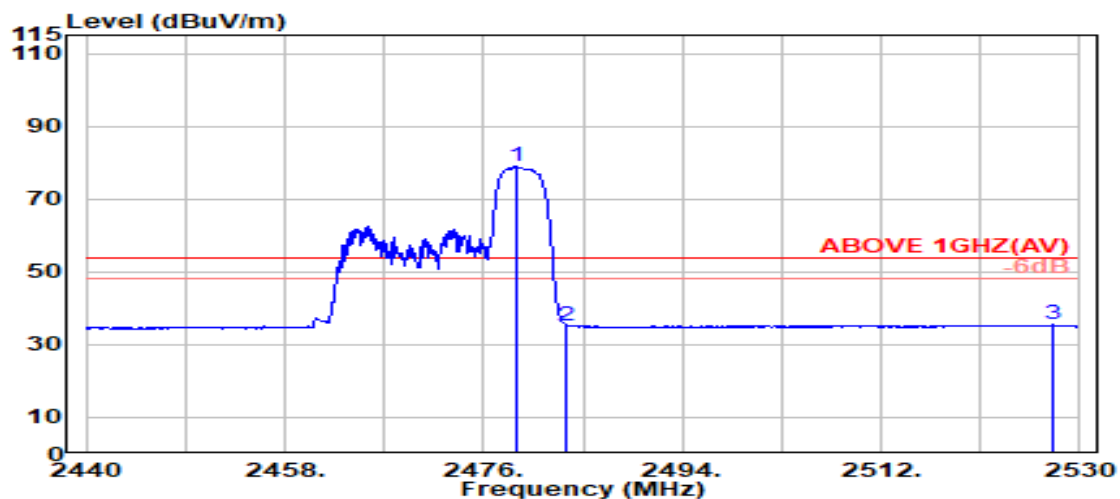

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2478.900               | 28.42                 | 5.82            | 39.92                  | 84.52             | 78.84                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 40.86             | 35.20                   | 54.00           | 18.80       | Average  |
| 2527.650                 | 28.61                 | 5.88            | 39.92                  | 40.89             | 35.46                   | 54.00           | 18.54       | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |               |           |            |
|------------------|---------------|-----------|------------|
| Mode             | 802.11ax-HE20 | Frequency | TX 2472MHz |
| RU Configuration | 106/54        |           |            |

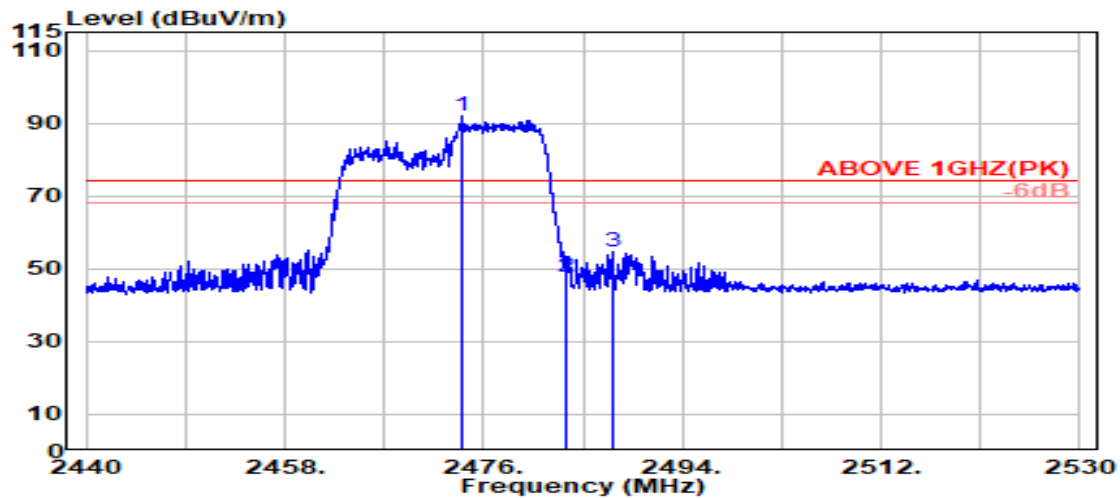

#### Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2474.000                 | 28.40                 | 5.82            | 39.92            | 97.68             | 91.98                   | ---             | ---         | Peak     |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92            | 53.56             | 47.90                   | 74.00           | 26.10       | Peak     |
|   | 2487.650                 | 28.45                 | 5.83            | 39.92            | 60.25             | 54.61                   | 74.00           | 19.39       | Peak     |

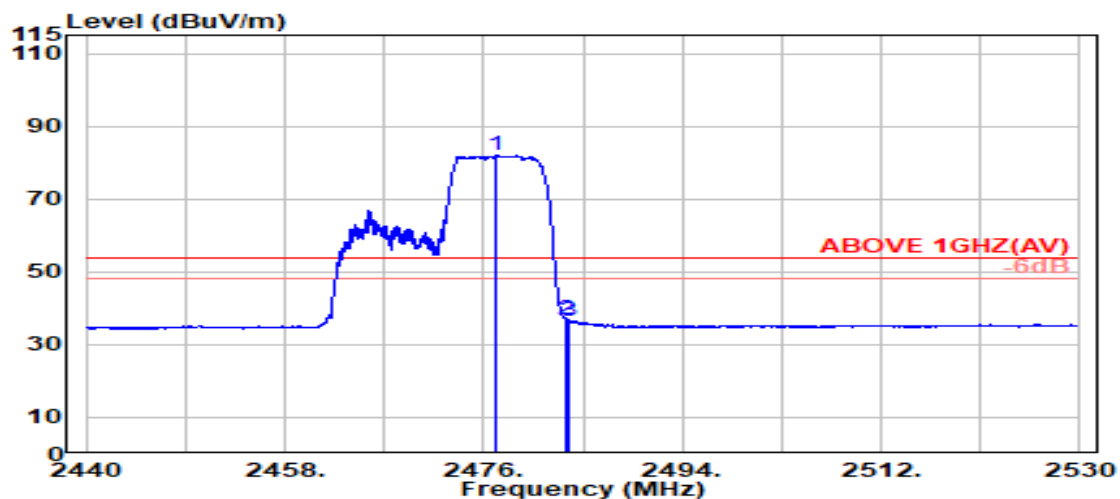

#### Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2477.100                 | 28.41                 | 5.82            | 39.92            | 87.67             | 81.97                   | ---             | ---         | Average  |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92            | 42.53             | 36.88                   | 54.00           | 17.12       | Average  |
|   | 2483.700                 | 28.44                 | 5.83            | 39.92            | 42.16             | 36.51                   | 54.00           | 17.49       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |               |           |            |
|------------------|---------------|-----------|------------|
| Mode             | 802.11ax-HE20 | Frequency | TX 2472MHz |
| RU Configuration | 106/54        |           |            |

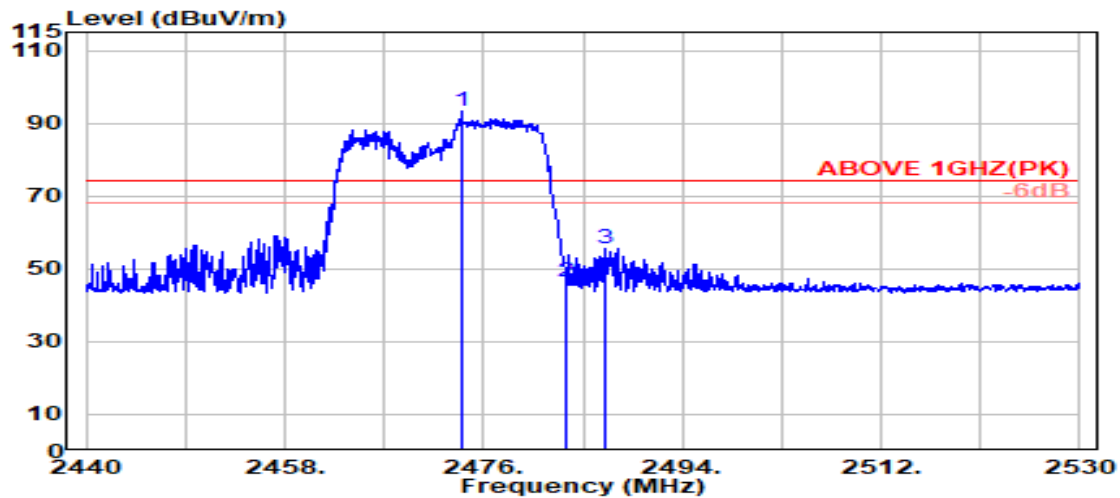

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2474.000               | 28.40                 | 5.82            | 39.92                  | 98.86             | 93.15                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 52.05             | 46.40                   | 74.00           | 27.60       | Peak     |
| 2487.050                 | 28.45                 | 5.83            | 39.92                  | 61.15             | 55.52                   | 74.00           | 18.48       | Peak     |

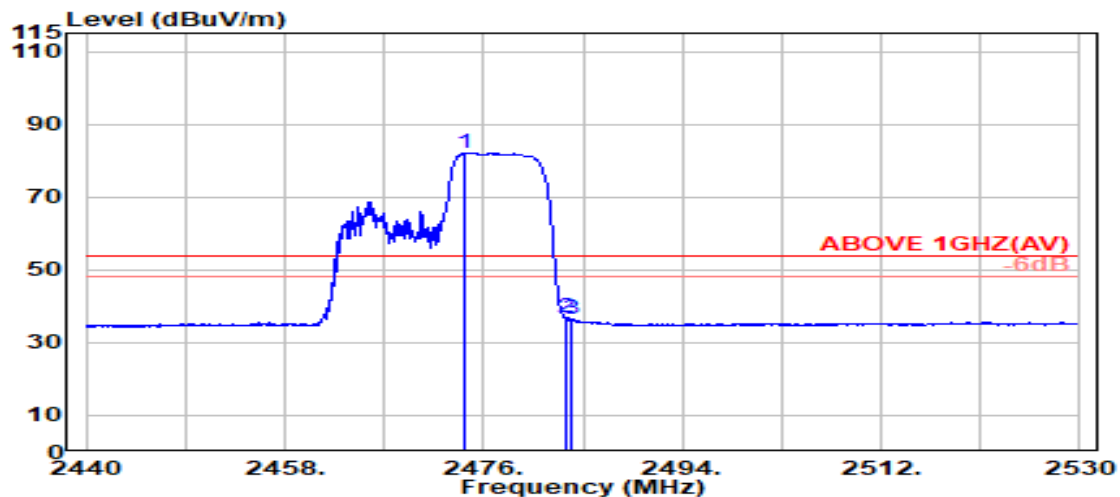


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2474.350               | 28.40                 | 5.82            | 39.92                  | 87.85             | 82.15                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 42.40             | 36.74                   | 54.00           | 17.26       | Average  |
| 2484.050                 | 28.44                 | 5.83            | 39.92                  | 42.10             | 36.44                   | 54.00           | 17.56       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section.

|                  |               |           |            |
|------------------|---------------|-----------|------------|
| Mode             | 802.11ax-HE40 | Frequency | TX 2422MHz |
| RU Configuration | 242/61        |           |            |

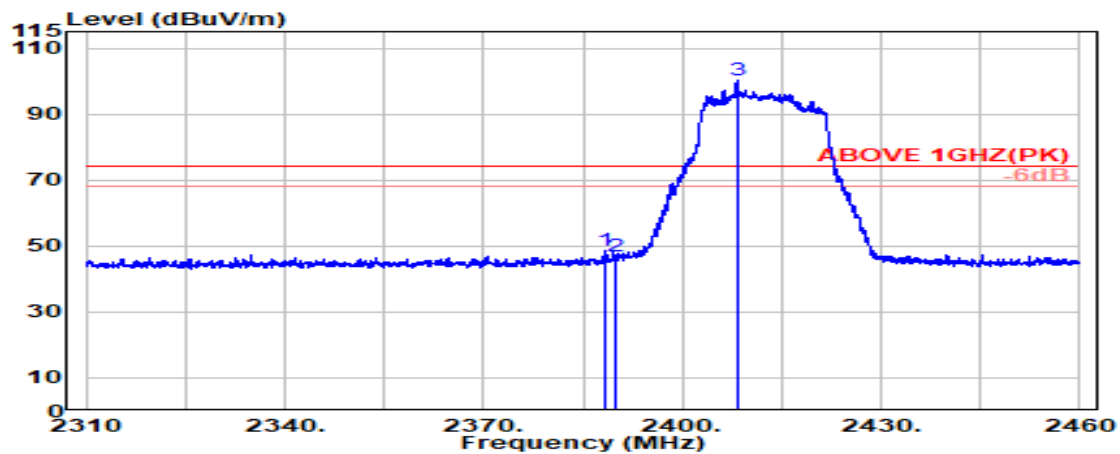

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.200                 | 28.20                 | 5.70            | 39.92                  | 54.72             | 48.70                   | 74.00           | 25.30       | Peak     |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 52.84             | 46.83                   | 74.00           | 27.17       | Peak     |
| @ 2408.250               | 28.22                 | 5.73            | 39.92                  | 106.07            | 100.10                  | ---             | ---         | Peak     |

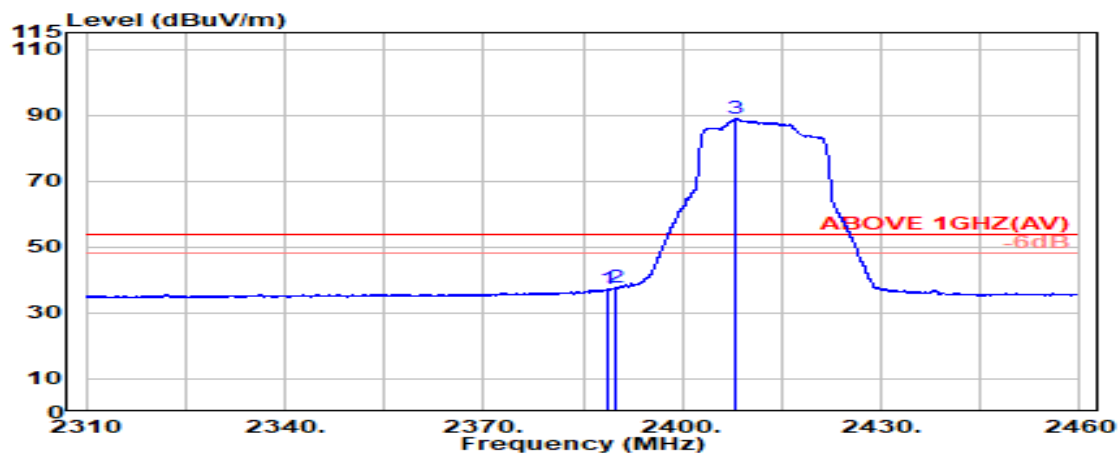

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.750                 | 28.20                 | 5.70            | 39.92                  | 43.37             | 37.35                   | 54.00           | 16.65       | Average  |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 43.57             | 37.56                   | 54.00           | 16.44       | Average  |
| @ 2407.950               | 28.22                 | 5.73            | 39.92                  | 94.79             | 88.81                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |               |           |            |
|------------------|---------------|-----------|------------|
| Mode             | 802.11ax-HE40 | Frequency | TX 2422MHz |
| RU Configuration | 242/61        |           |            |

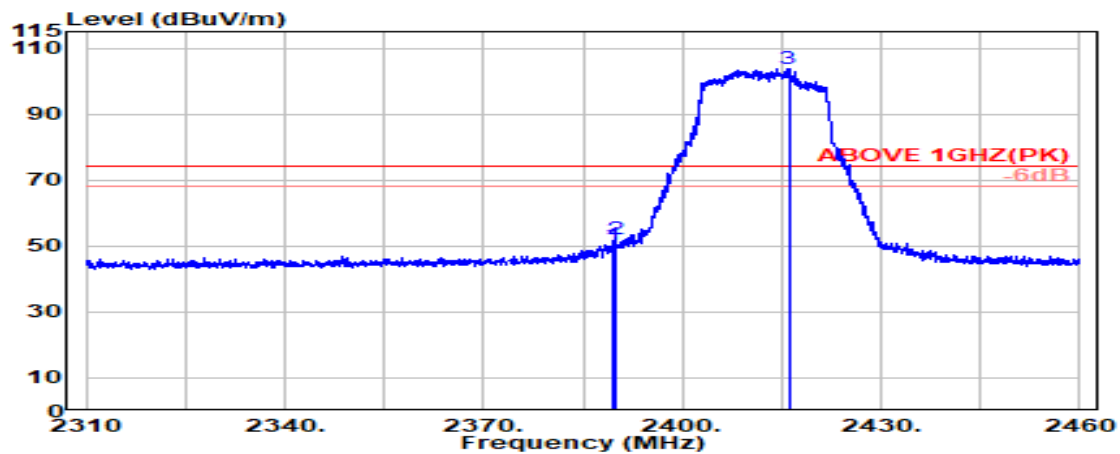

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.350                 | 28.20                 | 5.70            | 39.92            | 56.40             | 50.39                   | 74.00           | 23.61       | Peak     |
| 2389.800                 | 28.20                 | 5.70            | 39.92            | 58.23             | 52.21                   | 74.00           | 21.79       | Peak     |
| @ 2416.050               | 28.23                 | 5.74            | 39.92            | 109.71            | 103.76                  | ---             | ---         | Peak     |

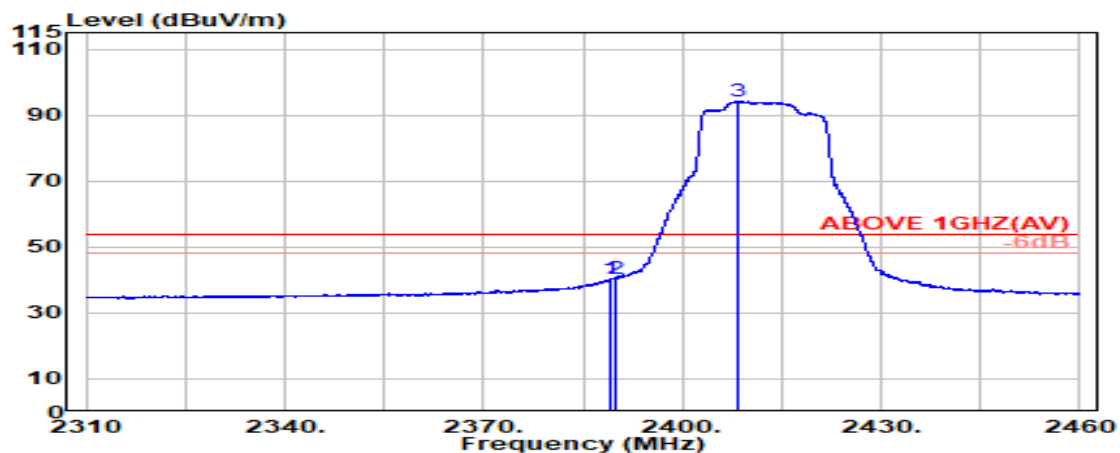


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.150                 | 28.20                 | 5.70            | 39.92            | 46.34             | 40.32                   | 54.00           | 13.68       | Average  |
| 2389.800                 | 28.20                 | 5.70            | 39.92            | 46.29             | 40.27                   | 54.00           | 13.73       | Average  |
| @ 2408.400               | 28.22                 | 5.73            | 39.92            | 100.21            | 94.24                   | ---             | ---         | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section

|                  |               |           |            |
|------------------|---------------|-----------|------------|
| Mode             | 802.11ax-HE40 | Frequency | TX 2462MHz |
| RU Configuration | 242/62        |           |            |

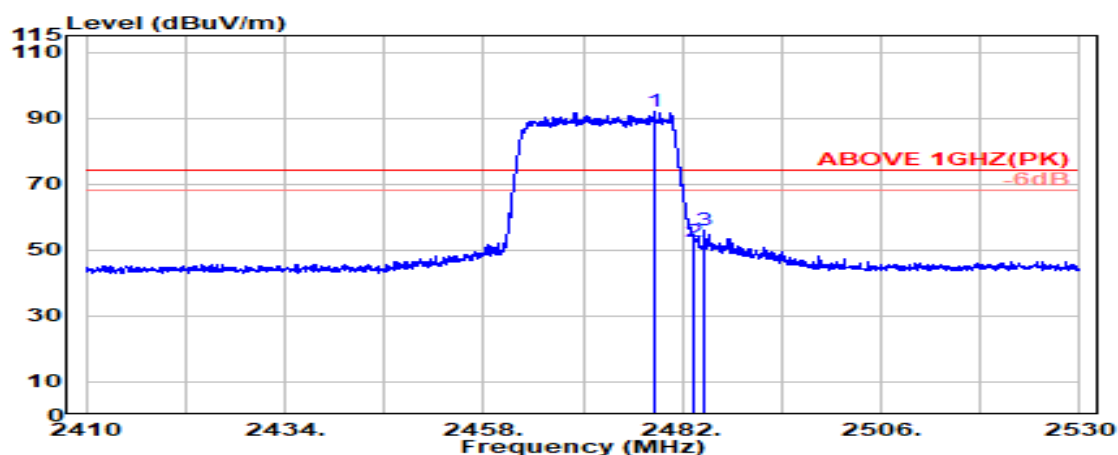

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2478.550               | 28.41                 | 5.82            | 39.92            | 97.55             | 91.87                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 58.26             | 52.60                   | 74.00           | 21.40       | Peak     |
| 2484.700                 | 28.44                 | 5.83            | 39.92            | 61.79             | 56.14                   | 74.00           | 17.86       | Peak     |

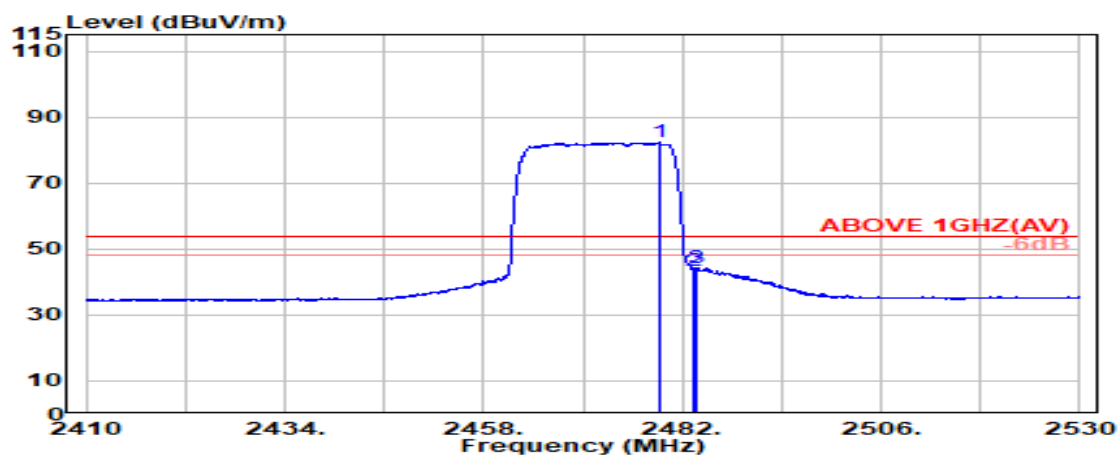

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2479.150               | 28.42                 | 5.82            | 39.92            | 87.96             | 82.28                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 49.22             | 43.56                   | 54.00           | 10.44       | Average  |
| 2483.800                 | 28.44                 | 5.83            | 39.92            | 49.77             | 44.11                   | 54.00           | 9.89        | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |               |           |            |
|------------------|---------------|-----------|------------|
| Mode             | 802.11ax-HE40 | Frequency | TX 2462MHz |
| RU Configuration | 242/62        |           |            |

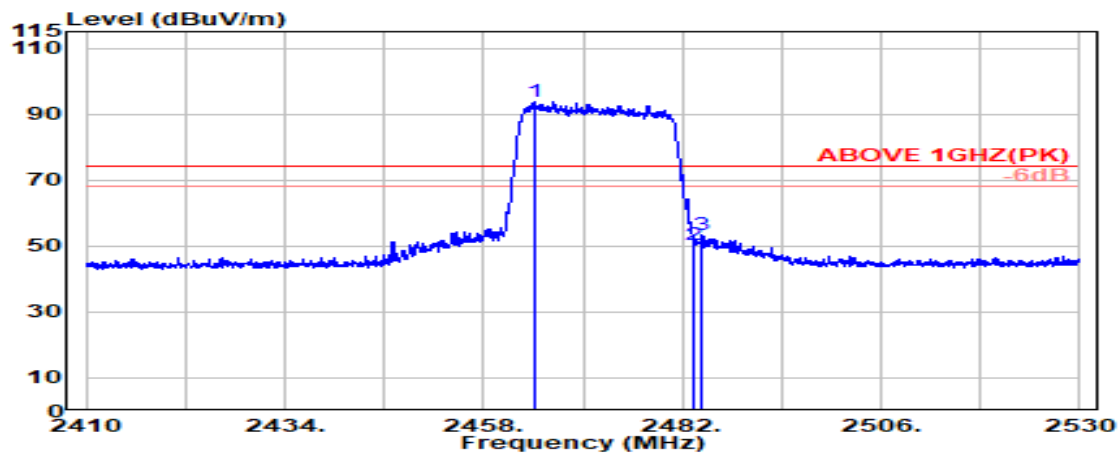

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2464.050               | 28.36                 | 5.80            | 39.92            | 99.55             | 93.79                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 56.10             | 50.44                   | 74.00           | 23.56       | Peak     |
| 2484.350                 | 28.44                 | 5.83            | 39.92            | 58.88             | 53.23                   | 74.00           | 20.77       | Peak     |

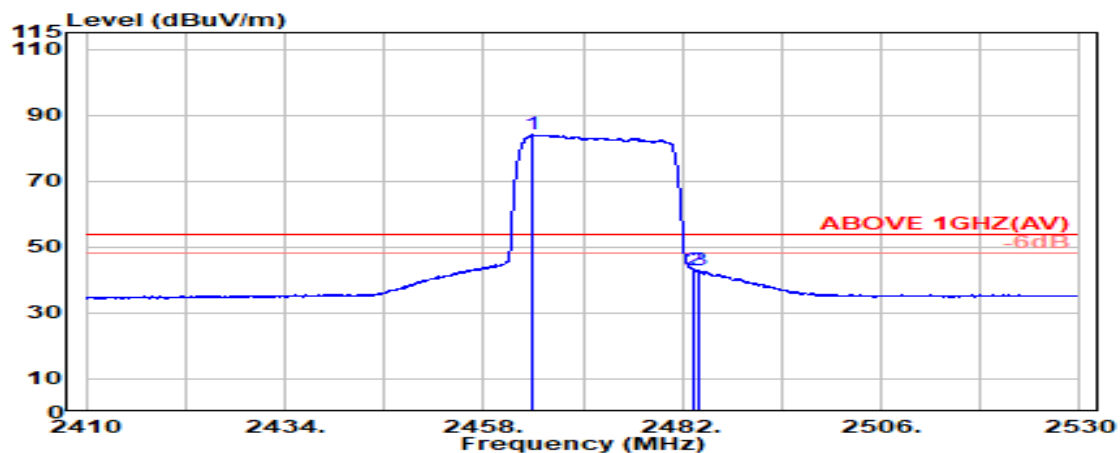

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2464.000               | 28.36                 | 5.80            | 39.92            | 89.75             | 83.99                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 48.73             | 43.08                   | 54.00           | 10.92       | Average  |
| 2483.850                 | 28.44                 | 5.83            | 39.92            | 48.53             | 42.87                   | 54.00           | 11.13       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |                |           |             |
|------------------|----------------|-----------|-------------|
| Mode             | 802.11be-EHT20 | Frequency | TX 2412 MHz |
| RU Configuration | 26/0           |           |             |

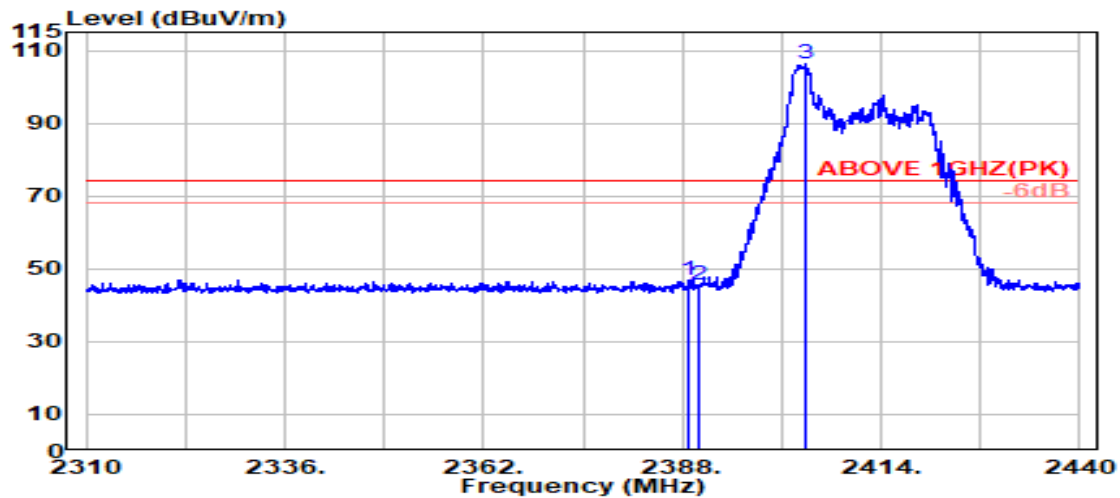

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.867                 | 28.20                 | 5.70            | 39.92            | 53.09             | 47.08                   | 74.00           | 26.92       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 51.37             | 45.36                   | 74.00           | 28.64       | Peak     |
| @ 2404.033               | 28.21                 | 5.72            | 39.92            | 112.14            | 106.15                  | ---             | ---         | Peak     |

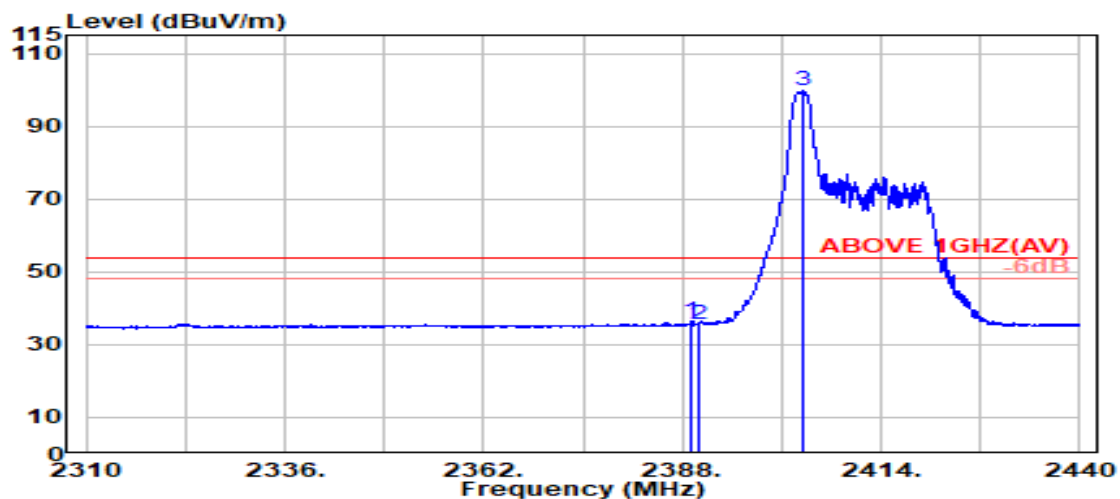

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.300                 | 28.20                 | 5.70            | 39.92            | 42.59             | 36.58                   | 54.00           | 17.42       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92            | 41.64             | 35.62                   | 54.00           | 18.38       | Average  |
| @ 2403.817               | 28.21                 | 5.72            | 39.92            | 105.62            | 99.63                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |                |           |             |
|------------------|----------------|-----------|-------------|
| Mode             | 802.11be-EHT20 | Frequency | TX 2412 MHz |
| RU Configuration | 26/0           |           |             |

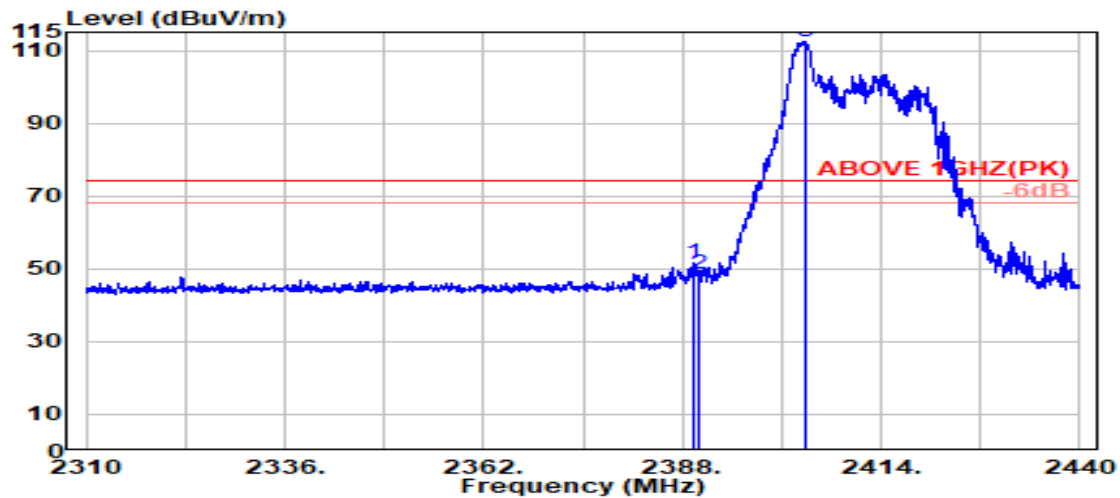

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.625                 | 28.20                 | 5.70            | 39.92                  | 57.55             | 51.53                   | 74.00           | 22.47       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 54.55             | 48.54                   | 74.00           | 25.46       | Peak     |
| @ 2403.979               | 28.21                 | 5.72            | 39.92                  | 118.28            | 112.29                  | ---             | ---         | Peak     |

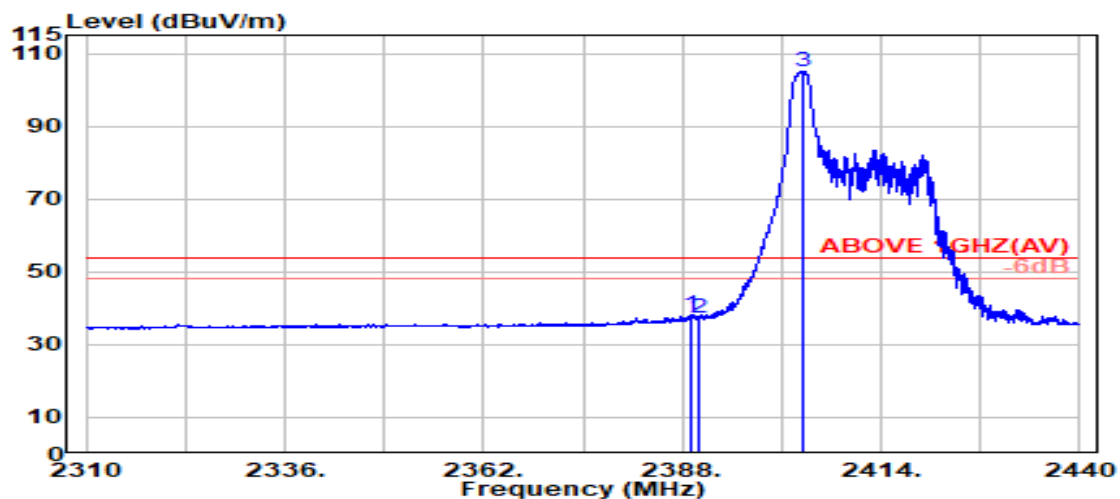

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.246                 | 28.20                 | 5.70            | 39.92                  | 44.31             | 38.30                   | 54.00           | 15.70       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 43.42             | 37.41                   | 54.00           | 16.59       | Average  |
| @ 2403.762               | 28.21                 | 5.72            | 39.92                  | 111.06            | 105.07                  | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |                |           |             |
|------------------|----------------|-----------|-------------|
| Mode             | 802.11be-EHT20 | Frequency | TX 2412 MHz |
| RU Configuration | 52/37          |           |             |

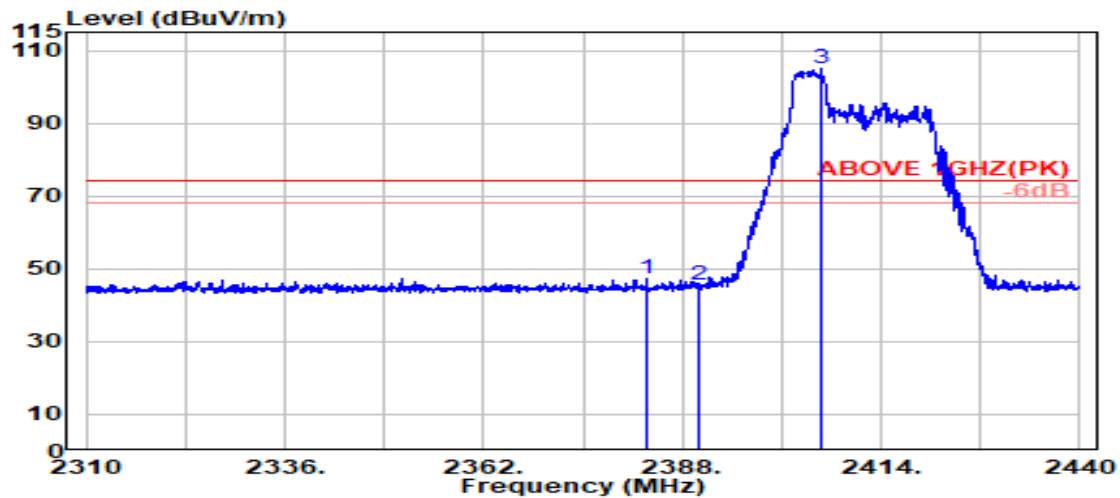

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2383.288                 | 28.20                 | 5.69            | 39.92                  | 53.44             | 47.41                   | 74.00           | 26.59       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 51.76             | 45.75                   | 74.00           | 28.25       | Peak     |
| @ 2406.200               | 28.21                 | 5.72            | 39.92                  | 110.86            | 104.88                  | ---             | ---         | Peak     |

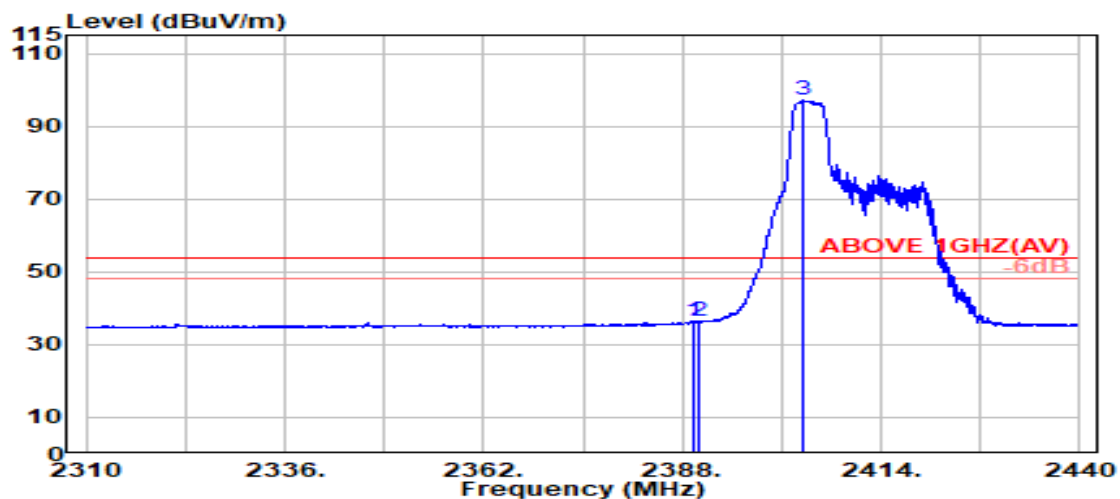

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.408                 | 28.20                 | 5.70            | 39.92                  | 42.49             | 36.47                   | 54.00           | 17.53       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 42.29             | 36.27                   | 54.00           | 17.73       | Average  |
| @ 2403.762               | 28.21                 | 5.72            | 39.92                  | 103.01            | 97.02                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |                |           |             |
|------------------|----------------|-----------|-------------|
| Mode             | 802.11be-EHT20 | Frequency | TX 2412 MHz |
| RU Configuration | 52/37          |           |             |

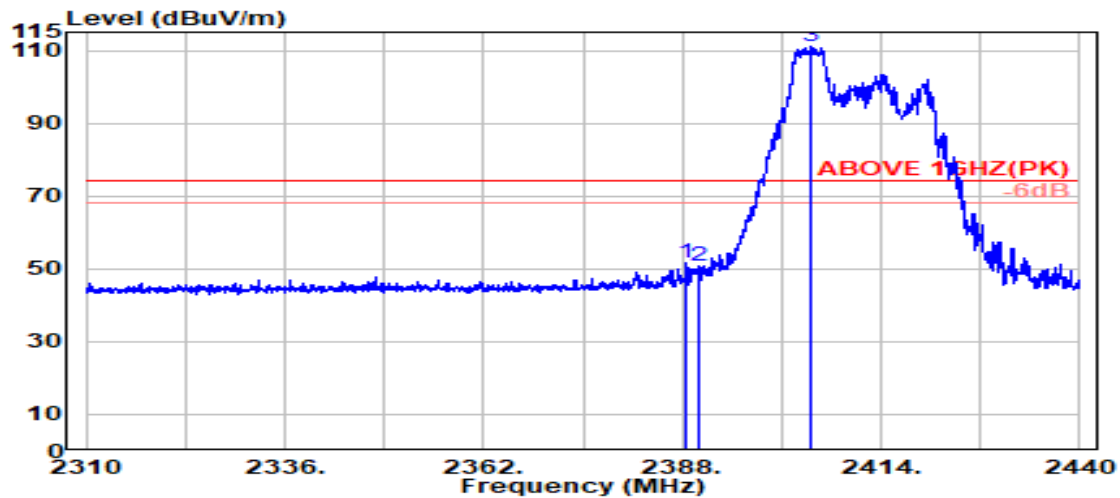

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.596                 | 28.20                 | 5.70            | 39.92                  | 57.82             | 51.80                   | 74.00           | 22.20       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 56.73             | 50.72                   | 74.00           | 23.28       | Peak     |
| @ 2404.900               | 28.21                 | 5.72            | 39.92                  | 116.92            | 110.93                  | ---             | ---         | Peak     |

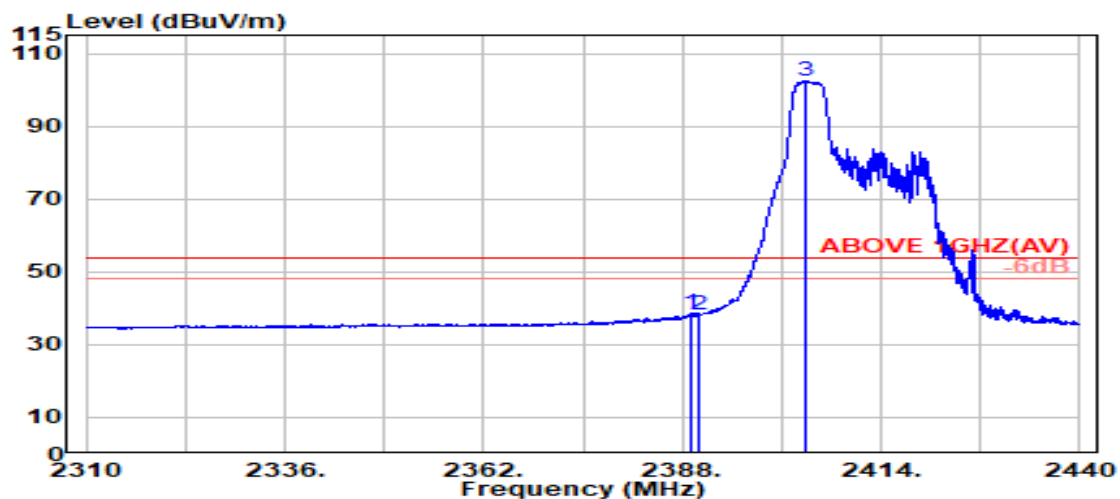

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.137                 | 28.20                 | 5.70            | 39.92                  | 44.64             | 38.63                   | 54.00           | 15.37       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 44.22             | 38.21                   | 54.00           | 15.79       | Average  |
| @ 2404.033               | 28.21                 | 5.72            | 39.92                  | 108.59            | 102.60                  | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |                |           |             |
|------------------|----------------|-----------|-------------|
| Mode             | 802.11be-EHT20 | Frequency | TX 2412 MHz |
| RU Configuration | 106/53         |           |             |

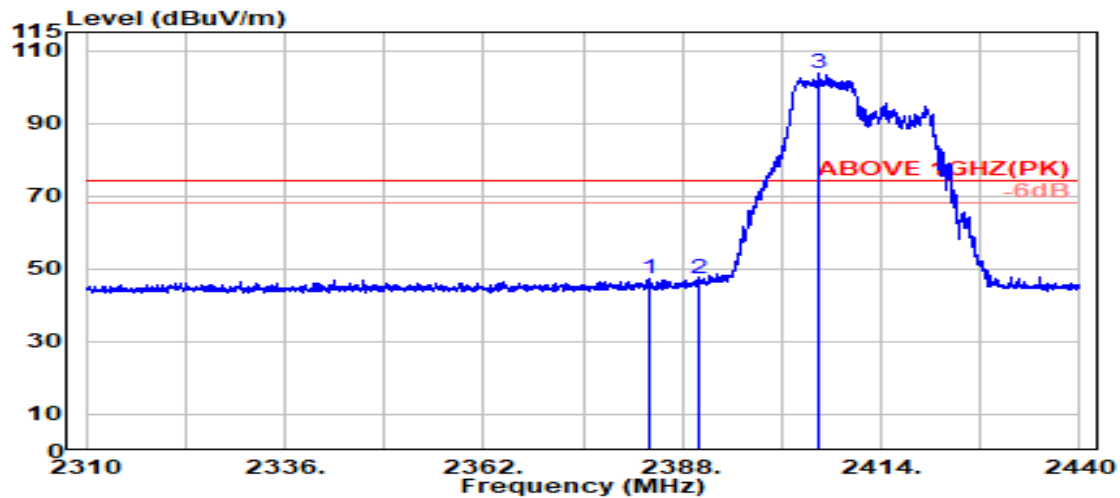

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2383.558                 | 28.20                 | 5.69            | 39.92                  | 53.26             | 47.24                   | 74.00           | 26.76       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 53.48             | 47.46                   | 74.00           | 26.54       | Peak     |
| @ 2405.712               | 28.21                 | 5.72            | 39.92                  | 109.58            | 103.60                  | ---             | ---         | Peak     |

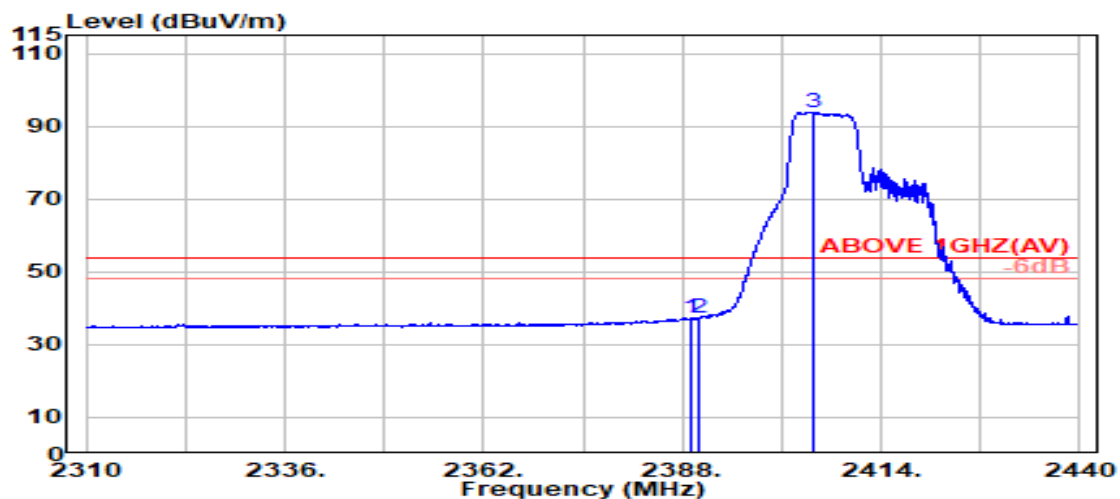

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.300                 | 28.20                 | 5.70            | 39.92                  | 43.33             | 37.31                   | 54.00           | 16.69       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 43.41             | 37.39                   | 54.00           | 16.61       | Average  |
| @ 2405.063               | 28.21                 | 5.72            | 39.92                  | 99.85             | 93.87                   | ---             | ---         | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |                |           |             |
|------------------|----------------|-----------|-------------|
| Mode             | 802.11be-EHT20 | Frequency | TX 2412 MHz |
| RU Configuration | 106/53         |           |             |

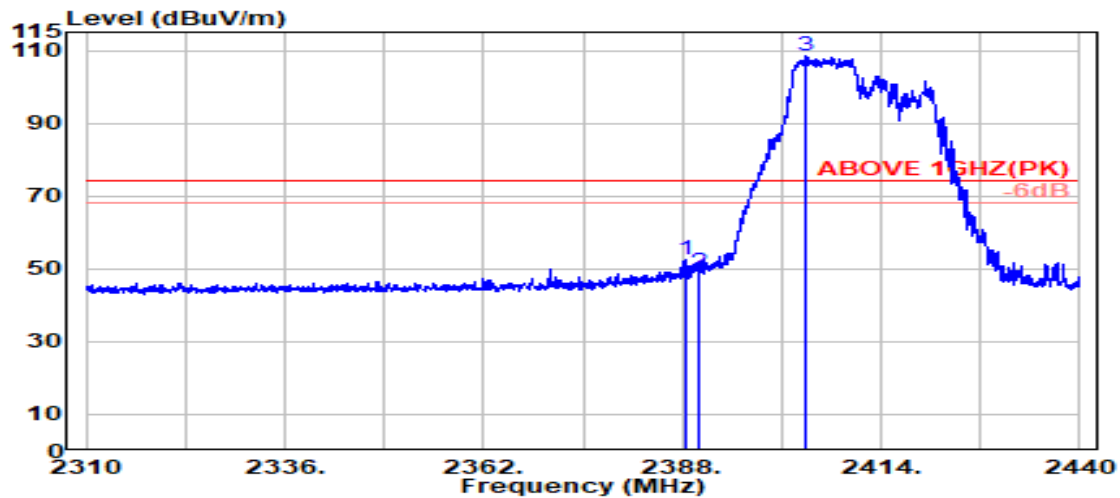

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.325                 | 28.20                 | 5.70            | 39.92                  | 58.69             | 52.67                   | 74.00           | 21.33       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 54.97             | 48.96                   | 74.00           | 25.04       | Peak     |
| @ 2404.087               | 28.21                 | 5.72            | 39.92                  | 114.69            | 108.70                  | ---             | ---         | Peak     |

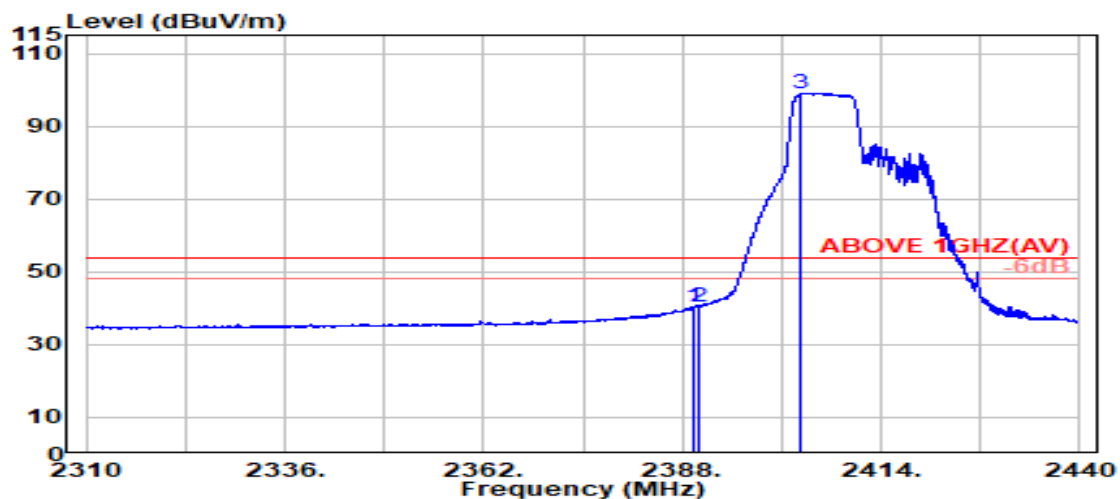

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.571                 | 28.20                 | 5.70            | 39.92                  | 46.35             | 40.33                   | 54.00           | 13.67       | Average  |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 46.46             | 40.44                   | 54.00           | 13.56       | Average  |
| @ 2403.600               | 28.21                 | 5.72            | 39.92                  | 105.06            | 99.07                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |                |           |            |
|------------------|----------------|-----------|------------|
| Mode             | 802.11be-EHT20 | Frequency | TX 2472MHz |
| RU Configuration | 26/8           |           |            |

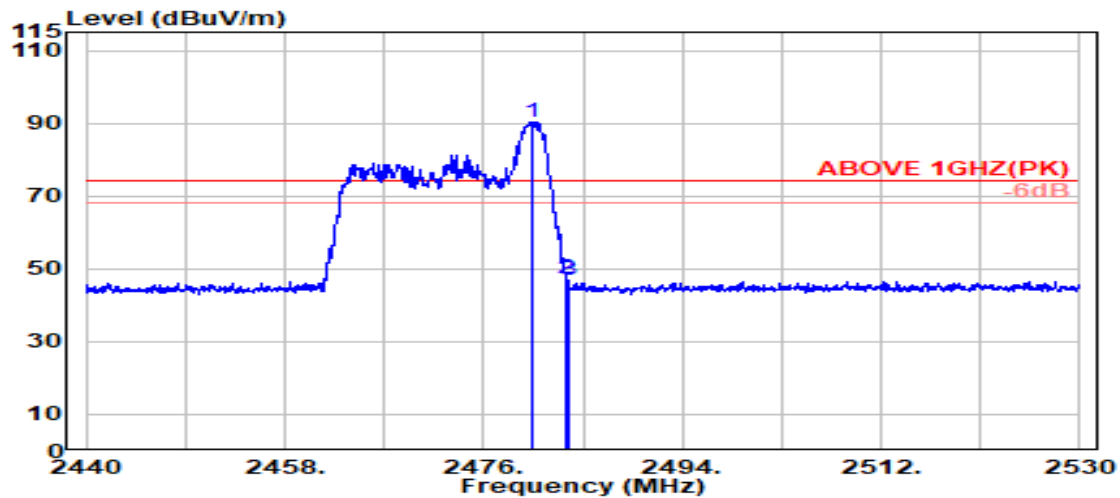

#### Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2480.300                 | 28.42                 | 5.82            | 39.92            | 96.02             | 90.35                   | ---             | ---         | Peak     |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92            | 52.84             | 47.19                   | 74.00           | 26.81       | Peak     |
|   | 2483.750                 | 28.44                 | 5.83            | 39.92            | 52.67             | 47.01                   | 74.00           | 26.99       | Peak     |

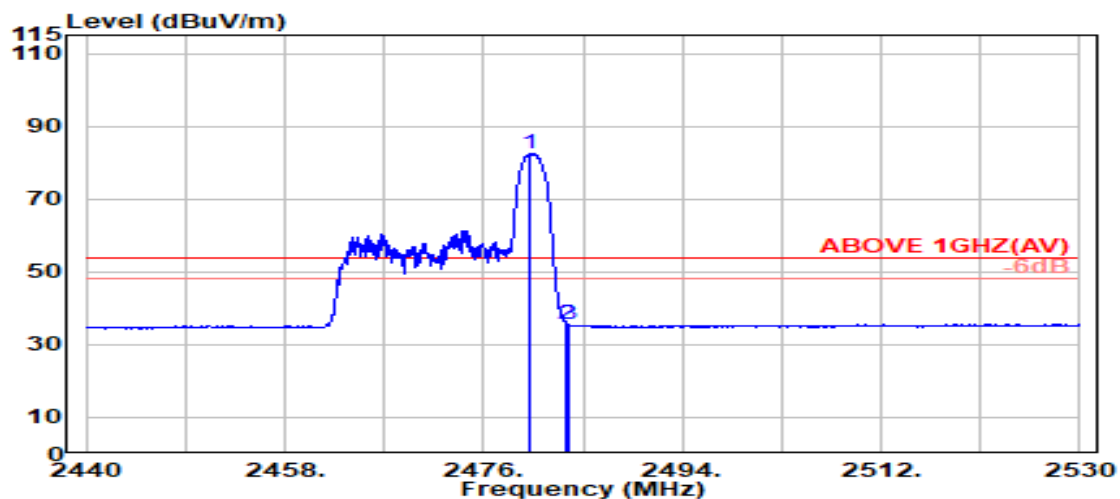

#### Antenna at Horizontal Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2480.250                 | 28.42                 | 5.82            | 39.92            | 88.04             | 82.36                   | ---             | ---         | Average  |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92            | 41.43             | 35.78                   | 54.00           | 18.22       | Average  |
|   | 2483.700                 | 28.44                 | 5.83            | 39.92            | 41.22             | 35.56                   | 54.00           | 18.44       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |                |           |            |
|------------------|----------------|-----------|------------|
| Mode             | 802.11be-EHT20 | Frequency | TX 2472MHz |
| RU Configuration | 26/8           |           |            |

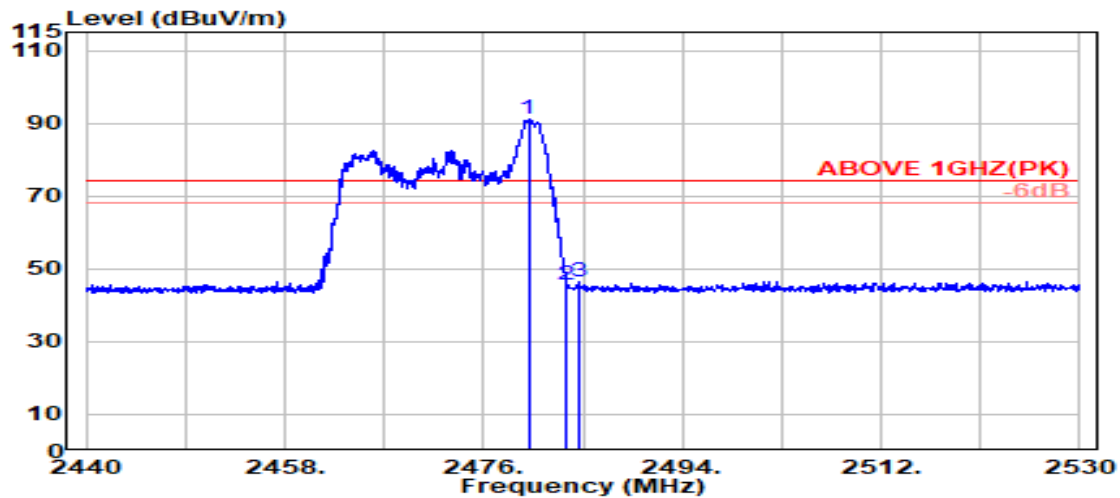

Antenna at Vertical Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2480.050                 | 28.42                 | 5.82            | 39.92            | 96.78             | 91.11                   | ---             | ---         | Peak     |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92            | 51.41             | 45.75                   | 74.00           | 28.25       | Peak     |
|   | 2484.650                 | 28.44                 | 5.83            | 39.92            | 52.07             | 46.42                   | 74.00           | 27.58       | Peak     |

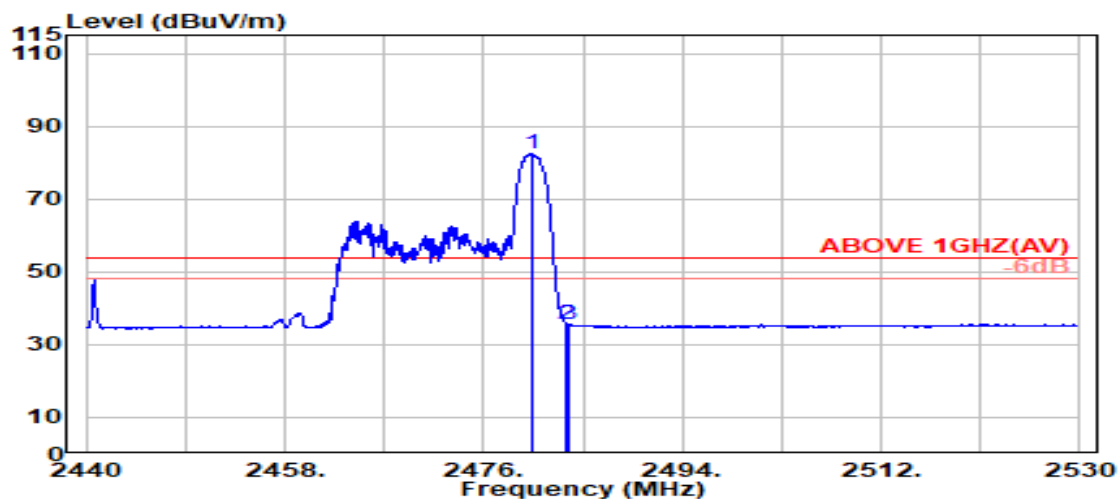

Antenna at Vertical Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2480.450                 | 28.42                 | 5.82            | 39.92            | 88.22             | 82.54                   | ---             | ---         | Average  |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92            | 41.30             | 35.65                   | 54.00           | 18.35       | Average  |
|   | 2483.750                 | 28.44                 | 5.83            | 39.92            | 41.19             | 35.53                   | 54.00           | 18.47       | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |                |           |            |
|------------------|----------------|-----------|------------|
| Mode             | 802.11be-EHT20 | Frequency | TX 2472MHz |
| RU Configuration | 52/40          |           |            |

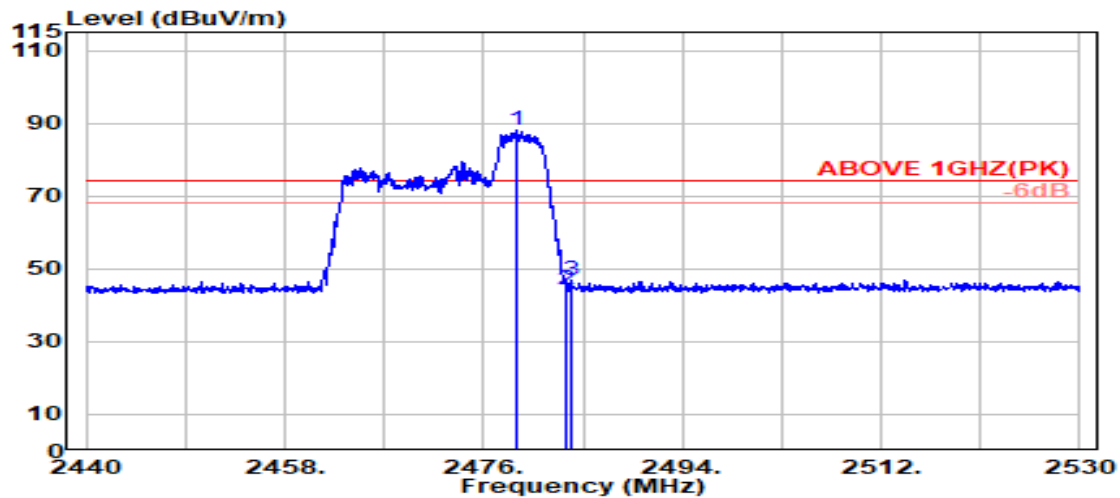

#### Antenna at Horizontal Polarization

|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2478.950                 | 28.42                 | 5.82            | 39.92            | 93.92             | 88.24                   | ---             | ---         | Peak     |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92            | 49.97             | 44.31                   | 74.00           | 29.69       | Peak     |
|   | 2483.900                 | 28.44                 | 5.83            | 39.92            | 52.40             | 46.74                   | 74.00           | 27.26       | Peak     |

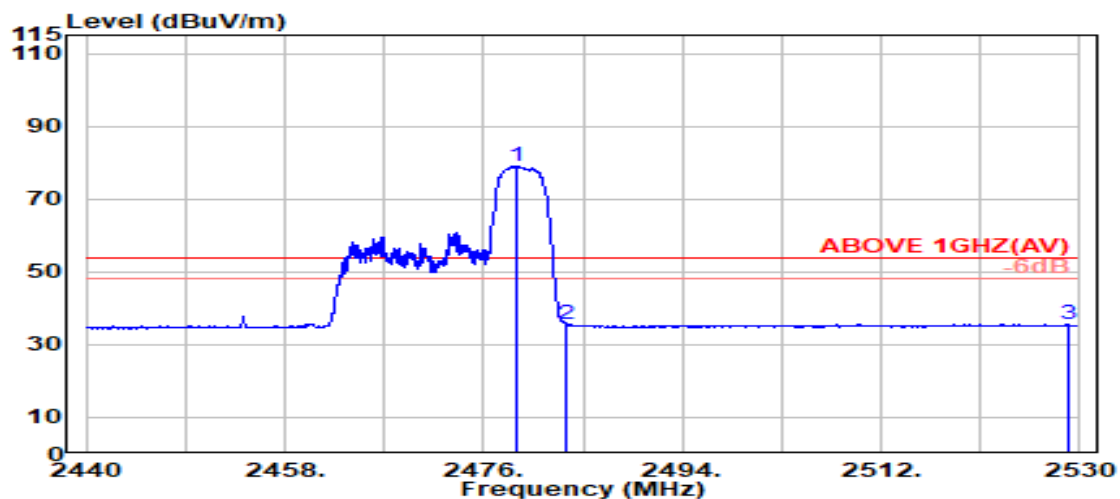

#### Antenna at Horizontal Polarization


|   | Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|---|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ | 2478.900                 | 28.42                 | 5.82            | 39.92            | 84.76             | 79.08                   | ---             | ---         | Average  |
|   | 2483.500                 | 28.43                 | 5.83            | 39.92            | 41.32             | 35.66                   | 54.00           | 18.34       | Average  |
|   | 2528.900                 | 28.62                 | 5.88            | 39.93            | 41.00             | 35.57                   | 54.00           | 18.43       | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |                |           |            |
|------------------|----------------|-----------|------------|
| Mode             | 802.11be-EHT20 | Frequency | TX 2472MHz |
| RU Configuration | 52/40          |           |            |

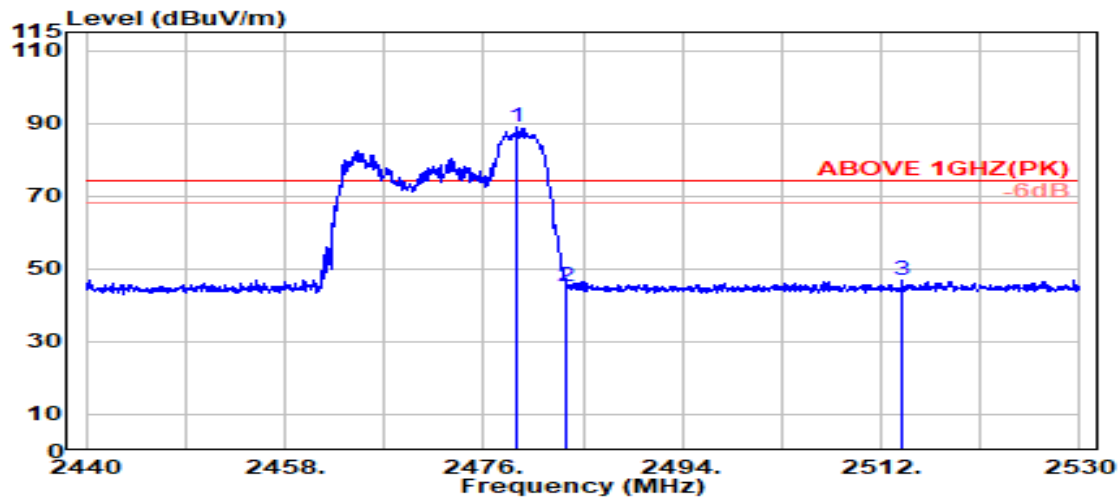

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2478.950               | 28.42                 | 5.82            | 39.92            | 94.62             | 88.94                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 50.68             | 45.03                   | 74.00           | 28.97       | Peak     |
| 2513.900                 | 28.56                 | 5.87            | 39.92            | 52.23             | 46.73                   | 74.00           | 27.27       | Peak     |

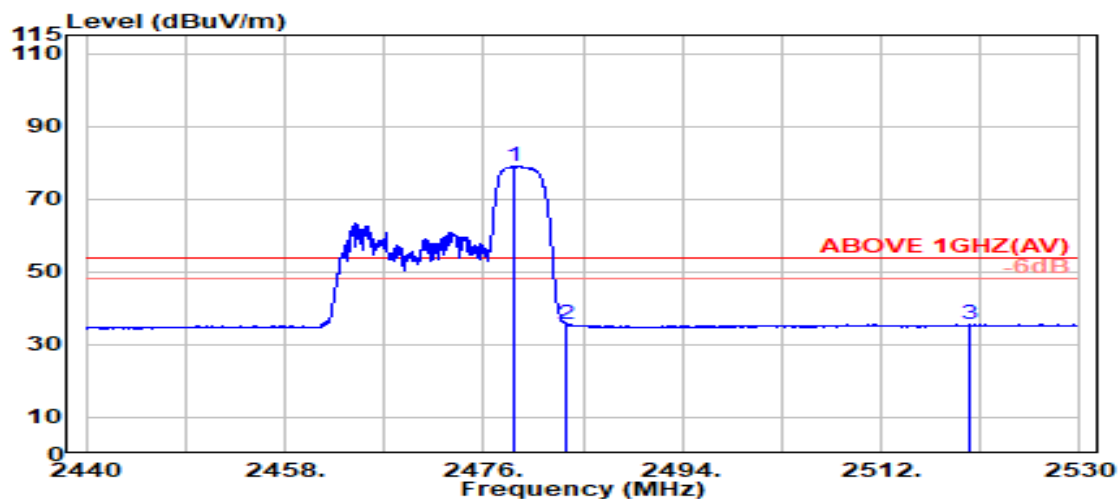

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2478.850               | 28.42                 | 5.82            | 39.92            | 84.68             | 79.00                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 41.18             | 35.52                   | 54.00           | 18.48       | Average  |
| 2520.100                 | 28.58                 | 5.87            | 39.92            | 40.99             | 35.52                   | 54.00           | 18.48       | Average  |

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |                |           |            |
|------------------|----------------|-----------|------------|
| Mode             | 802.11be-EHT20 | Frequency | TX 2472MHz |
| RU Configuration | 106/54         |           |            |

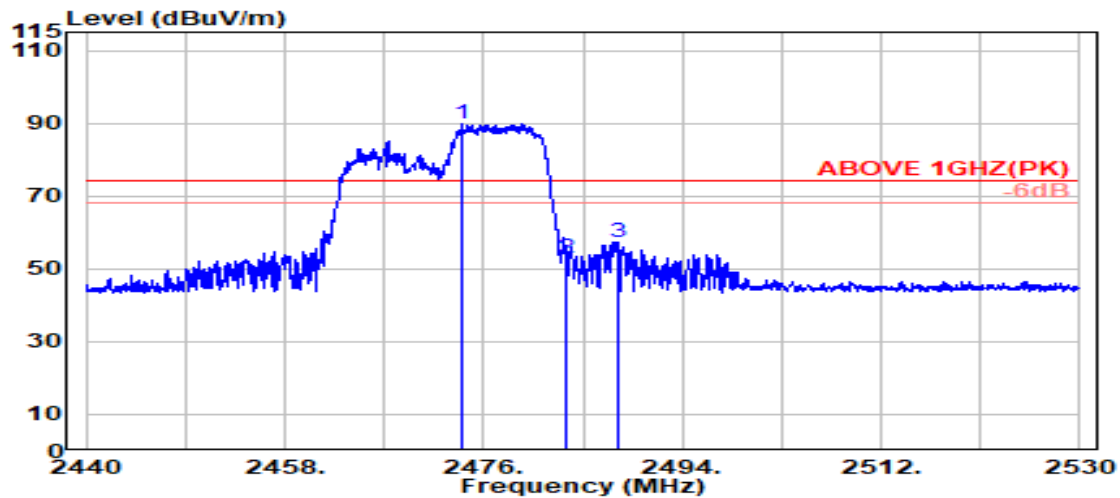

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2474.000               | 28.40                 | 5.82            | 39.92            | 95.61             | 89.90                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 58.80             | 53.15                   | 74.00           | 20.85       | Peak     |
| 2488.200                 | 28.45                 | 5.83            | 39.92            | 63.13             | 57.50                   | 74.00           | 16.50       | Peak     |

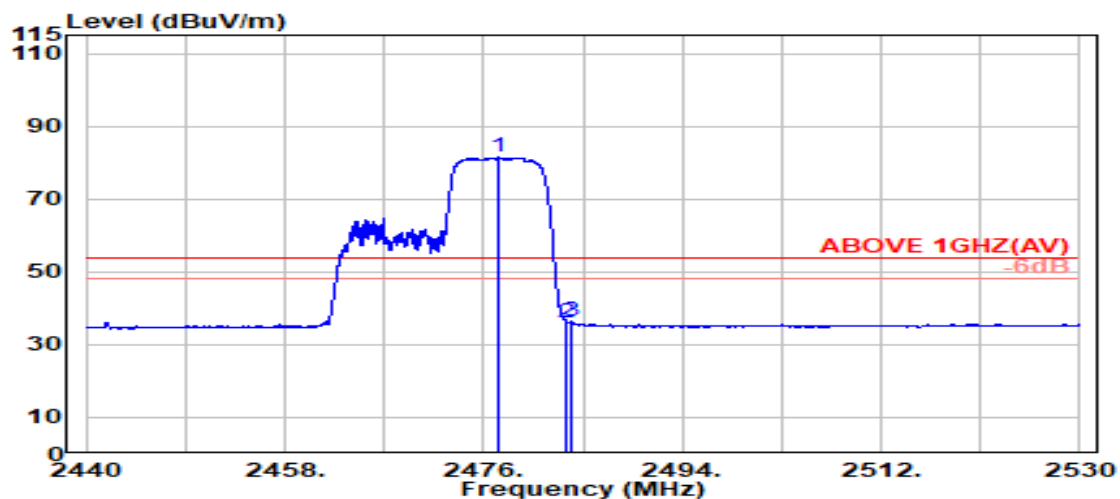

Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2477.400               | 28.41                 | 5.82            | 39.92            | 87.09             | 81.40                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 41.81             | 36.15                   | 54.00           | 17.85       | Average  |
| 2483.900                 | 28.44                 | 5.83            | 39.92            | 41.96             | 36.30                   | 54.00           | 17.70       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |                |           |            |
|------------------|----------------|-----------|------------|
| Mode             | 802.11be-EHT20 | Frequency | TX 2472MHz |
| RU Configuration | 106/54         |           |            |

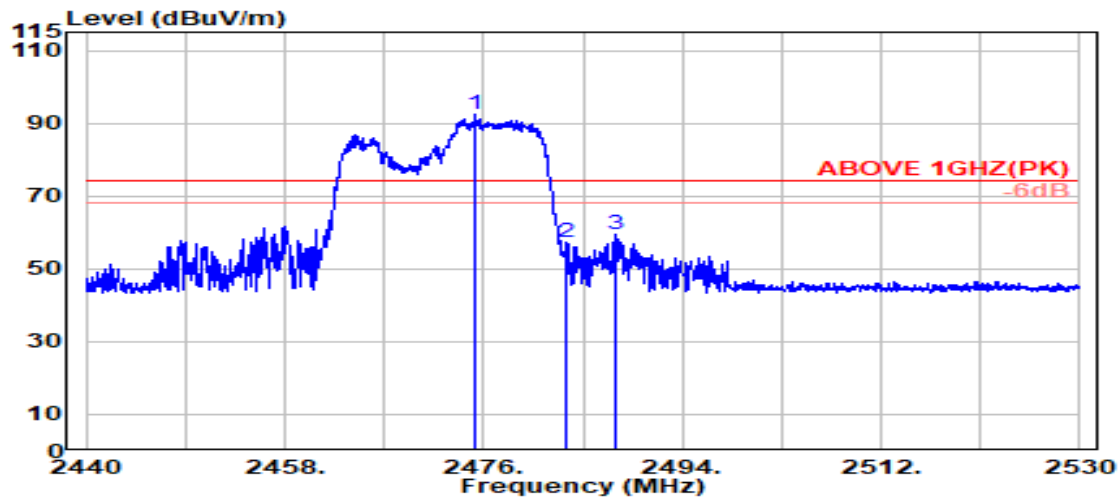

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2475.250               | 28.40                 | 5.82            | 39.92            | 98.14             | 92.44                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 63.02             | 57.36                   | 74.00           | 16.64       | Peak     |
| 2488.050                 | 28.45                 | 5.83            | 39.92            | 64.92             | 59.29                   | 74.00           | 14.71       | Peak     |

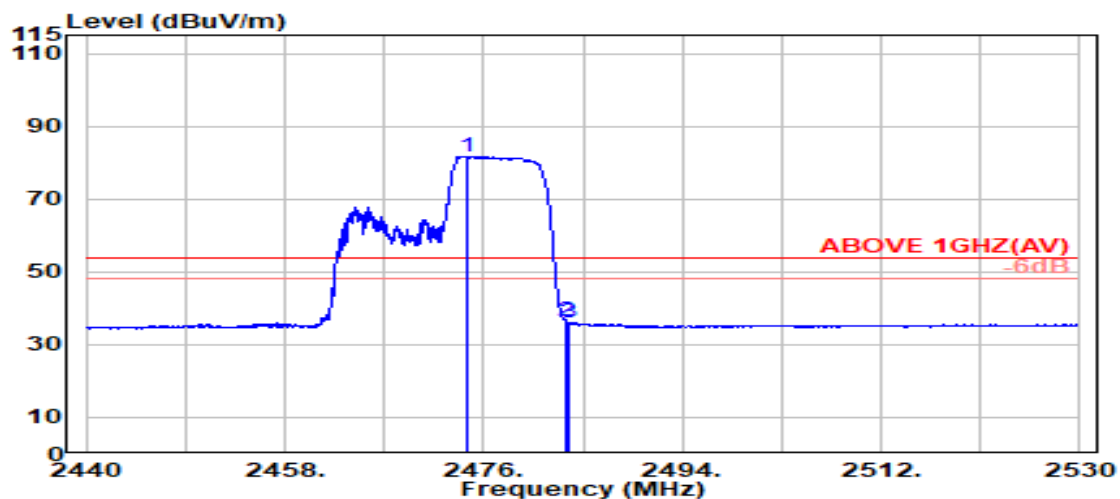

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2474.450               | 28.40                 | 5.82            | 39.92            | 87.47             | 81.77                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 41.93             | 36.27                   | 54.00           | 17.73       | Average  |
| 2483.750                 | 28.44                 | 5.83            | 39.92            | 41.75             | 36.09                   | 54.00           | 17.91       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |                |           |            |
|------------------|----------------|-----------|------------|
| Mode             | 802.11be-EHT40 | Frequency | TX 2422MHz |
| RU Configuration | 242/61         |           |            |

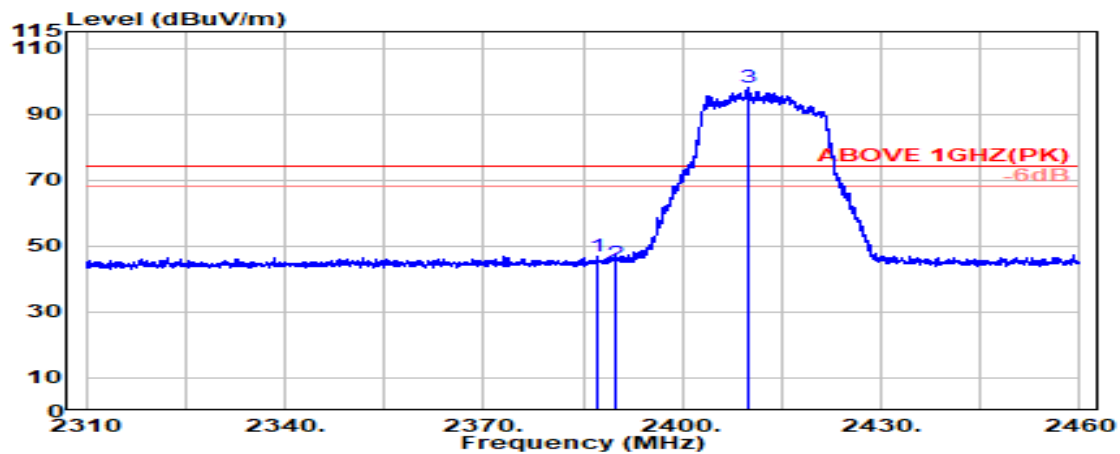

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2387.200                 | 28.20                 | 5.70            | 39.92                  | 52.90             | 46.88                   | 74.00           | 27.12       | Peak     |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 50.87             | 44.85                   | 74.00           | 29.15       | Peak     |
| @ 2410.050               | 28.22                 | 5.73            | 39.92                  | 104.22            | 98.25                   | ---             | ---         | Peak     |

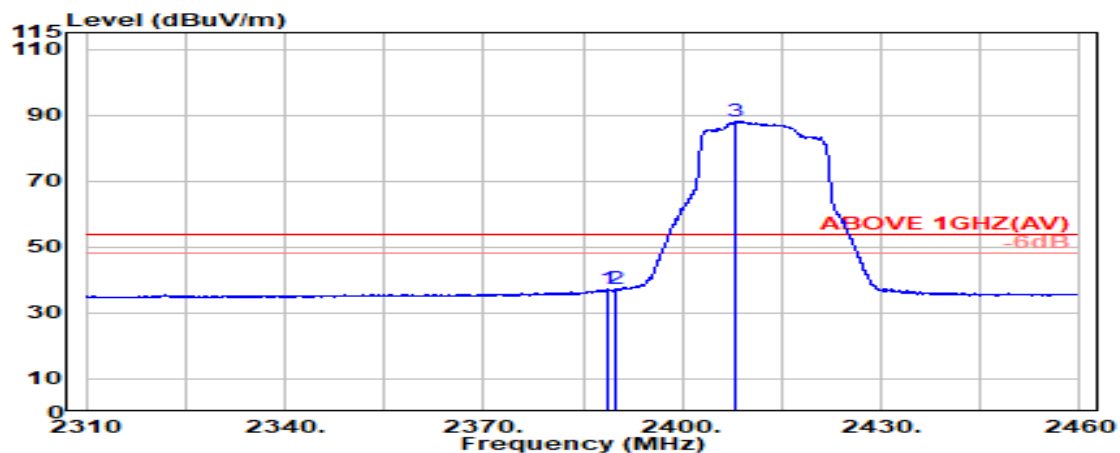

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.850                 | 28.20                 | 5.70            | 39.92                  | 43.14             | 37.12                   | 54.00           | 16.88       | Average  |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 43.14             | 37.12                   | 54.00           | 16.88       | Average  |
| @ 2407.900               | 28.22                 | 5.73            | 39.92                  | 94.10             | 88.12                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

**Audix Technology Corp.**


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

|                  |                |           |            |
|------------------|----------------|-----------|------------|
| Mode             | 802.11be-EHT40 | Frequency | TX 2422MHz |
| RU Configuration | 242/61         |           |            |

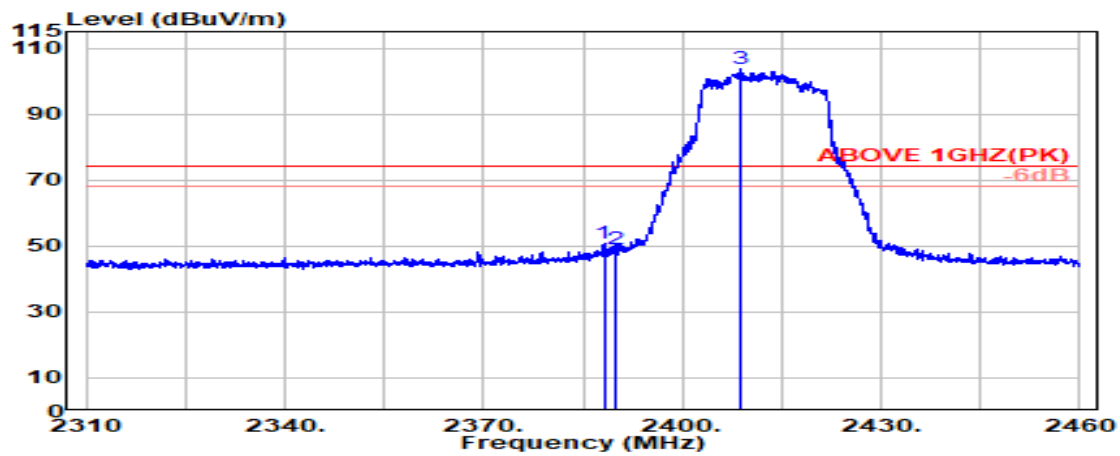

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.150                 | 28.20                 | 5.70            | 39.92                  | 56.63             | 50.62                   | 74.00           | 23.38       | Peak     |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 55.22             | 49.20                   | 74.00           | 24.80       | Peak     |
| @ 2408.650               | 28.22                 | 5.73            | 39.92                  | 109.50            | 103.53                  | ---             | ---         | Peak     |

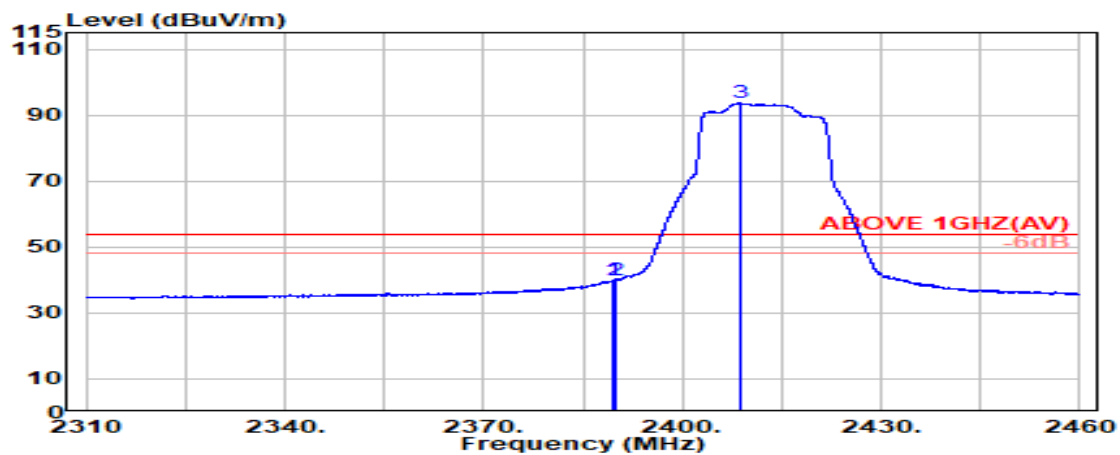

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2389.600                 | 28.20                 | 5.70            | 39.92                  | 46.14             | 40.13                   | 54.00           | 13.87       | Average  |
| 2389.800                 | 28.20                 | 5.70            | 39.92                  | 45.83             | 39.82                   | 54.00           | 14.18       | Average  |
| @ 2408.900               | 28.22                 | 5.73            | 39.92                  | 99.52             | 93.54                   | ---             | ---         | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |                |           |            |
|------------------|----------------|-----------|------------|
| Mode             | 802.11be-EHT40 | Frequency | TX 2462MHz |
| RU Configuration | 242/62         |           |            |

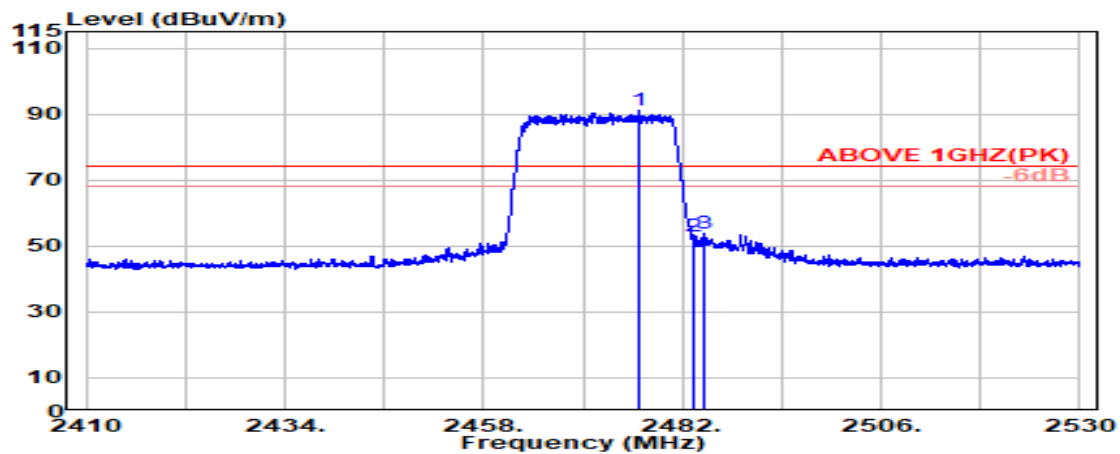

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2476.850               | 28.41                 | 5.82            | 39.92            | 96.81             | 91.12                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 58.81             | 53.15                   | 74.00           | 20.85       | Peak     |
| 2484.550                 | 28.44                 | 5.83            | 39.92            | 59.27             | 53.62                   | 74.00           | 20.38       | Peak     |

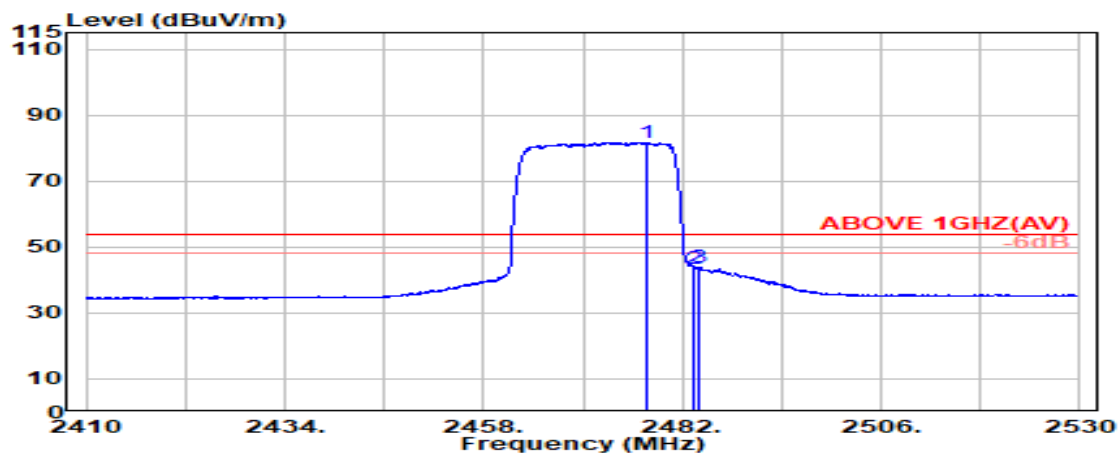

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2477.600               | 28.41                 | 5.82            | 39.92            | 87.45             | 81.76                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 49.04             | 43.38                   | 54.00           | 10.62       | Average  |
| 2484.050                 | 28.44                 | 5.83            | 39.92            | 49.37             | 43.72                   | 54.00           | 10.28       | Average  |

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

|                  |                |           |            |
|------------------|----------------|-----------|------------|
| Mode             | 802.11be-EHT40 | Frequency | TX 2462MHz |
| RU Configuration | 242/62         |           |            |

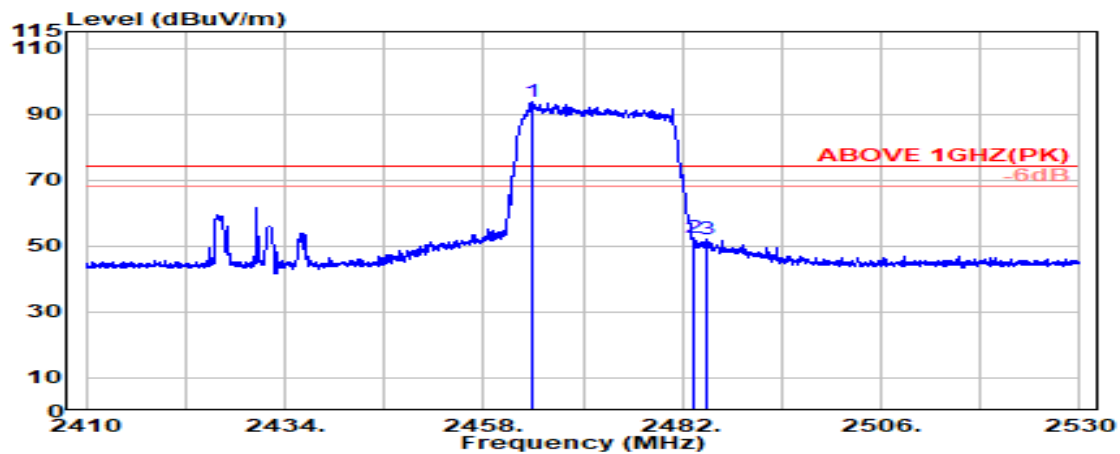

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2463.750               | 28.36                 | 5.80            | 39.92            | 99.36             | 93.60                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 58.07             | 52.41                   | 74.00           | 21.59       | Peak     |
| 2485.000                 | 28.44                 | 5.83            | 39.92            | 57.70             | 52.06                   | 74.00           | 21.94       | Peak     |

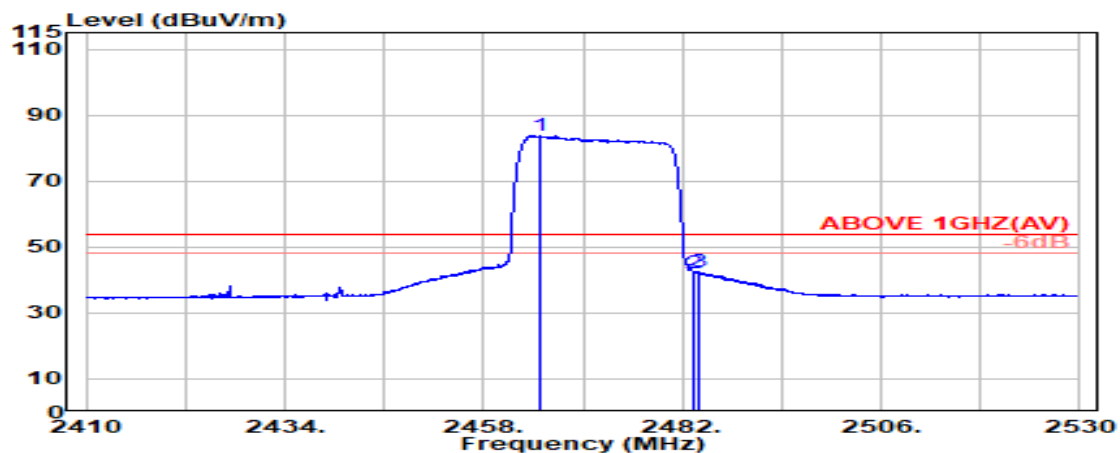

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2464.800               | 28.36                 | 5.80            | 39.92            | 89.50             | 83.74                   | ---             | ---         | Average  |
| 2483.500                 | 28.43                 | 5.83            | 39.92            | 47.78             | 42.13                   | 54.00           | 11.87       | Average  |
| 2483.950                 | 28.44                 | 5.83            | 39.92            | 48.02             | 42.37                   | 54.00           | 11.63       | Average  |


Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

Tel: +886 2 26099301  
Fax: +886 2 26099303


# ● BLE Mode

| Mode | BLE (2Mbps) | Frequency | TX 2402MHz |
|------|-------------|-----------|------------|
|------|-------------|-----------|------------|

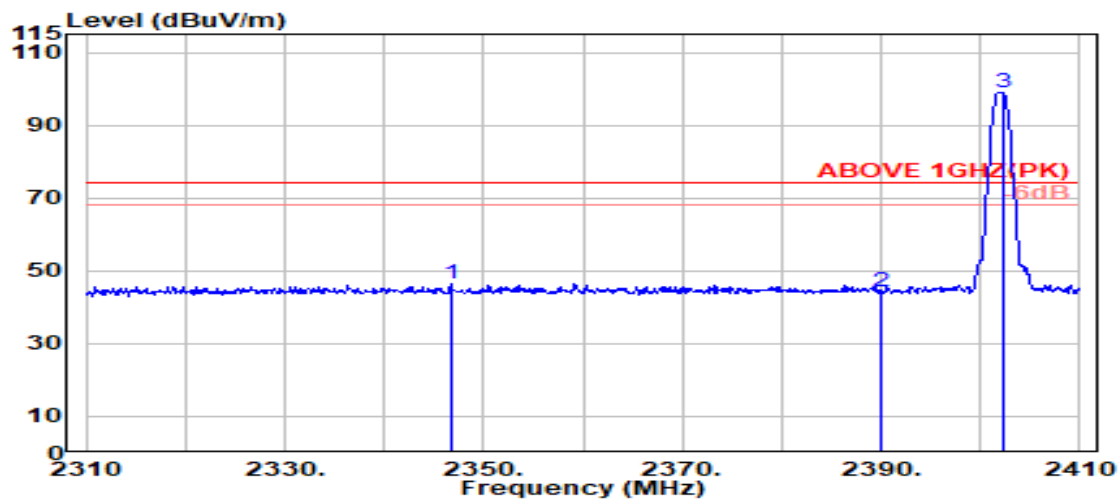

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2346.700                 | 28.19                 | 5.64            | 39.92                  | 52.39             | 46.30                   | 74.00           | 27.70       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 50.27             | 44.26                   | 74.00           | 29.74       | Peak     |
| @ 2402.200               | 28.20                 | 5.72            | 39.92                  | 105.03            | 99.04                   | ---             | ---         | Peak     |

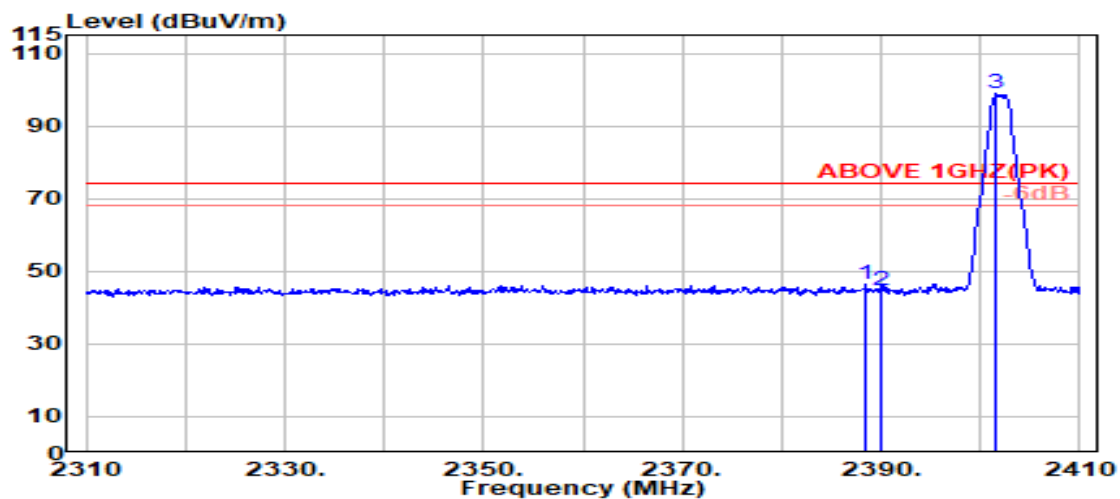

## Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2388.400                 | 28.20                 | 5.70            | 39.92                  | 52.35             | 46.33                   | 74.00           | 27.67       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 50.80             | 44.78                   | 74.00           | 29.22       | Peak     |
| @ 2401.600               | 28.20                 | 5.72            | 39.92                  | 104.80            | 98.80                   | ---             | ---         | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | BLE (2Mbps) | Frequency | TX 2402MHz |
|------|-------------|-----------|------------|
|------|-------------|-----------|------------|

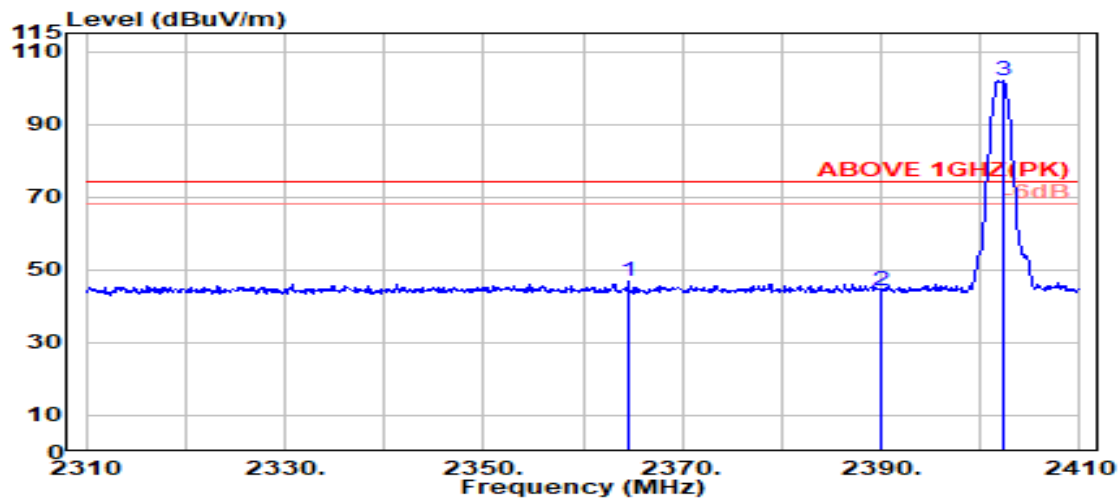

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2364.600                 | 28.20                 | 5.67            | 39.92                  | 52.91             | 46.86                   | 74.00           | 27.14       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 50.32             | 44.30                   | 74.00           | 29.70       | Peak     |
| @ 2402.300               | 28.20                 | 5.72            | 39.92                  | 107.89            | 101.89                  | ---             | ---         | Peak     |

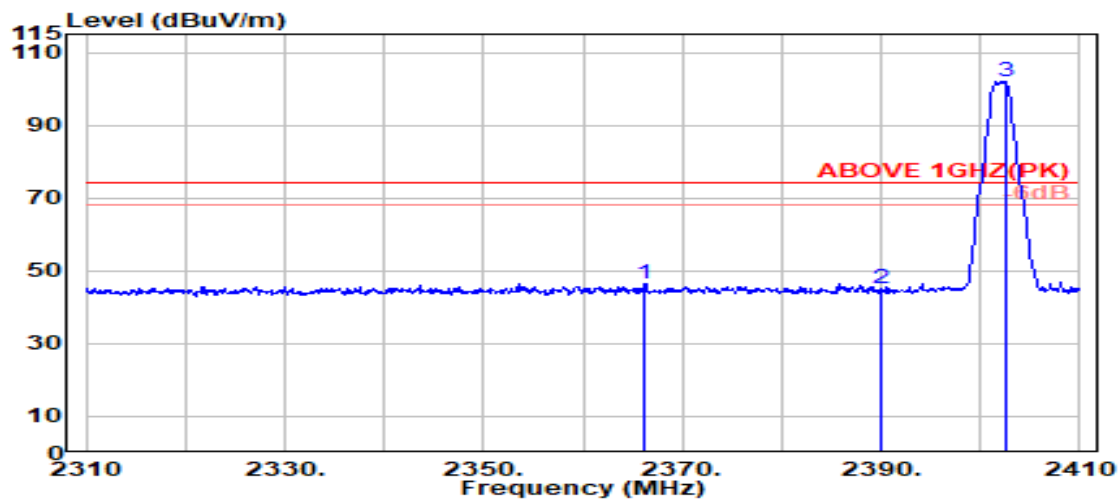

Antenna at Vertical Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| 2366.200                 | 28.20                 | 5.67            | 39.92                  | 52.61             | 46.56                   | 74.00           | 27.44       | Peak     |
| 2390.000                 | 28.20                 | 5.70            | 39.92                  | 51.03             | 45.02                   | 74.00           | 28.98       | Peak     |
| @ 2402.500               | 28.21                 | 5.72            | 39.92                  | 108.02            | 102.03                  | ---             | ---         | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | BLE (2Mbps) | Frequency | TX 2480 MHz |
|------|-------------|-----------|-------------|
|------|-------------|-----------|-------------|

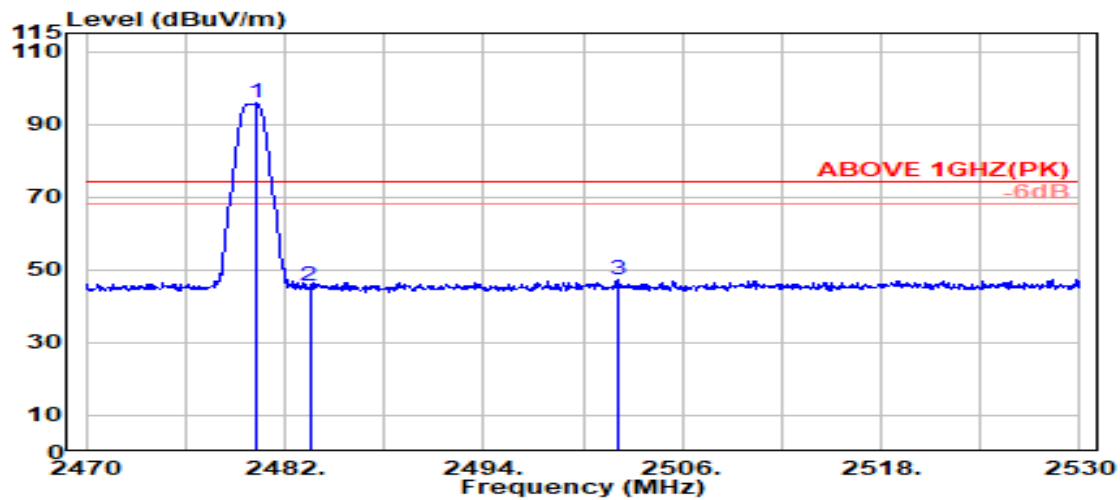

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2480.255               | 28.42                 | 5.82            | 39.92                  | 101.48            | 95.81                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 51.08             | 45.43                   | 74.00           | 28.57       | Peak     |
| 2502.182                 | 28.51                 | 5.85            | 39.92                  | 52.79             | 47.23                   | 74.00           | 26.77       | Peak     |

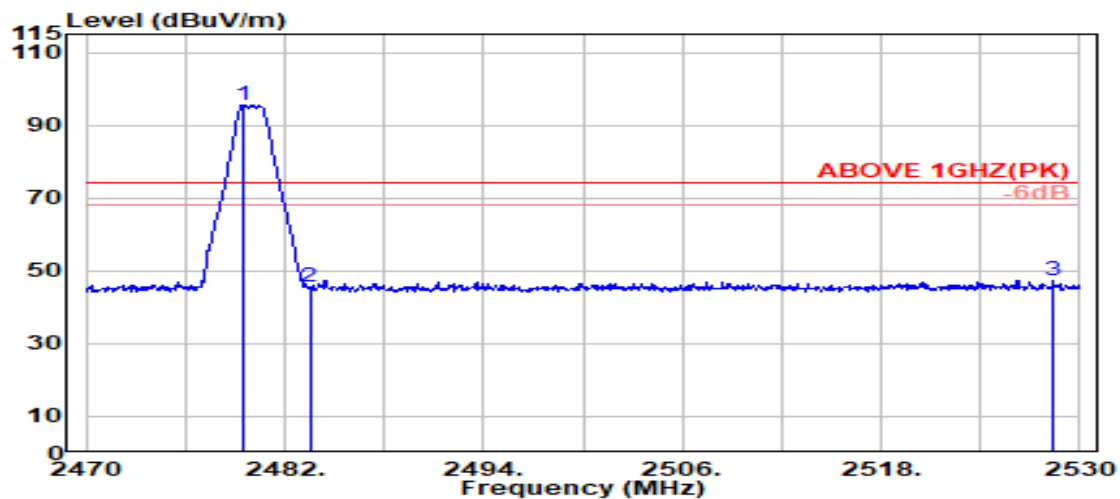

#### Antenna at Horizontal Polarization


| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2479.545               | 28.42                 | 5.82            | 39.92                  | 101.21            | 95.53                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 51.33             | 45.67                   | 74.00           | 28.33       | Peak     |
| 2528.364                 | 28.61                 | 5.88            | 39.92                  | 52.89             | 47.47                   | 74.00           | 26.53       | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City244, Taiwan


Tel: +886 2 26099301  
Fax: +886 2 26099303

| Mode | BLE (2Mbps) | Frequency | TX 2480 MHz |
|------|-------------|-----------|-------------|
|------|-------------|-----------|-------------|

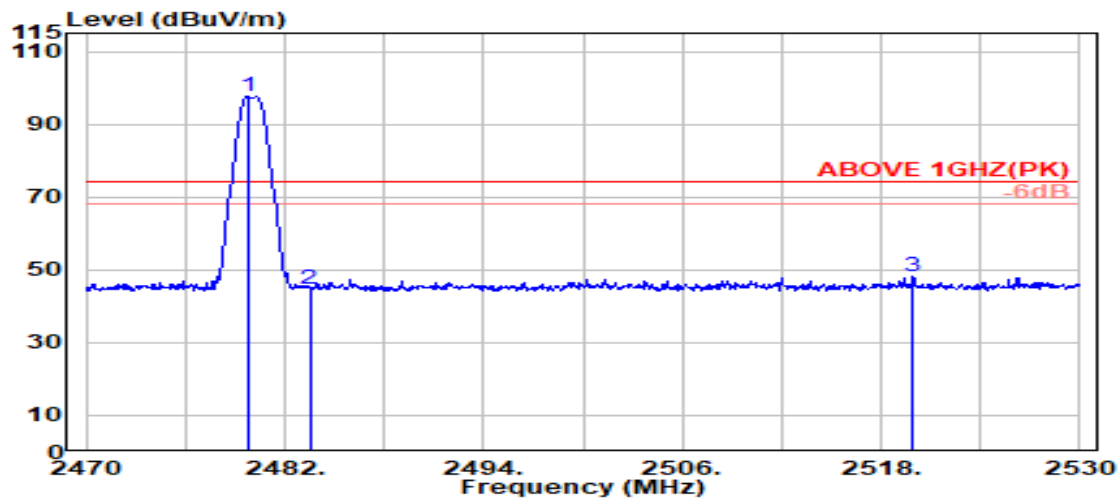

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2479.764               | 28.42                 | 5.82            | 39.92                  | 103.25            | 97.58                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 50.25             | 44.59                   | 74.00           | 29.41       | Peak     |
| 2519.909                 | 28.58                 | 5.87            | 39.92                  | 53.43             | 47.96                   | 74.00           | 26.04       | Peak     |

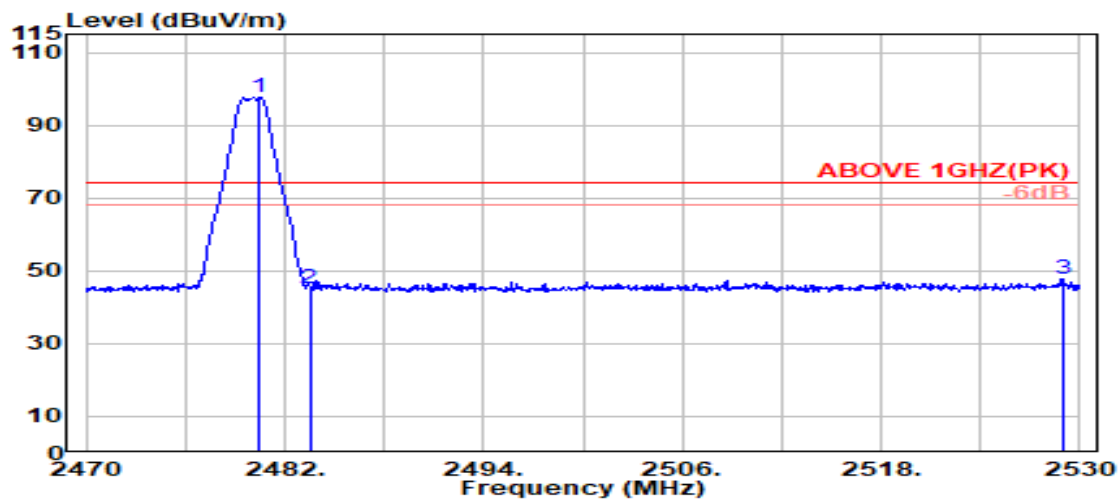

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Read Level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|-------------------|-------------------------|-----------------|-------------|----------|
| @ 2480.473               | 28.42                 | 5.82            | 39.92                  | 103.32            | 97.64                   | ---             | ---         | Peak     |
| 2483.500                 | 28.43                 | 5.83            | 39.92                  | 50.67             | 45.02                   | 74.00           | 28.98       | Peak     |
| 2528.964                 | 28.62                 | 5.88            | 39.93                  | 53.13             | 47.70                   | 74.00           | 26.30       | Peak     |

Remark: The “@” means fundamental frequency, it is ignored in this section.

## A.2.2 Emissions outside the frequency band

The emissions (up to 25GHz) not reported for there is no emission be found.

The 802.11ax and be were assessed with full RU mode.

### ● Wireless LAN Mode

| Mode | 802.11b | Frequency | TX 2412MHz |
|------|---------|-----------|------------|
|------|---------|-----------|------------|

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4824.000                 | 32.80                 | 8.04            | 39.17                  | 42.56                | 44.22                   | 54.00           | 9.78        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4824.000                 | 32.80                 | 8.04            | 39.17                  | 45.63                | 47.29                   | 54.00           | 6.71        | Peak     |

| Mode | 802.11b | Frequency | TX 2442MHz |
|------|---------|-----------|------------|
|------|---------|-----------|------------|

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4884.000                 | 33.04                 | 8.08            | 39.15                  | 41.51                | 43.47                   | 54.00           | 10.53       | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4884.000                 | 33.04                 | 8.08            | 39.15                  | 41.50                | 43.47                   | 54.00           | 10.53       | Peak     |

| Mode | 802.11b | Frequency | TX 2472MHz |
|------|---------|-----------|------------|
|------|---------|-----------|------------|

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4944.000                 | 33.19                 | 8.12            | 39.12                  | 42.15                | 44.33                   | 54.00           | 9.67        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4944.000                 | 33.19                 | 8.12            | 39.12                  | 41.98                | 44.16                   | 54.00           | 9.84        | Peak     |

| Mode | 802.11g | Frequency | TX 2412MHz |
|------|---------|-----------|------------|
|------|---------|-----------|------------|

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4824.000                 | 32.80                 | 8.04            | 39.17                  | 40.06                | 41.72                   | 54.00           | 12.28       | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4824.000                 | 32.80                 | 8.04            | 39.17                  | 40.56                | 42.23                   | 54.00           | 11.77       | Peak     |

| Mode | 802.11g | Frequency | TX 2442MHz |
|------|---------|-----------|------------|
|------|---------|-----------|------------|

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4884.000                 | 33.04                 | 8.08            | 39.15                  | 41.64                | 43.61                   | 54.00           | 10.39       | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4884.000                 | 33.04                 | 8.08            | 39.15                  | 42.35                | 44.32                   | 54.00           | 9.68        | Peak     |

| Mode | 802.11g | Frequency | TX 2472MHz |
|------|---------|-----------|------------|
|------|---------|-----------|------------|

## Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4944.000                 | 33.19                 | 8.12            | 39.12                  | 42.03                | 44.21                   | 54.00           | 9.79        | Peak     |

## Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4944.000                 | 33.19                 | 8.12            | 39.12                  | 42.01                | 44.20                   | 54.00           | 9.80        | Peak     |

| Mode | 802.11n-HT20 | Frequency | TX 2412MHz |
|------|--------------|-----------|------------|
|------|--------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4824.000                 | 32.80                 | 8.04            | 39.17                  | 43.28                | 44.94                   | 54.00           | 9.06        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4824.000                 | 32.80                 | 8.04            | 39.17                  | 42.42                | 44.08                   | 54.00           | 9.92        | Peak     |

| Mode | 802.11n-HT20 | Frequency | TX 2442MHz |
|------|--------------|-----------|------------|
|------|--------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4884.000                 | 33.04                 | 8.08            | 39.15                  | 41.42                | 43.39                   | 54.00           | 10.61       | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4884.000                 | 33.04                 | 8.08            | 39.15                  | 42.36                | 44.33                   | 54.00           | 9.67        | Peak     |

| Mode | 802.11n-HT20 | Frequency | TX 2472MHz |
|------|--------------|-----------|------------|
|------|--------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4944.000                 | 33.19                 | 8.12            | 39.12                  | 42.39                | 44.58                   | 54.00           | 9.42        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4944.000                 | 33.19                 | 8.12            | 39.12                  | 40.68                | 42.87                   | 54.00           | 11.13       | Peak     |

| Mode | 802.11n-HT40 | Frequency | TX 2422MHz |
|------|--------------|-----------|------------|
|------|--------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4844.000                 | 32.88                 | 8.05            | 39.16                  | 41.57                | 43.34                   | 54.00           | 10.66       | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4844.000                 | 32.88                 | 8.05            | 39.16                  | 42.19                | 43.95                   | 54.00           | 10.05       | Peak     |

| Mode | 802.11n-HT40 | Frequency | TX 2442MHz |
|------|--------------|-----------|------------|
|------|--------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4884.000                 | 33.04                 | 8.08            | 39.15                  | 40.23                | 42.20                   | 54.00           | 11.80       | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4884.000                 | 33.04                 | 8.08            | 39.15                  | 42.09                | 44.06                   | 54.00           | 9.94        | Peak     |

| Mode | 802.11n-HT40 | Frequency | TX 2462MHz |
|------|--------------|-----------|------------|
|------|--------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4924.000                 | 33.15                 | 8.11            | 39.13                  | 40.37                | 42.49                   | 54.00           | 11.51       | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4924.000                 | 33.15                 | 8.11            | 39.13                  | 40.46                | 42.59                   | 54.00           | 11.41       | Peak     |

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

| Mode | 802.11ax-HE20 | Frequency | TX 2412MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4824.000                 | 32.80                 | 8.04            | 39.17                  | 40.96                | 42.63                   | 54.00           | 11.37       | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4824.000                 | 32.80                 | 8.04            | 39.17                  | 39.68                | 41.34                   | 54.00           | 12.66       | Peak     |

| Mode | 802.11ax-HE20 | Frequency | TX 2442MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4884.000                 | 33.04                 | 8.08            | 39.15                  | 41.42                | 43.39                   | 54.00           | 10.61       | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4884.000                 | 33.04                 | 8.08            | 39.15                  | 40.26                | 42.23                   | 54.00           | 11.77       | Peak     |

| Mode | 802.11ax-HE20 | Frequency | TX 2472MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4944.000                 | 33.19                 | 8.12            | 39.12                  | 42.28                | 44.46                   | 54.00           | 9.54        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4944.000                 | 33.19                 | 8.12            | 39.12                  | 40.97                | 43.16                   | 54.00           | 10.84       | Peak     |

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

**Tel: +886 2 26099301****Fax: +886 2 26099303**

| Mode | 802.11ax-HE40 | Frequency | TX 2422MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4844.000                 | 32.88                 | 8.05            | 39.16                  | 40.78                | 42.55                   | 54.00           | 11.45       | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4844.000                 | 32.88                 | 8.05            | 39.16                  | 41.15                | 42.92                   | 54.00           | 11.08       | Peak     |

| Mode | 802.11ax-HE40 | Frequency | TX 2442MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4884.000                 | 33.04                 | 8.08            | 39.15                  | 41.41                | 43.37                   | 54.00           | 10.63       | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4884.000                 | 33.04                 | 8.08            | 39.15                  | 40.92                | 42.89                   | 54.00           | 11.11       | Peak     |

| Mode | 802.11ax-HE40 | Frequency | TX 2462MHz |
|------|---------------|-----------|------------|
|------|---------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4924.000                 | 33.15                 | 8.11            | 39.13                  | 41.35                | 43.48                   | 54.00           | 10.52       | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4924.000                 | 33.15                 | 8.11            | 39.13                  | 42.23                | 44.36                   | 54.00           | 9.64        | Peak     |

| Mode | 802.11be-EHT20 | Frequency | TX 2412MHz |
|------|----------------|-----------|------------|
|------|----------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4824.000                 | 32.80                 | 8.04            | 39.17                  | 40.79                | 42.45                   | 54.00           | 11.55       | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4824.000                 | 32.80                 | 8.04            | 39.17                  | 40.54                | 42.20                   | 54.00           | 11.80       | Peak     |

| Mode | 802.11be-EHT20 | Frequency | TX 2442MHz |
|------|----------------|-----------|------------|
|------|----------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4884.000                 | 33.04                 | 8.08            | 39.15                  | 40.40                | 42.37                   | 54.00           | 11.63       | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4884.000                 | 33.04                 | 8.08            | 39.15                  | 41.47                | 43.44                   | 54.00           | 10.56       | Peak     |

| Mode | 802.11be-EHT20 | Frequency | TX 2472MHz |
|------|----------------|-----------|------------|
|------|----------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4944.000                 | 33.19                 | 8.12            | 39.12                  | 41.39                | 43.57                   | 54.00           | 10.43       | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4944.000                 | 33.19                 | 8.12            | 39.12                  | 41.10                | 43.28                   | 54.00           | 10.72       | Peak     |

| Mode | 802.11be-EHT40 | Frequency | TX 2422MHz |
|------|----------------|-----------|------------|
|------|----------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4844.000                 | 32.88                 | 8.05            | 39.16                  | 40.55                | 42.32                   | 54.00           | 11.68       | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4844.000                 | 32.88                 | 8.05            | 39.16                  | 40.59                | 42.35                   | 54.00           | 11.65       | Peak     |

| Mode | 802.11be-EHT40 | Frequency | TX 2442MHz |
|------|----------------|-----------|------------|
|------|----------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4884.000                 | 33.04                 | 8.08            | 39.15                  | 42.28                | 44.24                   | 54.00           | 9.76        | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4884.000                 | 33.04                 | 8.08            | 39.15                  | 42.00                | 43.97                   | 54.00           | 10.03       | Peak     |

| Mode | 802.11be-EHT40 | Frequency | TX 2462MHz |
|------|----------------|-----------|------------|
|------|----------------|-----------|------------|

**Antenna at Horizontal Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4924.000                 | 33.15                 | 8.11            | 39.13                  | 41.77                | 43.90                   | 54.00           | 10.10       | Peak     |

**Antenna at Vertical Polarization**

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4924.000                 | 33.15                 | 8.11            | 39.13                  | 41.68                | 43.81                   | 54.00           | 10.19       | Peak     |

### ● BLE Mode

| Mode | BLE (2Mbps) | Frequency | TX 2402MHz |
|------|-------------|-----------|------------|
|------|-------------|-----------|------------|

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4804.000                 | 32.72                 | 8.02            | 39.18                  | 43.76                | 45.32                   | 54.00           | 8.68        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4804.000                 | 32.72                 | 8.02            | 39.18                  | 42.72                | 44.28                   | 54.00           | 9.72        | Peak     |

| Mode | BLE (2Mbps) | Frequency | TX 2440MHz |
|------|-------------|-----------|------------|
|------|-------------|-----------|------------|

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4880.000                 | 33.02                 | 8.08            | 39.15                  | 45.13                | 47.08                   | 54.00           | 6.92        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4880.000                 | 33.02                 | 8.08            | 39.15                  | 44.39                | 46.33                   | 54.00           | 7.67        | Peak     |

| Mode | BLE (2Mbps) | Frequency | TX 2480MHz |
|------|-------------|-----------|------------|
|------|-------------|-----------|------------|

#### Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4960.000                 | 33.22                 | 8.13            | 39.12                  | 43.90                | 46.14                   | 54.00           | 7.86        | Peak     |

#### Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Gain (dB) | Reading level (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|------------------------|----------------------|-------------------------|-----------------|-------------|----------|
| 4960.000                 | 33.22                 | 8.13            | 39.12                  | 44.93                | 47.16                   | 54.00           | 6.84        | Peak     |

### A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.