

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands	4
A.2.2 Emissions outside the frequency band	9
A.2.3 Emissions in Non-restricted Frequency Bands	9
A.3 20dB BANDWIDTH	10
A.3.1 20dB Bandwidth Result	10
A.3.2 Measurement Plots	11
A.4 CARRIER FREQUENCY SEPARATION	13
A.5 TIME OF OCCUPANCY	17
A.5.1 Time of Occupancy	17
A.6 NUMBER OF HOPPING CHANNELS	37
A.7 MAXIMUM PEAK OUTPUT POWER	38
A.7.1 Maximum Peak Output Power	38
A.7.2 Average Output Power (Reporting only)	38
A.8 EMISSION LIMITATIONS MEASUREMENT	39
A.8.1 Band Edge	39
A.8.2 Spurious Emission	43

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2025/10/22	Temp./Hum.	24°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng

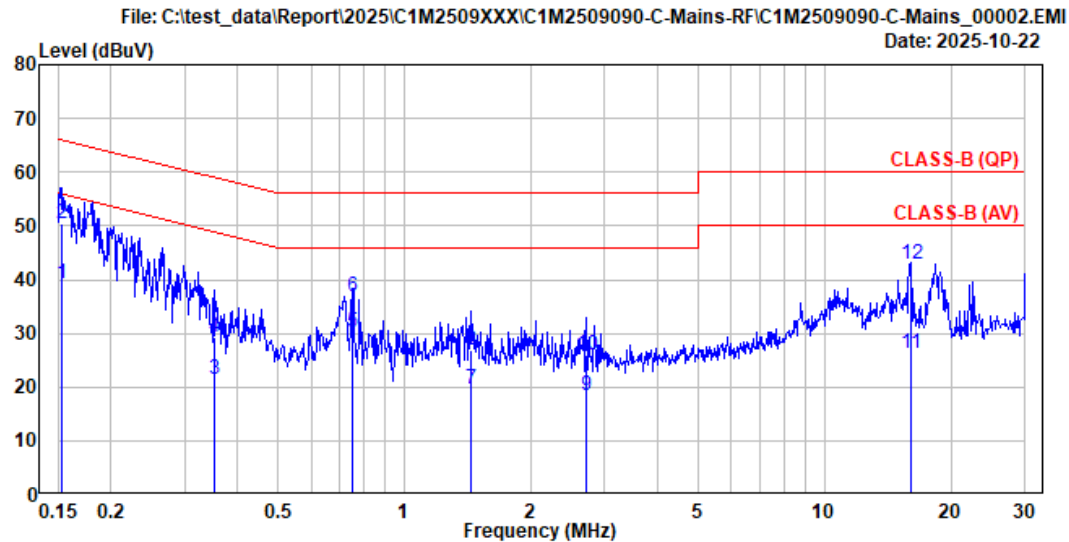

Site No.	: No.7 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(114)		
Instrument 2	: ENV4200 (169)(A) CE-07 ESH3-Z2 (495)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 24°C/61%	Test Rating	: 120Vac/60Hz
EUT Model	: 17Z90UR	Engineer	: Bruce
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.153	10.67	0.05	9.86	18.56	39.14	55.83	16.69	Average
2	0.153	10.67	0.05	9.86	29.71	50.29	65.83	15.54	QP
3	0.354	10.48	0.05	9.86	1.17	21.56	48.88	27.32	Average
4	0.354	10.48	0.05	9.86	8.92	29.31	58.88	29.57	QP
5	0.754	10.45	0.06	9.87	9.81	30.19	46.00	15.81	Average
6	0.754	10.45	0.06	9.87	16.59	36.97	56.00	19.03	QP
7	1.434	10.47	0.07	9.87	-0.84	19.57	46.00	26.43	Average
8	1.434	10.47	0.07	9.87	6.52	26.93	56.00	29.07	QP
9	2.701	10.57	0.09	9.87	-2.23	18.30	46.00	27.70	Average
10	2.701	10.57	0.09	9.87	5.43	25.96	56.00	30.04	QP
11	16.089	13.23	0.21	9.93	2.78	26.15	50.00	23.85	Average
12	16.089	13.23	0.21	9.93	19.48	42.85	60.00	17.15	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2025/10/22	Temp./Hum.	24°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng

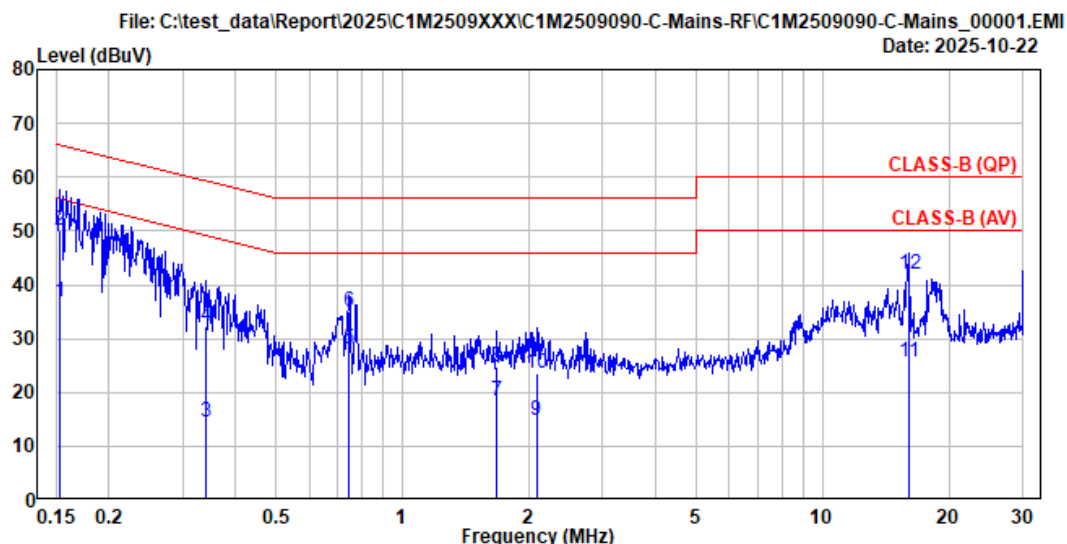

Site No.	: No.7 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(114)		
Instrument 2	: ENV4200 (169) (A) CE-07 ESH3-Z2 (495)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 24°C/61%	Test Rating	: 120Vac/60Hz
EUT Model	: 17Z90UR	Engineer	: Bruce
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.153	10.64	0.05	9.86	16.28	36.83	55.83	19.00	Average
2	0.153	10.64	0.05	9.86	29.42	49.97	65.83	15.86	QP
3	0.341	10.47	0.05	9.86	-5.86	14.52	49.17	34.65	Average
4	0.341	10.47	0.05	9.86	11.98	32.36	59.17	26.81	QP
5	0.747	10.43	0.06	9.87	7.65	28.01	46.00	17.99	Average
6	0.747	10.43	0.06	9.87	14.79	35.15	56.00	20.85	QP
7	1.682	10.46	0.07	9.87	-2.12	18.28	46.00	27.72	Average
8	1.682	10.46	0.07	9.87	4.35	24.75	56.00	31.25	QP
9	2.085	10.48	0.08	9.87	-5.64	14.79	46.00	31.21	Average
10	2.085	10.48	0.08	9.87	3.22	23.65	56.00	32.35	QP
11	16.089	12.79	0.21	9.93	2.60	25.53	50.00	24.47	Average
12	16.089	12.79	0.21	9.93	19.00	41.93	60.00	18.07	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2025/10/08 ~ 14	Temp./Hum.	23 ~ 24°C/50 ~ 52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Harry Huang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	GFSK	Frequency	TX 2480MHz
------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.500	22.10	1.46	26.46	34.33	31.43	40.00	8.57	Peak
106.500	17.06	2.66	26.23	40.57	34.06	43.50	9.44	Peak
250.000	18.46	4.18	25.69	46.93	43.89	46.00	2.11	Peak
677.000	24.50	7.53	27.40	28.14	32.77	46.00	13.23	Peak
933.500	26.66	9.01	26.90	27.83	36.61	46.00	9.39	Peak
966.000	26.88	9.20	26.80	27.50	36.78	54.00	17.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.500	22.10	1.46	26.46	41.33	38.43	40.00	1.57	Peak
104.500	16.91	2.63	26.24	47.72	41.02	43.50	2.48	Peak
250.000	18.46	4.18	25.69	44.04	41.00	46.00	5.00	Peak
656.000	24.44	7.43	27.40	28.13	32.60	46.00	13.40	Peak
931.500	26.64	9.00	26.90	27.71	36.45	46.00	9.55	Peak
979.500	26.97	9.27	26.76	27.50	36.98	54.00	17.02	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	GFSK	Frequency	TX 2402MHz
------	------	-----------	------------

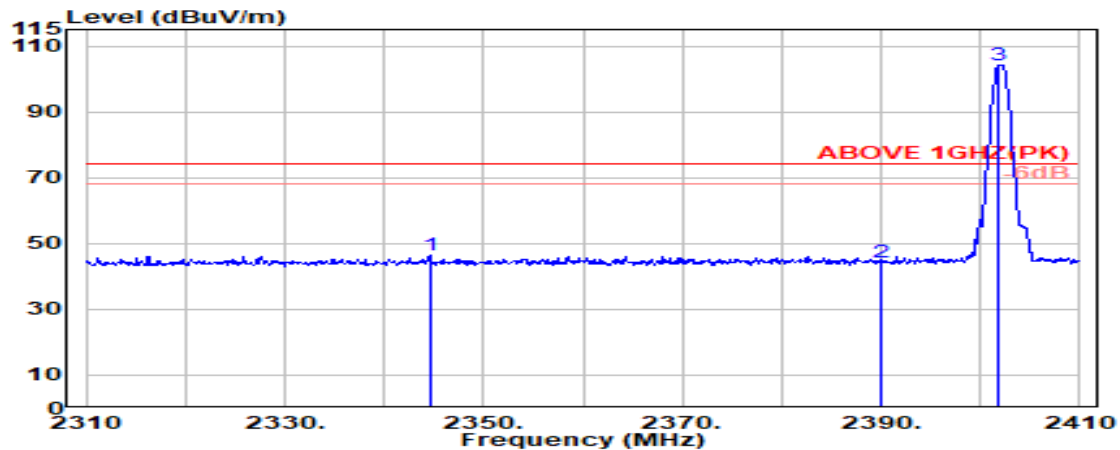

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2344.600	28.18	5.64	39.92	52.50	46.40	74.00	27.60	Peak
2390.000	28.20	5.70	39.92	50.45	44.44	74.00	29.56	Peak
@ 2401.900	28.20	5.72	39.92	110.15	104.15	---	---	Peak

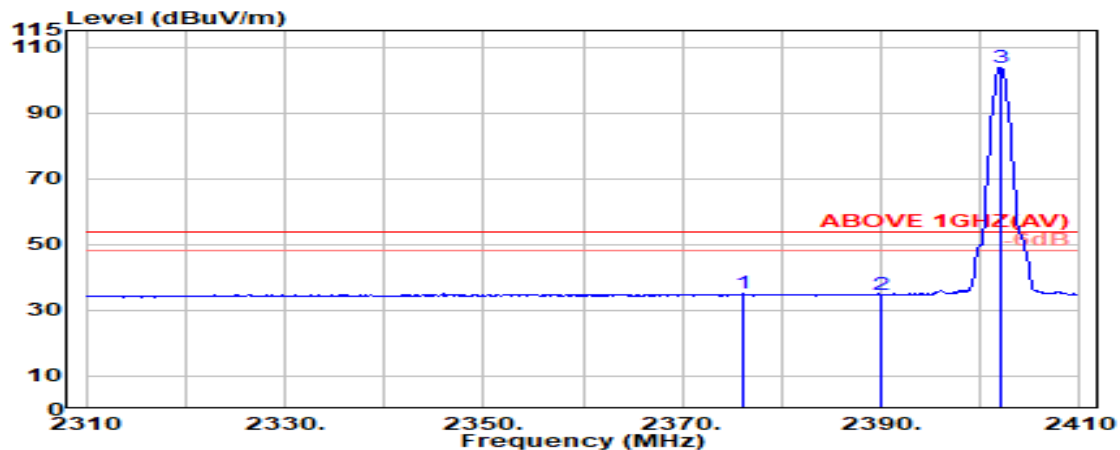

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.000	28.20	5.68	39.92	41.04	35.01	54.00	18.99	Average
2390.000	28.20	5.70	39.92	40.70	34.68	54.00	19.32	Average
@ 2402.000	28.20	5.72	39.92	109.78	103.79	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	GFSK	Frequency	TX 2402MHz
------	------	-----------	------------

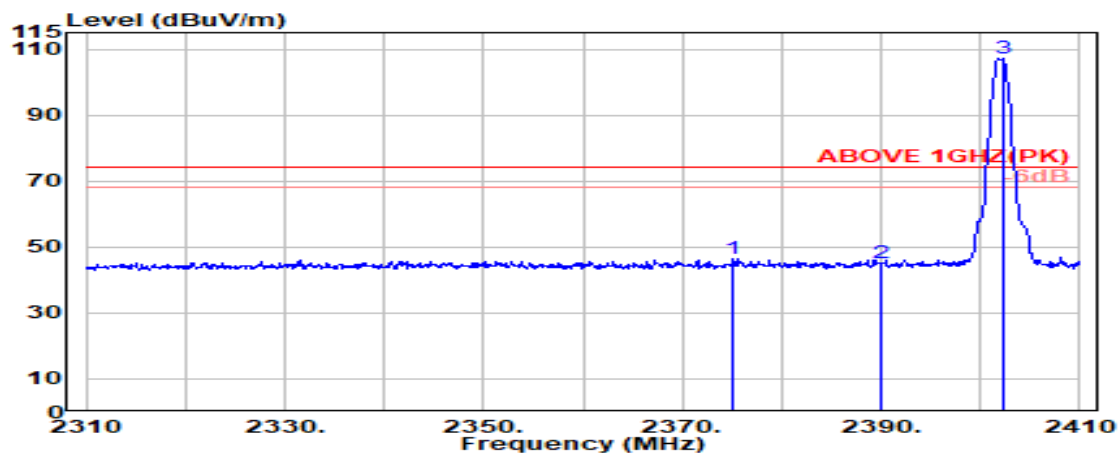

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2375.100	28.20	5.68	39.92	52.65	46.61	74.00	27.39	Peak
2390.000	28.20	5.70	39.92	51.01	44.99	74.00	29.01	Peak
@ 2402.200	28.20	5.72	39.92	113.00	107.00	---	---	Peak

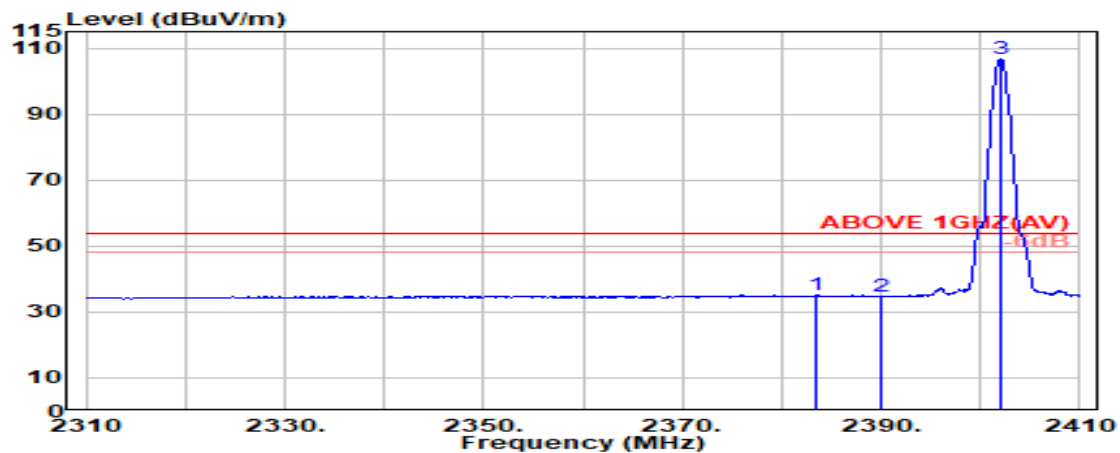

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.500	28.20	5.69	39.92	41.06	35.04	54.00	18.96	Average
2390.000	28.20	5.70	39.92	40.86	34.84	54.00	19.16	Average
@ 2402.000	28.20	5.72	39.92	112.63	106.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	GFSK	Frequency	TX 2480MHz
------	------	-----------	------------

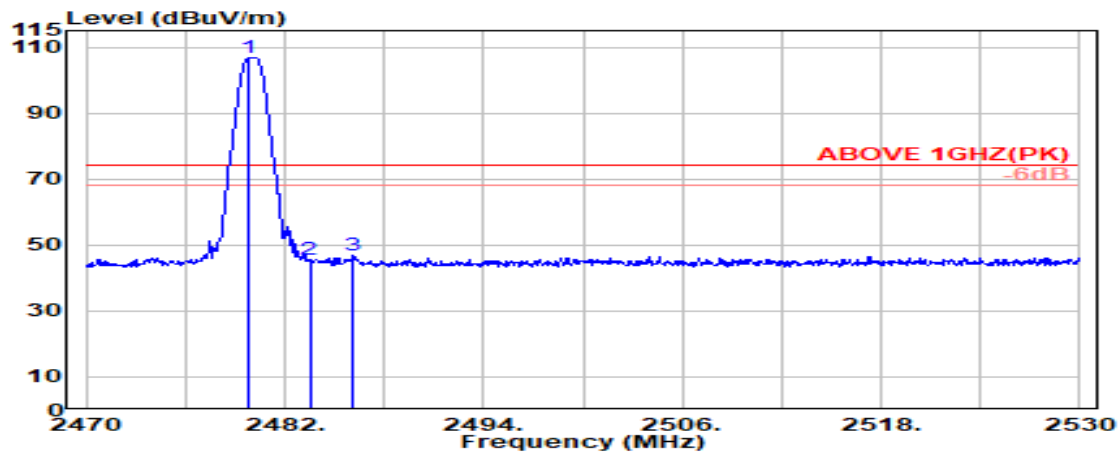

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.873	28.42	5.82	39.92	112.63	106.95	---	---	Peak
2483.500	28.43	5.83	39.92	51.43	45.77	74.00	28.23	Peak
2486.091	28.44	5.83	39.92	52.68	47.04	74.00	26.96	Peak

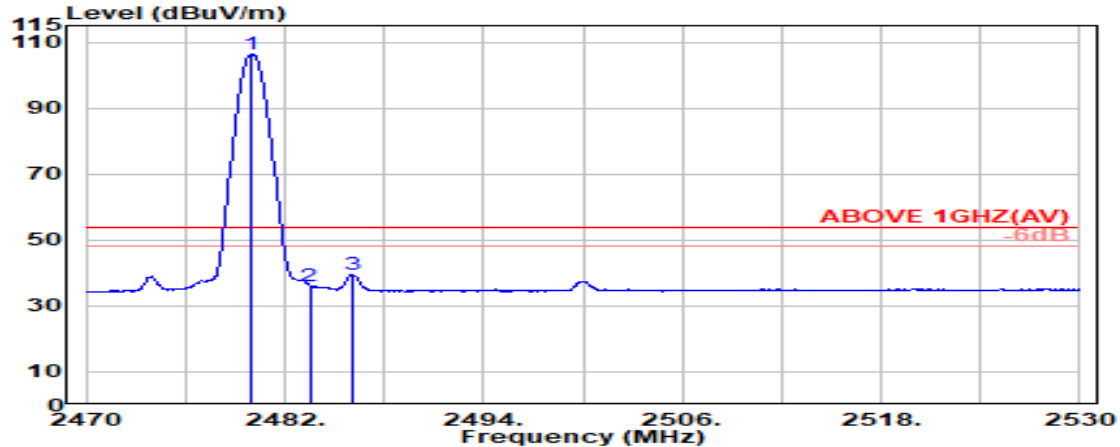

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.036	28.42	5.82	39.92	111.98	106.30	---	---	Average
2483.500	28.43	5.83	39.92	41.83	36.17	54.00	17.83	Average
2486.036	28.44	5.83	39.92	44.97	39.33	54.00	14.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	GFSK	Frequency	TX 2480MHz
------	------	-----------	------------

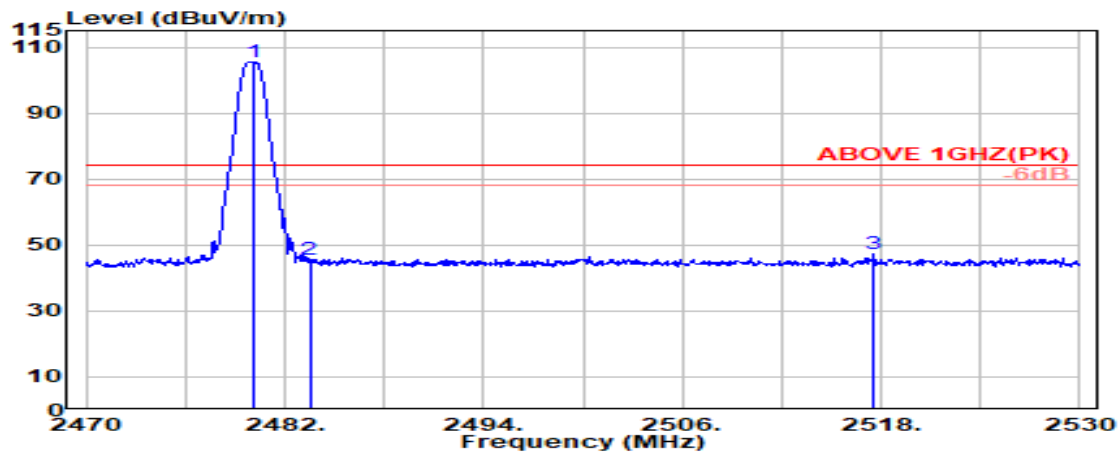

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.146	28.42	5.82	39.92	111.19	105.51	---	---	Peak
	2483.500	28.43	5.83	39.92	51.23	45.57	74.00	28.43	Peak
	2517.564	28.57	5.87	39.92	52.68	47.19	74.00	26.81	Peak

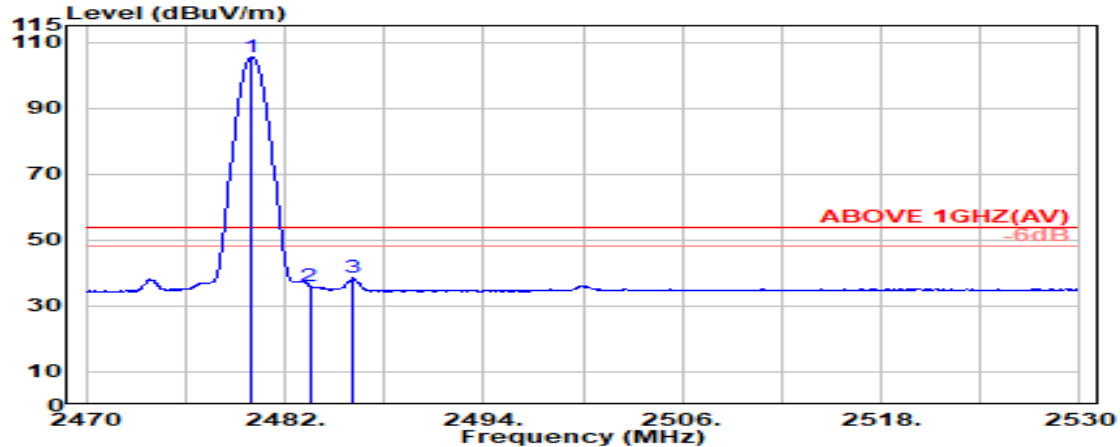

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.036	28.42	5.82	39.92	111.02	105.35	---	---	Average
	2483.500	28.43	5.83	39.92	41.57	35.91	54.00	18.09	Average
	2486.091	28.44	5.83	39.92	44.07	38.43	54.00	15.57	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303****A.2.2 Emissions outside the frequency band**

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.72	8.02	39.18	40.70	42.26	54.00	11.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.72	8.02	39.18	40.75	42.31	54.00	11.69	Peak

Mode	8-DPSK	Frequency	TX 2441MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.000	33.03	8.08	39.15	40.46	42.42	54.00	11.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.000	33.03	8.08	39.15	40.74	42.70	54.00	11.30	Peak

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.22	8.13	39.12	40.51	42.75	54.00	11.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.22	8.13	39.12	40.95	43.19	54.00	10.81	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

All emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.3 20dB BANDWIDTH

Test Date	2025/10/19	Temp./Hum.	25°C/61%
Cable Loss	1.80dB	Tested By	Chuntse Wu
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 20dB Bandwidth Result

Main

Mode	Centre Frequency (MHz)	20dB Bandwidth (MHz)	99%Occupied Bandwidth (MHz) (Reference only)	2/3 (20dB Bandwidth)
GFSK	2402	0.9189	0.85361	0.613
	2441	0.9175	0.84231	0.612
	2480	0.9187	0.85010	0.612
8-DPSK	2402	1.340	1.2234	0.893
	2441	1.342	1.2259	0.895
	2480	1.340	1.2241	0.893

Remark: The maximum two-thirds of the 20dB bandwidth is the limit for carrier frequency separation presented.

Aux

Mode	Centre Frequency (MHz)	20dB Bandwidth (MHz)	99%Occupied Bandwidth (MHz) (Reference only)	2/3 (20dB Bandwidth)
GFSK	2402	0.9190	0.84937	0.613
	2441	0.9190	0.85085	0.613
	2480	0.9188	0.84825	0.613
8-DPSK	2402	1.341	1.2239	0.894
	2441	1.340	1.2248	0.893
	2480	1.340	1.2245	0.893

Remark: The maximum two-thirds of the 20dB bandwidth is the limit for carrier frequency separation presented.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

A.3.2 Measurement Plots



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

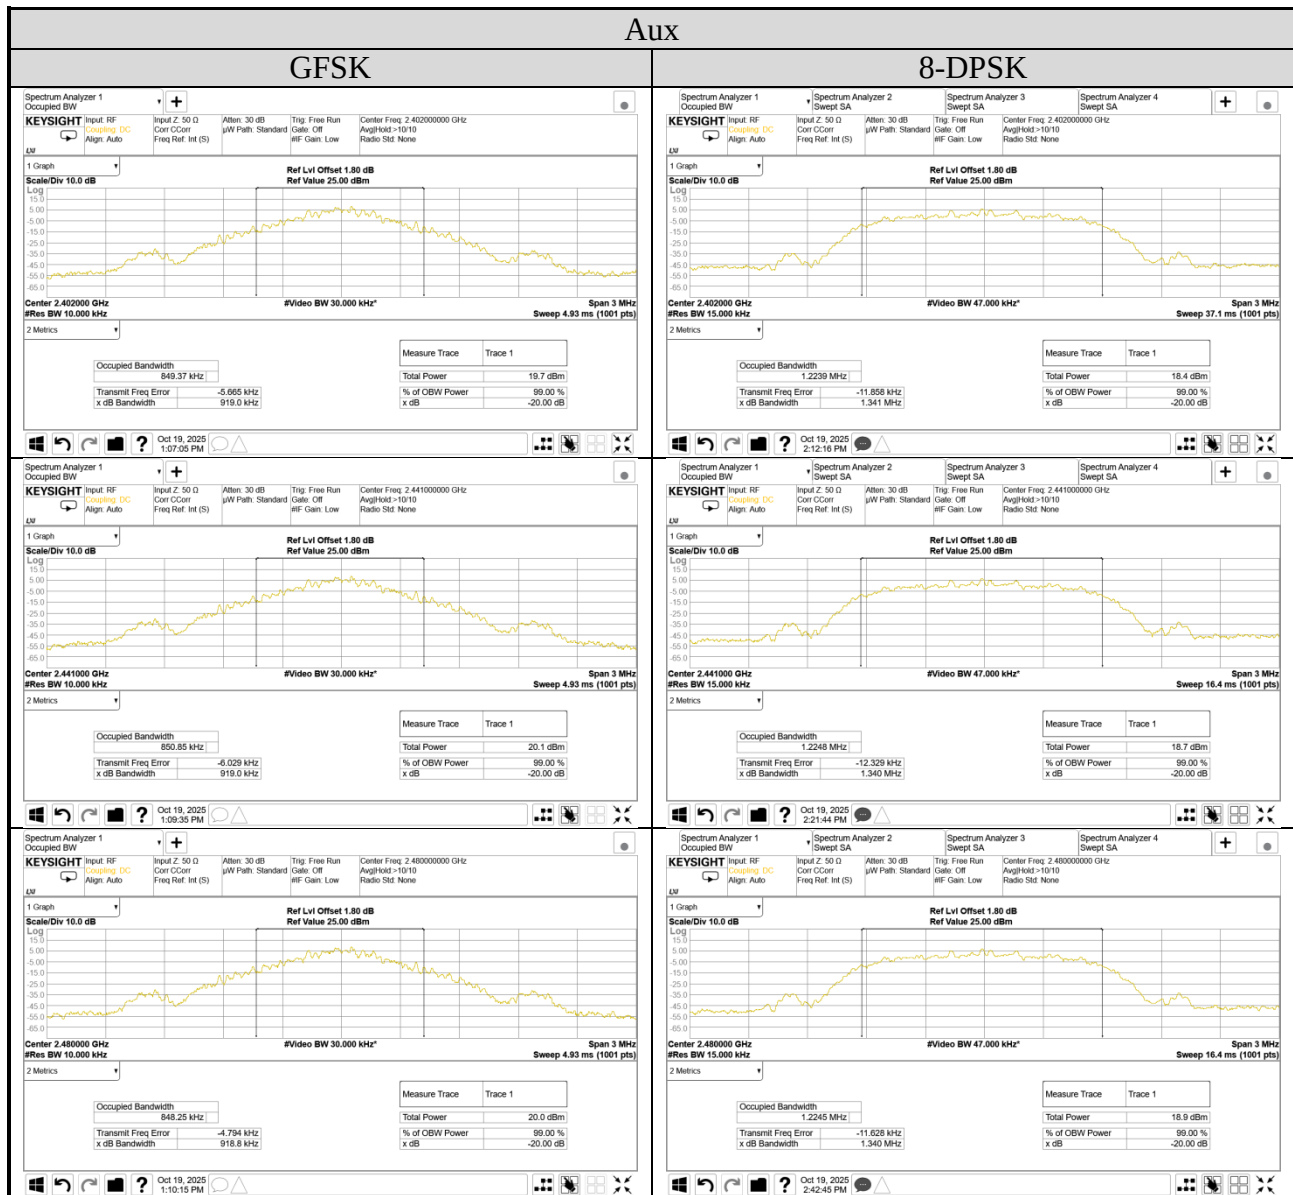


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


A.4 CARRIER FREQUENCY SEPARATION

Test Date	2025/10/19	Temp./Hum.	25°C/61%
Cable Loss	1.80dB	Tested By	Chuntse Wu
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

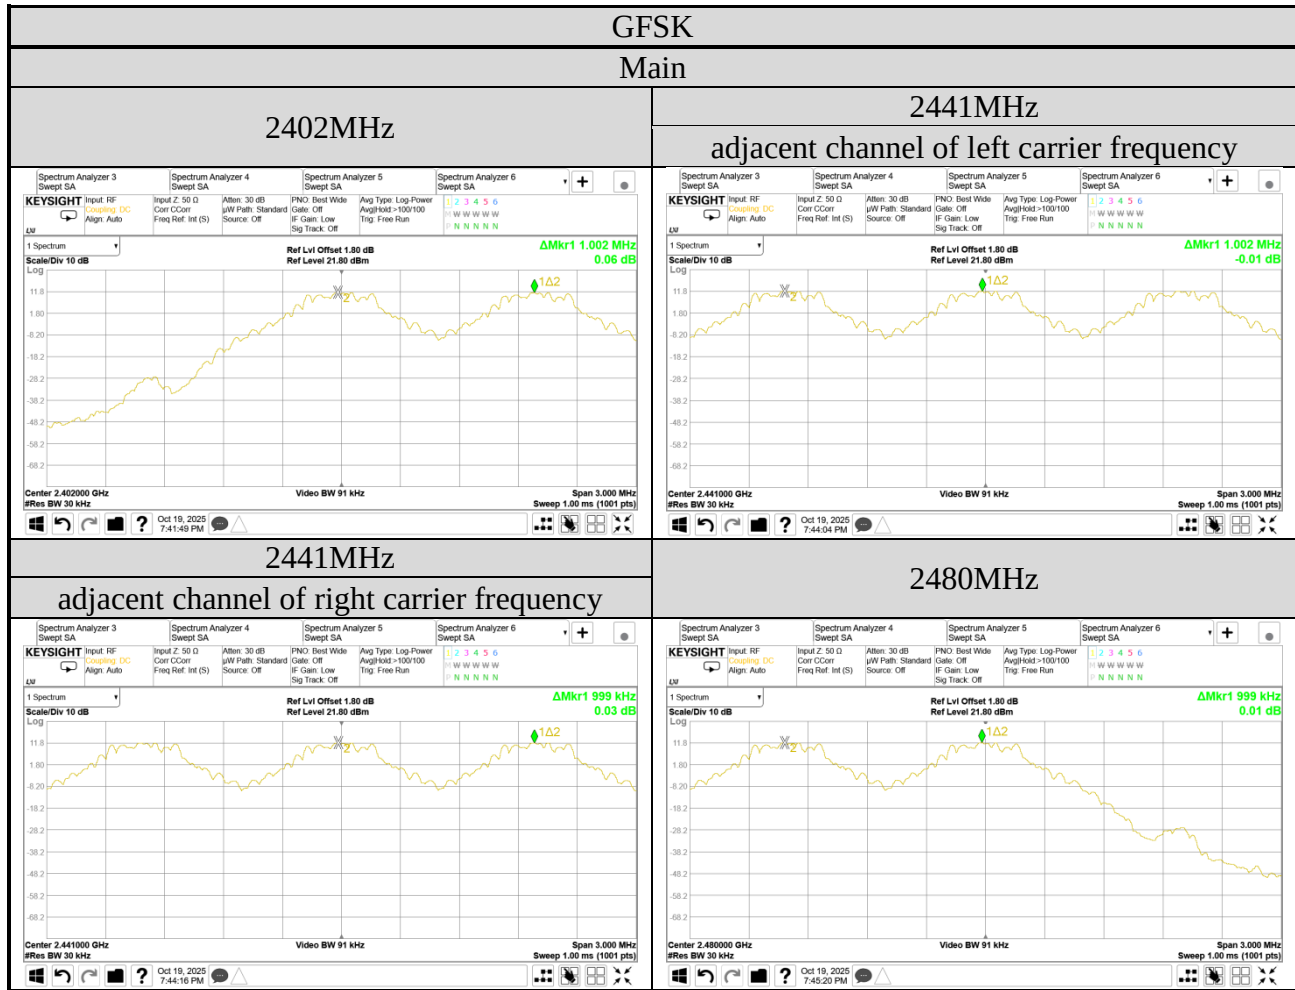

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

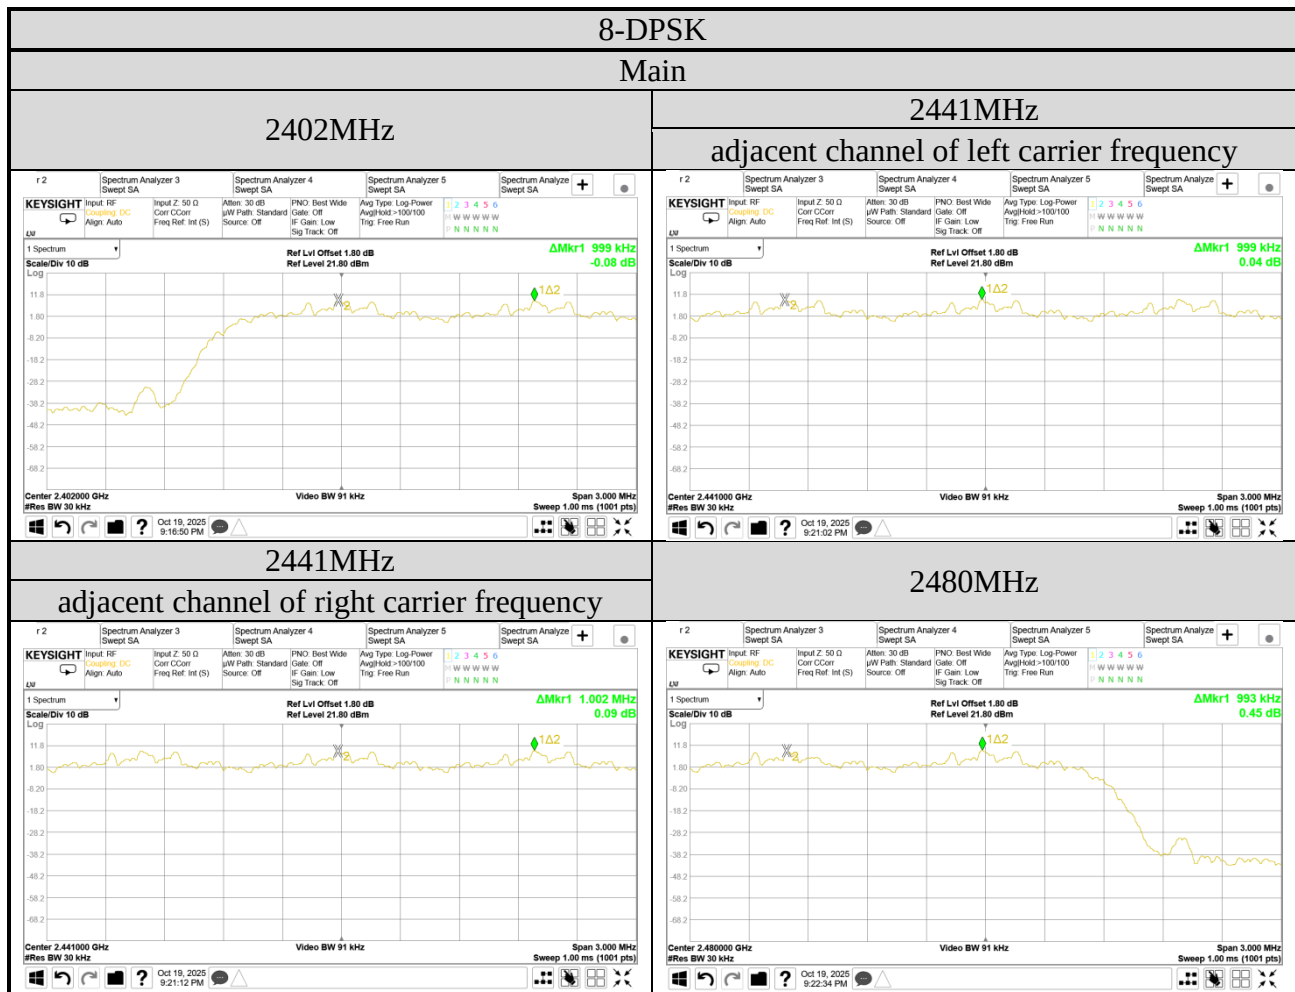


Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan


Tel: +886 2 26099301

Fax: +886 2 26099303

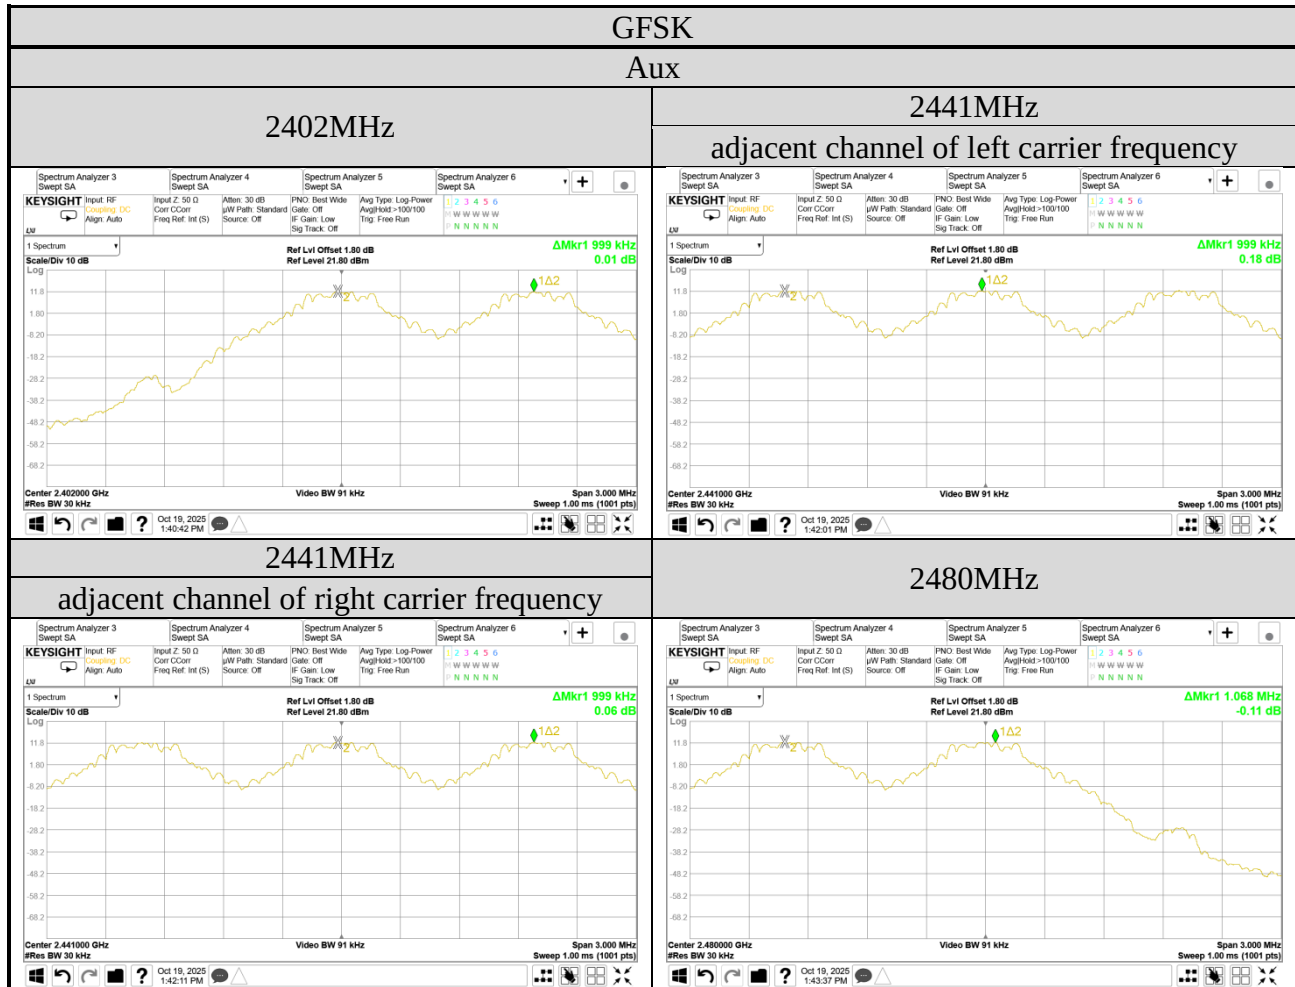

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

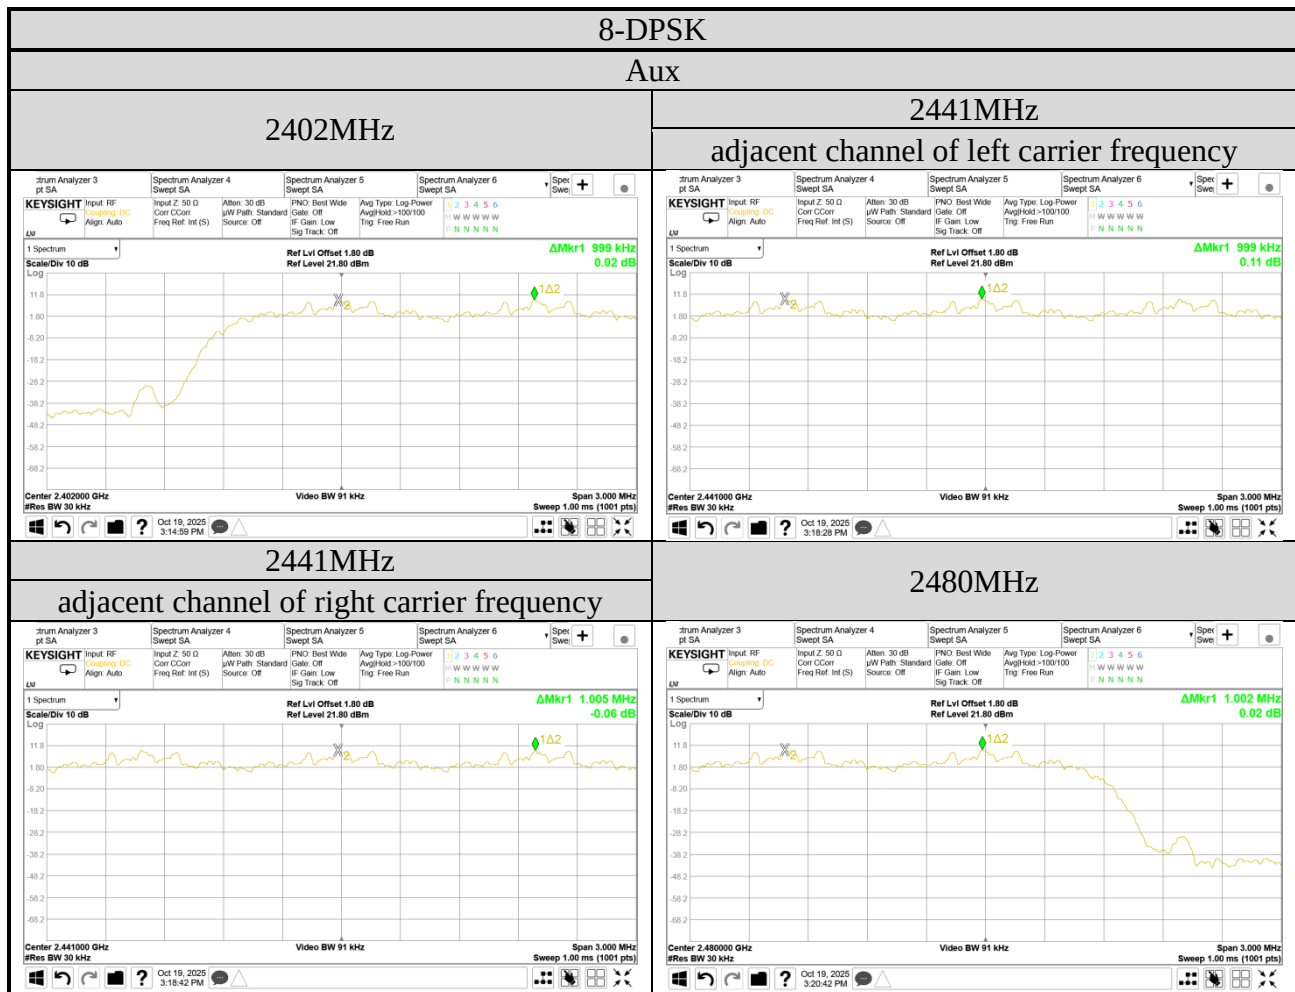

A.5 TIME OF OCCUPANCY

Test Date	2025/10/19 ~ 30	Temp./Hum.	24 ~ 25°C/56 ~ 61%
Cable Loss	1.80dB	Tested By	Chuntse Wu
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.5.1 Time of Occupancy

Main

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2402	DH1	10	0.360	113.760	<400
		DH3	6	1.620	307.152	<400
		DH5	3	2.880	273.024	<400

Observation Period:

79 channels* 0.4 seconds= 31.6 seconds

DH1 Mode

For each second of 10 transmission appearance,the longest time of occupancy is

10 transmission* 31.6 seconds* 0.360 ms= 113.760 ms (<400ms)

DH3 Mode

For each second of 6 transmission appearance,the longest time of occupancy is

6 transmission* 31.6 seconds* 1.620 ms= 307.152 ms (<400ms)

DH5 Mode

For each second of 3 transmission appearance,the longest time of occupancy is

3 transmission* 31.6 seconds* 2.880 ms= 273.024 ms (<400ms)

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2441	DH1	10	0.370	116.920	<400
		DH3	5	1.640	259.120	<400
		DH5	3	2.850	270.180	<400

Observation Period:

79 channels* 0.4 seconds= 31.6 seconds

DH1 Mode

For each second of 10 transmission appearance,the longest time of occupancy is

10 transmission* 31.6 seconds* 0.370 ms= 116.920 ms (<400ms)

DH3 Mode

For each second of 5 transmission appearance,the longest time of occupancy is

5 transmission* 31.6 seconds* 1.640 ms= 259.120 ms (<400ms)

DH5 Mode

For each second of 3 transmission appearance,the longest time of occupancy is

3 transmission* 31.6 seconds* 2.850 ms= 270.180 ms (<400ms)

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2480	DH1	10	0.360	113.760	<400
		DH3	5	1.620	255.960	<400
		DH5	3	2.880	273.024	<400

Observation Period:

79 channels * 0.4 seconds = 31.6 seconds

DH1 Mode

For each second of 10 transmission appearance, the longest time of occupancy is
10 transmission * 31.6 seconds * 0.360 ms = 113.760 ms (<400ms)

DH3 Mode

For each second of 5 transmission appearance, the longest time of occupancy is
5 transmission * 31.6 seconds * 1.620 ms = 255.960 ms (<400ms)

DH5 Mode

For each second of 3 transmission appearance, the longest time of occupancy is
3 transmission * 31.6 seconds * 2.880 ms = 273.024 ms (<400ms)

Aux

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2402	DH1	10	0.370	116.920	<400
		DH3	6	1.620	307.152	<400
		DH5	3	2.850	270.180	<400

Observation Period:

79 channels* 0.4 seconds= 31.6 seconds

DH1 Mode

For each second of 10 transmission appearance, the longest time of occupancy is
 10 transmission* 31.6 seconds* 0.370 ms= 116.920 ms (<400ms)

DH3 Mode

For each second of 6 transmission appearance, the longest time of occupancy is
 6 transmission* 31.6 seconds* 1.620 ms= 307.152 ms (<400ms)

DH5 Mode

For each second of 3 transmission appearance, the longest time of occupancy is
 3 transmission* 31.6 seconds* 2.850 ms= 270.180 ms (<400ms)

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2441	DH1	10	0.360	113.760	<400
		DH3	5	1.620	255.960	<400
		DH5	3	2.850	270.180	<400

Observation Period:

79 channels* 0.4 seconds= 31.6 seconds

DH1 Mode

For each second of 10 transmission appearance, the longest time of occupancy is
 10 transmission* 31.6 seconds* 0.360 ms= 113.760 ms (<400ms)

DH3 Mode

For each second of 5 transmission appearance, the longest time of occupancy is
 5 transmission* 31.6 seconds* 1.620 ms= 255.960 ms (<400ms)

DH5 Mode

For each second of 3 transmission appearance, the longest time of occupancy is
 3 transmission* 31.6 seconds* 2.850 ms= 270.180 ms (<400ms)

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2480	DH1	10	0.360	113.760	<400
		DH3	6	1.620	307.152	<400
		DH5	3	2.850	270.180	<400

Observation Period:

79 channels * 0.4 seconds = 31.6 seconds

DH1 Mode

For each second of 10 transmission appearance, the longest time of occupancy is
10 transmission * 31.6 seconds * 0.360 ms = 113.760 ms (<400ms)

DH3 Mode

For each second of 6 transmission appearance, the longest time of occupancy is
6 transmission * 31.6 seconds * 1.620 ms = 307.152 ms (<400ms)


DH5 Mode

For each second of 3 transmission appearance, the longest time of occupancy is
3 transmission * 31.6 seconds * 2.850 ms = 270.180 ms (<400ms)

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● Measurement Plots

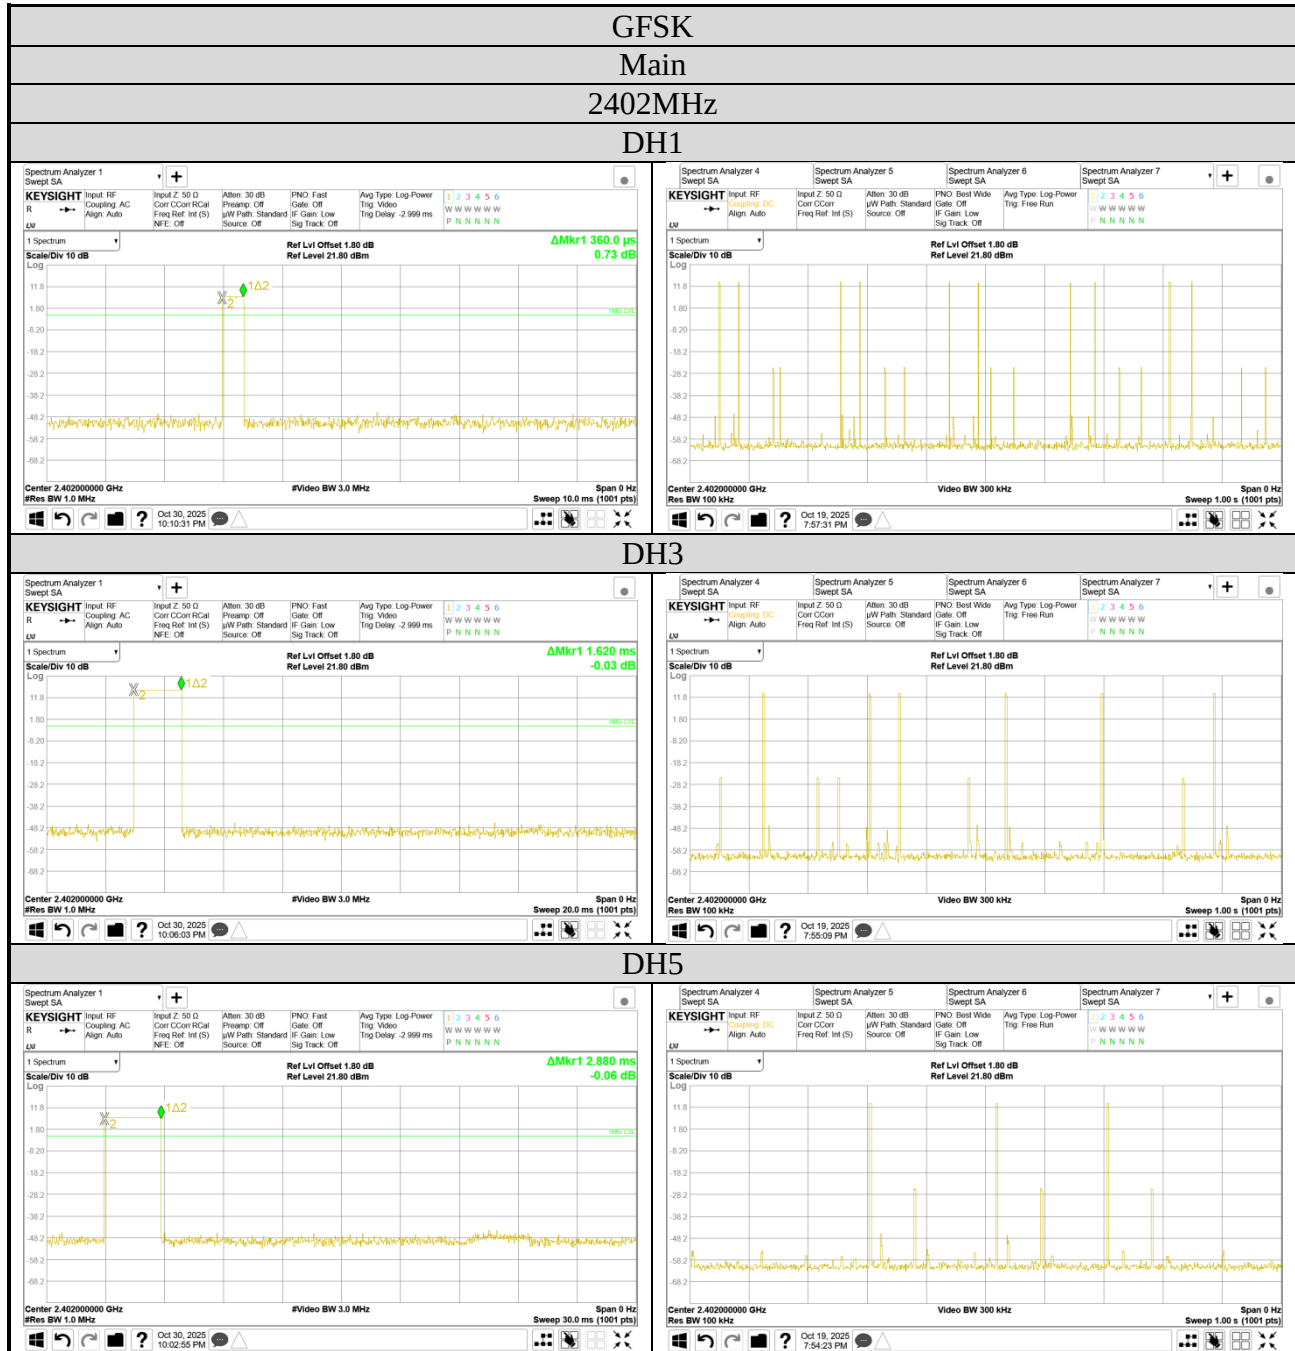

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

GFSK


Main

2441MHz


DH1



DH3

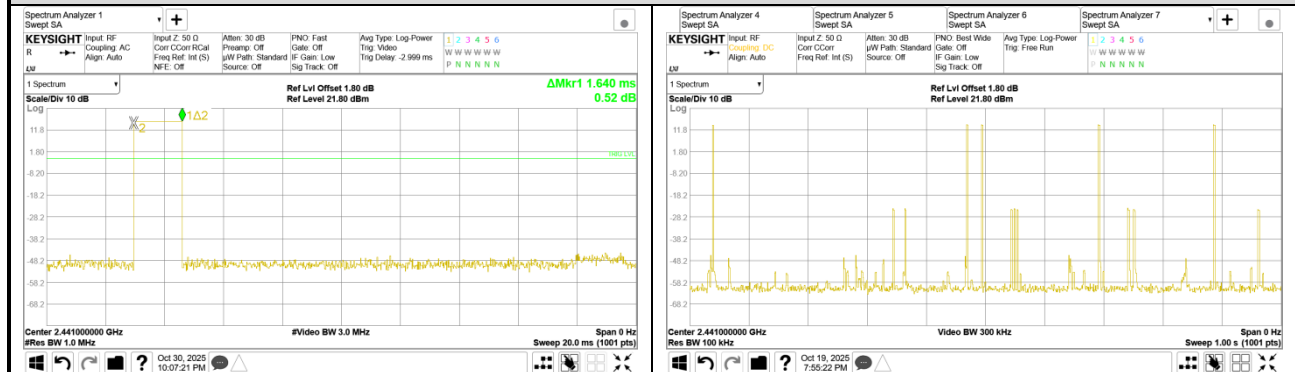

DH5

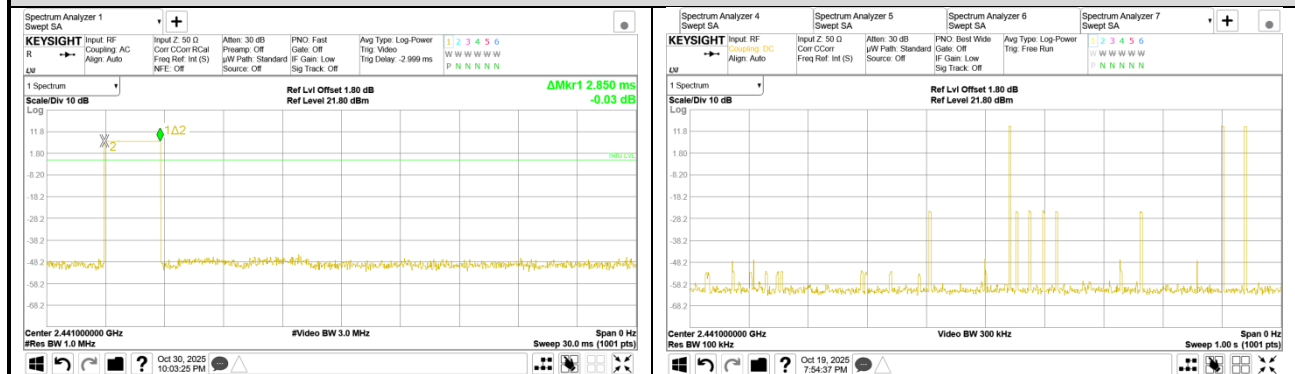

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

GFSK


Main

2480MHz


DH1

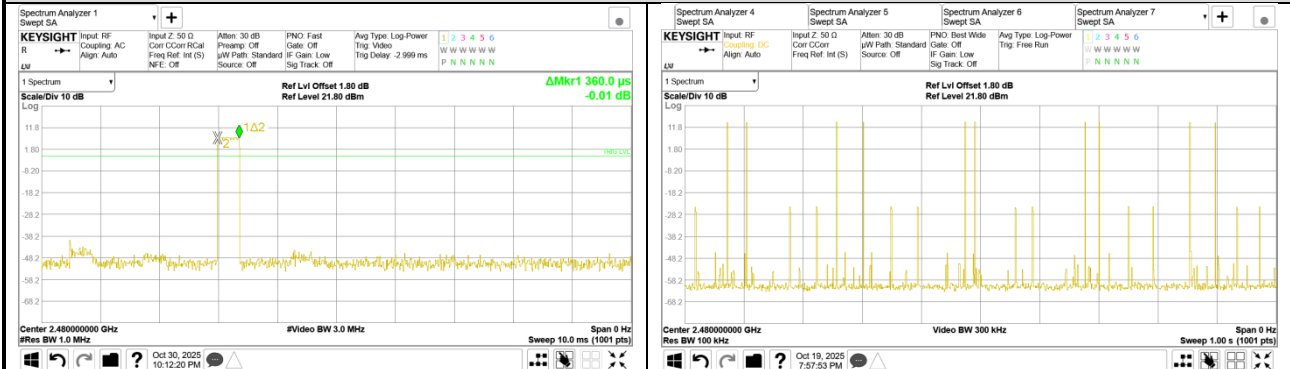

DH3

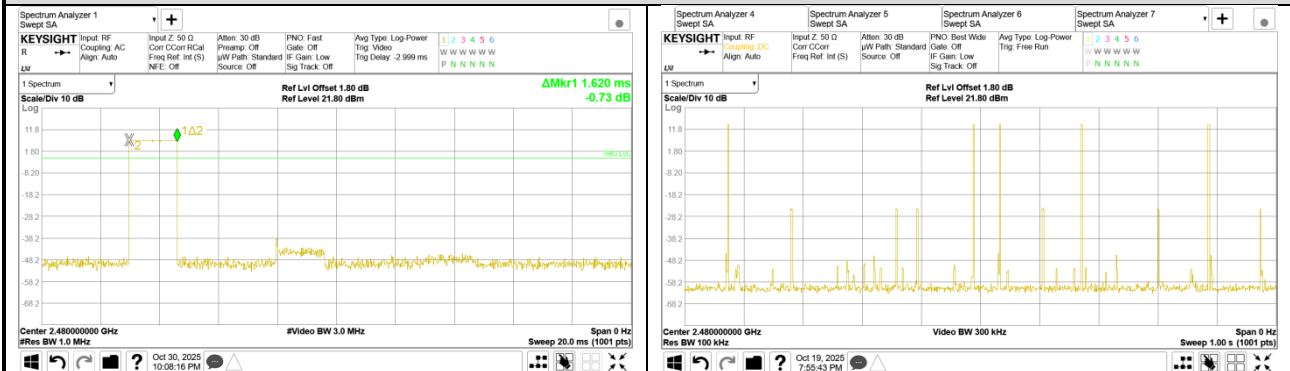

DH5

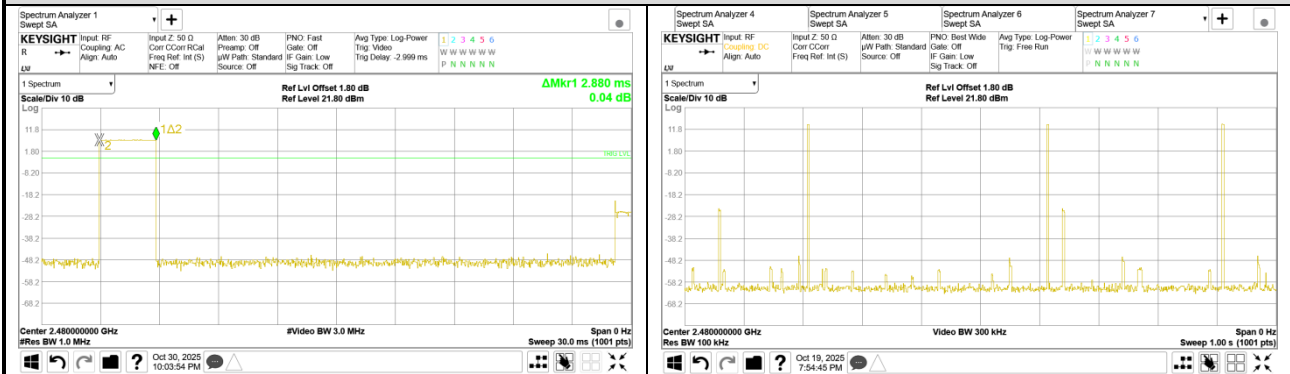

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

GFSK

Aux

2402MHz


DH1

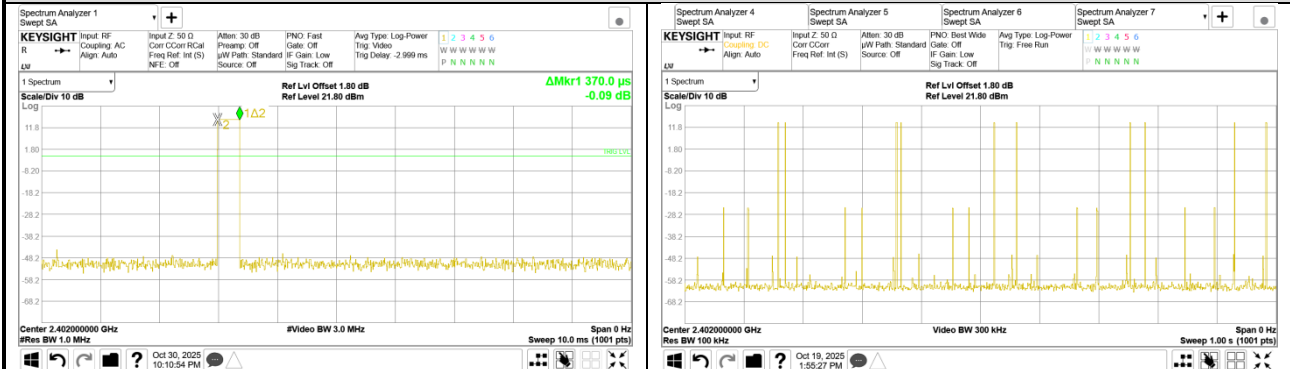

DH3




DH5

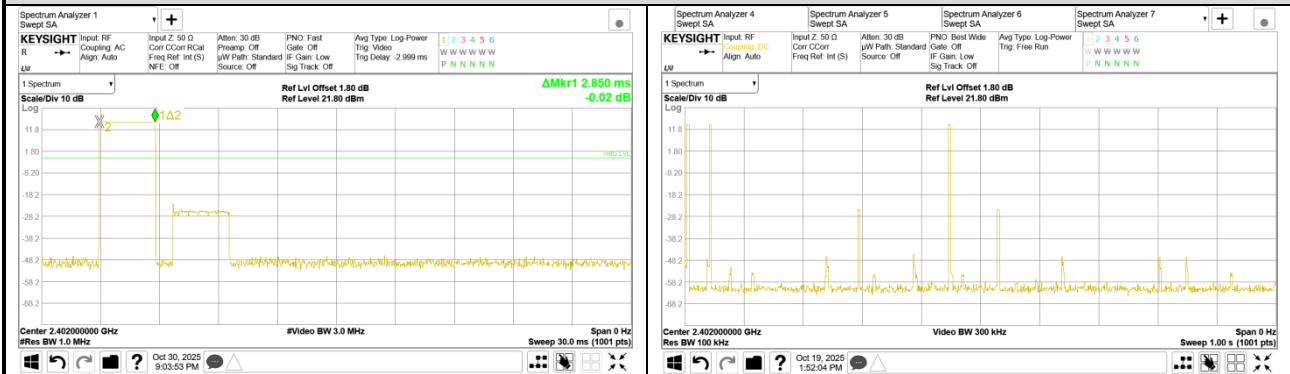

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

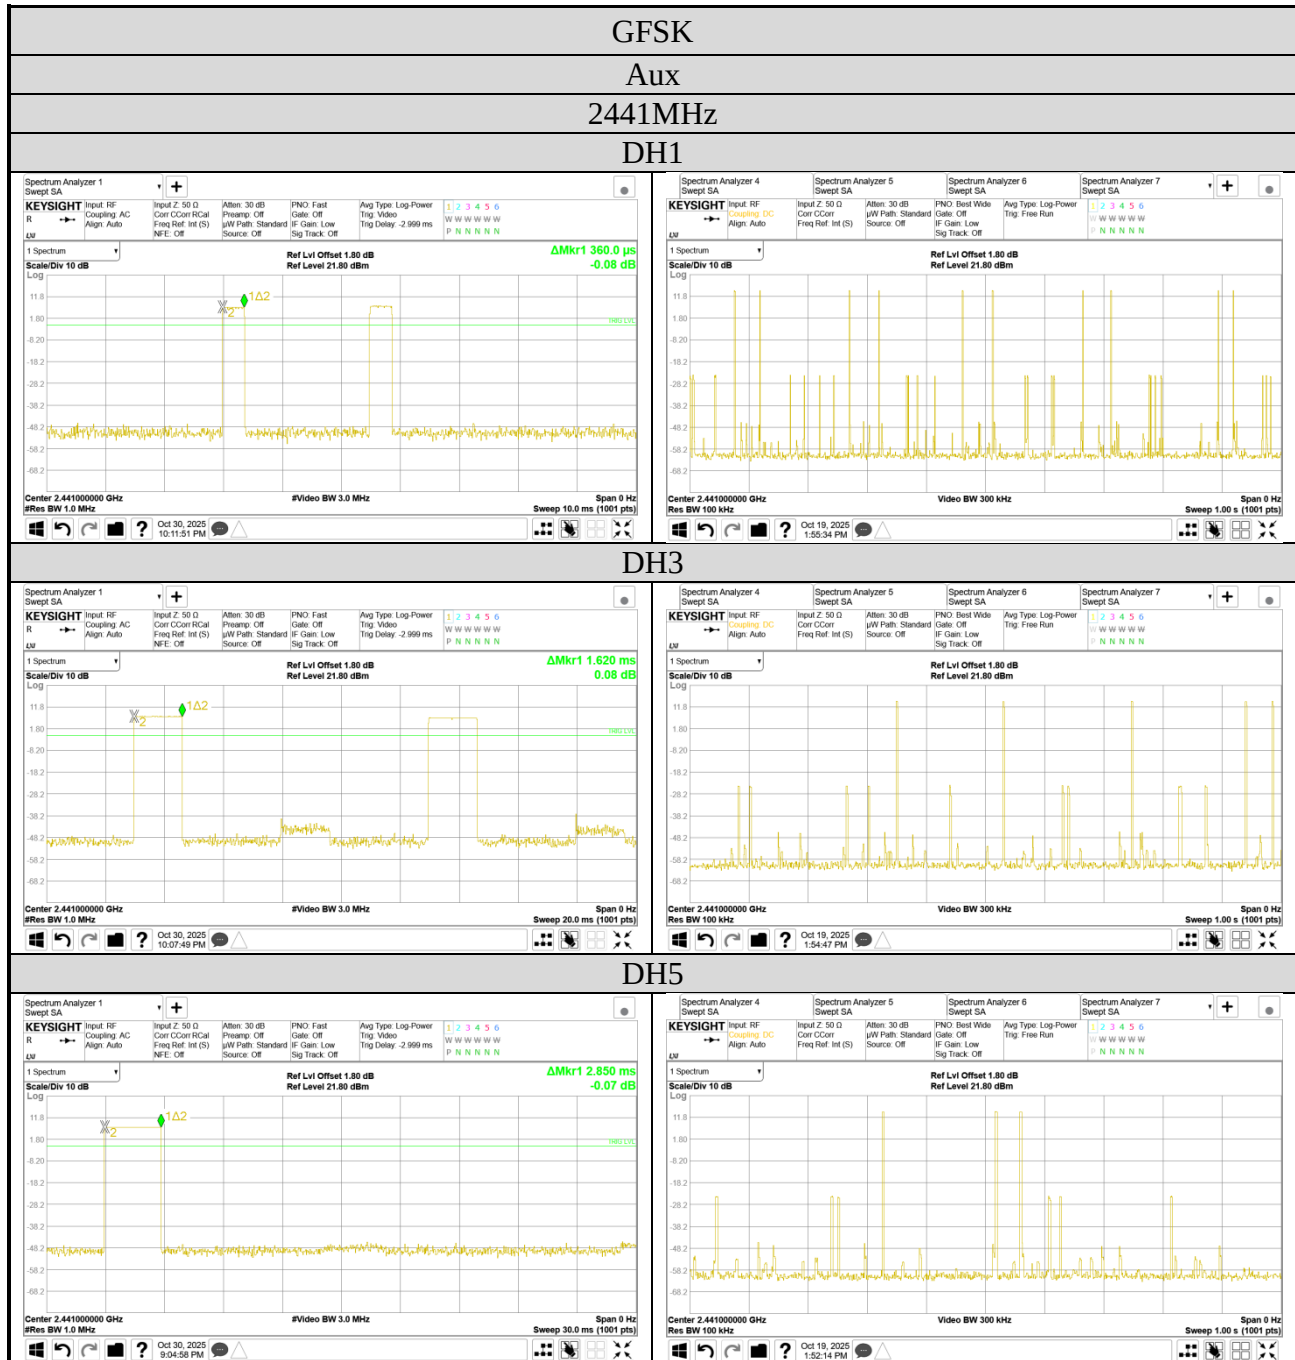

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

GFSK


Aux

2480MHz


DH1

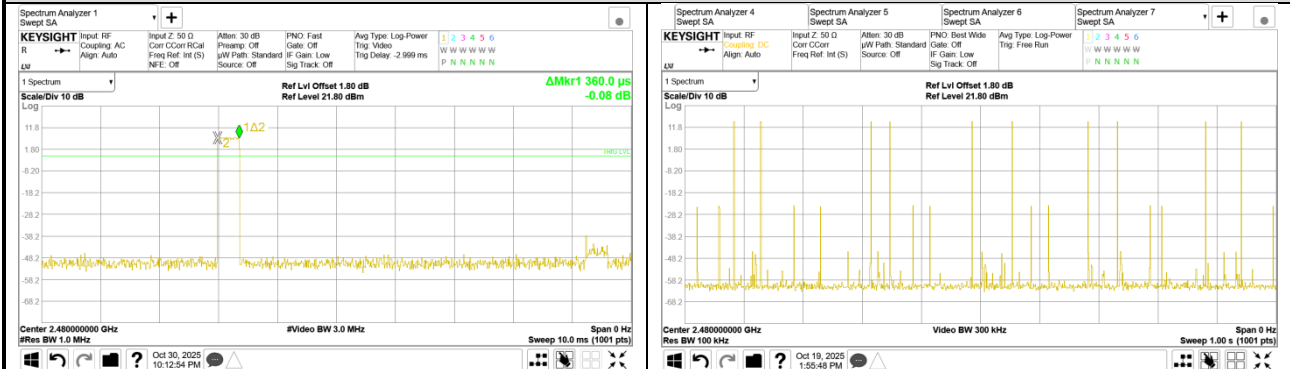

DH3

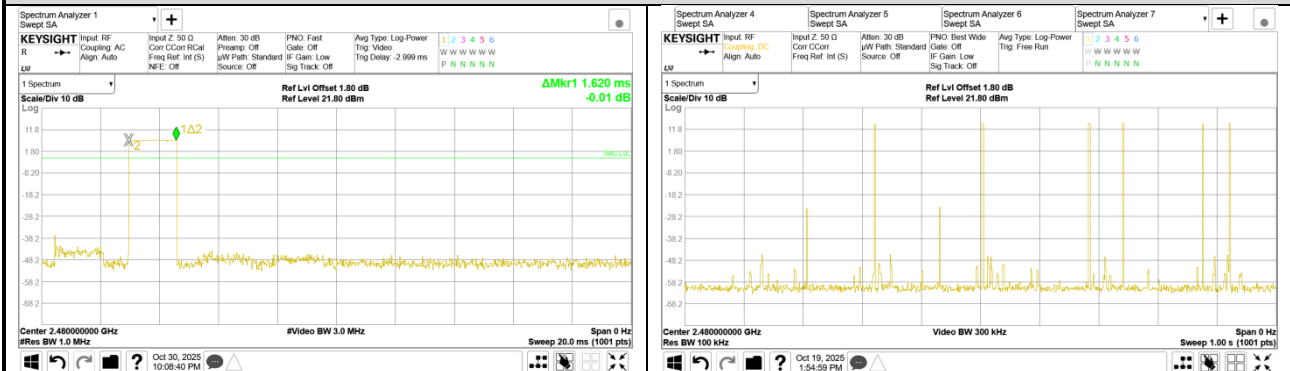

DH5

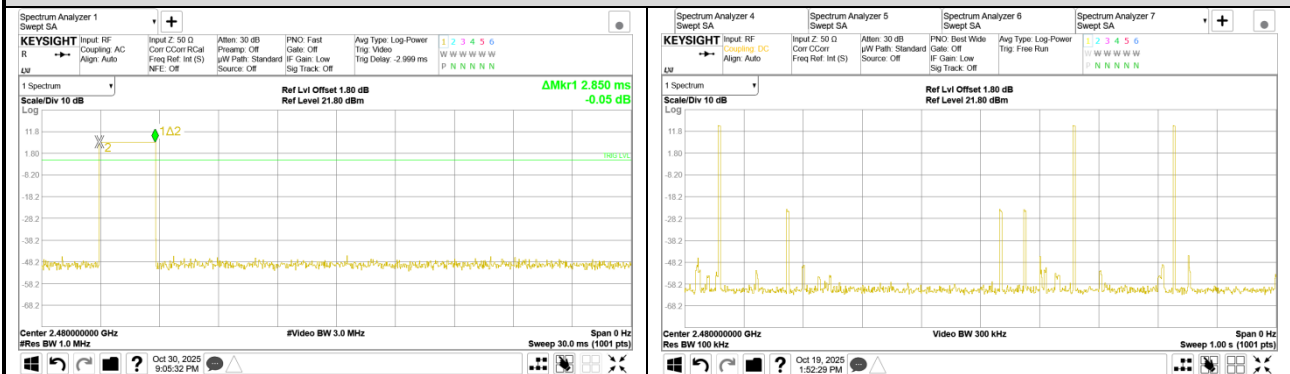

Main

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2402	3DH1	10	0.380	120.080	<400
		3DH3	5	1.605	253.590	<400
		3DH5	3	2.880	273.024	<400

Observation Period:

79 channels* 0.4 seconds= 31.6 seconds

3DH1 Mode

For each second of 10 transmission appearance, the longest time of occupancy is
10 transmission* 31.6 seconds* 0.380 ms= 120.080 ms (<400ms)

3DH3 Mode

For each second of 5 transmission appearance, the longest time of occupancy is
5 transmission* 31.6 seconds* 1.605 ms= 253.590 ms (<400ms)

3DH5 Mode

For each second of 3 transmission appearance, the longest time of occupancy is
3 transmission* 31.6 seconds* 2.880 ms= 273.024 ms (<400ms)

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2441	3DH1	10	0.375	118.500	<400
		3DH3	6	1.620	307.152	<400
		3DH5	4	2.880	364.032	<400

Observation Period:

79 channels* 0.4 seconds= 31.6 seconds

3DH1 Mode

For each second of 10 transmission appearance, the longest time of occupancy is
10 transmission* 31.6 seconds* 0.375 ms= 118.500 ms (<400ms)

3DH3 Mode

For each second of 6 transmission appearance, the longest time of occupancy is
6 transmission* 31.6 seconds* 1.620 ms= 307.152 ms (<400ms)

3DH5 Mode

For each second of 4 transmission appearance, the longest time of occupancy is
4 transmission* 31.6 seconds* 2.880 ms= 364.032 ms (<400ms)

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2480	3DH1	10	0.380	120.080	<400
		3DH3	5	1.635	258.330	<400
		3DH5	3	2.880	273.024	<400

Observation Period:

79 channels* 0.4 seconds= 31.6 seconds

3DH1 Mode

For each second of 10 transmission appearance,the longest time of occupancy is
10 transmission* 31.6 seconds* 0.380 ms= 120.080 ms (<400ms)

3DH3 Mode

For each second of 5 transmission appearance,the longest time of occupancy is
5 transmission* 31.6 seconds* 1.635 ms= 258.330 ms (<400ms)

3DH5 Mode

For each second of 3 transmission appearance,the longest time of occupancy is
3 transmission* 31.6 seconds* 2.880 ms= 273.024 ms (<400ms)

Aux

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2402	3DH1	10	0.370	116.920	<400
		3DH3	5	1.635	258.330	<400
		3DH5	4	2.860	361.504	<400

Observation Period:

79 channels* 0.4 seconds= 31.6 seconds

3DH1 Mode

For each second of 10 transmission appearance,the longest time of occupancy is
10 transmission* 31.6 seconds* 0.370 ms= 116.920 ms (<400ms)

3DH3 Mode

For each second of 5 transmission appearance,the longest time of occupancy is
5 transmission* 31.6 seconds* 1.635 ms= 258.330 ms (<400ms)

3DH5 Mode

For each second of 4 transmission appearance,the longest time of occupancy is
4 transmission* 31.6 seconds* 2.860 ms= 361.504 ms (<400ms)

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2441	3DH1	10	0.380	120.080	<400
		3DH3	5	1.635	258.330	<400
		3DH5	3	2.860	271.128	<400

Observation Period:

79 channels* 0.4 seconds= 31.6 seconds

3DH1 Mode

For each second of 10 transmission appearance,the longest time of occupancy is
10 transmission* 31.6 seconds* 0.380 ms= 120.080 ms (<400ms)

3DH3 Mode

For each second of 5 transmission appearance,the longest time of occupancy is
5 transmission* 31.6 seconds* 1.635 ms= 258.330 ms (<400ms)

3DH5 Mode

For each second of 3 transmission appearance,the longest time of occupancy is
3 transmission* 31.6 seconds* 2.860 ms= 271.128 ms (<400ms)

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2480	3DH1	10	0.380	120.080	<400
		3DH3	5	1.620	255.960	<400
		3DH5	3	2.880	273.024	<400

Observation Period:

79 channels* 0.4 seconds= 31.6 seconds

3DH1 Mode

For each second of 10 transmission appearance, the longest time of occupancy is
10 transmission* 31.6 seconds* 0.380 ms= 120.080 ms (<400ms)

3DH3 Mode

For each second of 5 transmission appearance, the longest time of occupancy is
5 transmission* 31.6 seconds* 1.620 ms= 255.960 ms (<400ms)


3DH5 Mode

For each second of 3 transmission appearance, the longest time of occupancy is
3 transmission* 31.6 seconds* 2.880 ms= 273.024 ms (<400ms)

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

● Measurement Plots

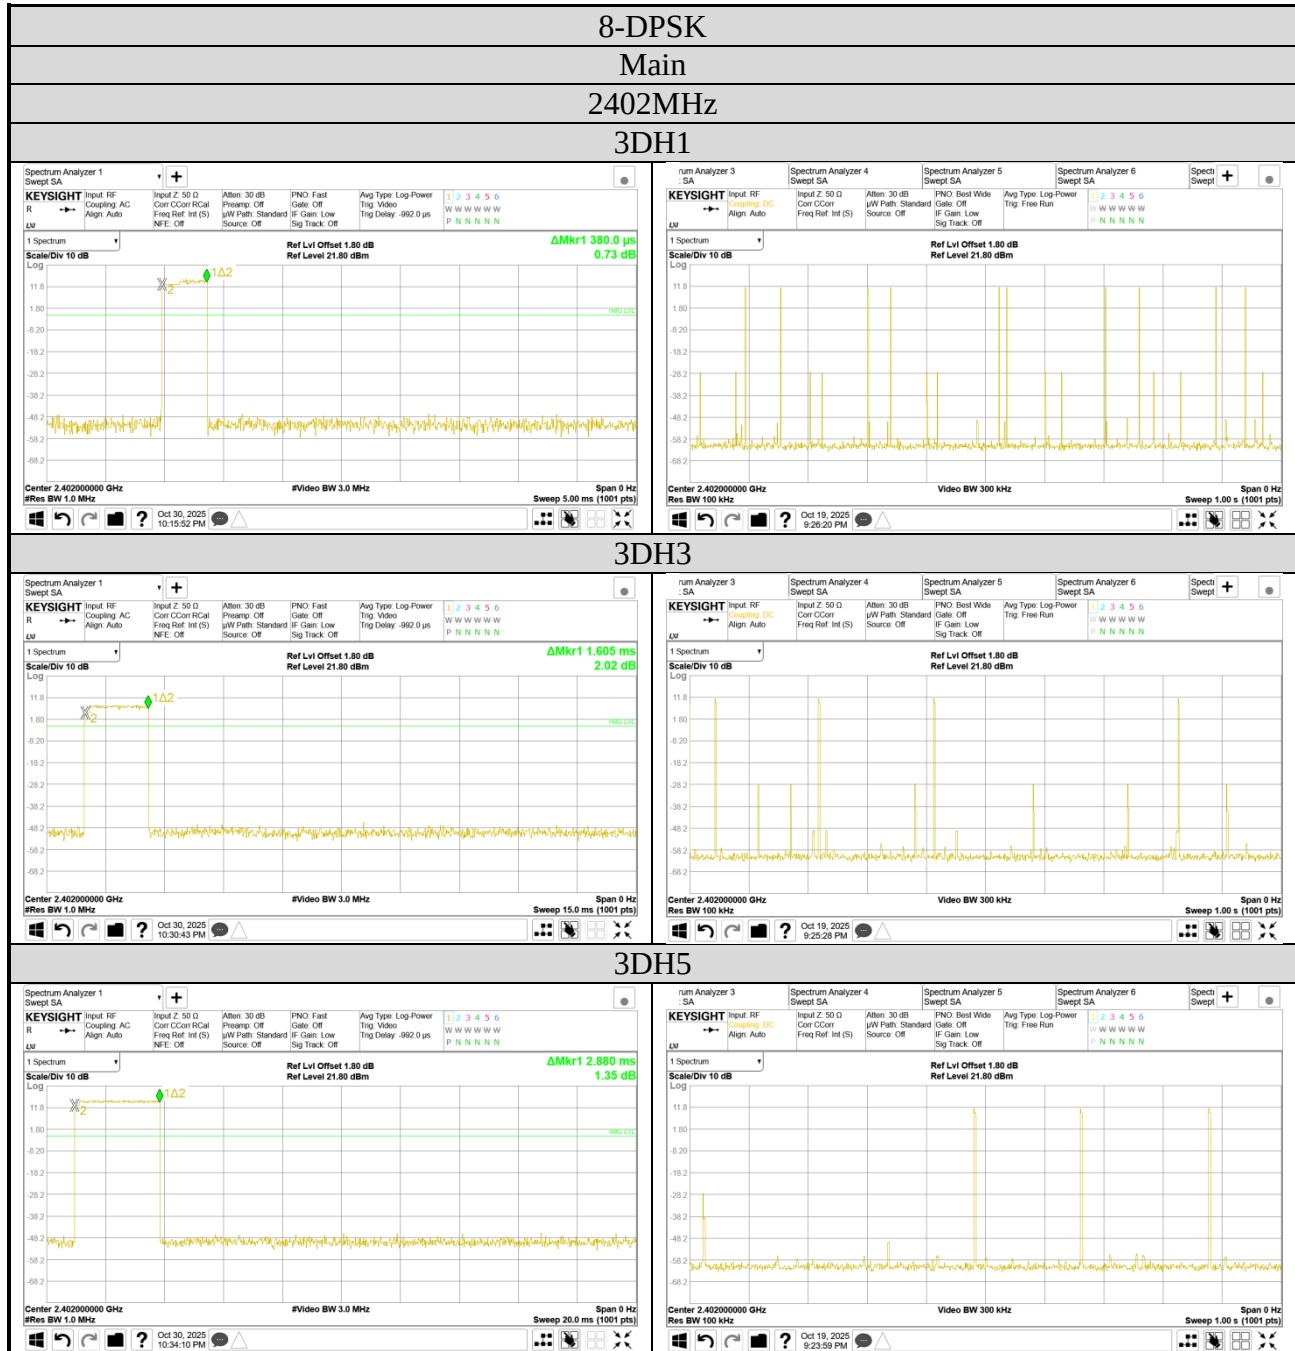

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

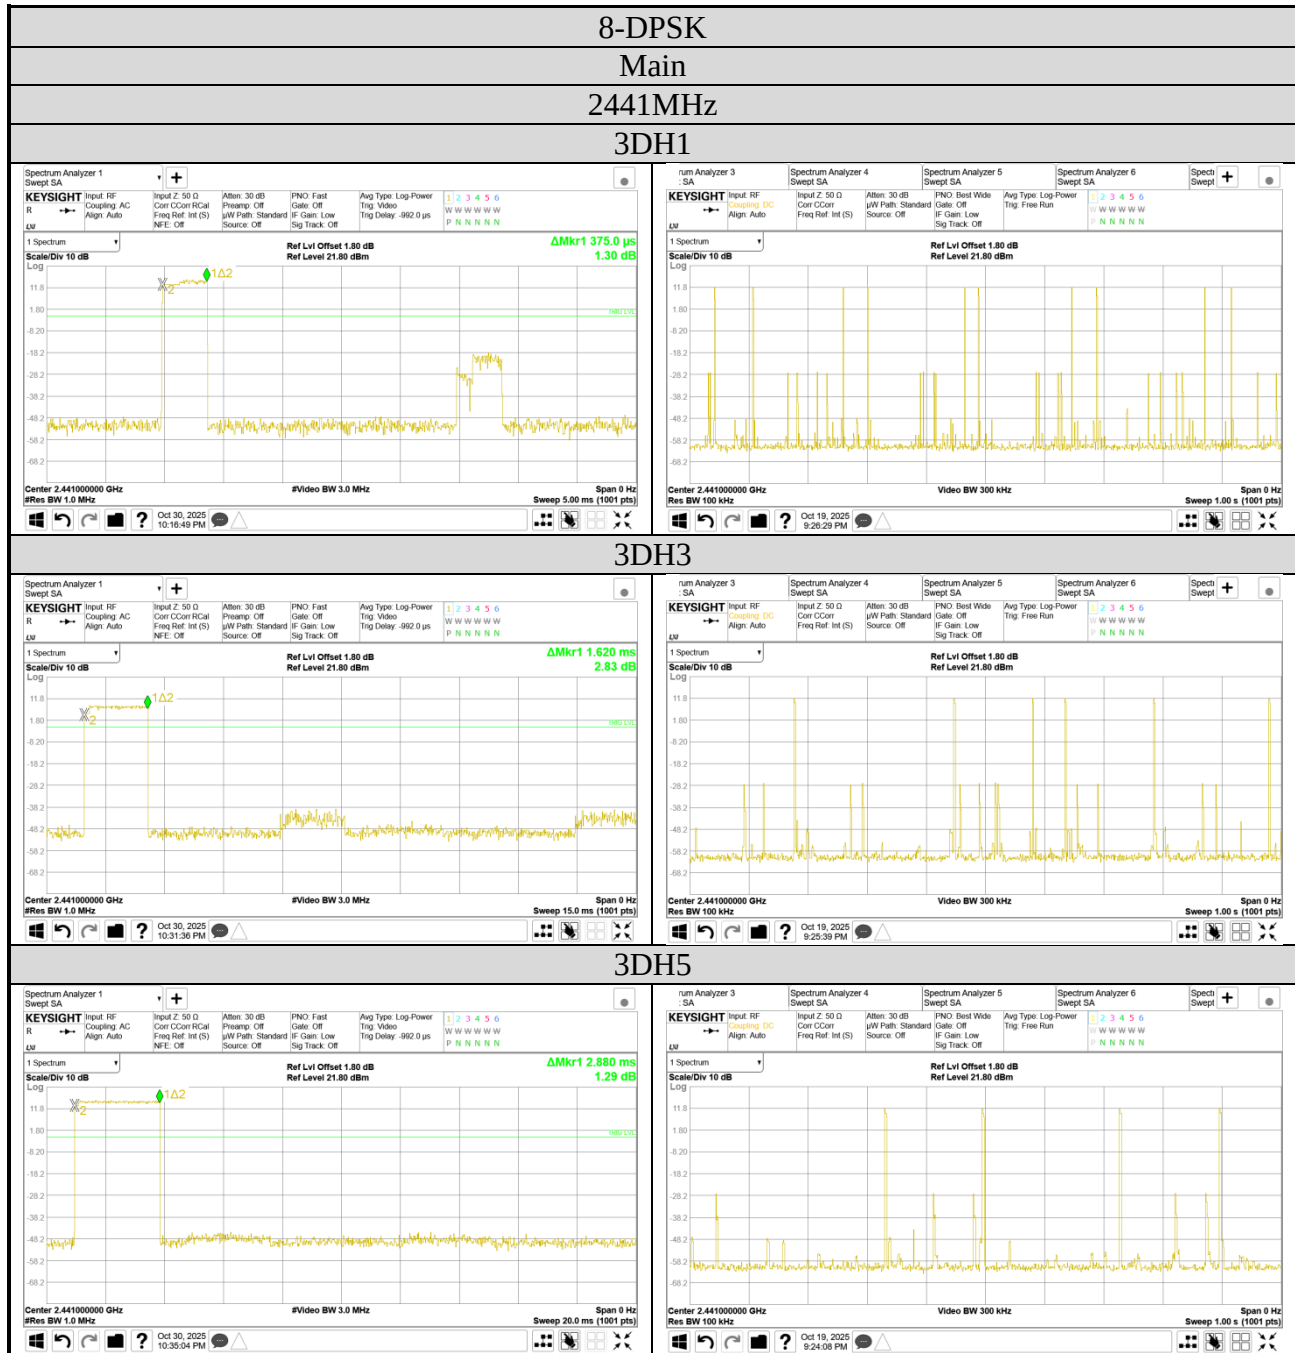

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

8-DPSK


Main

2480MHz


3DH1

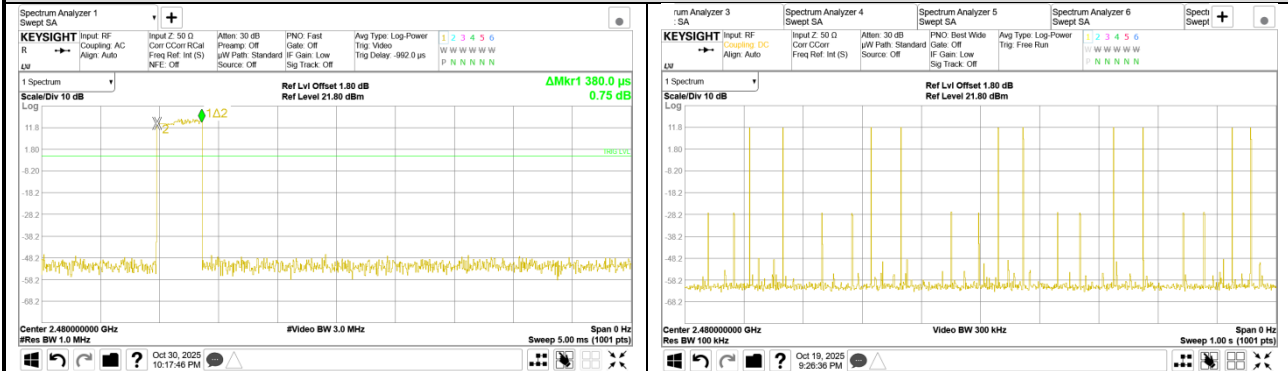

3DH3

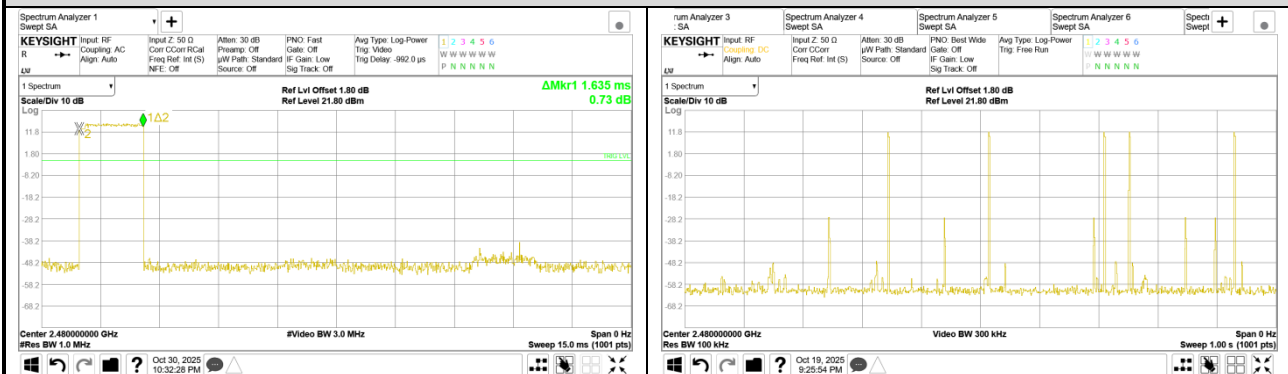

3DH5

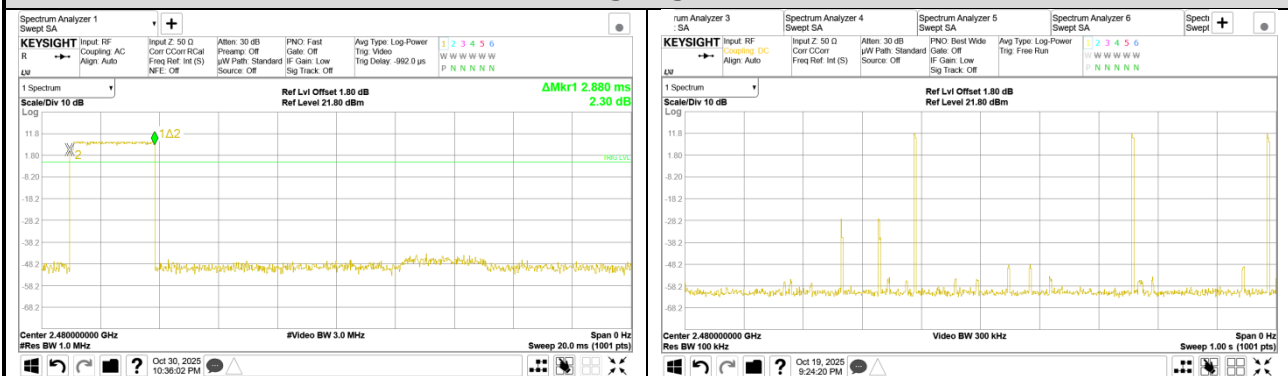

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

8-DPSK


Aux

2402MHz

3DH1



3DH3

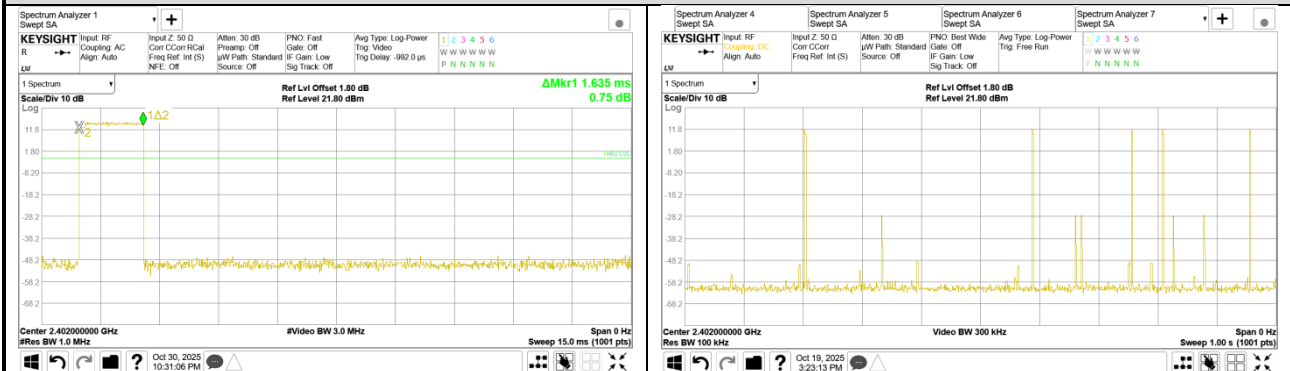

3DH5

