

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION.....	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	108
A.2.3 Emissions in Non-restricted Frequency Bands:.....	125
A.3 DTS/OCCUPIED BANDWIDTH.....	126
A.3.1 DTS/Occupied Bandwidth Result.....	126
A.3.2 Measurement Plots	128
A.4 MAXIMUM PEAK OUTPUT POWER	136
A.4.1 Peak Output Power	136
A.4.2 Average Output Power (Reporting only).....	140
A.5 EMISSION LIMITATIONS	144
A.6 POWER SPECTRAL DENSITY	180
A.6.1 Power Spectral Density Result	180
A.6.2 Measurement Plots	183

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2025/10/22	Temp./Hum.	24°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng

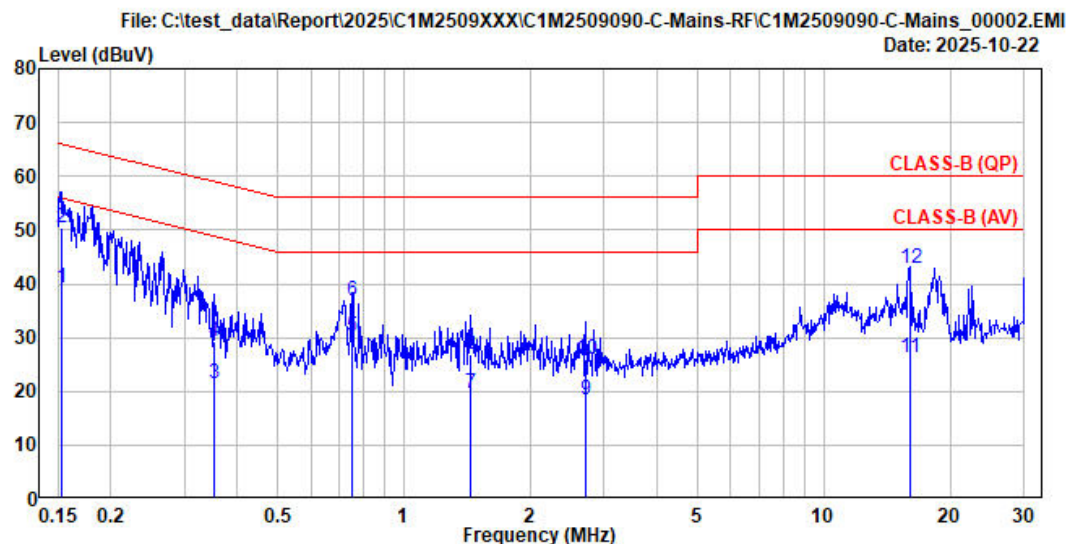

Site No.	: No.7 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(114)		
Instrument 2	: ENV4200 (169)(A) CE-07 ESH3-Z2 (495)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 24°C/61%	Test Rating	: 120Vac/60Hz
EUT Model	: 17Z90UR	Engineer	: Bruce
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.153	10.67	0.05	9.86	18.56	39.14	55.83	16.69	Average
2	0.153	10.67	0.05	9.86	29.71	50.29	65.83	15.54	QP
3	0.354	10.48	0.05	9.86	1.17	21.56	48.88	27.32	Average
4	0.354	10.48	0.05	9.86	8.92	29.31	58.88	29.57	QP
5	0.754	10.45	0.06	9.87	9.81	30.19	46.00	15.81	Average
6	0.754	10.45	0.06	9.87	16.59	36.97	56.00	19.03	QP
7	1.434	10.47	0.07	9.87	-0.84	19.57	46.00	26.43	Average
8	1.434	10.47	0.07	9.87	6.52	26.93	56.00	29.07	QP
9	2.701	10.57	0.09	9.87	-2.23	18.30	46.00	27.70	Average
10	2.701	10.57	0.09	9.87	5.43	25.96	56.00	30.04	QP
11	16.089	13.23	0.21	9.93	2.78	26.15	50.00	23.85	Average
12	16.089	13.23	0.21	9.93	19.48	42.85	60.00	17.15	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Test Date	2025/10/22	Temp./Hum.	24°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng

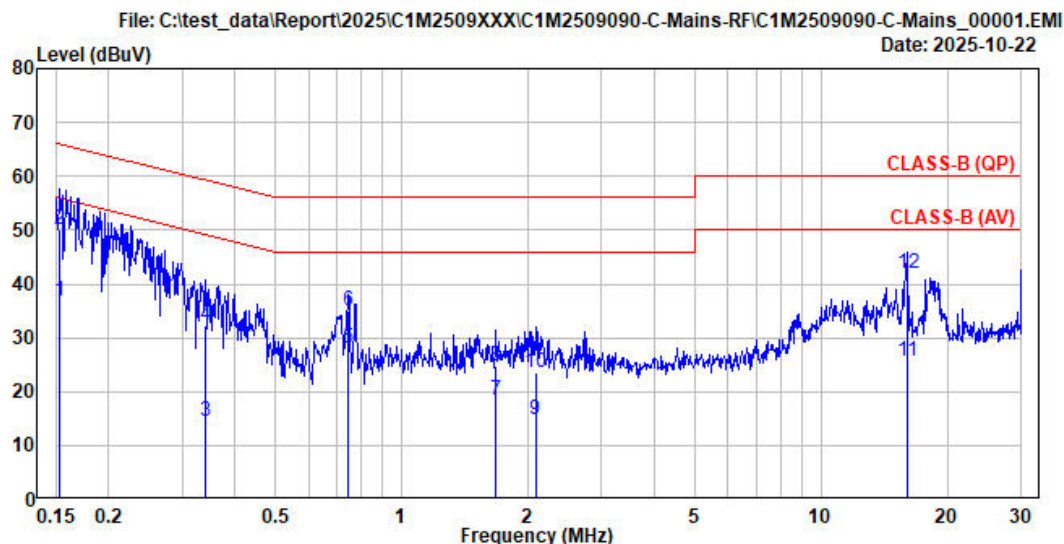

Site No.	: No.7 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(114)		
Instrument 2	: ENV4200 (169)(A) CE-07 ESH3-Z2 (495)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 24°C/61%	Test Rating	: 120Vac/60Hz
EUT Model	: 17Z90UR	Engineer	: Bruce
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.153	10.64	0.05	9.86	16.28	36.83	55.83	19.00	Average
2	0.153	10.64	0.05	9.86	29.42	49.97	65.83	15.86	QP
3	0.341	10.47	0.05	9.86	-5.86	14.52	49.17	34.65	Average
4	0.341	10.47	0.05	9.86	11.98	32.36	59.17	26.81	QP
5	0.747	10.43	0.06	9.87	7.65	28.01	46.00	17.99	Average
6	0.747	10.43	0.06	9.87	14.79	35.15	56.00	20.85	QP
7	1.682	10.46	0.07	9.87	-2.12	18.28	46.00	27.72	Average
8	1.682	10.46	0.07	9.87	4.35	24.75	56.00	31.25	QP
9	2.085	10.48	0.08	9.87	-5.64	14.79	46.00	31.21	Average
10	2.085	10.48	0.08	9.87	3.22	23.65	56.00	32.35	QP
11	16.089	12.79	0.21	9.93	2.60	25.53	50.00	24.47	Average
12	16.089	12.79	0.21	9.93	19.00	41.93	60.00	18.07	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2025/10/01 ~ 16	Temp./Hum.	23 ~ 24°C/48~56%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Harry Huang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz.

● Wireless LAN Mode

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.500	22.10	1.46	26.46	36.37	33.47	40.00	6.53	Peak
109.000	17.24	2.70	26.21	40.52	34.26	43.50	9.24	Peak
250.000	18.46	4.18	25.69	47.40	44.35	46.00	1.65	Peak
655.500	24.44	7.42	27.40	28.49	32.96	46.00	13.04	Peak
916.500	26.54	8.92	26.95	28.21	36.72	46.00	9.28	Peak
980.500	26.98	9.28	26.76	29.95	39.45	54.00	14.55	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.500	22.10	1.46	26.46	41.09	38.19	40.00	1.81	Peak
104.500	16.91	2.63	26.24	45.99	39.29	43.50	4.21	Peak
250.000	18.46	4.18	25.69	43.73	40.69	46.00	5.31	Peak
670.500	24.48	7.50	27.40	28.23	32.81	46.00	13.19	Peak
943.000	26.72	9.07	26.87	26.97	35.89	46.00	10.11	Peak
993.000	27.07	9.34	26.72	27.22	36.91	54.00	17.09	Peak

● BLE Mode

Mode	BLE (1Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.500	22.10	1.46	26.46	36.40	33.50	40.00	6.50	Peak
106.500	17.06	2.66	26.23	41.48	34.98	43.50	8.52	Peak
250.000	18.46	4.18	25.69	47.27	44.22	46.00	1.78	Peak
693.000	24.54	7.61	27.41	28.05	32.79	46.00	13.21	Peak
954.500	26.81	9.13	26.83	27.24	36.34	46.00	9.66	Peak
965.000	26.88	9.19	26.80	27.69	36.96	54.00	17.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.500	22.55	1.45	26.47	40.25	37.78	40.00	2.22	Peak
105.000	16.94	2.64	26.24	46.33	39.67	43.50	3.83	Peak
250.000	18.46	4.18	25.69	43.97	40.92	46.00	5.08	Peak
687.500	24.53	7.58	27.41	27.86	32.56	46.00	13.44	Peak
949.500	26.76	9.10	26.85	27.18	36.19	46.00	9.81	Peak
972.500	26.93	9.23	26.78	27.91	37.29	54.00	16.71	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


● Wireless LAN Mode

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

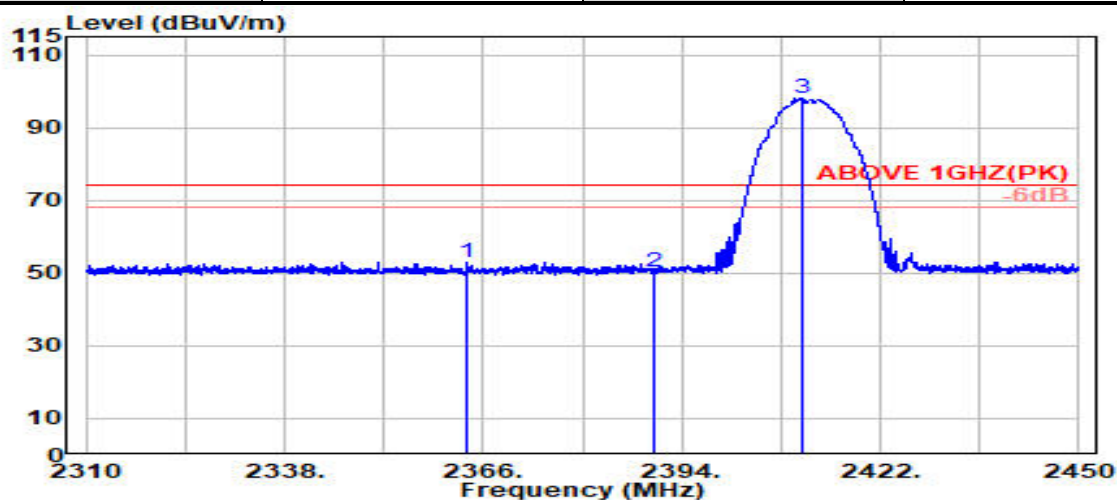

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2363.700	28.20	5.67	39.92	58.92	52.87	74.00	21.13	Peak
2390.000	28.20	5.70	39.92	56.39	50.37	74.00	23.63	Peak
@ 2410.900	28.22	5.73	39.92	104.03	98.06	---	---	Peak

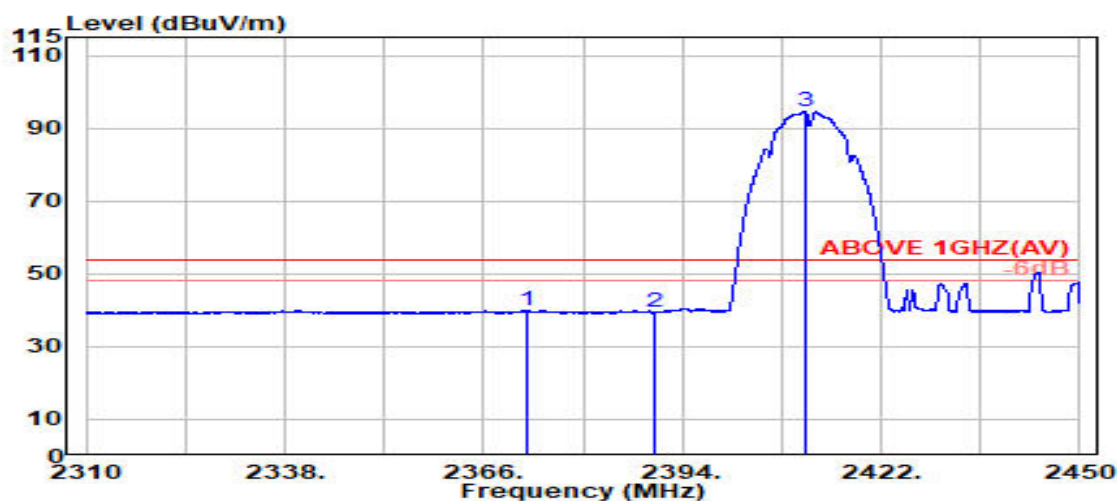

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2372.050	28.20	5.68	39.92	45.98	39.94	54.00	14.06	Average
2390.000	28.20	5.70	39.92	45.44	39.43	54.00	14.57	Average
@ 2411.300	28.22	5.73	39.92	100.78	94.81	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

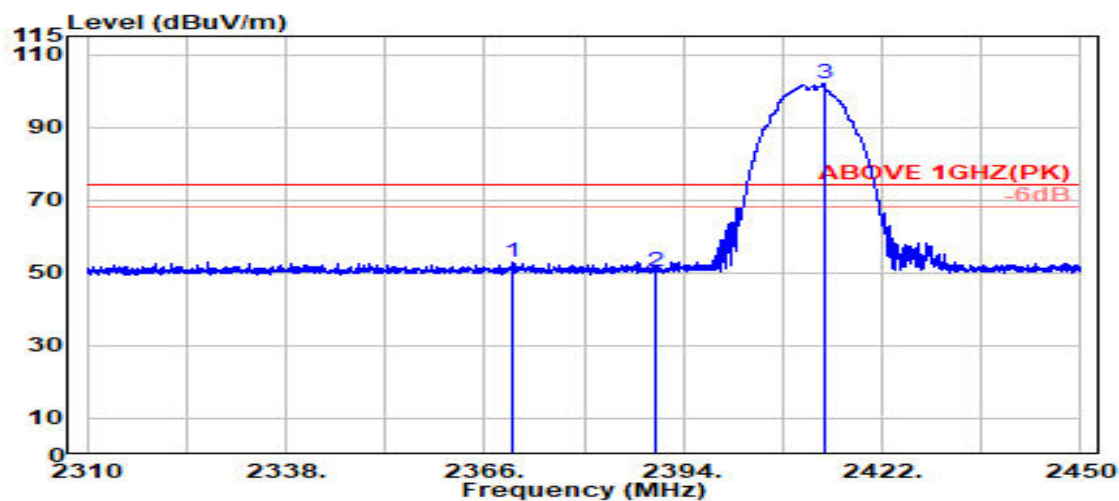

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2370.050	28.20	5.68	39.92	58.87	52.83	74.00	21.17	Peak
2390.000	28.20	5.70	39.92	56.55	50.53	74.00	23.47	Peak
@ 2413.850	28.23	5.74	39.92	108.10	102.15	---	---	Peak

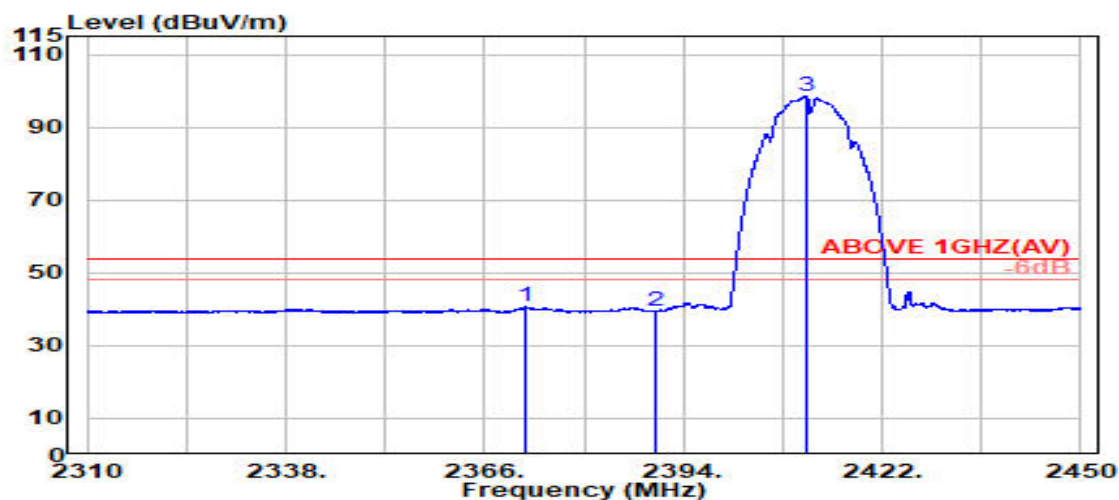

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2371.800	28.20	5.68	39.92	46.73	40.69	54.00	13.31	Average
2390.000	28.20	5.70	39.92	45.35	39.34	54.00	14.66	Average
@ 2411.300	28.22	5.73	39.92	104.39	98.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

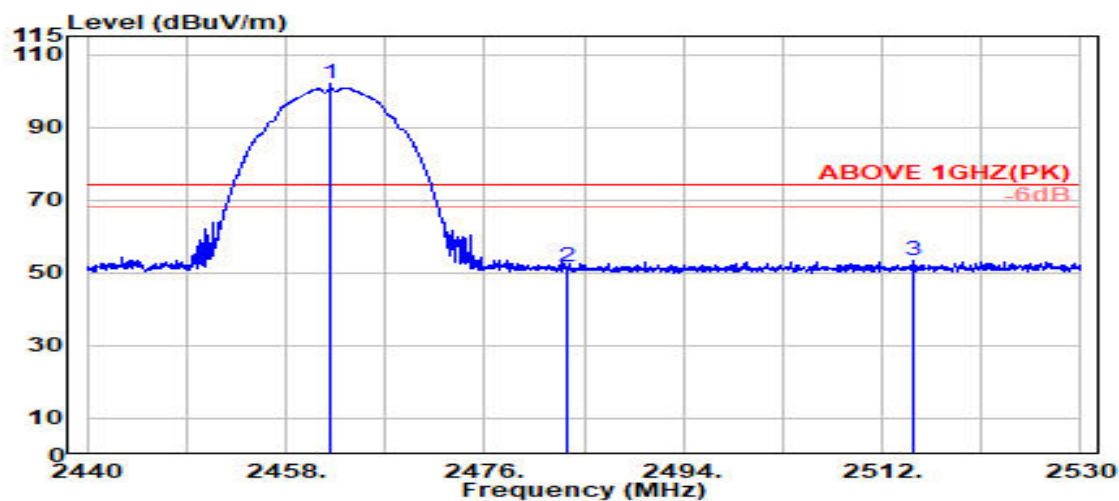

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.000	28.35	5.80	39.92	107.81	102.04	---	---	Peak
2483.500	28.43	5.83	39.92	57.21	51.55	74.00	22.45	Peak
2514.900	28.56	5.87	39.92	58.83	53.34	74.00	20.66	Peak

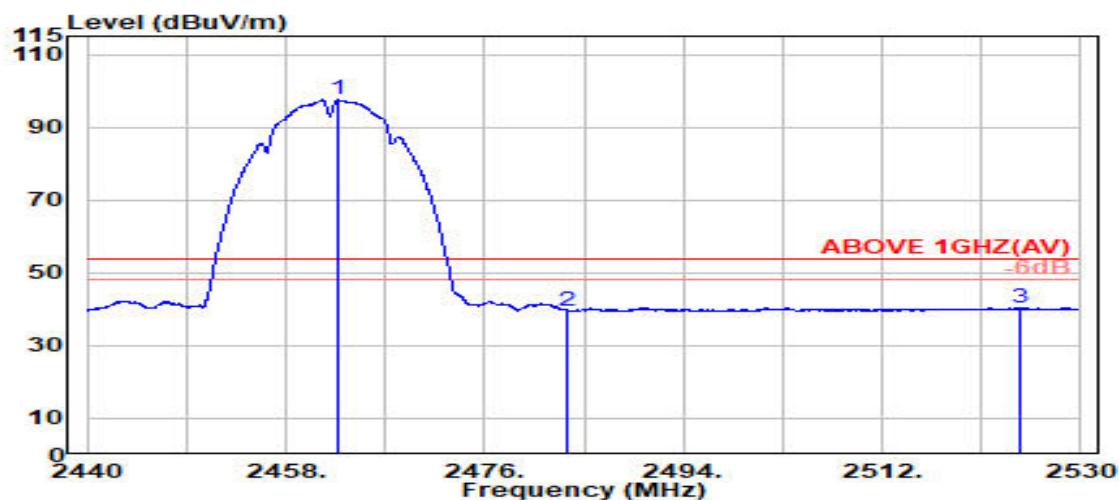

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.750	28.35	5.80	39.92	103.24	97.47	---	---	Average
2483.500	28.43	5.83	39.92	45.24	39.59	54.00	14.41	Average
2524.550	28.60	5.88	39.92	45.84	40.39	54.00	13.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

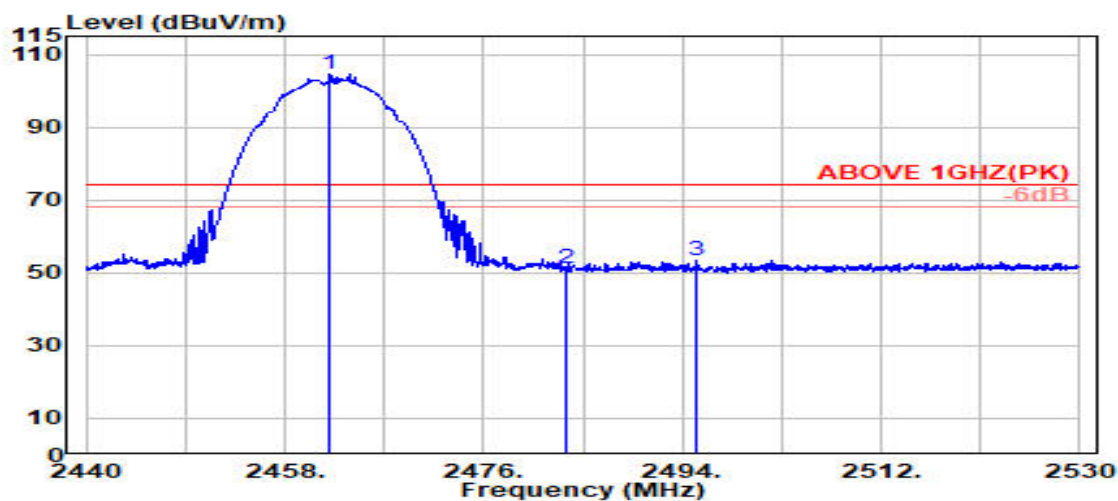

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.950	28.35	5.80	39.92	110.30	104.53	---	---	Peak
2483.500	28.43	5.83	39.92	56.95	51.29	74.00	22.71	Peak
2495.300	28.48	5.84	39.92	59.15	53.55	74.00	20.45	Peak

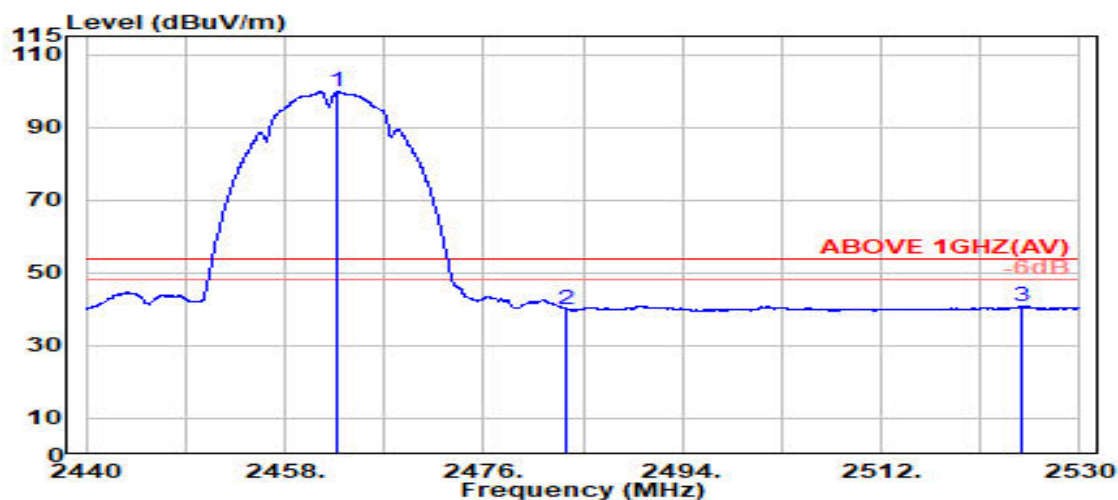

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.800	28.35	5.80	39.92	105.59	99.82	---	---	Average
2483.500	28.43	5.83	39.92	45.66	40.01	54.00	13.99	Average
2524.750	28.60	5.88	39.92	46.29	40.85	54.00	13.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

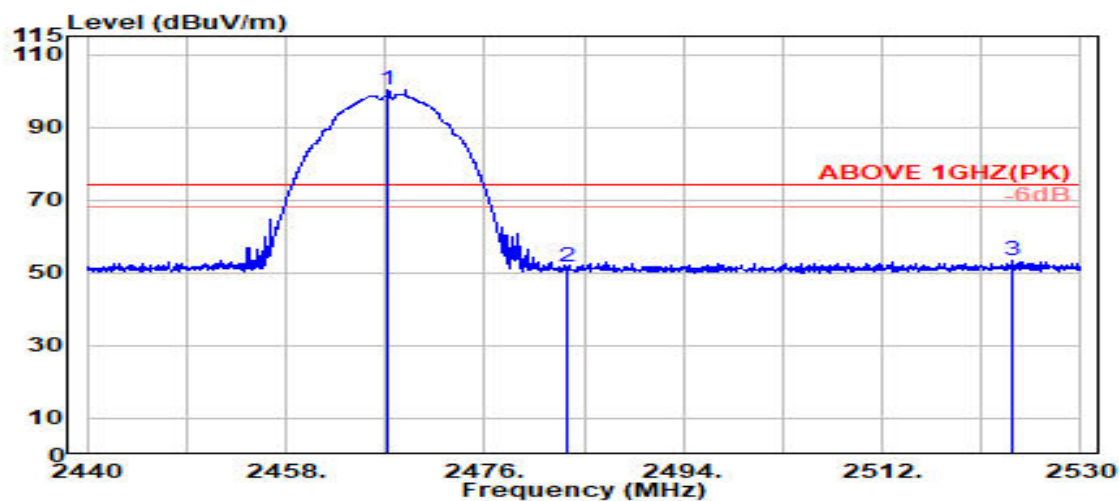

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.300	28.37	5.81	39.92	106.06	100.31	---	---	Peak
2483.500	28.43	5.83	39.92	57.41	51.75	74.00	22.25	Peak
2523.800	28.60	5.88	39.92	58.71	53.26	74.00	20.74	Peak

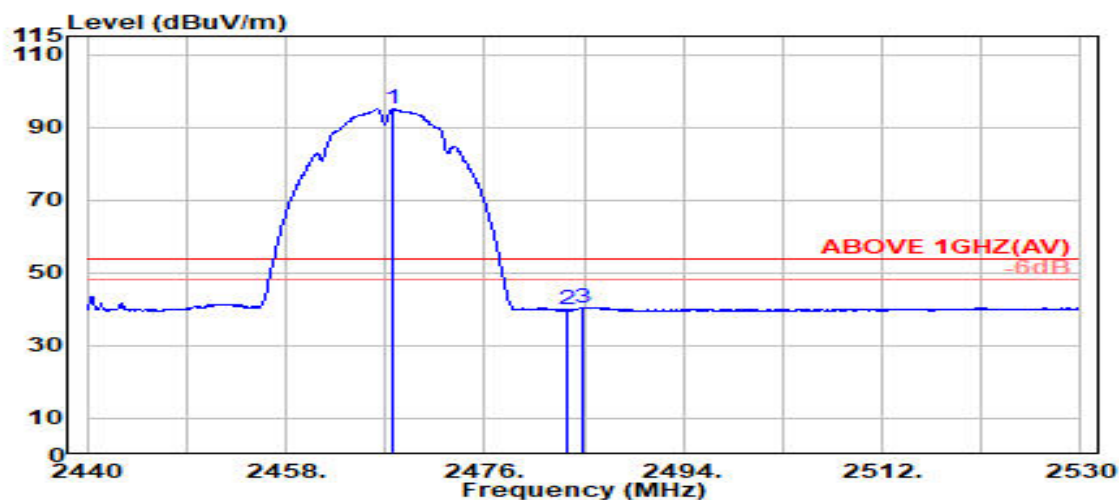

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.750	28.37	5.81	39.92	100.75	95.01	---	---	Average
2483.500	28.43	5.83	39.92	45.43	39.77	54.00	14.23	Average
2484.800	28.44	5.83	39.92	46.12	40.47	54.00	13.53	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

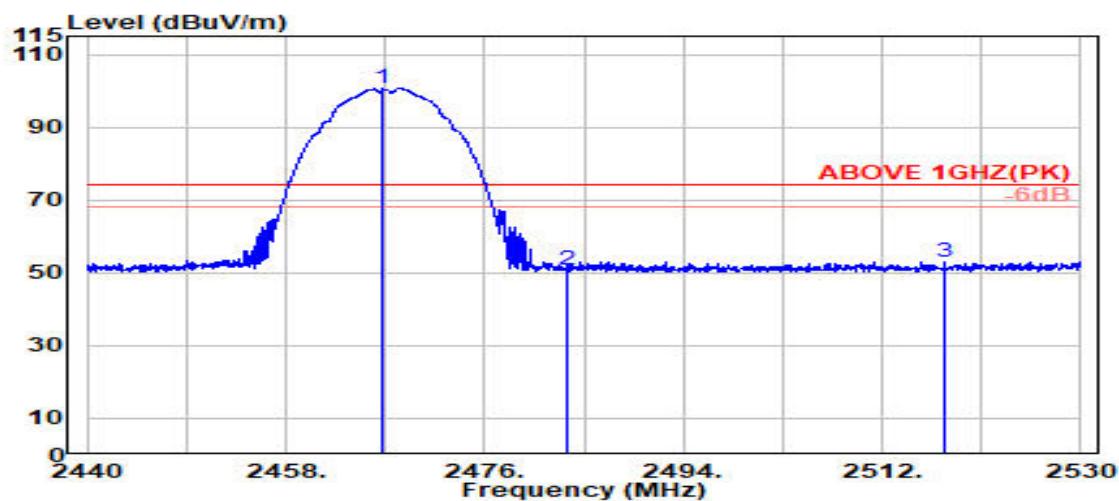

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.750	28.37	5.81	39.92	106.48	100.73	---	---	Peak
2483.500	28.43	5.83	39.92	56.53	50.87	74.00	23.13	Peak
2517.700	28.57	5.87	39.92	58.43	52.95	74.00	21.05	Peak

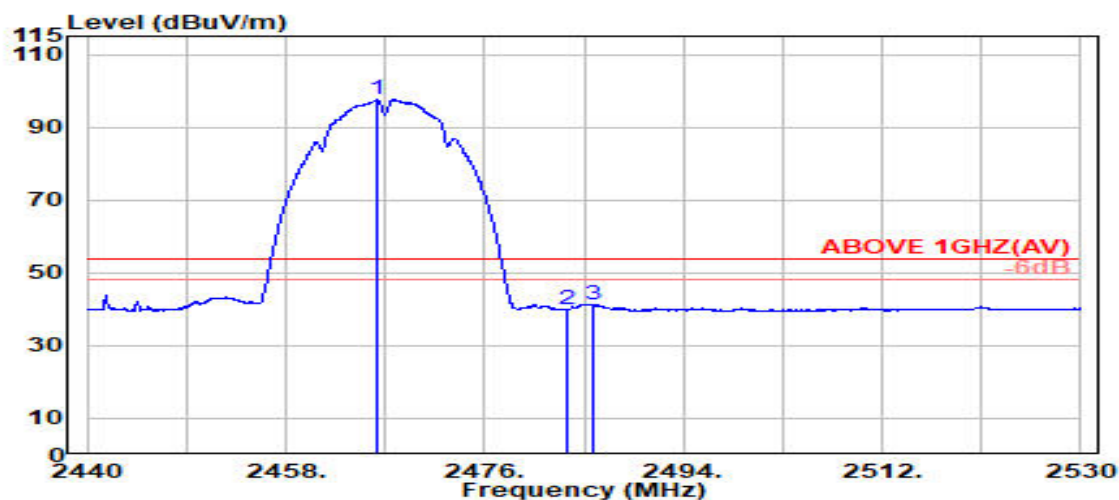

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	28.37	5.81	39.92	103.30	97.55	---	---	Average
2483.500	28.43	5.83	39.92	45.52	39.86	54.00	14.14	Average
2485.850	28.44	5.83	39.92	47.07	41.42	54.00	12.58	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

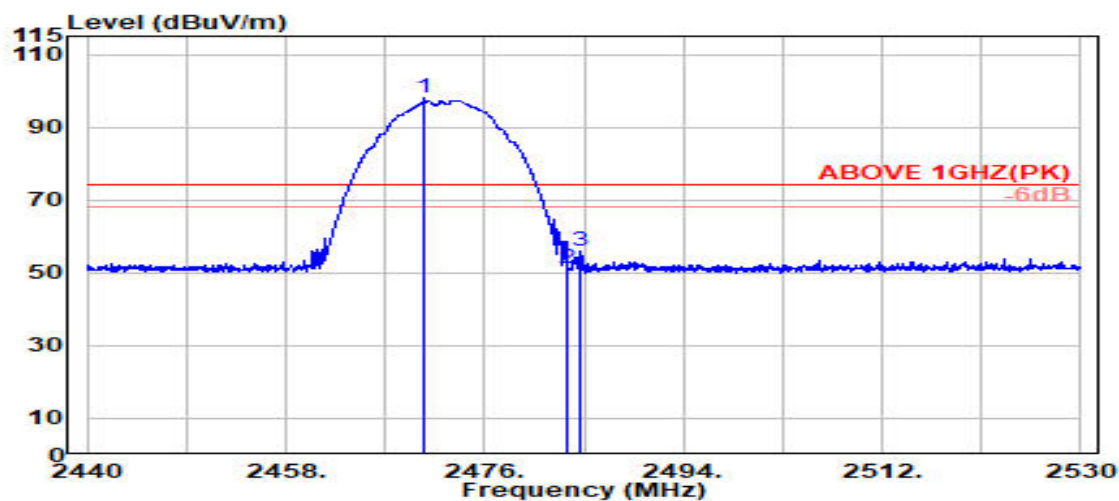

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.450	28.38	5.81	39.92	103.97	98.24	---	---	Peak
2483.500	28.43	5.83	39.92	57.06	51.40	74.00	22.60	Peak
2484.750	28.44	5.83	39.92	61.72	56.07	74.00	17.93	Peak

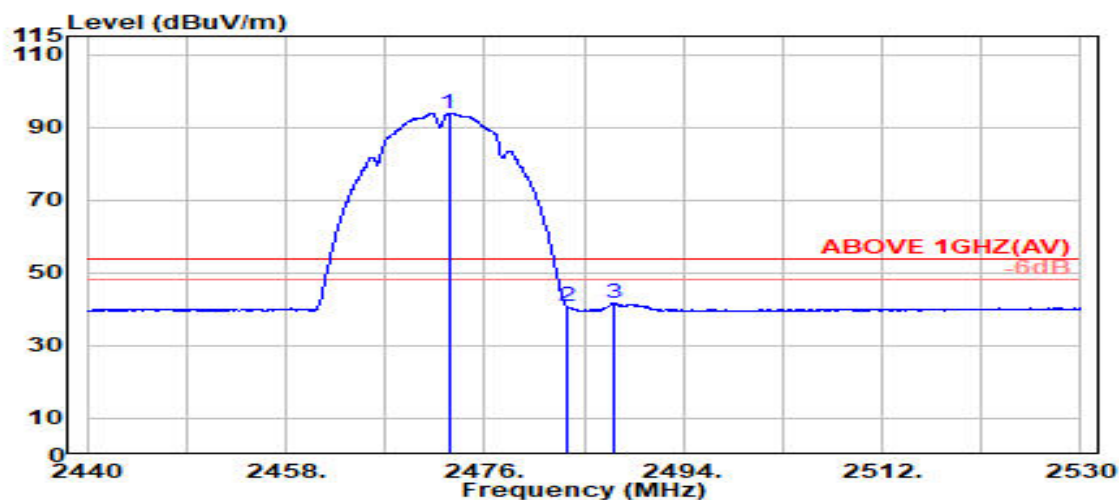

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.750	28.39	5.81	39.92	99.54	93.82	---	---	Average
2483.500	28.43	5.83	39.92	46.41	40.75	54.00	13.25	Average
2487.650	28.45	5.83	39.92	47.20	41.57	54.00	12.43	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

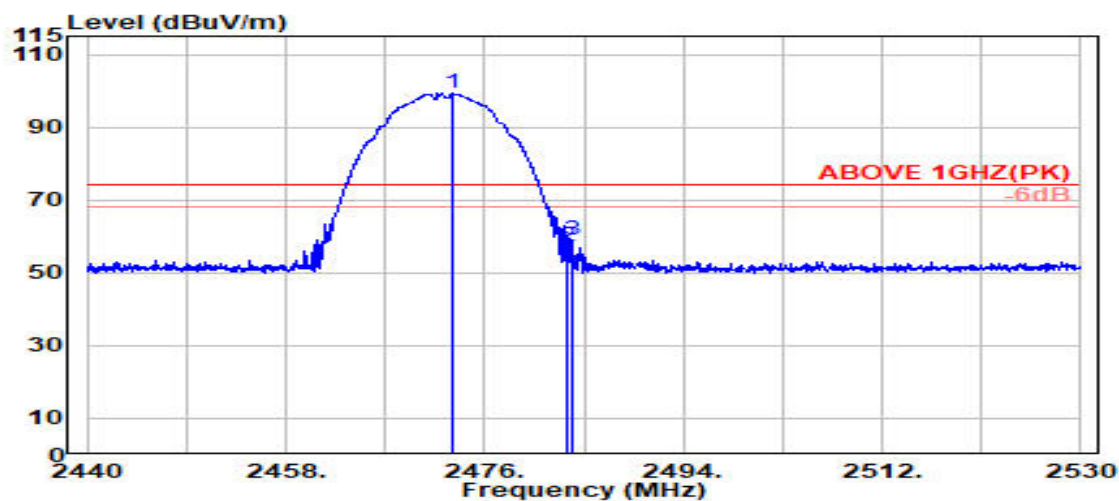

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.050	28.39	5.81	39.92	105.18	99.47	---	---	Peak
2483.500	28.43	5.83	39.92	62.97	57.31	74.00	16.69	Peak
2484.000	28.44	5.83	39.92	64.68	59.03	74.00	14.97	Peak

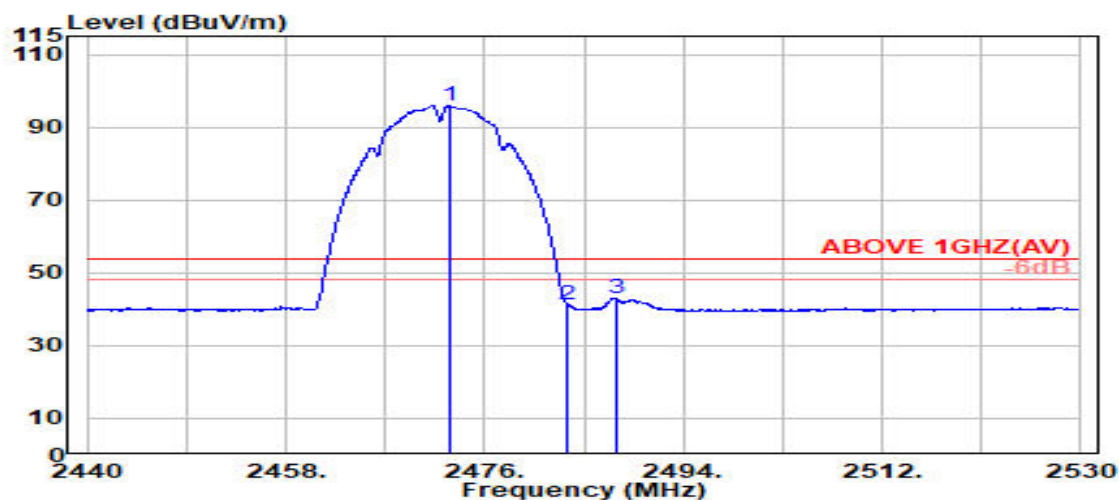

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.800	28.39	5.81	39.92	101.57	95.86	---	---	Average
2483.500	28.43	5.83	39.92	46.80	41.14	54.00	12.86	Average
2487.850	28.45	5.83	39.92	48.68	43.04	54.00	10.96	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

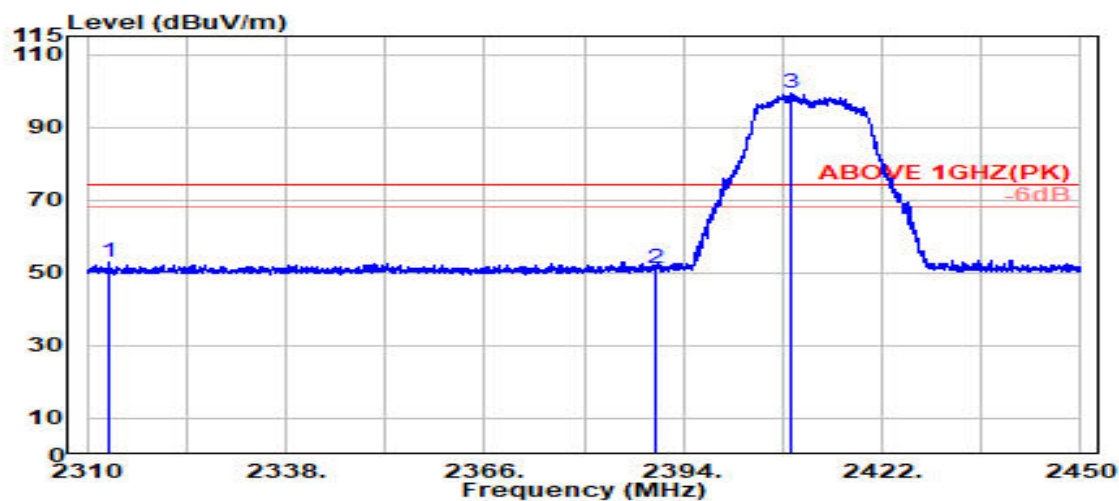

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2313.100	28.05	5.60	39.92	59.32	53.05	74.00	20.95	Peak
2390.000	28.20	5.70	39.92	57.35	51.34	74.00	22.66	Peak
@ 2409.050	28.22	5.73	39.92	105.24	99.27	---	---	Peak

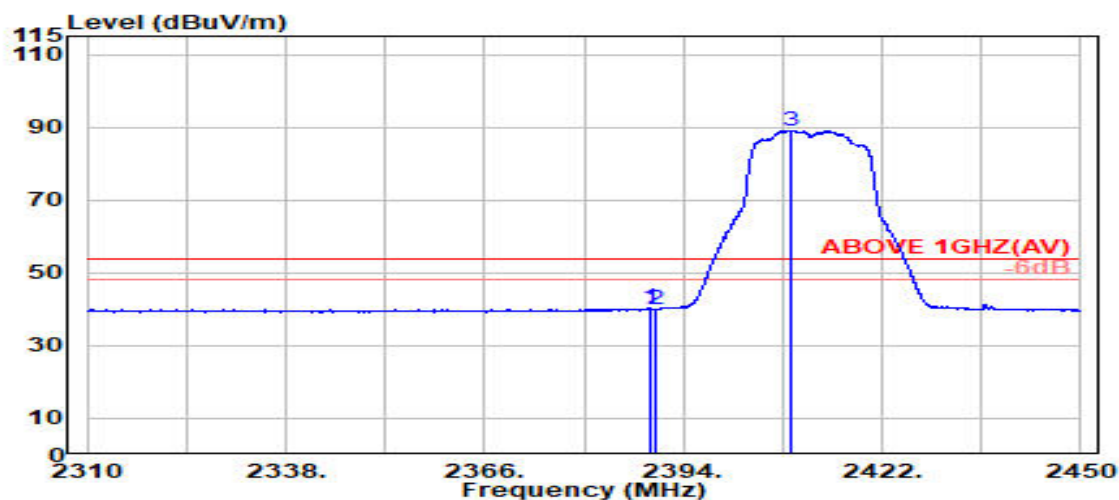

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.20	5.70	39.92	46.32	40.30	54.00	13.70	Average
2390.000	28.20	5.70	39.92	46.04	40.03	54.00	13.97	Average
@ 2409.250	28.22	5.73	39.92	95.14	89.17	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

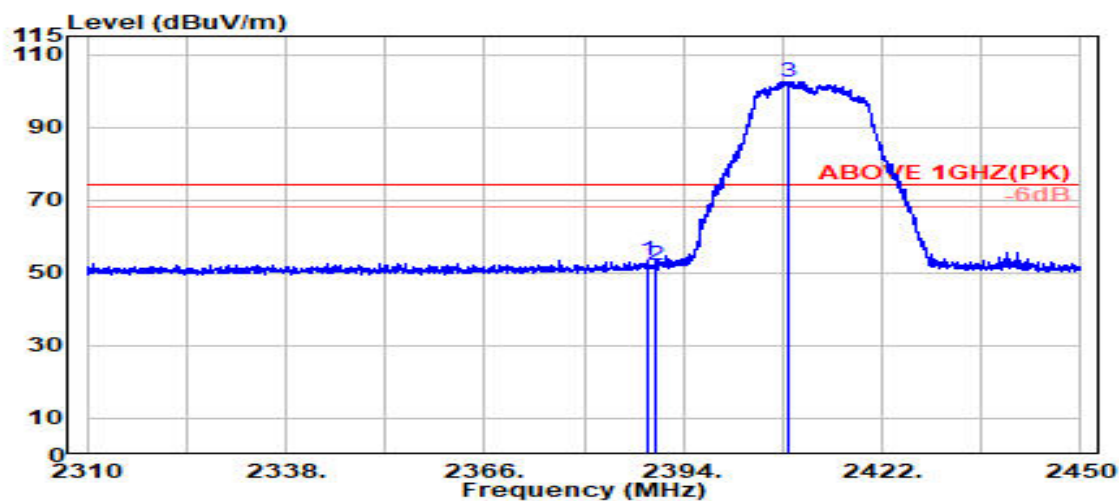

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.20	5.70	39.92	59.41	53.40	74.00	20.60	Peak
2390.000	28.20	5.70	39.92	57.93	51.91	74.00	22.09	Peak
@ 2408.750	28.22	5.73	39.92	108.51	102.54	---	---	Peak

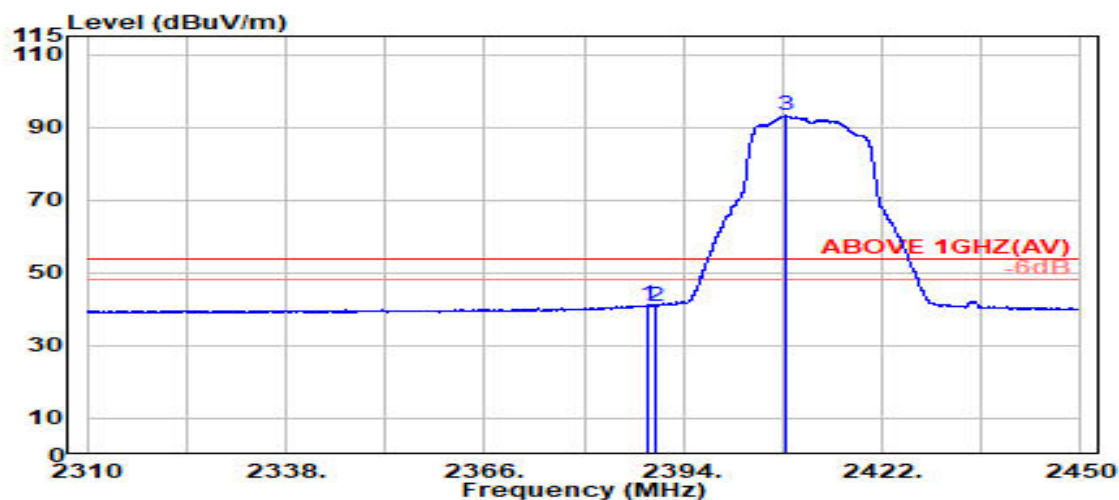

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.950	28.20	5.70	39.92	47.16	41.14	54.00	12.86	Average
2390.000	28.20	5.70	39.92	46.87	40.86	54.00	13.14	Average
@ 2408.550	28.22	5.73	39.92	99.20	93.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

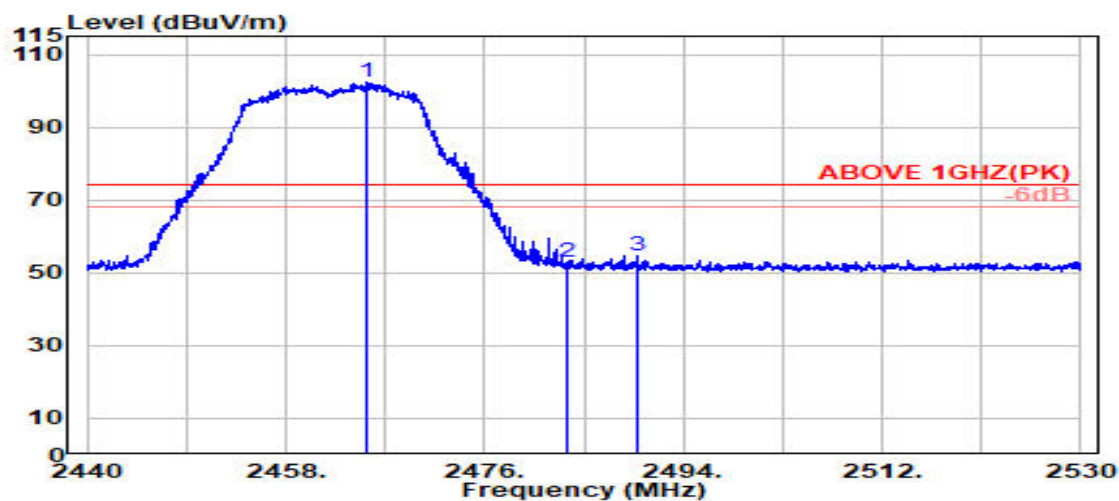

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.300	28.36	5.80	39.92	108.09	102.34	---	---	Peak
2483.500	28.43	5.83	39.92	58.73	53.08	74.00	20.92	Peak
2489.900	28.46	5.84	39.92	60.50	54.87	74.00	19.13	Peak

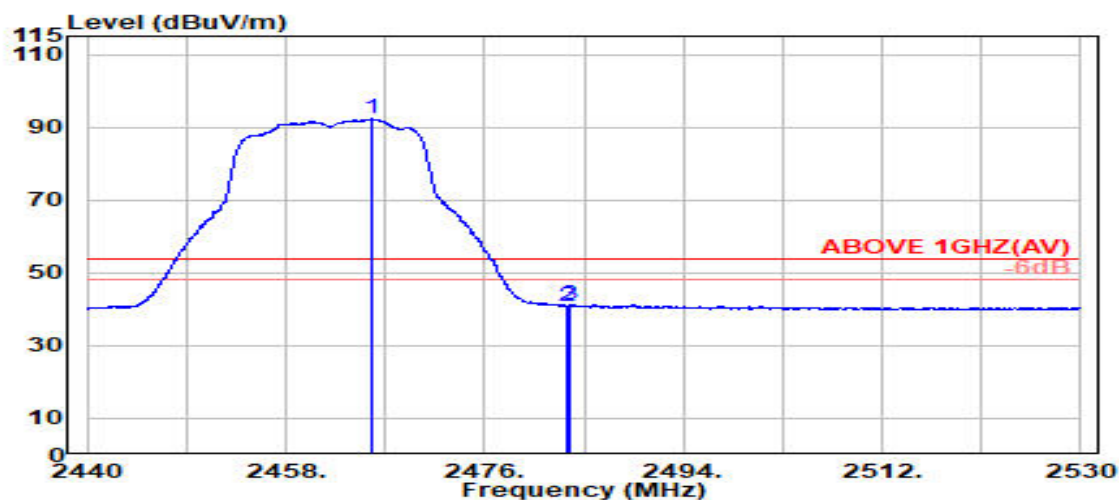

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.700	28.36	5.80	39.92	98.00	92.25	---	---	Average
2483.500	28.43	5.83	39.92	46.60	40.95	54.00	13.05	Average
2483.750	28.44	5.83	39.92	46.91	41.26	54.00	12.74	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

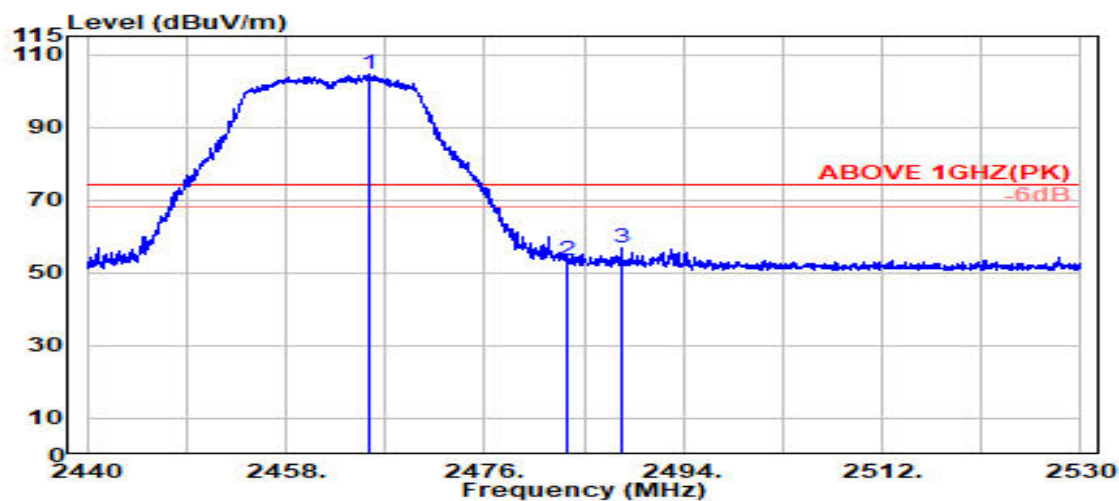

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.36	5.80	39.92	110.48	104.72	---	---	Peak
2483.500	28.43	5.83	39.92	58.91	53.25	74.00	20.75	Peak
2488.350	28.45	5.83	39.92	62.60	56.97	74.00	17.03	Peak

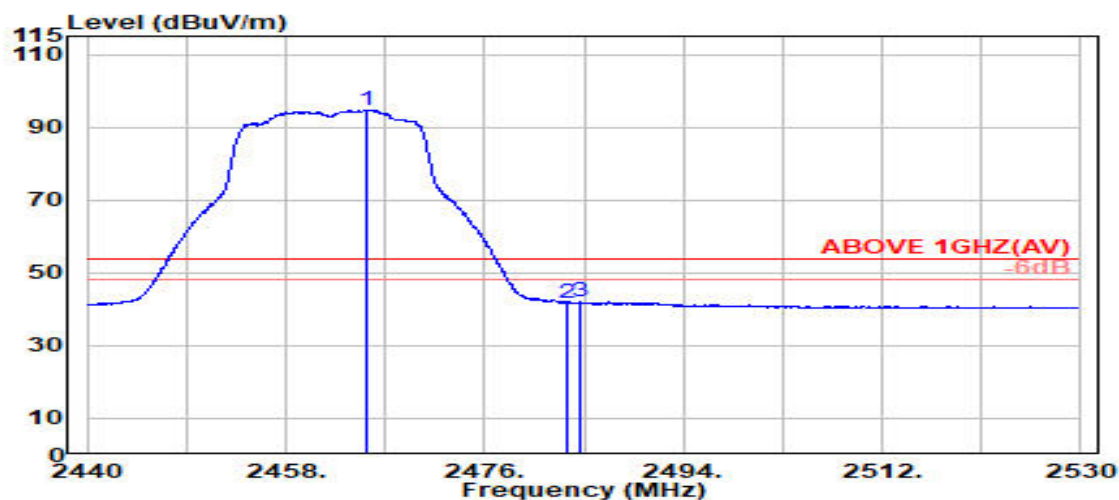

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.250	28.36	5.80	39.92	100.46	94.70	---	---	Average
2483.500	28.43	5.83	39.92	47.40	41.74	54.00	12.26	Average
2484.650	28.44	5.83	39.92	47.62	41.97	54.00	12.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

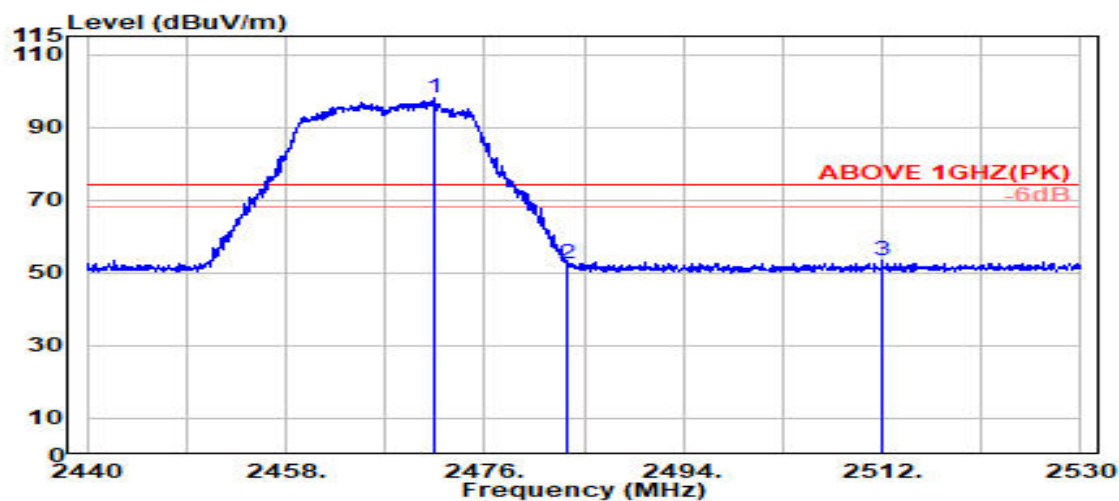

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.350	28.39	5.81	39.92	103.59	97.87	---	---	Peak
2483.500	28.43	5.83	39.92	58.28	52.62	74.00	21.38	Peak
2512.050	28.55	5.86	39.92	58.87	53.36	74.00	20.64	Peak

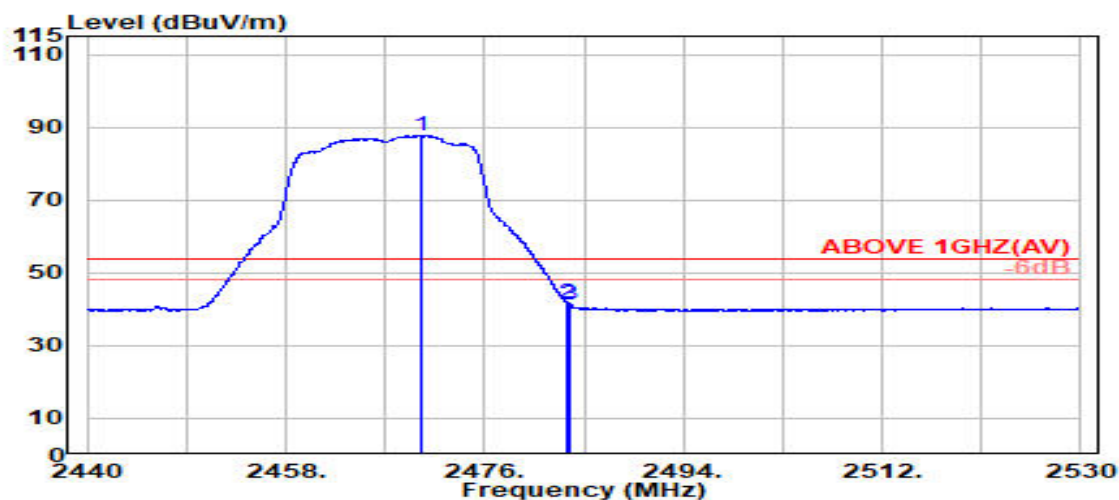

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.300	28.38	5.81	39.92	93.45	87.72	---	---	Average
2483.500	28.43	5.83	39.92	47.32	41.66	54.00	12.34	Average
2483.700	28.44	5.83	39.92	46.99	41.33	54.00	12.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

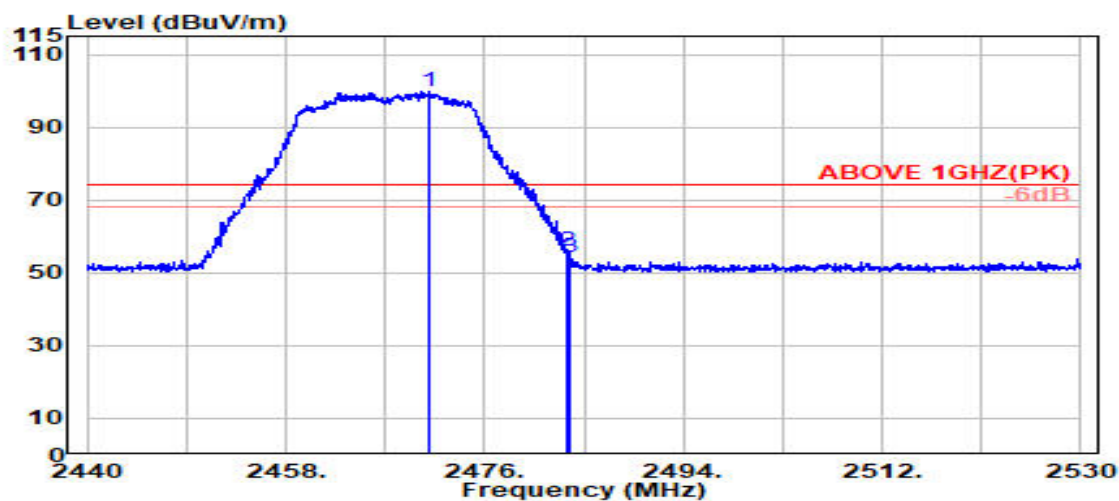

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.950	28.38	5.81	39.92	105.37	99.65	---	---	Peak
2483.500	28.43	5.83	39.92	61.72	56.07	74.00	17.93	Peak
2483.750	28.44	5.83	39.92	60.06	54.41	74.00	19.59	Peak

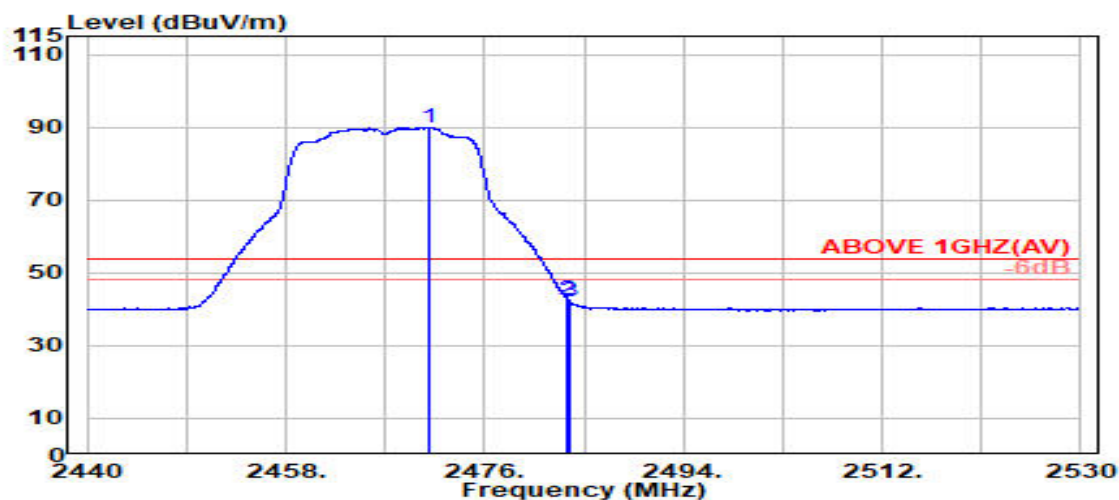

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.900	28.38	5.81	39.92	95.75	90.03	---	---	Average
2483.500	28.43	5.83	39.92	48.33	42.68	54.00	11.32	Average
2483.700	28.44	5.83	39.92	47.83	42.17	54.00	11.83	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

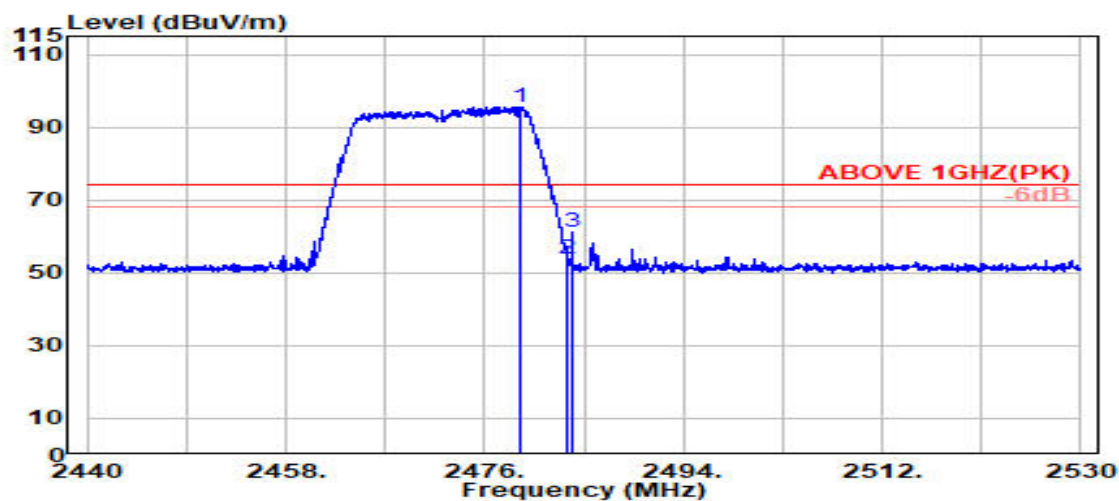

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.150	28.42	5.82	39.92	101.37	95.69	---	---	Peak
2483.500	28.43	5.83	39.92	59.49	53.83	74.00	20.17	Peak
2483.950	28.44	5.83	39.92	66.75	61.10	74.00	12.90	Peak

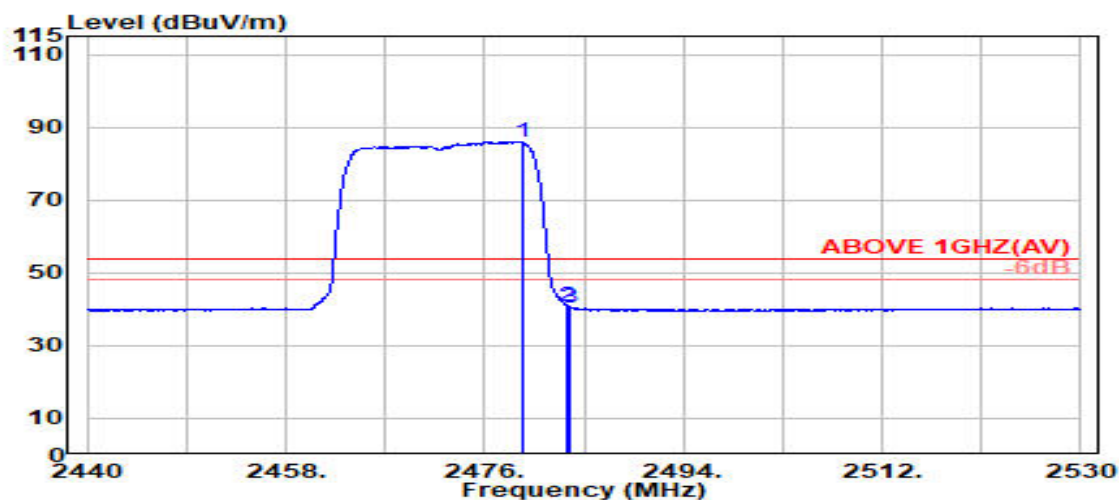

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.400	28.42	5.82	39.92	91.76	86.08	---	---	Average
2483.500	28.43	5.83	39.92	46.47	40.81	54.00	13.19	Average
2483.800	28.44	5.83	39.92	46.14	40.48	54.00	13.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

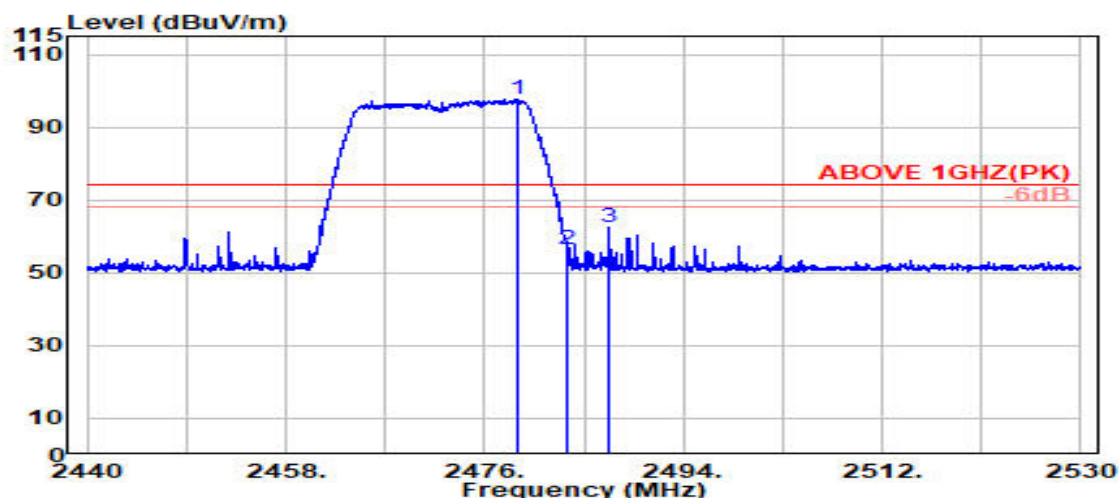

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.050	28.42	5.82	39.92	103.22	97.54	---	---	Peak
2483.500	28.43	5.83	39.92	62.06	56.40	74.00	17.60	Peak
2487.350	28.45	5.83	39.92	68.10	62.46	74.00	11.54	Peak

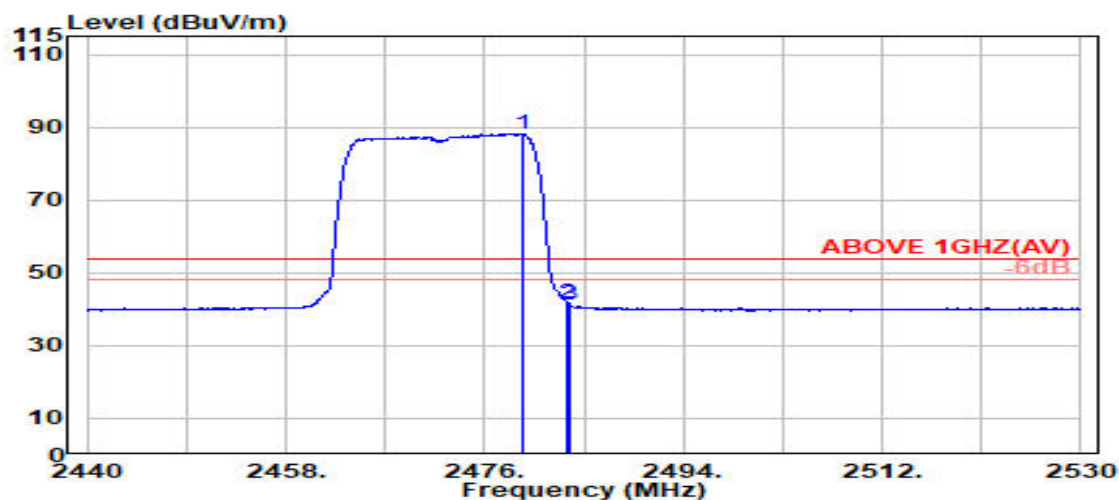

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.450	28.42	5.82	39.92	93.97	88.29	---	---	Average
2483.500	28.43	5.83	39.92	47.38	41.72	54.00	12.28	Average
2483.700	28.44	5.83	39.92	46.93	41.27	54.00	12.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

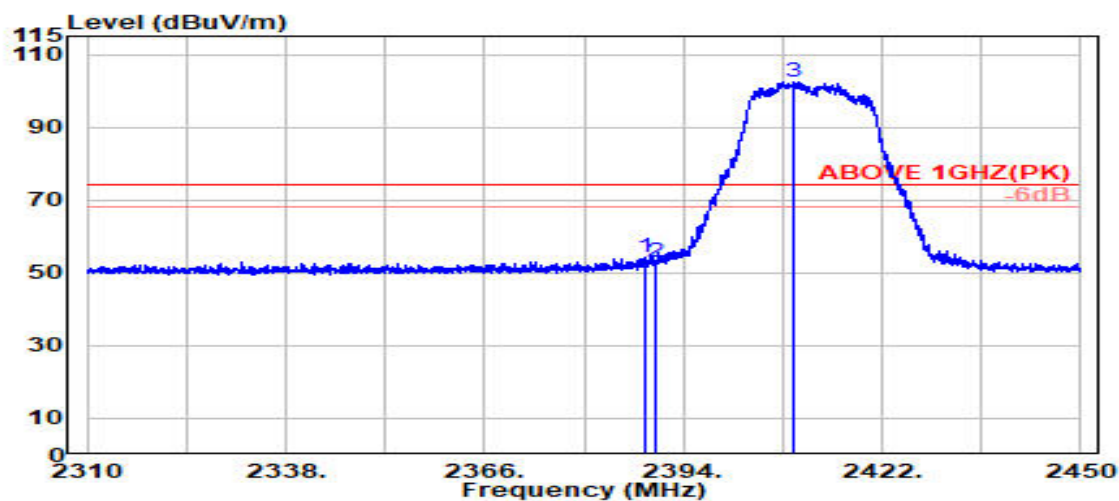

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.650	28.20	5.70	39.92	60.47	54.46	74.00	19.54	Peak
2390.000	28.20	5.70	39.92	58.97	52.96	74.00	21.04	Peak
@ 2409.500	28.22	5.73	39.92	108.45	102.48	---	---	Peak

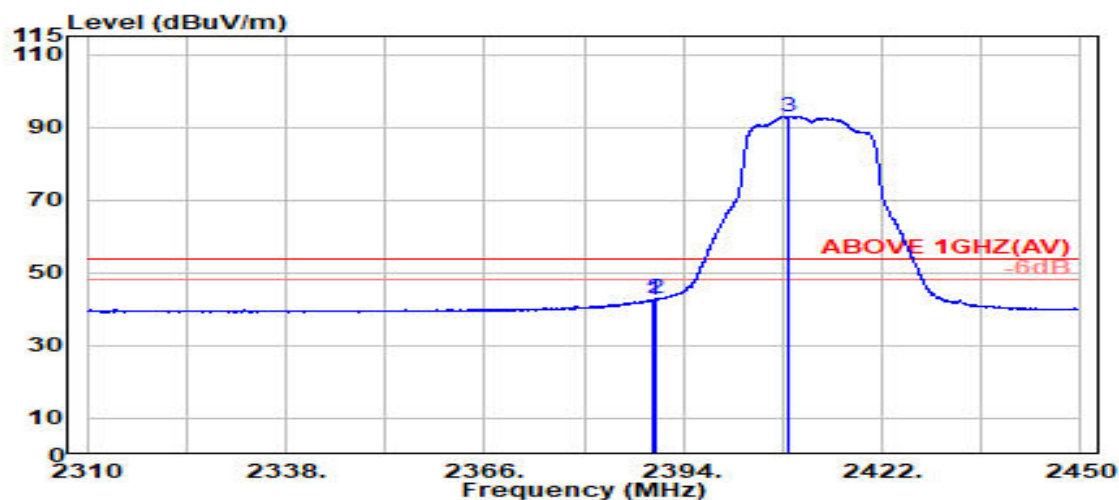

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.92	48.47	42.46	54.00	11.54	Average
2390.000	28.20	5.70	39.92	48.79	42.78	54.00	11.22	Average
@ 2408.750	28.22	5.73	39.92	99.01	93.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

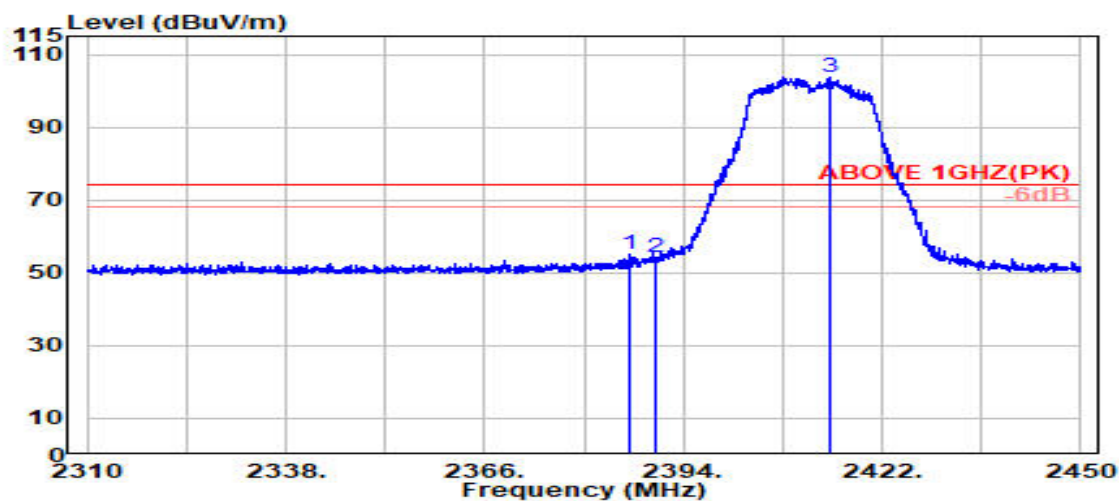

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.550	28.20	5.70	39.92	61.00	54.98	74.00	19.02	Peak
2390.000	28.20	5.70	39.92	60.44	54.42	74.00	19.58	Peak
@ 2414.650	28.23	5.74	39.92	109.70	103.75	---	---	Peak

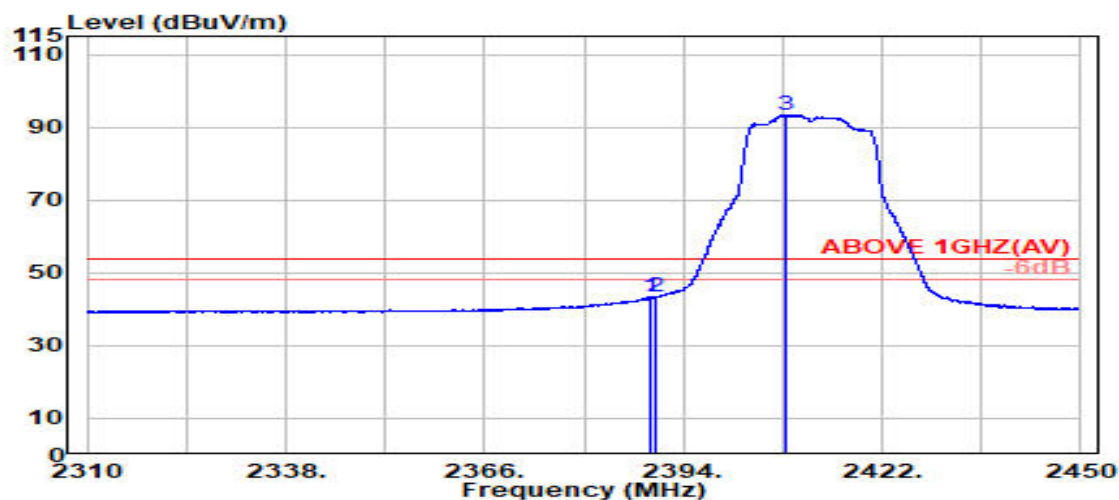

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.20	5.70	39.92	49.25	43.23	54.00	10.77	Average
2390.000	28.20	5.70	39.92	49.26	43.25	54.00	10.75	Average
@ 2408.300	28.22	5.73	39.92	99.39	93.41	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

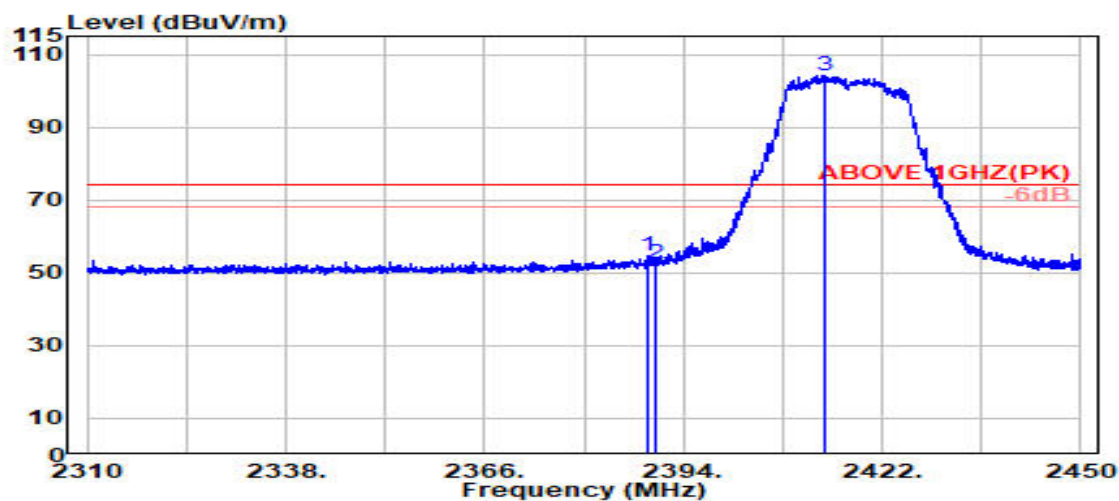

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.20	5.70	39.92	60.83	54.81	74.00	19.19	Peak
2390.000	28.20	5.70	39.92	58.60	52.58	74.00	21.42	Peak
@ 2414.050	28.23	5.74	39.92	110.23	104.28	---	---	Peak

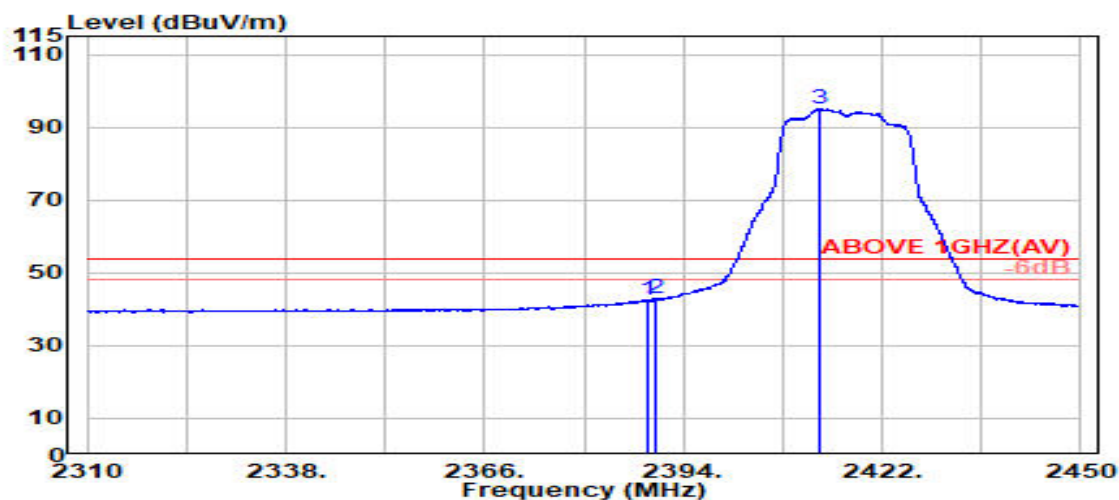

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.150	28.20	5.70	39.92	48.65	42.63	54.00	11.37	Average
2390.000	28.20	5.70	39.92	48.86	42.84	54.00	11.16	Average
@ 2413.200	28.23	5.73	39.92	100.99	95.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

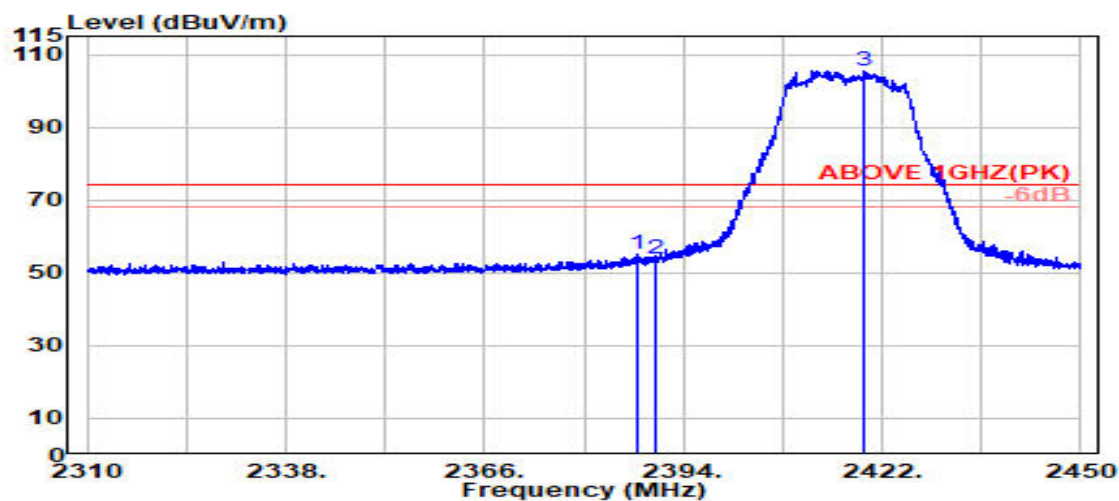

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.700	28.20	5.70	39.92	61.23	55.21	74.00	18.79	Peak
2390.000	28.20	5.70	39.92	59.74	53.72	74.00	20.28	Peak
@ 2419.400	28.24	5.74	39.92	111.53	105.59	---	---	Peak

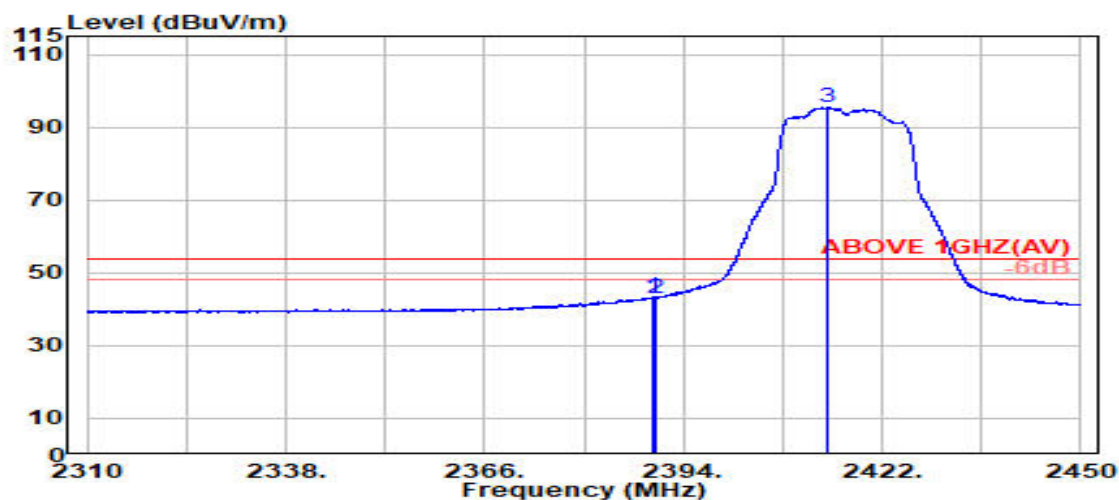

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.92	49.27	43.25	54.00	10.75	Average
2390.000	28.20	5.70	39.92	49.18	43.17	54.00	10.83	Average
@ 2414.200	28.23	5.74	39.92	101.32	95.37	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

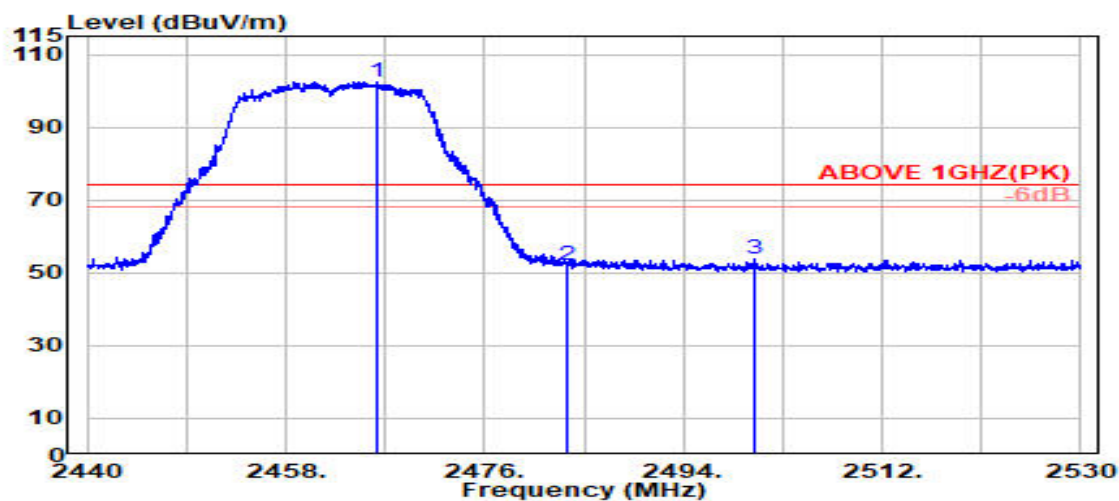

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.350	28.37	5.81	39.92	108.24	102.50	---	---	Peak
2483.500	28.43	5.83	39.92	57.60	51.95	74.00	22.05	Peak
2500.400	28.50	5.85	39.92	59.41	53.84	74.00	20.16	Peak

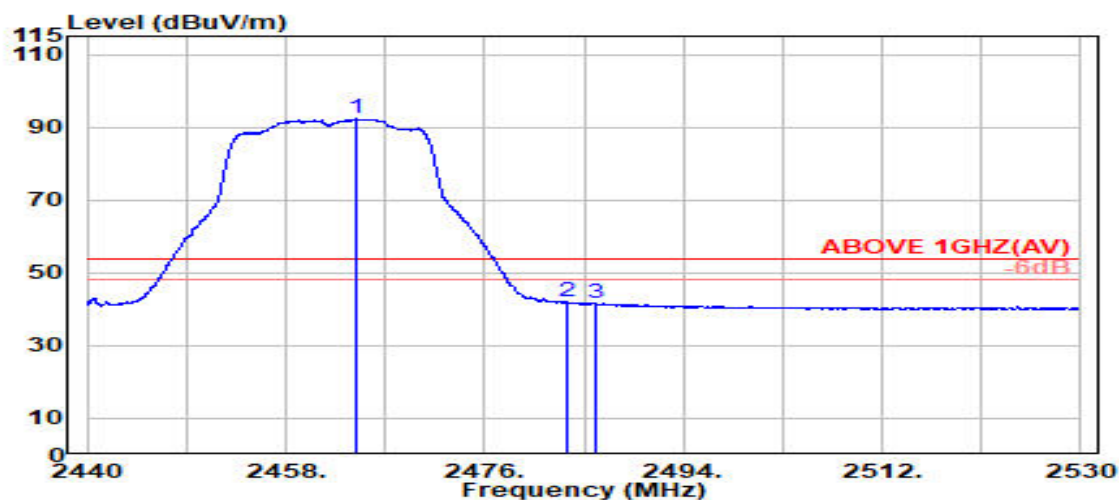

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.450	28.36	5.80	39.92	97.99	92.23	---	---	Average
2483.500	28.43	5.83	39.92	47.70	42.04	54.00	11.96	Average
2486.050	28.44	5.83	39.92	47.34	41.70	54.00	12.30	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

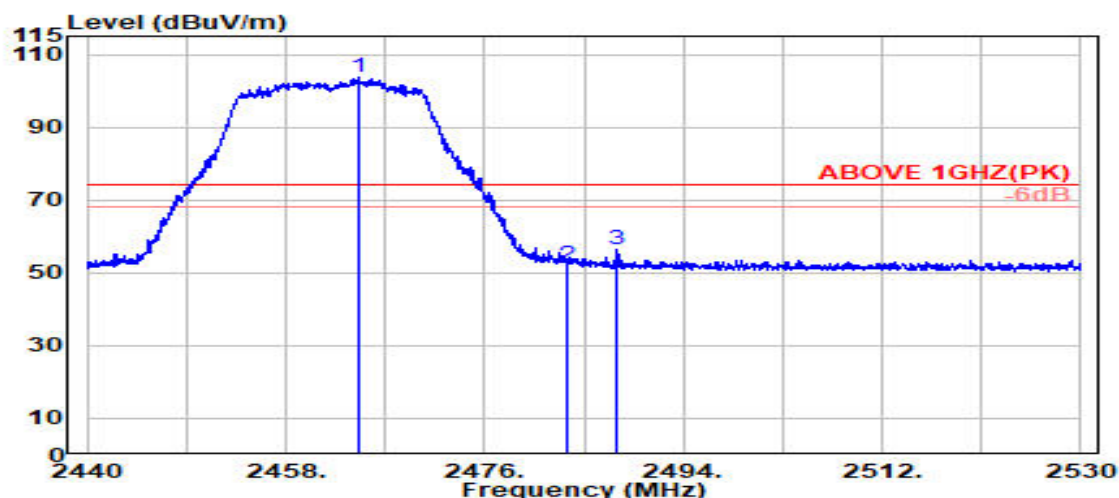

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	28.36	5.80	39.92	109.60	103.84	---	---	Peak
2483.500	28.43	5.83	39.92	57.74	52.09	74.00	21.91	Peak
2488.050	28.45	5.83	39.92	62.00	56.37	74.00	17.63	Peak

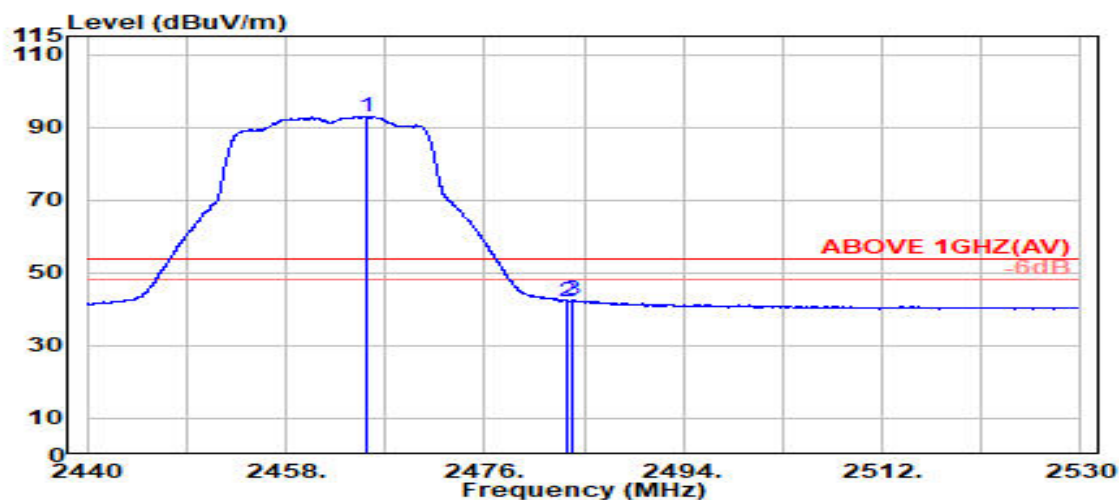

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.250	28.36	5.80	39.92	98.76	93.01	---	---	Average
2483.500	28.43	5.83	39.92	47.93	42.27	54.00	11.73	Average
2484.050	28.44	5.83	39.92	48.01	42.35	54.00	11.65	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

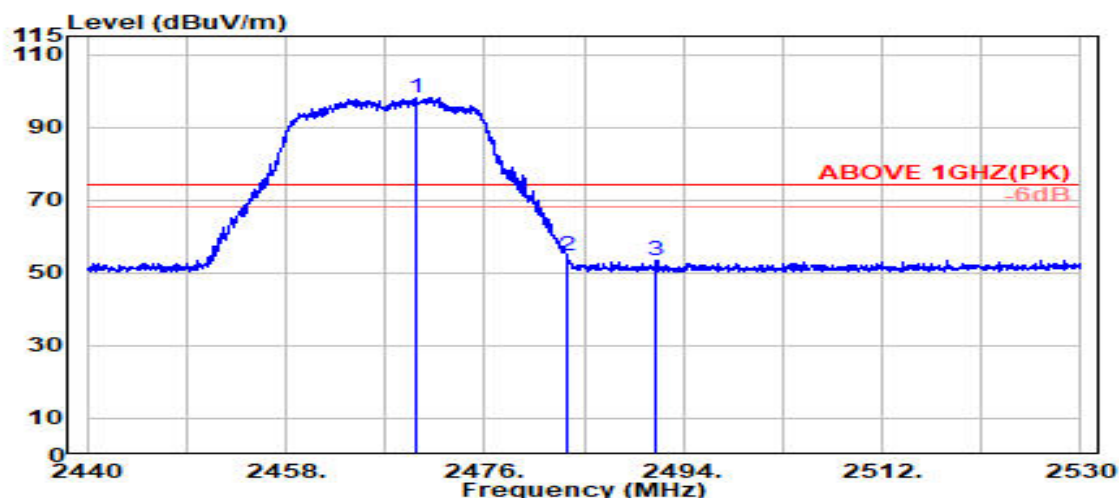

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.850	28.38	5.81	39.92	103.91	98.18	---	---	Peak
2483.500	28.43	5.83	39.92	60.49	54.83	74.00	19.17	Peak
2491.600	28.47	5.84	39.92	58.96	53.35	74.00	20.65	Peak

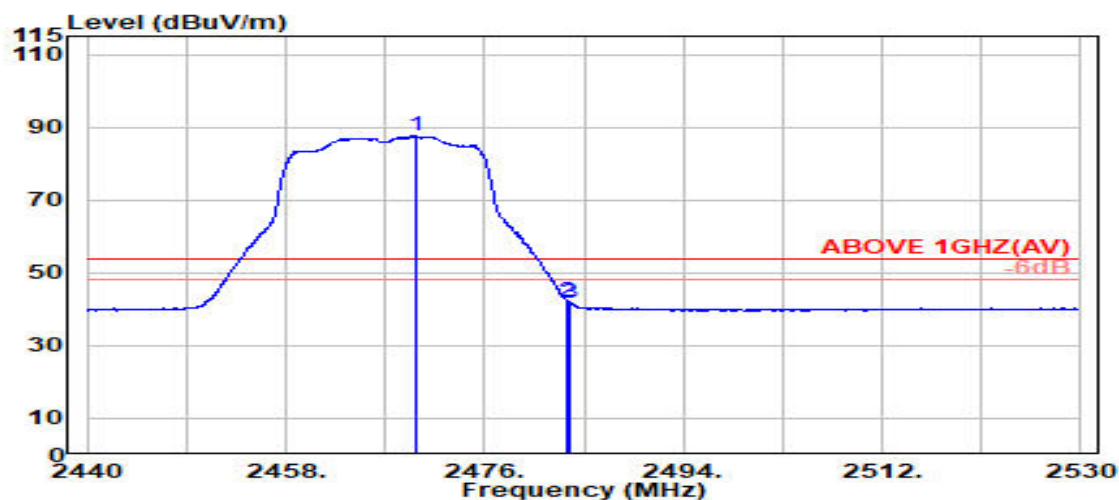

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.750	28.38	5.81	39.92	93.23	87.50	---	---	Average
2483.500	28.43	5.83	39.92	47.80	42.15	54.00	11.85	Average
2483.700	28.44	5.83	39.92	47.52	41.86	54.00	12.14	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

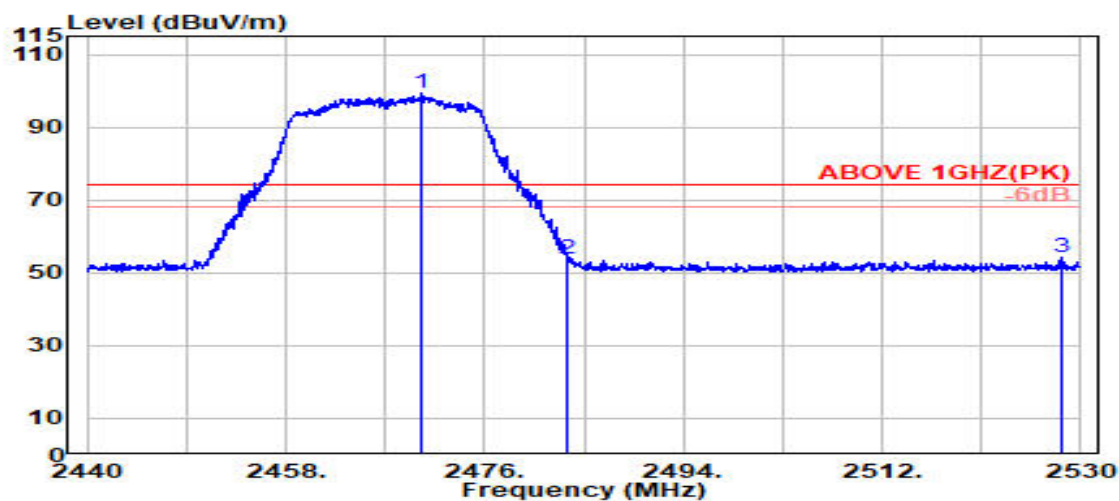

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.350	28.38	5.81	39.92	104.98	99.25	---	---	Peak
2483.500	28.43	5.83	39.92	59.29	53.63	74.00	20.37	Peak
2528.250	28.61	5.88	39.92	59.67	54.24	74.00	19.76	Peak

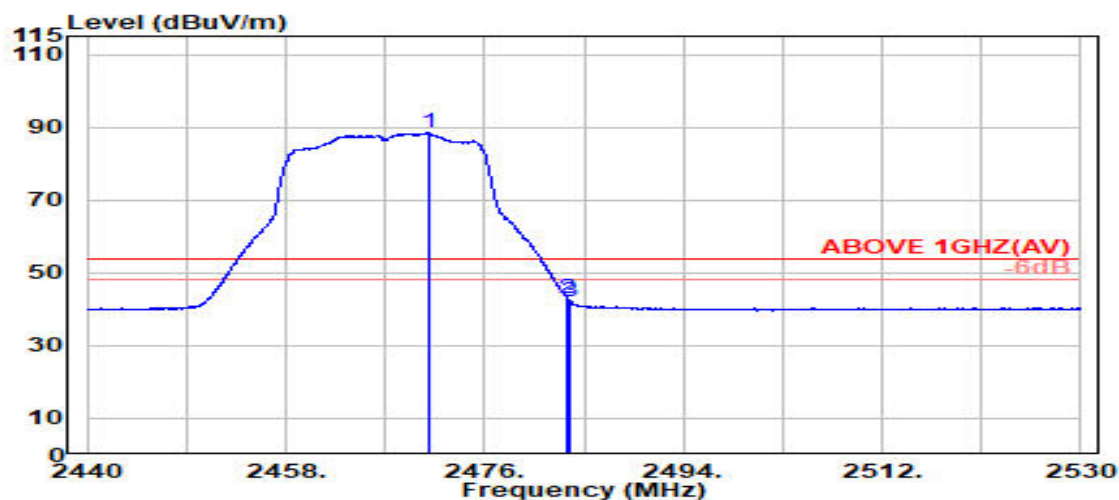

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.900	28.38	5.81	39.92	94.12	88.39	---	---	Average
2483.500	28.43	5.83	39.92	48.59	42.93	54.00	11.07	Average
2483.700	28.44	5.83	39.92	47.83	42.17	54.00	11.83	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

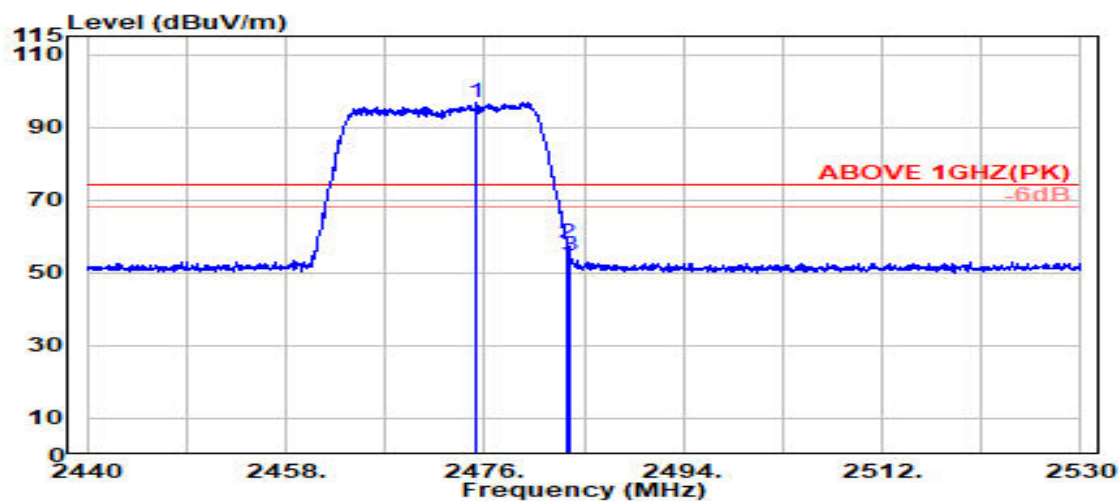

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.250	28.40	5.82	39.92	102.64	96.94	---	---	Peak
2483.500	28.43	5.83	39.92	63.83	58.18	74.00	15.82	Peak
2483.750	28.44	5.83	39.92	60.52	54.87	74.00	19.13	Peak

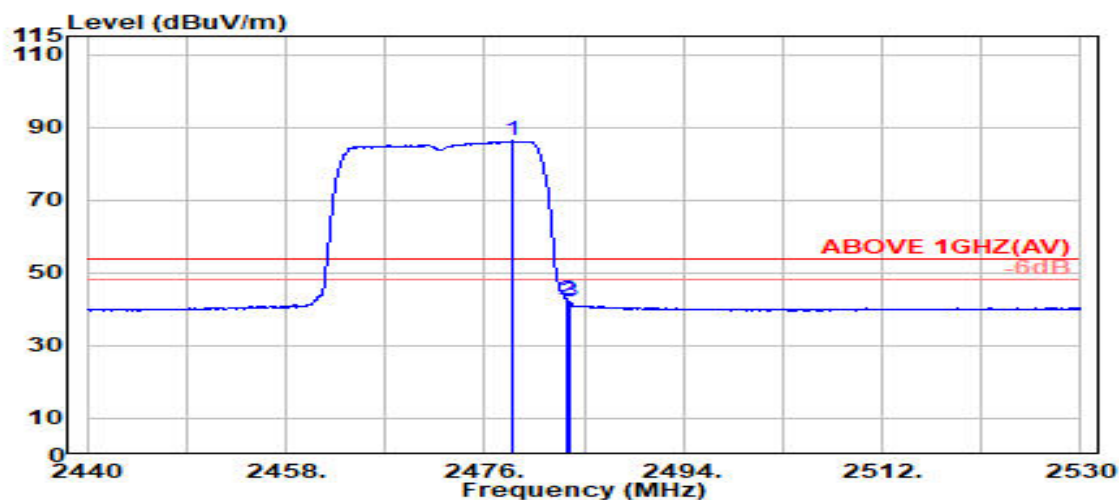

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.450	28.41	5.82	39.92	91.85	86.17	---	---	Average
2483.500	28.43	5.83	39.92	48.15	42.49	54.00	11.51	Average
2483.800	28.44	5.83	39.92	47.66	42.00	54.00	12.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

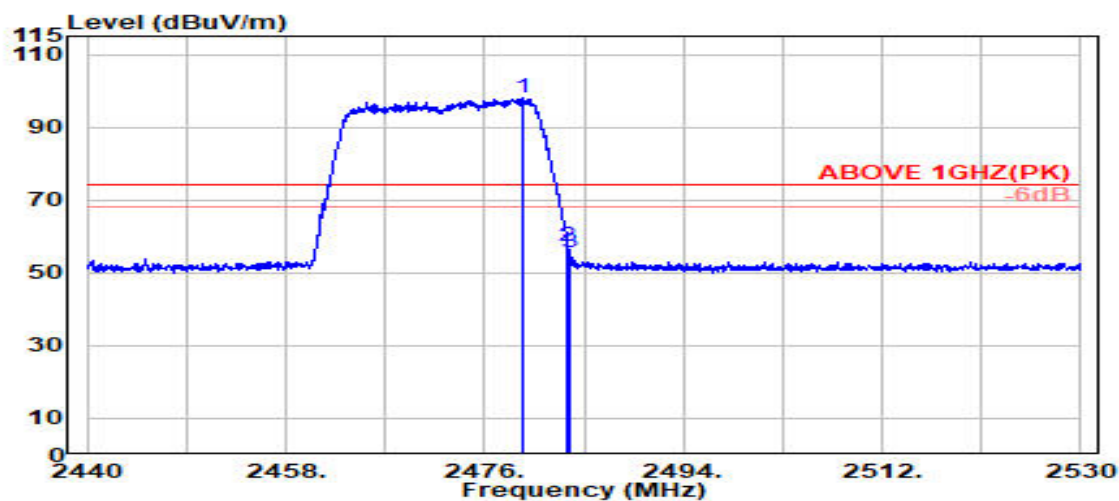

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.400	28.42	5.82	39.92	103.59	97.91	---	---	Peak
2483.500	28.43	5.83	39.92	62.86	57.21	74.00	16.79	Peak
2483.700	28.44	5.83	39.92	61.16	55.51	74.00	18.49	Peak

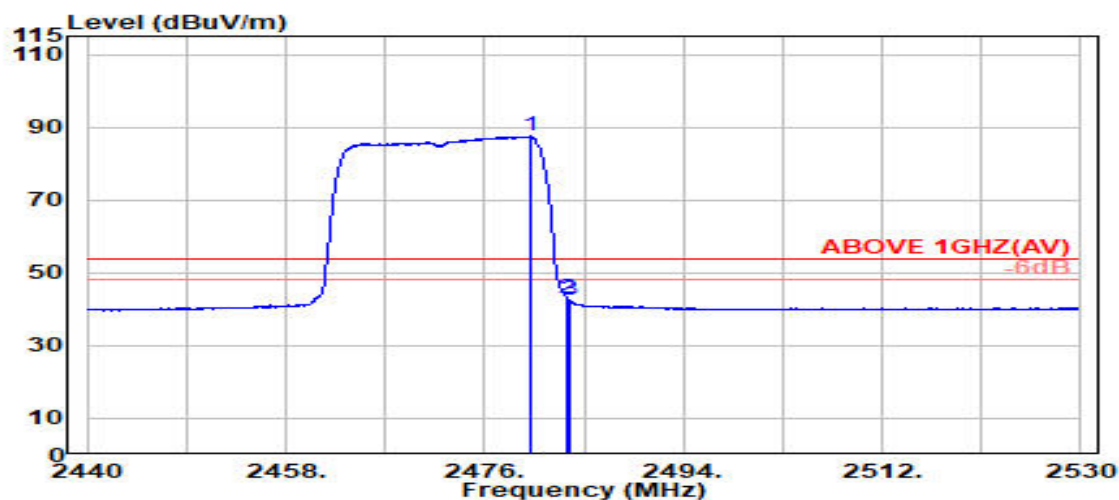

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.250	28.42	5.82	39.92	93.16	87.48	---	---	Average
2483.500	28.43	5.83	39.92	48.70	43.04	54.00	10.96	Average
2483.700	28.44	5.83	39.92	48.19	42.53	54.00	11.47	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

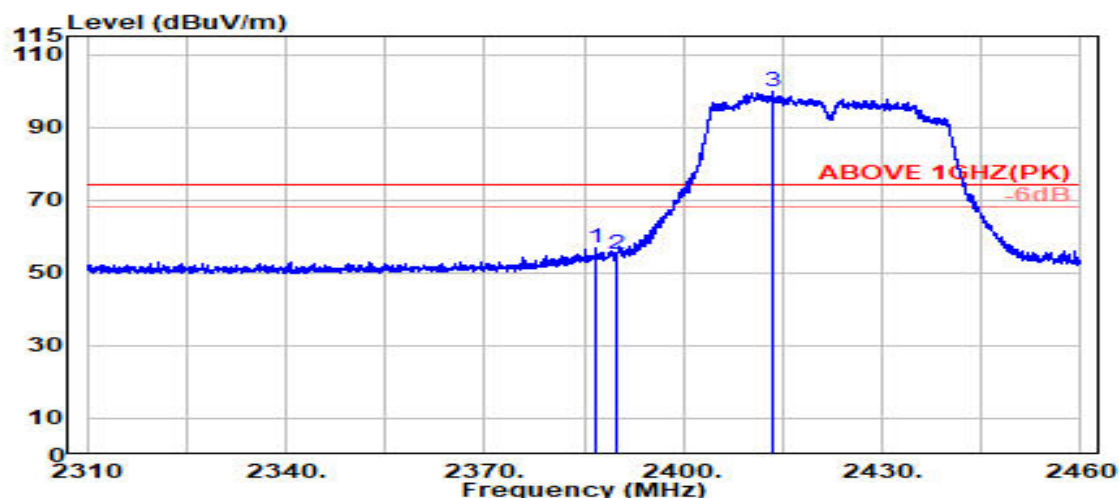

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.800	28.20	5.70	39.92	62.75	56.73	74.00	17.27	Peak
2389.800	28.20	5.70	39.92	61.06	55.05	74.00	18.95	Peak
@ 2413.450	28.23	5.73	39.92	105.88	99.92	---	---	Peak

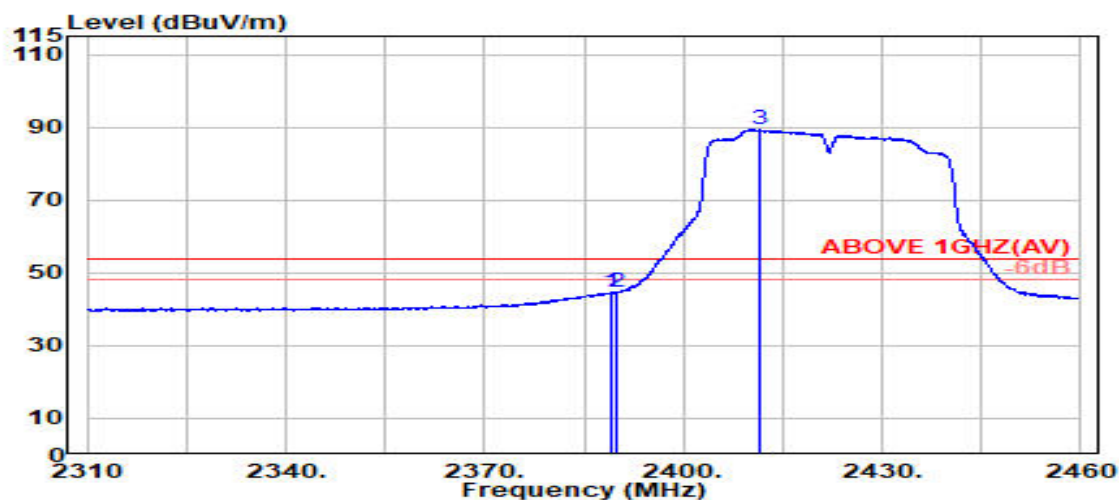

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.20	5.70	39.92	50.85	44.83	54.00	9.17	Average
2389.800	28.20	5.70	39.92	50.54	44.52	54.00	9.48	Average
@ 2411.400	28.22	5.73	39.92	95.40	89.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

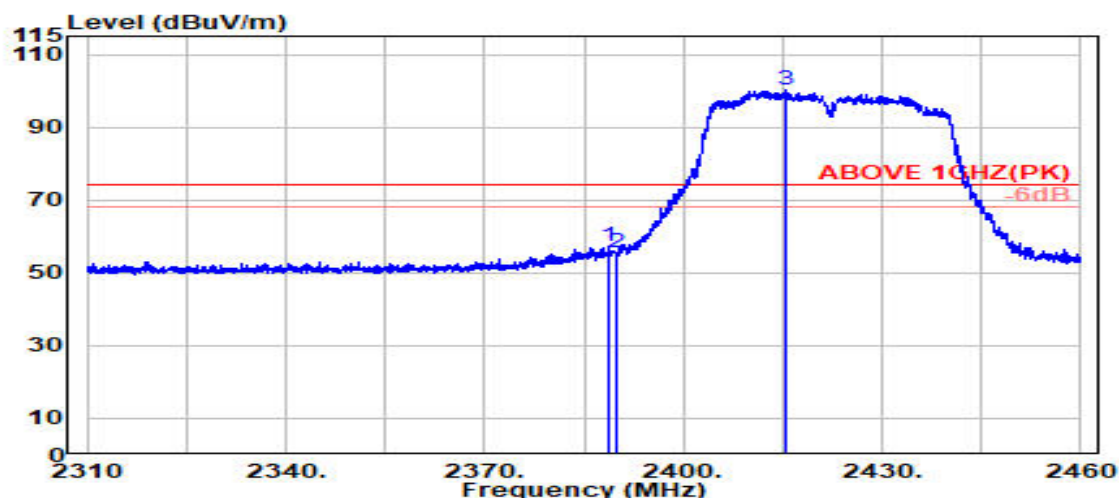

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.750	28.20	5.70	39.92	63.36	57.35	74.00	16.65	Peak
2389.800	28.20	5.70	39.92	61.39	55.38	74.00	18.62	Peak
@ 2415.350	28.23	5.74	39.92	106.10	100.15	---	---	Peak

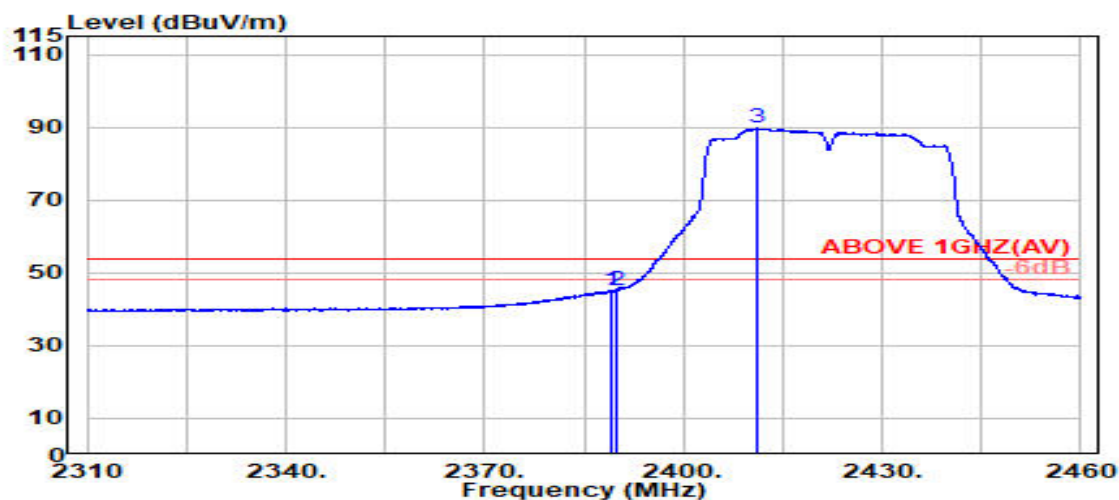

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.20	5.70	39.92	51.32	45.31	54.00	8.69	Average
2389.800	28.20	5.70	39.92	51.35	45.34	54.00	8.66	Average
@ 2411.300	28.22	5.73	39.92	95.58	89.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

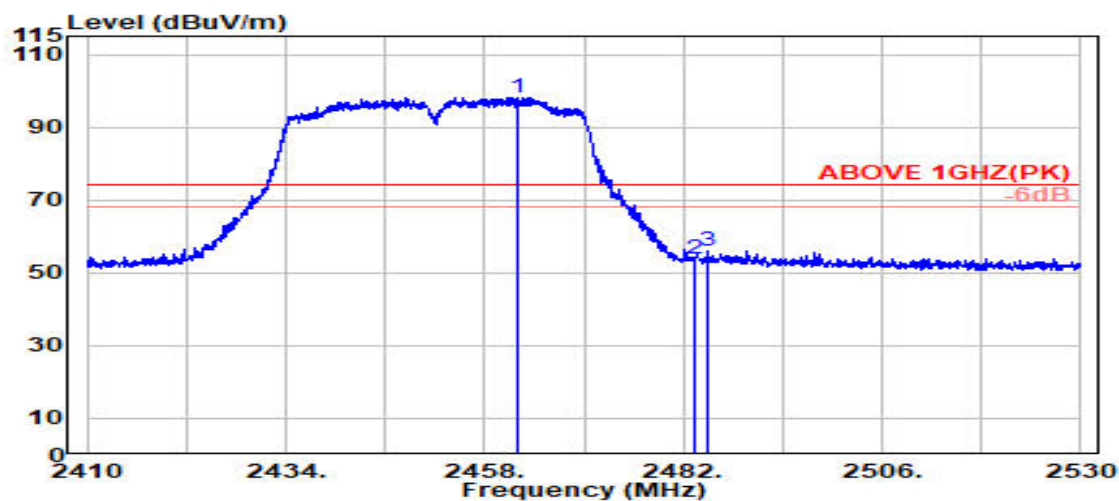

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.050	28.35	5.80	39.92	103.97	98.20	---	---	Peak
2483.500	28.43	5.83	39.92	59.62	53.96	74.00	20.04	Peak
2484.950	28.44	5.83	39.92	61.69	56.04	74.00	17.96	Peak

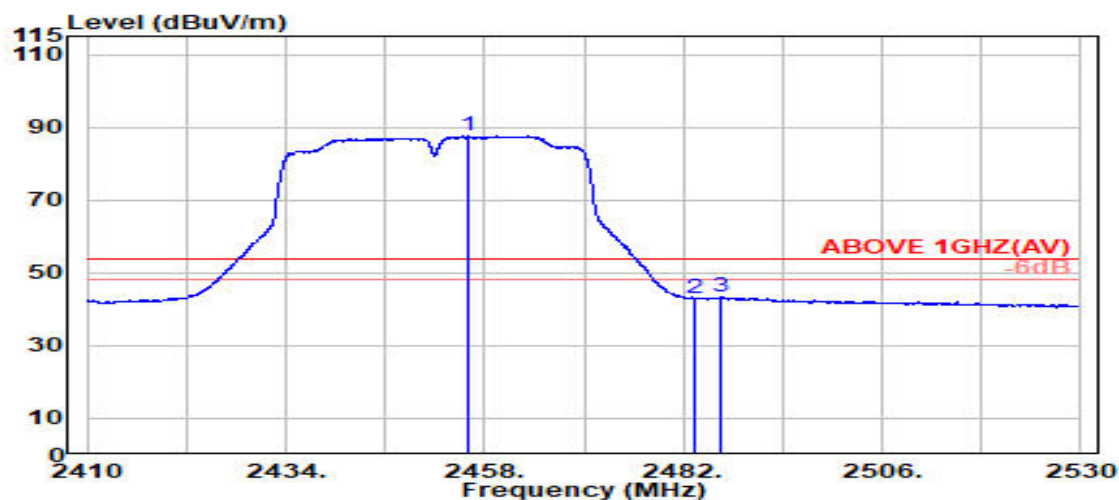

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.100	28.32	5.79	39.92	93.30	87.50	---	---	Average
2483.500	28.43	5.83	39.92	48.49	42.83	54.00	11.17	Average
2486.650	28.45	5.83	39.92	48.99	43.34	54.00	10.66	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

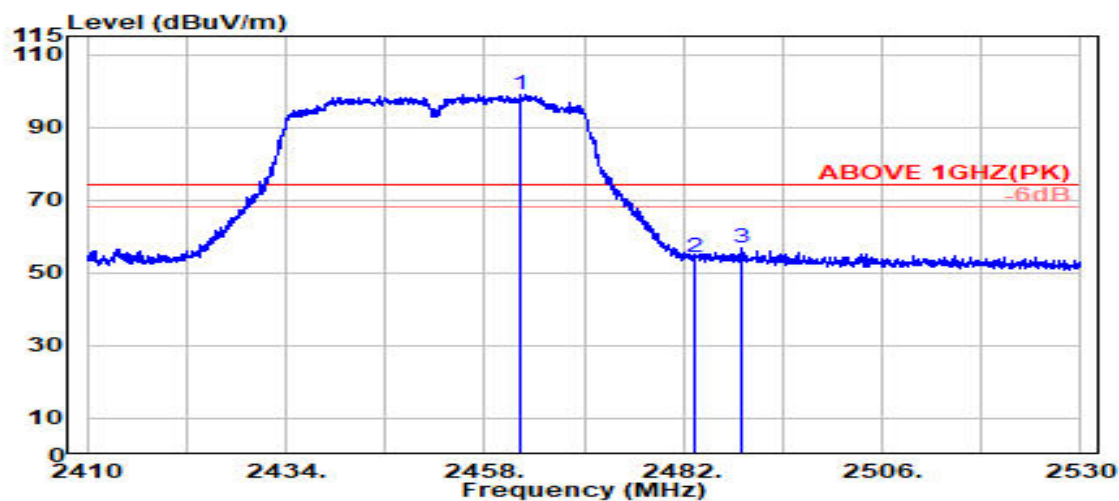

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.300	28.35	5.80	39.92	104.72	98.95	---	---	Peak
2483.500	28.43	5.83	39.92	60.08	54.42	74.00	19.58	Peak
2489.100	28.46	5.84	39.92	62.59	56.97	74.00	17.03	Peak

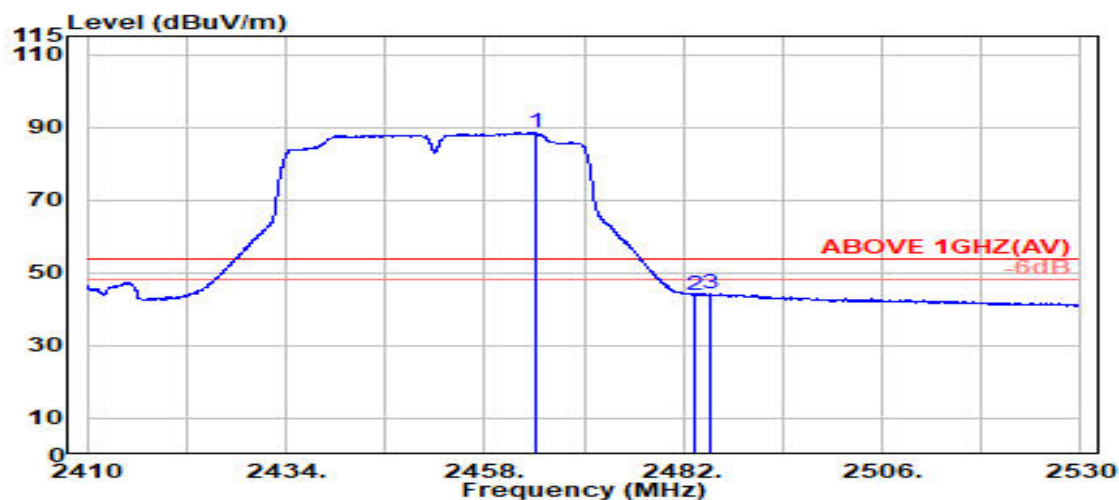

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	28.36	5.80	39.92	94.22	88.46	---	---	Average
2483.500	28.43	5.83	39.92	49.69	44.03	54.00	9.97	Average
2485.200	28.44	5.83	39.92	49.85	44.20	54.00	9.80	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

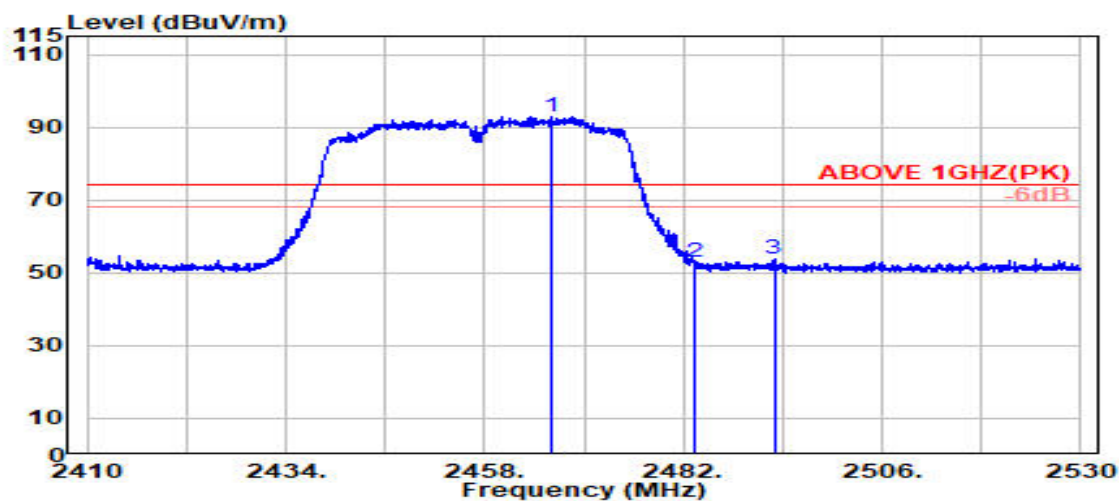

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.050	28.36	5.81	39.92	98.62	92.87	---	---	Peak
2483.500	28.43	5.83	39.92	58.50	52.84	74.00	21.16	Peak
2492.950	28.47	5.84	39.92	59.60	53.99	74.00	20.01	Peak

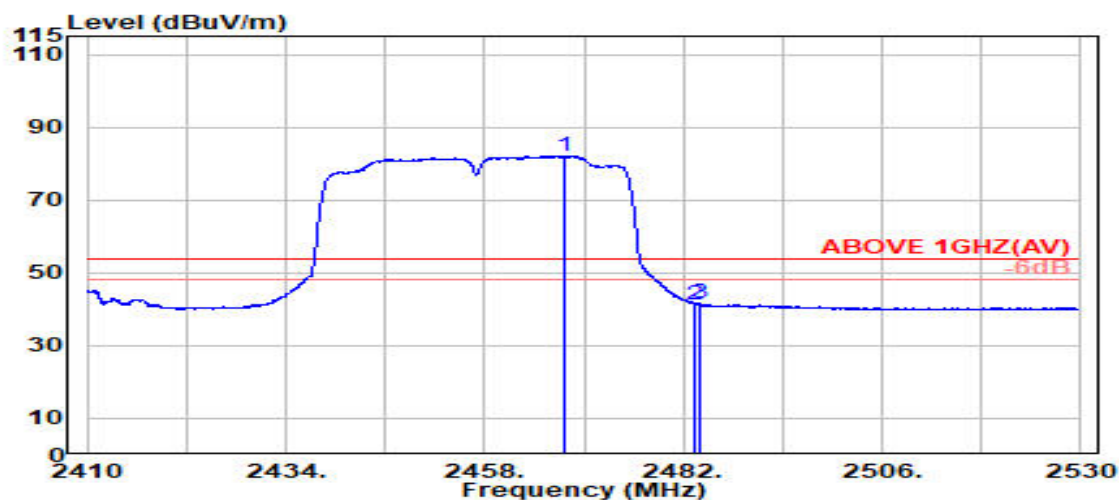

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.37	5.81	39.92	87.96	82.22	---	---	Average
2483.500	28.43	5.83	39.92	47.06	41.41	54.00	12.59	Average
2483.950	28.44	5.83	39.92	47.22	41.56	54.00	12.44	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

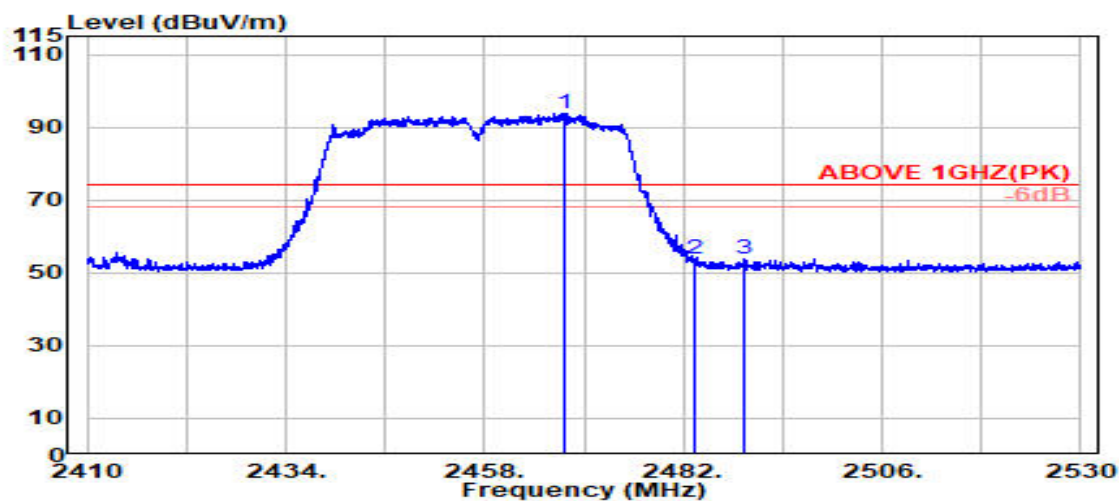

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.750	28.37	5.81	39.92	99.58	93.84	---	---	Peak
2483.500	28.43	5.83	39.92	59.67	54.01	74.00	19.99	Peak
2489.400	28.46	5.84	39.92	59.57	53.94	74.00	20.06	Peak

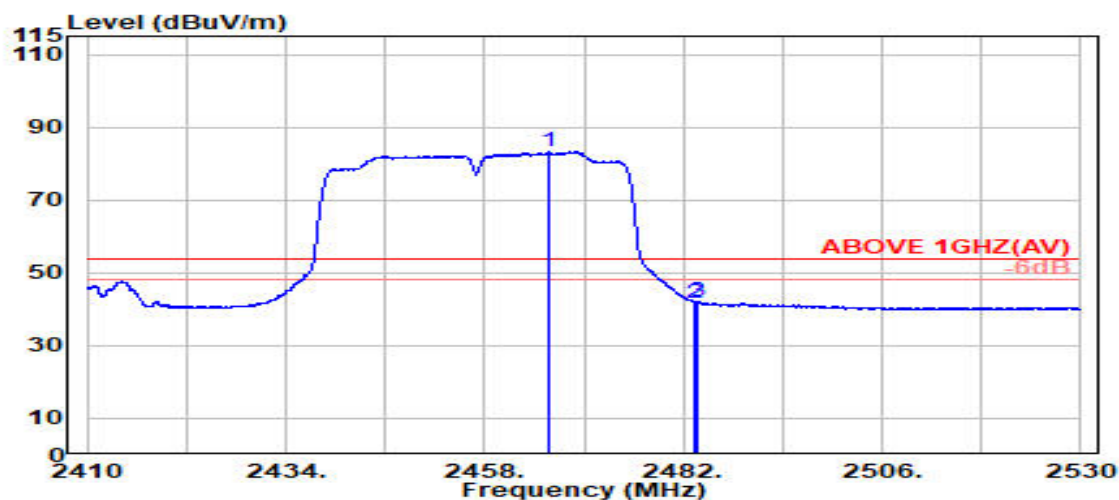

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.900	28.36	5.81	39.92	88.94	83.19	---	---	Average
2483.500	28.43	5.83	39.92	47.52	41.86	54.00	12.14	Average
2483.750	28.44	5.83	39.92	47.89	42.24	54.00	11.76	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

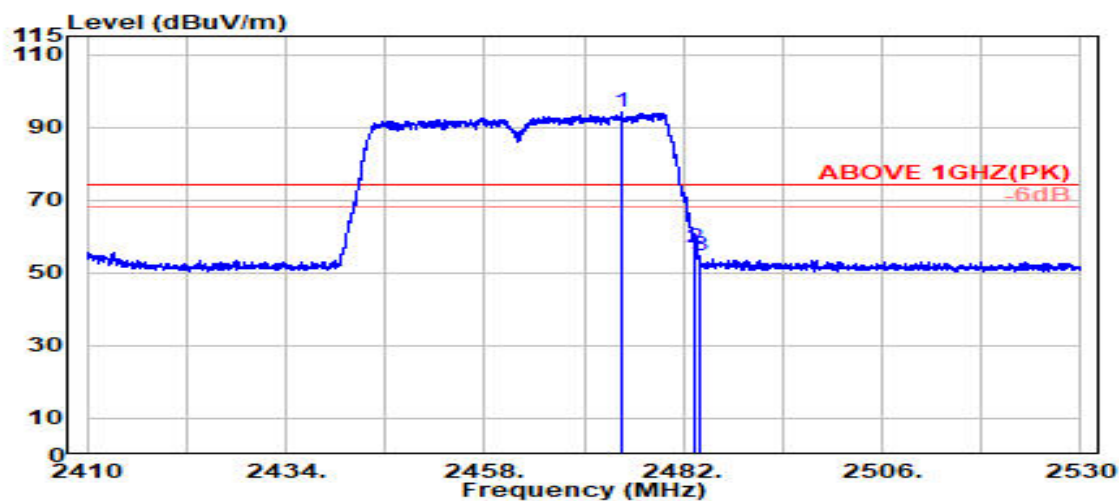

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.500	28.40	5.82	39.92	100.00	94.30	---	---	Peak
2483.500	28.43	5.83	39.92	62.45	56.79	74.00	17.21	Peak
2483.850	28.44	5.83	39.92	60.43	54.78	74.00	19.22	Peak

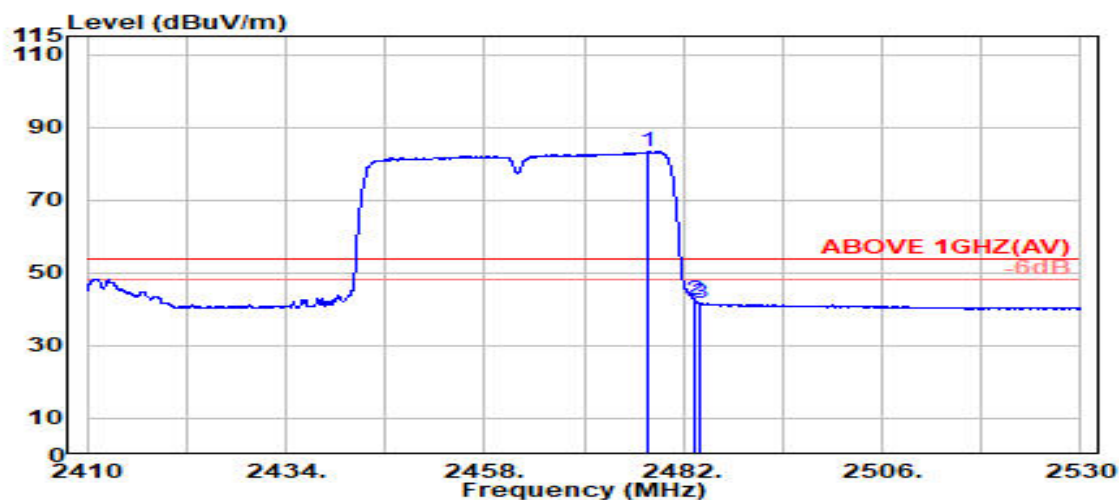

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.650	28.41	5.82	39.92	88.92	83.24	---	---	Average
2483.500	28.43	5.83	39.92	48.02	42.37	54.00	11.63	Average
2483.850	28.44	5.83	39.92	47.51	41.85	54.00	12.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

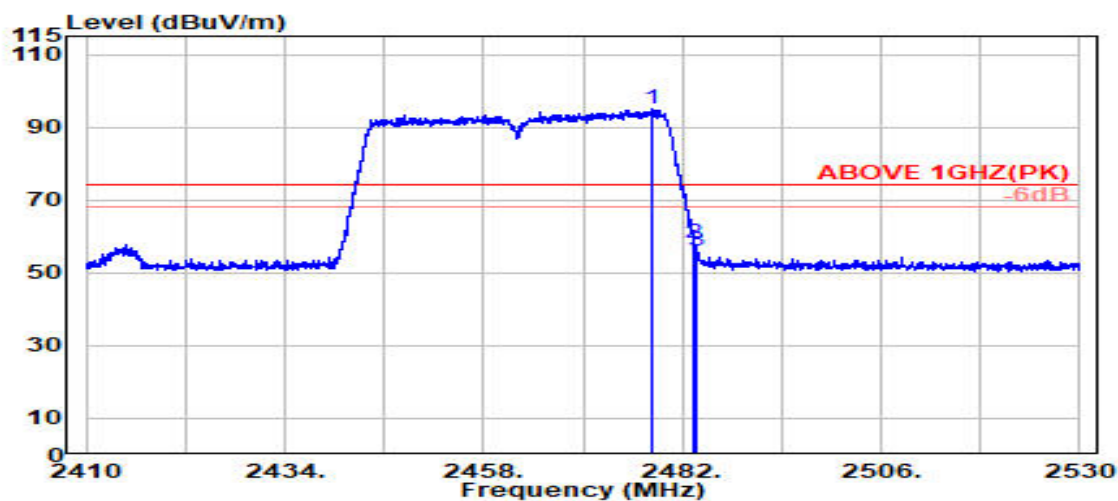

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.200	28.41	5.82	39.92	100.58	94.89	---	---	Peak
2483.500	28.43	5.83	39.92	63.82	58.16	74.00	15.84	Peak
2483.700	28.44	5.83	39.92	61.47	55.81	74.00	18.19	Peak

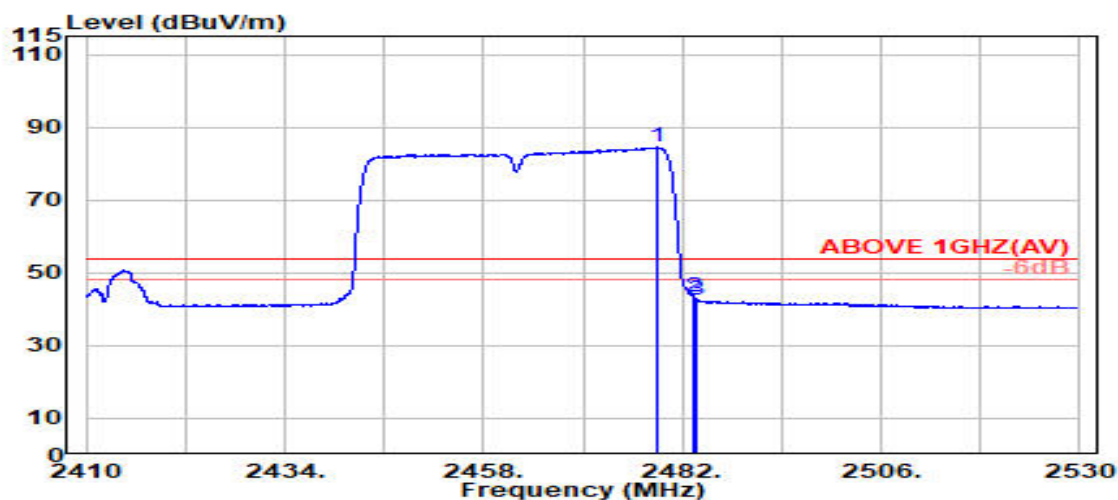

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.050	28.42	5.82	39.92	90.10	84.42	---	---	Average
2483.500	28.43	5.83	39.92	48.89	43.24	54.00	10.76	Average
2483.700	28.44	5.83	39.92	48.38	42.72	54.00	11.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

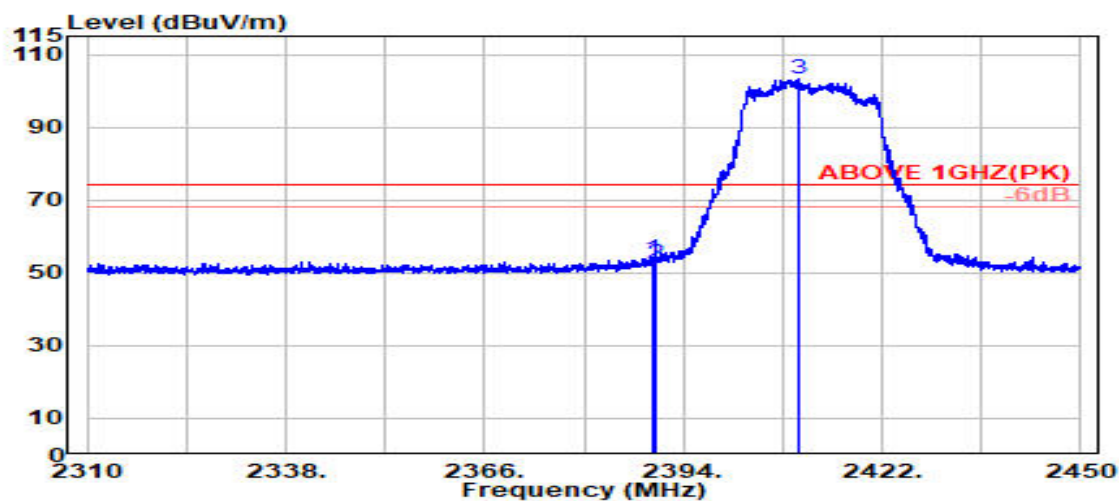

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.92	60.02	54.01	74.00	19.99	Peak
2390.000	28.20	5.70	39.92	58.61	52.59	74.00	21.41	Peak
@ 2410.100	28.22	5.73	39.92	109.19	103.22	---	---	Peak

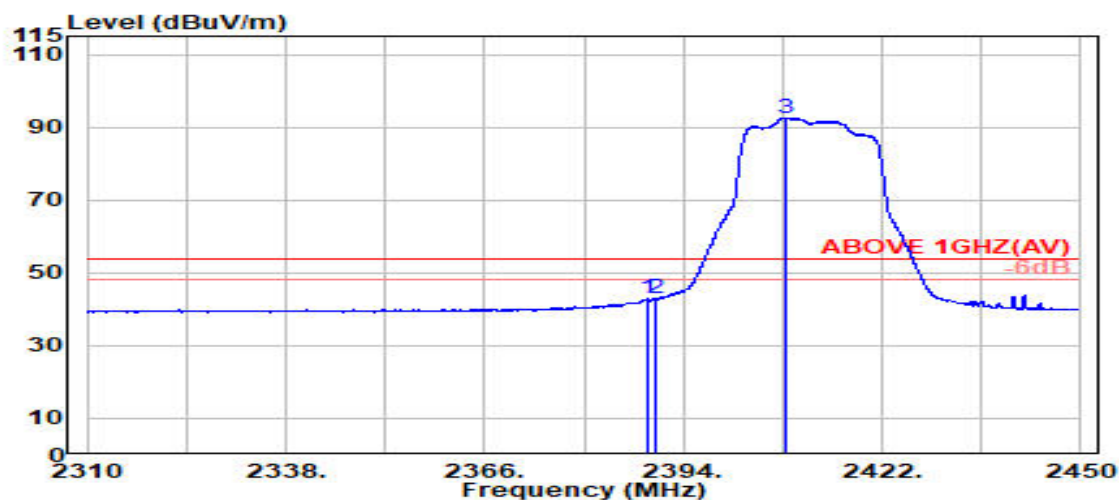

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.850	28.20	5.70	39.92	48.96	42.94	54.00	11.06	Average
2390.000	28.20	5.70	39.92	48.76	42.75	54.00	11.25	Average
@ 2408.300	28.22	5.73	39.92	98.56	92.58	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

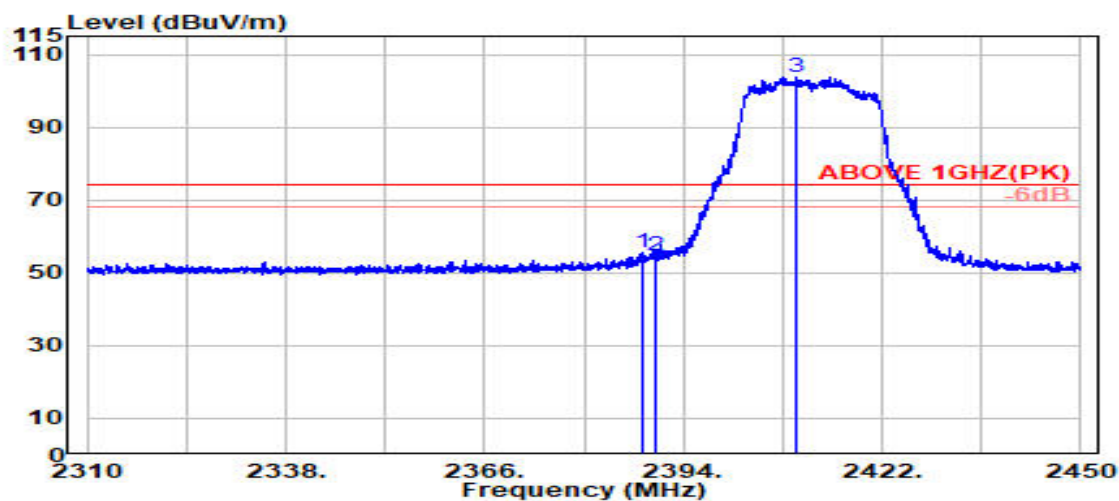

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	28.20	5.70	39.92	61.47	55.45	74.00	18.55	Peak
2390.000	28.20	5.70	39.92	60.81	54.79	74.00	19.21	Peak
@ 2410.050	28.22	5.73	39.92	109.88	103.91	---	---	Peak

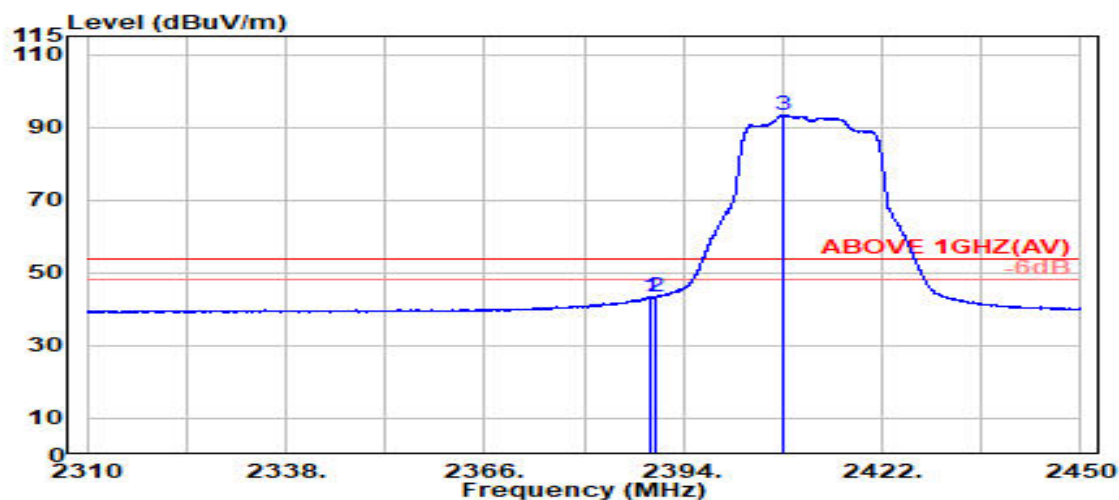

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.20	5.70	39.92	49.38	43.37	54.00	10.63	Average
2390.000	28.20	5.70	39.92	49.31	43.29	54.00	10.71	Average
@ 2407.900	28.22	5.73	39.92	99.28	93.31	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

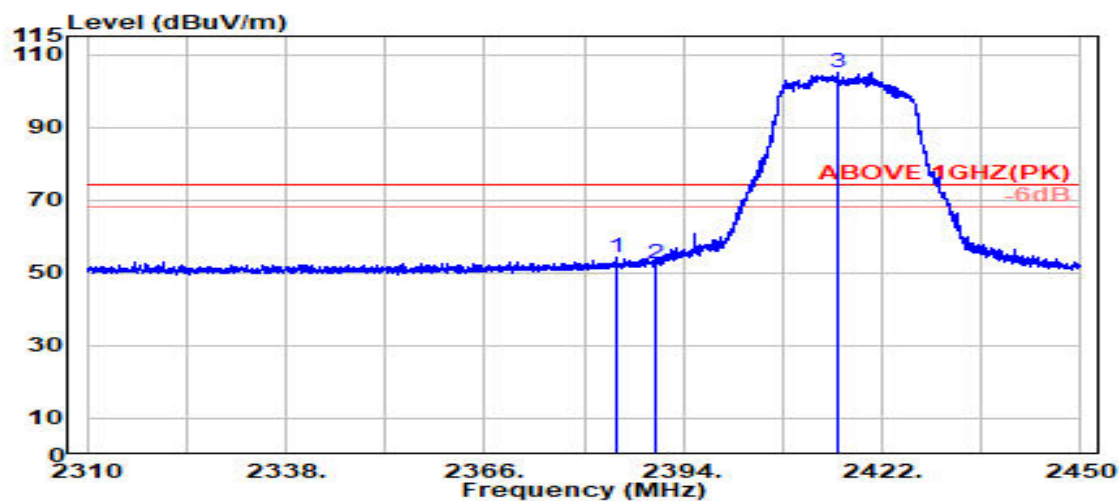

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.550	28.20	5.70	39.92	60.14	54.12	74.00	19.88	Peak
2390.000	28.20	5.70	39.92	58.37	52.35	74.00	21.65	Peak
@ 2415.750	28.23	5.74	39.92	111.17	105.22	---	---	Peak

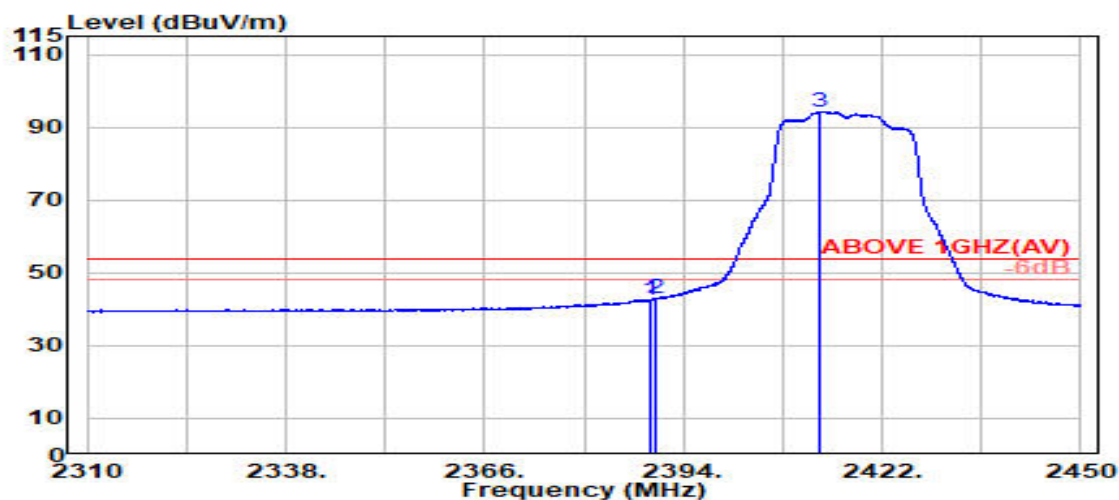

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.20	5.70	39.92	48.67	42.65	54.00	11.35	Average
2390.000	28.20	5.70	39.92	48.93	42.91	54.00	11.09	Average
@ 2413.250	28.23	5.73	39.92	100.34	94.38	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

File Number: CIM2509090


Report Number: EM-F250634

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2417 MHz
------	---------------	-----------	-------------

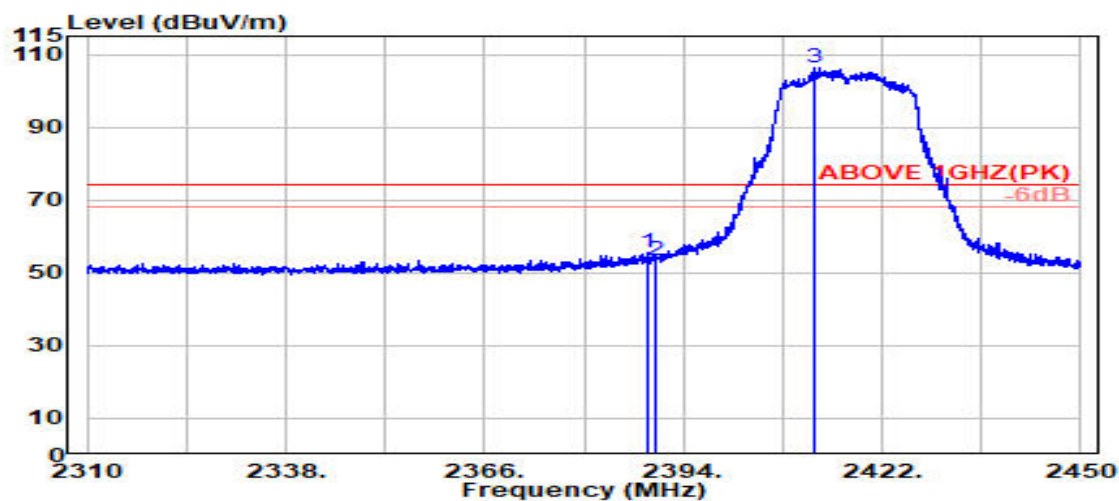

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.850	28.20	5.70	39.92	61.59	55.57	74.00	18.43	Peak
2390.000	28.20	5.70	39.92	59.43	53.41	74.00	20.59	Peak
@ 2412.500	28.23	5.73	39.92	112.26	106.30	---	---	Peak

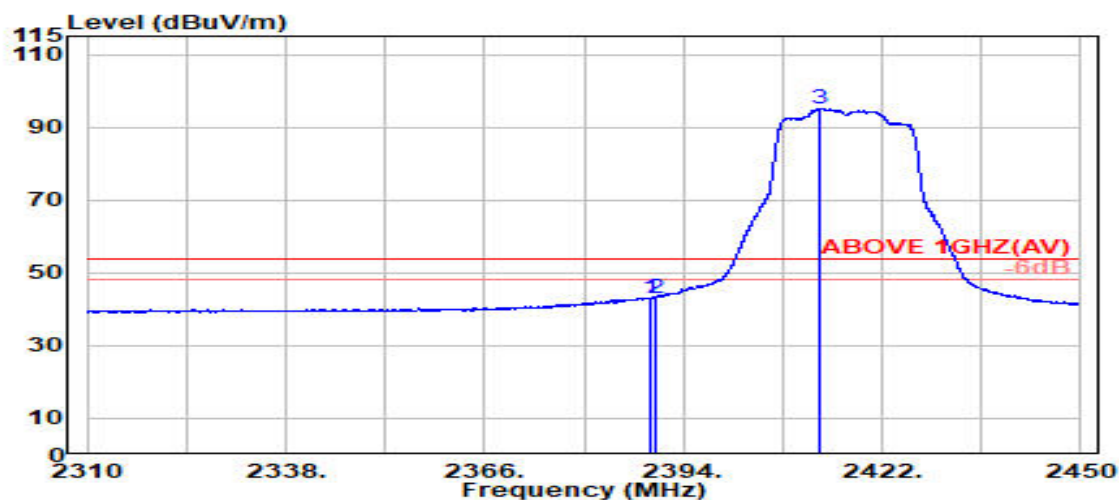

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.20	5.70	39.92	49.18	43.17	54.00	10.83	Average
2390.000	28.20	5.70	39.92	49.17	43.15	54.00	10.85	Average
@ 2413.200	28.23	5.73	39.92	101.09	95.13	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2457 MHz
------	---------------	-----------	-------------

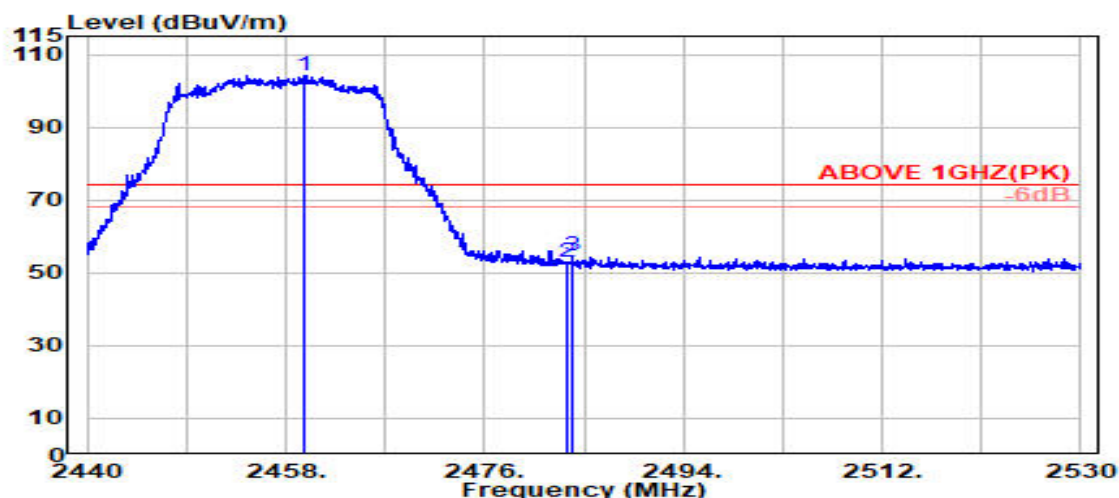

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.650	28.34	5.80	39.92	109.96	104.18	---	---	Peak
2483.500	28.43	5.83	39.92	58.64	52.99	74.00	21.01	Peak
2484.000	28.44	5.83	39.92	60.21	54.56	74.00	19.44	Peak

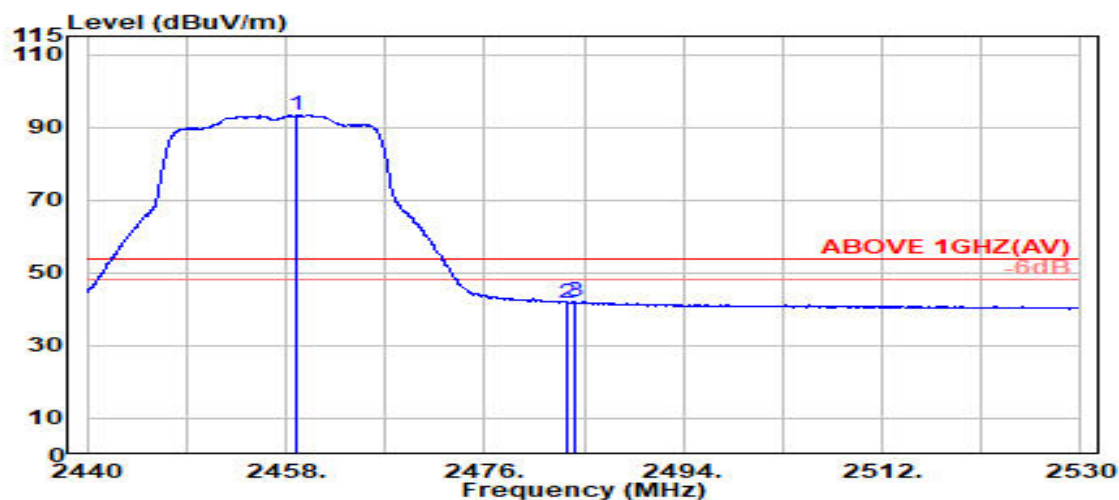

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	28.34	5.80	39.92	99.04	93.25	---	---	Average
2483.500	28.43	5.83	39.92	47.53	41.87	54.00	12.13	Average
2484.100	28.44	5.83	39.92	47.66	42.01	54.00	11.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2457 MHz
------	---------------	-----------	-------------

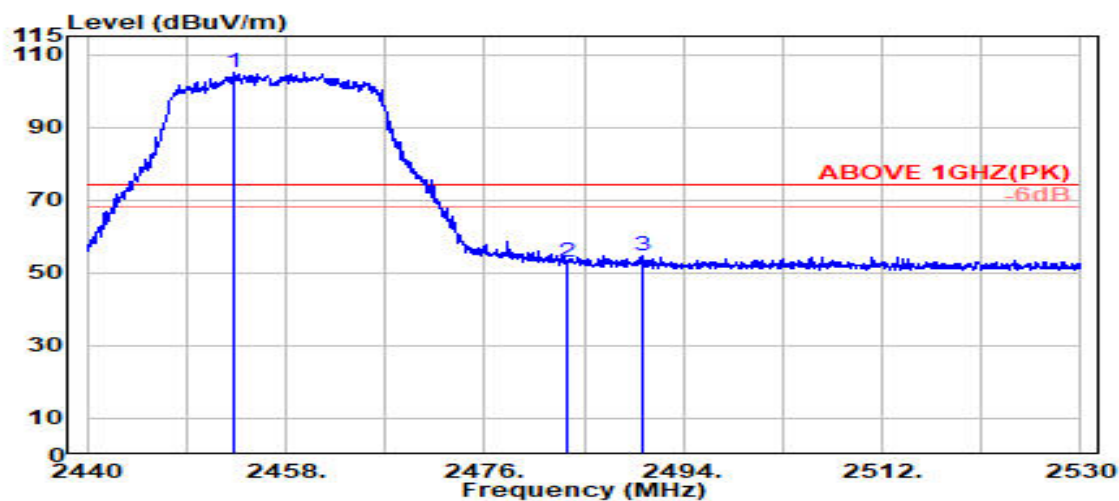

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.200	28.31	5.79	39.92	110.94	105.12	---	---	Peak
2483.500	28.43	5.83	39.92	58.72	53.06	74.00	20.94	Peak
2490.350	28.46	5.84	39.92	60.47	54.84	74.00	19.16	Peak

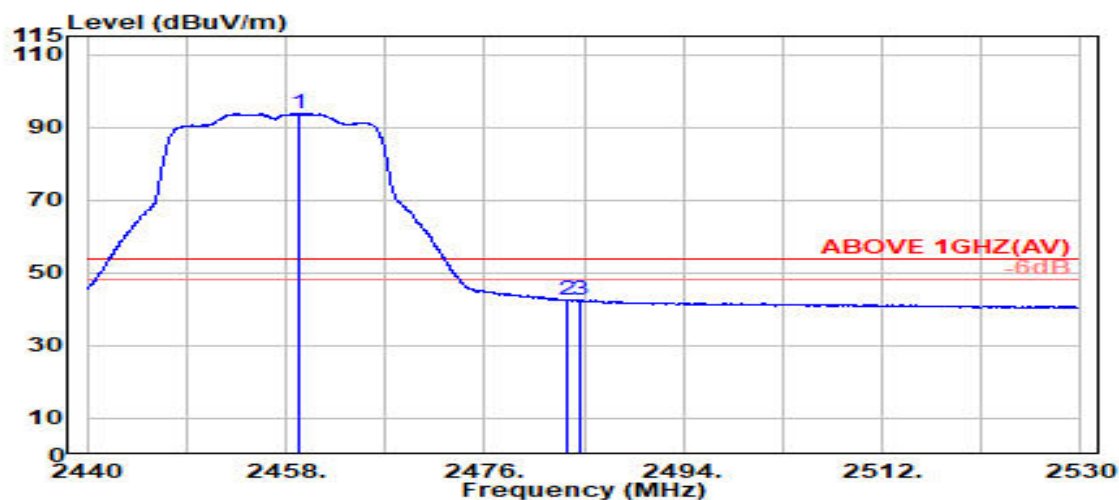

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.250	28.34	5.80	39.92	99.57	93.79	---	---	Average
2483.500	28.43	5.83	39.92	48.06	42.40	54.00	11.60	Average
2484.600	28.44	5.83	39.92	48.30	42.65	54.00	11.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

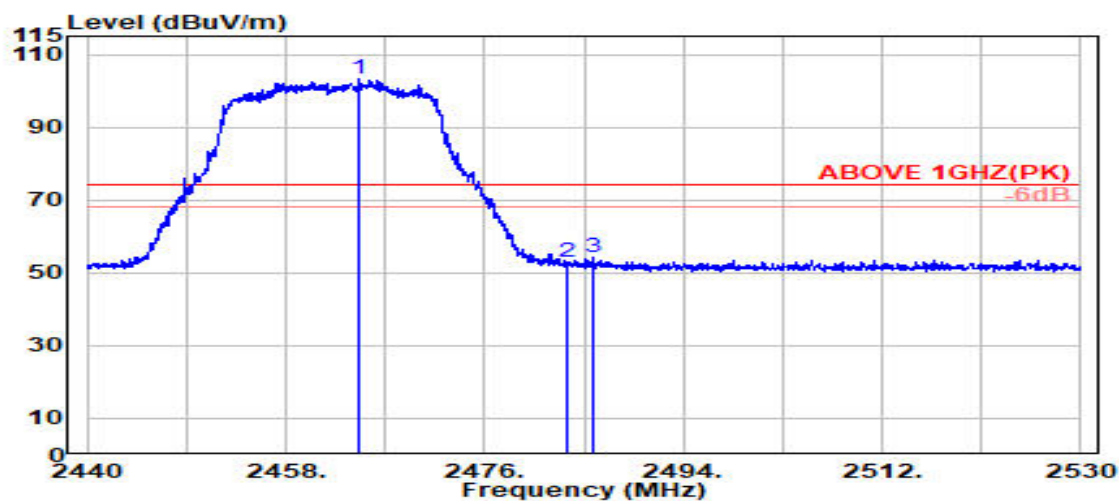

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.700	28.36	5.80	39.92	108.84	103.09	---	---	Peak
2483.500	28.43	5.83	39.92	58.50	52.85	74.00	21.15	Peak
2485.850	28.44	5.83	39.92	60.00	54.35	74.00	19.65	Peak

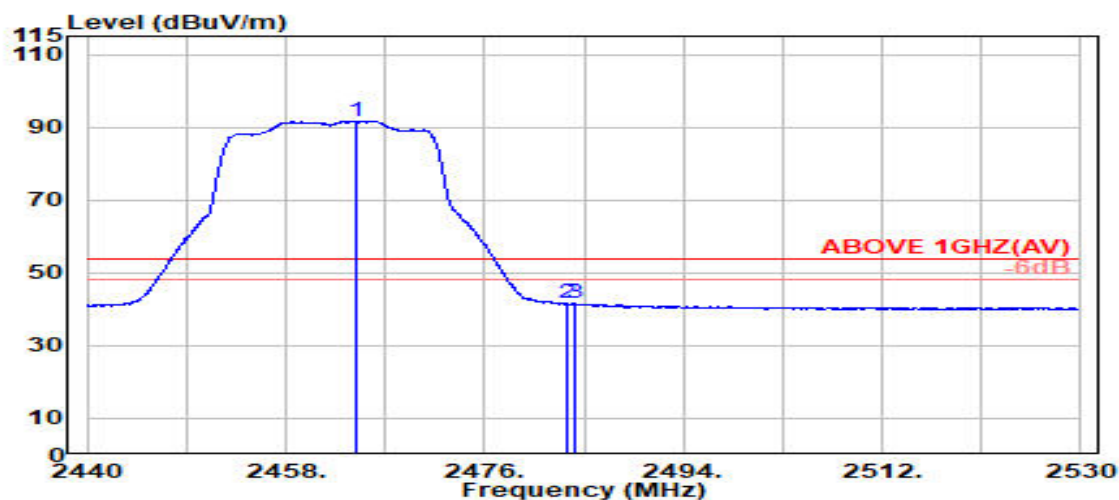

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.300	28.36	5.80	39.92	97.51	91.75	---	---	Average
2483.500	28.43	5.83	39.92	47.10	41.45	54.00	12.55	Average
2484.150	28.44	5.83	39.92	47.19	41.54	54.00	12.46	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

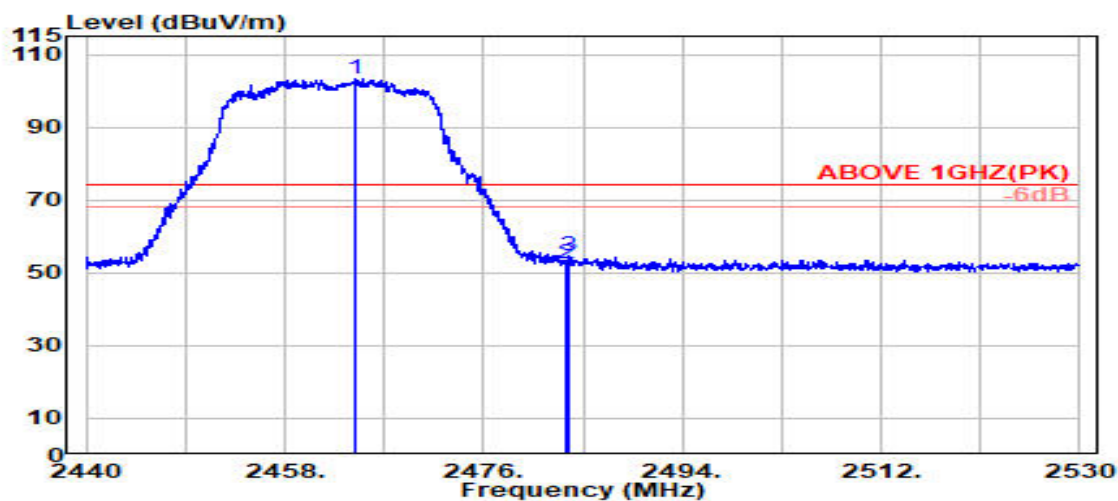

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.450	28.36	5.80	39.92	109.13	103.38	---	---	Peak
2483.500	28.43	5.83	39.92	58.25	52.59	74.00	21.41	Peak
2483.800	28.44	5.83	39.92	60.25	54.60	74.00	19.40	Peak

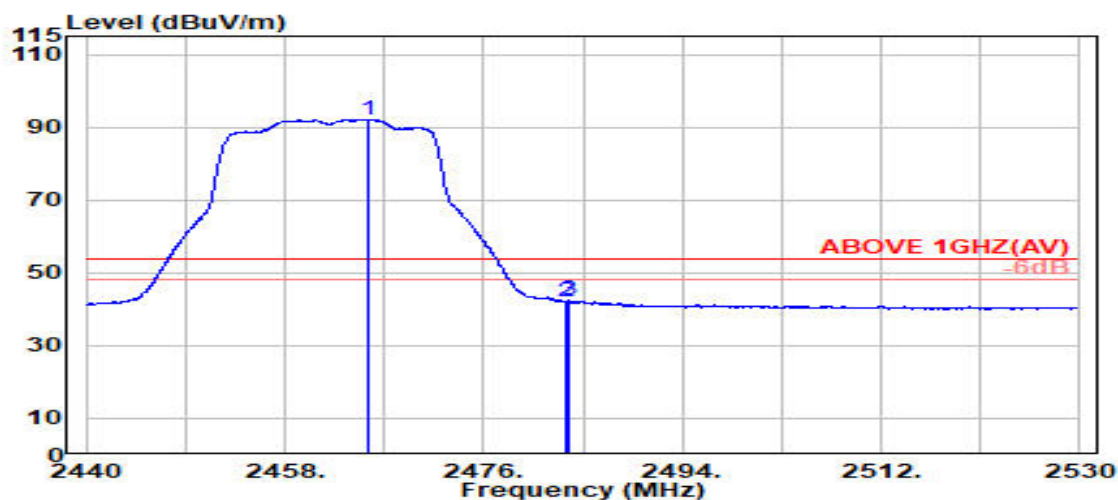

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.36	5.80	39.92	97.97	92.22	---	---	Average
2483.500	28.43	5.83	39.92	47.66	42.00	54.00	12.00	Average
2483.800	28.44	5.83	39.92	48.01	42.35	54.00	11.65	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

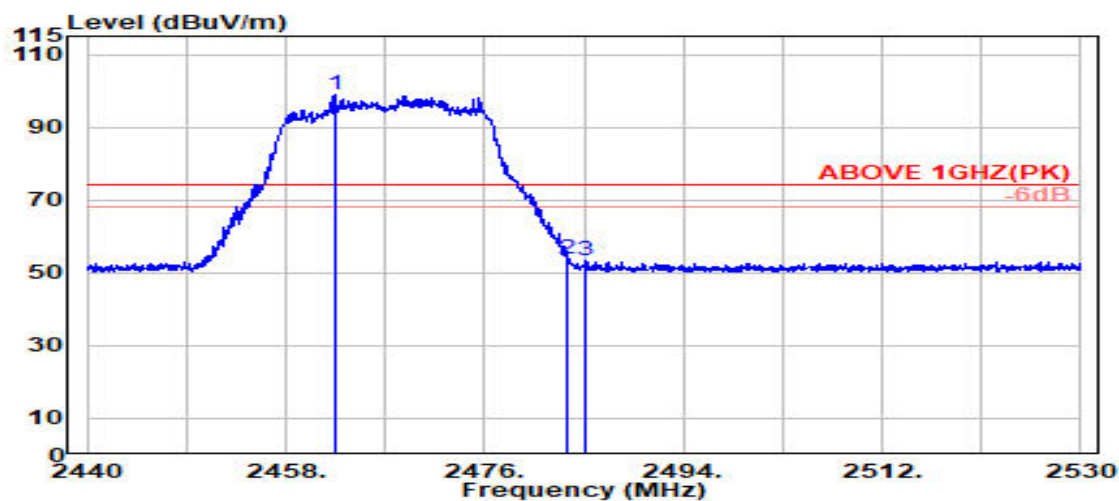

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.400	28.35	5.80	39.92	104.53	98.76	---	---	Peak
2483.500	28.43	5.83	39.92	59.40	53.74	74.00	20.26	Peak
2485.050	28.44	5.83	39.92	59.13	53.48	74.00	20.52	Peak

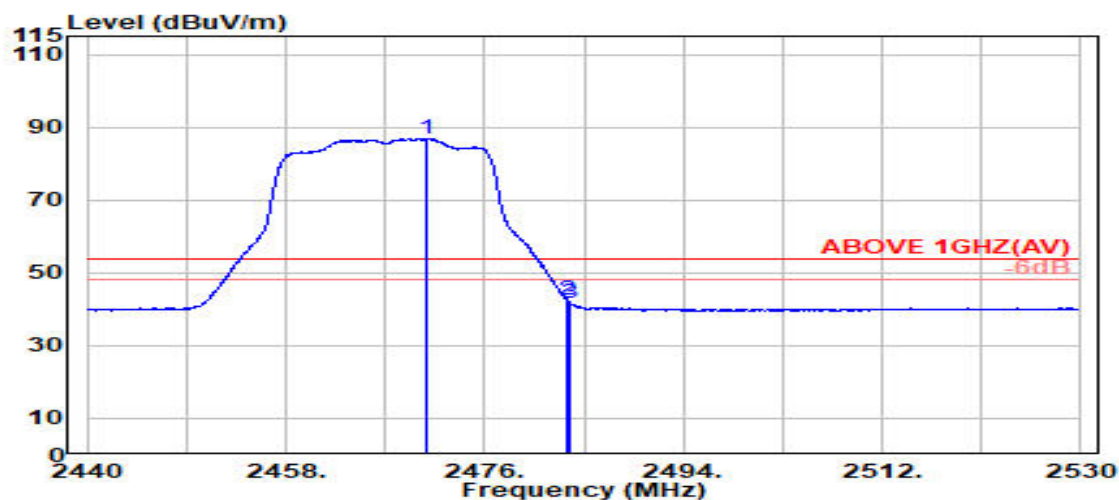

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.700	28.38	5.81	39.92	92.54	86.82	---	---	Average
2483.500	28.43	5.83	39.92	48.06	42.41	54.00	11.59	Average
2483.700	28.44	5.83	39.92	47.53	41.88	54.00	12.12	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

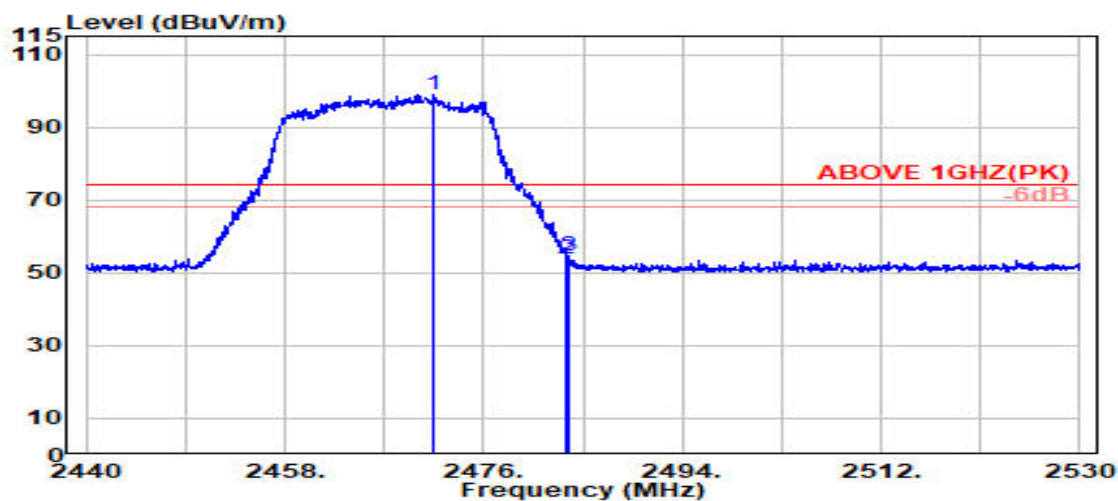

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.400	28.39	5.81	39.92	104.88	99.16	---	---	Peak
2483.500	28.43	5.83	39.92	59.51	53.85	74.00	20.15	Peak
2483.800	28.44	5.83	39.92	60.25	54.59	74.00	19.41	Peak

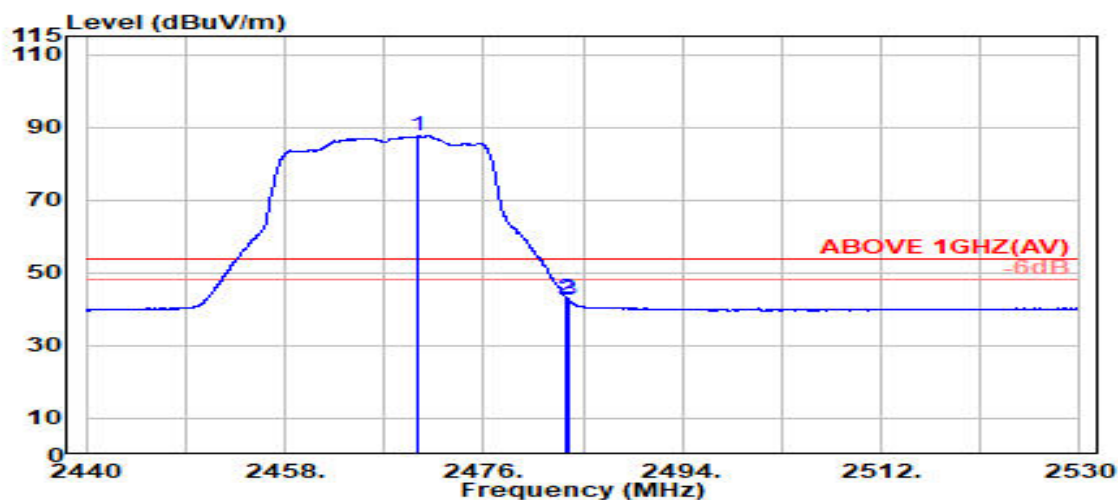

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.100	28.38	5.81	39.92	93.46	87.73	---	---	Average
2483.500	28.43	5.83	39.92	48.71	43.05	54.00	10.95	Average
2483.700	28.44	5.83	39.92	48.02	42.36	54.00	11.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

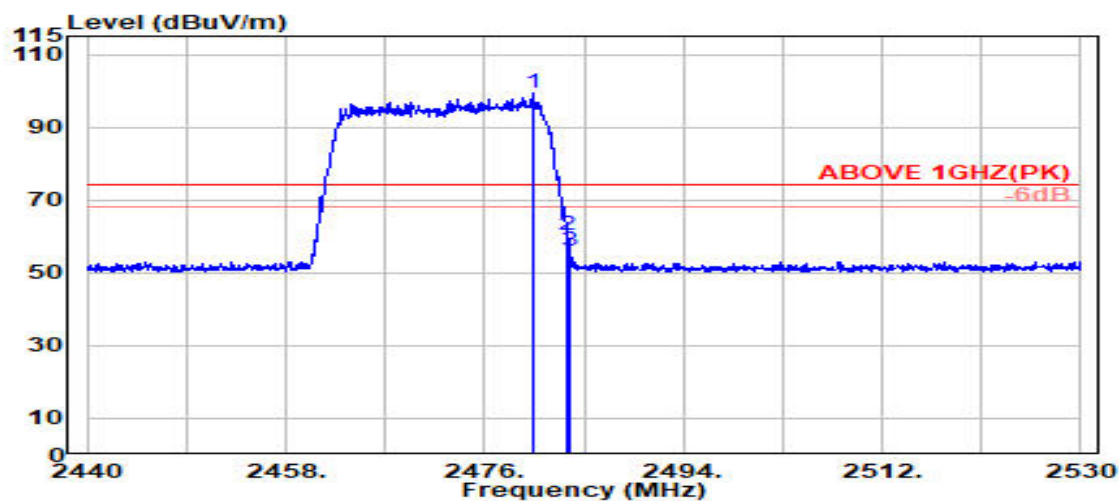

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.350	28.42	5.82	39.92	105.15	99.48	---	---	Peak
2483.500	28.43	5.83	39.92	66.13	60.47	74.00	13.53	Peak
2483.750	28.44	5.83	39.92	61.76	56.10	74.00	17.90	Peak

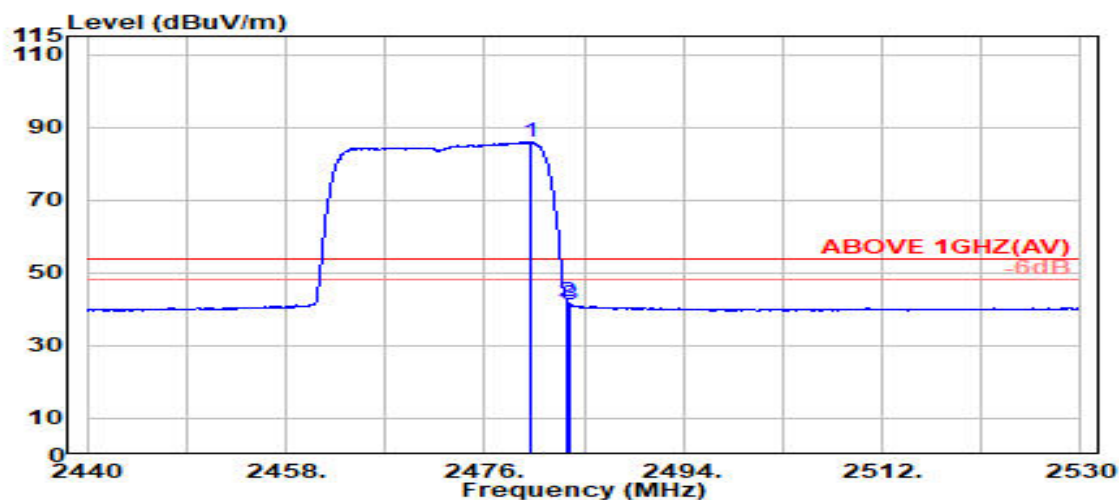

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.200	28.42	5.82	39.92	91.53	85.85	---	---	Average
2483.500	28.43	5.83	39.92	47.64	41.98	54.00	12.02	Average
2483.700	28.44	5.83	39.92	46.86	41.20	54.00	12.80	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

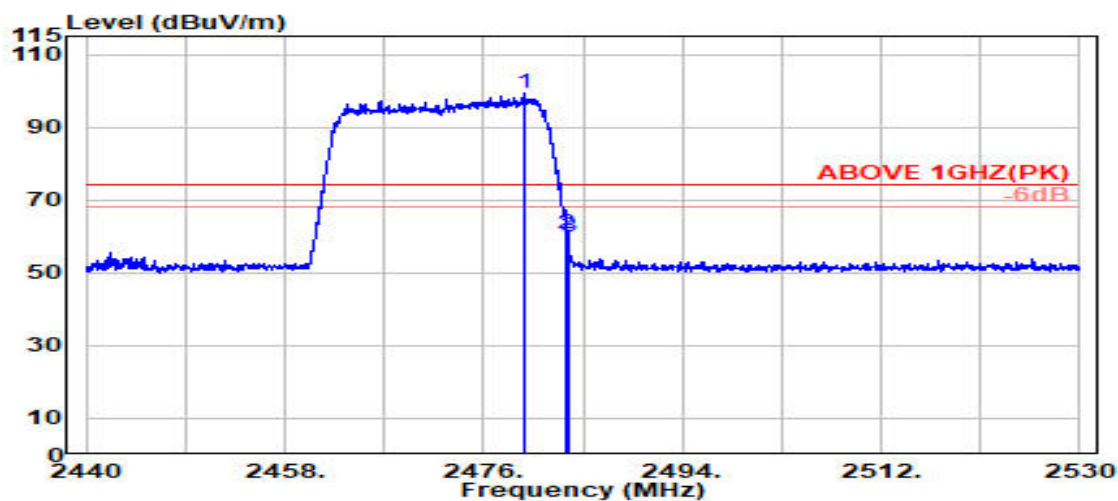

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.700	28.42	5.82	39.92	105.04	99.36	---	---	Peak
2483.500	28.43	5.83	39.92	66.38	60.72	74.00	13.28	Peak
2483.700	28.44	5.83	39.92	65.66	60.01	74.00	13.99	Peak

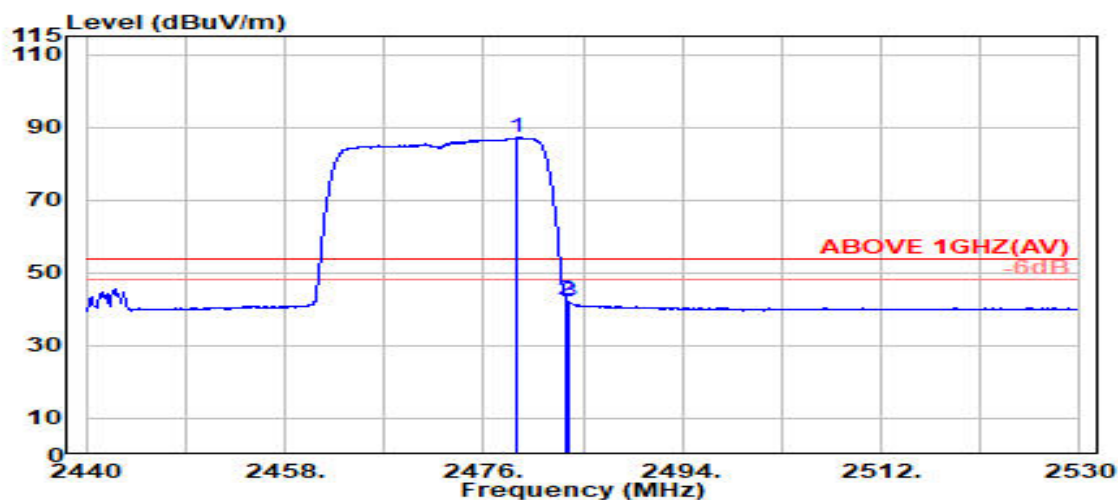

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	28.42	5.82	39.92	92.79	87.11	---	---	Average
2483.500	28.43	5.83	39.92	48.38	42.73	54.00	11.27	Average
2483.700	28.44	5.83	39.92	47.68	42.02	54.00	11.98	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

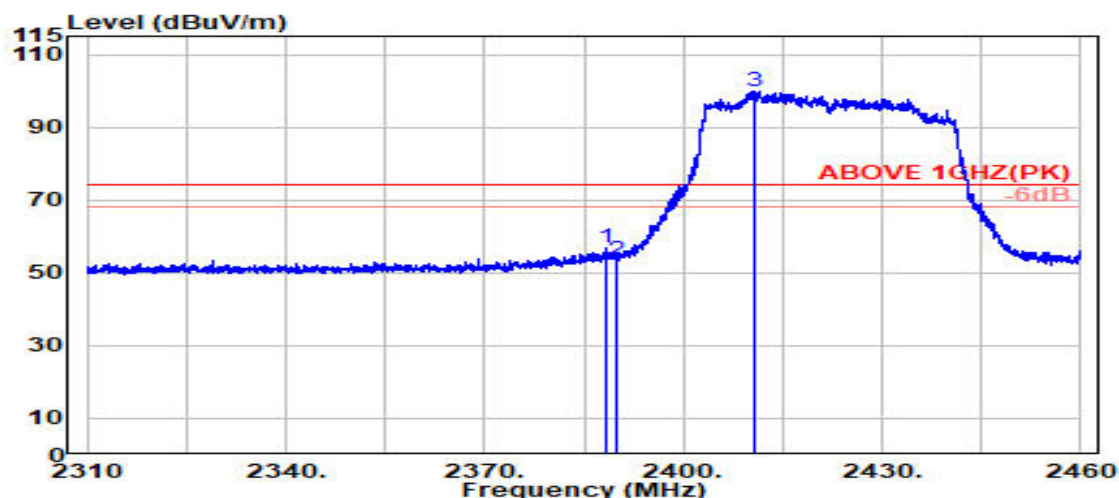

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.400	28.20	5.70	39.92	62.90	56.89	74.00	17.11	Peak
2389.800	28.20	5.70	39.92	59.59	53.58	74.00	20.42	Peak
@ 2410.700	28.22	5.73	39.92	105.96	99.99	---	---	Peak

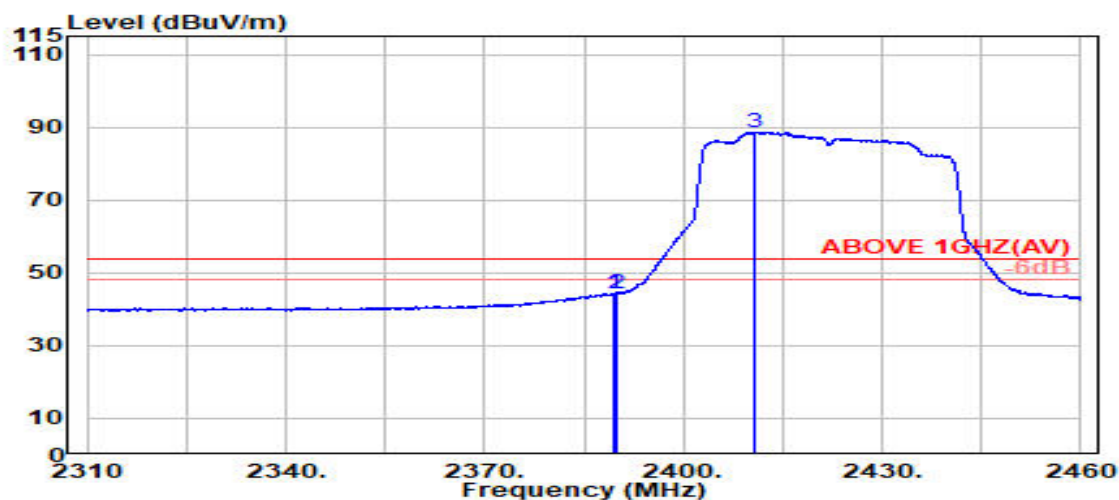

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	5.70	39.92	50.26	44.25	54.00	9.75	Average
2389.800	28.20	5.70	39.92	50.08	44.06	54.00	9.94	Average
@ 2410.850	28.22	5.73	39.92	94.65	88.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

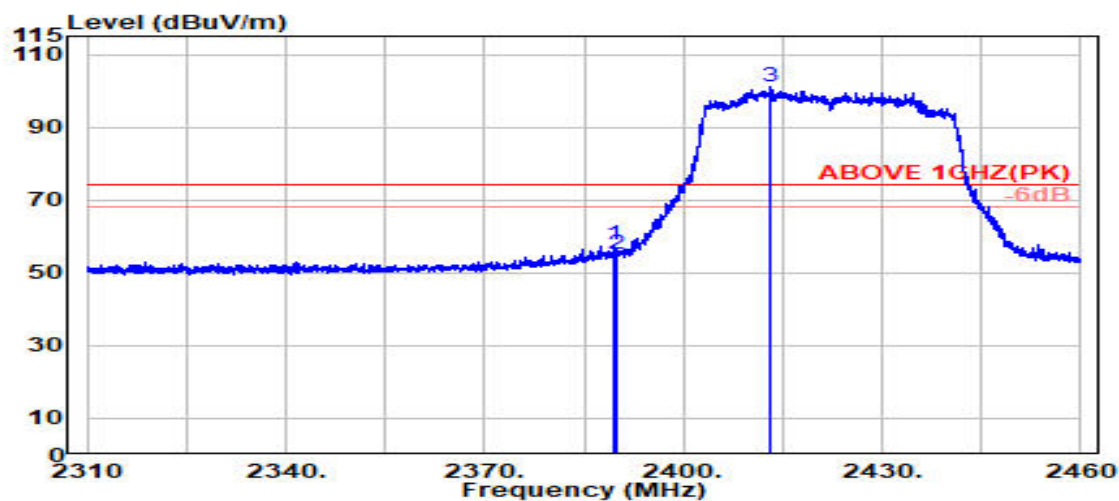

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	5.70	39.92	63.61	57.60	74.00	16.40	Peak
2389.800	28.20	5.70	39.92	60.99	54.98	74.00	19.02	Peak
@ 2413.250	28.23	5.73	39.92	107.21	101.25	---	---	Peak

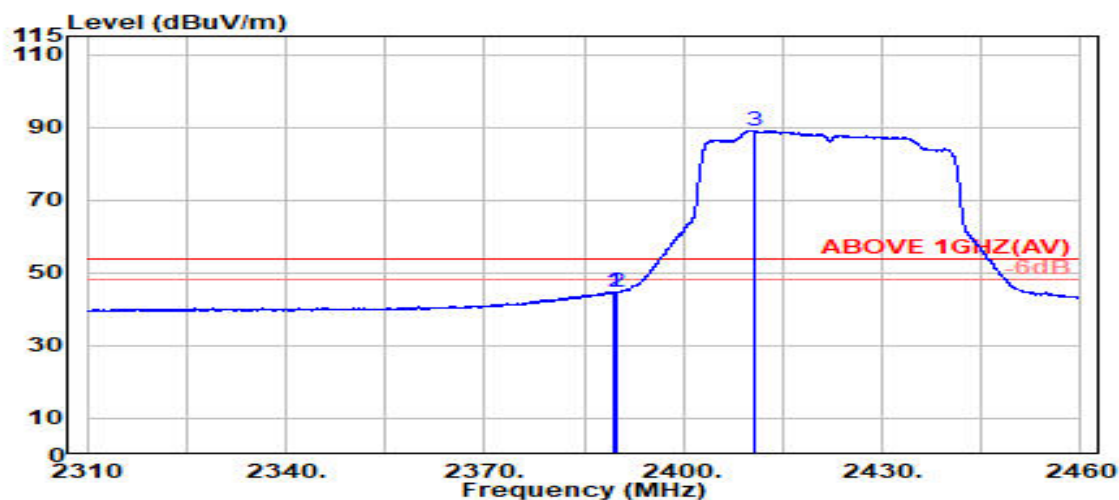

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.20	5.70	39.92	50.68	44.66	54.00	9.34	Average
2389.800	28.20	5.70	39.92	50.54	44.52	54.00	9.48	Average
@ 2410.800	28.22	5.73	39.92	94.98	89.01	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

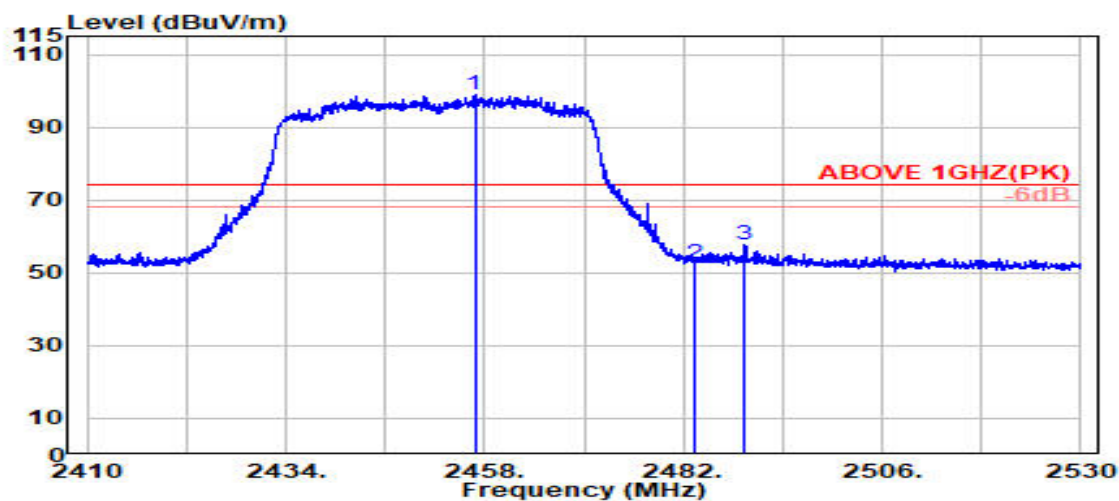

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.800	28.33	5.79	39.92	104.74	98.94	---	---	Peak
2483.500	28.43	5.83	39.92	58.37	52.71	74.00	21.29	Peak
2489.450	28.46	5.84	39.92	63.18	57.55	74.00	16.45	Peak

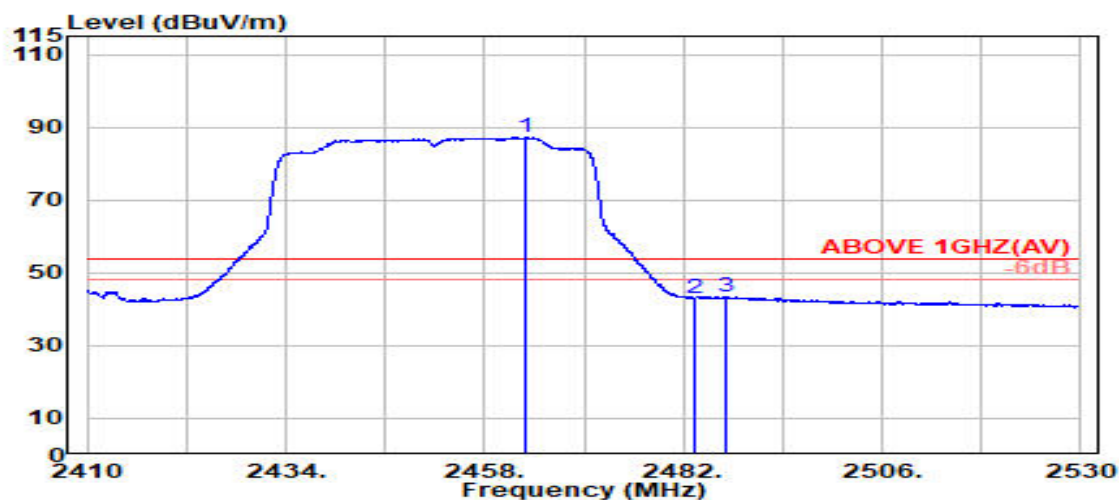

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.050	28.35	5.80	39.92	93.10	87.34	---	---	Average
2483.500	28.43	5.83	39.92	48.73	43.08	54.00	10.92	Average
2487.250	28.45	5.83	39.92	49.13	43.50	54.00	10.50	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

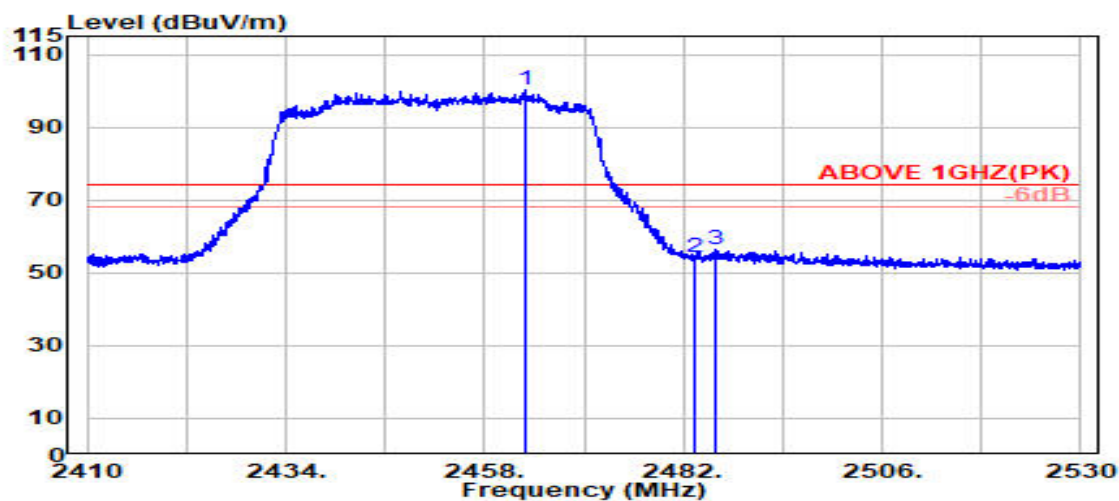

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.950	28.35	5.80	39.92	105.92	100.16	---	---	Peak
2483.500	28.43	5.83	39.92	59.80	54.14	74.00	19.86	Peak
2485.900	28.44	5.83	39.92	61.94	56.30	74.00	17.70	Peak

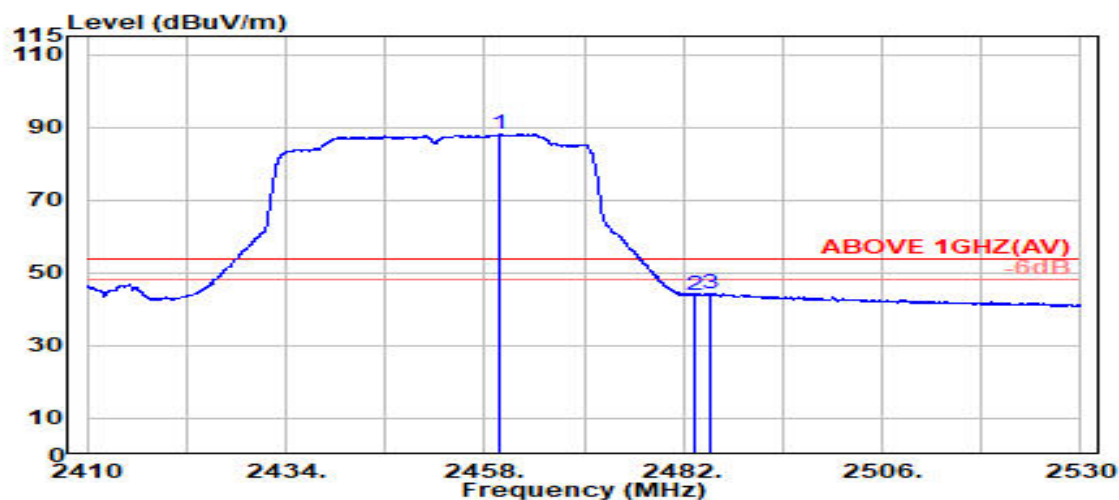

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.850	28.34	5.80	39.92	93.87	88.09	---	---	Average
2483.500	28.43	5.83	39.92	49.64	43.98	54.00	10.02	Average
2485.300	28.44	5.83	39.92	49.96	44.31	54.00	9.69	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

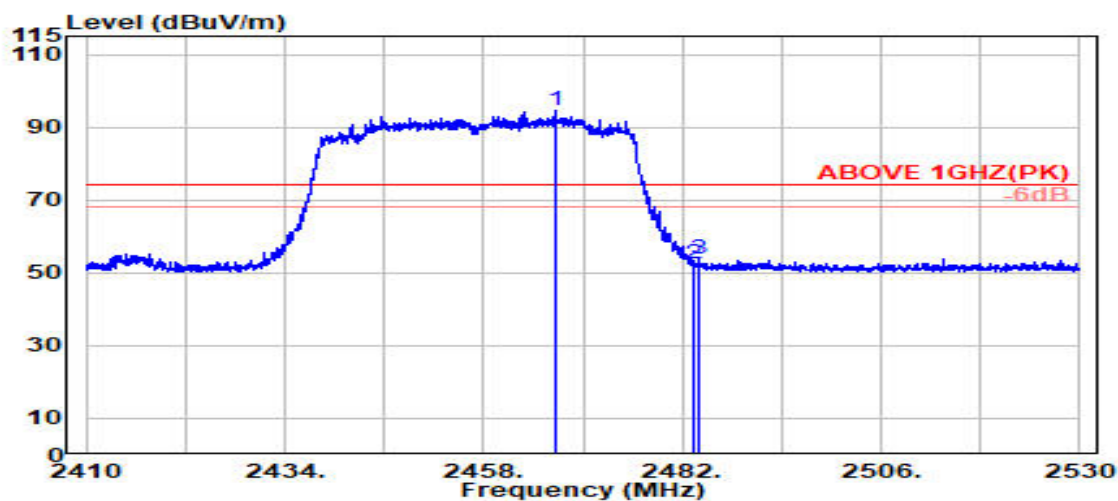

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.800	28.37	5.81	39.92	100.46	94.72	---	---	Peak
2483.500	28.43	5.83	39.92	58.08	52.42	74.00	21.58	Peak
2484.000	28.44	5.83	39.92	59.65	53.99	74.00	20.01	Peak

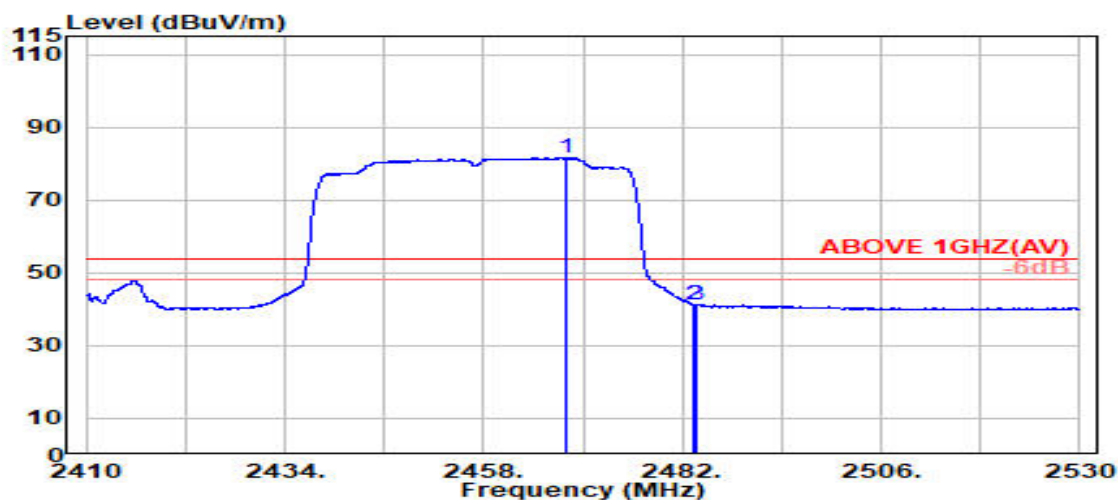

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.000	28.37	5.81	39.92	87.31	81.57	---	---	Average
2483.500	28.43	5.83	39.92	46.98	41.33	54.00	12.67	Average
2483.750	28.44	5.83	39.92	47.01	41.35	54.00	12.65	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

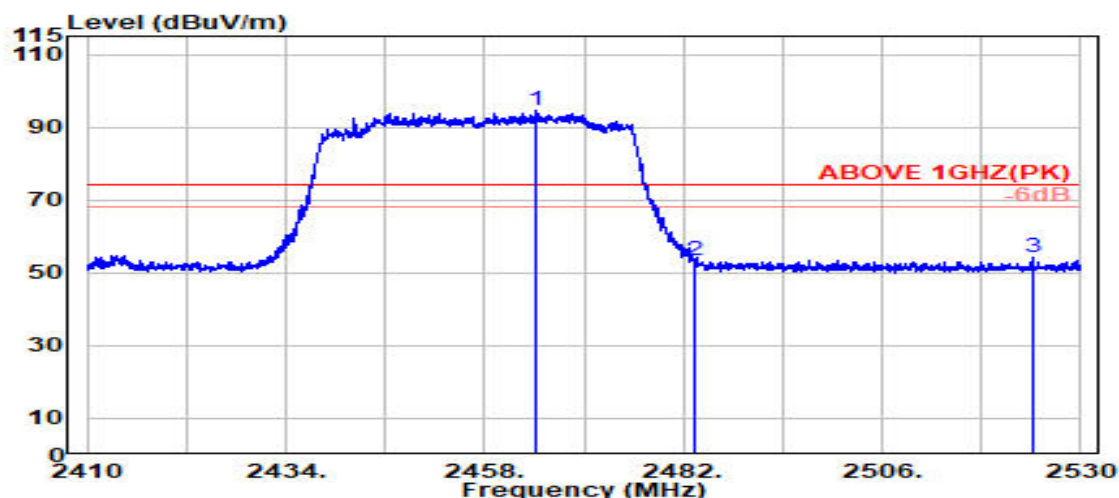

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.300	28.36	5.80	39.92	100.32	94.56	---	---	Peak
2483.500	28.43	5.83	39.92	59.10	53.44	74.00	20.56	Peak
2524.150	28.60	5.88	39.92	59.50	54.05	74.00	19.95	Peak



Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.150	28.37	5.81	39.92	88.59	82.85	---	---	Average
2483.500	28.43	5.83	39.92	47.48	41.82	54.00	12.18	Average
2483.700	28.44	5.83	39.92	47.47	41.82	54.00	12.18	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

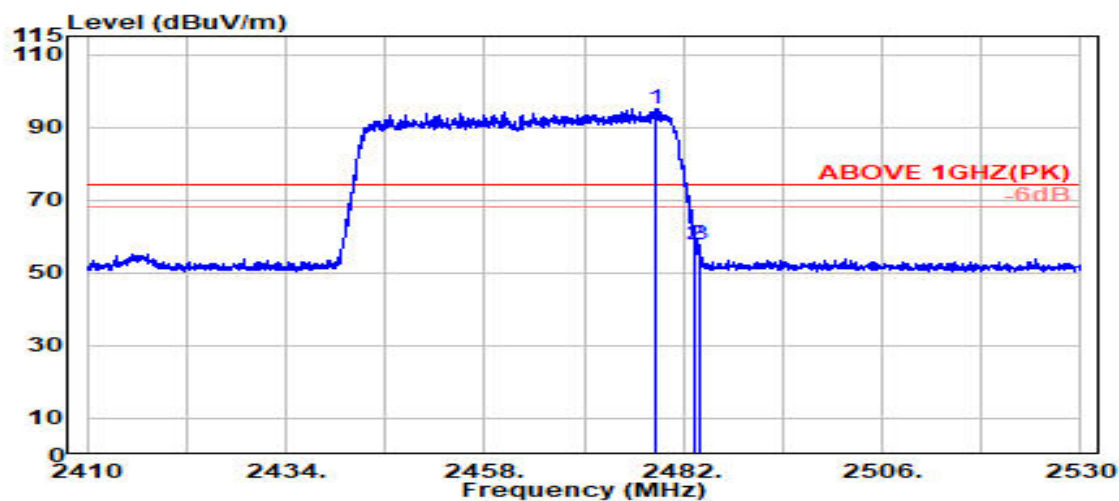

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.650	28.42	5.82	39.92	100.73	95.05	---	---	Peak
2483.500	28.43	5.83	39.92	63.48	57.83	74.00	16.17	Peak
2483.850	28.44	5.83	39.92	63.34	57.69	74.00	16.31	Peak

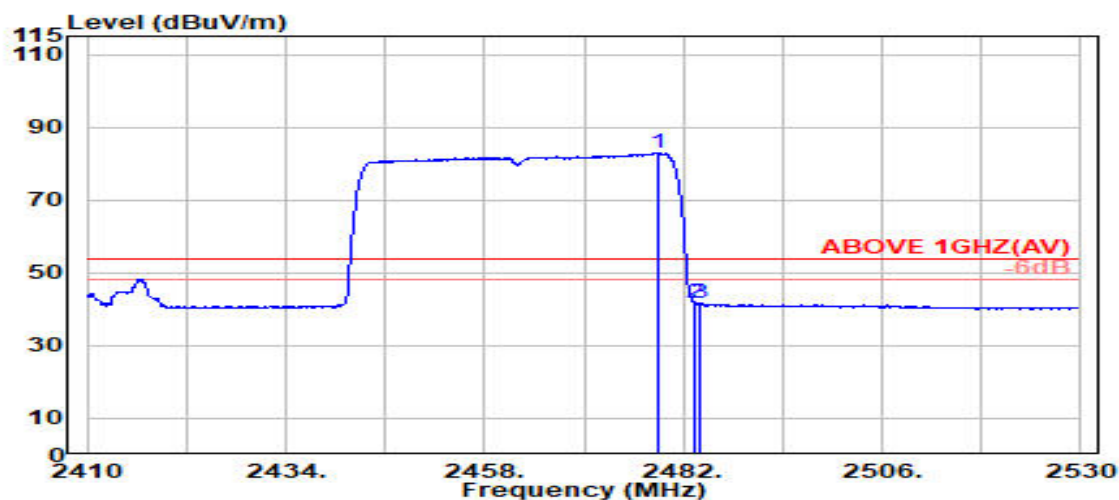

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	28.42	5.82	39.92	88.53	82.85	---	---	Average
2483.500	28.43	5.83	39.92	47.24	41.58	54.00	12.42	Average
2483.900	28.44	5.83	39.92	47.23	41.58	54.00	12.42	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

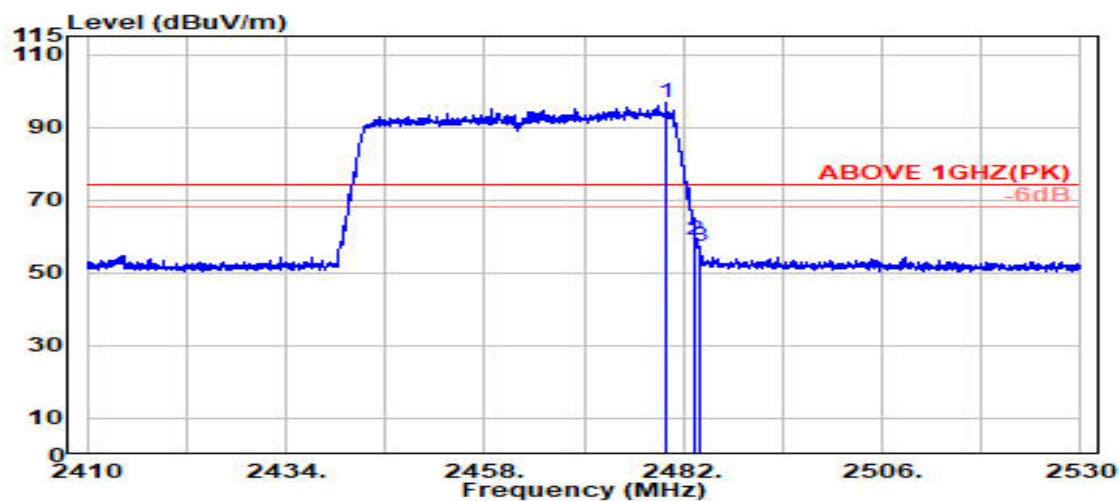

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.800	28.42	5.82	39.92	102.26	96.58	---	---	Peak
2483.500	28.43	5.83	39.92	64.59	58.93	74.00	15.07	Peak
2483.950	28.44	5.83	39.92	63.07	57.42	74.00	16.58	Peak

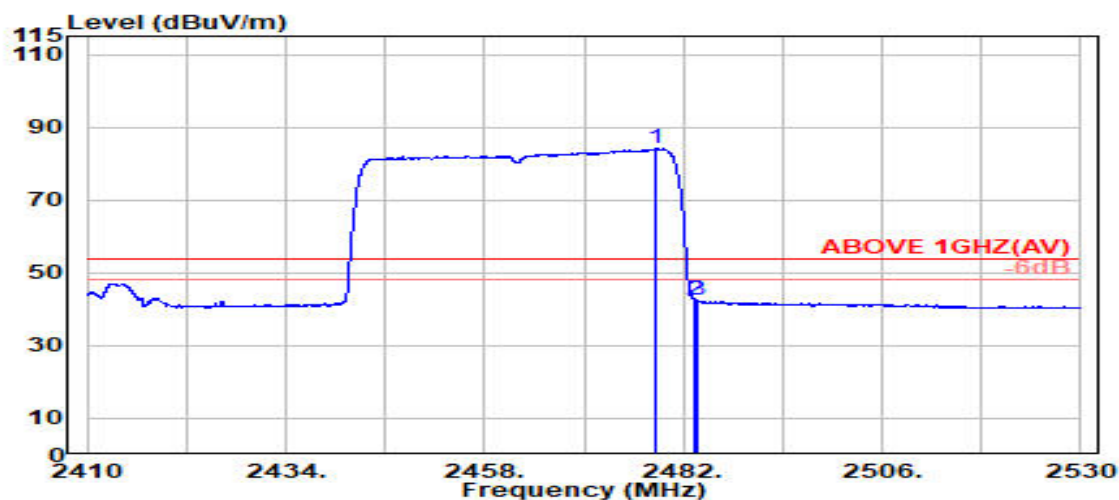

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.800	28.42	5.82	39.92	89.79	84.10	---	---	Average
2483.500	28.43	5.83	39.92	48.04	42.38	54.00	11.62	Average
2483.700	28.44	5.83	39.92	48.13	42.48	54.00	11.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

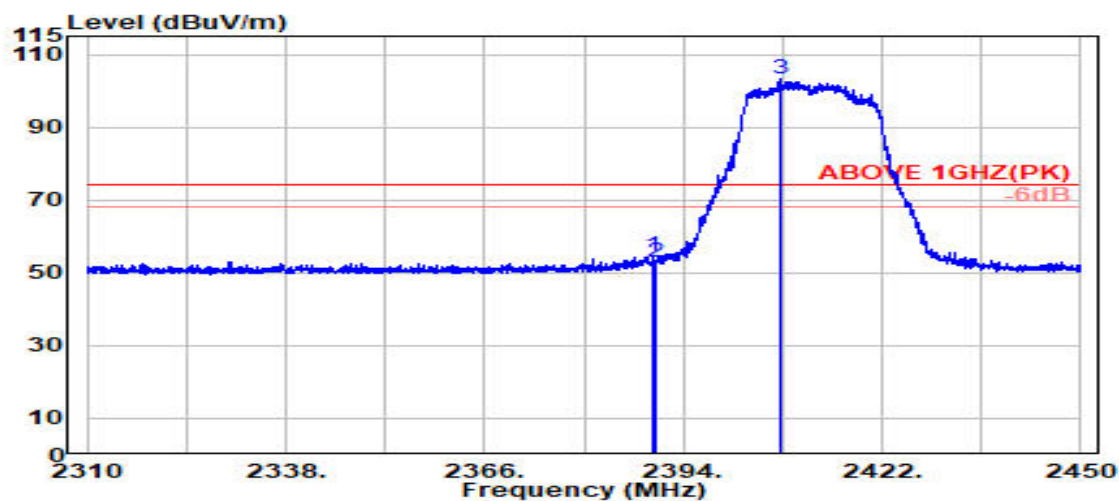

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.92	60.61	54.60	74.00	19.40	Peak
2390.000	28.20	5.70	39.92	59.05	53.03	74.00	20.97	Peak
@ 2407.600	28.22	5.73	39.92	109.16	103.19	---	---	Peak

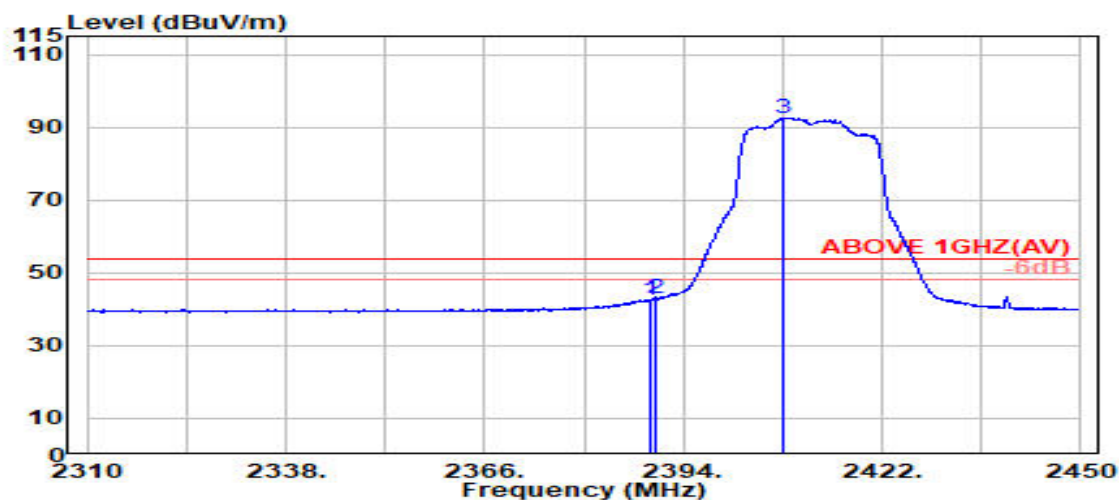

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.20	5.70	39.92	48.60	42.59	54.00	11.41	Average
2390.000	28.20	5.70	39.92	48.88	42.86	54.00	11.14	Average
@ 2407.900	28.22	5.73	39.92	98.49	92.51	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

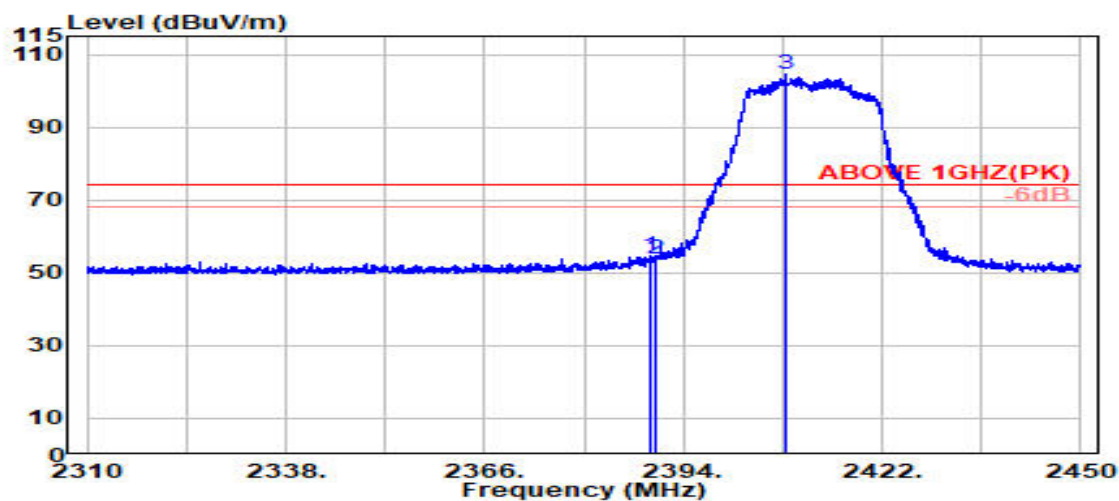

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	5.70	39.92	60.68	54.66	74.00	19.34	Peak
2390.000	28.20	5.70	39.92	59.89	53.87	74.00	20.13	Peak
@ 2408.450	28.22	5.73	39.92	110.48	104.51	---	---	Peak

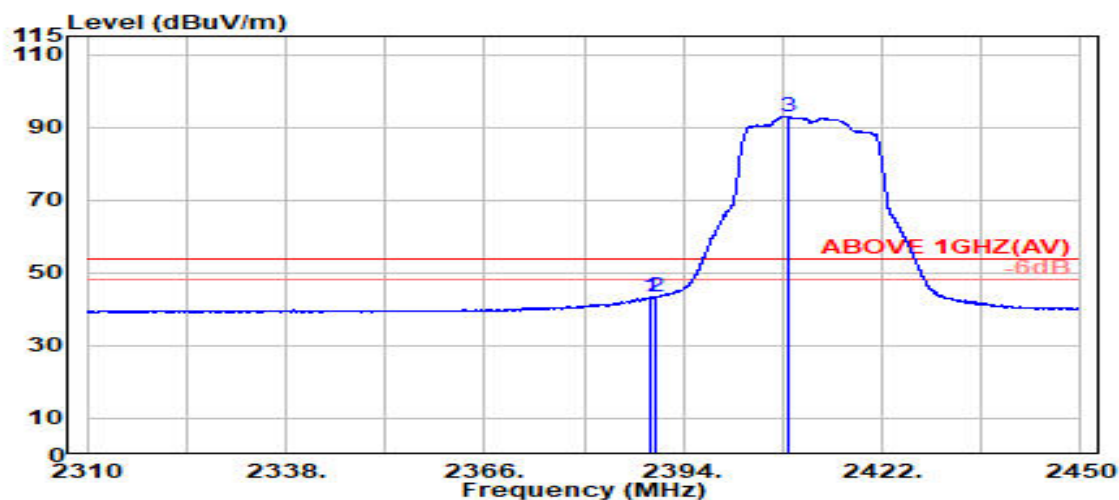

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	5.70	39.92	49.37	43.35	54.00	10.65	Average
2390.000	28.20	5.70	39.92	49.24	43.22	54.00	10.78	Average
@ 2408.750	28.22	5.73	39.92	98.95	92.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2417MHz
------	----------------	-----------	------------

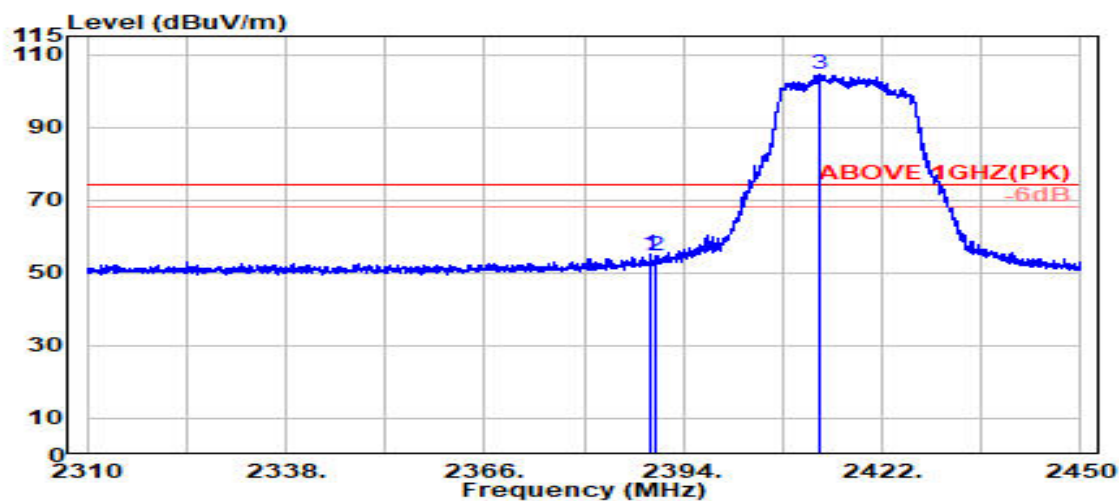

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.20	5.70	39.92	61.23	55.21	74.00	18.79	Peak
2390.000	28.20	5.70	39.92	60.83	54.82	74.00	19.18	Peak
@ 2413.200	28.23	5.73	39.92	110.49	104.54	---	---	Peak

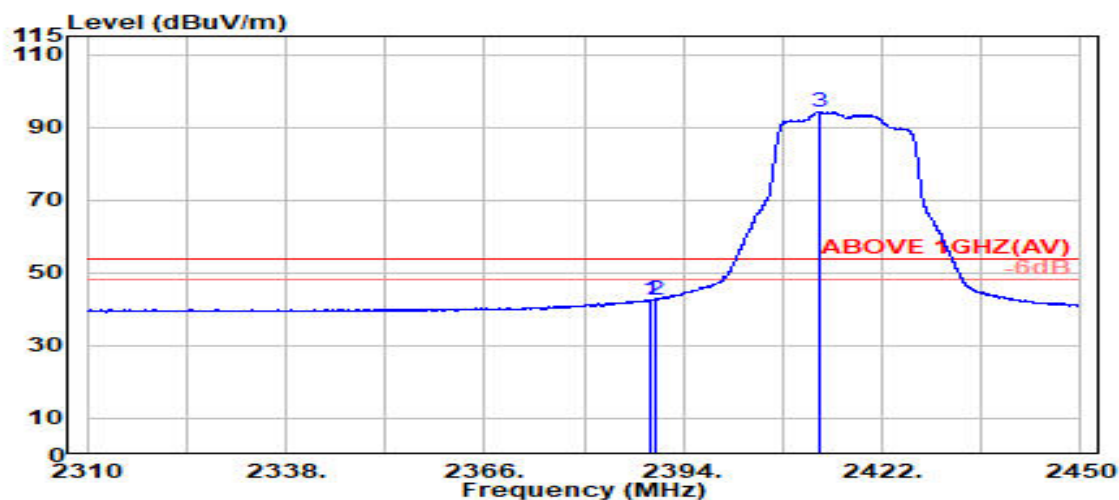

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.20	5.70	39.92	48.69	42.68	54.00	11.32	Average
2390.000	28.20	5.70	39.92	48.59	42.57	54.00	11.43	Average
@ 2413.100	28.23	5.73	39.92	100.16	94.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2417MHz
------	----------------	-----------	------------

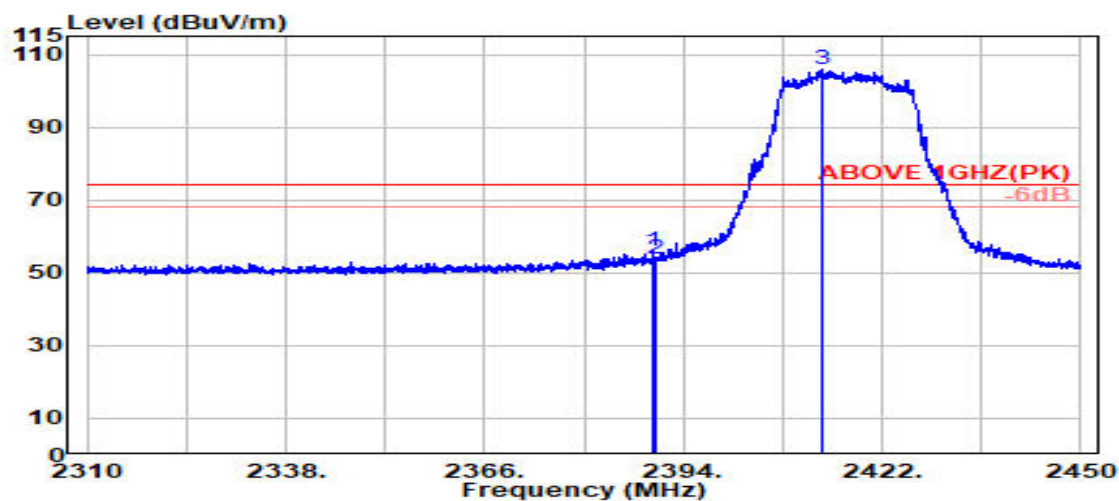

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.92	62.17	56.15	74.00	17.85	Peak
2390.000	28.20	5.70	39.92	59.64	53.62	74.00	20.38	Peak
@ 2413.400	28.23	5.73	39.92	111.66	105.71	---	---	Peak

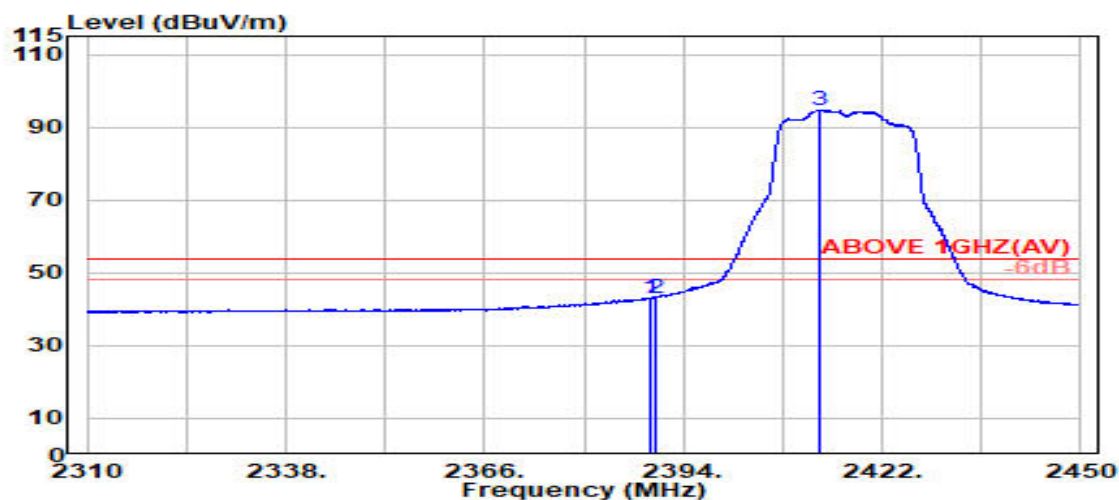

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	5.70	39.92	49.18	43.17	54.00	10.83	Average
2390.000	28.20	5.70	39.92	49.03	43.01	54.00	10.99	Average
@ 2413.300	28.23	5.73	39.92	100.74	94.79	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2457MHz
------	----------------	-----------	------------

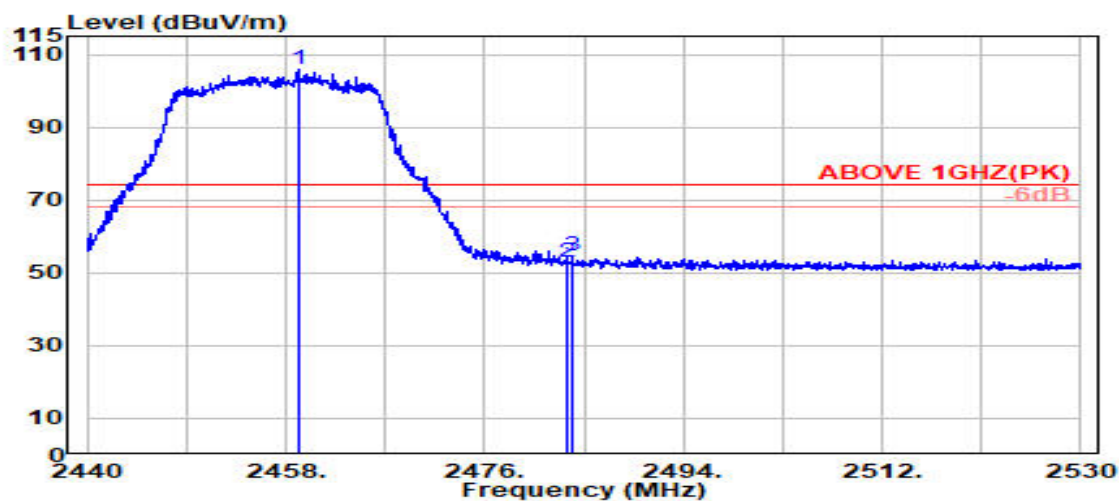

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.150	28.34	5.80	39.92	111.46	105.68	---	---	Peak
2483.500	28.43	5.83	39.92	58.46	52.81	74.00	21.19	Peak
2483.900	28.44	5.83	39.92	60.18	54.52	74.00	19.48	Peak

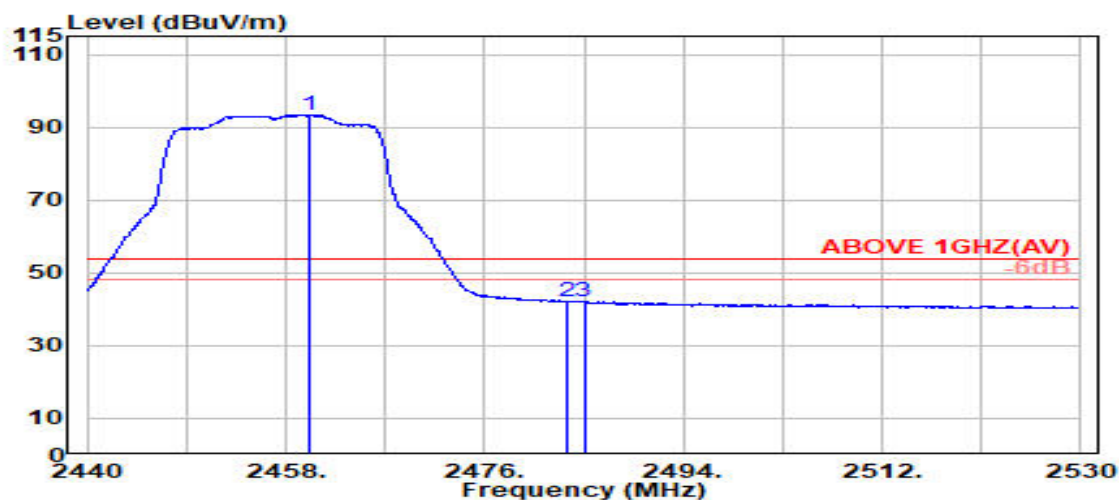

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.100	28.34	5.80	39.92	99.25	93.47	---	---	Average
2483.500	28.43	5.83	39.92	47.86	42.20	54.00	11.80	Average
2485.000	28.44	5.83	39.92	47.92	42.27	54.00	11.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2457MHz
------	----------------	-----------	------------

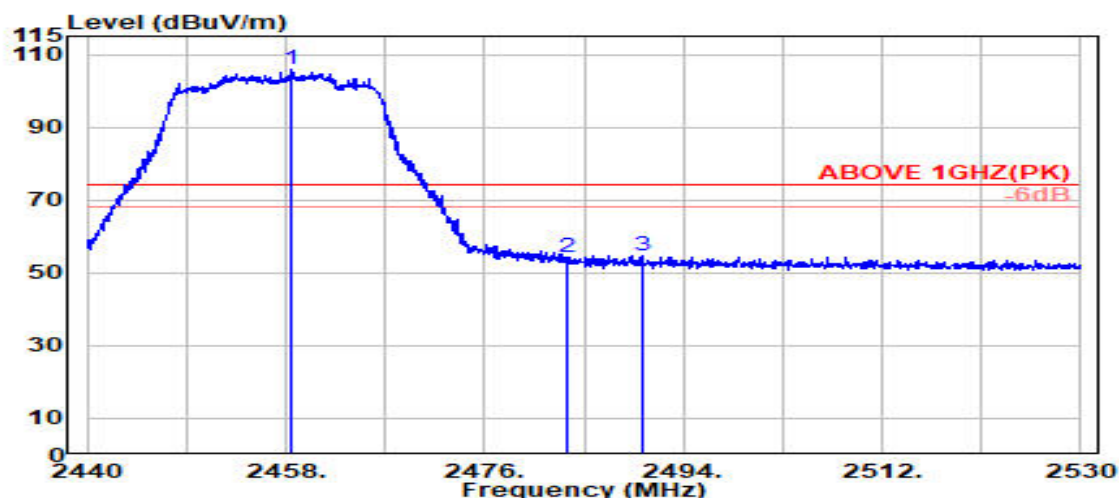

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.400	28.33	5.80	39.92	111.82	106.03	---	---	Peak
2483.500	28.43	5.83	39.92	59.97	54.31	74.00	19.69	Peak
2490.250	28.46	5.84	39.92	60.24	54.62	74.00	19.38	Peak

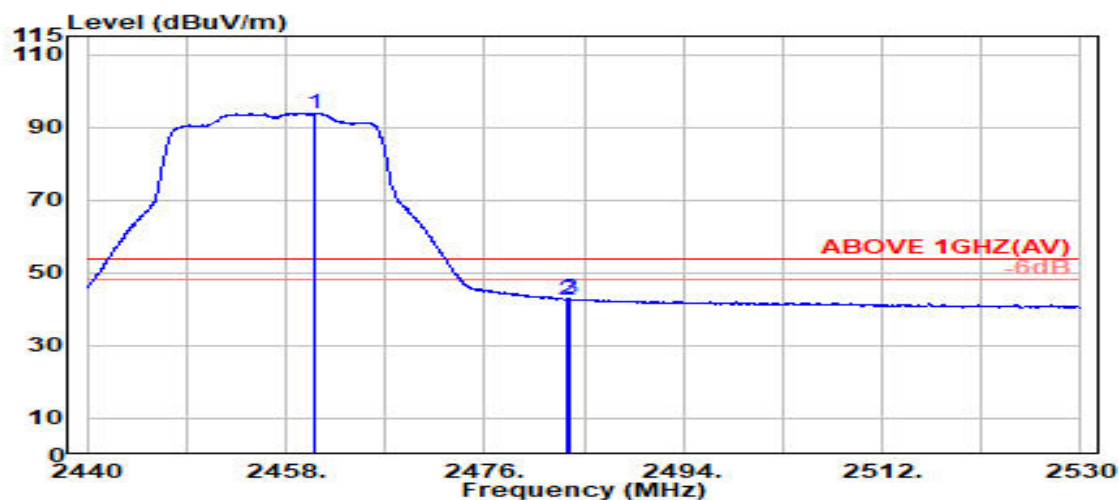

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.650	28.34	5.80	39.92	99.68	93.90	---	---	Average
2483.500	28.43	5.83	39.92	48.37	42.72	54.00	11.28	Average
2483.700	28.44	5.83	39.92	48.79	43.14	54.00	10.86	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

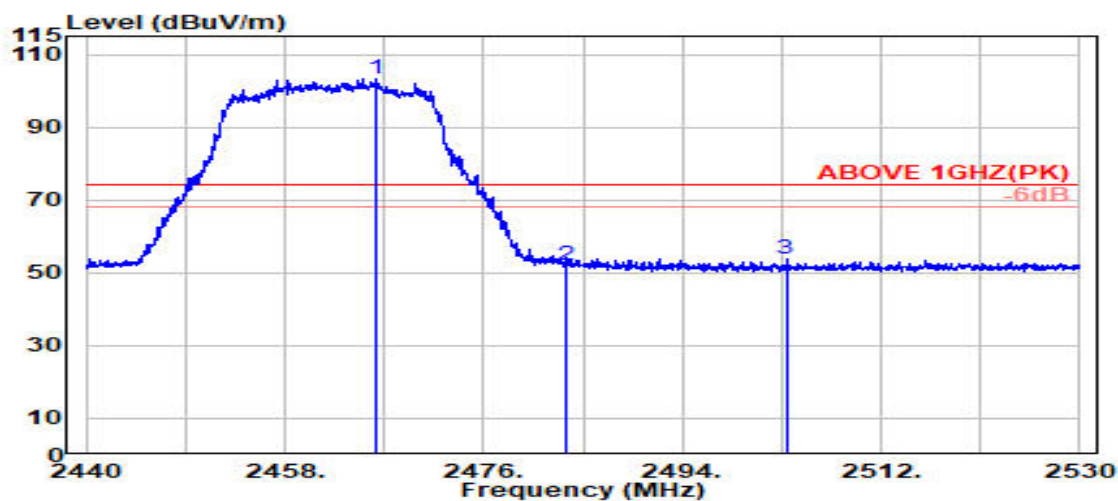

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.350	28.37	5.81	39.92	109.17	103.42	---	---	Peak
2483.500	28.43	5.83	39.92	57.73	52.08	74.00	21.92	Peak
2503.400	28.51	5.85	39.92	59.30	53.74	74.00	20.26	Peak

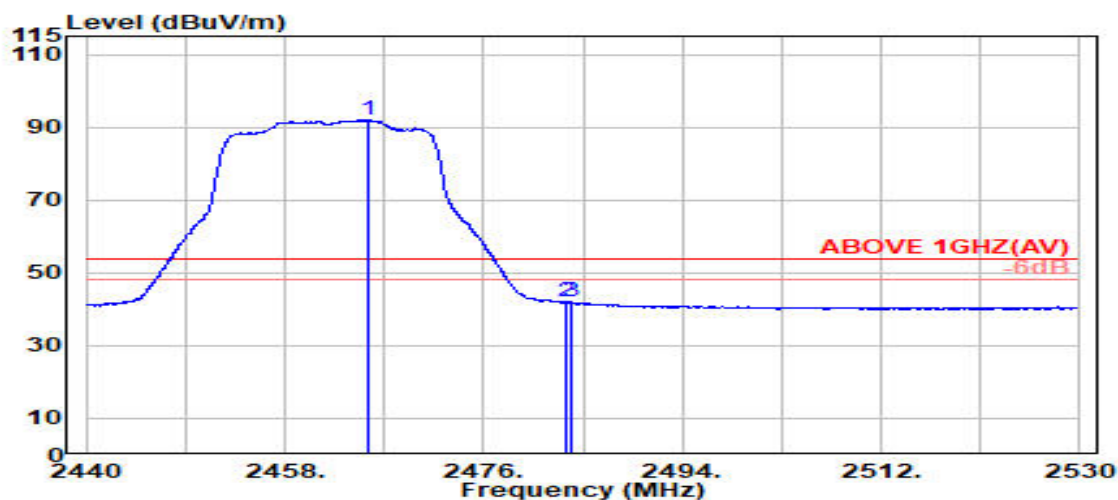


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.450	28.36	5.80	39.92	97.69	91.94	---	---	Average
2483.500	28.43	5.83	39.92	47.55	41.90	54.00	12.10	Average
2484.000	28.44	5.83	39.92	47.55	41.89	54.00	12.11	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

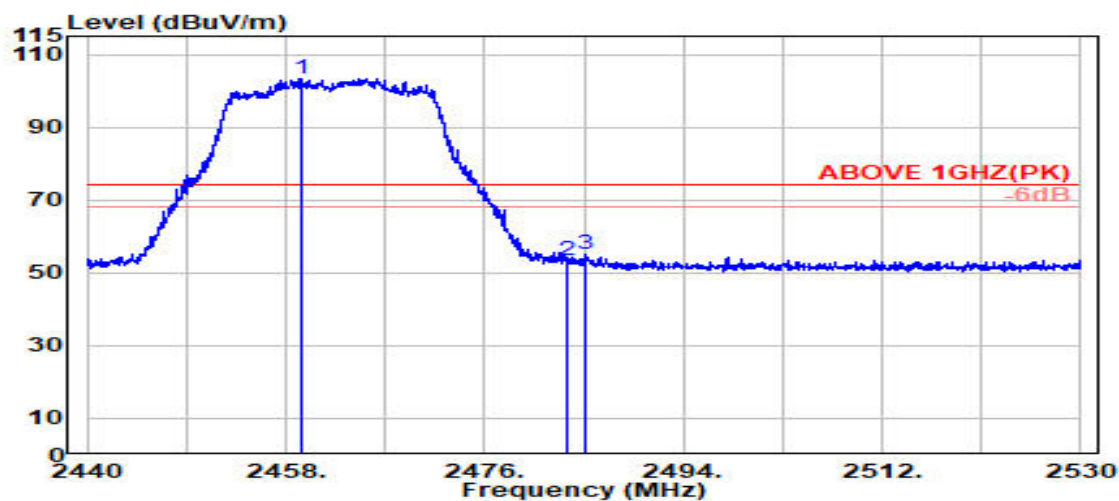

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	28.34	5.80	39.92	109.13	103.34	---	---	Peak
2483.500	28.43	5.83	39.92	58.90	53.24	74.00	20.76	Peak
2485.150	28.44	5.83	39.92	60.65	55.01	74.00	18.99	Peak

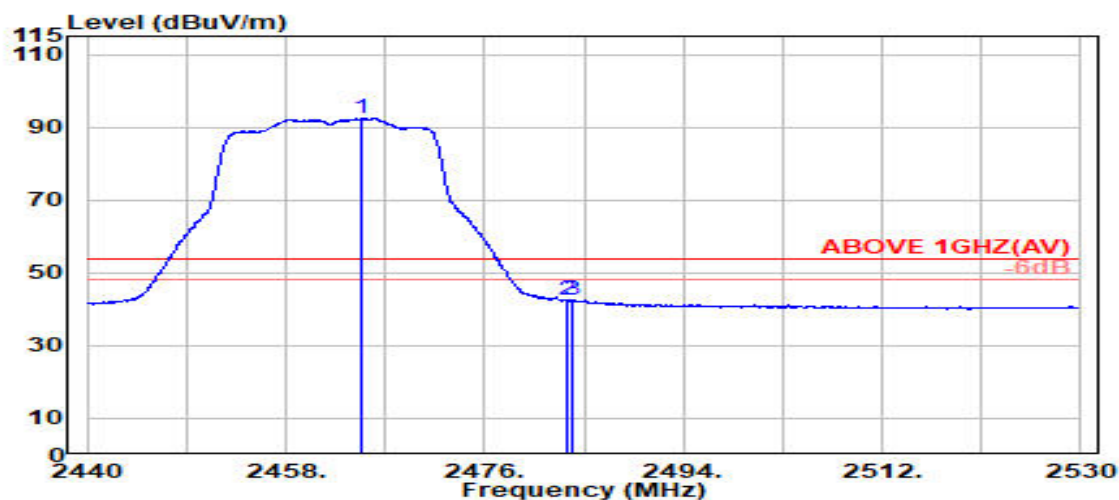

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.950	28.36	5.80	39.92	98.23	92.47	---	---	Average
2483.500	28.43	5.83	39.92	48.02	42.36	54.00	11.64	Average
2483.950	28.44	5.83	39.92	48.23	42.58	54.00	11.42	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

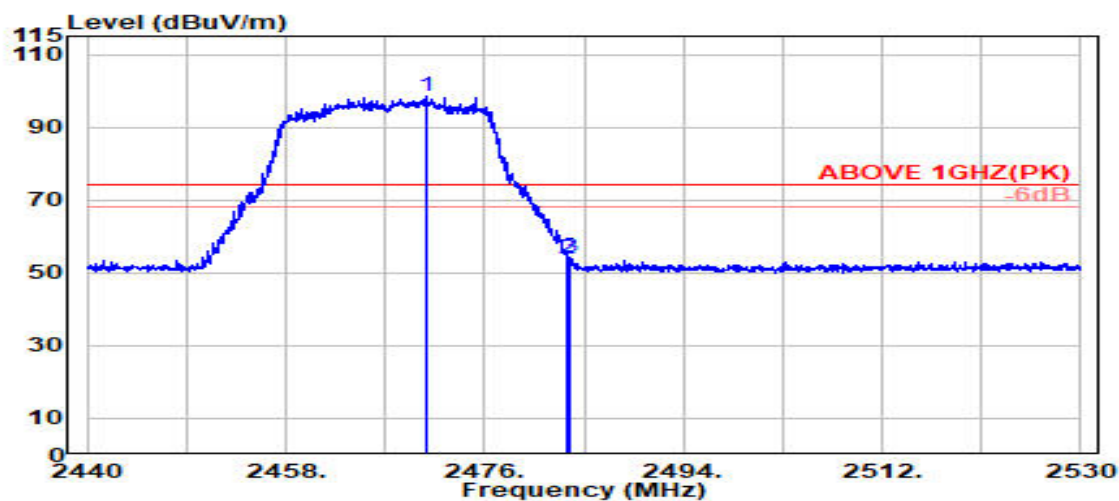

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.750	28.38	5.81	39.92	104.11	98.38	---	---	Peak
2483.500	28.43	5.83	39.92	59.25	53.60	74.00	20.40	Peak
2483.750	28.44	5.83	39.92	59.94	54.29	74.00	19.71	Peak

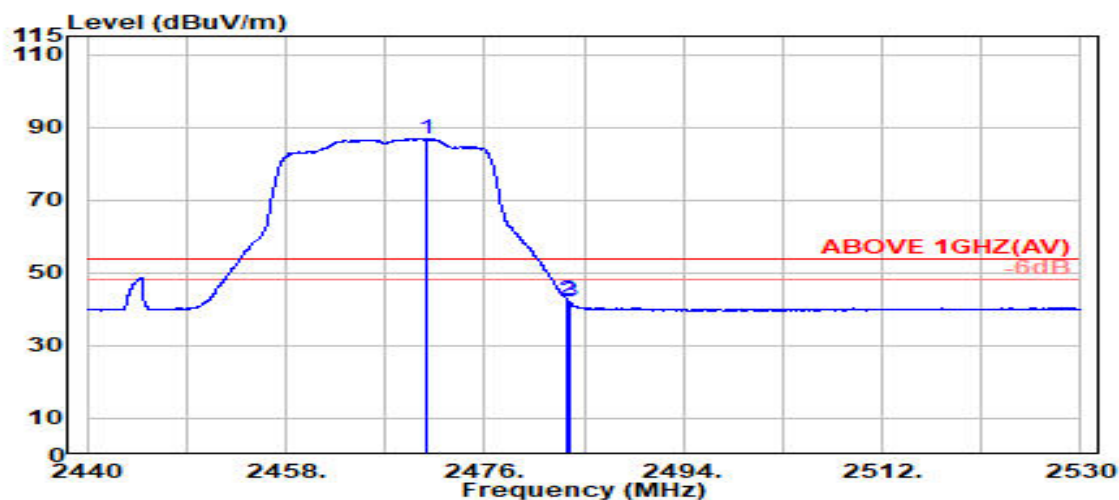

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.750	28.38	5.81	39.92	92.61	86.89	---	---	Average
2483.500	28.43	5.83	39.92	48.03	42.37	54.00	11.63	Average
2483.700	28.44	5.83	39.92	47.61	41.96	54.00	12.04	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

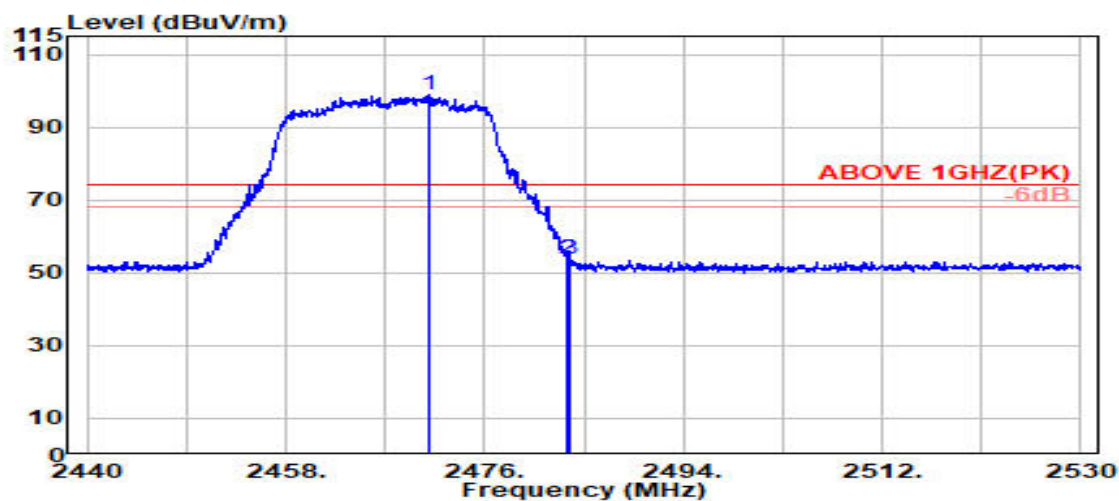

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.900	28.38	5.81	39.92	104.71	98.99	---	---	Peak
2483.500	28.43	5.83	39.92	59.64	53.98	74.00	20.02	Peak
2483.700	28.44	5.83	39.92	59.68	54.02	74.00	19.98	Peak

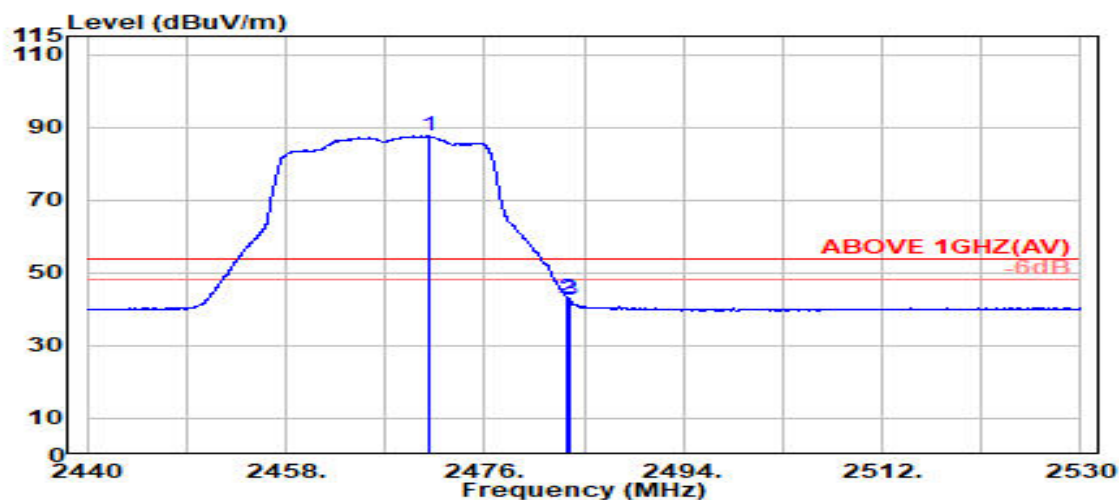

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.950	28.38	5.81	39.92	93.47	87.74	---	---	Average
2483.500	28.43	5.83	39.92	48.71	43.05	54.00	10.95	Average
2483.700	28.44	5.83	39.92	47.98	42.33	54.00	11.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

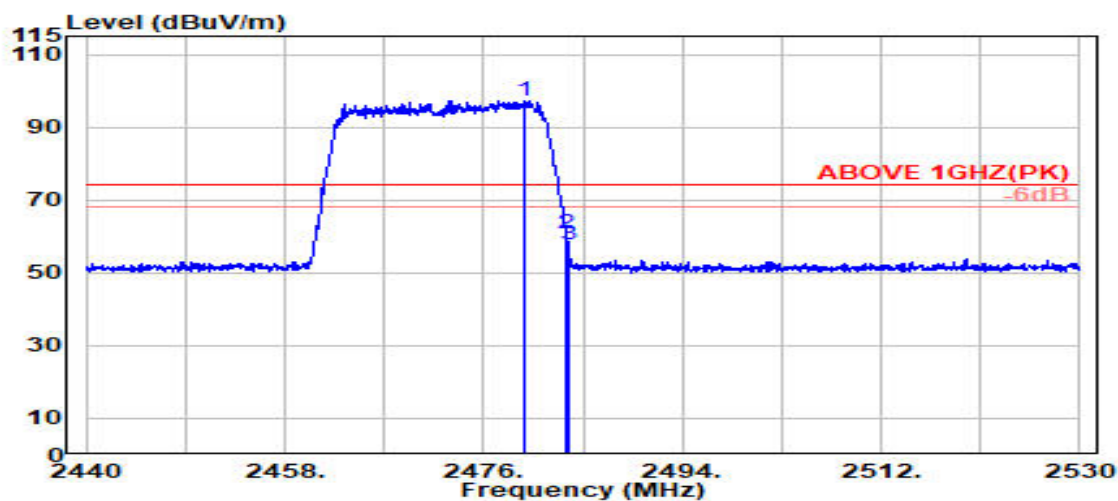

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.650	28.42	5.82	39.92	103.09	97.42	---	---	Peak
2483.500	28.43	5.83	39.92	66.29	60.63	74.00	13.37	Peak
2483.700	28.44	5.83	39.92	63.47	57.81	74.00	16.19	Peak

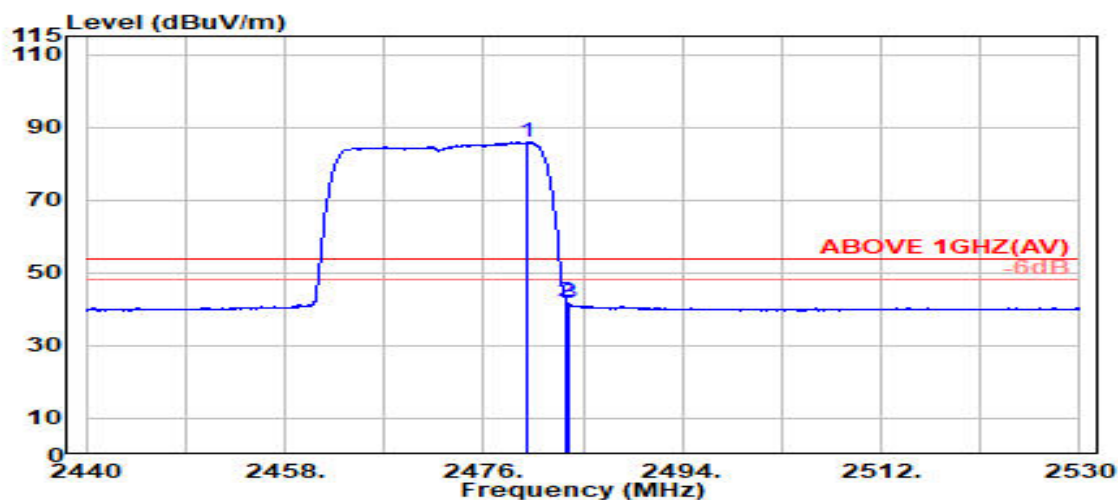

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.950	28.42	5.82	39.92	91.63	85.95	---	---	Average
2483.500	28.43	5.83	39.92	47.81	42.16	54.00	11.84	Average
2483.700	28.44	5.83	39.92	47.16	41.51	54.00	12.49	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

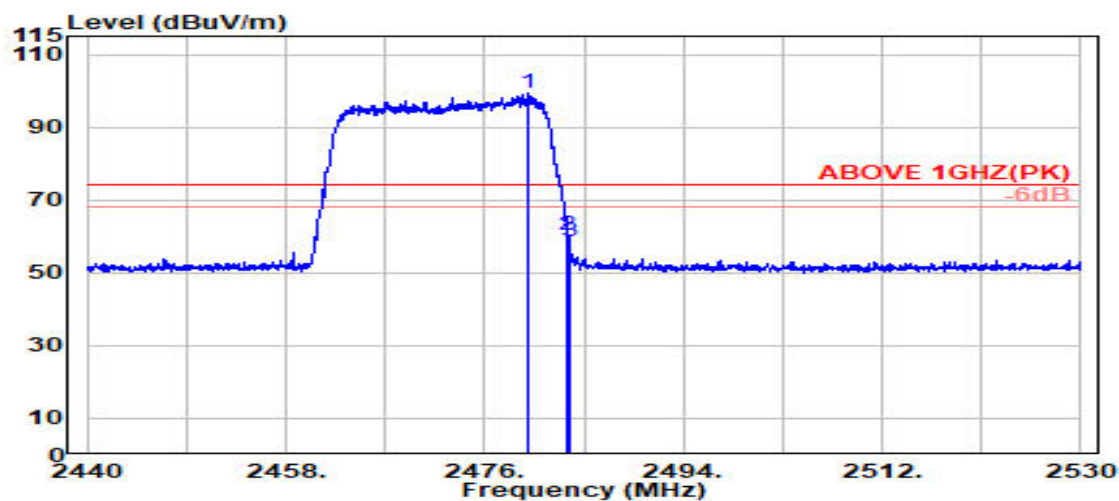

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.42	5.82	39.92	105.06	99.39	---	---	Peak
2483.500	28.43	5.83	39.92	65.98	60.32	74.00	13.68	Peak
2483.700	28.44	5.83	39.92	64.23	58.58	74.00	15.42	Peak

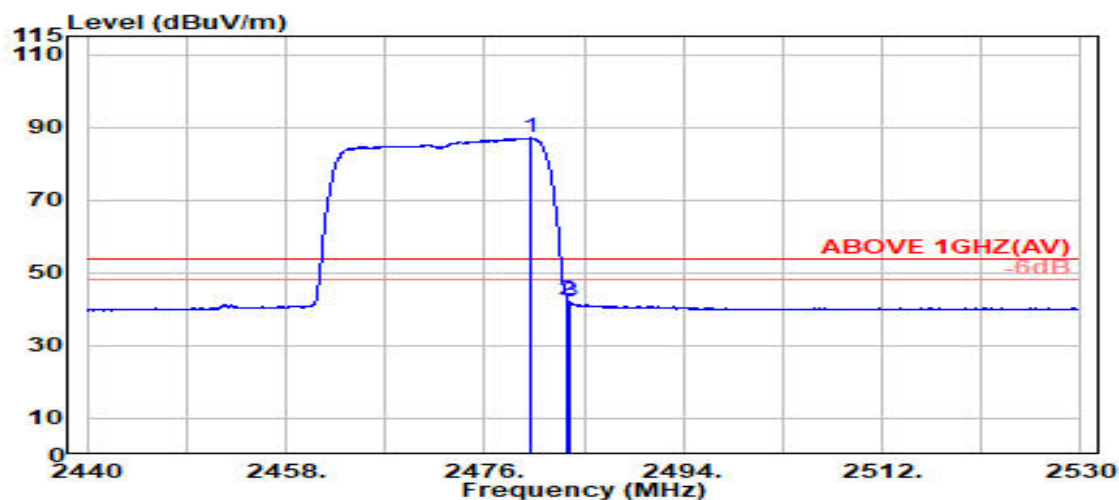

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.42	5.82	39.92	92.78	87.10	---	---	Average
2483.500	28.43	5.83	39.92	48.27	42.61	54.00	11.39	Average
2483.700	28.44	5.83	39.92	47.80	42.15	54.00	11.85	Average

Remark: The “@” means fundamental frequency, it is ignored in this section