



|            |                |
|------------|----------------|
| PART NO.   | 2ANE00024A     |
| Maker Code | KT-WIFI-KM2607 |
| DATE       | 2026. 06. 02   |
| Page       | 1 / 16         |

|                |                   |      |         |    |
|----------------|-------------------|------|---------|----|
| Model          | Type              | Rev. | KEITECH | IR |
| Outdoor WIFI-1 | Int F-PCB Antenna |      | LGIT    | A  |

## For specification certification Sheet

Customer : LGIT


Company : KEITECH

Product Name : Int F-PCB Antenna

Model : Outdoor WIFI-1

Customer P/N : 2ANE00024A

Maker Code : KT-WIFI-KM2607
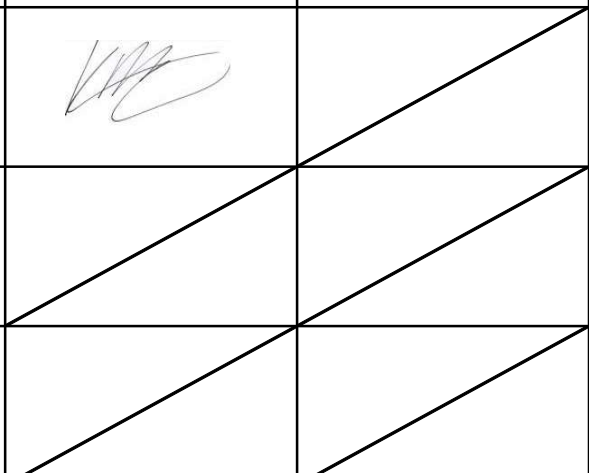
| Department | Investigation                                                                       | Verification                                                                         | Approval                                                                              |
|------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Circuit    |  |  |  |
| Machine    |                                                                                     |                                                                                      |  |
| Safety     |                                                                                     |                                                                                      |  |



**KEITECH Co., LTD**  
1312ho 80,Jomaru-ro 385beon-gil  
Bucheon-si,Gyeonggi-do, Korea  
Tel) +82 70-8670-6980 Fax) +82 2-6442-7314




|            |                |
|------------|----------------|
| PART NO.   | 2ANE00024A     |
| Maker Code | KT-WIFI-KM2607 |
| DATE       | 2026. 06. 02   |
| Page       | 2 / 16         |

|                |                   |      |         |    |
|----------------|-------------------|------|---------|----|
| Model          | Type              | Rev. | KEITECH | IR |
| Outdoor WIFI-1 | Int F-PCB Antenna |      | LGIT    | A  |

## ► Contents ◀

|                                                     |         |
|-----------------------------------------------------|---------|
| <b>1. Revision History of Product Specification</b> | 03 / 16 |
| 1.1 History List of Approval Sheet                  | 03 / 16 |
| <b>2. Circuit Specification</b>                     | 04 / 16 |
| 2.1 Test Setting                                    | 04 / 16 |
| 2.1.1 Test Environment (Condition/Method)           | 04 / 16 |
| 2.2 Electrical Specification                        | 05 / 16 |
| 2.2.1 Electrical Spec. of Piece (With VSWR)         | 06 / 16 |
| 2.2.2 Passive Gain & 3D Pattern                     | 07 / 16 |
| <b>3. Mechanical Specification</b>                  | 08 / 16 |
| 3.1 Material Certificate                            | 08 / 16 |
| 3.2 Assy Drawing                                    | 09 / 16 |
| 3.3 Packing Spec                                    | 10 / 16 |
| <b>4. Quality Specification</b>                     | 11 / 16 |
| 4.1 Required Test (With Report)                     | 11 / 16 |
| 4.1.1 Apperance and Size DATA                       | 12 / 16 |
| 4.1.2 Thermal Shock                                 | 13 / 16 |
| 4.1.3 High humidity Storage                         | 14 / 16 |
| 4.1.4 High Temperature Storage                      | 15 / 16 |
| 4.1.5 Low Temperature Storage                       | 16 / 16 |

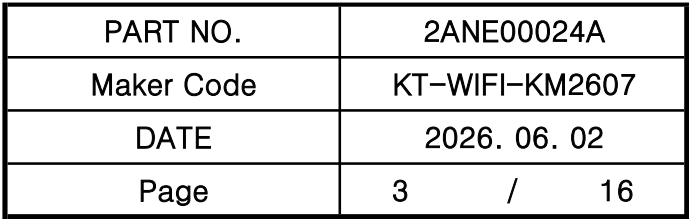

|                |                   |      |         |    |
|----------------|-------------------|------|---------|----|
| Model          | Type              | Rev. | KEITECH | IR |
| Outdoor WIFI-1 | Int F-PCB Antenna |      | LGIT    | A  |

## 1. Revision History of Product Specification

## 1.1 History List of Approval Sheet

[illegible]

|            |                |
|------------|----------------|
| PART NO.   | 2ANE00024A     |
| Maker Code | KT-WIFI-KM2607 |
| DATE       | 2026. 06. 02   |
| Page       | 4 / 16         |

|                |                   |      |         |    |
|----------------|-------------------|------|---------|----|
| Model          | Type              | Rev. | KEITECH | IR |
| Outdoor WIFI-1 | Int F-PCB Antenna |      | LGIT    | A  |

## 2. Circuit Specification

### 2.1 Test Setting

#### 2.1.1 Test Environment (Condition/Method)

##### ① VSWR

Step 1. Connect ANT port with cable included adaptor to port1 of Network analyzer.

Step 2. Point out markers on network analyzer display at target frequencies.

Step 3. Inspect VSWR


##### ② Radiation Pattern and Gain

Step 1. Calibrate chamber system for gain measurement using horn antenna.

At the same time set up software program for chamber system control.

Step 2. Change over from a horn antenna to measuring antenna on target positioner

Step 3. Start a software program for chamber system control & measuring.

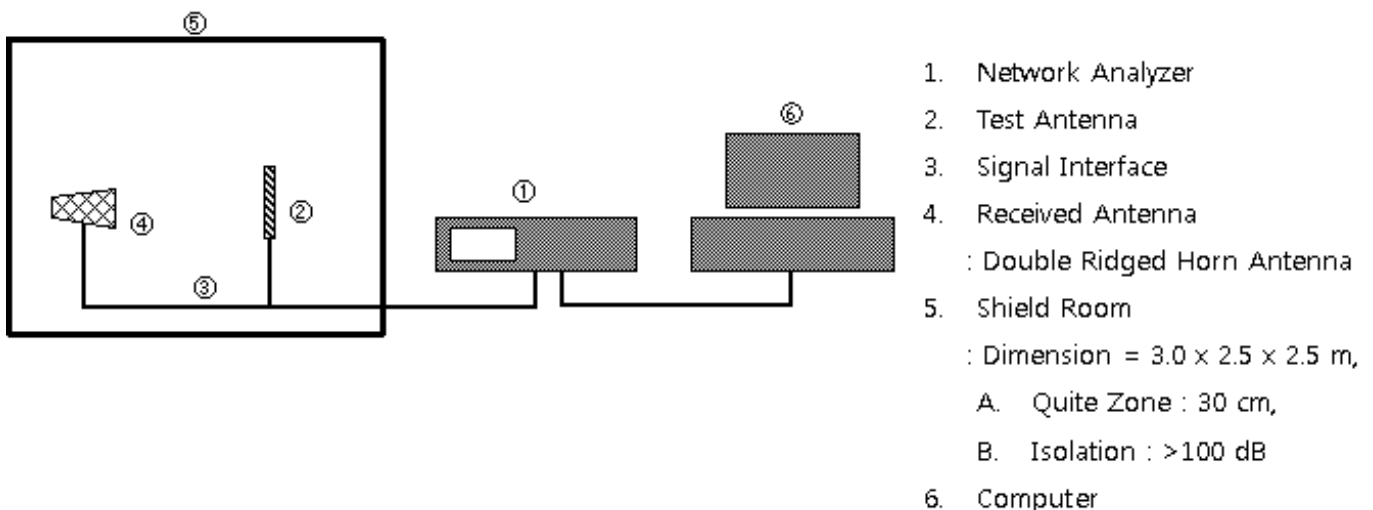



#### ●Antenna Gain Test Equipment Measurement system

Changwoo System

Calibration date: October 21, 2024

Network Analyzer  
Agilent 5071B

Calibration date: May 13, 2024

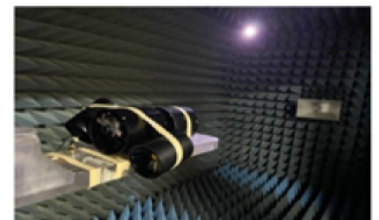



|            |                |
|------------|----------------|
| PART NO.   | 2ANE00024A     |
| Maker Code | KT-WIFI-KM2607 |
| DATE       | 2026. 06. 02   |
| Page       | 5 / 16         |

|                |                   |      |         |    |
|----------------|-------------------|------|---------|----|
| Model          | Type              | Rev. | KEITECH | IR |
| Outdoor WIFI-1 | Int F-PCB Antenna |      | LGIT    | A  |


## 2.2 Electrical Specification

| Outdoor WIFI-1  |                  |            |            |            |
|-----------------|------------------|------------|------------|------------|
| Frequency       | 2400MHz          | 2500MHz    | 5200MHz    | 5800MHz    |
| VSWR            | $\leq 2.5$       | $\leq 2.5$ | $\leq 3.0$ | $\leq 3.0$ |
| Peak Gain (dBi) | 1.0              | 1.0        | 1.0        | 1.0        |
| Directivity     | Omni-directional |            |            |            |
| Polarization    | Linear           |            |            |            |

|            |                |
|------------|----------------|
| PART NO.   | 2ANE00024A     |
| Maker Code | KT-WIFI-KM2607 |
| DATE       | 2026. 06. 02   |
| Page       | 6 / 16         |

|                |                   |      |         |    |
|----------------|-------------------|------|---------|----|
| Model          | Type              | Rev. | KEITECH | IR |
| Outdoor WIFI-1 | Int F-PCB Antenna |      | LGIT    | A  |


### 2.2.1 Electrical Spec. of Piece (With VSWR)

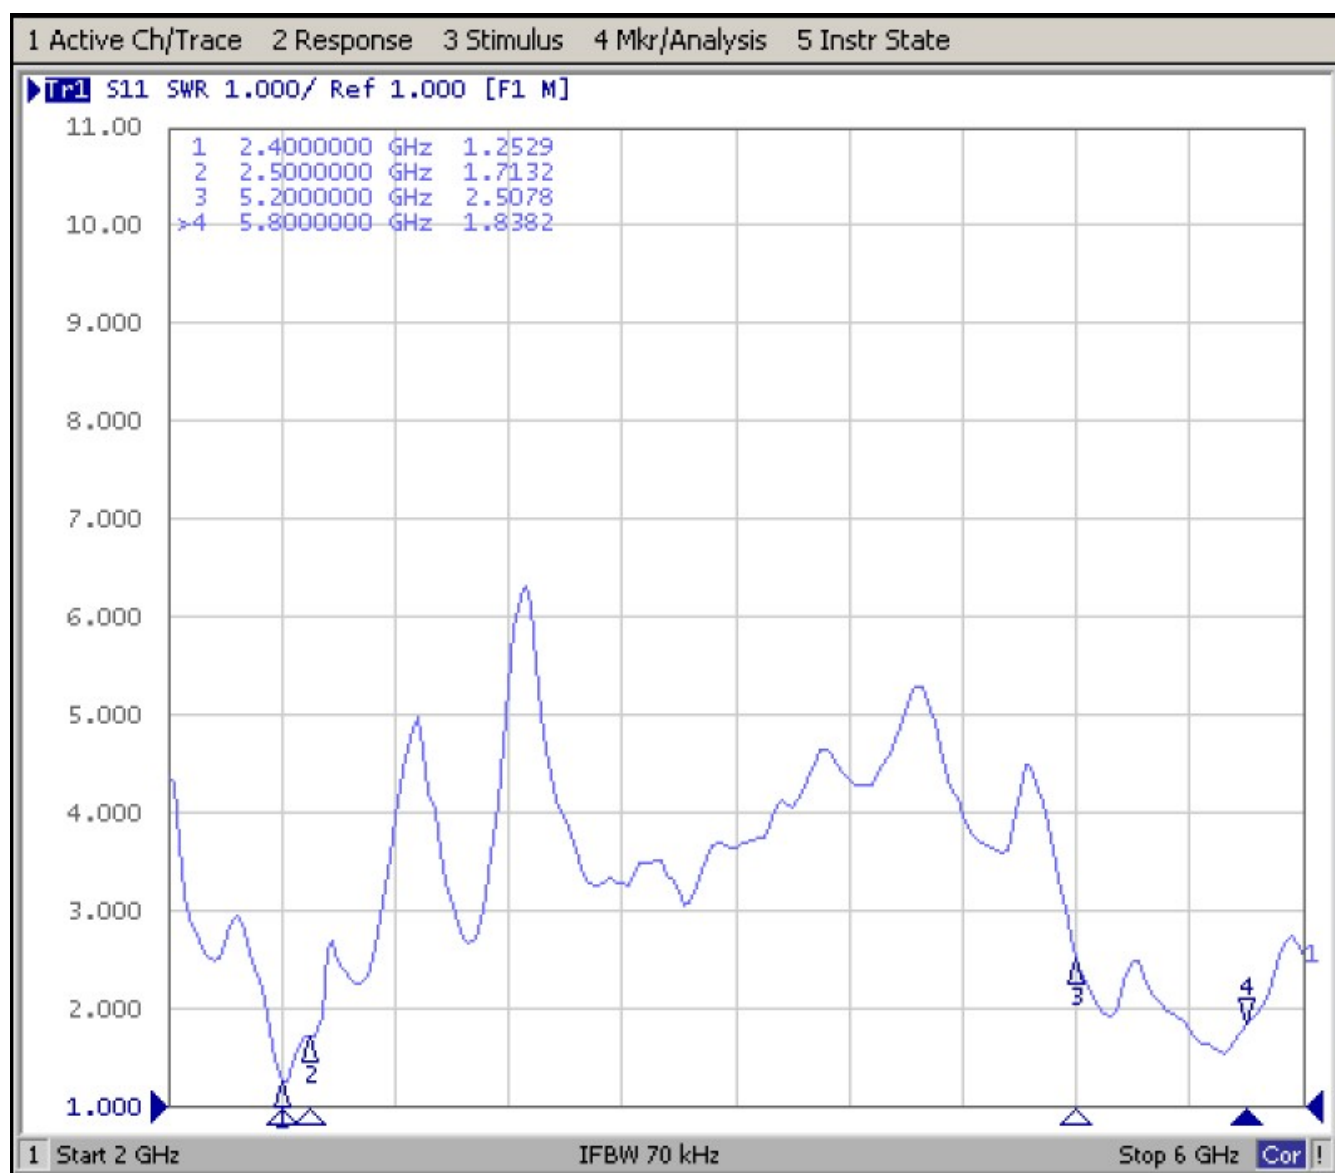

|            |                |
|------------|----------------|
| PART NO.   | 2ANE00024A     |
| Maker Code | KT-WIFI-KM2607 |
| DATE       | 2026. 06. 02   |
| Page       | 7 / 16         |

|                |                   |      |         |    |
|----------------|-------------------|------|---------|----|
| Model          | Type              | Rev. | KEITECH | IR |
| Outdoor WIFI-1 | Int F-PCB Antenna |      | LGIT    | A  |

## 2.2.2 Passive Gain & 3D Pattern

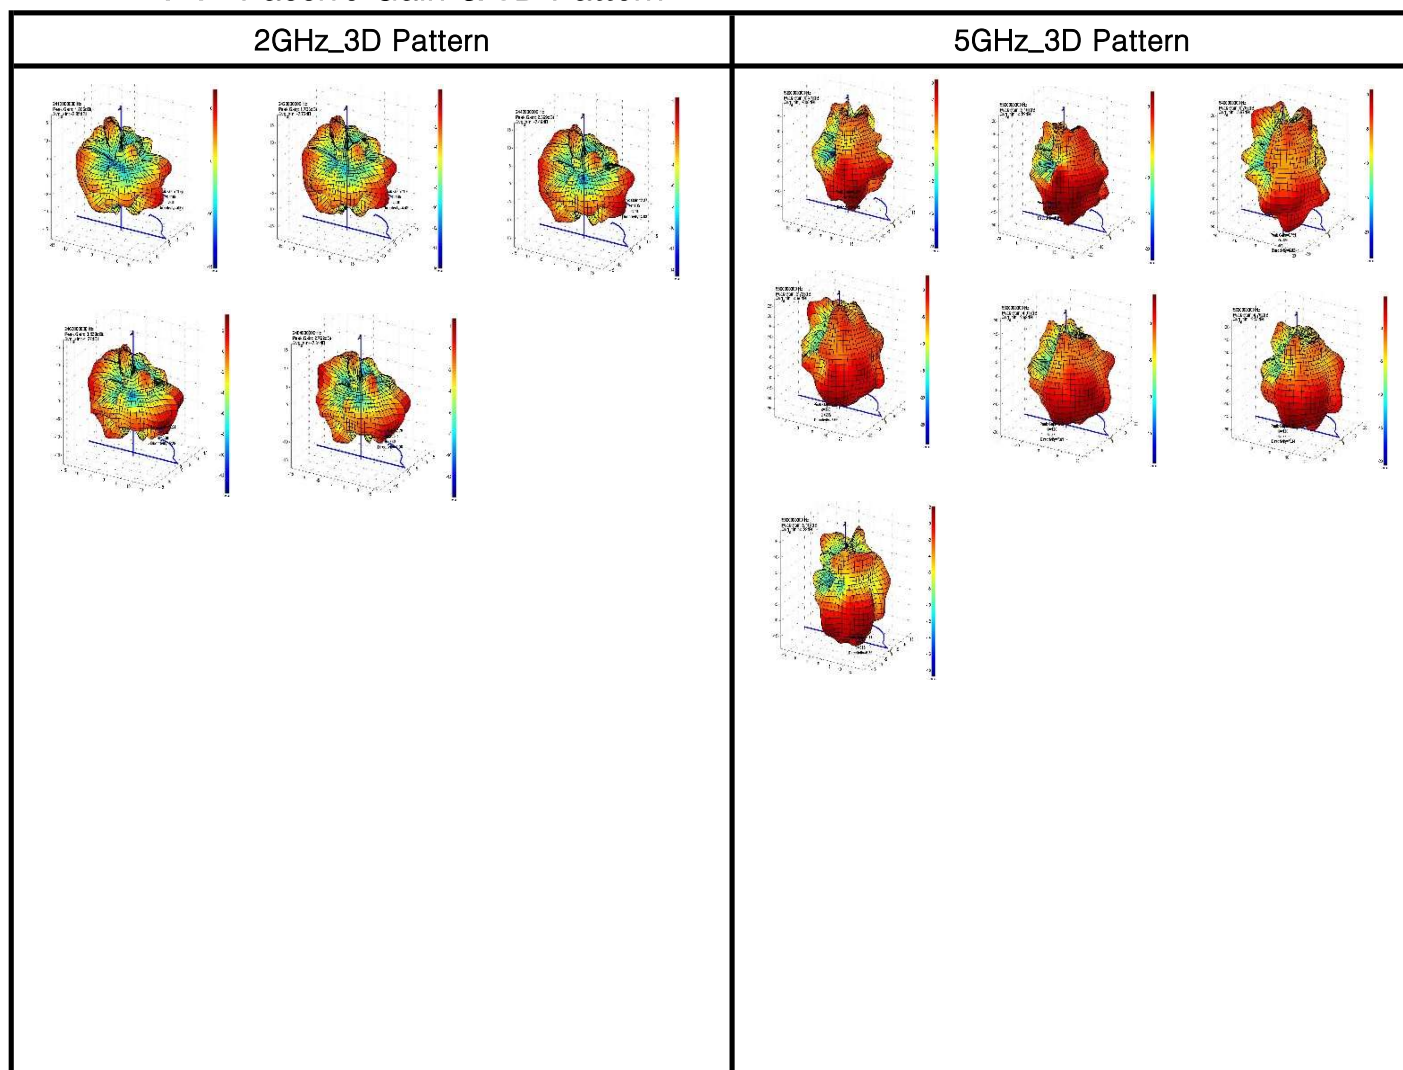

## Passive Gain

| Frequency        | Efficiency | Average Gain |          |          | Max Gain |          |         |
|------------------|------------|--------------|----------|----------|----------|----------|---------|
|                  |            | Ver          | Hor      | Total    | Ver      | Hor      | Total   |
| 2,400,000,000 Hz | 17.7 %     | -10.3 dBi    | -8.5 dBi | -7.8 dBi | -0.9 dBi | -1.8 dBi | 0.6 dBi |
| 2,420,000,000 Hz | 17.8 %     | -10.7 dBi    | -8.1 dBi | -7.3 dBi | -0.2 dBi | -1.5 dBi | 0.8 dBi |
| 2,442,000,000 Hz | 18.1 %     | -10.5 dBi    | -8.3 dBi | -7.3 dBi | 0.5 dBi  | -0.9 dBi | 1.0 dBi |
| 2,462,000,000 Hz | 17.9 %     | -10.5 dBi    | -8.1 dBi | -7.2 dBi | 0.9 dBi  | -0.9 dBi | 0.9 dBi |
| 2,500,000,000 Hz | 17.8 %     | -10.0 dBi    | -8.4 dBi | -7.6 dBi | 0.8 dBi  | -1.4 dBi | 0.8 dBi |
| 5,200,000,000 Hz | 17.5 %     | -9.7 dBi     | -5.0 dBi | -7.0 dBi | -3.8 dBi | 0.9 dBi  | 0.5 dBi |
| 5,300,000,000 Hz | 17.6 %     | -10.7 dBi    | -5.8 dBi | -7.6 dBi | -5.2 dBi | 0.3 dBi  | 0.5 dBi |
| 5,400,000,000 Hz | 17.7 %     | -10.2 dBi    | -7.4 dBi | -7.2 dBi | -6.0 dBi | -0.1 dBi | 0.7 dBi |
| 5,500,000,000 Hz | 17.1 %     | -10.9 dBi    | -7.8 dBi | -7.4 dBi | -5.2 dBi | -0.1 dBi | 0.4 dBi |
| 5,600,000,000 Hz | 18.0 %     | -10.6 dBi    | -6.0 dBi | -7.1 dBi | -2.7 dBi | 0.9 dBi  | 1.0 dBi |
| 5,700,000,000 Hz | 17.7 %     | -10.5 dBi    | -5.1 dBi | -7.7 dBi | -0.9 dBi | 0.3 dBi  | 0.8 dBi |
| 5,800,000,000 Hz | 17.6 %     | -10.5 dBi    | -5.5 dBi | -7.4 dBi | -1.1 dBi | 0.2 dBi  | 0.6 dBi |



|            |                |
|------------|----------------|
| PART NO.   | 2ANE00024A     |
| Maker Code | KT-WIFI-KM2607 |
| DATE       | 2026. 06. 02   |
| Page       | 8 / 16         |

|                |                   |      |         |    |
|----------------|-------------------|------|---------|----|
| Model          | Type              | Rev. | KEITECH | IR |
| Outdoor WIFI-1 | Int F-PCB Antenna |      | LGIT    | A  |

### 3. Mechanical Specification


#### 3.1 Material Certificate

| Model    |           | Outdoor WIFI-1    |                                 |                                        |                        |                                      |
|----------|-----------|-------------------|---------------------------------|----------------------------------------|------------------------|--------------------------------------|
| Ant Type |           | Int F-PCB Antenna |                                 |                                        |                        |                                      |
| No       | Part Name | Part No.          | Raw Material<br>(Plating Spec.) | Raw Material<br>Company                | Manufacture<br>Company | Processing Company<br>Representative |
| 1        | F-PCB     | —                 | F-PCB, 0.16T<br>/ PI Film       | INTERNATION<br>AL LAMINATE<br>MATERIAL | Gaoke Ant<br>Co.,Ltd   | Chen Biyun<br>+86-13570069921        |
| 2        | Cable     | —                 | FEP/Copper<br>φ1.13*245mm/Black | Yuanda                                 |                        |                                      |
|          |           |                   |                                 |                                        |                        |                                      |
|          |           |                   |                                 |                                        |                        |                                      |
|          |           |                   |                                 |                                        |                        |                                      |
|          |           |                   |                                 |                                        |                        |                                      |
|          |           |                   |                                 |                                        |                        |                                      |
|          |           |                   |                                 |                                        |                        |                                      |

|            |                |
|------------|----------------|
| PART NO.   | 2ANE00024A     |
| Maker Code | KT-WIFI-KM2607 |
| DATE       | 2026. 06. 02   |
| Page       | 9 / 16         |

|                |                   |      |         |    |
|----------------|-------------------|------|---------|----|
| Model          | Type              | Rev. | KEITECH | IR |
| Outdoor WIFI-1 | Int F-PCB Antenna |      | LGIT    | A  |


### 3.2 Assy Drawing

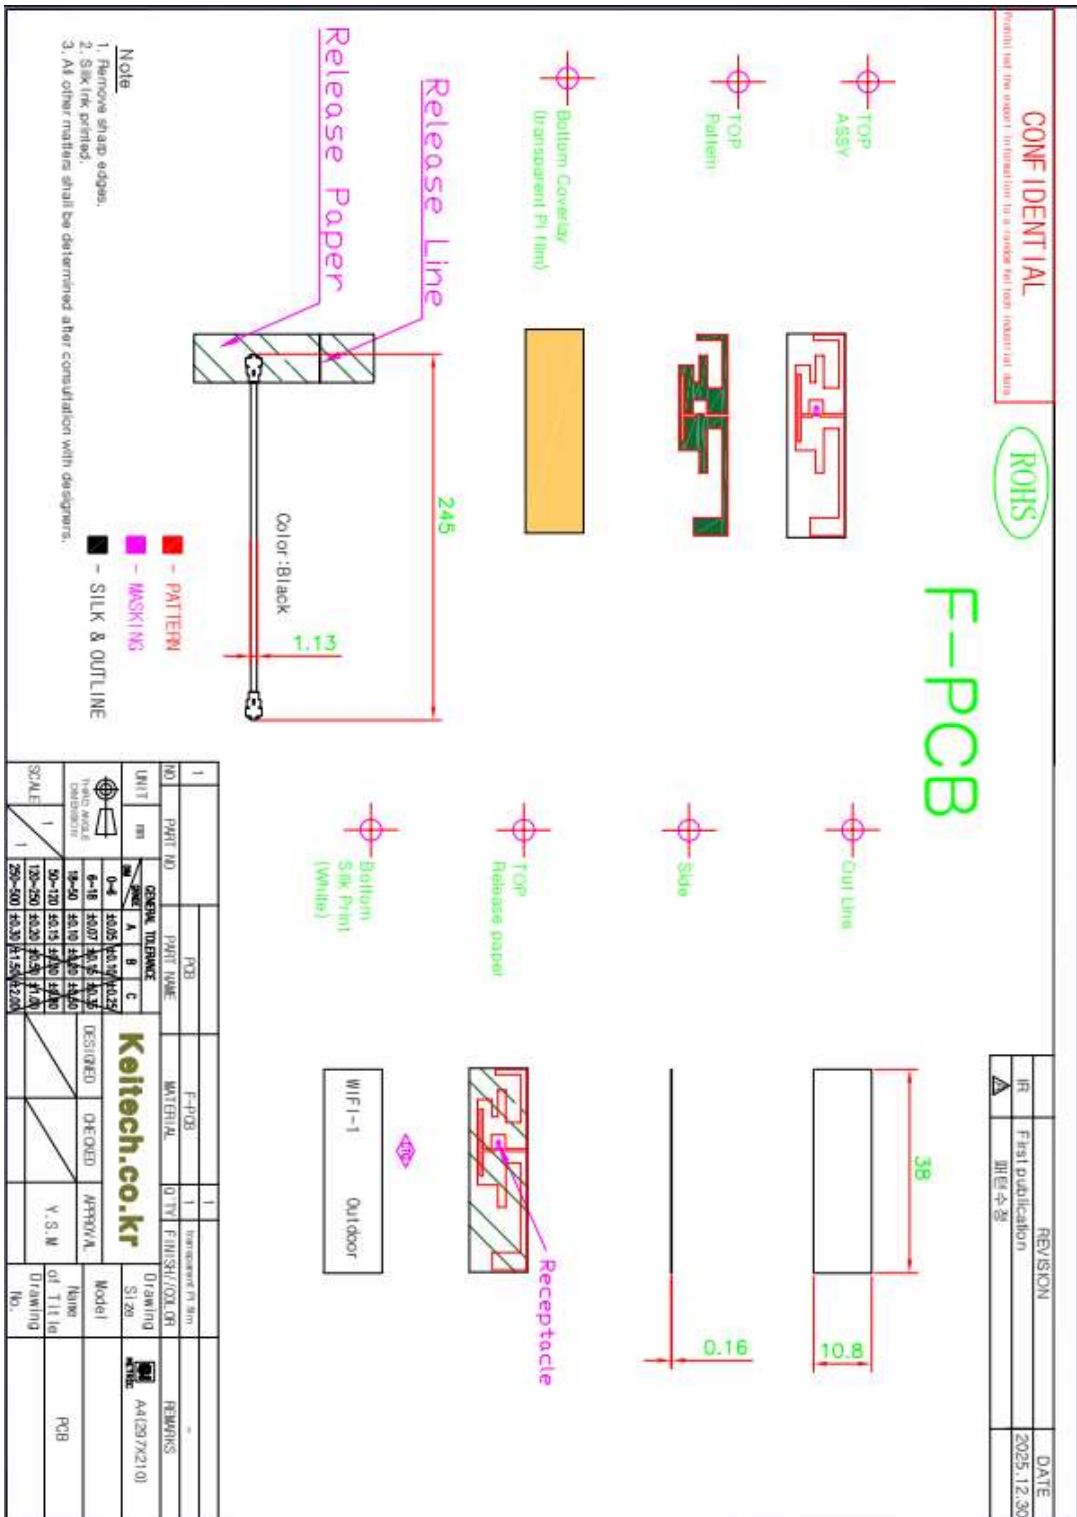

|            |                |
|------------|----------------|
| PART NO.   | 2ANE00024A     |
| Maker Code | KT-WIFI-KM2607 |
| DATE       | 2026. 06. 02   |
| Page       | 10 / 16        |

|                |                   |      |         |    |
|----------------|-------------------|------|---------|----|
| Model          | Type              | Rev. | KEITECH | IR |
| Outdoor WIFI-1 | Int F-PCB Antenna |      | LGIT    | A  |

### 3.3 Packing Spec.

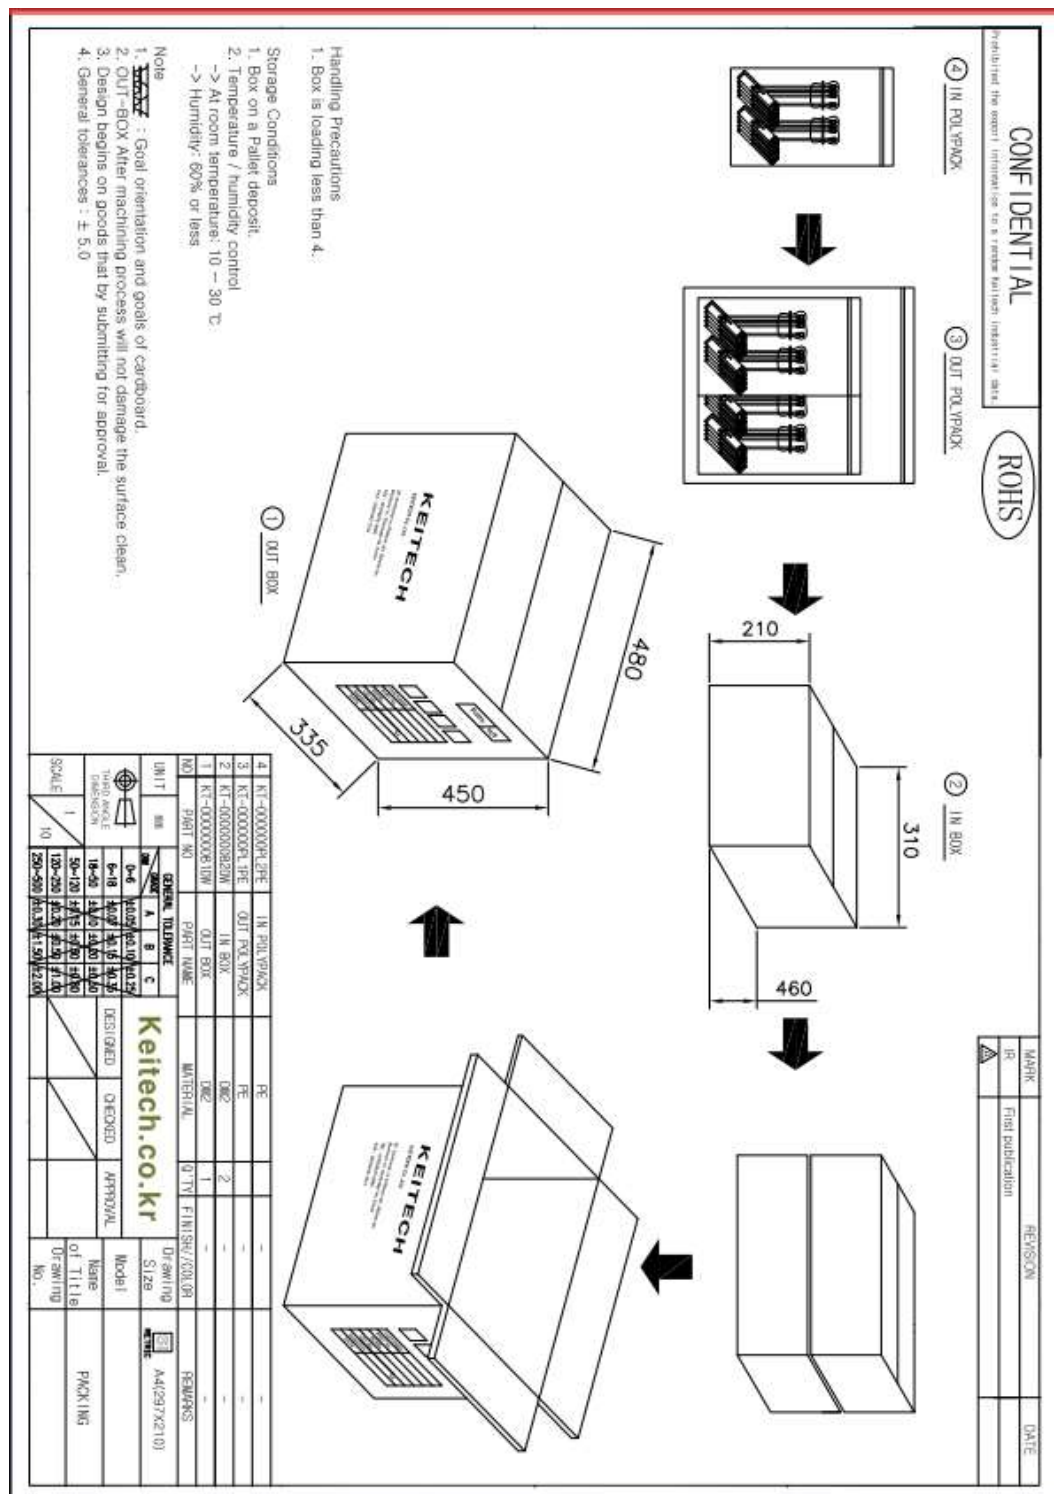

|            |                |
|------------|----------------|
| PART NO.   | 2ANE00024A     |
| Maker Code | KT-WIFI-KM2607 |
| DATE       | 2026. 06. 02   |
| Page       | 11 / 16        |

|                |                   |      |         |    |
|----------------|-------------------|------|---------|----|
| Model          | Type              | Rev. | KEITECH | IR |
| Outdoor WIFI-1 | Int F-PCB Antenna |      | LGIT    | A  |

#### 4. Quality Specification

##### 4.1 Required Test (With Report)

|                         |                        |                  |                  |                                                                                     |
|-------------------------|------------------------|------------------|------------------|-------------------------------------------------------------------------------------|
| Reliability Test Report |                        | 작 성              | 검 토              | 승 인                                                                                 |
|                         |                        |                  |                  |  |
| Objective               | Approval               | PERSON IN CHARGE | Park Byoung Wook |                                                                                     |
| TEST DATE               | 2026.03.14~2026.03.23. | DATE             | 2026.03.23       |                                                                                     |
| ITEM                    | WIFI Antenna           | MODEL            | Outdoor WIFI-1   |                                                                                     |
| Request                 | R & D                  | Quantity         | 20ea             |                                                                                     |
| Information             | PCB, CABLE             | CUSTOMMER        | LGIT             |                                                                                     |
| RESULT                  |                        | PASS             |                  |                                                                                     |

| Test Item |                         | Test Conditions / Judgment Standards                                                                                                                                                                                                                                                                                                                                                                                                                                         | RESULT |
|-----------|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 1         | Estimation of Documents | <ul style="list-style-type: none"> <li>- It is checked missing and error of commissioned paper that drawing, approval sheet, design samples etc.</li> <li>- Our requirements and test specifications are satisfied.</li> </ul>                                                                                                                                                                                                                                               | OK     |
| 2         | Characteristics         | <b>Appearance</b> <ul style="list-style-type: none"> <li>- It is checked abnormalities of color, printing specifications compared to design sample.</li> <li>- It is checked abnormalities of appearance defect visually.</li> <li>- It should not have ratch, strain, burr, discoloration, eccentricity, stain etc.</li> </ul>                                                                                                                                              | OK     |
|           |                         | <b>Dimensions</b> <ul style="list-style-type: none"> <li>- It should be satisfied management standards of drawing, approval sheet.</li> <li>- It is measured major point as a vernier caliper, microscope.</li> <li>* Basic measurement points: length, width, thickness, etc. (Important point)</li> </ul>                                                                                                                                                                  | OK     |
|           |                         | <b>Electrical Characteristics</b> <ul style="list-style-type: none"> <li>- It should be satisfied management standards of drawing, approval sheet.</li> <li>- Shall be tested as follows</li> <li>1. It is recommended to be tested equipment setting and test environment in the space completely shielded from external radiation.</li> <li>2. Network Analyzer and LCR meter are calibrated before test.</li> <li>3. It is measured inductance using test jig.</li> </ul> | OK     |



|            |                |
|------------|----------------|
| PART NO.   | 2ANE00024A     |
| Maker Code | KT-WIFI-KM2607 |
| DATE       | 2026. 06. 02   |
| Page       | 12 / 16        |

|                |                   |      |         |    |
|----------------|-------------------|------|---------|----|
| Model          | Type              | Rev. | KEITECH | IR |
| Outdoor WIFI-1 | Int F-PCB Antenna |      | LGIT    | A  |

| Test Item                  | Test Conditions / Judgment Standards                                                                                                                                                                                                           | RESULT |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 3 Thermal Shock            | 1. Test conditions<br>- Test temperature/Time: -40℃/45min, 85℃/45min<br>- Test Cycle: 27 Cycle<br>2. Standards of Judgment<br>- It should not be change of inductance and have problem at using, be damaged of appearance..                    | OK     |
| 4 High humidity Storage    | 1. Test conditions<br>- Test temperature/Humidity: 60℃/95%<br>- Test time: room temperature 1Hr after storage 48Hr<br>2. Standards of Judgment<br>- It should not be change of inductance and have problem at using, be damaged of appearance. | OK     |
| 5 High Temperature Storage | 1. Test conditions<br>- Test temperature: 85℃<br>- Test time: room temperature 1Hr after storage 48Hr<br>2. Standards of Judgment<br>- It should not be change of inductance and have problem at using, be damaged of appearance.              | OK     |
| 6 Low Temperature Storage  | 1. Test conditions<br>- Test temperature: -40℃<br>- Test time: room temperature 1Hr after storage 48Hr<br>2. Standards of Judgment<br>- It should not be change of inductance and have problem at using, be damaged of appearance. .           | OK     |

|            |                |
|------------|----------------|
| PART NO.   | 2ANE00024A     |
| Maker Code | KT-WIFI-KM2607 |
| DATE       | 2026. 06. 02   |
| Page       | 13 / 16        |

|                |                   |      |         |    |
|----------------|-------------------|------|---------|----|
| Model          | Type              | Rev. | KEITECH | IR |
| Outdoor WIFI-1 | Int F-PCB Antenna |      | LGIT    | A  |

#### 4.1.2 Thermal Shock

|             |                        |         |                  |                                         |        |
|-------------|------------------------|---------|------------------|-----------------------------------------|--------|
| TEST RESULT | 2026.03.14~2026.03.23. |         | PERSON IN CHARGE | Park Byoung Wook                        |        |
| TEST ITEM   | Environment Test       |         | TEST Condition   | -40℃/45min ~ +85℃/45min<br>( 27 Cycle ) |        |
|             | Thermal Shock          |         |                  |                                         |        |
| SPEC        | BEFORE(VSWR)           |         |                  |                                         | RESULT |
| Frequency   | 2400MHz                | 2500MHz | 5200MHz          | 5800MHz                                 |        |
| SPEC        | Max 2.5                | Max 2.5 | Max 3.0          | Max 3.0                                 |        |
| 1           | 2.32                   | 2.32    | 2.83             | 2.84                                    | PASS   |
| 2           | 2.39                   | 2.38    | 2.87             | 2.82                                    | PASS   |
| 3           | 2.36                   | 2.37    | 2.84             | 2.80                                    | PASS   |
| 4           | 2.34                   | 2.37    | 2.85             | 2.85                                    | PASS   |
| 5           | 2.31                   | 2.32    | 2.88             | 2.81                                    | PASS   |
| MAX         | 2.39                   | 2.38    | 2.88             | 2.85                                    |        |
| MIN         | 2.31                   | 2.32    | 2.83             | 2.80                                    |        |
| AVG.        | 2.35                   | 2.35    | 2.85             | 2.82                                    |        |

|           |             |         |         |         |        |
|-----------|-------------|---------|---------|---------|--------|
| SPEC      | AFTER(VSWR) |         |         |         | RESULT |
| Frequency | 2400MHz     | 2500MHz | 5200MHz | 5800MHz |        |
| SPEC      | Max 2.5     | Max 2.5 | Max 3.0 | Max 3.0 |        |
| 1         | 2.31        | 2.31    | 2.82    | 2.83    | PASS   |
| 2         | 2.35        | 2.30    | 2.86    | 2.82    | PASS   |
| 3         | 2.40        | 2.34    | 2.86    | 2.81    | PASS   |
| 4         | 2.38        | 2.32    | 2.85    | 2.85    | PASS   |
| 5         | 2.34        | 2.31    | 2.81    | 2.83    | PASS   |
| MAX       | 2.40        | 2.34    | 2.86    | 2.85    |        |
| MIN       | 2.31        | 2.30    | 2.81    | 2.81    |        |
| AVG.      | 2.36        | 2.32    | 2.84    | 2.83    |        |

|            |                |
|------------|----------------|
| PART NO.   | 2ANE00024A     |
| Maker Code | KT-WIFI-KM2607 |
| DATE       | 2026. 06. 02   |
| Page       | 14 / 16        |

|                |                   |      |         |    |
|----------------|-------------------|------|---------|----|
| Model          | Type              | Rev. | KEITECH | IR |
| Outdoor WIFI-1 | Int F-PCB Antenna |      | LGIT    | A  |

#### 4.1.3 High humidity Storage

|           |                        |         |                  |                   |        |
|-----------|------------------------|---------|------------------|-------------------|--------|
| TEST DATE | 2026.03.14~2026.03.23. |         | PERSON IN CHARGE | Park Byoung Wook  |        |
| TEST ITEM | Environment Test       |         | TEST Condition   | 60℃ / 95% / 48Hrs |        |
|           | High Humidity          |         |                  |                   |        |
| SPEC      | BEFORE(VSWR)           |         |                  |                   | RESULT |
| Frequency | 2400MHz                | 2500MHz | 5200MHz          | 5800MHz           |        |
| SPEC      | Max 2.5                | Max 2.5 | Max 3.0          | Max 3.0           |        |
| 1         | 2.40                   | 2.32    | 2.81             | 2.81              | PASS   |
| 2         | 2.31                   | 2.39    | 2.86             | 2.85              | PASS   |
| 3         | 2.39                   | 2.36    | 2.84             | 2.85              | PASS   |
| 4         | 2.34                   | 2.34    | 2.87             | 2.85              | PASS   |
| 5         | 2.31                   | 2.33    | 2.87             | 2.81              | PASS   |
| MAX       | 2.40                   | 2.39    | 2.87             | 2.85              |        |
| MIN       | 2.31                   | 2.32    | 2.81             | 2.81              |        |
| AVG.      | 2.35                   | 2.35    | 2.85             | 2.83              |        |
|           |                        |         |                  |                   |        |
| SPEC      | AFTER(VSWR)            |         |                  |                   | RESULT |
| Frequency | 2400MHz                | 2500MHz | 5200MHz          | 5800MHz           |        |
| SPEC      | Max 2.5                | Max 2.5 | Max 3.0          | Max 3.0           |        |
| 1         | 2.33                   | 2.37    | 2.84             | 2.84              | PASS   |
| 2         | 2.32                   | 2.36    | 2.87             | 2.83              | PASS   |
| 3         | 2.38                   | 2.37    | 2.86             | 2.88              | PASS   |
| 4         | 2.37                   | 2.33    | 2.84             | 2.85              | PASS   |
| 5         | 2.38                   | 2.39    | 2.88             | 2.88              | PASS   |
| MAX       | 2.38                   | 2.39    | 2.88             | 2.88              |        |
| MIN       | 2.32                   | 2.33    | 2.84             | 2.83              |        |
| AVG.      | 2.36                   | 2.36    | 2.86             | 2.86              |        |

|            |                |
|------------|----------------|
| PART NO.   | 2ANE00024A     |
| Maker Code | KT-WIFI-KM2607 |
| DATE       | 2026. 06. 02   |
| Page       | 15 / 16        |

|                |                   |      |         |    |
|----------------|-------------------|------|---------|----|
| Model          | Type              | Rev. | KEITECH | IR |
| Outdoor WIFI-1 | Int F-PCB Antenna |      | LGIT    | A  |

#### 4.1.4 High Temperature Storage

|           |                        |         |                  |                  |        |
|-----------|------------------------|---------|------------------|------------------|--------|
| TEST DATE | 2026.03.14~2026.03.23. |         | PERSON IN CHARGE | Park Byoung Wook |        |
| TEST ITEM | Environment Test       |         | TEST Condition   | 85℃/ 48Hrs       |        |
|           | High Temperature       |         |                  |                  |        |
| SPEC      | BEFORE(VSWR)           |         |                  |                  | RESULT |
| Frequency | 2400MHz                | 2500MHz | 5200MHz          | 5800MHz          |        |
| SPEC      | Max 2.5                | Max 2.5 | Max 3.0          | Max 3.0          |        |
| 1         | 2.39                   | 2.30    | 2.85             | 2.80             | PASS   |
| 2         | 2.32                   | 2.33    | 2.85             | 2.83             | PASS   |
| 3         | 2.36                   | 2.33    | 2.81             | 2.86             | PASS   |
| 4         | 2.39                   | 2.40    | 2.86             | 2.85             | PASS   |
| 5         | 2.30                   | 2.39    | 2.82             | 2.88             | PASS   |
| MAX       | 2.39                   | 2.40    | 2.86             | 2.88             |        |
| MIN       | 2.30                   | 2.30    | 2.81             | 2.80             |        |
| AVG.      | 2.35                   | 2.35    | 2.84             | 2.85             |        |
|           |                        |         |                  |                  |        |
| SPEC      | AFTER(VSWR)            |         |                  |                  | RESULT |
| Frequency | 2400MHz                | 2500MHz | 5200MHz          | 5800MHz          |        |
| SPEC      | Max 2.5                | Max 2.5 | Max 3.0          | Max 3.0          |        |
| 1         | 2.31                   | 2.31    | 2.87             | 2.87             | PASS   |
| 2         | 2.37                   | 2.32    | 2.88             | 2.83             | PASS   |
| 3         | 2.31                   | 2.35    | 2.84             | 2.82             | PASS   |
| 4         | 2.33                   | 2.37    | 2.88             | 2.89             | PASS   |
| 5         | 2.33                   | 2.36    | 2.87             | 2.85             | PASS   |
| MAX       | 2.37                   | 2.37    | 2.88             | 2.89             |        |
| MIN       | 2.31                   | 2.31    | 2.84             | 2.82             |        |
| AVG.      | 2.33                   | 2.34    | 2.87             | 2.85             |        |

|            |                |
|------------|----------------|
| PART NO.   | 2ANE00024A     |
| Maker Code | KT-WIFI-KM2607 |
| DATE       | 2026. 06. 02   |
| Page       | 16 / 16        |

|                |                   |      |         |    |
|----------------|-------------------|------|---------|----|
| Model          | Type              | Rev. | KEITECH | IR |
| Outdoor WIFI-1 | Int F-PCB Antenna |      | LGIT    | A  |

#### 4.1.5 Low Temperature Storage

|           |                        |         |                  |                  |        |
|-----------|------------------------|---------|------------------|------------------|--------|
| TEST DATE | 2026.03.14~2026.03.23. |         | PERSON IN CHARGE | Park Byoung Wook |        |
| TEST ITEM | Environment Test       |         | TEST Condition   | -40℃ / 48Hrs     |        |
|           | Low Temperature        |         |                  |                  |        |
| SPEC      | BEFORE(VSWR)           |         |                  |                  | RESULT |
| Frequency | 2400MHz                | 2500MHz | 5200MHz          | 5800MHz          |        |
| SPEC      | Max 2.5                | Max 2.5 | Max 3.0          | Max 3.0          |        |
| 1         | 2.31                   | 2.38    | 2.89             | 2.86             | PASS   |
| 2         | 2.38                   | 2.33    | 2.84             | 2.89             | PASS   |
| 3         | 2.37                   | 2.35    | 2.81             | 2.85             | PASS   |
| 4         | 2.36                   | 2.34    | 2.84             | 2.84             | PASS   |
| 5         | 2.31                   | 2.35    | 2.80             | 2.86             | PASS   |
| MAX       | 2.38                   | 2.38    | 2.89             | 2.89             |        |
| MIN       | 2.31                   | 2.33    | 2.80             | 2.84             |        |
| AVG.      | 2.35                   | 2.35    | 2.84             | 2.86             |        |
|           |                        |         |                  |                  |        |
| SPEC      | AFTER(VSWR)            |         |                  |                  | RESULT |
| Frequency | 2400MHz                | 2500MHz | 5200MHz          | 5800MHz          |        |
| SPEC      | Max 2.5                | Max 2.5 | Max 3.0          | Max 3.0          |        |
| 1         | 2.40                   | 2.39    | 2.88             | 2.80             | PASS   |
| 2         | 2.31                   | 2.31    | 2.87             | 2.83             | PASS   |
| 3         | 2.37                   | 2.33    | 2.89             | 2.80             | PASS   |
| 4         | 2.39                   | 2.31    | 2.90             | 2.87             | PASS   |
| 5         | 2.33                   | 2.30    | 2.86             | 2.82             | PASS   |
| MAX       | 2.40                   | 2.39    | 2.90             | 2.87             |        |
| MIN       | 2.31                   | 2.30    | 2.86             | 2.80             |        |
| AVG.      | 2.36                   | 2.33    | 2.88             | 2.82             |        |

