

FCC TEST REPORT

FCC ID:2BO4Z-WX20

Product : Wireless Microphone
Model Name : WX20
Brand : N/A
Report No. : NCT260261654E1-1

Prepared for

Enping Zhongxinhe Technology Co.,LTD

**4th Floor, A2, Zone 1, No. 74 Enzhou Industrial Avenue, Dong'an Industrial Park,
Enping City, Jiangmen City, Guangdong Province, China**

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

**A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China**

TEL: 400-8868-419

TEST RESULT CERTIFICATION

Applicant's name : Enping Zhongxinhe Technology Co.,LTD

Address : 4th Floor, A2, Zone 1, No. 74 Enzhou Industrial Avenue, Dong'an
Industrial Park, Enping City, Jiangmen City, Guangdong Province, China

Manufacture's name : Enping Zhongxinhe Technology Co.,LTD

Address : 4th Floor, A2, Zone 1, No. 74 Enzhou Industrial Avenue, Dong'an
Industrial Park, Enping City, Jiangmen City, Guangdong Province, China

Product name : Wireless Microphone

Model name : WX20

Standards : FCC CFR47 Part 15 Section 15.236

Test procedure : ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to
C63.10a-2024

Date of test : Jul. 22, 2026-Aug. 05, 2026

Date of Issue : Aug. 05, 2026

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:



Keven Wu / Engineer

Technical Manager:



Henry Wang / Manager

Table of Contents	Page
TEST RESULT CERTIFICATION	2
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
4. EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.3 TEST SETUP	17
4.2.4 TEST PROCEDURE	17
4.2.5 TEST RESULTS	17
5. MAXIMUM RADIATED POWER(EIRP)	22
5.1 APPLIED PROCEDURES / LIMIT	22
5.2 TEST PROCEDURE	22
5.3 DEVIATION FROM STANDARD	22
5.4 TEST SETUP	22
5.5 EUT OPERATION CONDITIONS	22
5.6 TEST RESULTS	23
6. CHANNEL BANDWIDTH	25
6.1 APPLIED PROCEDURES / LIMIT	25
6.2 TEST PROCEDURE	25
6.3 DEVIATION FROM STANDARD	25
6.4 TEST SETUP	25

6.5 EUT OPERATION CONDITIONS	25
6.6 TEST RESULTS	25
7. NECESSARY BANDWIDTH	28
7.1 LIMIT	28
7.2 TEST SETUP	30
7.3 TEST PROCEDURE	30
7.4 TEST RESULTS	31
8. FREQUENCY STABILITY	34
9. ANTENNA REQUIREMENT	36
10. TEST PHOTO & EUT PHOTO	36

1. VERSION

Report No.	Version	Description	Approved
NCT260261654E1-1	Rev.01	Initial issue of report	Aug. 05, 2026

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.236) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.203	Antenna Requirement	PASS	
15.207	Conducted Emission	PASS	
15.236(d)(1)	Maximum Radiated Power(EIRP)	PASS	
15.236(g)	Radiated Spurious Emission Measurement	PASS	
15.236(g)	Spurious Emission at Antenna Port	PASS	
15.236(f)(2)	Occupied Bandwidth Emission	PASS	
15.236(f)(3)	Frequency Stability	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

(2)Per FCC rule, §15.203 is exempted for devices operating under §15.236

2.1 TEST FACILITY

Site Description

EMC Lab. : Accredited by CNAS
The Certificate Registration Number is L8251

Designation Number: CN1347
Test Firm Registration Number: 894804
Accredited by A2LA
The Certificate Registration Number is 6837.01

Accredited by Industry Canada
The Conformity Assessment Body Identifier is CN0150
Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(9KHz~30MHz)	$\pm 4.51\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$
Remark: The coverage Factor ($k=2$), and measurement Uncertainty for a level of Confidence of 95%	

3.GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless Microphone
Model Name	WX20
Serial Model	N/A
Model Difference	N/A
Hardware version	N/A
Software version	N/A
Operation Frequency:	560.1MHz - 591.1MHz
Modulation Type:	GFSK
Antenna Type:	PCB Antenna
Antenna Gain:	1.7 dBi
Ratings:	DC 3.7V
Declared Channel Bandwidth:	100KHz
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.	

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2020 + Cor. 1-2023+ C63.10a -2024 + Errata to C63.10a-2024 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The details of test channels and bandwidth were for RF conductive measurement.

Operation Frequency each of channel									
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	560.1	08	567.1	15	574.1	22	581.1	29	588.1
02	561.1	09	568.1	16	575.1	23	582.1	30	589.1
03	562.1	10	569.1	17	576.1	24	583.1	31	590.1
04	563.1	11	570.1	18	577.1	25	584.1	32	591.1
05	564.1	12	571.1	19	578.1	26	585.1		
06	565.1	13	572.1	20	579.1	27	586.1		
07	566.1	14	573.1	21	580.1	28	587.1		

Note:

1. Test of channel was included the lowest, middle and highest frequency in highest data rate and to perform the test, then record on this report.

	Channel	Frequency(MHz)
Low Channel	01	560.1
Mid Channel	16	575.1
High Channel	32	591.1

3.2 DESCRIPTION OF TEST MODES

For All Emission	
Final Test Mode	Description
Transmitting mode	Keep the EUT in continuously transmitting mode

test Mode	Description
Mode 1	TX CH 01
Mode 2	TX CH 16
Mode 3	TX CH 32
Mode 4	Charging

Note:


- (1) Fully-charged battery is used during the test
- (2) All the modes have tested and recorded the worst mode in the report.

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Radiated Emission



Conducted Emission



Conducted Emission Test



Spurious emissions



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Adapter	OMIX	X2904	04A3650000024	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2025/1/17	2028/1/16
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2026/6/5	2027/6/4
LISN	ENV 216	102796	Rohde & Schwarz	2026/6/5	2027/6/4
LISN	VN1-13S	004023	CRANAGE	2026/6/5	2027/6/4
Cable	RG223-1500MM	NA	RG	2026/6/5	2027/6/4

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2025/1/17	2028/1/16
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2026/6/5	2027/6/4
Spectrum Analyze (10Hz-26.5GHz)	N9020A	MY50510202	Agilent	2026/6/5	2027/6/4
Amplifi (30MHz-1GHz)	BBV 9743 B	00374	SCHWARZBECK	2026/6/5	2027/6/4
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHWARZBECK	2026/3/07	2027/3/06
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHWARZBECK	2026/3/07	2027/3/06
Pream plifier (1GHz-18GHz)	BBV 9718D	00042	SCHWARZBECK	2026/6/5	2027/6/4
Spectrum Analyze (1GHz-40GHz)	FSV 40	100952	Rohde & Schwarz	2026/6/5	2027/6/4
Pream plifier (15GHz-40GHz)	BBV 9721	0056	SCHWARZBECK	2026/6/5	2027/6/4
Broadband Antenna (15GHz-40GHz)	SAS-574	588	A.H.System	2026/6/5	2027/6/4
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHWARZBECK	2026/6/9	2027/6/8
Capacitive voltage probe	CVP 9222 C	00109	SCHWARZBECK	2026/6/5	2027/6/4
MXG Signal Analyzer	N9020A	MY50510202	Agilent	2026/6/5	2027/6/4
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2026/6/5	2027/6/4
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2026/6/5	2027/6/4
Power Meter	ML2485A	319502	Aritsu	2026/6/5	2027/6/4
Power Sensor	TR1029-2	512364	Techoy	2026/6/5	2027/6/4
RF Swith	TR1029-1	512364	Techoy	2026/6/5	2027/6/4
Cable	DA800- 4000MM	NA	DA	2026/6/5	2027/6/4
Cable	DA800- 11000MM	NA	DA	2026/6/5	2027/6/4
High Pass Filter	HXHPF-3G-S	202507220001	luanwei	2026/6/5	2027/6/4
Attenuator	SN-SMA-10	N/A	SNIT	2026/6/5	2027/6/4

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ-EMC	Ver.EMC-CON 3A1.1+
2	EMC radiation test system	FALA	EZ-EMC	Ver.FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

4. EMC EMISSION TEST**4.1 CONDUCTED EMISSION MEASUREMENT**

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS

(Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

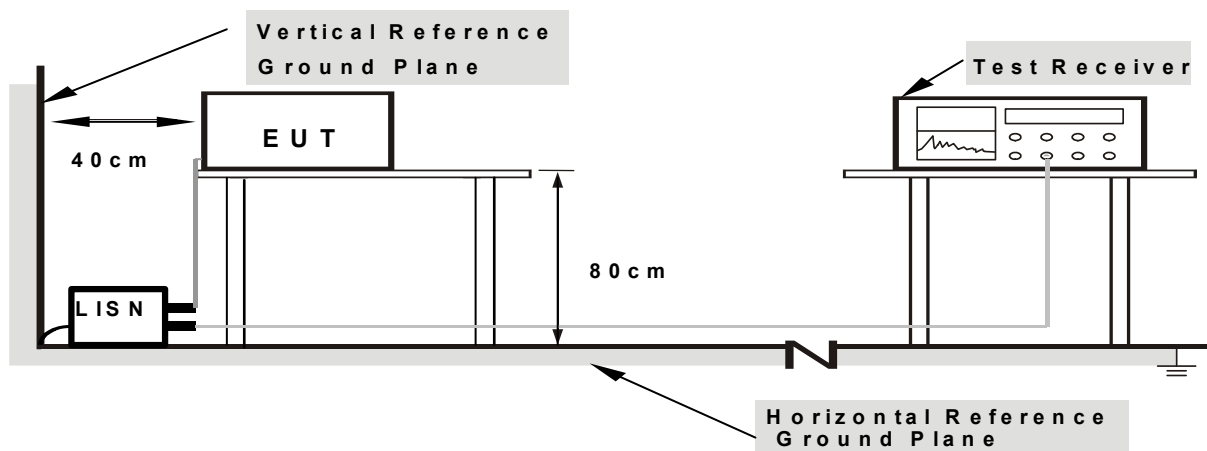

Note: 1. Support units were connected to second LISN.


2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


4.1.6 TEST RESULTS

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode	Mode 4

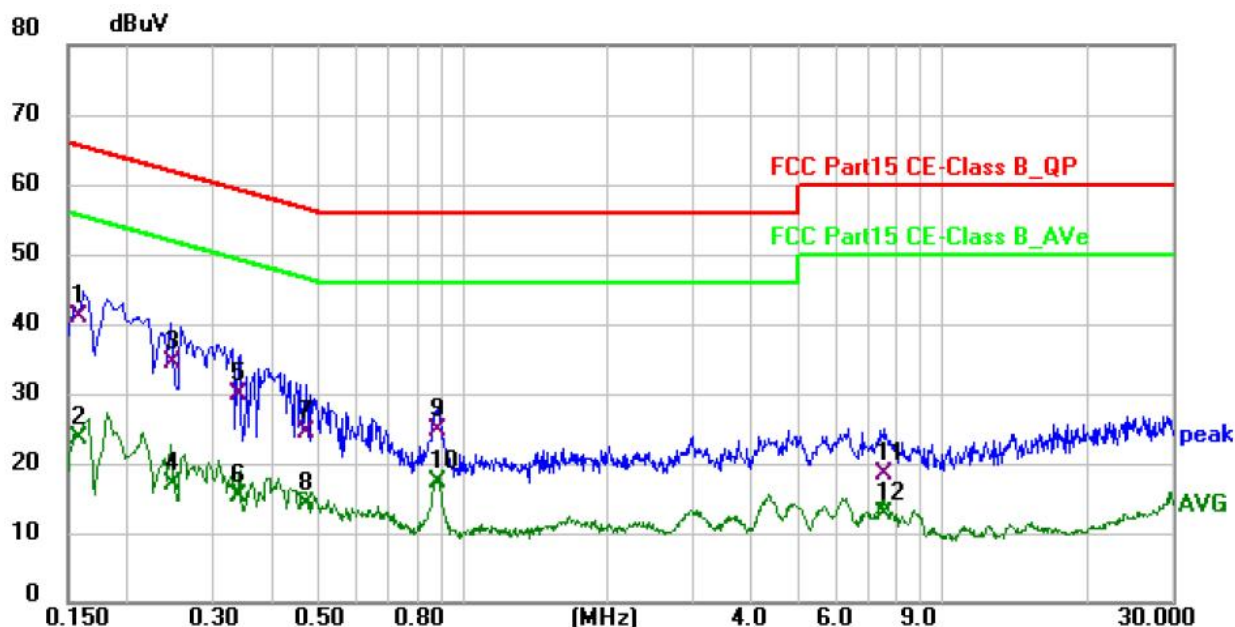

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1 *	0.1583	21.19	19.68	40.87	65.55	-24.68	QP	P
2	0.1583	3.89	19.68	23.57	55.55	-31.98	AVG	P
3	0.2481	14.44	19.92	34.36	61.82	-27.46	QP	P
4	0.2481	-2.91	19.92	17.01	51.82	-34.81	AVG	P
5	0.3384	9.99	19.90	29.89	59.24	-29.35	QP	P
6	0.3384	-4.55	19.90	15.35	49.24	-33.89	AVG	P
7	0.4730	4.48	19.91	24.39	56.46	-32.07	QP	P
8	0.4730	-5.71	19.91	14.20	46.46	-32.26	AVG	P
9	0.8851	4.88	19.92	24.80	56.00	-31.20	QP	P
10	0.8851	-2.51	19.92	17.41	46.00	-28.59	AVG	P
11	7.5708	-1.60	19.93	18.33	60.00	-41.67	QP	P
12	7.5708	-7.34	19.93	12.59	50.00	-37.41	AVG	P

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode	Mode 4

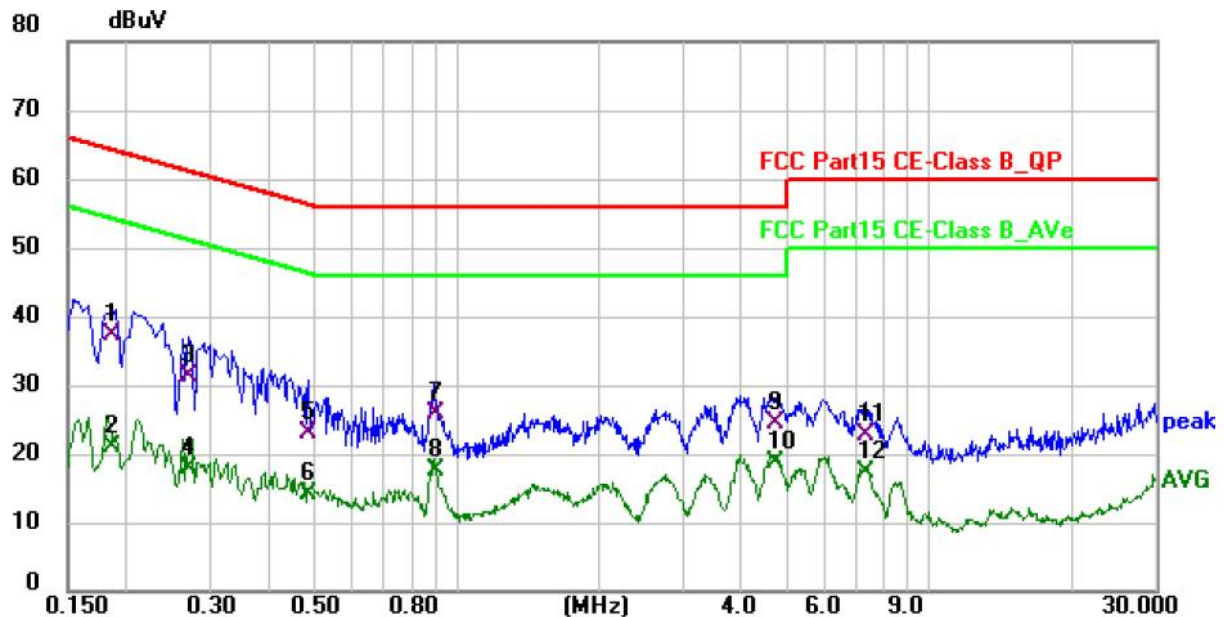

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1 *	0.1863	17.60	19.80	37.40	64.20	-26.80	QP	P
2	0.1863	1.32	19.80	21.12	54.20	-33.08	AVG	P
3	0.2708	11.58	19.84	31.42	61.09	-29.67	QP	P
4	0.2708	-1.84	19.84	18.00	51.09	-33.09	AVG	P
5	0.4859	3.18	19.88	23.06	56.24	-33.18	QP	P
6	0.4859	-5.84	19.88	14.04	46.24	-32.20	AVG	P
7	0.8975	5.88	19.86	25.74	56.00	-30.26	QP	P
8	0.8975	-2.28	19.86	17.58	46.00	-28.42	AVG	P
9	4.6736	4.52	19.91	24.43	56.00	-31.57	QP	P
10	4.6736	-1.18	19.91	18.73	46.00	-27.27	AVG	P
11	7.3107	2.90	19.88	22.78	60.00	-37.22	QP	P
12	7.3107	-2.58	19.88	17.30	50.00	-32.70	AVG	P

Notes: 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3.Measurement Level = Reading level + Correct Factor

4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	ETSI EN 300 422-1 V2.2.1 (2021-11)				
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS


According to 15.236(g)(4): Emissions outside of the emission masks listed in paragraphs (g)(1) through (g)(3) shall comply with the limits specified in section 4.2.4.1.2 of ETSI EN 300 422-1 V2.2.1 (2021-11), (incorporated by reference, see § 15.38).

Frequency range	Maximum power	RBW
9 kHz - 150 kHz	-36 dBm	1 kHz
150 kHz - 30 MHz	-36 dBm	10 kHz
30 MHz - 1 GHz	-36 dBm	$F_c + 2,5 B \leq f \leq f_c + 4 B$: 1 kHz $F_c + 4 B < f \leq f_c + 10 B$: 10 kHz $f > f_c + 10 B$: 100 kHz $f < f_c - 10 B$: 100 kHz $f_c - 10 B \leq f < f_c - 4 B$: 10 kHz $f_c - 4 B \leq f \leq f_c - 2,5 B$: 1 kHz
except:		
47 MHz - 74 MHz 87,5 MHz - 118 MHz	-54 dBm	100 kHz
174 MHz - 230 MHz 470 MHz - 862 MHz	-54 dBm	$F_c + 2,5 B \leq f \leq f_c + 4 B$: 1 kHz $F_c + 4 B < f \leq f_c + 10 B$: 10 kHz $f > f_c + 10 B$: 100 kHz $f < f_c - 10 B$: 100 kHz $f_c - 10 B \leq f < f_c - 4 B$: 10 kHz $f_c - 4 B \leq f \leq f_c - 2,5 B$: 1 kHz
1 GHz < $f \leq F_{upper}$	-30 dBm	$F_c + 2,5 B \leq f \leq f_c + 10 B$: 30 kHz $F_c + 10 B < f \leq f_c + 12 B$: 300 kHz $f > f_c + 12 B$: 1 MHz $f < f_c - 12 B$: 1 MHz $f_c - 12 B \leq f < f_c - 10 B$: 300 kHz $f_c - 10 B \leq f \leq f_c - 2,5 B$: 30 kHz

4.2.2 DEVIATION FROM TEST STANDARD

No deviation

4.2.3 TEST SETUP

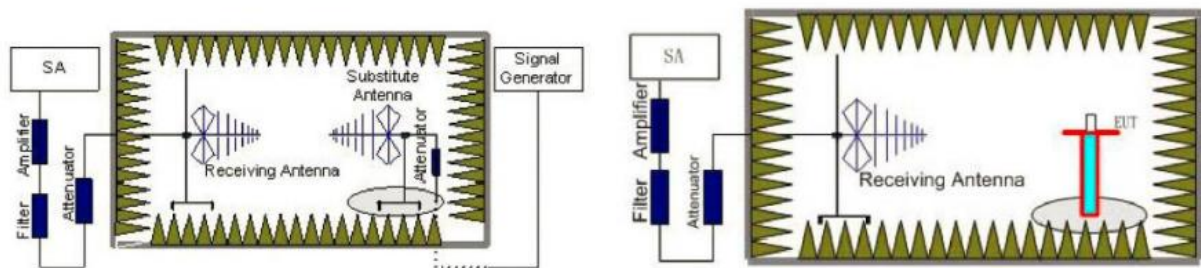

Frequency :9kHz-30MHz
RBW=10KHz,
VBW =30KHz
Sweep time= Auto
Trace = max hold
Detector function = peak

Frequency :30MHz-1GHz
RBW=120KHz,
VBW=300KHz
Sweep time= Auto
Trace = max hold
Detector function = peak

Frequency :Above 1GHz
RBW=1MHz,
VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto
Trace = max hold
QP Detector function = peak, AV

4.2.4 TEST PROCEDURE

1. The EUT was placed on a turntable with 1.5m height
2. The test distance between the receiving antenna and the EUT is 3 meter, while the receiving (test)antenna is kept at 1.5 meter height.
3. Set EUT in continuous transmitting with maximum output power at test frequency.
4. The table was rotated from 0 to 360 degree to search the highest radiated emission.
5. Repeat step 3 to 4 for each polarization and test channel to find the worst emission level
6. The results obtained are compared to the limits in order to prove compliance with the requirement

4.2.5 TEST RESULTS

Radiated Spurious Emission (9KHz-30MHz)


Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

1. The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. Distance extrapolation factor = $40 \log(\text{Specific distance} / \text{test distance})$ (dB);
3. Limit line = Specific limits(dBuV) + distance extrapolation factor.

Radiated Spurious Emission (30MHz – 1GHz)

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		
Test Mode :	TX Mode 1 (Low Channel)		

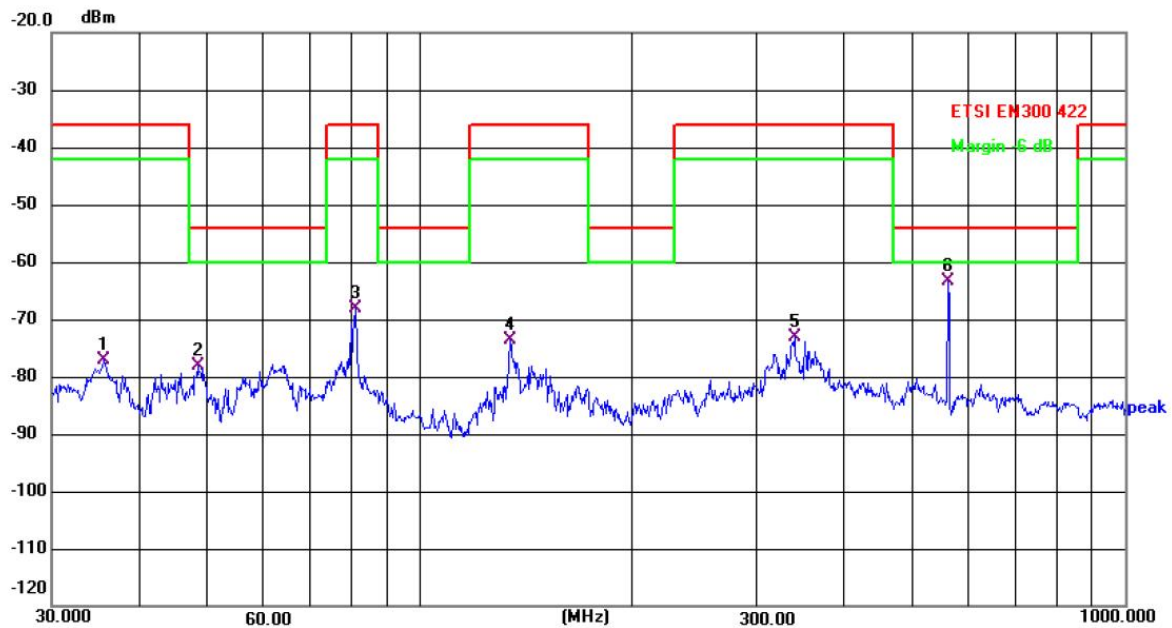


No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector
1	35.6240	-60.97	-16.15	-77.12	-36.00	-41.12	QP
2	48.3318	-63.76	-14.31	-78.07	-54.00	-24.07	QP
3	80.9275	-47.48	-20.53	-68.01	-36.00	-32.01	QP
4	134.0882	-53.89	-19.72	-73.61	-36.00	-37.61	QP
5	339.5888	-60.31	-12.85	-73.16	-36.00	-37.16	QP
6	560.6928	-54.04	-9.30	-63.34	-54.00	-9.34	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.All the modes have tested and record the worst mode(Low Channel) in the report.

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Vertical
Test Voltage :	DC 3.7V		
Test Mode :	TX Mode (Low Channel)		

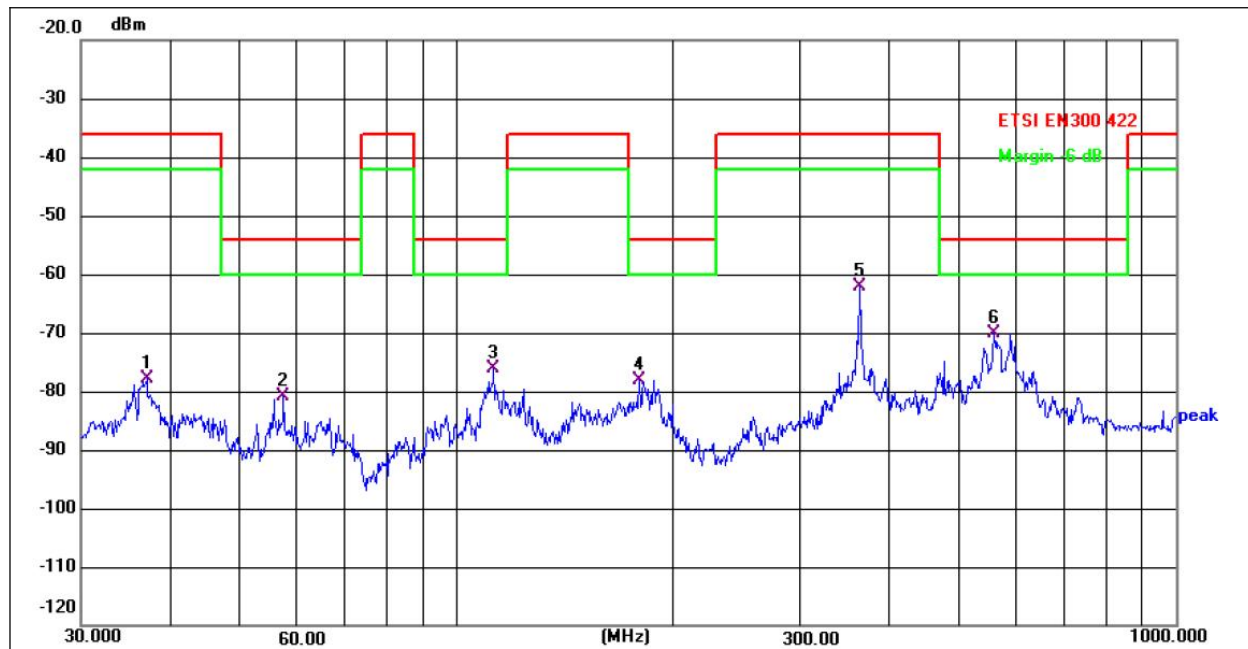


No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector
1	37.0250	-61.79	-16.19	-77.98	-36.00	-41.98	QP
2	57.3923	-65.62	-15.18	-80.80	-54.00	-26.80	QP
3	112.5243	-59.14	-16.89	-76.03	-54.00	-22.03	QP
4	179.3863	-59.71	-18.39	-78.10	-54.00	-24.10	QP
5	362.9844	-49.38	-12.75	-62.13	-36.00	-26.13	QP
6	558.7301	-60.83	-9.22	-70.05	-54.00	-16.05	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.All the modes have tested and record the worst mode(Low Channel) in the report.


Radiated Spurious Emission (Above 1GHz)

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		
Test Mode :	Mode 1(Low Channel)		

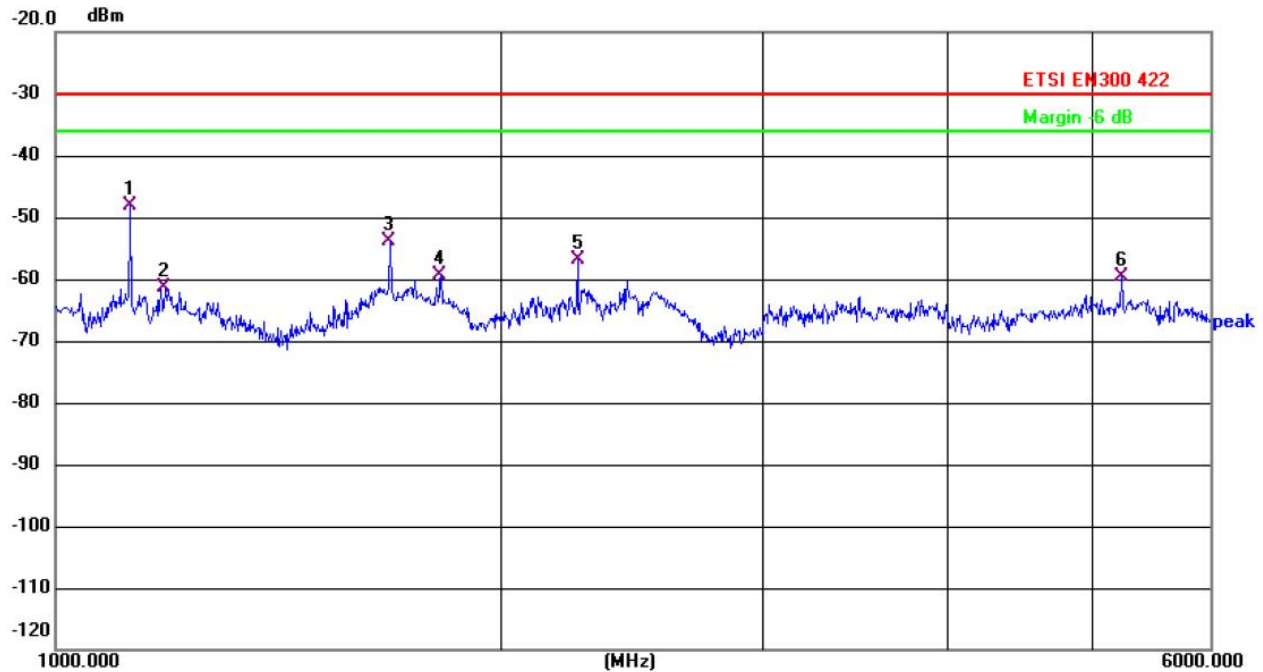

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector
1	1123.517	-22.47	-25.72	-48.19	-30.00	-18.19	QP
2	1185.562	-35.75	-25.63	-61.38	-30.00	-31.38	QP
3	1681.372	-28.79	-24.97	-53.76	-30.00	-23.76	QP
4	1819.292	-34.59	-24.82	-59.41	-30.00	-29.41	QP
5	2247.628	-32.58	-24.40	-56.98	-30.00	-26.98	QP
6	5226.773	-37.03	-22.50	-59.53	-30.00	-29.53	QP

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Vertical
Test Voltage :	DC 3.7V		
Test Mode :	Mode 1(Low Channel)		

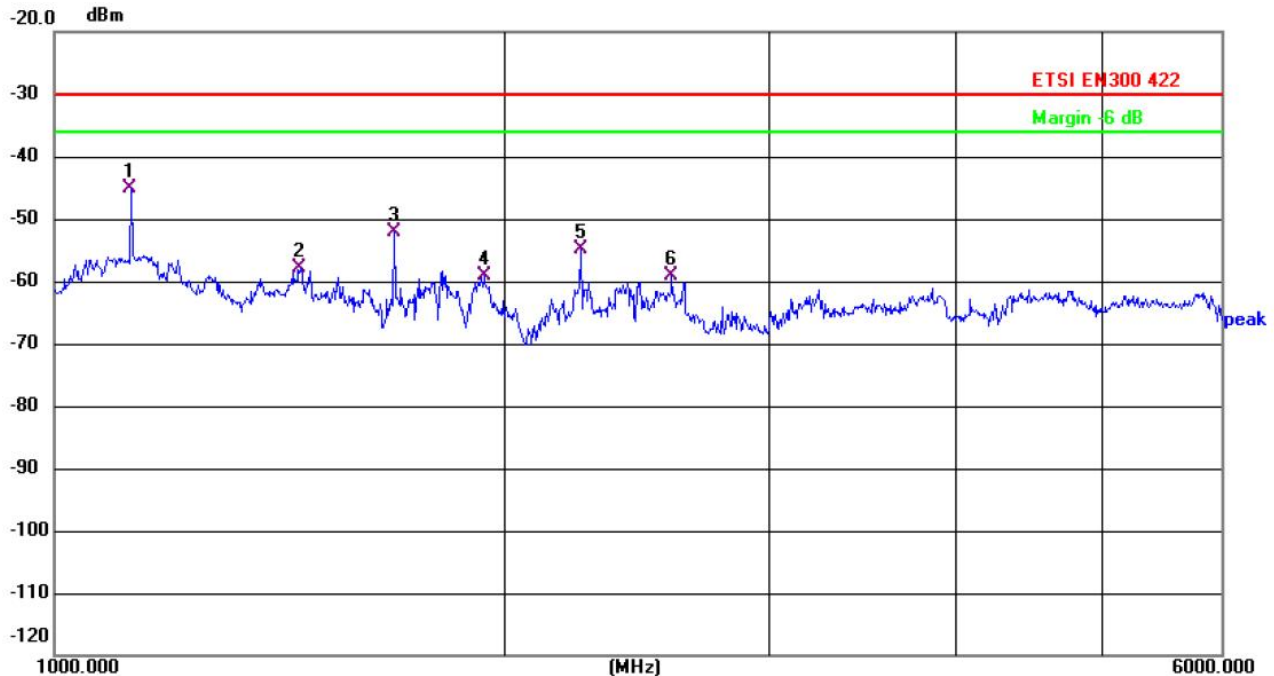

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector
1	1125.532	-19.32	-25.72	-45.04	-30.00	-15.04	QP
2	1459.452	-32.53	-25.22	-57.75	-30.00	-27.75	QP
3	1684.388	-27.07	-24.97	-52.04	-30.00	-22.04	QP
4	1933.569	-34.31	-24.70	-59.01	-30.00	-29.01	QP
5	2243.604	-30.46	-24.40	-54.86	-30.00	-24.86	QP
6	2580.133	-35.19	-23.99	-59.18	-30.00	-29.18	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.All the modes have tested and record the worst mode(Low Channel) in the report.

5. MAXIMUM RADIATED POWER(EIRP)**5.1 APPLIED PROCEDURES / LIMIT**

ACCORDING TO FCC 15.236(D)(1), FOR LOW POWER AUXILIARY STATION OPERATING IN THE 470-608, AND 614-698 MHZ BANDS, IN THE BANDS ALLOCATED AND ASSIGNED FOR BROADCAST TELEVISION AND IN THE 600 MHZ SERVICE BAND: 50 MW EIRP

5.2 TEST PROCEDURE

1. THE MAXIMUM PEAK OUTPUT POWER WAS MEASURED WITH A SPECTRUM ANALYZER CONNECTED TO THE ANTENNA TERMINAL WHILE EUT WAS OPERATING IN UNMODULATED SITUATION.
2. POWER WAS SUPPLIED TO THE BATTERY INPUT CONNECTOR A POWER SUPPLY. THE POWER SUPPLY WAS SET FOR +3.0VDC. THE SPECTRUM ANALYZER WAS CONNECTED AT ANTENNA TERMINAL TO MEASURE RF POWER OF THE CARRIER.
3. A MULTIMETER WAS CONNECTED IN SERIES WITH FINAL RF STAGE TO MEASURE THE CURRENT; A MULTIMETER WAS USED TO MEASURE FINAL RF STAGE SUPPLY VOLTAGE. THEN THE VOLTAGE V.S. CURRENT OF THE FINAL RF STAGE CAN BE SHOWN.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP**5.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


5.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V


Frequency	CONDUCTED OUTPUT POWER (dBm)	ANT GAIN (dBi)	EIRP (dBm)	Limit (dBm)	Result
560.1MHz	0.753	1.7	2.453	17	PASS
575.1MHz	-0.488	1.7	1.212	17	PASS
591.1MHz	-0.991	1.7	0.709	17	PASS

Remark: cable loss is 1dBm, It has been compensated in the test diagram.

Low Channel

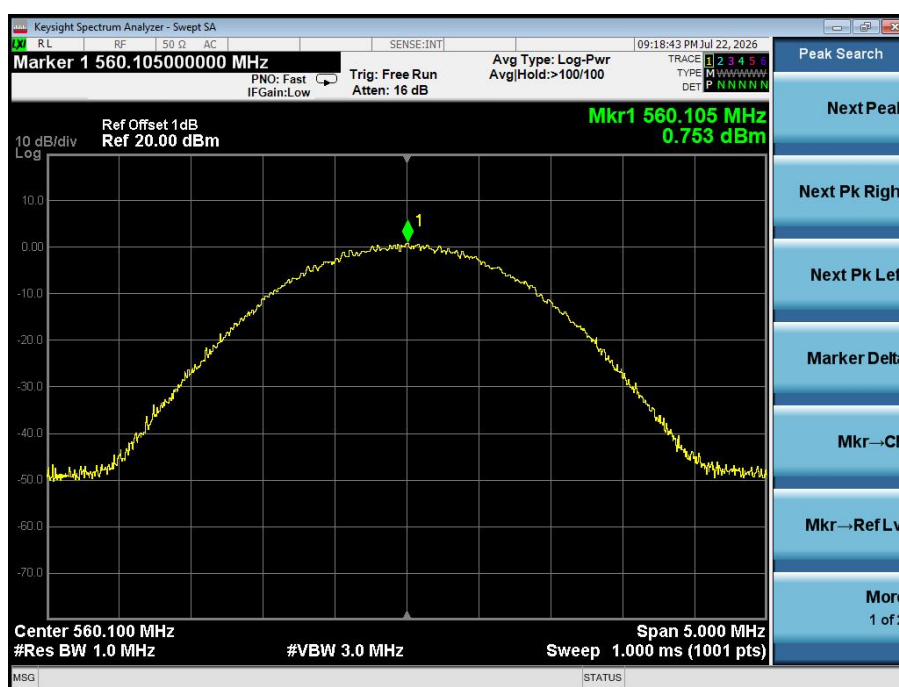

Mid Channel

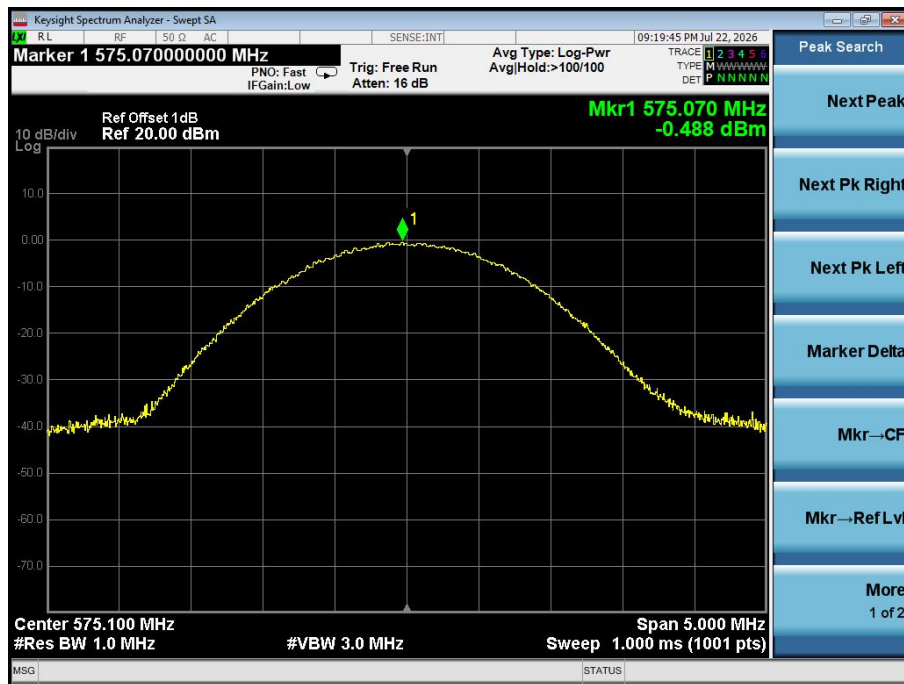

High Channel



6. CHANNEL BANDWIDTH**6.1 APPLIED PROCEDURES / LIMIT**

According to FCC 15.236(f)(2), The operating frequency within a permissible band of operation as defined in paragraph (c) must comply with the following requirements.

- (1) The frequency selection shall be offset from the upper or lower band limits by 25 kHz or an integral multiple thereof.
- (2) One or more adjacent 25 kHz segments within the assignable frequencies may be combined to form a channel whose maximum bandwidth shall not exceed 200 kHz. The operating bandwidth shall not exceed 200kHz.
- (3) Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in Section 8.3 of ETSI EN 300 422-1 V2.2.1 (2021-11) (incorporated by reference, see §15.38). Emissions outside this band shall comply with the limit specified at the edges of the ETSI mask

6.2 TEST PROCEDURE

Please refer to clause 7.3

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP**6.5 EUT OPERATION CONDITIONS**


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V

Frequency (MHz)	-20 bandwidth (KHz)	Limit (KHz)	Result
560.1MHz	60.66	200	Pass
575.1MHz	60.46	200	Pass
591.1MHz	60.30	200	Pass


Low Channel

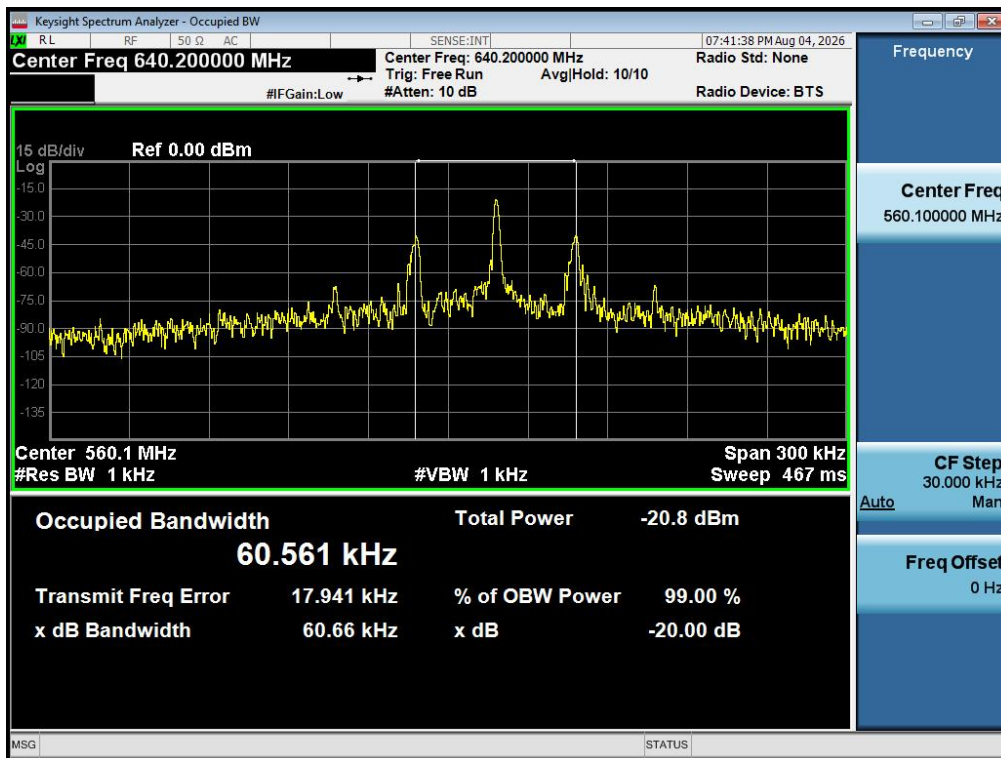

Mid Channel

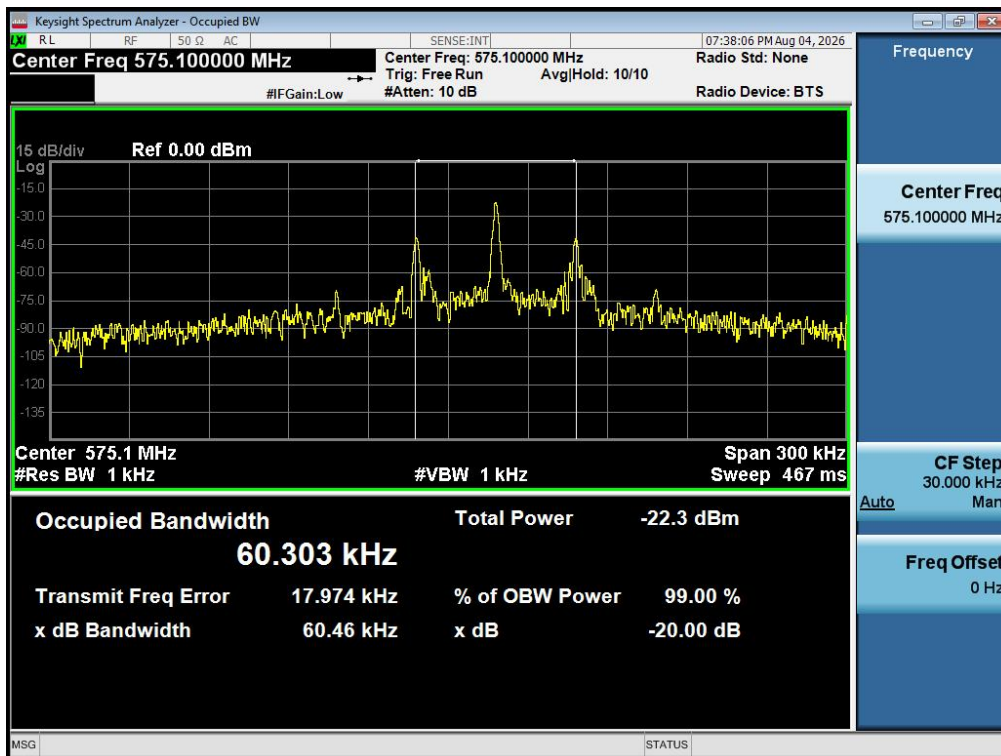

High Channel

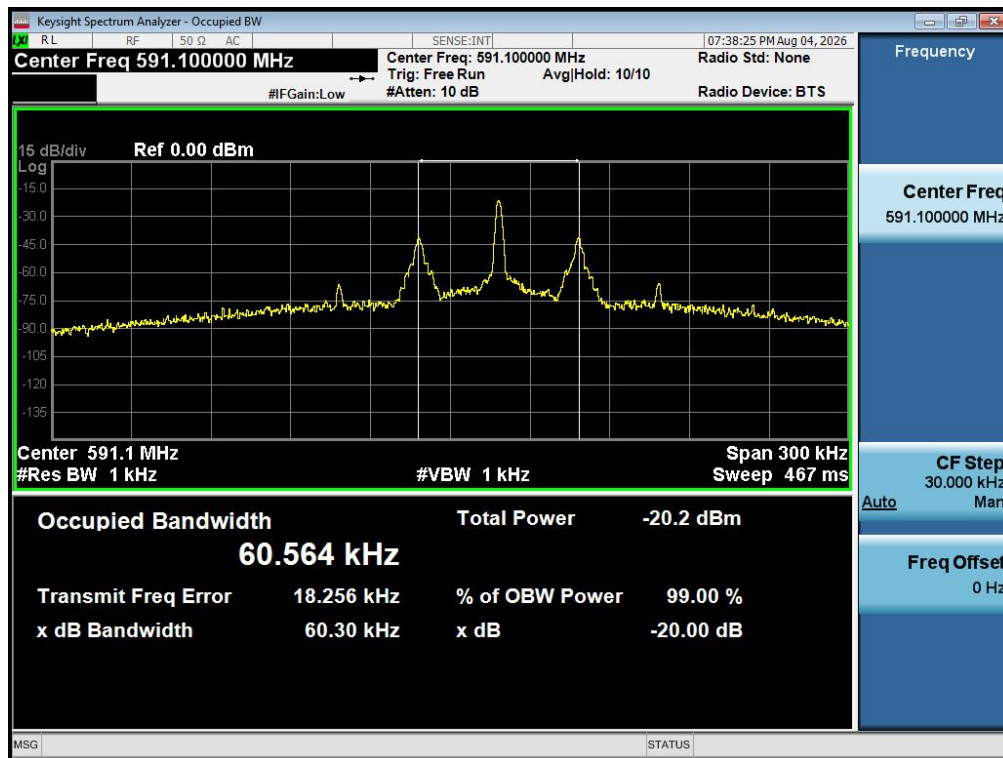

7. NECESSARY BANDWIDTH

7.1 LIMIT

The mean Power Density, measured with 1 kHz measurement bandwidth and RMS detector, of the transmitter unwanted emissions shall not exceed the limits of the masks provided in figure 1 for equipment employing analogue modulation and figure 2 for equipment employing digital modulation, but excluding WMAS.

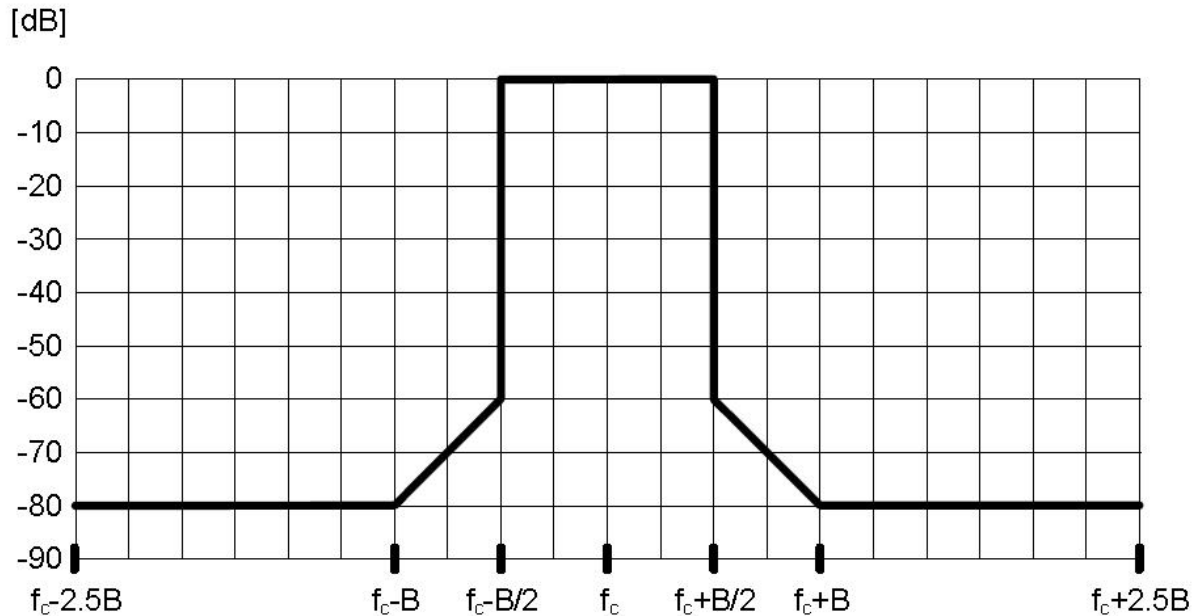


Figure 1: Transmit spectral power mask for equipment employing analogue modulation, RBW = 1 kHz

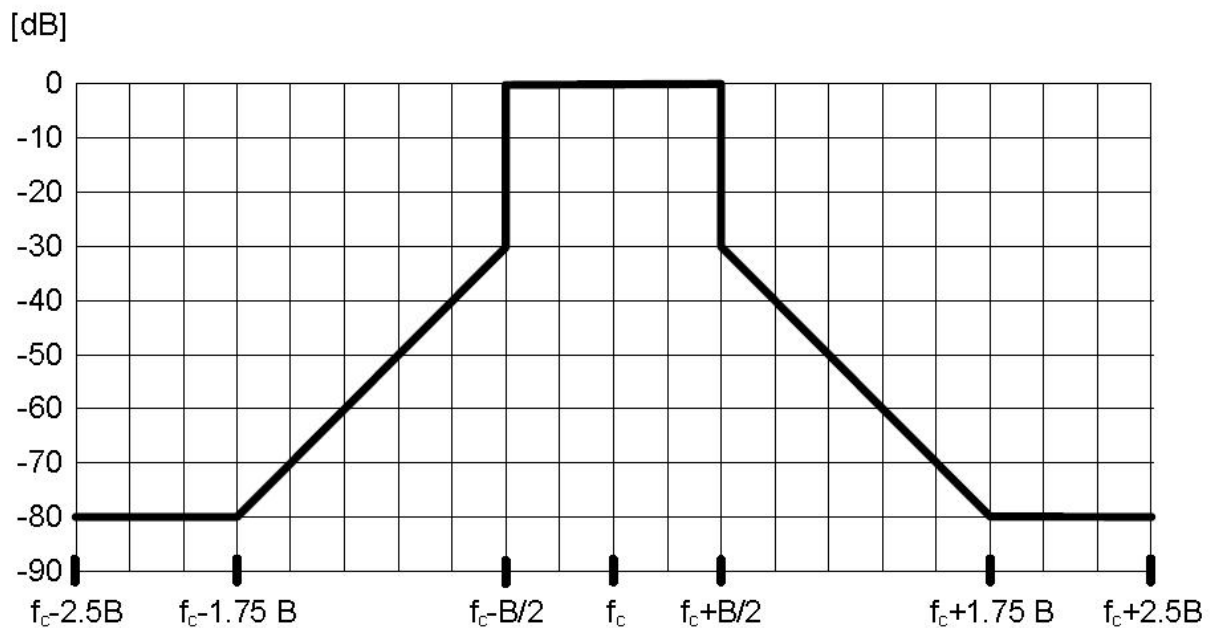


Figure 2: Transmit spectral power mask for equipment employing digital modulation, except WMAS, RBW = 1 kHz

The mean Power Density, measured with 100 kHz measurement bandwidth and PEAK detector, of the transmitter unwanted emissions shall not exceed the limits of the mask provided in figure 3

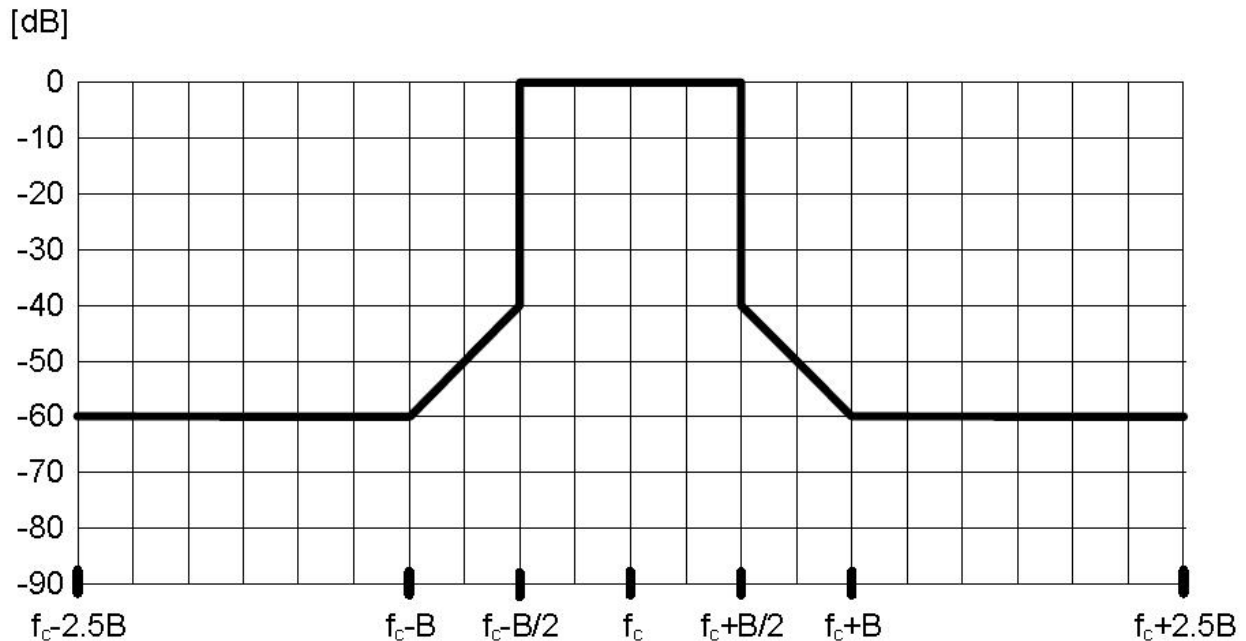


Figure 3: Transmit spectral power mask for WMAS, RBW = 100 kHz

The limits in figure 3 are provided with RBW = 100 kHz. The relevant measurements can also be performed with other RBW for certain ranges of B as given in table 3, accounting that the relevant limit given under RBW = 100 kHz needs to be converted appropriately by adding $c = 10 \times \log_{10} (RBW/100 \text{ kHz})$ for correction.

Table 6: Correction factor for different B and applicable RBW


B	RBW, VBW	c = correction factor
$B < 2 \text{ MHz}$	10 kHz	-10 dB
$2 \text{ MHz} \leq B < 5 \text{ MHz}$	25 kHz	-7 dB
$5 \text{ MHz} \leq B \leq 20 \text{ MHz}$	100 kHz	0 dB

Standard Applicable

According to §15.236 (g) Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in §8.3 of ETSI EN 300 422-1 V2.2.1 (2021-11), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless Microphones in the 25 MHz to 3GHz frequency range; Part 1: Technical characteristics and methods of measurement. Emissions outside of this band shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 V2.2.1 (2021-11).

According to EN 300 422-1 V2.2.1 (2021-11) section 8.3, the transmitter output spectrum shall be within the mask defined in the following figure.

7.2 TEST SETUP

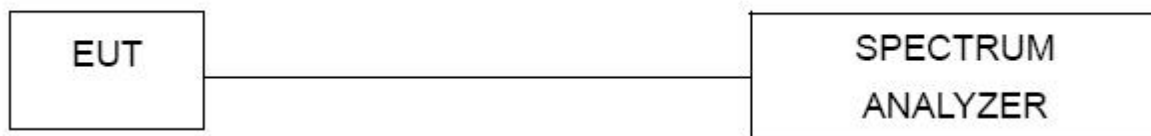

7.3 TEST PROCEDURE

For analogue modulated equipment

The settings of the spectrum analyser shall be:

Centre Frequency = f_{em} (actual centre frequency)

Span = $5 \times B$

RBW = 1 kHz

VBW = 3 kHz

Sweep Points = Span / RBW

Detector = PEAK (Max or Positive)

Trace Mode = Clear Write

Measurement Time = 20 s

Sweep Time = Measurement Time

Sweep Mode = Single sweep

NOTE: If the DUT does not provide an unmodulated carrier to measure the actual centre frequency f_{om} according to clause 5.4.2, the declared centre frequency f_e can be used.

Step 1:

Perform spectrum mask conformity test.

Step 2:

This value shall be recorded

Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the DUT.

For digital modulated equipment except WMAS

The settings of the spectrum analyser shall be:

Centre Frequency = f_{em} (actual centre frequency)

Span = $5 \times B$

RBW = 1 kHz

VBW = 3 kHz

Sweep Points > Span / RBW

Detector = RMS

Trace Mode = Clear Write

Measurement Time > 20 s

Sweep Time = Measurement Time

Sweep Mode = Single sweep

NOTE: If the DUT does not provide an unmodulated carrier to measure the actual centre frequency f_c according to clause 5.4.2, the declared centre frequency f_c can be used.

Step 1:

Perform spectrum mask conformity test.

Step 2:

Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the DUT. This value shall be recorded.

For WMAS

The settings of the spectrum analyser shall be:

Centre Frequency = f_{em} (actual centre frequency)

Span = $5 \times B$

RBW and VBW = see table 6

Sweep Points > Span / RBW

Detector = PEAK (Max or Positive)

Trace Mode = MAX HOLD

Measurement Time 60 s

Sweep Time < Measurement Time

Sweep Mode = Continuous sweep

NOTE: If the DUT does not provide an unmodulated carrier to measure the actual centre frequency f_c according to clause 5.4.2, the declared centre frequency f_e can be used.

Step 1:

Perform spectrum mask conformity test.


Step 2:

Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the DUT. This value shall be recorded.


7.4 TEST RESULTS

Pass


Low Channel

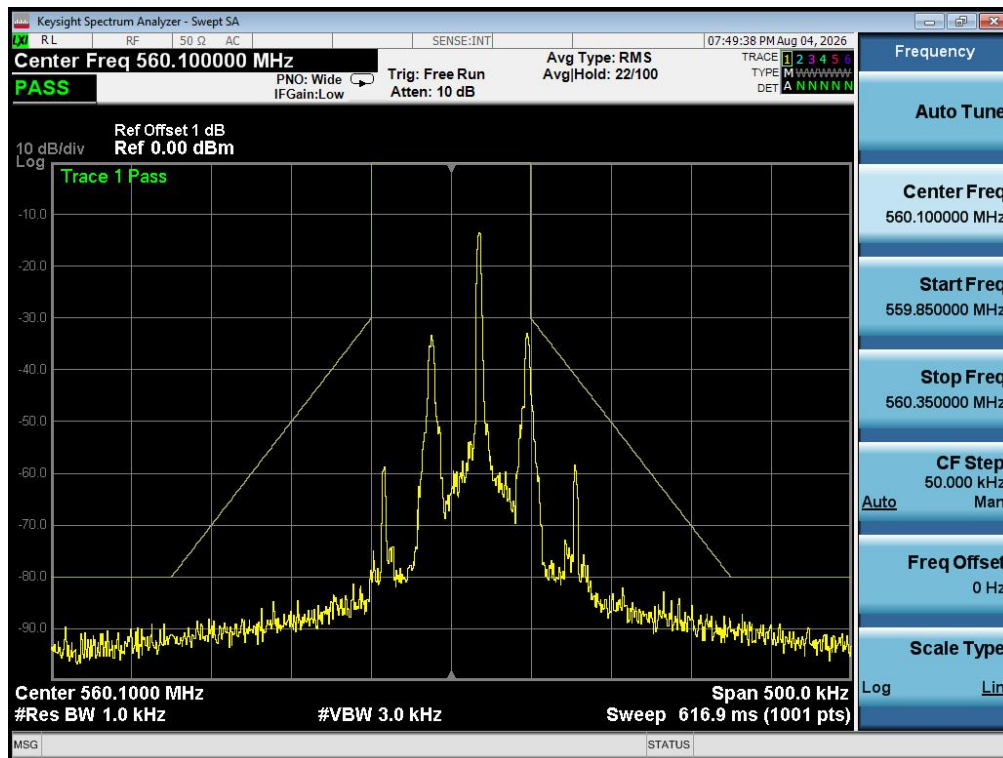

Mid Channel

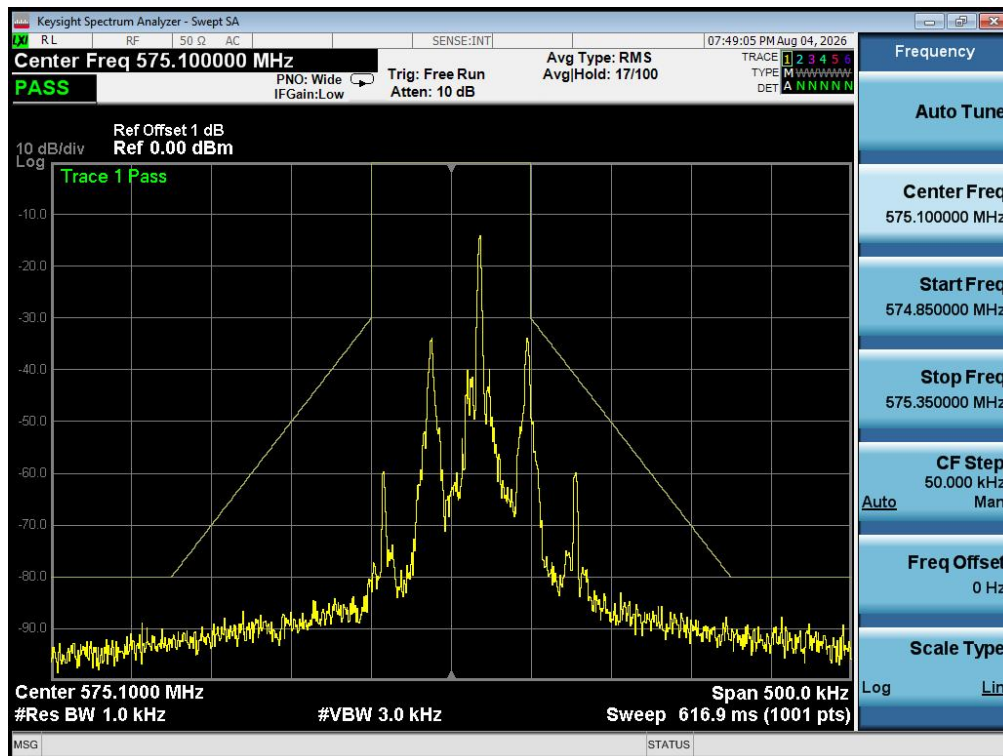

High Channel

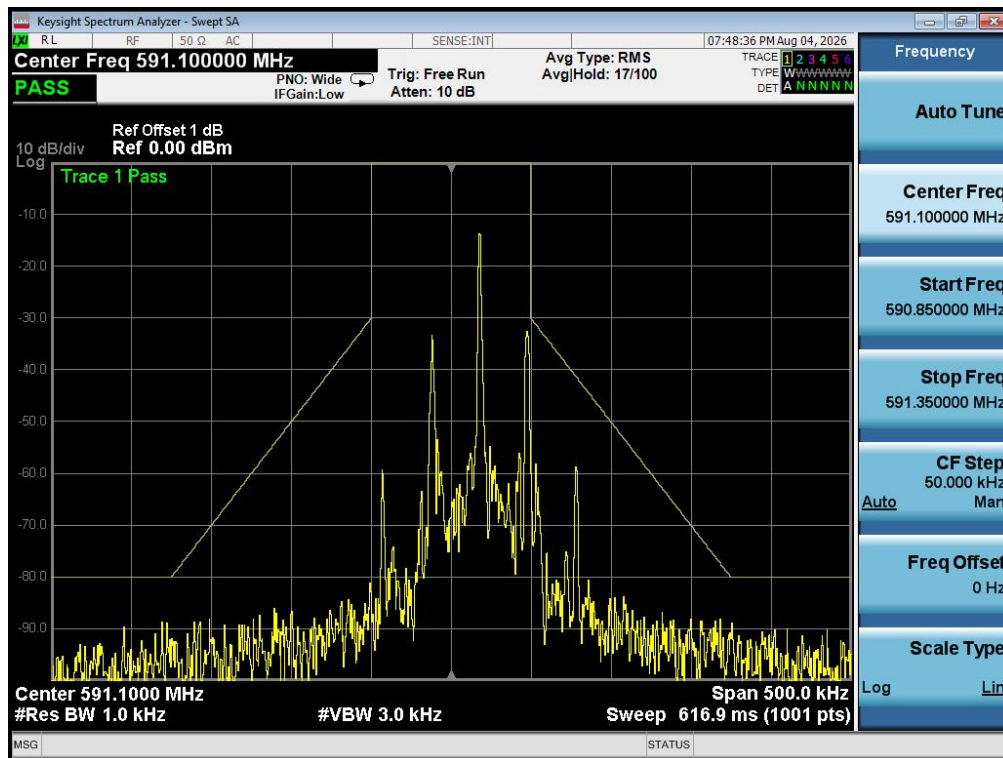

8. FREQUENCY STABILITY

8.1 Limit

$$\pm 0.005\% \times 560.1 \text{ MHz} = 28.01 \text{ KHz}$$

$$\pm 0.005\% \times 575.1 \text{ MHz} = 28.76 \text{ KHz}$$

$$\pm 0.005\% \times 591.1 \text{ MHz} = 29.56 \text{ KHz}$$

8.2 Standard Applicable

According to FCC 15.236(f)(3), The frequency tolerance of the carrier signal shall be maintained within $\pm 0.005\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. Battery operated equipment shall be tested using a new battery

8.3 TEST SETUP



8.4 Test Procedure

1. Setup the configuration of the ambient temperature from -20°C to 50°C with sufficient time. And measure the different power of the EUT with an artificial power from highest to end point voltage.
2. Set frequency counter center frequency to the right frequency needs to be measured band.

8.5 Test Result

Test frequency	Test Conditions		Measure Frequency	Frequency Error	Limit	Result
(MHz)	Voltage (V)	Temperature($^{\circ}\text{C}$)	(MHz)	(KHz)	(KHz)	
560.1	N	N	560.115	15	± 28.01	Pass
		L	560.114	14		Pass
		H	560.115	15		Pass
	L	N	560.116	16		Pass
		L	560.115	15		Pass
		H	560.115	15		Pass
	H	N	560.116	16		Pass
		L	560.116	16		Pass
		H	560.115	15		Pass

Test frequency	Test Conditions		Measure Frequency	Frequency Error	Limit	Result
(MHz)	Voltage (V)	Temperature(°C)	(MHz)	(KHz)	(KHz)	
575.1	N	N	575.115	15	±28.76	Pass
		L	575.114	14		Pass
		H	575.115	15		Pass
	L	N	575.116	16		Pass
		L	575.115	15		Pass
		H	575.115	15		Pass
	H	N	575.116	16		Pass
		L	575.116	16		Pass
		H	575.115	15		Pass

Test frequency	Test Conditions		Measure Frequency	Frequency Error	Limit	Result
(MHz)	Voltage (V)	Temperature(°C)	(MHz)	(KHz)	(KHz)	
591.1	N	N	591.115	15	±29.56	Pass
		L	591.114	14		Pass
		H	591.115	15		Pass
	L	N	591.116	16		Pass
		L	591.115	15		Pass
		H	591.115	15		Pass
	H	N	591.116	16		Pass
		L	591.116	16		Pass
		H	591.115	15		Pass

9. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antennas are PCB antenna, the best case gain of the antenna is 1.7 dBi, reference to the appendix II for details	

10. TEST PHOTO & EUT PHOTO

Reference to the appendix for details.

******* END OF REPORT *******