
Test Plot 1#: GSM 850 Mid Body Bottom

DUT: Tablet PC; Type: G868 V7.0; Serial: 3PG8-1

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.561$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1493; Calibrated: 2025/12/01
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.638 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.09 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 2.65 W/kg

SAR(1 g) = 0.543 W/kg; SAR(10 g) = 0.179 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 63.4%

Maximum value of SAR (measured) = 0.549 W/kg

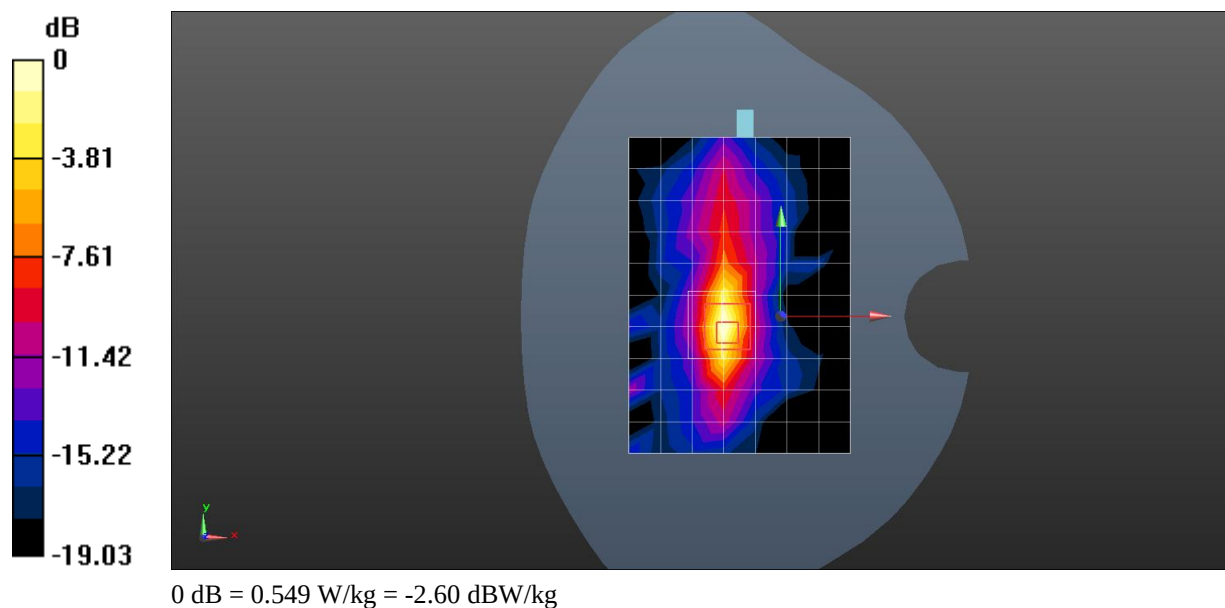

Test Plot 2#: GSM 1900 Mid Body Bottom

DUT: Tablet PC; Type: G868 V7.0; Serial: 3PG8-1

Communication System: Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.447$ S/m; $\epsilon_r = 40.765$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1493; Calibrated: 2025/12/01
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.660 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.54 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.616 W/kg; SAR(10 g) = 0.354 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 66.4%

Maximum value of SAR (measured) = 0.642 W/kg

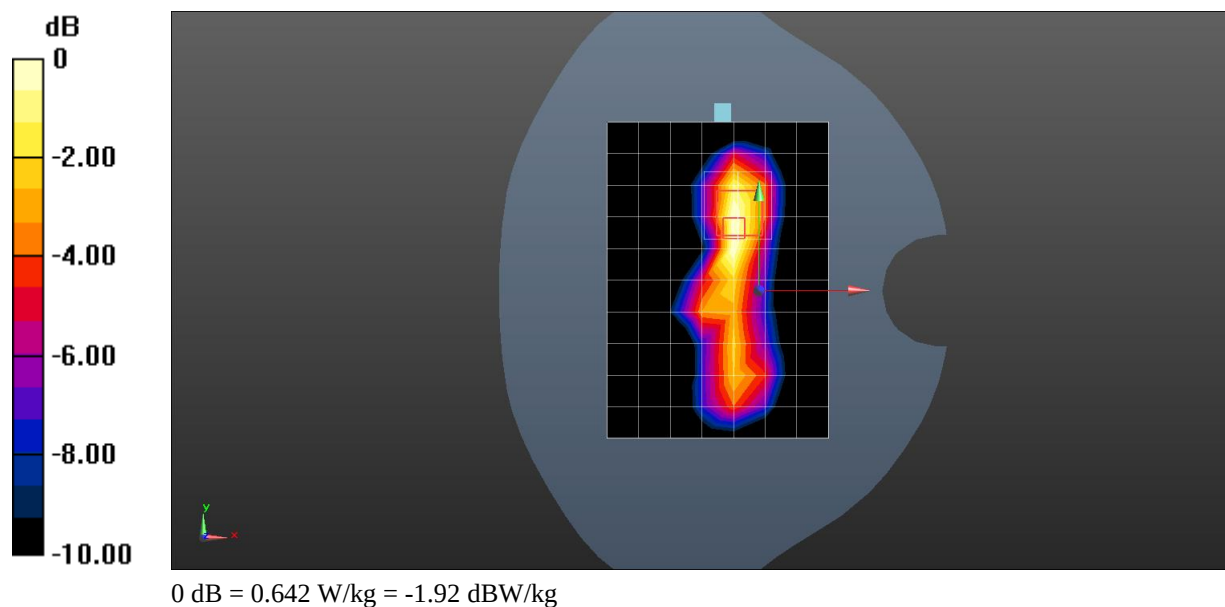

Test Plot 3#: WCDMA Band 2 Mid Body Bottom

DUT: Tablet PC; Type: G868 V7.0; Serial: 3PG8-1

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.447$ S/m; $\epsilon_r = 40.765$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1493; Calibrated: 2025/12/01
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.684 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.63 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.674 W/kg; SAR(10 g) = 0.269 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 43.4%

Maximum value of SAR (measured) = 1.06 W/kg

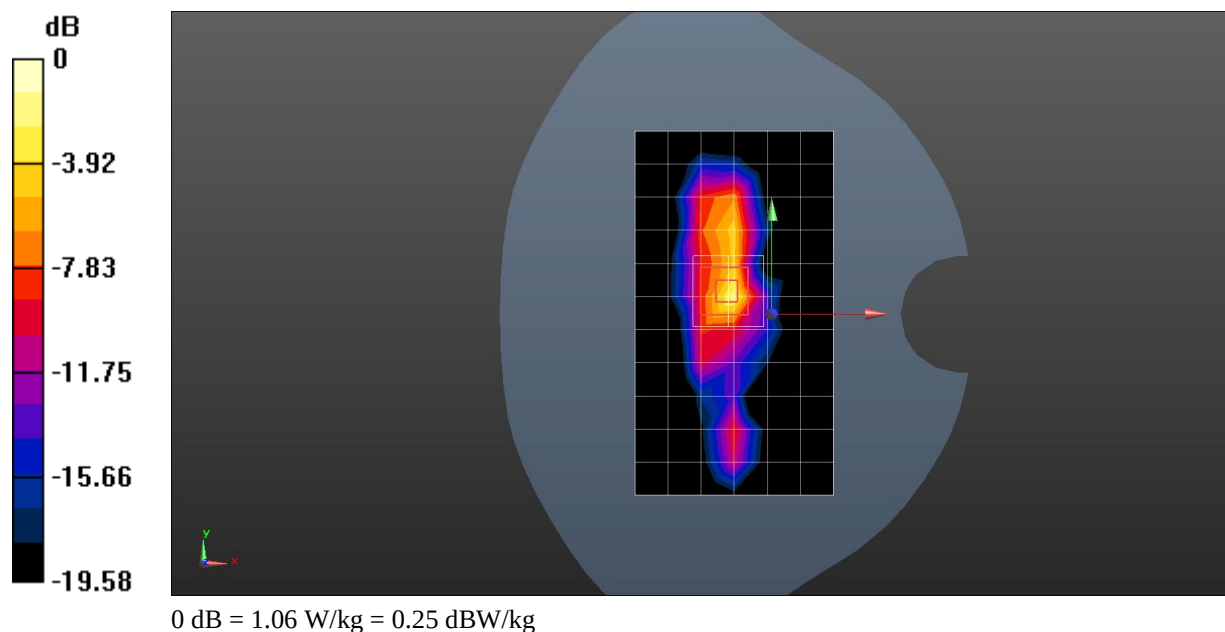

Test Plot 4#: WCDMA Band 5 Mid Body Botttom

DUT: Tablet PC; Type: G868 V7.0; Serial: 3PG8-1

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.561$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1493; Calibrated: 2025/12/01
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.507 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.10 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.162 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 30.5%

Maximum value of SAR (measured) = 0.518 W/kg

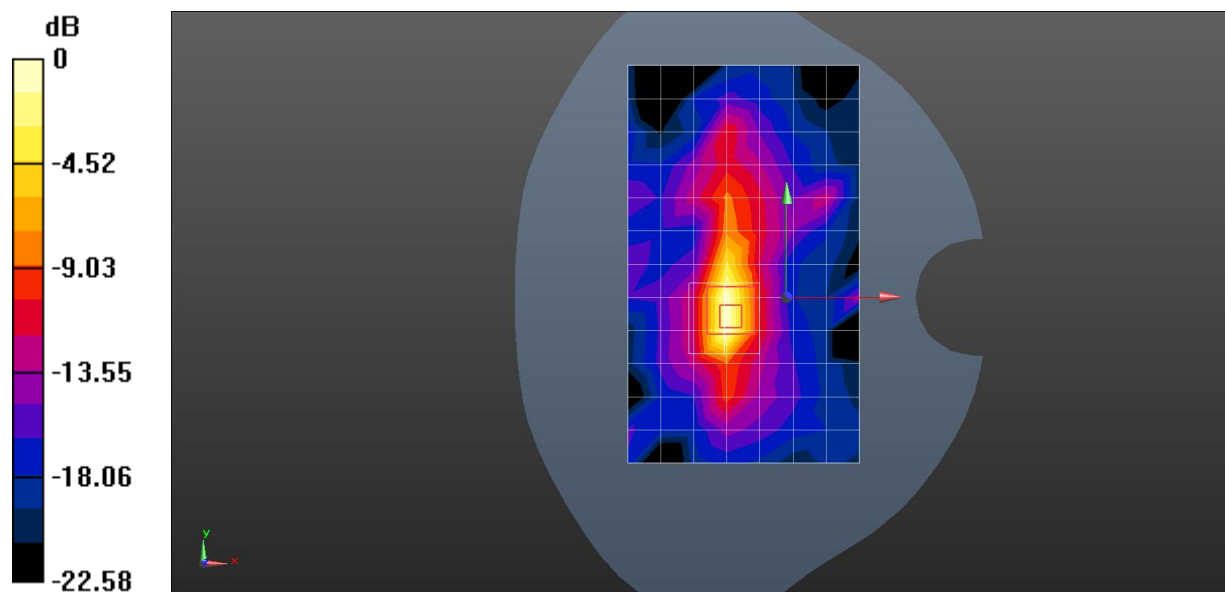

Test Plot 5#: LTE Band 2 1RB Mid Body Bottom

DUT: Tablet PC; Type: G868 V7.0; Serial: 3PG8-1

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.447$ S/m; $\epsilon_r = 40.765$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1493; Calibrated: 2025/12/01
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.484 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.60 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.201 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 43.6%

Maximum value of SAR (measured) = 0.990 W/kg

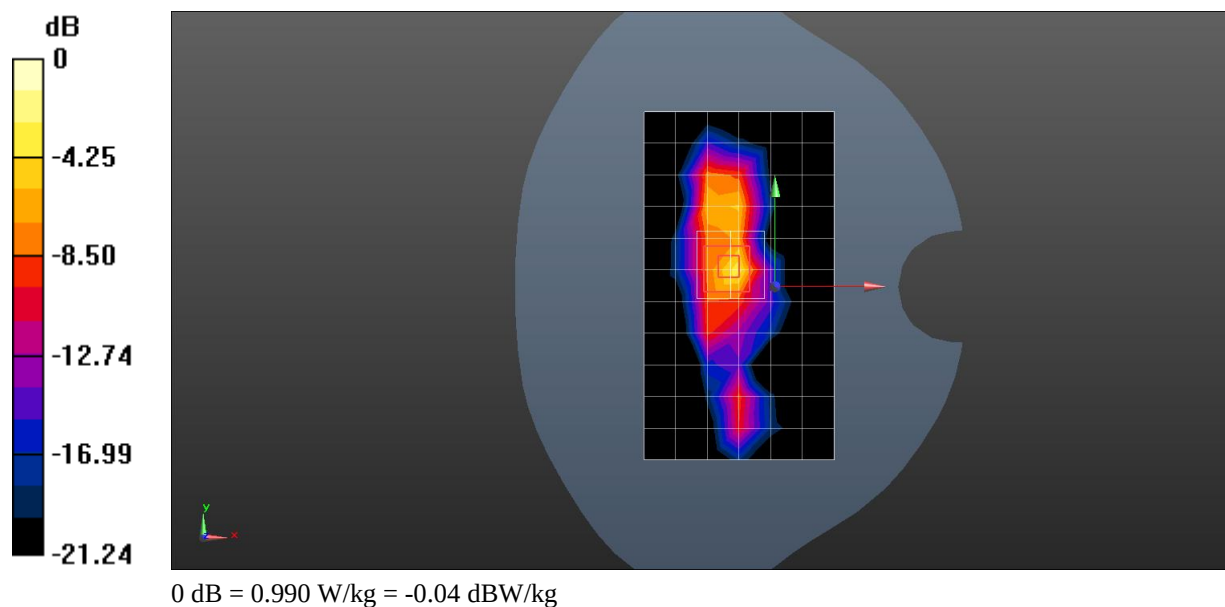

Test Plot 6#: LTE Band 4 1RB Mid Body Bottom

DUT: Tablet PC; Type: G868 V7.0; Serial: 3PG8-1

Communication System: Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.365$ S/m; $\epsilon_r = 41.352$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.13, 7.09, 7) @1732.5 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1493; Calibrated: 2025/12/01
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.721 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.04 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.504 W/kg; SAR(10 g) = 0.276 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.7%

Maximum value of SAR (measured) = 0.717 W/kg

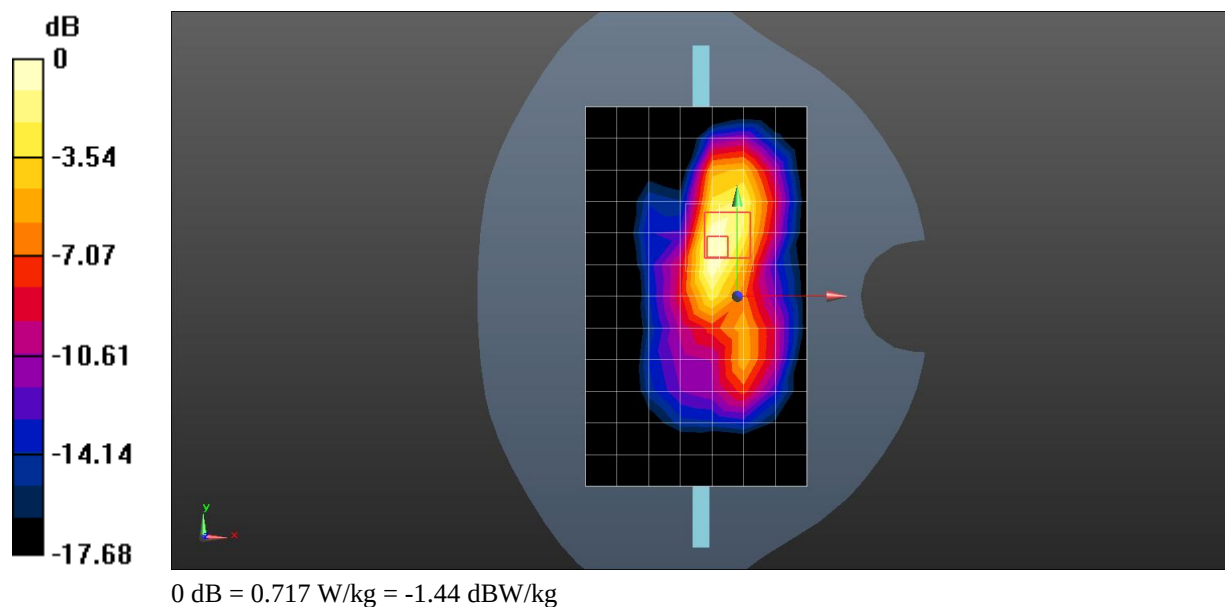

Test Plot 7#: LTE Band 7 1RB Mid Body Bottom

DUT: Tablet PC; Type: G868 V7.0; Serial: 3PG8-1

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.894$ S/m; $\epsilon_r = 39.807$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.32, 6.29, 6.21) @2535 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1493; Calibrated: 2025/12/01
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.911 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.14 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.524 W/kg; SAR(10 g) = 0.205 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 45.8%

Maximum value of SAR (measured) = 1.02 W/kg

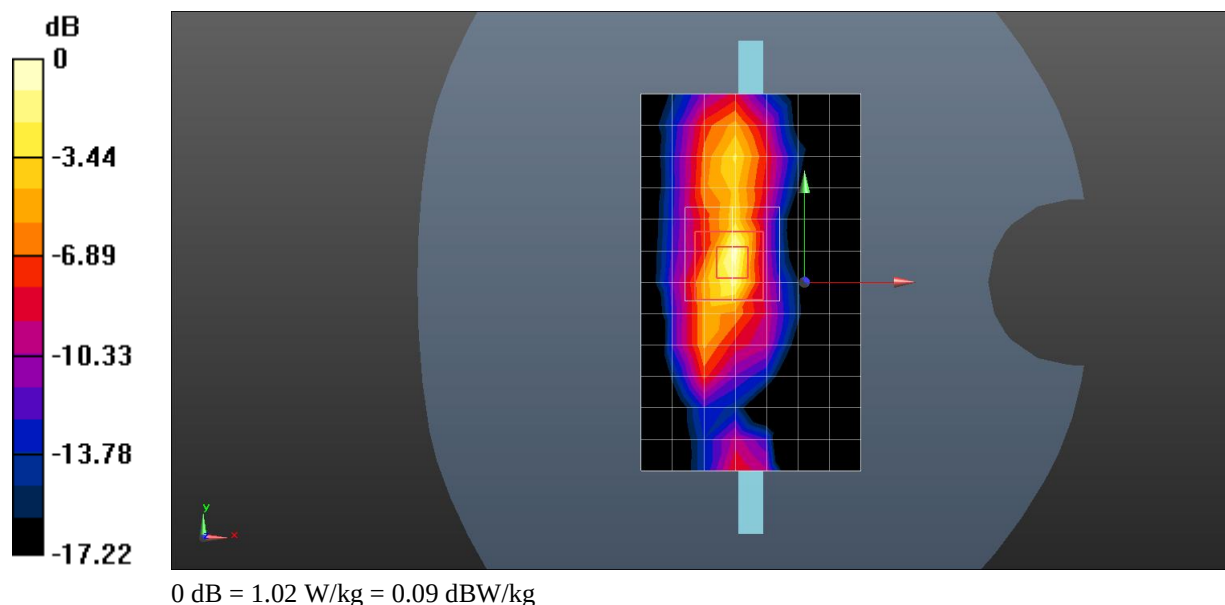

Test Plot 8#: WLAN 802.11b Mid Body Right

DUT: Tablet PC; Type: G868 V7.0; Serial: 3PG8-1

Communication System: 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1.007
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.815$ S/m; $\epsilon_r = 40.426$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.49, 6.46, 6.38) @2437 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1493; Calibrated: 2025/12/01
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.306 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.923 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.573 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.119 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 0.308 W/kg

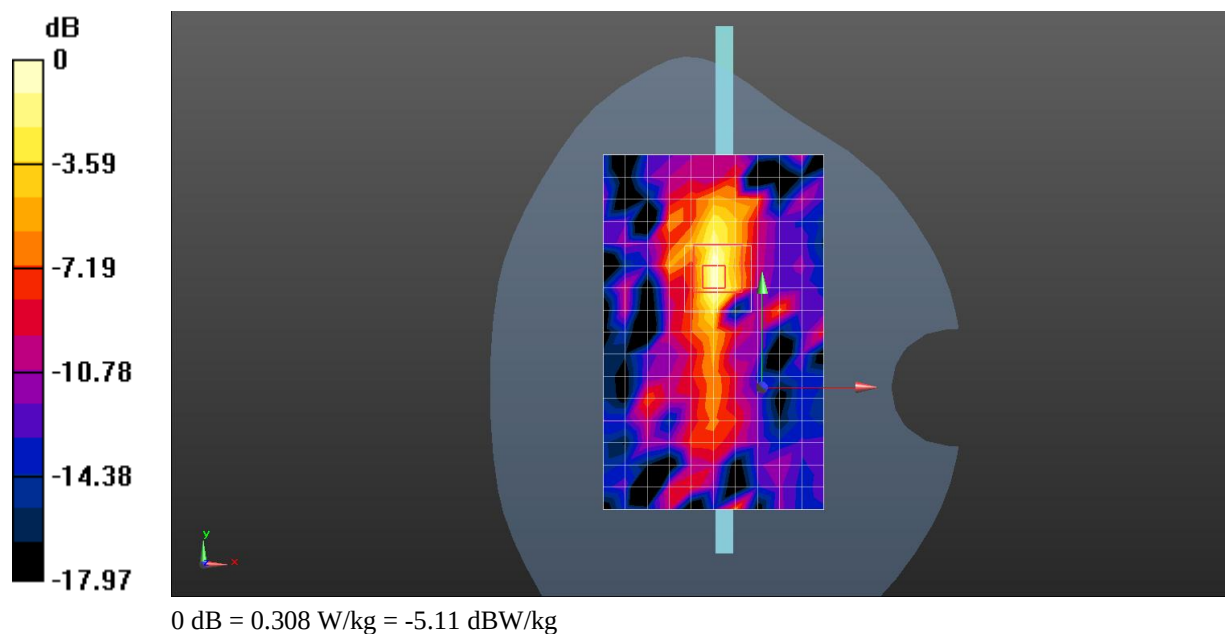

Test Plot 9#: WLAN 5.2G 802.11a Mid Body Right

DUT: Tablet PC; Type: G868 V7.0; Serial: 3PG8-1

Communication System: 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.04
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.512$ S/m; $\epsilon_r = 36.964$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.11, 5.08, 5.02) @5200 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1493; Calibrated: 2025/12/01
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.301 W/kg

Zoom Scan (8x8x16) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.785 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.865 W/kg

SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.094 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 76.1%

Maximum value of SAR (measured) = 0.384 W/kg

