

# FCC TEST REPORT

## FCC ID:2BOCT-T50

**Product** : Dog Bark Control Collar  
**Model Name** : T50, T50-2  
**Brand** : N/A  
**Report No.** : SZNTT26018450E1-1

Prepared for

**Shenzhen Papani Pet Products Co.,Ltd.**

**Room 501, Block D, Huachuangda Technology Park, No. 176, Hangcheng Avenue,  
Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, China**

Prepared by

**Shenzhen NTT Testing Technology Co.,Ltd.**

**1B, Building 2, Factory Building & 103, Building 3, Factory Building, Dayang Industrial  
Park, No.4, Industrial Avenue, Tangwei Community, Fuhai Sub-district, Bao 'an District,  
Shenzhen City, Guangdong, China**

**TEL: 0755-27889935**

**FAX: /**

## 1 TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Papani Pet Products Co.,Ltd.  
Address : Room 501, Block D, Huachuangda Technology Park, No. 176,  
Hangcheng Avenue, Sanwei Community, Hangcheng Street, Bao'an  
District, Shenzhen, China  
Manufacture's name : Shenzhen Papani Pet Products Co.,Ltd.  
Address : Room 501, Block D, Huachuangda Technology Park, No. 176,  
Hangcheng Avenue, Sanwei Community, Hangcheng Street, Bao'an  
District, Shenzhen, China  
Product name : Dog Bark Control Collar  
Model name : T50  
Series Model name : T50-2  
Standards : FCC PART 15C 15.231  
Test procedure : ANSI C63.10-2020+Cor 1+2023  
Date of test : Apr. 28, 2026 - May. 20, 2026  
Date of Issue : Mar. 27, 2026

This device described above has been tested by NTT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTT, this document may be altered or revised by NTT, personal only, and shall be noted in the revision of the document.

Prepared by(Test Engineer):  
Zhao Di



Reviewer(Supervisor):  
Ken Wu



Approved(Manager):  
Abel Yu



Table of Contents

Page

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>1 TEST RESULT CERTIFICATION .....</b>                          | <b>2</b>  |
| <b>2. SUMMARY OF TEST RESULTS .....</b>                           | <b>5</b>  |
| 2.1 TEST FACILITY .....                                           | 6         |
| 2.2 MEASUREMENT UNCERTAINTY .....                                 | 6         |
| <b>3.GENERAL INFORMATION .....</b>                                | <b>7</b>  |
| 3.1 GENERAL DESCRIPTION OF EUT .....                              | 7         |
| 3.2 DESCRIPTION OF TEST MODES .....                               | 8         |
| 3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED ..... | 8         |
| 3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) .....            | 8         |
| 3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS .....                      | 9         |
| <b>4. EMC EMISSION TEST .....</b>                                 | <b>11</b> |
| 4.1 CONDUCTED EMISSION MEASUREMENT .....                          | 11        |
| 4.1.1 POWER LINE CONDUCTED EMISSION LIMITS .....                  | 11        |
| 4.1.2 TEST PROCEDURE .....                                        | 12        |
| 4.1.3 DEVIATION FROM TEST STANDARD .....                          | 12        |
| 4.1.4 TEST SETUP .....                                            | 12        |
| 4.1.5 EUT OPERATING CONDITIONS .....                              | 12        |
| 4.1.6 TEST RESULTS .....                                          | 12        |
| 4.2 RADIATED EMISSION MEASUREMENT .....                           | 15        |
| 4.2.1 RADIATED EMISSION LIMITS .....                              | 15        |
| 4.2.2 TEST PROCEDURE .....                                        | 16        |
| 4.2.3 TEST SETUP .....                                            | 17        |
| 4.2.4 EUT OPERATING CONDITIONS .....                              | 18        |
| 4.2.5 TEST RESULTS .....                                          | 18        |
| 5.1 APPLIED PROCEDURES / LIMIT .....                              | 23        |
| 5.2 TEST PROCEDURE .....                                          | 23        |
| 5.3 DEVIATION FROM STANDARD .....                                 | 23        |
| 5.4 TEST SETUP .....                                              | 23        |
| 5.5 EUT OPERATION CONDITIONS .....                                | 23        |
| 5.6 TEST RESULTS .....                                            | 24        |
| <b>6. CALCULATION OF AVERAGE FACTOR .....</b>                     | <b>25</b> |
| <b>7. DWELL TIME .....</b>                                        | <b>27</b> |
| 7.1 APPLICABLE STANDARD .....                                     | 27        |
| 7.2 TEST PROCEDURE .....                                          | 27        |
| 7.5 EUT OPERATION CONDITIONS .....                                | 27        |
| 7.6 TEST RESULTS .....                                            | 28        |

|                                      |    |
|--------------------------------------|----|
| 8. ANTENNA REQUIREMENT .....         | 29 |
| 9. TEST SETUP PHOTO .....            | 30 |
| 10. EUT CONSTRUCTIONAL DETAILS ..... | 30 |

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 (15.231) , Subpart C |                                                     |          |        |
|---------------------------------|-----------------------------------------------------|----------|--------|
| Standard Section                | Test Item                                           | Judgment | Remark |
| 15.207                          | Conducted Emission                                  | PASS     |        |
| 15.209,15.231b                  | Fundamental &Radiated Spurious Emission Measurement | PASS     |        |
| 15.231c                         | Occupy Bandwidth                                    | PASS     |        |
| 15.231a                         | Dwell time                                          | PASS     |        |
| 15.203                          | Antenna Requirement                                 | PASS     |        |

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

## 2.1 TEST FACILITY

Site Description

EMC Lab. :

Designation Number: CN3446

Test Firm Registration Number: 129414

Accredited by ANAB, Dec. 19, 2025

The Certificate Registration Number is AT-3446

Name of Firm : Shenzhen NTT Testing Technology Co.,Ltd.

Site Location : 1B, Building 2, Factory Building & 103, Building 3, Factory Building,  
Dayang Industrial Park, No.4, Industrial Avenue, Tangwei Community,  
Fuhai Sub-district, Bao 'an District, Shenzhen City, Guangdong, China

## 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$  · where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$  · providing a level of confidence of approximately 95 % .

| Parameter                                                                                           | Uncertainty              |
|-----------------------------------------------------------------------------------------------------|--------------------------|
| RF output power, conducted                                                                          | $\pm 1.0\text{dB}$       |
| Power Spectral Density, conducted                                                                   | $\pm 2.2\text{dB}$       |
| Radio Frequency                                                                                     | $\pm 1 \times 10^{-6}$   |
| Bandwidth                                                                                           | $\pm 1.5 \times 10^{-6}$ |
| Time                                                                                                | $\pm 2\%$                |
| Duty Cycle                                                                                          | $\pm 2\%$                |
| Temperature                                                                                         | $\pm 1^\circ\text{C}$    |
| Humidity                                                                                            | $\pm 5\%$                |
| DC and low frequency voltages                                                                       | $\pm 3\%$                |
| Conducted Emissions (150kHz~30MHz)                                                                  | $\pm 3.64\text{dB}$      |
| Radiated Emission(9KHz~30MHz)                                                                       | $\pm 4.51\text{dB}$      |
| Radiated Emission(30MHz~1GHz)                                                                       | $\pm 5.03\text{dB}$      |
| Radiated Emission(1GHz~25GHz)                                                                       | $\pm 4.74\text{dB}$      |
| Radiated Emission(25GHz~40GHz)                                                                      | $\pm 3.38\text{dB}$      |
| Remark: The coverage Factor ( $k=2$ ), and measurement Uncertainty for a level of Confidence of 95% |                          |



### 3.GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                                                                                                                                                                                                                |   |                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|-------------------------------------------------------------------------------------|
| Product Name                                                                                                                                                                                                   | : | Dog Bark Control Collar                                                             |
| Model Name                                                                                                                                                                                                     | : | T50                                                                                 |
| Sample ID                                                                                                                                                                                                      | : | SZNTT26018450E1-001#                                                                |
| Sample(s) Status:                                                                                                                                                                                              | : | Engineer sample                                                                     |
| Series Model                                                                                                                                                                                                   | : | T50-2                                                                               |
| Model Different.:                                                                                                                                                                                              | : | All the models are the same circuit and RF module, except the model name and color. |
| Operating frequency                                                                                                                                                                                            | : | 433.92 MHz                                                                          |
| Number of Channels                                                                                                                                                                                             | : | 1 channels                                                                          |
| Type of Modulation                                                                                                                                                                                             | : | ASK                                                                                 |
| Antenna installation                                                                                                                                                                                           | : | Internal Antenna                                                                    |
| Antenna Gain                                                                                                                                                                                                   | : | 0.18dBi                                                                             |
| Power supply                                                                                                                                                                                                   | : | DC 3.7V from battery; Charging input: DC 5V                                         |
| Hardware Version                                                                                                                                                                                               | : | N/A                                                                                 |
| Software Version                                                                                                                                                                                               | : | N/A                                                                                 |
| Note:433MHz RemoteControl forDog Bark Control Collar Model T50.                                                                                                                                                |   |                                                                                     |
| Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant. |   |                                                                                     |



### 3.2 DESCRIPTION OF TEST MODES


| For All Emission  |                                                |
|-------------------|------------------------------------------------|
| Final Test Mode   | Description                                    |
| Transmitting mode | Keep the EUT in continuously transmitting mode |

Note:


- (1) Fully-charged battery is used during the test

### 3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test



Spurious emissions



### 3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment      | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|----------------|-----------|----------------|------------|------|
| E-1  | Remote Control | N/A       | DS306-R        | N/A        | EUT  |
| E-2  | Adapter        | /         | GA-0502000     | /          | /    |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
|      |               |              |        |      |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

**3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS**
**Radiated emission & Radio Frequency Test Equipment**

| Name                                                | Model No.         | Serial No. | Manufacturer    | Date of Cal. | Due Date  |
|-----------------------------------------------------|-------------------|------------|-----------------|--------------|-----------|
| 966 Shielded Room                                   | 966 Room          | /          | EMToni          | 2025/7/24    | 2028/7/23 |
| EMI Test Receiver                                   | ESCI              | 101018     | RS              | 2025/9/8     | 2026/9/7  |
| Amplifier<br>(30MHz-1GHz)                           | BBV 9718D         | 00042      | SCHWARZBECK     | 2025/9/8     | 2026/9/7  |
| Bilog Antenna<br>(30MHz-1GHz)                       | VULB9168          | 1858       | SCHWARZBECK     | 2025/9/9     | 2026/9/8  |
| Horn antenna<br>(1GHz-18GHz)                        | BBHA 9120<br>D    | 02622      | SCHWARZBECK     | 2025/9/9     | 2026/9/8  |
| Preamplifier<br>(1GHz-18GHz)                        | BBV 9718D         | 0024       | SCHWARZBECK     | 2025/9/8     | 2026/9/7  |
| Spectrum Analyzer<br>(10Hz-40GHz)                   | FSV 40            | 100952     | Rohde & Schwarz | 2025/9/8     | 2026/9/7  |
| Preamplifier<br>(18GHz-40GHz)                       | BBV 9721          | 0056       | SCHWARZBECK     | 2025/9/8     | 2026/9/7  |
| Double Ridge Guide<br>Horn Antenna<br>(18GHz-40GHz) | SAS-574           | 588        | A.H.System      | 2025/9/8     | 2026/9/7  |
| Loop Antenna<br>(9KHz-30MHz)                        | FMZB1519B         | 014        | SCHWARZBECK     | 2025/9/8     | 2026/9/7  |
| Amplifier<br>(9KHz-30MHz)                           | CVP 9222 C        | 00109      | SCHWARZBECK     | 2025/9/8     | 2026/9/7  |
| MXG Signal Analyzer                                 | N9020A            | MY50510202 | Agilent         | 2025/9/8     | 2026/9/7  |
| MXG Vector Signal<br>Generator                      | N5182A            | MY50140020 | Agilent         | 2025/9/8     | 2026/9/7  |
| MXG Analog Signal<br>Generator                      | N5181A            | MY47420919 | Agilent         | 2025/9/8     | 2026/9/7  |
| Power Sensor                                        | TR1029-2          | 512364     | Techoy          | 2025/9/8     | 2026/9/7  |
| RF Switch                                           | TR1029-1          | 512364     | Techoy          | 2025/9/8     | 2026/9/7  |
| Cable                                               | DA800-<br>4000MM  | NA         | DA              | 2025/9/8     | 2026/9/7  |
| Cable                                               | DA800-<br>11000MM | NA         | DA              | 2025/9/8     | 2026/9/7  |

**Conducted emission Test Equipment**

| Name              | Model No.        | Serial No. | Manufacturer | Date of Cal. | Due Date  |
|-------------------|------------------|------------|--------------|--------------|-----------|
| 944 Shielded Room | HSRCE944         | /          | HTEC         | 2025/4/30    | 2028/4/29 |
| EMI Test Receiver | ESPI             | /          | RS           | 2025/9/8     | 2026/9/7  |
| LISN              | NNLK 8129        | 00603      | Schwarzbeck  | 2025/9/8     | 2026/9/7  |
| LISN              | NNHV<br>8123-400 | 00694      | Schwarzbeck  | 2025/9/8     | 2026/9/7  |
| LISN              | NNHV<br>8123-400 | 00680      | Schwarzbeck  | 2025/9/8     | 2026/9/7  |
| Cable             | RG223-<br>1500MM | NA         | RG           | 2025/9/8     | 2026/9/7  |

**Other**

| Item | Name                         | Manufacturer | Model  | Software version   |
|------|------------------------------|--------------|--------|--------------------|
| 1    | EMC Conduction Test System   | FALA         | EZ-EMC | Ver.EMC-CON 3A1.1+ |
| 2    | EMC radiation test system    | FALA         | EZ-EMC | Ver.FA-03A2 RE+    |
| 3    | RF test system               | TACHOY       | RFTest | V1.0.0             |
| 4    | RF communication test system | TACHOY       | RFTest | V1.0.0             |



#### 4. EMC EMISSION TEST

##### 4.1 CONDUCTED EMISSION MEASUREMENT

|                       |                                      |
|-----------------------|--------------------------------------|
| Test Requirement:     | FCC Part15 C Section 15.207          |
| Test Method:          | ANSI C63.10-2020+Cor 1+2023          |
| Test Frequency Range: | 150KHz to 30MHz                      |
| Receiver setup:       | RBW=9KHz, VBW=30KHz, Sweep time=auto |

##### 4.1.1 POWER LINE CONDUCTED EMISSION LIMITS

(Frequency Range 150KHz-30MHz)

| FREQUENCY (MHz) | Limit (dBuV) |           | Standard |
|-----------------|--------------|-----------|----------|
|                 | Quasi-peak   | Average   |          |
| 0.15 -0.5       | 66 - 56 *    | 56 - 46 * | FCC      |
| 0.50 -5.0       | 56.00        | 46.00     | FCC      |
| 5.0 -30.0       | 60.00        | 50.00     | FCC      |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


#### 4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

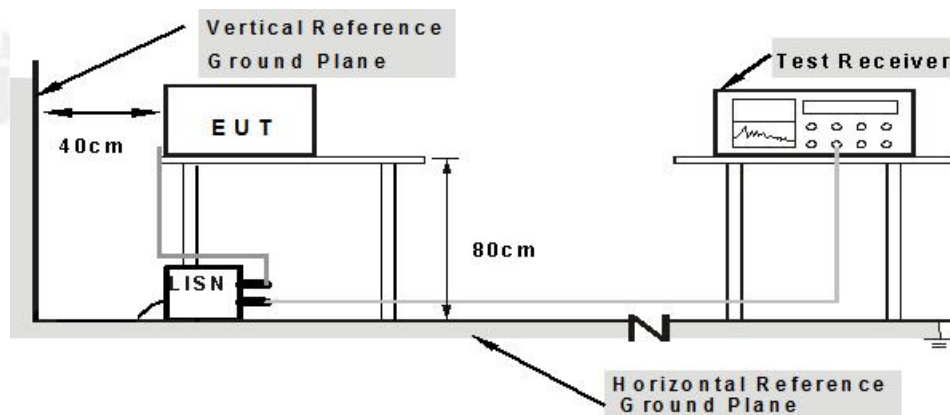

**Note:** 1.Support units were connected to second LISN.  
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

#### 4.1.6 TEST RESULTS



|                |              |                    |     |
|----------------|--------------|--------------------|-----|
| Temperature:   | 26 °C        | Relative Humidity: | 54% |
| Pressure:      | 1010hPa      | Phase :            | L   |
| Test Voltage : | AC 120V/60Hz |                    |     |

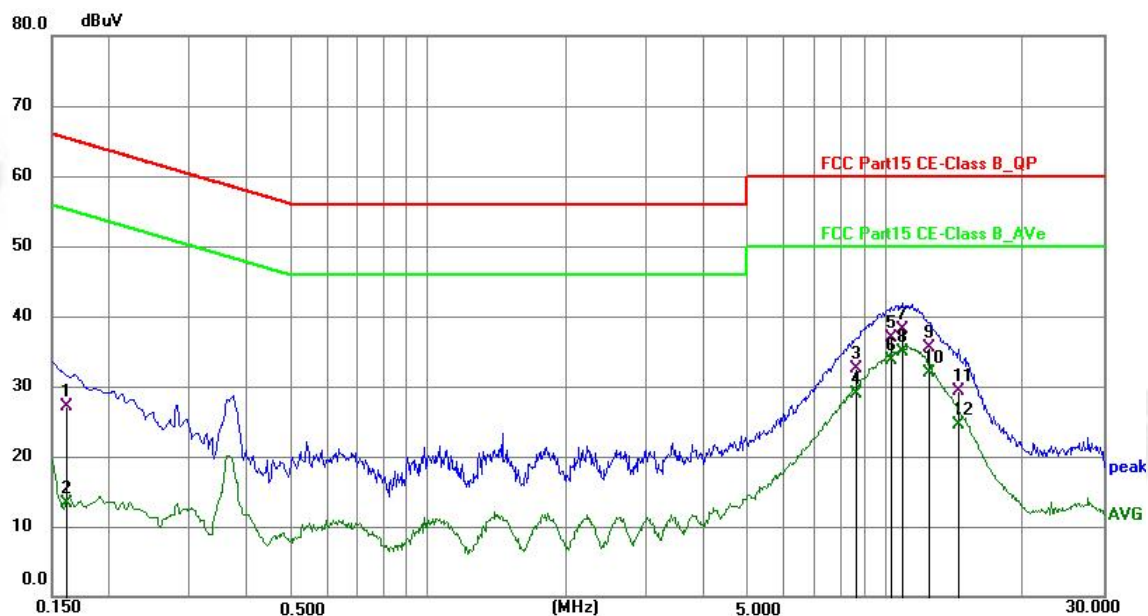


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|
| 1   | 0.1615          | 16.90          | 10.18       | 27.08        | 65.39        | -38.31      | QP       |
| 2   | 0.1615          | 3.04           | 10.18       | 13.22        | 55.39        | -42.17      | AVG      |
| 3   | 8.6244          | 22.27          | 10.32       | 32.59        | 60.00        | -27.41      | QP       |
| 4   | 8.6244          | 18.56          | 10.32       | 28.88        | 50.00        | -21.12      | AVG      |
| 5   | 10.3089         | 26.63          | 10.35       | 36.98        | 60.00        | -23.02      | QP       |
| 6   | 10.3089         | 23.34          | 10.35       | 33.69        | 50.00        | -16.31      | AVG      |
| 7   | 10.9498         | 27.64          | 10.38       | 38.02        | 60.00        | -21.98      | QP       |
| 8 * | 10.9498         | 24.46          | 10.38       | 34.84        | 50.00        | -15.16      | AVG      |
| 9   | 12.5168         | 24.97          | 10.45       | 35.42        | 60.00        | -24.58      | QP       |
| 10  | 12.5168         | 21.54          | 10.45       | 31.99        | 50.00        | -18.01      | AVG      |
| 11  | 14.4633         | 18.79          | 10.52       | 29.31        | 60.00        | -30.69      | QP       |
| 12  | 14.4633         | 13.92          | 10.52       | 24.44        | 50.00        | -25.56      | AVG      |

Note:

1. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
2. An initial pre-scan was performed on the line and neutral lines with peak detector.
3. Correct Factor = Insertion loss of LISN + Cable loss.
4. Margin = Reading level + Correct Factor - Limit.



|                |              |                    |     |
|----------------|--------------|--------------------|-----|
| Temperature:   | 26 °C        | Relative Humidity: | 54% |
| Pressure:      | 1010hPa      | Phase :            | N   |
| Test Voltage : | AC 120V/60Hz |                    |     |

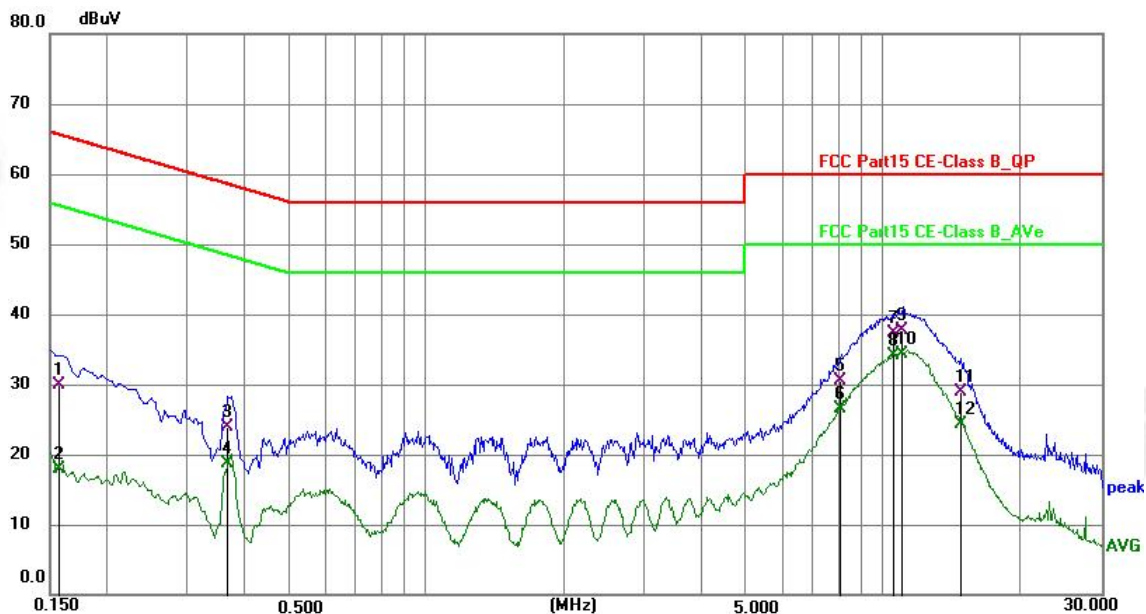

| No.  | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|------|-----------------|----------------|-------------|--------------|--------------|-------------|----------|
| 1    | 0.1567          | 19.77          | 10.19       | 29.96        | 65.64        | -35.68      | QP       |
| 2    | 0.1567          | 7.68           | 10.19       | 17.87        | 55.64        | -37.77      | AVG      |
| 3    | 0.3663          | 13.69          | 10.12       | 23.81        | 58.58        | -34.77      | QP       |
| 4    | 0.3663          | 8.67           | 10.12       | 18.79        | 48.58        | -29.79      | AVG      |
| 5    | 8.0819          | 20.23          | 10.31       | 30.54        | 60.00        | -29.46      | QP       |
| 6    | 8.0819          | 16.17          | 10.31       | 26.48        | 50.00        | -23.52      | AVG      |
| 7    | 10.5666         | 26.89          | 10.37       | 37.26        | 60.00        | -22.74      | QP       |
| 8    | 10.5666         | 23.65          | 10.37       | 34.02        | 50.00        | -15.98      | AVG      |
| 9    | 11.0246         | 27.23          | 10.38       | 37.61        | 60.00        | -22.39      | QP       |
| 10 * | 11.0246         | 23.99          | 10.38       | 34.37        | 50.00        | -15.63      | AVG      |
| 11   | 14.7917         | 18.35          | 10.51       | 28.86        | 60.00        | -31.14      | QP       |
| 12   | 14.7917         | 13.77          | 10.51       | 24.28        | 50.00        | -25.72      | AVG      |

Note:

1. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
2. An initial pre-scan was performed on the line and neutral lines with peak detector.
3. Correct Factor = Insertion loss of LISN + Cable loss.
4. Margin = Reading level + Correct Factor - Limit

#### 4.2 RADIATED EMISSION MEASUREMENT

|                       |                             |            |        |        |            |
|-----------------------|-----------------------------|------------|--------|--------|------------|
| Test Requirement:     | FCC Part15 C Section 15.209 |            |        |        |            |
| Test Method:          | ANSI C63.10-2020+Cor 1+2023 |            |        |        |            |
| Test Frequency Range: | 9kHz to 25GHz               |            |        |        |            |
| Test site:            | Measurement Distance: 3m    |            |        |        |            |
| Receiver setup:       | Frequency                   | Detector   | RBW    | VBW    | Value      |
|                       | 9KHz-150KHz                 | Quasi-peak | 200Hz  | 600Hz  | Quasi-peak |
|                       | 150KHz-30MHz                | Quasi-peak | 9KHz   | 30KHz  | Quasi-peak |
|                       | 30MHz-1GHz                  | Quasi-peak | 100KHz | 300KHz | Quasi-peak |
|                       | Above 1GHz                  | Peak       | 1MHz   | 3MHz   | Peak       |
|                       |                             | Peak       | 1MHz   | 10Hz   | Average    |

##### 4.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.231(b) limit in the table below has to be followed.

| Frequencies(MHz) | Field Strength(micorvolts/meter) | Measurement Distance(meters) |
|------------------|----------------------------------|------------------------------|
| 0.009~0.490      | 2400/F(KHz)                      | 300                          |
| 0.490~1.705      | 24000/F(KHz)                     | 30                           |
| 1.705~30.0       | 30                               | 30                           |
| 30~88            | 100                              | 3                            |
| 88~216           | 150                              | 3                            |
| 216~960          | 200                              | 3                            |
| Above 960        | 500                              | 3                            |

##### LIMITS OF RADIATED EMISSION MEASUREMENT

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

**FUNDAMENTAL AND HARMONICS EMISSION LIMITS**

| Fundamental Frequency (MHz) | Field Strength of Fundamental (microvolts/meter) | Field Strength of Spurious Emissions (microvolts/meter) |
|-----------------------------|--------------------------------------------------|---------------------------------------------------------|
| 40.66 - 40.70               | 2,250                                            | 225                                                     |
| 70 - 130                    | 1,250                                            | 125                                                     |
| 130 - 174                   | 1,250 to 3,750 **                                | 125 to 375 **                                           |
| 174 - 260                   | 3,750                                            | 375                                                     |
| 260 - 470                   | 3,750 to 12,500 **                               | 375 to 1,250 **                                         |
| Above 470                   | 12,500                                           | 1,250                                                   |

\*\* linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz,  $\mu\text{V/m}$  at 3 meters =  $56.81818(F) - 6136.3636$ ; for the band 260-470 MHz,  $\mu\text{V/m}$  at 3 meters =  $41.6667(F) - 7083.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

**FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)**

| Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz) | Range (MHz)                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Below 1.705                                                                                                                     | 30                                                                              |
| 1.705 – 108                                                                                                                     | 1000                                                                            |
| 108 – 500                                                                                                                       | 2000                                                                            |
| 500 – 1000                                                                                                                      | 5000                                                                            |
| Above 1000                                                                                                                      | 5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower |

| Spectrum Parameter | Setting                                          |
|--------------------|--------------------------------------------------|
| Attenuation        | Auto                                             |
| Start Frequency    | 1000 MHz                                         |
| Stop Frequency     | 10th carrier harmonic                            |
| RBW / VBW setting  | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

**4.2.2 TEST PROCEDURE**

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.


- c. The height of the equipment or of the substitution antenna shall be 0.8 m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case was X axis and the emissions were reported

#### 4.2.3 TEST SETUP


##### (A) Radiated Emission Test-Up Frequency Below 30MHz

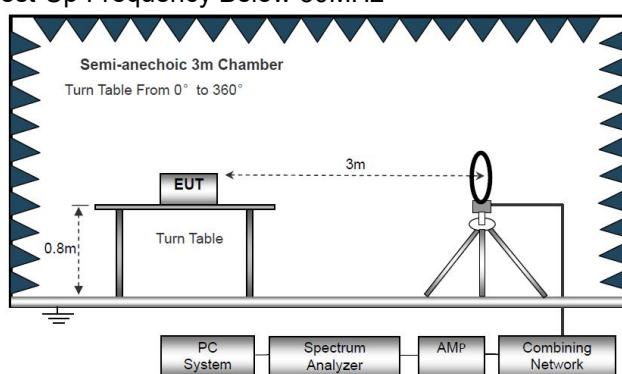

##### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

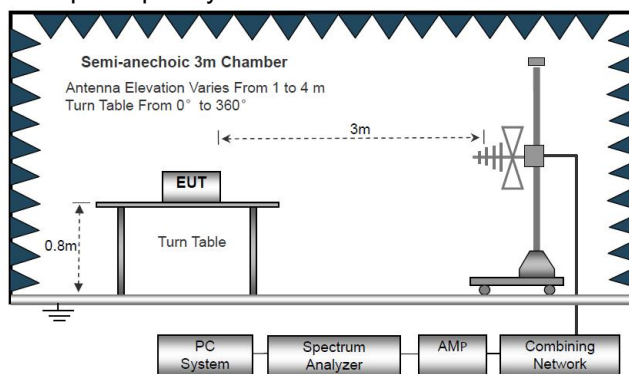

##### (C) Radiated Emission Test-Up Frequency Above 1GHz

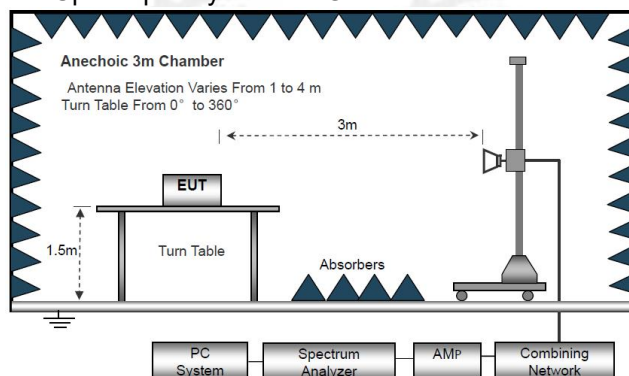



#### 4.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.2.5 TEST RESULTS

Radiated Spurious Emission (Below 9KHz – 30MHz )

|                |         |                     |     |
|----------------|---------|---------------------|-----|
| Temperature :  | 26 °C   | Relative Humidity : | 54% |
| Pressure :     | 101 kPa | Polarization :      | --- |
| Test Voltage : | DC 3V   |                     |     |
| Test Mode :    | TX Mode |                     |     |

| Freq. | Reading  | Limit    | Margin | State |
|-------|----------|----------|--------|-------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB)   | P/F   |
| --    | --       | --       | --     | PASS  |
| --    | --       | --       | --     | PASS  |

**NOTE:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Radiated Spurious Emission (Between 30MHz – 1GHz)

|                |         |                     |            |
|----------------|---------|---------------------|------------|
| Temperature :  | 26 °C   | Relative Humidity : | 54%        |
| Pressure :     | 101 kPa | Polarization :      | Horizontal |
| Test Voltage : | DC 3V   |                     |            |
| Test Mode :    | TX Mode |                     |            |

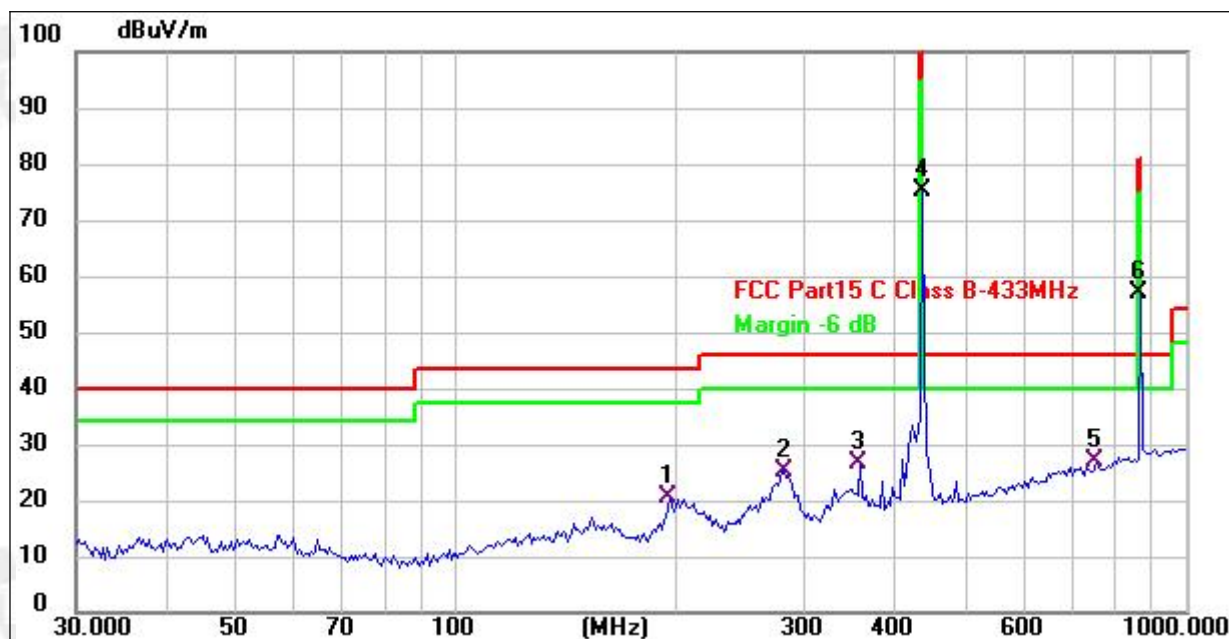


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 196.5098        | 35.90          | -15.40        | 20.50          | 43.50          | -23.00      | QP       |
| 2   | 281.0075        | 38.27          | -12.98        | 25.29          | 46.00          | -20.71      | QP       |
| 3   | 356.6758        | 37.48          | -10.98        | 26.50          | 46.00          | -19.50      | QP       |
| 4   | 434.0651        | 84.46          | -9.18         | 75.28          | 100.80         | -25.52      | peak     |
| 5 * | 755.3873        | 29.15          | -2.12         | 27.03          | 46.00          | -18.97      | QP       |
| 6   | 869.1302        | 57.35          | -0.43         | 56.92          | 80.80          | -23.88      | peak     |

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.



|                |         |                     |          |
|----------------|---------|---------------------|----------|
| Temperature :  | 26 °C   | Relative Humidity : | 54%      |
| Pressure :     | 101 kPa | Polarization :      | Vertical |
| Test Voltage : | DC 3V   |                     |          |
| Test Mode :    | TX Mode |                     |          |

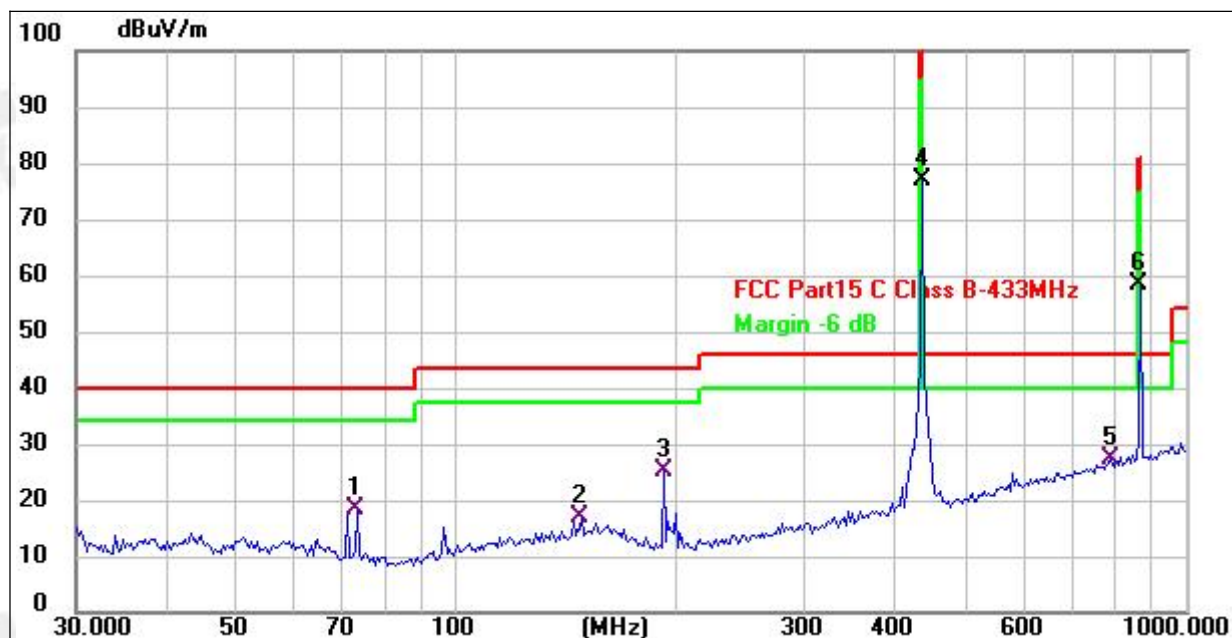

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 73.1025         | 34.86          | -16.34        | 18.52          | 40.00          | -21.48      | QP       |
| 2   | 148.4410        | 29.34          | -12.52        | 16.82          | 43.50          | -26.68      | QP       |
| 3 * | 192.4186        | 40.42          | -15.22        | 25.20          | 43.50          | -18.30      | QP       |
| 4   | 434.0651        | 86.22          | -9.18         | 77.04          | 100.80         | -23.76      | peak     |
| 5   | 787.8513        | 28.69          | -1.51         | 27.18          | 46.00          | -18.82      | QP       |
| 6   | 869.1302        | 58.82          | -0.43         | 58.39          | 80.80          | -22.41      | peak     |

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.



For average Emission

| Frequency<br>MHz | Peak<br>Level<br>dBuV/m | Duty<br>cycle<br>factor | Average<br>Level<br>dBuV/m | Limit<br>AV | Margin | Polarization |
|------------------|-------------------------|-------------------------|----------------------------|-------------|--------|--------------|
| 433.92           | 75.28                   | -8.09                   | 67.19                      | 80.8        | -13.61 | Horizontal   |

| Frequency<br>MHz | Peak<br>Level<br>dBuV/m | Duty<br>cycle<br>factor | Average<br>Level<br>dBuV/m | Limit<br>AV | Margin | Polarization |
|------------------|-------------------------|-------------------------|----------------------------|-------------|--------|--------------|
| 433.92           | 77.04                   | -8.09                   | 68.95                      | 80.8        | -11.85 | Vertical     |

Notes: 1. Average emission Level = Peak Level + Duty cycle factor  
2. Duty cycle level please see clause 6.

For average Emission

| Frequency<br>MHz | Peak<br>Level<br>dBuV/m | Duty<br>cycle<br>factor | Average<br>Level<br>dBuV/m | Limit<br>AV | Margin | Polarization |
|------------------|-------------------------|-------------------------|----------------------------|-------------|--------|--------------|
| 867.840          | 56.92                   | -8.09                   | 48.83                      | 60.8        | -11.97 | Horizontal   |

| Frequency<br>MHz | Peak<br>Level<br>dBuV/m | Duty<br>cycle<br>factor | Average<br>Level<br>dBuV/m | Limit<br>AV | Margin | Polarization |
|------------------|-------------------------|-------------------------|----------------------------|-------------|--------|--------------|
| 867.840          | 58.39                   | -8.09                   | 50.3                       | 60.8        | -10.50 | Vertical     |

Notes: 1. Average emission Level = Peak Level + Duty cycle factor  
2. Duty cycle level please see clause 6.

**Radiated Spurious Emission ( 1GHz to 10<sup>th</sup> harmonics)**

| Frequency<br>MHz | Peak<br>Reading<br>Level<br>dBuV | Factor<br>dB | Peak<br>Level<br>dBuV/m | Duty<br>cycle<br>factor | Average<br>Level<br>dBuV/m | Limit |      | Margin dB |        | Polarization |
|------------------|----------------------------------|--------------|-------------------------|-------------------------|----------------------------|-------|------|-----------|--------|--------------|
|                  |                                  |              |                         |                         |                            | PK    | AV   | PK        | AV     |              |
| 1301.21          | 46.23                            | -11.65       | 34.58                   | -8.09                   | 26.49                      | 74    | 54   | -39.42    | -27.51 | Vertical     |
| 1735.75          | 53.88                            | -11.65       | 42.23                   | -8.09                   | 34.14                      | 80.8  | 60.8 | -38.57    | -26.66 | Vertical     |
| 2169.25          | 52.03                            | -9.53        | 42.5                    | -8.09                   | 34.41                      | 80.8  | 60.8 | -38.3     | -26.39 | Vertical     |
| 2604.01          | 51.97                            | -9.53        | 42.44                   | -8.09                   | 34.35                      | 80.8  | 60.8 | -38.36    | -26.45 | Vertical     |
| 3036.95          | 49.08                            | -2.83        | 46.25                   | -8.09                   | 38.16                      | 80.8  | 60.8 | -34.55    | -22.64 | Vertical     |
| 3904.21          | 50.11                            | -2.83        | 47.28                   | -8.09                   | 39.19                      | 74    | 54   | -26.72    | -14.81 | Vertical     |
| 1301.65          | 49.23                            | -11.65       | 37.58                   | -8.09                   | 29.49                      | 74    | 54   | -36.42    | -24.51 | Horizontal   |
| 1735.19          | 53.25                            | -11.65       | 41.6                    | -8.09                   | 33.51                      | 80.8  | 60.8 | -39.2     | -27.29 | Horizontal   |
| 2169.75          | 51.64                            | -9.53        | 42.11                   | -8.09                   | 34.02                      | 80.8  | 60.8 | -38.69    | -26.78 | Horizontal   |
| 2603.47          | 48.32                            | -9.53        | 38.79                   | -8.09                   | 30.7                       | 80.8  | 60.8 | -42.01    | -30.1  | Horizontal   |
| 3037.16          | 47.56                            | -2.83        | 44.73                   | -8.09                   | 36.64                      | 80.8  | 60.8 | -36.07    | -24.16 | Horizontal   |
| 3905.07          | 48.74                            | -2.83        | 45.91                   | -8.09                   | 37.82                      | 74    | 54   | -28.09    | -16.18 | Horizontal   |

Notes: 1.PK Level = Peak Reading Level + Factor

2.Average emission Level = Peak Level + Duty cycle factor

3.Duty cycle level please see clause 6.

## 5. BANDWIDTH TEST

### 5.1 APPLIED PROCEDURES / LIMIT

According to FCC 15.231(c) requirement:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating between 70 MHz to 900 MHz. Those devices operating above 900 MHz, the emission spurious shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

$$\text{B.W (20dBc) Limit} = 0.25\% * f(\text{MHz}) = 0.25\% * 433.92\text{MHz} = 1.085\text{MHz}$$

| Spectrum Parameter | Setting                                       |
|--------------------|-----------------------------------------------|
| Attenuation        | Auto                                          |
| Span Frequency     | > Measurement Bandwidth or Channel Separation |
| RB                 | 3kHz                                          |
| VB                 | $\geq \text{RBW}$                             |
| Detector           | Peak                                          |
| Trace              | Max Hold                                      |
| Sweep Time         | Auto                                          |

### 5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 3kHz, VBW $\geq$  RBW, Sweep time = Auto.

### 5.3 DEVIATION FROM STANDARD

No deviation.

### 5.4 TEST SETUP




### 5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 5.6 TEST RESULTS

|               |         |                     |       |
|---------------|---------|---------------------|-------|
| Temperature : | 26 °C   | Relative Humidity : | 54%   |
| Pressure :    | 101kPa  | Test Voltage :      | DC 3V |
| Test Mode :   | TX Mode |                     |       |

| Frequency | 20dB Bandwidth<br>(KHz) | Limit<br>(MHz) | Result |
|-----------|-------------------------|----------------|--------|
| 433.92MHz | 122.0                   | 1.082          | PASS   |

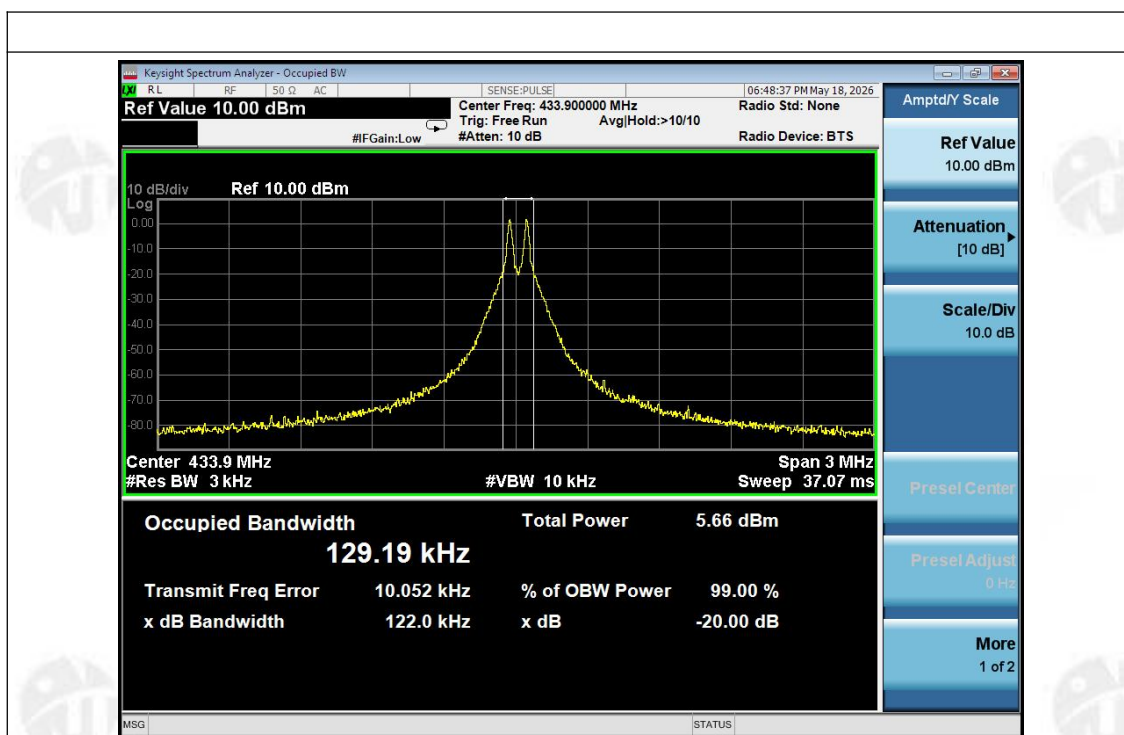

## 6. CALCULATION OF AVERAGE FACTOR

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The duty cycle is measured in 100 ms or the repetition cycle period, whichever is a shorter time frame. The duty cycle is measured by placing the spectrum analyzer to set zero span at 1MHz resolution bandwidth.

Averaging factor in dB =  $20\log(\text{duty cycle})$

The duration of one cycle = 48.6ms

The duty cycle is simply the on-time divided the duration of one cycle

Duty Cycle =  $(1.180\text{ms} \times 11 + 0.440\text{ms} \times 14) / 48.6$

=  $19.14\text{ms} / 48.6\text{ms}$

= 0.3938


Therefore, the averaging factor is found by  $20\log 0.3938 = -8.09 \text{ dB}$

Test plot as follows:

Note: During the 100ms, the amount of pulse and on-time of pulse are the same for every pulse train.

|               |         |                     |         |
|---------------|---------|---------------------|---------|
| Temperature : | 26 °C   | Relative Humidity : | 54%     |
| Pressure :    | 101kPa  | Test Voltage :      | DC 3.7V |
| Test Mode :   | TX Mode |                     |         |



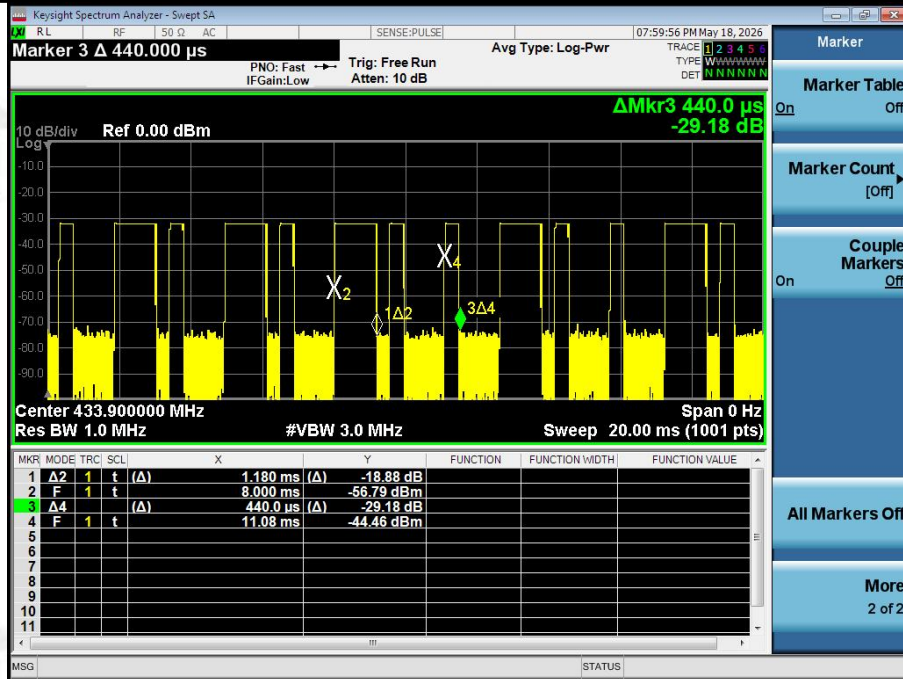

## 7. DWELL TIME

### 7.1 APPLICABLE STANDARD

According to FCC 15.231(a) requirement:

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### 7.2 TEST PROCEDURE

Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

- 1.Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 2.Set RBW to 100kHz and VBW of spectrum analyzer to 300kHz with a convenient frequency span including 100 KHz bandwidth from band edge.
- 3.Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 4.Repeat above procedures until all measured frequencies were complete.

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP




### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 7.6 TEST RESULTS

| Dwell time (second) | Limit (second) | Result |
|---------------------|----------------|--------|
| 3.870               | <5s            | Pass   |

Test plot as follows:

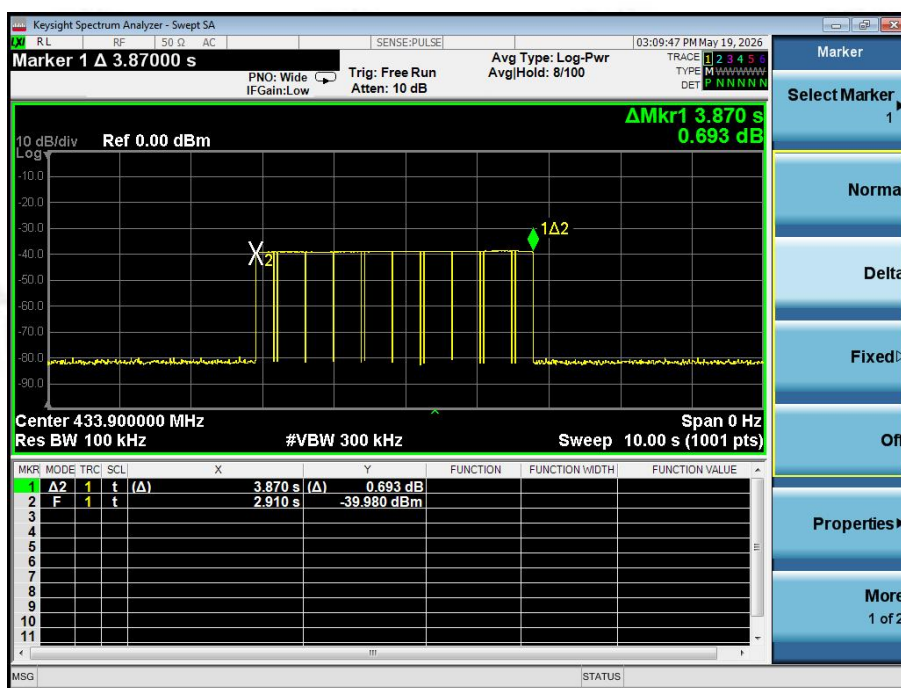

**8. ANTENNA REQUIREMENT**

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| Standard requirement:                                                                                                                                                                                                                                                                                                                                                                                                                                                     | FCC Part15 C Section 15.203 |
| 15.203 requirement:<br>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. |                             |
| EUT Antenna:                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                             |
| The antennas are Internal Antenna , the best case gain of the antennas are 0.18 dBi, reference to the attachment for details                                                                                                                                                                                                                                                                                                                                              |                             |



## **9. TEST SETUP PHOTO**

Reference to the Test photo attachment for details.

## **10. EUT CONSTRUCTIONAL DETAILS**

Reference to EUT photo attachment for details.

\*\*\*\*\* END OF REPORT \*\*\*\*\*