


Restricted bands:

Test plot as follows:

Test_Mode	GFSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

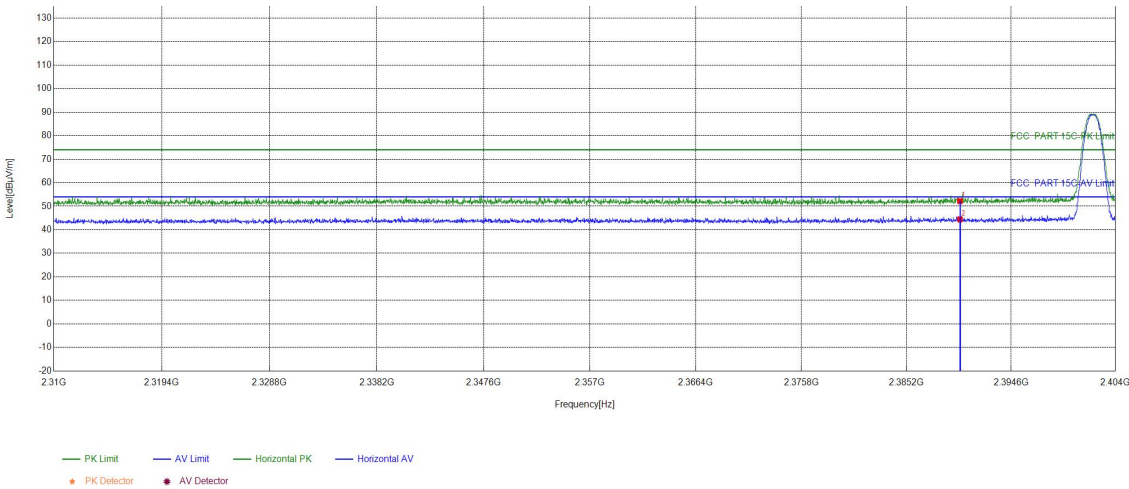

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.26	52.22	74.00	21.78	PASS	Horizontal	PK
2	2390	15.96	28.47	44.43	54.00	9.57	PASS	Horizontal	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

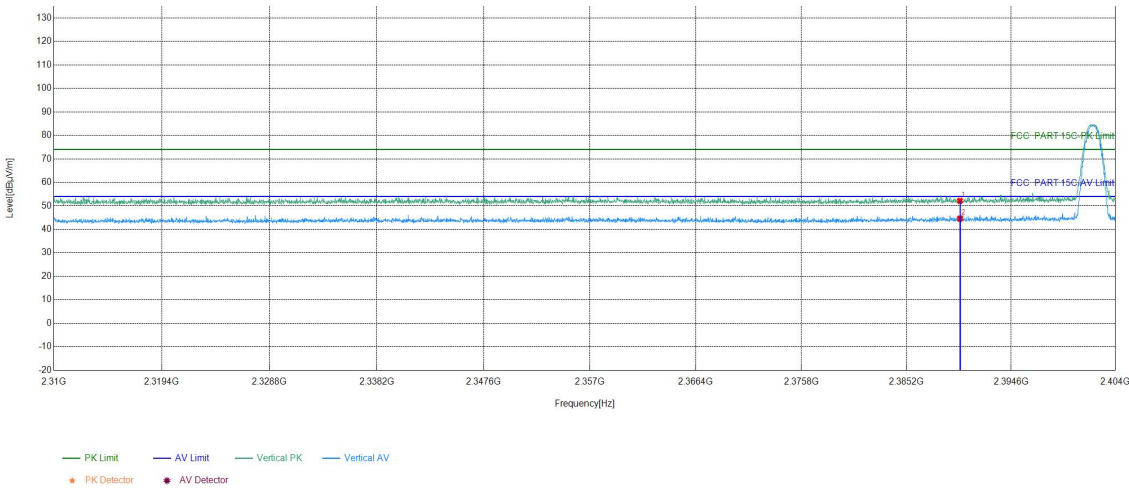

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.17	52.13	74.00	21.87	PASS	Vertical	PK
2	2390	15.96	28.60	44.56	54.00	9.44	PASS	Vertical	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

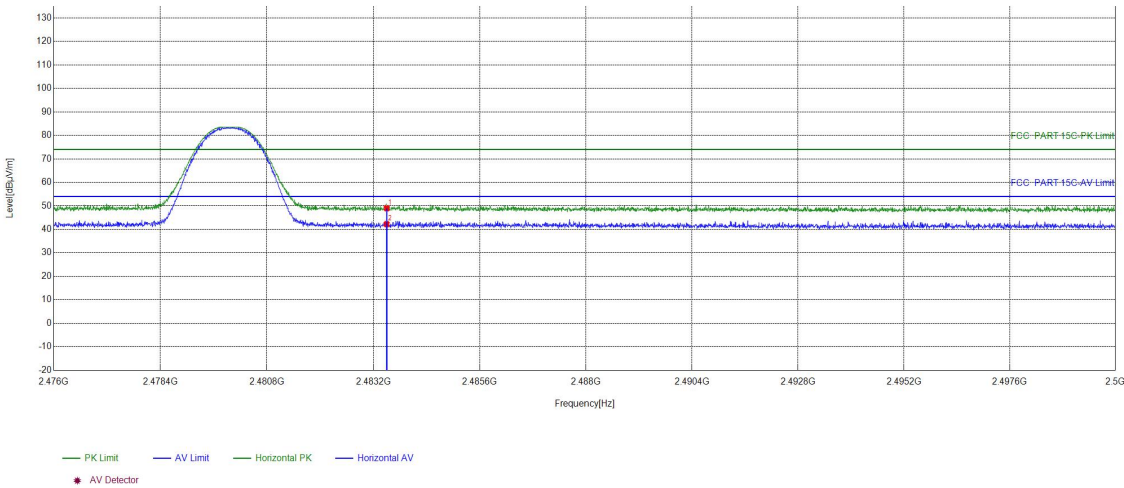

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.67	48.96	74.00	25.04	PASS	Horizontal	PK
2	2483.5	16.29	25.89	42.18	54.00	11.82	PASS	Horizontal	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

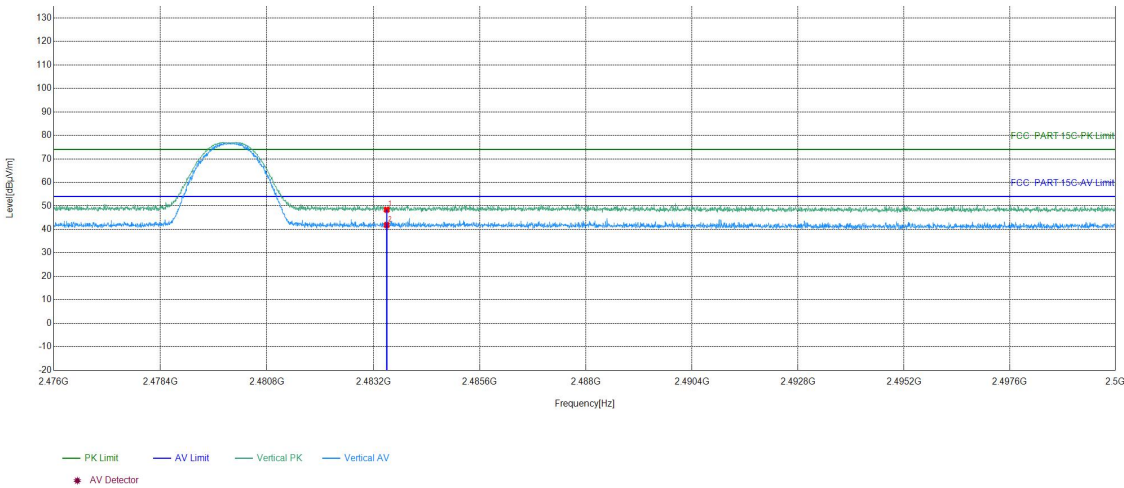

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.06	48.35	74.00	25.65	PASS	Vertical	PK
2	2483.5	16.29	25.50	41.79	54.00	12.21	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

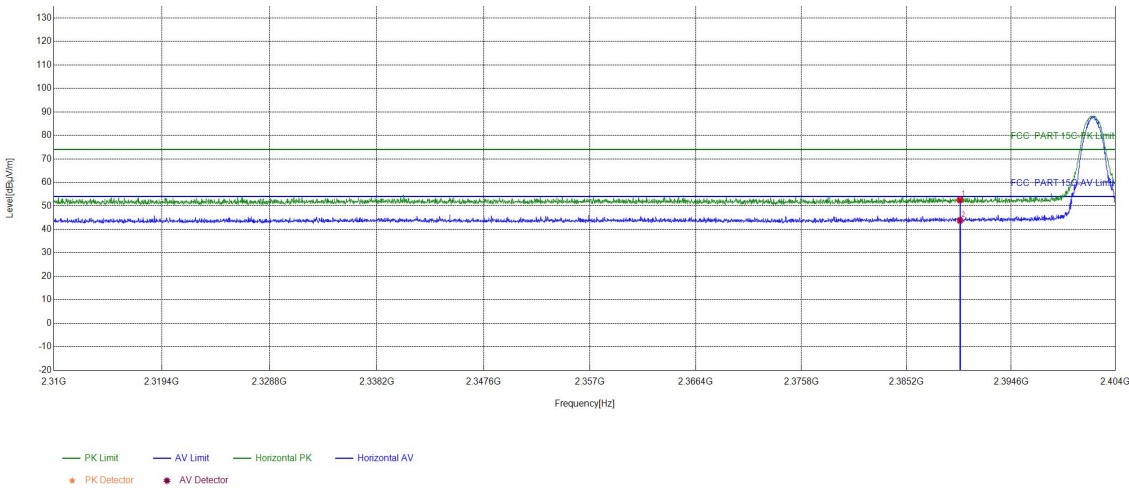

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.51	52.47	74.00	21.53	PASS	Horizontal	PK
2	2390	15.96	27.82	43.78	54.00	10.22	PASS	Horizontal	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

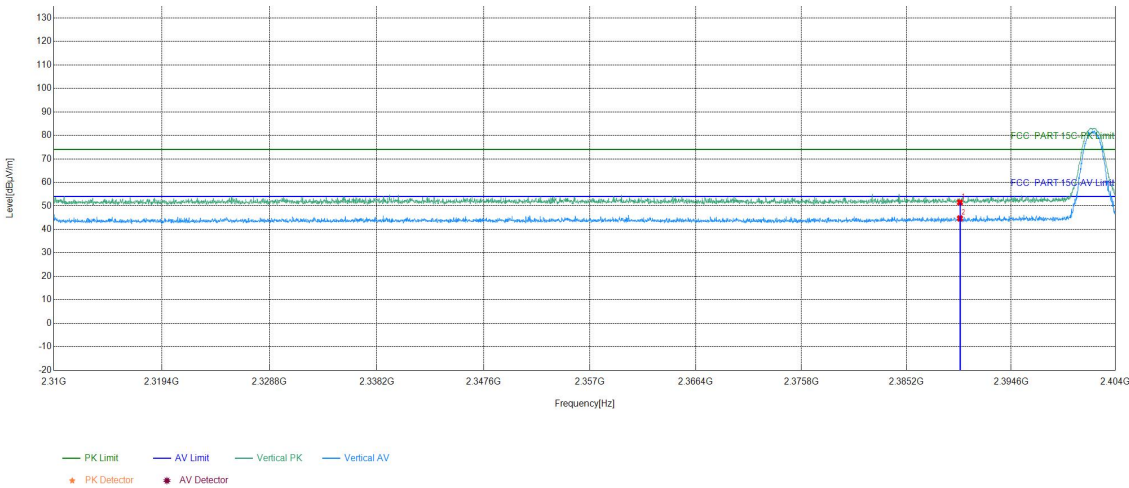

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.47	51.43	74.00	22.57	PASS	Vertical	PK
2	2390	15.96	28.66	44.62	54.00	9.38	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

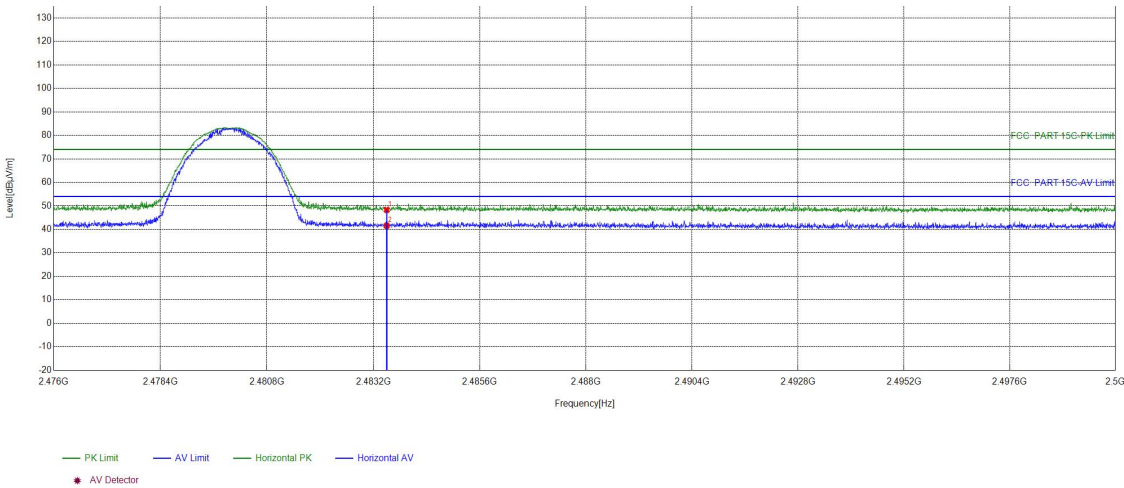

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	31.95	48.24	74.00	25.76	PASS	Horizontal	PK
2	2483.5	16.29	25.21	41.50	54.00	12.50	PASS	Horizontal	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

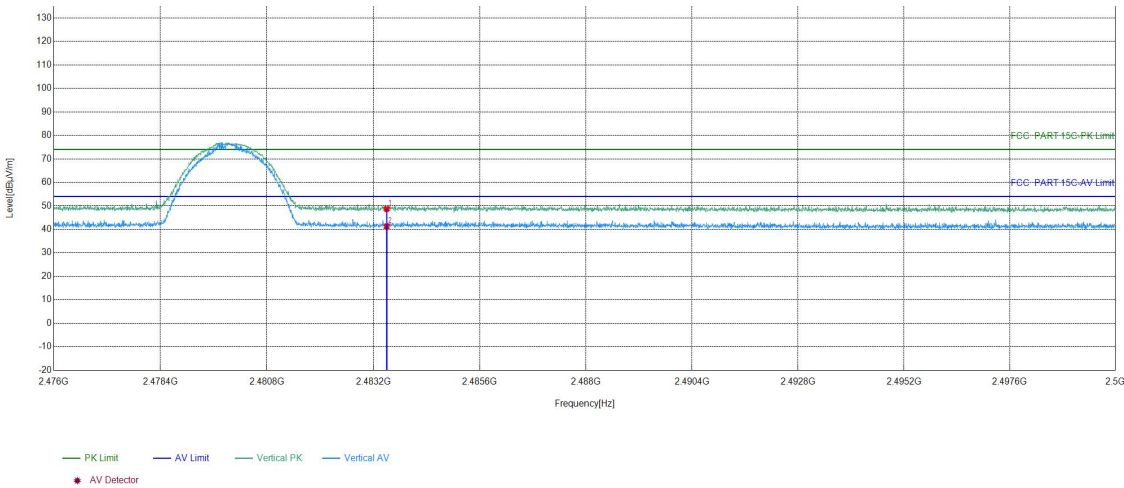

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.40	48.69	74.00	25.31	PASS	Vertical	PK
2	2483.5	16.29	24.92	41.21	54.00	12.79	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

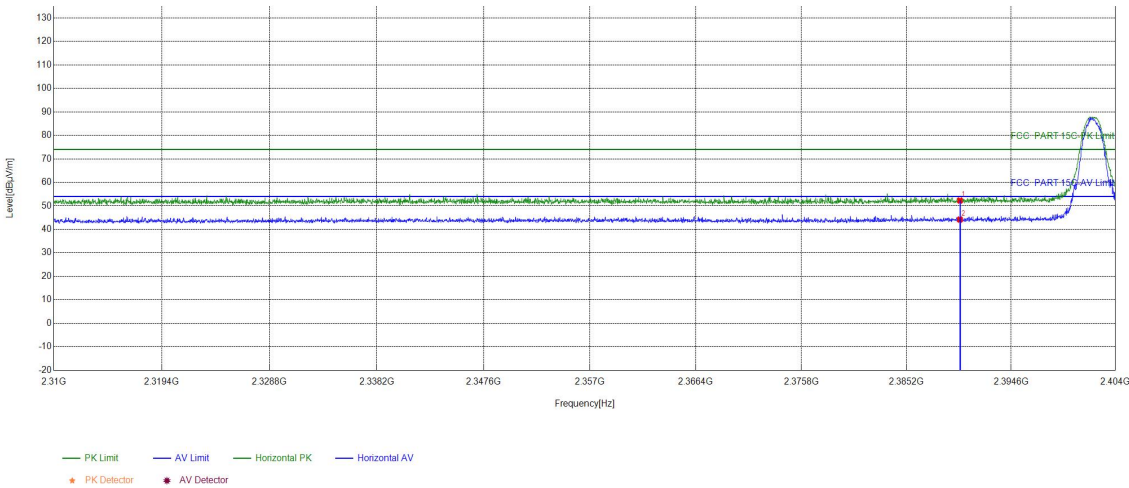

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.29	52.25	74.00	21.75	PASS	Horizontal	PK
2	2390	15.96	28.18	44.14	54.00	9.86	PASS	Horizontal	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

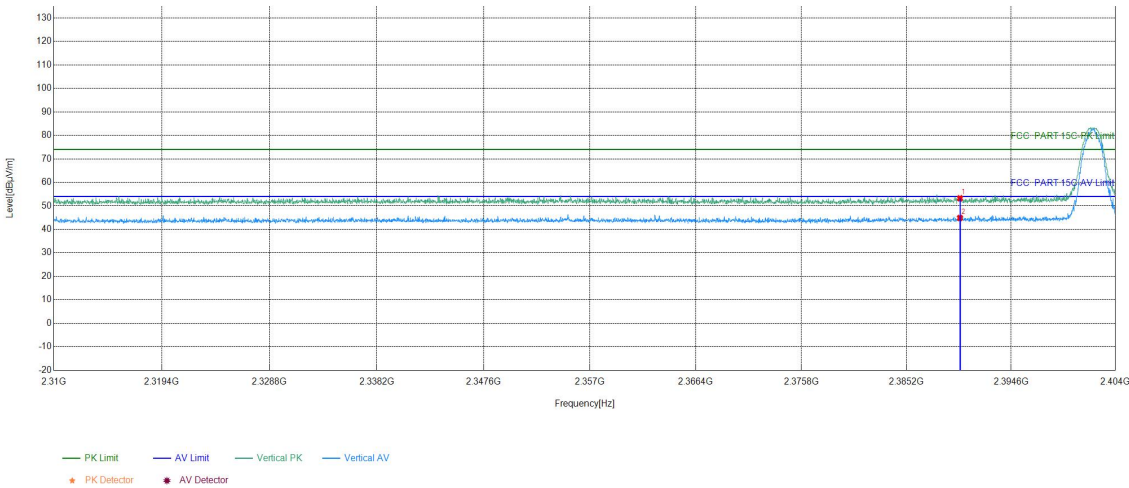

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	37.26	53.22	74.00	20.78	PASS	Vertical	PK
2	2390	15.96	28.86	44.82	54.00	9.18	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	\	Test_Date	2026/7/31


Test Graph

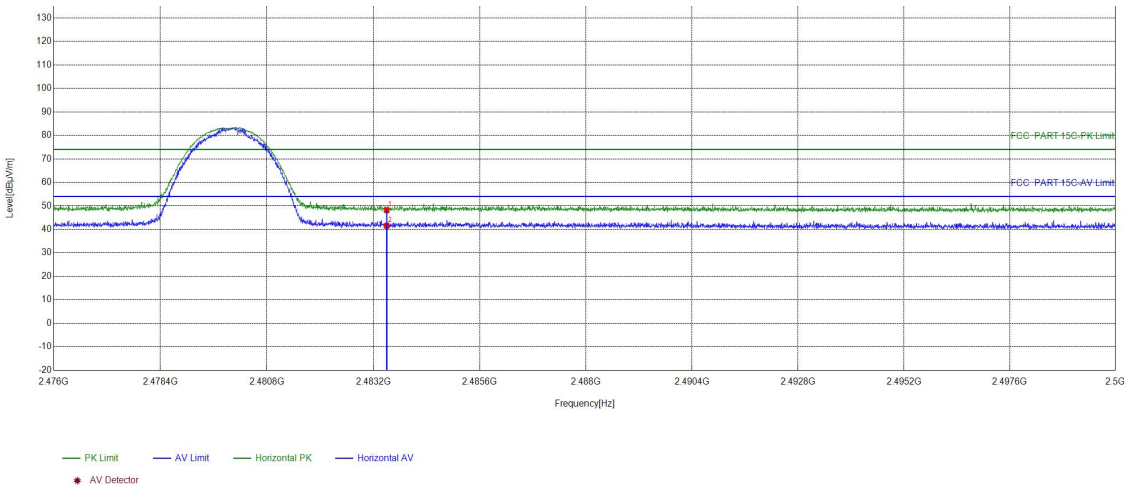

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	31.86	48.15	74.00	25.85	PASS	Horizontal	PK
2	2483.5	16.29	25.22	41.51	54.00	12.49	PASS	Horizontal	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	\	Test_Date	2026/7/31

Test Graph

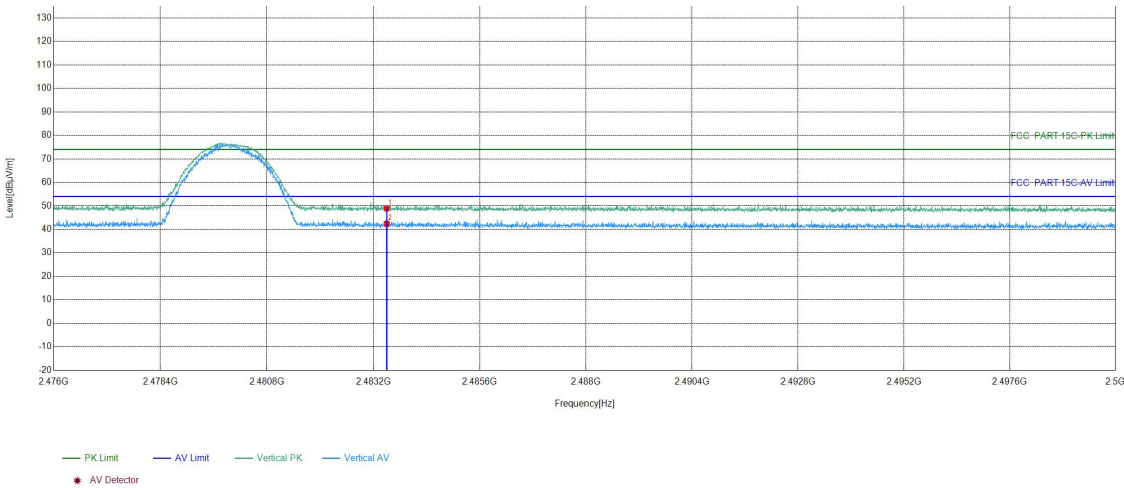

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.57	48.86	74.00	25.14	PASS	Vertical	PK
2	2483.5	16.29	26.06	42.35	54.00	11.65	PASS	Vertical	AV

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

5 Appendix A

Refer to Appendix: Bluetooth Classic of EED32S81359402

6 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S81359401.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***