

Product Label and Location (TX)

wirelessly powered by
Xenergy

M/N TX18PH-AU10
S/N LXXXXYM
Input: 100-230 Vac; 50/60Hz;
12A max.



FCC ID: 2BOHS-XNGYPHTX
IC: 33631-XNGYPHTX

Made in China
www.xenergytech.com




This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation

CAN RSS-216 (A) / CNR-216 (A)

Label affixation method:

- Pressure-sensitive adhesive label (sticker)
- Ink printing using a thermal transfer ribbon
- Label is affixed to the surface of the product housing

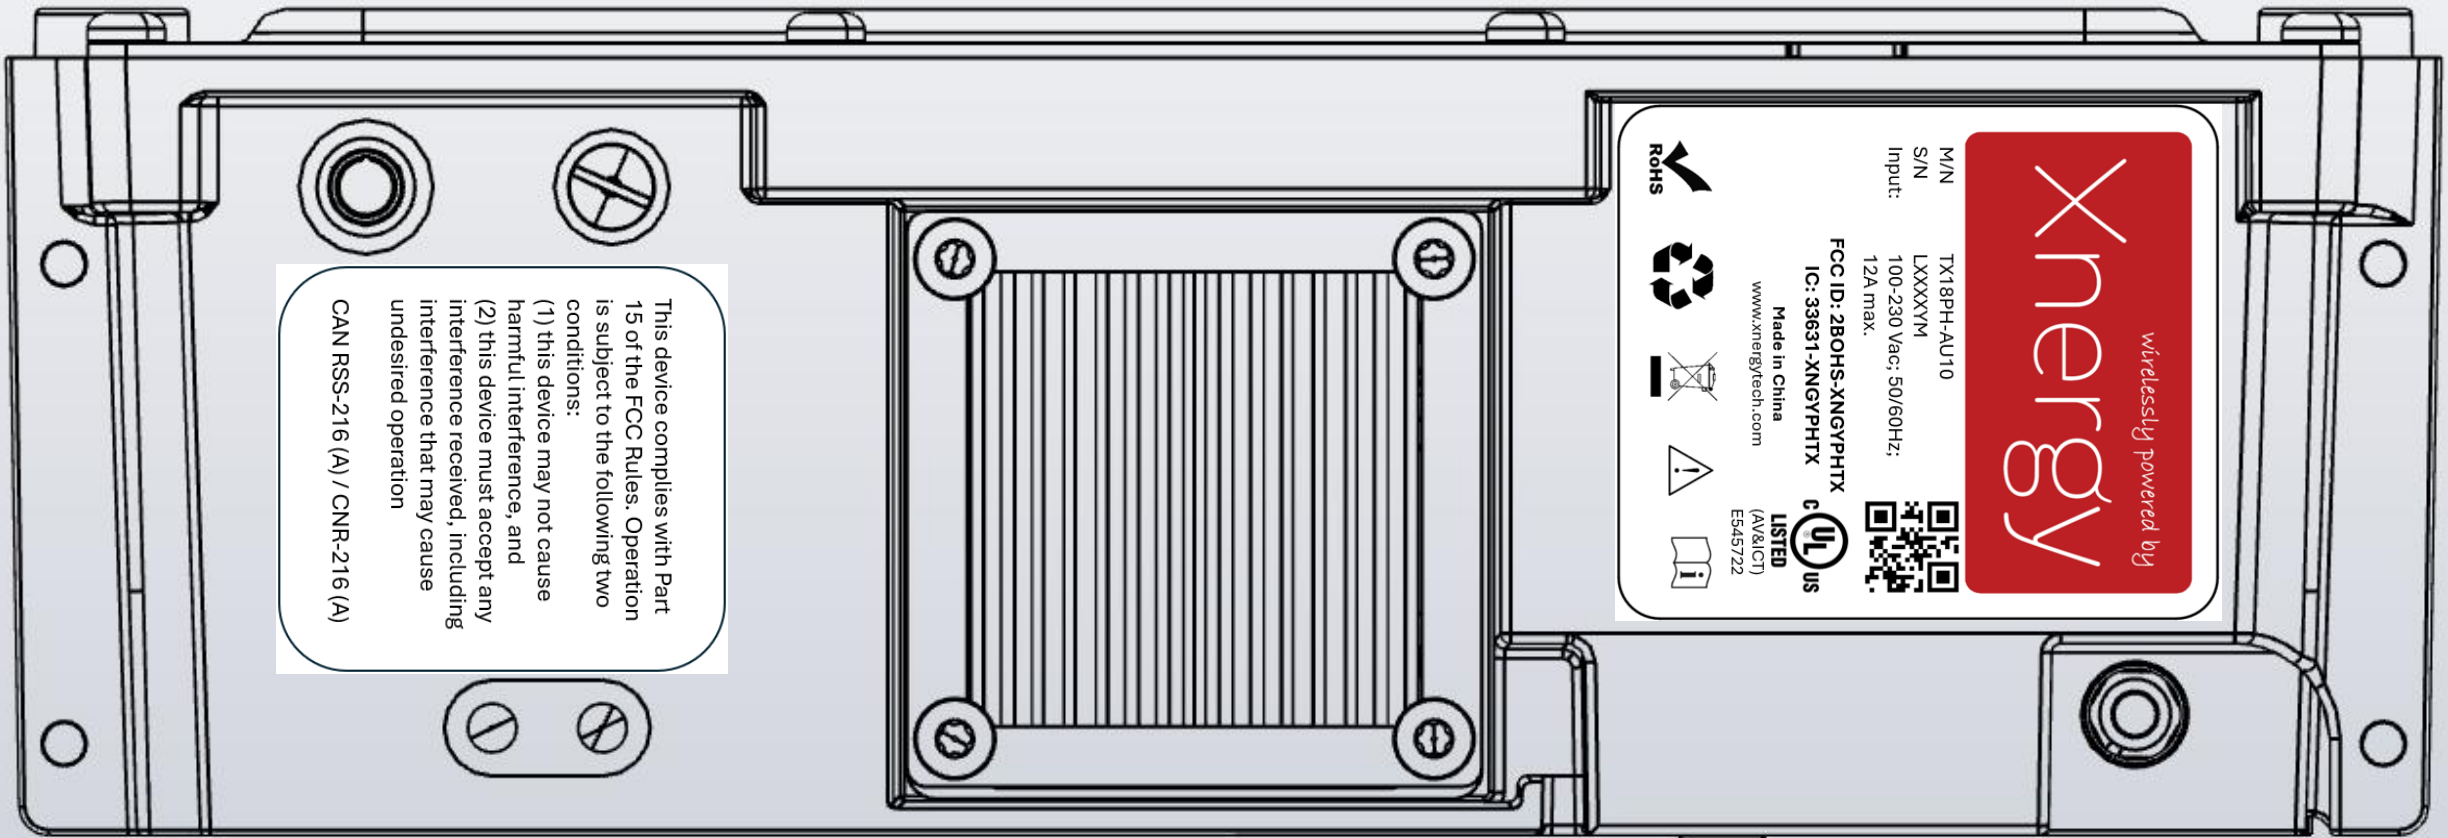

wirelessly powered by
Xenergy

M/N TX18PH-AU20
S/N LXXXXYM
Input: 100-230 Vac; 50/60Hz;
12A max.



FCC ID: 2BOHS-XNGYPHTX
IC: 33631-XNGYPHTX

Made in China
www.xenergytech.com



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation

CAN RSS-216 (A) / CNR-216 (A)

Label affixation method:

- Pressure-sensitive adhesive label (sticker)
- Ink printing using a thermal transfer ribbon
- Label is affixed to the surface of the product housing

