



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FCC PART 15.236

Report Reference No.....: CTL2510092011-WF

Compiled by:
(position+printedname+signature)

Happy Guo
(File administrators)

Tested by:
(position+printedname+signature)

Jack Wang
(Test Engineer)

Approved by:
(position+printedname+signature)

Ivan Xie
(Manager)



Product Name.....: Wireless monitoring system

Model/Type reference.....: STUDIO22+

List Model(s).....: STUDIO42+, STUDIO11+, IE-1000, ER100, P8-DF, DS100, T-01,
T-04, FX-222, FX-224, FX-228, SEM100, SEM200, SEM400,
D16-DF, MK-100, ATH100, BM-01, QT-01

Trade Mark.....: N/A

FCC ID.....: 2BOJN-STUDIO22

Applicant's name.....: Enping Fuluode electronics Co., LTD

Address of applicant.....: 4th Floor, Workshop C2, Zone 1, Enping Industrial Park,
Jiangmen Industrial Transfer Park, Enping City, China

Test Firm.....: Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm.....: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Test specification.....:

Standard.....: FCC Part 15.236: Operation of Wireless monitoring
systemphones in the bands 54-72 MHz, 76-88 MHz, 174-216
MHz, 470-608 MHz and 614-698 MHz

TRF Originator.....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF.....: Dated 2011-01

Date of receipt of test item.....: Oct. 13, 2025

Date of Test Date.....: Oct. 13, 2025–Nov. 06, 2025

Data of Issue.....: Nov. 07, 2025

Result.....: Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL2510092011-WF	Nov. 07, 2025
		Date of issue

Equipment under Test : Wireless monitoring system

Sample No. CTL251009201001

Model /Type : STUDIO22+

Listed Models : STUDIO42+, STUDIO11+, IE-1000, ER100, P8-DF, DS100, T-01, T-04, FX-222, FX-224, FX-228, SEM100, SEM200, SEM400, D16-DF, MK-100, ATH100, BM-01, QT-01

Model Difference : All models have same circuit diagram and construction except different model name.

Applicant : **Enping Fuluode electronics Co., LTD**

Address : 4th Floor, Workshop C2, Zone 1, Enping Industrial Park, Jiangmen Industrial Transfer Park, Enping City, China

Manufacturer : **Enping Fuluode electronics Co., LTD**

Address : 4th Floor, Workshop C2, Zone 1, Enping Industrial Park, Jiangmen Industrial Transfer Park, Enping City, China

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

[illegible]

Table of Contents**Page**

1. SUMMARY.....	5
1.1. TEST STANDARDS.....	5
1.2. TEST DESCRIPTION.....	5
1.3. TEST FACILITY.....	5
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	5
2. GENERAL INFORMATION.....	7
2.1. ENVIRONMENTAL CONDITIONS.....	7
2.2. GENERAL DESCRIPTION OF EUT.....	7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....	7
2.4. EQUIPMENTS USED DURING THE TEST.....	9
2.5. RELATED SUBMITTAL(S) / GRANT(S).....	9
2.6. MODIFICATIONS.....	9
3. TEST CONDITIONS AND RESULTS.....	10
3.1. CONDUCTED EMISSIONS TEST.....	10
3.2. MAXIMUM OUTPUT POWER.....	12
3.2. OCCUPIED BANDWIDTH MEASUREMENT.....	15
3.3. NECESSARY BANDWIDTH.....	18
3.4. TRANSMITTER SPURIOUS EMISSIONS.....	21
3.5. FREQUENCY STABILITY.....	28
4. TEST SETUP PHOTOS OF THE EUT.....	30
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT.....	32

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.236](#): Operation of Wireless monitoring systemphones in the bands 54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-698 MHz

[ANSI C63.10:2020](#): American National Standard for Testing Unlicensed Wireless Devices

According to KDB 206256 D01 Wireless monitoring systemphone Certification v02.

1.2. Test Description

Test Specification clause		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.236(d)	RF Power Output	PASS
FCC Part 15.236(f)(2)	Occupied Bandwidth	PASS
FCC Part 15.236(g) EN 300 422-1 V2.2.1	Necessary Bandwidth Spurious emissions	PASS
FCC Part 15.236(f)(3)	Frequency Stability	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSIC63.10 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9618B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4

„Specification for radio disturbance and immunity measuring apparatus and methods – Part 4:

Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole

responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power Radiated	± 2.20 dB	(1)
Radiated Emission 9KHz~30MHz	± 3.66 dB	(1)
Radiated Emission 30~1000MHz	± 4.08 dB	(1)
Radiated Emission Above 1GHz	± 4.32 dB	(1)
20dB Emission Bandwidth	$\pm 1.9\%$	(1)
Carrier Frequency Separation	$\pm 1.9\%$	(1)
Maximum Power Spectral Density Level	± 0.98 dB	(1)
Number of Hopping Channel	$\pm 1.9\%$	(1)
Time of Occupancy	$\pm 0.11\%$	(1)
Max Peak Conducted Output Power	± 0.98 dB	(1)
Band-edge Spurious Emission	± 1.21 dB	(1)
Conducted RF Spurious Emission	9kHz-7GHz: ± 1.09 dB 7GHz-26.5GHz: ± 3.27 dB	(1)

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Wireless monitoring system
Model/Type reference:	STUDIO22+
Power supply:	Adapter Model: CIS-120100H6 Input: AC 100-240V~50/60Hz Output: 12V---1000mA
Wireless microphone	
Modulation:	FM
Operation frequency:	550MHz-579.25MHz
Channel number:	40
Channel separation:	See the channel list
Antenna type:	External Antenna
Antenna gain:	0dBi

Note1: For more details, please refer to the user's manual of the EUT.

Note2: Antenna gain and cable loss provided by the applicant.

Note3: The product cannot be configured to operate outside the current frequency band plan through software configuration, Third parties are not allowed to change any software parameter configuration of the product.

2.3. Description of Test Modes and Test Frequency

The system is configured to test under continuous transmission conditions and transmission frequency through the switch button control. And the number of channels provided to EUT is 40, select channel 01/21/40 for testing.

Operation Frequency List :

Channel	Frequency (MHz)
01	550
02	550.75
03	551.5
...	...
20	564.25
21	565
22	565.75
...	...

38	577.75
39	578.5
40	579.25

Note: The line display in grey is the channel selected to perform test.

2.4. Equipments Used during the Test

Conducted Emission						
Test Equipment	Manufacturer	Model No.	Serial No.	Previous calibration	Last Cal.	Cal.Due
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1166.5950.03	2024/04/30	2025/04/29	2026/04/28
LISN	ROHDE & SCHWARZ	ESH2-Z5	860014/010	2024/04/30	2025/04/29	2026/04/28
Limitator	ROHDE & SCHWARZ	ESH3-Z2	100408	2024/04/30	2025/04/29	2026/04/28
Software:						
Name of Software:			Version:			
ES-K1			V1.71			

Radiated Emission						
Test Equipment	Manufacturer	Model No.	Serial No.	Previous calibration	Last Cal.	Cal.Due
Active Loop Antenna	Da Ze	ZN30900A	/	2021/05/13	2024/04/30	2027/04/29
Double cone logarithmic antenna	Schwarzbeck	VULB 9168	824	2020/04/07	2023/02/13	2026/02/12
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2021/12/23	2024/11/25	2027/11/24
Horn Antenna	Ocean Microwave	OBH100400	26999002	2022/02/22	2025/02/21	2028/02/20
Amplifier	MRT-AP01M06	MRT	S-001	2024/04/30	2025/04/29	2026/04/28
Amplifier	Brief&Smart	LNA-4018	2104197	2024/05/03	2025/05/02	2026/04/29
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1166.5950.03	2024/04/30	2025/04/29	2026/04/28
Spectrum Analyzer	RS	FSP	1164.4391.38	2024/05/03	2025/05/02	2026/04/28
Software:						
Name of Software:			Version:			
EZ_EMC(Below 1GHz)			V1.1.4.2			
EZ_EMC(Above 1GHz)			V1.1.4.2			

RF Conducted						
Test Equipment	Manufacturer	Model No.	Serial No.	Previous calibration	Last Cal.	Cal.Due
Spectrum Analyzer	Keysight	N9020A	MY53420874	2024/07/04	2025/07/03	2026/07/03
Temperature/Humidity Meter	Ji Yu	MC501	/	2024/05/04	2025/05/03	2026/05/05
Software:						
Name of Software:			Version:			
TST-PASS			V2.0			

2.5. Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended to comply with Section 15.236 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

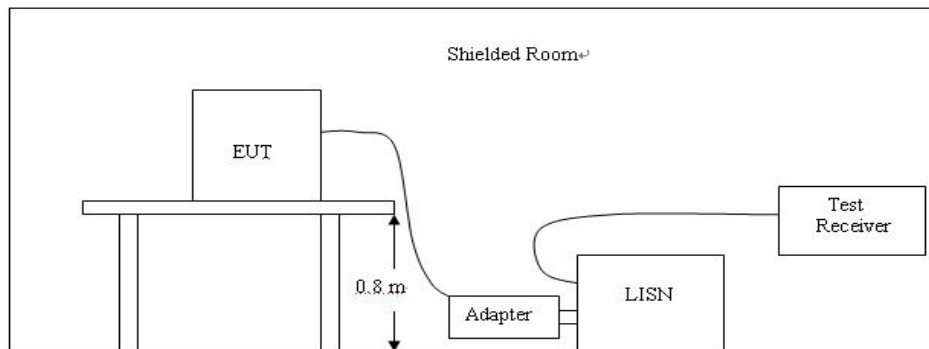

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2020.
2. Support equipment, if needed, was placed as per ANSI C63.10:2020.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2020.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

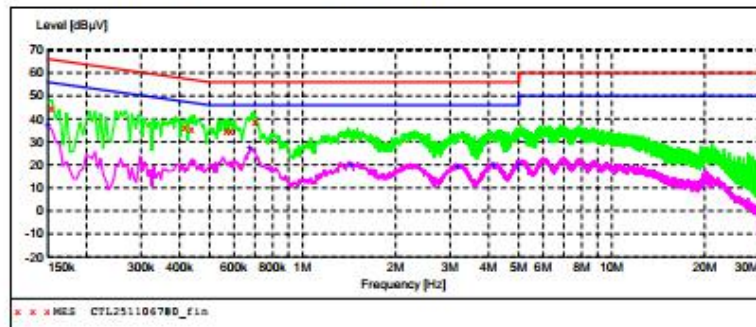TEST RESULTS**Line:****L1****SCAN TABLE: "Voltage (9K-30M)FIN"**
Short Description: 150K-30M Voltage**MEASUREMENT RESULT: "CTL251106780_fin"**


11/6/2025 10:15PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	FE
0.154500	44.50	10.0	66	21.3	QP	L1	GND
0.415500	36.10	9.9	58	21.4	QP	L1	GND
0.438000	35.60	9.9	57	21.5	QP	L1	GND
0.568500	34.90	10.0	56	21.1	QP	L1	GND
0.586500	35.10	10.0	56	20.9	QP	L1	GND
0.703500	38.60	10.0	56	17.4	QP	L1	GND

MEASUREMENT RESULT: "CTL251106780_fin2"

11/6/2025 10:15PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	FE
0.150000	37.30	10.0	56	18.7	AV	L1	GND
0.676500	27.20	10.0	46	18.8	AV	L1	GND
1.432500	19.90	10.1	46	26.1	AV	L1	GND
3.160500	19.20	10.4	46	26.8	AV	L1	GND
4.128000	20.00	10.5	46	26.0	AV	L1	GND
4.974000	20.20	10.5	46	25.8	AV	L1	GND

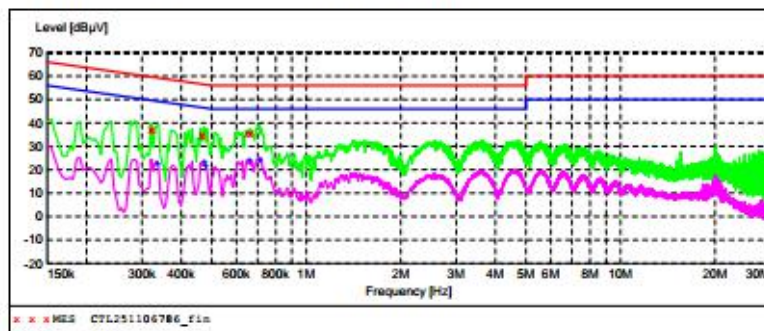Line:**N****SCAN TABLE: "Voltage (9K-30M)FIN"**
Short Description: 150K-30M Voltage**MEASUREMENT RESULT: "CTL251106786_fin"**

11/6/2025 10:31PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	FE
0.321000	37.30	9.9	60	22.4	QP	N	GND
0.325500	37.30	9.9	60	22.3	QP	N	GND
0.465000	35.00	9.9	57	21.6	QP	N	GND
0.469500	34.80	9.9	57	21.7	QP	N	GND
0.649500	35.30	10.0	56	20.7	QP	N	GND
0.667500	35.30	10.0	56	20.7	QP	N	GND

MEASUREMENT RESULT: "CTL251106786_fin2"

11/6/2025 10:31PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	FE
0.334500	22.60	9.9	49	26.7	AV	N	GND
0.474000	23.00	9.9	46	23.4	AV	N	GND
0.478500	21.90	9.9	46	24.5	AV	N	GND
0.658500	24.40	10.0	46	21.6	AV	N	GND
0.712500	24.00	10.0	46	22.0	AV	N	GND

3.2. Maximum Output Power

Limit

The maximum radiated power shall not exceed the following values:


(1) In the bands allocated and assigned for broadcast television and in the 600 MHz service band: 50 mW EIRP

(2) In the 600 MHz guard band and the 600 MHz duplex gap: 20 mW EIRP.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.

Test Configuration




Test Results


Channel	Output power (dBm)	Ant. Gain (dBi)	EIRP (dBm)	Limit (dBm)	Result
CH01	11.81	0	11.81	17	Pass
CH21	11.37	0	11.37	17	Pass
CH40	10.44	0	10.44	17	Pass

Note: 1.The test results including the cable lose.
2.The RF cable is 50 ohm.


Test plot as follows:

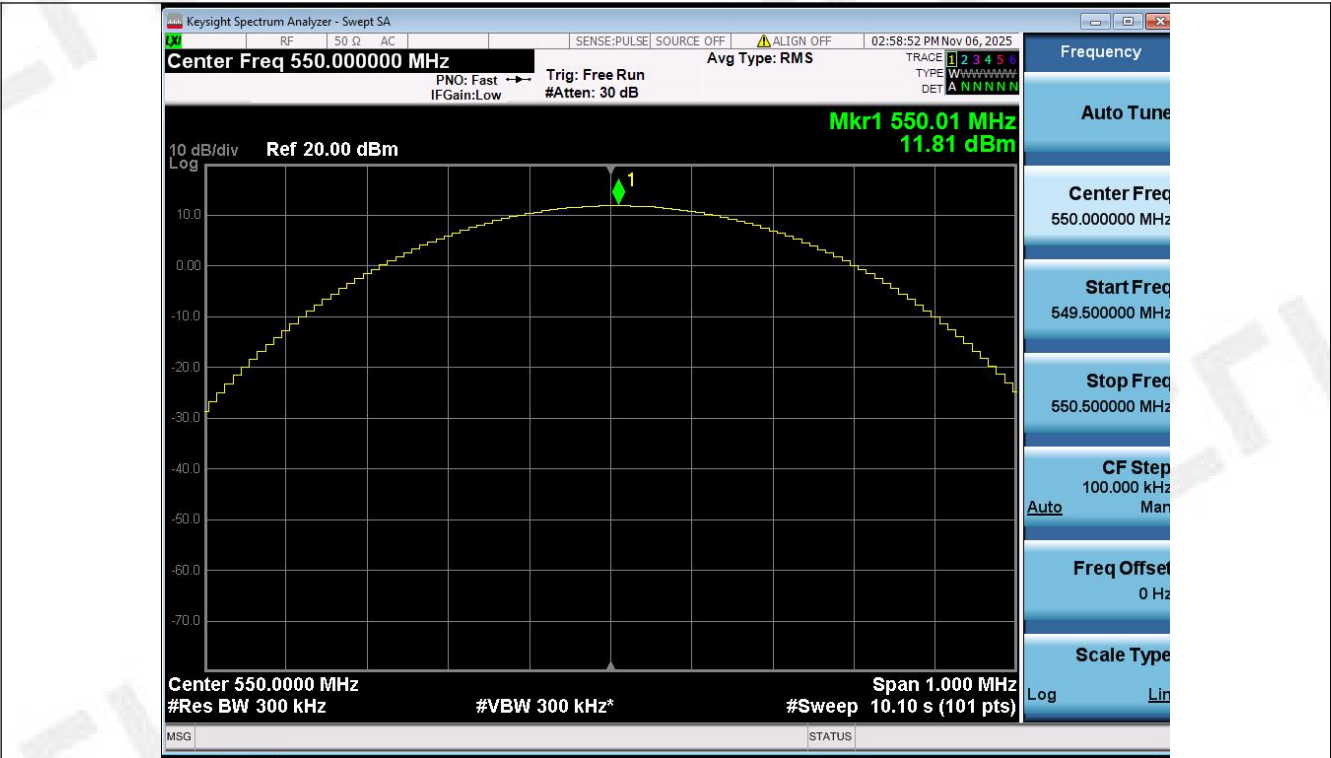

CH01

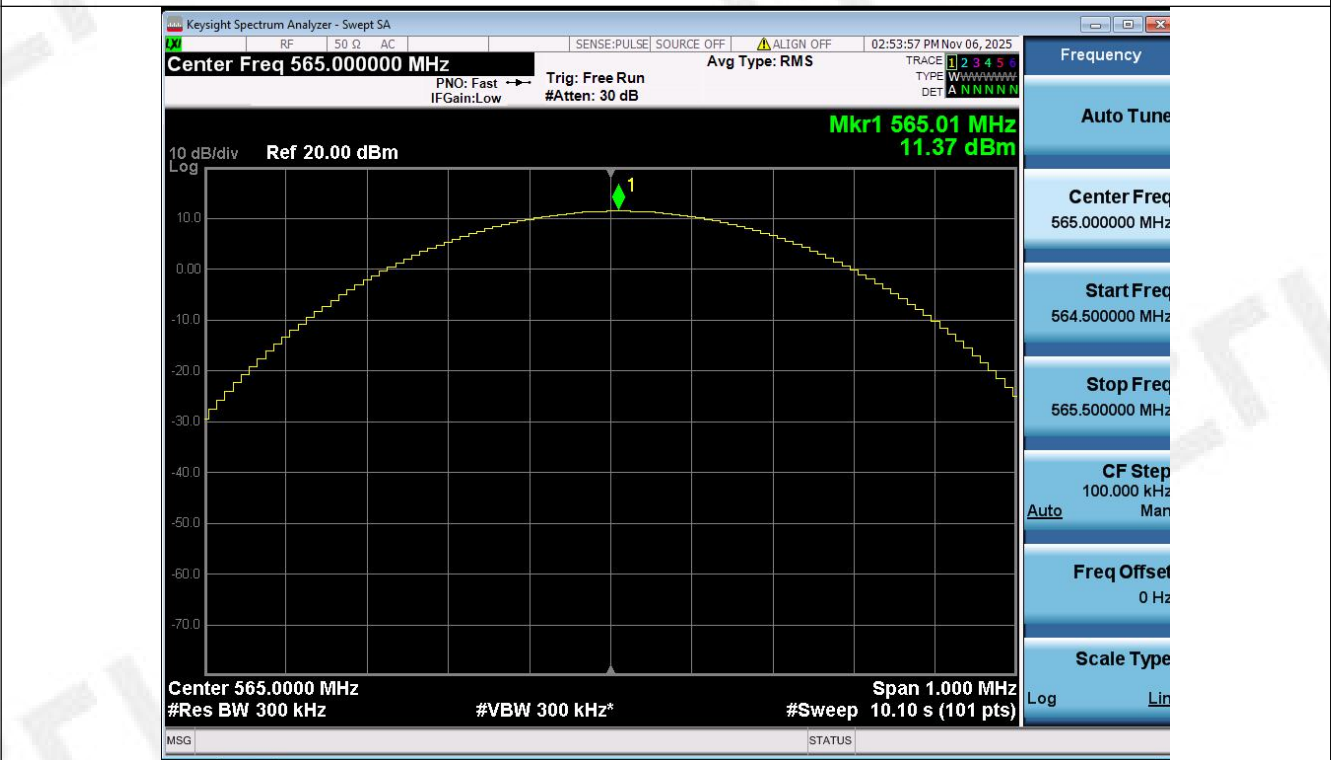

CH21

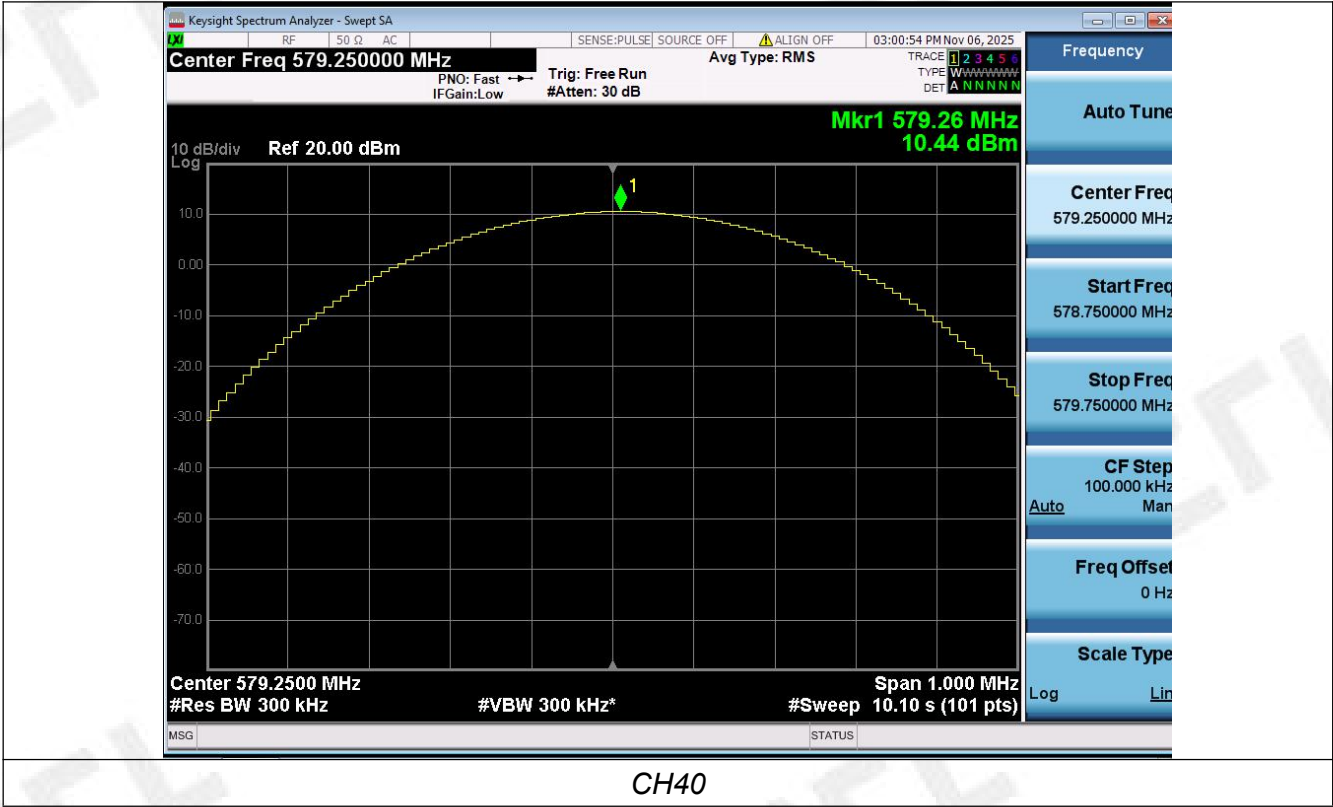

3.2. Occupied Bandwidth Measurement

Limit

One or more adjacent 25 kHz segments within the assignable frequencies may be combined to form a channel whose maximum bandwidth shall not exceed 200 kHz. The operating bandwidth shall not exceed 200 kHz.

Test Configuration




Test Procedure

The test shall be modulated by a 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation.


Test Results

Channel	99% OBW (KHz)	Limit (KHz)	Result
CH01	62.306	200	Pass
CH21	61.587	200	
CH40	60.101	200	


Test plot as follows:

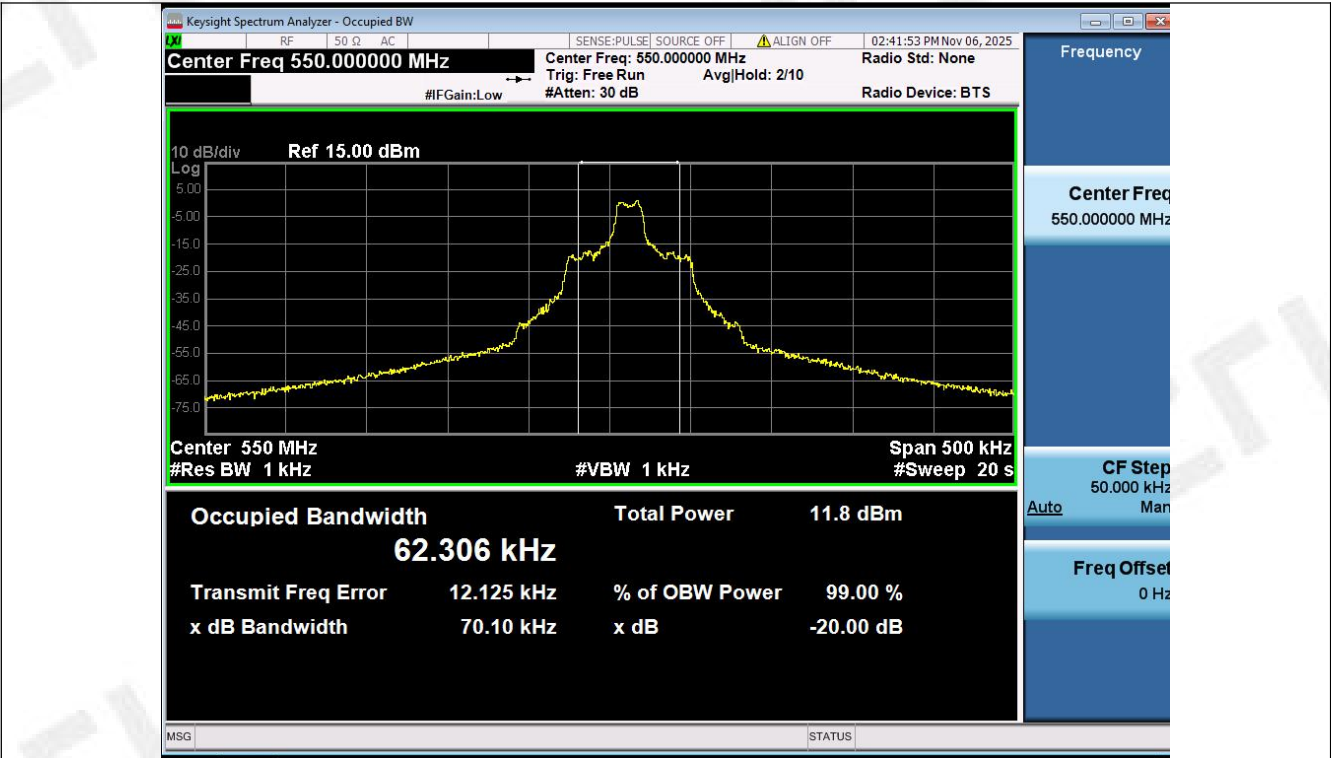

CH01

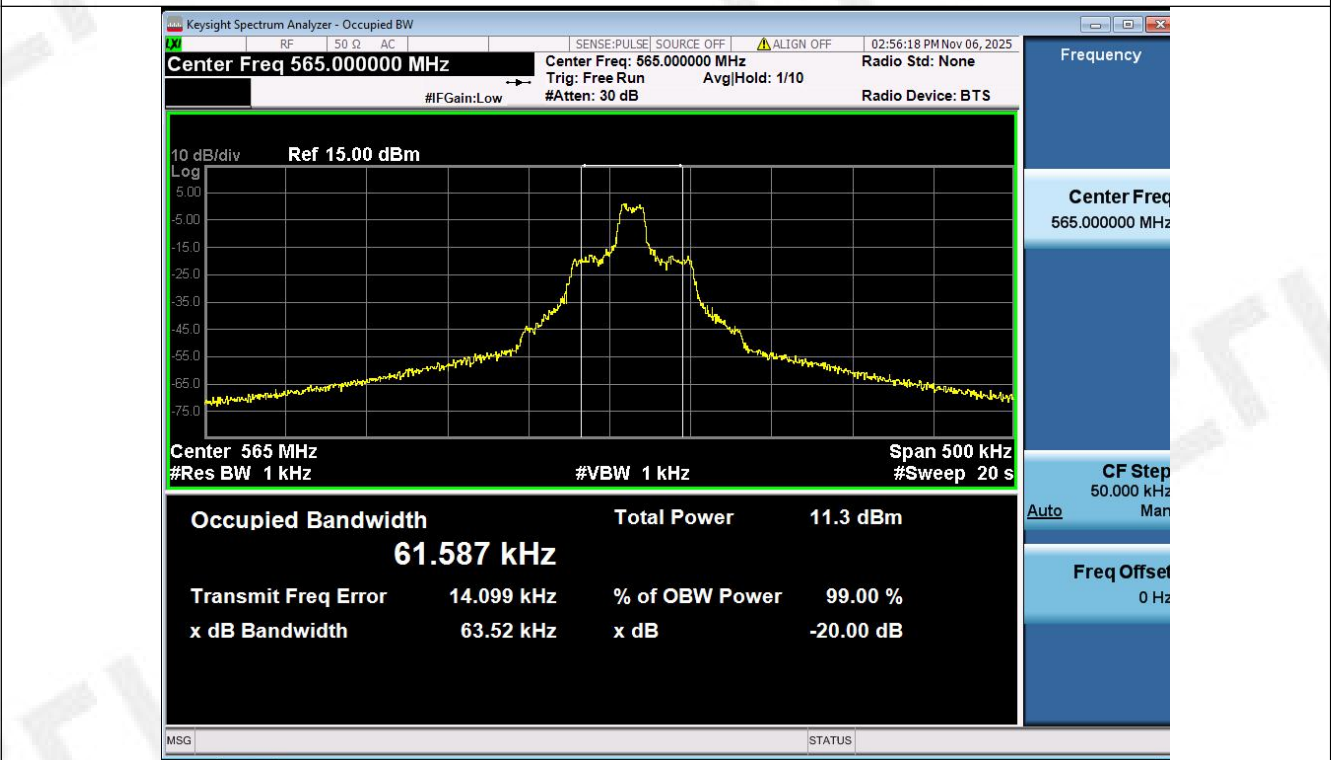

CH21

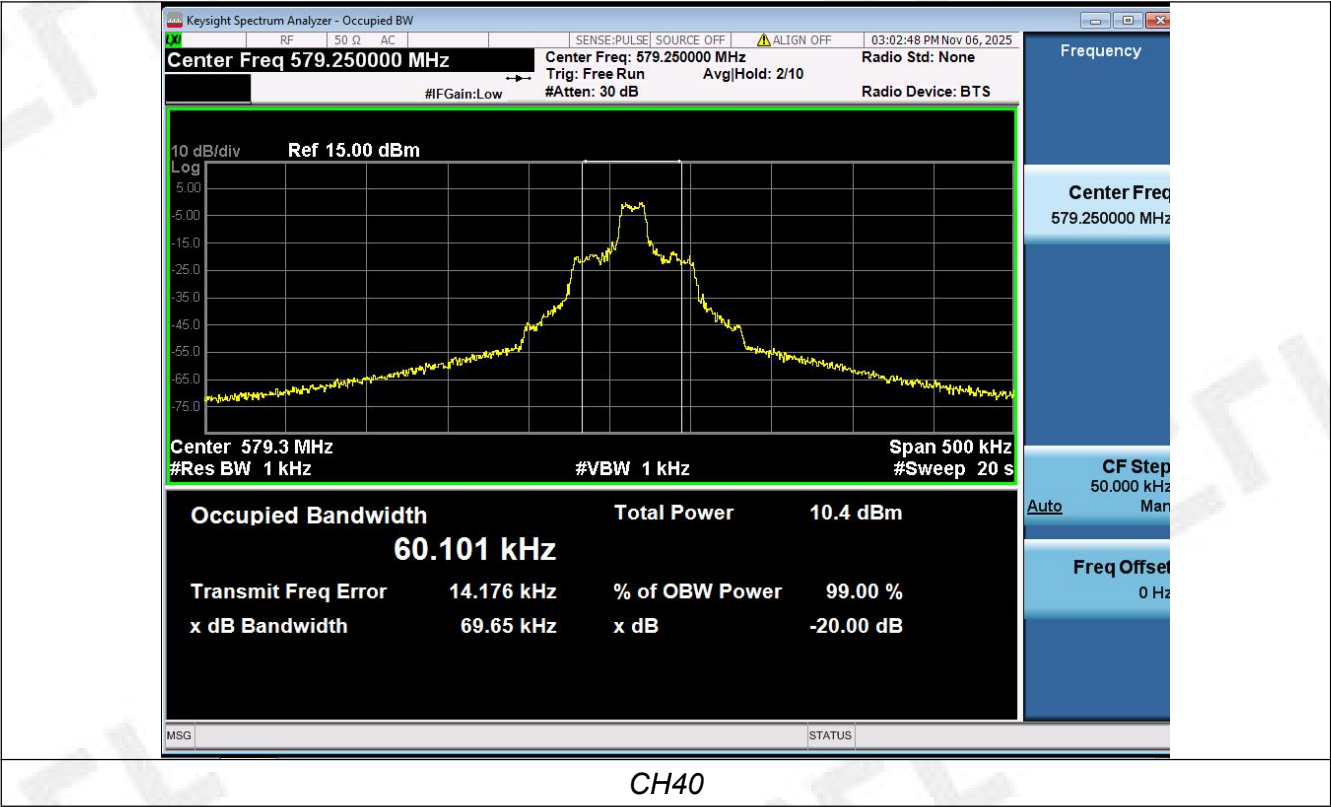

3.3. Necessary Bandwidth

LIMIT

According to ETSI EN 300 422-1 v2.2.1(2021-11) section 4.2.4.2, The mean Power Density, measured with 1 kHz measurement bandwidth and RMS detector, of the transmitter unwanted emissions shall not exceed the limits of the masks provided in figure 1 for equipment employing analogue modulation and figure 2 for equipment employing digital modulation, but excluding WMAS. The limits in figures 1 and 2 are relative to the transmitter RF output power according to clauses 4.2.1 and 5.4.1.

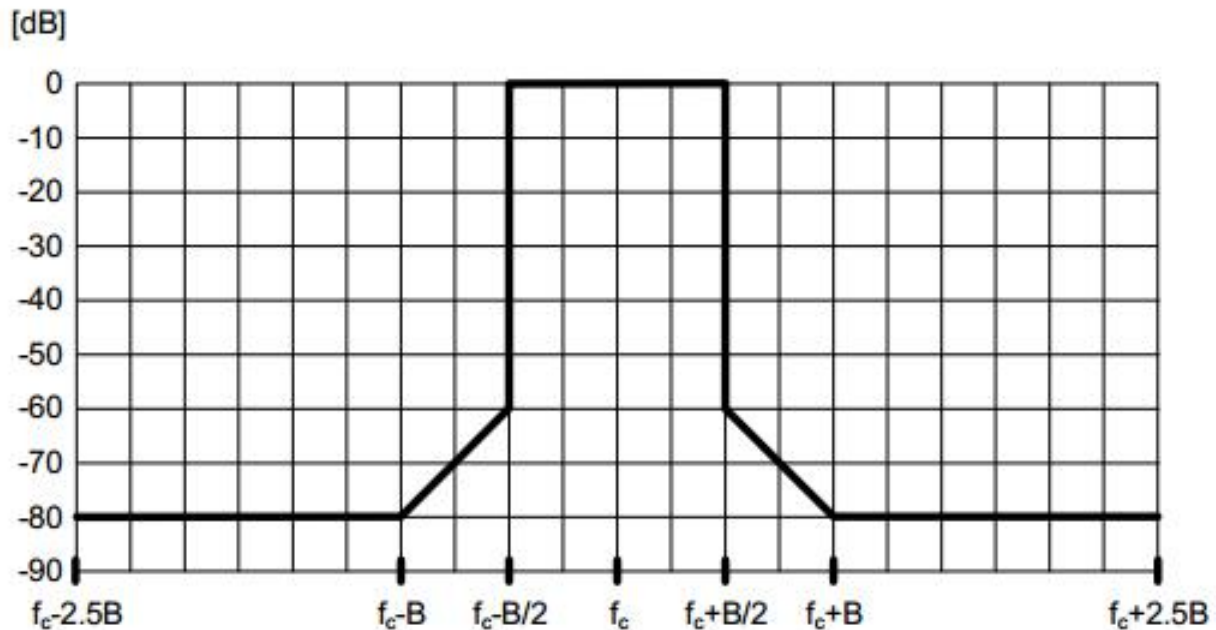


Figure 1: Transmit spectral power mask for equipment employing analogue modulation, RBW = 1 kHz

TEST PROCEDURE

The arrangement of test equipment as shown in figure B.1 shall be used. Note that the noise meter conforms to (quasi) without weighting filter (flat).

With the Low Frequency (LF) audio signal generator set to 500 Hz, the audio input level to the DUT shall be adjusted to 8 dB below the limiting threshold (-8 dB (lim)) as declared by the manufacturer. The corresponding audio output level from the demodulator shall be measured and recorded.

The input impedance of the noise meter shall be sufficiently high to avoid more than 0,1 dB change in input level when the meter is switched between input and output.

The audio input level shall be increased by 20 dB, i.e. to +12 dB (lim), and the corresponding change in output level shall be measured.

It shall be checked that the audio output level has increased by ≤ 10 dB.

If this condition is not met, the initial audio input level shall be increased from -8 dB (lim) in 1 dB steps until the above condition is fulfilled, and the input level recorded in the test report. This level replaces the value derived from the manufacturer's declaration and is defined as -8 dB (lim).

Measure the input level at the transmitter required to give +12 dB (lim).

The LF generator shall be replaced with the weighted noise source to Recommendation ITU-R BS.559-2 [i.3], band-limited to 15 kHz as described in IEC 60244-13 [2], and the level shall be adjusted such that the measured input to the transmitter corresponds to +12 dB (lim).

If the transmitter incorporates any ancillary coding or signalling channels (e.g. pilot-tones), these shall be enabled prior to any spectral measurements.


If the transmitter incorporates more than one audio input, e.g. stereo systems, the second and subsequent channels shall be simultaneously driven from the same noise source, attenuated to a level

of -6 dB (lim).


The transmitter RF output spectrum shall be measured, using a spectrum analyser with the following settings:


- centre frequency: fc: Transmitter (Tx) nominal frequency;
- dispersion (Span): 5B(B is the declared bandwidth);
- Resolution BandWidth (RBW): 1 kHz;
- Video BandWidth (VBW): 1 kHz;
- detector: Average hold.

TEST CONFIGURATION

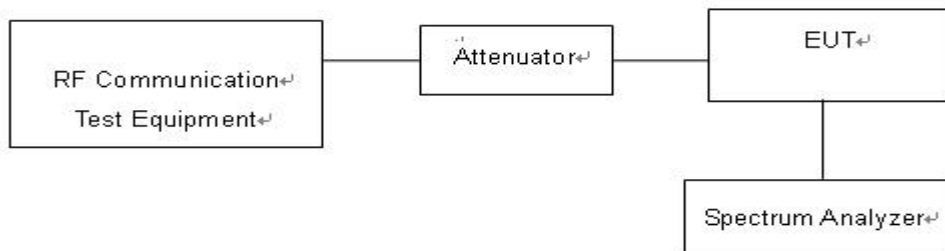


TEST RESULTS

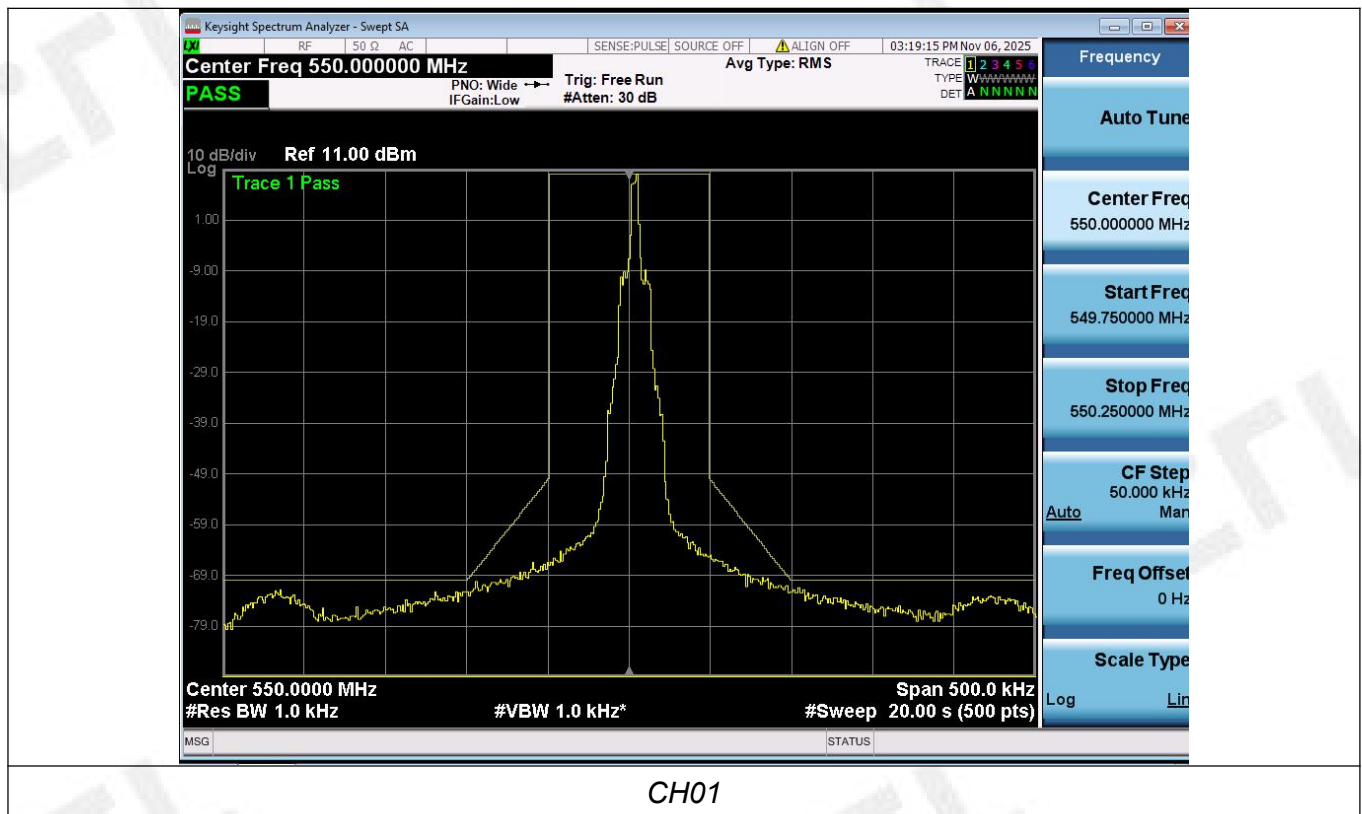

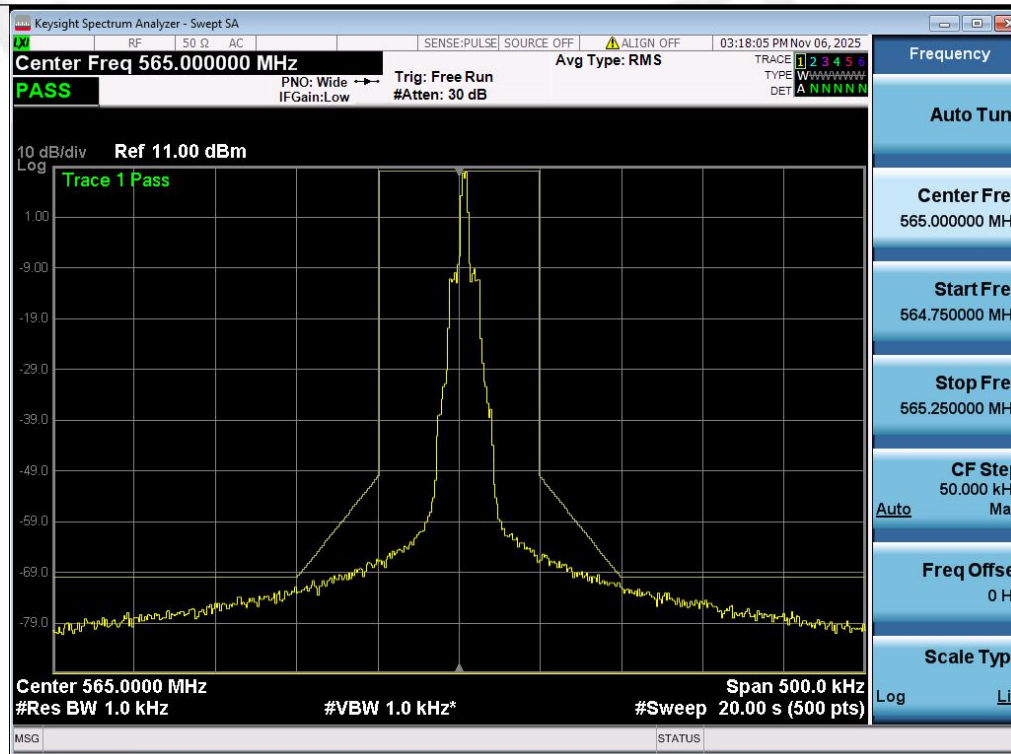

CH21

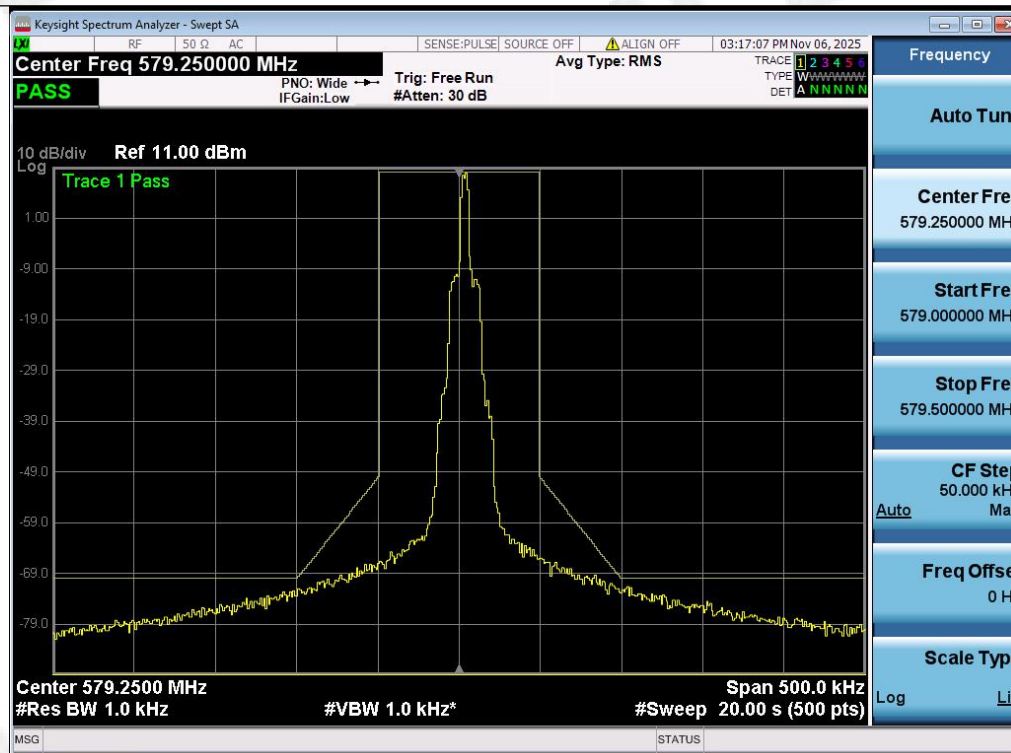

CH40

3.4. Transmitter spurious emissions

Limit

Spurious emissions are emissions outside the frequency range(s) of the equipment. The power of the spurious emissions shall not exceed the limits of table as below:


State	Frequency		
	47MHz to 74MHz 87.5MHz to 118MHz 174MHz to 230MHz 470MHz to 862MHz	Other Frequencies Below 1000MHz	Frequencies above 1000MHz
Operation	4nW	250nW	1μW
Standby	2nW	2nW	20nW

Test Procedure

1. EUT shall be placed on a 0.8m high table for frequency below 1GHz
2. EUT shall be placed on a 1.5m high table for frequency above 1GHz, The test distance between the receiving antenna and the EUT is 1m up to 4m, Set EUT in continuous transmitting with maximum output power at test frequency.
3. The table was rotated from 0 to 360 degree to search the highest radiated emission.
4. Repeat step 3 to 4 for each polarization and test channel to find the worst emission level.
5. The results obtained are compared to the limits in order to prove compliance with the requirement.
6. Please refer to ETSI EN 300 422-1 v2.2.1(2021-11) clause 4.2.4.1 for the test conditions.
7. Please refer to ETSI EN 300 422-1 v2.2.1(2021-11) clause 5.4.4 for the measurement method.

Test Configuration

Effective Radiated Power measurement (30 MHz to 12.75 GHz)

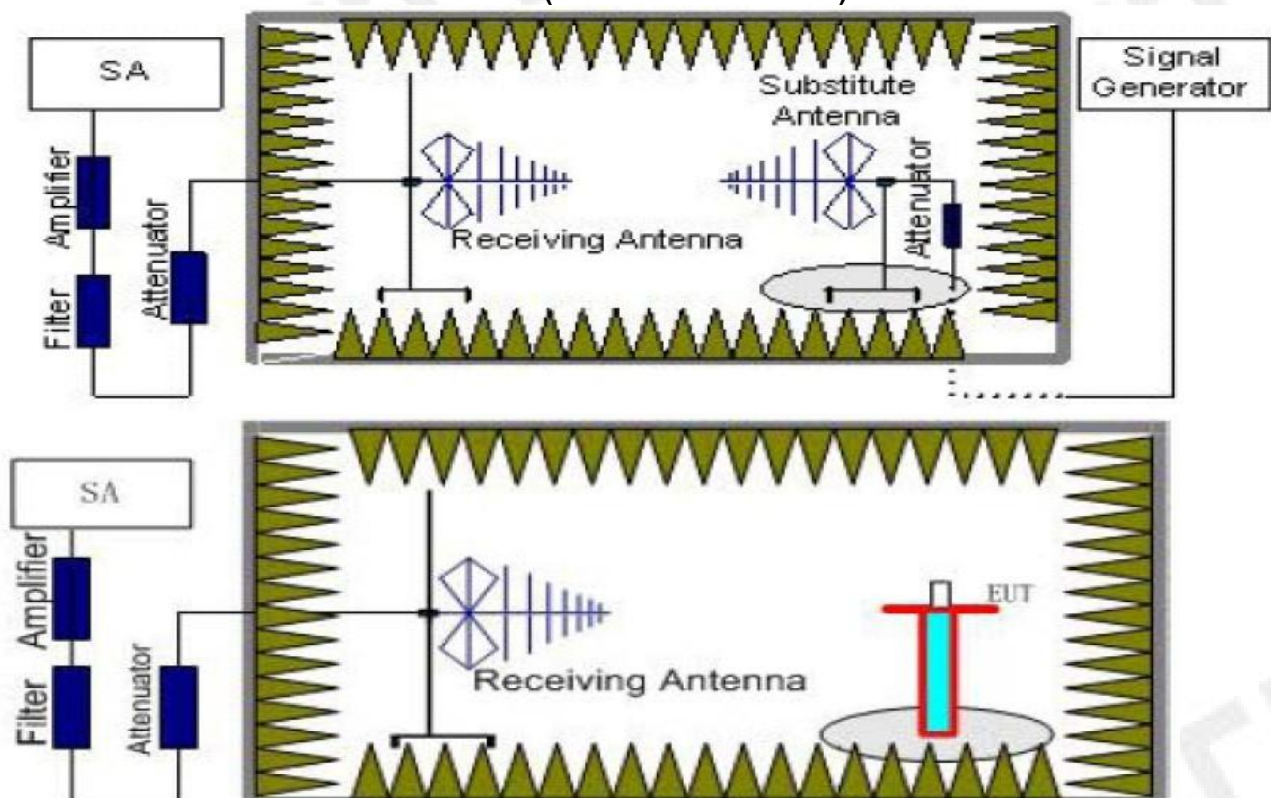

Test Results

Channel:


CH01

Polarity:

Horizontal



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

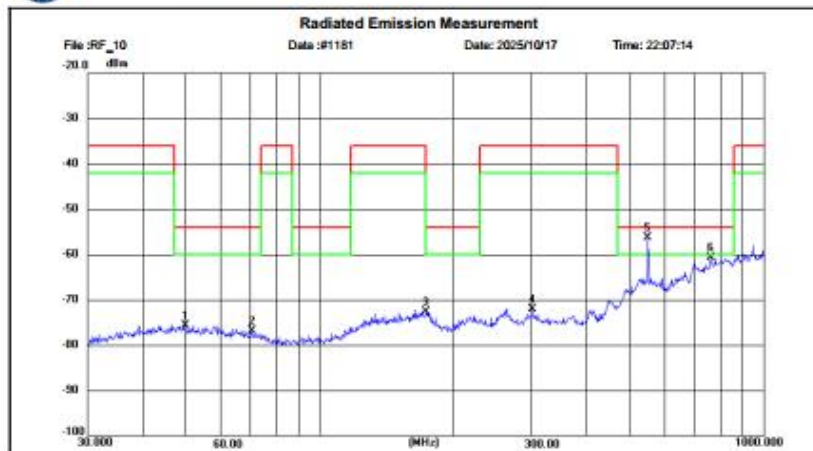

Site: LAB Chamber 2
Limit: ETSI EN300422TX(RF)
EUT:
M/N:
Mode: 550MHz TX
Note: CTL2510092011-WF


Polarization: **Horizontal**
Power:
Distance: 3m

Temperature: 25(C)
Humidity: 50 %

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	49.7722	-62.89	+12.72	-75.61	-54.00	21.61	peak	150	360	P	
2	70.5526	-61.28	+15.71	-76.99	-54.00	22.99	peak	150	360	P	
3	174.3476	-57.28	+15.47	-72.75	-54.00	18.75	peak	150	360	P	
4	301.9513	-57.49	+14.70	-72.19	-54.00	36.19	peak	150	360	P	
5	549.9628	-48.38	-7.97	-56.35	-54.00	2.35	peak	150	360	P	
6	762.0385	-57.08	+3.62	-60.70	-54.00	6.70	peak	150	360	P	



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

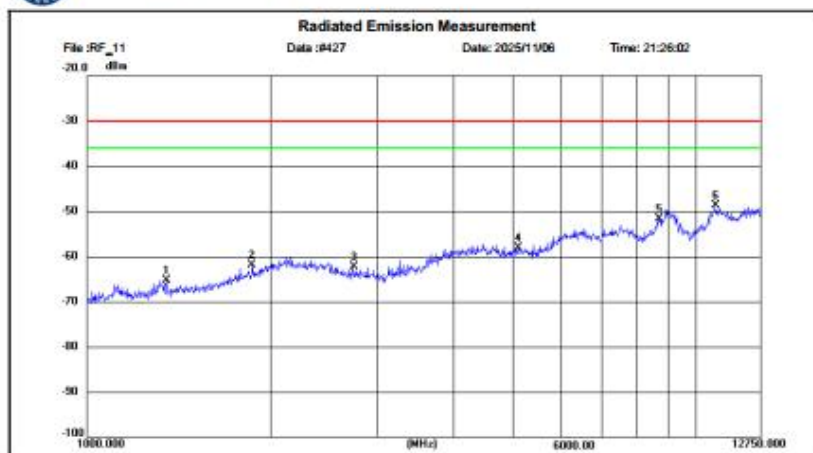

Site: LAB Chamber 2
Limit: ETSI EN300422TX(RF)
EUT:
M/N:
Mode: 550MHz TX
Note: CTL2510092011-WF

Polarization: **Horizontal**
Power:
Distance: 3m

Temperature: 25(C)
Humidity: 50 %

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1352.512	-55.60	+9.68	-65.28	-30.00	35.28	peak	150	0	P	
2	1866.329	-55.06	+6.82	-61.88	-30.00	31.88	peak	150	0	P	
3	2740.199	-59.13	+3.24	-62.37	-30.00	32.37	peak	150	0	P	
4	5120.625	-61.85	3.81	-58.04	-30.00	28.04	peak	150	0	P	
5	8722.701	-61.69	10.05	-51.64	-30.00	21.64	peak	150	0	P	
6	10778.207	-60.67	11.94	-48.73	-30.00	18.73	peak	150	0	P	

Channel:


CH01

Polarity:


Vertical



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

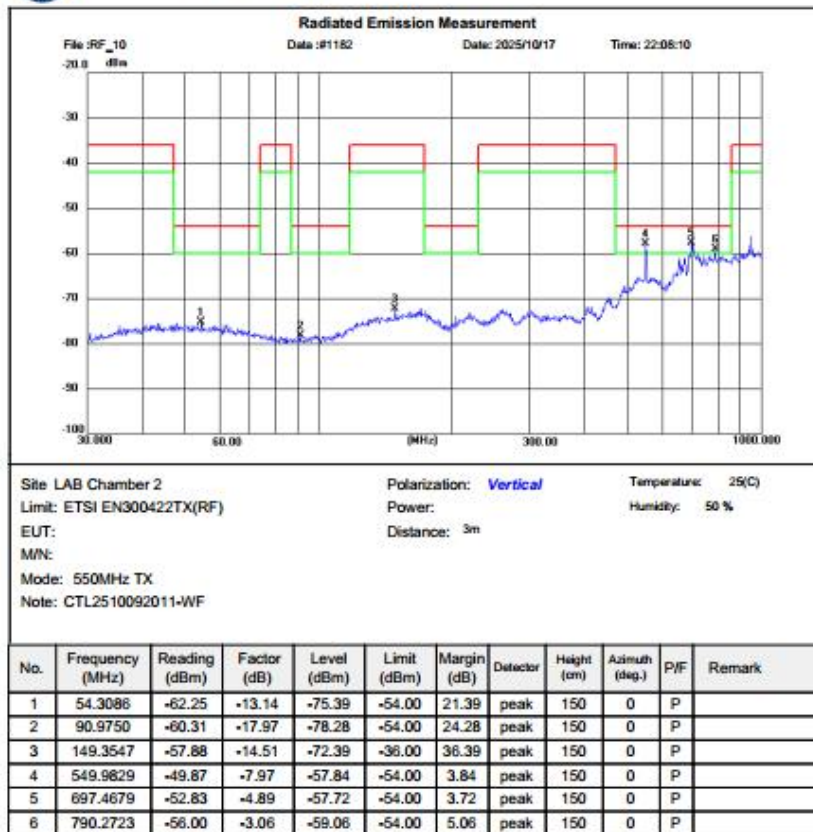

Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

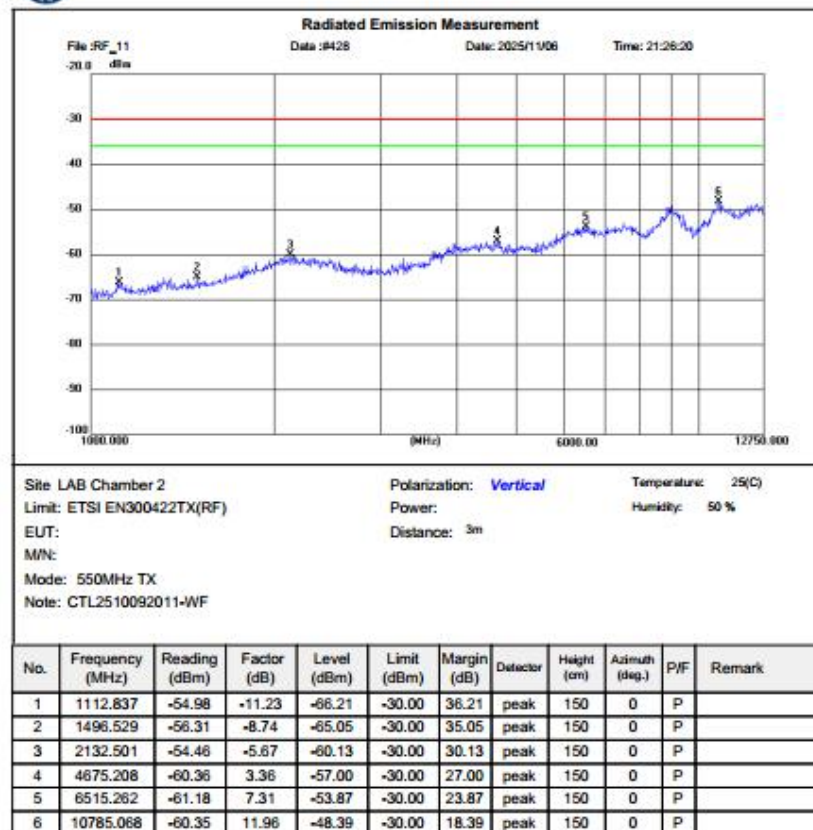

Channel:


CH21

Polarity:

Horizontal



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

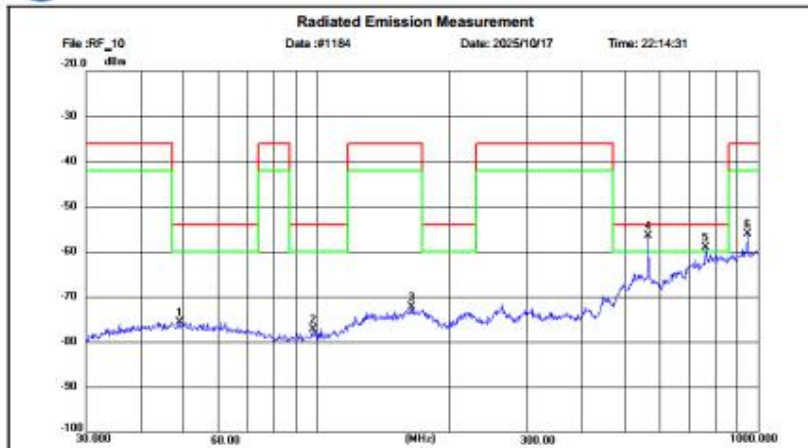

Site: LAB Chamber 2
Limit: ETSI EN300422TX(RF)
EUT:
MN:
Mode: 565MHz TX
Note: CTL2510092011-WF


Polarization: **Horizontal**
Power:
Distance: 3m

Temperature: 25(C)
Humidity: 50 %

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	48.9930	-62.97	+12.67	-75.64	-54.00	21.64	peak	150	360	P	
2	98.4866	-59.57	+17.69	-77.26	-54.00	23.26	peak	150	360	P	
3	164.4743	-57.82	+14.56	-72.38	-54.00	36.38	peak	150	360	P	
4	564.6389	-48.97	+7.45	-56.42	-54.00	2.42	peak	150	360	P	
5	762.7068	-55.45	+3.61	-59.06	-54.00	5.06	peak	150	360	P	
6	948.7610	-54.49	-1.53	-56.02	-54.00	20.02	peak	150	360	P	



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

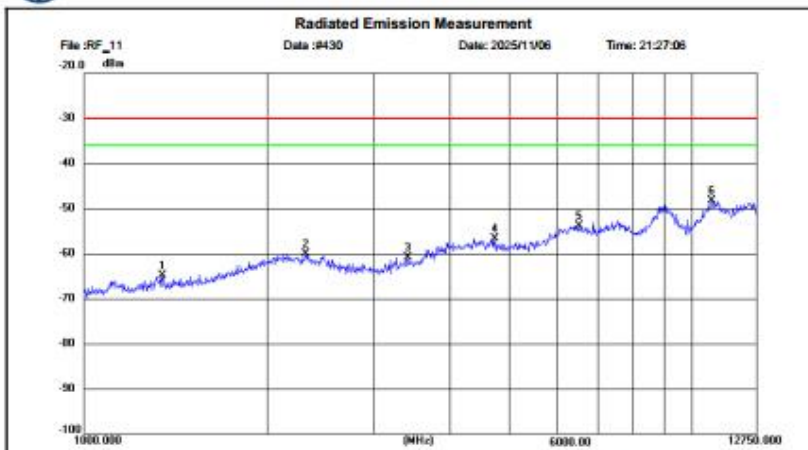

Site: LAB Chamber 2
Limit: ETSI EN300422TX(RF)
EUT:
MN:
Mode: 565MHz TX
Note: CTL2510092011-WF

Polarization: **Horizontal**
Power:
Distance: 3m

Temperature: 25(C)
Humidity: 50 %

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1346.072	-55.12	+9.71	-64.83	-30.00	34.83	peak	150	0	P	
2	2320.114	-55.02	+5.01	-60.03	-30.00	30.03	peak	150	0	P	
3	3414.055	-60.24	+0.68	-60.92	-30.00	30.92	peak	150	0	P	
4	4741.124	-60.10	3.43	-56.67	-30.00	26.67	peak	150	0	P	
5	6515.262	-61.18	7.31	-53.87	-30.00	23.87	peak	150	0	P	
6	10785.068	-60.35	11.96	-48.39	-30.00	18.39	peak	150	0	P	

Channel:


CH21

Polarity:

Vertical



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

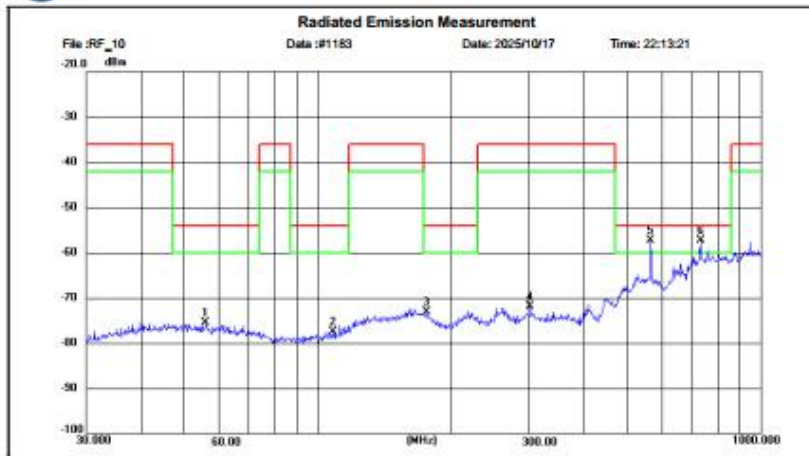

Site: LAB Chamber 2
Limit: ETSI EN300422TX(RF)
EUT:
MN:
Mode: 565MHz TX
Note: CTL2510092011-WF


Polarization: **Vertical**
Power:
Distance: 3m

Temperature: 25(C)
Humidity: 50 %

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	55.9271	-62.16	+13.30	-75.46	-54.00	21.46	peak	150	0	P	
2	108.5518	-60.72	+16.86	-77.58	-54.00	23.58	peak	150	0	P	
3	176.4232	-57.40	+15.66	-73.06	-54.00	19.06	peak	150	0	P	
4	301.6867	-57.17	+14.70	-71.87	-54.00	35.87	peak	150	0	P	
5	565.1341	-49.94	+7.43	-57.37	-54.00	3.37	peak	150	0	P	
6	733.2047	-53.01	+4.19	-57.20	-54.00	3.20	peak	150	0	P	



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

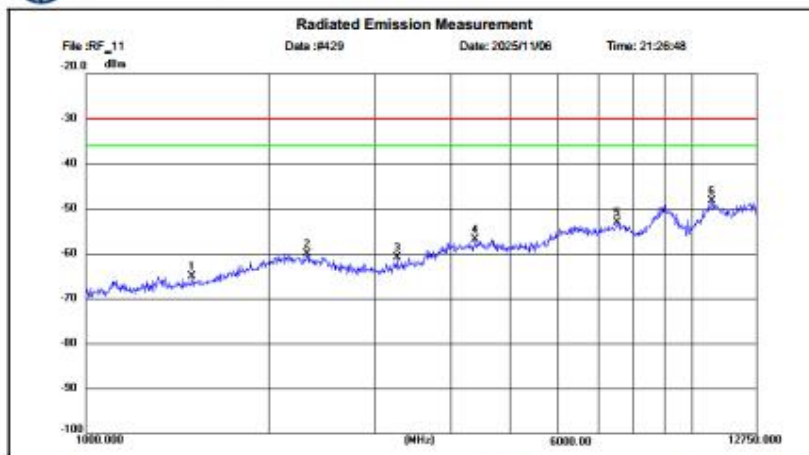

Site: LAB Chamber 2
Limit: ETSI EN300422TX(RF)
EUT:
MN:
Mode: 565MHz TX
Note: CTL2510092011-WF

Polarization: **Vertical**
Power:
Distance: 3m

Temperature: 25(C)
Humidity: 50 %

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1496.529	-56.31	-8.74	-65.05	-30.00	35.05	peak	150	0	P	
2	2320.114	-55.02	-5.01	-60.03	-30.00	30.03	peak	150	0	P	
3	3263.230	-59.79	+1.16	-60.95	-30.00	30.95	peak	150	0	P	
4	4392.543	-59.57	2.70	-56.87	-30.00	26.87	peak	150	0	P	
5	7508.688	-61.85	8.70	-53.15	-30.00	23.15	peak	150	0	P	
6	10785.068	-60.35	11.96	-48.39	-30.00	18.39	peak	150	0	P	

Channel:


CH40

Polarity:

Horizontal



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

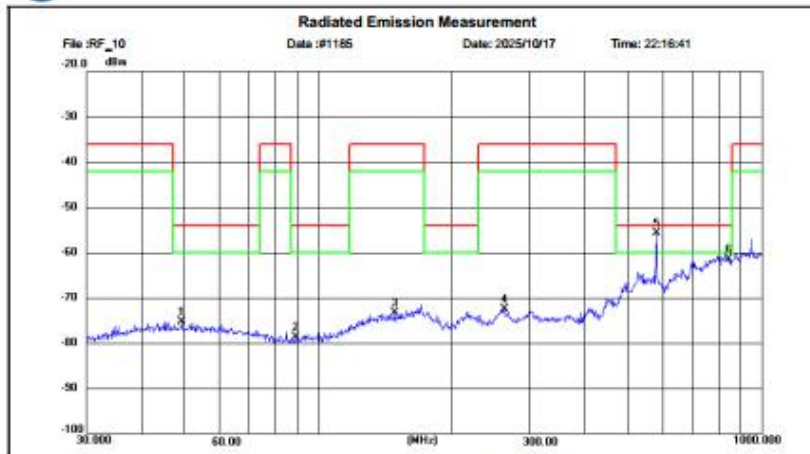

Site: LAB Chamber 2
Limit: ETSI EN300422TX(RF)
EUT:
M/N:
Mode: 579.25MHz TX
Note: CTL2510092011-WF


Polarization: **Horizontal**
Power:
Distance: 3m

Temperature: 25(C)
Humidity: 50 %

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	49.2946	-62.68	+12.70	-75.38	-54.00	21.38	peak	150	0	P	
2	89.0419	-60.73	+17.99	-78.72	-54.00	24.72	peak	150	0	P	
3	148.8972	-58.77	+14.53	-73.30	-36.00	37.30	peak	150	0	P	
4	263.4723	-56.58	+15.84	-72.42	-36.00	36.42	peak	150	0	P	
5	579.4314	-48.82	-6.93	-55.75	-54.00	1.75	peak	150	0	P	
6	842.8682	-58.99	-2.55	-61.54	-54.00	7.54	peak	150	0	P	



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

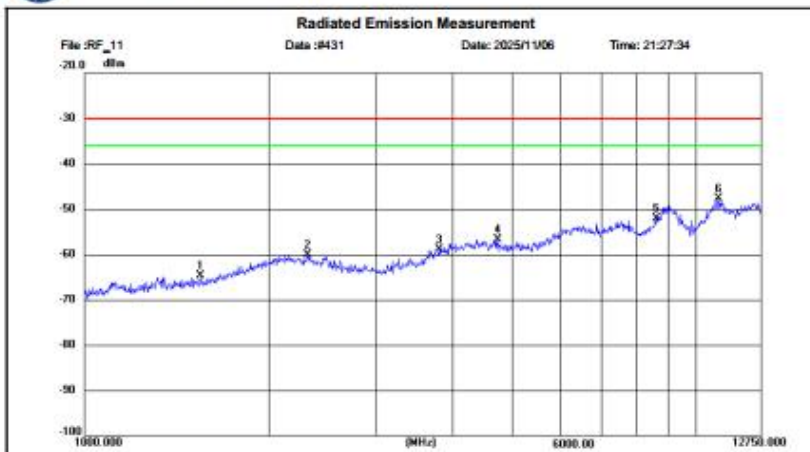

Site: LAB Chamber 2
Limit: ETSI EN300422TX(RF)
EUT:
M/N:
Mode: 579.25MHz TX
Note: CTL2510092011-WF

Polarization: **Horizontal**
Power:
Distance: 3m

Temperature: 25(C)
Humidity: 50 %

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1546.881	-56.18	-8.47	-64.65	-30.00	34.65	peak	150	0	P	
2	2320.114	-55.02	-5.01	-60.03	-30.00	30.03	peak	150	0	P	
3	3812.606	-59.51	0.54	-58.97	-30.00	28.97	peak	150	0	P	
4	4741.124	-60.10	3.43	-56.67	-30.00	26.67	peak	150	0	P	
5	8634.336	-61.96	9.78	-52.18	-30.00	22.18	peak	150	0	P	
6	10902.380	-59.85	12.18	-47.67	-30.00	17.67	peak	150	0	P	

Channel:


CH40

Polarity:

Vertical



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

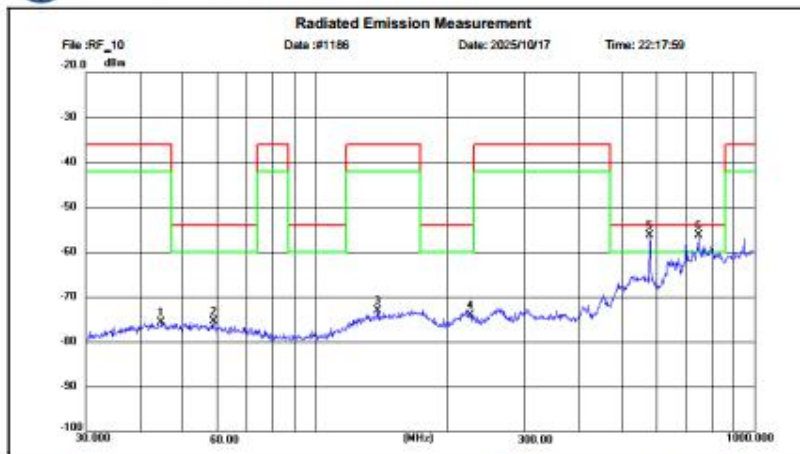


Site: LAB Chamber 2
Limit: ETSI EN300422TX(RF)
EUT:
M/N:
Mode: 579.25MHz TX
Note: CTL2510092011-WF

Polarization: **Vertical** Temperature: 25(C)
Power: Humidity: 50 %
Distance: 3m

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	44.6651	-63.16	+12.47	-75.63	-36.00	39.63	peak	150	360	P	
2	58.7670	-62.00	+13.58	-75.58	-54.00	21.58	peak	150	360	P	
3	138.6910	-58.12	+14.91	-73.03	-36.00	37.03	peak	150	360	P	
4	225.6044	-56.38	+17.62	-74.00	-54.00	20.00	peak	150	360	P	
5	578.4163	-49.42	-6.97	-56.39	-54.00	2.39	peak	150	360	P	
6	747.4826	-52.30	-3.90	-56.20	-54.00	2.20	peak	150	360	P	



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

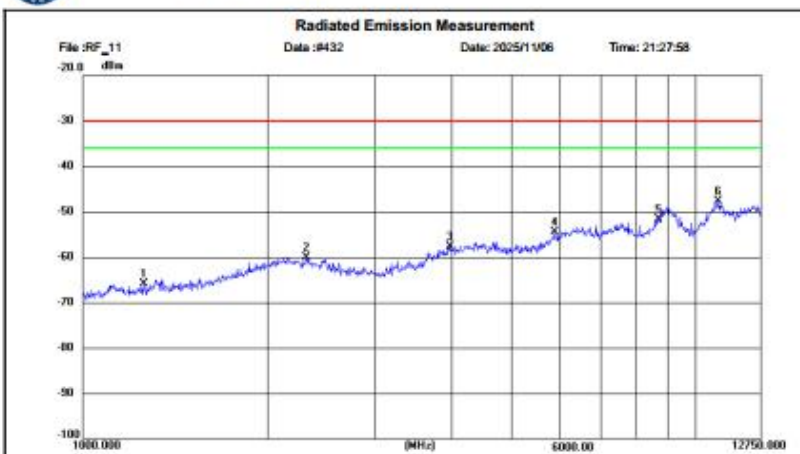

Site: LAB Chamber 2
Limit: ETSI EN300422TX(RF)
EUT:
M/N:
Mode: 579.25MHz TX
Note: CTL2510092011-WF

Polarization: **Vertical** Temperature: 25(C)
Power: Humidity: 50 %
Distance: 3m

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1260.269	-55.60	+10.28	-65.88	-30.00	35.88	peak	150	0	P	
2	2320.114	-55.02	-5.01	-60.03	-30.00	30.03	peak	150	0	P	
3	3974.886	-58.68	1.03	-57.65	-30.00	27.65	peak	150	0	P	
4	5886.398	-60.14	5.72	-54.42	-30.00	24.42	peak	150	0	P	
5	8722.701	-61.69	10.05	-51.64	-30.00	21.64	peak	150	0	P	
6	10902.380	-59.85	12.18	-47.67	-30.00	17.67	peak	150	0	P	

3.5. Frequency Stability

Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.005\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. Battery operated equipment shall be tested using a new battery.

Test Procedure


a) Frequency stability versus environmental temperature

1. Setup as Test Configuration for frequencies measured at ambient temperature if it is within 15°C to 25°C . Otherwise, an environmental chamber set for a temperature of 20°C shall be used.
2. Turn on EUT and set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 3 kHz, VBW to 10kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. Set the temperature of chamber to 50°C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -20°C is measured, record all measurement frequencies.

b) Frequency stability versus input voltage

1. Setup as Test Configuration for frequencies measured at ambient temperature if it is within 15°C to 25°C . Otherwise, an environmental chamber set for a temperature of 20°C shall be used. Install new batteries in the EUT.
2. Set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 3kHz, VBW to 10kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. For non hand carried, battery operated device, supply the EUT primary voltage with 85 and 115 percent of the nominal value and record the frequency.

Test Configuration


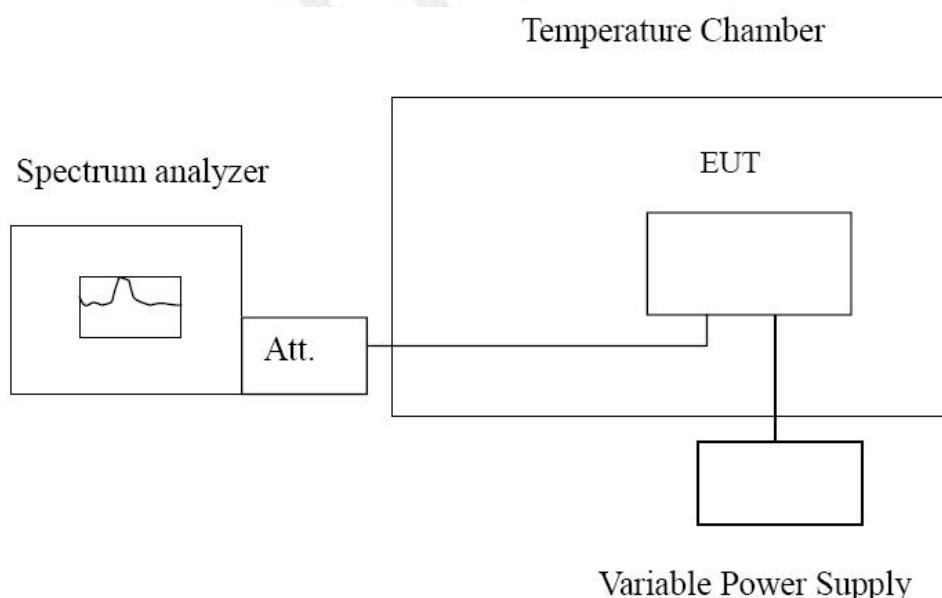




Test Results


Reference Frequency: CH01: 550MHz					
Voltage (V)	Temperature (°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
AC 120V	-20	0.01816	0.00313	±0.005	PASS
	-10	0.01815	0.00312		
	0	0.01733	0.00297		
	10	0.01742	0.00295		
	20	0.01847	0.00313		
	30	0.01743	0.00294		
	40	0.01765	0.00301		
	50	0.01874	0.00322		
AC 132V	25	0.01942	0.00330	±0.005	PASS
AC 108V	25	0.01961	0.00335		



Note: The report tests all channel data, but this report only records the worst channel data.



4. Test Setup Photos of the EUT

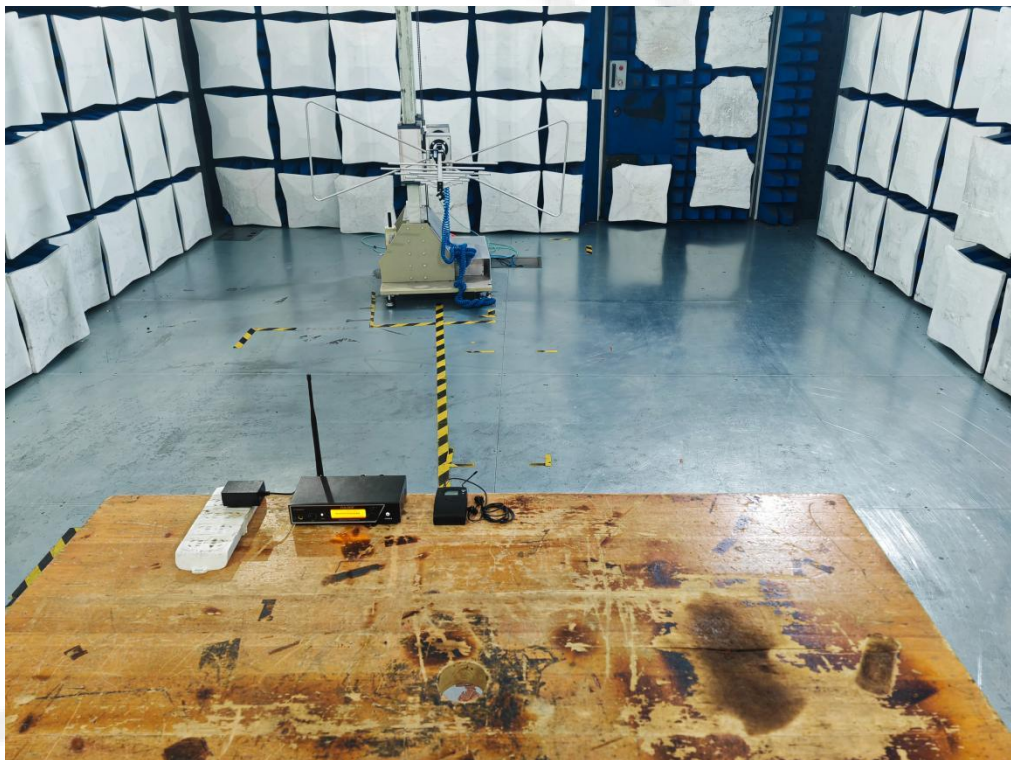
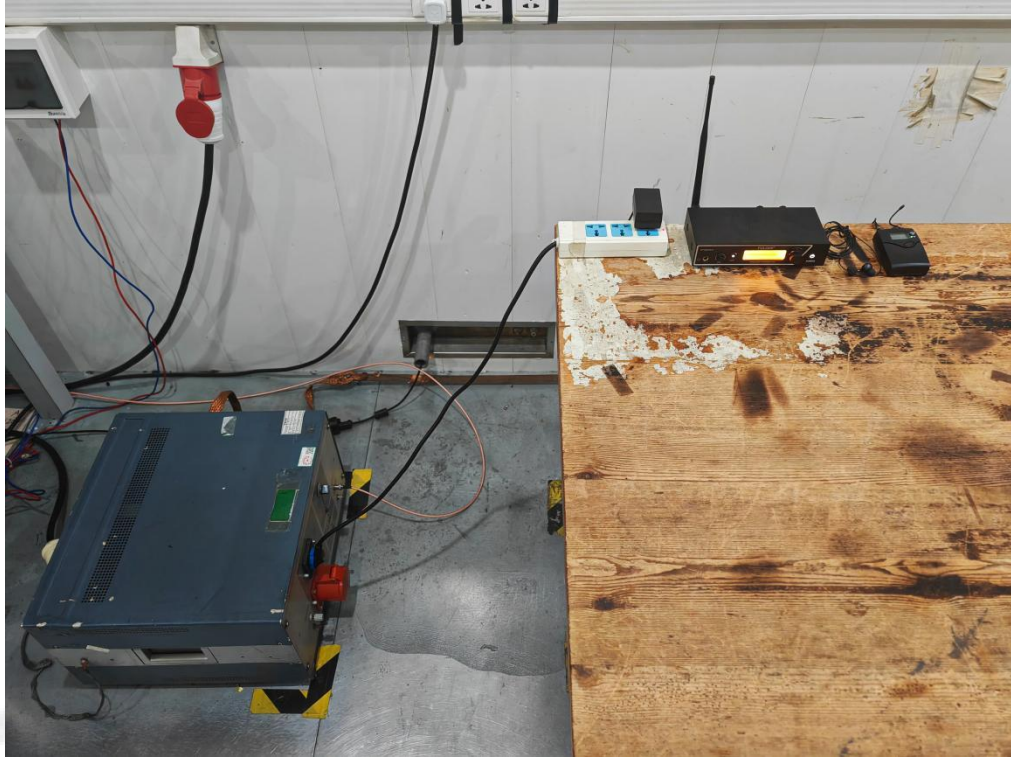


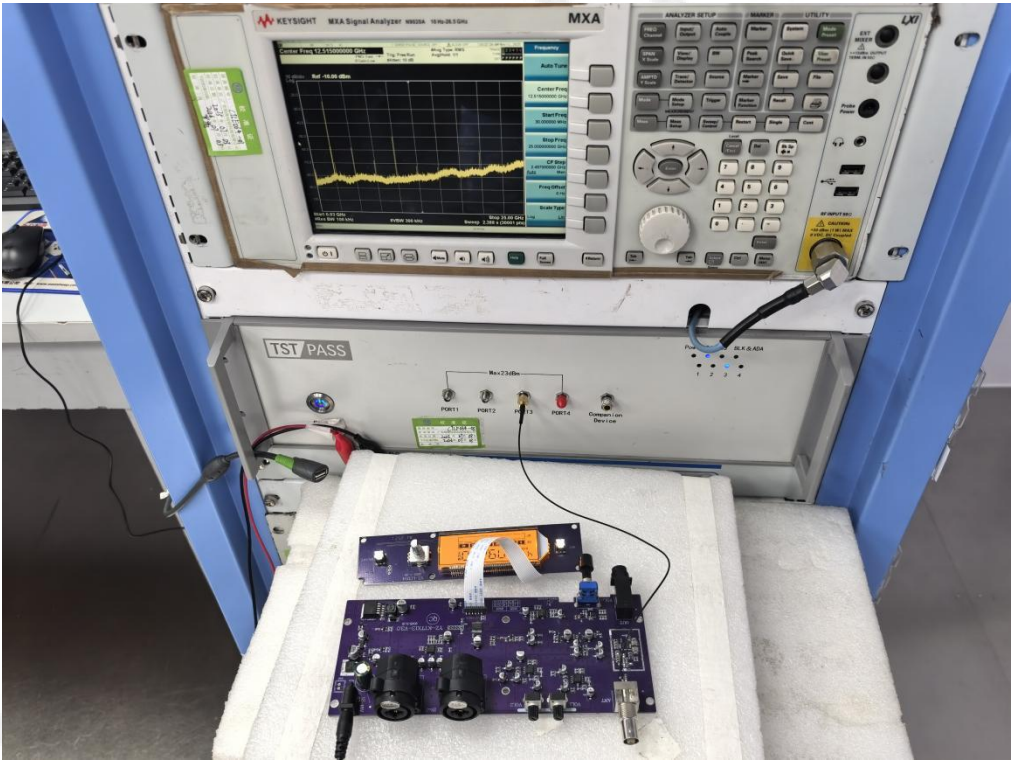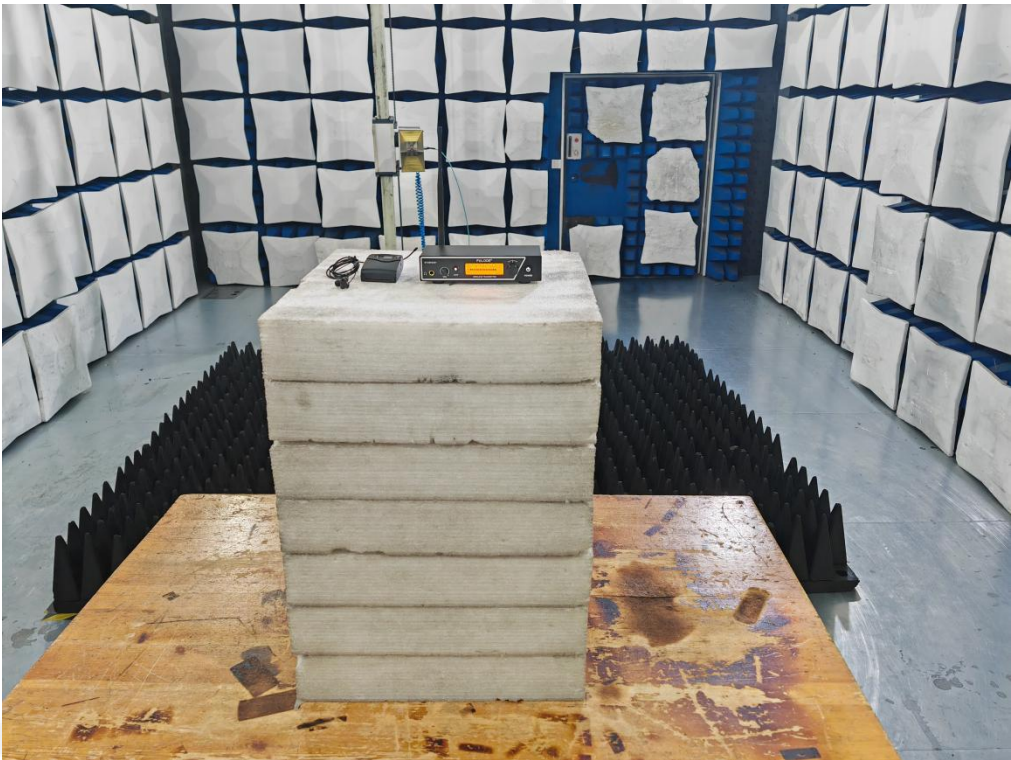


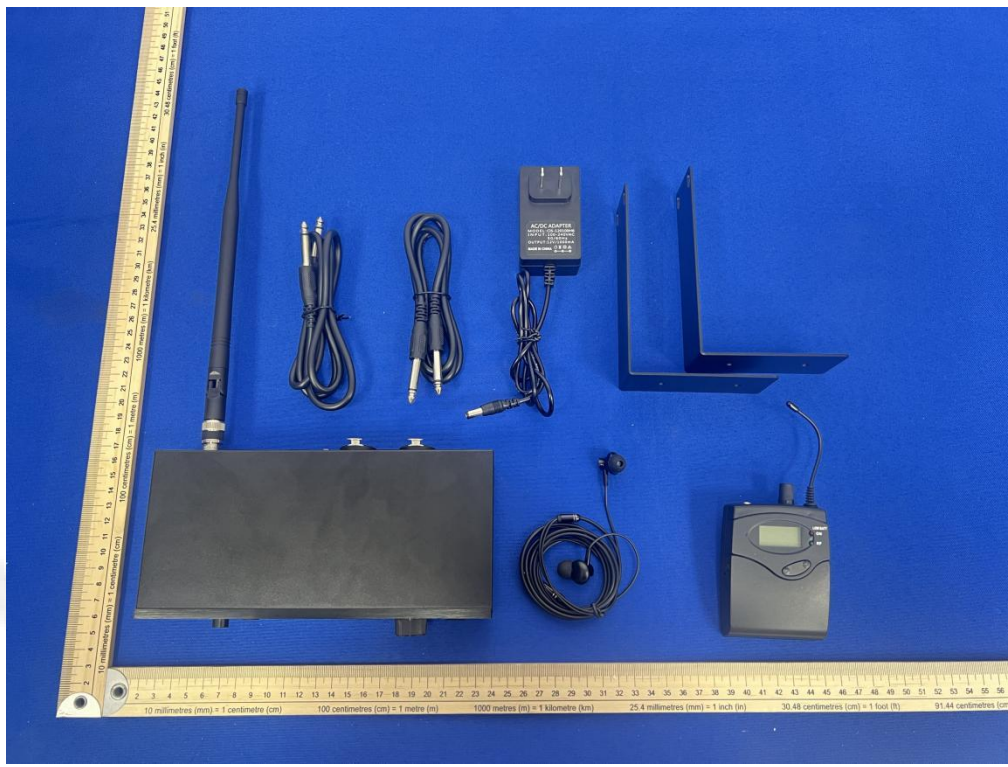


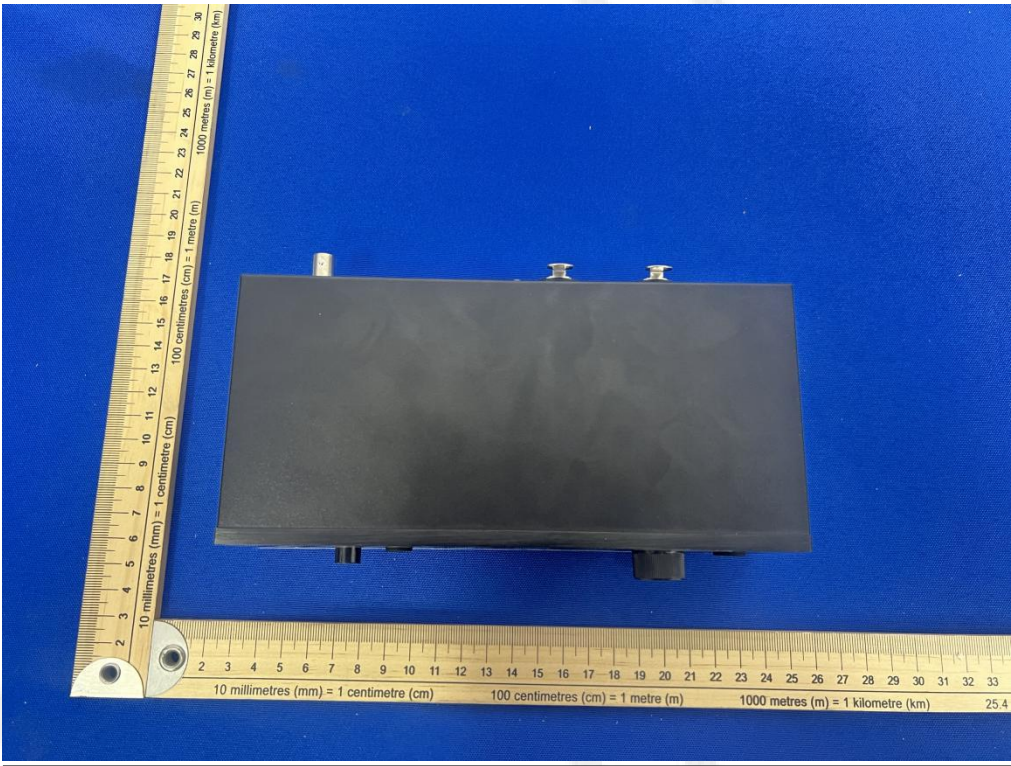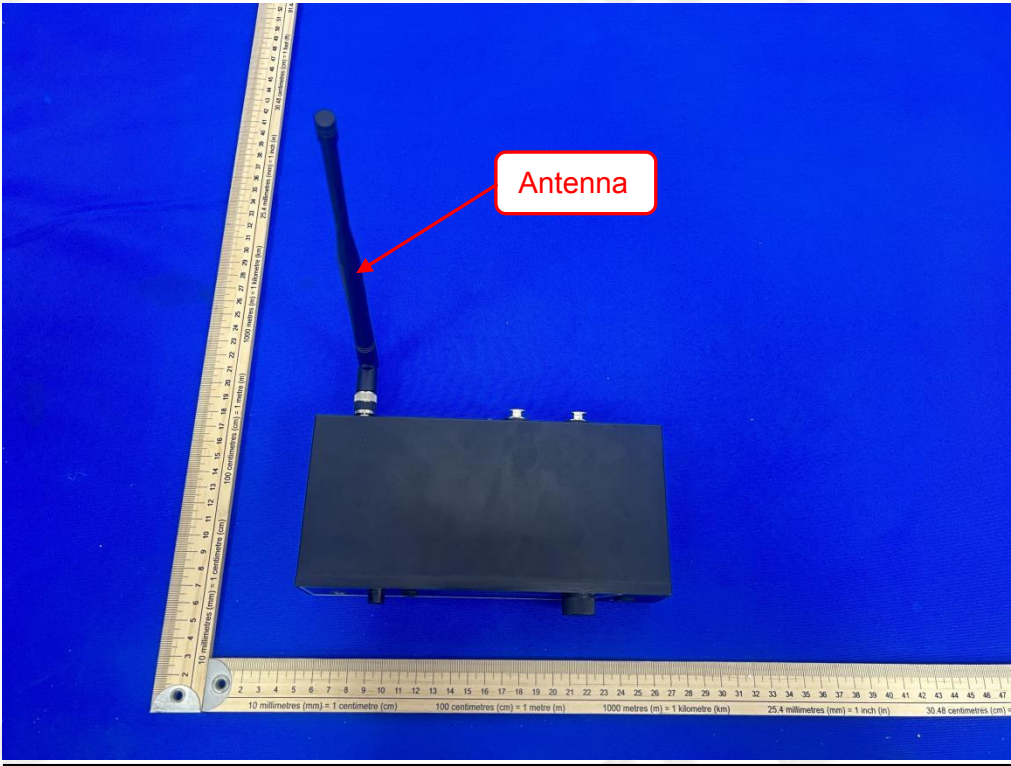

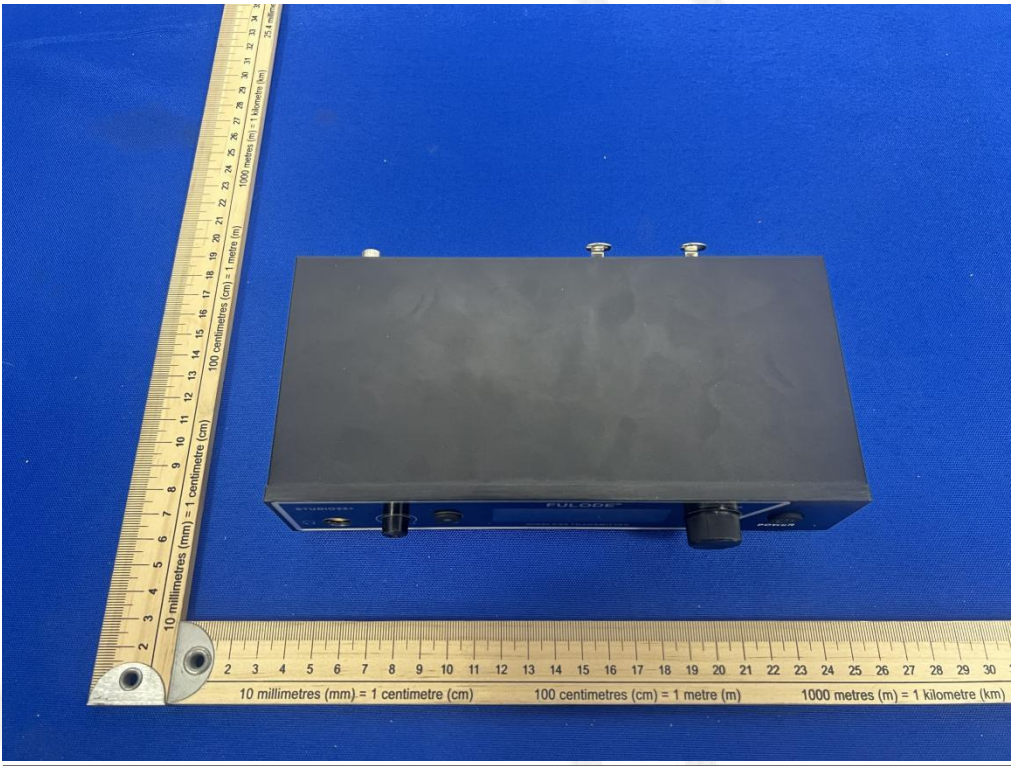
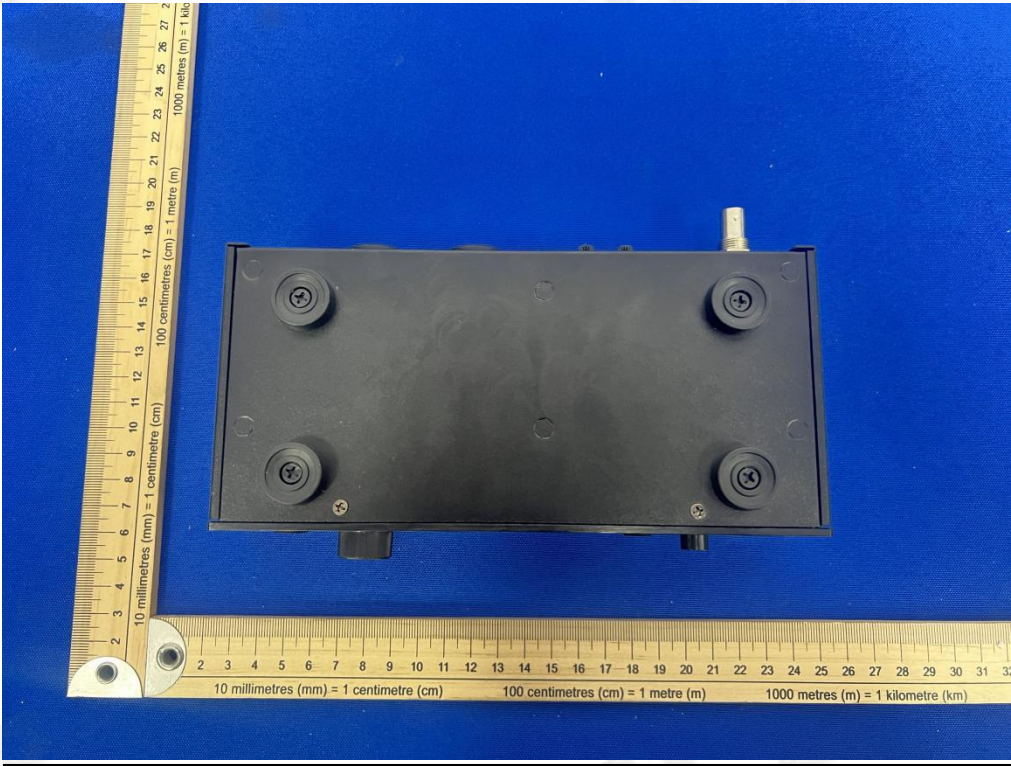


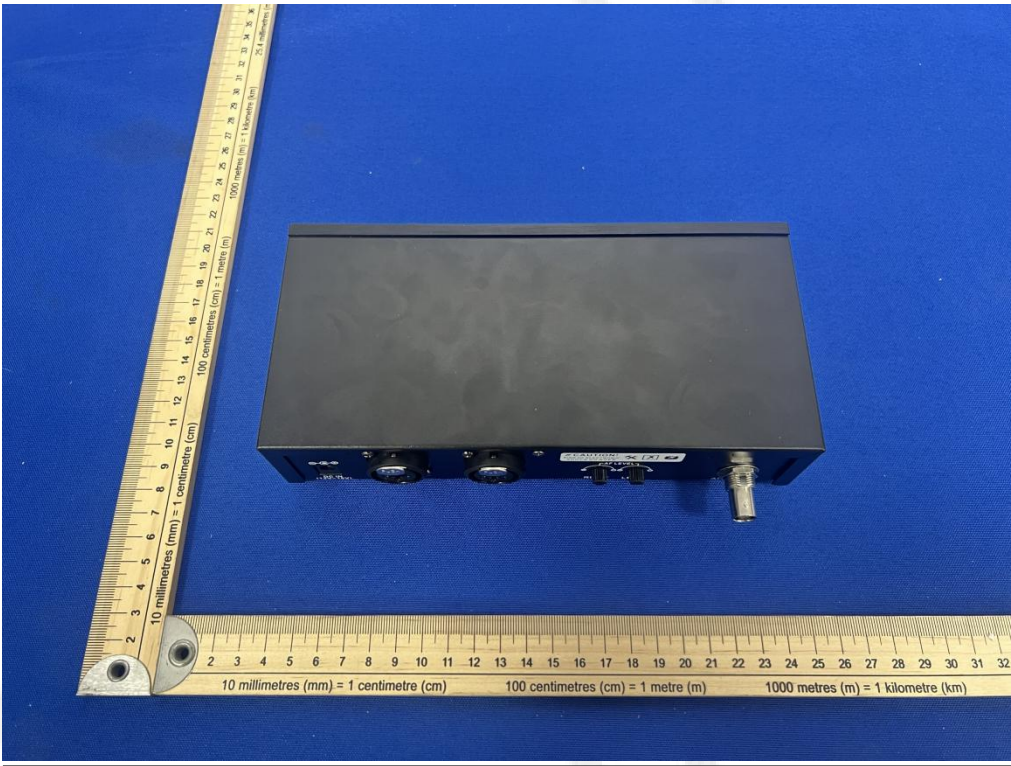
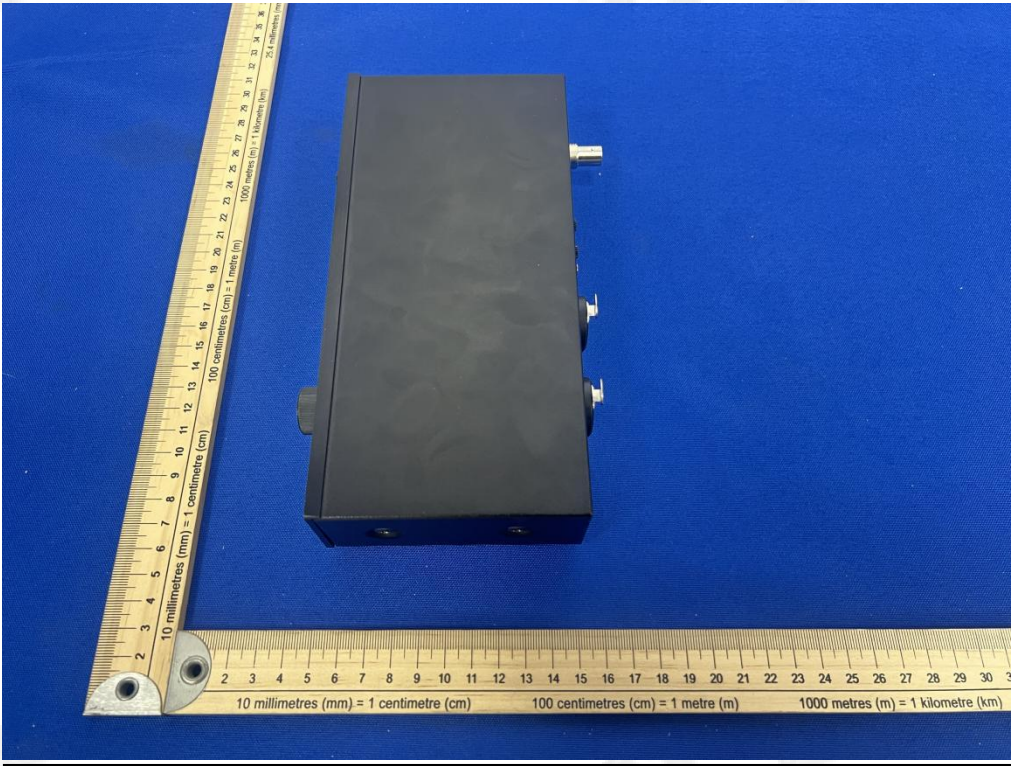



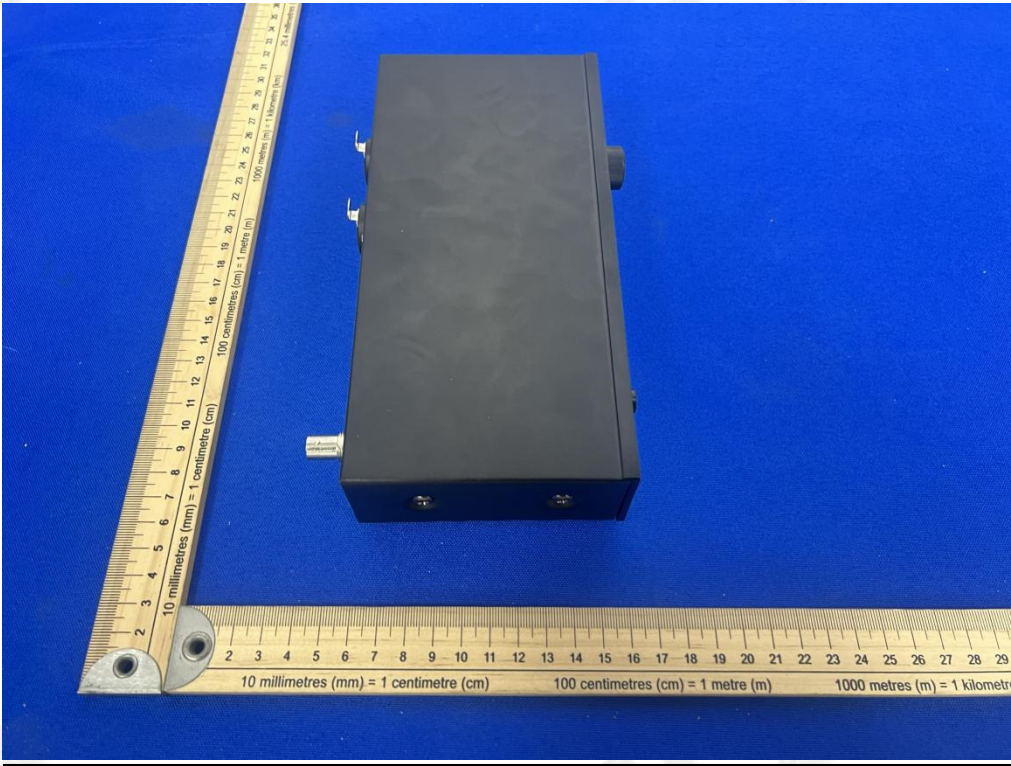


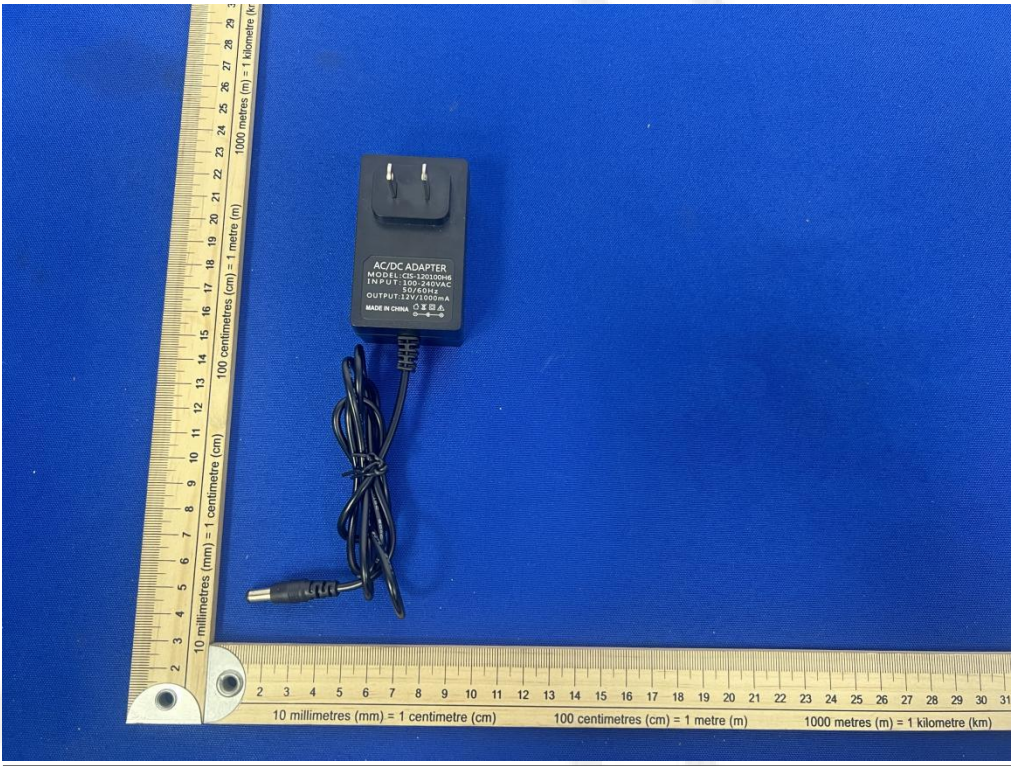

Internal Photos of EUT

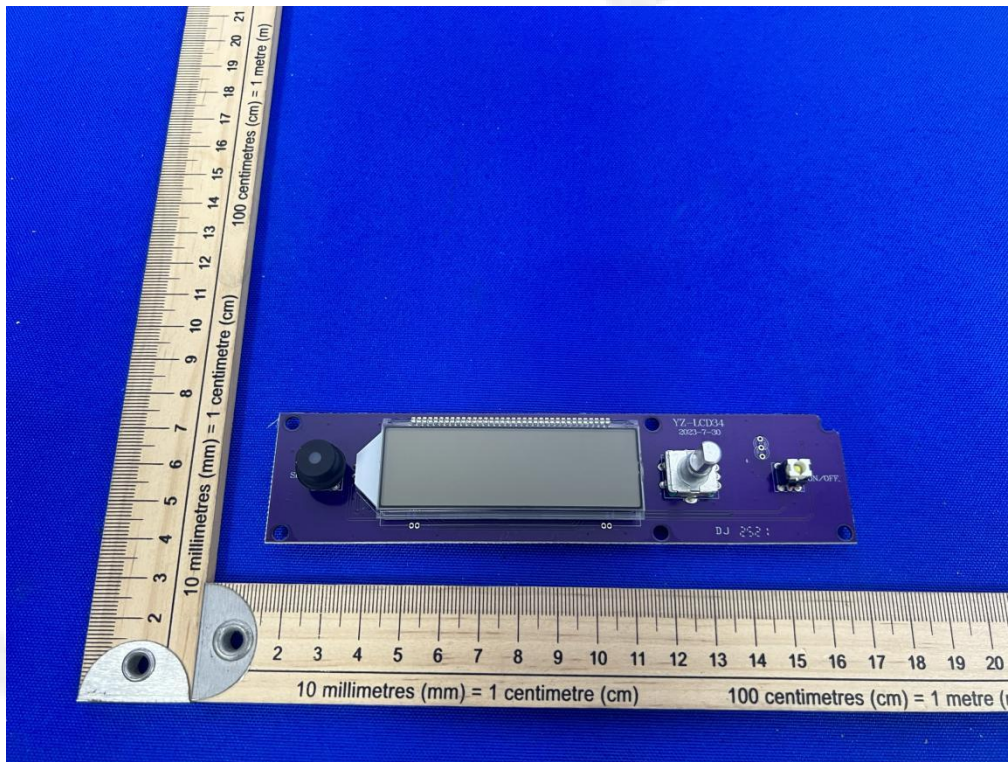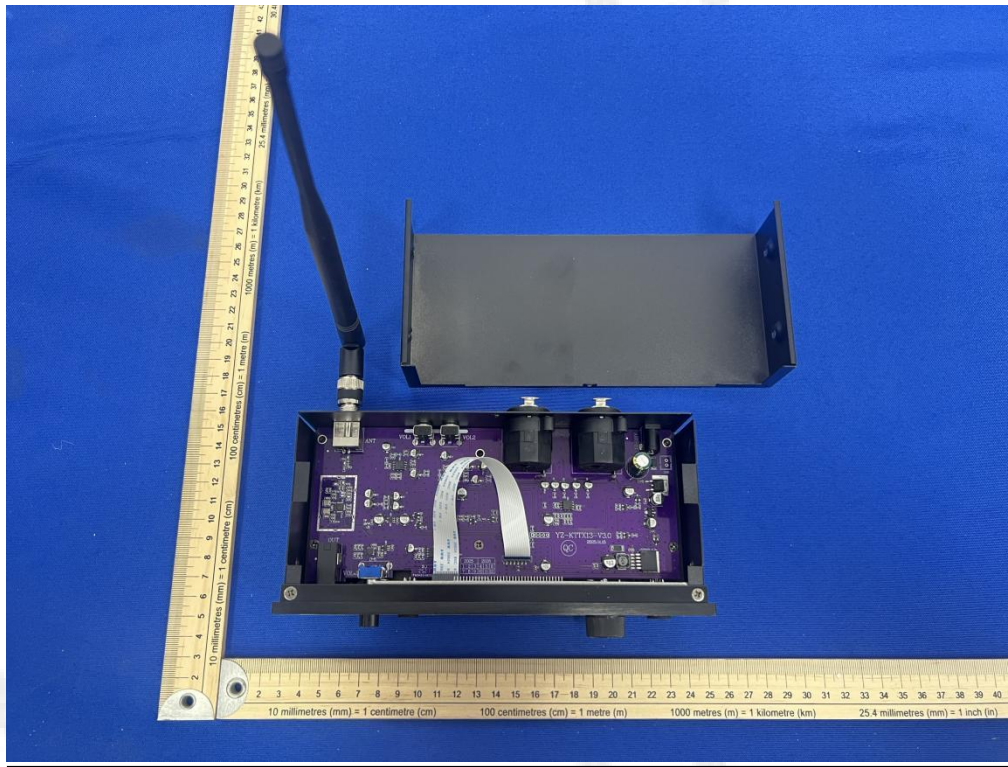

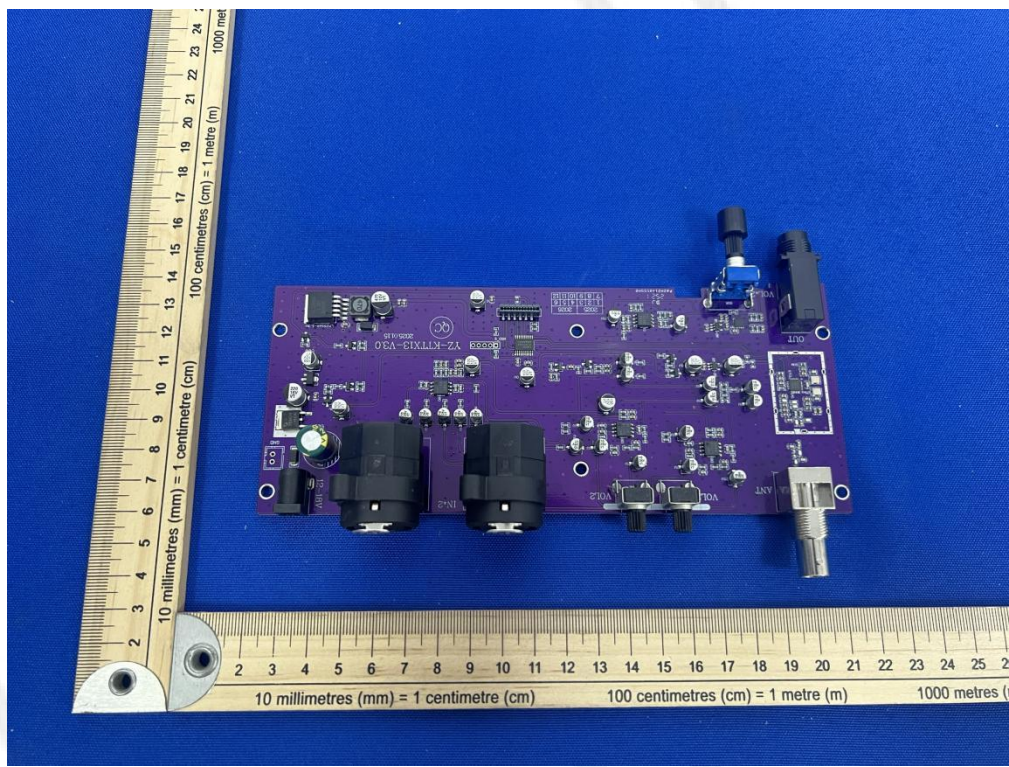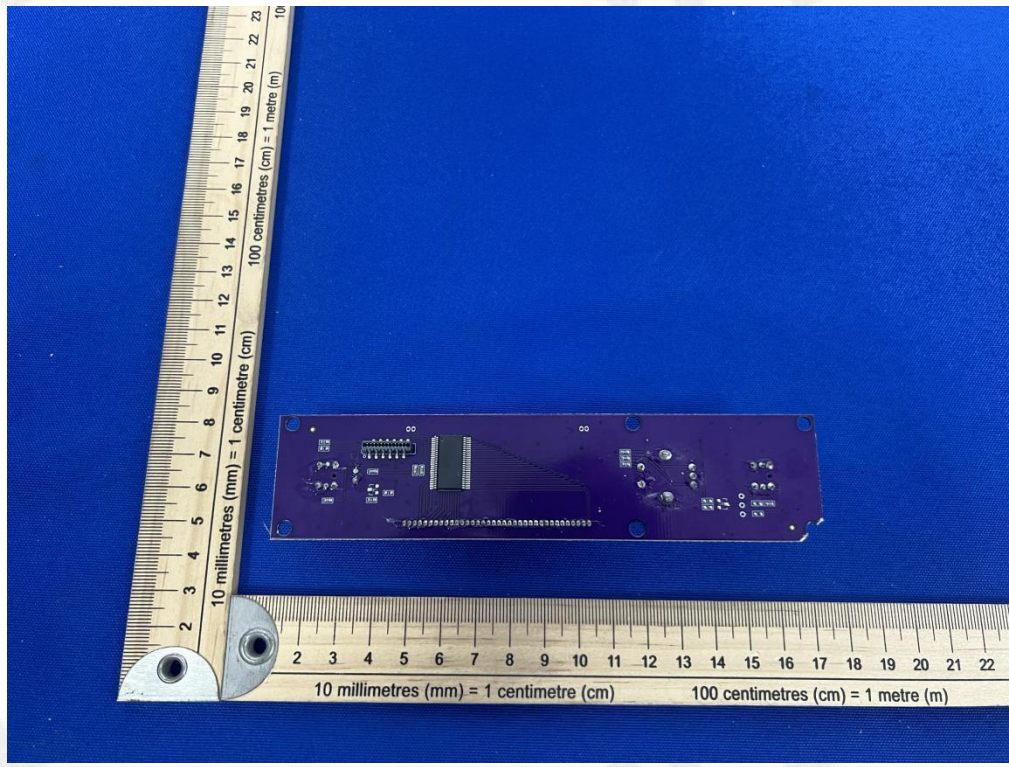

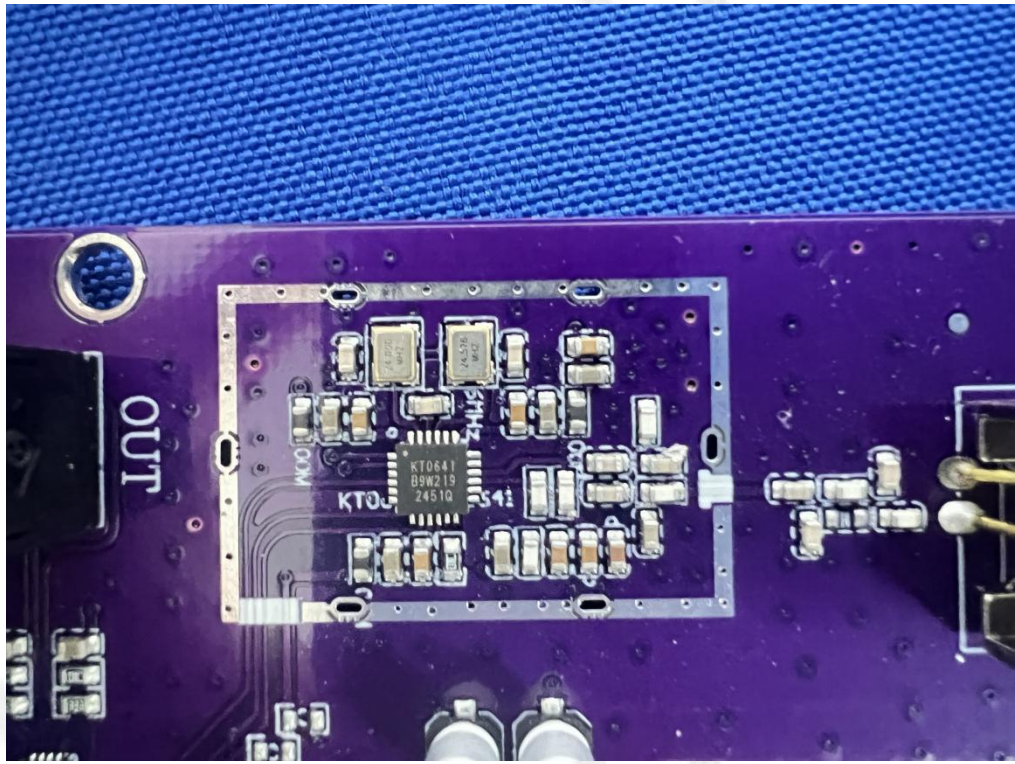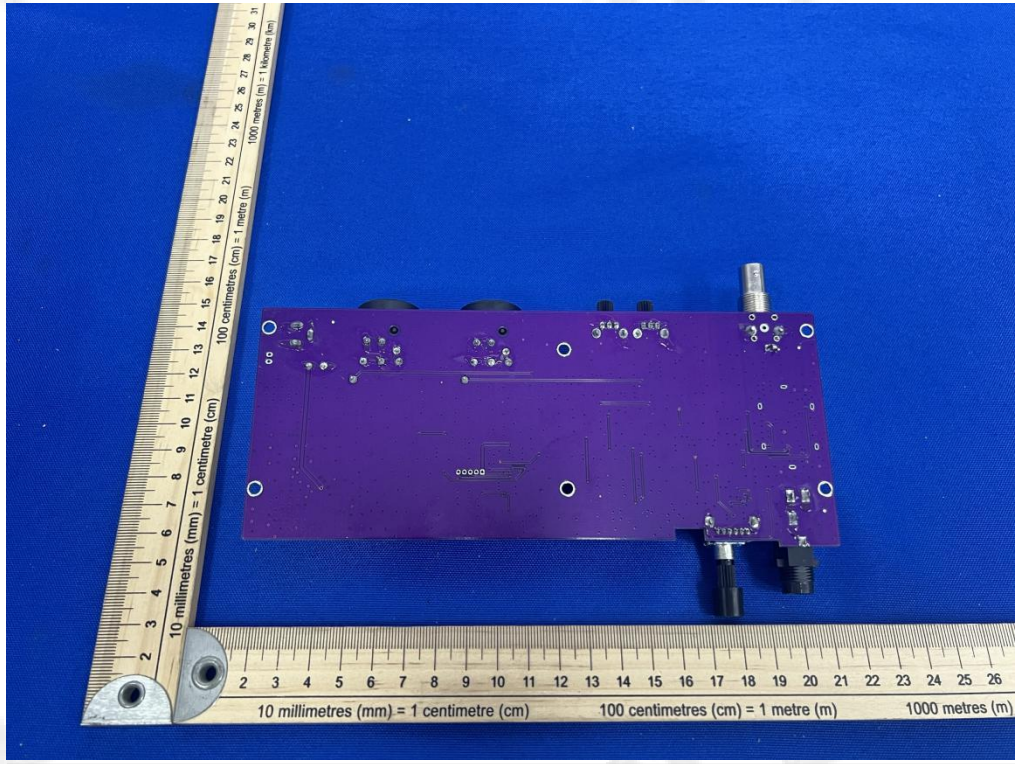

*****End of Report*****