



SHENZHEN DIBITONG TELECOMMUNICATION TECHNOLOGY CO.,LTD.

ANTENNA DATA SHEET

- ◆ Projec: T240
- ◆ Name: 2.4G antenna
- ◆ Antenna Type: FPC antenna
- ◆ Peak Gain : -6.02dBi


Manufacturer: **SHENZHEN DIBITONG TELECOMMUNICATION TECHNOLOGY CO.,LTD.**

Add: Rm505, 8th building, Yungu 2nd period, pingshan No.1 Road, Xili Town,Nanshan District, ShenZhen , China

Contents

- 1. Antenna 2D diagram**
- 2. Technical target**
- 3Test results of antenna S11 parameters**
- 4. Dynamic test instruction**
- 5. Matching Circuit**
- 6. Antenna test report**
- 7. Packing method**

1. Antenna 2D diagram

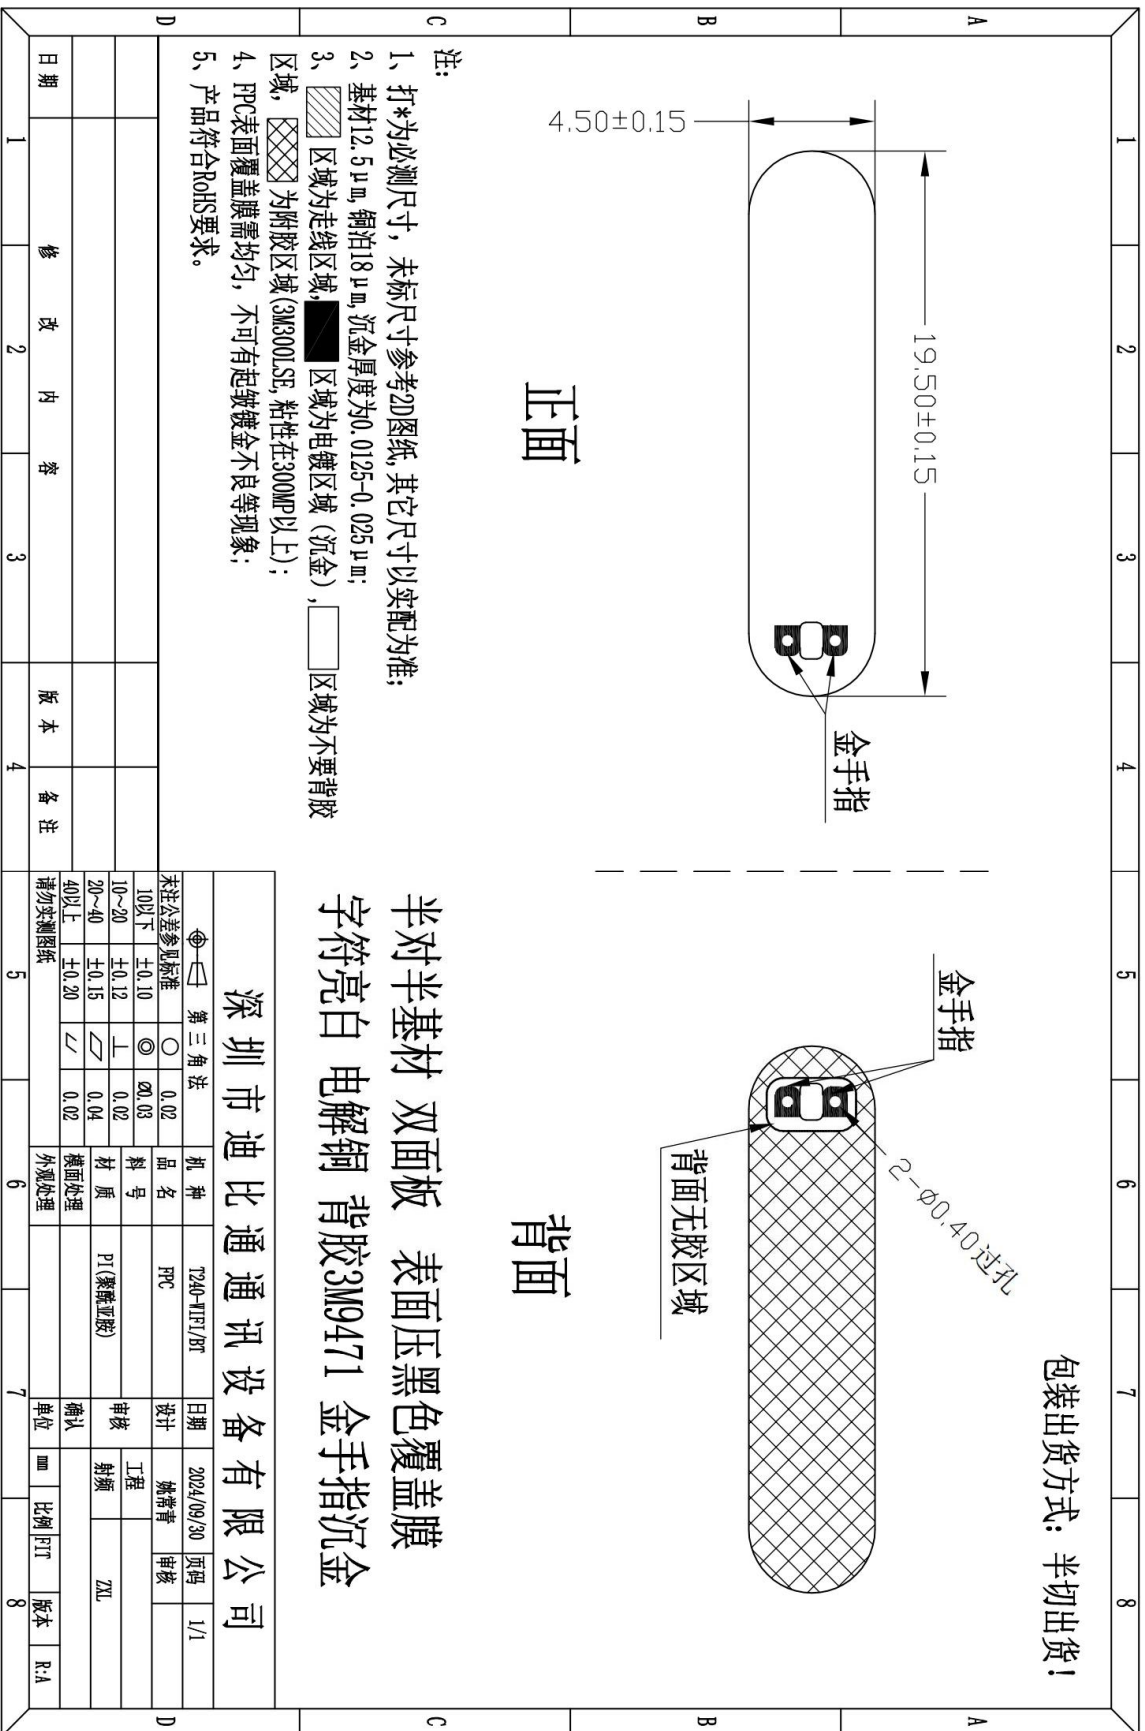

2. Technical target

A. Electrical Parameter

Frequency Range	2400-2500MHz
VSWR	2400-2500MHz: ≤ 2.0
Gain (MAX)	2400-2500MHz: -6.02 dBi
Radiation efficiency	2400-2500MHz: 7.97%
Input Impedance	50 ohm


B. Material

FPC

C. Environmental Science


Working Temperature	- 30°C ~ + 85 °C
Storage temperature	- 30°C ~ + 85 °C

3Test results of antenna S11 parameters

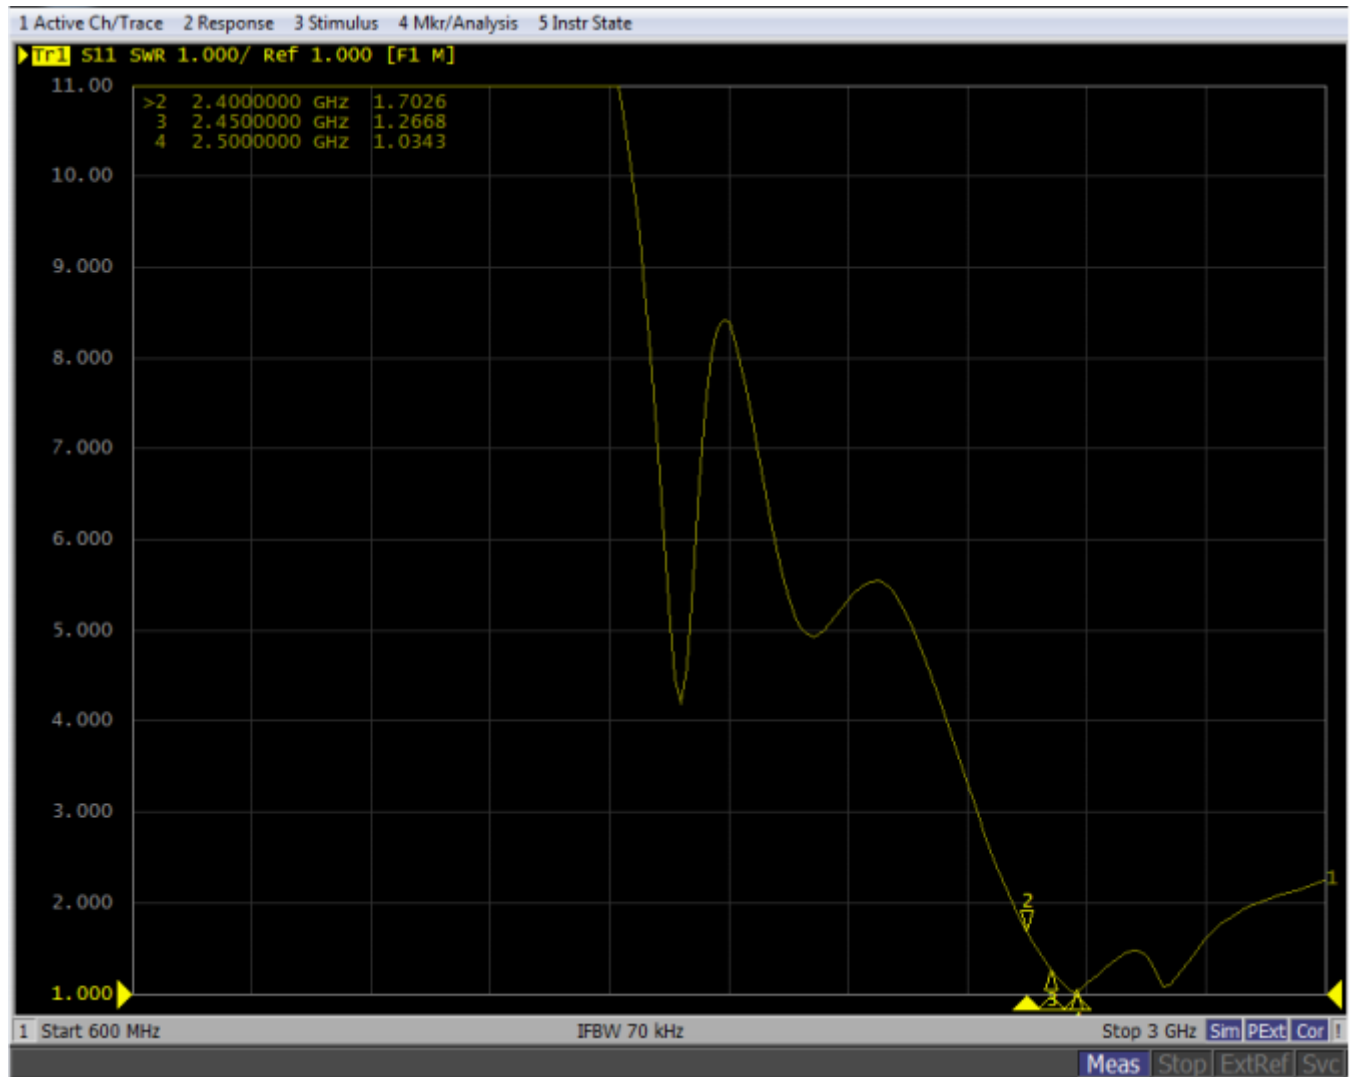


4. Dynamic test instructions - Antennas are placed in electronic scales

Testing instrument : Anrits CMW500+ Anechoic Chamber 6X4X3m(3D-OTA)

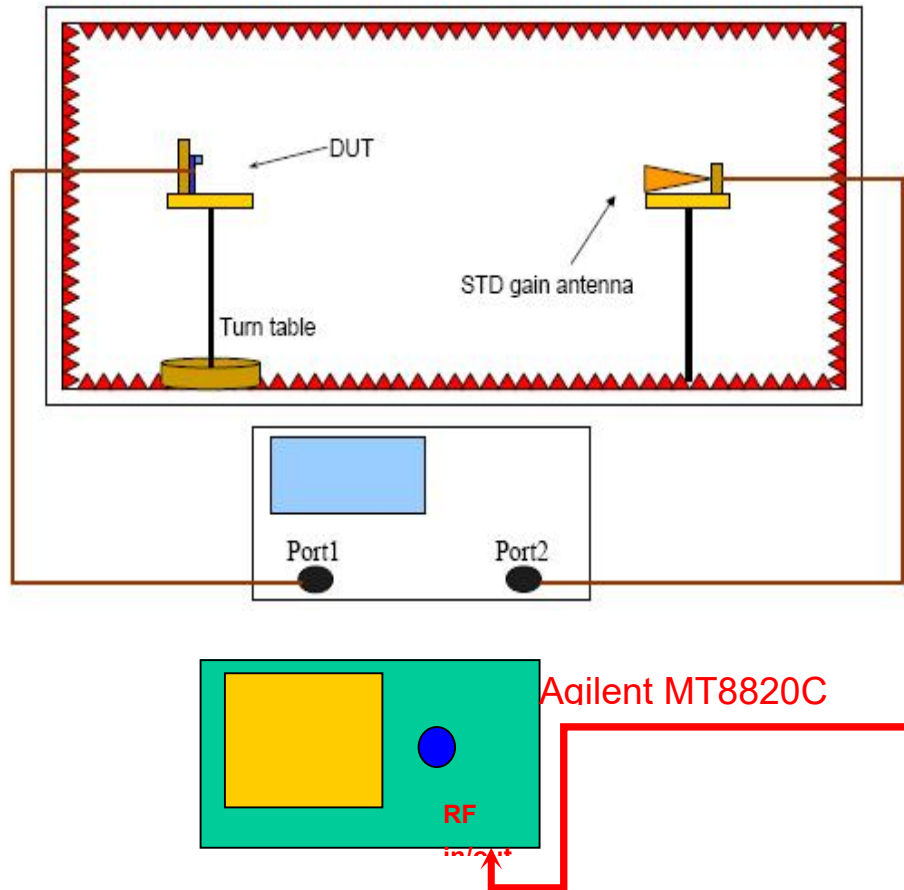


5. Matching Circuit

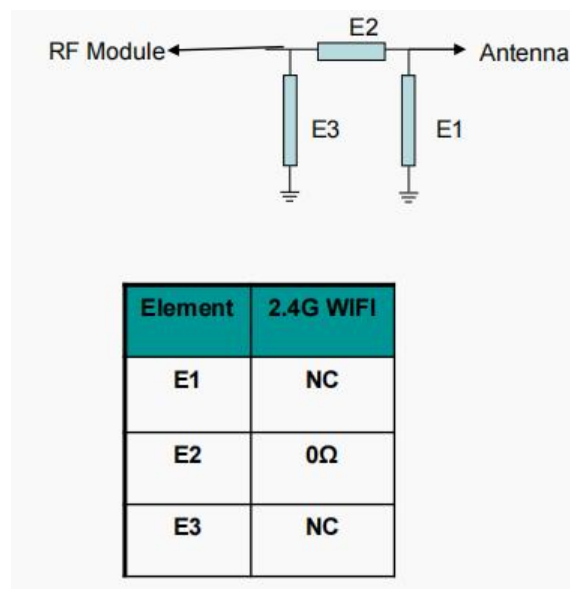



6. Antenna test report

Test data Gain/Efficiency/3D POLar plot & Radiation Pattern

Freq (MHz)	Effi (%)	Gain (dBi)
2400	7.01	-6.98
2410	5.58	-8.11
2420	6.43	-7.66
2430	9.1	-6.11
2440	7.76	-6.85
2450	8.24	-6.77
2460	9.59	-6.1
2470	7.78	-7.06
2480	7.97	-6.94
2490	9.83	-6.02
2500	8.43	-6.62

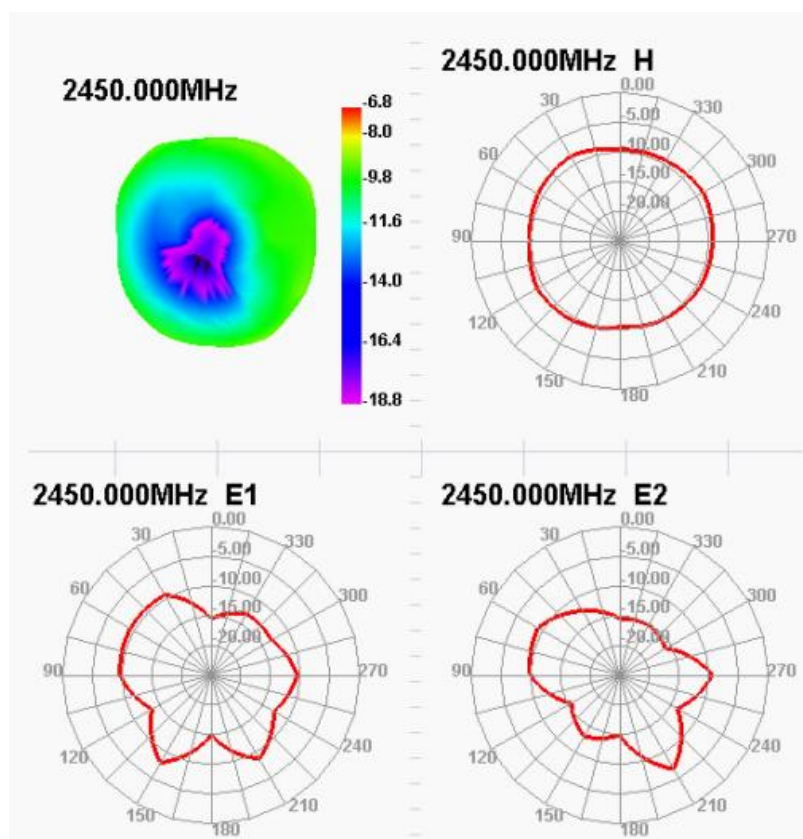

7. Packing method

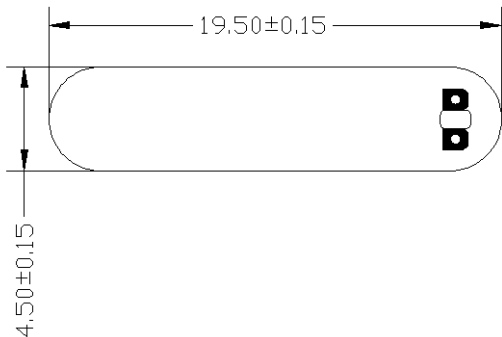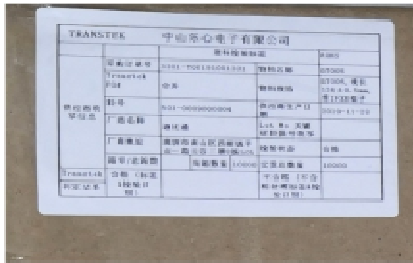1.2D drawing of the product		The product material number	
		Product name	T240_天线
		Product version	/
2. Photos of all stacked layers in the box	3. Photo of the whole case after sealing		
		Number of full pages	
		Remarks: the quantity of each boxshall be actual, the picture on the left sideshall be for reference, and the actual goods shall be regarded as standard.	
4.A whole pack of photos	5.Aphotograph of the label on the surface of the entire case	Storage conditions:between -10 ° to 30 ° , humidity 70% Rh below the indoor.	
			
Note: the picture in the picture above is only used for packing standard demonstration, not for final data audit.			
Confirmer	Yang Xiaoping	Date	2024-11-12

Remark:

1.The above test results are limited to the test prototype.

2.Full shell material technology, software version, accessories (camera, FPC, speaker, receiver, motor, battery, etc.), core

The performance of the whole antenna will change with the change of the chip.

3.The change of environmental treatment (such as grounding position, size, shielding mode, etc.) of the whole machine will lead to the change of the performance of the whole machine.

Solemnly declare:

This antenna design and R&D intellectual property rights are owned by our company. If we find that the same products are supplied to your company without our permission, we will pursue the corresponding legal responsibility according to law. Please respect intellectual, property rights. Your support is our unlimited power. Thank you for your cooperation.