

2TB-21U

4 Port Antenna / 2H / 1.0m

PROSE

- 2×(3300-4200) MHz
- Integrated RET (AISG 2.0 Compliant), Field Exchangeable
- 4.3-10 Connectors

Electrical Data (BASTA11.1)

Frequency(MHz)		3300-4200	
		3300-3800	3800-4200
Gain P1/P2	Mid Tilt	dBi	17.8
	Over All Tilts		17.9
			17.7±0.5
			17.8±0.5
Polarization		°	±45

Horizontal Pattern

3dB Azimuth Beamwidth	°	64±5	64±5
Front to Back Ratio, Total Power, 180°±30°	dB	> 26	> 26
Cross-Polar Discrimination At Mechanical Boresight 0°		> 18	> 18
Over Sector ±60°		> 6	> 7

Vertical Pattern

3dB Elevation Beamwidth	°	5.4±0.5	5.0±0.5
Electrical Downtilt		0-10	
1st Upper Sidelobe Suppression	dB	> 16	> 16

RF Parameters

VSWR		< 1.5
Intra - Cluster Isolation	dB	26
3rd PIM(2 x 43 dBm)	dBc	< -153
Impedance	Ω	50
Maximum Effective Power per Port	W	150

— Maximum Effective Power Whole Antenna: 400 W.

2TB-21U

4 Port Antenna / 2H / 1.0m

PROSE

Mechanical Data (BASTA11.1)


Connector Type	4 x 4.3-10 Female	
Connector Position	Bottom	
Lightning Protection	DC Ground	
Radome Material	ASA	
Radome Color	Light Grey	
Antenna Net Weight	5.8 kg	12.8 lb
Shipping Weight	12.3 kg	26.5 lb
Antenna Dimensions (H x W x D)	998 x 180 x 115 mm	39.3 x 7.1 x 4.5 in
Packing Size (H x W x D)	1148 x 308 x 216 mm	45.2 x 12.1 x 8.5 in
Survival Wind Speed	241 km/h	150 mph
Wind Load @150 km/h (Frontal / Lateral / Max)	130 / 57 / 157 N	29 / 13 / 35 lbf
Mast Diameter Supported	50 - 110 mm	2.0 - 4.3 in
Relative Humidity	5% - 95%	
Operating Temperature Range	-40 ~ +60 °C	-40 ~ +140 °F





RET Specification (BASTA11.1)

Compatible Standards	AISG2.0/ 3GPP
Power Consumption	≤2(stand by); ≤13(operating)
Configuration Management	Integrated RET, pre-configured
Software Upgradability	True
Replaceability in Field	True

Pattern (Sample for reference)

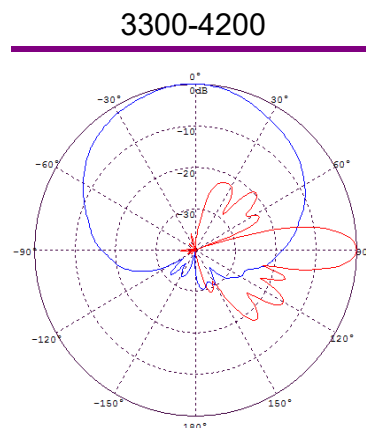

Layout

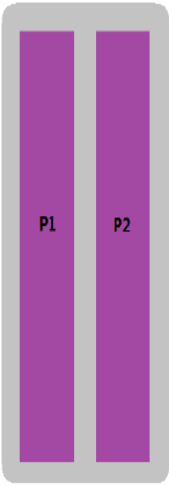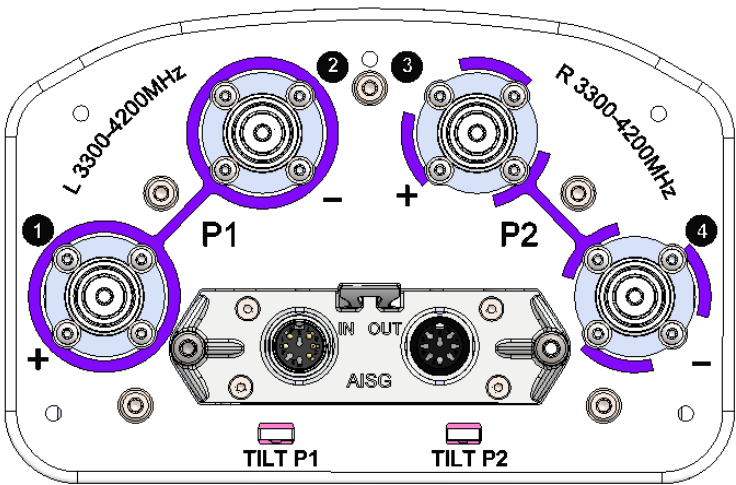

Array	Connector	Frequency (MHz)	Sub Unit #	RET Type	RET Serial*
●P1	1 - 2	3300-4200	1	MRET	RB.....XYXxxxx-MM
●P2	3 - 4	3300-4200	2	MRET	RB.....XYXxxxx-MM

*Remark: X – Year, YY – Week , xxxxx – Serial Number

Accessories

Item	Model	Weight	Mechanical Tilt Range (°)
Mounting Kit	70-1	2.4kg	0-10

Compliance

- Our quality assurance system and our environmental management system apply to the entire company and are certified according to EN ISO 9001, EN ISO 14001 and OHSAS 18001
- Our products are compliant to the EU Directive RoHS as well as to other environmentally relevant regulations (e.g. REACH)



While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary. For environmental information, please refer to