


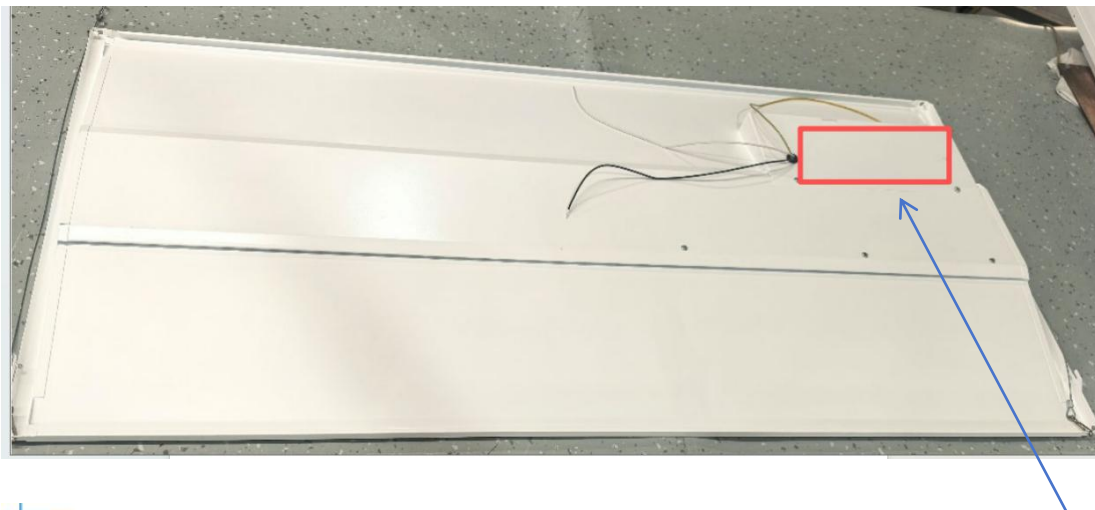

GreenWay
LIGHTING

LED Bluetooth Retrofit Troffer

ITEM NO.: GW-RFKT24-35WS-CCT-BLE-BS

Input: 120-277Vac, 0.35A, 35W, 60Hz

CCT: 3,000-5,000K, CRI80

TYPE IC

INHERENTLY PROTECTED

SUITABLE FOR DAMP LOCATIONS

ACCESS ABOVE CEILING REQUIRED.

VAPOR BARRIER MUST BE SUITABLE FOR 90 °C

FOR USE IN NON-FIRE-RATED INSTALLATIONS ONLY

TYPE IC

PROTECTION INHÉRENTE

CONVIENT AUX EMPLACEMENTS HUMIDES

ACCÈS REQUIS AU-DESSUS DU PLAFOND

LE PARE-VAPEUR DOIT CONVENIR POUR 90 °C

UTILISER SEULEMENT DANS DES INSTALLATIONS OÙ

LE DEGRÉ DE RÉSISTANCE AU FEU N'EST PAS ÉTABLI

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



FCC ID: 2BOXR-RFK

ETL CLASSIFIED



Intertek
5024223

CONFORMS TO UL STD. 1598C
CERTIFIED TO CSA STD. C22.2 NO. 250.1

Date Code: **MMYY**
Made in Malaysia