


Product specification

1. Technical indicators of products

Frequency Range (MHz)	2400–2500
Band Width (MHz)	100
Impedance (Z)	50
VSWR	1.8
Return Loss (dB)	–15.3
Peak Gain (dBi)	0.93
Polarization	Linear Vertical
Antenna Material	PCB
Operating Temp (°C)	–20 ~ 65
Storage Temp (°C)	–30 ~ 75

Manufacturer: WENZHOU JINHAO COMBINATION LOCK CO., LTD
Address: Floor 1-4, Zhejiang Jindeli Electric Appliance Co., Ltd, No. 29,
Chuangda Road, Lucheng District, China

2. Product picture

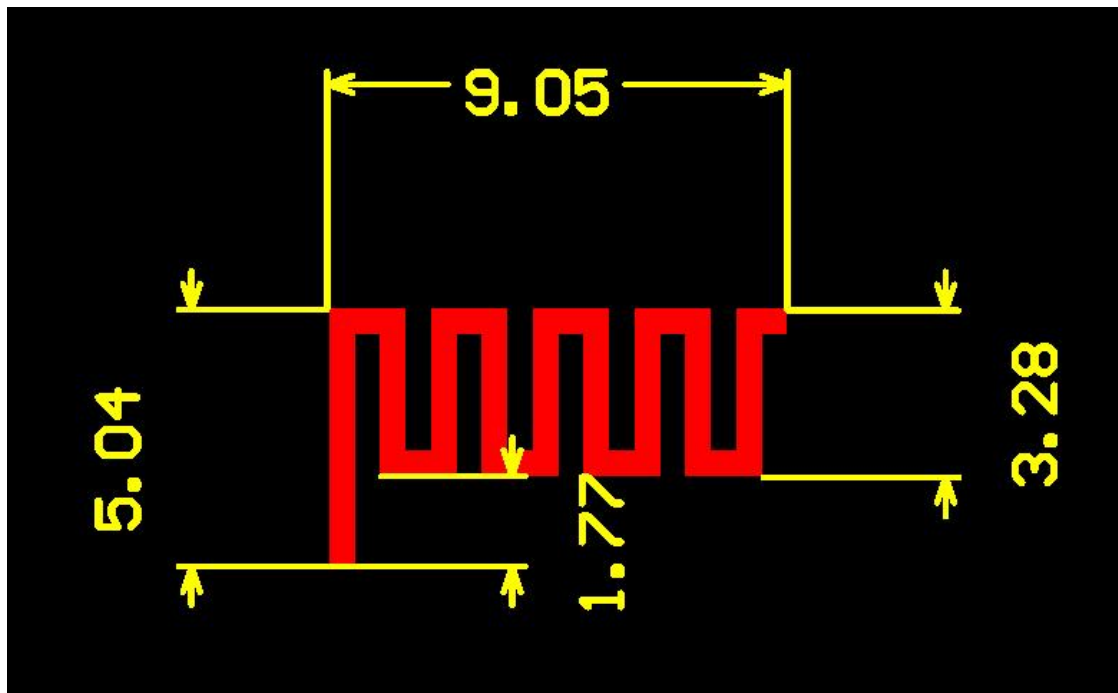


3、 Test Data:

S-Parameter test data S-参数量测数据:

Frequency MHz 工作频段	2400	2450	2500
V.S.W.R 驻波比	1.80	1.79	1.78


S-Parameter test image S-参数量测图片:

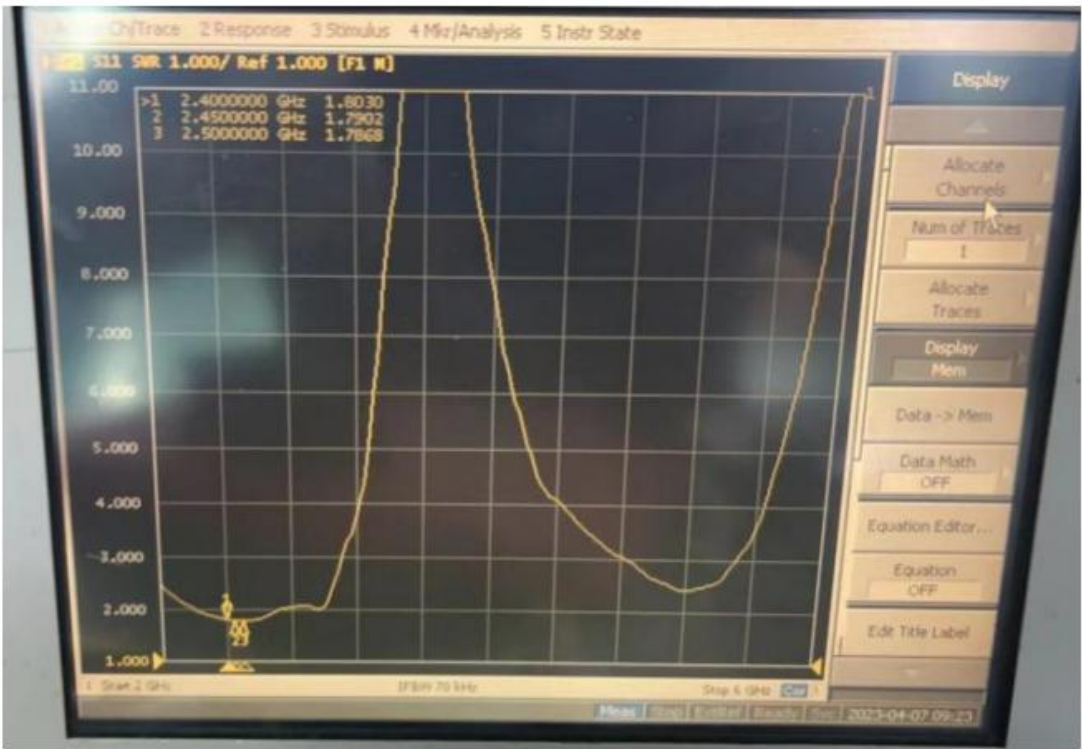


无源数值:

Frequency (MHz) (工作频段)	Efficiency (%) (效率)	Peak GAIN (dBi) (增益)
2400	18.03	0.87
2450	21.04	0.93
2500	17.49	0.85

2D、3D

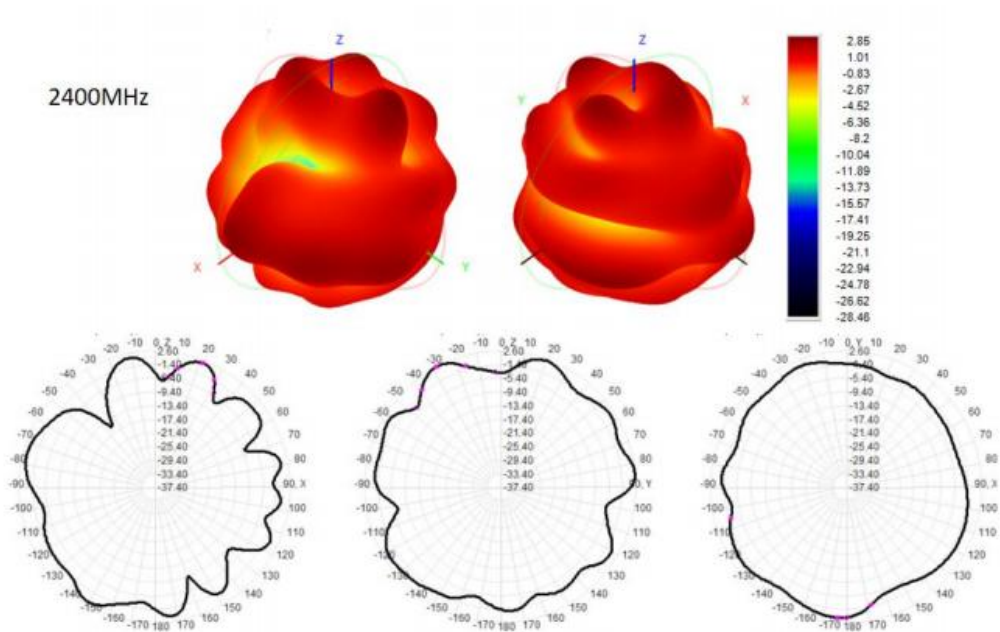

2450MHz

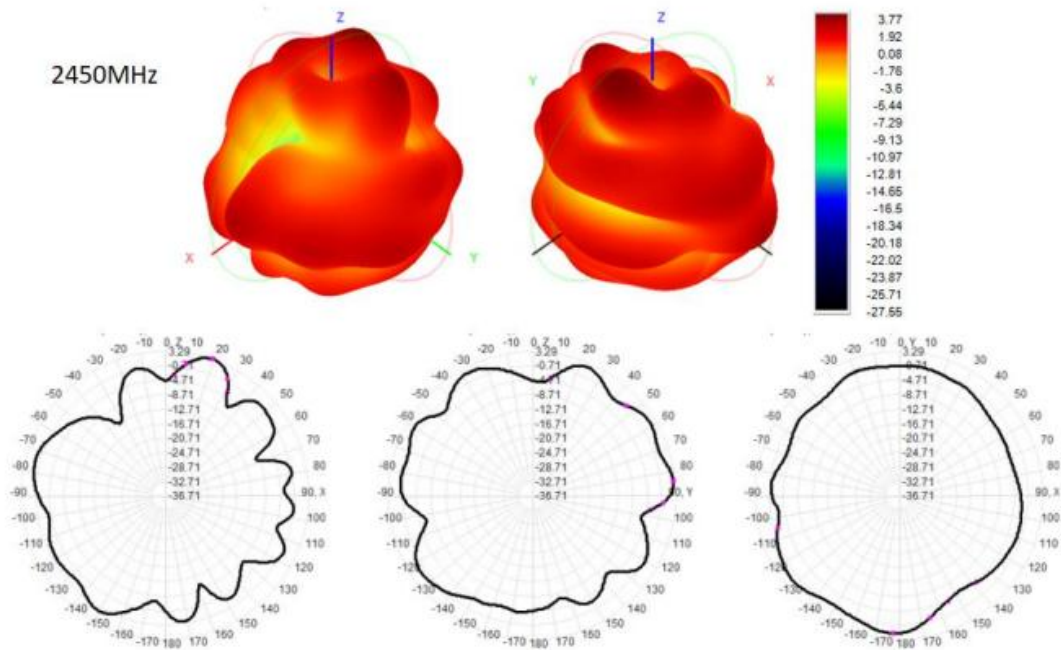

2500MHz

