

Prüfbericht-Nr.: Test report no.:	IN25RB7P 001	Auftrags-Nr.: Order no.:	147014378 020	Seite 1 von 43 Page 1 of 43
Kunden-Referenz-Nr.: Client reference no.:	2621237	Auftragsdatum: Order date:	2025-01-27	
Auftraggeber: Client:	Scanbo Technologies Inc. 2401-13303 Central Avenue, Surrey, British Columbia, Canada - V3T 0K6,			
Prüfgegenstand: Test item:	Vital signs and blood glucose meter			
Bezeichnung / Typ-Nr.: Identification / Type no.:	Scanbo® D8	Serien-Nr.: Serial no.:	240012AF	
Auftrags-Inhalt: Order content:	Testing and issue of Test Report with Grant Certificate			
Prüfgrundlage: Test specification:	FCC Part15 SubpartC 15.247; 15.205; 15.207; 15.209 RSS Gen Issue 5; RSS 247 Issue 4			
Wareneingangsdatum: Date of sample receipt:	2025-01-28			
Prüfmuster-Nr.: Test sample no.:	A003918824-001 A003918824-002			
Prüfzeitraum: Testing period:	2025-02-24 - 2025-07-12			
Ort der Prüfung: Place of testing:	Wireless laboratory, Bangalore			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (India) Pvt.Ltd., 27/B, 2nd Cross, Electronic City Phase1 Bangalore -560 100, India FCC Test site registration number: 496599 ISED Test site registration number: 27711			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:			genehmigt von: authorized by:	
Datum: Date: 2025-10-07	Signed by: Naveen Kumar Muthyalapati Venkata		Ausstellungsdatum: Issue date: 2025-10-07	Signed by: Vinay Narayana
Stellung / Position:	M.V.Naveen Kumar Senior Engineer	Stellung / Position:	Vinay N Manager	
Sonstiges / Other:	FCC ID:2BOXZSCANBO-D8 IC:33813-D8 HVIN: 2.0			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

Prüfbericht - Nr.:

Test Report No.:

IN25RB7P 001

Seite 2 von 43

Page 2 of 43

- | | |
|---|--|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</p> <p>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p> |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature</p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.</p> <p>Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i></p> <p><i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p> |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p> |

Prüfbericht - Nr.:
Test Report No.:

IN25RB7P 001

Seite 3 von 43
Page 3 of 43

TEST SUMMARY

Test Item	FCC	ISED	Result
Maximum conducted (Peak) output power	15.247 (b)(3)	RSS 247 Issue 4 Section 6.3.2	Pass
Maximum Power Spectral Density	FCC 15.247(e)	RSS 247 Issue 4 Section 6.3.1	Pass
DTS Bandwidth & 99% Bandwidth	FCC 15.247(a)(2)	RSS 247 Issue 4 Section 6.3.1 RSS Gen Issue 5 Section 6.7	Pass
Emissions in non-restricted frequency bands	15.247 (d)	RSS 247 Issue 4 Section 6.6	Pass
Spurious Radiated Emissions and Restricted Bands of Operation	15.247 (d) / FCC 15.209 / FCC 15.205	RSS-Gen Issue 5, Section 8.9 /8.10	Pass
AC Power lines Conducted emission	FCC 15.207	RSS Gen Issue 5 Section 8.8	Pass
Antenna Requirement	FCC 15.203	RSS Gen Issue 5 Section 6.8	Complied

Product Category: Electronics Testing

Test Discipline: EMC Test Facility

Prüfbericht - Nr.:

Test Report No.:

IN25RB7P 001

Seite 4 von 43

Page 4 of 43

REVISION HISTORY OF THIS REPORT

Report Number	Version	Description	Issue date
IN25RB7P 001	01	Initial issue of report	2025-10-07

Table of Contents

1	GENERAL REMARKS	6
1.1	Attachments	6
2	TEST SITES	7
2.1	Testing Facilities	7
2.2	List of Test and Measurement Instruments.....	7
3	GENERAL PRODUCT INFORMATION.....	8
3.1	Product Function and Intended Use	8
3.2	Ratings and System Details of Equipment under Test	8
3.3	Measurement Uncertainty:	9
4	TEST SET-UP AND OPERATION MODE.....	10
4.1	Principle of Configuration Selection	10
4.2	Test Operation and Test Software	10
4.3	Special Accessories and Auxiliary Equipment	10
4.4	Countermeasures to achieve EMC Compliance	10
4.5	List of frequencies	10
4.6	TUV Sample Identification.....	10
5	OPERATIONAL DESCRIPTION.....	11
6	TEST METHODOLOGY	12
6.1	AC Power lines Conducted emission	12
6.1.1	Test Setup Configuration.....	12
6.2	Radiated Emission Test	13
6.2.1	Test Setup Configuration.....	13
7	TEST RESULTS	15
7.1	Maximum Peak Conducted Output Power	15
7.2	DTS Bandwidth & 99% Bandwidth.....	17
7.3	Power Spectral Density.....	20
7.4	Emissions in non-restricted frequency bands and Conducted Spurious Emission.....	22
7.4.1	Out-Of-Band Emissions.....	25
7.5	Spurious Radiated Emissions & Restricted Bands of Operation	28
7.6	AC Power lines Conducted Emission	40
8	LIST OF TABLES.....	43
9	List of Figures	43

Prüfbericht - Nr.:

Test Report No.:

IN25RB7P 001

Seite 6 von 43

Page 6 of 43

1 GENERAL REMARKS

1.1 Attachments

All attachments are part of this test report and are issued in separate document

1. Test Setup photos
2. EUT External Photos
3. EUT Internal Photos
4. FCC Label and Label Location
5. Block Diagram
6. Specification of EUT
7. Schematic Diagrams
8. Bill of Material
9. User Manual
10. Maximum Permissible Exposure Information

Prüfbericht - Nr.:
Test Report No.:

IN25RB7P 001

Seite 7 von 43
Page 7 of 43

2 TEST SITES

2.1 Testing Facilities

1. TÜV Rheinland (India) Pvt.Ltd.,
27/B, 2nd Cross,
ElectronicCityPhase1
Bangalore – 560 100,
India
2. TUV Rheinland (India) Pvt.Ltd.,
108, Beside ISBR Business School,
Electronic city Phase I
Bangalore - 560 100,
India

2.2 List of Test and Measurement Instruments

Table 1: List of test and measurement instruments

Equipment	Manufacturer	Model Name	Serial Number	Firmware Versions	Calibration Due Date	Periodicity	Test Facility
EMI Receiver	Rohde & Schwarz	ESW 44	103384	4.73 SP5	24-06-2026	Yearly	Radiated Spurious Emission
Active loop antenna	Frankonia	LAX-10	LAX-10-800	-	16-04-2026	Yearly	
Baloon and Biconical Antenna	Schwarzbeck mess-elektronik	VHBB-9124 / BBA-9106	01028	-	11-04-2026	Yearly	
Log-Periodic Antenna	Schwarzbeck mess-elektronik	VUSLP-9111B	9111B-111	-	13-03-2026	Yearly	
Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-01944	-	12-11-2025	Yearly	
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA 9170-0904	-	14-02-2026	Yearly	
EMI Test Receiver	Rohde & Schwarz	ESW44	101773	1.72.SP1	26-01-2026	Yearly	
Semi Anechoic Chamber	Frankonia	-	-	-	-	-	
Fully Anechoic Chamber	Albatross	-	-	-	-	-	
Spectrum Analyzer	Agilent	E4407B	US411927 72	A.14.07	16-01-2026	Yearly	Conducted Test Parameters
10 dB RF Attenuator (DUT-1)	Rohde & Schwarz	-	-	-	15-10-2025	Yearly	
EMI Receiver	Rohde & Schwarz	ESR7	101133	3.48 SP3	20-05-2026	Yearly	Conducted AC Power line Test
Two Line LISN	Scientific	SMLIN6 3-2	161101	-	12-06-2026	Yearly	
Pulse limiter [0 - 30 MHz]	Rohde & Schwarz	ESH3-Z2	100811	-	26-06-2026	Yearly	

Table 2: Instrument application Software versions

SL. No.	Test Type	Application software	Version
1	Radiated spurious emission measurement in FAC	EMC 32	10.60.20
2	Radiated spurious emission measurement in 10mtr SAC	BAT EMC	3.20.0.17

3 GENERAL PRODUCT INFORMATION

3.1 Product Function and Intended Use

Scanbo® D8 is a handheld, reusable, and rechargeable device intended for measuring, displaying, and storing non-invasive blood pressure (NIBP), pulse rate (PR), functional oxygen saturation of arterial haemoglobin (SpO2), electrocardiograph (ECG), Heart Rate, and body temperature in adults no less than 18 years of age. The device is intended for use by healthcare professionals and medical service providers in a physician's office, endocrinology clinics, and nursing facilities. The blood glucose monitoring function of Scanbo® D8 quantitatively measures glucose concentration in fresh capillary whole blood drawn from the fingertip. It is intended for point-of-care testing, outside the body (in vitro diagnostic use) in a physician's office, endocrinology clinics, and nursing facilities, for multiple patient use. The device is not intended for home use or testing alternative anatomical sites or for neonatal and paediatric use

3.2 Ratings and System Details of Equipment under Test

Table 3: Ratings and System Details as declared by Client*

Radio Protocol		Bluetooth Low Energy
Operating Frequency Range		2402MHz to 2480MHz
No. of Channels		40
Channel Spacing		2MHz
Transmitter Power level(dBm)		0dBm
Maximum Measured e.i.r.p (dBm)		0.16dBm
Modulation		GFSK
Data Rates		1Mbps
Number of antennas		1
Antenna Gain		1.88dBi
Antenna Type		Chip Antenna
Supply Voltage to Product		5V through USB
Environmental conditions	Storage(°C)	-25°C to +40°C
	Operating(°C)	+5°C to +40°C
EUT Dimension(L x W x H) in mm		70mm x 70mm x 18.4mm

***Disclaimer:** The information/data is supplied by the client and the same is considered to arrive at the final value. Any changes made apart from the specified specification, can directly impact on the tests results. Refer the products user manual for more details.

3.3 Measurement Uncertainty:

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k = 2$

Table 4: Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	± 0.67 dB
Power Spectral Density, conducted	± 0.85 dB
Unwanted Emissions, conducted	± 2.58 dB
All emissions, radiated	± 3.67 dB

Prüfbericht - Nr.:
Test Report No.:

IN25RB7P 001

Seite 10 von 43
Page 10 of 43

4 TEST SET-UP AND OPERATION MODE

4.1 Principle of Configuration Selection

Transmission was enabled with highest possible duty cycle transmission on low, mid and high channel.

4.2 Test Operation and Test Software

Hardware Version Identification number (HVIN)	2.0
Software version	ED Mac: 2.2
Configuration Tool	CC- DEBUGGER
	Smart RF Studio 7 (Version - 2.28.0)

4.3 Special Accessories and Auxiliary Equipment

- None

4.4 Countermeasures to achieve EMC Compliance

- None

4.5 List of frequencies

Frequency Band (MHz)	Channel No.	Channel Frequency (MHz)
2402 – 2483.5 BLE	0	2402
	1	2404
	2	2406
	3	2408
	:	:
	11	2424
	12	2426
	:	:
	19	2440
	20	2442
	:	:
	:	:
	:	:
	:	:
	36	2474
	37	2476
	38	2478
	39	2480

Table 5: List of BLE Centre frequencies

Channel used for BLE testing.

Channel low: 2402MHz

Channel mid: 2440MHz

Channel high : 2480MHz

4.6 TUV Sample Identification

TUV Sample Identification number: A003918824-001 – Radiated test Sample.
A003918824-002 - Conducted test Sample

5 OPERATIONAL DESCRIPTION

The Scanbo® D8 Signal Acquisition Module (SAM) powered by a 400 mAh Li-ion Battery with a nominal voltage of 3.7 V DC which captures vital signs and blood glucose and sends data via Bluetooth Low Energy (BLE) using the CC2541 SoC to the Scanbo®3.0 mobile app on iOS and Android. The mobile app sends the vitals, and blood glucose concentration data to the web server for storage and retrieves it for display. The stored data can also be retrieved and displayed in Scanbo®3.0 web app. Users can control the SAM through the app, including starting or stopping measurements.


6 TEST METHODOLOGY

6.1 AC Power lines Conducted emission

Measured levels of ac powerline conducted emission across the 50Ω LISN port (to which the EUT is connected). All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer.

The device is placed on the test table, raised 80cm above the reference ground plane. The vertical conducting plane is located 40cm to the rear of the device. AC Conducted emission measurement is made over frequency range from 150 kHz to 30MHz, this measurement was performed an AC adaptor 110V AC 60Hz supply

6.1.1 Test Setup Configuration

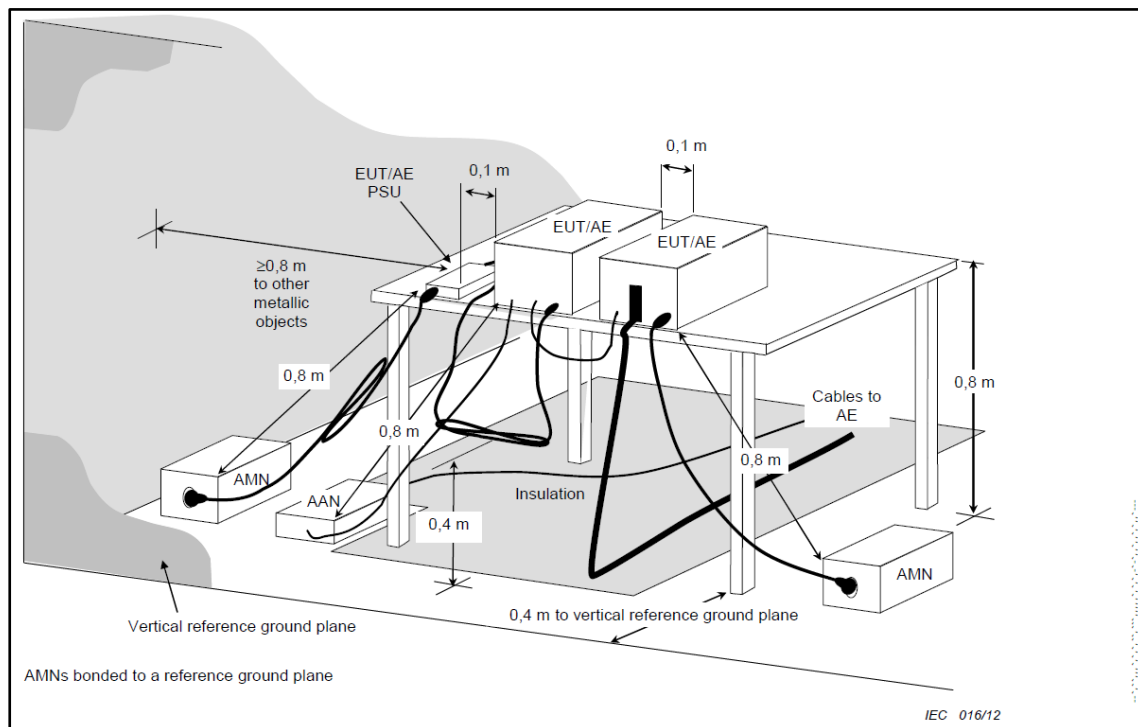

6.2 Radiated Emission Test

The radiated emission measurement was performed according to the procedures in ANSI C63.10-2020. The equipment under test (EUT) was placed at the middle of the 80 cm high turntable for below 1 GHz & 1.5 m height for above 1 GHz measurement, and the EUT is 3 meters far from the measuring antenna. The turntable was rotated 360° for obtaining the maximum emission. The height of the measuring antennas was scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained. The measurement above 1000 MHz was performed by horn antenna, the measurement below 30 MHz was performed by loop antenna, Measurement from 30 MHz to 200 MHz was performed by Balloon and Biconical Antenna, and measurement from 200 MHz to 1 GHz was performed by Log-Periodic Antenna.

The EUT was rotated around the X-, Y-, and Z-Axis and the results from worst case axis are recorded

6.2.1 Test Setup Configuration

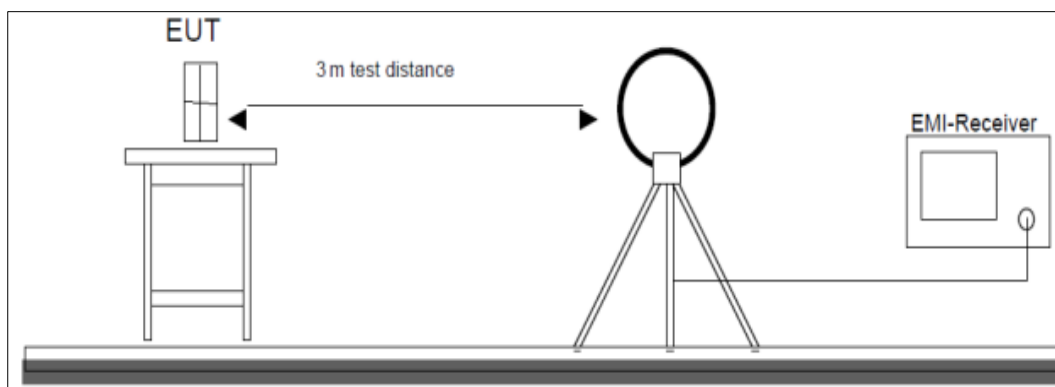


Figure 1: Frequency Range 9 kHz- 30 MHz

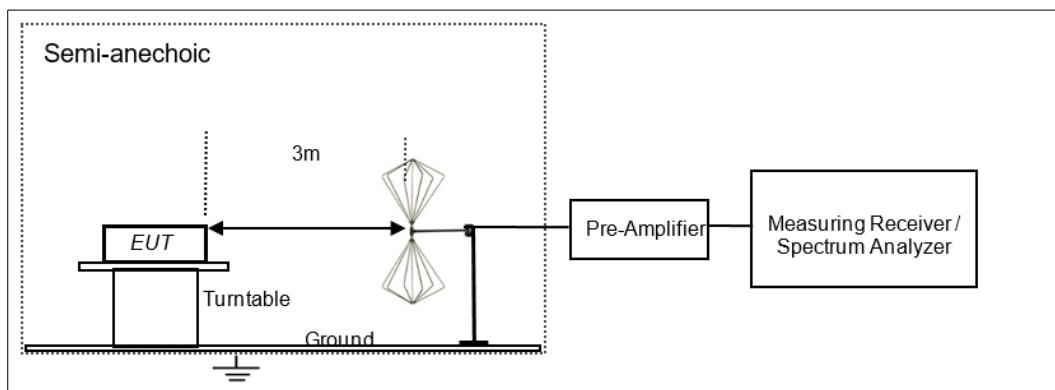


Figure 2: Frequency Range 30 MHz – 200 MHz

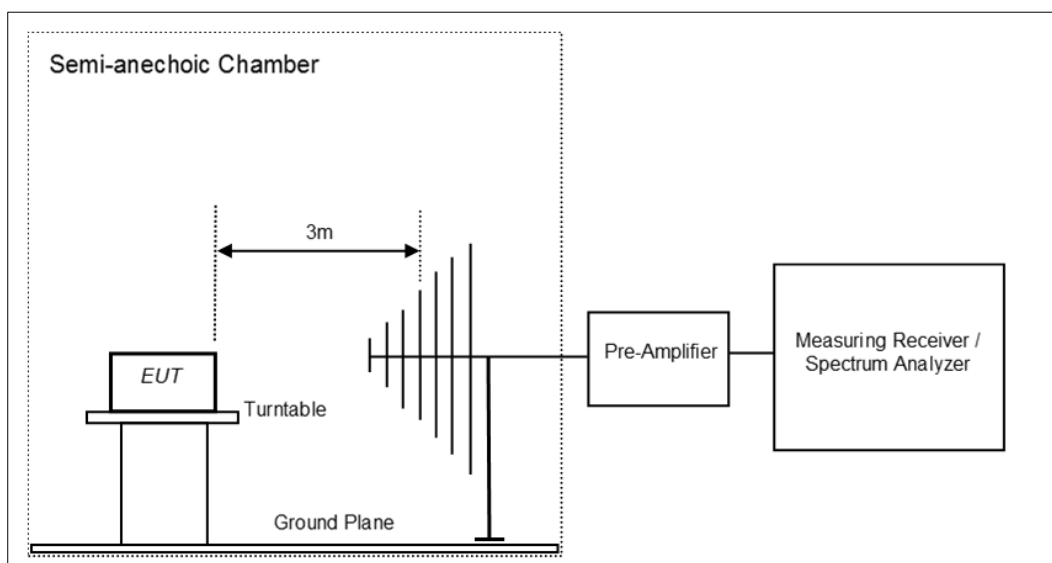


Figure 3: Frequency Range 200 MHz - 1GHz

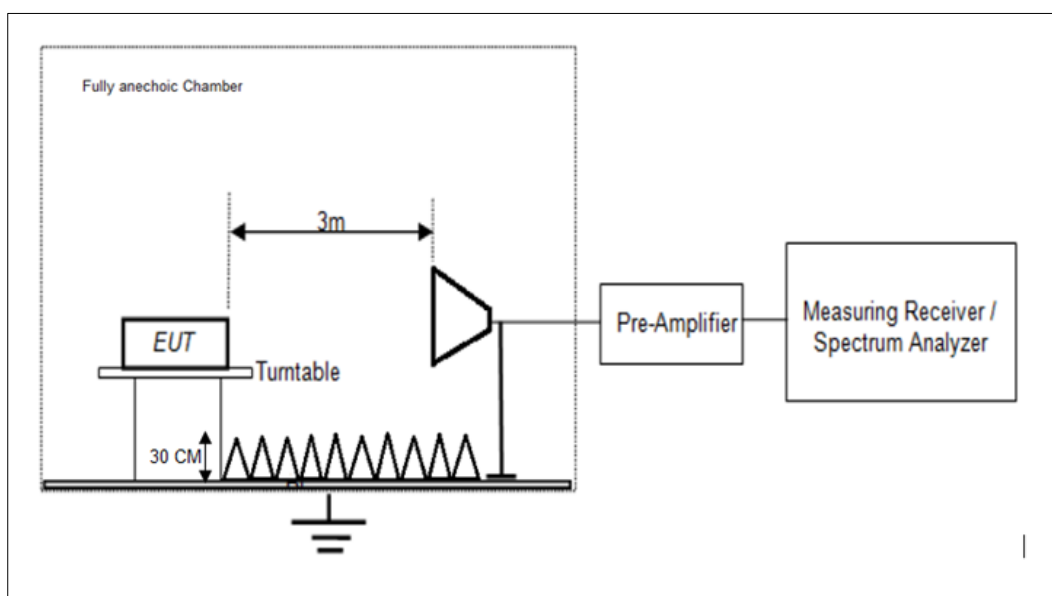


Figure 4: Frequency Range above 1 GHz

Prüfbericht - Nr.:
Test Report No.:

IN25RB7P 001

Seite 15 von 43
Page 15 of 43

7 TEST RESULTS

7.1 Maximum Peak Conducted Output Power

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (b)(3)/ RSS 247 Issue 4 Section 6.3.2 (a)
Test Method	Subclause 11.9.1.1 of ANSI C63.10-2020
Measurement Bandwidth	1MHz
Detector	Peak
Port of testing	Conducted mode
Requirement	Power ≤ 1 W (30 dBm) & e.i.r.p ≤ 4 W (36dBm)

Test Condition

Normal Test Condition:

Temperature(Norm) = +21.8°C

Voltage =5VDC through USB

Relative humidity: 55%

KDB Guidelines applied:

Measurements were made as per section 8.3.1.1 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:

Test Report No.:

IN25RB7P 001

Seite 16 von 43

Page 16 of 43

Test results:


Note:

1. All the losses are included during measurement and final values are mentioned in the test report
2. Total Peak Output power (dBm) = Measured Peak power (dBm) + Cable loss (1dB)
3. This product does not support additional beamforming gain / directional gain, it uses single antenna and hence Directional gain of the single antenna is 1.88 dBi


Data rate	Channel frequency	Measured power (dBm)	Measured e.i.r.p (dBm)	FCC/ISED Limit (dBm)	e.i.r.p limit (dBm)
1 Mbps	2402.00	-1.72	0.16	30.00	36.00
	2440.00	-2.27	-0.39	30.00	36.00
	2480.00	-3.17	-1.29	30.00	36.00

Test Plots:


Data Rate: 1Mbps

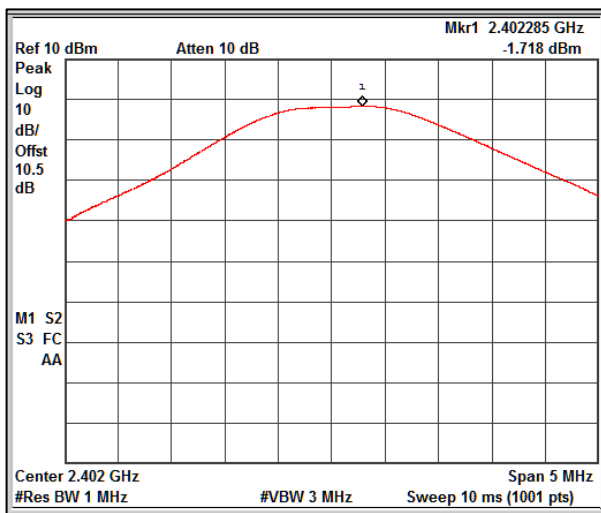

Channel frequency: 2402MHz

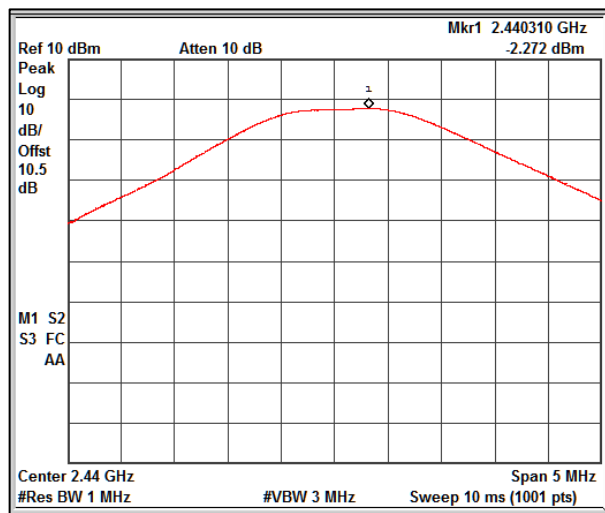

Channel frequency: 2440MHz

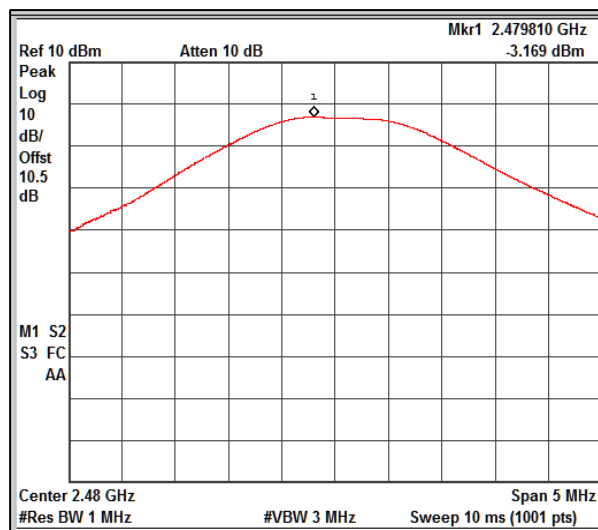

Channel frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:

IN25RB7P 001

Seite 17 von 43
Page 17 of 43

7.2 DTS Bandwidth & 99% Bandwidth

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (a) (2)/ RSS 247 Issue 4 Section 6.3.1 RSS Gen Issue 5 Section 6.7
Test Method	Subclause 11.8.1 of ANSI C63.10-2020 for DTS Subclause 6.9.3 of ANSI C63.10-2020 for OBW Subclause 6.9.3 of ANSI C63.10a-2024
Measurement Bandwidth	100 kHz for DTS Bandwidth 1% to 5% of OBW
Detector	Peak
Port of testing	Conducted mode
Requirement	Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Condition

Normal Test Condition:

Temperature(Norm) = +21.8°C

Voltage = 5VDC through USB

Relative humidity: 55%

KDB Guidelines applied:

Measurements were made as per section 8.2 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN25RB7P 001

Seite 18 von 43
Page 18 of 43

Test results:

Note: All the losses are included during measurement and final values are mentioned in the test report.

Data rate	Channel frequency	99% (MHz)	6dB BW (MHz)	Limit (MHz)
1 Mbps	2402.00	1.05	0.71	0.50
	2440.00	1.06	0.70	0.50
	2480.00	1.06	0.71	0.50

Test Plots:

99% Bandwidth:
Data Rate: 1Mbps




Prüfbericht - Nr.:
Test Report No.:


IN25RB7P 001

Seite 19 von 43
Page 19 of 43


DTS Bandwidth:
Data Rate: 1Mbps

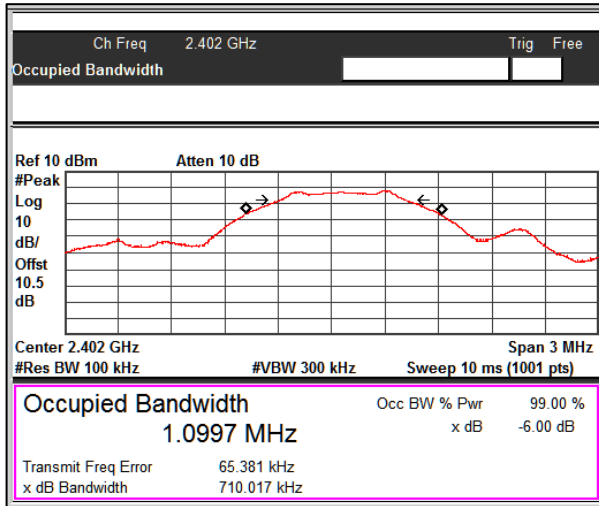

Channel frequency: 2402MHz

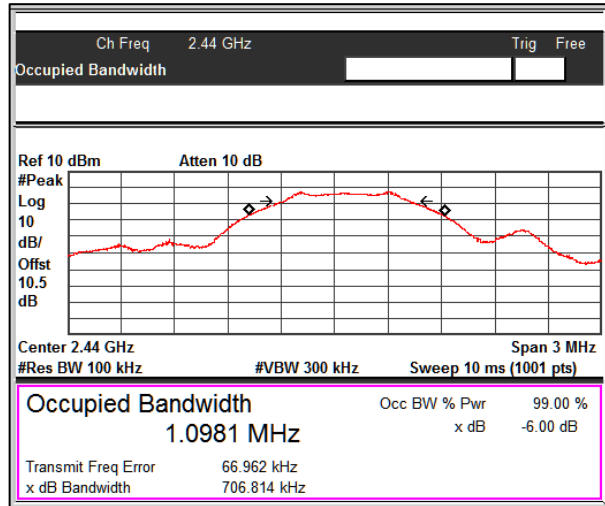

Channel frequency: 2440MHz

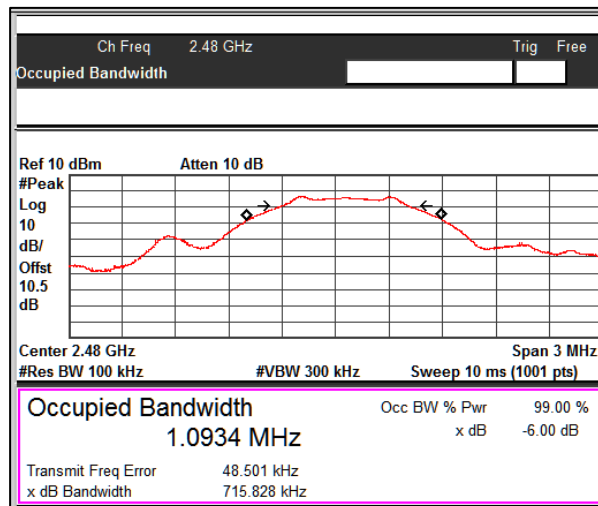

Channel frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:

IN25RB7P 001

Seite 20 von 43
Page 20 of 43

7.3 Power Spectral Density

Result

Pass

Test Specification	FCC Part 15 Subpart C Section 15.247 (e)/ RSS 247 Issue 4 Section 6.3.1
Test Method	Subclause 11.10.2 of ANSI C63.10-2020
Measurement Bandwidth	3 kHz
Detector	Peak
Port of testing	Conducted mode
Requirement	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Condition

Normal Test Condition:

Temperature(Norm) = +21.8°C Voltage = 5VDC through USB Relative humidity: 55%

KDB Guidelines applied:

Measurements were made as per section 8.4 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN25RB7P 001

Seite 21 von 43
Page 21 of 43


Test results:

Note: All the losses are included during measurement and final values are mentioned in the test report.


Data rate	Channel Frequency (MHz)	Measured PSD (dBm)	Limit (dBm in any 3kHz)
1 Mbps	2402.00	-13.34	8.00
	2440.00	-14.05	8.00
	2480.00	-15.52	8.00

Test Plots:


Data Rate: 1Mbps

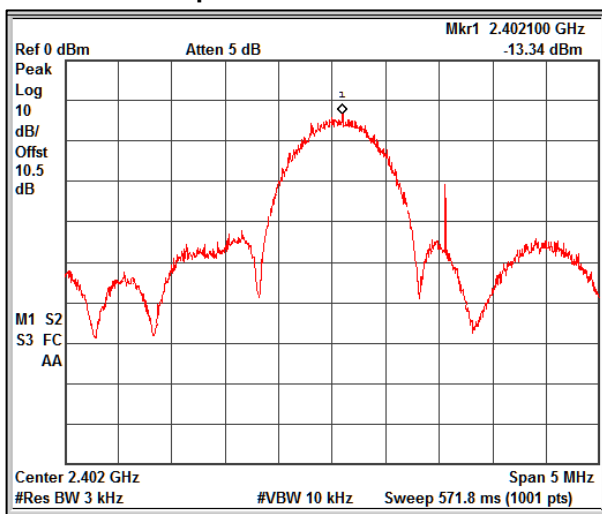

Channel frequency: 2402MHz

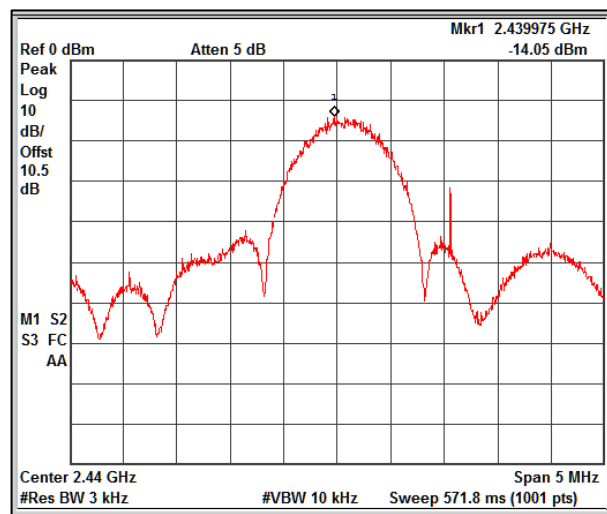

Channel frequency: 2440MHz

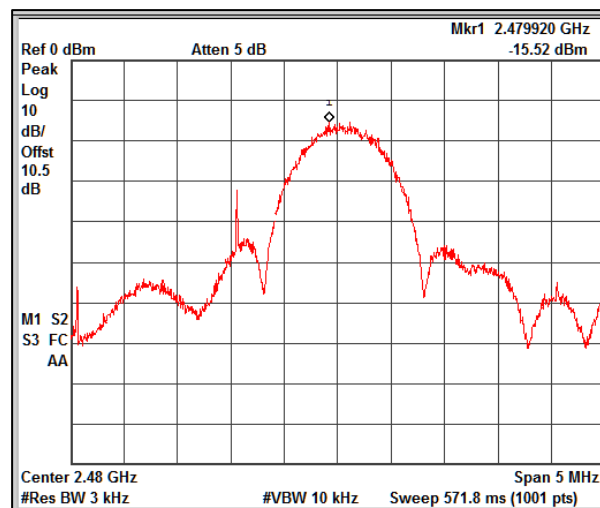

Channel frequency: 2480MHz

Prüfbericht - Nr.:
Test Report No.:

IN25RB7P 001

Seite 22 von 43
Page 22 of 43

7.4 Emissions in non-restricted frequency bands and Conducted Spurious Emission

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (d)/ RSS 247 Issue 4 Section 6.6
Test Method	Subclause 11.11.3 of ANSI C63.10
Measurement Bandwidth	100 kHz
Detector	Peak
Port of testing	Conducted mode
Requirement	In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB

Test Condition

Normal Test Condition:

Temperature(Norm) = +21.8°C Voltage = 5VDC through USB Relative humidity: 55%

KDB Guidelines applied:

Measurements were made as per section 8.5 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

IN25RB7P 001

Seite 23 von 43
Page 23 of 43

Test results:


Note: All the losses are included during measurement and final values are mentioned in the test report

Band edge


Data rate	Channel Frequency (MHz)	Band edge frequency (MHz)	Value at band edge (A) (dBm)	Reference value (B) (dBm)	A-B (dBc)	Minimum Limit (dBc)
1 Mbps	2402.00	2399.32	-37.42	-2.30	-35.12	-20.00
	2480.00	2483.50	-50.09	-3.67	-46.42	-20.00

Reference Plots:


Data Rate: 1Mbps

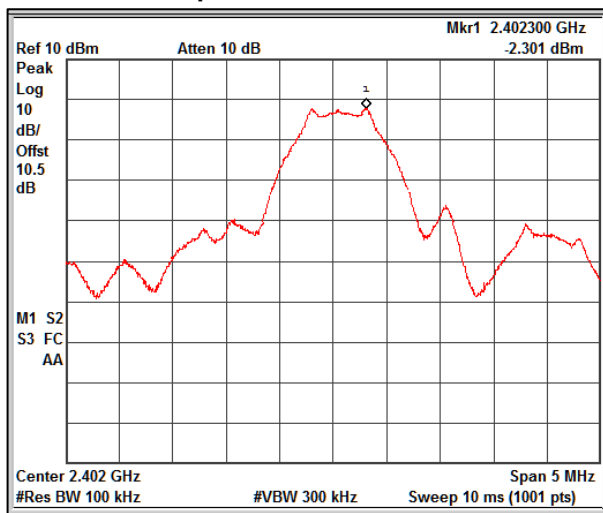

Channel frequency: 2402MHz

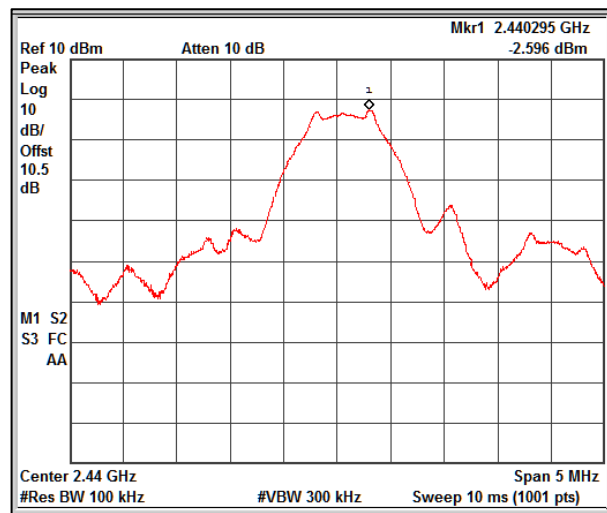

Channel frequency: 2440MHz

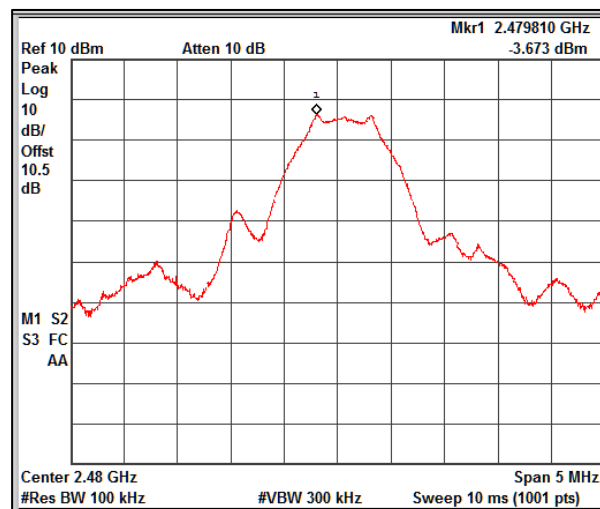

Channel frequency: 2480MHz


Prüfbericht - Nr.:
Test Report No.:

IN25RB7P 001


Seite 24 von 43
Page 24 of 43

Bandedge Plots:

Data Rate: 1Mbps

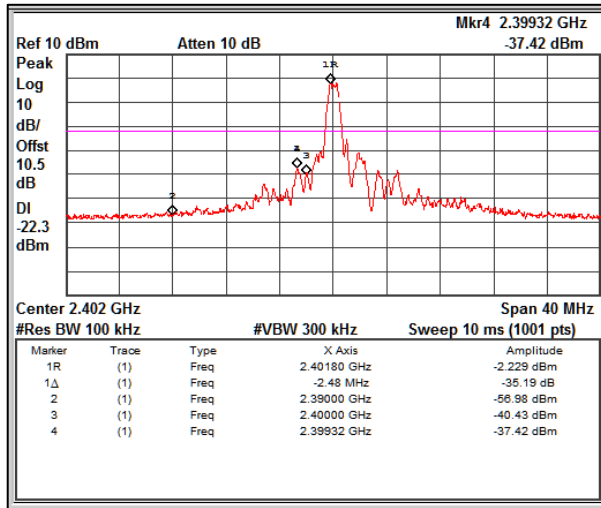


Channel frequency: 2402MHz

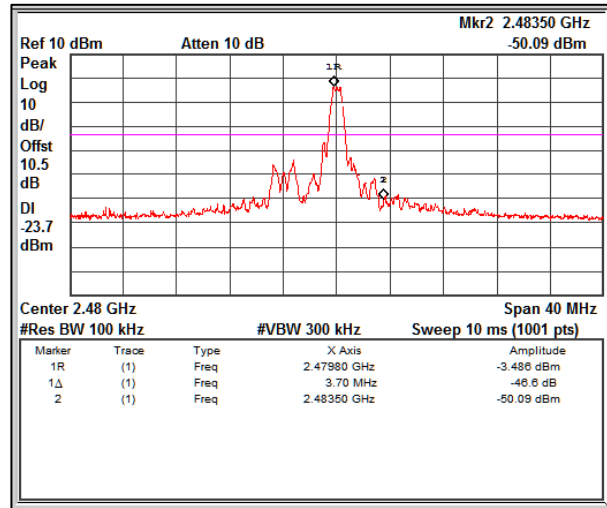

Channel frequency: 2480MHz


7.4.1 Out-Of-Band Emissions

Data Rate: 1Mbps

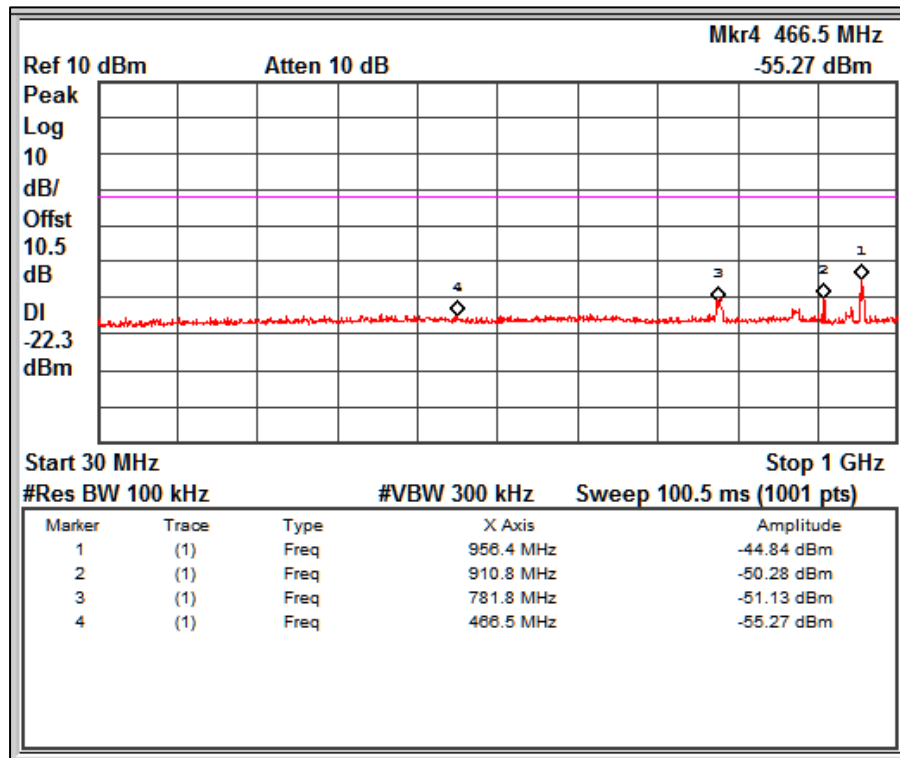

Channel Frequency: 2402 MHz

Frequency Range 30 MHz – 1 GHz

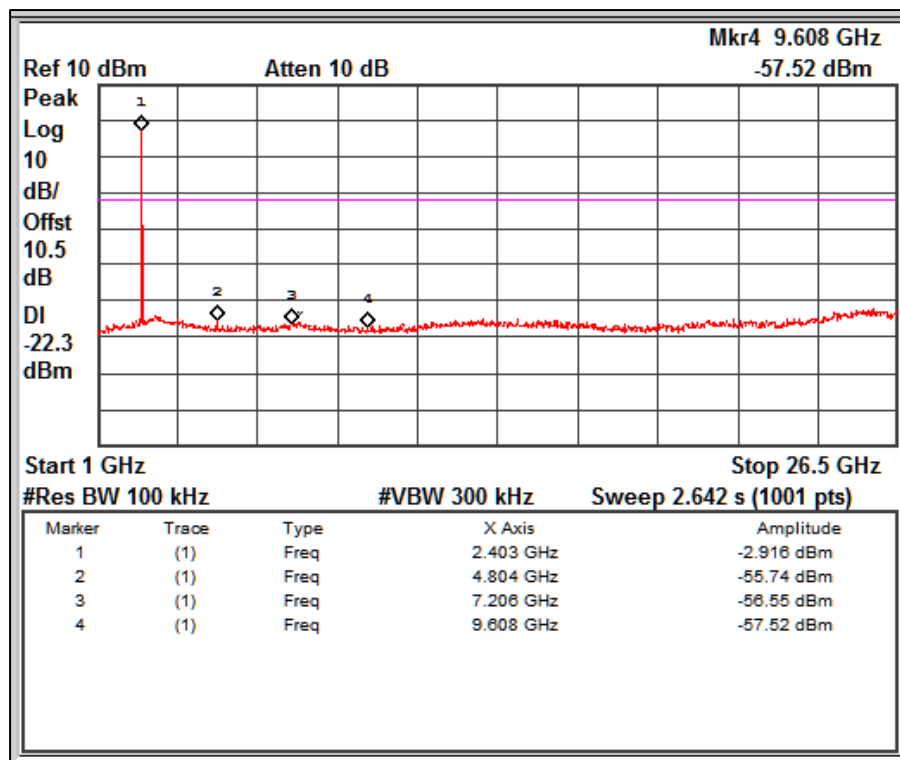


Channel Frequency: 2402 MHz

Frequency Range 1 GHz to 26.5 GHz

Prüfbericht - Nr.:
Test Report No.:


IN25RB7P 001

Seite 26 von 43
Page 26 of 43

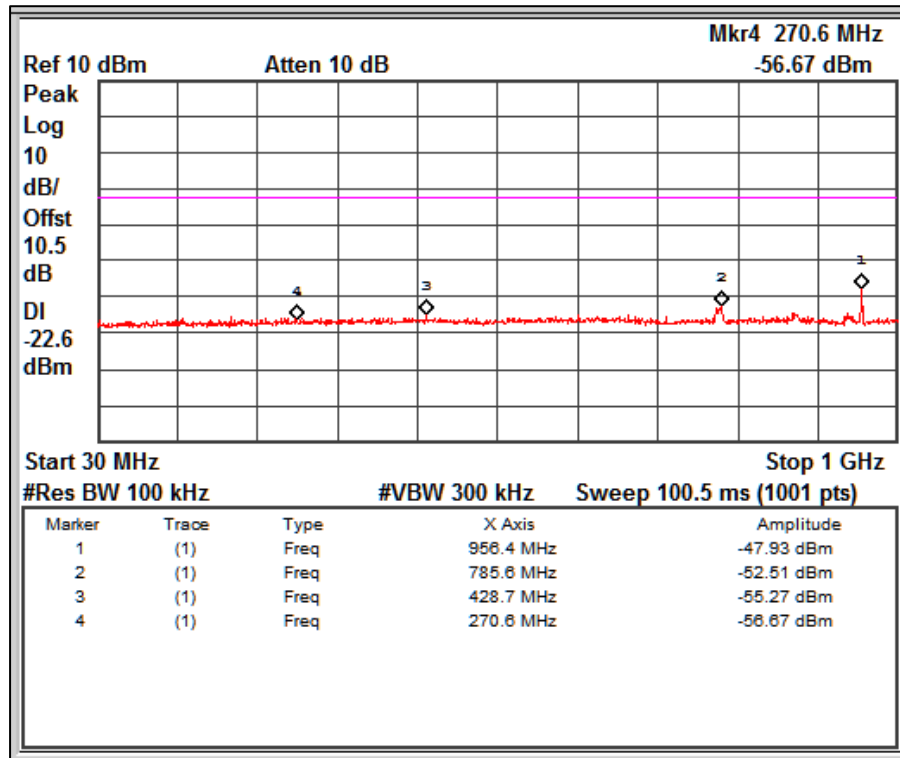


Channel Frequency: 2440MHz

Frequency Range 30MHz – 1GHz

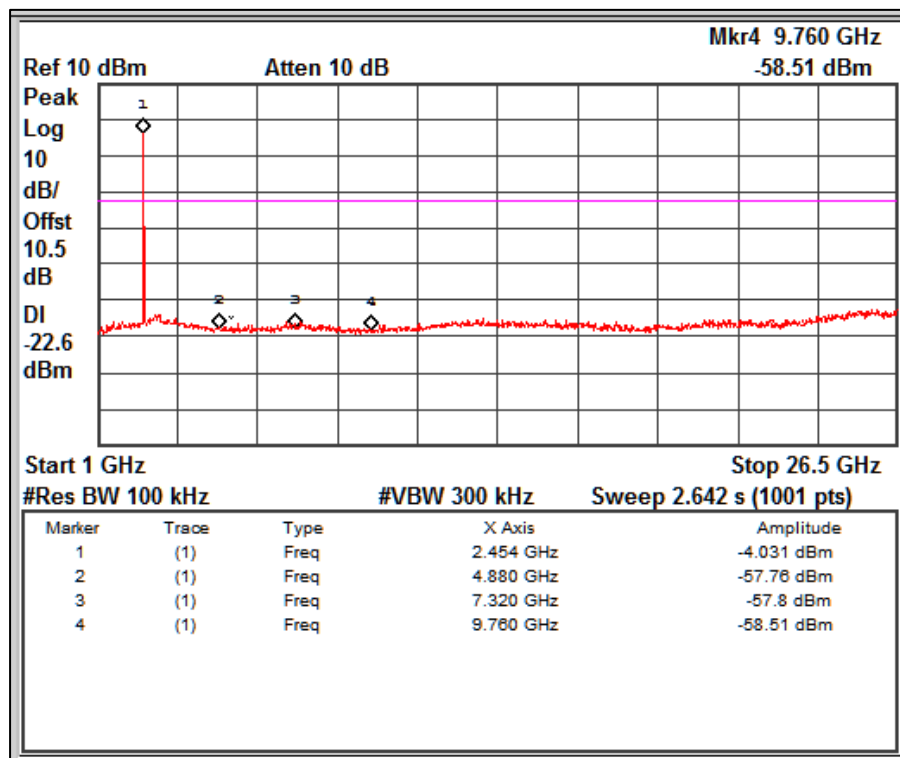


Channel Frequency: 2440MHz

Frequency Range: 1GHz – 26.5GHz

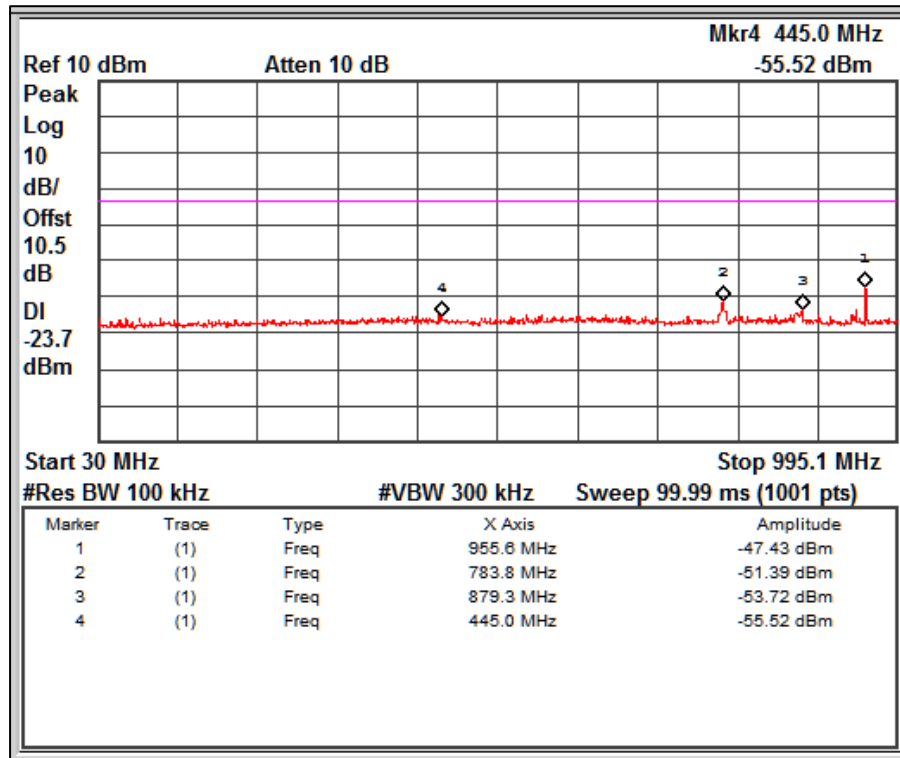

Channel Frequency: 2480MHz

Frequency Range 30MHz – 1GHz

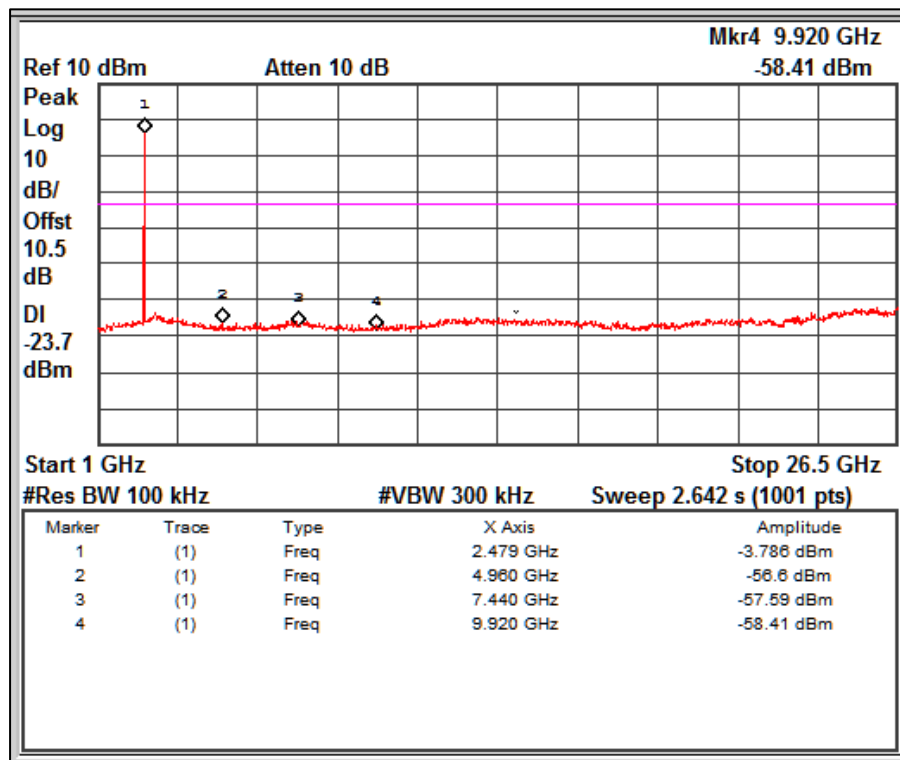

Channel Frequency: 2480MHz

Frequency Range: 1GHz – 26.5GHz

Prüfbericht - Nr.:
Test Report No.:

IN25RB7P 001

Seite 28 von 43
Page 28 of 43

7.5 Spurious Radiated Emissions & Restricted Bands of Operation

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (d) / (15.209 & 15.205)/ RSS-Gen Issue 5, Section 8.9 /8.10
Test Method	ANSI C63.10:2020
Measurement Location	Semi Anechoic Chamber 9kHz - 1 GHz Fully Anechoic Chamber 1 GHz - 26GHz
Measurement Bandwidth	100 kHz for frequency range < 1GHz 1 MHz for Frequency range >1GHz
Detector	Refer remarks below
Measuring Distance	3 m
Requirement	As per the limits mentioned in the below table
Test setup	Refer TEST METHODOLOGY

Table 6: Transmitter limits for Radiated emission

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Distance of Measurement (m)
0.009 – 0.490	2400/F(kHz)	48.50 – 13.80	300*
0.490 – 1.705	24000/F(kHz)	33.80 – 23.00	30*
1.705 -30	30	29.54	30*
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Remark: * The limit shows in the table above of frequency range 0.009 – 0.490, 0.490 – 1.705 MHz and 1.705-30MHz is at 300-meter, 30 meter and 30-meter range respectively, which corresponds to 128.51 – 93.80, 73.80 – 62.96 and 69.54 dBμV/m at 3m range by extrapolation calculation and the measurement of loop antenna.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

Test Conditions:

Temperature(Norm) = +21.8°C

Voltage = 5VDC through USB

Relative humidity: 55%

Prüfbericht - Nr.:

Test Report No.:

IN25RB7P 001

Seite 29 von 43

Page 29 of 43

Test results:

Note: All the losses are included during measurement and final values are mentioned in the test report. Refer TEST METHODOLOGY for more details

Test results for frequency range 9kHz – 30MHz


No emissions found in frequency range 9 kHz to 30 MHz, and measured levels are below 20dB from the limit line, hence not reported.

Table 7: Test results for frequency range 30MHz – 1GHz

Mode of testing: Battery Mode


Antenna Polarization	Measured Frequency (MHz)	Emission level (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	41.37	19.23	40.00	-20.77
	70.44	17.61	40.00	-22.39
	99.96	22.61	43.50	-20.89
	113.67	22.24	43.50	-21.26
	236.03	20.41	46.00	-25.59
	328.64	28.78	46.00	-17.22
	345.71	29.61	46.00	-16.39
Horizontal	353.93	29.29	46.00	-16.71
	35.55	20.68	40.00	-19.32
	50.94	20.95	40.00	-19.05
	81.78	29.08	40.00	-10.92
	96.87	24.04	43.50	-19.46
	219.68	15.04	46.00	-30.96
	336.38	16.38	46.00	-29.62
	364.16	19.20	46.00	-26.80
	545.03	21.05	46.00	-24.95

Test Plots:

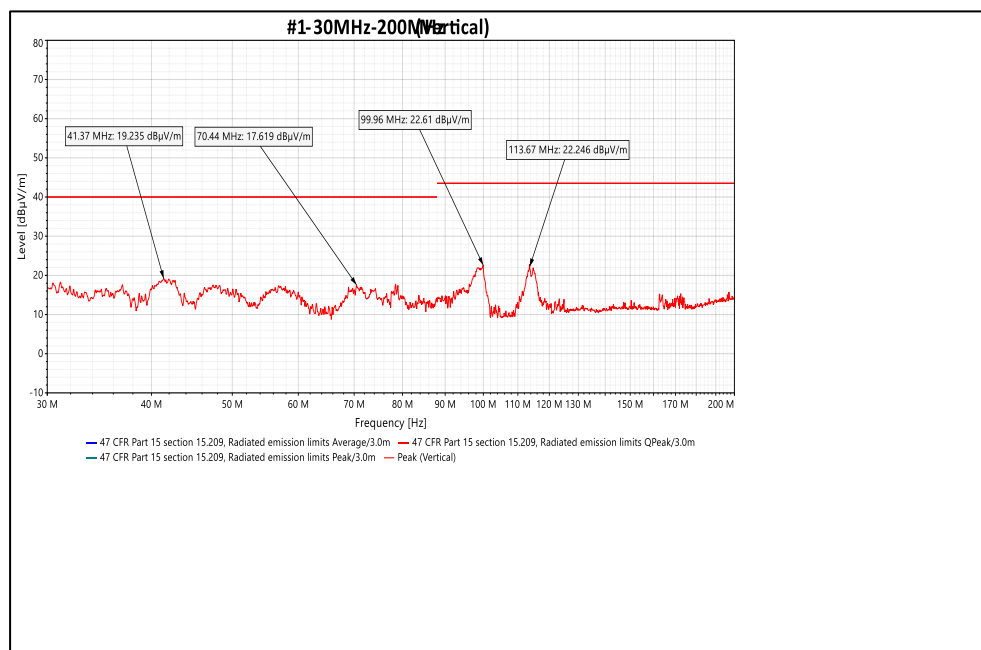


Channel Frequency 30MHz – 200MHz

Polarization Vertical

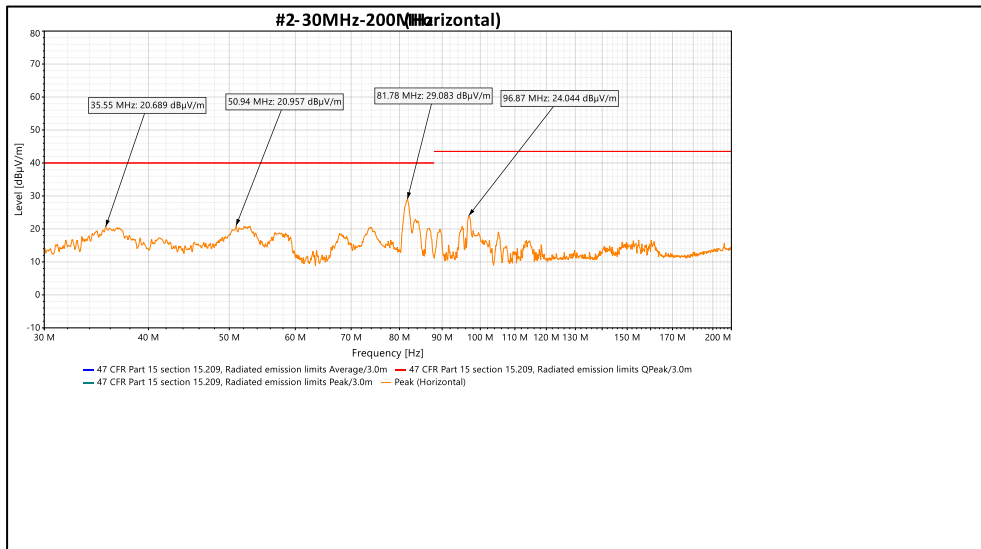


Channel Frequency 30MHz – 200MHz

Polarization Horizontal

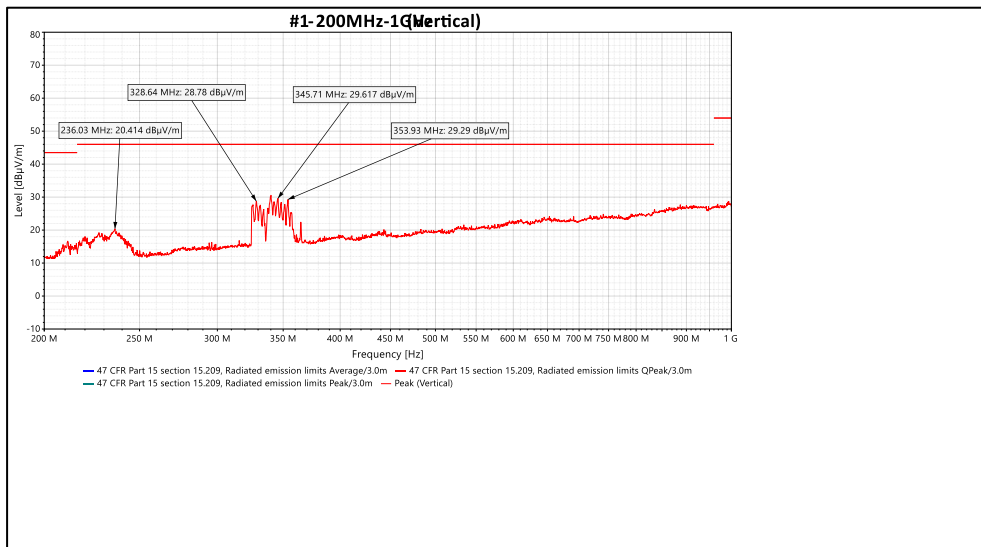

Channel Frequency 200MHz – 1GHz

Polarization Vertical

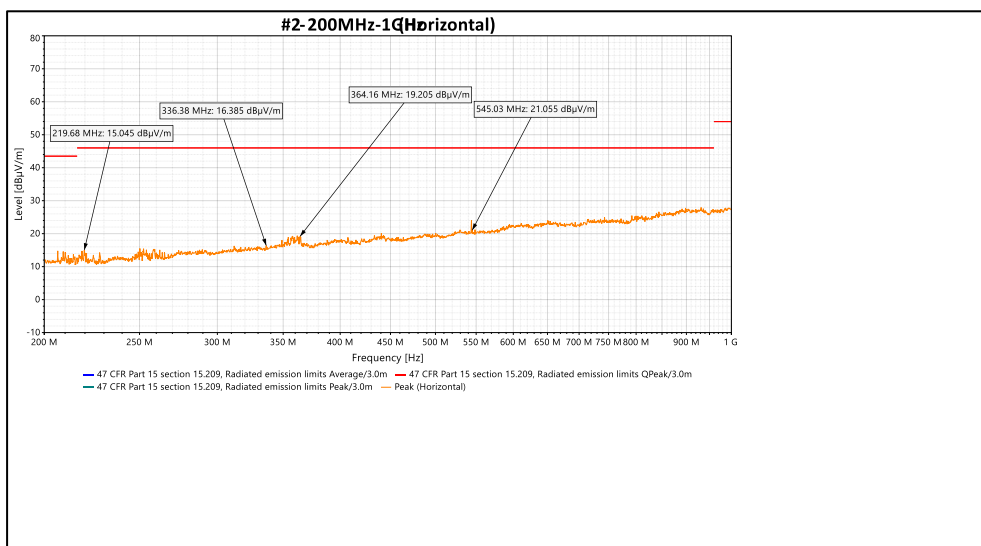

Channel Frequency 200MHz – 1GHz

Polarization Horizontal

Prüfbericht - Nr.:

Test Report No.:

IN25RB7P 001


Seite 31 von 43

Page 31 of 43

Mode of testing: Charging Mode


Antenna Polarization	Measured Frequency (MHz)	Emission level (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	35.40	33.01	40.00	-6.99
	39.91 (QP)	35.98	40.00	-4.02
	55.89	7.07	40.00	-32.93
	76.41	32.53	40.00	-7.47
	219.20	26.51	43.50	-16.99
	249.29	24.06	43.50	-19.44
	313.13	23.40	43.50	-20.10
	368.90	21.42	43.50	-22.08
Horizontal	605.21	23.85	43.50	-19.65
	73.80	22.15	40.00	-17.85
	78.63 (QP)	0.66	40.00	-39.34
	94.50	31.40	43.50	-12.10
	115.14	30.42	43.50	-13.08
	252.14	19.33	43.50	-24.17
	331.55	19.25	43.50	-24.25
	395.99	23.82	43.50	-19.68
	544.01	23.02	43.50	-20.48

Test Plots:

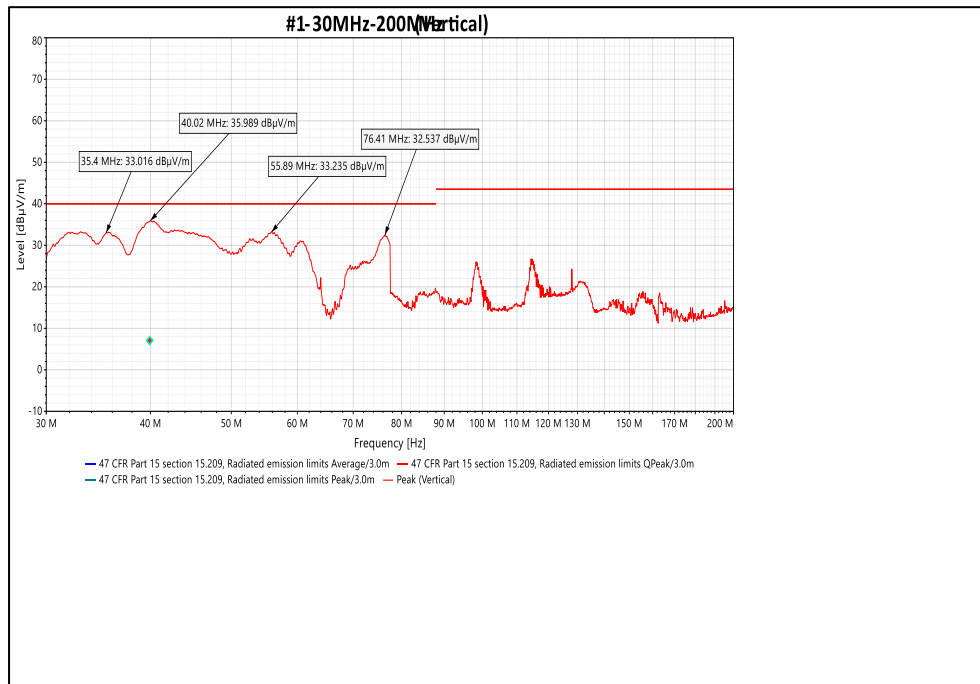


Channel Frequency 30MHz – 200MHz

Polarization Vertical

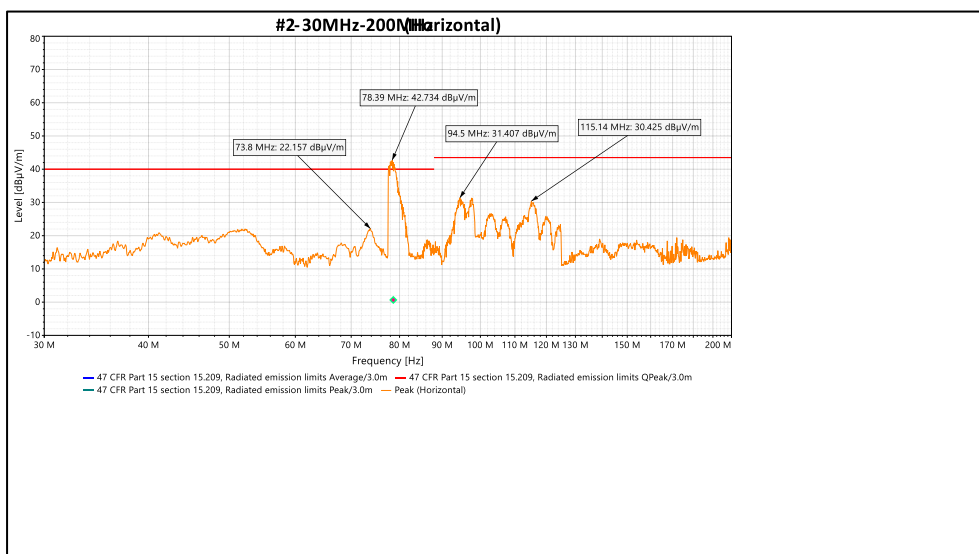


Channel Frequency 30MHz – 200MHz

Polarization Horizontal

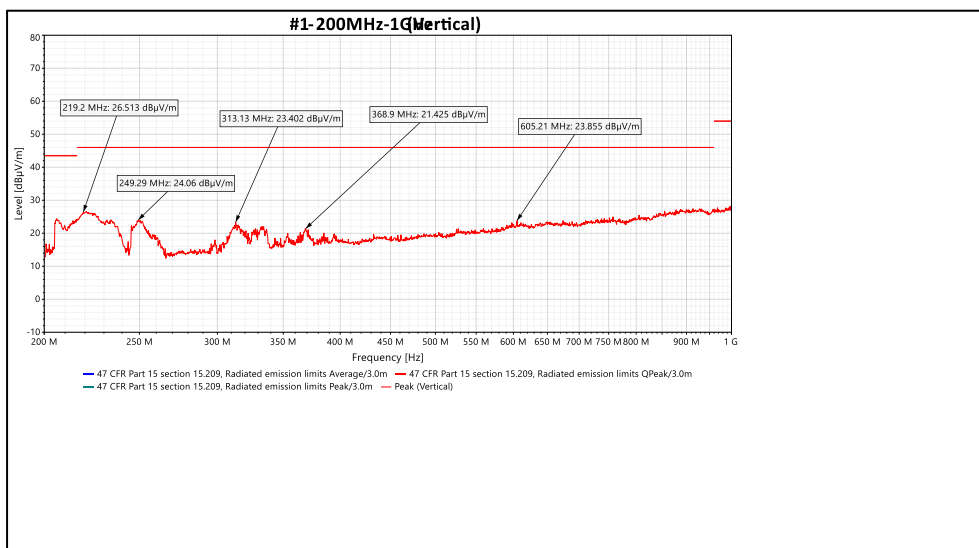

Channel Frequency 200MHz – 1GHz

Polarization Vertical

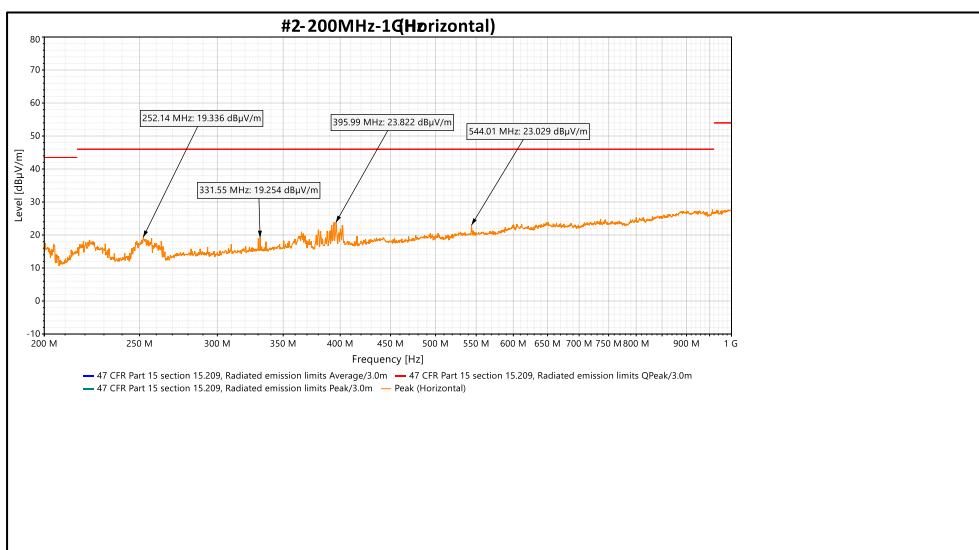

Channel Frequency 200MHz – 1GHz

Polarization Horizontal

Prüfbericht - Nr.:

Test Report No.:

IN25RB7P 001

Seite 33 von 43

Page 33 of 43

Table 8: Test results for the frequencies above 1GHz:

Data Rate: 1Mbps

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Measured Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2402	2402(Pk)	Vertical	81.06	-	-
	2402(Av)		79.81	-	-
	2390(Pk)		38.54	74.00*	-35.46
	2390(Av)		25.35	54.00*	-28.65
	4804(Pk)		45.91	74.00	-28.09
	4804(Av)		40.16	54.00	-13.84
	7206(Pk)		46.95	74.00	-27.05
	7206(Av)		34.95	54.00	-19.05
	2402(Pk)	Horizontal	79.16	-	-
	2402(Av)		77.90	-	-
	2390(Pk)		37.55	74.00*	-36.45
	2390(Av)		25.01	54.00*	-28.99
	4804(Pk)		43.92	74.00	-30.08
	4804(Av)		34.15	54.00	-19.85
	7206(Pk)		46.67	74.00	-27.33
	7206(Av)		34.69	54.00	-19.31
2440	2440(Pk)	Vertical	84.08	-	-
	2440(Av)		82.86	-	-
	4880(Pk)		45.56	74.00	-28.44
	4880(Av)		39.28	54.00	-14.72
	7320(Pk)		46.59	74.00	-27.41
	7320(Av)		34.93	54.00	-19.07
	2440(Pk)	Horizontal	77.64	-	-
	2440(Av)		76.38	-	-
	4880(Pk)		45.03	74.00	-28.97
	4880(Av)		33.79	54.00	-20.21
	7320(Pk)		46.94	74.00	-27.06
	7320(Av)		34.70	54.00	-19.30
2480	2480(Pk)	Vertical	84.55	-	-
	2480(Av)		83.32	-	-
	2483.5(Pk)		44.19	74.00*	-29.81
	2483.5(Av)		33.79	54.00*	-20.21
	4960(Pk)		44.51	74.00	-29.49
	4960(Av)		36.41	54.00	-17.59
	7440(Pk)		46.58	74.00	-27.42
	7440(Av)		34.69	54.00	-19.31
	2480(Pk)	Horizontal	78.21	-	-
	2480(Av)		76.96	-	-
	2483.5(Pk)		40.69	74.00*	-33.31
	2483.5(Av)		28.73	54.00*	-25.27
	4960(Pk)		42.71	74.00	-31.29
	4960(Av)		31.33	54.00	-22.67
	7440(Pk)		46.43	74.00	-27.57
	7440(Av)		34.66	54.00	-19.34

_ → Fundamental Frequency

*→ Restricted Band edges


Pk: Peak Detector;

Av: Average Detector

Test Plots:


Restricted Bands of Operation

Data Rate: 1Mbps

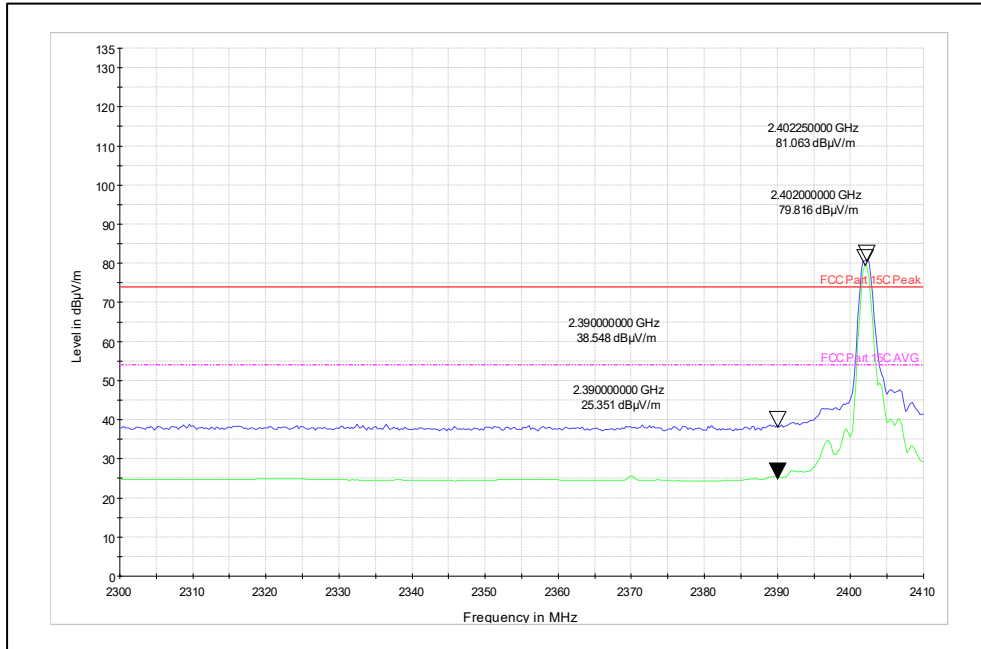


Channel Frequency: 2402MHz

Polarization: Vertical

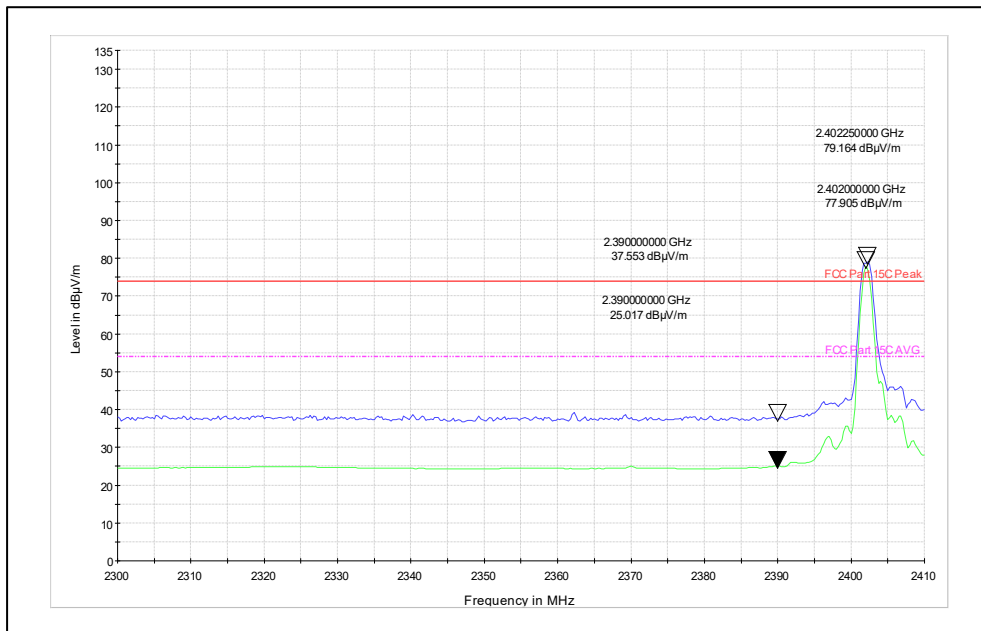


Channel Frequency: 2402MHz

Polarization: Horizontal

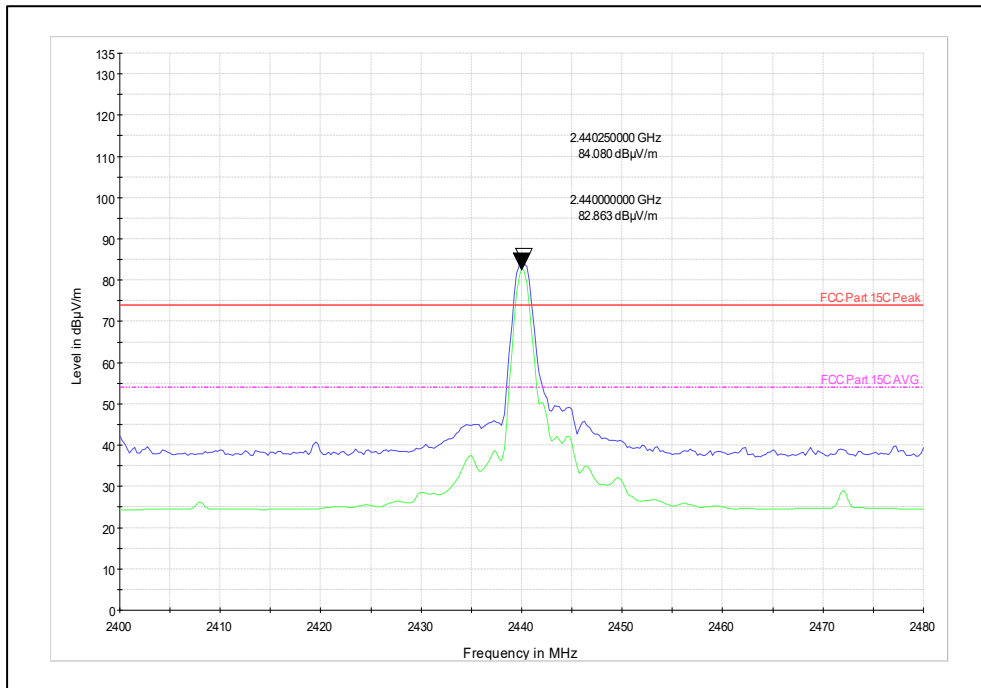


Channel Frequency: 2440MHz

Polarization: Vertical

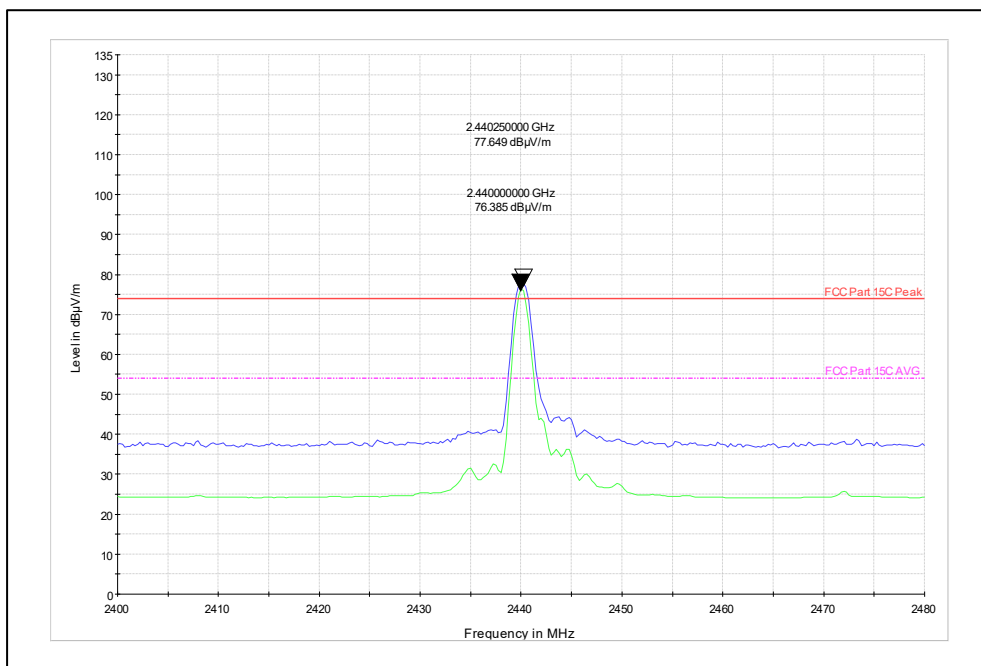


Channel Frequency: 2440MHz

Polarization: Horizontal

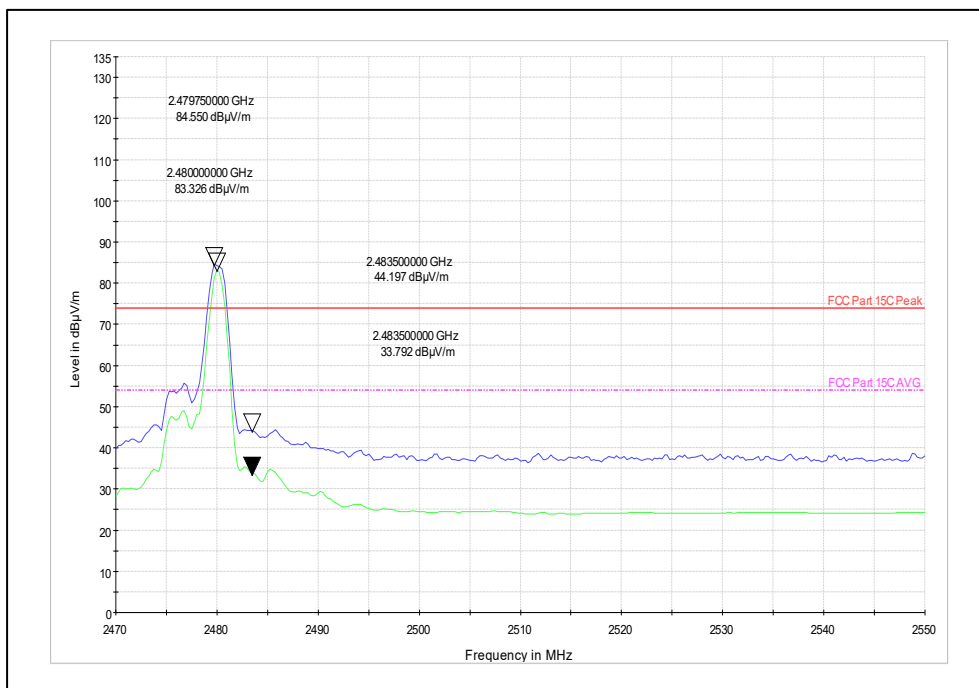

Channel Frequency: 2480MHz

Polarization: Vertical

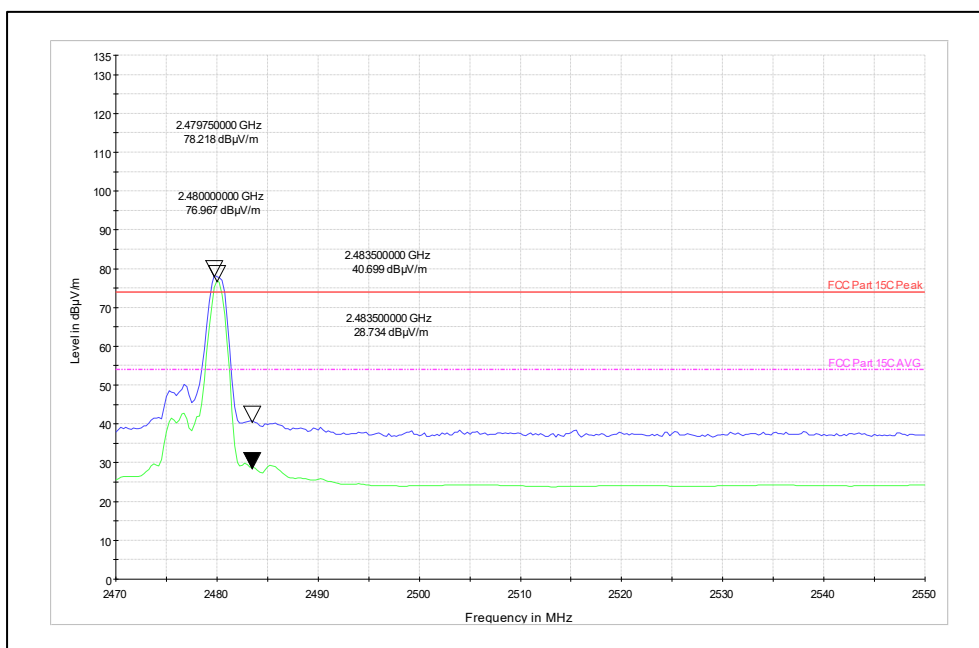

Channel Frequency: 2480MHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:


IN25RB7P 001

Seite 37 von 43
Page 37 of 43

Spurious Radiated emission:


Data Rate: 1Mbps

Channel frequency: 2402MHz

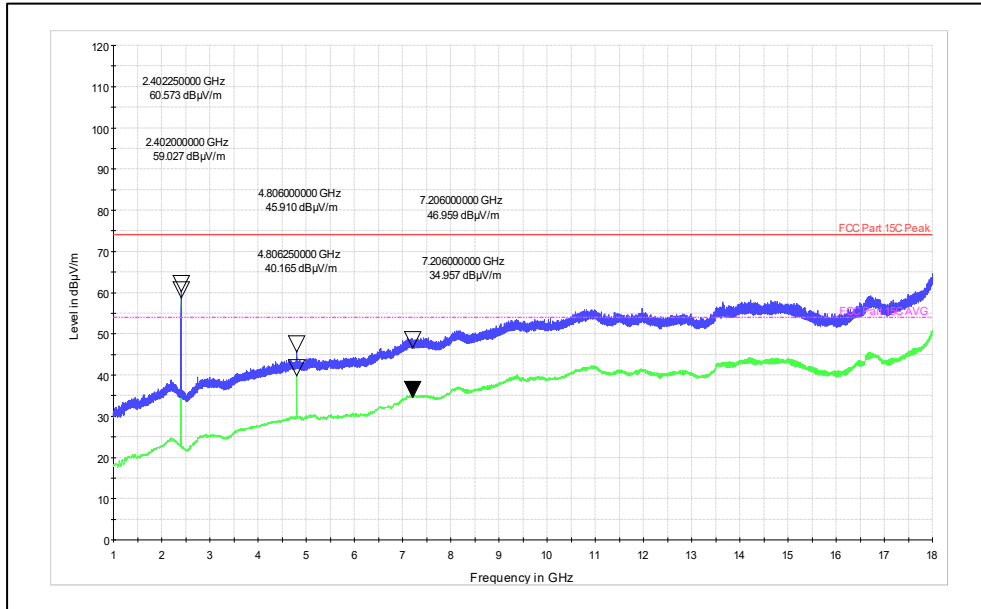

Polarization: Vertical


Frequency range: 1GHz to 18GHz

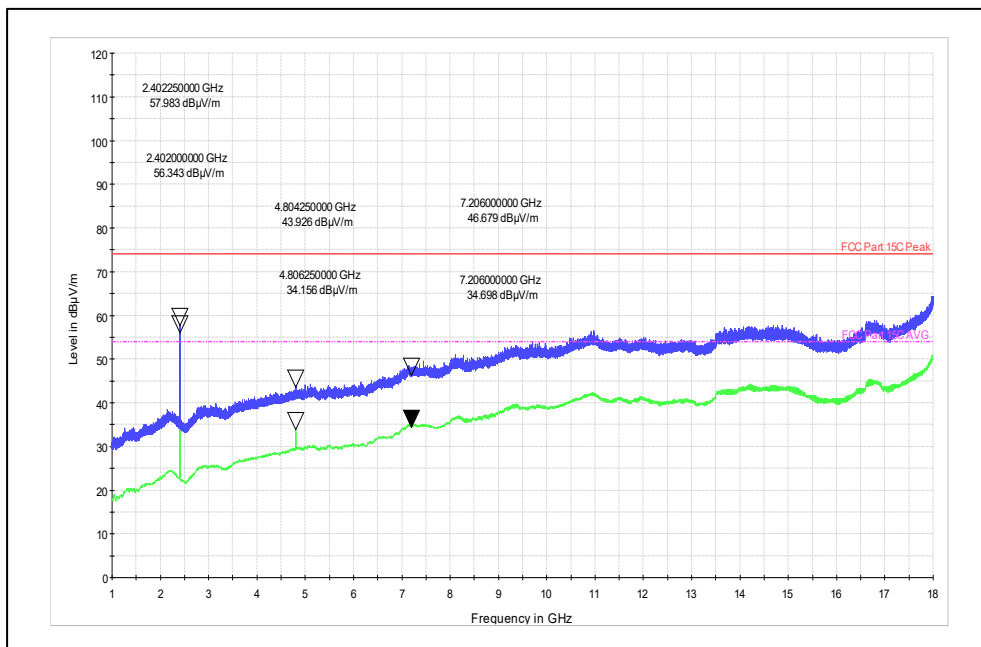

Polarization: Horizontal


Frequency range: 1GHz to 18GHz

Channel frequency: 2440MHz

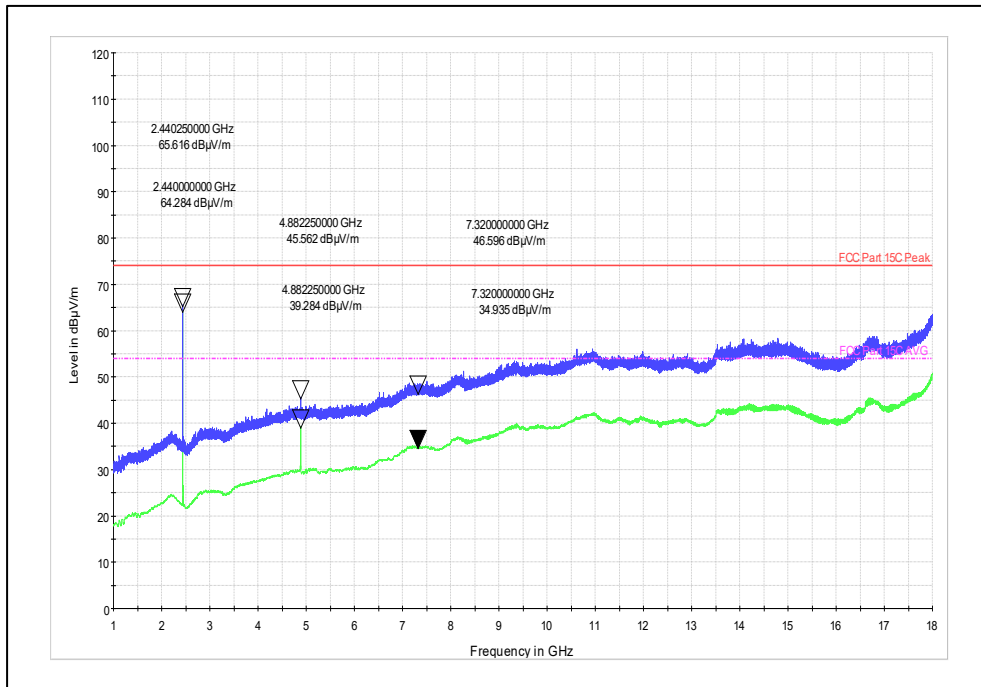

Polarization: Vertical

Frequency range: 1GHz to 18GHz

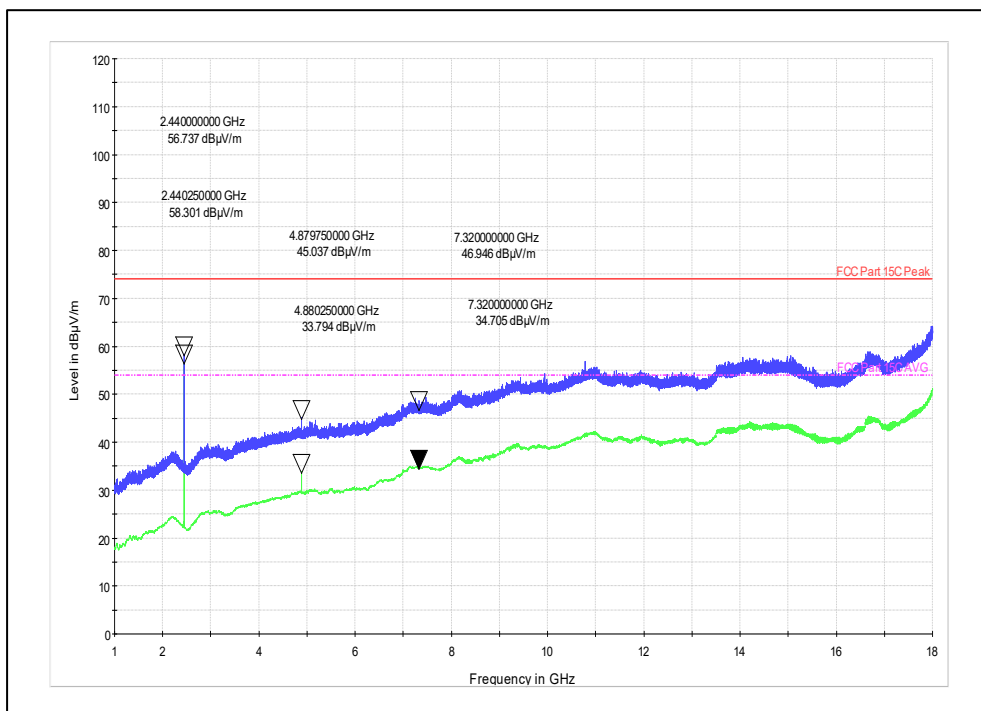

Polarization: Horizontal

Frequency range: 1GHz to 18GHz

Prüfbericht - Nr.:


Test Report No.:

IN25RB7P 001

Seite 39 von 43


Page 39 of 43

Channel frequency: 2480MHz

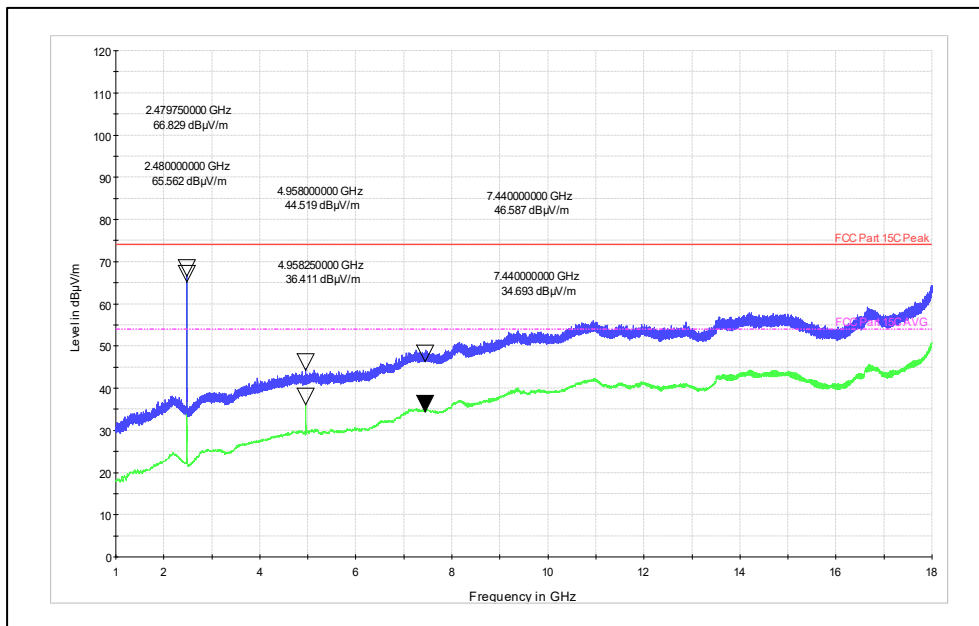

Polarization: Vertical

Frequency range: 1GHz to 18GHz

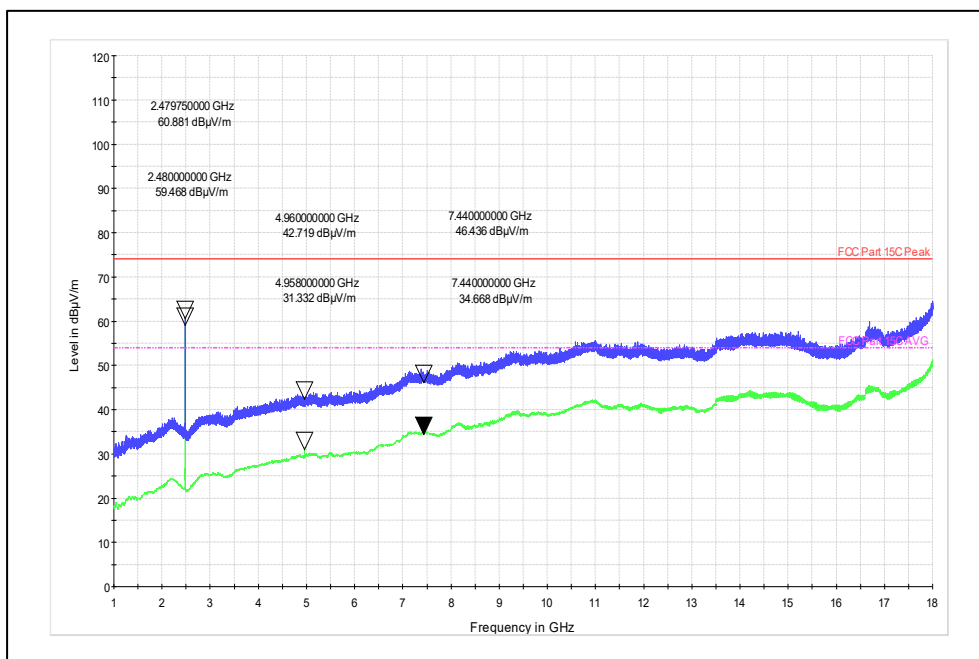

Polarization: Horizontal

Frequency range: 1GHz to 18GHz

Prüfbericht - Nr.:
Test Report No.:

IN25RB7P 001

Seite 40 von 43
Page 40 of 43

7.6 AC Power lines Conducted Emission

Result

Pass

Test Specification : FCC Part 15 Section 15.207/RSS Gen Issue 5 Section 8.8
Test Method : ANSI C 63.10-2020
ANSI C63.10-2020/Cor1-2023
Testing Location : Screened room
Measurement Bandwidth : 9kHz
Frequency Range : 150kHz – 30MHz
Supply Voltage : 110VAC,60Hz
Test Method : Refer TEST METHODOLOGY

Table 9: Limits for Conducted power line emission

Frequency of Emission (MHz)	QP Limit (dBµV/m)	AV Limit (dBµV/m)
0.15 -0.5	66 - 56*	56 - 46*
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency

Test Conditions:

Temperature (Norm) = +22.3°C Voltage = 110VAC through AC-DC Adapter Relative humidity: 57%

Prüfbericht - Nr.:

Test Report No.:


IN25RB7P 001

Seite 41 von 43

Page 41 of 43

Test results:

110VAC-60Hz-Line

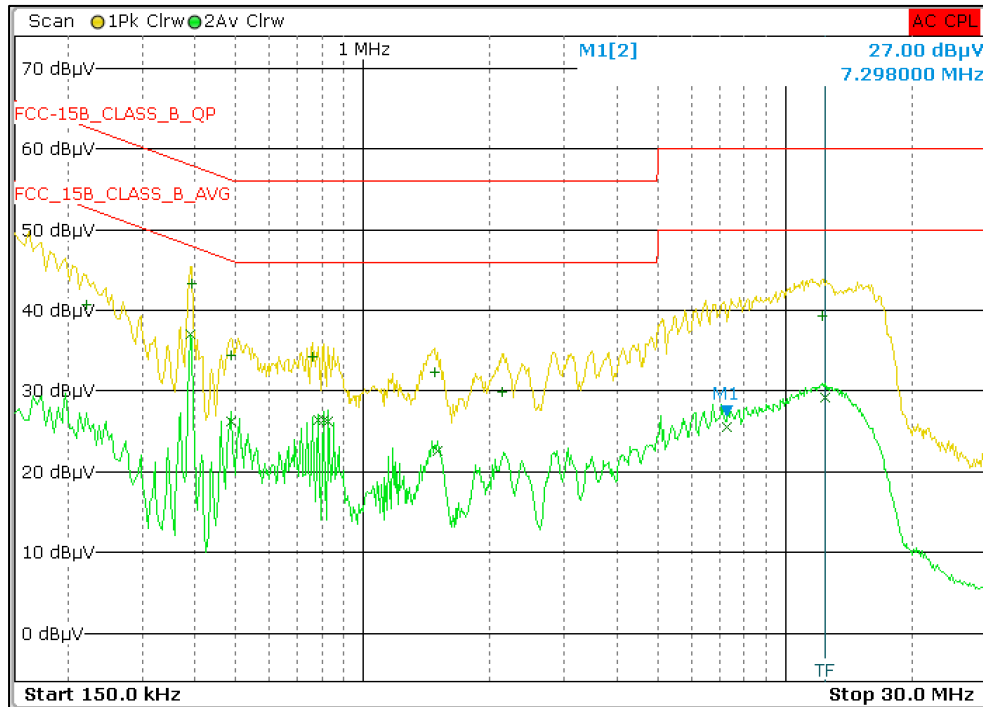

Final Results

Meas Time 1.0 s
Margin 6.0 dB
Peaks 25


Trace	Frequency	Level (dBμV)	Phase	Detector	Delta Limit/dB
2	390.000000000 kHz	37.11		Average	-10.95
1	394.000000000 kHz	43.38		Quasi Peak	-14.60
2	782.000000000 kHz	26.47		Average	-19.53
2	806.000000000 kHz	26.43		Average	-19.57
2	830.000000000 kHz	26.17		Average	-19.83
2	486.000000000 kHz	26.19		Average	-20.05
1	12.206000000 MHz	39.36		Quasi Peak	-20.64
2	12.422000000 MHz	29.14		Average	-20.86
1	758.000000000 kHz	34.19		Quasi Peak	-21.81
1	486.000000000 kHz	34.36		Quasi Peak	-21.88
1	222.000000000 kHz	40.75		Quasi Peak	-21.99
2	1.502000000 MHz	22.60		Average	-23.40
1	1.478000000 MHz	32.35		Quasi Peak	-23.65
2	7.298000000 MHz	25.57		Average	-24.43
1	2.138000000 MHz	29.94		Quasi Peak	-26.06

Prüfbericht - Nr.:
Test Report No.:

IN25RB7P 001

Seite 42 von 43
Page 42 of 43

110VAC-60Hz-Neutral:

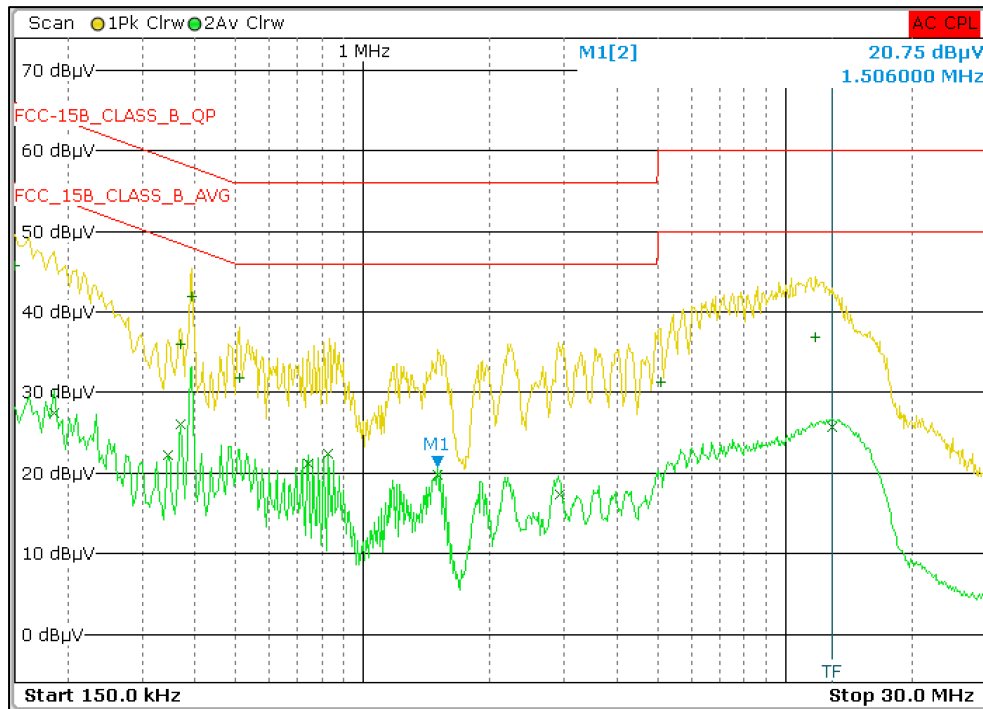

Final Results

Meas Time

1.0 s

Margin

6.0 dB

Peaks

25

Trace	Frequency	Level (dBμV)	Phase	Detector	Delta Limit/dB
1	394.00000000 kHz	41.90		Quasi Peak	-16.08
1	150.00000000 kHz	45.68		Quasi Peak	-20.32
2	370.00000000 kHz	26.00		Average	-22.50
1	370.00000000 kHz	35.98		Quasi Peak	-22.52
1	11.81400000 MHz	36.90		Quasi Peak	-23.10
2	830.00000000 kHz	22.47		Average	-23.53
1	510.00000000 kHz	31.84		Quasi Peak	-24.16
2	12.93000000 MHz	25.78		Average	-24.22
2	742.00000000 kHz	21.20		Average	-24.80
2	1.50600000 MHz	19.71		Average	-26.29
2	186.00000000 kHz	27.48		Average	-26.73
2	346.00000000 kHz	22.21		Average	-26.85
2	2.92200000 MHz	17.38		Average	-28.62
1	5.06200000 MHz	31.27		Quasi Peak	-28.73

8 LIST OF TABLES

Table 1: List of test and measurement instruments	7
Table 2: Instrument application Software versions	7
Table 3: Ratings and System Details as declared by Client*	8
Table 4: Measurement Uncertainty	9
Table 5: List of BLE Centre frequencies	10
Table 6: Transmitter limits for Radiated emission	28
Table 7: Test results for frequency range 30MHz – 1GHz	29
Table 8: Test results for the frequencies above 1GHz:	33
Table 9: Limits for Conducted power line emission	40

9 List of Figures

Figure 1: Frequency Range 9 kHz- 30 MHz	13
Figure 2: Frequency Range 30 MHz – 200 MHz	13
Figure 3: Frequency Range 200 MHz - 1GHz	14
Figure 4: Frequency Range above 1 GHz	14

End of test report