




TEST REPORT

FCC ID. :	2BOY2-WO2	
Test Report No..... :	TCT260226E908	
Date of issue..... :	Mar. 02, 2026	
Testing laboratory	SHENZHEN TONGCE TESTING LAB	
Testing location/ address:	2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China	
Applicant's name..... :	Shenzhen Yishunxing Technology Co., Ltd	
Address..... :	4/F, Building A2, Tangwei Fuyuan Industrial Zone, Tangwei Community Fuyong Street, Xixiang, Bao an District, Shenzhen, China	
Manufacturer's name ... :	Shenzhen Yishunxing Technology Co., Ltd	
Address..... :	4/F, Building A2, Tangwei Fuyuan Industrial Zone, Tangwei Community Fuyong Street, Xixiang, Bao an District, Shenzhen, China	
Standard(s)	FCC CFR Title 47 Part 2 FCC CFR Title 47 Part22 FCC CFR Title 47 Part24 FCC CFR Title 47 Part27	
Product Name..... :	Smartphone	
Trade Mark	W&O	
Model/Type reference..... :	WO2, S25 Ultra, S26 Ultra, S27 Ultra, I17 Pro Max, I17 Pro, I16 Pro Max, I16 Pro, C25 Ultra, WO1, WO3	
Rating(s)..... :	Rechargeable Li-polymer Battery DC 3.87V	
Date of receipt of test item	Feb. 26, 2026	
Date (s) of performance of test..... :	Feb. 26, 2026 ~ Mar. 02, 2026	
Tested by (+signature) ... :	Rleo LIU	
Check by (+signature).... :	Beryl ZHAO	
Approved by (+signature):	Tomsin	

**General disclaimer:**

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Table of Contents

1. General Product Information	3
1.1. EUT description	3
1.2. Model(s) list.....	4
1.3. Operation Frequency	5
2. Test Result Summary	6
3. General Information.....	7
3.1. Test environment and mode.....	7
3.2. Description of Support Units.....	8
3.3. Configuration of Tested System	9
3.4. Measurement Results Explanation Example.....	9
4. Facilities and Accreditations	10
4.1. Facilities	10
4.2. Location	10
5. Measurement Uncertainty	10
5.1. Field Strength of Spurious Radiation Measurement	11
Appendix A: Photographs of Test Setup	
Appendix B: Photographs of EUT	

1. General Product Information

1.1. EUT description

Product Name.....:	Smartphone
Model/Type reference.....:	WO2
Sample Number.....:	TCT260226E902-0101
3G Version	WCDMA: R99 HSDPA: Release 5 HSUPA: Release 6
Tx Frequency	GSM/GPRS/EGPRS 850: 824.2MHz ~ 848.8MHz GSM/GPRS/EGPRS 1900: 1850.2MHz ~ 1909.8MHz WCDMA Band V: 826.4MHz ~ 846.6MHz WCDMA Band IV: 1712.4MHz ~ 1752.6MHz WCDMA Band II: 1852.4MHz ~ 1907.6MHz
Rx Frequency	GSM/GPRS/EGPRS 850: 869.2MHz ~ 893.8MHz GSM/GPRS/EGPRS 1900: 1930.2MHz ~ 1989.8MHz WCDMA Band V: 871.4MHz ~ 891.6MHz WCDMA Band IV: 2112.4MHz ~ 2152.6MHz WCDMA Band II: 1932.4MHz ~ 1987.6MHz
Maximum Output Power to Antenna.....:	GSM850: 32.09dBm GSM1900: 29.86dBm GPRS850: 32.78dBm GPRS1900: 29.75dBm EGPRS850: 29.78dBm EGPRS1900: 26.52dBm WCDMA Band V: 23.62dBm WCDMA Band IV: 23.45dBm WCDMA Band II: 23.61dBm
99% Occupied Bandwidth.....:	GSM850: 245KGXW GSM1900: 246KGXW GPRS850 Class 8: 245KGXW GPRS1900 Class 8: 246KGXW EGPRS850 Class 8: 244KG7W EGPRS1900 Class 8: 248KG7W WCDMA Band V RMC 12.2Kbps: 4M17F9W WCDMA Band IV RMC 12.2Kbps: 4M16F9W WCDMA Band II RMC 12.2Kbps: 4M17F9W WCDMA Band V HSDPA: 4M18F9W WCDMA Band IV HSDPA: 4M18F9W WCDMA Band II HSDPA: 4M18F9W WCDMA Band V HSUPA: 4M19F9W WCDMA Band IV HSUPA: 4M19F9W WCDMA Band II HSUPA: 4M19F9W
Type of Modulation.....:	GSM/GPRS: GMSK EGPRS: 8PSK WCDMA/HSDPA/HSUPA: QPSK

Antenna Type.....:	FPC Antenna
Antenna Gain.....:	GSM/GPRS/EGPRS 850: 1.55dBi GSM/GPRS/EGPRS 1900: 1.15dBi WCDMA Band V: 1.55dBi WCDMA Band IV: 1.55dBi WCDMA Band II: 1.15dBi
Rating(s).....:	Rechargeable Li-polymer Battery DC 3.87V

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

1.2. Model(s) list

No.	Model No.	Tested with
1	WO2	☒
Other models	S25 Ultra, S26 Ultra, S27 Ultra, I17 Pro Max, I17 Pro, I16 Pro Max, I16 Pro, C25 Ultra, WO1, WO3	☐

Note: WO2 is tested model, other models are derivative models. The models are identical in circuit and PCB layout, only different on the model names, color and appearance. So the test data of WO2 can represent the remaining models.

1.3. Operation Frequency

GSM 850		PCS1900	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
128	824.20	512	1850.20
129	824.40	513	1850.40
....			
189	836.40	660	1879.80
190	836.60	661	1880.00
191	836.80	662	1880.20
...	...	...	...
250	848.60	809	1909.60
251	848.80	810	1909.80

WCDMA Band IV		WCDMA Band V		WCDMA Band II	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
1312	1712.4	4132	826.40	9262	1852.40
....		4133	826.60	9263	1852.60
....					
....		4182	836.40	9399	1879.80
1413	1732.6	4183	836.60	9400	1880.00
....		4184	836.80	9401	1880.20
....		...	...	...	...
1513	1752.6	4233	846.60	9538	1907.60

2. Test Result Summary

Requirement	CFR 47 Section	Result
Conducted Output Power	§22.913; §2.1046 §24.232; §27.50(d)	PASS
Peak-to-Average Ratio	§2.1046; §24.232(d) §22.913; §27.50(d)	PASS
Effective Radiated Power	§2.1046; §22.913(a) §24.232; §27.50(d)	PASS
Equivalent Isotropic Radiated Power	§2.1046; §22.913(a) §24.232; §27.50(d)	PASS
Occupied Bandwidth	§2.1049	PASS
Band Edge	§2.1051 §22.917(a) §24.238(a) §27.53(g)	PASS
Conducted Spurious Emission	§2.1051; §22.917 §24.238; §27.53(h)	PASS
Field Strength of Spurious Radiation	§2.1053; §22.917(a) §24.238; §27.53(g)	PASS
Frequency Stability for Temperature & Voltage	§2.1055; §22.355 §24.235; §27.54	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.
5. This report is issued as a supplemental report to original FCC ID: 2BOY2-WO2, the difference is changing appearance in this report, spurious radiation had been re-tested and only its data was presented in this report.

3. General Information

3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar

Keep the EUT in communication with CMU200 and select channel with modulation All modes and data rates and positions were investigated.
Test modes are chosen to be reported as the worst case configuration below:

Test Mode		
Band	Radiated TCs	Conducted TCs
GSM 850	GSM Link GPRS class 12 Link EGPRS class 12 Link	GSM Link GPRS class 12 Link EGPRS class 12 Link
PCS 1900	GSM Link GPRS class 12 Link EGPRS class 12 Link	GSM Link GPRS class 12 Link EGPRS class 12 Link
WCDMA Band V	RMC 12.2Kbps Link	RMC 12.2Kbps Link HSDPA Link HSUPA Link
WCDMA Band IV	RMC 12.2Kbps Link	RMC 12.2Kbps Link HSDPA Link HSUPA Link
WCDM Band II	RMC 12.2Kbps Link	RMC 12.2Kbps Link HSDPA Link HSUPA Link

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power. Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission. The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarization. The emissions worst-case (Z axis) are shown in Test Results of the following pages.

3.2. Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Adapter	WC065A11JH	J121083BA1003016	/	1+

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

3.3. Configuration of Tested System

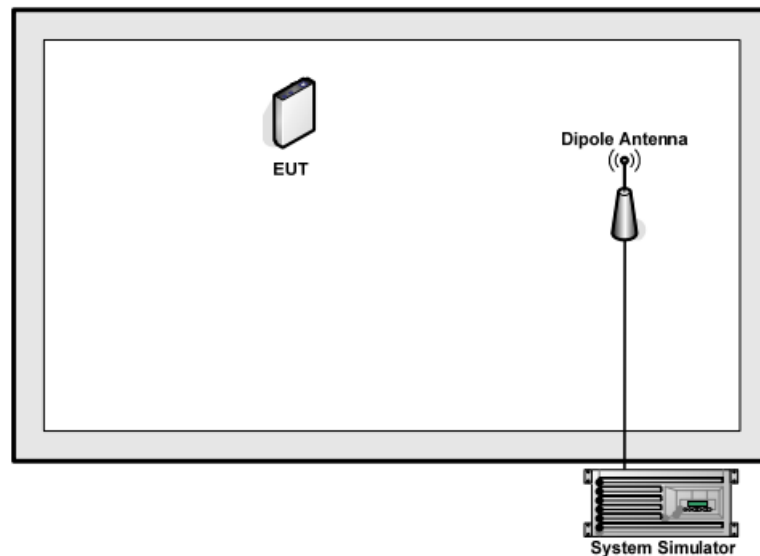

3.4. Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level. The spectrum analyzer offset is derived from RF cable loss factor. *Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 3 dB and a 5dB attenuator.

Example: $\text{Offset (dB)} = \text{RF cable loss (dB)} + \text{attenuator factor (dB)}$
 $= 8(\text{dB})$

4. Facilities and Accreditations

4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- A2LA-No.: 4320.01

SHENZHEN TONGCE TESTING LAB

The testing lab has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339



5. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	± 3.10 dB
2	RF power, conducted	± 0.12 dB
3	Spurious emissions, conducted	± 0.11 dB
4	Frequency deviation	0.48 kHz
5	Occupied bandwidth	57.74 kHz
6	All emissions, radiated(<1 GHz)	± 4.56 dB
7	All emissions, radiated(1 GHz - 18 GHz)	± 4.22 dB
8	All emissions, radiated(18 GHz- 40 GHz)	± 4.36 dB
9	Temperature	$\pm 0.1^{\circ}\text{C}$
10	Humidity	$\pm 1.0\%$

5.1. Field Strength of Spurious Radiation Measurement

5.1.1. Test Specification

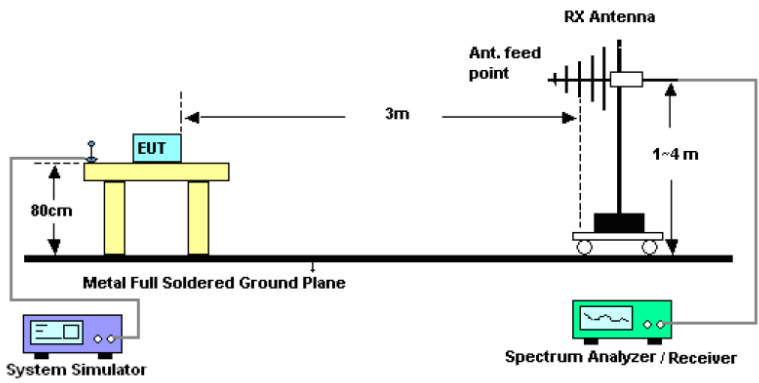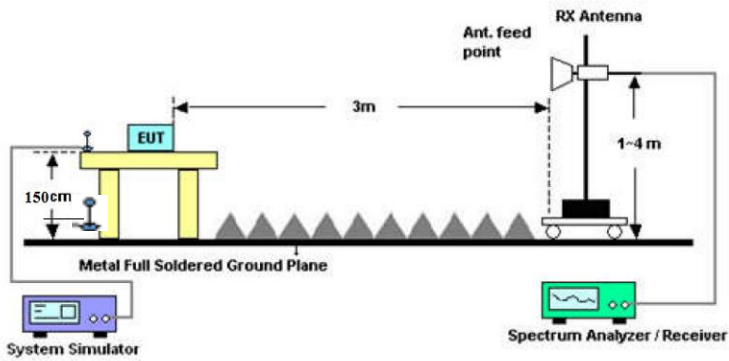Test Requirement:	FCC part 22.917(a) and FCC part 24.238(a) FCC part 27.53(g)
Test Method:	FCC KDB 971168 D01v03r01
Operation mode:	Refer to item 3.1
Limit:	-13dBm
Test setup:	For 30MHz~1GHz  Above 1GHz 
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03r01 Section 6 and ANSI / TIA-603-D-2010 Section 2.2.12. 2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground. 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower. 4. The table was rotated 360 degrees to determine the position of the highest spurious emission. 5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations. 6. Make the measurement with the spectrum analyzer's

	RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission. 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission. 9. Taking the record of output power at antenna port. 10. Repeat step 7 to step 8 for another polarization. 11. $EIRP\ (dBm) = S.G.\ Power - Tx\ Cable\ Loss + Tx\ Antenna\ Gain$ 12. $ERP\ (dBm) = EIRP - 2.15$ 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band. 14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts) $= P(W) - [43 + 10\log(P)]\ (dB)$ $= [30 + 10\log(P)]\ (dBm) - [43 + 10\log(P)]\ (dB)$ $= -13dBm.$
Test results:	PASS
Remark:	All modulations have been tested, but only the worst modulation show in this test item.

5.1.2. Test Instruments

Radiated Emission Test Site (966)					
Name of Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
Universal Radio Communication Tester	R&S	CMU200	110188	Jun. 26, 2025	Jun. 25, 2026
Spectrum Analyzer	R&S	FSQ40	200061	Jun. 26, 2025	Jun. 25, 2026
Signal Generator	Agilent	N5173B	MY58108823	Jan. 15, 2026	Jan. 14, 2027
Broadband Antenna	Schwarzbeck	VULB9163	340	Jun. 29, 2025	Jun. 28, 2026
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jun. 29, 2025	Jun. 28, 2026
Broadband Antenna	Schwarzbeck	VULB9163	412	Jun. 29, 2025	Jun. 28, 2026
Horn Antenna	Schwarzbeck	BBHA 9120D	1201	Jun. 29, 2025	Jun. 28, 2026
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Jan. 17, 2026	Jan. 16, 2027
Coaxial cable	SKET	RE-03-D	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-03-M	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-03-L	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-D	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-M	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-L	/	Jun. 27, 2025	Jun. 26, 2026
Antenna Mast	Keleto	RE-AM	/	/	/
EMI Test Software	EZ_EM	FA-03A2 RE+	1.1.4.2	/	/

5.1.3. Test Data

Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss+Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

Band	GSM 850	Test channel:	Lowest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1648.4	Vertical	-41.01	-6.47	-47.48	-13.00	PASS
2472.6	V	-51.05	-2.89	-53.94		
3296.8	V	-61.89	-0.48	-62.37		
1648.4	Horizontal	-41.83	-6.29	-48.12		
2472.6	H	-48.76	-2.99	-51.75		
3296.8	H	-59.51	-0.10	-59.61		

Band	GSM 850	Test channel:	Middle
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1673.2	Vertical	-42.04	-6.46	-48.50	-13.00	PASS
2509.8	V	-54.77	-2.75	-57.52		
3346.4	V	-62.82	-0.47	-63.29		
1673.2	Horizontal	-41.19	-6.32	-47.51		
2509.8	H	-49.00	-2.85	-51.85		
3346.4	H	-62.84	-0.10	-62.94		

Band	GSM 850	Test channel:	Highest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1697.6	Vertical	-42.56	-6.44	-49.00	-13.00	PASS
2546.4	V	-55.63	-2.58	-58.21		
3395.2	V	-61.38	-0.47	-61.85		
1697.6	Horizontal	-39.02	-6.35	-45.37		
2546.4	H	-49.31	-2.65	-51.96		
3395.2	H	-64.79	-0.10	-64.89		

Band	PCS 1900	Test channel:	Lowest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3700.4	Vertical	-48.27	0.91	-47.36	-13.00	PASS
5550.6	V	-57.05	6.87	-50.18		
7400.8	V	-66.31	10.39	-55.92		
3700.4	Horizontal	-44.80	1.89	-42.91		
5550.6	H	-52.36	7.38	-44.98		
7400.8	H	-62.59	10.01	-52.58		

Band	PCS 1900	Test channel:	Middle
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3760.0	Vertical	-49.40	1.32	-48.08	-13.00	PASS
5640.0	V	-58.65	7.21	-51.44		
7520.0	V	-58.64	10.43	-48.21		
3760.0	Horizontal	-44.91	2.48	-42.43		
5640.0	H	-58.47	7.63	-50.84		
7520.0	H	-63.18	10.03	-53.15		

Band	PCS 1900	Test channel:	Highest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3819.6	Vertical	-48.03	1.72	-46.31	-13.00	PASS
5729.4	V	-55.59	7.54	-48.05		
7639.2	V	-63.35	10.58	-52.77		
3819.6	Horizontal	-47.02	3.07	-43.95		
5729.4	H	-50.97	7.89	-43.08		
7639.2	H	-64.14	10.33	-53.81		

Band	WCDMA Band V	Test channel:	Lowest
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1652.8	Vertical	-55.82	-6.47	-62.29	-13.00	PASS
2479.2	V	-62.05	-2.84	-64.89		
3305.6	V	-61.56	-0.48	-62.04		
1652.8	Horizontal	-52.39	-6.30	-58.69		
2479.2	H	-62.14	-2.95	-65.09		
3305.6	H	-62.11	-0.10	-62.21		

Band	WCDMA Band V	Test channel:	Middle
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1673.2	Vertical	-50.80	-6.46	-57.26	-13.00	PASS
2509.8	V	-61.73	-2.75	-64.48		
3346.4	V	-64.46	-0.47	-64.93		
1673.2	Horizontal	-50.98	-6.32	-57.30		
2509.8	H	-62.84	-2.86	-65.70		
3346.4	H	-61.99	-0.10	-62.09		

Band	WCDMA Band V	Test channel:	Highest
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1693.2	Vertical	-57.07	-6.45	-63.52	-13.00	PASS
2539.8	V	-62.61	-2.65	-65.26		
3386.4	V	-67.18	-0.47	-67.65		
1693.2	Horizontal	-52.42	-6.35	-58.77		
2539.8	H	-60.63	-2.74	-63.37		
3386.4	H	-64.99	-0.11	-65.10		

Band	WCDMA Band IV	Test channel:	Lowest
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
2452.3	Vertical	-64.24	-2.96	-67.20	-13.00	PASS
3424.8	V	-63.55	-0.46	-64.01		
5137.2	V	-65.28	6.11	-59.17		
2452.3	Horizontal	-62.02	-2.99	-65.01		
3424.8	H	-61.99	-0.11	-62.10		
5137.2	H	-62.56	6.55	-56.01		

Band	WCDMA Band IV	Test channel:	Middle
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
2641.3	Vertical	-63.33	-2.15	-65.48	-13.00	PASS
3465.2	V	-60.94	-0.46	-61.40		
5197.8	V	-66.07	6.21	-59.86		
2641.3	Horizontal	-61.72	-2.11	-63.83		
3465.2	H	-63.88	-0.11	-63.99		
5197.8	H	-65.86	6.66	-59.20		

Band	WCDMA Band IV	Test channel:	Highest
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3102.2	Vertical	-63.51	-2.15	-65.66	-13.00	PASS
3505.2	V	-63.14	-0.41	-63.55		
5257.8	V	-59.87	6.30	-53.57		
3102.2	Horizontal	-63.52	-0.09	-63.61		
3505.2	H	-63.45	-0.06	-63.51		
5257.8	H	-66.96	6.77	-60.19		

Band	WCDMA Band II	Test channel:	Lowest
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3704.8	Vertical	-51.17	0.94	-50.23	-13.00	PASS
5557.2	V	-64.49	6.89	-57.60		
7409.6	V	-66.76	10.39	-56.37		
3704.8	Horizontal	-55.01	1.93	-53.08		
5557.2	H	-61.42	7.39	-54.03		
7409.6	H	-68.44	10.01	-58.43		

Band	WCDMA Band II	Test channel:	Middle
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3760.0	Vertical	-61.83	1.32	-60.51	-13.00	PASS
5640.0	V	-65.35	7.21	-58.14		
7520.0	V	-55.56	10.43	-45.13		
3760.0	Horizontal	-60.69	2.48	-58.21		
5640.0	H	-64.98	7.63	-57.35		
7520.0	H	-63.97	10.03	-53.94		

Band	WCDMA Band II	Test channel:	Highest
Test mode:	RMC 12.2Kbps Link (QPSK)	Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3815.2	Vertical	-55.24	1.69	-53.55	-13.00	PASS
5722.8	V	-67.05	7.52	-59.53		
7630.4	V	-67.58	10.57	-57.01		
3815.2	Horizontal	-55.03	3.03	-52.00		
5722.8	H	-62.12	7.87	-54.25		
7630.4	H	-66.49	10.31	-56.18		

Appendix A: Photographs of Test Setup

Please refer to document Appendix No.: TCT260226E902-A

Appendix B: Photographs of EUT

Please refer to document Appendix No.: TCT260226E902-B & TCT260226E902-C

*******END OF REPORT*******