

FCC 47 CFR Part 15 Subpart B

TEST REPORT

For

Chicco Flippable Milk Warmer USA

MODEL NUMBER: N0358

REPORT NUMBER: 4792188332.2.1-EMC-1

FCC ID: 2BOZA-N0358

ISSUE DATE: July 3, 2026

Prepared for

Artsana USA, Inc.

1826 William Penn Way, Lancaster, Pennsylvania, 17601 United States

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

**Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,
Guangdong, China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	July 3, 2026	Initial Issue	

Summary of Test Results

Emission			
Standard	Test Item	Limit	Result
FCC 47 CFR Part 15 Subpart B	Conducted emissions	FCC Part 15.107	Pass
	Radiated emissions below 1GHz	FCC Part 15.109	Pass
	Radiated emissions above 1GHz	FCC Part 15.109	N/A (NOTE 1, 2)

Note:

1. N/A: In this whole report not applicable.

2. If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz; If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz; If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, measurement shall only be made up to 5 GHz; If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is less.

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <FCC 47 CFR Part 15 Subpart B> when <Simple Acceptance> decision rule is applied. Decision rule for statement of conformity: The measurement uncertainty is not taken into account for statement of conformity.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY.....	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>7</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>7</i>
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	<i>8</i>
5.2. <i>TEST MODE.....</i>	<i>8</i>
5.3. <i>EUT ACCESSORY</i>	<i>8</i>
5.4. <i>SUPPORT UNITS FOR SYSTEM TEST</i>	<i>8</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	9
7. EMISSION TEST	10
7.1. <i>CONDUCTED EMISSIONS</i>	<i>10</i>
7.2. <i>RADIATED EMISSIONS BELOW 1GHZ.....</i>	<i>14</i>

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Artsana USA, Inc.
Address: 1826 William Penn Way, Lancaster, Pennsylvania, 17601
United States

Manufacturer Information


Company Name: Artsana USA, Inc.
Address: 1826 William Penn Way, Lancaster, Pennsylvania, 17601
United States

EUT Information

EUT Name: Chicco Flippable Milk Warmer USA
Model: N0358
Brand: Chicco
Sample Received Date: April 24, 2026
Sample Status: Normal
Sample ID: 9676476
Date of Tested: April 30, 2026 to May 8, 2026


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR Part 15 Subpart B	Pass

Prepared By:



Karl Wu
Engineer Project Associate

Checked By:



Kebo Zhang
Operations Leader

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard FCC 47 CFR Part 15 Subpart B

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules. ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202
---------------------------	---

Note:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Measurement Frequency Range	K	U(dB)
Conducted emissions	0.15 MHz-30 MHz	2	3.49
Radiated emissions below 1GHz	30 MHz-1 GHz	2	4.47
Note1: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.			
Note 2: According to the standard CISPR 16-4-2, the MU for the Conducted emissions from the AC mains power ports using AMN should not exceed 3.8 in range of 9kHz to 150kHz and 3.4 in range of 150kHz to 30MHz. We have considered the test results containing the value of U _{lab} (in dB) for the measurement instrumentation actually used for the measurements.			

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Chicco Flippable Milk Warmer USA
Model	N0358
EUT Classification	Class B
Highest Internal Frequency	Below 30MHz
Ratings	USB Charge Input: DC 5V Built-in Li-ion battery: DC 14.8V

5.2. TEST MODE

Test Mode	Description
M01	Connect the EUT to the AC/DC adapter through USB-C cable to charge the battery
M02	Set the EUT to heating mode while battery-powered
M03	Set the EUT to steam mode while battery-powered

Note: The EUT cannot operate while charging.

5.3. EUT ACCESSORY

Cable	
Description:	USB Cable
Cable Type:	Unshielded without ferrite
Length:	0.61 Meter

5.4. SUPPORT UNITS FOR SYSTEM TEST

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr./Brand	Model/Type No.	Series No.	Note
E-1	Adapter	ZTE	STC-A520A-Z	N/A	UL Support

The following cables were used to form a representative test configuration during the tests.

Item	Type of cable	Shielded Type	Ferrite Core	Length
C-1	USB cable	Unshielded	without ferrite	0,61m

6. MEASURING EQUIPMENT AND SOFTWARE USED

Test Equipment of Conducted emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESR3	101961	Sep. 12, 2025	Sep. 11, 2026
Two-Line V-Network	ROHDE & SCHWARZ	ENV216	101983	Sep. 12, 2025	Sep. 11, 2026
Test Software for Conducted Emission	Farad	EZ-EMC	Ver.UL-3A1	N/A	N/A

Test Equipment of Radiated emissions below 1GHz					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130958	Dec. 13, 2024	Dec. 12, 2027
MXE EMI Receiver	KEYSIGHT	N9038A	MY56400036	Sep. 12, 2025	Sep. 11, 2026
Amplifier	HP	8447F	2944A03683	Sep. 12, 2025	Sep. 11, 2026
Test Software for Radiated Emission	Farad	EZ-EMC	Ver.UL-3A1.3	N/A	N/A

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Sep. 16, 2025	Sep. 15, 2026
Barometer	Yiyi	Baro	N/A	Sep. 19, 2025	Sep. 18, 2026
Attenuator	Agilent	8495B	2814a12853	Sep. 12, 2025	Sep. 11, 2026

7. EMISSION TEST

7.1. CONDUCTED EMISSIONS

LIMITS

Frequency (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79	66	66 - 56 *	56 - 46*
0.50 -5.0	73	60	56	46
5.0 -30.0	73	60	60	50


Note:

- (1). The tighter limit applies at the band edges.
- (2). The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

TEST PROCEDURE

- 1) The testing follows the guideline in ANSI C63.4-2014.
- 2) The EUT was placed on the top of a rotating table 0.8 meters above the horizontal ground plane and being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- 3) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- 4) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- 5) Cables of hand-operated devices, such as keyboards and mice, shall be placed as for normal used.
- 6) LISN at least 80 cm from nearest part of EUT chassis.
- 7) Conducted emissions from the EUT measured in the frequency range between 0.15MHz and 30MHz using CISPR Quasi-Peak and average detector mode, resolution bandwidth set 9kHz.

TEST SETUP

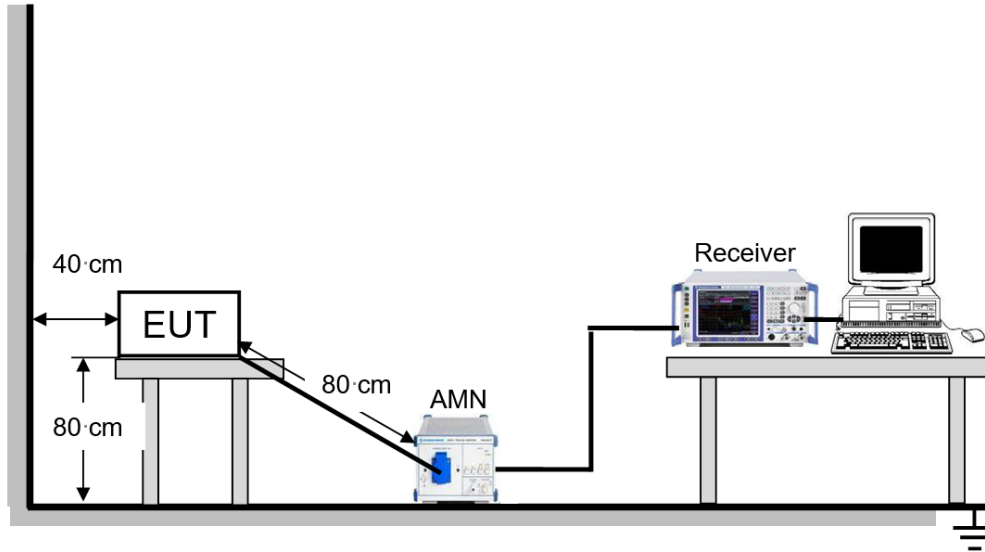

TEST ENVIRONMENT

Temperature	23.7°C	Relative Humidity	60%
Atmosphere Pressure	101kPa		

TEST DATE / ENGINEER


Test Date	April 30, 2026	Test By	Andy Xiong
-----------	----------------	---------	------------

TEST MODE

Pre-test Mode:	M01
Final Test Mode:	M01

TEST RESULTS

Test Mode:	M01	Line:	Line
Test Voltage:	AC 120V_60Hz (Adapter Input)		

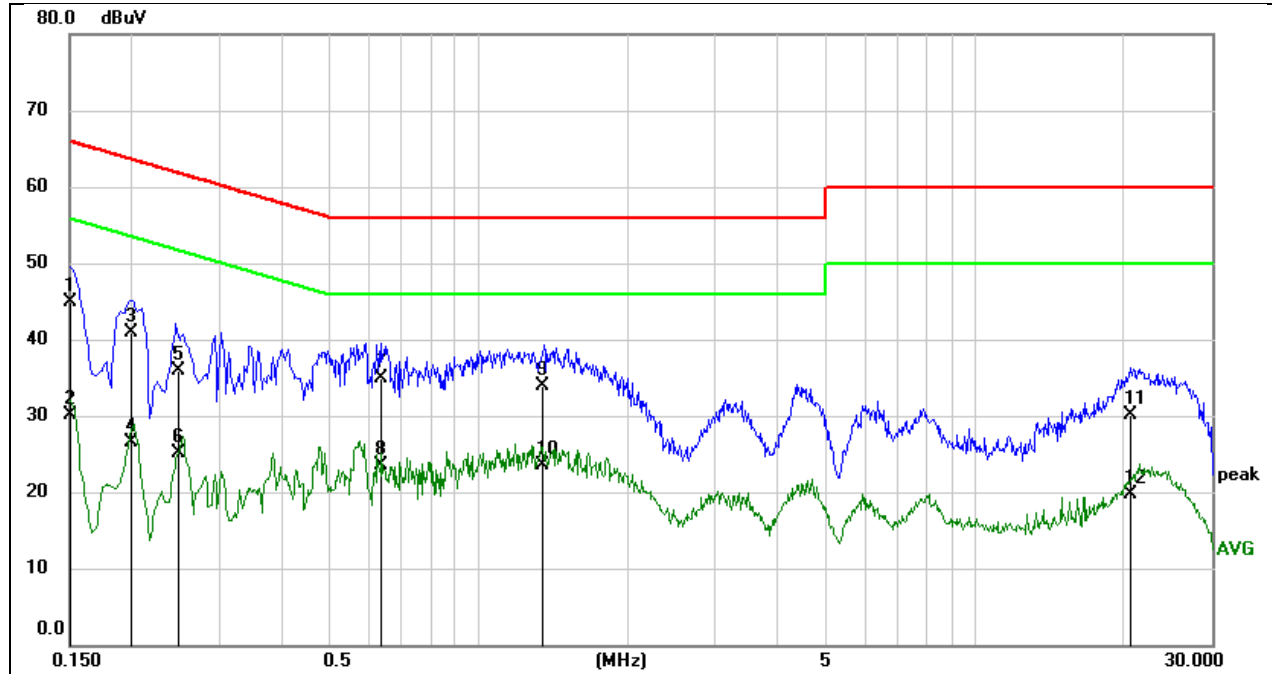


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1511	34.99	9.87	44.86	65.94	-21.08	QP
2	0.1511	20.19	9.87	30.06	55.94	-25.88	AVG
3	0.2004	31.19	9.67	40.86	63.59	-22.73	QP
4	0.2004	16.89	9.67	26.56	53.59	-27.03	AVG
5	0.2494	26.21	9.69	35.90	61.78	-25.88	QP
6	0.2494	15.45	9.69	25.14	51.78	-26.64	AVG
7	0.6351	25.19	9.66	34.85	56.00	-21.15	QP
8	0.6351	13.78	9.66	23.44	46.00	-22.56	AVG
9	1.3463	23.96	9.88	33.84	56.00	-22.16	QP
10	1.3463	13.58	9.88	23.46	46.00	-22.54	AVG
11	20.6017	19.72	10.37	30.09	60.00	-29.91	QP
12	20.6017	9.31	10.37	19.68	50.00	-30.32	AVG

Remark:

1. Result = Reading +Correct (Insertion Loss + Cable Loss + Attenuator Factor)
2. Margin = Result - Limit

Test Mode:	M01	Line:	Neutral
Test Voltage:	AC 120V_60Hz (Adapter Input)		

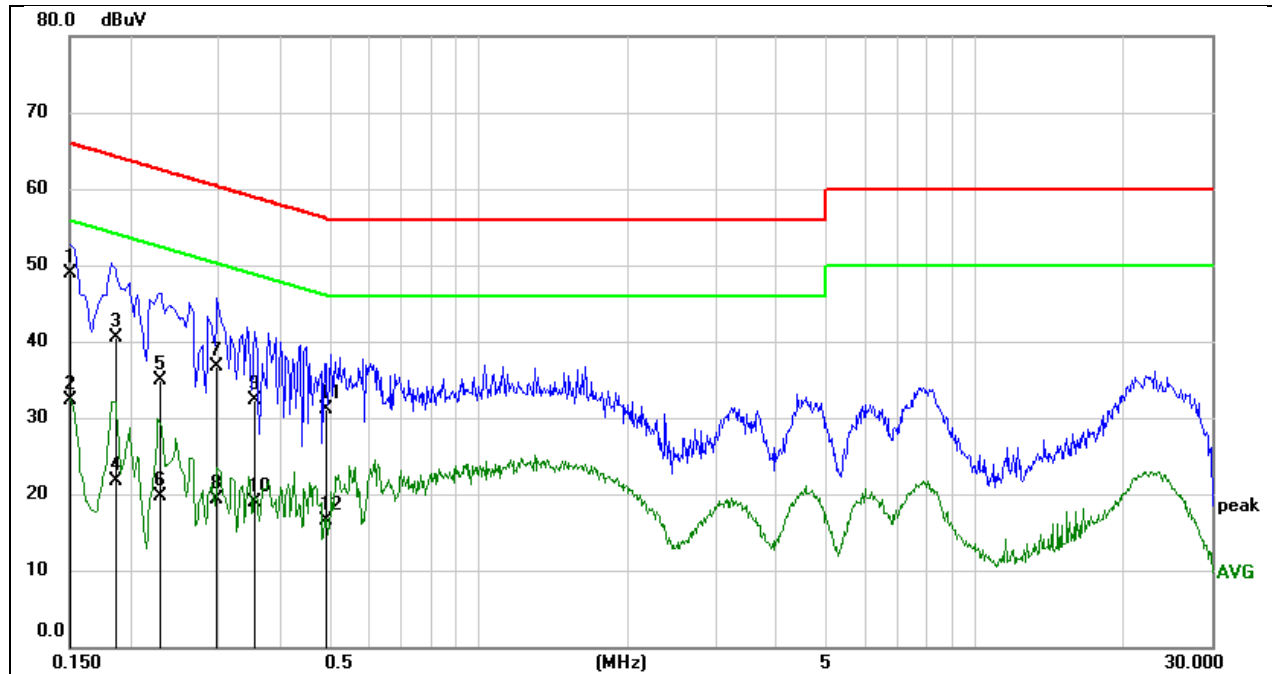

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1505	39.41	9.57	48.98	65.97	-16.99	QP
2	0.1505	22.76	9.57	32.33	55.97	-23.64	AVG
3	0.1866	30.90	9.57	40.47	64.19	-23.72	QP
4	0.1866	12.05	9.57	21.62	54.19	-32.57	AVG
5	0.2270	25.30	9.58	34.88	62.56	-27.68	QP
6	0.2270	10.14	9.58	19.72	52.56	-32.84	AVG
7	0.2940	27.18	9.61	36.79	60.41	-23.62	QP
8	0.2940	9.78	9.61	19.39	50.41	-31.02	AVG
9	0.3535	22.70	9.63	32.33	58.88	-26.55	QP
10	0.3535	9.29	9.63	18.92	48.88	-29.96	AVG
11	0.4943	21.43	9.69	31.12	56.10	-24.98	QP
12	0.4943	6.76	9.69	16.45	46.10	-29.65	AVG

Remark:

1. Result = Reading +Correct (Insertion Loss + Cable Loss + Attenuator Factor)
2. Margin = Result - Limit

7.2. RADIATED EMISSIONS BELOW 1GHZ

LIMITS

Frequency (MHz)	Field strength (dBuV/m@ 3 m)	
	Class A	Class B
30 - 88	49.5	40
88 - 216	53.9	43.5
216 - 960	56.9	46
Above 960	60	54

Note: The tighter limit applies at the band edges


TEST PROCEDURE

- 1) The testing follows the guidelines in ANSI C63.4-2014.
- 2) The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3) The EUT was placed on a turntable with 80cm above ground.
- 4) The EUT was set 3 meters from the interference receiving antenna, test antenna mast is remotely controlled and can be varied in height from 1m to 4m.
- 5) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- 6) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- 7) Cables of hand-operated devices, such as keyboards and mice, shall be placed as for normal used.
- 8) For measurement below 1 GHz, the initial step in collecting radiated emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

The setting of the spectrum analyser

RBW	100kHz
VBW	300kHz
Detector	Peak / Quasi Peak
Trace	Max hold

TEST SETUP

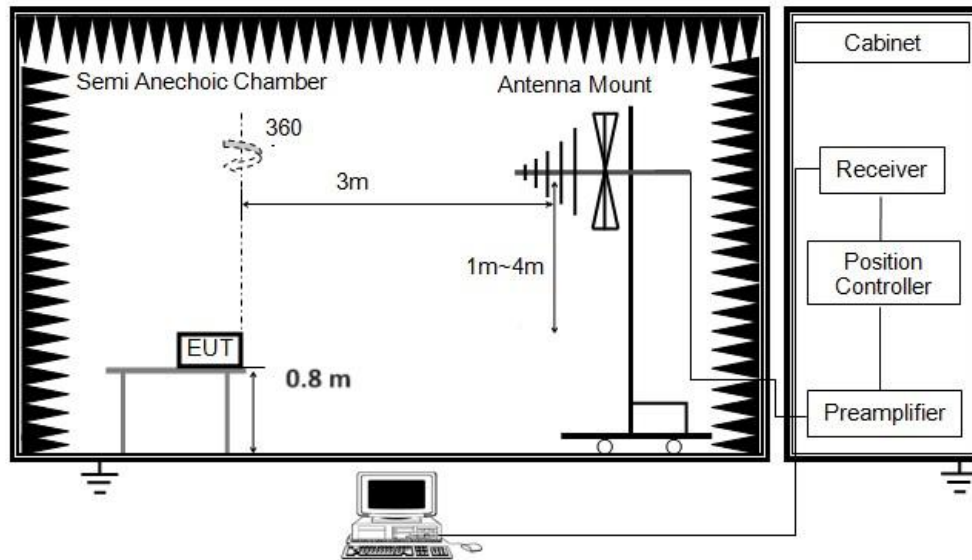

Below 1 GHz and above 30 MHz

TEST ENVIRONMENT

Temperature	22.3°C	Relative Humidity	59%
Atmosphere Pressure	101kPa		

TEST DATE / ENGINEER

Test Date	May 8, 2026	Test By	Zhenlang Li
-----------	-------------	---------	-------------


TEST MODE

Pre-test Mode:	M01 ~ M03
Final Test Mode:	M01

Note: All test modes had been tested, but only the worst data recorded in the report.

TEST RESULTS

Test Mode:	M01	Polarity:	Horizontal
Test Voltage:	AC 120V_60Hz (Adapter Input)		

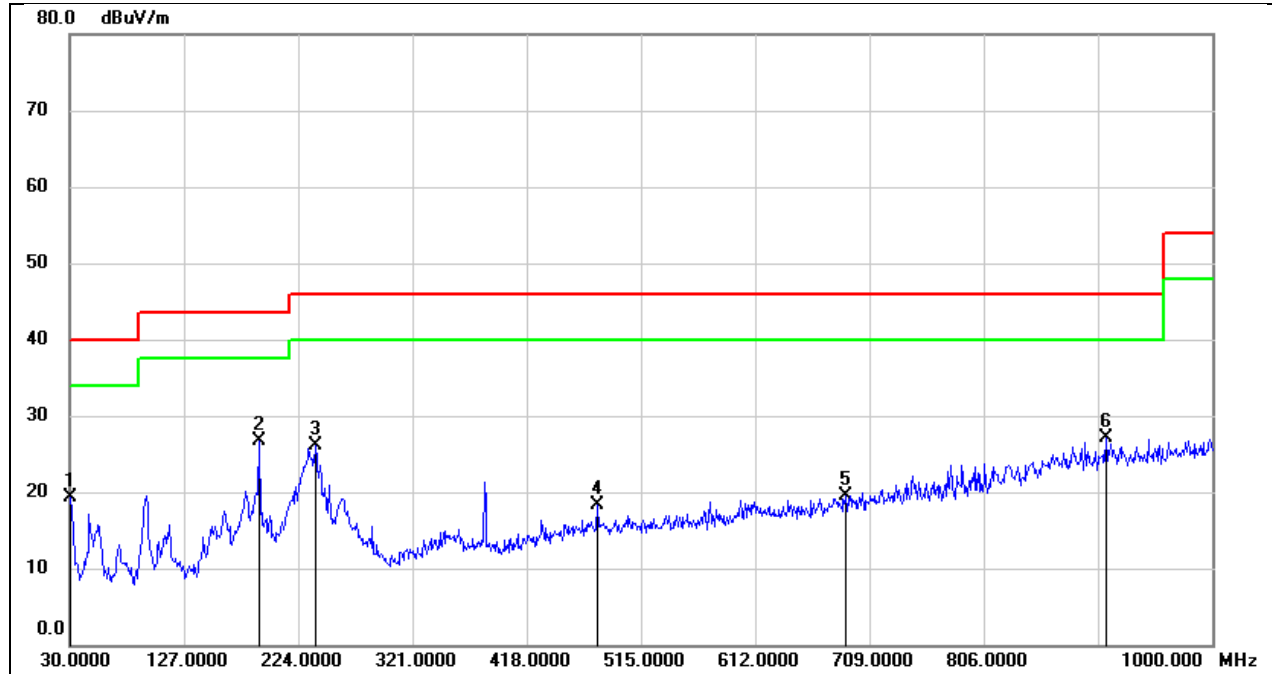

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	33.83	-14.58	19.25	40.00	-20.75	Peak*
2	191.0200	38.84	-12.10	26.74	43.50	-16.76	Peak*
3	238.5500	40.07	-14.05	26.02	46.00	-19.98	Peak*
4	478.1400	25.80	-7.53	18.27	46.00	-27.73	Peak*
5	688.6300	23.87	-4.33	19.54	46.00	-26.46	Peak*
6	909.7900	27.58	-0.52	27.06	46.00	-18.94	Peak*


Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)

2. Margin = Result - Limit

* If the peak values are less than the QP limit, the peak result is deemed to comply with QP limit.

Test Mode:	M01	Polarity:	Vertical
Test Voltage:	AC 120V_60Hz (Adapter Input)		

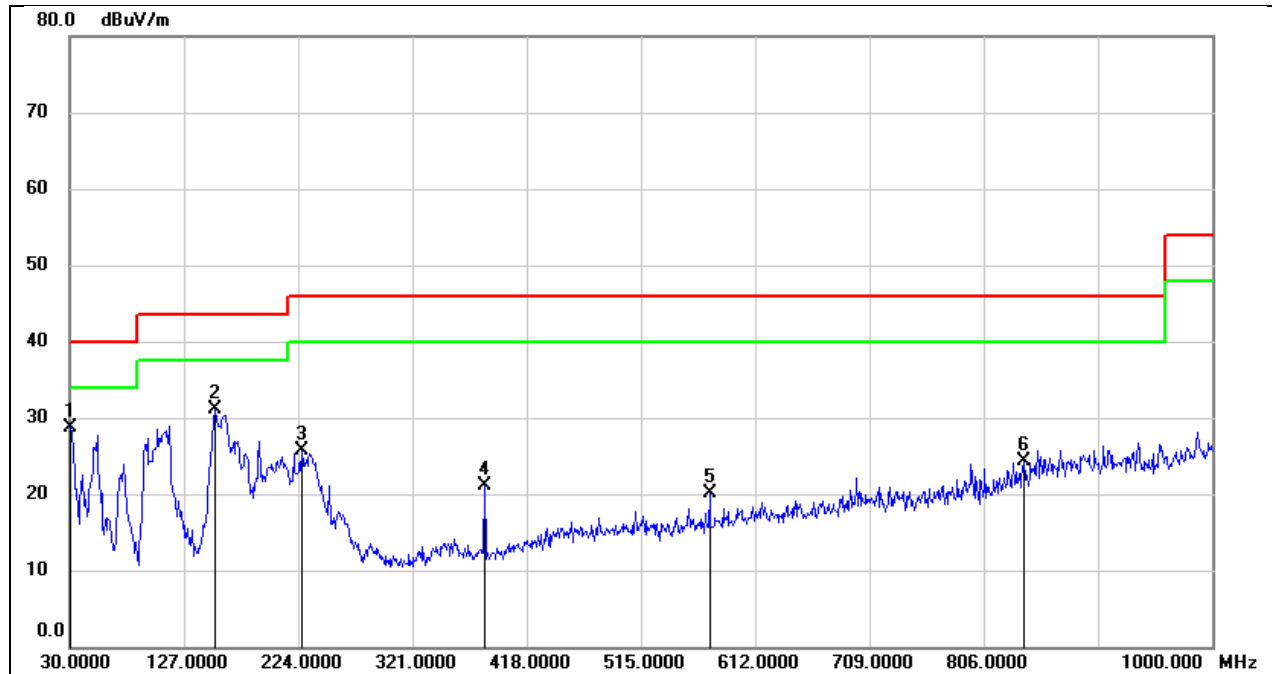

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	43.34	-14.58	28.76	40.00	-11.24	Peak*
2	153.1900	44.38	-13.35	31.03	43.50	-12.47	Peak*
3	226.9100	39.19	-13.49	25.70	46.00	-20.30	Peak*
4	382.1099	30.60	-9.53	21.07	46.00	-24.93	Peak*
5	573.2000	26.38	-6.18	20.20	46.00	-25.80	Peak*
6	839.9500	25.99	-1.63	24.36	46.00	-21.64	Peak*

Remark:

1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)

2. Margin = Result - Limit

* If the peak values are less than the QP limit, the peak result is deemed to comply with QP limit.

END OF REPORT