Appendix A: Test Results of Bluetooth BR & EDR mode

APPENDIX A: TEST RESULTS OF BLUETOOTH BR & EDR MODE **1**
APPENDIX A.1: TEST RESULTS OF 99% BANDWIDTH 2
APPENDIX A.2: TEST RESULTS OF 20DB BANDWIDTH 5
APPENDIX A.3: TEST RESULTS OF CARRIER FREQUENCY SEPARATION 8
APPENDIX A.4: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY 9
APPENDIX A.5: TEST RESULTS OF TIME OF OCCUPANCY 10
APPENDIX A.6: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHZ BANDWIDTH 15
Band Edge *15*
Conducted Emissions *19*
APPENDIX A.7: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS 26
30 MHz - 1GHz *26*
1GHz - 18GHz *28*
APPENDIX A.8: TEST RESULTS OF RADIATED EMISSIONS IN SIMULTANEOUS MODE 40
APPENDIX A.9: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS 46

Appendix A.1: Test Results of 99% Bandwidth

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.92219	2401.5361	2402.4583	---	---
		2441	0.92197	2440.5361	2441.4581	---	---
		2480	0.91991	2479.5360	2480.4559	---	---
3DH5	Ant1	2402	1.2332	2401.3616	2402.5948	---	---
		2441	1.2352	2440.3602	2441.5954	---	---
		2480	1.2356	2479.3604	2480.5960	---	---

DH5_Ant1_2402

DH5_Ant1_2441

DH5_Ant1_2480

3DH5_Ant1_2402

3DH5_Ant1_2441

3DH5_Ant1_2480

Appendix A.2: Test Results of 20dB Bandwidth

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	1.029	2401.457	2402.486	---	---
		2441	1.032	2440.454	2441.486	---	---
		2480	1.032	2479.454	2480.486	---	---
3DH5	Ant1	2402	1.323	2401.310	2402.633	---	---
		2441	1.326	2440.307	2441.633	---	---
		2480	1.332	2479.307	2480.639	---	---

DH5_Ant1_2402

DH5_Ant1_2441

DH5_Ant1_2480

3DH5_Ant1_2402

3DH5_Ant1_2441

3DH5_Ant1_2480

Appendix A.3: Test Results of Carrier Frequency Separation

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.078	≥1.032	PASS
3DH5	Ant1	Hop	1.442	≥1.332	PASS

DH5_Ant1_Hop

3DH5_Ant1_Hop

Appendix A.4: Test Results of Number of Hopping Frequency

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

DH5_Ant1_Hop

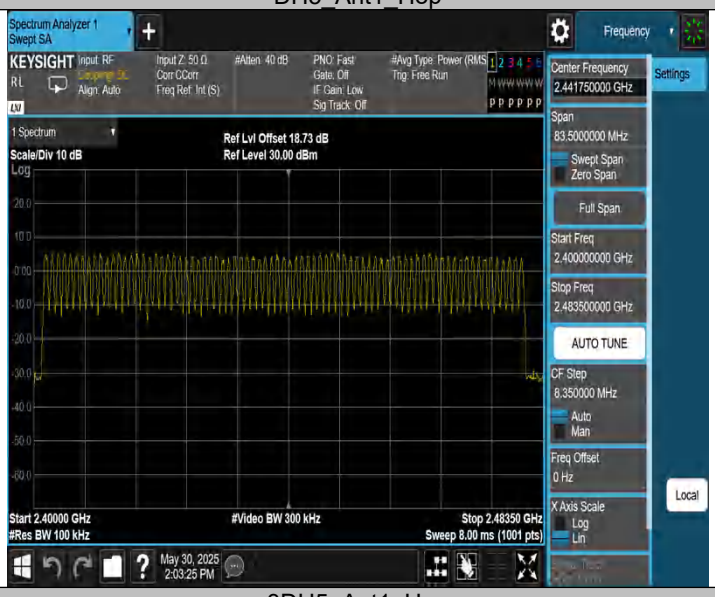

3DH5_Ant1_Hop

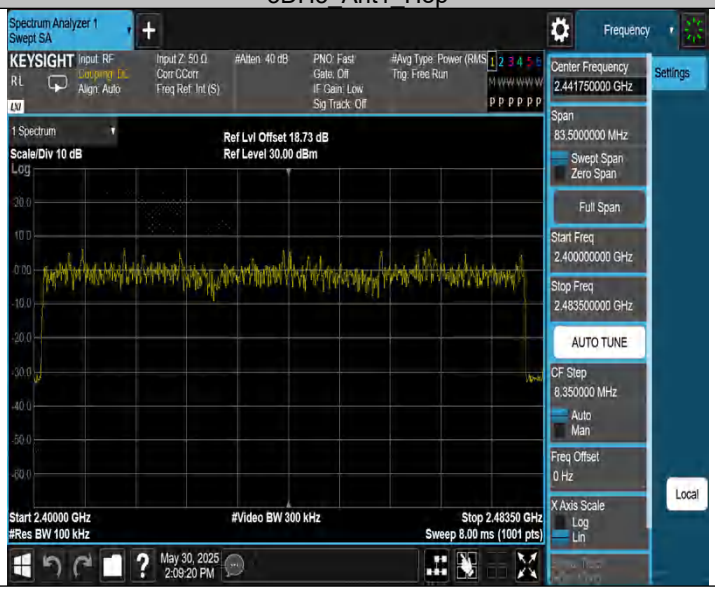

Appendix A.5: Test Results of Time of Occupancy

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.381	315	0.12	≤0.4	PASS
DH3	Ant1	Hop	1.637	153	0.25	≤0.4	PASS
DH5	Ant1	Hop	2.885	109	0.314	≤0.4	PASS
3DH1	Ant1	Hop	0.389	314	0.122	≤0.4	PASS
3DH3	Ant1	Hop	1.640	157	0.257	≤0.4	PASS
3DH5	Ant1	Hop	2.892	129	0.373	≤0.4	PASS

DH1_Ant1_Hop

DH3_Ant1_Hop

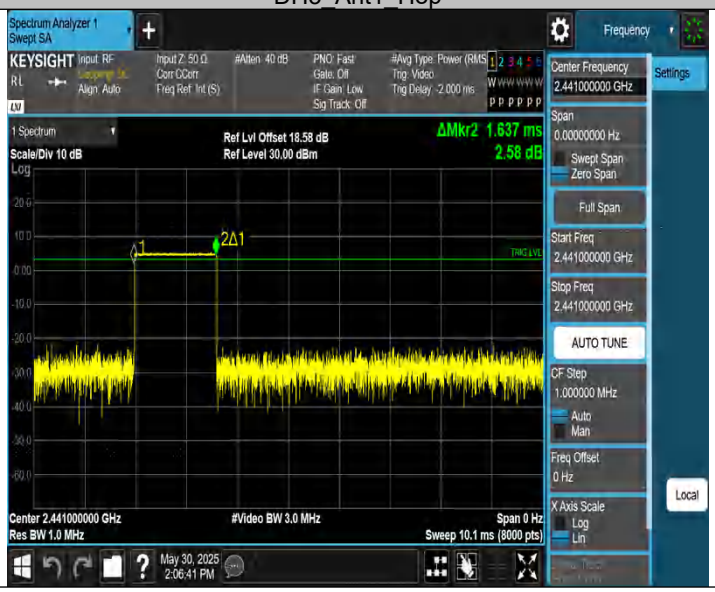

DH5_Ant1_Hop

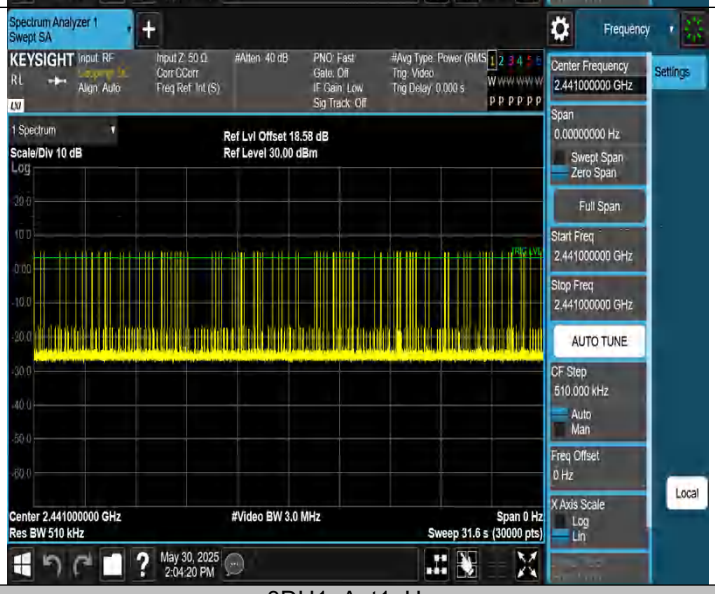

3DH1_Ant1_Hop

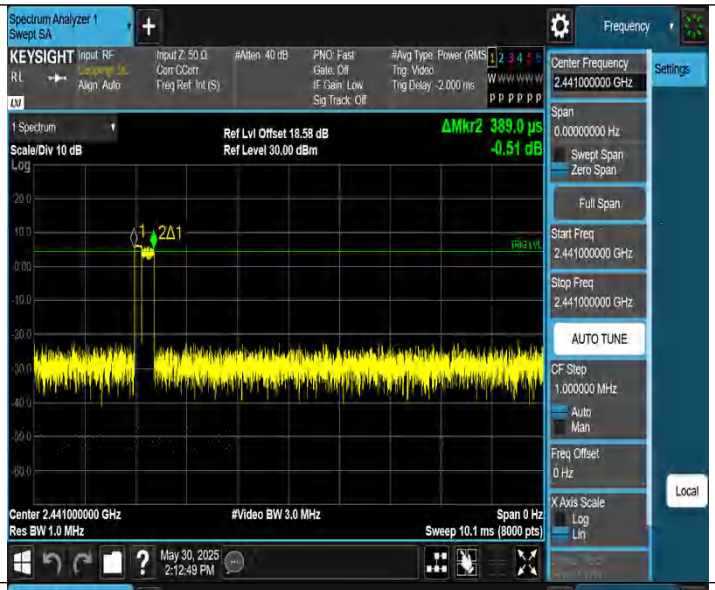

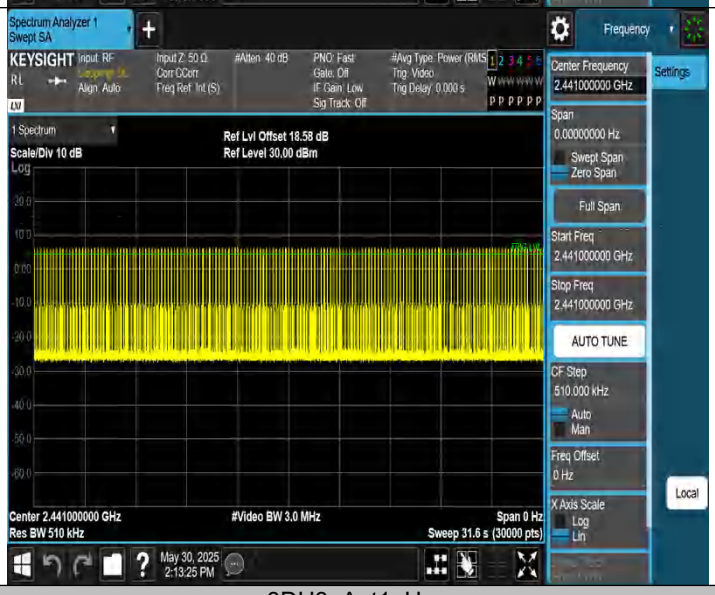

3DH3_Ant1_Hop

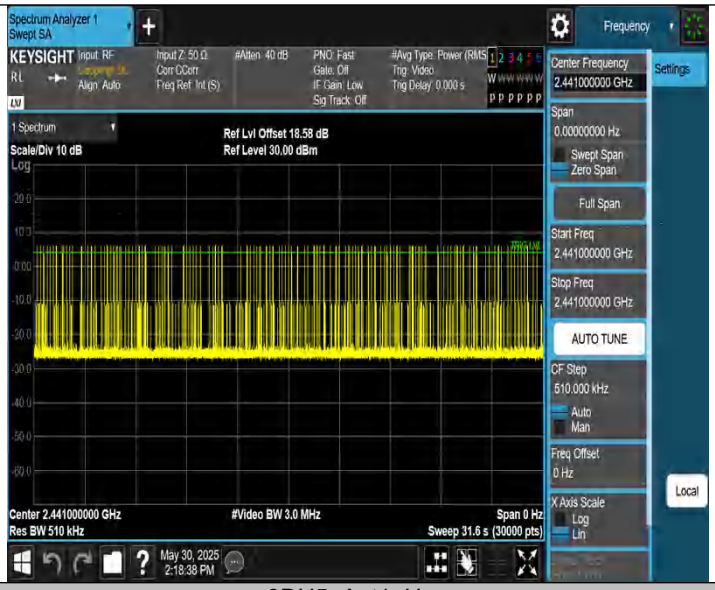

3DH5_Ant1_Hop

Appendix A.6: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Band Edge

TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	5.67	-43.61	≤-14.33	PASS
		High	2480	4.86	-43.55	≤-15.14	PASS
3DH5	Ant1	Low	2402	1.91	-41.90	≤-18.09	PASS
		High	2480	1.20	-41.86	≤-18.80	PASS
DH5	Ant1	Hopping	2402	4.35	-42.24	≤-15.65	PASS
		Hopping	2480	3.49	-43.44	≤-16.51	PASS
3DH5	Ant1	Hopping	2402	1.13	-42.69	≤-18.87	PASS
		Hopping	2480	1.19	-43.46	≤-18.81	PASS

DH5_Ant1_Low_2402

DH5_Ant1_High_2480

3DH5_Ant1_Low_2402

3DH5_Ant1_High_2480

DH5_Ant1_Hopping_2402

DH5_Ant1_Hopping_2480

3DH5_Ant1_Hopping_2402

3DH5_Ant1_Hopping_2480

Conducted Emissions

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	5.37	5.37	---	PASS
			30~1000	5.37	-41.71	≤-14.63	PASS
			1000~26500	5.37	-32.09	≤-14.63	PASS
		2441	Reference	5.08	5.08	---	PASS
			30~1000	5.08	-41.66	≤-14.92	PASS
			1000~26500	5.08	-32.51	≤-14.92	PASS
		2480	Reference	4.65	4.65	---	PASS
			30~1000	4.65	-41.21	≤-15.35	PASS
			1000~26500	4.65	-31.72	≤-15.35	PASS
3DH5	Ant1	2402	Reference	1.58	1.58	---	PASS
			30~1000	1.58	-41.73	≤-18.42	PASS
			1000~26500	1.58	-31.72	≤-18.42	PASS
		2441	Reference	1.44	1.44	---	PASS
			30~1000	1.44	-40.34	≤-18.56	PASS
			1000~26500	1.44	-32.36	≤-18.56	PASS
		2480	Reference	0.85	0.85	---	PASS
			30~1000	0.85	-41.89	≤-19.15	PASS
			1000~26500	0.85	-32.47	≤-19.15	PASS

DH5_Ant1_2402_0~Reference

DH5_Ant1_2402_30~1000

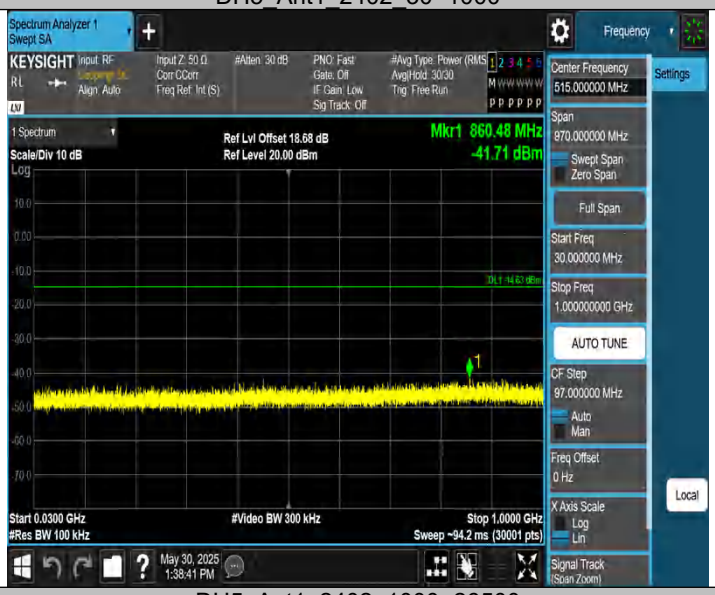

DH5_Ant1_2402_1000~26500

DH5_Ant1_2441_0~Reference

DH5_Ant1_2441_30~1000

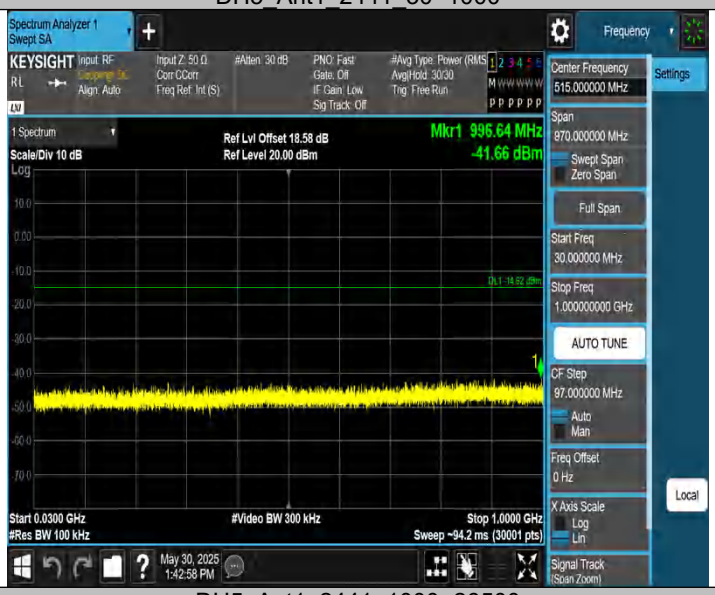

DH5_Ant1_2441_1000~26500

DH5_Ant1_2480_0~Reference

DH5_Ant1_2480_30~1000

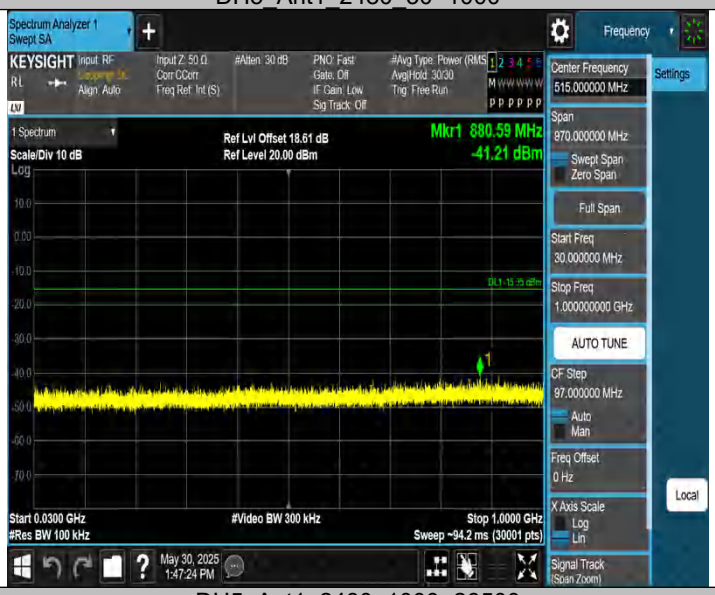

DH5_Ant1_2480_1000~26500

3DH5_Ant1_2402_0~Reference

3DH5_Ant1_2402_30~1000

3DH5_Ant1_2402_1000~26500

3DH5_Ant1_2441_0~Reference

3DH5_Ant1_2441_30~1000

3DH5_Ant1_2441_1000~26500

3DH5_Ant1_2480_0~Reference

3DH5_Ant1_2480_30~1000

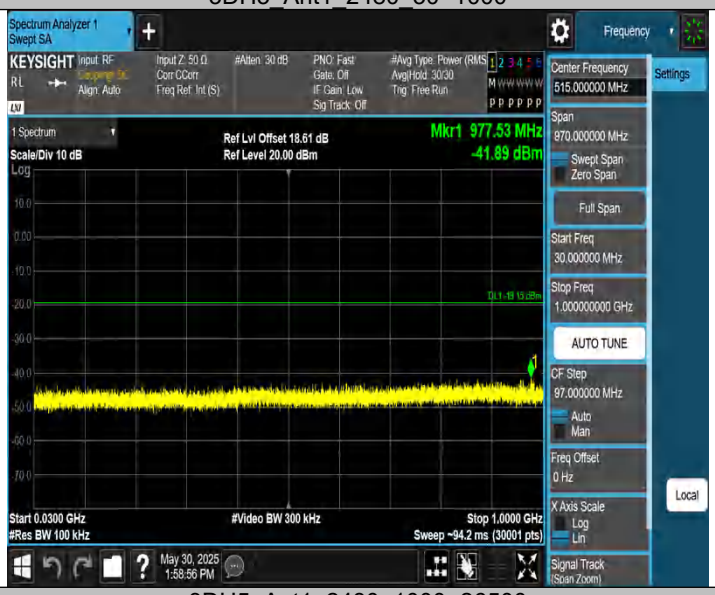

3DH5_Ant1_2480_1000~26500

Appendix A.7: Test Results of Radiated Spurious Emissions

Note:
1) This testing was carried out on different modulations, but only the worst case was presented in this report.
2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.
3) Full test performed on the right earbud and worst-case re-checked for the left earbud.

30 MHz - 1GHz

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

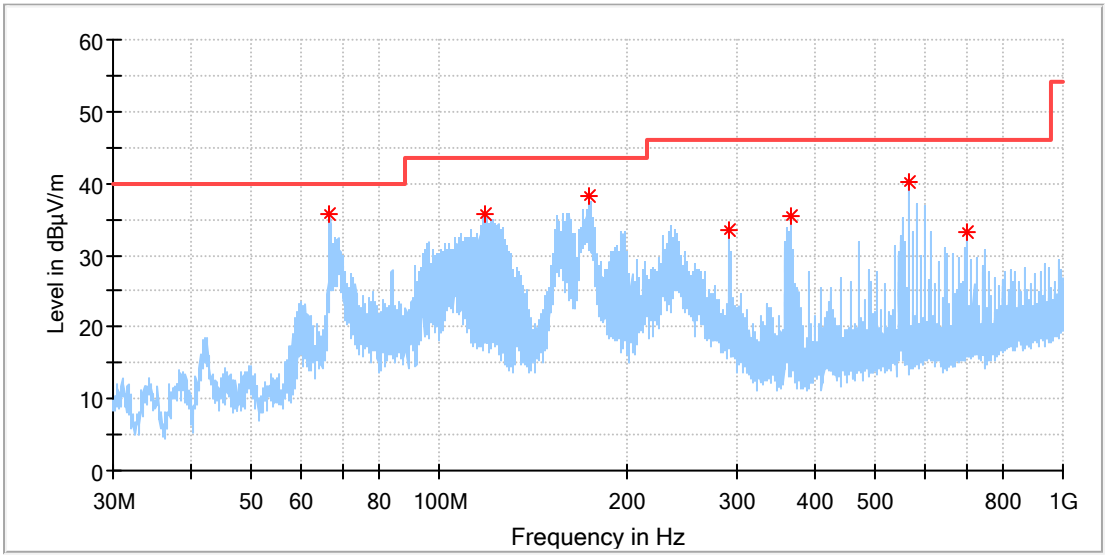

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
66.785385	35.74	40.00	4.26	100.0	H	47.0	-20.9
118.792308	35.60	43.50	7.90	100.0	H	252.0	-20.6
173.448077	38.29	43.50	5.21	100.0	H	26.0	-21.1
291.974615	33.61	46.00	12.39	100.0	H	357.0	-16.5
367.410769	35.39	46.00	10.61	100.0	H	66.0	-14.5
568.014231	40.14	46.00	5.86	100.0	H	130.0	-10.4
700.046154	33.08	46.00	12.92	100.0	H	0.0	-7.9

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

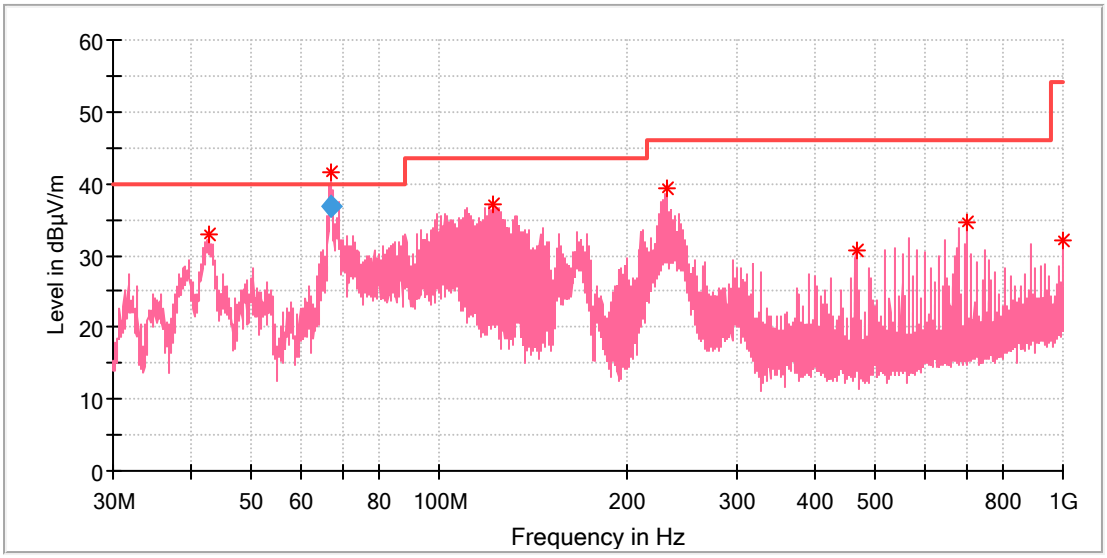

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.759231	32.99	40.00	7.01	100.0	V	319.0	-19.5
67.245962	41.62	40.00	-1.62	100.0	V	24.0	-21.0
121.739615	37.23	43.50	6.27	100.0	V	355.0	-21.1
231.610769	39.39	46.00	6.61	100.0	V	36.0	-18.1
465.791154	30.60	46.00	15.40	100.0	V	349.0	-12.4
700.046154	34.70	46.00	11.30	100.0	V	0.0	-7.9
1000.000000	32.19	54.00	21.81	100.0	V	359.0	-3.4

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
67.245962	36.75	40.00	3.25	100.0	V	24.0	-21.0

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

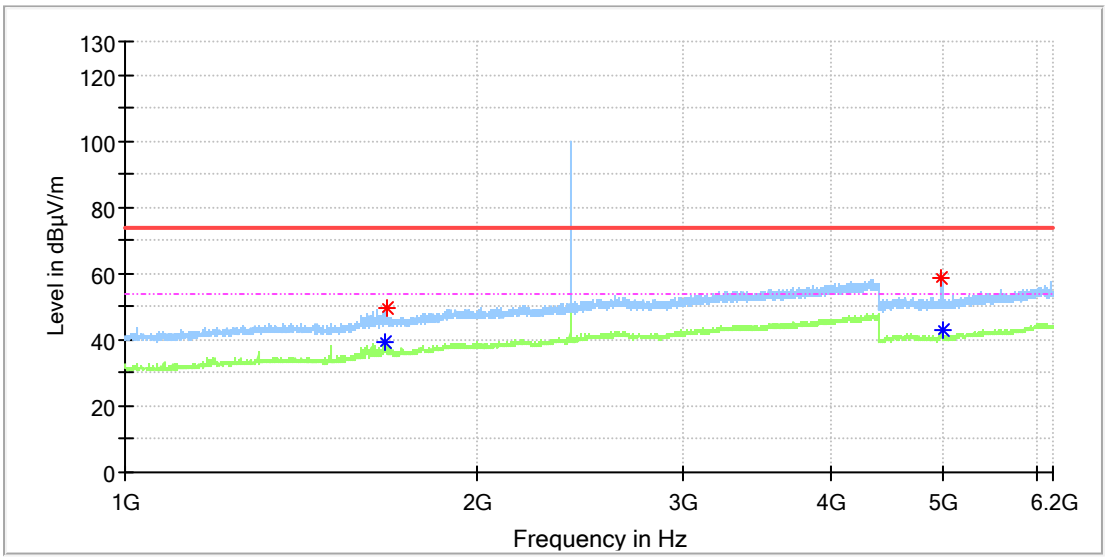

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1664.500000	---	39.12	54.00	14.88	150.0	H	60.0	4.4
1671.000000	49.72	---	74.00	24.29	150.0	H	60.0	4.5
4977.500000	58.64	---	74.00	15.36	150.0	H	221.0	13.3
4996.000000	---	43.11	54.00	10.89	150.0	H	221.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

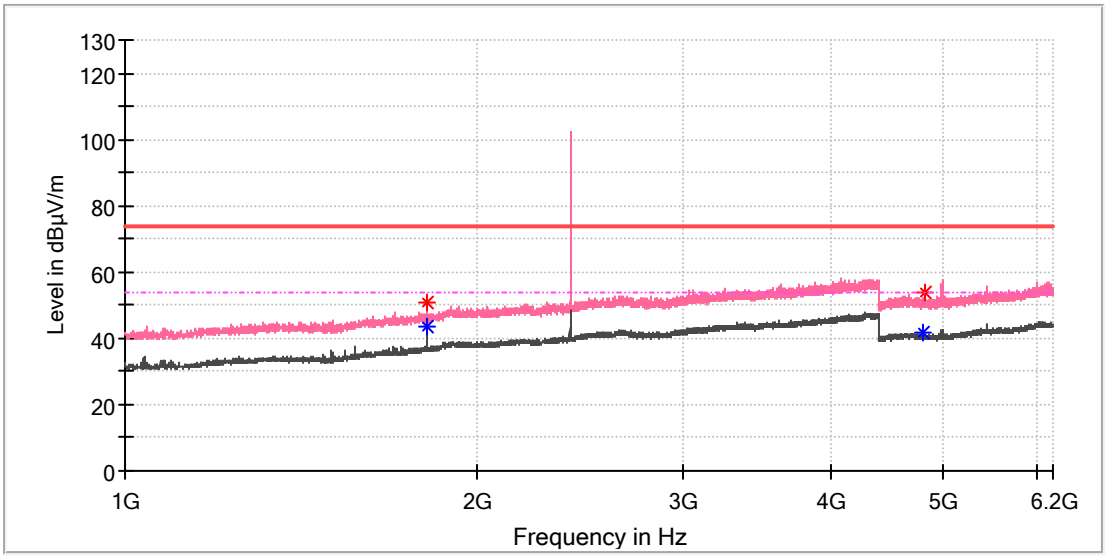

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1811.500000	50.85	---	74.00	23.15	150.0	V	105.0	5.9
1811.500000	---	43.50	54.00	10.50	150.0	V	105.0	5.9
4804.000000	---	41.88	54.00	12.12	150.0	V	27.0	13.3
4813.000000	53.88	---	74.00	20.12	150.0	V	204.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

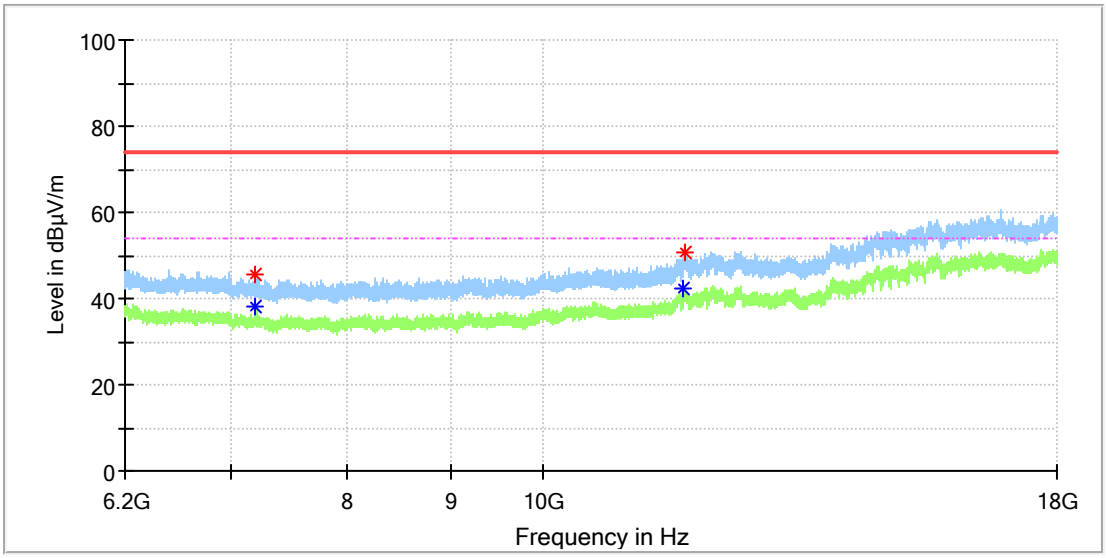

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7199.066667	45.72	---	74.00	28.28	150.0	H	106.0	8.8
7201.033333	---	38.09	54.00	15.91	150.0	H	106.0	8.8
11748.458333	---	42.12	54.00	11.88	150.0	H	331.0	15.4
11766.158333	50.70	---	74.00	23.30	150.0	H	203.0	15.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

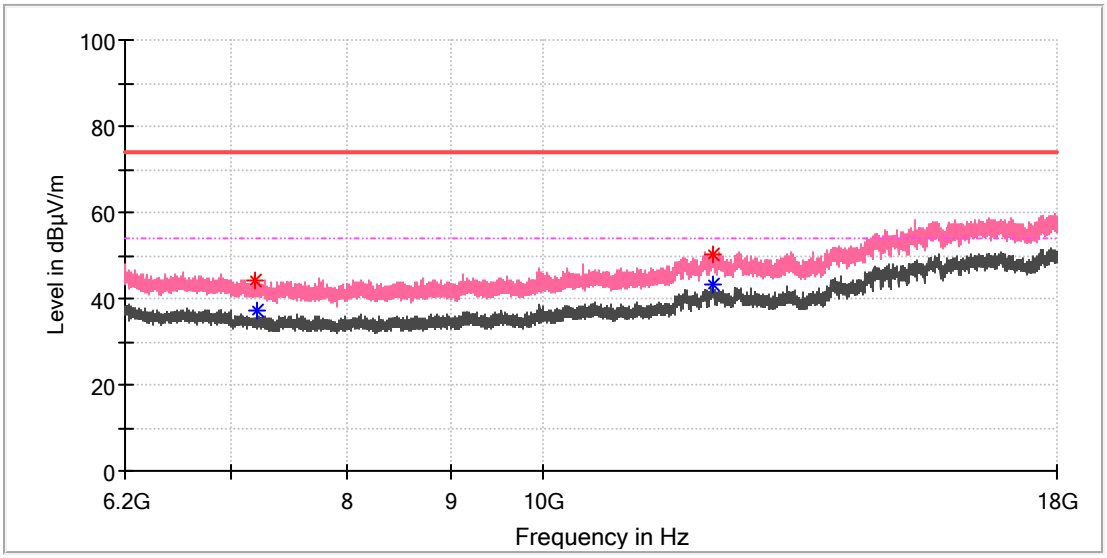

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7191.200000	44.02	---	74.00	29.98	150.0	V	45.0	8.8
7215.783333	---	37.03	54.00	16.97	150.0	V	116.0	8.7
12143.758333	50.41	---	74.00	23.59	150.0	V	304.0	16.6
12147.200000	---	43.20	54.00	10.80	150.0	V	316.0	16.7

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

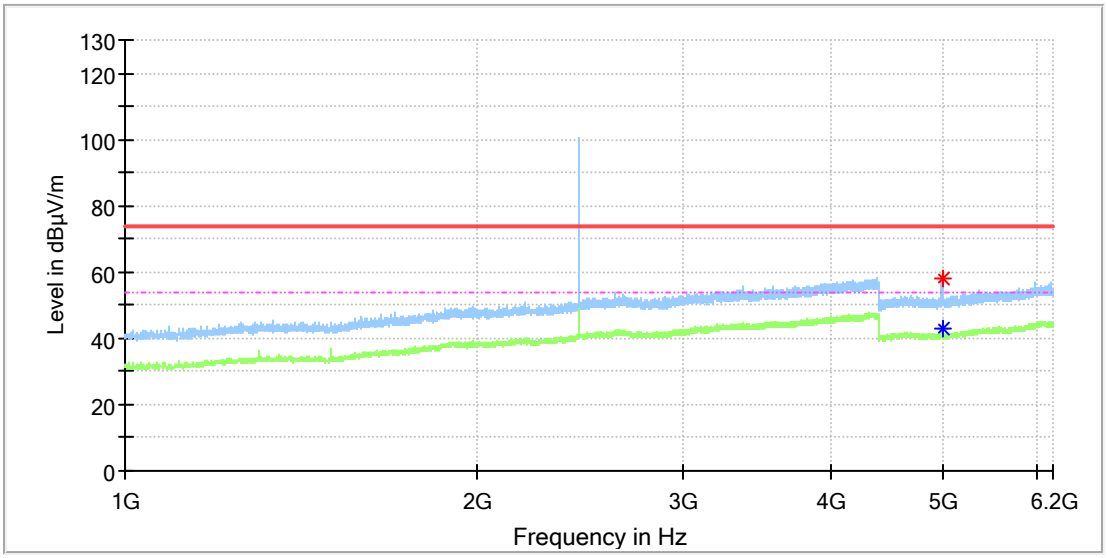

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4997.000000	---	42.76	54.00	11.24	150.0	H	198.0	13.3
4999.000000	58.14	---	74.00	15.87	150.0	H	224.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

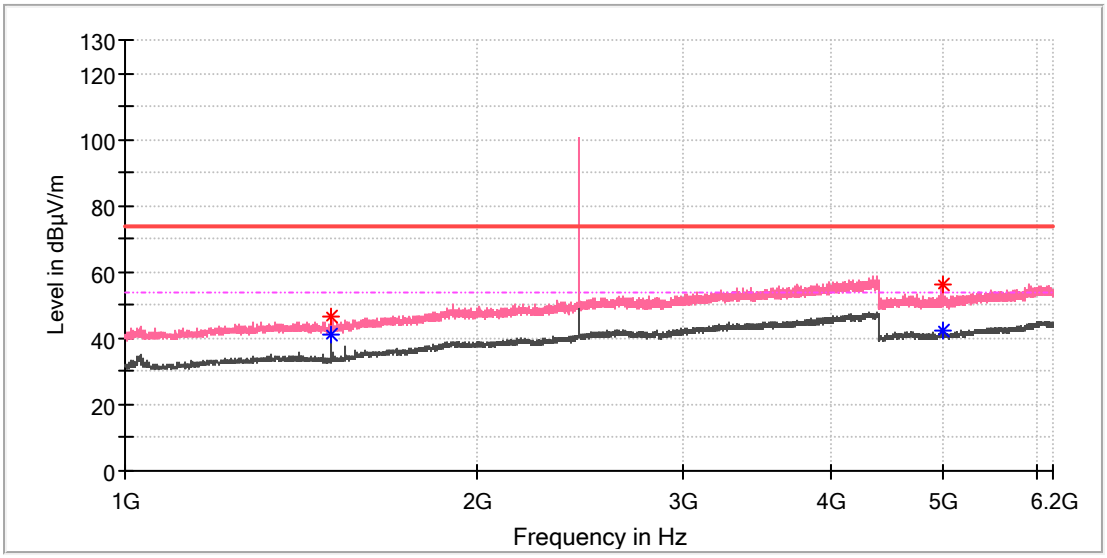

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1500.000000	46.34	---	74.00	27.66	150.0	V	45.0	2.5
1500.000000	---	41.14	54.00	12.86	150.0	V	45.0	2.5
4993.000000	---	42.51	54.00	11.49	150.0	V	2.0	13.3
4997.000000	56.29	---	74.00	17.71	150.0	V	0.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

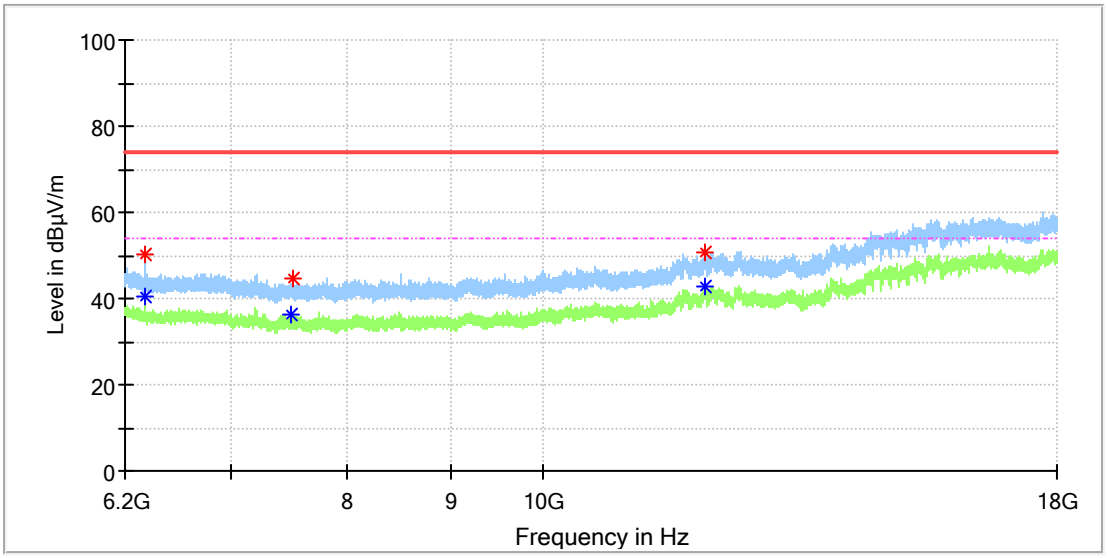

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6341.108333	---	40.59	54.00	13.41	150.0	H	100.0	9.0
6341.600000	50.17	---	74.00	23.83	150.0	H	245.0	9.0
7504.391667	---	36.08	54.00	17.92	150.0	H	0.0	8.7
7510.291667	44.44	---	74.00	29.56	150.0	H	132.0	8.7
12027.725000	50.77	---	74.00	23.23	150.0	H	314.0	15.9
12027.725000	---	43.01	54.00	10.99	150.0	H	314.0	15.9

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

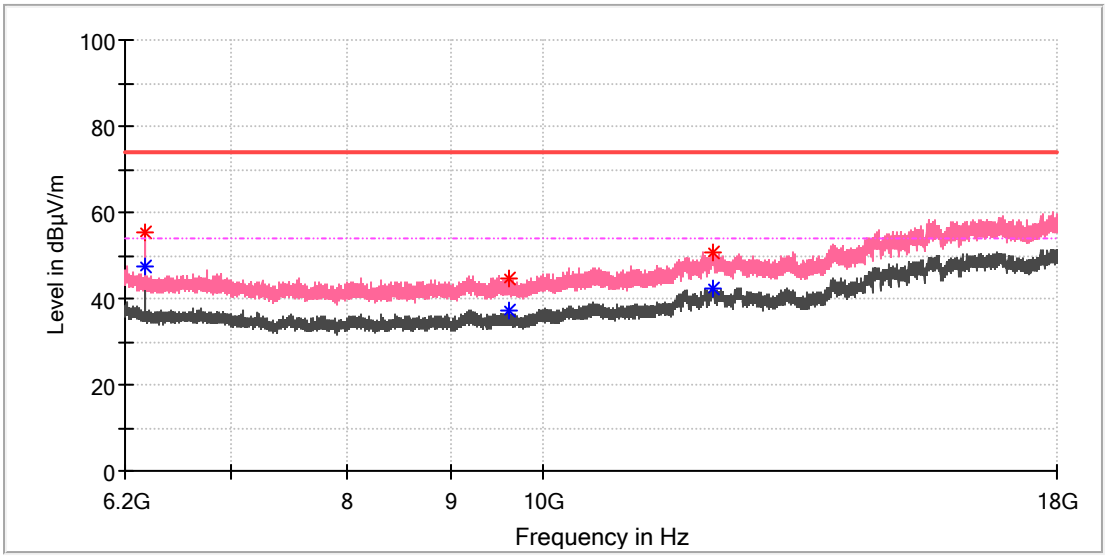

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6342.091667	---	47.38	54.00	6.62	150.0	V	323.0	9.0
6342.583333	55.19	---	74.00	18.81	150.0	V	323.0	9.0
9611.675000	44.49	---	74.00	29.51	150.0	V	0.0	10.4
9613.641667	---	37.40	54.00	16.60	150.0	V	188.0	10.4
12144.741667	50.56	---	74.00	23.44	150.0	V	232.0	16.6
12144.741667	---	42.45	54.00	11.55	150.0	V	232.0	16.6

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

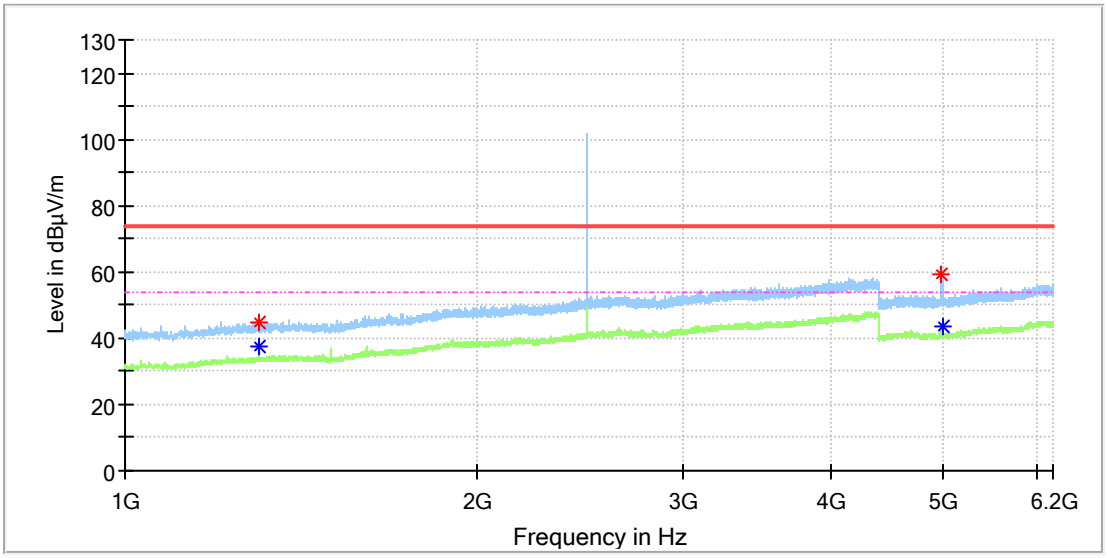

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1300.000000	44.55	---	74.00	29.45	150.0	H	30.0	2.8
1300.000000	---	37.21	54.00	16.79	150.0	H	30.0	2.8
4977.000000	59.39	---	74.00	14.61	150.0	H	253.0	13.3
4994.000000	---	43.31	54.00	10.69	150.0	H	222.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

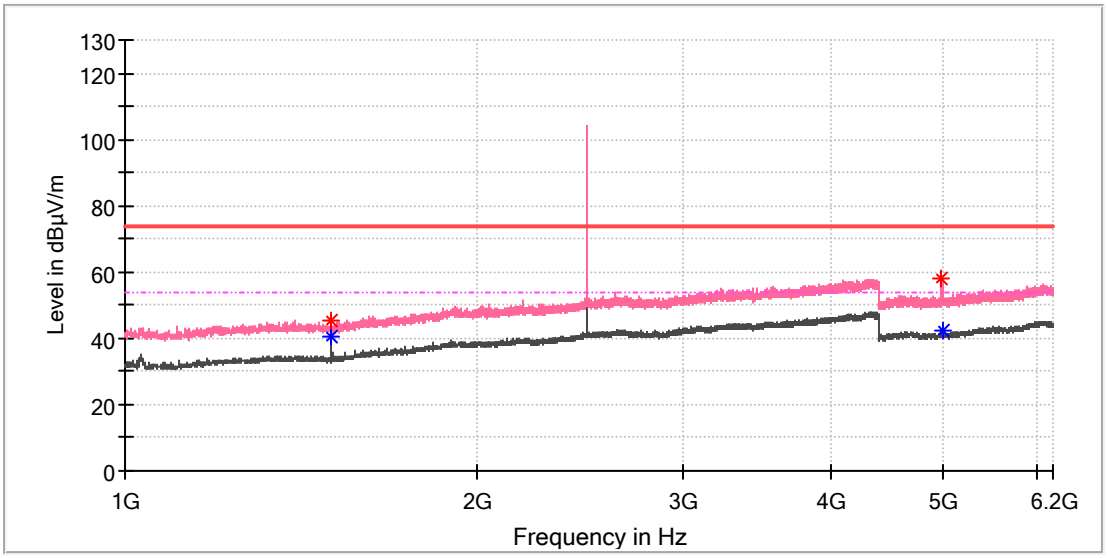

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1499.500000	45.46	---	74.00	28.54	150.0	V	11.0	2.5
1500.000000	---	40.24	54.00	13.76	150.0	V	11.0	2.5
4977.000000	57.89	---	74.00	16.11	150.0	V	357.0	13.3
4993.000000	---	42.52	54.00	11.48	150.0	V	0.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

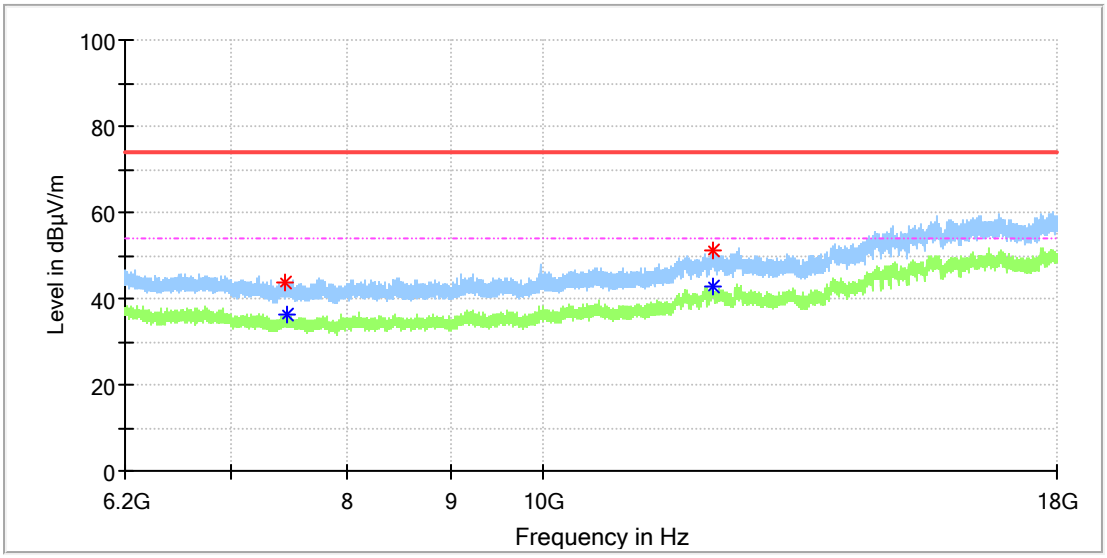

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7450.308333	43.93	---	74.00	30.07	150.0	H	330.0	8.5
7459.158333	---	36.36	54.00	17.64	150.0	H	291.0	8.5
12138.350000	---	42.91	54.00	11.09	150.0	H	359.0	16.4
12145.233333	50.96	---	74.00	23.04	150.0	H	352.0	16.6

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

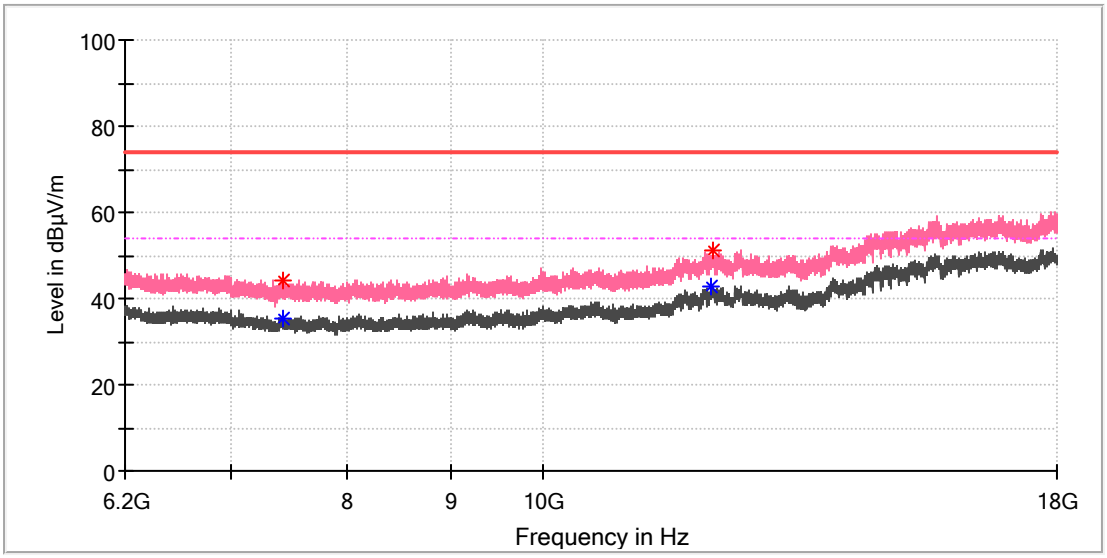

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7431.625000	44.14	---	74.00	29.86	150.0	V	210.0	8.4
7434.083333	---	35.49	54.00	18.51	150.0	V	22.0	8.4
12129.008333	---	42.61	54.00	11.39	150.0	V	33.0	16.2
12136.875000	50.97	---	74.00	23.03	150.0	V	268.0	16.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

Appendix A.8: Test Results of Radiated Emissions in Simultaneous Mode

This device contains the certificated single modules for wireless functions SRD (915MHz Band), Lora and LTE. As per KDB 996369 D01 section 7 and KDB 996369 D02 (Question 12), the EMC testing of the Module in simultaneous transmission operations were performed while integrated into the host.
There is no emissions with increased amplitude and/or on different frequencies are detected in simultaneous transmissions compared to what is reported in the modular grant (that refers to single-transmitter operations testing), the test results for worst-cases listed as below:

Mode: Bluetooth + Lora (915MHz band) +915MHz band SRD+LTE B5

EUT Information

EUT Name:	General-Purpose Robot
Model:	AgiBot A2
Test Mode:	BT+LTE+802.11ah+Lora
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC Part 22
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

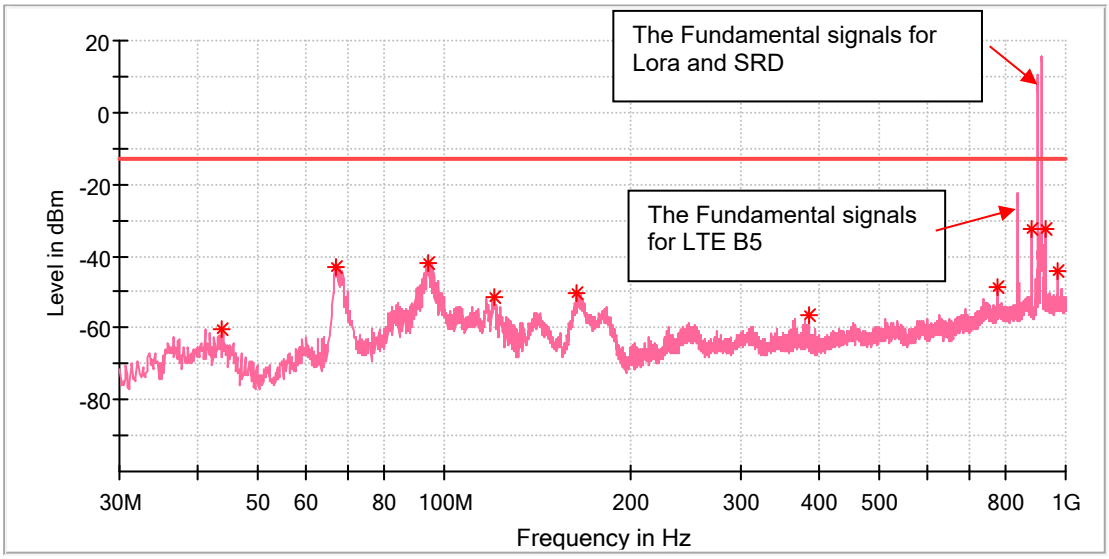

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
43.943750	-60.47	-13.00	47.47	100.0	V	87.0	-124.5
66.738750	-43.08	-13.00	30.08	100.0	V	15.0	-122.7
94.020000	-42.05	-13.00	29.05	100.0	V	208.0	-100.1
120.452500	-51.56	-13.00	38.56	100.0	V	249.0	-115.4
163.496250	-50.24	-13.00	37.24	100.0	V	212.0	-120.3
385.990000	-56.73	-13.00	43.73	100.0	V	112.0	-111.4
775.323750	-48.78	-13.00	35.78	100.0	V	203.0	-102.3
881.660000	-32.68	-13.00	19.68	100.0	V	285.0	-102.4
926.886250	-32.72	-13.00	19.72	100.0	V	21.0	-100.0
967.383750	-44.39	-13.00	31.39	100.0	V	315.0	-100.7

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BT+LTE+802.11ah+Lora
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC Part 22
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

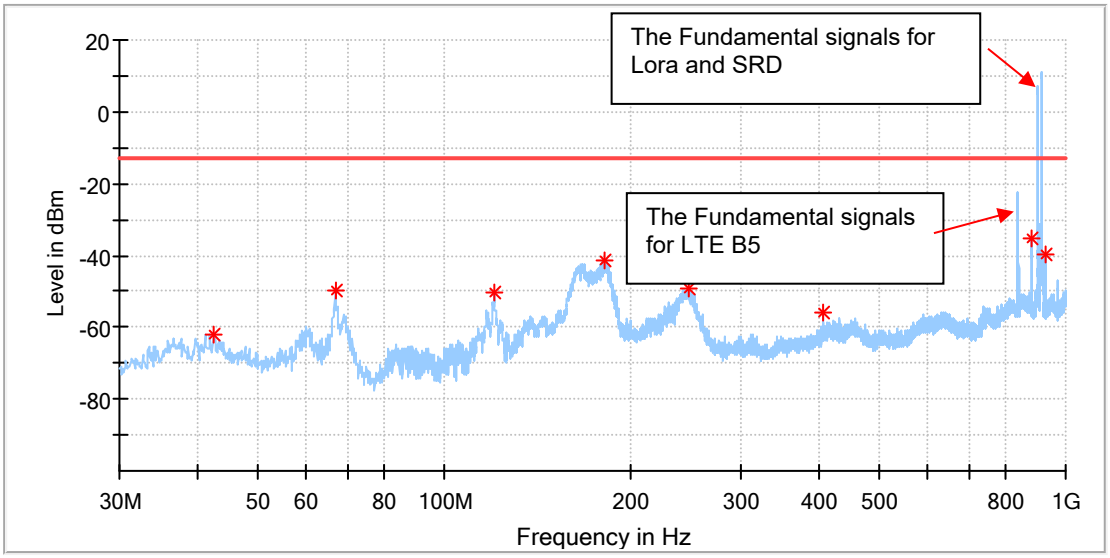

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
42.610000	-61.91	-13.00	48.91	100.0	H	282.0	-112.8
66.738750	-49.84	-13.00	36.84	100.0	H	41.0	-120.6
120.452500	-50.58	-13.00	37.58	100.0	H	212.0	-122.9
180.835000	-41.48	-13.00	28.48	100.0	H	246.0	-118.1
246.673750	-49.14	-13.00	36.14	100.0	H	294.0	-110.0
406.845000	-56.03	-13.00	43.03	100.0	H	103.0	-109.5
881.175000	-35.47	-13.00	22.47	100.0	H	185.0	-102.0
926.037500	-39.73	-13.00	26.73	100.0	H	133.0	-102.5

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BT+LTE+802.11ah+Lora
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC Part 22
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

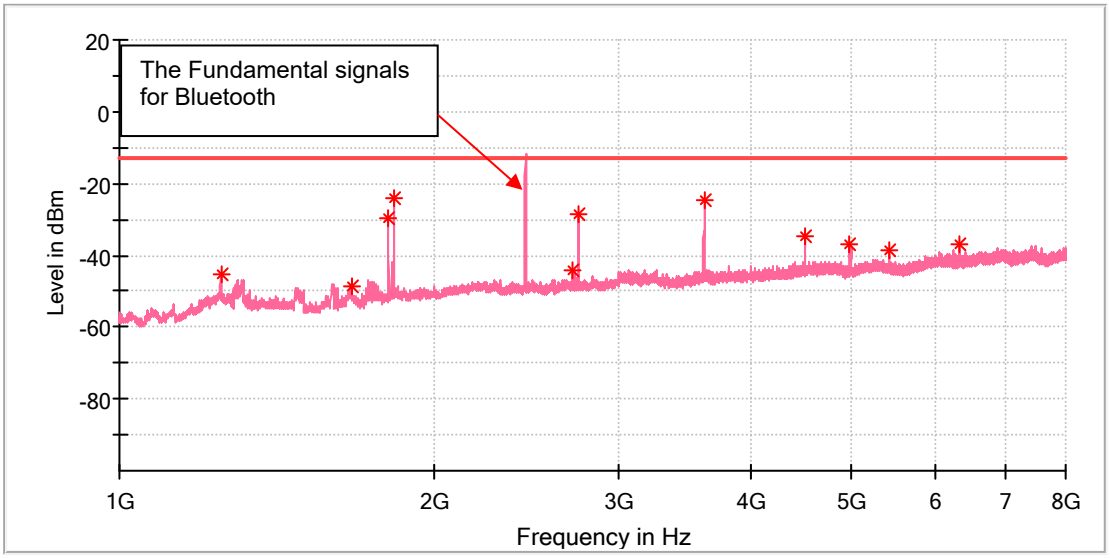

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1249.500000	-45.06	-13.00	32.06	150.0	V	16.0	-90.1
1667.000000	-48.48	-13.00	35.48	150.0	V	152.0	-90.3
1807.500000	-29.70	-13.00	16.71	150.0	V	298.0	-89.0
1830.000000	-23.89	-13.00	10.89	150.0	V	347.0	-88.1
2711.000000	-44.41	-13.00	31.41	150.0	V	335.0	-86.3
2746.000000	-28.46	-13.00	15.46	150.0	V	353.0	-86.0
3614.000000	-24.86	-13.00	11.86	150.0	V	313.0	-83.6
4516.500000	-34.95	-13.00	21.95	150.0	V	263.0	-81.3
4979.500000	-36.99	-13.00	23.99	150.0	V	213.0	-81.5
5421.500000	-38.56	-13.00	25.56	150.0	V	191.0	-80.5
6324.000000	-36.77	-13.00	23.77	150.0	V	213.0	-78.6

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BT+LTE+802.11ah+Lora
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC Part 22
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

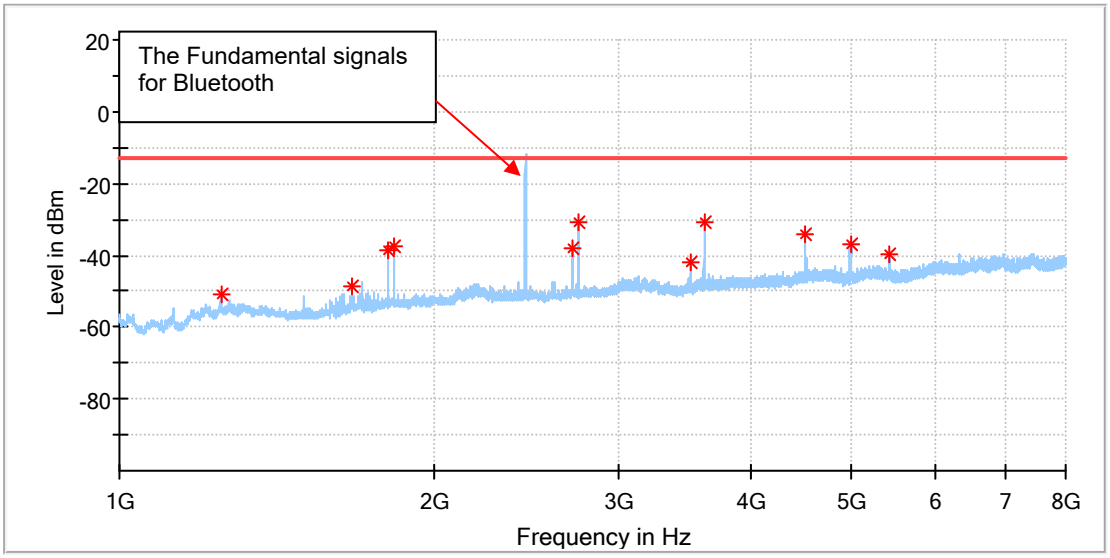

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1250.000000	-50.66	-13.00	37.66	150.0	H	256.0	-92.9
1668.000000	-48.84	-13.00	35.84	150.0	H	81.0	-92.4
1807.000000	-38.67	-13.00	25.67	150.0	H	182.0	-90.8
1829.500000	-37.32	-13.00	24.32	150.0	H	31.0	-90.6
2710.500000	-37.86	-13.00	24.86	150.0	H	308.0	-88.2
2745.000000	-30.73	-13.00	17.73	150.0	H	44.0	-87.9
3505.000000	-42.14	-13.00	29.14	150.0	H	316.0	-86.2
3614.500000	-30.61	-13.00	17.61	150.0	H	316.0	-85.7
4517.000000	-33.91	-13.00	20.91	150.0	H	275.0	-83.3
4995.500000	-37.17	-13.00	24.17	150.0	H	79.0	-83.6
5421.500000	-39.45	-13.00	26.45	150.0	H	225.0	-82.3

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BT+LTE+802.11ah+Lora
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC Part 22
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

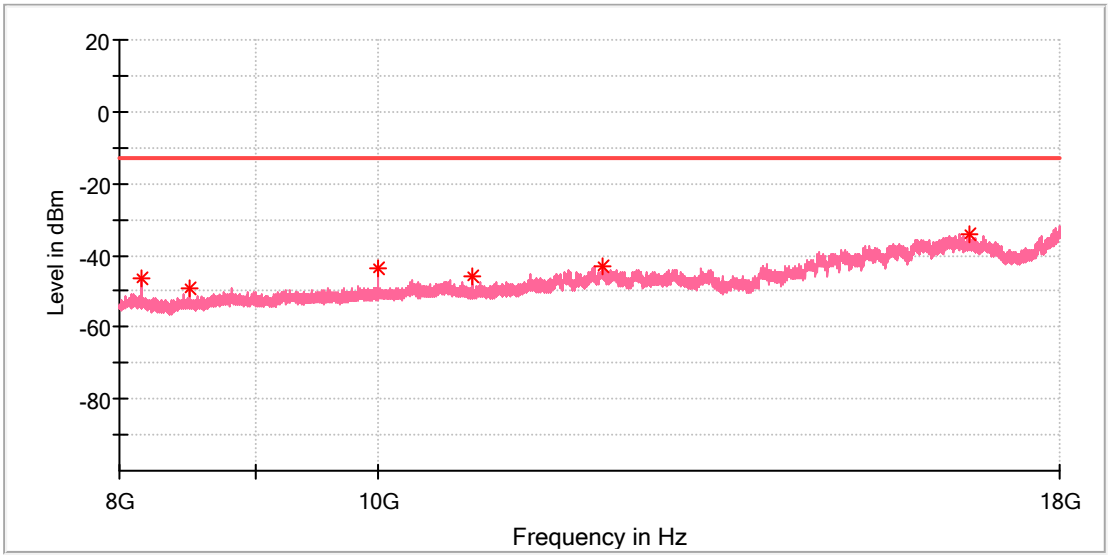

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
8154.500000	-46.31	-13.00	33.31	150.0	V	180.0	-86.6
8500.000000	-49.18	-13.00	36.18	150.0	V	208.0	-87.0
10000.000000	-43.58	-13.00	30.58	150.0	V	180.0	-83.5
10842.000000	-45.76	-13.00	32.76	150.0	V	256.0	-82.5
12127.000000	-43.27	-13.00	30.27	150.0	V	311.0	-78.2
16655.000000	-34.00	-13.00	21.00	150.0	V	333.0	-70.9

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BT+LTE+802.11ah+Lora
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC Part 22
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

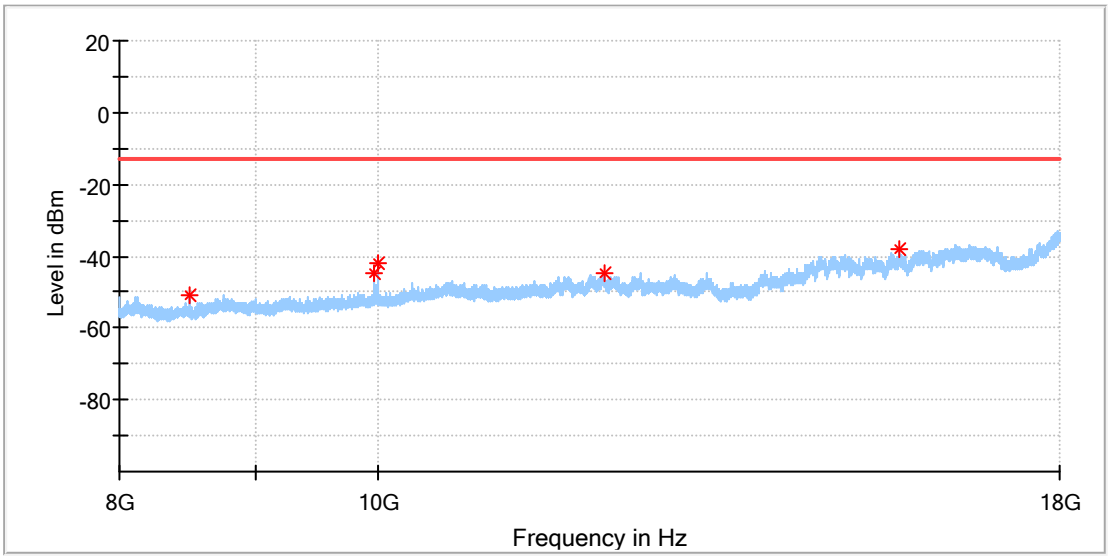

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
8500.000000	-50.74	-13.00	37.74	150.0	H	169.0	-89.1
9966.000000	-44.68	-13.00	31.68	150.0	H	0.0	-85.1
9999.500000	-41.68	-13.00	28.68	150.0	H	175.0	-85.0
12150.000000	-45.00	-13.00	32.00	150.0	H	262.0	-79.6
15680.500000	-38.08	-13.00	25.08	150.0	H	107.0	-77.3

Appendix A.9: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

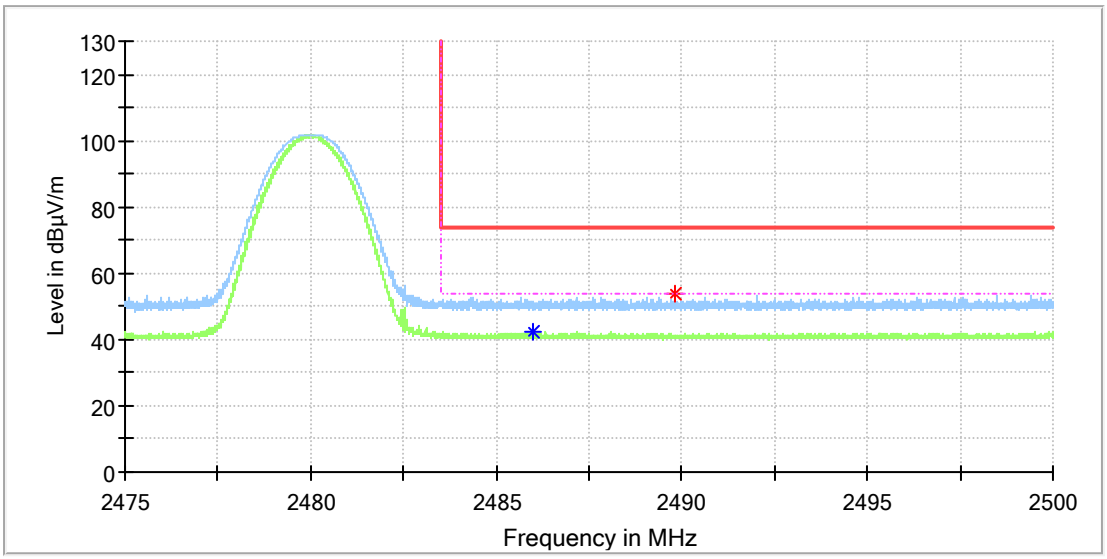

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2486.014706	---	42.17	54.00	11.83	150.0	H	323.0	9.0
2489.816177	53.52	---	74.00	20.48	150.0	H	222.0	9.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

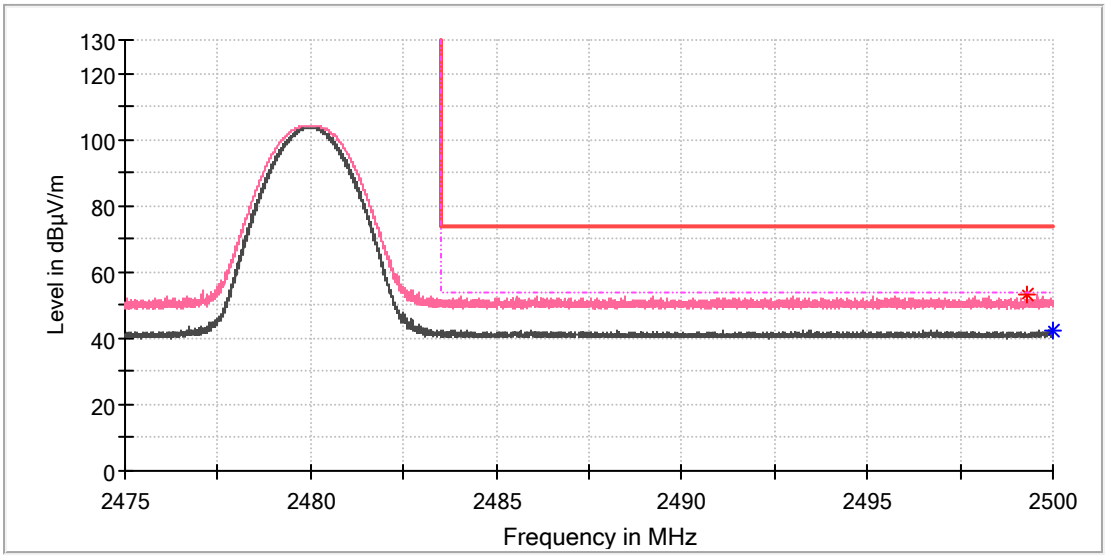

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2499.316177	53.43	---	74.00	20.57	150.0	V	166.0	9.0
2499.977941	---	42.55	54.00	11.45	150.0	V	146.0	9.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

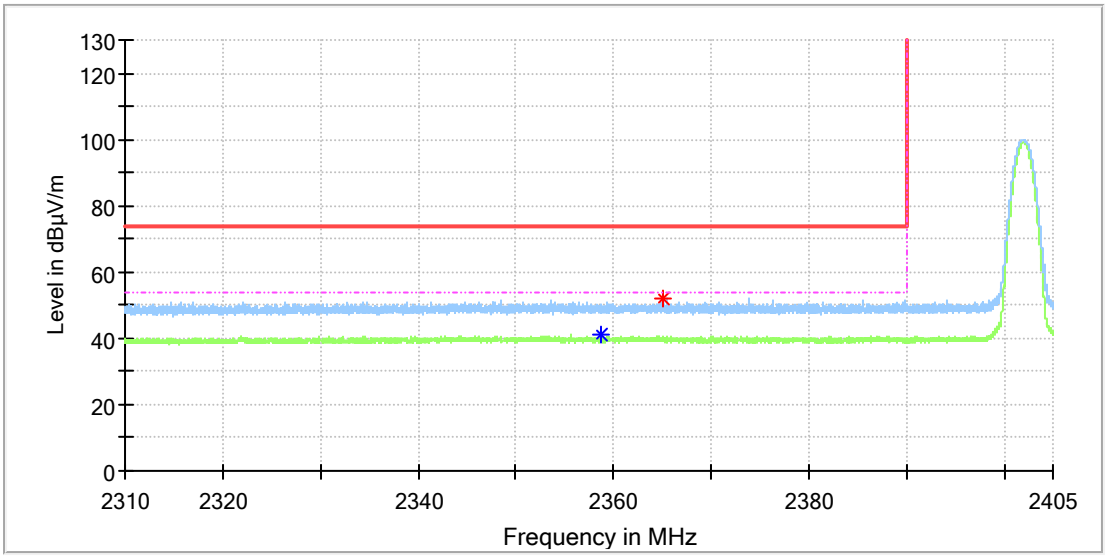

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2358.659559	---	40.86	54.00	13.14	150.0	H	266.0	8.5
2365.169853	52.00	---	74.00	22.00	150.0	H	187.0	8.5

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

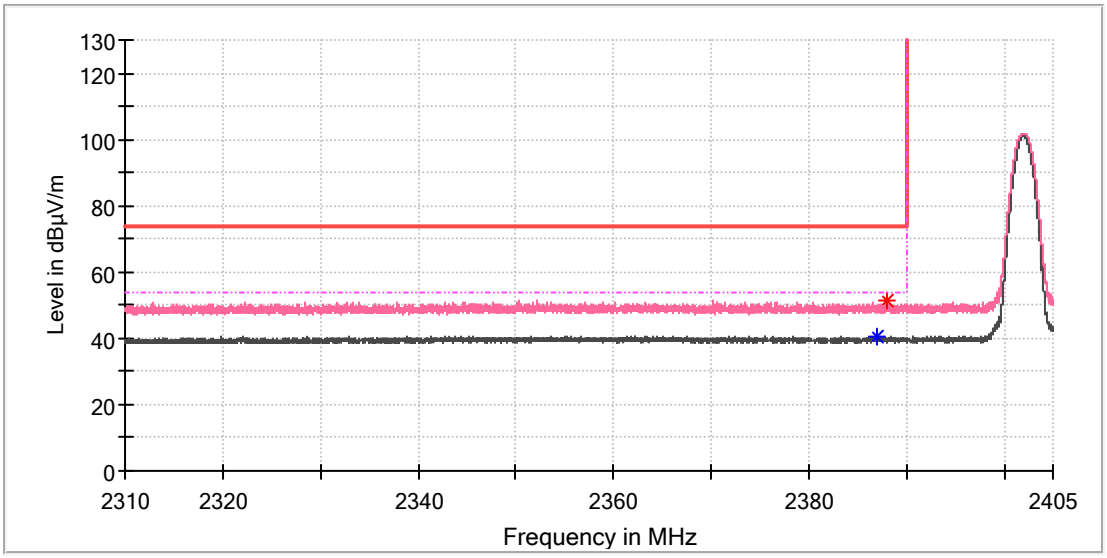

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2386.977941	---	40.25	54.00	13.75	150.0	V	60.0	8.5
2387.913971	51.51	---	74.00	22.49	150.0	V	234.0	8.5

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---