

Wireless Two-way Pager

Model: HS500 User Manual

Customer operation:

To power on: Hold the call button (🔔) for 5 seconds. A ringtone confirms activation
Press and release the call button (🔔). Other pagers will ring

FAQ :

Does not ring ----a. Check whether it has been powered on.
----b. Test it while getting close
----c. Check if there is any battery power
----d. Match the code again

Code operation for two callers (Factory settings)

1. Power on all the callers first
2. Take one pager, press and hold the **volume button** and the **ringtone button** for 3 seconds. Release your hand when the light flashes red.
3. Press the call button (🔔) of the other pager. If it rings and the light doesn't flash, it means the code pairing is successful.

Code operation for three callers (Factory settings)


1. Power on all the callers first
2. Take two pager, press and hold the **volume button** and the **ringtone button** for 3 seconds. Release your hand when the light flashes red.
3. Press the call button (🔔) on the caller that didn't flash the red light. If it rings and the light doesn't flash, it means that the code pairing is successful.

Product Features:

1. Features wireless two-way call alert functionality
2. Working distance: 80 meters in open space; 1st to 3rd floor range
3. Frequency: 433 MHz
4. Portable design for mobile use
5. One-touch call function, easy for elderly operation
6. Working hours: 40 days per charge
7. Battery capacity: 600 mAh
8. Max volume: 105 dB
9. 5 Volume Levels
10. 38 Music Tracks
11. Included lanyard for easy use
12. Dimensions: 79mm × 42mm × 13.5mm

1

PRODUCT PROFILE

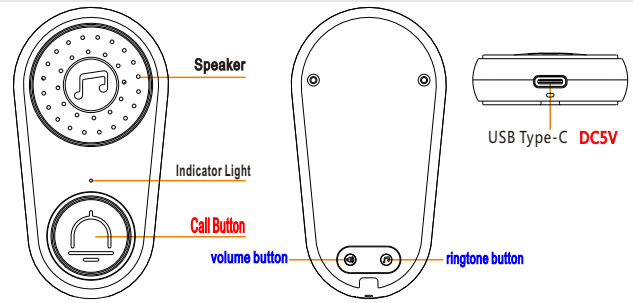

Indicator Light -- Color Explanation:

Calling and ringing-----Indicator Light (On)Blue low power-----Indicator Light (Flash)Red
Charging -----Indicator Light (On)Red Full -----Indicator Light (On)Blue

Volume button--Press to adjust volume (up/down)

Ringtone button--Press to switch music ringtones

Parameters

Product name	Wireless Two-way Pager
Battery capacity	600 mAh lithium battery
Charging voltage	DC5V
Work temperature	-20℃~55℃
Working Distance	Max: 260 feet (w/o any obstacle)
Working Frequency	433MHz
Working time	Around 40 days
Volume adjustment level	Volume Level 5
Maximum Volume	105DB
Ringtones	38 songs
SIZE	79mm*42mm*13.5mm

CE FC
Made in china ROHS

2

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction