

FCC Test Report

Report No. : 1819C50064212501

Applicant : Enping Weisaisi Electronic Technology Co., Ltd.

Address : Room 701, No. A07, Zone D, Xincun,
Nanchang Village, Zhongnan Village
Committee, Enping, Guangdong, 529400,
China

Product Name : Wireless Microphone System

Report Date : 2025-10-16

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Configuration.....	6
1.5. Description Of Test Setup	7
1.6. Test Equipment List.....	8
1.7. Measurement Uncertainty	9
1.8. Description of Test Facility	9
1.9. Disclaimer	10
2. Summary of Test Results	11
3. Conducted Emission Test.....	12
3.1. Test Standard and Limit.....	12
3.2. Test Setup	12
3.3. Test Procedure.....	12
3.4. Test Data	12
4. RF Output Power Test	13
4.1. Test Standard and Limit.....	13
4.2. Test Setup	13
4.3. Test Procedure.....	13
4.4. Test Data	14
5. Frequency Stability Test	17
5.1. Test Standard and Limit.....	17
5.2. Test Setup	17
5.3. Test Procedure.....	17
5.4. Test Data	18
6. Operating Bandwidth & Emission Mask Test.....	20
6.1. Test Standard and Limit.....	20
6.2. Test Setup	20
6.3. Test Procedure.....	20
6.4. Test Data	20
7. Radiation Spurious Emission Test	24
7.1. Test Standard and Limit.....	24
7.2. Test Setup	24
7.3. Test Procedure.....	25
7.4. Test Data	25
APPENDIX I -- TEST SETUP PHOTOGRAPH	30
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	30
APPENDIX III -- INTERNAL PHOTOGRAPH	30

TEST REPORT

Applicant : Enping Weisaisi Electronic Technology Co., Ltd.

Manufacturer : Enping Weisaisi Electronic Technology Co., Ltd.

Product Name : Wireless Microphone System

Model No. : SG-2, SG-4, SG-8, SL-2, SL-4, SL-8, SH-2, SH-4, SH-8, SF-2, SF-4, SF-8,
SX-2, SX-4, SX-8

Trade Mark : SonixForce

Rating(s) : Input: 3VDC by "AA"*2 batteries

Test Standard(s) : 47 CFR Part 15.236

Test Method(s) : ANSI C63.10: 2020

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the 47 CFR Part 15.236 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt 2025-6-13

Date of Test 2025-6-13 to 2025-09-28

Prepared By

Lene Chen

(Lene Chen)

Approved & Authorized Signer

Hugo Chen

(Hugo Chen)

Revision History

Report Version	Description	Issued Date
R00	Original Issue.	2025-10-16

1. General Information

1.1. Client Information

Applicant	:	Enping Weisaisi Electronic Technology Co., Ltd.
Address	:	Room 701, No. A07, Zone D, Xincun, Nanchang Village, Zhongnan Village Committee, Enping, Guangdong, 529400, China
Manufacturer	:	Enping Weisaisi Electronic Technology Co., Ltd.
Address	:	Room 701, No. A07, Zone D, Xincun, Nanchang Village, Zhongnan Village Committee, Enping, Guangdong, 529400, China
Factory	:	Enping Weisaisi Electronic Technology Co., Ltd.
Address	:	Room 701, No. A07, Zone D, Xincun, Nanchang Village, Zhongnan Village Committee, Enping, Guangdong, 529400, China

1.2. Description of Device (EUT)

Product Name	:	Wireless Microphone System
Model No.	:	SG-2, SG-4, SG-8, SL-2, SL-4, SL-8, SH-2, SH-4, SH-8, SF-2, SF-4, SF-8, SX-2, SX-4, SX-8 (Note: All samples are the same except the model number and appearance color, so we prepare "SG-2" for test only.)
Trade Mark	:	SonixForce
Test Power Supply	:	DC 3V by battery
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A
RF Specification		
Operation Frequency	:	Group A: 540.10MHz to 564.85MHz Group B: 561.10MHz to 589.85MHz
Channel Spacing	:	0.25MHz
Number of Channel	:	Group A: 100Channels Group B: 100Channels
Modulation Type	:	Pi/4 DQPSK
Antenna Type	:	Group A: Spring Antenna Group B: Spring Antenna
Antenna Gain(Peak)	:	Group A: 1dBi Group B: 1dBi
Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
/	/	/	/

1.4. Description of Test Configuration


Group A		Group B	
Channel	Freq. (MHz)	Channel	Freq. (MHz)
01	540.10	01	565.10
...	...	...	...
50	552.35	50	577.35
...	...	...	...
100	564.85	100	589.85

Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT was tested with Group A channel 1, 50, 100 and Group B channel 1, 50, 100.

1.5. Description Of Test Setup

RE

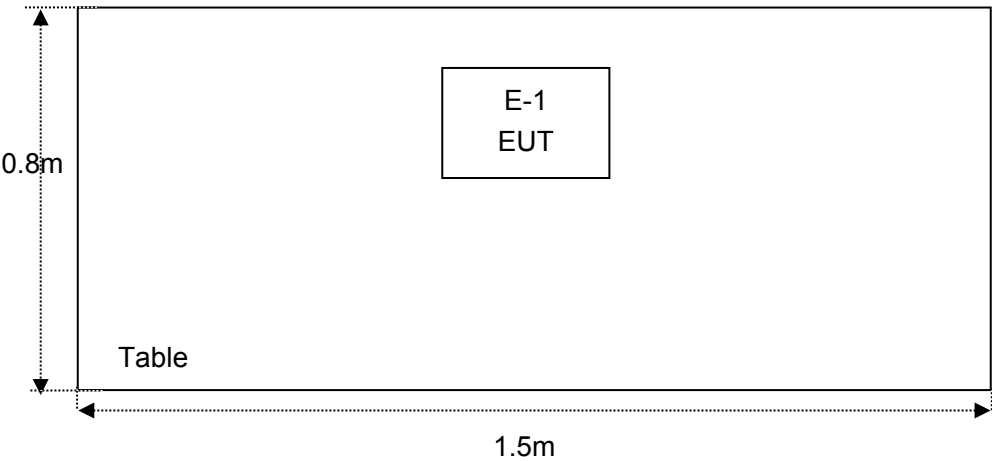

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	2024-09-09	1 Year
					2025-09-05	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT00 1	2025-01-13	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	2025-01-13	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	2025-01-14	1 Year
5.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	2024-09-09	1 Year
					2025-09-05	1 Year
6.	EMI Preamplifier	SKET Electronic	LNPA-0118G- 45	SKET-PA-002	2025-01-13	1 Year
7.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	2022-10-16	3 Year
					2025-09-05	3 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	345	2022-10-13	3 Year
					2025-09-05	3 Year
9.	Loop Antenna(9K-30M)	Schwarzbeck	FMZB1519B	00053	2024-09-12	1 Year
					2025-09-05	1 Year
10.	Horn Antenna	A-INFO	LB-180400-KF	J211060628	2024-01-22	3 Year
11.	Pre-amplifier	SONOMA	310N	186860	2025-01-14	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	2024-09-09	1 Year
					2025-09-05	1 Year
14.	MXG RF Vector Signal Generator	Agilent	N5182A	MY47420647	2025-01-14	1 Year
15.	Signal Generator	Agilent	E4421B	MY41000743	2025-02-21	1 Year
16.	DC Power Supply	IVYTECH	IV3605	1804D360510	2024-09-09	1 Year
					2025-09-05	1 Year
17.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	2024-10-14	1 Year
18.	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102150	2025-04-25	1 Year

1.7. Measurement Uncertainty

Parameter	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	3.2dB
Occupied Bandwidth	925Hz
Conducted Output Power	0.76dB
Frequency tolerance	74.60Hz
Conducted Spurious Emission	1.24dB
Radiated spurious emissions (Below 30MHz)	3.26dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.70dB; Vertical: 4.42dB
Radiated spurious emissions (above 1GHz)	1G-6GHz: 4.64dB 6G-18GHz: 4.82dB 18G-40GHz: 5.62dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 279531

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 279531.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

1.9. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.
7. The data in this report will be synchronized with the corresponding national market supervision and management departments and cross-border e-commerce platforms as required by regulatory agencies.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2. Summary of Test Results


Standard Section	Test Item	Result
15.207	Conducted Emission	N/A
15.236(d)	RF Output Power	PASS
15.236(f)(3)	Frequency Stability	PASS
15.236(f)(g)	Operating Bandwidth & Emission Mask	PASS
15.236(g)	Radiated Spurious Emissions	PASS
Remark: “N/A” is an abbreviation for Not Applicable.		

3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBUV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

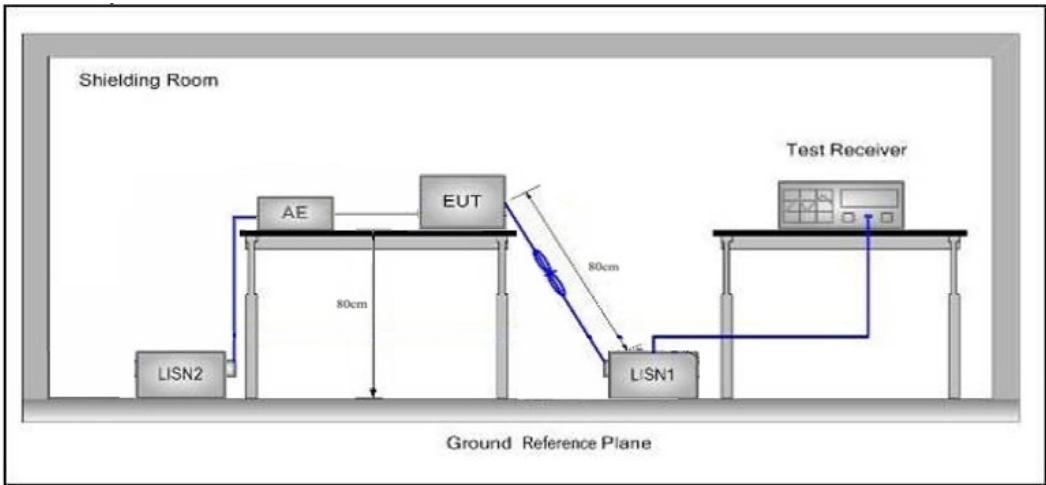

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data


Not applicable. The EUT is powered by DC 3V battery inside, so there is no need to conduct this test.

4. RF Output Power Test

4.1. Test Standard and Limit

Test Standard	FCC Part15 Subpart C, §15.236(d)
Test Limit	In the bands allocated and assigned for broadcast television and in the 600 MHz service band: 50 mW (17dBm) EIRP. In the 600 MHz guard band and the 600 MHz duplex gap: 20 mW (13dBm) EIRP.

4.2. Test Setup



4.3. Test Procedure

1. The EUT was connected to a spectrum analyzer for the output power test.
2. The output power was set to 50 mW.
3. The modulated output power was measured using a QP detector per ANSI C63.10: 2020 section 4.1.5.2.1.
4. The output power was measured at the low, middle, and high frequencies of the passband.
5. The cable loss from the EUT output to the spectrum analyzer input were input to the spectrum analyzer as correction factor before recording the output power.
6. RBW = 120 kHz, VBW = 3 x RBW, Detector = QP

4.4. Test Data


Temperature:	23.6 °C	Humidity:	56 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------


Group A				
Test Channel	Peak Power output (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Results
Low	10.391	11.391	17	PASS
Middle	10.015	11.015	17	PASS
High	9.543	10.543	17	PASS

Note: EIRP=Peak Power+ Antenna gain (dBi)

Group B				
Frequency (MHz)	Peak Power output (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Results
Low	10.076	11.076	17	PASS
Middle	9.188	10.188	17	PASS
High	8.242	9.242	17	PASS

Note: EIRP=Peak Power+ Antenna gain (dBi)

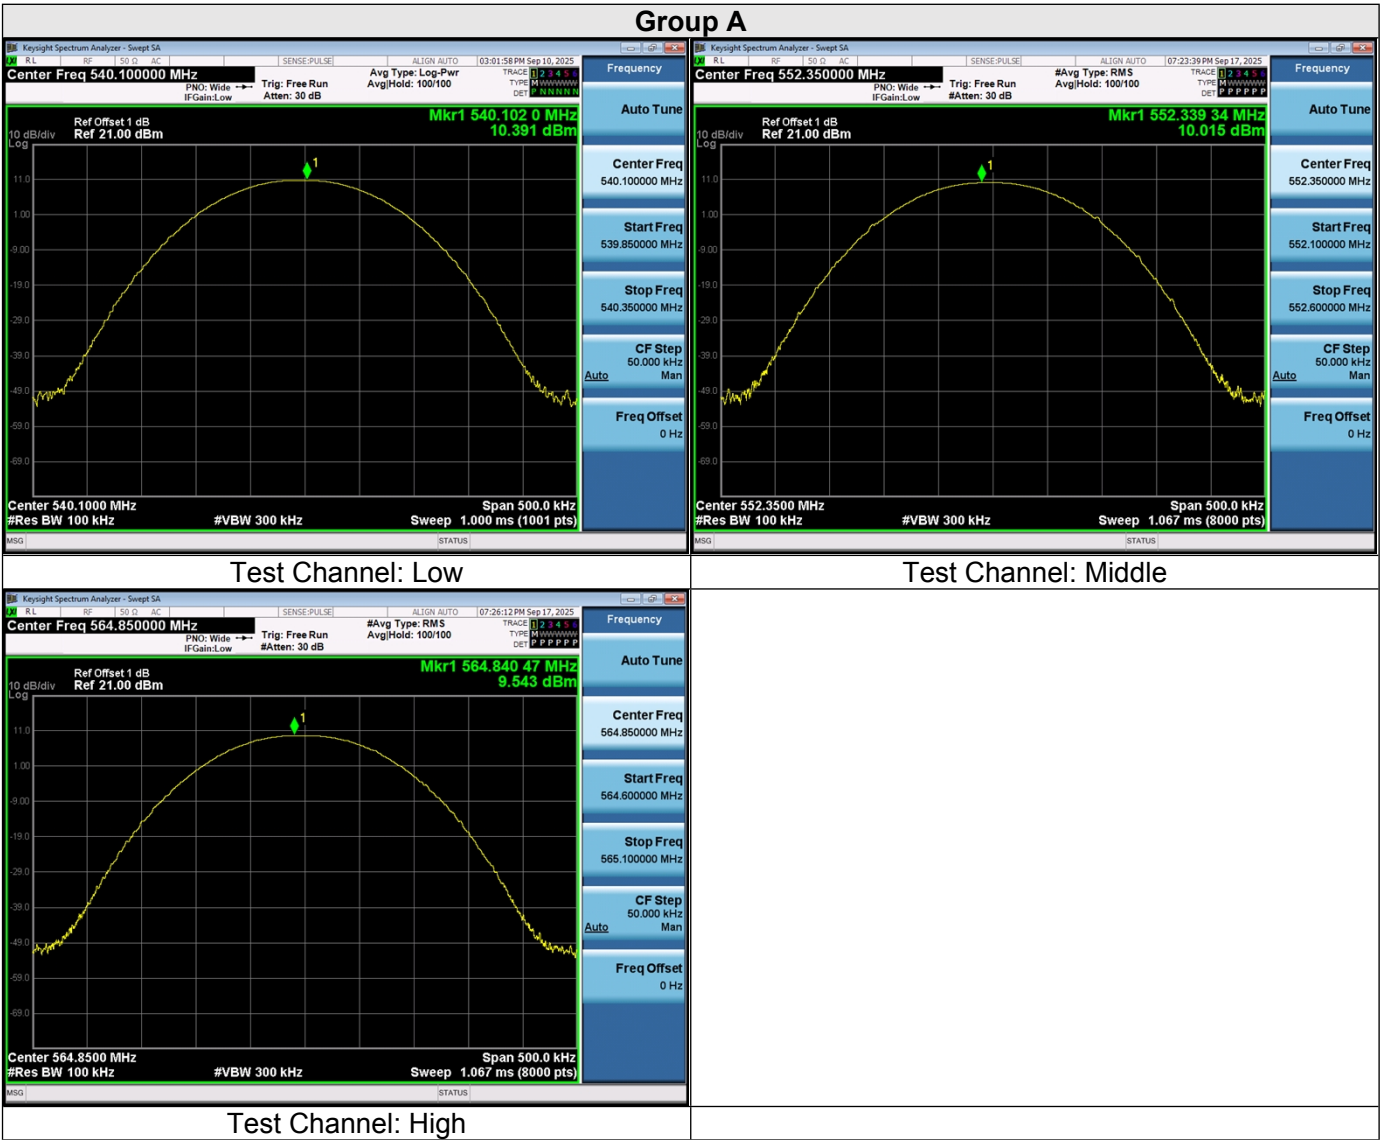

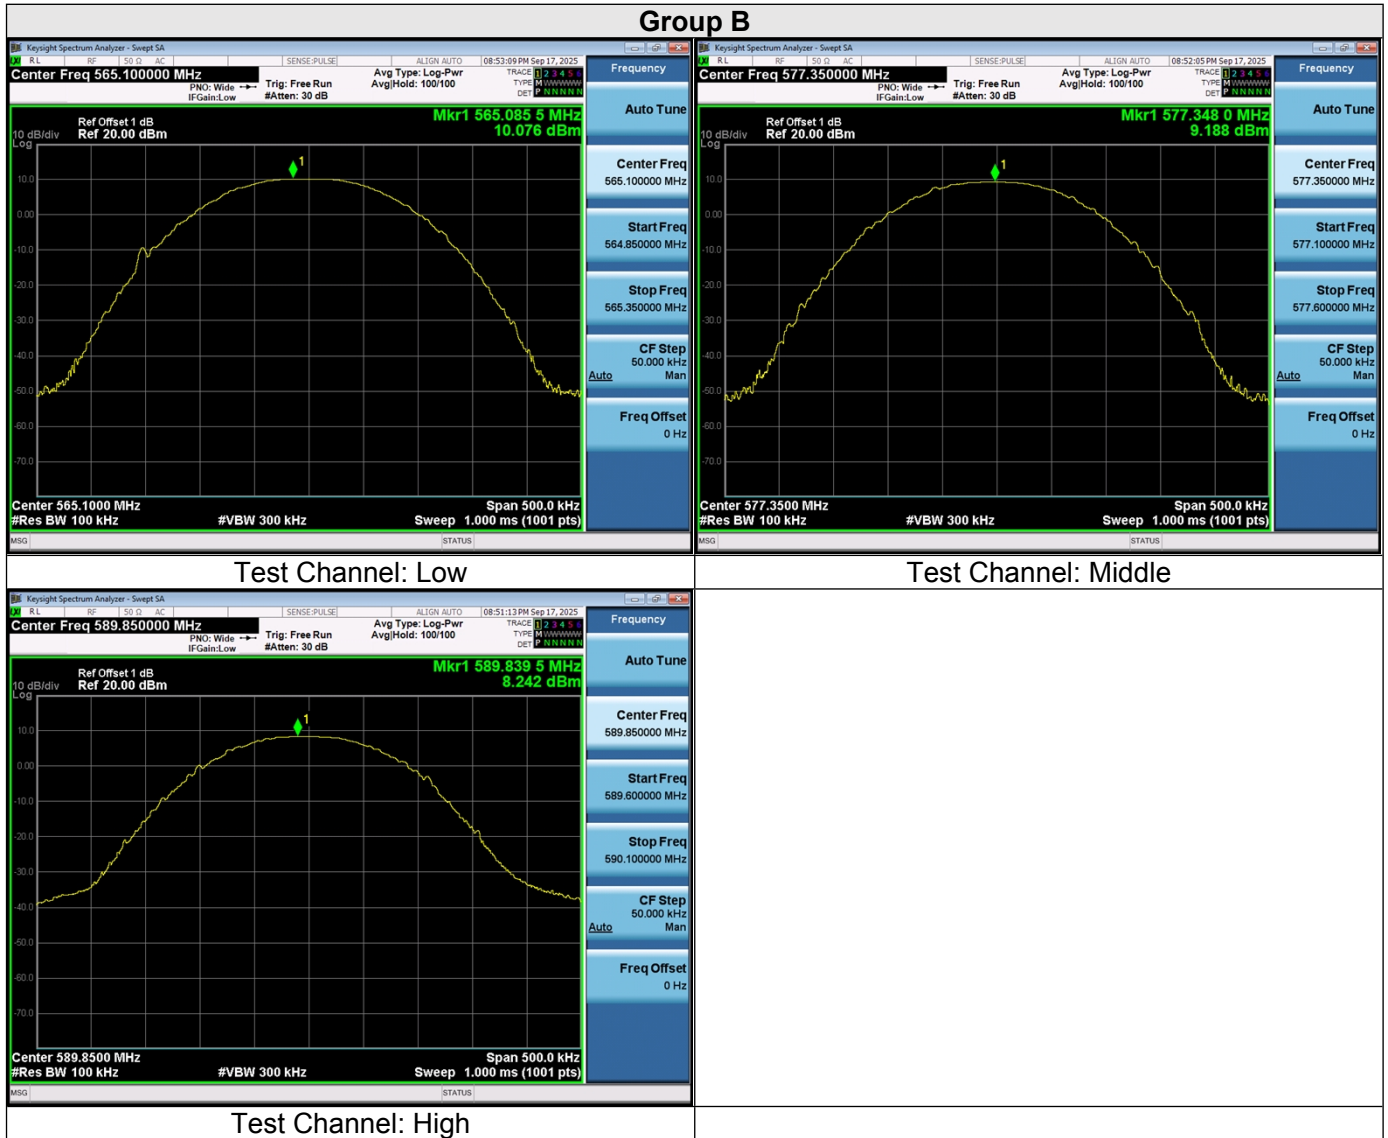


5. Frequency Stability Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 Subpart C, 15.236(f)(3)
Test Limit	The frequency tolerance of the transmitter shall be ± 0.005 percent.

5.2. Test Setup

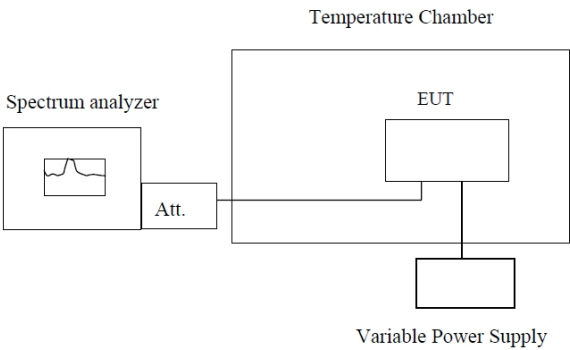

Note : Measurement setup for testing on Antenna connector

5.3. Test Procedure

1. The EUT was placed in an environmental test chamber and the RF output was connected to a spectrum analyzer.
2. The temperature was varied from -20°C to 50°C in 10°C increments. After a sufficient time for temperature stabilization the RF output frequency was measured.
3. At 20°C the power supply voltage to the EUT was varied from 85% to 115% of the nominal value and the RF output was measured.

5.4. Test Data

Temperature:	23.6 °C	Humidity:	56 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

Group A					
Test Frequency:					
Test Frequency (MHz)	Temperature (°C)	Power Supplied (VDC)	Measured frequency (MHz)	Error (ppm)	Limit (ppm)
540.10	-20	3.0	540.107344	13.60	±50
	-10		540.106967	12.90	±50
	0		540.107962	14.74	±50
	10		540.107559	14.00	±50
	20		540.106322	11.70	±50
	30		540.106160	11.41	±50
	40		540.106671	12.35	±50
	50		540.106295	11.65	±50
	20	2.7	540.104977	9.21	±50
	20	3.3	540.107613	14.09	±50
552.35	-20	3.0	552.357344	13.30	±50
	-10		552.356967	12.61	±50
	0		552.357962	14.42	±50
	10		552.357559	13.68	±50
	20		552.356322	11.44	±50
	30		552.356160	11.15	±50
	40		552.356671	12.08	±50
	50		552.356295	11.40	±50
	20	2.7	552.354977	9.01	±50
	20	3.3	552.357613	13.78	±50
564.85	-20	3.0	564.857344	13.00	±50
	-10		564.856967	12.33	±50
	0		564.857962	14.10	±50
	10		564.857559	13.38	±50
	20		564.856322	11.19	±50
	30		564.856160	10.91	±50
	40		564.856671	11.81	±50
	50		564.856295	11.14	±50
	20	2.7	564.854977	8.81	±50
	20	3.3	564.857613	13.48	±50


Group B					
Test Frequency:					
Test Frequency (MHz)	Temperature (°C)	Power Supplied (VDC)	Measured frequency (MHz)	Error (ppm)	Limit (ppm)
565.10	-20	3.0	565.108463	14.98	±50
	-10		565.108029	14.21	±50
	0		565.109176	16.24	±50
	10		565.108711	15.41	±50
	20		565.107285	12.89	±50
	30		565.107099	12.56	±50
	40		565.107688	13.60	±50
	50		565.107254	12.84	±50
	20	2.7	565.105735	10.15	±50
	20	3.3	565.108773	15.52	±50
577.35	-20	3.0	577.359145	15.84	±50
	-10		577.358463	14.66	±50
	0		577.358029	13.91	±50
	10		577.359176	15.89	±50
	20		577.358711	15.09	±50
	30		577.357285	12.62	±50
	40		577.357099	12.30	±50
	50		577.357688	13.32	±50
	20	2.7	577.357254	12.56	±50
	20	3.3	577.355735	9.93	±50
589.85	-20	3.0	589.859145	15.50	±50
	-10		589.858463	14.35	±50
	0		589.858029	13.61	±50
	10		589.859176	15.56	±50
	20		589.858711	14.77	±50
	30		589.857285	12.35	±50
	40		589.857099	12.04	±50
	50		589.857688	13.03	±50
	20	2.7	589.857254	12.30	±50
	20	3.3	589.855735	9.72	±50

6. Operating Bandwidth & Emission Mask Test

6.1. Test Standard and Limit

Test Standard	FCC Part15 Subpart C, §15.236 (f)(g)
Test Limit	The operating bandwidth shall not exceed 200 kHz. Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in § 8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; Part 1: Technical characteristics and methods of measurement. Emissions outside of this band shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 V1.4.2 (2011-08).

6.2. Test Setup

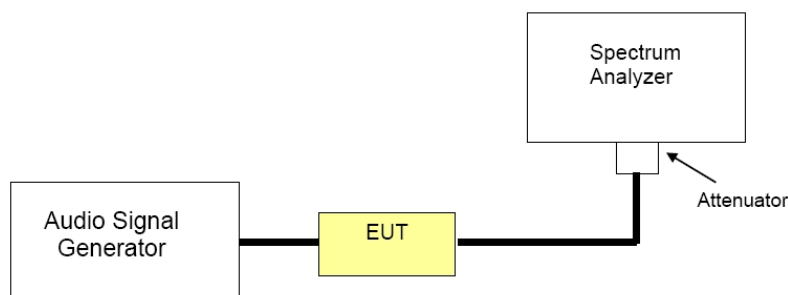

6.3. Test Procedure

The OBW is according to ANSI C63.10: 2020


The Emission Mask is according to section 8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08).


6.4. Test Data

Temperature:	23.6 °C	Humidity:	56 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

Group A			
Test Channel	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	61.795	200	Pass
Middle	61.621	200	Pass
High	61.722	200	Pass

Group B			
Test Channel	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	63.696	200	Pass
Middle	62.899	200	Pass
High	63.158	200	Pass

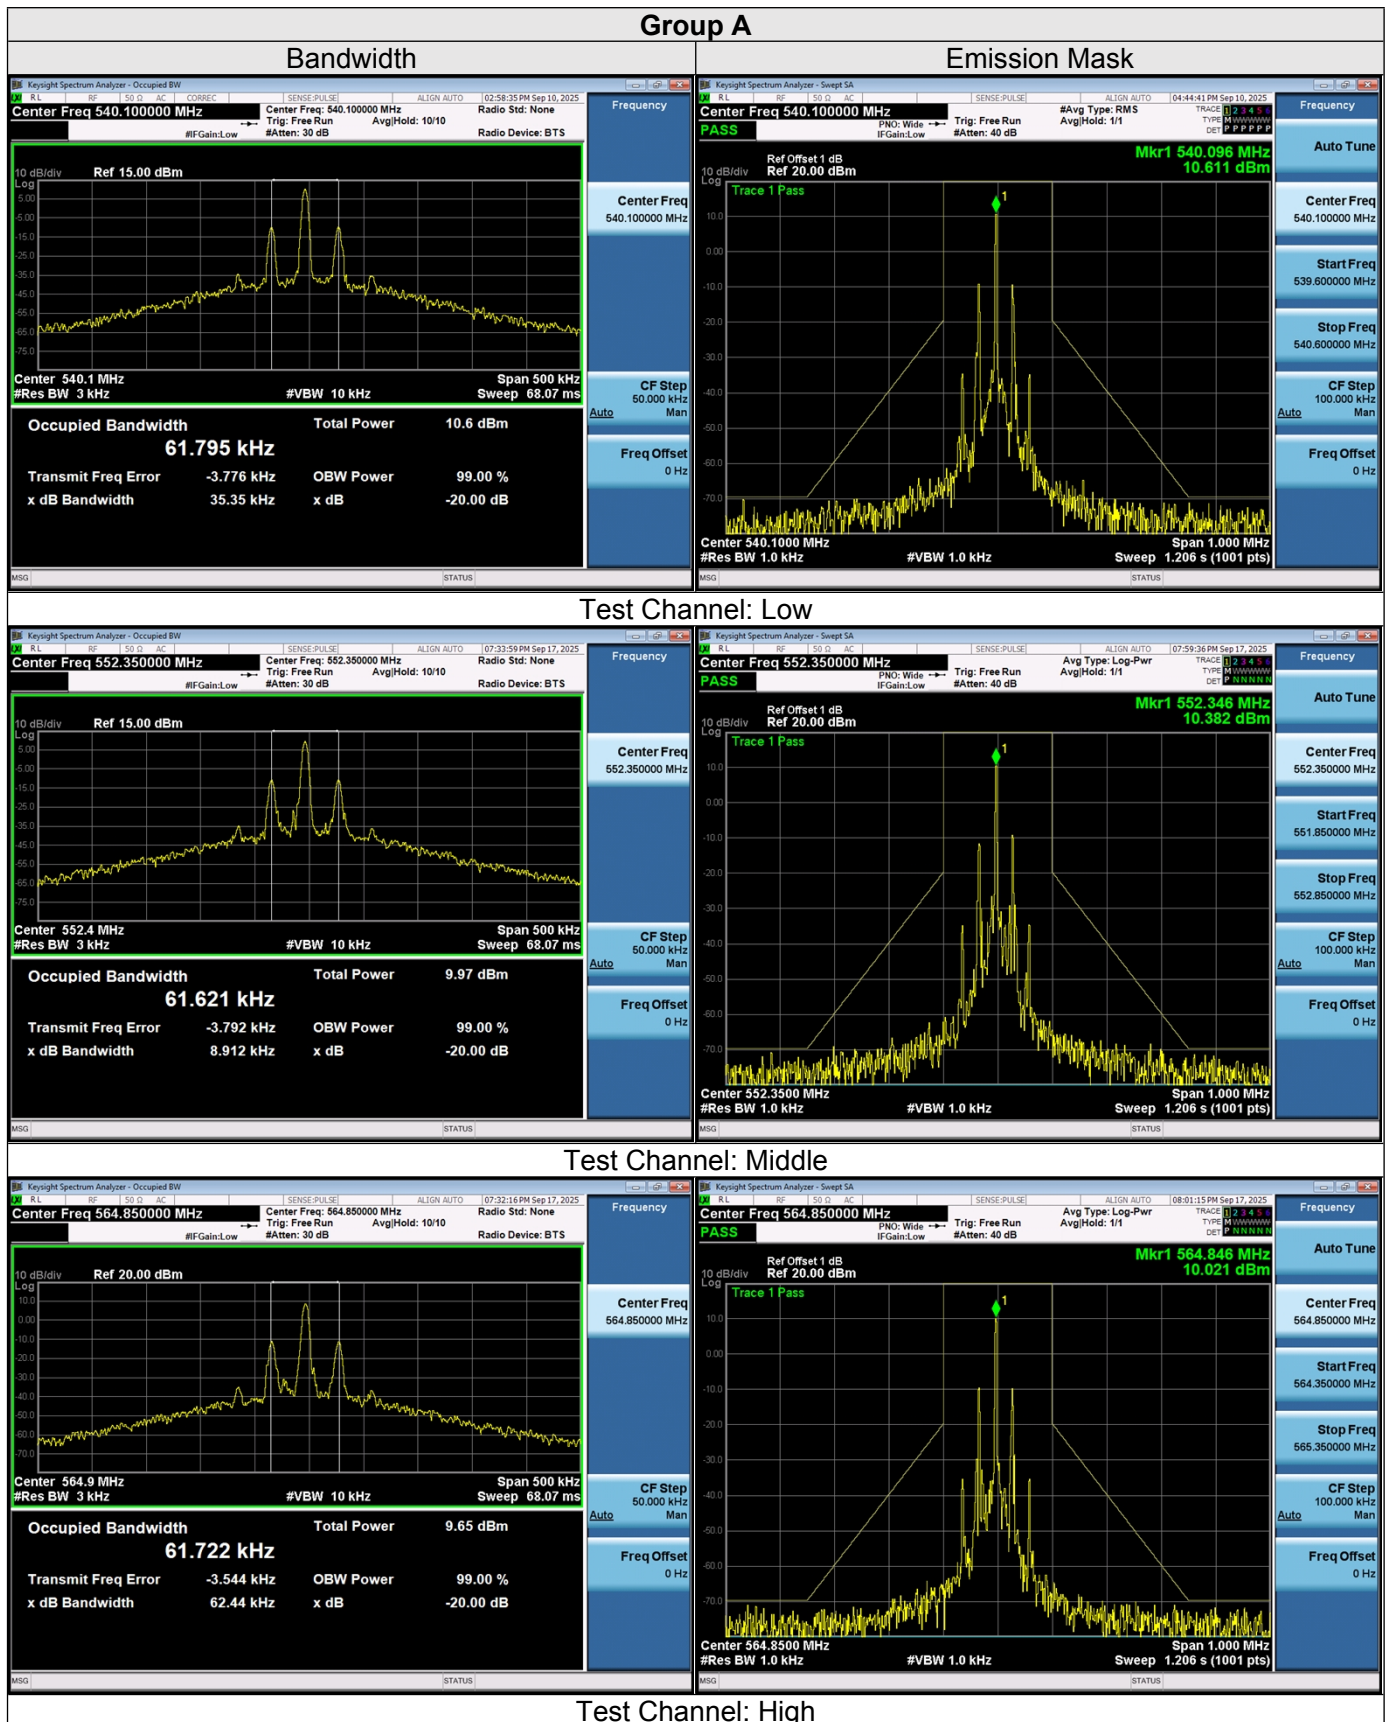

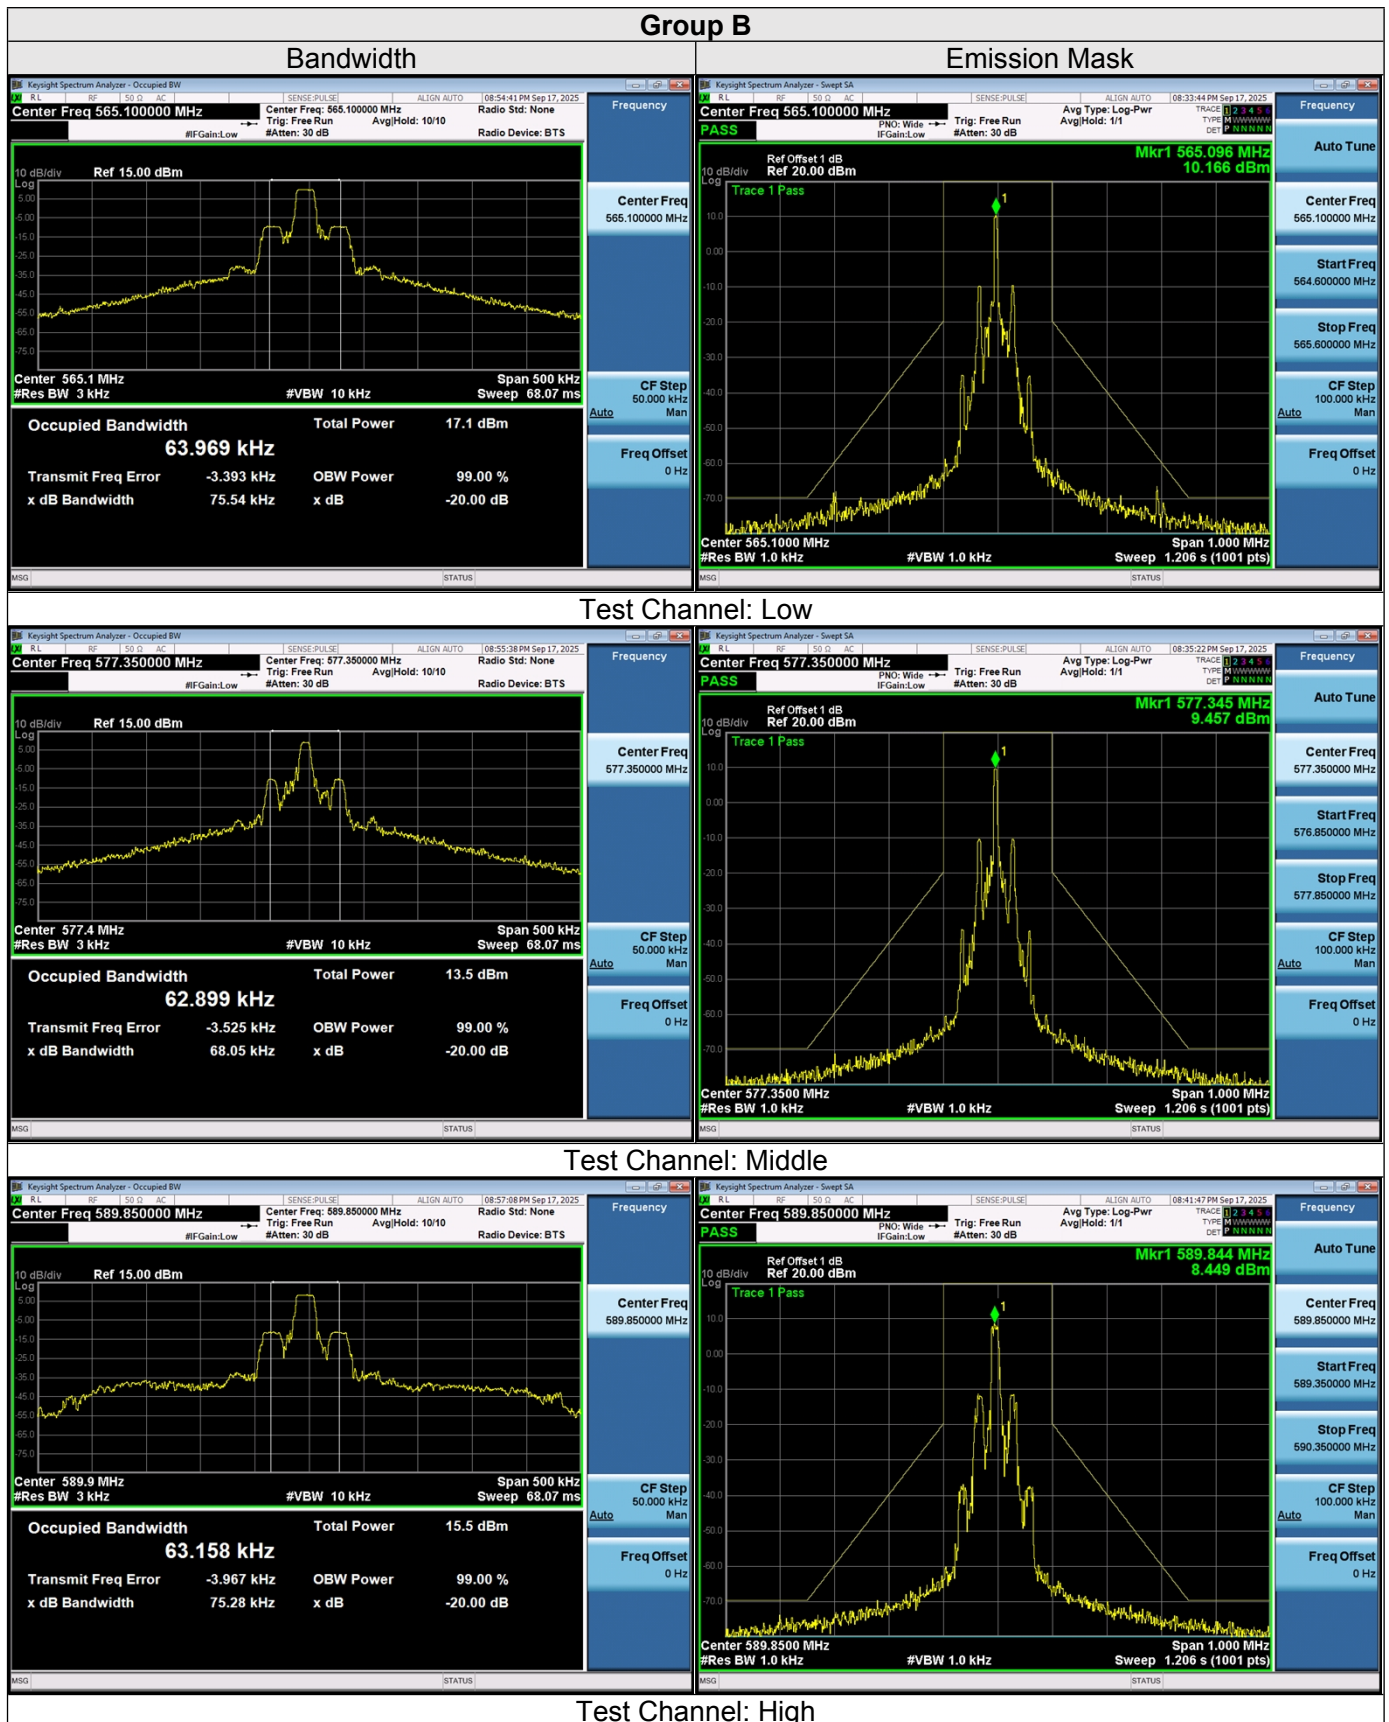

7. Radiation Spurious Emission Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 Subpart C, §15.236(g)
Test Limit	The operating bandwidth shall not exceed 200 kHz. Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in § 8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; Part 1: Technical characteristics and methods of measurement. Emissions outside of this band shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 V1.4.2 (2011-08).

7.2. Test Setup

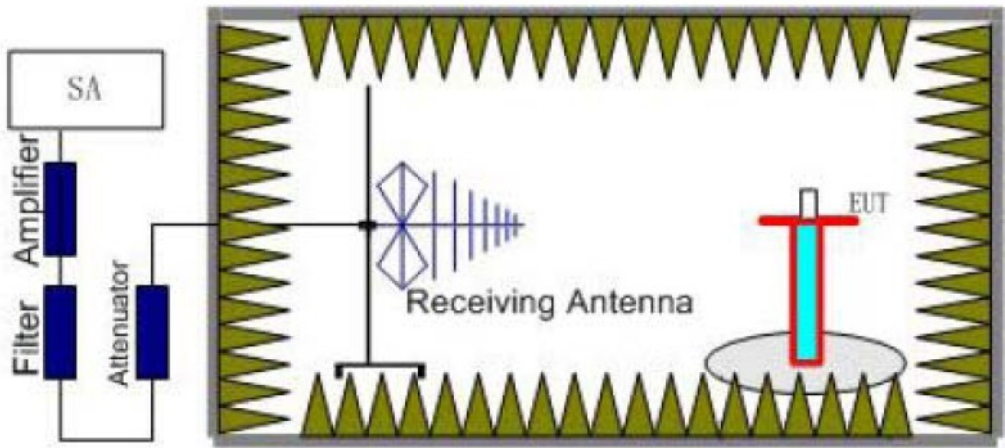


Figure 1

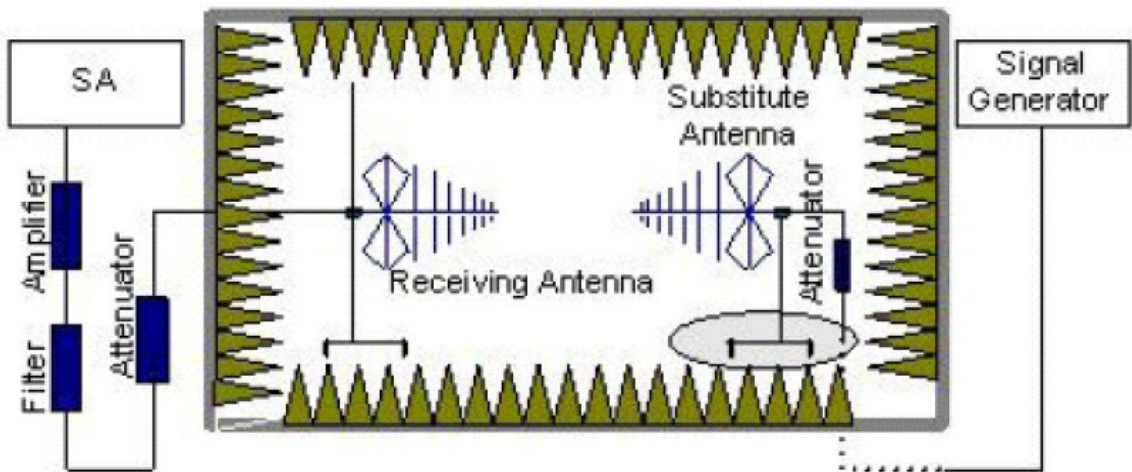


Figure 2

7.3. Test Procedure

1. EUT was placed on a 0.8 meter for below 1GHz and 1.5 meter for above 1GHz high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.0m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
6. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$

We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.


7.4. Test Data

PASS

During the test, pre-scan all modes, only the worst case is recorded in the report.

Test Results:


Operating Condition: 540.10MHz
Test Specification: DC 3V by battery
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 22.5°C/55%RH
Fundamental

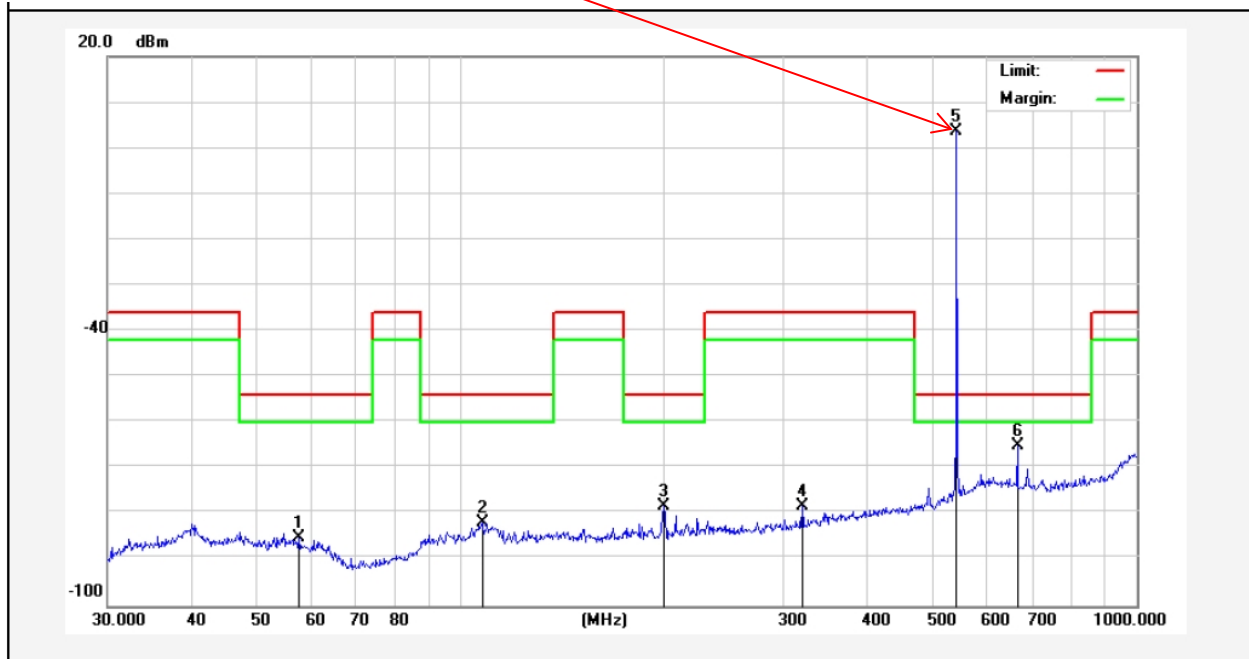

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Over Limit (dB)	Detector	Remark
1	57.5939	-76.23	-9.02	-85.25	-54.00	-31.25	QP	
2	107.5101	-72.90	-9.05	-81.95	-54.00	-27.95	QP	
3	199.9856	-70.09	-8.15	-78.24	-54.00	-24.24	QP	
4	319.9370	-72.63	-5.63	-78.26	-36.00	-42.26	QP	
5	541.3725	5.45	-1.86	3.59				
6	665.8035	-66.13	0.97	-65.16	-54.00	-11.16	QP	

Note: Result = Reading + Factor Over Limit = Result - Limit

Operating Condition: 540.10MHz
Test Specification: DC 3V by battery
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 22.5°C/55%RH
Fundamental

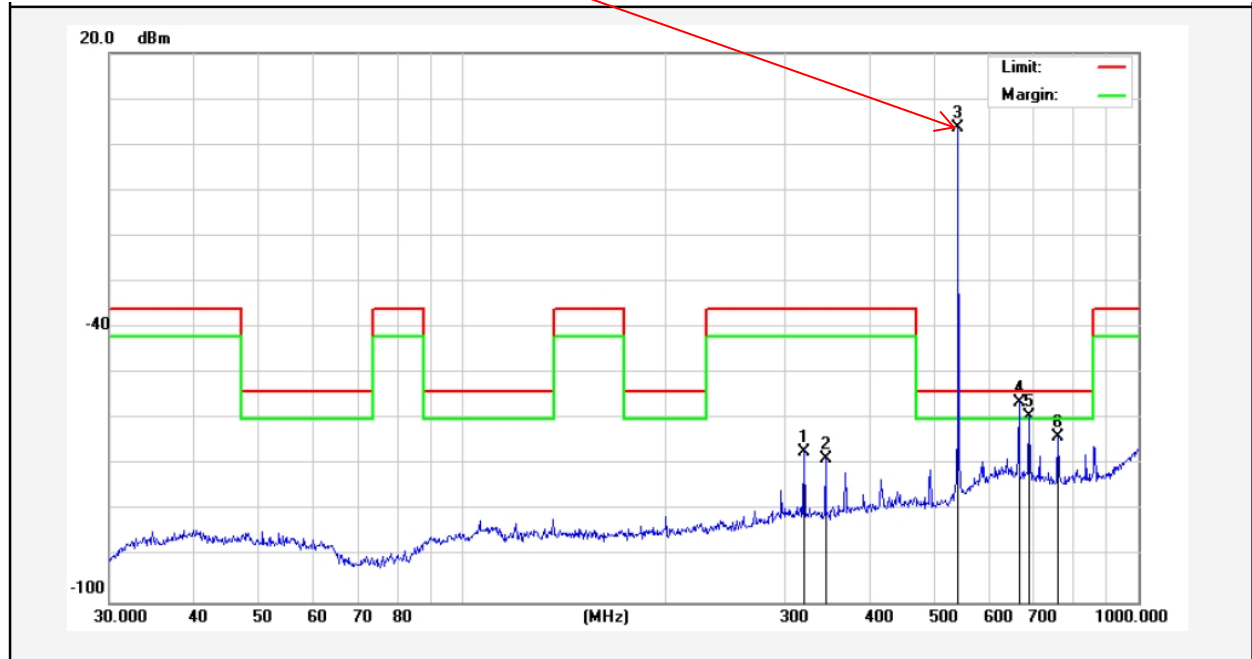

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Over Limit (dB)	Detector	Remark
1	319.9370	-61.04	-6.03	-67.07	-36.00	-31.07	QP	
2	344.3855	-63.30	-5.48	-68.78	-36.00	-32.78	QP	
3	541.3725	4.54	-0.84	3.70				
4	664.1255	-57.30	0.99	-56.31	-54.00	-2.31	QP	
5	689.5644	-59.75	0.55	-59.20	-54.00	-5.20	QP	
6	760.7036	-65.64	1.66	-63.98	-54.00	-9.98	QP	

Note: Result = Reading + Factor Over Limit = Result - Limit

Above 1GHz:

Group A				
Test Channel: Low				
Frequency MHz	Measurement (dBm)	Limit (dBm)	Margin (dB)	Antenna Polar (H/V)
1080.20	-32.25	-30.00	-2.25	H
1620.30	-45.65	-30.00	-15.65	H
2160.40	-49.46	-30.00	-19.46	H
1080.20	-35.64	-30.00	-5.64	V
1620.30	-45.54	-30.00	-15.54	V
2160.40	-47.19	-30.00	-17.19	V
Test Channel: Middle				
Frequency MHz	Measurement (dBm)	Limit (dBm)	Margin (dB)	Antenna Polar (H/V)
1104.70	-33.80	-30.00	-3.80	H
1657.05	-46.91	-30.00	-16.91	H
2209.40	-51.12	-30.00	-21.12	H
1104.70	-34.93	-30.00	-4.93	V
1657.05	-52.10	-30.00	-22.10	V
2209.40	-46.95	-30.00	-16.95	V
Test Channel: High				
Frequency MHz	Measurement (dBm)	Limit (dBm)	Margin (dB)	Antenna Polar (H/V)
1129.70	-33.01	-30.00	-3.01	H
1694.55	-45.78	-30.00	-15.78	H
2259.40	-53.61	-30.00	-23.61	H
1129.70	-36.58	-30.00	-6.58	V
1694.55	-44.36	-30.00	-14.36	V
2259.40	-52.40	-30.00	-22.40	V

Remark: Margin = Measurement - Limit

Above 1GHz:

Group B				
Test Channel: Low				
Frequency MHz	Measurement (dBm)	Limit (dBm)	Margin (dB)	Antenna Polar (H/V)
1130.20	-31.35	-30.00	-1.35	H
1695.30	-43.94	-30.00	-13.94	H
2260.40	-49.31	-30.00	-19.31	H
1130.20	-33.12	-30.00	-3.12	V
1695.30	-51.54	-30.00	-21.54	V
2260.40	-52.88	-30.00	-22.88	V
Test Channel: Middle				
Frequency MHz	Measurement (dBm)	Limit (dBm)	Margin (dB)	Antenna Polar (H/V)
1154.70	-32.71	-30.00	-2.71	H
1732.05	-44.87	-30.00	-14.87	H
2309.40	-53.09	-30.00	-23.09	H
1154.70	-35.66	-30.00	-5.66	V
1732.05	-46.31	-30.00	-16.31	V
2309.40	-46.71	-30.00	-16.71	V
Test Channel: High				
Frequency MHz	Measurement (dBm)	Limit (dBm)	Margin (dB)	Antenna Polar (H/V)
1179.70	-33.50	-30.00	-3.50	H
1769.55	-47.04	-30.00	-17.04	H
2359.40	-51.55	-30.00	-21.55	H
1179.70	-37.43	-30.00	-7.43	V
1769.55	-48.31	-30.00	-18.31	V
2359.40	-51.84	-30.00	-21.84	V

Remark: Margin = Measurement - Limit

APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_RF

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----