

TEST REPORT

Radio Frequency Devices-Intentional Radiators

for

Products Name: Smart Watch

Model No.: E52

FCC ID: 2BP7H-E52

Report No.: SST2606E129

Issued Date: Jun. 10, 2026

Issued for

LETSFIT LLC

1951 NW 22nd St, Bay 12, Fort Lauderdale, Florida 33311, United States

Issued by

Dongguan Qiyang Testing Technology Co., Ltd.

Room 101-1, Building 1, No.19, Tianxin Butterfly 1st Road, Huangjiang, Dongguan, Guangdong, China



General disclaimer:

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing Dongguan Qiyang Testing Technology Co., Ltd. The authenticity of this test report and its contents can be verified by contacting the Dongguan Qiyang Testing Technology Co., Ltd., responsible for this test report.

Table of Contents

1.	Basic Introduction	3
2.	General description	4
2.1.	EUT description	4
2.2.	Serial model(s) and model difference	4
2.3.	Auxiliary equipment	4
2.4.	Description of test modes	5
2.5.	Test environmental conditions	5
2.6.	Statement of Measurement Uncertainty	6
2.7.	Report modification record	6
2.8.	Test Facility	6
2.9.	Other information	7
2.10.	Addition Instructions	7
3.	Verdict summary section	8
4.	List of Test Equipment	9
5.	Technical Requirement and Measurement Data	10
5.1.	Generally requirement	10
5.2.	Connected emissions	11
5.3.	Duty Cycle	15
5.4.	Conducted Peak Output Power	16
5.5.	Channel Bandwidth	17
5.6.	Power Spectral Density	18
5.7.	Conducted Spurious Emission	19
5.8.	Radiated emissions	20
6.	Test setup photo	40
7.	Photo of the EUT	41

1. Basic Introduction

Applicant's name..... :	LETSFIT LLC	
Address	1951 NW 22nd St, Bay 12, Fort Lauderdale, Florida 33311, United States	
Manufacturer's name	HongKong Morrison Co Limited	
Address	Building C, Xiaweyuan Jingfa Intelligent Park, Gushu Community, Xixiang Street, Baoan, China	
Products Name..... :	Smart Watch	
Model No..... :	E52	
Trade Mark		
Rating(s)	Rechargeable Li-ion Battery DC 3.7V	
Date of sample receipt..... :	Jun. 03, 2026	
Date of Test..... :	Jun. 03, 2026 ~ Jun. 10, 2026	
Standard(s)	FCC 47 CFR PART 15 Subpart C Section 15.247 ANSI C63.10-2020+COR 1-2023	
Tested by (+signature)..... :	Connor Ma	
Check by (+signature)..... :	Davis Zhou	
Approved by (+signature).... :	Tiger Chen	



2. General description

2.1. EUT description

Products Name	Smart Watch	
Model No.	E52	
Rating(s)	Rechargeable Li-ion Battery DC 3.7V	
SN	SST2606E128-0101	
Operation frequency	2402MHz ~ 2480MHz	
Channel numbers	40	
Channel separation	2MHz	
Modulation technology	GFSK	
Antenna type	Internal antenna	
Antenna gain	0.17dBi	
Cable	Name	Description
	DC Line	☐ Shielded ☒ Unshielded ☒ Detachable ☐ Un-detachable ☐ No applicable ☒ Length: 0.55 m

2.2. Serial model(s) and model difference

Main model(s)	E52
Serial model(s)	/
Model difference	/

2.3. Auxiliary equipment

Support equipment list			
Description	Manufacturer	Model No.	Serial No.
Notebook PC	HP	ZHAN 66P	66Y03PC#AB2
UART	Tengfei	USB TO TTL	/
Adapter	UGREEN	X763	E9C122810534
Support cable list			
Description	Specified length(m)	Shielded	Unshielded
/	/	/	/

2.4. Description of test modes

Prescan Operating Mode		
No.	Detailed description of the operating mode	Test voltage
1	continuously transmitting, with its lowest data rate which emit the max power level	DC 3.7V

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

2.5. Test environmental conditions

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment.

The climatic conditions during the tests were within the following limits:

Ambient temperature	Relative humidity	Atmospheric pressure
15 °C ~ 35 °C	30 % ~ 60 %	86 kPa ~ 106 kPa

If explicitly required in the basic standard or applied product standard the climatic values are recorded and documented separately in this test report.

2.6.Statement of Measurement Uncertainty

Test Item	Uncertainty
Uncertainty for Conducted emissions	3.31 dB
Uncertainty for Radiated emission (9 kHz to 30 MHz)	3.1 dB
Uncertainty for Radiated emission (30 MHz to 1 GHz)	4.53 dB
Uncertainty for Radiated emission (above 1 GHz)	4.80 dB
RF power, conducted	1.08 dB
Power Spectral Density, Conducted	1.46 dB
Spurious Emissions, Conducted	2.94 dB
Measurement Uncertainty Decision Rule Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2023, clause 4.3.3 and 4.3.4.	

2.7.Report modification record

Report No.	Issue Date	Description
SST2606E129	2026-06-10	Original Report

2.8.Test Facility

The test facility is recognized, certified, or accredited by the following organizations:	
A2LA	Certificate No.:7057.01
FCC	Designation Number: CN1432
	Test Firm Registration Number: 640253
IC	Company Number: 30419
	CAB identifier: CN0154
CNAS	Registration No.: L17883
Location	Dongguan Qiyang Testing Technology Co., Ltd. Room 101-1, Building 1, No.19, Tianxin Butterfly 1st Road, Huangjiang, Dongguan, Guangdong, China

2.9. Other information

The laboratory responsible for all the information provided in the report, except those information provided by the applicant.

The applicant shall fully responsible for the information they provided.

The report would be invalid without a stamp of test laboratory and the signatures of compiler and approver.

The laboratory has not been responsible for the sampling stage; the test report merely corresponds to the test sample received.

Any objection to the test report shall submitted to the test laboratory within 15 days from the date of receipt of the report.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

2.10. Addition Instructions

Test Software	FCC Assist 1.0.2.2
Power level setup	10

3. Verdict summary section

FCC 47 CFR PART 15 Subpart C		
Requirement – Test case	Basic standard	Verdict
Antenna requirement	FCC part 15.203	Pass
AC Power Line Conducted Emission	FCC part 15.207	Pass
Conducted Peak Output Power	FCC part 15.247 (b)(3)	Pass
Channel Bandwidth & 99% OCB	FCC part 15.247 (a)(2)	Pass
Power Spectral Density	FCC part 15.247 (e)	Pass
Band Edge	FCC part 15.247(d)	Pass
Spurious Emission	FCC part 15.205/15.209	Pass

Test case verdicts	
- Test case does not apply to the test object	N/A
- Test object does meet the requirement	P (Pass)
- Test object does not meet the requirement	F (Fail)

4. List of Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Date of Cal.	Cal. Due
Connected emissions					
EMI Test Receiver	R&S	ESR3	103057	2026/04/10	2027/04/09
LISN	R&S	ENV 216	102832	2026/04/10	2027/04/09
Test Software	Farad	EZ-EMC	3A1.6	/	/
Radiated emissions					
Loop Antenna	Schwarzbeck	FMZB 1513-60 B	00044	2026/04/11	2027/04/10
Broadband Antenna	Schwarzbeck	VULB 9162	00556	2026/04/11	2027/04/10
Horn Antenna	Schwarzbeck	BBHA 9120 D	02783	2026/04/11	2027/04/10
Horn Antenna	Schwarzbeck	BBHA9170	01306	2026/04/11	2027/04/10
EMI Test Receiver	R&S	ESU8	100372	2026/04/11	2027/04/10
Spectrum Analyzer	R&S	FSV40-N	101791	2026/04/11	2027/04/10
Amplifier	Schwarzbeck	BBV 9744	00327	2026/04/11	2027/04/10
Amplifier	TSTPASS	LNA10180G45	TS2215008	2026/04/14	2027/04/13
Amplifier	RF system	TRLA-180400G45B	23060801	2026/04/14	2027/04/13
3m Anechoic Chamber	BOST	CHC-966	/	2026/04/11	2029/04/10
Test Software	Farad	EZ-EMC	3A1.1+	/	/
RF conducted					
Spectrum Analyzer	keysight	N9020A	MY51280659	2026/04/10	2027/04/09
Signal Generator	Agilent	N5181A	MY48180054	2026/04/10	2027/04/09
Signal Generator	keysight	N5172B	MY57281610	2026/04/10	2027/04/09
Spectrum Analyzer	R&S	FSV40-N	101791	2026/04/10	2027/04/09
Wideband Radio Communication Tester	R&S	CMW500	123123	2026/04/10	2027/04/09
RF Switch Box	TST PASS	TST V2	/	2026/04/10	2027/04/09
Test Software	TST PASS	TST PASS	V2.0	/	/
Temperature and Humidity Meter	KTJ	TA218A	879033	2026/04/13	2027/04/12

5. Technical Requirement and Measurement Data

5.1. Generally requirement

Antenna requirement:

§15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

§15.247(b) (4) requirement:

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is internal antenna which is permanently attached, Reference to the appendix for details

5.2.4. Test information

Ambient temperature:	23.6 °C
Relative humidity:	41 %
EUT operation mode:	Mode 1
Test Voltage:	DC 5V(Adapter Input AC 120V/60Hz)
Test results:	Pass
Remark:	Correct Factor Value = Attenuator Factor + Cable Loss + LISN Factor Measurement Value = Reading Level Value + Correct Factor Value Over Value = Measurement Value - Limit Value Only the worst case report (BLE_2M, 2440MHz)

Measurement data and Graphical presentation of the result

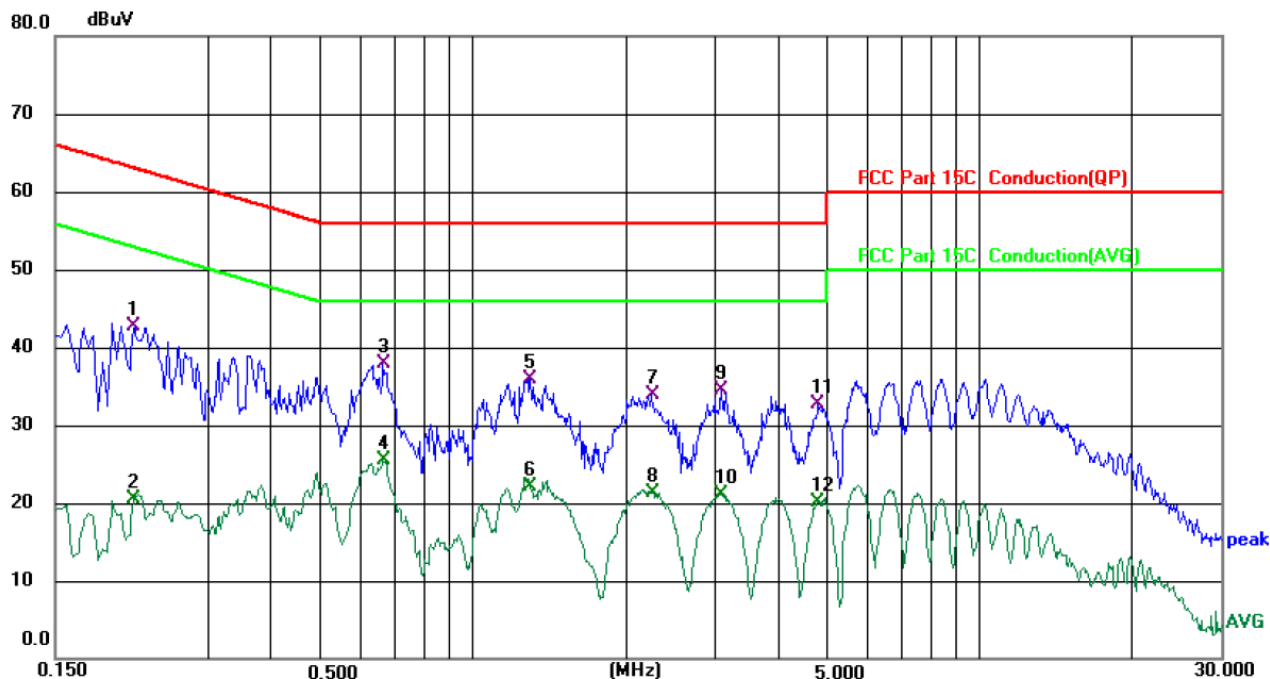

Site 844 Shielding Room

Phase: **L1**


Temperature: 23.6 (°C)

Humidity: 41 %

Limit: FCC Part 15C Conduction(QP)

Power: DC 5V(Adapter Input AC 120V/60Hz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2139	32.51	10.18	42.69	63.05	-20.36	QP	
2		0.2139	10.31	10.18	20.49	53.05	-32.56	AVG	
3	*	0.6660	27.73	10.15	37.88	56.00	-18.12	QP	
4		0.6660	15.32	10.15	25.47	46.00	-20.53	AVG	
5		1.2980	25.76	10.18	35.94	56.00	-20.06	QP	
6		1.2980	11.85	10.18	22.03	46.00	-23.97	AVG	
7		2.2580	23.72	10.19	33.91	56.00	-22.09	QP	
8		2.2580	11.12	10.19	21.31	46.00	-24.69	AVG	
9		3.0939	24.20	10.21	34.41	56.00	-21.59	QP	
10		3.0939	10.98	10.21	21.19	46.00	-24.81	AVG	
11		4.8100	22.44	10.24	32.68	56.00	-23.32	QP	
12		4.8100	9.89	10.24	20.13	46.00	-25.87	AVG	

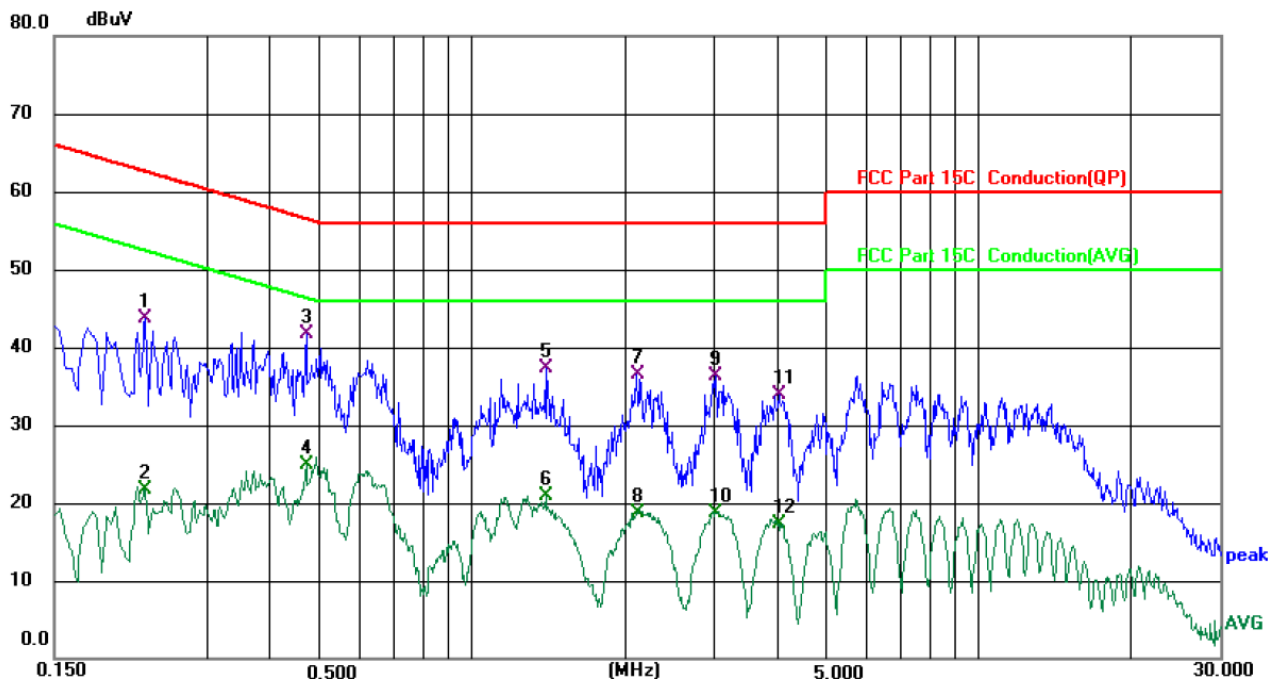

Site 844 Shielding Room

Phase: **N**

Temperature: 23.6 (°C)

Humidity: 41 %


Limit: FCC Part 15C Conduction(QP)

Power: DC 5V(Adapter Input AC 120V/60Hz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2260	33.48	10.14	43.62	62.60	-18.98	QP	
2		0.2260	11.64	10.14	21.78	52.60	-30.82	AVG	
3	*	0.4700	31.53	10.12	41.65	56.51	-14.86	QP	
4		0.4700	14.69	10.12	24.81	46.51	-21.70	AVG	
5		1.3977	27.21	10.13	37.34	56.00	-18.66	QP	
6		1.3977	10.72	10.13	20.85	46.00	-25.15	AVG	
7		2.1179	26.24	10.17	36.41	56.00	-19.59	QP	
8		2.1179	8.57	10.17	18.74	46.00	-27.26	AVG	
9		3.0259	26.19	10.20	36.39	56.00	-19.61	QP	
10		3.0259	8.59	10.20	18.79	46.00	-27.21	AVG	
11		4.0460	23.71	10.23	33.94	56.00	-22.06	QP	
12		4.0460	7.02	10.23	17.25	46.00	-28.75	AVG	



5.3. Duty Cycle

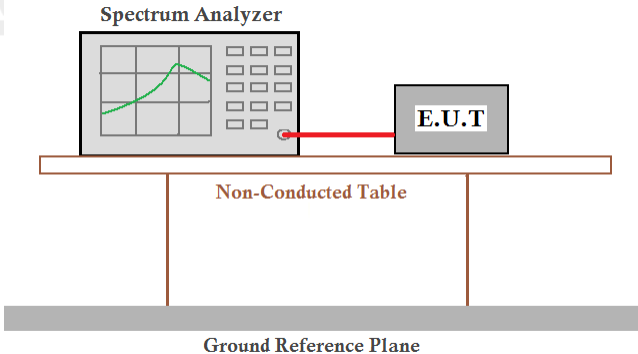Limit
Report for use
Block diagram of Test Setup
 The diagram shows a Spectrum Analyzer and an E.U.T. (Equipment Under Test) connected by a red cable. They are both placed on a table labeled 'Non-Conducted Table'. Below this table is a 'Ground Reference Plane'.
Test Instrument
Refer to section 4 for details
Test Procedures
The transmitter output connected to the Spectrum Analyzer. Test according to Procedure 6.0)b in KDB 558074 v05r02. 1.RBW=8 MHz(the largest available value) 2.VBW=8 MHz(>RBW) 3.SPAN = 0 Hz 4.Detector = Peak 5.Number of points in sweep: 30001 6.Trace mode: Clear write 7.Measure T_{total} and T_{on} 8.Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$
Verdict
Pass


Measurement Data: The detailed test data see Appendix V

5.4. Conducted Peak Output Power

Limit

1W(30dBm)

Block diagram of Test Setup

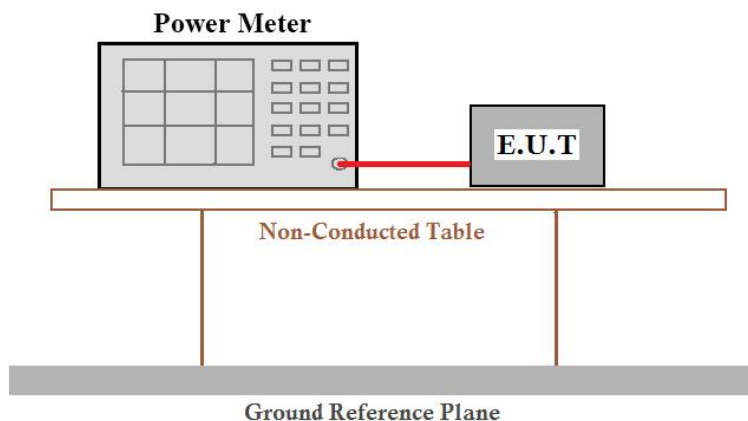

Test Instrument

Refer to section 4 for details

Test Procedures

Set spectrum analyzer as following:


- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq 3 \times$ RBW.
- Set span $\geq 3 \times$ RBW
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Verdict

Pass


Measurement Data: The detailed test data see Appendix V

5.5. Channel Bandwidth

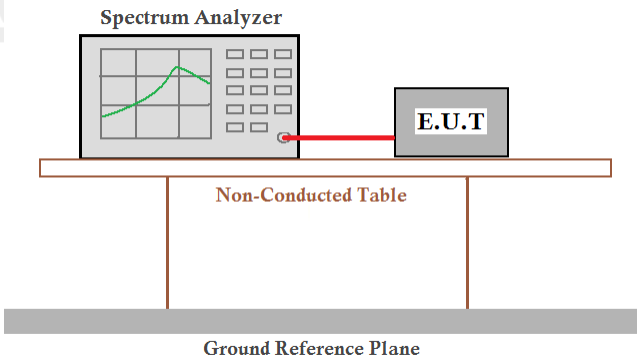Limit
>500KHz
Block diagram of Test Setup
 The diagram shows a Spectrum Analyzer and an E.U.T. connected by a red cable. They are both sitting on a table labeled 'Non-Conducted Table'. Below the table is a thick grey bar labeled 'Ground Reference Plane'.
Test Instrument
Refer to section 4 for details
Test Procedures
The steps for the first option are as follows: - Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. - Set the VBW $\geq [3 \times \text{RBW}]$. - Detector = peak. - Trace mode = max-hold. - Sweep = No faster than coupled (auto) time. - Allow the trace to stabilize. - Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.
Verdict
Pass

Measurement Data: The detailed test data see Appendix V

5.6. Power Spectral Density

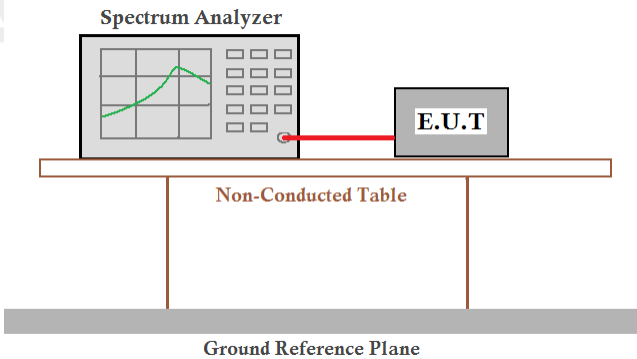Limit
8dBm/3kHz
Block diagram of Test Setup
 The diagram shows a Spectrum Analyzer and an E.U.T. (Equipment Under Test) connected by a red cable. They are both placed on a table labeled 'Non-Conducted Table'. Below this table is a thick grey bar labeled 'Ground Reference Plane'.
Test Instrument
Refer to section 4 for details
Test Procedures
a) Set analyzer center frequency to DTS channel center frequency. b) Set the span >1.5 times the DTS bandwidth. c) Set the RBW to $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$. d) Set the VBW $\geq [3 \times \text{RBW}]$. e) Detector = peak. f) Sweep time = No faster than coupled (auto) time. g) Trace mode = max-hold. h) Allow trace to fully stabilize. i) Use the peak marker function to determine the maximum amplitude level within the RBW.
Verdict
Pass


Measurement Data: The detailed test data see Appendix V

5.7. Conducted Spurious Emission

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Block diagram of Test Setup

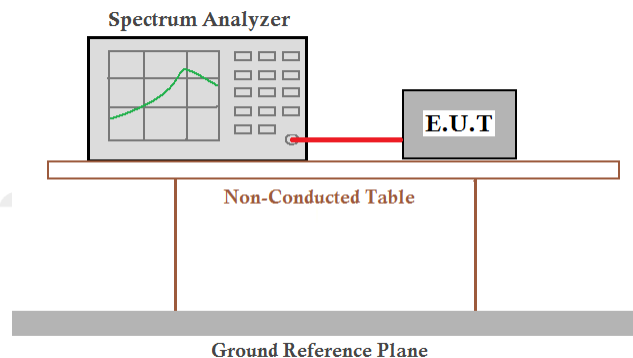

Test Instrument

Refer to section 4 for details

Test Procedures

Establish a reference level by using the following procedure:

- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 times the DTS bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level

Establish an emission level by using the following procedure:

- Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.

NOTE—the number of points can also be increased for large spans to retain frequency resolution

- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Verdict

Pass

Measurement Data: The detailed test data see Appendix V

5.8. Radiated emissions

5.8.1. Limits

Frequency (MHz)	Field Strength(microvolts/meter)	Measurement distance(meters)
0.009~0.49	2400/F(kHz)	300
0.49~1.705	24000/F(kHz)	30
1.705~30	30	30
30~88	100**	3
88~216	150**	3
216~960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.


5.8.2. Test method

Measurements were made in semi-anechoic chamber or Open Area Test Site that complies to CISPR 16. Preliminary (peak) measurements. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (quasi-peak detector below 1 GHz and average detector above 1 GHz) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable.

Test applies to KDB558074 D01 15.247 Meas Guidance v05r02 & C63.10

5.8.3. Block diagram of test setup

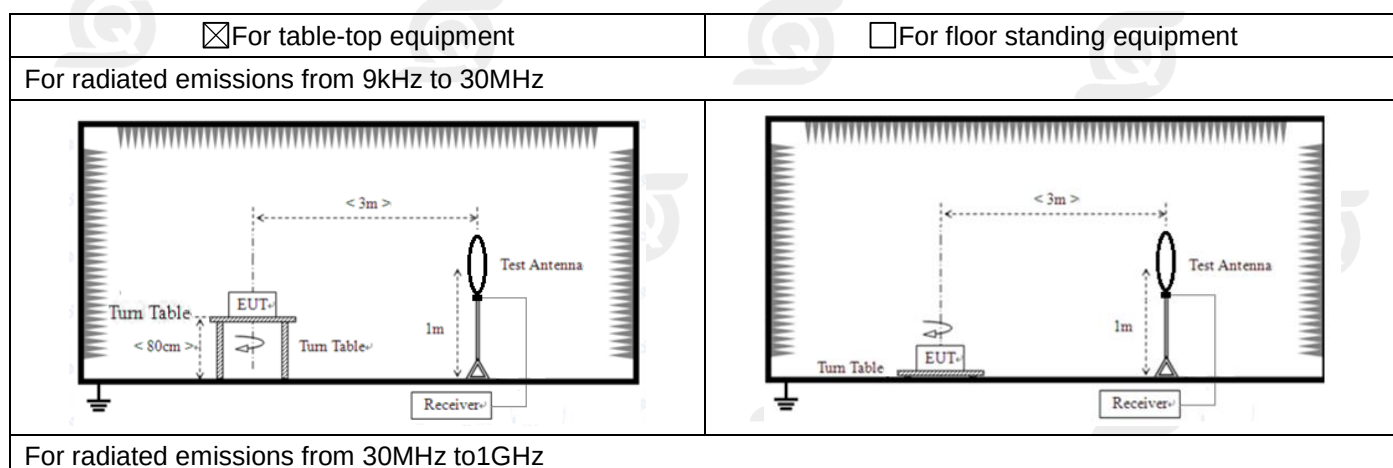

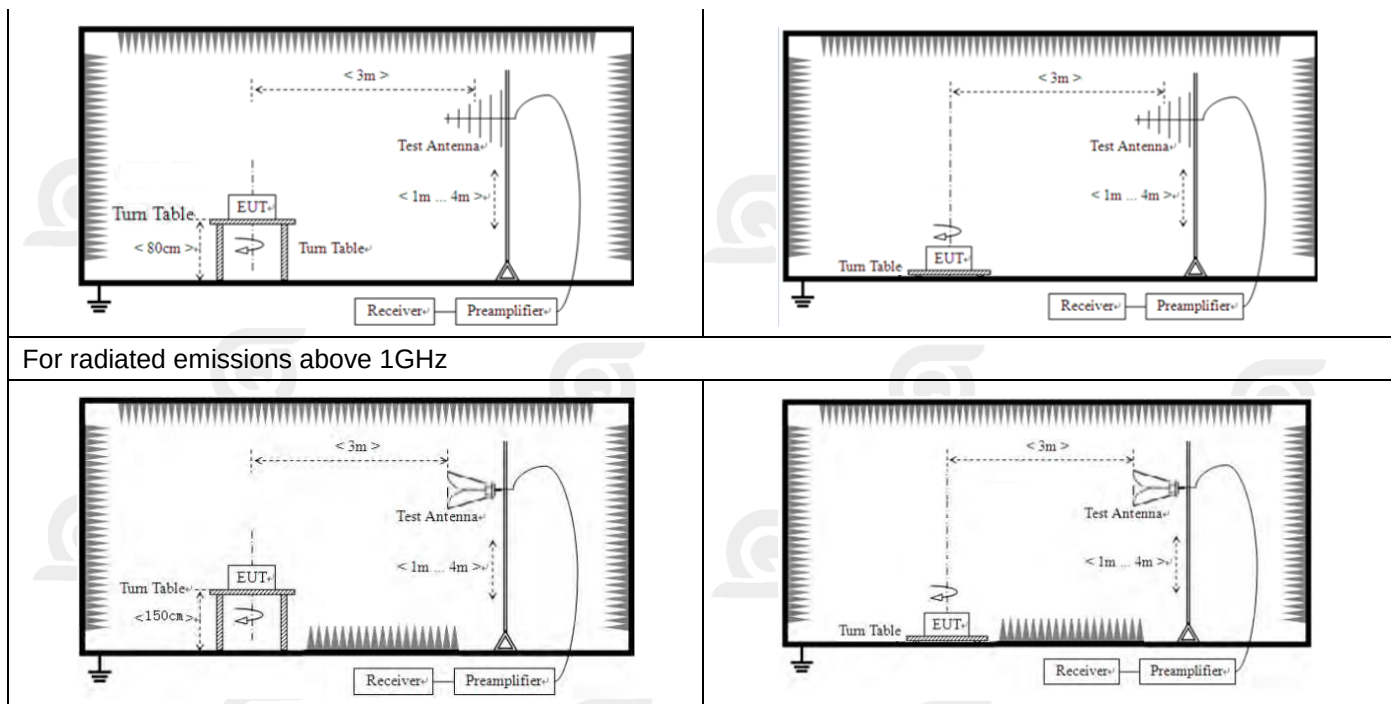


5.8.4. Test information

Ambient temperature:	25.7 °C
Relative humidity:	51 %
EUT operation mode:	Mode 1
Test results:	Pass
Remark:	Factor Value = Antenna Factor + Cable Loss - Preamplifier Factor Level Value = Reading Value + Factor Value Margin Value = Level Value - Limit Value Only the worst case report (BLE_2M, 2440MHz)

Note: The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

Measurement data and Graphical presentation of the result

All condition were test and passed, only worst data report (BLE_2M, 2440MHz)

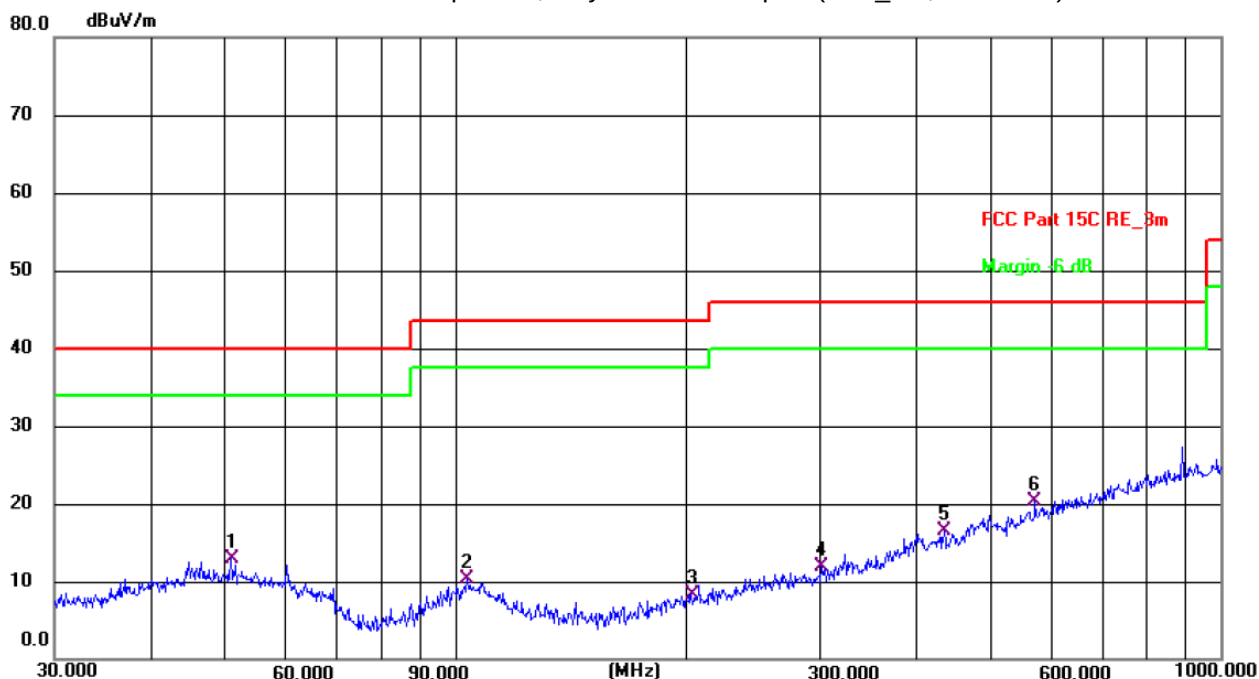

Site: 3m Anechoic Chamber1

Polarization: **Horizontal**


Temperature: 25.7(C)

Humidity: 51 %

Limit: FCC Part 15C RE_3m

Power: DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	50.9419	27.36	-14.51	12.85	40.00	-27.15	QP	P	
2	103.8054	26.49	-16.23	10.26	43.50	-33.24	QP	P	
3	203.5227	25.29	-16.95	8.34	43.50	-35.16	QP	P	
4	301.4223	26.09	-14.14	11.95	46.00	-34.05	QP	P	
5	435.5898	27.03	-10.54	16.49	46.00	-29.51	QP	P	
6 *	572.6144	28.10	-7.84	20.26	46.00	-25.74	QP	P	

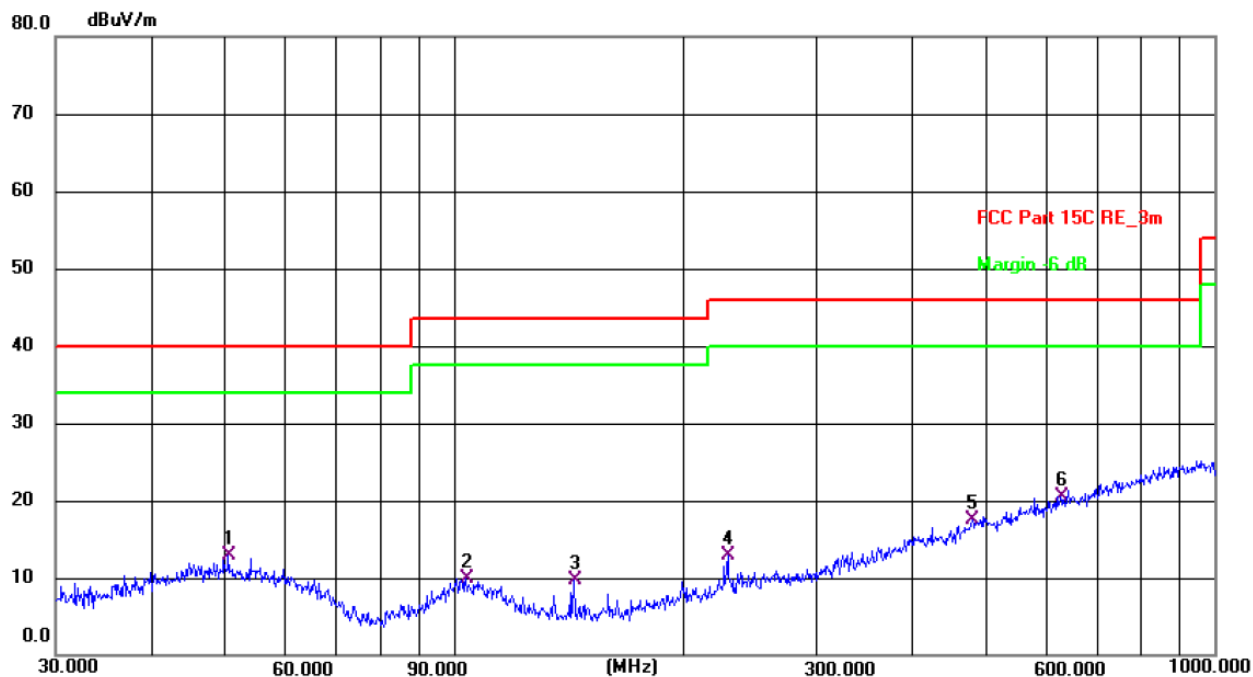

Site: 3m Anechoic Chamber1

Polarization: **Vertical**

Temperature: 25.7(C) Humidity: 51 %

Limit: FCC Part 15C RE_3m


Power: DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	50.5860	27.26	-14.45	12.81	40.00	-27.19	QP	P	
2	103.8055	26.21	-16.23	9.98	43.50	-33.52	QP	P	
3	143.8295	29.43	-19.80	9.63	43.50	-33.87	QP	P	
4	229.2931	28.83	-15.95	12.88	46.00	-33.12	QP	P	
5	480.5276	26.52	-8.96	17.56	46.00	-28.44	QP	P	
6 *	627.2738	27.12	-6.58	20.54	46.00	-25.46	QP	P	

Band Edge:

All condition were test and passed, only worst data report (BLE_2M)

Lowest channel:

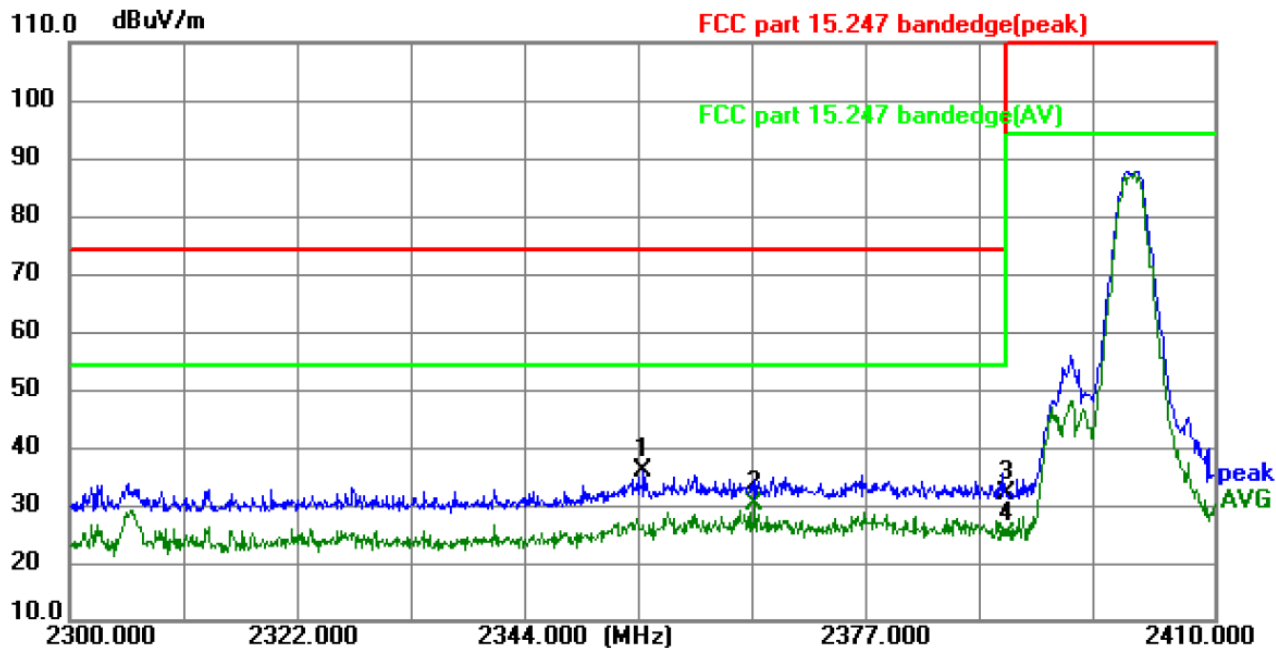

Site: 3m Anechoic Chamber

Polarization: **Horizontal**


Temperature: 26.6 °C

Humidity: 57 %

Limit: FCC part 15.247 bandedge(peak)

Power:DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	2355.1651	57.05	-21.11	35.94	74.00	-38.06	peak	P	
2 *	2365.8458	51.09	-21.07	30.02	54.00	-23.98	AVG	P	
3	2390.0000	53.01	-20.98	32.03	74.00	-41.97	peak	P	
4	2390.0000	45.95	-20.98	24.97	54.00	-29.03	AVG	P	

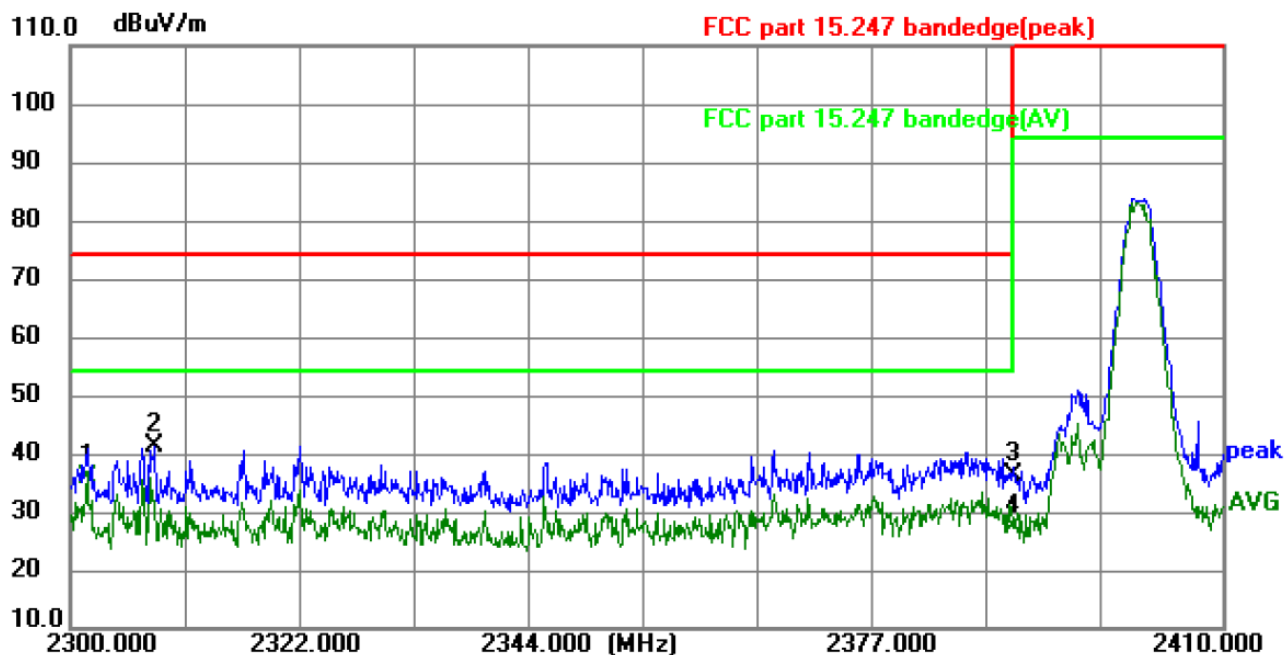

Site: 3m Anechoic Chamber

Polarization: **Vertical**

Temperature: 26.6 °C


Humidity: 57 %

Limit: FCC part 15.247 bandedge(peak)

Power:DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	2301.6516	57.64	-21.59	36.05	54.00	-17.95	AVG	P	
2	2308.0380	62.93	-21.54	41.39	74.00	-32.61	peak	P	
3	2390.0000	57.35	-20.98	36.37	74.00	-37.63	peak	P	
4	2390.0000	48.31	-20.98	27.33	54.00	-26.67	AVG	P	

Highest channel:

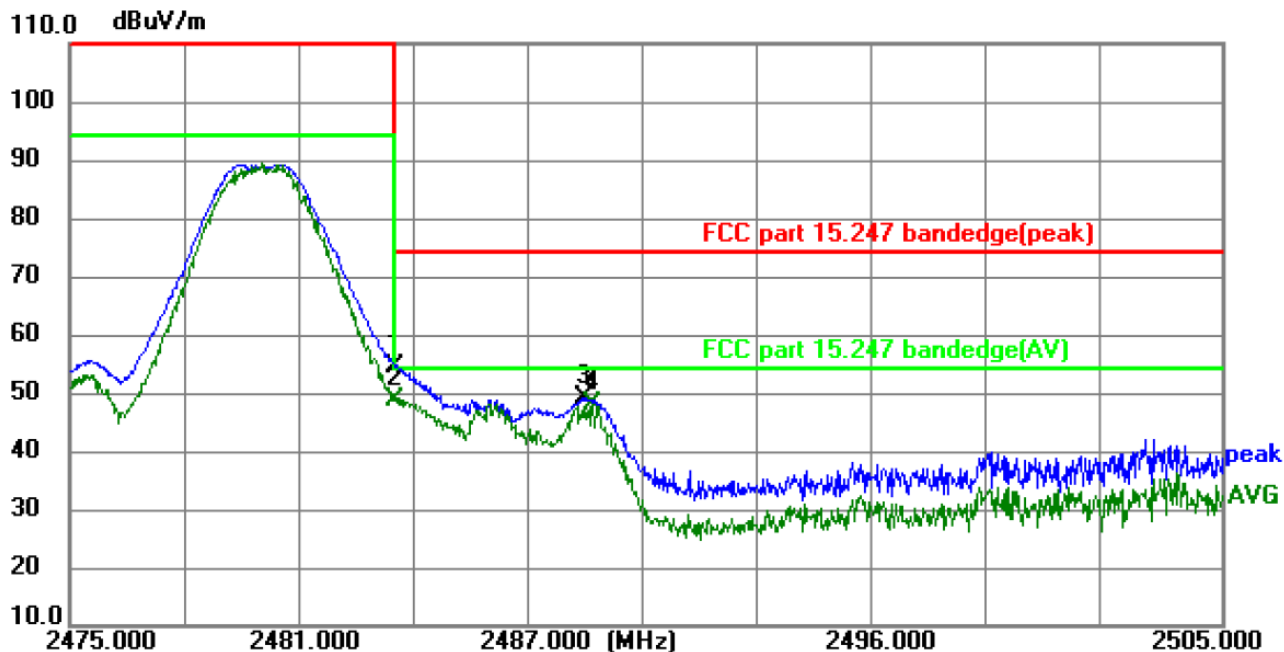

Site: 3m Anechoic Chamber

Polarization: **Horizontal**


Temperature: 26.6 °C

Humidity: 57 %

Limit: FCC part 15.247 bandedge(peak)

Power:DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	2483.5000	75.22	-20.79	54.43	74.00	-19.57	peak	P	
2 *	2483.5000	69.67	-20.79	48.88	54.00	-5.12	AVG	P	
3	2488.3933	69.90	-20.73	49.17	74.00	-24.83	peak	P	
4	2488.6036	68.84	-20.72	48.12	54.00	-5.88	AVG	P	

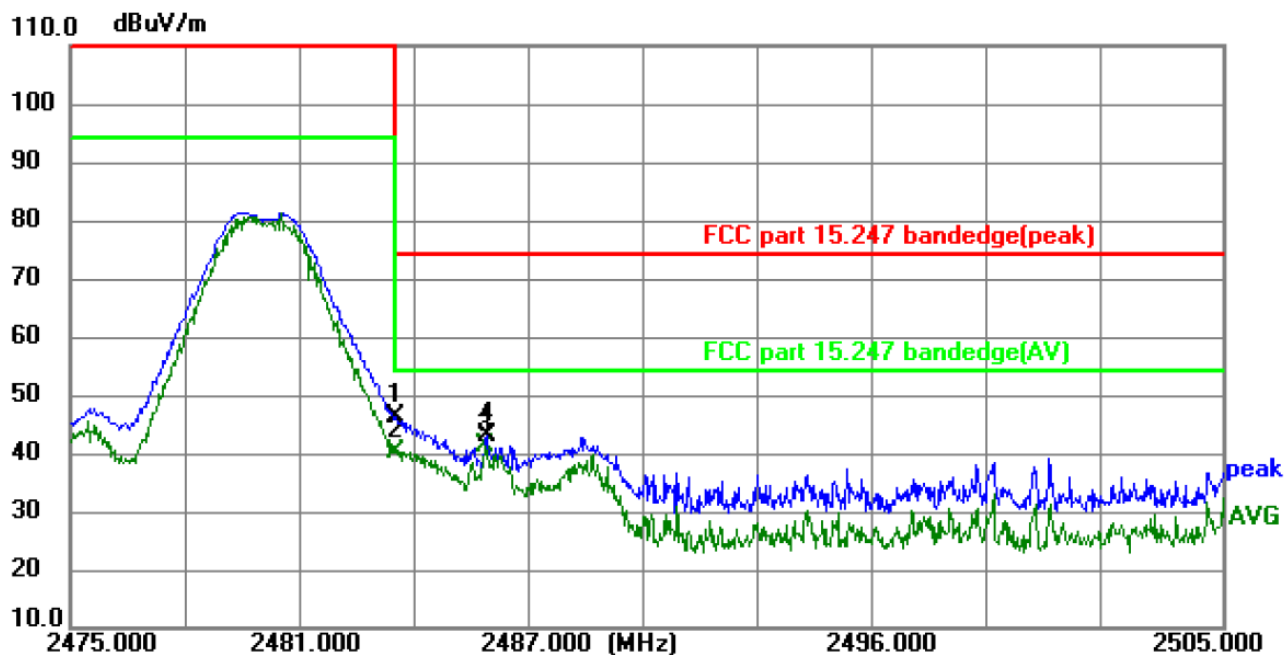

Site: 3m Anechoic Chamber

Polarization: **Vertical**

Temperature: 26.6 °C

Humidity: 57 %

Limit: FCC part 15.247 bandedge(peak)


Power:DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	2483.5000	66.96	-20.79	46.17	74.00	-27.83	peak	P	
2	2483.5000	61.10	-20.79	40.31	54.00	-13.69	AVG	P	
3 *	2485.8108	61.84	-20.76	41.08	54.00	-12.92	AVG	P	
4	2485.8407	63.77	-20.76	43.01	74.00	-30.99	peak	P	

Spurious Emissions:

All condition were test and passed, only worst data report (BLE_2M)

Lowest channel

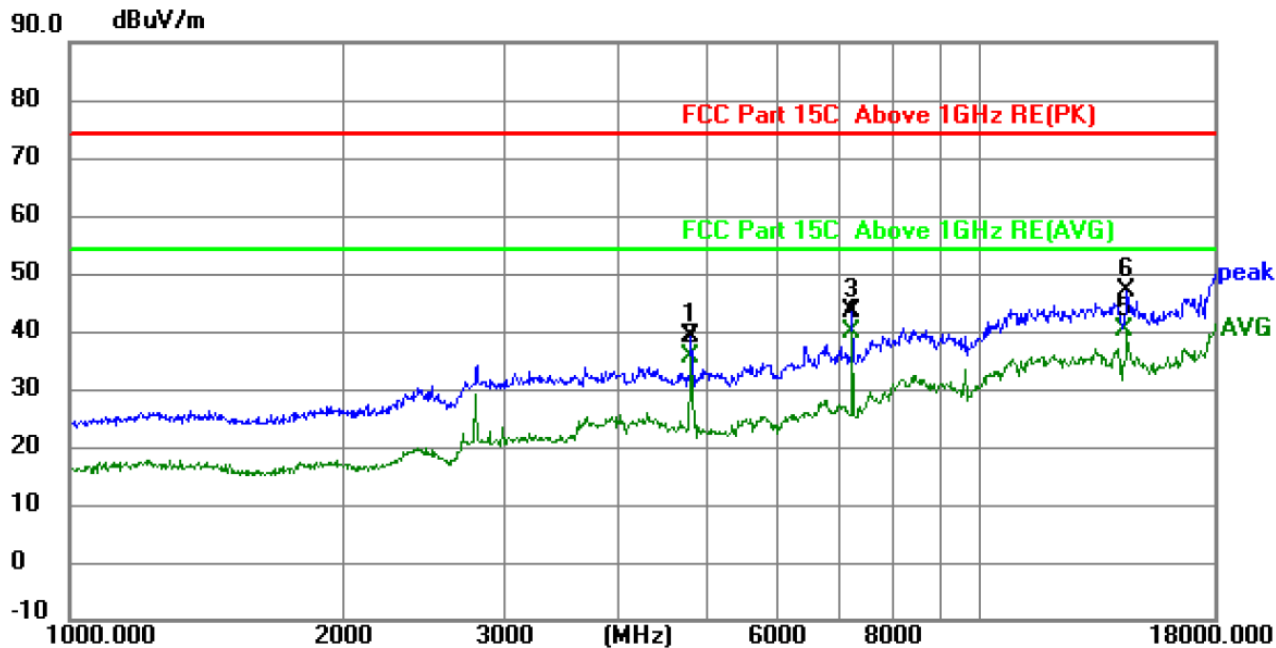

Site: 3m Anechoic Chamber

Polarization: **Horizontal**


Temperature: 24.2 °C

Humidity: 58 %

Limit: FCC Part 15C Above 1GHz RE(PK)

Power:DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	4804.1103	52.43	-13.49	38.94	74.00	-35.06	peak	P	
2	4804.1103	48.97	-13.49	35.48	54.00	-18.52	AVG	P	
3	7206.5550	51.38	-7.83	43.55	74.00	-30.45	peak	P	
4	7206.5550	47.51	-7.83	39.68	54.00	-14.32	AVG	P	
5 *	14407.0373	39.16	0.86	40.02	54.00	-13.98	AVG	P	
6	14408.4254	46.01	0.86	46.87	74.00	-27.13	peak	P	

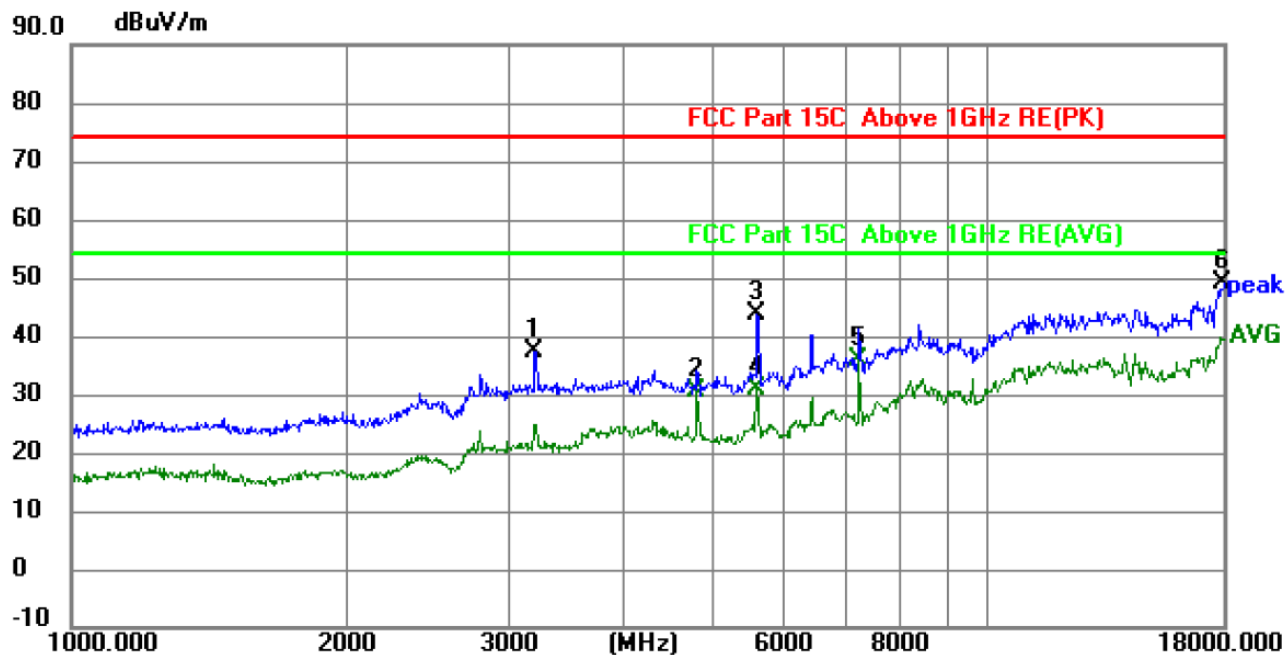

Site: 3m Anechoic Chamber

Polarization: **Vertical**


Temperature: 24.2 °C

Humidity: 58 %

Limit: FCC Part 15C Above 1GHz RE(PK)

Power:DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	3194.5547	56.34	-18.93	37.41	74.00	-36.59	peak	P	
2	4801.3340	44.14	-13.51	30.63	54.00	-23.37	AVG	P	
3	5581.6373	56.26	-12.54	43.72	74.00	-30.28	peak	P	
4	5581.6373	43.54	-12.54	31.00	54.00	-23.00	AVG	P	
5 *	7206.5550	43.75	-7.83	35.92	54.00	-18.08	AVG	P	
6	17998.2659	41.59	7.35	48.94	74.00	-25.06	peak	P	

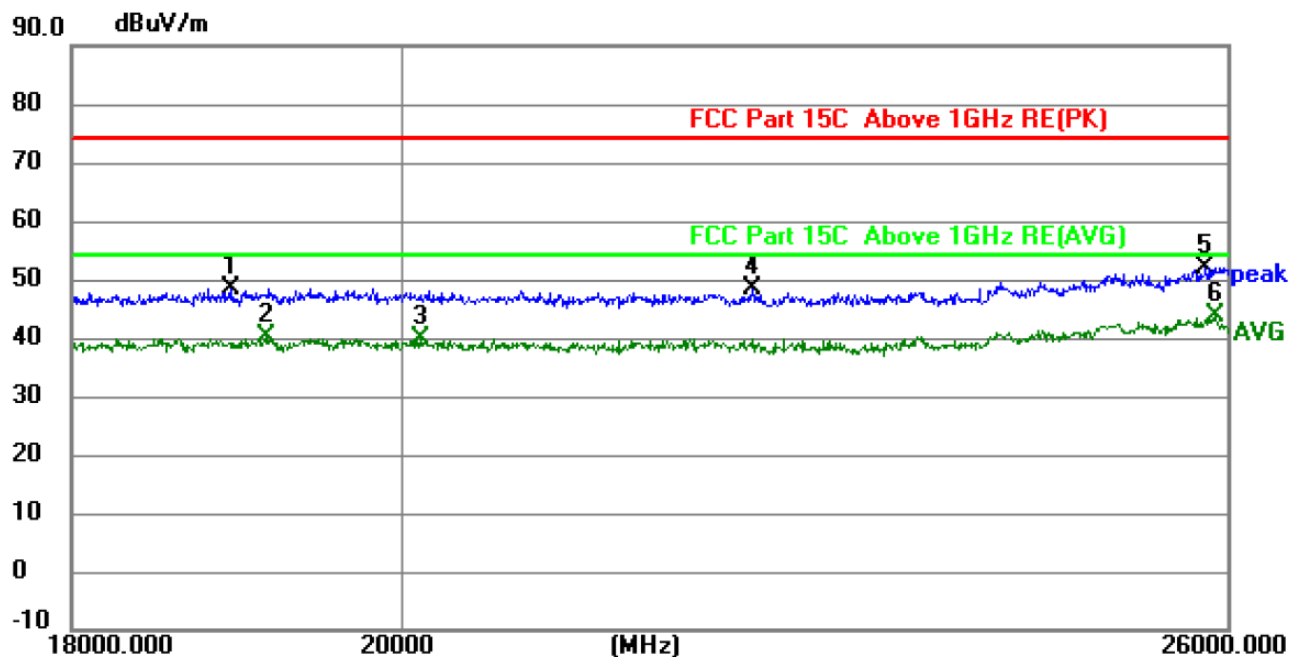

Site: 3m Anechoic Chamber

Polarization: **Horizontal**


Temperature: 24.2 °C

Humidity: 58 %

Limit: FCC Part 15C Above 1GHz RE(PK)

Power:DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	18931.6638	49.46	-1.03	48.43	74.00	-25.57	peak	P	
2	19142.6079	41.07	-0.79	40.28	54.00	-13.72	AVG	P	
3	20107.2698	40.66	-0.70	39.96	54.00	-14.04	AVG	P	
4	22350.2851	50.15	-1.79	48.36	74.00	-25.64	peak	P	
5	25815.8125	52.03	0.10	52.13	74.00	-21.87	peak	P	
6 *	25896.9476	43.46	0.19	43.65	54.00	-10.35	AVG	P	

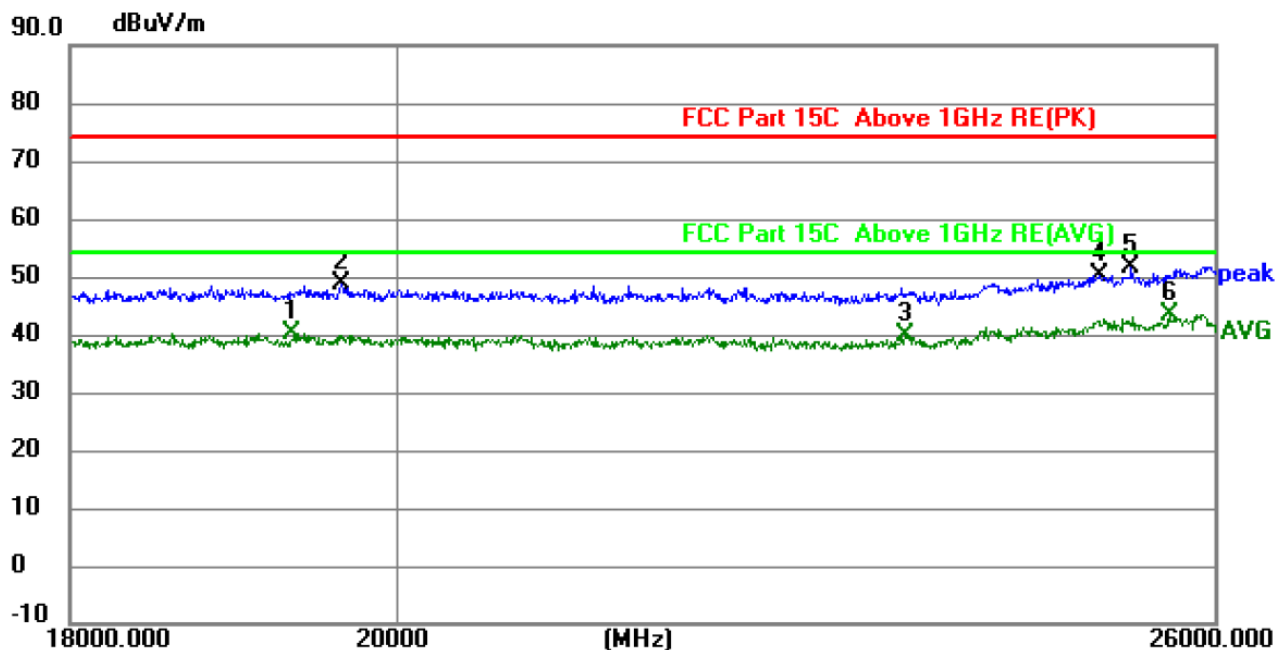

Site: 3m Anechoic Chamber

Polarization: **Vertical**

Temperature: 24.2 °C


Humidity: 58 %

Limit: FCC Part 15C Above 1GHz RE(PK)

Power: DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	19334.3242	41.01	-0.71	40.30	54.00	-13.70	AVG	P	
2	19641.5085	49.21	-0.52	48.69	74.00	-25.31	peak	P	
3	23548.0671	41.74	-1.93	39.81	54.00	-14.19	AVG	P	
4	25056.0592	50.93	-0.63	50.30	74.00	-23.70	peak	P	
5	25309.4814	51.68	-0.17	51.51	74.00	-22.49	peak	P	
6 *	25631.3589	43.38	-0.04	43.34	54.00	-10.66	AVG	P	

Middle channel:

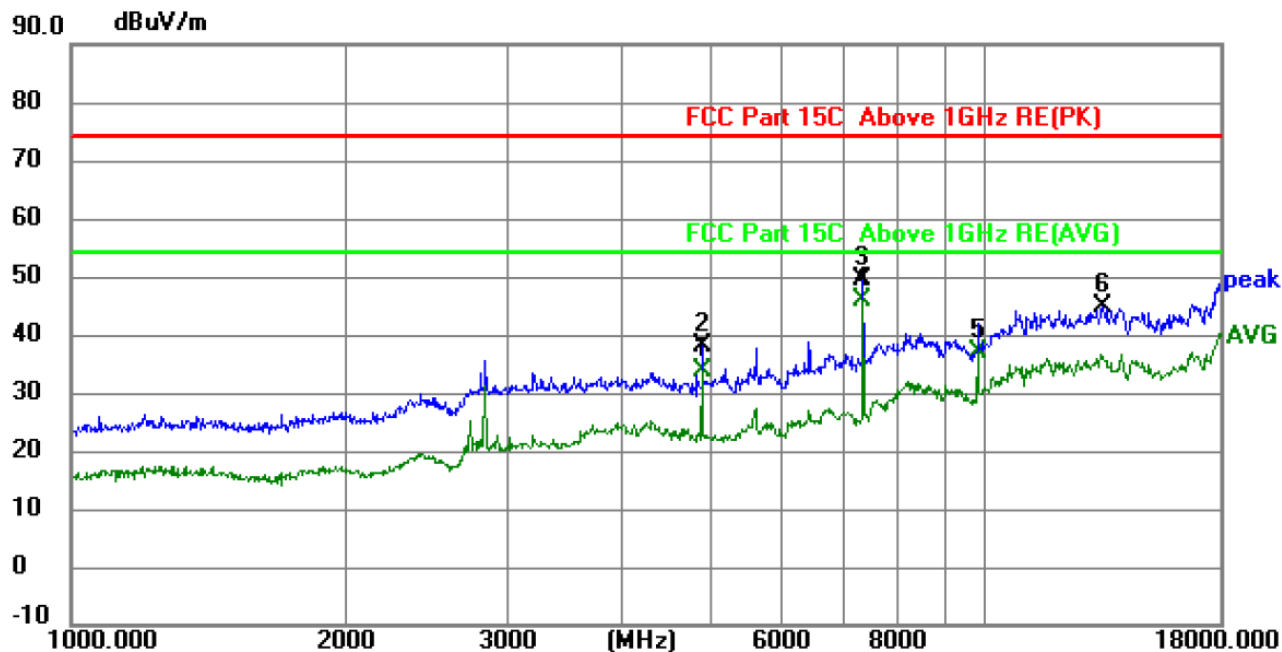

Site: 3m Anechoic Chamber

Polarization: **Horizontal**


Temperature: 24.2 °C

Humidity: 58 %

Limit: FCC Part 15C Above 1GHz RE(PK)

Power: DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	4877.3310	47.13	-13.29	33.84	54.00	-20.16	AVG	P	
2	4879.2110	51.45	-13.28	38.17	74.00	-35.83	peak	P	
3	7320.6226	57.03	-7.63	49.40	74.00	-24.60	peak	P	
4 *	7320.6226	53.54	-7.63	45.91	54.00	-8.09	AVG	P	
5	9755.2503	40.42	-3.58	36.84	54.00	-17.16	AVG	P	
6	13366.6101	45.66	-0.67	44.99	74.00	-29.01	peak	P	

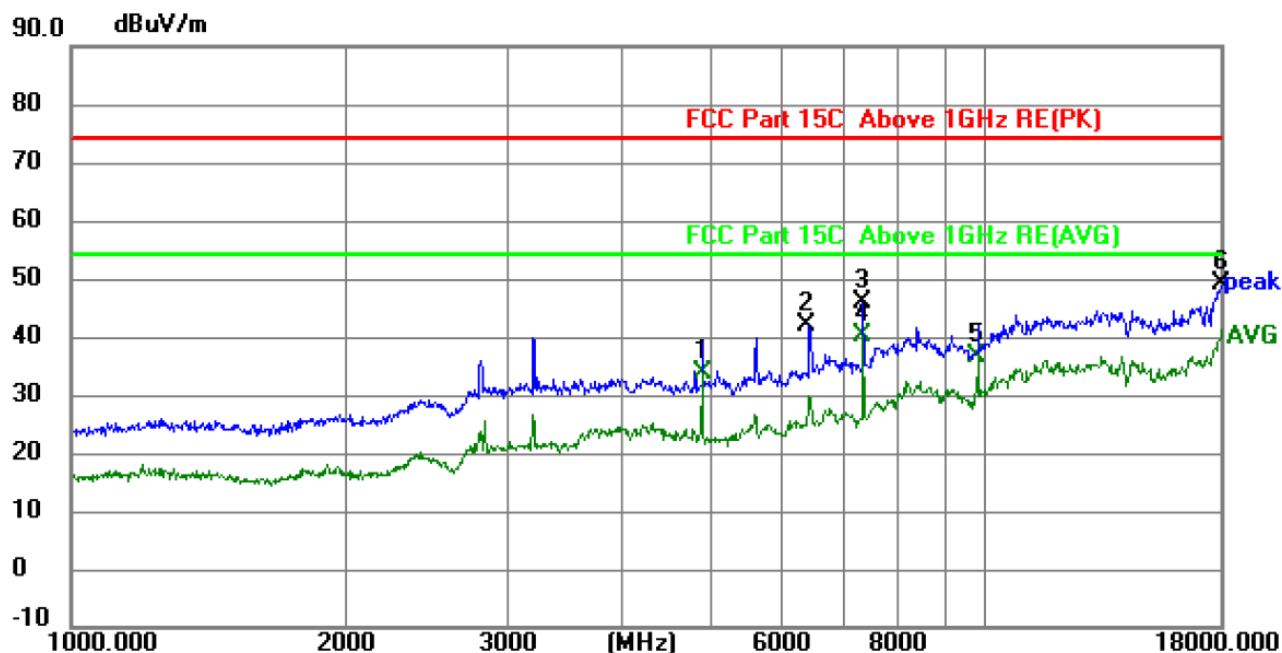

Site: 3m Anechoic Chamber

Polarization: **Vertical**


Temperature: 24.2 °C

Humidity: 58 %

Limit: FCC Part 15C Above 1GHz RE(PK)

Power: DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	4879.6810	46.89	-13.28	33.61	54.00	-20.39	AVG	P	
2	6373.5093	52.30	-10.33	41.97	74.00	-32.03	peak	P	
3	7319.2121	53.40	-7.63	45.77	74.00	-28.23	peak	P	
4 *	7319.2121	47.72	-7.63	40.09	54.00	-13.91	AVG	P	
5	9755.2503	40.21	-3.58	36.63	54.00	-17.37	AVG	P	
6	18000.0000	41.75	7.37	49.12	74.00	-24.88	peak	P	

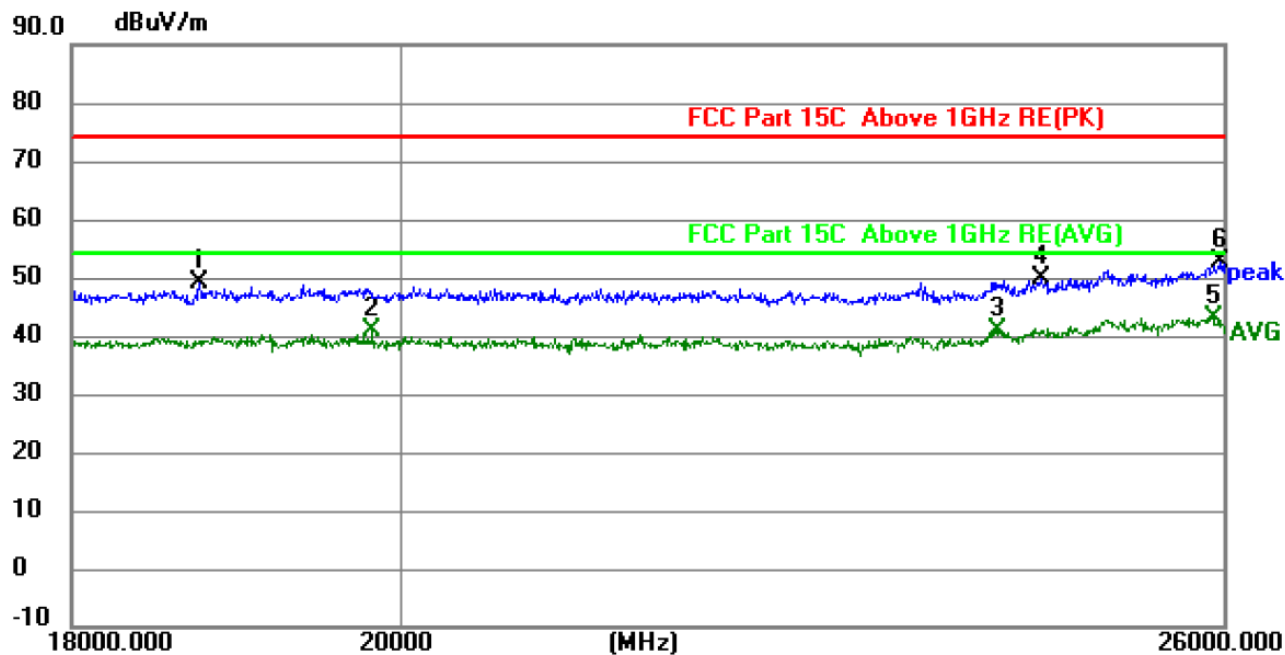

Site: 3m Anechoic Chamber

Polarization: **Horizontal**


Temperature: 24.2 °C

Humidity: 58 %

Limit: FCC Part 15C Above 1GHz RE(PK)

Power:DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	18749.6850	50.18	-1.21	48.97	74.00	-25.03	peak	P	
2	19811.4910	41.26	-0.45	40.81	54.00	-13.19	AVG	P	
3	24194.3840	42.31	-1.49	40.82	54.00	-13.18	AVG	P	
4	24526.4192	50.89	-1.04	49.85	74.00	-24.15	peak	P	
5 *	25906.7899	42.97	0.21	43.18	54.00	-10.82	AVG	P	
6	25963.3760	52.25	0.26	52.51	74.00	-21.49	peak	P	

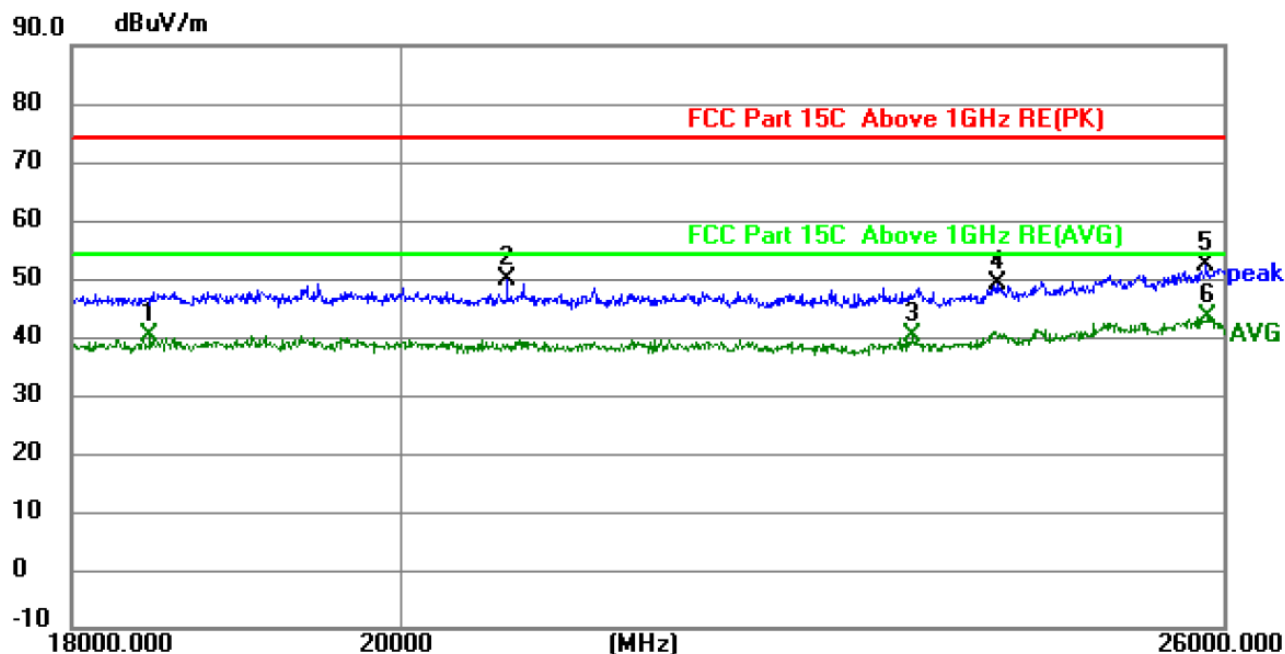

Site: 3m Anechoic Chamber

Polarization: **Vertical**

Temperature: 24.2 °C


Humidity: 58 %

Limit: FCC Part 15C Above 1GHz RE(PK)

Power:DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	18454.6386	41.65	-1.40	40.25	54.00	-13.75	AVG	P	
2	20685.2472	50.47	-0.69	49.78	74.00	-24.22	peak	P	
3	23550.3763	42.02	-1.93	40.09	54.00	-13.91	AVG	P	
4	24184.5993	50.70	-1.48	49.22	74.00	-24.78	peak	P	
5	25848.7430	52.13	0.14	52.27	74.00	-21.73	peak	P	
6 *	25875.6885	43.21	0.17	43.38	54.00	-10.62	AVG	P	

Highest channel:

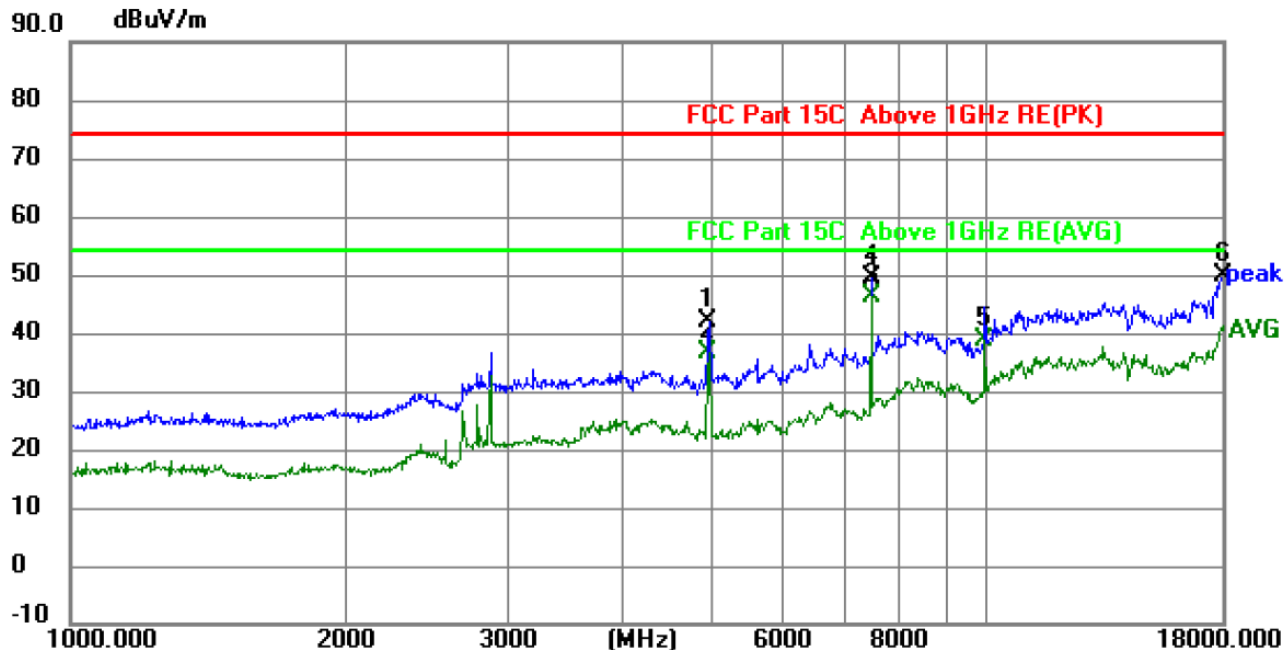

Site: 3m Anechoic Chamber

Polarization: **Horizontal**


Temperature: 24.2 °C

Humidity: 58 %

Limit: FCC Part 15C Above 1GHz RE(PK)

Power:DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	4960.2624	55.10	-13.04	42.06	74.00	-31.94	peak	P	
2	4960.2624	49.59	-13.04	36.55	54.00	-17.45	AVG	P	
3 *	7440.0790	53.70	-7.29	46.41	54.00	-7.59	AVG	P	
4	7441.5127	56.72	-7.29	49.43	74.00	-24.57	peak	P	
5	9915.3896	41.67	-2.82	38.85	54.00	-15.15	AVG	P	
6	17998.2658	42.50	7.35	49.85	74.00	-24.15	peak	P	

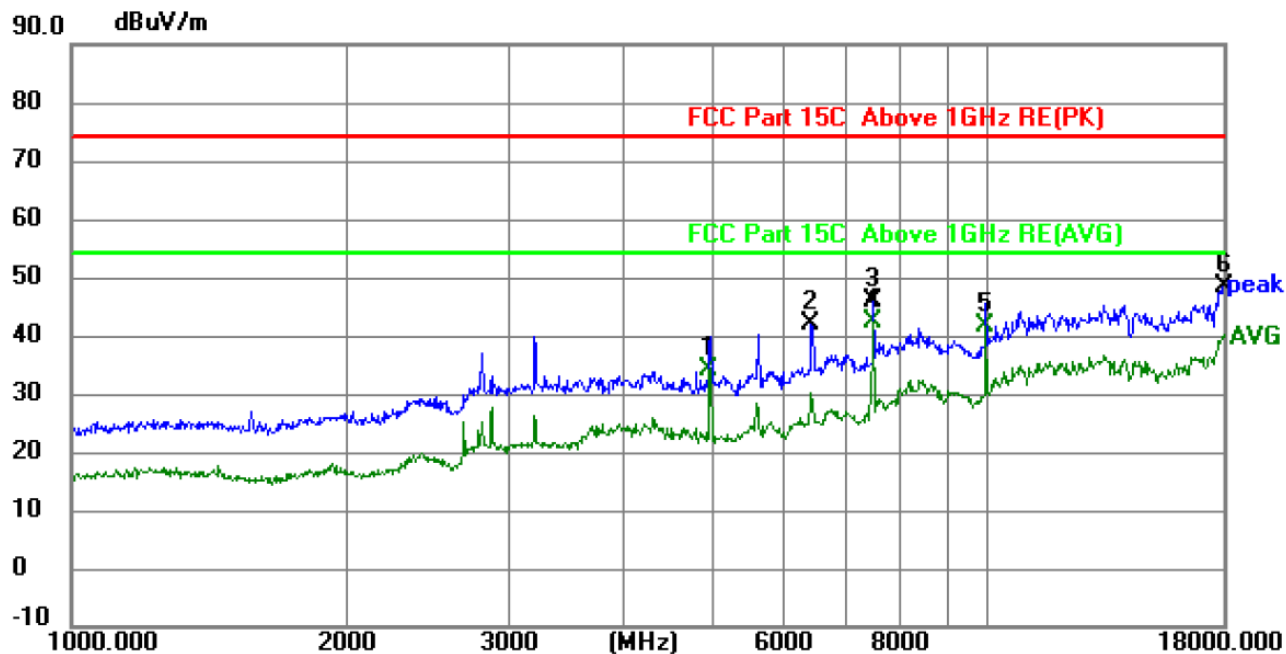

Site: 3m Anechoic Chamber

Polarization: **Vertical**


Temperature: 24.2 °C

Humidity: 58 %

Limit: FCC Part 15C Above 1GHz RE(PK)

Power: DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	4957.3958	47.26	-13.07	34.19	54.00	-19.81	AVG	P	
2	6377.1947	52.27	-10.32	41.95	74.00	-32.05	peak	P	
3	7440.0789	53.33	-7.29	46.04	74.00	-27.96	peak	P	
4 *	7440.0789	49.51	-7.29	42.22	54.00	-11.78	AVG	P	
5	9914.4344	44.44	-2.82	41.62	54.00	-12.38	AVG	P	
6	18000.0000	41.14	7.37	48.51	74.00	-25.49	peak	P	

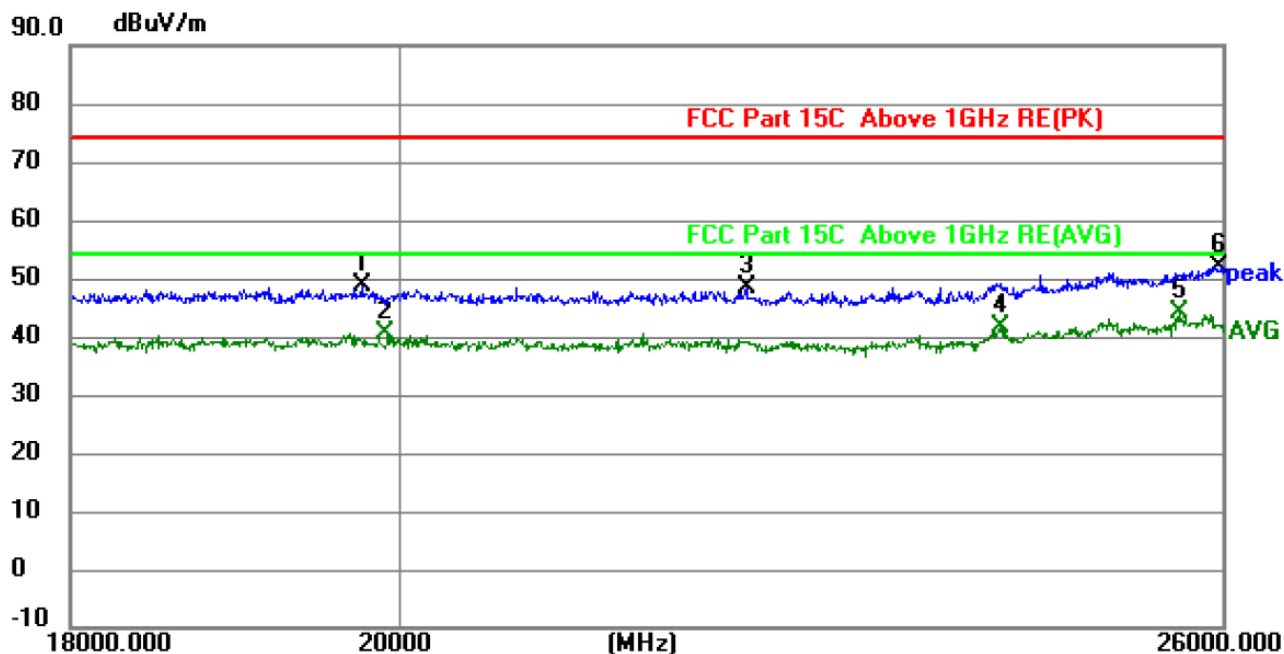

Site: 3m Anechoic Chamber

Polarization: **Horizontal**


Temperature: 24.2 °C

Humidity: 58 %

Limit: FCC Part 15C Above 1GHz RE(PK)

Power:DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	19748.4533	48.97	-0.36	48.61	74.00	-25.39	peak	P	
2	19915.2111	40.98	-0.58	40.40	54.00	-13.60	AVG	P	
3	22331.3900	50.29	-1.78	48.51	74.00	-25.49	peak	P	
4	24215.7459	43.00	-1.50	41.50	54.00	-12.50	AVG	P	
5 *	25648.6443	44.18	-0.03	44.15	54.00	-9.85	AVG	P	
6	25986.6183	51.81	0.29	52.10	74.00	-21.90	peak	P	

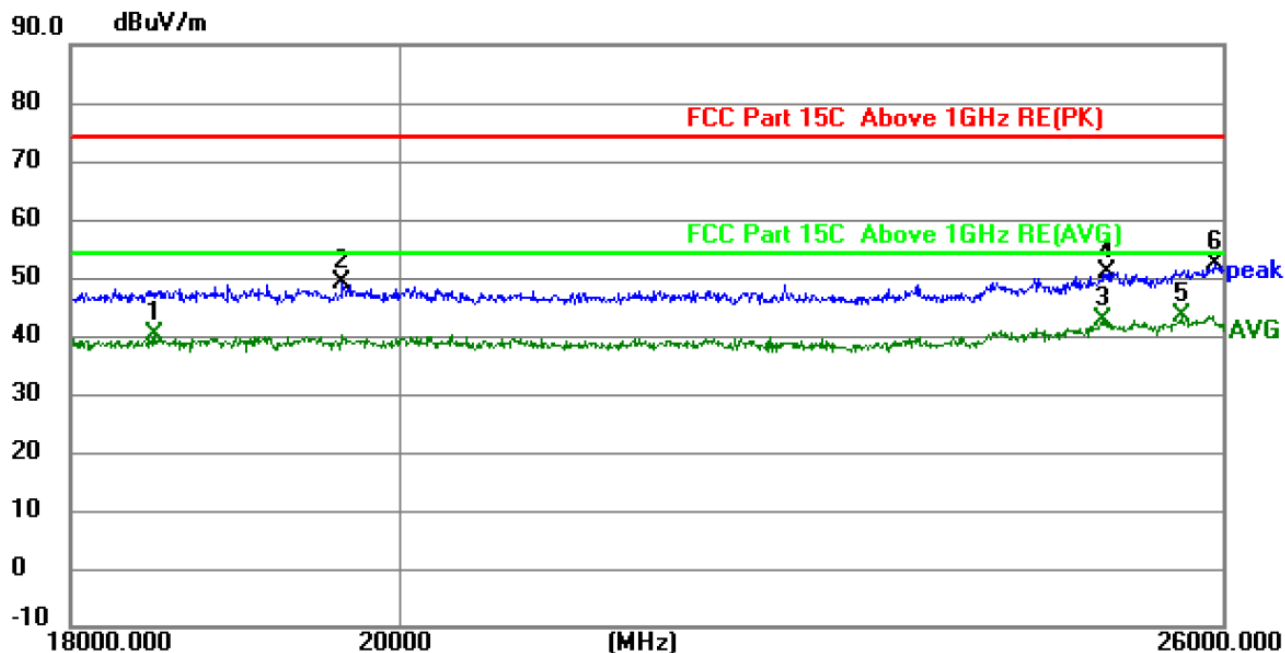

Site: 3m Anechoic Chamber

Polarization: **Vertical**

Temperature: 24.2 °C

Humidity: 58 %

Limit: FCC Part 15C Above 1GHz RE(PK)

Power:DC 3.7V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	18493.1340	41.67	-1.38	40.29	54.00	-13.71	AVG	P	
2	19628.7525	49.55	-0.53	49.02	74.00	-24.98	peak	P	
3	25020.7647	43.38	-0.70	42.68	54.00	-11.32	AVG	P	
4	25068.6545	51.44	-0.59	50.85	74.00	-23.15	peak	P	
5 *	25654.9330	43.59	-0.03	43.56	54.00	-10.44	AVG	P	
6	25939.5184	52.22	0.23	52.45	74.00	-21.55	peak	P	

6. Test setup photo

Refer to appendix I for details

7. Photo of the EUT

Refer to appendix II & appendix III for details

*****End of report*****