



Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community, Fenghuang Street, Guangming District, Shenzhen, China

RF Exposure evaluation

Report Reference No.....: GRCTR260602002-02

FCC ID.....: 2BPAK-CH323

Compiled by

(position+printed name+signature)..: Testing Engineer Jimmy Wang

Supervised by

(position+printed name+signature)..: Project Engineer Kelley Zhang

Approved by

(position+printed name+signature)..: Manager Zhihui Deng



Date of issue.....: Jun. 13, 2026

Testing Laboratory Name.....: Shenzhen GUOREN Certification Technology Service Co., Ltd.

Address.....: 101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community, Fenghuang Street, Guangming District, Shenzhen, China

Applicant's name.....: Shenzhen Yongshi Technology Co., Ltd.

Address.....: Shenzhen Shi Longgang Qu Bantian Jiedao Nankeng Shequ Wuhe Dadao (Nan) 2 Hao Wanke Xinghuo 7 Dong 1 Ceng 107 Danyuan - A

Test specification.....:

Standard.....: 47CFR §2.1091
KDB447498 D01 v06

Shenzhen GUOREN Certification Technology Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen GUOREN Certification Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen GUOREN Certification Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: Wireless Charging Car Mount

Trade Mark.....: /

Manufacturer.....: Shenzhen Yongshi Technology Co., Ltd.

Model/Type reference.....: CH323

Listed Models: CH307, CH3071, CH308, CH3081, CH309, CH311, CH319, CH320, CH321, CH322, CH324, CH327, CH328, CH329

Hardware Version: V1.0

Software Version.....: V1.0

Frequency.....: 110KHz - 205KHz

Ratings.....: Input:DC 5V/2A, 9V/2A, 12V/2A
Output:5W/7.5W/10W/15W

Result.....: PASS

TEST REPORT

Equipment under Test : Wireless Charging Car Mount

Model /Type : CH323

Listed Models : CH307,CH3071,CH308,CH3081,CH309,CH311,CH319,CH320,C
H321,CH322,CH324,CH327,CH328,CH329

Applicant : **Shenzhen Yongshi Technology Co., Ltd.**

Address : Shenzhen Shi Longgang Qu Bantian Jiedao Nankeng Shequ
Wuhe Dadao (Nan) 2 Hao Wanke Xinghuo 7 Dong 1 Ceng 107
Danyuan - A

Manufacturer : **Shenzhen Yongshi Technology Co., Ltd.**

Address : Shenzhen Shi Longgang Qu Bantian Jiedao Nankeng Shequ
Wuhe Dadao (Nan) 2 Hao Wanke Xinghuo 7 Dong 1 Ceng 107
Danyuan - A

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. SUMMARY	4
1.1. General Remarks	4
1.2. Product Description	4
1.3. Equipment Under Test	4
1.4. Short description of the Equipment under Test (EUT)	4
1.5. EUT configuration	4
1.6. Modifications	5
2. TEST ENVIRONMENT	6
2.1. Address of the test laboratory	6
2.2. Test Facility	6
2.3. Environmental conditions	6
2.4. Statement of the measurement uncertainty	6
3. METHOD OF MEASUREMENT	8
3.1. Applicable Standard	8
3.2. Test Setup	8
3.3. Test Procedure	9
3.4. Equipment Approval Considerations	10
3.5. Description of the test mode	10
3.6. Special Accessories	10
3.7. Test Instruments list	10
3.8. Test Result	11
3.9. Conclusion	11

1. SUMMARY

1.1. General Remarks

Date of receipt of test sample	:	Jun. 05, 2026
Testing commenced on	:	Jun. 05, 2026
Testing concluded on	:	Jun. 13, 2026

1.2. Product Description

Product Name:	Wireless Charging Car Mount
Model/Type reference:	CH323
Listed Models:	CH307,CH3071,CH308,CH3081,CH309,CH311,CH319,CH320,CH321,CH322,CH324,CH327,CH328,CH329
Power supply:	Input:DC 5V/2A,9V/2A,12V/2A Output:5W/7.5W/10W/15W
Car Charger Information:	Model:TE-P36 Input:DC 12V-30V Output:DC 5V/3A,9V/3A,12V/2.5A
Modulation type:	ASK
Operation frequency:	110.5KHz - 205KHz
Channel number:	1
Antenna type:	Loop coil antenna
Antenna gain*(Supplied by the customer):	0 dBi
Remark:*When the information provided by the customer was used to calculate test results, if the information provided by the customer is not accurate, shenzhen GUOREN Certification Technology Service Co., Ltd. does not assume any responsibility.	
Remark:The products are identical in interior structure, electrical circuits and components, just model fittings is different.	

1.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☒ 12 V DC	☐ 24 V DC
		☐ Other (specified in blank below)	

DC 12V

1.4. Short description of the Equipment under Test (EUT)

This is a Wireless Charging Car Mount.
For more details, refer to the user's manual of the EUT.

1.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

☐ /	M/N: /
-------------------------	--------

		Manufacturer: /
--	--	-----------------

1.6. Modifications

No modifications were implemented to meet testing criteria.

2. TEST ENVIRONMENT

2.1. Address of the test laboratory

Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community, Fenghuang Street, Guangming District, Shenzhen, China

2.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 920798 Designation Number: CN1304

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6202.01

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

ISED#: 27264 CAB identifier: CN0115

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

CNAS-Lab Code: L15631

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories for the Competence of Testing and Calibration Laboratories.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

2.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

2.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen GUOREN Certification Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GUOREN Certification Technology Service Co., Ltd.:

Test Items	Measurement Uncertainty	Notes
Magnetic field measurement (9kHz~30MHz)	$\pm 7.5\%$	(1)
Electric field measurements (9kHz~ 30MHz)	$\pm 7.5\%$	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3. Method of measurement

3.1. Applicable Standard

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength(V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	/	/	f/300	<6
1500-100000	/	/	5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	/	/	f/500	<30
1500-100000	/	/	1.0	<30


f= frequency in MHz

*= Plane-wave equivalent power density


Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

3.2. Test Setup

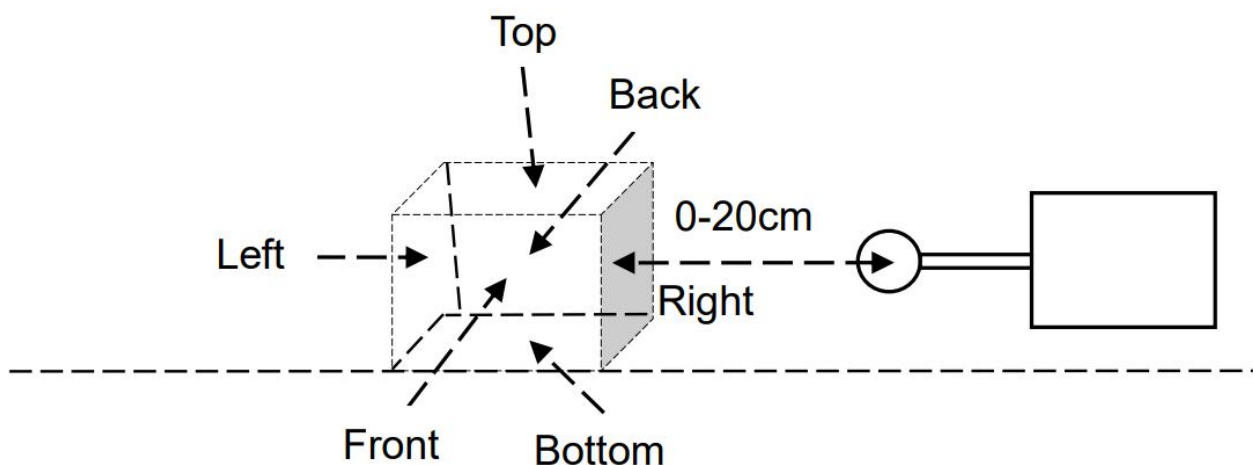

Note: The distance of the points A/B/C/D/E is 20cm.

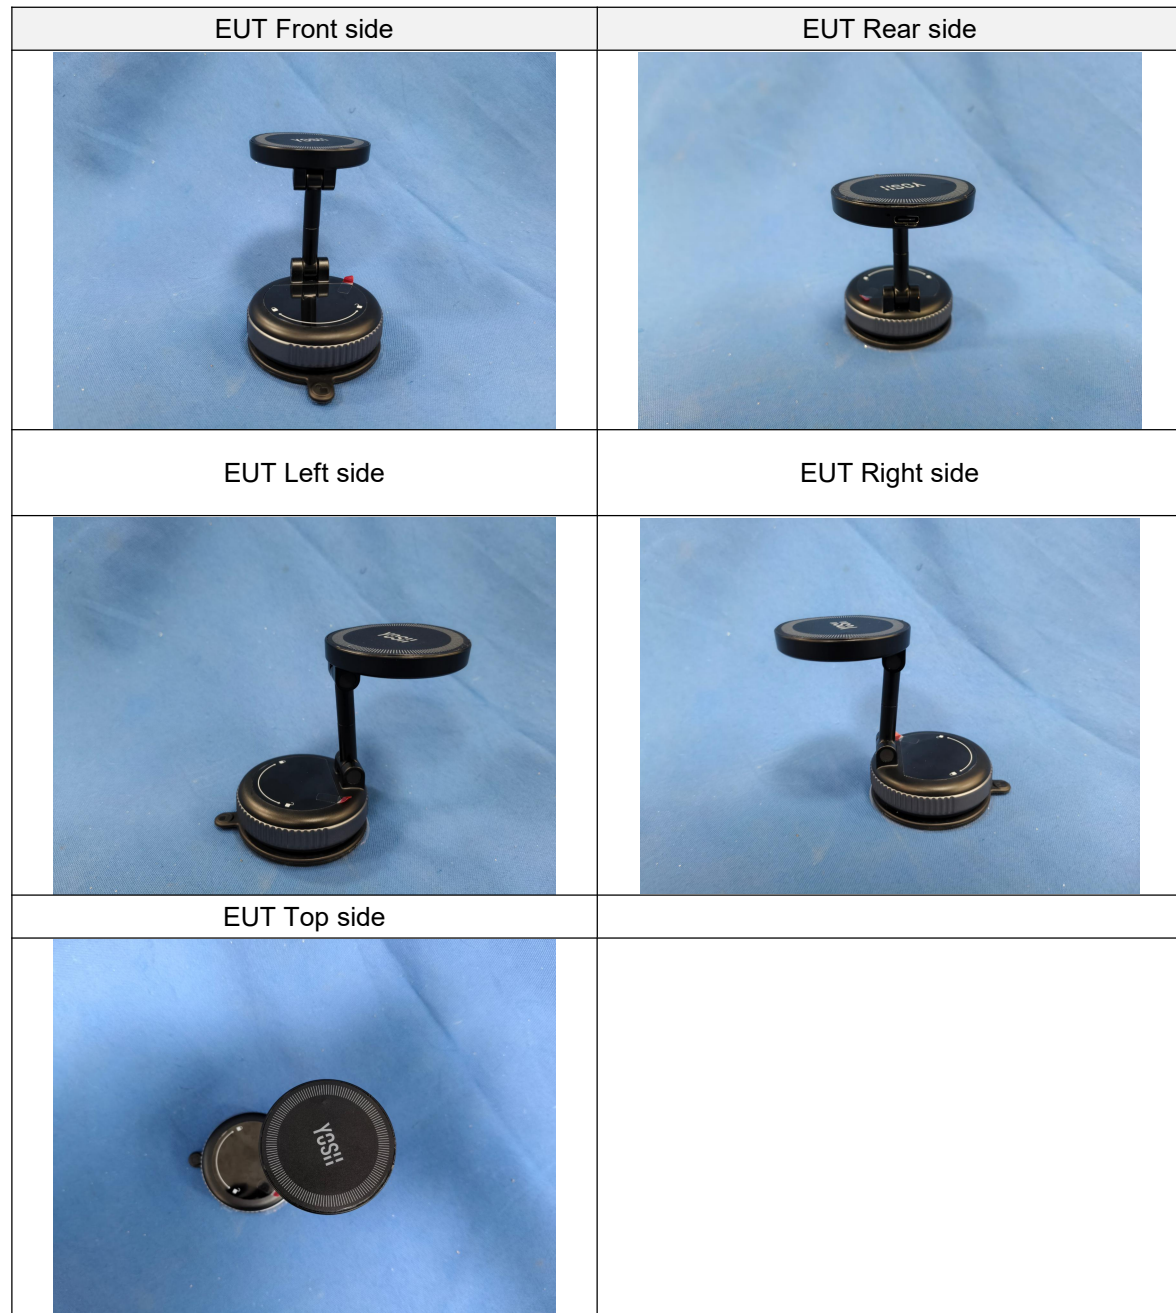

3.3. Test Procedure

For mobile exposure conditions:

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with the center of the probe at a distance of 20 cm surrounding the primary/client pair.
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.

3.4. Equipment Approval Considerations

Requirements of KDB 680106 D01v04	Yes / No	Description
Mobile Device and Portable Device Configurations	Yes	Mobile Device
Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz	Yes	The device operate in the frequency range 110.5KHz - 205KHz
RF Exposure compliance may be ensured only for a minimum separation distance that is greater than 20 cm, while use conditions at smaller distances can still be considered unlikely.	Yes	The EUT H-field strengths at 20 cm surrounding the device.

3.5. Description of the test mode

Equipment under test was operated during the measurement under the following conditions:

☒ Charging and communication mode

Test Modes:		
Mode 1	Input DC 5V/2A + EUT + Without load	Pre-tested
Mode 2	Input DC 5V/2A + EUT + Wireless charger tester (Half Load)	Pre-tested
Mode 3	Input DC 5V/2A + EUT + Wireless charger tester (Full Load)	Pre-tested
Mode 4	Input DC 9V/2A + EUT + Without load	Pre-tested
Mode 5	Input DC 9V/2A + EUT + Wireless charger tester (Half Load)	Pre-tested
Mode 6	Input DC 9V/2A + EUT + Wireless charger tester (Full Load)	Pre-tested
Mode 7	Input DC 12V/2A + EUT + Without load	Record
Mode 8	Input DC 12V/2A + EUT + Wireless charger tester (Half Load)	Record
Mode 9	Input DC 12V/2A + EUT + Wireless charger tester (Full Load)	Record
Note: All test modes were pre-tested, but we only recorded the worst case in this report.		

3.6. Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

Description	Manufacturer	Model	Technical Parameters	Certificate	Provided by
Intelligent wireless charging full function test module	/	YBZ	5W/7.5W/9W/10W/12W/15W	/	LAB

3.7. Test Instruments list

Test Equipment	Manufacturer	Model No.	Equipment No.	Cal.Date (mm-dd-yy)	Cal.Due Date (mm-dd-yy)
Exposure Level Tester	Narda	ELT-400	GRCTEE050	2025/09/11	2026/09/10
Magnetic field probe 100cm ²	Narda	ELT probe 100cm ²	GRCTEE056	2025/09/11	2026/09/10

3.8. Test Result

H-Field Strength at 20 cm from the edges surrounding the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured E-Field Strength Values (A/m)					FCC H-Field Strength Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
1%	uT	0.11807	0.549	0.553	0.548	0.562	0.541	--	--
1%	A/m	0.11807	0.439	0.442	0.438	0.450	0.433	0.815	1.63
50%	uT	0.11807	0.416	0.423	0.429	0.431	0.415	--	--
50%	A/m	0.11807	0.333	0.338	0.343	0.345	0.332	0.815	1.63
99%	uT	0.11807	0.284	0.276	0.264	0.257	0.286	--	--
99%	A/m	0.11807	0.227	0.221	0.211	0.206	0.229	0.815	1.63

Note1: A/m=uT/1.25

Note2: During test the frequencies less than 1 MHz and E/H ratio less than 1/10 of the 377-ohm free space wave impedance, only record H-field measurements result.

3.9. Conclusion

A minimum safety distance of 20 cm to the antenna is required when the device is charging a smart phone for mobile exposure. The detected emissions are below the limitations according FCC KDB 680106 D01v04 and confirmed by the FCC according to KDB Inquire.

***** End of Report *****