



## SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD

102A, 102B, Building 2, Shanghenglang New Industrial Zone, Shanghenglang Community, Dalang Street, Longhua District, Shenzhen, Guangdong, People's Republic of China, 518000

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: [www.cqa-cert.com](http://www.cqa-cert.com)

Report Template Version: V06

Report Template Revision Date: 2026-01-30

# TEST REPORT

**Report No.:** CQASZ20260601343E-02  
**Applicant:** DREO PTE. LTD.  
**Address of Applicant:** 1 COLEMAN STREET, #05-05, THE ADELPHI, SINGAPORE 179803  
**Equipment Under Test (EUT):**  
**Product:** Air Purifier Fan  
**Model No.:** DR-HTF022S, DWTF22S  
**Test Model No.:** DR-HTF022S  
**Brand Name:** DREO, DREO HOME  
**FCC ID:** 2BPBC-HTF022  
**Standards:** 47 CFR Part 15, Subpart C  
KDB558074 D01 15.247 Meas Guidance v05r02  
ANSI C63.10:2020  
**Date of Receipt:** 2026-06-25  
**Date of Test:** 2026-06-25 to 2026-07-08  
**Date of Issue:** 2026-07-09  
**Test Result :** **PASS\***

\*In the configuration tested, the EUT complied with the standards specified above

**Tested By:**

*Lewis Zhou*

( Lewis Zhou )

**Reviewed By:**

*Timo Lei*

( Timo Lei )

**Approved By:**

*Jack Ai*

( Jack Ai )



The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

---

## 1 Version

### Revision History Of Report

| Report No.           | Version | Description    | Issue Date |
|----------------------|---------|----------------|------------|
| CQASZ20260601343E-02 | Rev.01  | Initial report | 2026-07-09 |

## 2 Test Summary

| Test Item                                                               | Test Requirement          | Test method                                                                       | Result |
|-------------------------------------------------------------------------|---------------------------|-----------------------------------------------------------------------------------|--------|
| Antenna Requirement                                                     | 47 CFR Part 15.203        | N/A                                                                               | PASS   |
| AC Power Line<br>Conducted<br>Emission                                  | 47 CFR Part 15.207        | ANSI C63.10-<br>2020+Cor. 1-<br>2023+C63.10a-2024 +<br>Errata to C63.10a-<br>2024 | PASS   |
| Conducted Peak &<br>Average Output Power                                | 47 CFR Part 15.247        | ANSI C63.10-<br>2020+Cor. 1-<br>2023+C63.10a-2024 +<br>Errata to C63.10a-<br>2024 | PASS   |
| 6dB Occupied<br>Bandwidth                                               | 47 CFR Part 15.247        | ANSI C63.10-<br>2020+Cor. 1-<br>2023+C63.10a-2024 +<br>Errata to C63.10a-<br>2024 | PASS   |
| Power Spectral Density                                                  | 47 CFR Part 15.247        | ANSI C63.10-<br>2020+Cor. 1-<br>2023+C63.10a-2024 +<br>Errata to C63.10a-<br>2024 | PASS   |
| Band-edge for RF<br>Conducted Emissions                                 | 47 CFR Part 15.247        | ANSI C63.10-<br>2020+Cor. 1-<br>2023+C63.10a-2024 +<br>Errata to C63.10a-<br>2024 | PASS   |
| RF Conducted Spurious<br>Emissions                                      | 47 CFR Part 15.247        | ANSI C63.10-<br>2020+Cor. 1-<br>2023+C63.10a-2024 +<br>Errata to C63.10a-<br>2024 | PASS   |
| Radiated Spurious<br>Emissions                                          | 47 CFR Part 15.209        | ANSI C63.10-<br>2020+Cor. 1-<br>2023+C63.10a-2024 +<br>Errata to C63.10a-<br>2024 | PASS   |
| Restricted bands around<br>fundamental frequency<br>(Radiated Emission) | 47 CFR Part 15.205/15.209 | ANSI C63.10-<br>2020+Cor. 1-<br>2023+C63.10a-2024 +<br>Errata to C63.10a-<br>2024 | PASS   |

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

### 3 Contents

|                                                             | Page      |
|-------------------------------------------------------------|-----------|
| <b>1 VERSION .....</b>                                      | <b>2</b>  |
| <b>2 TEST SUMMARY .....</b>                                 | <b>3</b>  |
| <b>3 CONTENTS .....</b>                                     | <b>5</b>  |
| <b>4 GENERAL INFORMATION .....</b>                          | <b>6</b>  |
| 4.1 CLIENT INFORMATION .....                                | 6         |
| 4.2 GENERAL DESCRIPTION OF EUT .....                        | 6         |
| 4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD ..... | 6         |
| 4.4 TEST ENVIRONMENT AND MODE .....                         | 8         |
| 4.5 DESCRIPTION OF SUPPORT UNITS .....                      | 9         |
| 4.6 TEST LOCATION .....                                     | 9         |
| 4.7 TEST FACILITY .....                                     | 9         |
| 4.8 TEST CONFIGURATION .....                                | 9         |
| 4.9 STATEMENT OF THE MEASUREMENT UNCERTAINTY .....          | 10        |
| 4.10 DEVIATION FROM STANDARDS .....                         | 10        |
| 4.11 ABNORMALITIES FROM STANDARD CONDITIONS .....           | 10        |
| 4.12 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....      | 10        |
| 4.13 EQUIPMENT LIST .....                                   | 11        |
| <b>5 TEST RESULTS AND MEASUREMENT DATA .....</b>            | <b>12</b> |
| 5.1 ANTENNA REQUIREMENT .....                               | 12        |
| 5.2 CONDUCTED EMISSIONS .....                               | 13        |
| 5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER .....             | 17        |
| 5.4 99% OCCUPIED BANDWIDTH .....                            | 19        |
| 5.5 6dB OCCUPIED BANDWIDTH .....                            | 20        |
| 5.6 POWER SPECTRAL DENSITY .....                            | 21        |
| 5.7 BAND-EDGE FOR RF CONDUCTED EMISSIONS .....              | 22        |
| 5.8 RF CONDUCTED SPURIOUS EMISSIONS .....                   | 23        |
| 5.9 RADIATED SPURIOUS EMISSIONS .....                       | 24        |
| 5.9.1 Radiated emission below 1GHz .....                    | 27        |
| 5.9.2 Transmitter emission above 1GHz .....                 | 29        |
| 5.10 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY .....    | 35        |
| <b>6 PHOTOGRAPHS - EUT TEST SETUP .....</b>                 | <b>40</b> |
| <b>7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS .....</b>     | <b>41</b> |

## 4 General Information

### 4.1 Client Information

|                          |                                                         |
|--------------------------|---------------------------------------------------------|
| Applicant:               | DREO PTE. LTD.                                          |
| Address of Applicant:    | 1 COLEMAN STREET, #05-05, THE ADELPHI, SINGAPORE 179803 |
| Manufacturer:            | DREO PTE. LTD.                                          |
| Address of Manufacturer: | 1 COLEMAN STREET, #05-05, THE ADELPHI, SINGAPORE 179803 |

### 4.2 General Description of EUT

|                                  |                                                                                                                                                              |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:                    | Air Purifier Fan                                                                                                                                             |
| Model No.:                       | DR-HTF022S, DWTF22S                                                                                                                                          |
| Test Model No.:                  | DR-HTF022S                                                                                                                                                   |
| Trade Mark:                      | DREO, DREO HOME                                                                                                                                              |
| Software Version:                | V1.0                                                                                                                                                         |
| Hardware Version:                | IMB-068-V1.4                                                                                                                                                 |
| Power Supply:                    | Input:100-240V ~50/60Hz 1.8A Output:24.0V = 3.0A                                                                                                             |
| EUT Supports Radios application: | BLE: 2402-2480MHz<br>2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz;                                                                                      |
| Simultaneous Transmission        | <input type="checkbox"/> Simultaneous TX is supported and evaluated in this report.<br><input checked="" type="checkbox"/> Simultaneous TX is not supported. |

### 4.3 Product Specification subjective to this standard

|                       |                                                                                                                                                                                                                            |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operation Frequency:  | IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz                                                                                                                                                                                 |
| Channel Numbers:      | IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels                                                                                                                                                                             |
| Channel Separation:   | 5MHz                                                                                                                                                                                                                       |
| Type of Modulation:   | IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK)<br>IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK)<br>IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM, QPSK, BPSK)                                                                   |
| Transfer Rate:        | IEEE for 802.11b:<br>1Mbps/2Mbps/5.5Mbps/11Mbps<br>IEEE for 802.11g :<br>6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps<br>IEEE for 802.11n(HT20) :<br>6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps |
| Product Type:         | <input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable <input type="checkbox"/> Fix Location                                                                                                         |
| Test Software of EUT: | EspRFTTestTool                                                                                                                                                                                                             |
| Antenna Type:         | FPC antenna                                                                                                                                                                                                                |
| Antenna Gain:         | 6.64dBi                                                                                                                                                                                                                    |

| Operation Frequency each of channel(802.11b/g/n HT20) |           |         |           |         |           |         |           |
|-------------------------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                                               | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                                     | 2412MHz   | 4       | 2427MHz   | 7       | 2442MHz   | 10      | 2457MHz   |
| 2                                                     | 2417MHz   | 5       | 2432MHz   | 8       | 2447MHz   | 11      | 2462MHz   |
| 3                                                     | 2422MHz   | 6       | 2437MHz   | 9       | 2452MHz   |         |           |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):


| Channel             | Frequency |
|---------------------|-----------|
| The Lowest channel  | 2412MHz   |
| The Middle channel  | 2437MHz   |
| The Highest channel | 2462MHz   |

Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

## 4.4 Test Environment and Mode

| Operating Environment:                              |                                                                                             |
|-----------------------------------------------------|---------------------------------------------------------------------------------------------|
| Radiated Emissions:                                 |                                                                                             |
| Temperature:                                        | 25.3 °C                                                                                     |
| Humidity:                                           | 55 % RH                                                                                     |
| Atmospheric Pressure:                               | 1009 mbar                                                                                   |
| Conducted Emissions:                                |                                                                                             |
| Temperature:                                        | 25.6 °C                                                                                     |
| Humidity:                                           | 60 % RH                                                                                     |
| Atmospheric Pressure:                               | 1009 mbar                                                                                   |
| Radio conducted item test (RF Conducted test room): |                                                                                             |
| Temperature:                                        | 25.5 °C                                                                                     |
| Humidity:                                           | 52 % RH                                                                                     |
| Atmospheric Pressure:                               | 1009 mbar                                                                                   |
| Test mode:                                          |                                                                                             |
| Transmitting mode:                                  | EUT is set in RF test mode in all supported modulation types, bandwidth and data rate, etc. |
| EUT Power level:                                    | Class15                                                                                     |
| Run Software:                                       |                                                                                             |

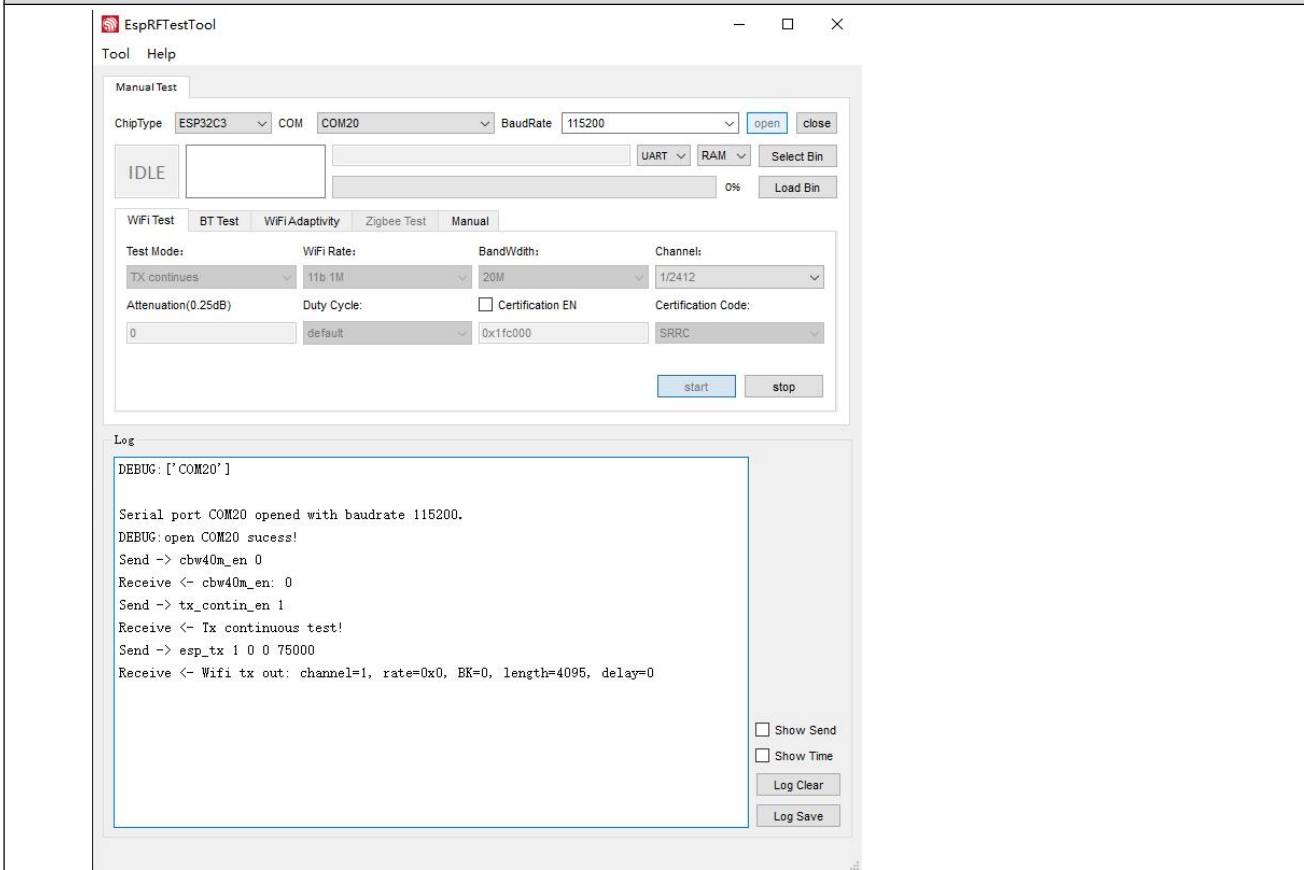

The screenshot displays the EspRFTTestTool software interface. The main window has a menu bar with 'Tool' and 'Help'. Below the menu bar, there are tabs for 'Manual Test', 'WiFi Test', 'BT Test', 'WiFiAdaptivity', 'Zigbee Test', and 'Manual'. The 'Manual Test' tab is active, showing a configuration panel with fields for 'ChipType' (ESP32C3), 'COM' (COM20), 'BaudRate' (115200), and buttons for 'open' and 'close'. Below this, there are buttons for 'IDLE', 'UART', 'RAM', 'Select Bin', and 'Load Bin'. The 'WiFi Test' tab is also visible, showing a configuration panel with fields for 'Test Mode' (TX continues), 'WiFi Rate' (11b 1M), 'BandWidth' (20M), 'Channel' (1/2412), 'Attenuation(0.25dB)' (0), 'Duty Cycle' (default), 'Certification EN' (unchecked), and 'Certification Code' (SRRC). There are 'start' and 'stop' buttons at the bottom of the configuration panel. Below the configuration panel, there is a 'Log' window showing a series of debug messages, including 'Serial port COM20 opened with baudrate 115200.', 'DEBUG:open COM20 suces!', 'Send -> cbw40m\_en 0', 'Receive <- cbw40m\_en: 0', 'Send -> tx\_contin\_en 1', 'Receive <- Tx continuous test!', 'Send -> esp\_tx 1 0 0 75000', and 'Receive <- Wifi tx out: channel=1, rate=0x0, BK=0, length=4095, delay=0'. There are checkboxes for 'Show Send' and 'Show Time', and buttons for 'Log Clear' and 'Log Save'.

## 4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

| Description | Manufacturer | Model No. | Certification | Supplied by |
|-------------|--------------|-----------|---------------|-------------|
| /           | /            | /         | /             | /           |

2) Cable

| Cable No. | Description | Manufacturer | Cable Type/Length | Supplied by |
|-----------|-------------|--------------|-------------------|-------------|
| /         | /           | /            | /                 | /           |

## 4.6 Test Location

All tests were performed at:

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD

102A, 102B, Building 2, Shanghenglang New Industrial Zone, Shanghenglang Community, Dalang Street, Longhua District, Shenzhen, Guangdong, People's Republic of China, 518000

## 4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 4742.01)**


SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD, Shenzhen EMC Laboratory is accredited by the

American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD, Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

## 4.8 Test configuration

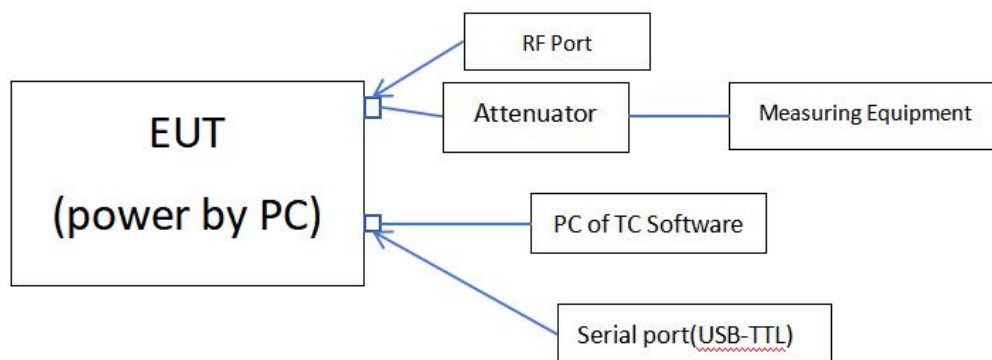

## 4.9 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

| No. | Item                               | Uncertainty        | Notes |
|-----|------------------------------------|--------------------|-------|
| 1   | Radiated Emission (Below 1GHz)     | 5.12dB             | (1)   |
| 2   | Radiated Emission (Above 1GHz)     | 4.60dB             | (1)   |
| 3   | Conducted Disturbance (0.15~30MHz) | 3.34dB             | (1)   |
| 4   | Radio Frequency                    | $3 \times 10^{-8}$ | (1)   |
| 5   | Duty cycle                         | 0.6 %.             | (1)   |
| 6   | Occupied Bandwidth                 | 1.1%               | (1)   |
| 7   | RF conducted power                 | 0.86dB             | (1)   |
| 8   | RF power density                   | 0.74               | (1)   |
| 9   | Conducted Spurious emissions       | 0.86dB             | (1)   |
| 10  | Temperature test                   | 0.8℃               | (1)   |
| 11  | Humidity test                      | 2.0%               | (1)   |
| 12  | Supply voltages                    | 0.5 %.             | (1)   |
| 13  | Frequency Error                    | 5.5 Hz             | (1)   |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 4.10 Deviation from Standards

None.

## 4.11 Abnormalities from Standard Conditions

None.

## 4.12 Other Information Requested by the Customer

None.

#### 4.13 Equipment List

| Test Equipment             | Manufacturer | Model No.              | Instrument No. | Calibration Date | Calibration Due Date |
|----------------------------|--------------|------------------------|----------------|------------------|----------------------|
| EMI Test Receiver          | R&S          | ESR7                   | CQA-005        | 2025/9/1         | 2026/8/31            |
| Spectrum analyzer          | R&S          | FSU26                  | CQA-038        | 2025/9/1         | 2026/8/31            |
| Spectrum analyzer          | R&S          | FSU40                  | CQA-075        | 2025/9/1         | 2026/8/31            |
| Preamplifier               | MITEQ        | AFS4-00010300-18-10P-4 | CQA-035        | 2025/9/1         | 2026/8/31            |
| Preamplifier               | MITEQ        | AMF-6D-02001800-29-20P | CQA-036        | 2025/9/1         | 2026/8/31            |
| Preamplifier               | EMCI         | EMC184055SE            | CQA-089        | 2025/9/1         | 2026/8/31            |
| Loop antenna               | Schwarzbeck  | FMZB1516               | CQA-060        | 2023/9/8         | 2026/9/7             |
| Bilog Antenna              | R&S          | HL562                  | CQA-011        | 2023/11/01       | 2026/10/31           |
| Horn Antenna               | R&S          | HF906                  | CQA-012        | 2023/11/01       | 2026/10/31           |
| Horn Antenna               | Schwarzbeck  | BBHA 9170              | CQA-088        | 2023/9/7         | 2026/9/6             |
| Coaxial Cable (Above 1GHz) | CQA          | N/A                    | C007           | 2025/9/1         | 2026/8/31            |
| Coaxial Cable (Below 1GHz) | CQA          | N/A                    | C013           | 2025/9/1         | 2026/8/31            |
| Antenna Connector          | CQA          | RFC-01                 | CQA-080        | 2025/9/1         | 2026/8/31            |
| RF cable(9KHz~40GHz)       | CQA          | RF-01                  | CQA-079        | 2025/9/1         | 2026/8/31            |
| Power meter                | R&S          | NRVD                   | CQA-029        | 2025/9/1         | 2026/8/31            |
| Power divider              | MIDWEST      | PWD-2533-02-SMA-79     | CQA-067        | 2025/9/1         | 2026/8/31            |
| EMI Test Receiver          | R&S          | ESR7                   | CQA-005        | 2025/9/1         | 2026/8/31            |
| LISN                       | R&S          | ENV216                 | CQA-003        | 2025/9/1         | 2026/8/31            |
| Coaxial cable              | CQA          | N/A                    | CQA-C009       | 2025/9/1         | 2026/8/31            |
| DC power                   | KEYSIGHT     | E3631A                 | CQA-028        | 2025/9/1         | 2026/8/31            |

Test software:


|                                   | Manufacturer | Software brand | Software version |
|-----------------------------------|--------------|----------------|------------------|
| Radiated Emissions test software  | Tonscend     | JS1120-3       | Version:8        |
| Conducted Emissions test software | Audix        | e3             | Version:9        |
| RF Conducted test software        | Audix        | e3             | V3.5.39          |

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

## 5 Test results and Measurement Data

### 5.1 Antenna Requirement
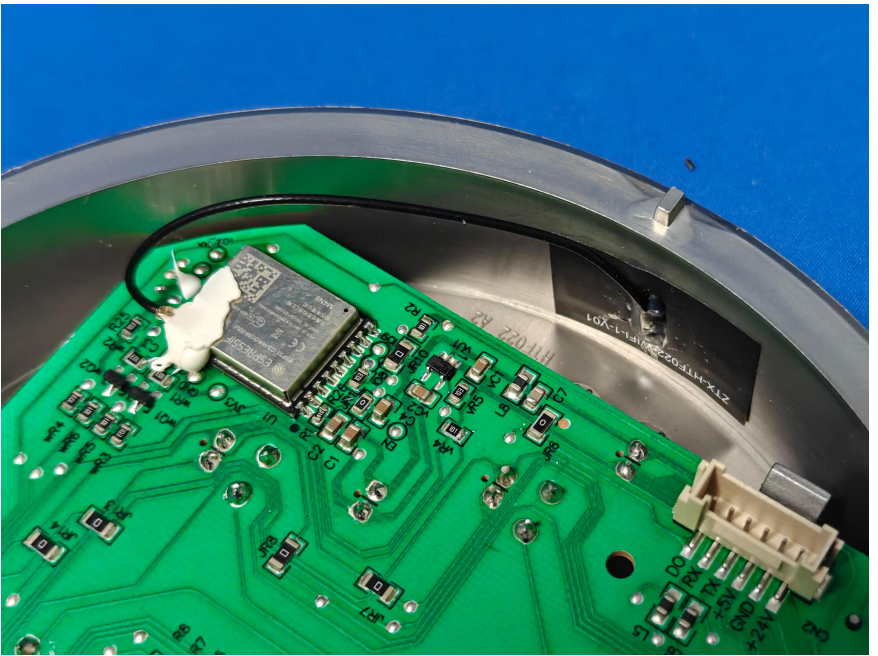
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Standard requirement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 47 CFR Part 15C Section 15.203 /247(c)                                              |
| <p>15.203 requirement:<br/>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:<br/>The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> |                                                                                     |
| <b>EUT Antenna:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
| <p>The antenna is FPC antenna.<br/>The connection/connection type between the antenna to the EUT's antenna port is:<br/>unique coupling<br/>This is either permanently attachment or a unique coupling that satisfies the requirement.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                     |


## 5.2 Conducted Emissions

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |              |           |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------|
| Test Requirement:     | 47 CFR Part 15C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |              |           |
| Test Method:          | ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |              |           |
| Test Frequency Range: | 150kHz to 30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |              |           |
| Limit:                | Frequency range (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Limit (dBuV) |           |
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Quasi-peak   | Average   |
|                       | 0.15-0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 66 to 56*    | 56 to 46* |
|                       | 0.5-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 56           | 46        |
|                       | 5-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 60           | 50        |
|                       | * Decreases with the logarithm of the frequency.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |              |           |
| Test Procedure:       | <div>1) The mains terminal disturbance voltage test was conducted in a shielded room.</div> <div>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</div> <div>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</div> <div>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</div> <div>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2020 on conducted measurement.</div> |              |           |
| Test Setup:           | <div><div>Shielding Room</div><div><div><div>AC Mains</div><div>LISN1</div><div>EUT</div><div>AE</div><div>LISN2</div><div>AC Mains</div><div>Test Receiver</div></div><div>80cm</div><div>80cm</div><div>Ground Reference Plane</div></div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |              |           |

|                        |                                                                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.                                               |
| Final Test Mode:       | Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case.<br>Only the worst case is recorded in the report. |
| Test Voltage:          | AC120V/60Hz                                                                                                                                |
| Test Results:          | Pass                                                                                                                                       |

## Measurement Data

Live Line:

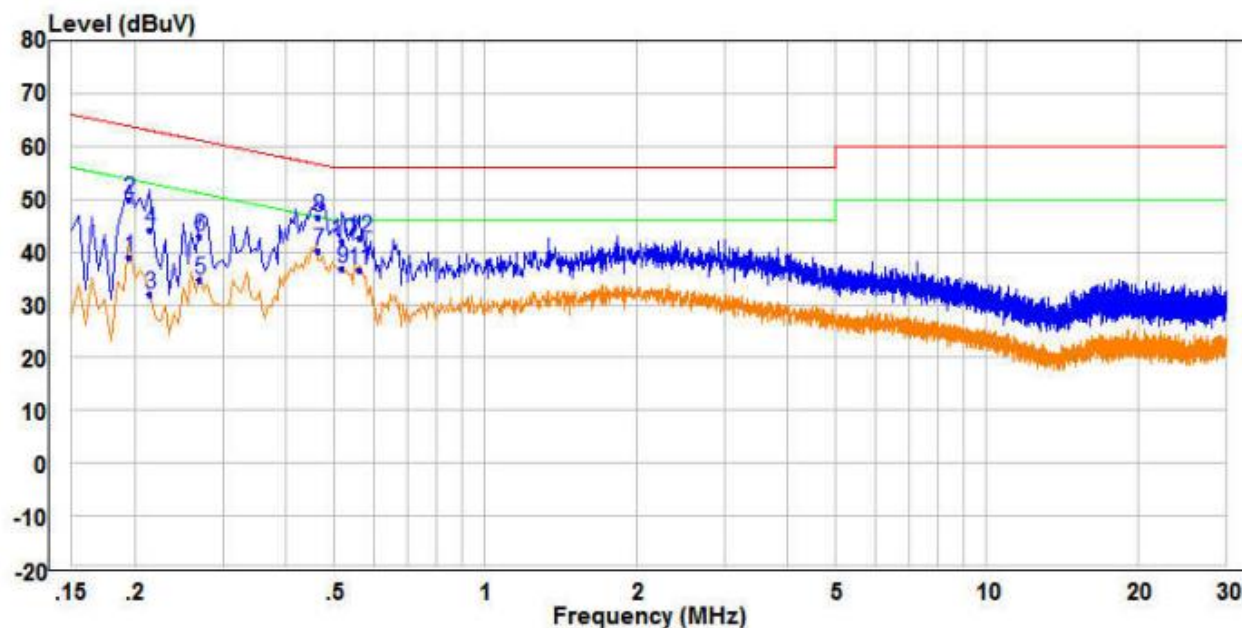


|      | Freq  | Read Level | Factor | Level | Limit | Over   | Remark  | Pol/Phase |
|------|-------|------------|--------|-------|-------|--------|---------|-----------|
|      | MHz   | dBuV       | dB     | dBuV  | dBuV  | dB     |         |           |
| 1    | 0.195 | 29.39      | 9.62   | 39.01 | 53.82 | -14.81 | Average | Line      |
| 2    | 0.195 | 40.33      | 9.62   | 49.95 | 63.82 | -13.87 | QP      | Line      |
| 3    | 0.215 | 22.32      | 9.59   | 31.91 | 53.01 | -21.10 | Average | Line      |
| 4    | 0.215 | 34.56      | 9.59   | 44.15 | 63.01 | -18.86 | QP      | Line      |
| 5    | 0.270 | 25.17      | 9.52   | 34.69 | 51.12 | -16.43 | Average | Line      |
| 6    | 0.270 | 33.30      | 9.52   | 42.82 | 61.12 | -18.30 | QP      | Line      |
| 7 PP | 0.465 | 30.62      | 9.67   | 40.29 | 46.60 | -6.31  | Average | Line      |
| 8 QP | 0.465 | 36.91      | 9.67   | 46.58 | 56.60 | -10.02 | QP      | Line      |
| 9    | 0.520 | 27.05      | 9.72   | 36.77 | 46.00 | -9.23  | Average | Line      |
| 10   | 0.520 | 32.35      | 9.72   | 42.07 | 56.00 | -13.93 | QP      | Line      |
| 11   | 0.560 | 26.92      | 9.76   | 36.68 | 46.00 | -9.32  | Average | Line      |
| 12   | 0.560 | 32.78      | 9.76   | 42.54 | 56.00 | -13.46 | QP      | Line      |

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

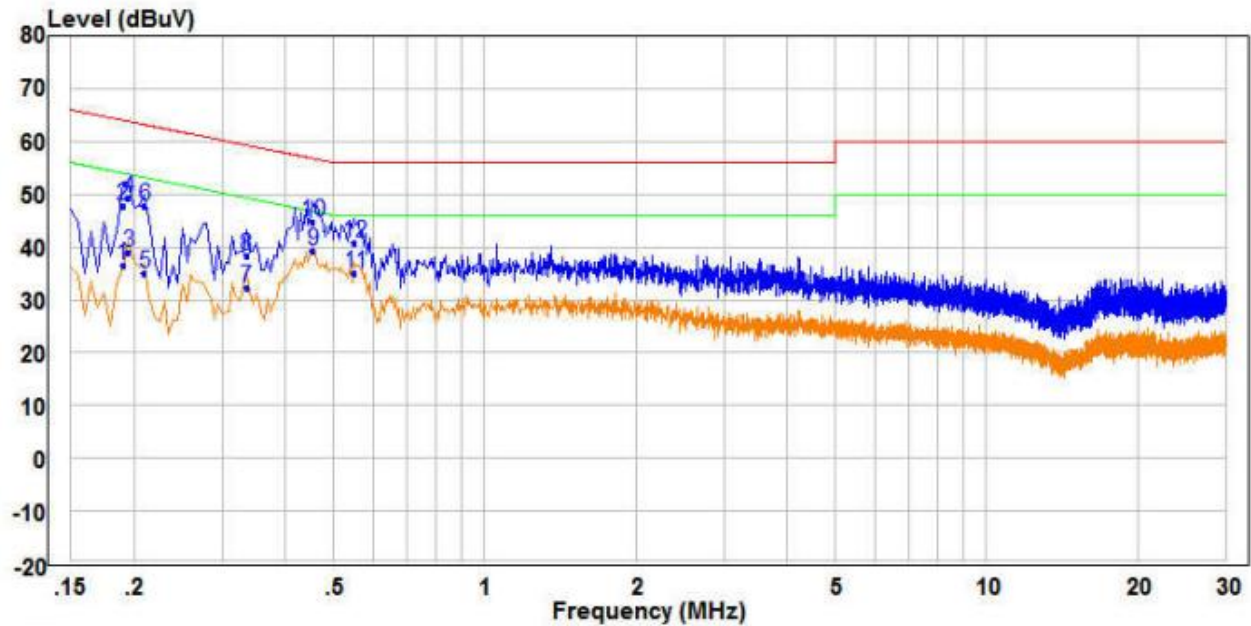


|       | Freq  | Read  | Factor | Level | Limit | Over   | Remark  | Pol/Phase |
|-------|-------|-------|--------|-------|-------|--------|---------|-----------|
|       | MHz   | dBuV  | dB     | dBuV  | dBuV  | dB     |         |           |
| 1     | 0.190 | 27.02 | 9.62   | 36.64 | 54.04 | -17.40 | Average | Neutral   |
| 2     | 0.190 | 38.31 | 9.62   | 47.93 | 64.04 | -16.11 | QP      | Neutral   |
| 3     | 0.195 | 29.32 | 9.62   | 38.94 | 53.82 | -14.88 | Average | Neutral   |
| 4     | 0.195 | 39.84 | 9.62   | 49.46 | 63.82 | -14.36 | QP      | Neutral   |
| 5     | 0.210 | 25.38 | 9.59   | 34.97 | 53.21 | -18.24 | Average | Neutral   |
| 6     | 0.210 | 38.19 | 9.59   | 47.78 | 63.21 | -15.43 | QP      | Neutral   |
| 7     | 0.335 | 22.80 | 9.53   | 32.33 | 49.33 | -17.00 | Average | Neutral   |
| 8     | 0.335 | 28.72 | 9.53   | 38.25 | 59.33 | -21.08 | QP      | Neutral   |
| 9 PP  | 0.455 | 29.74 | 9.66   | 39.40 | 46.78 | -7.38  | Average | Neutral   |
| 10 QP | 0.455 | 35.05 | 9.66   | 44.71 | 56.78 | -12.07 | QP      | Neutral   |
| 11    | 0.550 | 25.21 | 9.75   | 34.96 | 46.00 | -11.04 | Average | Neutral   |
| 12    | 0.550 | 31.14 | 9.75   | 40.89 | 56.00 | -15.11 | QP      | Neutral   |

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

### 5.3 Conducted Peak & Average Output Power


|                        |                                                                                                                                                                                                                                                                                           |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (b)(3)                                                                                                                                                                                                                                                     |
| Test Method:           | ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024                                                                                                                                                                                                                        |
| Test Setup:            | <p><i>Setup for Power meter measurement method</i></p>  <p><i>Setup for Spectrum analyser measurement method</i></p>  |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                                     |
| Final Test Mode:       | Only the worst case is recorded in the report.                                                                                                                                                                                                                                            |
| Limit:                 | 30dBm                                                                                                                                                                                                                                                                                     |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                      |

**Measurement Data**

Please Refer to Appendix for Details

.


## 5.4 99% Occupied Bandwidth

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C                                                                                                                                       |
| Test Method:           | ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024                                                                                    |
| Test Setup:            | <br>$\text{Offset} = \text{cable loss} + \text{attenuation factor}$ |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                 |
| Final Test Mode:       | Only the worst case is recorded in the report.                                                                                                        |
| Test Results:          | Pass                                                                                                                                                  |

### Measurement Data

Please Refer to Appendix for Details


## 5.5 6dB Occupied Bandwidth

|                        |                                                                                                                             |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (a)(2)                                                                                       |
| Test Method:           | ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024                                                          |
| Test Setup:            | <br>Offset=cable loss+ attenuation factor |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                       |
| Final Test Mode:       | Only the worst case is recorded in the report.                                                                              |
| Limit:                 | $\geq 500$ kHz                                                                                                              |
| Test Results:          | Pass                                                                                                                        |

### Measurement Data

Please Refer to Appendix for Details


## 5.6 Power Spectral Density

|                        |                                                                                                                             |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (e)                                                                                          |
| Test Method:           | ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024                                                          |
| Test Setup:            | <br>Offset=cable loss+ attenuation factor |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                       |
| Final Test Mode:       | Only the worst case is recorded in the report.                                                                              |
| Limit:                 | $\leq 8.00\text{dBm}/3\text{kHz}$                                                                                           |
| Test Results:          | Pass                                                                                                                        |

### Measurement Data

Please Refer to Appendix for Details


## 5.7 Band-edge for RF Conducted Emissions

|                        |                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:           | ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024                                                                                                                                                                                                                                                                                                                      |
| Test Setup:            |  <p>Offset=cable loss+ attenuation factor</p>                                                                                                                                                                                                                                                         |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                                                                                                                                   |
| Final Test Mode:       | Only the worst case is recorded in the report.                                                                                                                                                                                                                                                                                                                                          |
| Limit:                 | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                    |

### Measurement Data

Please Refer to Appendix for Details

## 5.8 RF Conducted Spurious Emissions

|                        |                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:           | ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024                                                                                                                                                                                                                                                                                                                      |
| Test Setup:            | <br>$\text{Offset} = \text{cable loss} + \text{attenuation factor}$                                                                                                                                                                                                                                   |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                                                                                                                                   |
| Final Test Mode:       | Only the worst case is recorded in the report.                                                                                                                                                                                                                                                                                                                                          |
| Limit:                 | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                    |

### Measurement Data

Please Refer to Appendix for Details

## 5.9 Radiated Spurious Emissions

|                   |                                                                                                                                                                                                                                                                             |                                     |                   |            |                             |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-------------------|------------|-----------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205                                                                                                                                                                                                                                   |                                     |                   |            |                             |
| Test Method:      | ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024                                                                                                                                                                                                          |                                     |                   |            |                             |
| Test Site:        | Measurement Distance: 3m (Semi-Anechoic Chamber)                                                                                                                                                                                                                            |                                     |                   |            |                             |
| Receiver Setup:   | Frequency                                                                                                                                                                                                                                                                   | Detector                            | RBW               | VBW        | Remark                      |
|                   | 0.009MHz-0.090MHz                                                                                                                                                                                                                                                           | Peak                                | 10kHz             | 30kHz      | Peak                        |
|                   | 0.009MHz-0.090MHz                                                                                                                                                                                                                                                           | Average                             | 10kHz             | 30kHz      | Average                     |
|                   | 0.090MHz-0.110MHz                                                                                                                                                                                                                                                           | Quasi-peak                          | 10kHz             | 30kHz      | Quasi-peak                  |
|                   | 0.110MHz-0.490MHz                                                                                                                                                                                                                                                           | Peak                                | 10kHz             | 30kHz      | Peak                        |
|                   | 0.110MHz-0.490MHz                                                                                                                                                                                                                                                           | Average                             | 10kHz             | 30kHz      | Average                     |
|                   | 0.490MHz -30MHz                                                                                                                                                                                                                                                             | Quasi-peak                          | 10kHz             | 30kHz      | Quasi-peak                  |
|                   | 30MHz-1GHz                                                                                                                                                                                                                                                                  | Quasi-peak                          | 100 kHz           | 300kHz     | Quasi-peak                  |
|                   | Above 1GHz                                                                                                                                                                                                                                                                  | Peak                                | 1MHz              | 3MHz       | Peak                        |
|                   |                                                                                                                                                                                                                                                                             | Peak                                | 1MHz              | 10Hz       | Average                     |
| Limit:            | Frequency                                                                                                                                                                                                                                                                   | Field strength<br>(microvolt/meter) | Limit<br>(dBuV/m) | Remark     | Measurement<br>distance (m) |
|                   | 0.009MHz-0.490MHz                                                                                                                                                                                                                                                           | 2400/F(kHz)                         | -                 | -          | 300                         |
|                   | 0.490MHz-1.705MHz                                                                                                                                                                                                                                                           | 24000/F(kHz)                        | -                 | -          | 30                          |
|                   | 1.705MHz-30MHz                                                                                                                                                                                                                                                              | 30                                  | -                 | -          | 30                          |
|                   | 30MHz-88MHz                                                                                                                                                                                                                                                                 | 100                                 | 40.0              | Quasi-peak | 3                           |
|                   | 88MHz-216MHz                                                                                                                                                                                                                                                                | 150                                 | 43.5              | Quasi-peak | 3                           |
|                   | 216MHz-960MHz                                                                                                                                                                                                                                                               | 200                                 | 46.0              | Quasi-peak | 3                           |
|                   | 960MHz-1GHz                                                                                                                                                                                                                                                                 | 500                                 | 54.0              | Quasi-peak | 3                           |
|                   | Above 1GHz                                                                                                                                                                                                                                                                  | 500                                 | 54.0              | Average    | 3                           |
|                   | Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. |                                     |                   |            |                             |

Test Setup:

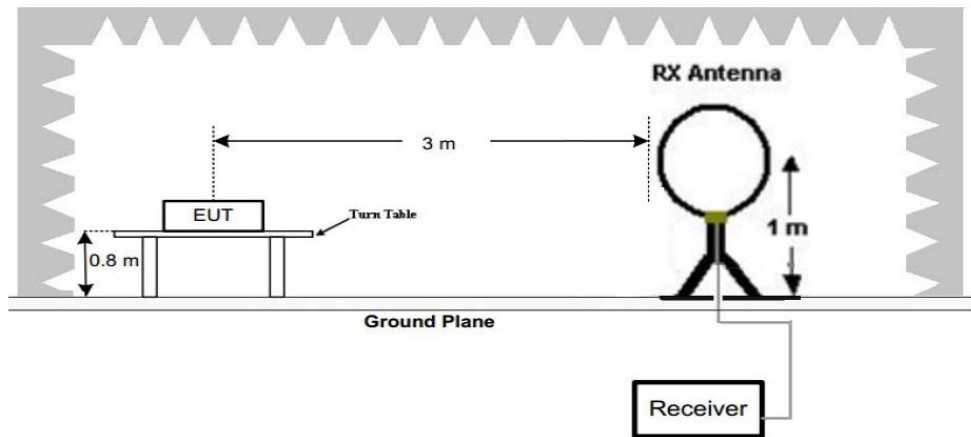


Figure 1. Below 30MHz

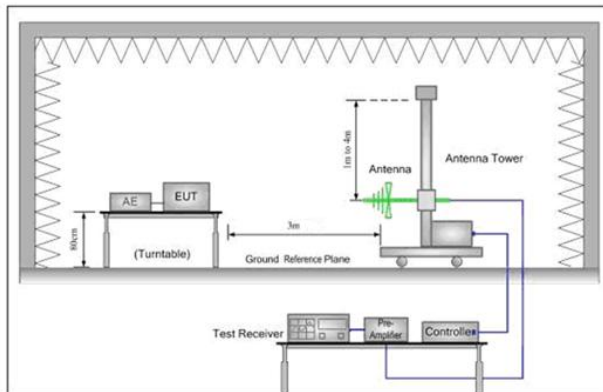


Figure 2. 30MHz to 1GHz

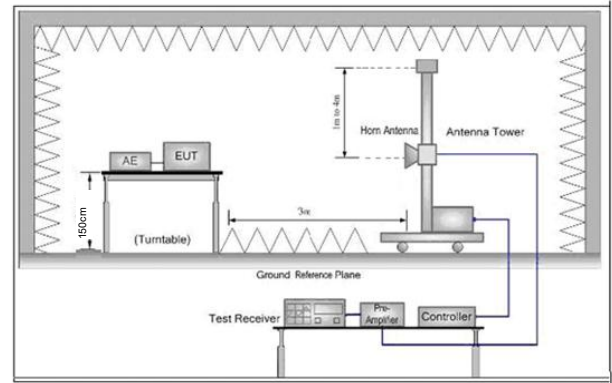


Figure 3. Above 1 GHz


Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
Note: For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        | <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case .</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Final Test Mode:       | Only the worst case is recorded in the report.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

### 5.9.1 Radiated emission below 1GHz

|            |
|------------|
| 30MHz~1GHz |
| Vertical   |

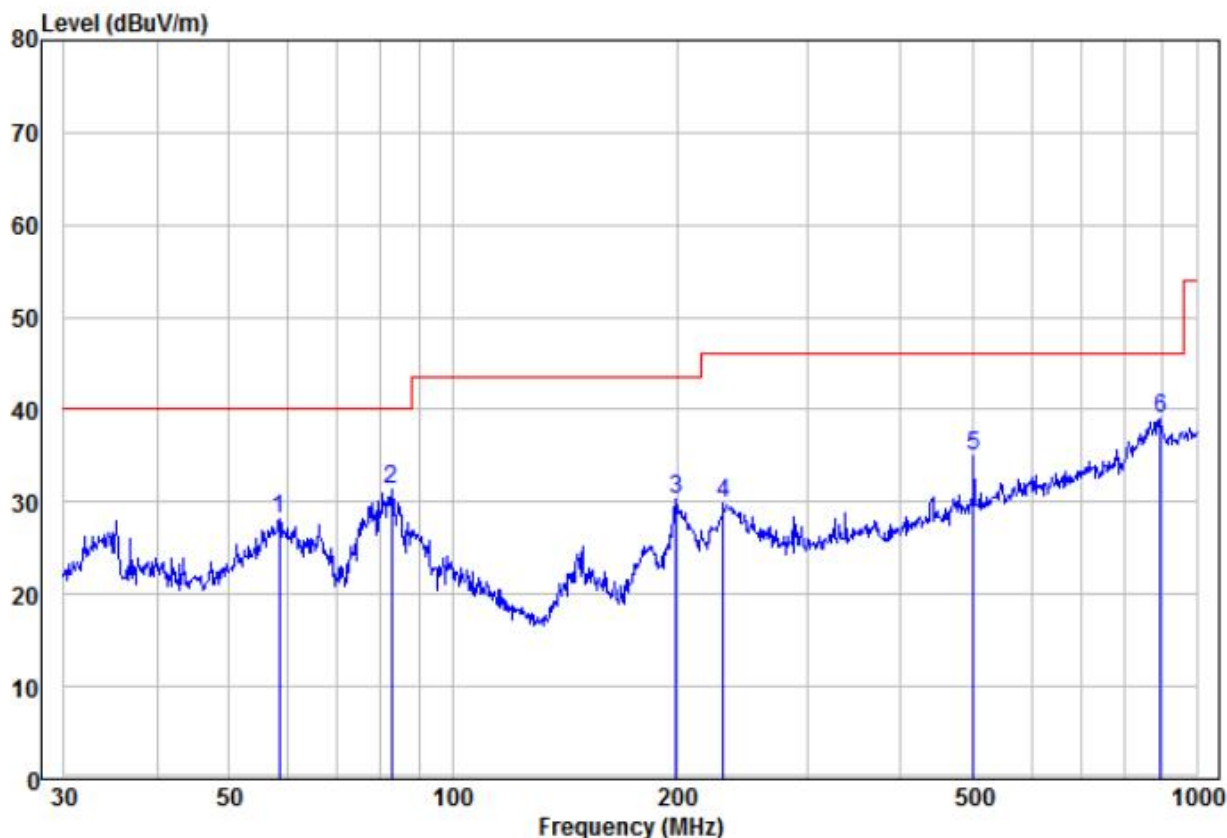

|      | Freq   | Read Level | Factor | Level  | Limit Line | Over Limit | Remark | Pol/Phase |
|------|--------|------------|--------|--------|------------|------------|--------|-----------|
|      | MHz    | dBuV       | dB/m   | dBuV/m | dBuV/m     | dB         |        |           |
| 1    | 58.41  | 15.76      | 12.31  | 28.07  | 40.00      | -11.93     | Peak   | VERTICAL  |
| 2    | 82.65  | 22.94      | 8.40   | 31.34  | 40.00      | -8.66      | Peak   | VERTICAL  |
| 3    | 199.29 | 17.96      | 12.25  | 30.21  | 43.50      | -13.29     | Peak   | VERTICAL  |
| 4    | 230.91 | 15.57      | 14.25  | 29.82  | 46.00      | -16.18     | Peak   | VERTICAL  |
| 5    | 501.18 | 13.95      | 20.94  | 34.89  | 46.00      | -11.11     | Peak   | VERTICAL  |
| 6 pp | 893.86 | 9.87       | 29.20  | 39.07  | 46.00      | -6.93      | Peak   | VERTICAL  |

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Horizontal

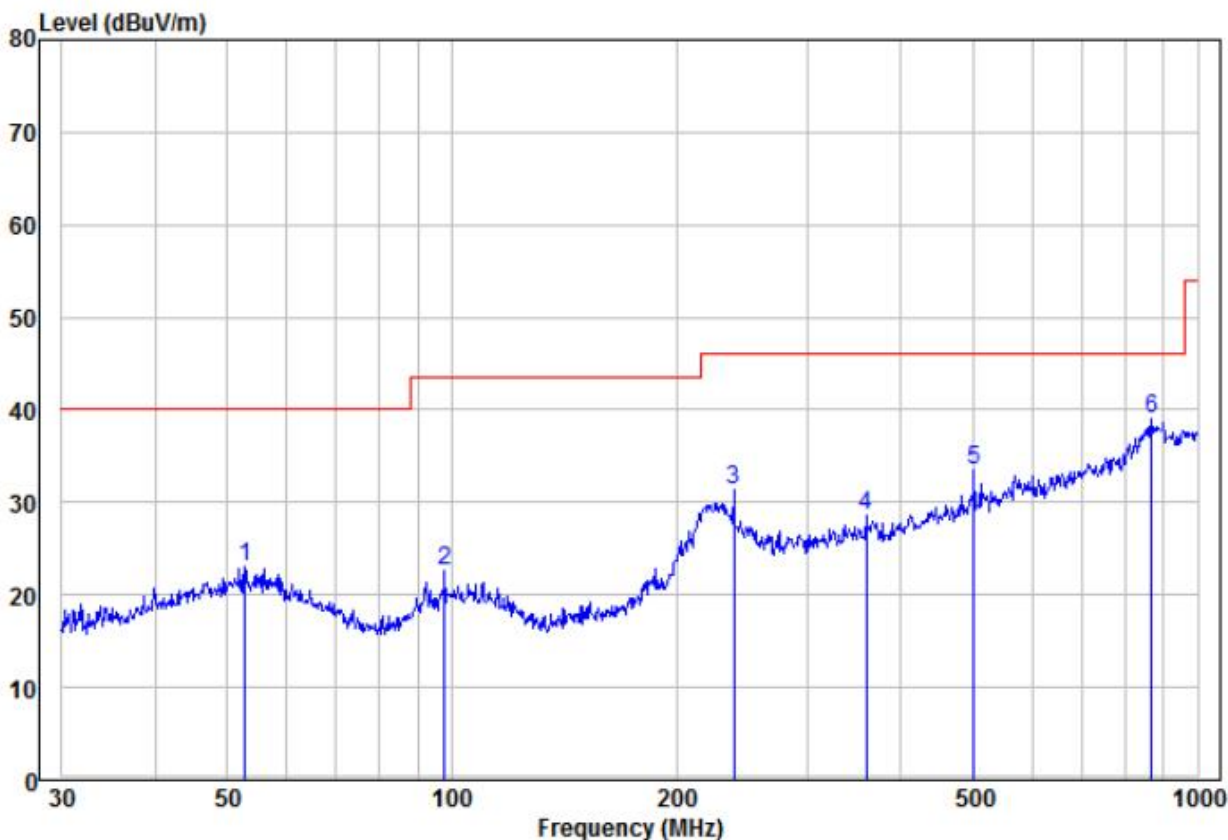

|      | Freq   | Read  | Factor | Level  | Limit  | Over   | Remark | Pol/Phase  |
|------|--------|-------|--------|--------|--------|--------|--------|------------|
|      | MHz    | dBuV  | dB/m   | dBuV/m | dBuV/m | dB     |        |            |
| 1    | 52.76  | 10.24 | 12.71  | 22.95  | 40.00  | -17.05 | Peak   | HORIZONTAL |
| 2    | 97.80  | 11.03 | 11.51  | 22.54  | 43.50  | -20.96 | Peak   | HORIZONTAL |
| 3    | 239.15 | 16.12 | 15.15  | 31.27  | 46.00  | -14.73 | Peak   | HORIZONTAL |
| 4    | 359.19 | 10.31 | 18.37  | 28.68  | 46.00  | -17.32 | Peak   | HORIZONTAL |
| 5    | 501.18 | 12.50 | 20.94  | 33.44  | 46.00  | -12.56 | Peak   | HORIZONTAL |
| 6 pp | 869.13 | 10.23 | 28.78  | 39.01  | 46.00  | -6.99  | Peak   | HORIZONTAL |

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

### 5.9.2 Transmitter emission above 1GHz

| Test mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Lowest        |           |                |             |
|------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|----------------|-------------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. | Antenna Height | Table Angle |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       | (m)            | (Degree)    |
| 4824.000   | 53.39         | -4.26          | 49.13          | 74            | -24.87 | peak          | H         | 1.5            | 175         |
| 4824.000   | 37.64         | -4.26          | 33.38          | 54            | -20.62 | AVG           | H         | 1.5            | 36          |
| 7236.000   | 50.88         | 1.18           | 52.06          | 74            | -21.94 | peak          | H         | 1.5            | 35          |
| 7236.000   | 37.36         | 1.18           | 38.54          | 54            | -15.46 | AVG           | H         | 1.5            | 50          |
| 4824.000   | 55.91         | -4.26          | 51.65          | 74            | -22.35 | peak          | V         | 1.5            | 195         |
| 4824.000   | 39.85         | -4.26          | 35.59          | 54            | -18.41 | AVG           | V         | 1.5            | 325         |
| 7236.000   | 51.57         | 1.18           | 52.75          | 74            | -21.25 | peak          | V         | 1.5            | 247         |
| 7236.000   | 36.08         | 1.18           | 37.26          | 54            | -16.74 | AVG           | V         | 1.5            | 172         |

| Test mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Middle         |           |                |             |
|------------|---------------|----------------|----------------|---------------|--------|----------------|-----------|----------------|-------------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detect or Type | Ant. Pol. | Antenna Height | Table Angle |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |                | H/V       | (m)            | (Degree)    |
| 4874.000   | 51.59         | -4.12          | 47.47          | 74            | -26.53 | peak           | H         | 1.5            | 313         |
| 4874.000   | 36.93         | -4.12          | 32.81          | 54            | -21.19 | AVG            | H         | 1.5            | 162         |
| 7311.000   | 49.50         | 1.46           | 50.96          | 74            | -23.04 | peak           | H         | 1.5            | 232         |
| 7311.000   | 35.02         | 1.46           | 36.48          | 54            | -17.52 | AVG            | H         | 1.5            | 94          |
| 4874.000   | 53.03         | -4.12          | 48.91          | 74            | -25.09 | peak           | V         | 1.5            | 310         |
| 4874.000   | 36.13         | -4.12          | 32.01          | 54            | -21.99 | AVG            | V         | 1.5            | 228         |
| 7311.000   | 48.85         | 1.46           | 50.31          | 74            | -23.69 | peak           | V         | 1.5            | 222         |
| 7311.000   | 35.51         | 1.46           | 36.97          | 54            | -17.03 | AVG            | V         | 1.5            | 35          |

| Test mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Highest        |               |                    |                      |
|------------|---------------|----------------|----------------|---------------|--------|----------------|---------------|--------------------|----------------------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detect or Type | Ant. Pol. H/V | Antenna Height (m) | Table Angle (Degree) |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |                |               |                    |                      |
| 4924.000   | 52.72         | -4.03          | 48.69          | 74            | -25.31 | peak           | H             | 1.5                | 250                  |
| 4924.000   | 38.61         | -4.03          | 34.58          | 54            | -19.42 | AVG            | H             | 1.5                | 178                  |
| 7386.000   | 50.85         | 1.66           | 52.51          | 74            | -21.49 | peak           | H             | 1.5                | 158                  |
| 7386.000   | 36.43         | 1.66           | 38.09          | 54            | -15.91 | AVG            | H             | 1.5                | 329                  |
| 4924.000   | 54.79         | -4.03          | 50.76          | 74            | -23.24 | peak           | V             | 1.5                | 344                  |
| 4924.000   | 37.09         | -4.03          | 33.06          | 54            | -20.94 | AVG            | V             | 1.5                | 16                   |
| 7386.000   | 49.36         | 1.66           | 51.02          | 74            | -22.98 | peak           | V             | 1.5                | 66                   |
| 7386.000   | 36.09         | 1.66           | 37.75          | 54            | -16.25 | AVG            | V             | 1.5                | 283                  |

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

| Test mode: |               | 802.11g(6Mbps) |                | Test channel: |        | Lowest         |           |                |             |
|------------|---------------|----------------|----------------|---------------|--------|----------------|-----------|----------------|-------------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detect or Type | Ant. Pol. | Antenna Height | Table Angle |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |                | H/V       | (m)            | (Degree)    |
| 4824.000   | 53.17         | -4.26          | 48.91          | 74            | -25.09 | peak           | H         | 1.5            | 294         |
| 4824.000   | 37.87         | -4.26          | 33.61          | 54            | -20.39 | AVG            | H         | 1.5            | 221         |
| 7236.000   | 50.62         | 1.18           | 51.80          | 74            | -22.20 | peak           | H         | 1.5            | 65          |
| 7236.000   | 38.35         | 1.18           | 39.53          | 54            | -14.47 | AVG            | H         | 1.5            | 114         |
| 4824.000   | 54.90         | -4.26          | 50.64          | 74            | -23.36 | peak           | V         | 1.5            | 2           |
| 4824.000   | 39.33         | -4.26          | 35.07          | 54            | -18.93 | AVG            | V         | 1.5            | 307         |
| 7236.000   | 51.53         | 1.18           | 52.71          | 74            | -21.29 | peak           | V         | 1.5            | 316         |
| 7236.000   | 36.77         | 1.18           | 37.95          | 54            | -16.05 | AVG            | V         | 1.5            | 19          |

| Test mode: |               | 802.11g(6Mbps) |                | Test channel: |        | Middle         |           |                |             |
|------------|---------------|----------------|----------------|---------------|--------|----------------|-----------|----------------|-------------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detect or Type | Ant. Pol. | Antenna Height | Table Angle |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |                | H/V       | (m)            | (Degree)    |
| 4874.000   | 51.64         | -4.12          | 47.52          | 74            | -26.48 | peak           | H         | 1.5            | 83          |
| 4874.000   | 36.60         | -4.12          | 32.48          | 54            | -21.52 | AVG            | H         | 1.5            | 197         |
| 7311.000   | 49.19         | 1.46           | 50.65          | 74            | -23.35 | peak           | H         | 1.5            | 83          |
| 7311.000   | 36.58         | 1.46           | 38.04          | 54            | -15.96 | AVG            | H         | 1.5            | 13          |
| 4874.000   | 52.42         | -4.12          | 48.30          | 74            | -25.70 | peak           | V         | 1.5            | 58          |
| 4874.000   | 37.12         | -4.12          | 33.00          | 54            | -21.00 | AVG            | V         | 1.5            | 77          |
| 7311.000   | 49.39         | 1.46           | 50.85          | 74            | -23.15 | peak           | V         | 1.5            | 2           |
| 7311.000   | 35.25         | 1.46           | 36.71          | 54            | -17.29 | AVG            | V         | 1.5            | 25          |

| Test mode: |               | 802.11g(6Mbps) |                | Test channel: |        | Highest        |               |                    |                      |
|------------|---------------|----------------|----------------|---------------|--------|----------------|---------------|--------------------|----------------------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detect or Type | Ant. Pol. H/V | Antenna Height (m) | Table Angle (Degree) |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |                |               |                    |                      |
| 4924.000   | 51.30         | -4.03          | 47.27          | 74            | -26.73 | peak           | H             | 1.5                | 7                    |
| 4924.000   | 37.45         | -4.03          | 33.42          | 54            | -20.58 | AVG            | H             | 1.5                | 89                   |
| 7386.000   | 49.80         | 1.66           | 51.46          | 74            | -22.54 | peak           | H             | 1.5                | 95                   |
| 7386.000   | 36.49         | 1.66           | 38.15          | 54            | -15.85 | AVG            | H             | 1.5                | 316                  |
| 4924.000   | 53.35         | -4.03          | 49.32          | 74            | -24.68 | peak           | V             | 1.5                | 241                  |
| 4924.000   | 37.02         | -4.03          | 32.99          | 54            | -21.01 | AVG            | V             | 1.5                | 245                  |
| 7386.000   | 49.84         | 1.66           | 51.50          | 74            | -22.50 | peak           | V             | 1.5                | 342                  |
| 7386.000   | 37.17         | 1.66           | 38.83          | 54            | -15.17 | AVG            | V             | 1.5                | 135                  |

Remark:

- 1) The 6Mbps of rate of 802.11g is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

| Test mode: |               | 802.11n20(6.5Mbps) |                | Test channel: |        | Lowest        |           |                |             |
|------------|---------------|--------------------|----------------|---------------|--------|---------------|-----------|----------------|-------------|
| Frequency  | Meter Reading | Factor             | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. | Antenna Height | Table Angle |
| (MHz)      | (dBμV)        | (dB)               | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       | (m)            | (Degree)    |
| 4824.000   | 53.94         | -4.26              | 49.68          | 74            | -24.32 | peak          | H         | 1.5            | 240         |
| 4824.000   | 37.29         | -4.26              | 33.03          | 54            | -20.97 | AVG           | H         | 1.5            | 197         |
| 7236.000   | 51.72         | 1.18               | 52.90          | 74            | -21.10 | peak          | H         | 1.5            | 72          |
| 7236.000   | 37.54         | 1.18               | 38.72          | 54            | -15.28 | AVG           | H         | 1.5            | 247         |
| 4824.000   | 55.63         | -4.26              | 51.37          | 74            | -22.63 | peak          | V         | 1.5            | 308         |
| 4824.000   | 39.40         | -4.26              | 35.14          | 54            | -18.86 | AVG           | V         | 1.5            | 38          |
| 7236.000   | 51.91         | 1.18               | 53.09          | 74            | -20.91 | peak          | V         | 1.5            | 109         |
| 7236.000   | 35.40         | 1.18               | 36.58          | 54            | -17.42 | AVG           | V         | 1.5            | 317         |

| Test mode: |               | 802.11n20(6.5Mbps) |                | Test channel: |        | Middle        |           |                |             |
|------------|---------------|--------------------|----------------|---------------|--------|---------------|-----------|----------------|-------------|
| Frequency  | Meter Reading | Factor             | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. | Antenna Height | Table Angle |
| (MHz)      | (dBμV)        | (dB)               | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       | (m)            | (Degree)    |
| 4874.000   | 53.02         | -4.12              | 48.90          | 74            | -25.10 | peak          | H         | 1.5            | 56          |
| 4874.000   | 36.25         | -4.12              | 32.13          | 54            | -21.87 | AVG           | H         | 1.5            | 146         |
| 7311.000   | 48.76         | 1.46               | 50.22          | 74            | -23.78 | peak          | H         | 1.5            | 46          |
| 7311.000   | 36.51         | 1.46               | 37.97          | 54            | -16.03 | AVG           | H         | 1.5            | 143         |
| 4874.000   | 54.13         | -4.12              | 50.01          | 74            | -23.99 | peak          | V         | 1.5            | 246         |
| 4874.000   | 37.46         | -4.12              | 33.34          | 54            | -20.66 | AVG           | V         | 1.5            | 0           |
| 7311.000   | 48.67         | 1.46               | 50.13          | 74            | -23.87 | peak          | V         | 1.5            | 114         |
| 7311.000   | 36.74         | 1.46               | 38.20          | 54            | -15.80 | AVG           | V         | 1.5            | 135         |

| Test mode: |               | 802.11n20(6.5Mbps) |                | Test channel: |        | Highest        |           |                |             |
|------------|---------------|--------------------|----------------|---------------|--------|----------------|-----------|----------------|-------------|
| Frequency  | Meter Reading | Factor             | Emission Level | Limits        | Over   | Detect or Type | Ant. Pol. | Antenna Height | Table Angle |
| (MHz)      | (dBμV)        | (dB)               | (dBμV/m)       | (dBμV/m)      | (dB)   |                | H/V       | (m)            | (Degree)    |
| 4924.000   | 51.51         | -4.03              | 47.48          | 74            | -26.52 | peak           | H         | 1.5            | 146         |
| 4924.000   | 37.39         | -4.03              | 33.36          | 54            | -20.64 | AVG            | H         | 1.5            | 194         |
| 7386.000   | 51.23         | 1.66               | 52.89          | 74            | -21.11 | peak           | H         | 1.5            | 7           |
| 7386.000   | 36.19         | 1.66               | 37.85          | 54            | -16.15 | AVG            | H         | 1.5            | 93          |
| 4924.000   | 53.74         | -4.03              | 49.71          | 74            | -24.29 | peak           | V         | 1.5            | 352         |
| 4924.000   | 38.54         | -4.03              | 34.51          | 54            | -19.49 | AVG            | V         | 1.5            | 202         |
| 7386.000   | 50.43         | 1.66               | 52.09          | 74            | -21.91 | peak           | V         | 1.5            | 157         |
| 7386.000   | 37.35         | 1.66               | 39.01          | 54            | -14.99 | AVG            | V         | 1.5            | 354         |

Remark:

- 1) The MCS0 of rate of 802.11n20 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

## 5.10 Restricted bands around fundamental frequency

|                   |                                                  |                    |                  |
|-------------------|--------------------------------------------------|--------------------|------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205        |                    |                  |
| Test Method:      | ANSI C63.10 2020                                 |                    |                  |
| Test Site:        | Measurement Distance: 3m (Semi-Anechoic Chamber) |                    |                  |
| Limit:            | Frequency                                        | Limit (dBuV/m @3m) | Remark           |
|                   | 30MHz-88MHz                                      | 40.0               | Quasi-peak Value |
|                   | 88MHz-216MHz                                     | 43.5               | Quasi-peak Value |
|                   | 216MHz-960MHz                                    | 46.0               | Quasi-peak Value |
|                   | 960MHz-1GHz                                      | 54.0               | Quasi-peak Value |
|                   | Above 1GHz                                       | 54.0               | Average Value    |
|                   |                                                  | 74.0               | Peak Value       |
| Test Setup:       |                                                  |                    |                  |

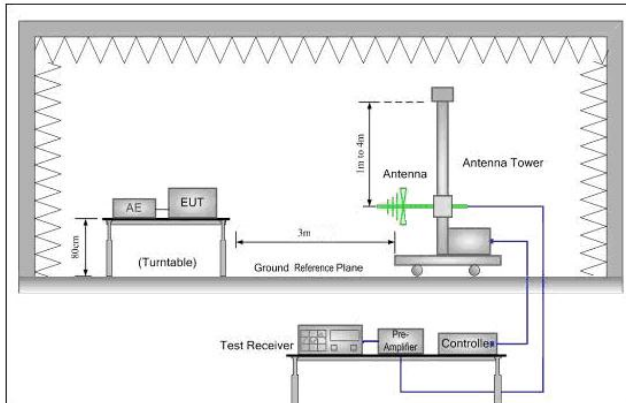


Figure 1. 30MHz to 1GHz

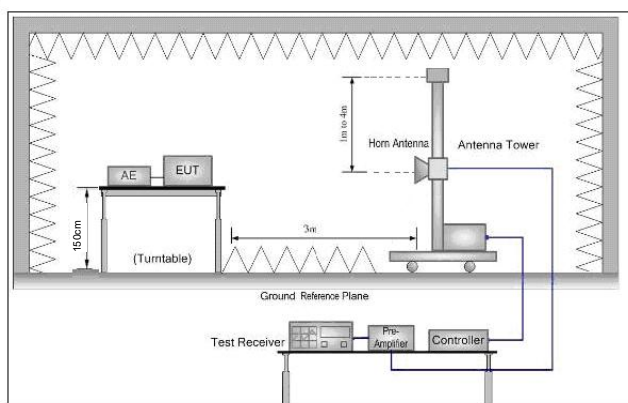


Figure 2. Above 1 GHz

### Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
  - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
  - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
  - For each suspected emission, the EUT was arranged to its worst case and

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        | <p>then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case .</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> |
| Exploratory Test Mode: | <p>Transmitting with all kind of modulations, data rates.</p> <p>Transmitting mode.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Final Test Mode:       | <p>Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case.</p> <p>Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20).</p> <p>Only the worst case is recorded in the report.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

**Test data:**

| Worse case mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Lowest        |           |                |             |
|------------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|----------------|-------------|
| Frequency        | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. | Antenna Height | Table Angle |
| (MHz)            | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       | (m)            | (Degree)    |
| 2390.000         | 58.29         | -9.2           | 49.09          | 74            | -24.91 | peak          | H         | 1.5            | 144         |
| 2390.000         | 44.38         | -9.2           | 35.18          | 54            | -18.82 | AVG           | H         | 1.5            | 155         |
| 2400.000         | 59.29         | -9.39          | 49.90          | 74            | -24.10 | peak          | H         | 1.5            | 337         |
| 2400.000         | 46.25         | -9.39          | 36.86          | 54            | -17.14 | AVG           | H         | 1.5            | 167         |
| 2390.000         | 58.28         | -9.2           | 49.08          | 74            | -24.92 | peak          | V         | 1.5            | 151         |
| 2390.000         | 44.71         | -9.2           | 35.51          | 54            | -18.49 | AVG           | V         | 1.5            | 234         |
| 2400.000         | 59.42         | -9.39          | 50.03          | 74            | -23.97 | peak          | V         | 1.5            | 231         |
| 2400.000         | 46.28         | -9.39          | 36.89          | 54            | -17.11 | AVG           | V         | 1.5            | 212         |

| Worse case mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Highest       |           |                |             |
|------------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|----------------|-------------|
| Frequency        | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. | Antenna Height | Table Angle |
| (MHz)            | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       | (m)            | (Degree)    |
| 2483.500         | 58.21         | -9.29          | 48.92          | 74            | -25.08 | peak          | H         | 1.5            | 22          |
| 2483.500         | 44.28         | -9.29          | 34.99          | 54            | -19.01 | AVG           | H         | 1.5            | 224         |
| 2483.500         | 58.21         | -9.29          | 48.92          | 74            | -25.08 | peak          | V         | 1.5            | 231         |
| 2483.500         | 46.09         | -9.29          | 36.80          | 54            | -17.20 | AVG           | V         | 1.5            | 265         |

| Worse case mode: |               | 802.11g(6Mbps) |                | Test channel: |        | Lowest        |           |                |             |
|------------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|----------------|-------------|
| Frequency        | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. | Antenna Height | Table Angle |
| (MHz)            | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       | (m)            | (Degree)    |
| 2390.000         | 58.37         | -9.2           | 49.17          | 74            | -24.83 | peak          | H         | 1.5            | 310         |
| 2390.000         | 44.36         | -9.2           | 35.16          | 54            | -18.84 | AVG           | H         | 1.5            | 345         |
| 2400.000         | 59.79         | -9.39          | 50.40          | 74            | -23.60 | peak          | H         | 1.5            | 290         |
| 2400.000         | 46.43         | -9.39          | 37.04          | 54            | -16.96 | AVG           | H         | 1.5            | 135         |
| 2390.000         | 58.72         | -9.2           | 49.52          | 74            | -24.48 | peak          | V         | 1.5            | 34          |
| 2390.000         | 44.81         | -9.2           | 35.61          | 54            | -18.39 | AVG           | V         | 1.5            | 65          |
| 2400.000         | 59.48         | -9.39          | 50.09          | 74            | -23.91 | peak          | V         | 1.5            | 151         |
| 2400.000         | 46.45         | -9.39          | 37.06          | 54            | -16.94 | AVG           | V         | 1.5            | 203         |

| Worse case mode: |               | 802.11g(6Mbps) |                | Test channel: |        | Highest       |           |                |             |
|------------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|----------------|-------------|
| Frequency        | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. | Antenna Height | Table Angle |
| (MHz)            | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       | (m)            | (Degree)    |
| 2483.500         | 58.22         | -9.29          | 48.93          | 74            | -25.07 | peak          | H         | 1.5            | 41          |
| 2483.500         | 44.02         | -9.29          | 34.73          | 54            | -19.27 | AVG           | H         | 1.5            | 129         |
| 2483.500         | 57.65         | -9.29          | 48.36          | 74            | -25.64 | peak          | V         | 1.5            | 3           |
| 2483.500         | 45.50         | -9.29          | 36.21          | 54            | -17.79 | AVG           | V         | 1.5            | 31          |

| Worse case mode: |               | 802.11n(HT20)(6.5Mbps) |                | Test channel: |        | Lowest   |           |                |             |
|------------------|---------------|------------------------|----------------|---------------|--------|----------|-----------|----------------|-------------|
| Frequency        | Meter Reading | Factor                 | Emission Level | Limits        | Over   | Detector | Ant. Pol. | Antenna Height | Table Angle |
| (MHz)            | (dBμV)        | (dB)                   | (dBμV/m)       | (dBμV/m)      | (dB)   | Type     | H/V       | (m)            | (Degree)    |
| 2390.000         | 58.68         | -9.2                   | 49.48          | 74            | -24.52 | peak     | H         | 1.5            | 236         |
| 2390.000         | 44.31         | -9.2                   | 35.11          | 54            | -18.89 | AVG      | H         | 1.5            | 80          |
| 2400.000         | 59.51         | -9.39                  | 50.12          | 74            | -23.88 | peak     | H         | 1.5            | 353         |
| 2400.000         | 46.23         | -9.39                  | 36.84          | 54            | -17.16 | AVG      | H         | 1.5            | 84          |
| 2390.000         | 59.17         | -9.2                   | 49.97          | 74            | -24.03 | peak     | V         | 1.5            | 190         |
| 2390.000         | 44.24         | -9.2                   | 35.04          | 54            | -18.96 | AVG      | V         | 1.5            | 57          |
| 2400.000         | 59.78         | -9.39                  | 50.39          | 74            | -23.61 | peak     | V         | 1.5            | 221         |
| 2400.000         | 46.91         | -9.39                  | 37.52          | 54            | -16.48 | AVG      | V         | 1.5            | 110         |

| Worse case mode: |               | 802.11n(HT20)(6.5Mbps) |                | Test channel: |        | Highest  |           |                |             |
|------------------|---------------|------------------------|----------------|---------------|--------|----------|-----------|----------------|-------------|
| Frequency        | Meter Reading | Factor                 | Emission Level | Limits        | Over   | Detector | Ant. Pol. | Antenna Height | Table Angle |
| (MHz)            | (dBμV)        | (dB)                   | (dBμV/m)       | (dBμV/m)      | (dB)   | Type     | H/V       | (m)            | (Degree)    |
| 2483.500         | 57.55         | -9.29                  | 48.26          | 74            | -25.74 | peak     | H         | 1.5            | 244         |
| 2483.500         | 43.55         | -9.29                  | 34.26          | 54            | -19.74 | AVG      | H         | 1.5            | 318         |
| 2483.500         | 57.71         | -9.29                  | 48.42          | 74            | -25.58 | peak     | V         | 1.5            | 347         |
| 2483.500         | 45.59         | -9.29                  | 36.30          | 54            | -17.70 | AVG      | V         | 1.5            | 261         |

**Note:**

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

*Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor*

## 6 Photographs - EUT Test Setup

Detailed information is given in Appendix A

## 7 Photographs - EUT Constructional Details

Detailed information is given in Appendix B and Appendix C

\*\*\* END OF REPORT \*\*\*