TEST REPORT

Reference No.	:	WTX25X03058750W001
FCC ID	:	2BPE2-LD01
Applicant	:	SVEA(HK)LIMITED
Address	:	FLAT/RM520, 5/F, CORE BUILDING 1, PH 1,1 SCIENCE PARK EAST AVE, SHA TIN, NT, HK, CHINA
Manufacturer	:	Sveaverken Intelligent Technology (shenzhen) Co., Ltd.
Address	:	Room 401-501, Building 13, Nangang Second Industrial Park, No.1026, Songbai Road, Sunshine Community, Xili Street, Nanshan District, Shenzhen
Product Name	:	3D Kit
Model No.	:	LD01
Standards	:	FCC Part 15.407
Date of Receipt sample	:	2025-03-14
Date of Test	:	2025-03-14 to 2025-03-31; 2025-04-05 to 2025-04-22
Date of Issue	:	2025-04-22
Test Report Form No.	:	WTX_Part 15_407W
Test Result	:	**Pass**

Remarks:
The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.
Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Gala Wang/Project Engineer

Approved by:

Jason Su/Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION 5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 5
1.2 TEST STANDARDS 6
1.3 TEST METHODOLOGY 6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING 6
1.5 EUT OPERATING DURING TEST 8
1.6 TEST FACILITY 8
1.7 EUT SETUP AND TEST MODE 9
1.8 MEASUREMENT UNCERTAINTY 11
1.9 TEST EQUIPMENT LIST AND DETAILS 12
2. SUMMARY OF TEST RESULTS 16
3. ANTENNA REQUIREMENT 17
3.1 STANDARD APPLICABLE 17
3.2 EVALUATION INFORMATION 17
4. AUTOMATICALLY DISCONTINUE TRANSMISSION 18
4.1 STANDARD APPLICABLE 18
4.2 SUMMARY OF TEST RESULTS 18
5. POWER SPECTRAL DENSITY 19
5.1 STANDARD APPLICABLE 19
5.2 TEST PROCEDURE 19
5.3 SUMMARY OF TEST RESULTS/PLOTS 20
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH 21
6.1 STANDARD APPLICABLE 21
6.2 TEST PROCEDURE 21
6.3 SUMMARY OF TEST RESULTS/PLOTS 23
7. MAXIMUM CONDUCTED OUTPUT POWER 24
7.1 STANDARD APPLICABLE 24
7.2 TEST PROCEDURE 24
7.3 SUMMARY OF TEST RESULTS/PLOTS 25
8. RADIATED SPURIOUS EMISSIONS 26
8.1 STANDARD APPLICABLE 26
8.2 TEST PROCEDURE 26
8.3 TEST RECEIVER SETUP 28
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION 28
8.5 SUMMARY OF TEST RESULTS/PLOTS 29
9. FREQUENCY STABILITY 100
9.1 STANDARD APPLICABLE 100
9.2 TEST PROCEDURE 100
9.3 SUMMARY OF TEST RESULTS/PLOTS 100
10 CONDUCTED EMISSIONS 101
10.1 TEST PROCEDURE 101
10.2 BASIC TEST SETUP BLOCK DIAGRAM 101
10.3 TEST RECEIVER SETUP 101
10.4 SUMMARY OF TEST RESULTS/PLOTS 101
APPENDIX SUMMARY 102
APPENDIX A 103
APPENDIX B 133
APPENDIX C 191
APPENDIX D 221

APPENDIX PHOTOGRAPHS.....222

Report version

Version No.	Date of issue	Description
Rev.00	2025-04-22	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	3D Kit
Trade Name:	/
Model No.:	LD01
Adding Model(s):	/
Rated Voltage:	DC12V
Battery Capacity:	/
Power Adapter:	/
Note: The test data is gathered from a production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-VHT20/40/80, 802.11ax-HE20/40/80
Frequency Range:	5180-5240MHz, 5745-5825MHz
Max. RF Output Power:	5180-5240MHz: Antenna 0: 15.85dBm (Conducted) Antenna 1: 15.44dBm (Conducted) 5745-5825MHz: Antenna 0: 14.82dBm (Conducted) Antenna 1: 14.39dBm (Conducted)
Type of Modulation:	QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Type of Antenna:	Glue stick antenna
Antenna Gain:	5180-5240MHz: 2.64dBi 5745-5825MHz: 3.20dBi
Note The Antenna Gain is provided by the customer and can affect the validity of results.	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.
ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.
KDB662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01
The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Run commands and follow the instructions given by the manufacturer, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Ant.	Test Frequency (MHz)												
		NCB: 20MHz												
		5180	5200	5240	5260	5280	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	ANT 0	16	16	16	/	/	/	/	/	/	/	16	16	16
	ANT 1	16	16	16	/	/	/	/	/	/	/	16	16	16
802.11n-HT20 MCS0	ANT 0	14	14	14	/	/	/	/	/	/	/	14	14	14
	ANT 1	14	14	14	/	/	/	/	/	/	/	14	14	14
802.11ac-VHT20 MCS0	ANT 0	14	14	14	/	/	/	/	/	/	/	14	14	14
	ANT 1	14	14	14	/	/	/	/	/	/	/	14	14	14
802.11ax-HE20	ANT	13	13	13	/	/	/	/	/	/	/	13	13	13

MCS0	0													
	ANT 1	13	13	13	/	/	/	/	/	/	/	13	13	13

Mode	Ant.	NCB: 40MHz									
		5190	5230	5270	5310	5510	5550	5670	5710	5755	5795
802.11n-HT40 MCS0	ANT 0	13	13	/	/	/	/	/	/	13	13
	ANT 1	13	13	/	/	/	/	/	/	13	13
802.11ac-VHT40 MCS0	ANT 0	13	13	/	/	/	/	/	/	13	13
	ANT 1	13	13	/	/	/	/	/	/	13	13
802.11ax-HE40 MCS0	ANT 0	13	13	/	/	/	/	/	/	13	13
	ANT 1	13	13	/	/	/	/	/	/	13	13

Mode	Ant.	NCB: 80MHz					
		5210	5290	5530	5610	/	5775
802.11ac-VHT80 MCS0	ANT 0	12	/	/	/	/	12
	ANT 1	12	/	/	/	/	12
802.11ax-HE80 MCS0	ANT 0	12	/	/	/	/	12
	ANT 1	12	/	/	/	/	12

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.
Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101）

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is mai ntained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, ,5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz,5755MHz,5795MHz
TM4	802.11ac-VHT20	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM5	802.11ac-VHT40	5190MHz,5230MHz,5755MHz,5795MHz
TM6	802.11ac-VHT80	5210MHz ,5775 MHz
TM7	802.11ax-HE20	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM8	802.11ax-HE40	5190MHz,5230MHz,5755MHz,5795MHz
TM9	802.11ax-HE80	5210MHz ,5775 MHz
Note1 : All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report. Note 2: The 5GHz WIFI has two antennas and support Multiple Outputs for 802.11n/ac/ax mode for this report; For 5150-5250MHz: Antenna 0 Gain is 2.64dBi; Antenna 1 Gain is 2.64dBi; For 5725-5850MHz: Antenna 0 Gain is 3.20dBi; Antenna 1 Gain is 3.20dBi; According to KDB 662911, for same directional gain: For 5150-5250MHz: Directional gain = GANT + 10 log(NANT) dBi =2.64+10log(2) dBi=5.65dBi For 5725-5850MHz: Directional gain = GANT + 10 log(NANT) dBi =3.20+10log(2) dBi=6.21dBi		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~75 %
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Cable	2.0	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	0.57dB
Occupied Bandwidth	Conducted	0.015MHz
Power Spectral Density	Conducted	1.8dB
Conducted Spurious Emission	Conducted	2.17dB
Conducted Emissions	Conducted	9-150kHz, 3.74dB
		0.15-30MHz, 3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz, 4.52dB
		0.2-1GHz 5.56dB
		1-6GHz, 3.84dB
		6-18GHz, 3.92dB

1.9 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2025-02-23	2026-02-22
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US47140102	2025-02-23	2026-02-22
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY54320548	2025-02-23	2026-02-22
WTXE1004A 1-001	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2025-02-23	2026-02-22
WTXE1103A 1003	Attenuator	Pasternack	PE4007-4	/	2025-02-23	2026-02-22
WTXE1003A 1-005	Coaxial Cable	/	0M4RFC	/	2025-02-23	2026-02-22
☐Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2025-02-23	2026-02-22
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2025-02-23	2026-02-22
WTXE1007A 1001	Amplifier	HP	8447F	2805A03475	2025-02-23	2026-02-22
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2026-02-25
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2025-02-23	2026-02-22
WTXE1104A 1032-1	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1032-2	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1032-3	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
☐Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2025-02-23	2026-02-22
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2025-02-23	2026-02-22
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	2002	2025-02-23	2026-02-22
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2025-02-23	2026-02-22

WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2026-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2025-02-23	2026-02-22
WTXE1104A 1033-1	Coaxial Cable	/	C16-07-07	/	2025-02-23	2026-02-22
WTXE1104A 1033-2	Coaxial Cable	/	C16-07-07	/	2025-02-23	2026-02-22
WTXE1104A 1033-3	Coaxial Cable	/	C16-07-07	/	2025-02-23	2026-02-22
☐Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2025-02-23	2026-02-22
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2025-02-23	2026-02-22
WTXE1104A 1031-1	Coaxial Cable	/	1.5MRFC-LWB3	/	2025-02-23	2026-02-22
WTXE1104A 1031-2	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22
WTXE1104A 1031-3	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22
☒Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2025-02-23	2026-02-22
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2026-02-25
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2025-02-23	2026-02-22
WTXE1104A 1034-1	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1034-2	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1034-3	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
☒Chamber C: Above 1GHz						
WTXE1093A	EMI Test	Rohde &	ESIB 26	100401	2025-02-23	2026-02-22

1001	Receiver	Schwarz				
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2025-02-23	2026-02-22
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2026-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2025-02-23	2026-02-22
WTXE1104A 1035-1	Coaxial Cable	/	RC-18G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1035-2	Coaxial Cable	/	RC-18G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1035-3	Coaxial Cable	/	RC-18G-N-M	/	2025-02-23	2026-02-22
☐Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2024-12-08	2025-12-07
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2025-02-23	2026-02-22
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2025-02-23	2026-02-22
WTXE1104A 1036	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22
WTXE1104A 1038	Coaxial Cable	/	6MRFC-DP	/	2025-02-23	2026-02-22
☐Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2025-02-23	2026-02-22
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2025-02-23	2026-02-22
WTXE1104A 1037	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22

Software List			
Description	**Manufacturer**	**Model**	**Version**
EMI Test Software (Radiated Emission A)	Farad	EZ-EMC	RA-03A1 (1.1.4.2)
EMI Test Software (Radiated Emission B)	Farad	EZ-EMC	RA-03A1 (1.1.4.2)
EMI Test Software (Radiated Emission C)	Farad	EZ-EMC	RA-03A1-2 (1.1.4.2)
EMI Test Software (Conducted Emission Room 1#)	Farad	EZ-EMC	3A1*CE-RE 1.1.4.3
EMI Test Software (Conducted Emission Room 2#)	Farad	EZ-EMC	3A1*CE-RE 1.1.4.3

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	N/A
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has two Glue stick antennas, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.
(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or 11dBm + 10 log B, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.
For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1MHz RBW to satisfy directly the 1MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1MHz, or 500kHz, “provided that the measured power is integrated over the full

reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500kHz) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

a) Set RBW ≥ 1/T, where T is defined in section II.B.I.a).
b) Set VBW ≥ 3 RBW.
c) If measurement bandwidth of Maximum PSD is specified in 500kHz, add 10log(500kHz/RBW) to the measured result, whereas RBW (< 500kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
d) If measurement bandwidth of Maximum PSD is specified in 1MHz, add 10log(1MHz/RBW) to the measured result, whereas RBW (< 1MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since RBW=100kHZ is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.
(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or 11dBm + 10 log B, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)
a) Set RBW = approximately 1% of the emission bandwidth.
b) Set the VBW > RBW.

c) Detector = Peak.
d) Trace mode = max hold.
e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85GHz
Section 15.407(e) specifies the minimum 6dB emission bandwidth of at least 500kHz for the band 5.715-5.85GHz. The following procedure shall be used for measuring this bandwidth:
a) Set RBW = 100kHz.
b) Set the video bandwidth (VBW) ≥ 3 × RBW.
c) Detector = Peak.
d) Trace mode = max hold.
e) Sweep = auto couple.
f) Allow the trace to stabilize.
g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth
The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:
1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW ≥ 3 * RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.

The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.
(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or 11dBm + 10 log B, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

(i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1MHz.

(iii) Set VBW ≥ 3MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is ≤ RBW/2, so that

narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of −27dBm/MHz.

(2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of −27dBm/MHz.

(3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of −27dBm/MHz.

(4) For transmitters operating in the 5.725-5.85GHz band:

(i) All emissions shall be limited to a level of −27dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.

789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

EIRP = ((E*d)^2) / 30

where:

• E is the field strength in V/m;

• d is the measurement distance in meters;

• EIRP is the equivalent isotropically radiated power in watts.

8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

The test setup for emission measurement below 30MHz.

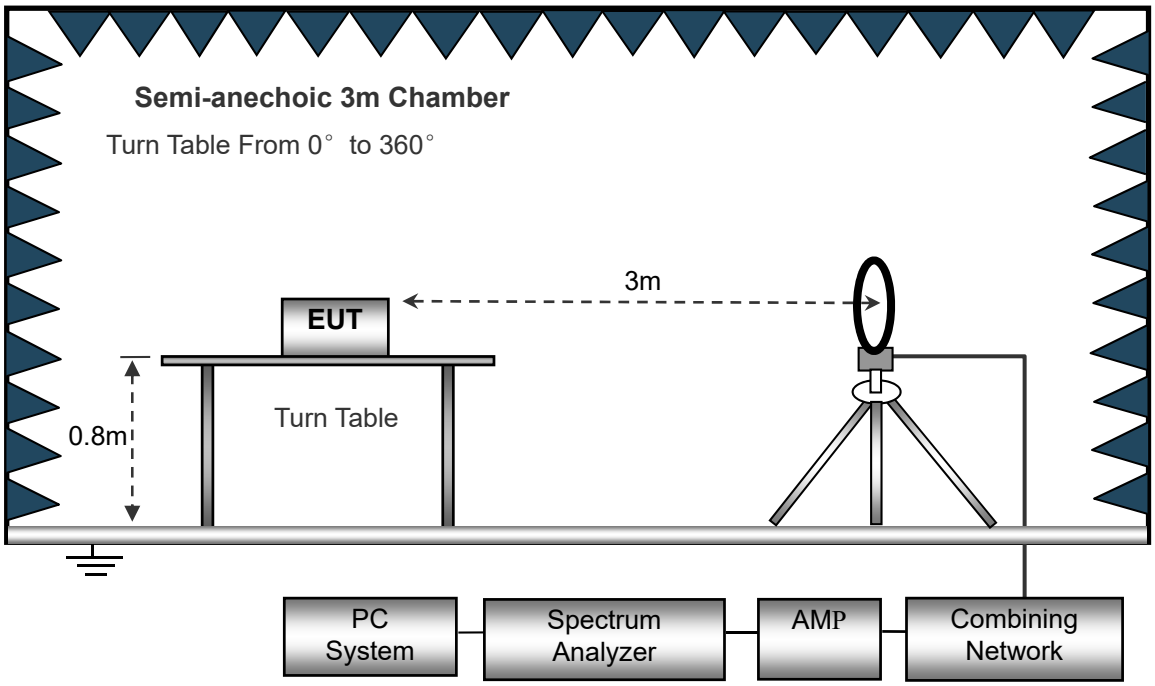

The test setup for emission measurement from 30 MHz to 1 GHz.

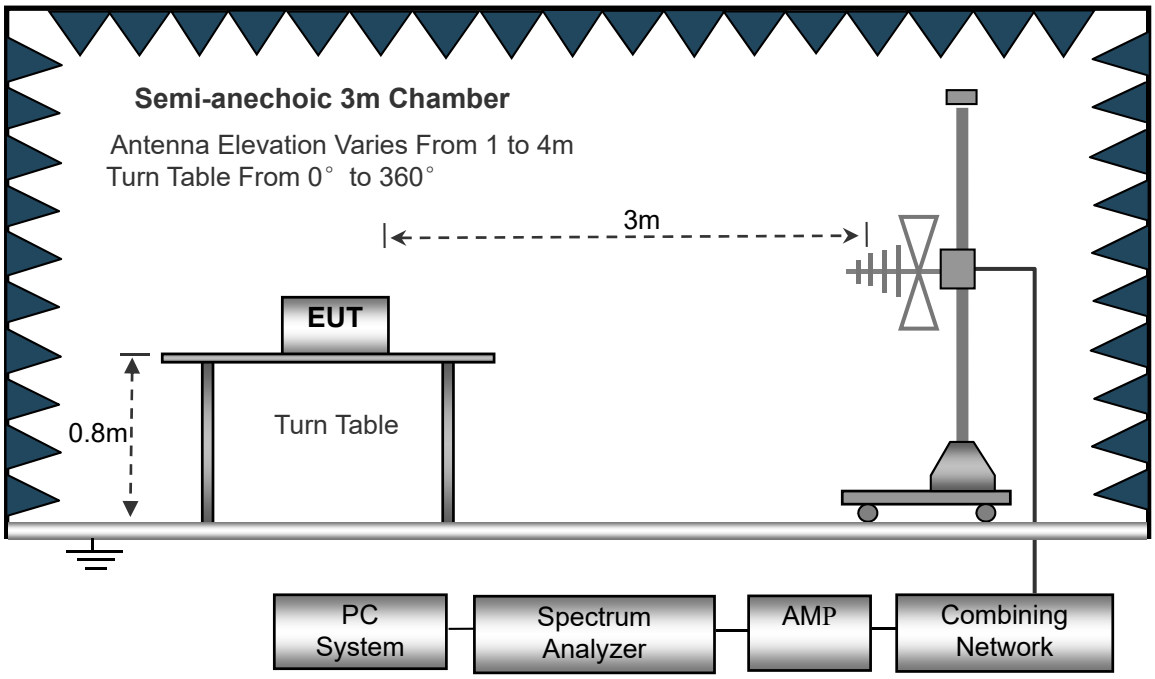

The test setup for emission measurement above 1GHz.

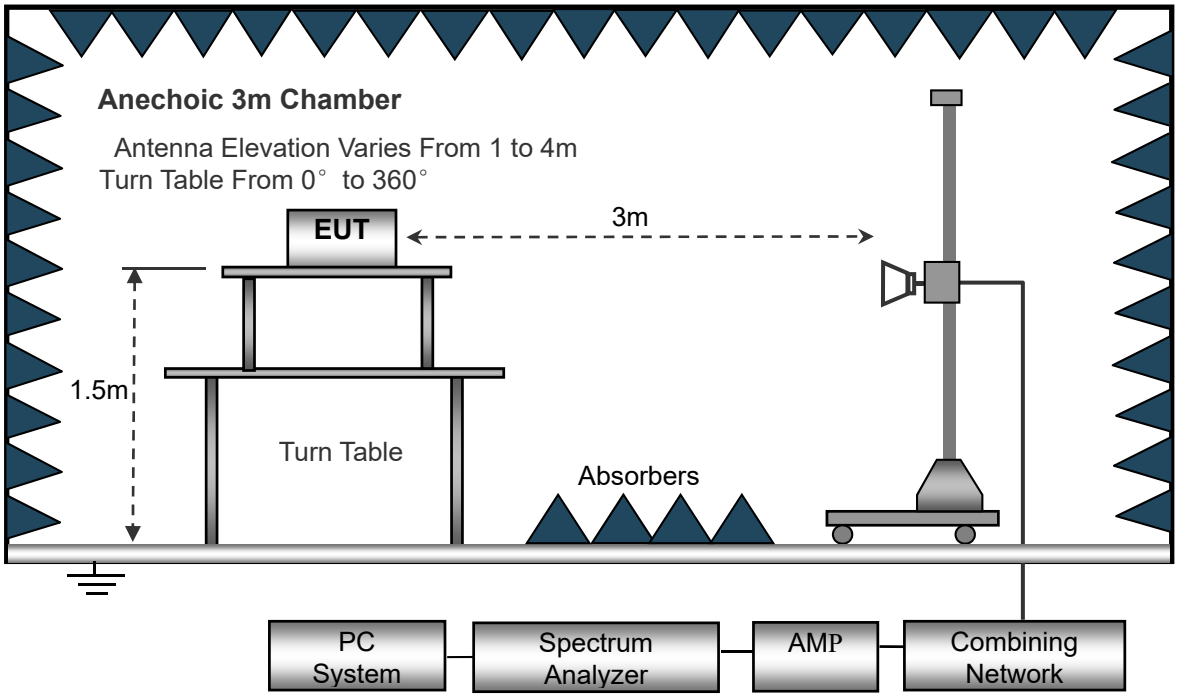

8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:
RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:
RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

Corr. Ampl. = Indicated Reading + Ant. Factor + Cable Loss – Ampl. Gain

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

Margin = Corr. Ampl. – FCC Part 15 Limit

8.5 Summary of Test Results/Plots

Note: *this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

- Spurious Emission From 30MHz to 1GHz

- Antenna 0(Worst case)
- 5150-5250MHz

802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Horizontal

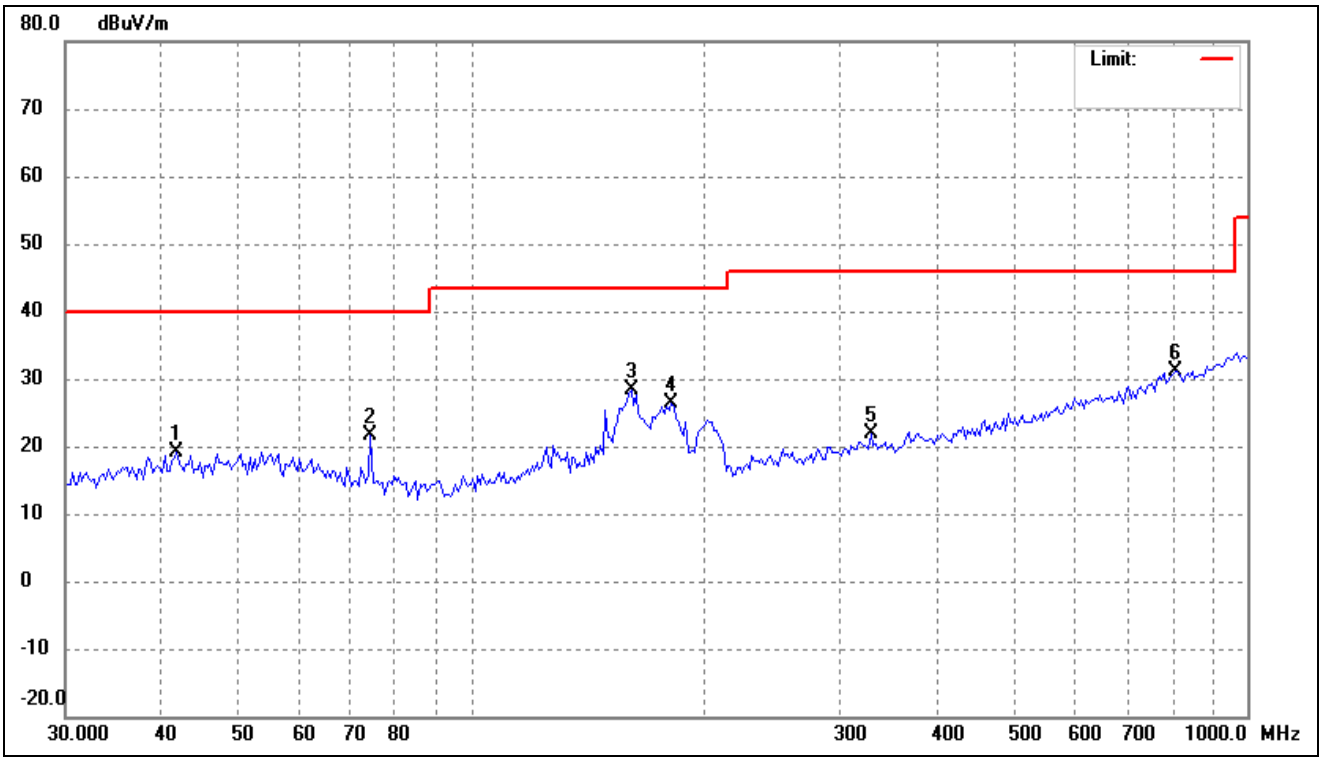

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	41.7406	27.03	-7.95	19.08	40.00	-20.92	-	-	peak
2	74.2696	32.70	-11.18	21.52	40.00	-18.48	-	-	peak
3	160.8852	36.45	-8.08	28.37	43.50	-15.13	-	-	peak
4	181.3000	36.34	-9.88	26.46	43.50	-17.04	-	-	peak
5	327.1554	29.13	-7.30	21.83	46.00	-24.17	-	-	peak
6	809.9238	30.05	1.11	31.16	46.00	-14.84	-	-	peak

802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Vertical

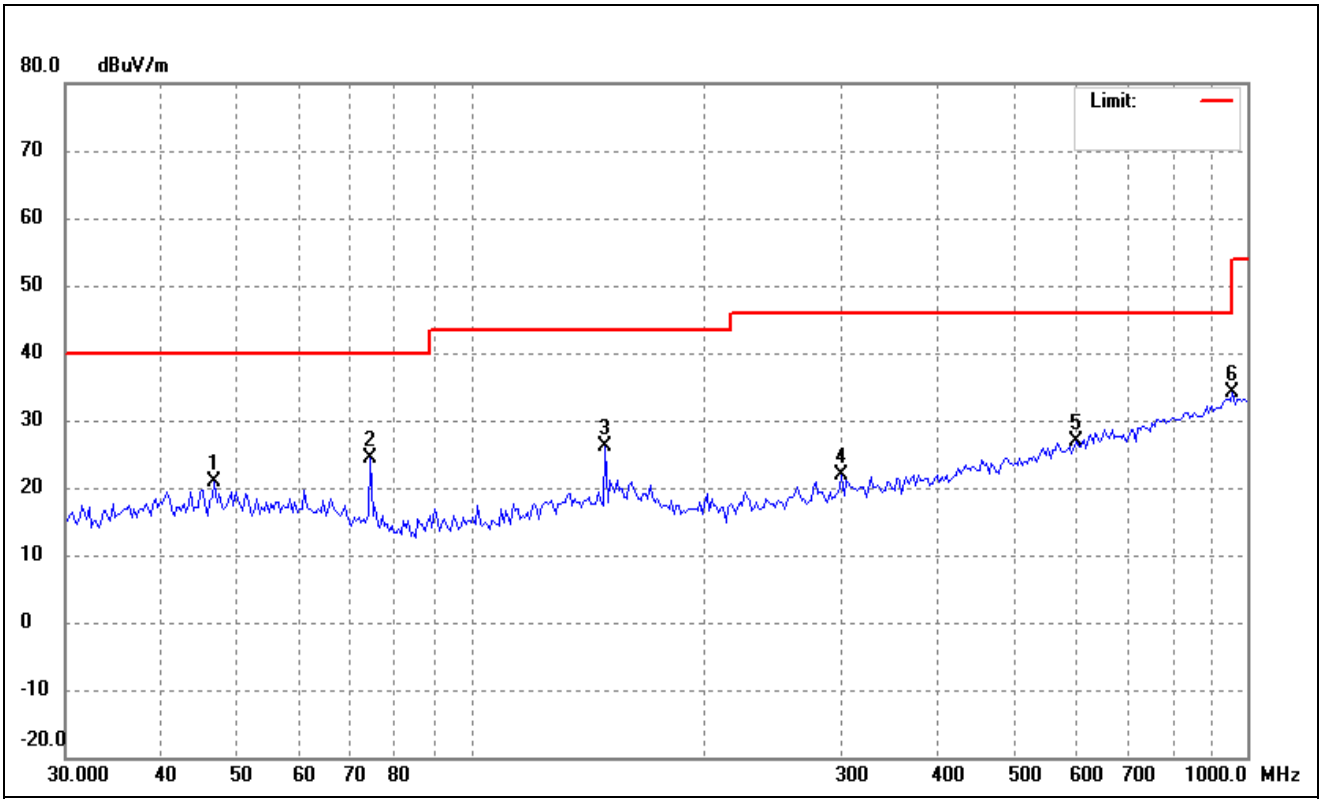

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	46.7077	28.60	-7.83	20.77	40.00	-19.23	-	-	peak
2	74.2696	35.46	-11.18	24.28	40.00	-15.72	-	-	peak
3	148.9175	34.31	-8.14	26.17	43.50	-17.33	-	-	peak
4	300.6988	29.73	-7.85	21.88	46.00	-24.12	-	-	peak
5	602.9287	29.07	-2.19	26.88	46.00	-19.12	-	-	peak
6	958.7135	30.86	3.34	34.20	46.00	-11.80	-	-	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

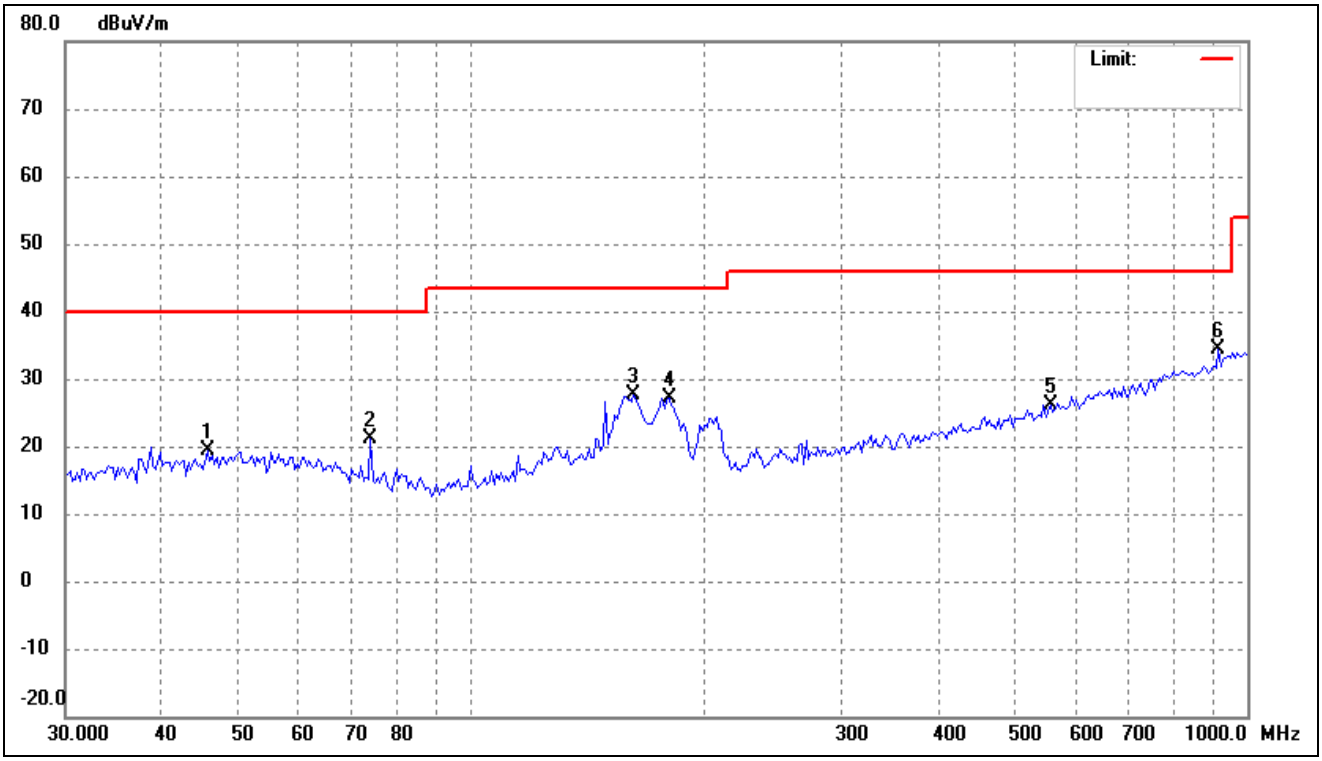

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	45.7333	27.19	-7.90	19.29	40.00	-20.71	-	-	peak
2	74.2696	32.22	-11.18	21.04	40.00	-18.96	-	-	peak
3	162.0197	35.67	-8.10	27.57	43.50	-15.93	-	-	peak
4	180.0304	36.91	-9.74	27.17	43.50	-16.33	-	-	peak
5	558.0788	29.58	-3.33	26.25	46.00	-19.75	-	-	peak
6	919.1315	31.82	2.55	34.37	46.00	-11.63	-	-	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

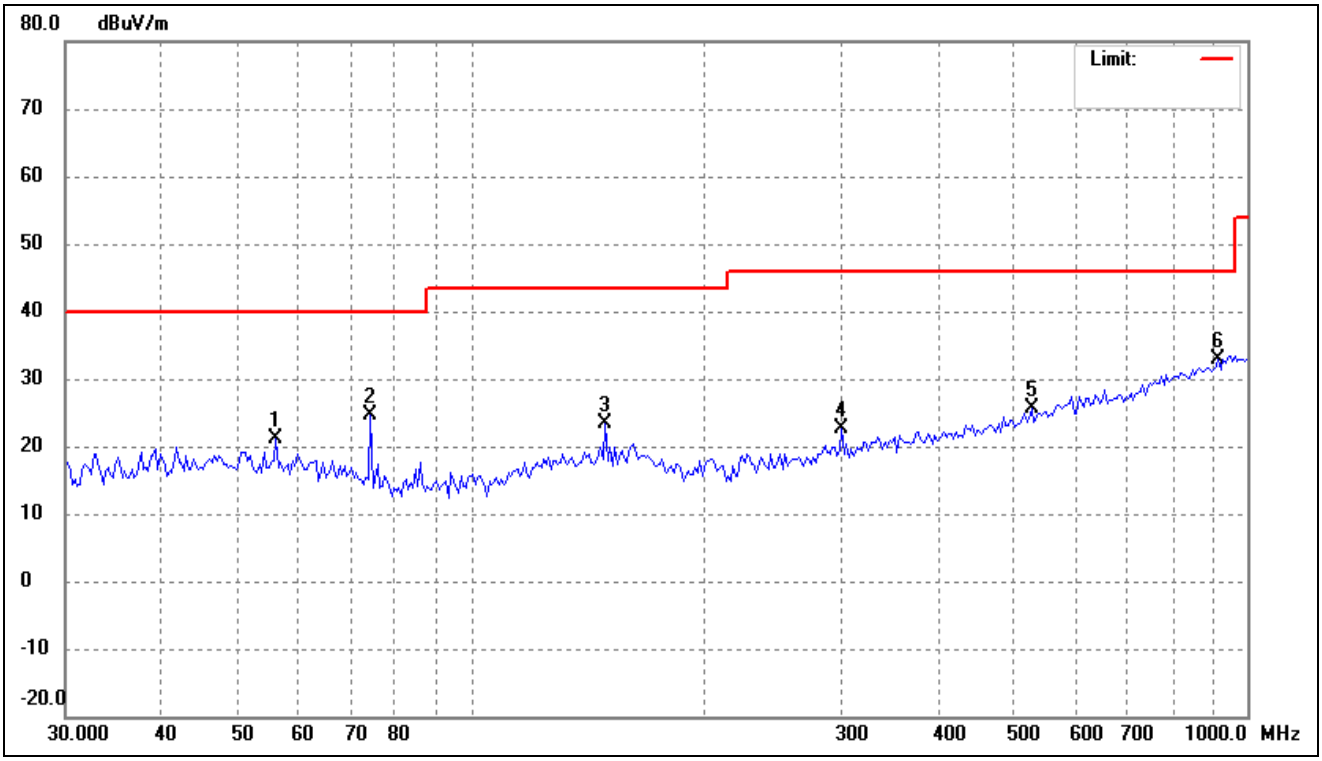

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	56.0708	29.38	-8.20	21.18	40.00	-18.82	-	-	peak
2	74.2696	35.79	-11.18	24.61	40.00	-15.39	-	-	peak
3	148.9175	31.52	-8.14	23.38	43.50	-20.12	-	-	peak
4	300.6988	30.50	-7.85	22.65	46.00	-23.35	-	-	peak
5	527.5707	29.85	-4.24	25.61	46.00	-20.39	-	-	peak
6	919.1315	30.39	2.55	32.94	46.00	-13.06	-	-	peak

802.11ac-VHT20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

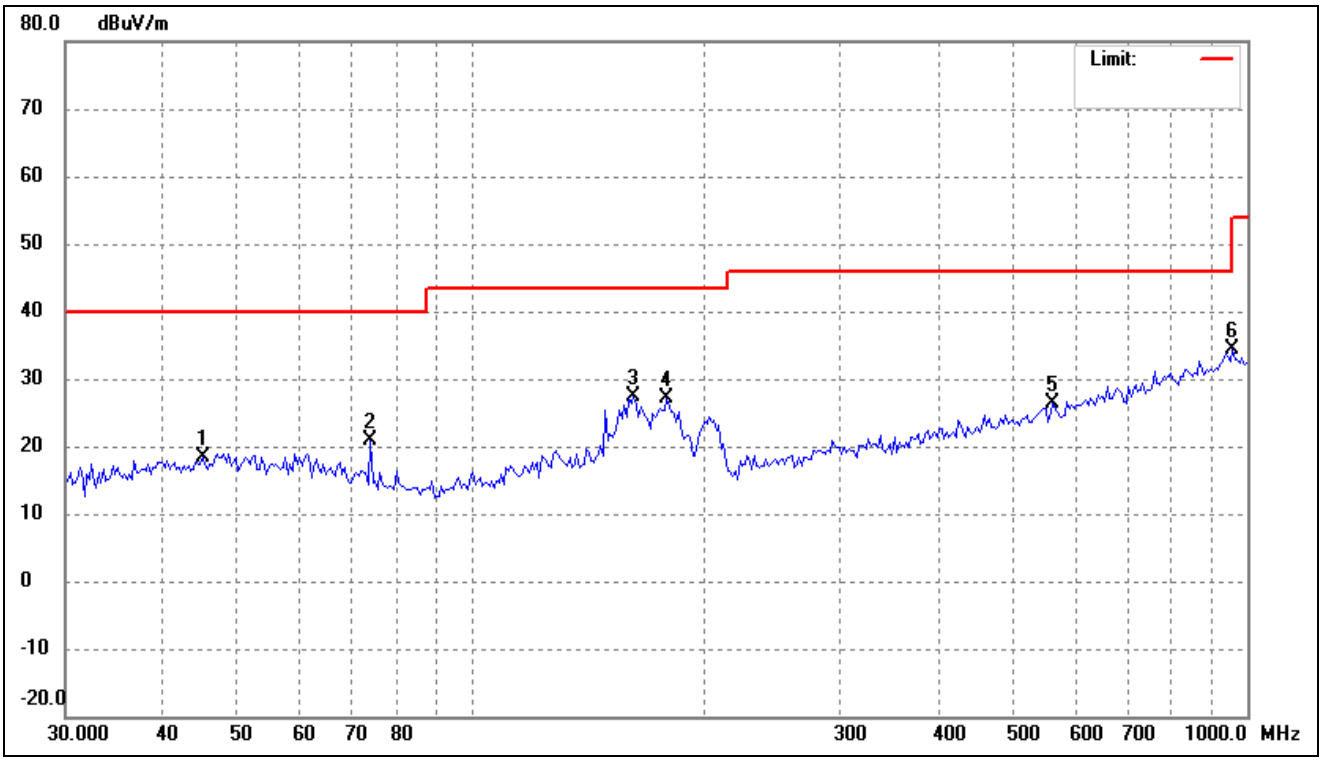

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	45.0951	26.37	-7.95	18.42	40.00	-21.58	-	-	peak
2	74.2696	32.13	-11.18	20.95	40.00	-19.05	-	-	peak
3	162.0197	35.53	-8.10	27.43	43.50	-16.07	-	-	peak
4	178.7697	36.68	-9.57	27.11	43.50	-16.39	-	-	peak
5	562.0143	29.67	-3.20	26.47	46.00	-19.53	-	-	peak
6	958.7135	31.15	3.34	34.49	46.00	-11.51	-	-	peak

802.11ac-VHT20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

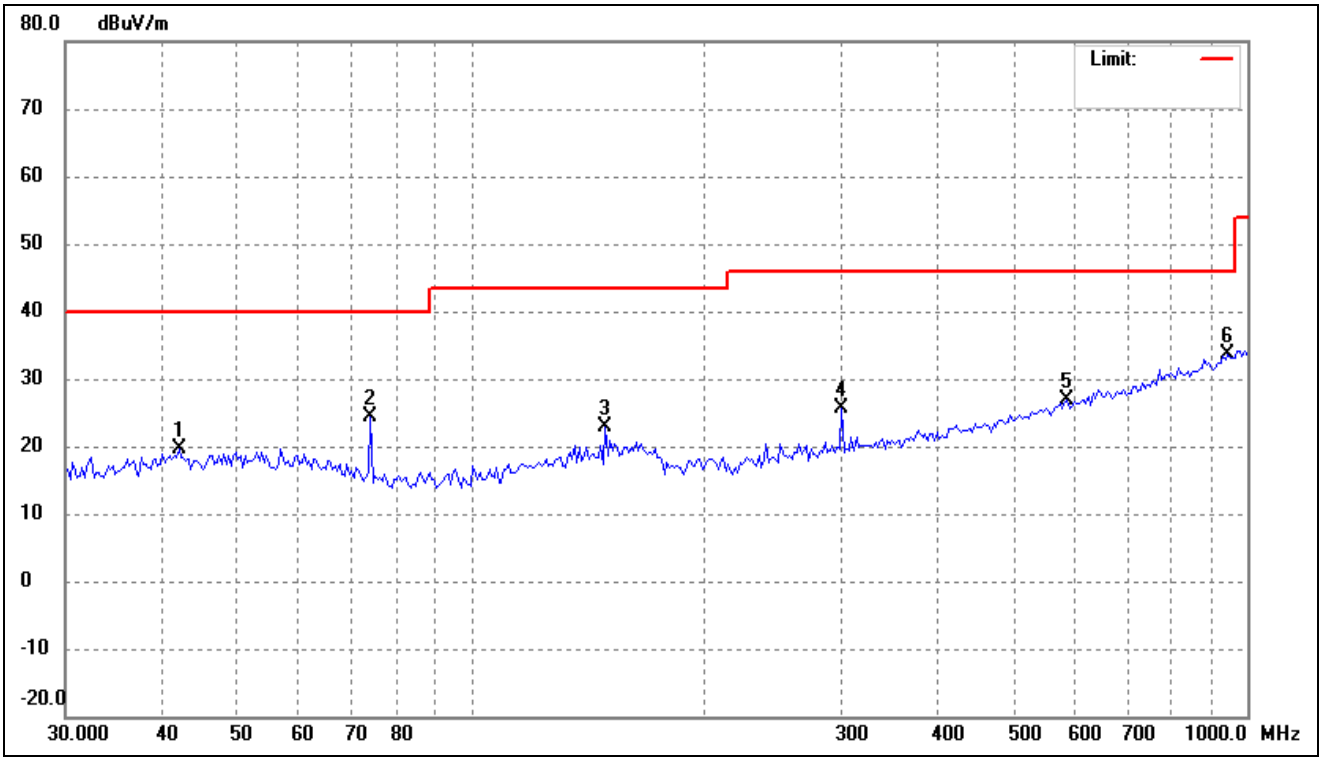

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	42.0350	27.59	-7.95	19.64	40.00	-20.36	-	-	peak
2	74.2696	35.66	-11.18	24.48	40.00	-15.52	-	-	peak
3	148.9175	31.01	-8.14	22.87	43.50	-20.63	-	-	peak
4	300.6988	33.36	-7.85	25.51	46.00	-20.49	-	-	peak
5	586.2172	29.37	-2.58	26.79	46.00	-19.21	-	-	peak
6	945.3336	30.54	3.19	33.73	46.00	-12.27	-	-	peak

802.11ax-HE20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

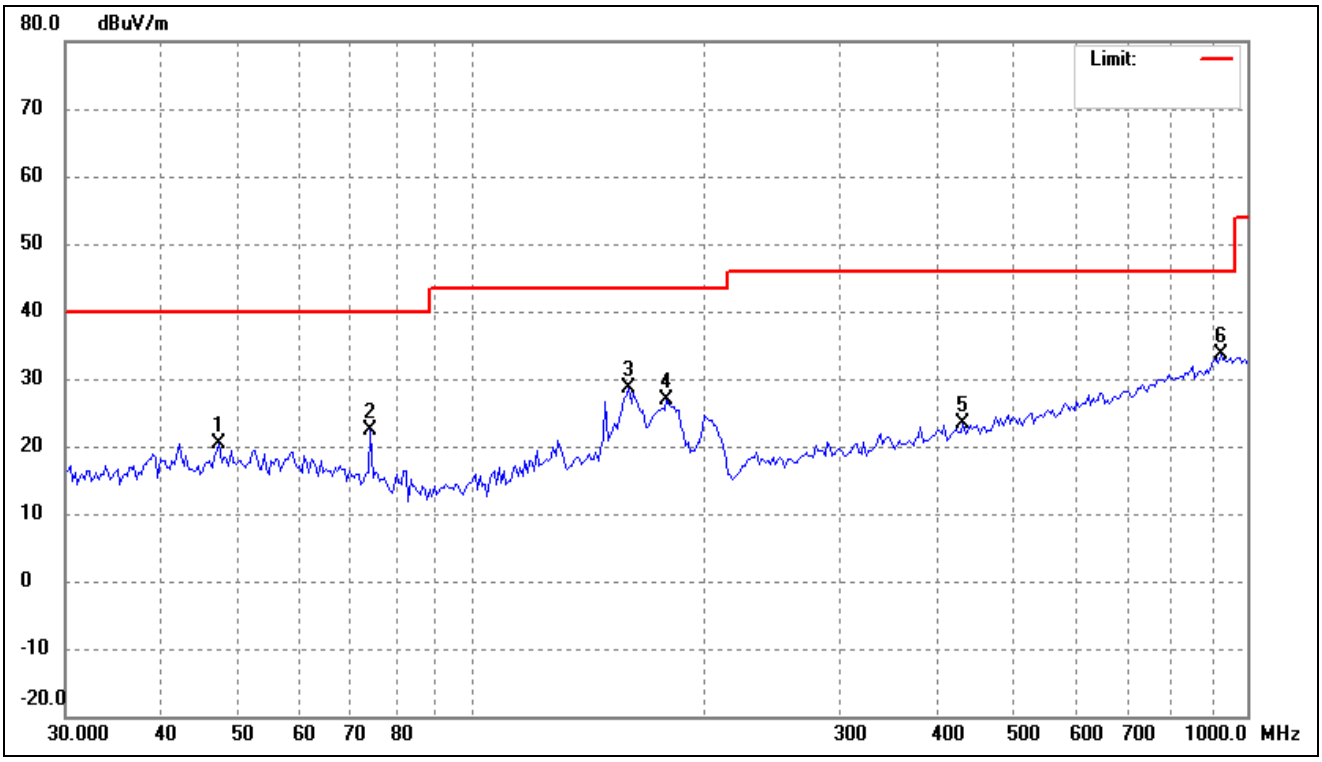

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	47.3688	28.22	-7.78	20.44	40.00	-19.56	-	-	peak
2	74.2696	33.51	-11.18	22.33	40.00	-17.67	-	-	peak
3	159.7586	36.63	-8.05	28.58	43.50	-14.92	-	-	peak
4	178.7697	36.45	-9.57	26.88	43.50	-16.62	-	-	peak
5	430.3053	29.10	-5.62	23.48	46.00	-22.52	-	-	peak
6	925.6132	30.84	2.72	33.56	46.00	-12.44	-	-	peak

802.11ax-HE20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

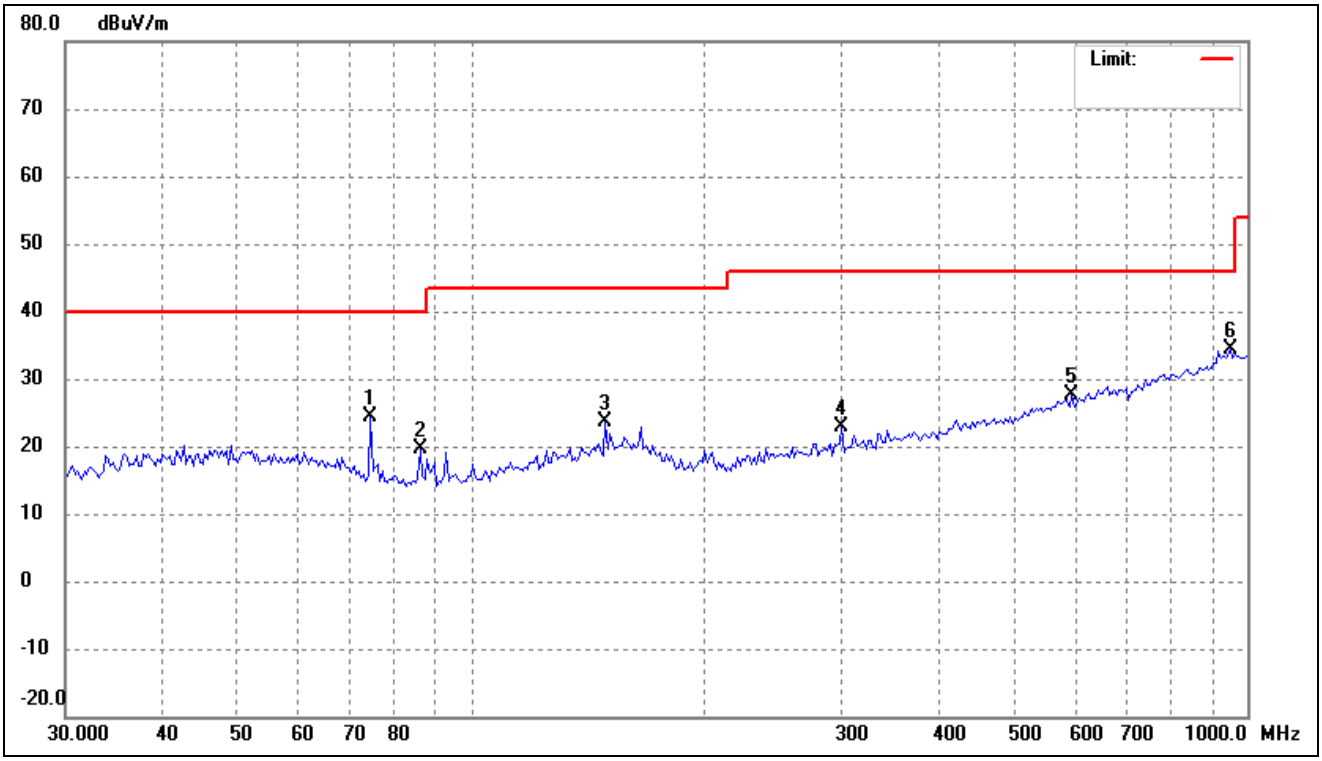

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	74.2696	35.54	-11.18	24.36	40.00	-15.64	-	-	peak
2	86.0796	32.04	-12.53	19.51	40.00	-20.49	-	-	peak
3	148.9175	31.66	-8.14	23.52	43.50	-19.98	-	-	peak
4	300.6988	30.63	-7.85	22.78	46.00	-23.22	-	-	peak
5	594.5143	30.09	-2.38	27.71	46.00	-18.29	-	-	peak
6	952.0001	31.08	3.31	34.39	46.00	-11.61	-	-	peak

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

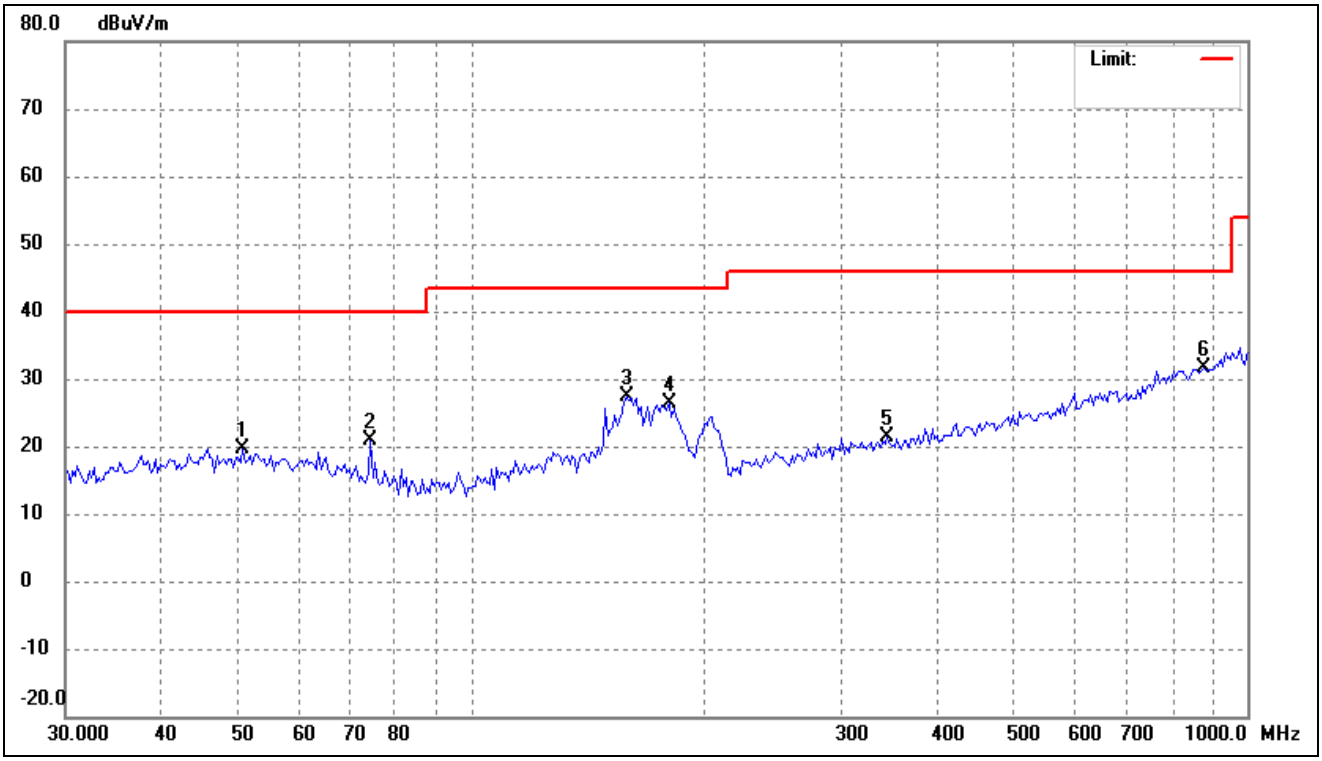

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	50.8172	27.32	-7.67	19.65	40.00	-20.35	-	-	peak
2	74.2696	32.15	-11.18	20.97	40.00	-19.03	-	-	peak
3	158.6399	35.37	-8.05	27.32	43.50	-16.18	-	-	peak
4	180.0304	36.18	-9.74	26.44	43.50	-17.06	-	-	peak
5	343.6506	28.59	-7.13	21.46	46.00	-24.54	-	-	peak
6	881.1838	29.75	1.88	31.63	46.00	-14.37	-	-	peak

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

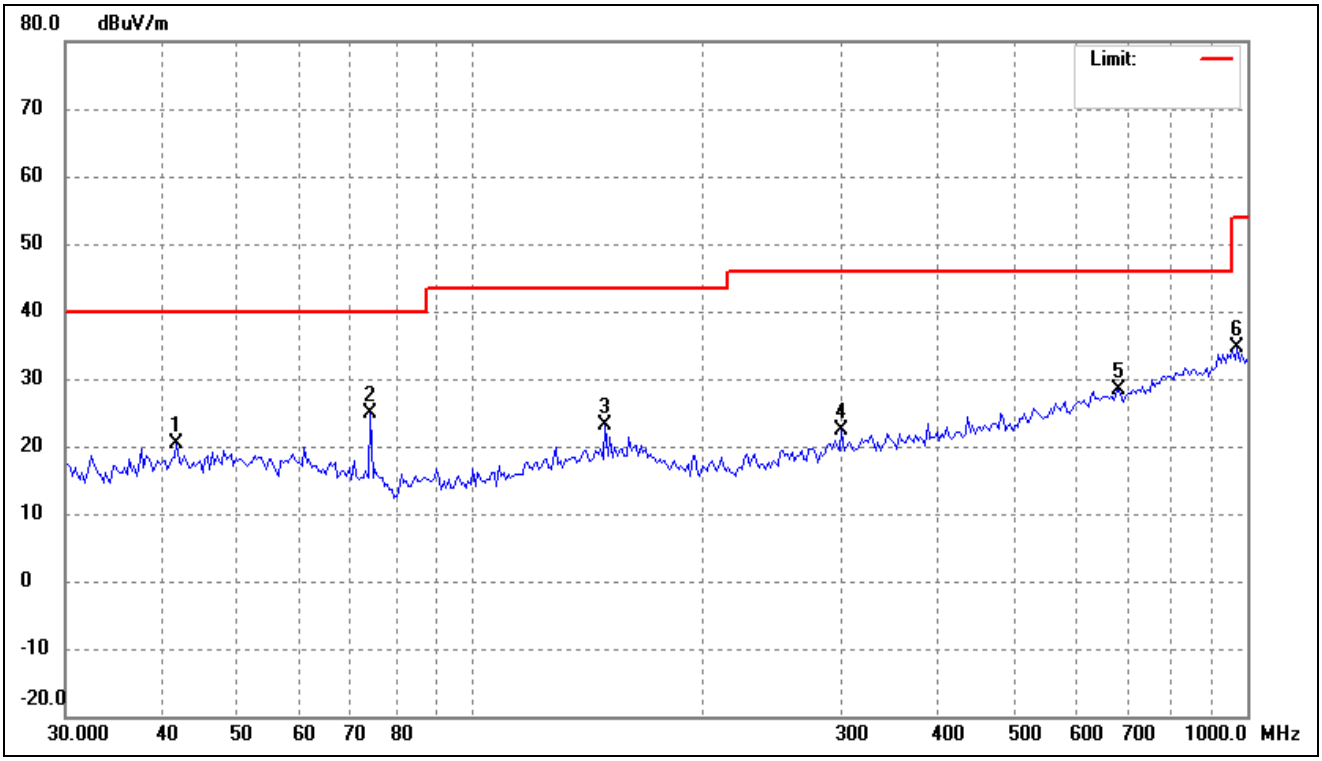

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	41.7406	28.26	-7.95	20.31	40.00	-19.69	-	-	peak
2	74.2696	36.00	-11.18	24.82	40.00	-15.18	-	-	peak
3	148.9175	31.39	-8.14	23.25	43.50	-20.25	-	-	peak
4	300.6988	30.26	-7.85	22.41	46.00	-23.59	-	-	peak
5	684.2259	29.72	-1.27	28.45	46.00	-17.55	-	-	peak
6	972.2827	31.20	3.39	34.59	54.00	-19.41	-	-	peak

802.11ac-VHT40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

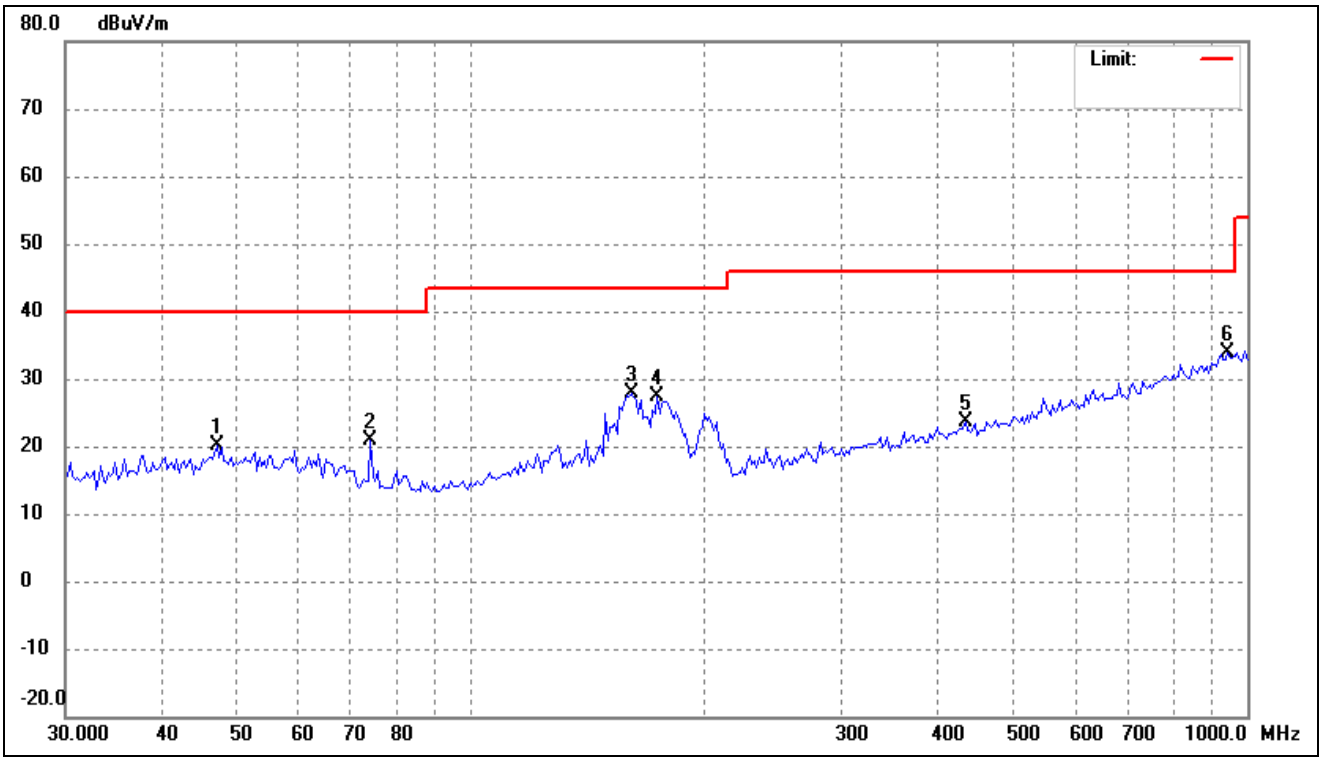

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	47.0371	27.85	-7.81	20.04	40.00	-19.96	-	-	peak
2	74.2696	32.11	-11.18	20.93	40.00	-19.07	-	-	peak
3	160.8852	36.04	-8.08	27.96	43.50	-15.54	-	-	peak
4	173.8147	36.15	-8.85	27.30	43.50	-16.20	-	-	peak
5	433.3397	29.15	-5.55	23.60	46.00	-22.40	-	-	peak
6	945.3336	30.81	3.19	34.00	46.00	-12.00	-	-	peak

802.11ac-VHT40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

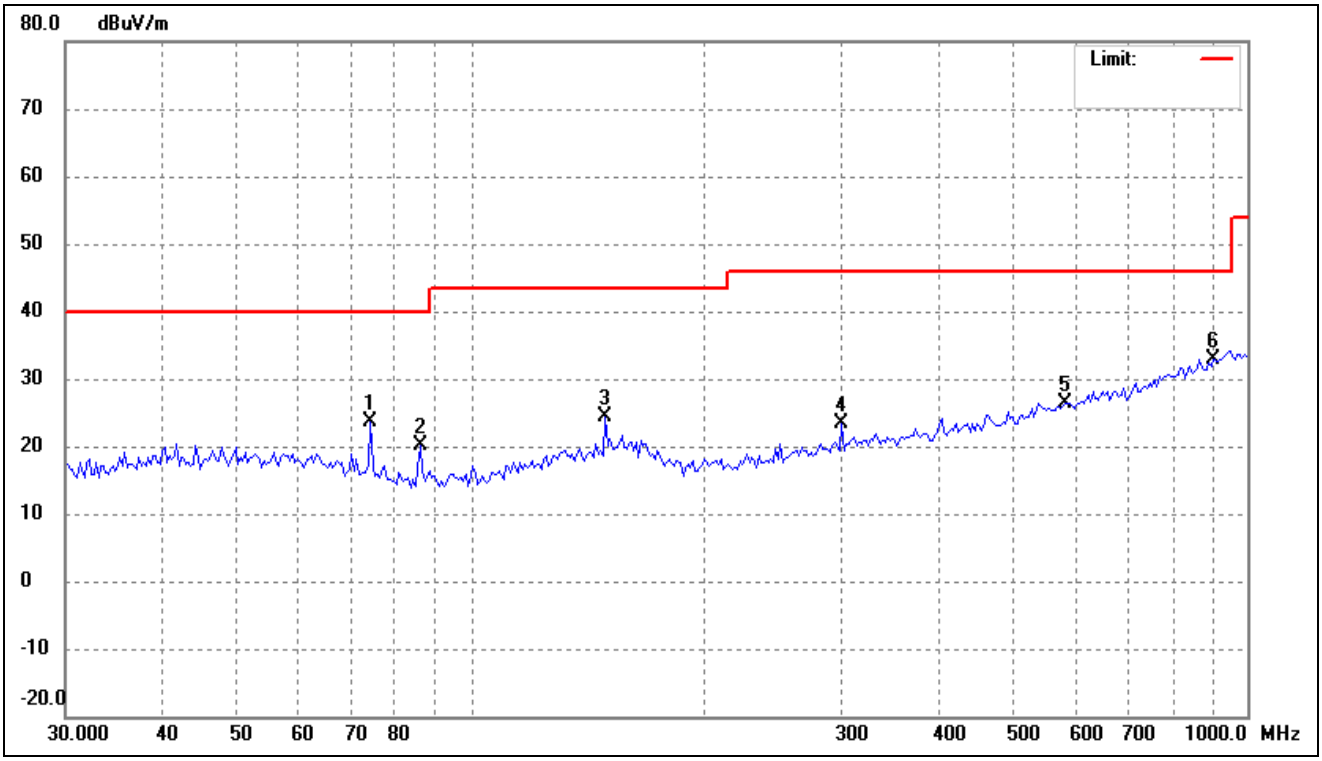

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	74.2696	34.83	-11.18	23.65	40.00	-16.35	-	-	peak
2	86.0796	32.54	-12.53	20.01	40.00	-19.99	-	-	peak
3	148.9175	32.58	-8.14	24.44	43.50	-19.06	-	-	peak
4	300.6988	31.32	-7.85	23.47	46.00	-22.53	-	-	peak
5	582.1122	29.05	-2.68	26.37	46.00	-19.63	-	-	peak
6	906.3041	30.72	2.24	32.96	46.00	-13.04	-	-	peak

802.11ax-HE40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

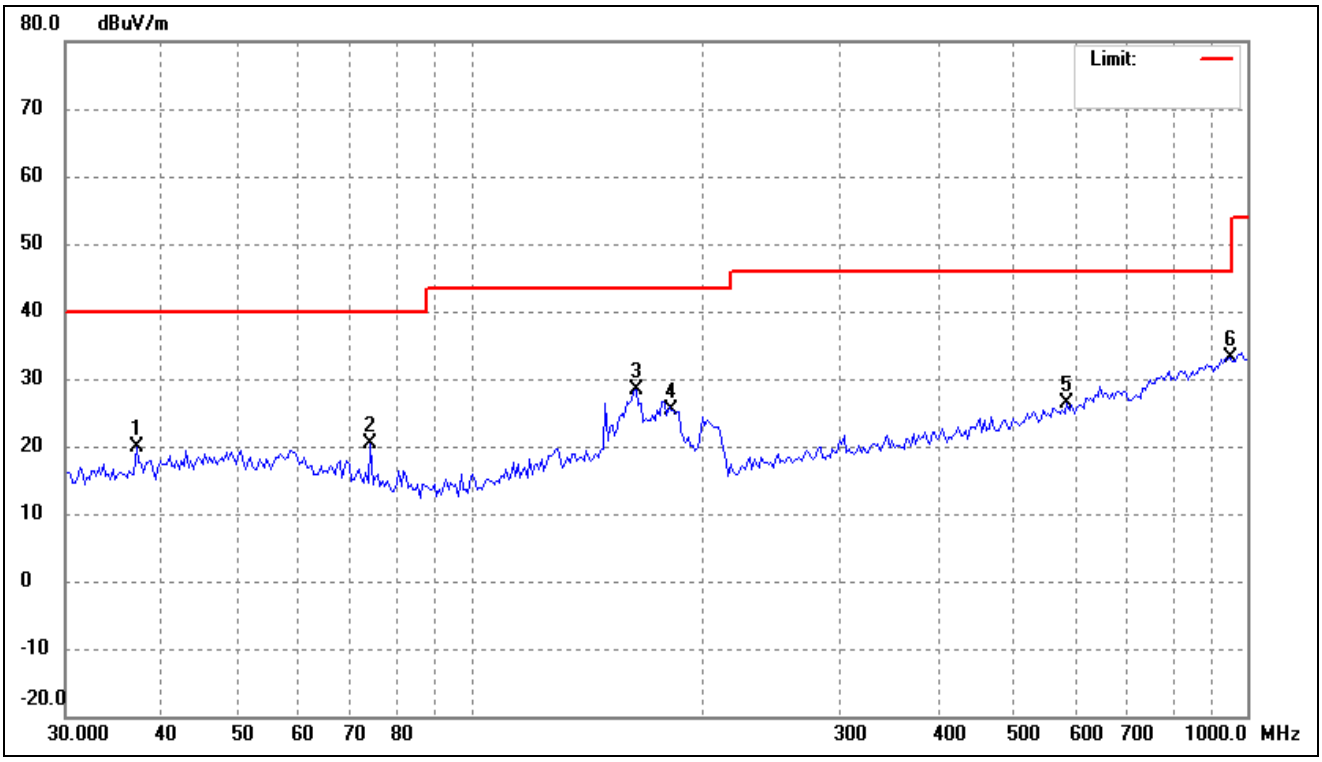

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	37.0405	28.40	-8.58	19.82	40.00	-20.18	-	-	peak
2	74.2696	31.50	-11.18	20.32	40.00	-19.68	-	-	peak
3	163.1623	36.40	-8.13	28.27	43.50	-15.23	-	-	peak
4	181.3000	35.30	-9.88	25.42	43.50	-18.08	-	-	peak
5	586.2172	28.95	-2.58	26.37	46.00	-19.63	-	-	peak
6	952.0001	29.81	3.31	33.12	46.00	-12.88	-	-	peak

802.11ax-HE40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

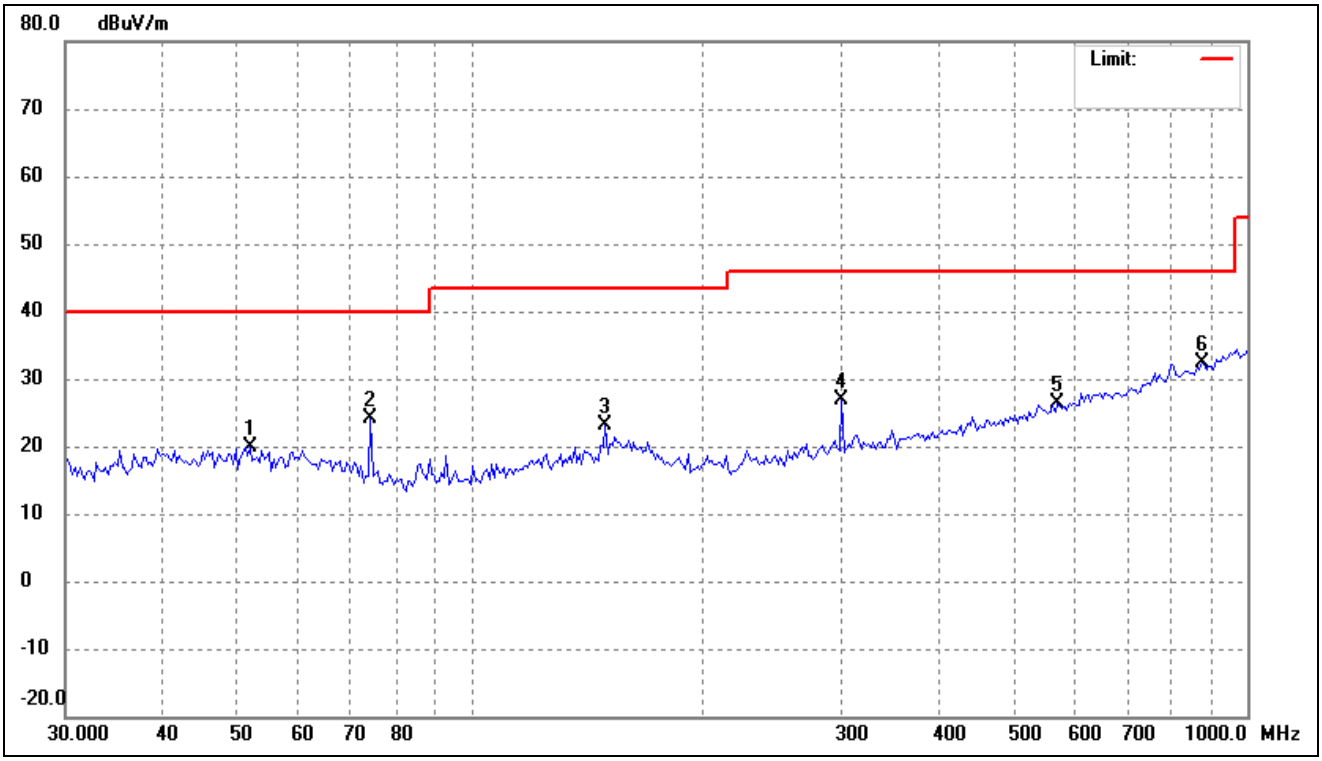

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	51.8999	27.69	-7.79	19.90	40.00	-20.10	-	-	peak
2	74.2696	35.26	-11.18	24.08	40.00	-15.92	-	-	peak
3	148.9175	31.39	-8.14	23.25	43.50	-20.25	-	-	peak
4	300.6988	34.81	-7.85	26.96	46.00	-19.04	-	-	peak
5	569.9688	29.41	-2.98	26.43	46.00	-19.57	-	-	peak
6	875.0133	30.47	1.82	32.29	46.00	-13.71	-	-	peak

802.11ac-VHT80			
Test Channel	5210MHz(worst case)	Polarity:	Horizontal

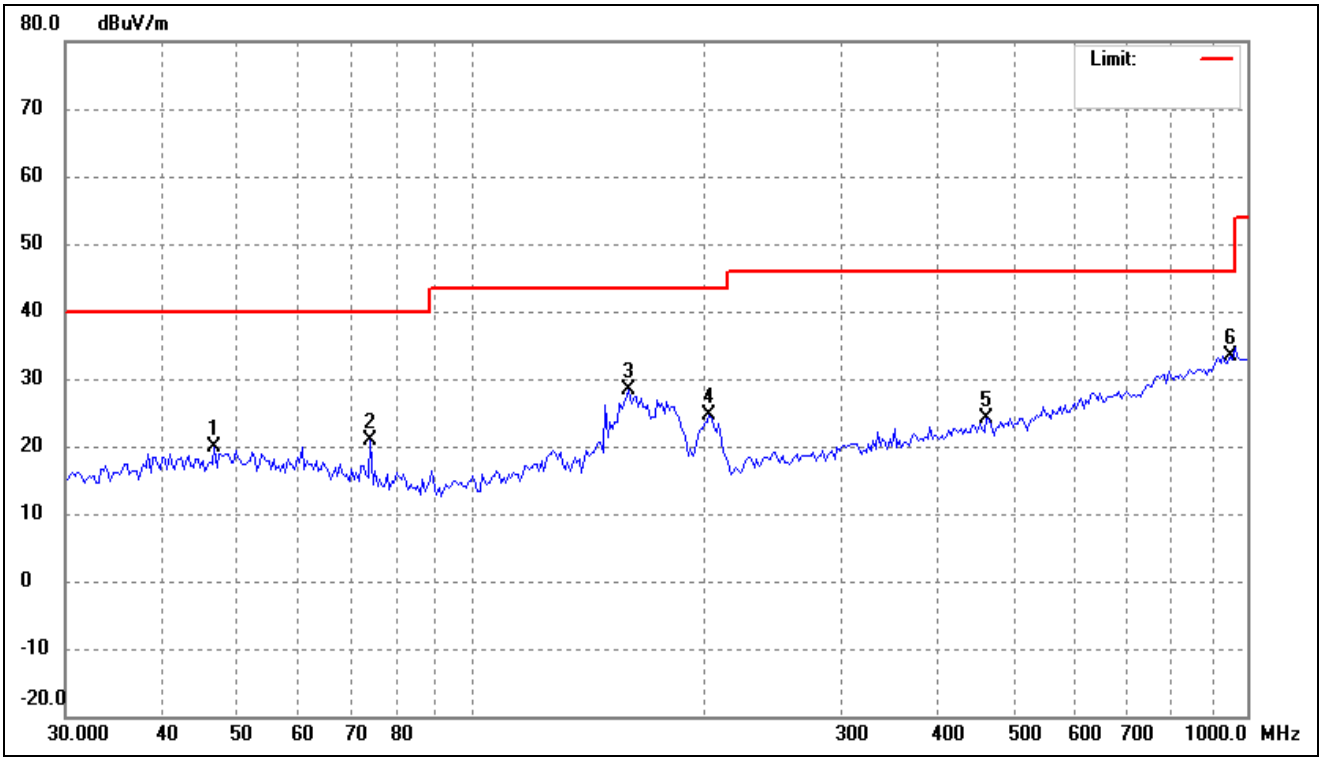

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	46.7077	27.68	-7.83	19.85	40.00	-20.15	-	-	peak
2	74.2696	32.03	-11.18	20.85	40.00	-19.15	-	-	peak
3	159.7586	36.42	-8.05	28.37	43.50	-15.13	-	-	peak
4	202.8745	35.98	-11.44	24.54	43.50	-18.96	-	-	peak
5	461.6313	29.26	-5.09	24.17	46.00	-21.83	-	-	peak
6	952.0001	30.05	3.31	33.36	46.00	-12.64	-	-	peak

802.11ac-VHT80			
Test Channel	5210MHz(worst case)	Polarity:	Vertical

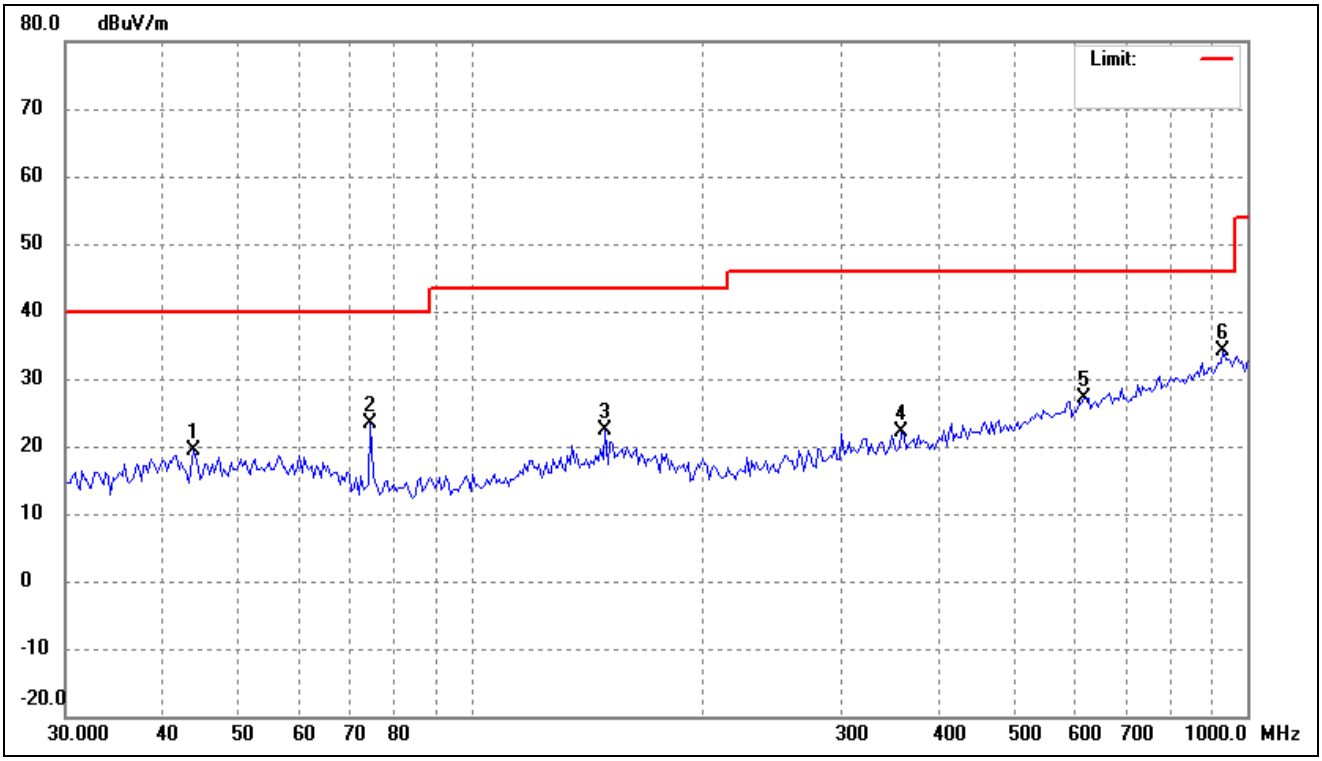

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	43.8452	27.46	-7.96	19.50	40.00	-20.50	-	-	peak
2	74.2696	34.67	-11.18	23.49	40.00	-16.51	-	-	peak
3	148.9175	30.53	-8.14	22.39	43.50	-21.11	-	-	peak
4	358.4497	28.94	-6.90	22.04	46.00	-23.96	-	-	peak
5	615.7743	29.15	-1.96	27.19	46.00	-18.81	-	-	peak
6	932.1405	31.31	2.87	34.18	46.00	-11.82	-	-	peak

802.11ax-HE80			
Test Channel	5210MHz(worst case)	Polarity:	Horizontal

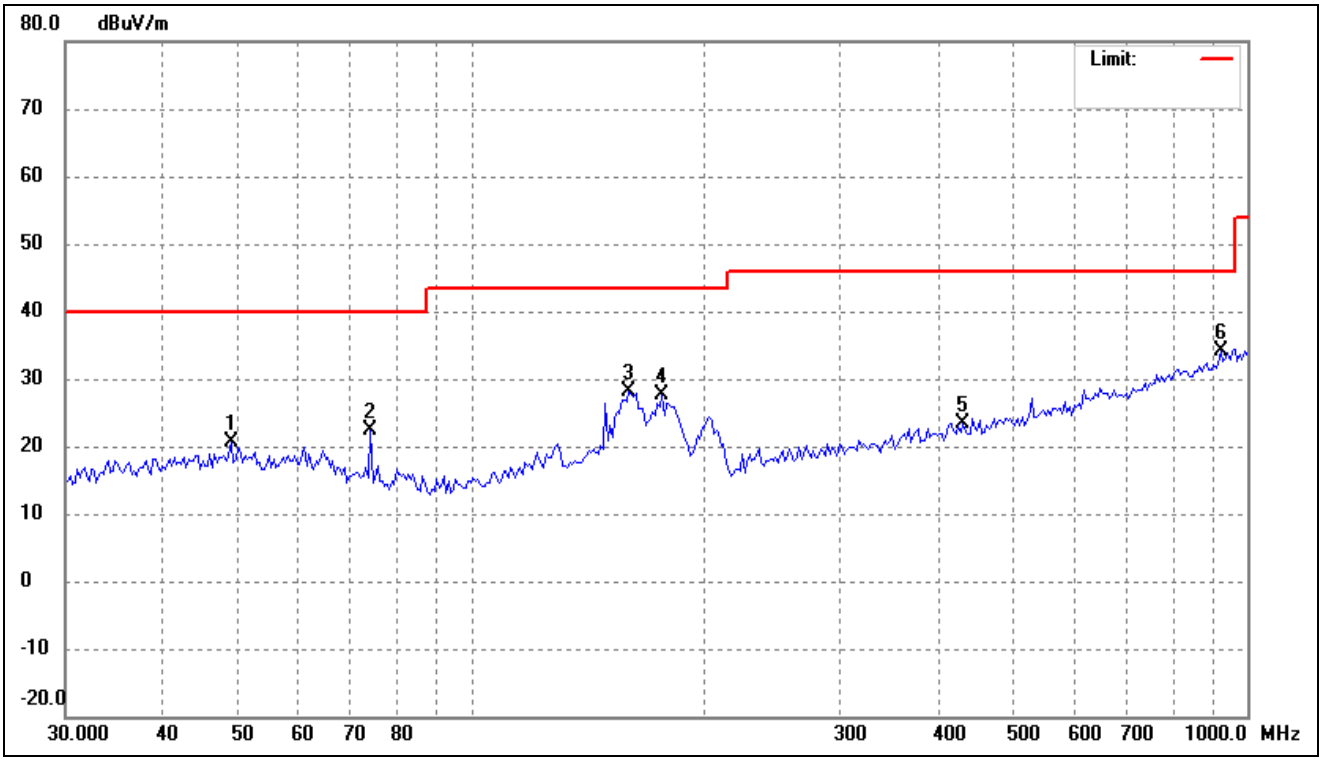

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	49.0627	28.37	-7.65	20.72	40.00	-19.28	-	-	peak
2	74.2696	33.50	-11.18	22.32	40.00	-17.68	-	-	peak
3	159.7586	36.10	-8.05	28.05	43.50	-15.45	-	-	peak
4	176.2748	36.95	-9.21	27.74	43.50	-15.76	-	-	peak
5	430.3053	29.09	-5.62	23.47	46.00	-22.53	-	-	peak
6	925.6132	31.34	2.72	34.06	46.00	-11.94	-	-	peak

802.11ax-HE80			
Test Channel	5210MHz(worst case)	Polarity:	Vertical

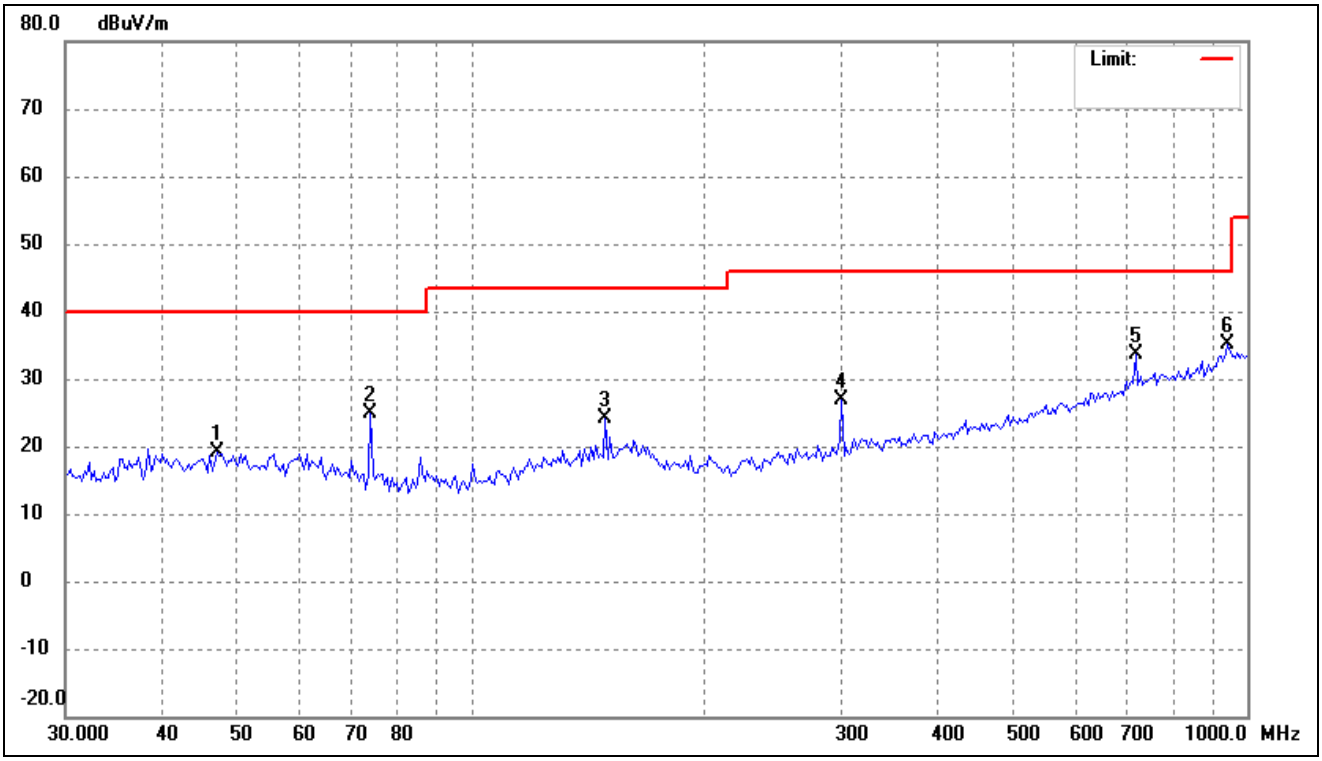

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	47.0371	27.04	-7.81	19.23	40.00	-20.77	-	-	peak
2	74.2696	36.15	-11.18	24.97	40.00	-15.03	-	-	peak
3	148.9175	32.37	-8.14	24.23	43.50	-19.27	-	-	peak
4	300.6988	34.63	-7.85	26.78	46.00	-19.22	-	-	peak
5	718.7246	34.16	-0.62	33.54	46.00	-12.46	-	-	peak
6	945.3336	31.92	3.19	35.11	46.00	-10.89	-	-	peak

➢ 5725-5850MHz

802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

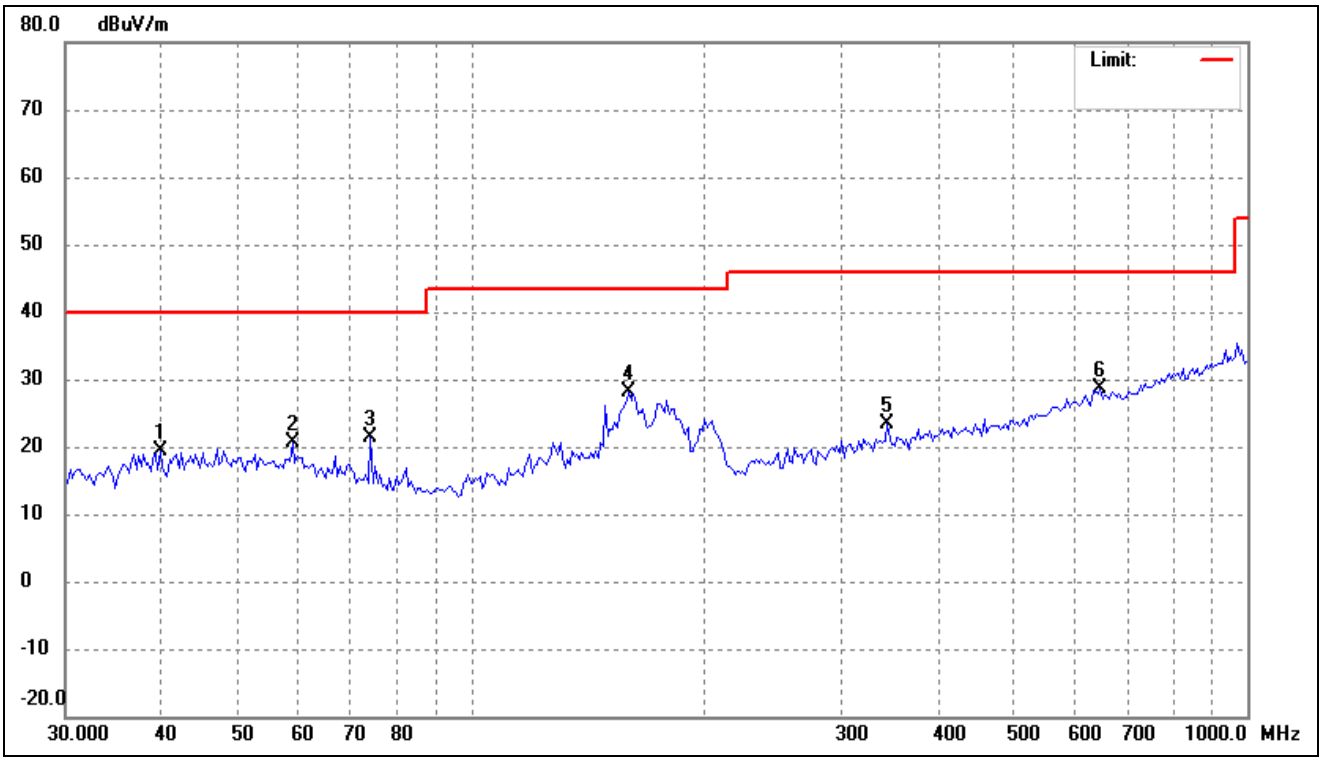

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	39.7371	27.48	-8.01	19.47	40.00	-20.53	-	-	peak
2	58.8979	29.06	-8.36	20.70	40.00	-19.30	-	-	peak
3	74.2696	32.59	-11.18	21.41	40.00	-18.59	-	-	peak
4	159.7586	36.30	-8.05	28.25	43.50	-15.25	-	-	peak
5	343.6506	30.40	-7.13	23.27	46.00	-22.73	-	-	peak
6	646.8217	30.21	-1.59	28.62	46.00	-17.38	-	-	peak

802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

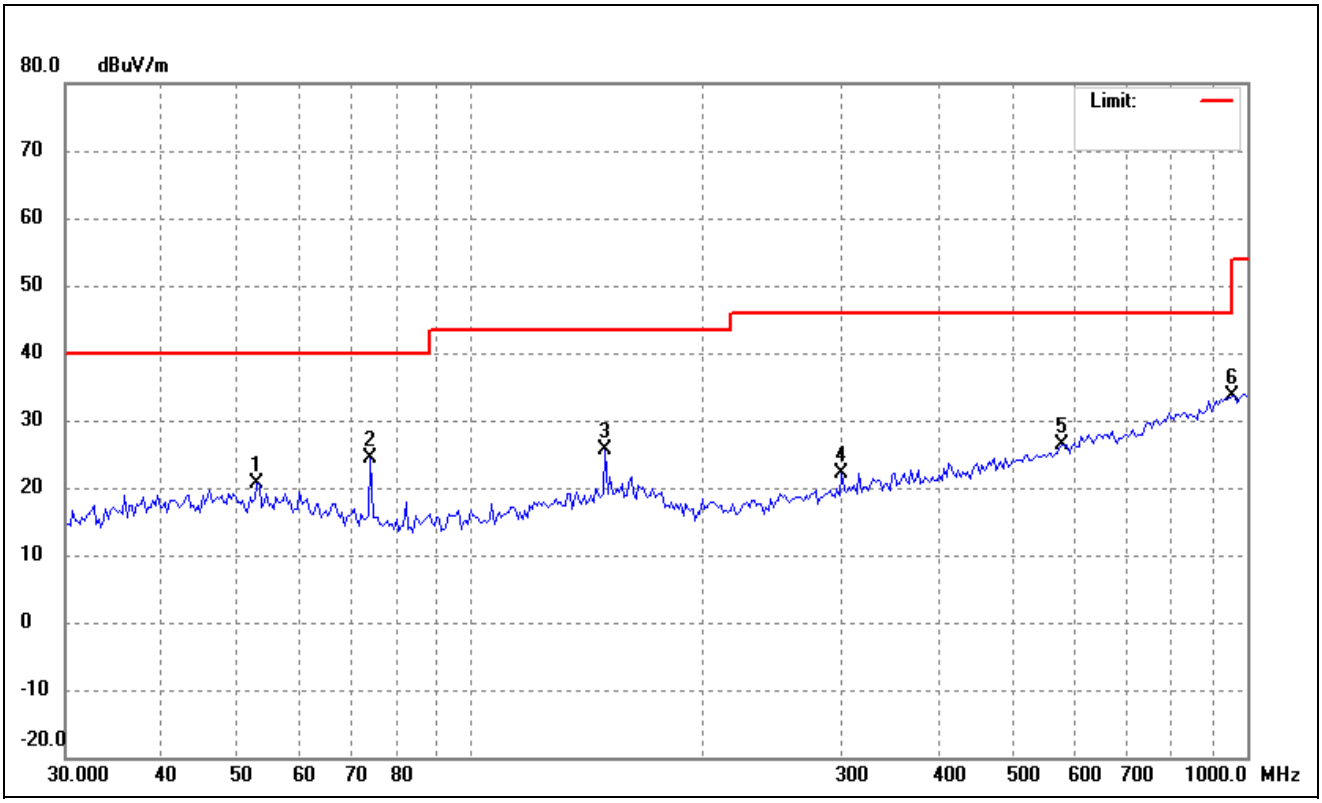

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	53.0056	28.42	-7.91	20.51	40.00	-19.49	-	-	peak
2	74.2696	35.47	-11.18	24.29	40.00	-15.71	-	-	peak
3	148.9175	33.81	-8.14	25.67	43.50	-17.83	-	-	peak
4	300.6988	30.07	-7.85	22.22	46.00	-23.78	-	-	peak
5	578.0359	29.24	-2.78	26.46	46.00	-19.54	-	-	peak
6	958.7135	30.25	3.34	33.59	46.00	-12.41	-	-	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

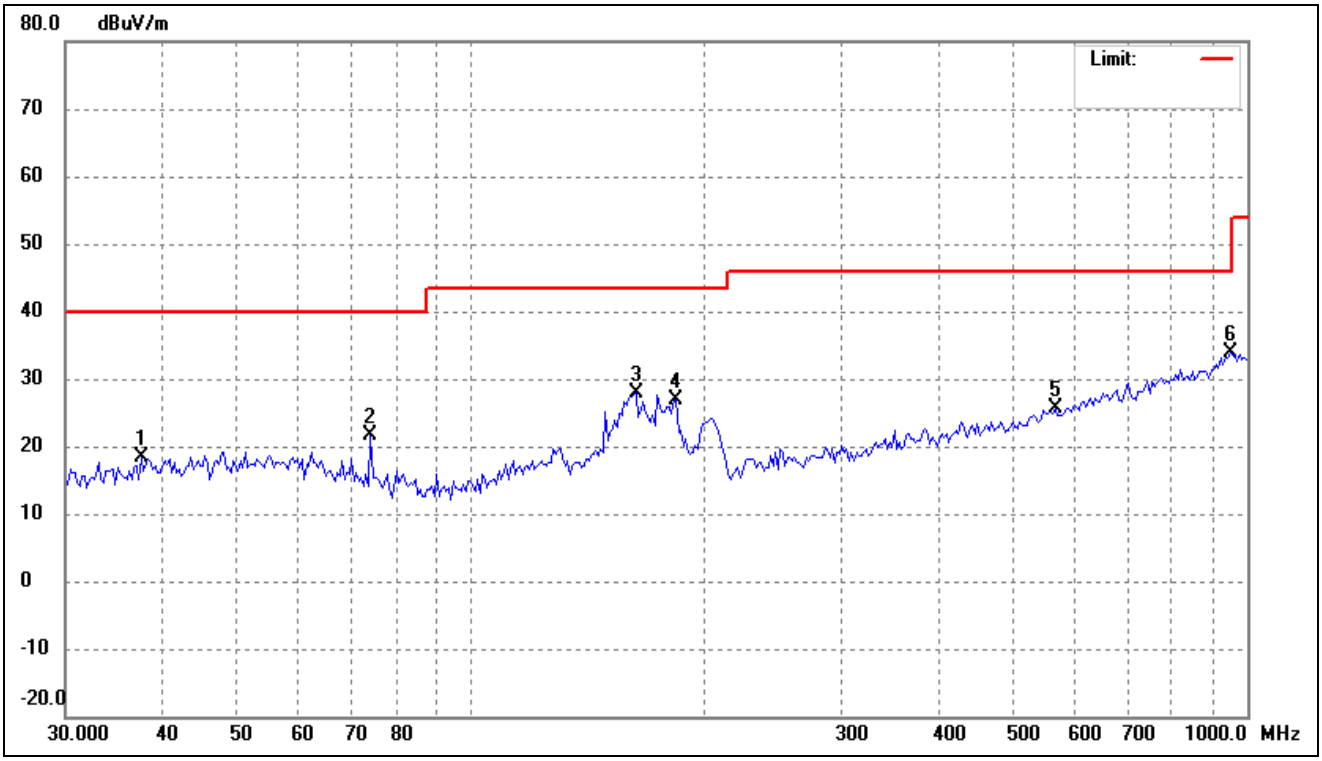

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	37.5648	26.95	-8.47	18.48	40.00	-21.52	-	-	peak
2	74.2696	32.90	-11.18	21.72	40.00	-18.28	-	-	peak
3	163.1623	35.91	-8.13	27.78	43.50	-15.72	-	-	peak
4	183.8660	37.07	-10.16	26.91	43.50	-16.59	-	-	peak
5	565.9776	28.63	-3.10	25.53	46.00	-20.47	-	-	peak
6	952.0001	30.67	3.31	33.98	46.00	-12.02	-	-	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

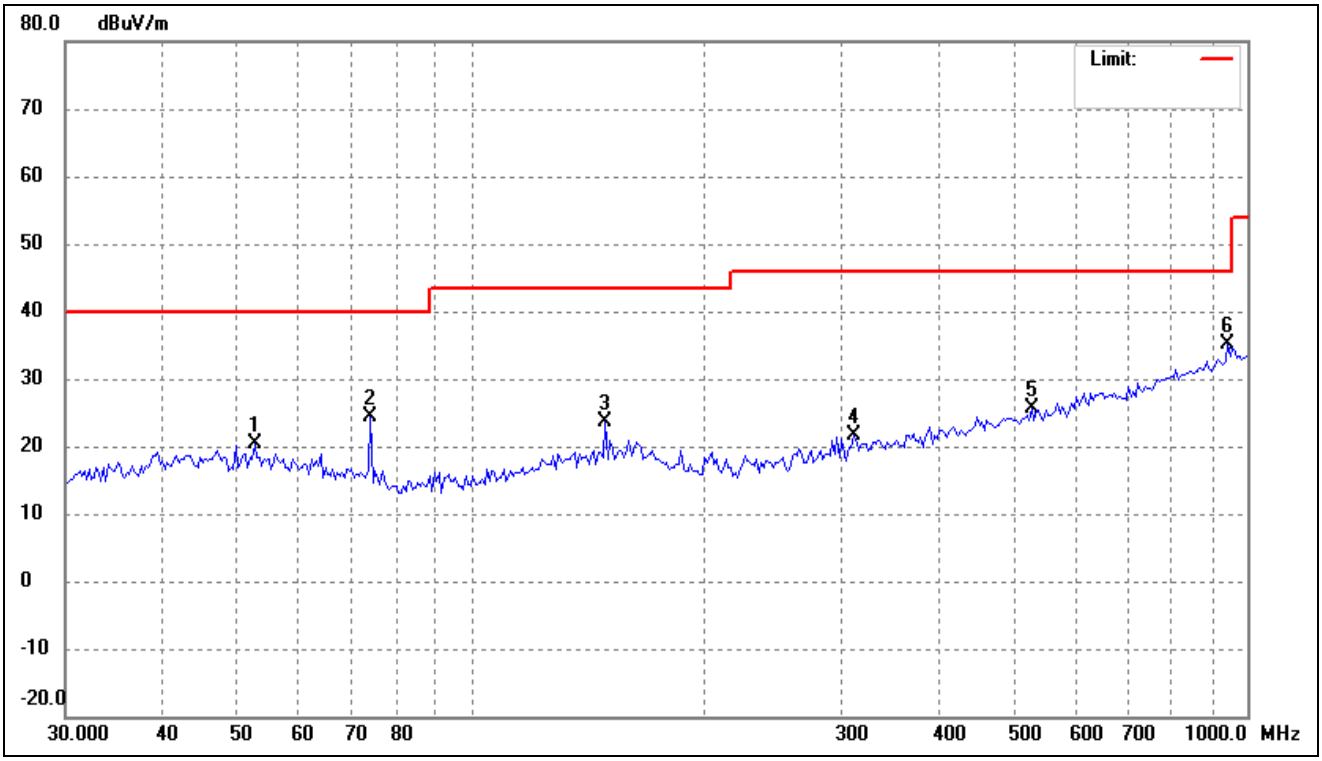

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	52.6345	28.37	-7.87	20.50	40.00	-19.50	-	-	peak
2	74.2696	35.64	-11.18	24.46	40.00	-15.54	-	-	peak
3	148.9175	31.77	-8.14	23.63	43.50	-19.87	-	-	peak
4	311.4519	29.25	-7.61	21.64	46.00	-24.36	-	-	peak
5	527.5707	29.81	-4.24	25.57	46.00	-20.43	-	-	peak
6	945.3336	31.97	3.19	35.16	46.00	-10.84	-	-	peak

802.11ac-VHT20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

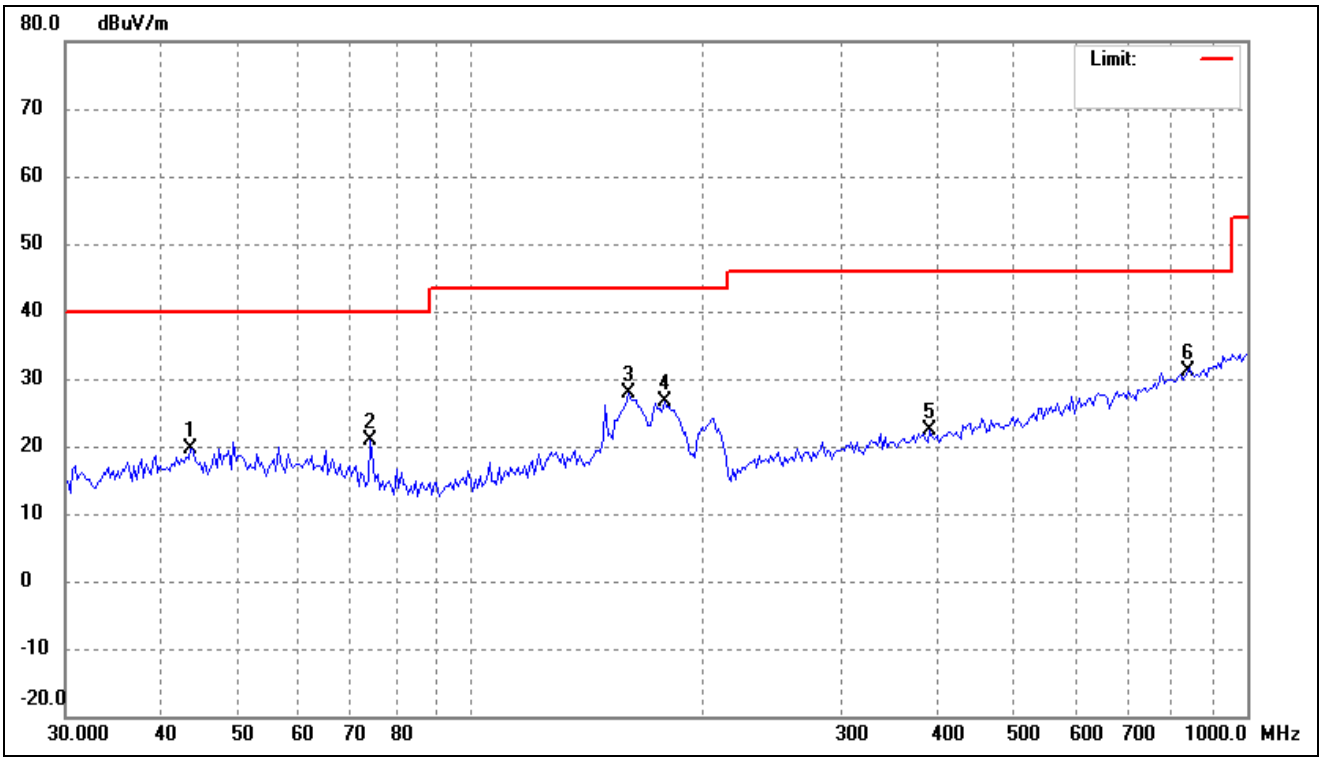

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	43.5381	27.55	-7.95	19.60	40.00	-20.40	-	-	peak
2	74.2696	32.15	-11.18	20.97	40.00	-19.03	-	-	peak
3	159.7586	35.93	-8.05	27.88	43.50	-15.62	-	-	peak
4	177.5179	36.12	-9.38	26.74	43.50	-16.76	-	-	peak
5	389.9874	28.71	-6.39	22.32	46.00	-23.68	-	-	peak
6	838.8870	29.68	1.42	31.10	46.00	-14.90	-	-	peak

802.11ac-VHT20			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

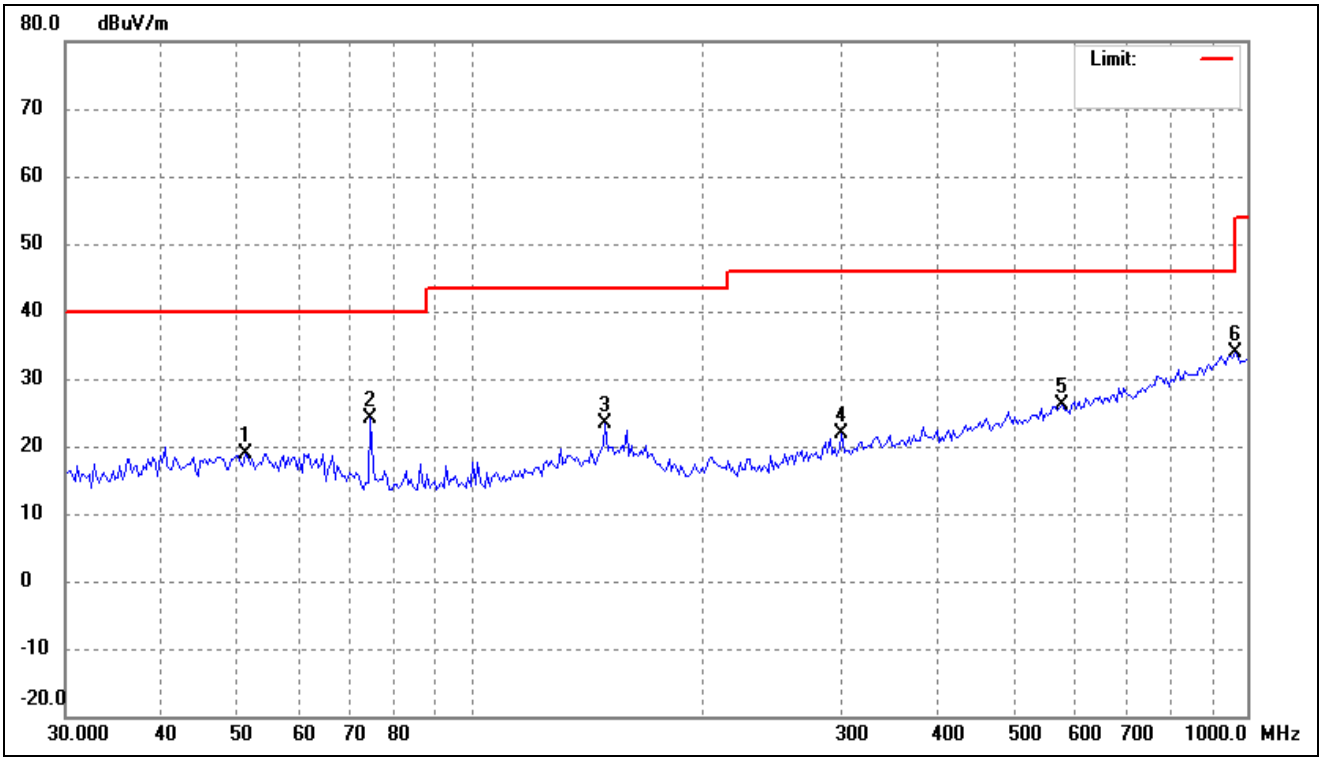

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	51.1756	26.67	-7.72	18.95	40.00	-21.05	-	-	peak
2	74.2696	35.42	-11.18	24.24	40.00	-15.76	-	-	peak
3	148.9175	31.49	-8.14	23.35	43.50	-20.15	-	-	peak
4	300.6988	29.65	-7.85	21.80	46.00	-24.20	-	-	peak
5	578.0359	28.90	-2.78	26.12	46.00	-19.88	-	-	peak
6	965.4742	30.58	3.37	33.95	54.00	-20.05	-	-	peak

802.11ax-HE20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

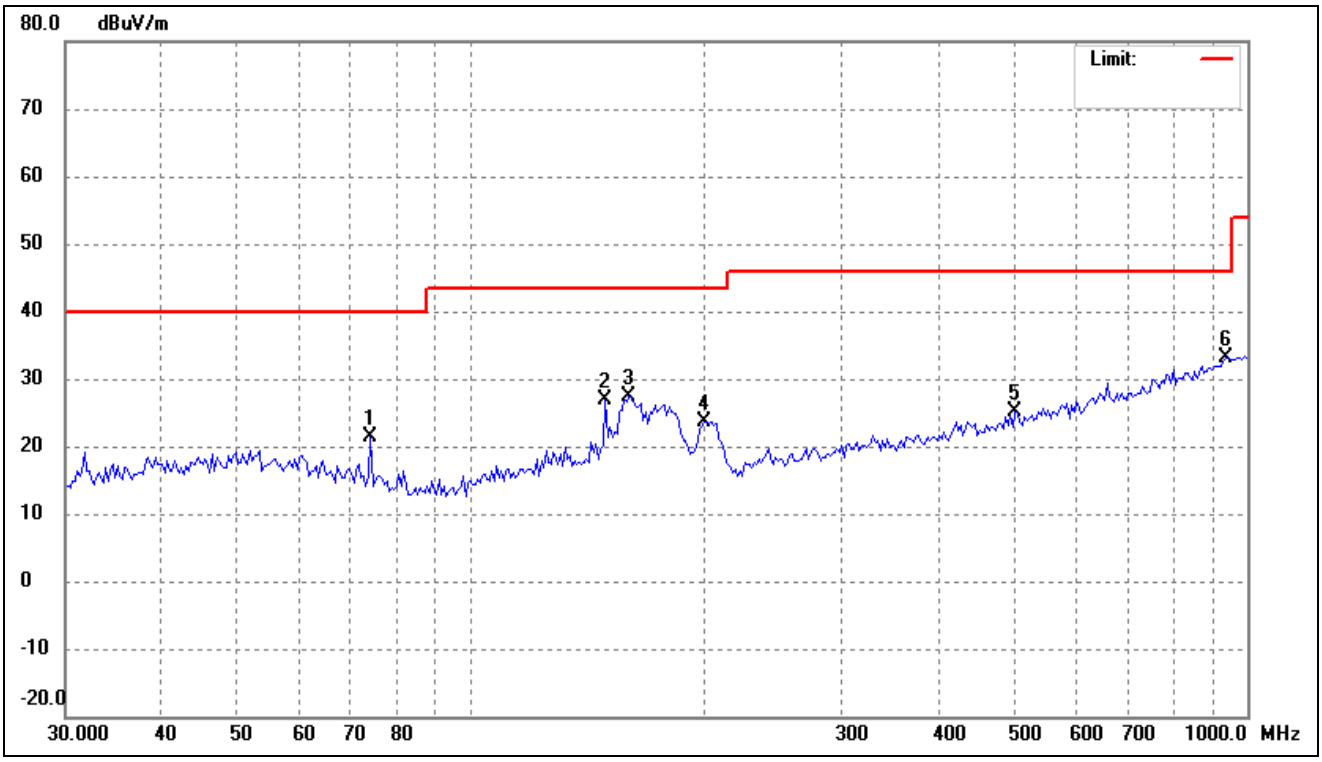

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	74.2696	32.55	-11.18	21.37	40.00	-18.63	-	-	peak
2	148.9175	34.96	-8.14	26.82	43.50	-16.68	-	-	peak
3	159.7586	35.34	-8.05	27.29	43.50	-16.21	-	-	peak
4	200.0432	35.11	-11.38	23.73	43.50	-19.77	-	-	peak
5	502.2473	29.99	-4.76	25.23	46.00	-20.77	-	-	peak
6	938.7139	30.05	3.03	33.08	46.00	-12.92	-	-	peak

802.11ax-HE20			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

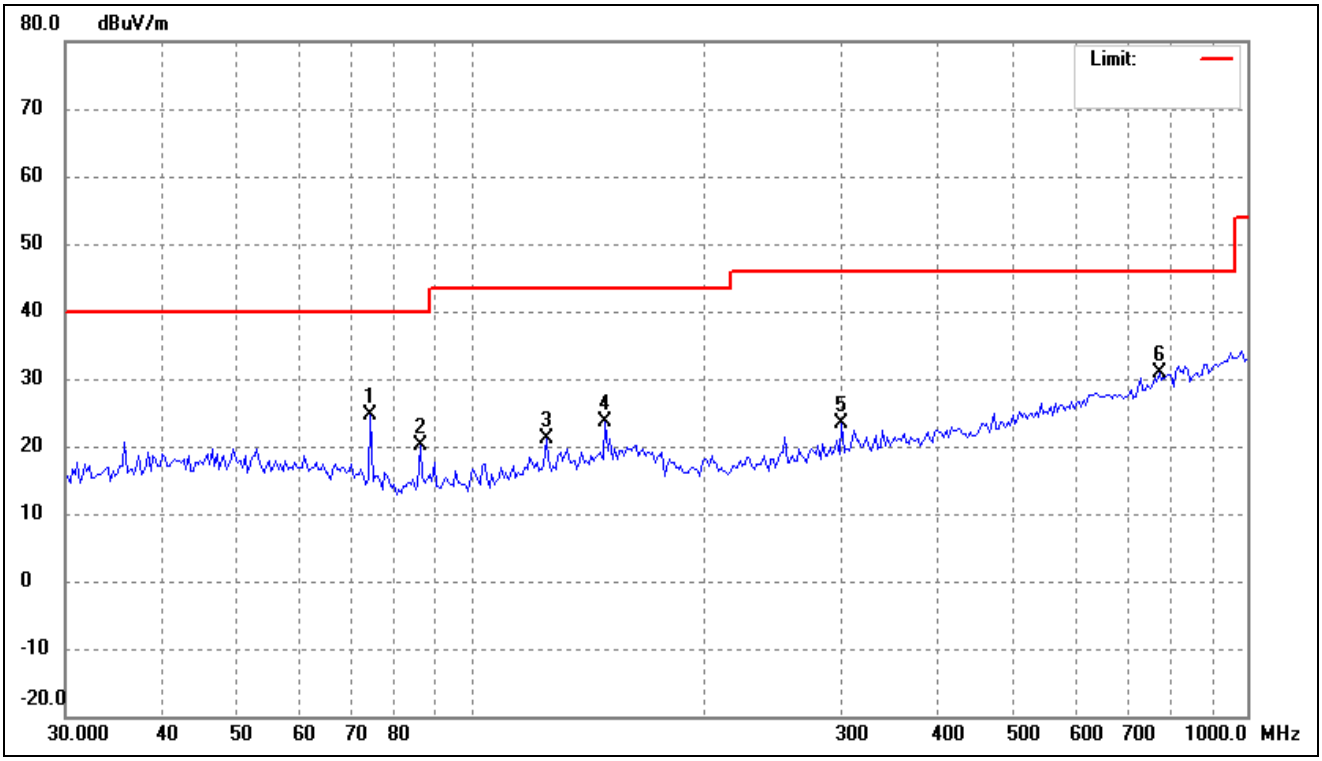

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	74.2696	35.81	-11.18	24.63	40.00	-15.37	-	-	peak
2	86.0796	32.60	-12.53	20.07	40.00	-19.93	-	-	peak
3	124.9249	30.82	-9.67	21.15	43.50	-22.35	-	-	peak
4	148.9175	31.89	-8.14	23.75	43.50	-19.75	-	-	peak
5	300.6988	31.12	-7.85	23.27	46.00	-22.73	-	-	peak
6	771.0475	30.31	0.53	30.84	46.00	-15.16	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

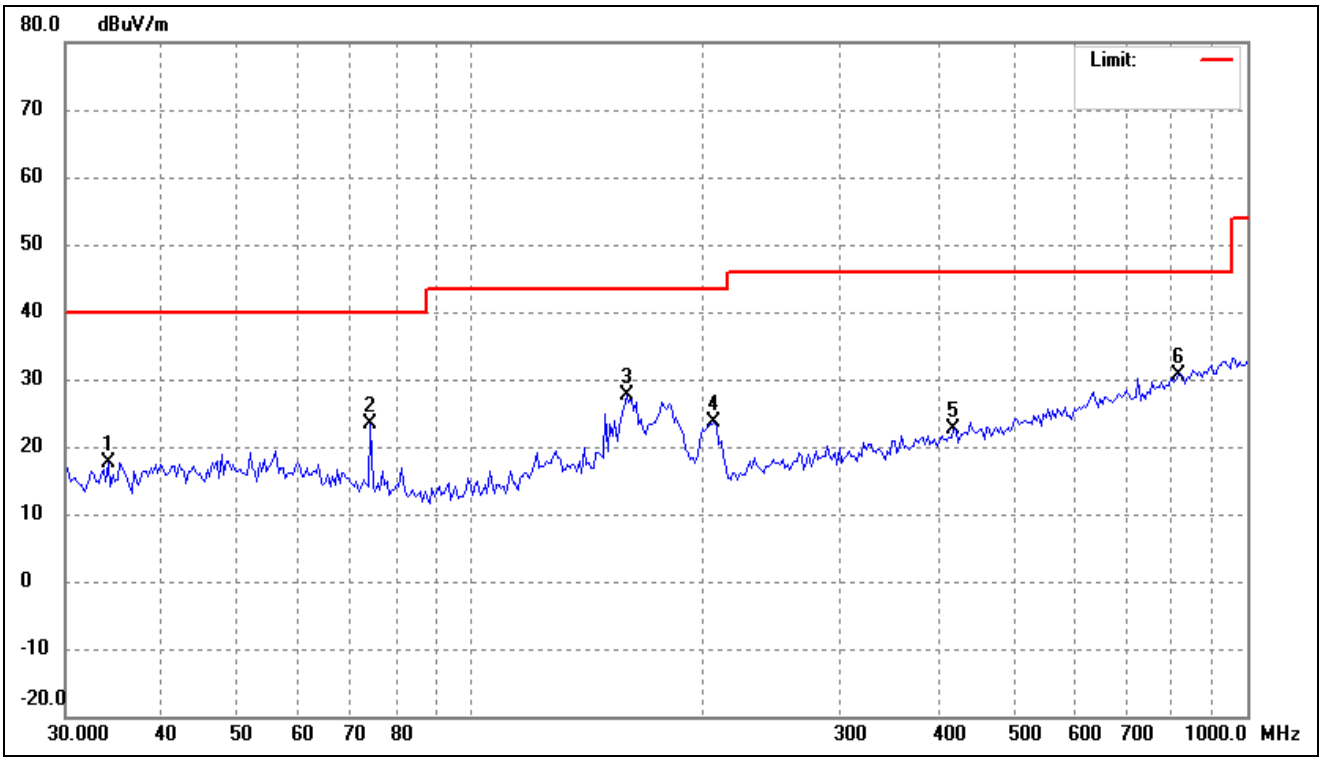

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	34.0451	26.76	-9.13	17.63	40.00	-22.37	-	-	peak
2	74.2696	34.55	-11.18	23.37	40.00	-16.63	-	-	peak
3	158.6399	35.62	-8.05	27.57	43.50	-15.93	-	-	peak
4	205.7459	35.10	-11.51	23.59	43.50	-19.91	-	-	peak
5	418.3784	28.57	-5.88	22.69	46.00	-23.31	-	-	peak
6	815.6353	29.34	1.17	30.51	46.00	-15.49	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

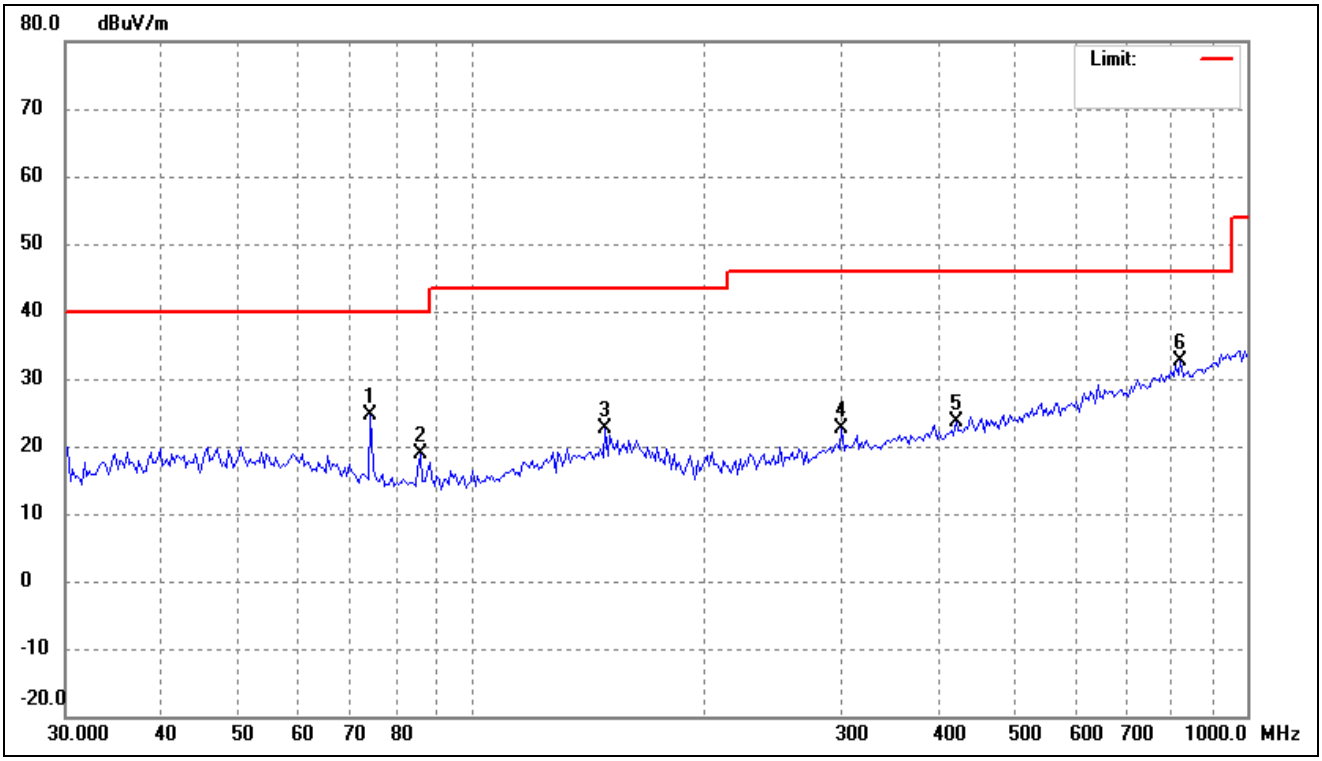

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	74.2696	35.89	-11.18	24.71	40.00	-15.29	-	-	peak
2	86.0796	31.43	-12.53	18.90	40.00	-21.10	-	-	peak
3	148.9175	30.81	-8.14	22.67	43.50	-20.83	-	-	peak
4	300.6988	30.45	-7.85	22.60	46.00	-23.40	-	-	peak
5	421.3287	29.43	-5.81	23.62	46.00	-22.38	-	-	peak
6	821.3871	31.34	1.23	32.57	46.00	-13.43	-	-	peak

802.11ac-VHT40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

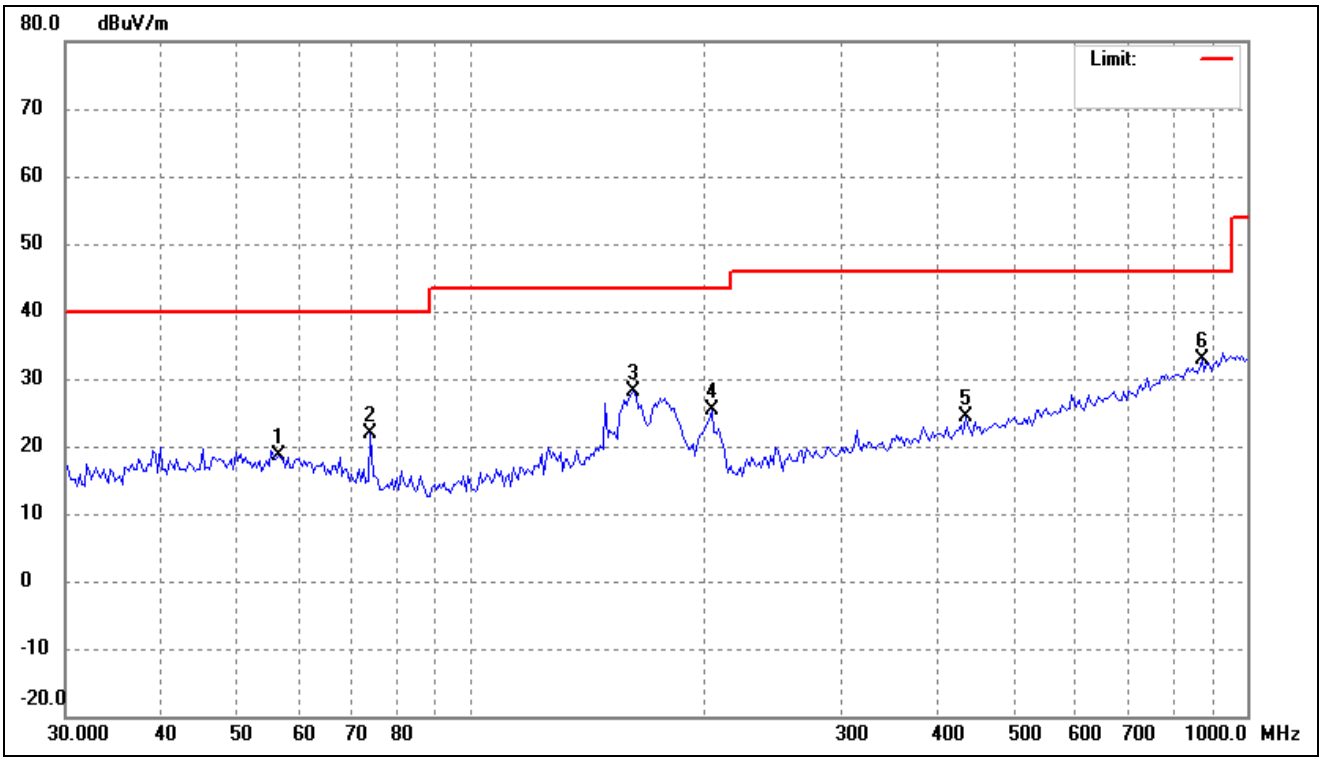

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	56.4662	26.80	-8.21	18.59	40.00	-21.41	-	-	peak
2	74.2696	33.14	-11.18	21.96	40.00	-18.04	-	-	peak
3	162.0197	36.18	-8.10	28.08	43.50	-15.42	-	-	peak
4	204.3052	36.97	-11.47	25.50	43.50	-18.00	-	-	peak
5	433.3397	30.05	-5.55	24.50	46.00	-21.50	-	-	peak
6	875.0133	31.10	1.82	32.92	46.00	-13.08	-	-	peak

802.11ac-VHT40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

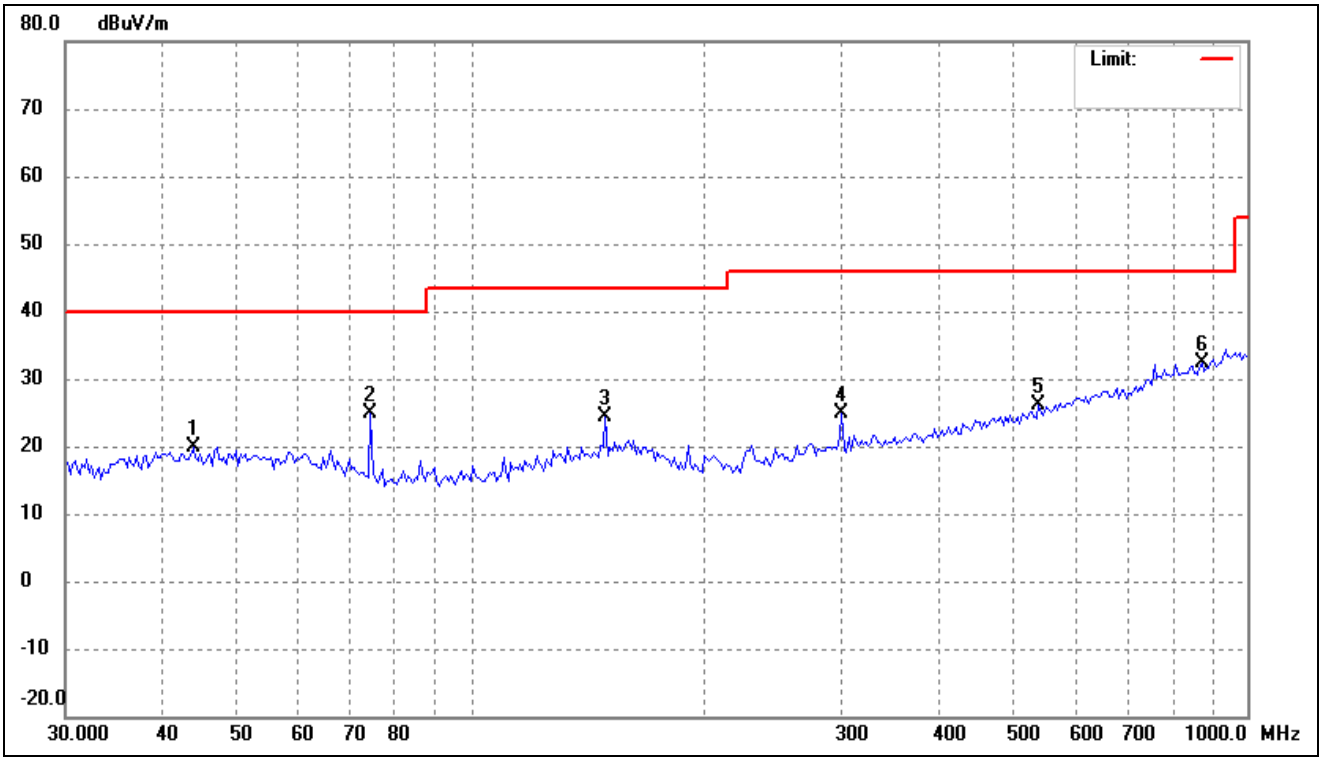

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	43.8452	27.80	-7.96	19.84	40.00	-20.16	-	-	peak
2	74.2696	36.18	-11.18	25.00	40.00	-15.00	-	-	peak
3	148.9175	32.45	-8.14	24.31	43.50	-19.19	-	-	peak
4	300.6988	32.76	-7.85	24.91	46.00	-21.09	-	-	peak
5	538.8107	29.92	-3.90	26.02	46.00	-19.98	-	-	peak
6	875.0133	30.62	1.82	32.44	46.00	-13.56	-	-	peak

802.11ax-HE40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

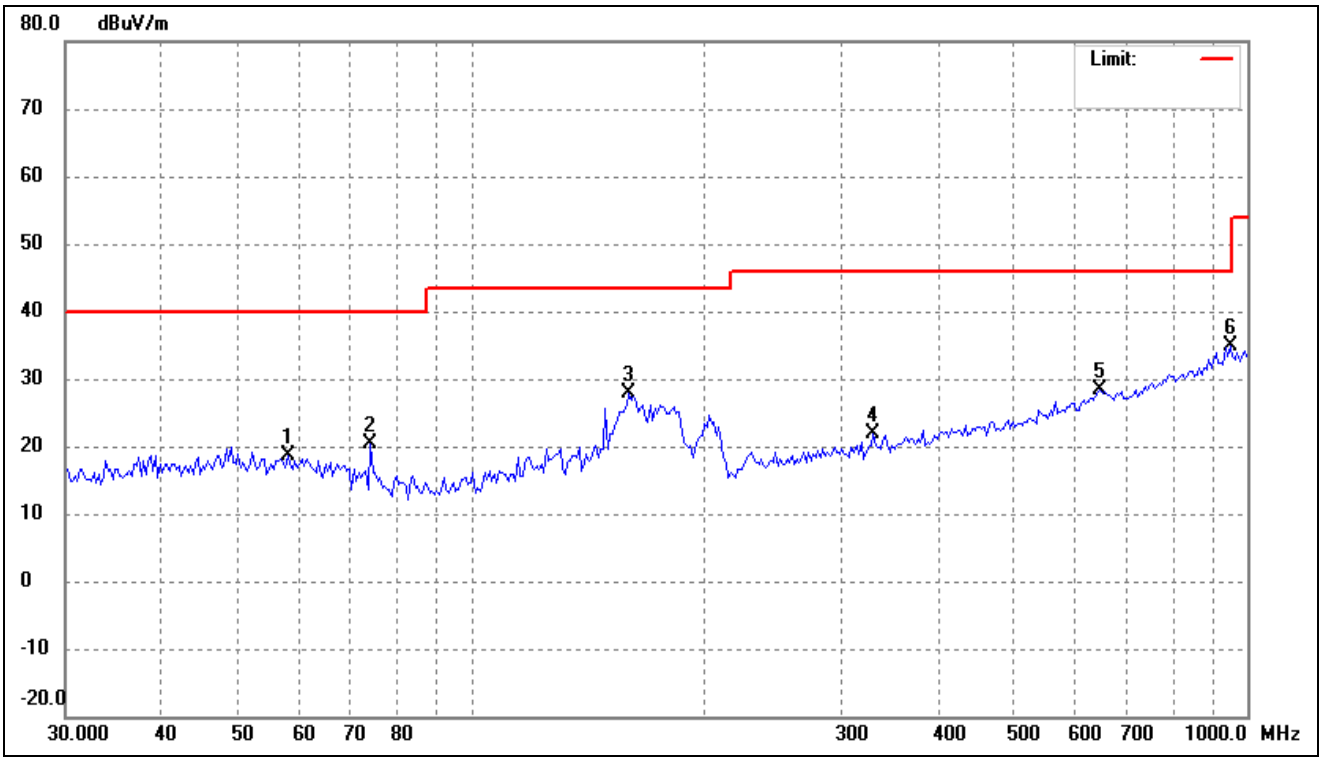

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	58.0759	26.83	-8.32	18.51	40.00	-21.49	-	-	peak
2	74.2696	31.64	-11.18	20.46	40.00	-19.54	-	-	peak
3	159.7586	35.88	-8.05	27.83	43.50	-15.67	-	-	peak
4	329.4625	29.19	-7.28	21.91	46.00	-24.09	-	-	peak
5	646.8217	30.09	-1.59	28.50	46.00	-17.50	-	-	peak
6	952.0001	31.52	3.31	34.83	46.00	-11.17	-	-	peak

802.11ax-HE40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

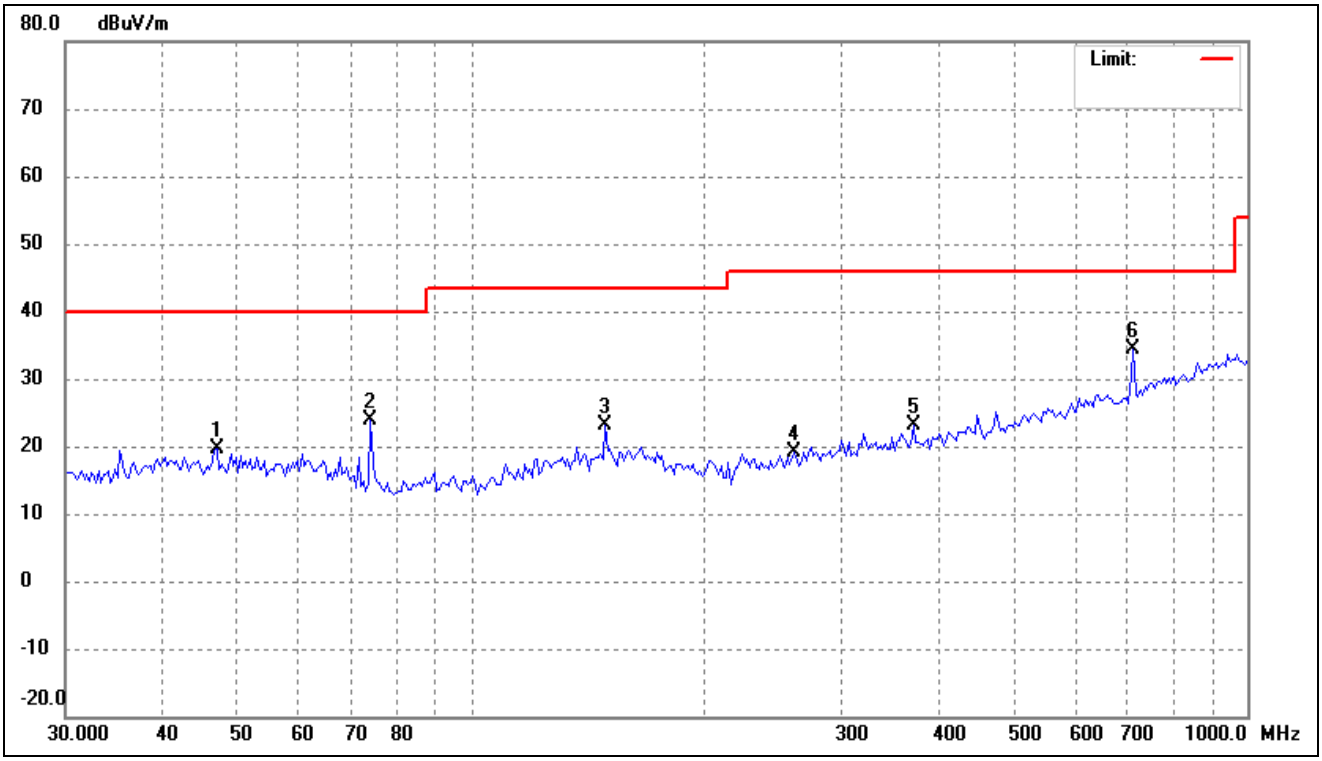

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	47.0371	27.40	-7.81	19.59	40.00	-20.41	-	-	peak
2	74.2696	34.94	-11.18	23.76	40.00	-16.24	-	-	peak
3	148.9175	31.22	-8.14	23.08	43.50	-20.42	-	-	peak
4	261.2730	28.25	-9.24	19.01	46.00	-26.99	-	-	peak
5	371.2680	29.72	-6.67	23.05	46.00	-22.95	-	-	peak
6	713.6917	35.02	-0.75	34.27	46.00	-11.73	-	-	peak

802.11ac-VHT80			
Test Channel	5775MHz(worst case)	Polarity:	Horizontal

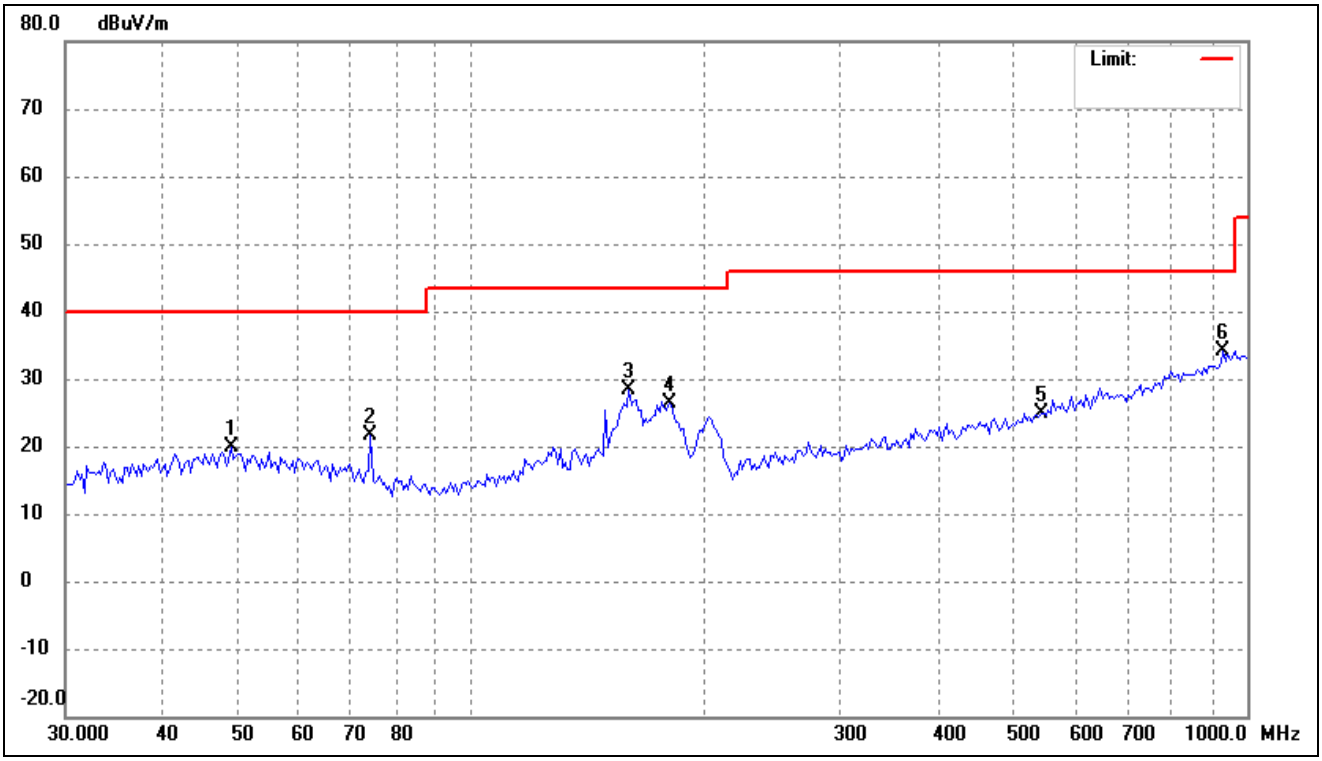

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	49.0627	27.44	-7.65	19.79	40.00	-20.21	-	-	peak
2	74.2696	32.73	-11.18	21.55	40.00	-18.45	-	-	peak
3	159.7586	36.40	-8.05	28.35	43.50	-15.15	-	-	peak
4	180.0304	36.08	-9.74	26.34	43.50	-17.16	-	-	peak
5	542.6104	28.72	-3.78	24.94	46.00	-21.06	-	-	peak
6	932.1405	31.29	2.87	34.16	46.00	-11.84	-	-	peak

802.11ac-VHT80			
Test Channel	5775MHz(worst case)	Polarity:	Vertical

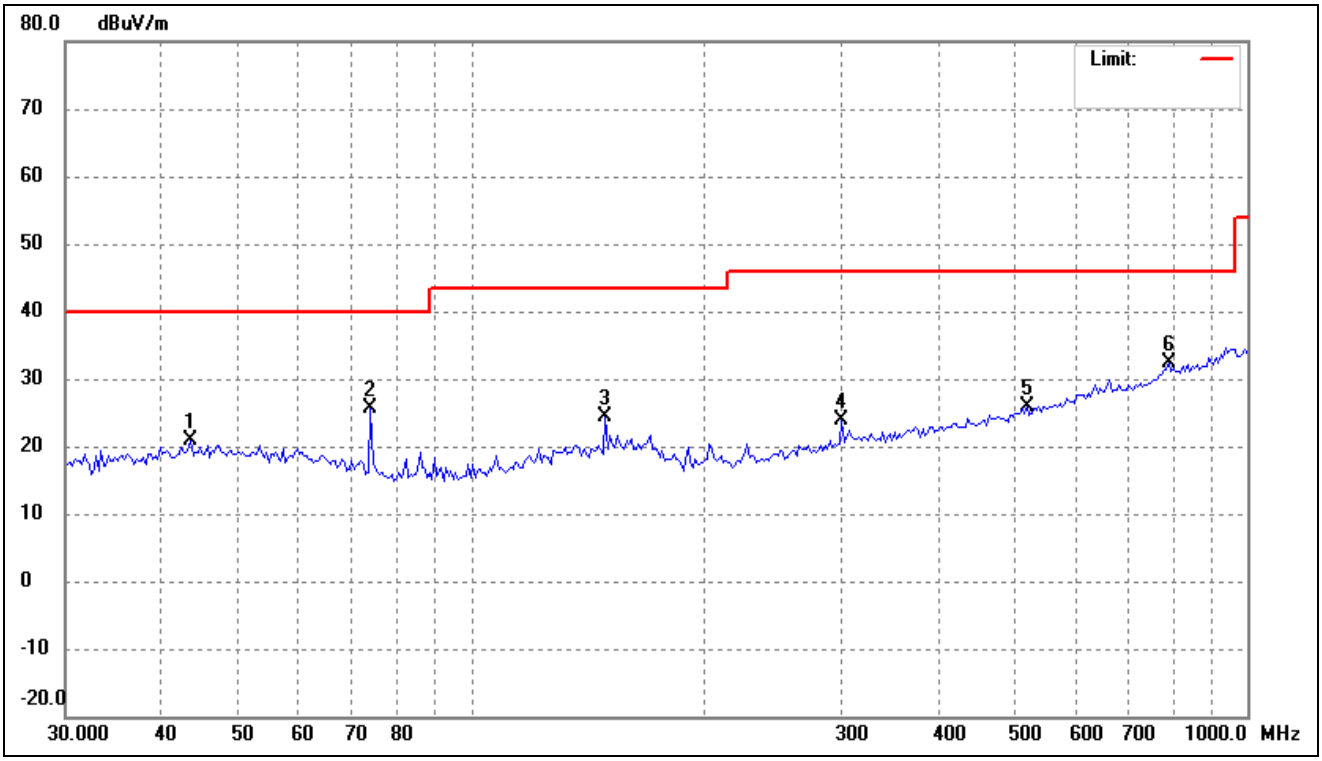

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	43.5381	28.81	-7.95	20.86	40.00	-19.14	-	-	peak
2	74.2696	36.71	-11.18	25.53	40.00	-14.47	-	-	peak
3	148.9175	32.57	-8.14	24.43	43.50	-19.07	-	-	peak
4	300.6988	31.72	-7.85	23.87	46.00	-22.13	-	-	peak
5	520.2079	30.18	-4.41	25.77	46.00	-20.23	-	-	peak
6	793.0281	31.52	0.88	32.40	46.00	-13.60	-	-	peak

802.11ax-HE80			
Test Channel	5775MHz(worst case)	Polarity:	Horizontal

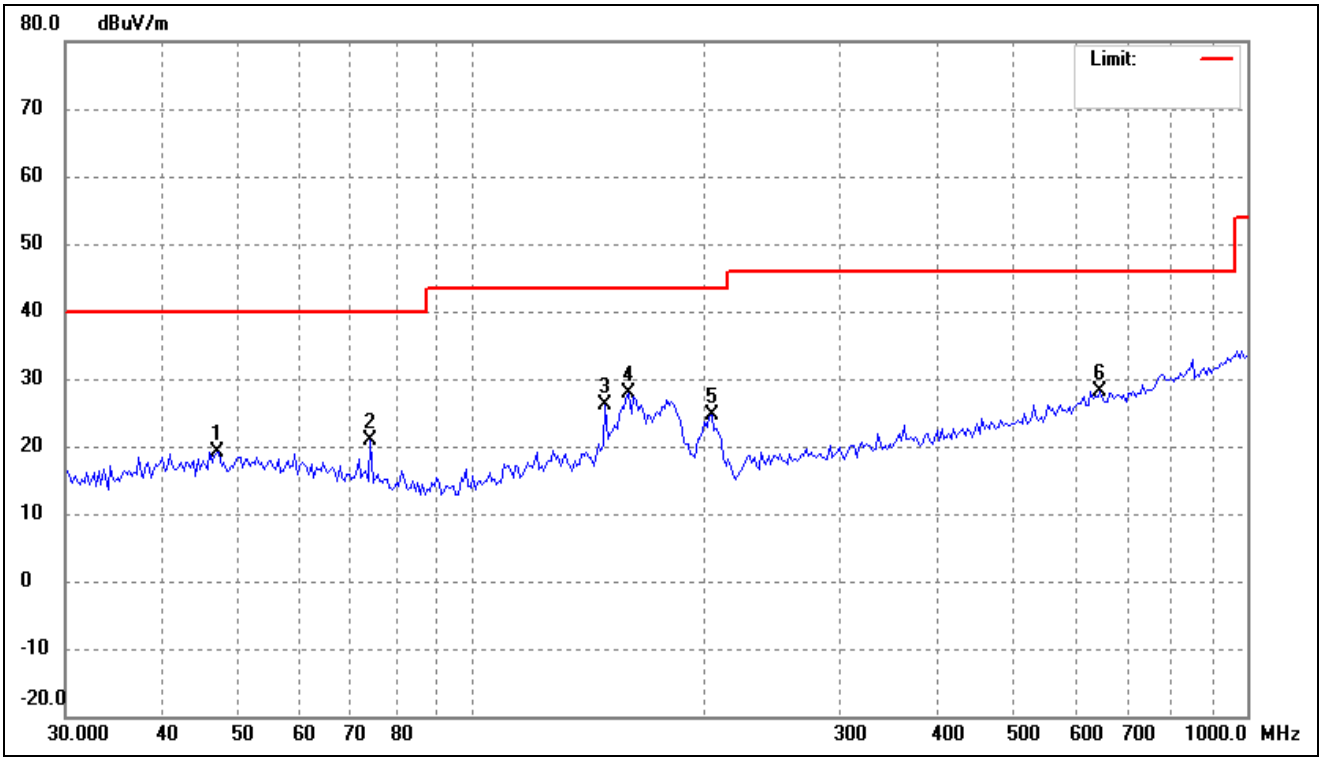

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	47.0371	26.95	-7.81	19.14	40.00	-20.86	-	-	peak
2	74.2696	31.98	-11.18	20.80	40.00	-19.20	-	-	peak
3	148.9175	34.23	-8.14	26.09	43.50	-17.41	-	-	peak
4	159.7586	35.87	-8.05	27.82	43.50	-15.68	-	-	peak
5	204.3052	36.14	-11.47	24.67	43.50	-18.83	-	-	peak
6	646.8217	29.79	-1.59	28.20	46.00	-17.80	-	-	peak

802.11ax-HE80			
Test Channel	5775MHz(worst case)	Polarity:	Vertical

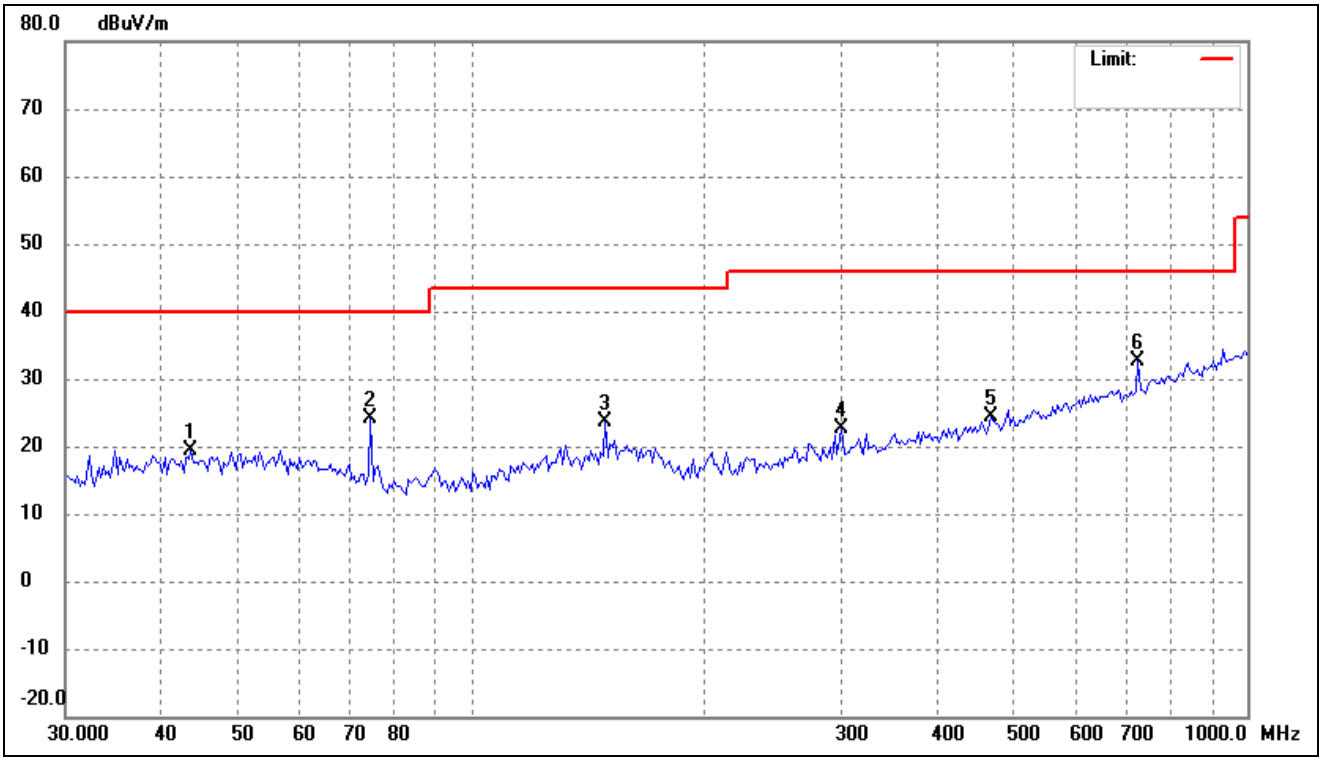

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	43.5381	27.37	-7.95	19.42	40.00	-20.58	-	-	peak
2	74.2696	35.41	-11.18	24.23	40.00	-15.77	-	-	peak
3	148.9175	31.78	-8.14	23.64	43.50	-19.86	-	-	peak
4	300.6988	30.41	-7.85	22.56	46.00	-23.44	-	-	peak
5	468.1651	29.54	-5.05	24.49	46.00	-21.51	-	-	peak
6	723.7930	33.06	-0.49	32.57	46.00	-13.43	-	-	peak

Remark: '-'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emission above 1GHz

- Antenna 0(worst case)

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

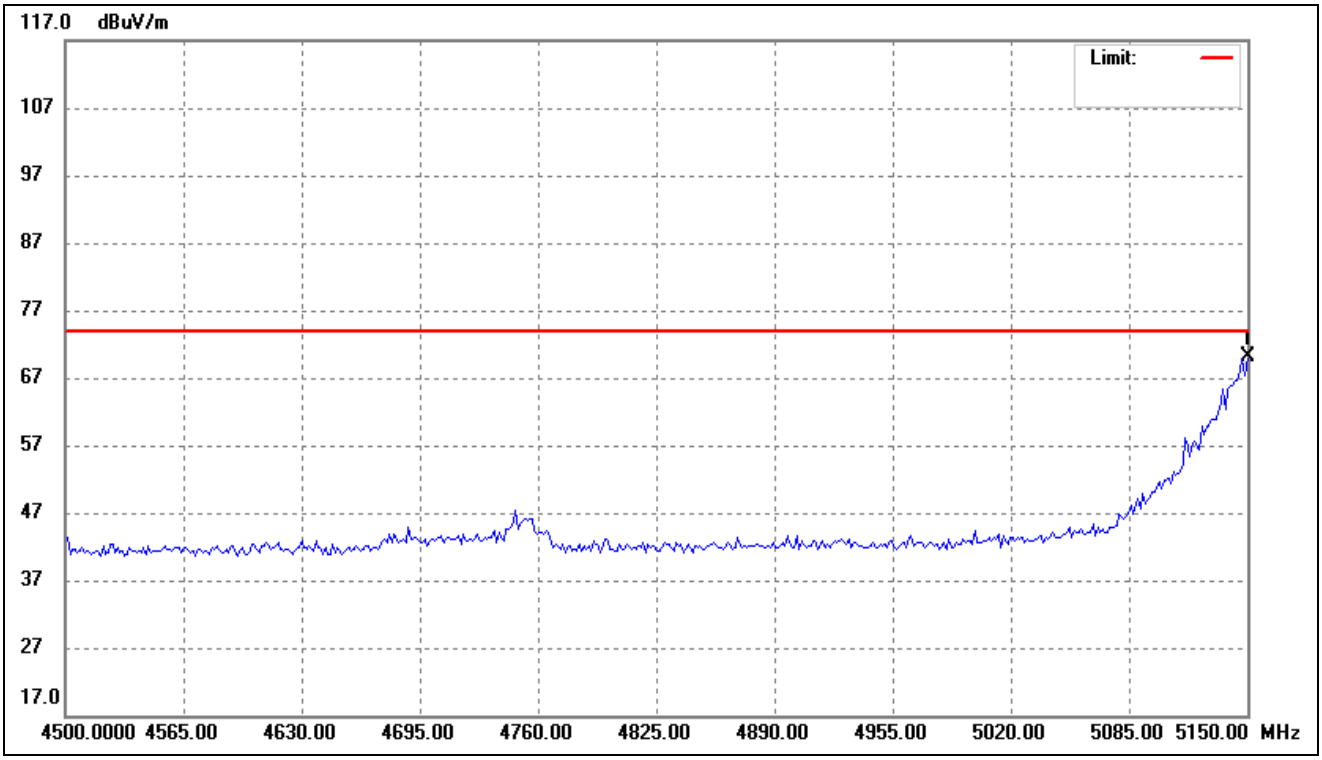

No.	Frequency	Reading	Corr.	Result	Limit	Margin	Deg.	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5150.000	82.56	-12.53	70.03	74.00	-3.97	-	-	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

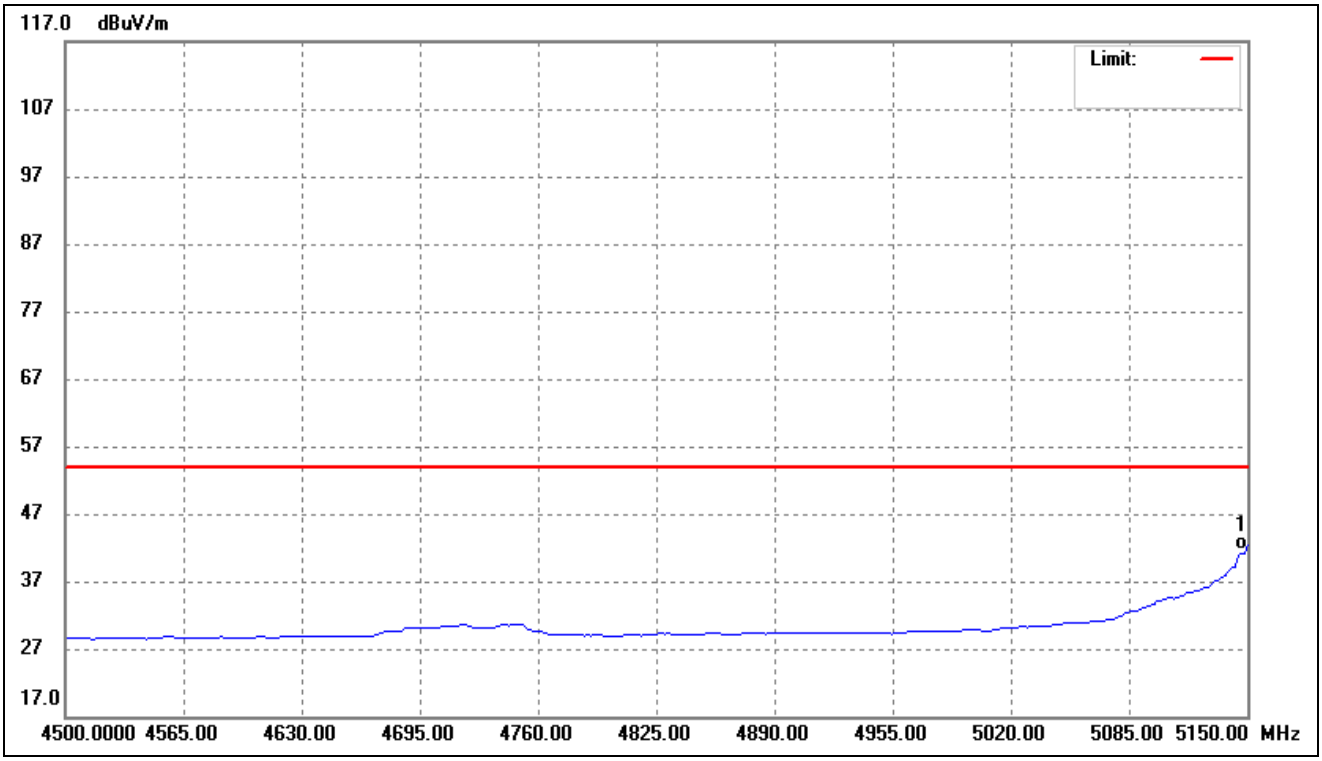

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5150.000	55.15	-12.53	42.62	54.00	-11.38	-	-	AVG

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

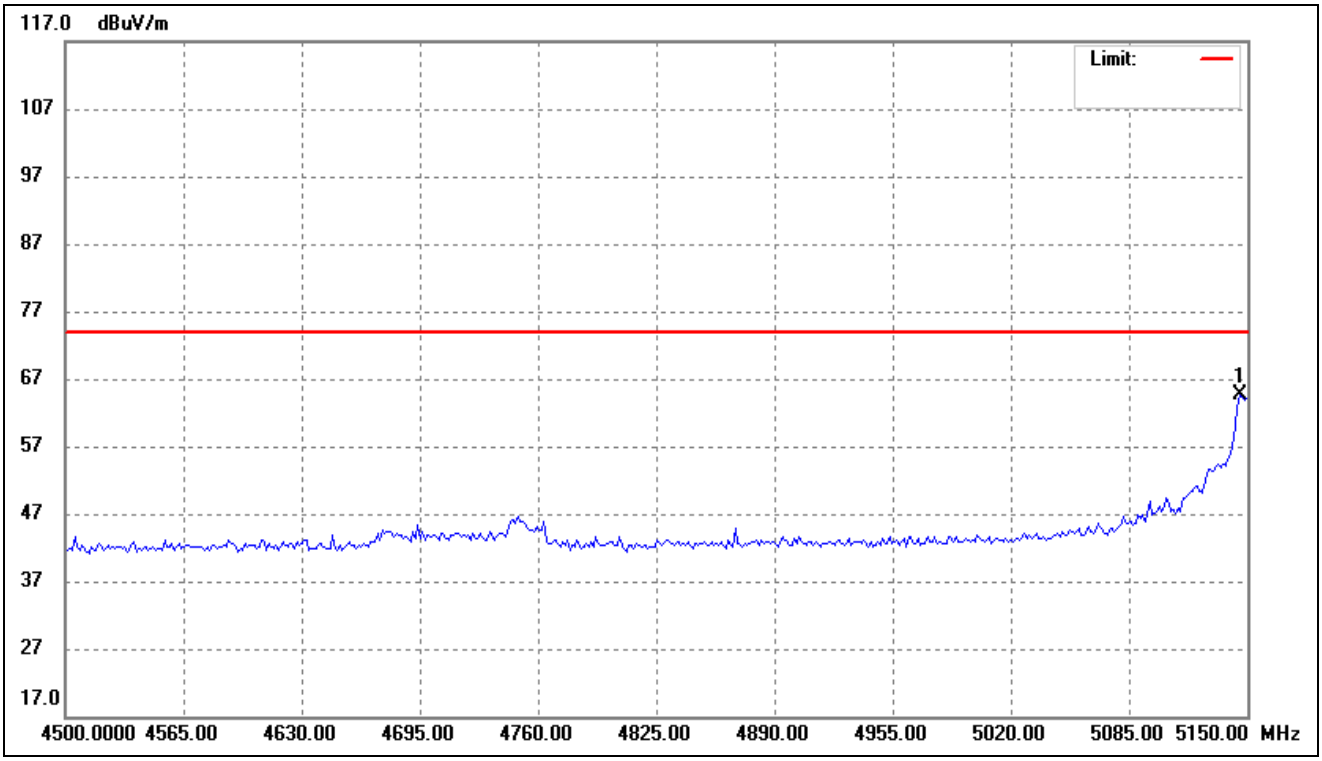

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5146.092	77.18	-12.55	64.63	74.00	-9.37	-	-	peak

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

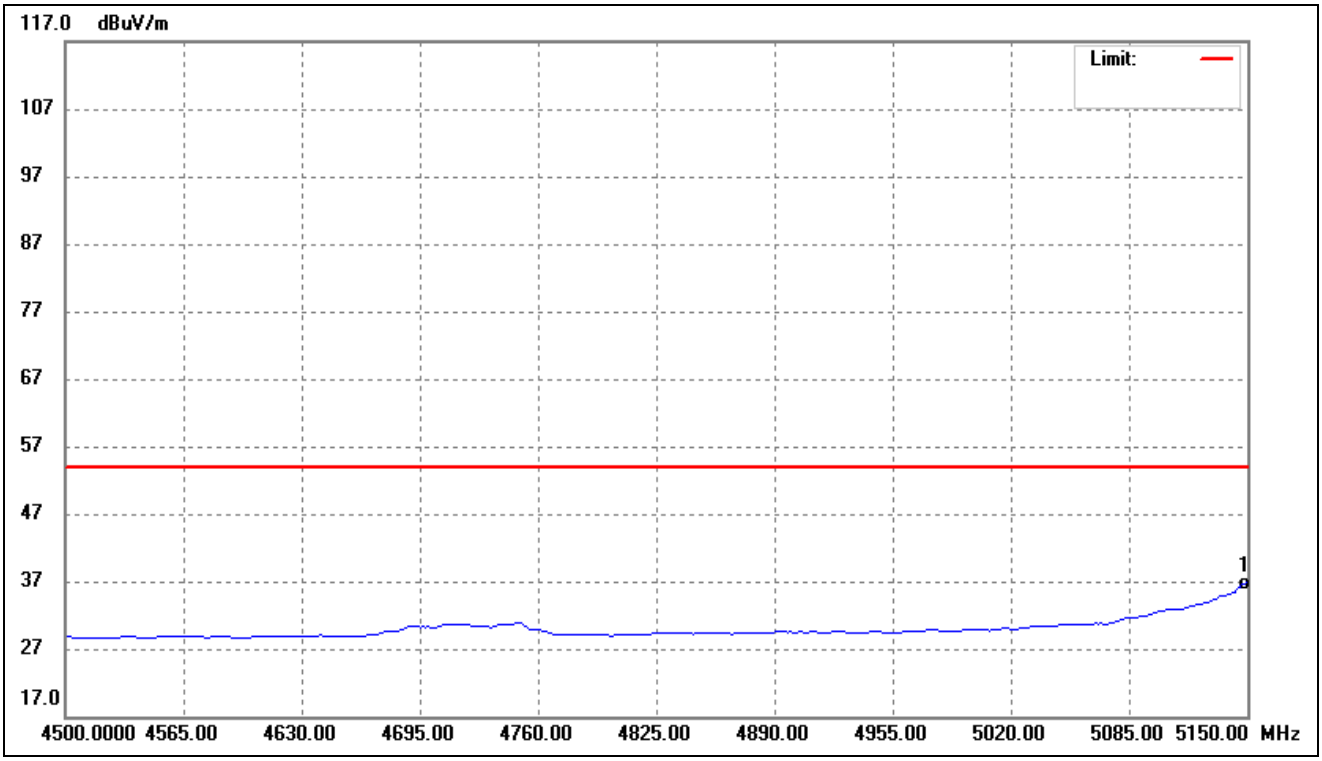

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5148.697	49.16	-12.53	36.63	54.00	-17.37	-	-	AVG

802.11ac-VHT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

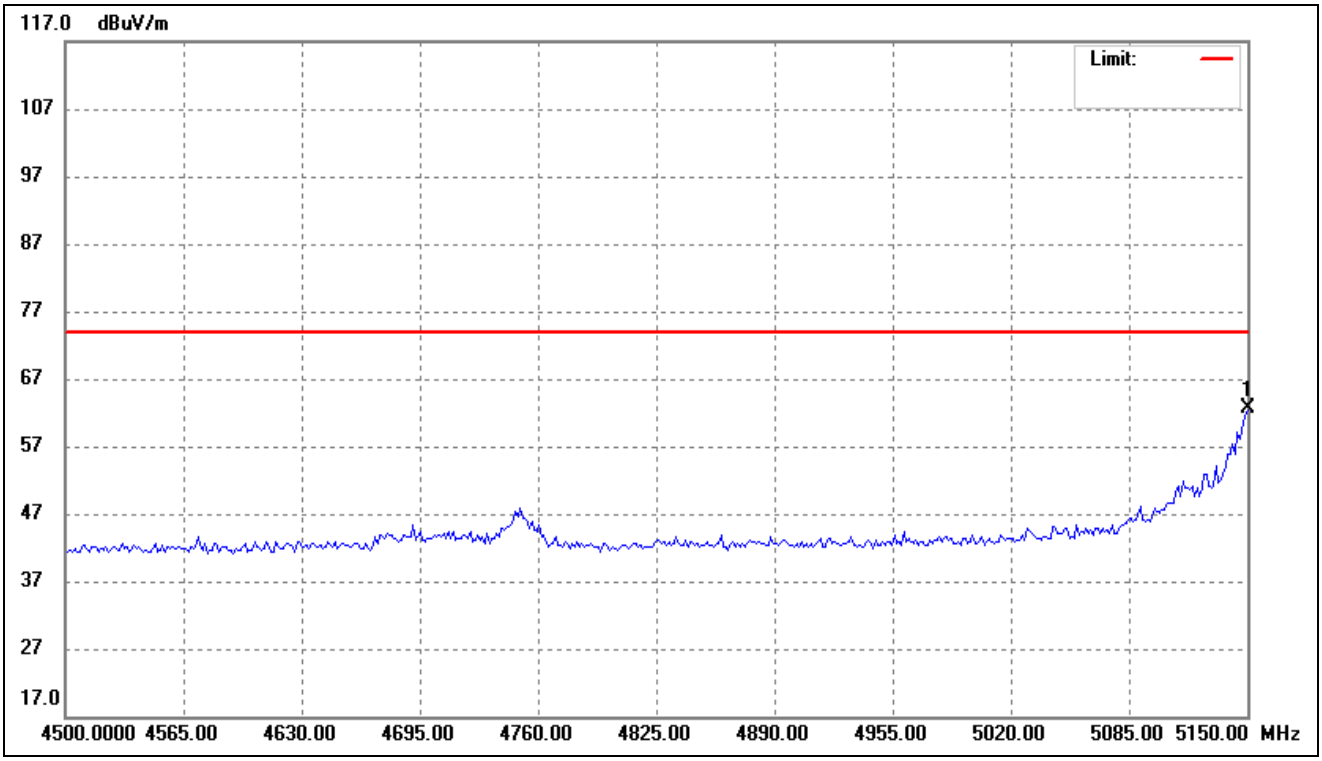

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5150.000	75.15	-12.53	62.62	74.00	-11.38	-	-	peak

802.11ac-VHT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

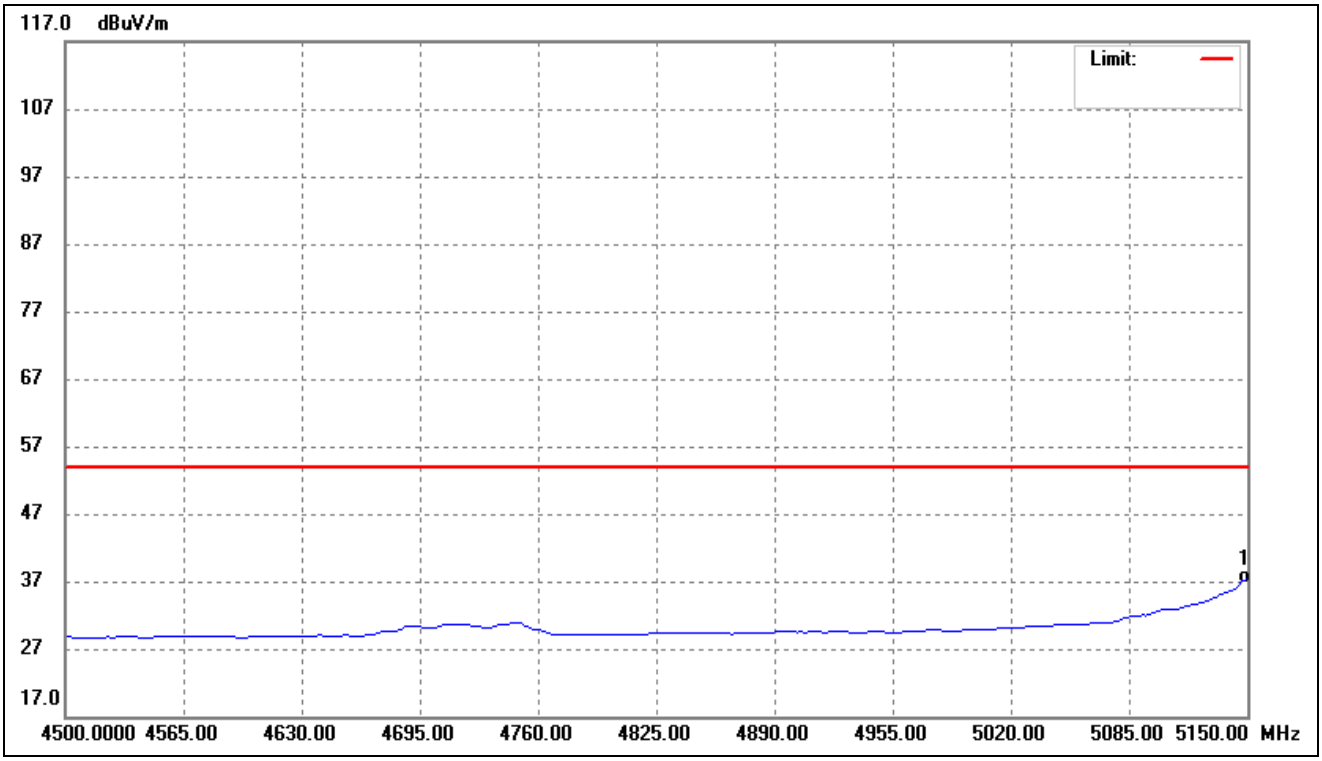

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5150.000	50.15	-12.53	37.62	54.00	-16.38	-	-	AVG

802.11ax-HE20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

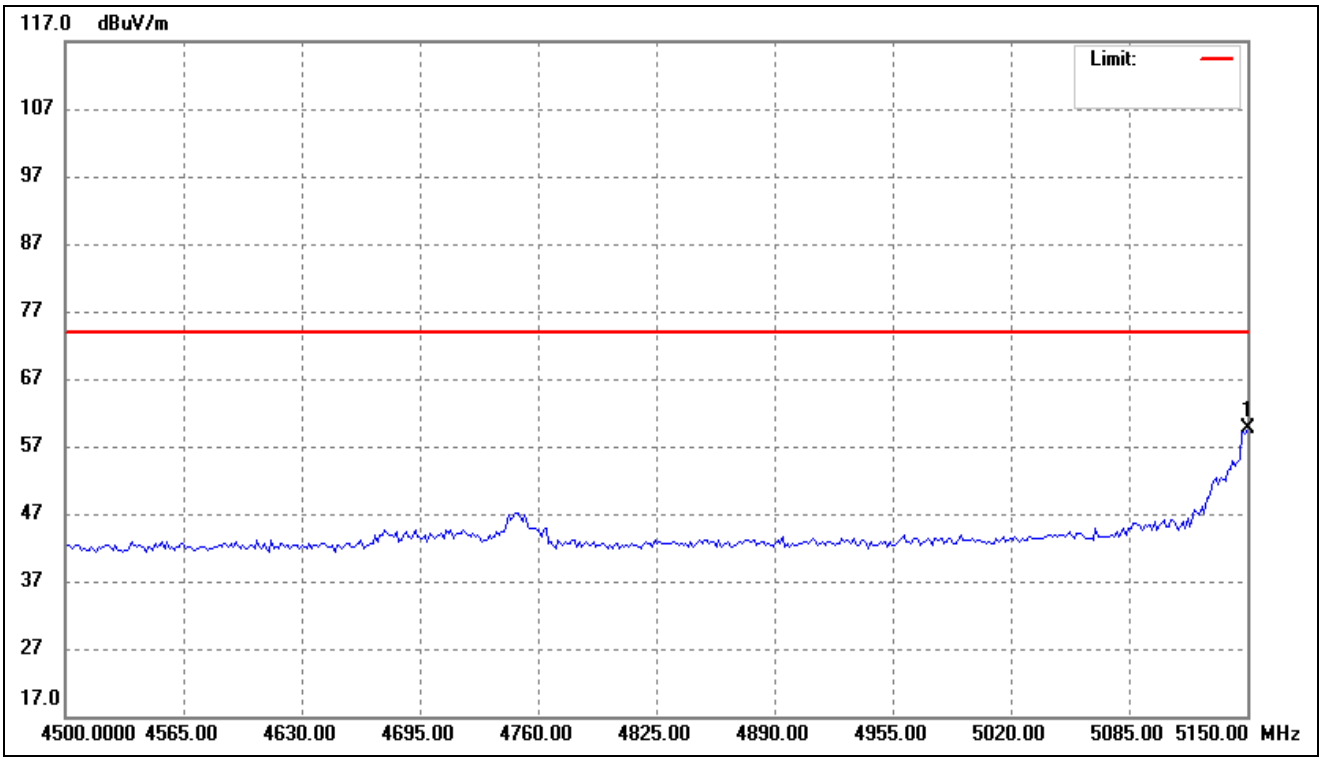

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5150.000	72.22	-12.53	59.69	74.00	-14.31	-	-	peak

802.11ax-HE20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

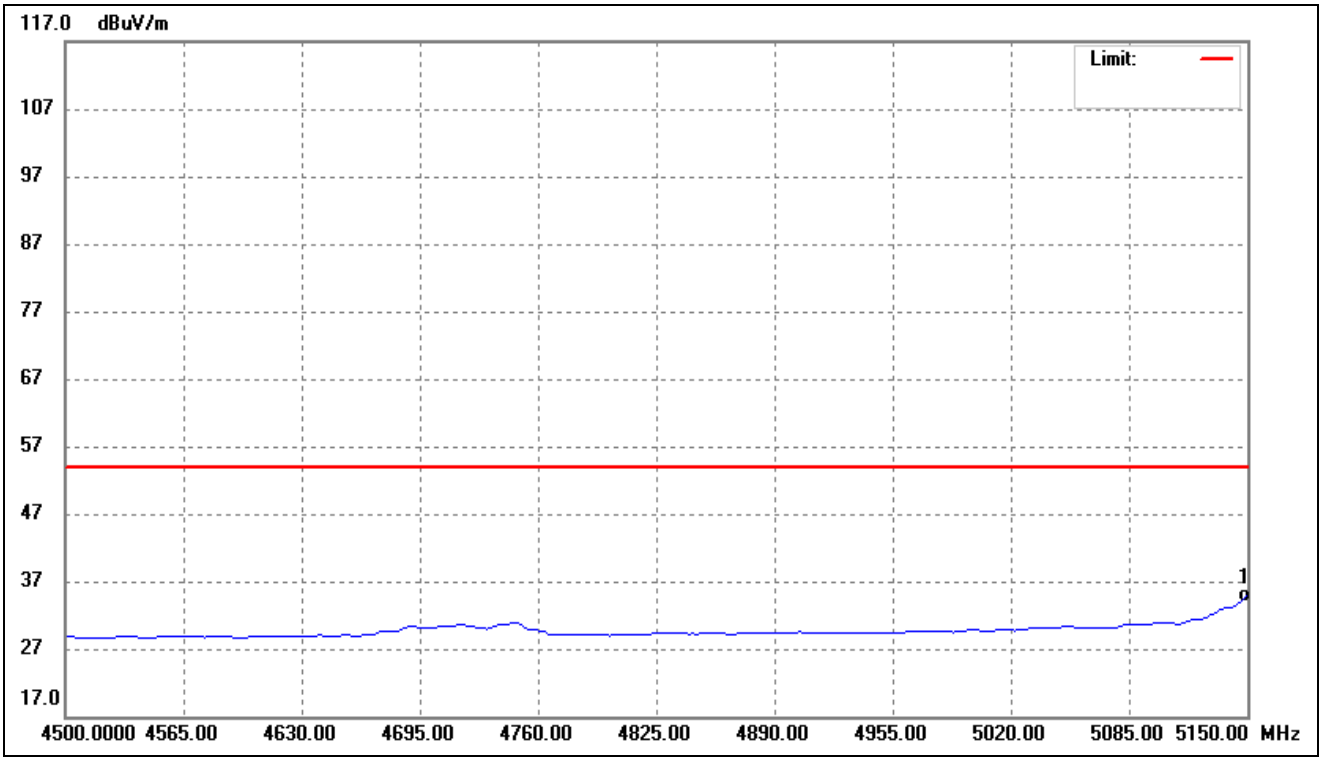

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5150.000	47.42	-12.53	34.89	54.00	-19.11	-	-	AVG

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

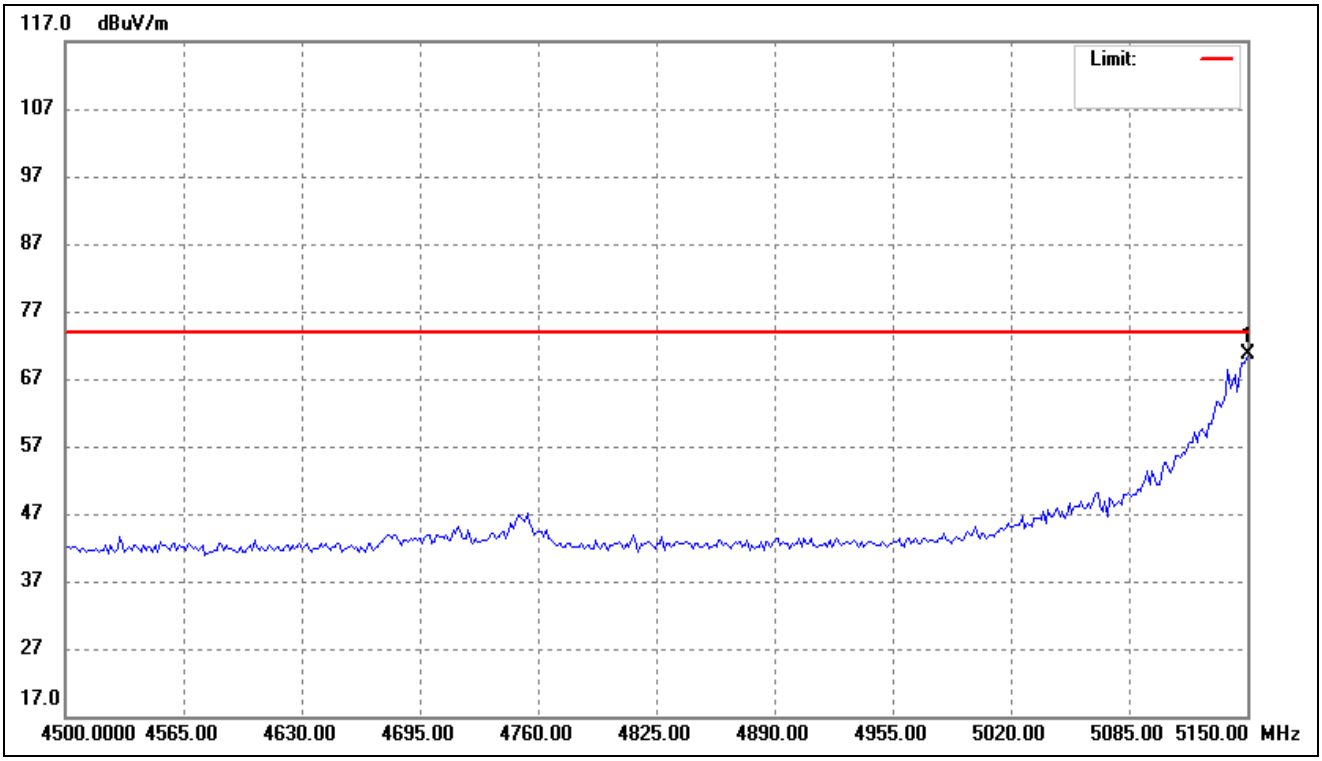

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5150.000	83.14	-12.53	70.61	74.00	-3.39	-	-	peak

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

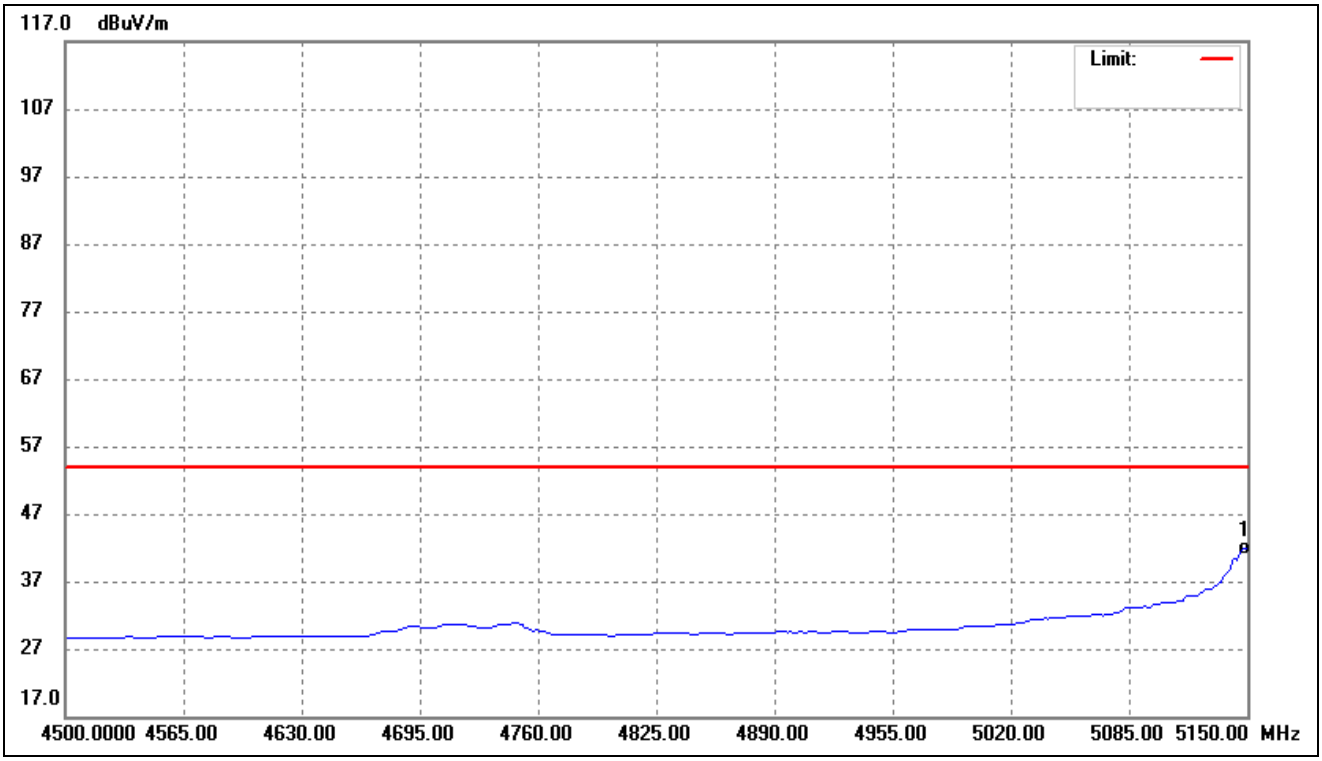

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5148.697	54.32	-12.53	41.79	54.00	-12.21	-	-	AVG

802.11ac-VHT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

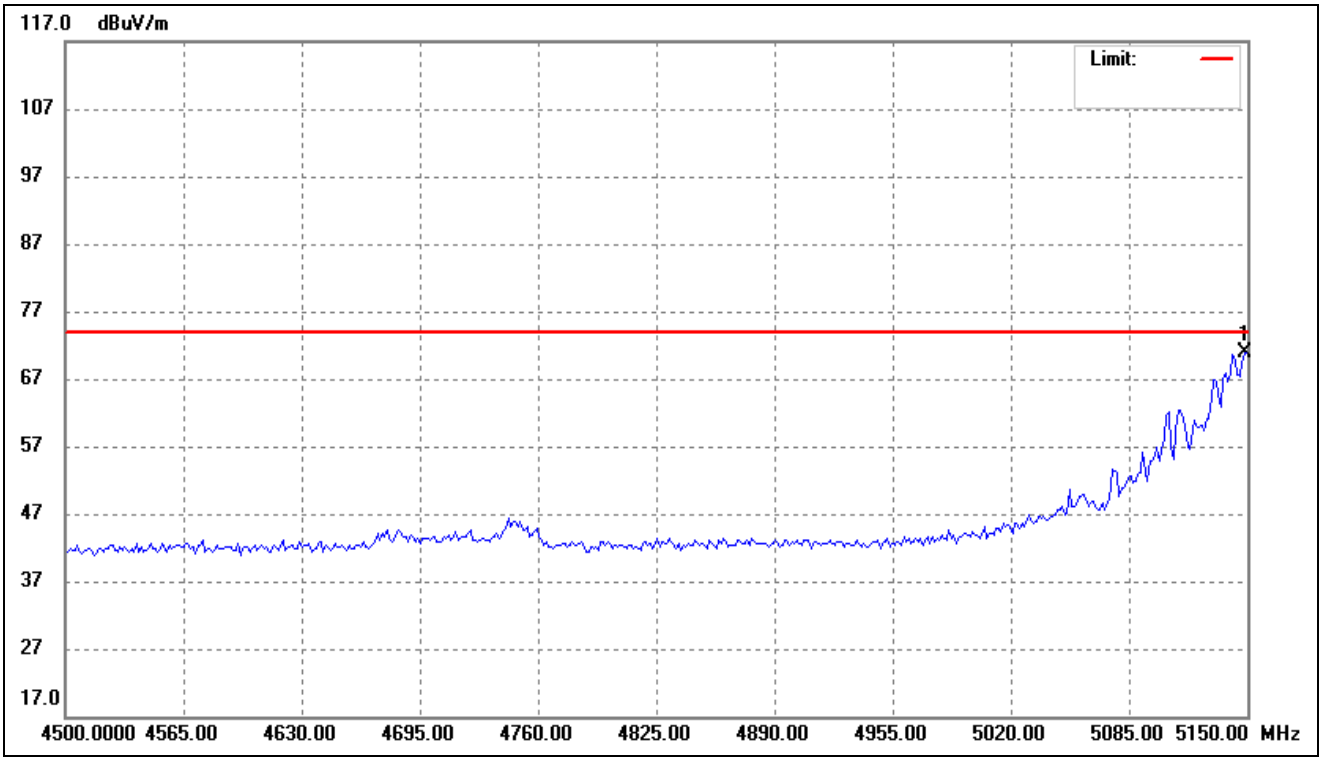

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5148.697	83.41	-12.53	70.88	74.00	-3.12	-	-	peak

802.11ac-VHT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

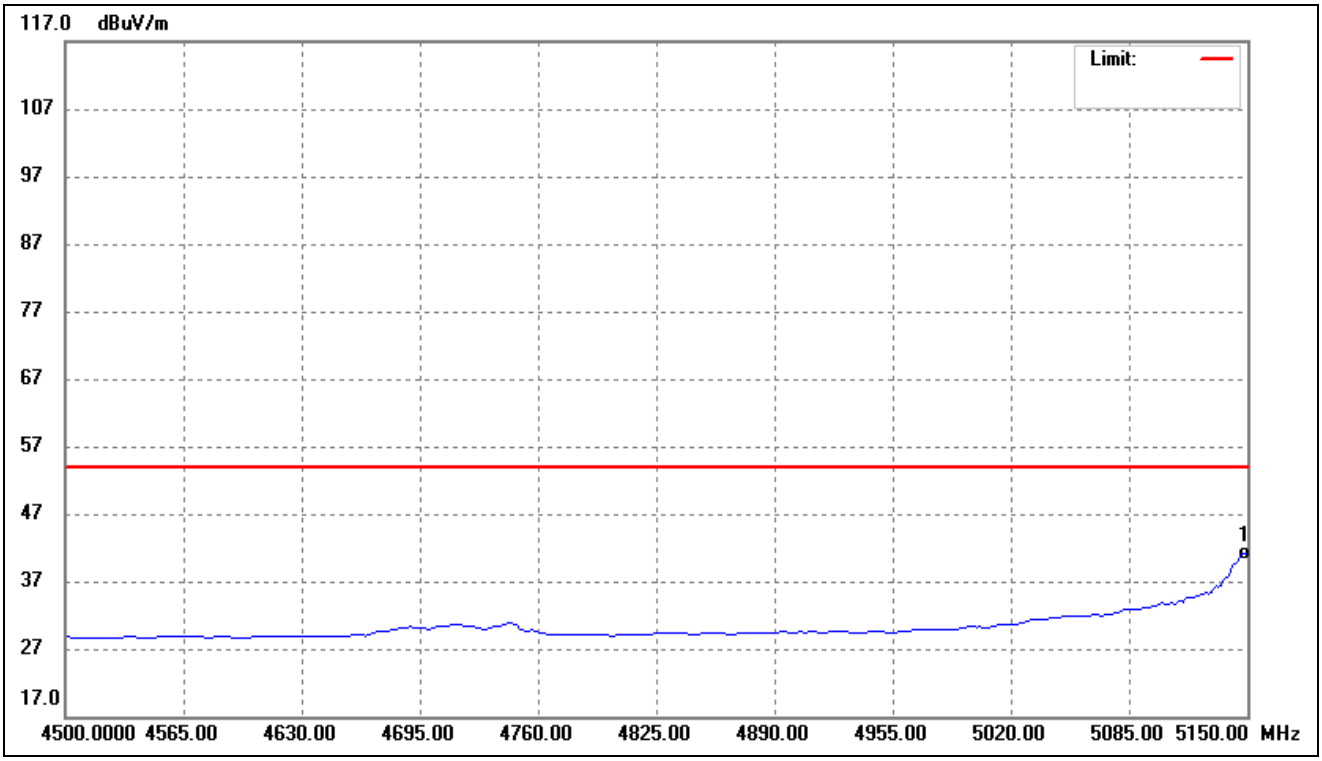

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5150.000	53.74	-12.53	41.21	54.00	-12.79	-	-	AVG

802.11ax-HE40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

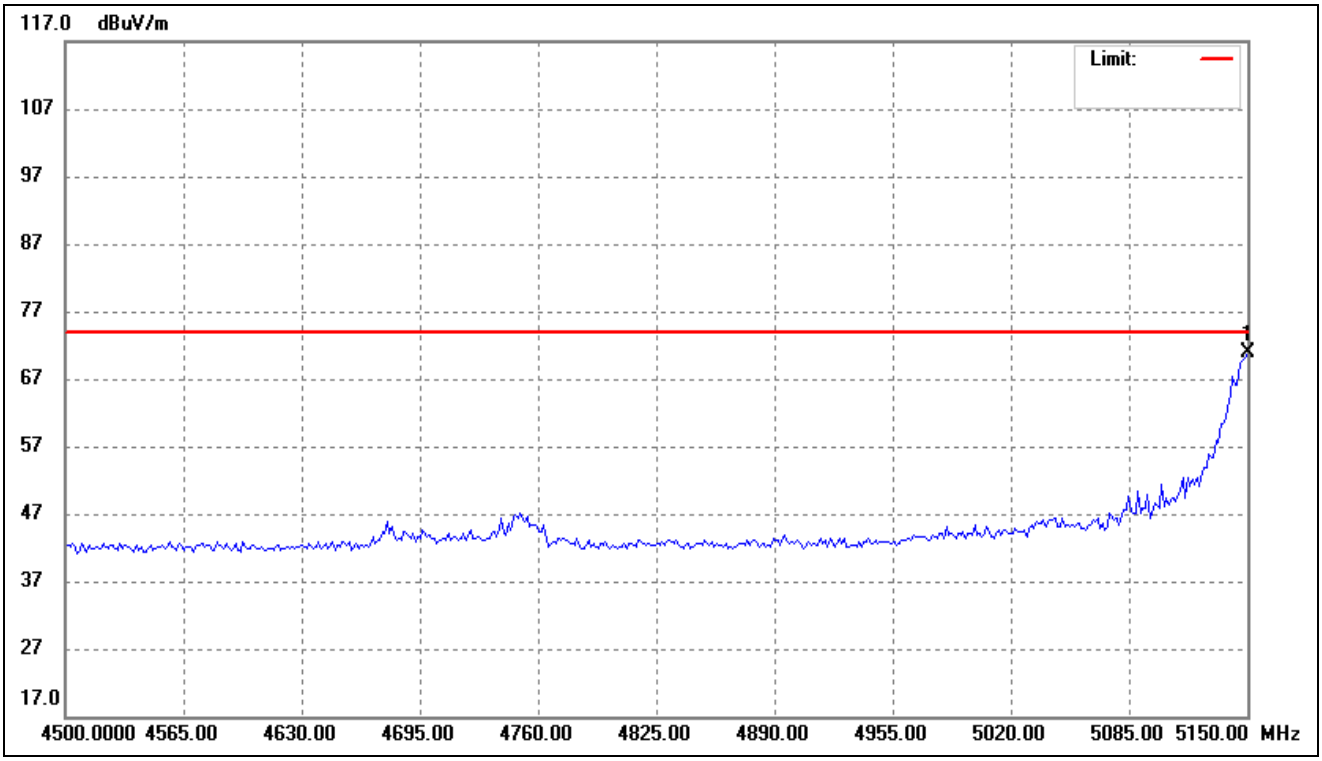

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5150.000	83.52	-12.53	70.99	74.00	-3.01	-	-	peak

802.11ax-HE40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

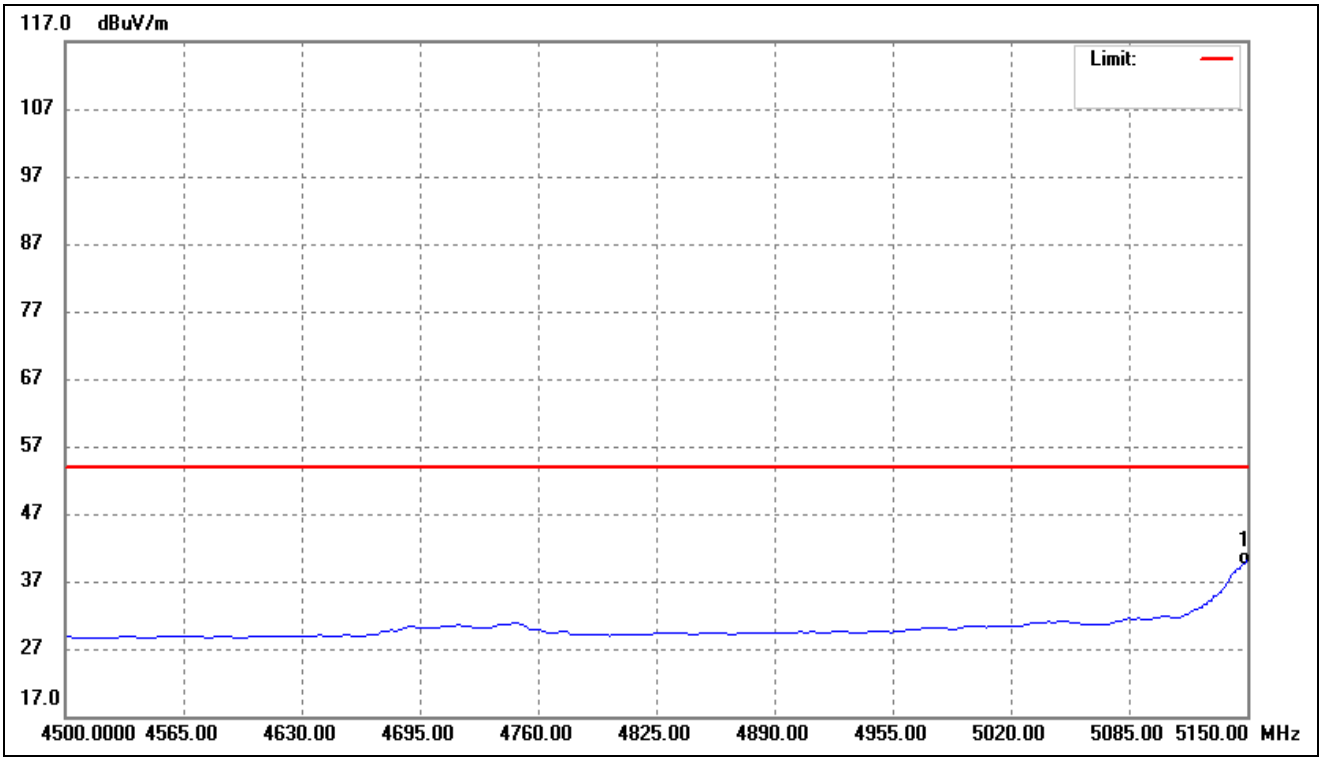

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5150.000	52.96	-12.53	40.43	54.00	-13.57	-	-	AVG

802.11ac-VHT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

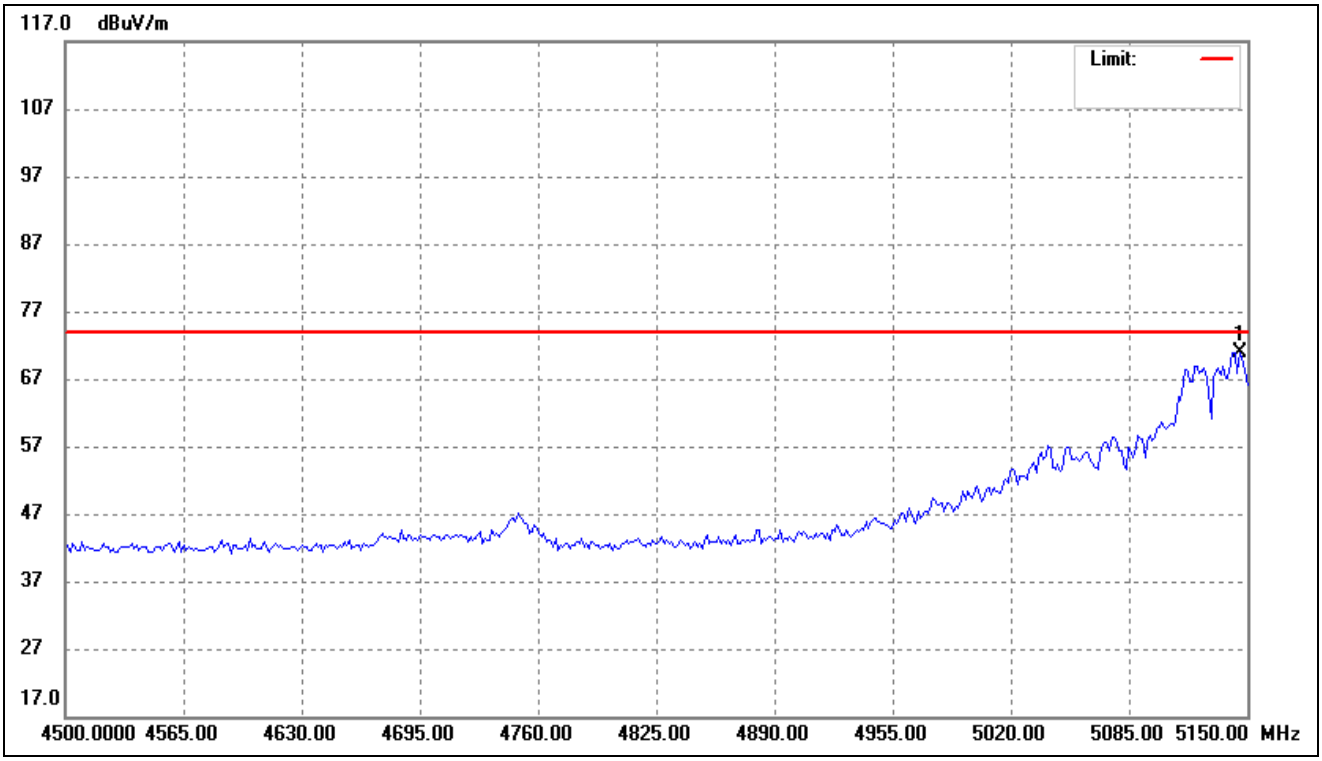

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5146.092	83.42	-12.55	70.87	74.00	-3.13	-	-	peak

802.11ac-VHT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

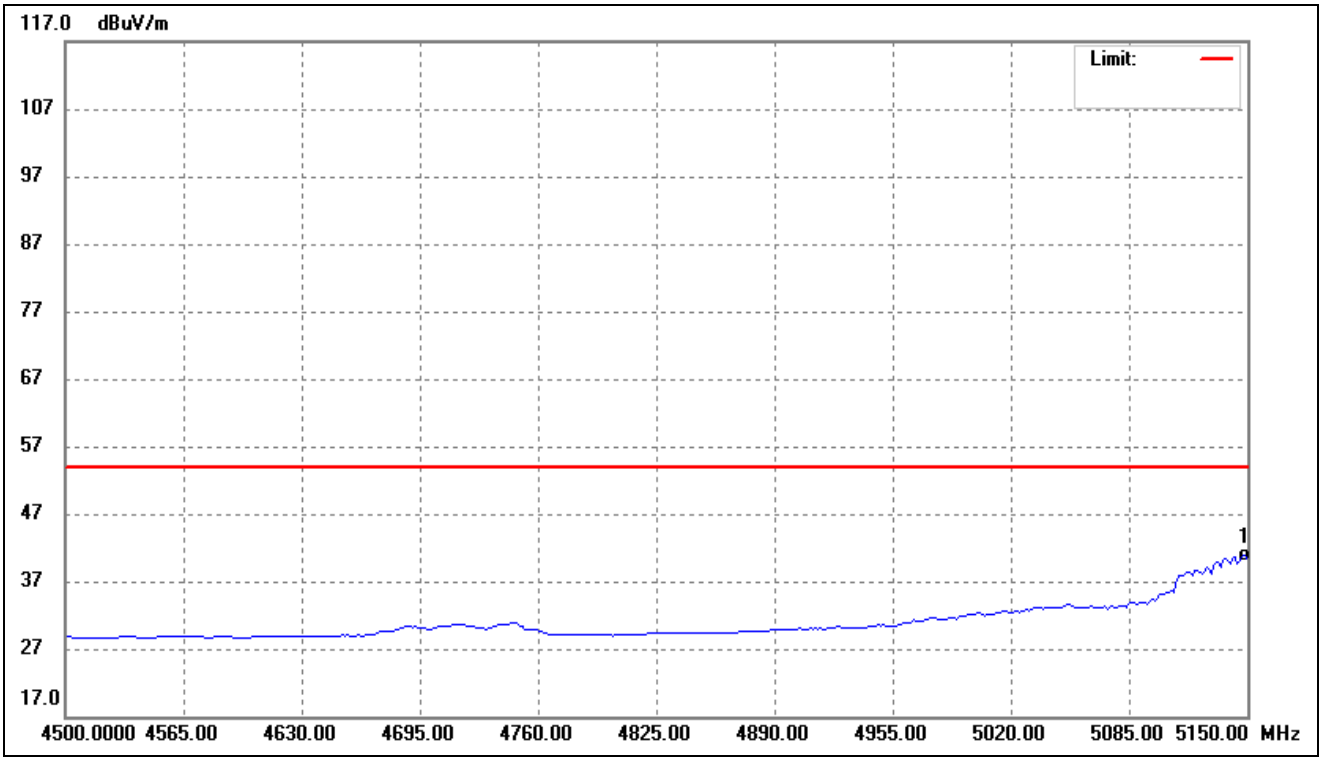

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5148.697	53.34	-12.53	40.81	54.00	-13.19	-	-	AVG

802.11ax-HE80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

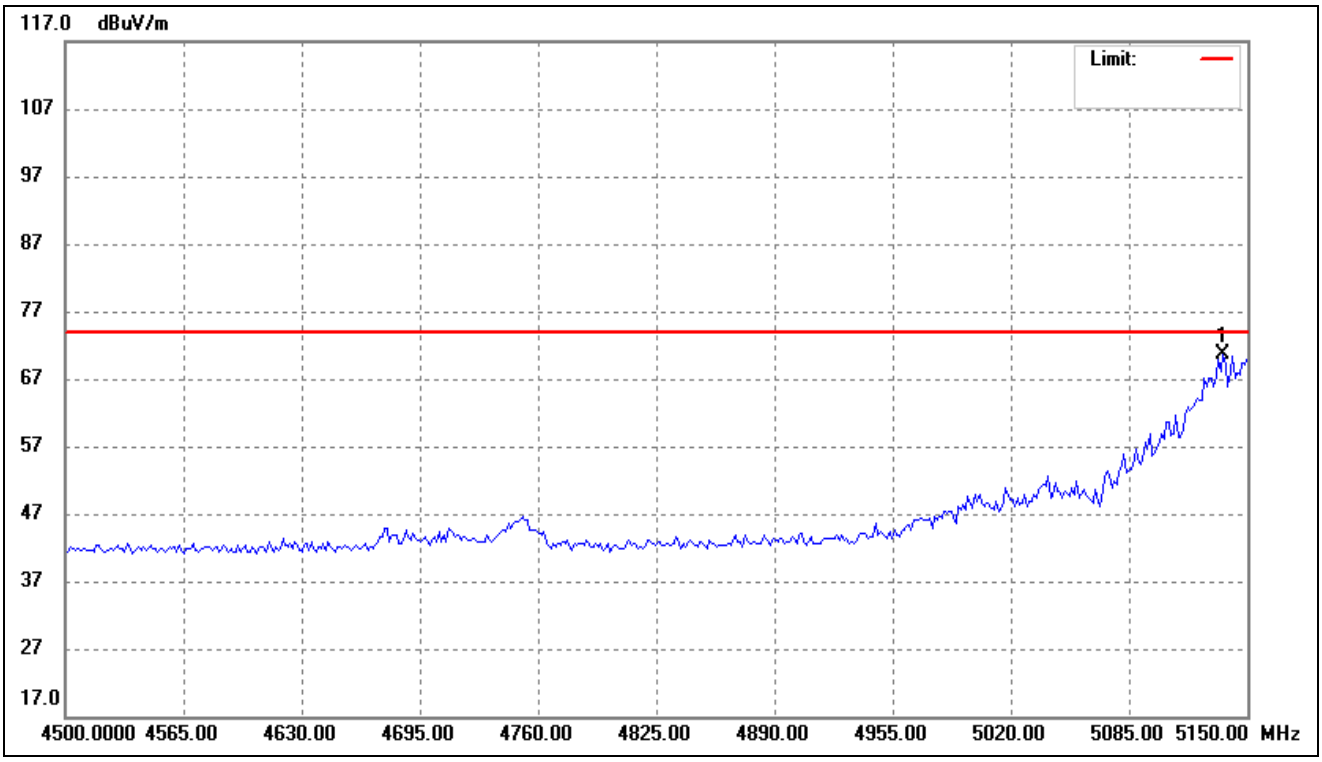

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5136.974	83.34	-12.59	70.75	74.00	-3.25	-	-	peak

802.11ax-HE80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal(worst case)

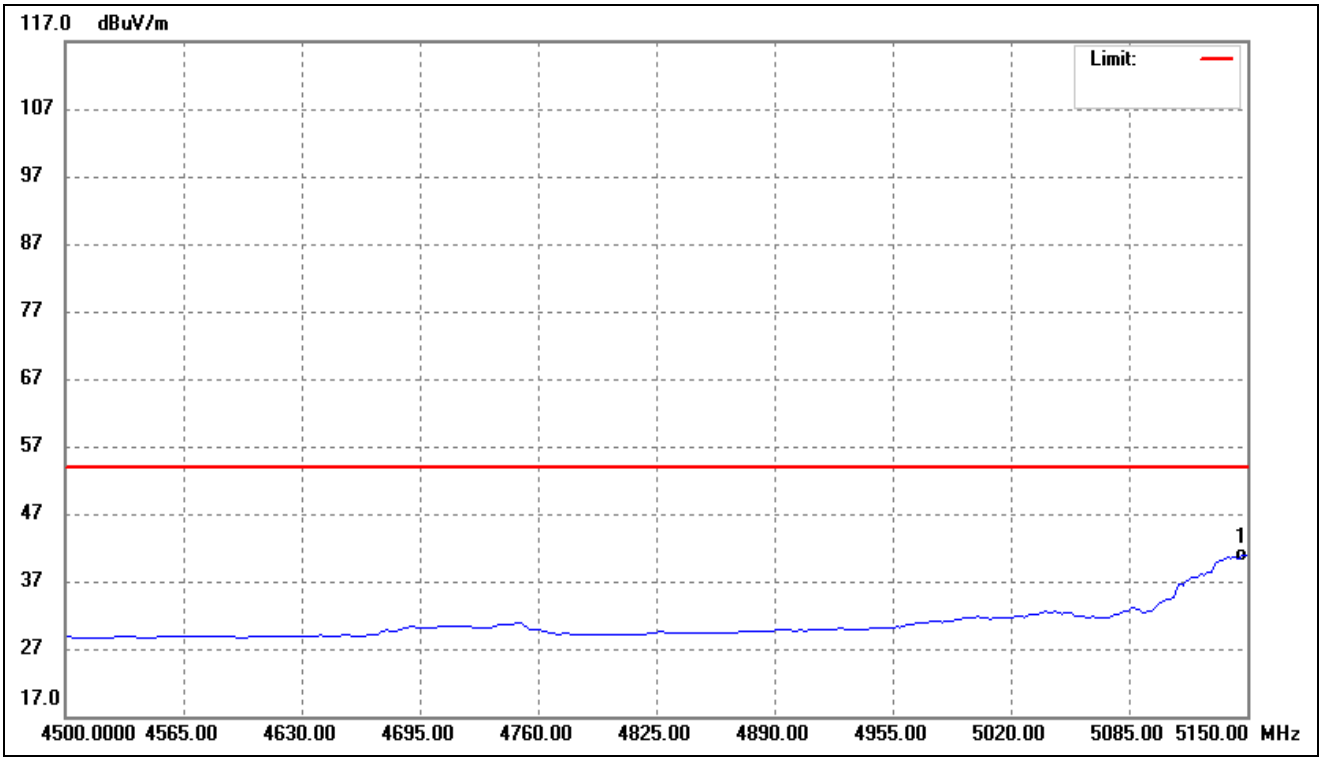

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	5147.395	53.37	-12.54	40.83	54.00	-13.17	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: '-'Means' the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- Antenna 0(worst case)
- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	60.34	8.82	69.16	74	-4.84	H	PK
10360	40.12	8.82	48.94	54	-5.06	H	AV
15540	55.72	9.93	65.65	74	-8.35	H	PK
15540	38.63	9.93	48.56	54	-5.44	H	AV
10360	58.17	9.93	68.10	74	-5.90	V	PK
10360	40.80	9.93	50.73	54	-3.27	V	AV
15540	58.71	-1.64	57.07	74	-16.93	V	PK
15540	40.86	-1.64	39.22	54	-14.78	V	AV
Middle Channel (5200MHz)							
10400	61.51	-5.93	55.58	74	-18.42	H	PK
10400	41.35	-5.93	35.42	54	-18.58	H	AV
15600	59.96	-1.58	58.38	74	-15.62	H	PK
15600	41.43	-1.58	39.85	54	-14.15	H	AV
10400	61.08	-5.93	55.15	74	-18.85	V	PK
10400	39.02	-5.93	33.09	54	-20.91	V	AV
15600	61.08	-1.58	59.5	74	-14.5	V	PK
15600	38.65	-1.58	37.07	54	-16.93	V	AV
High Channel (5240MHz)							
10480	60.88	-5.71	55.17	74	-18.83	H	PK
10480	41.14	-5.71	35.43	54	-18.57	H	AV
15720	61.39	-1.52	59.87	74	-14.13	H	PK
15720	41.72	-1.52	40.2	54	-13.8	H	AV
10480	61.04	-5.71	55.33	74	-18.67	V	PK
10480	41.28	-5.71	35.57	54	-18.43	V	AV
15720	61.09	-1.52	59.57	74	-14.43	V	PK
15720	38.81	-1.52	37.29	54	-16.71	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	60.09	8.82	68.91	74	-5.09	H	PK
11490	41.34	8.82	50.16	54	-3.84	H	AV
17235	58.00	9.93	67.93	74	-6.07	H	PK
17235	40.84	9.93	50.77	54	-3.23	H	AV
11490	58.04	9.93	67.97	74	-6.03	V	PK
11490	40.54	9.93	50.47	54	-3.53	V	AV
17235	56.81	-1.64	55.17	74	-18.83	V	PK
17235	38.16	-1.64	36.52	54	-17.48	V	AV
Middle Channel (5785MHz)							
11570	61.91	-5.93	55.98	74	-18.02	H	PK
11570	38.61	-5.93	32.68	54	-21.32	H	AV
17355	58.24	-1.58	56.66	74	-17.34	H	PK
17355	38.42	-1.58	36.84	54	-17.16	H	AV
11570	59.87	-5.93	53.94	74	-20.06	V	PK
11570	38.66	-5.93	32.73	54	-21.27	V	AV
17355	58.03	-1.58	56.45	74	-17.55	V	PK
17355	38.74	-1.58	37.16	54	-16.84	V	AV
High Channel (5825MHz)							
11650	59.47	-5.71	53.76	74	-20.24	H	PK
11650	41.38	-5.71	35.67	54	-18.33	H	AV
17475	59.97	-1.52	58.45	74	-15.55	H	PK
17475	40.47	-1.52	38.95	54	-15.05	H	AV
11650	60.05	-5.71	54.34	74	-19.66	V	PK
11650	41.45	-5.71	35.74	54	-18.26	V	AV
17475	60.22	-1.52	58.7	74	-15.3	V	PK
17475	40.87	-1.52	39.35	54	-14.65	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-34.21	-27
Highest	Above 5350	-33.11	-27
Note: the data just list the worst cases			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-37.26	-27
	5715 to 5725	-32.36	-17
Highest	5850 to 5860	-23.87	-17
	Above 5860	-35.21	-27
Note: the data just list the worst cases			

- For the frequency band 5.150-5.250GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	61.53	8.82	70.35	74	-3.65	H	PK
10360	43.91	8.82	52.73	54	-1.27	H	AV
10360	58.89	9.93	68.82	74	-5.18	V	PK
10360	40.76	9.93	50.69	54	-3.31	V	AV
Middle Channel (5200MHz)							
10400	58.74	9.93	68.67	74	-5.33	H	PK
10400	39.38	9.93	49.31	54	-4.69	H	AV
10400	57.42	-1.64	55.78	74	-18.22	V	PK
10400	38.86	-1.64	37.22	54	-16.78	V	AV
High Channel (5240MHz)							
10480	60.11	-5.93	54.18	74	-19.82	H	PK
10480	41.38	-5.93	35.45	54	-18.55	H	AV
10480	61.71	-1.58	60.13	74	-13.87	V	PK
10480	40.79	-1.58	39.21	54	-14.79	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	55.59	9.93	65.52	74	-8.48	H	PK
11490	38.66	9.93	48.59	54	-5.41	H	AV
11490	58.46	9.93	68.39	74	-5.61	V	PK
11490	38.29	9.93	48.22	54	-5.78	V	AV
Middle Channel (5785MHz)							
11570	61.35	-1.58	59.77	74	-14.23	H	PK
11570	39.54	-1.58	37.96	54	-16.04	H	AV
11570	61.98	-5.93	56.05	74	-17.95	V	PK
11570	39.32	-5.93	33.39	54	-20.61	V	AV
High Channel (5825MHz)							
11650	59.45	-1.58	57.87	74	-16.13	H	PK
11650	40.29	-1.58	38.71	54	-15.29	H	AV
11650	58.51	-5.93	52.58	74	-21.42	V	PK
11650	40.85	-5.93	34.92	54	-19.08	V	AV

➢ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-35.21	-27
Highest	Above 5350	-41.11	-27
Note: the data just list the worst cases			

➢ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-34.95	-27
	5715 to 5725	-35.21	-17
Highest	5850 to 5860	-31.22	-17
	Above 5860	-35.55	-27
Note: the data just list the worst cases			

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5190MHz)							
10380	58.51	8.82	67.33	74	-6.67	H	PK
10380	42.32	8.82	51.14	54	-2.86	H	AV
10380	57.84	9.93	67.77	74	-6.23	V	PK
10380	40.79	9.93	50.72	54	-3.28	V	AV
High Channel (5230MHz)							
10460	56.62	9.93	66.55	74	-7.45	H	PK
10460	41.98	9.93	51.91	54	-2.09	H	AV
10460	58.85	-1.64	57.21	74	-16.79	V	PK
10460	40.83	-1.64	39.19	54	-14.81	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5755MHz)							
11510	59.98	8.82	68.8	74	-5.2	H	PK
11510	40.36	8.82	49.18	54	-4.82	H	AV
11510	58.90	9.93	68.83	74	-5.17	V	PK
11510	41.75	9.93	51.68	54	-2.32	V	AV
High Channel (5795MHz)							
11590	56.96	9.93	66.89	74	-7.11	H	PK
11590	40.74	9.93	50.67	54	-3.33	H	AV
11590	58.87	-1.64	57.23	74	-16.77	V	PK
11590	39.29	-1.64	37.65	54	-16.35	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.21	-27
Highest	Above 5350	-35.98	-27
Note: the data just list the worst cases			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-37.23	-27
	5715 to 5725	-37.66	-17
Highest	5850 to 5860	-32.11	-17
	Above 5860	-34.69	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VHT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	60.64	8.82	69.46	74	-4.54	H	PK
10360	42.37	8.82	51.19	54	-2.81	H	AV
10360	58.73	9.93	68.66	74	-5.34	V	PK
10360	40.75	9.93	50.68	54	-3.32	V	AV
Middle Channel (5200MHz)							
10400	58.19	8.82	67.01	74	-6.99	H	PK
10400	42.94	8.82	51.76	54	-2.24	H	AV
10400	57.07	9.93	67.00	74	-7.00	V	PK
10400	38.46	9.93	48.39	54	-5.61	V	AV
High Channel (5240MHz)							
10480	59.11	8.82	67.93	74	-6.07	H	PK
10480	42.42	8.82	51.24	54	-2.76	H	AV
10480	57.05	9.93	66.98	74	-7.02	V	PK
10480	38.06	9.93	47.99	54	-6.01	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	58.85	8.82	67.67	74	-6.33	H	PK
11490	40.53	8.82	49.35	54	-4.65	H	AV
11490	58.70	9.93	68.63	74	-5.37	V	PK
11490	41.11	9.93	51.04	54	-2.96	V	AV
Middle Channel (5785MHz)							
11570	58.2	8.82	67.02	74	-6.98	H	PK
11570	40.33	8.82	49.15	54	-4.85	H	AV
11570	55.15	9.93	65.08	74	-8.92	V	PK
11570	41.08	9.93	51.01	54	-2.99	V	AV
High Channel (5825MHz)							
11650	61.79	8.82	70.61	74	-3.39	H	PK
11650	42.82	8.82	51.64	54	-2.36	H	AV
11650	57.50	9.93	67.43	74	-6.57	V	PK
11650	38.27	9.93	48.20	54	-5.80	V	AV

➢ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.32	-27
Highest	Above 5350	-40.51	-27
Note: the data just list the worst cases			

➢ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-34.21	-27
	5715 to 5725	-36.37	-17
Highest	5850 to 5860	-32.47	-17
	Above 5860	-35.33	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VHT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	60.78	8.82	69.6	74	-4.4	H	PK
10380	41.33	8.82	50.15	54	-3.85	H	AV
10380	55.46	9.93	65.39	74	-8.61	V	PK
10380	40.93	9.93	50.86	54	-3.14	V	AV
High Channel (5230MHz)							
10460	58.62	9.93	68.55	74	-5.45	H	PK
10460	40.00	9.93	49.93	54	-4.07	H	AV
10460	55.88	-1.64	54.24	74	-19.76	V	PK
10460	39.74	-1.64	38.1	54	-15.9	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	61.46	-5.93	55.53	74	-18.47	H	PK
11510	40.51	-5.93	34.58	54	-19.42	H	AV
11510	58.93	-1.58	57.35	74	-16.65	V	PK
11510	41.61	-1.58	40.03	54	-13.97	V	AV
High Channel (5795MHz)							
11590	58.42	-5.93	52.49	74	-21.51	H	PK
11590	41.73	-5.93	35.8	54	-18.2	H	AV
11590	60.05	-1.58	58.47	74	-15.53	V	PK
11590	40.54	-1.58	38.96	54	-15.04	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-35.21	-27
Highest	Above 5350	-34.36	-27
Note: the data just list the worst cases			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-37.33	-27
	5715 to 5725	-34.21	-17
Highest	5850 to 5860	-35.69	-17
	Above 5860	-34.42	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VHT80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	60.46	8.82	69.28	74	-4.72	H	PK
10420	42.17	8.82	50.99	54	-3.01	H	AV
10420	55.77	9.93	65.70	74	-8.30	H	PK
10420	38.32	9.93	48.25	54	-5.75	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	58.43	9.93	68.36	74	-5.64	H	PK
11550	41.45	9.93	51.38	54	-2.62	H	AV
11550	55.21	-1.64	53.57	74	-20.43	V	PK
11550	40.32	-1.64	38.68	54	-15.32	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.21	-27
Highest	Above 5350	-35.63	-27
Note: the data just list the worst cases			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-37.21	-27
	5715 to 5725	-35.33	-17
Highest	5850 to 5860	-31.25	-17
	Above 5860	-36.33	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ax HE20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	59.88	8.82	68.7	74	-5.3	H	PK
10360	41.87	8.82	50.69	54	-3.31	H	AV
10360	57.13	9.93	67.06	74	-6.94	V	PK
10360	40.44	9.93	50.37	54	-3.63	V	AV
Middle Channel (5200MHz)							
10400	58.09	9.93	68.02	74	-5.98	H	PK
10400	41.45	9.93	51.38	54	-2.62	H	AV
10400	55.6	-1.64	53.96	74	-20.04	V	PK
10400	38.41	-1.64	36.77	54	-17.23	V	AV
High Channel (5240MHz)							
10480	60.62	-5.93	54.69	74	-19.31	H	PK
10480	39.99	-5.93	34.06	54	-19.94	H	AV
10480	58.73	-1.58	57.15	74	-16.85	V	PK
10480	41.42	-1.58	39.84	54	-14.16	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	60.79	-5.93	54.86	74	-19.14	H	PK
11490	40.78	-5.93	34.85	54	-19.15	H	AV
11490	60.47	-1.58	58.89	74	-15.11	V	PK
11490	38.52	-1.58	36.94	54	-17.06	V	AV
Middle Channel (5785MHz)							
11570	61.11	-5.71	55.4	74	-18.6	H	PK
11570	41.32	-5.71	35.61	54	-18.39	H	AV
11570	60.26	-1.52	58.74	74	-15.26	V	PK
11570	39.29	-1.52	37.77	54	-16.23	V	AV
High Channel (5825MHz)							
11650	60.03	-5.71	54.32	74	-19.68	H	PK
11650	40.45	-5.71	34.74	54	-19.26	H	AV
11650	59.73	-1.52	58.21	74	-15.79	V	PK
11650	41.24	-1.52	39.72	54	-14.28	V	AV

➢ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-34.32	-27
Highest	Above 5350	-45.21	-27
Note: the data just list the worst cases			

➢ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-28.33	-27
	5715 to 5725	-34.36	-17
Highest	5850 to 5860	-32.55	-17
	Above 5860	-33.64	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ax HE40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	58.16	8.82	66.98	74	-7.02	H	PK
10380	42.41	8.82	51.23	54	-2.77	H	AV
10380	55.10	9.93	65.03	74	-8.97	V	PK
10380	40.21	9.93	50.14	54	-3.86	V	AV
High Channel (5230MHz)							
10460	57.90	9.93	67.83	74	-6.17	H	PK
10460	38.61	9.93	48.54	54	-5.46	H	AV
10460	55.14	-1.64	53.5	74	-20.5	V	PK
10460	40.03	-1.64	38.39	54	-15.61	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	58.55	-5.93	52.62	74	-21.38	H	PK
11510	41.72	-5.93	35.79	54	-18.21	H	AV
11510	60.86	-1.58	59.28	74	-14.72	V	PK
11510	40.09	-1.58	38.51	54	-15.49	V	AV
High Channel (5795MHz)							
11590	61.95	-5.93	56.02	74	-17.98	H	PK
11590	39.51	-5.93	33.58	54	-20.42	H	AV
11590	58.21	-1.58	56.63	74	-17.37	V	PK
11590	40.61	-1.58	39.03	54	-14.97	V	AV

➢ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.36	-27
Highest	Above 5350	-34.21	-27
Note: the data just list the worst cases			

➢ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-35.36	-27
	5715 to 5725	-33.14	-17
Highest	5850 to 5860	-35.33	-17
	Above 5860	-31.21	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ax HE80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	58.79	8.82	67.61	74	-6.39	H	PK
10420	41.75	8.82	50.57	54	-3.43	H	AV
10420	55.21	9.93	65.14	74	-8.86	H	PK
10420	39.86	9.93	49.79	54	-4.21	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	57.67	9.93	67.60	74	-6.40	H	PK
11550	41.21	9.93	51.14	54	-2.86	H	AV
11550	56.46	-1.64	54.82	74	-19.18	V	PK
11550	40.58	-1.64	38.94	54	-15.06	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-32.33	-27
Highest	Above 5350	-32.25	-27
Note: the data just list the worst cases			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-35.33	-27
	5715 to 5725	-36.34	-17
Highest	5850 to 5860	-38.33	-17
	Above 5860	-36.12	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to 40GHz, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.
The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.
The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

10 Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.
The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

10.2 Basic Test Setup Block Diagram

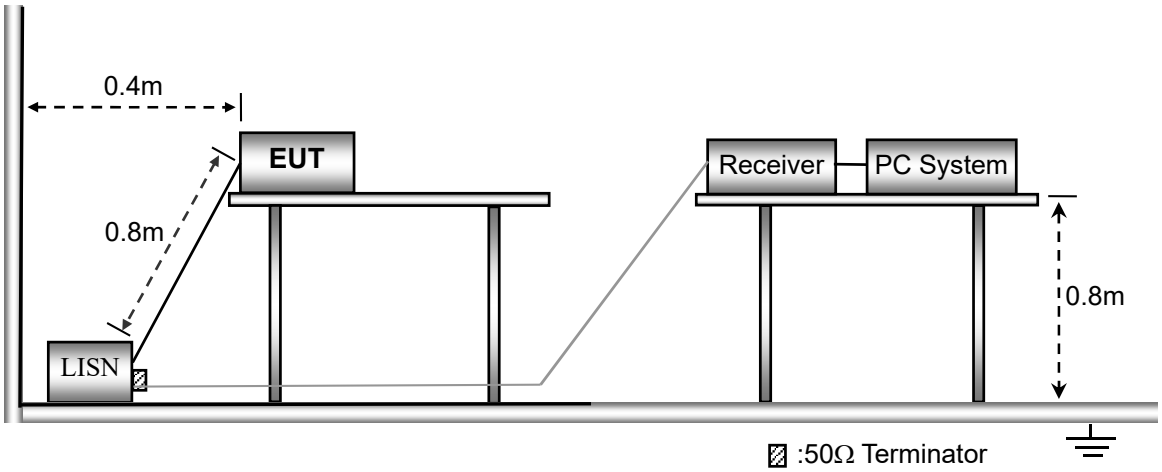

10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150kHz
Stop Frequency 30MHz
Sweep Speed ..... Auto
IF Bandwidth..... 10kHz
Quasi-Peak Adapter Bandwidth 9kHz
Quasi-Peak Adapter Mode ..... Normal

10.4 Summary of Test Results/Plots

Not applicable

APPENDIX SUMMARY

Project No.	WTX25X03058750W	Test Engineer	Timi Huang
Start date	2025/3/18	Finish date	2025/3/20
Temperature	24℃	Humidity	32%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant

APPENDIX A

Power Spectral Density					
U-NII-1:5150-5250MHz					
Operating mode	Test Channel	ANT 0 dBm/MHz	ANT 1 dBm/MHz	Total dBm/MHz	Limit (dBm/MHz)
802.11a	5180	1.10	0.98	/	11
	5200	1.48	1.36	/	11
	5240	2.07	1.23	/	11
802.11n-HT20	5180	-0.09	-0.30	2.82	11
	5200	0.29	0.06	3.19	11
	5240	0.78	0.01	3.42	11
802.11n-HT40	5190	-4.07	-4.43	-1.24	11
	5230	-4.68	-4.43	-1.54	11
802.11ac-VHT20	5180	-0.27	-0.26	2.75	11
	5200	0.18	0.05	3.13	11
	5240	0.87	0.03	3.48	11
802.11ac-VHT40	5190	-4.32	-4.81	-1.55	11
	5230	-4.80	-4.46	-1.62	11
802.11ac-VHT80	5210	-9.15	-9.52	-6.32	11
802.11ax-HE20	5180	-0.71	-0.93	2.19	11
	5200	-0.36	-0.57	2.55	11
	5240	-0.66	-0.64	2.36	11
802.11ax-HE40	5190	-4.36	-4.78	-1.55	11
	5230	-4.89	-4.49	-1.68	11
802.11ax-HE80	5210	-8.41	-8.88	-5.63	11

Power Spectral Density							
U-NII-3: 5725-5850MHz							
Operating mode	Test Channel	ANT 0 dBm/300kHz	ANT 1 dBm/300kHz	Factor	ANT 0 dBm/500kHz*	ANT 1 dBm/500kHz*	Limit dBm/500kHz
802.11a	5745	-4.26	-4.26	2.22	-2.04	-2.04	30
	5785	-4.03	-4.26	2.22	-1.81	-2.04	30
	5825	-3.58	-4.53	2.22	-1.36	-2.31	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22							

Power Spectral Density
U-NII-3: 5725-5850MHz

Operating mode	Test Channel	ANT 0 dBm/300kHz	ANT 1 dBm/300kHz	Factor	Total dBm/500kHz*	Limit dBm/500kHz
802.11n-HT20	5745	-5.17	-5.29	2.22	-2.22	30
	5785	-5.05	-5.24	2.22	-2.13	30
	5825	-5.33	-5.42	2.22	-2.36	30
802.11n-HT40	5755	-9.26	-9.43	2.22	-6.33	30
	5795	-9.52	-9.37	2.22	-6.43	30
802.11ac-VHT20	5745	-5.19	-5.33	2.22	-2.25	30
	5785	-4.97	-5.32	2.22	-2.13	30
	5825	-5.52	-5.58	2.22	-2.54	30
802.11ac-VHT40	5755	-9.43	-9.42	2.22	-6.41	30
	5795	-9.68	-9.43	2.22	-6.54	30
802.11ac-VHT80	5775	-13.22	-13.62	2.22	-10.41	30
802.11ax-HE20	5745	-5.77	-5.62	2.22	-2.68	30
	5785	-5.33	-5.81	2.22	-2.55	30
	5825	-5.88	-5.99	2.22	-2.92	30
802.11ax-HE40	5755	-9.32	-9.63	2.22	-6.46	30
	5795	-9.66	-9.64	2.22	-6.64	30
802.11ax-HE80	5775	-12.84	-13.31	2.22	-10.06	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22						

ANT 0

5150-5250MHz

802.11a-Low	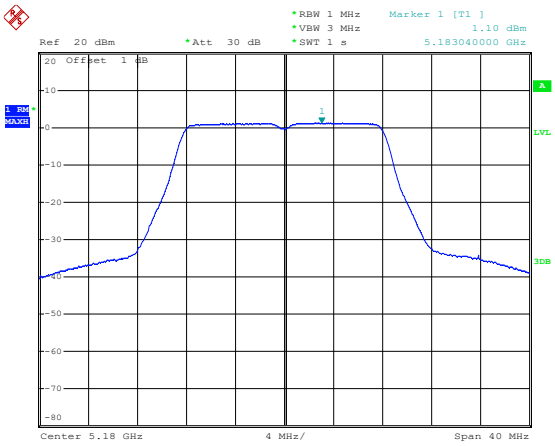
802.11a-Middle	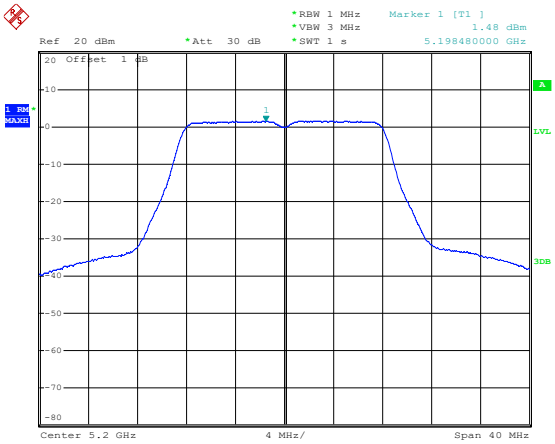
802.11a-High	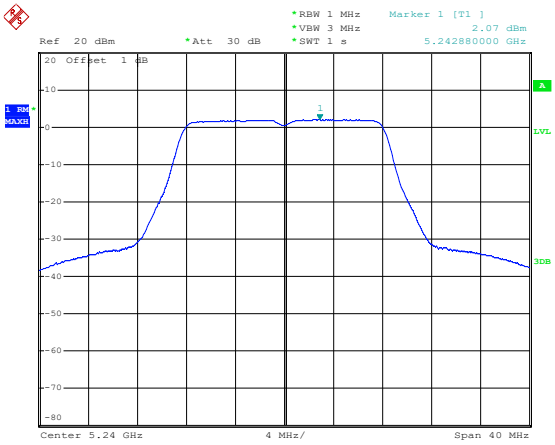

802.11n-HT20-Low	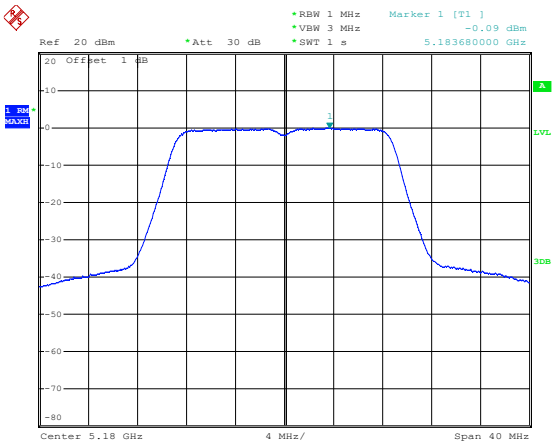
802.11n-HT20-Middle	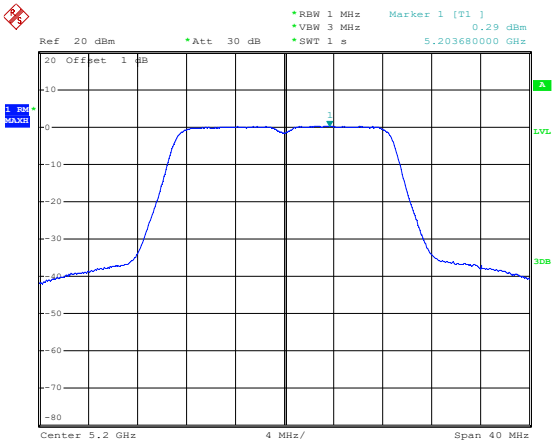
802.11n-HT20-High	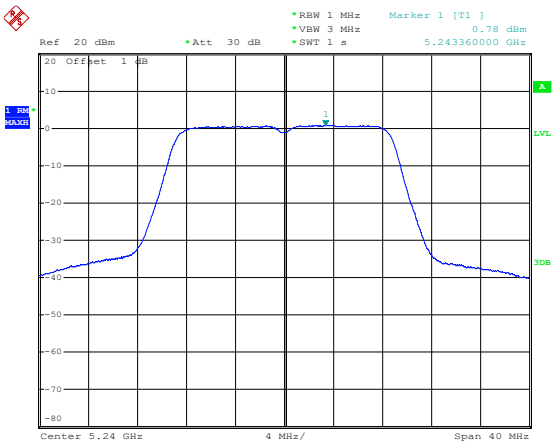

802.11n-HT40-Low	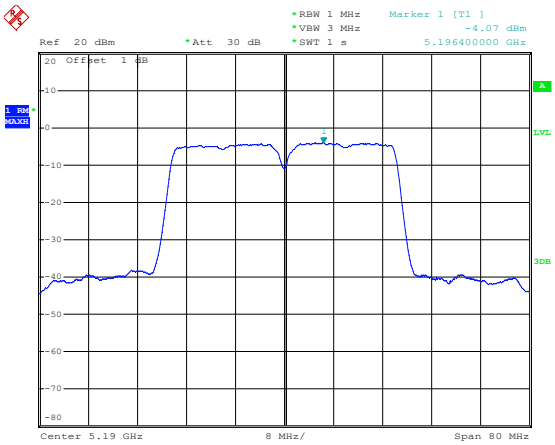 Date: 19.MAR.2025 10:43:14
802.11n-HT40-High	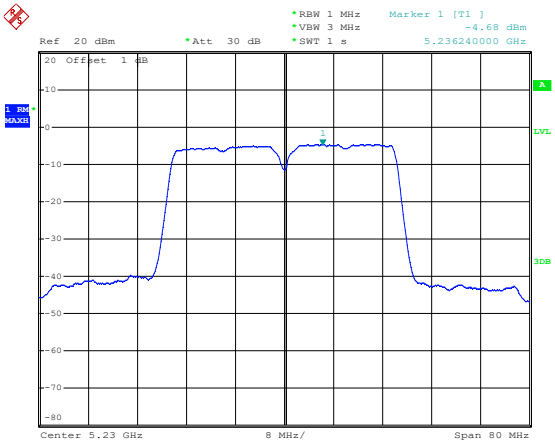 Date: 19.MAR.2025 10:42:39
802.11ac-VHT20-Low	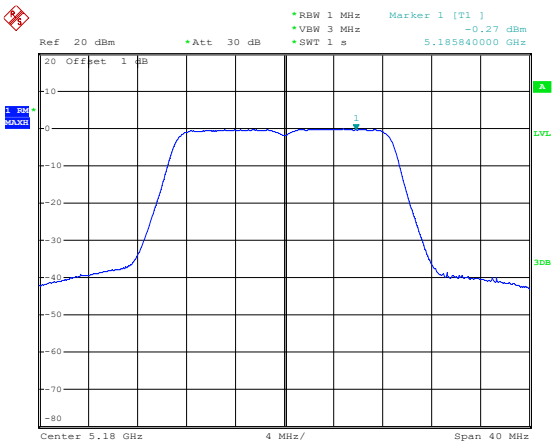 Date: 19.MAR.2025 10:45:35

802.11ac-VHT20-Middle	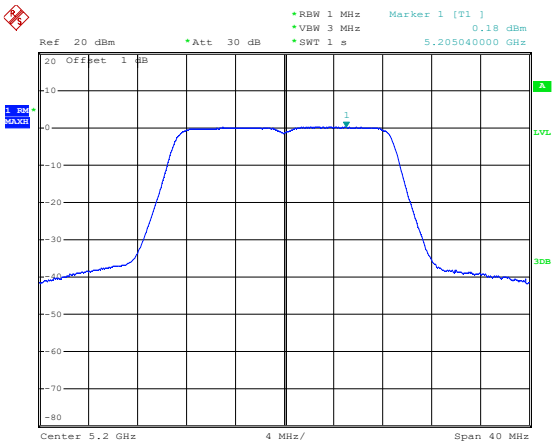
802.11ac-VHT20-High	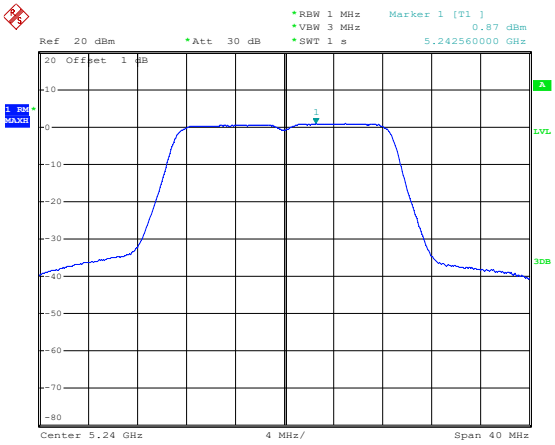
802.11ac-VHT40-Low	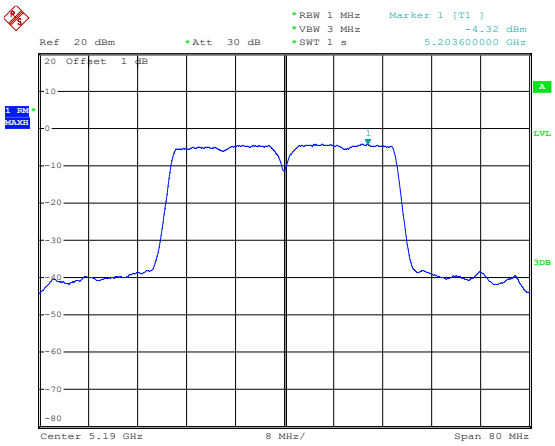

802.11ac-VHT40-High	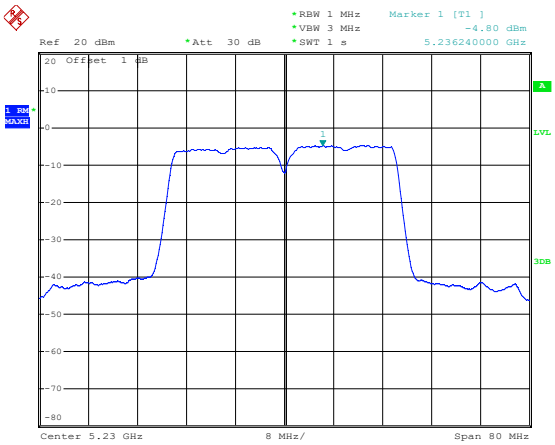 Date: 19.MAR.2025 10:42:03
802.11ac-VHT80	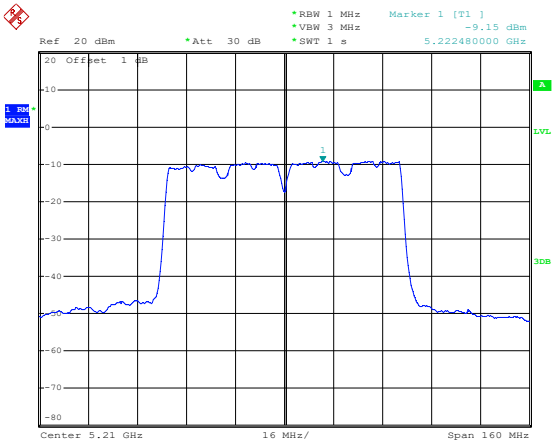 Date: 19.MAR.2025 10:39:45
802.11ax-HE20-Low	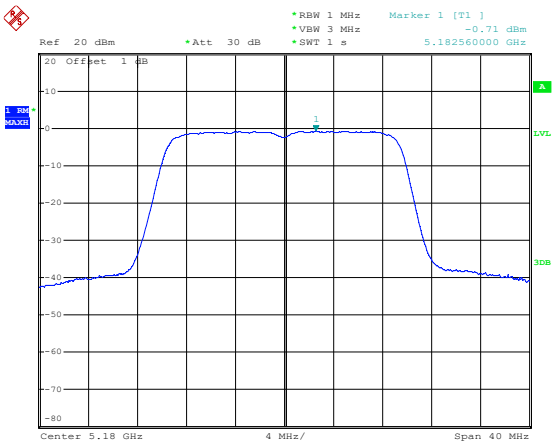 Date: 19.MAR.2025 10:45:03

802.11ax-HE20-Middle	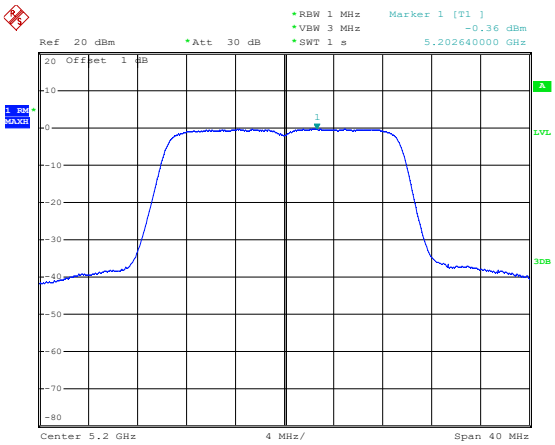 Date: 19.MAR.2025 10:44:37
802.11ax-HE20-High	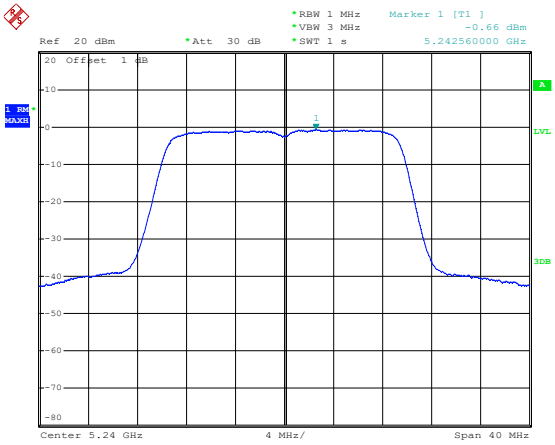 Date: 19.MAR.2025 10:44:08
802.11ax-HE40-Low	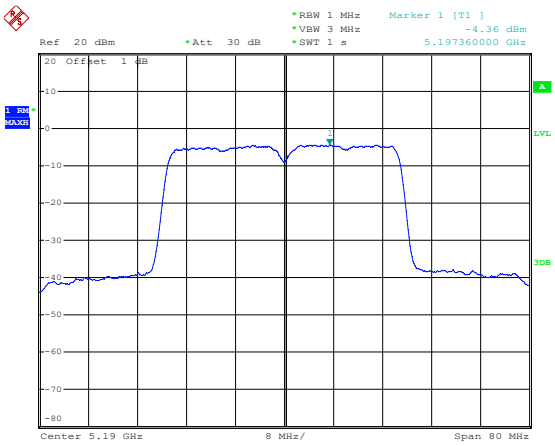 Date: 19.MAR.2025 10:41:00

802.11ax-HE40-High	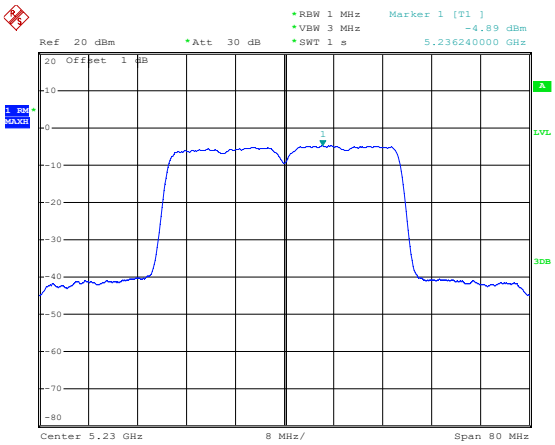 Date: 19.MAR.2025 10:40:25
802.11ax-HE80	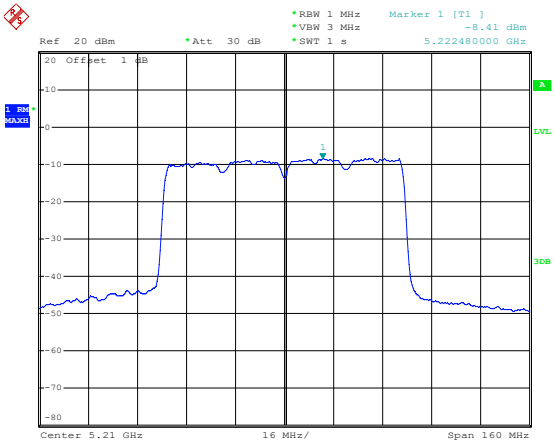 Date: 19.MAR.2025 10:39:15

5725-5850MHz

802.11a-Low	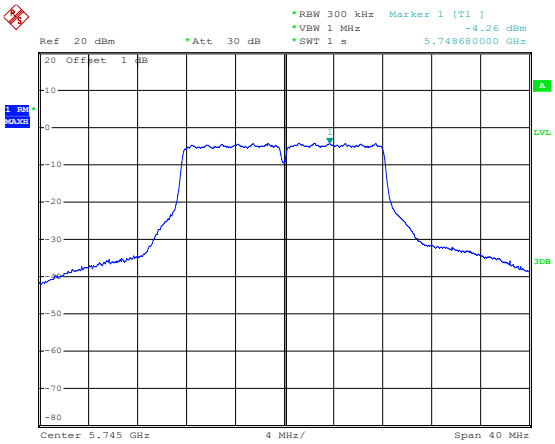
802.11a-Middle	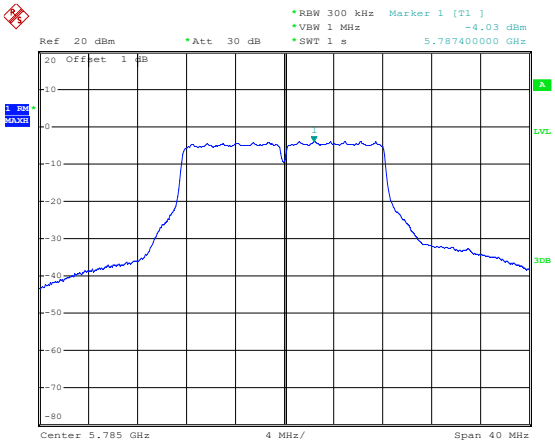
802.11a-High	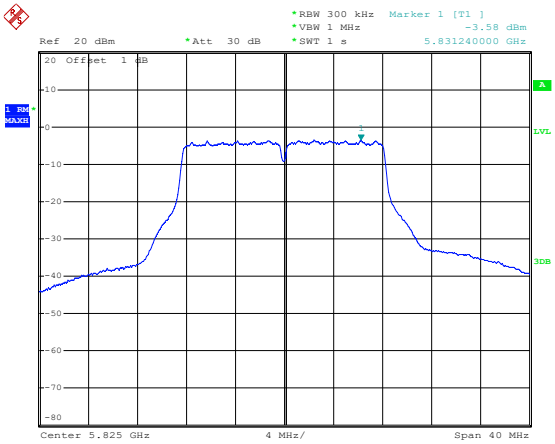

802.11n-HT20-Low	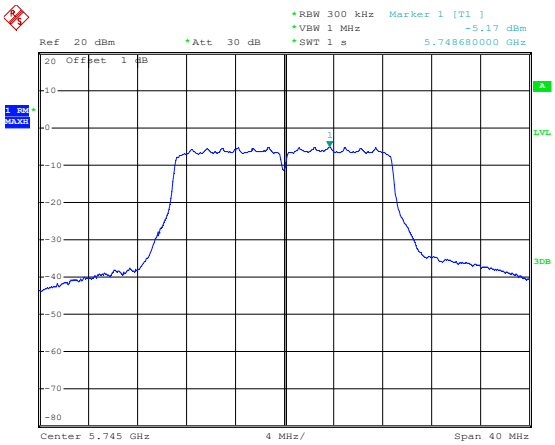
802.11n-HT20-Middle	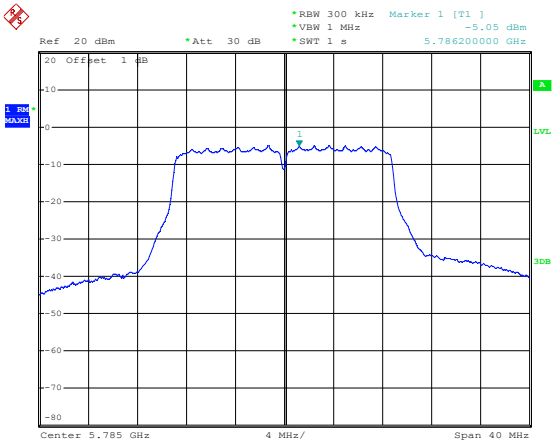
802.11n-HT20-High	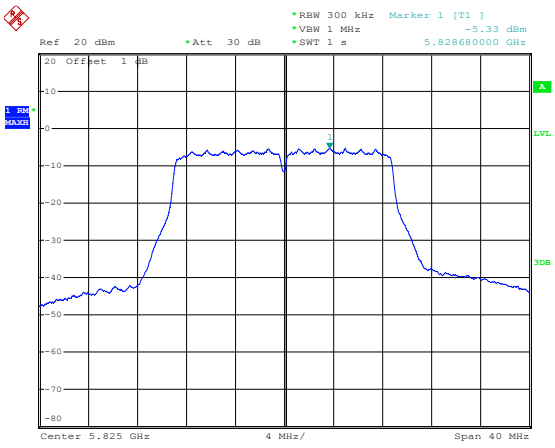

802.11n-HT40-Low	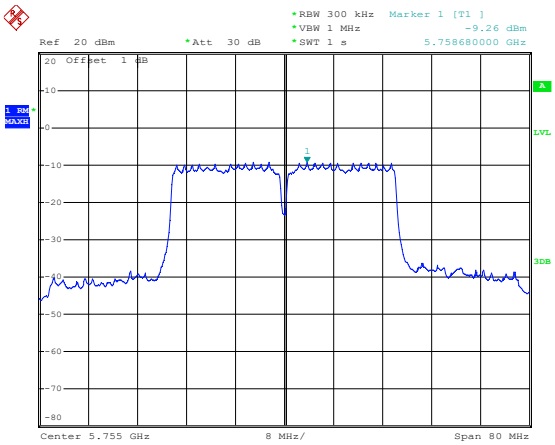
802.11n-HT40-High	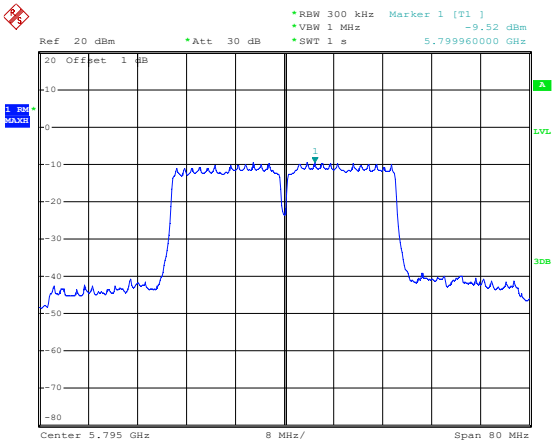
802.11ac-VHT20-Low	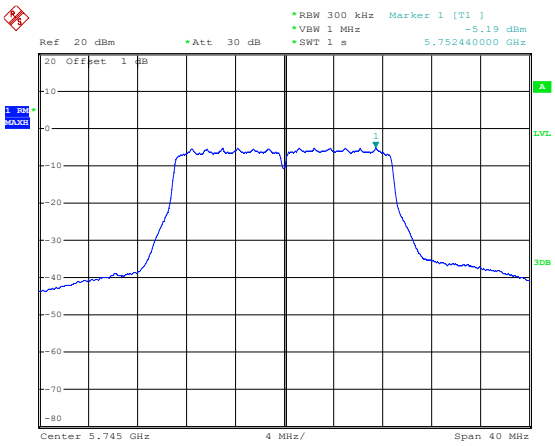

802.11ac-VHT20-Middle	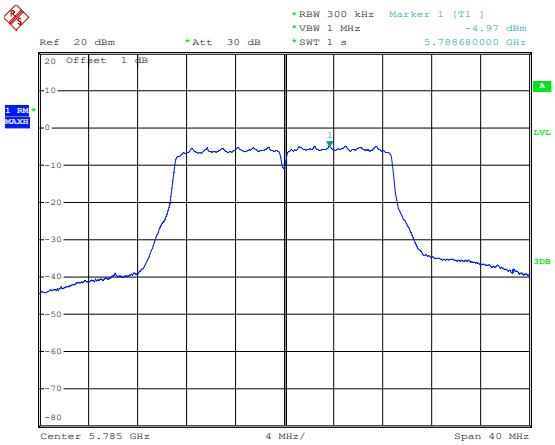
802.11ac-VHT20-High	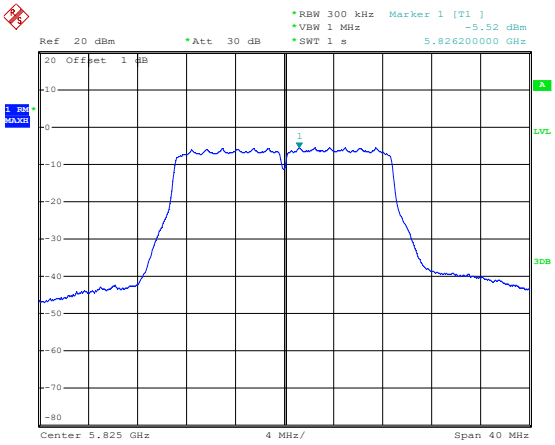
802.11ac-VHT40-Low	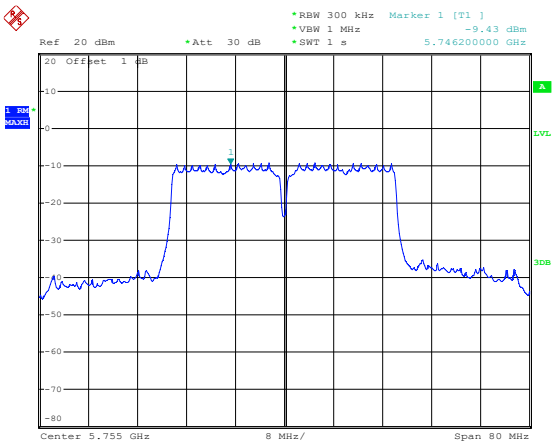

802.11ac-VHT40-High	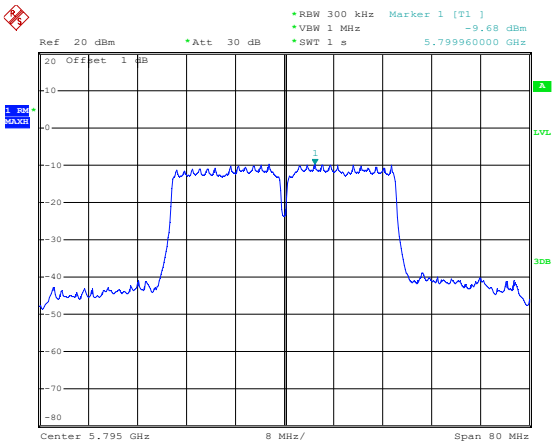 Date: 19.MAR.2025 14:50:44
802.11ac-VHT80	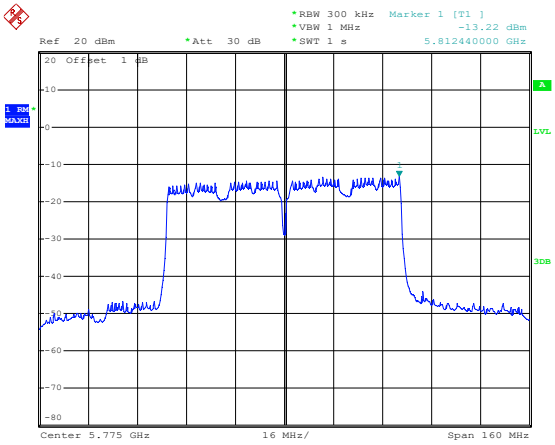 Date: 19.MAR.2025 14:48:14
802.11ax-HE20-Low	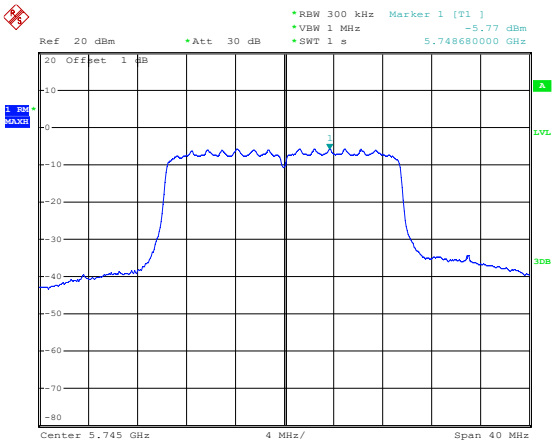 Date: 19.MAR.2025 14:53:17

802.11ax-HE20-Middle	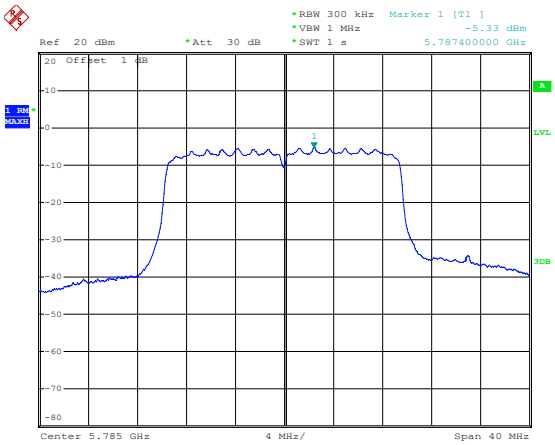 Date: 19.MAR.2025 14:52:50
802.11ax-HE20-High	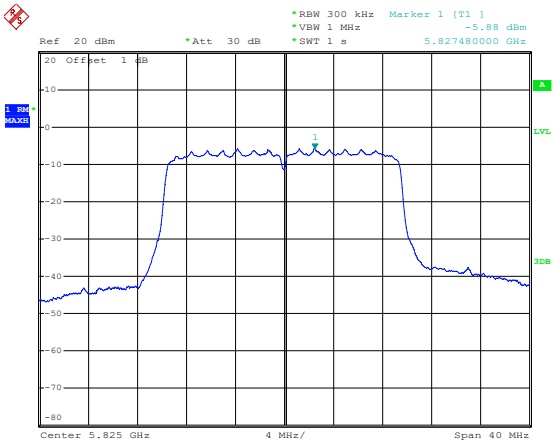 Date: 19.MAR.2025 14:52:24
802.11ax-HE40-Low	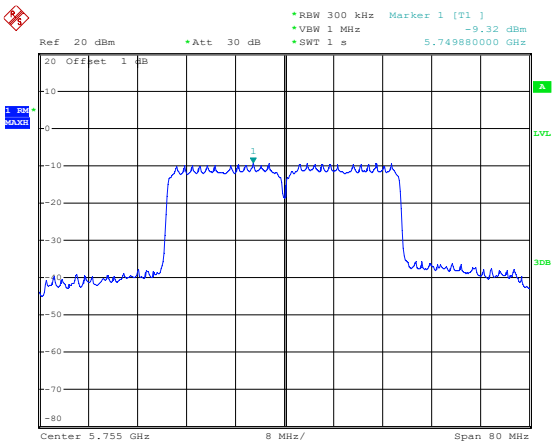 Date: 19.MAR.2025 14:49:31

802.11ax-HE40-High	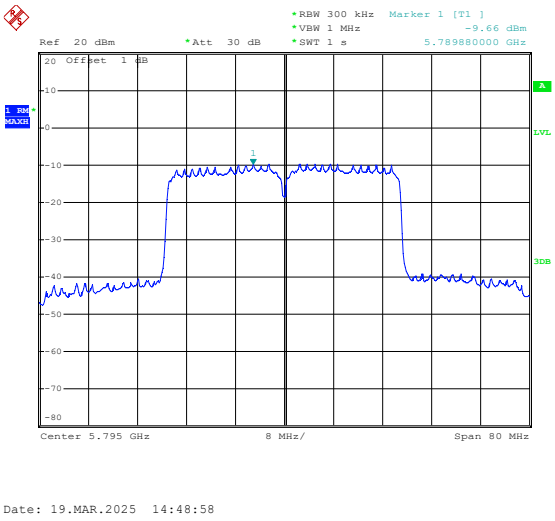
802.11ax-HE80	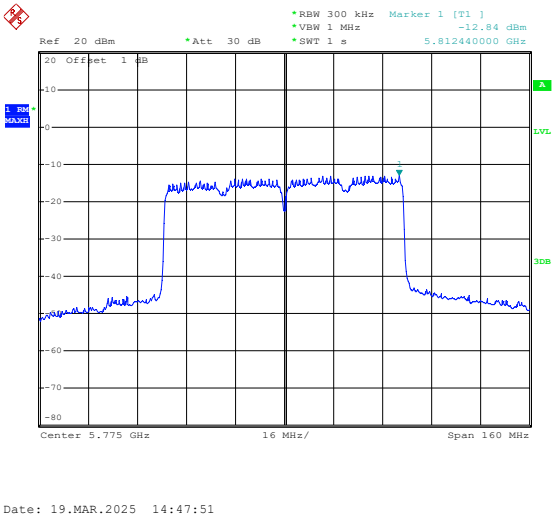

ANT 1

5150-5250MHz

802.11a-Low	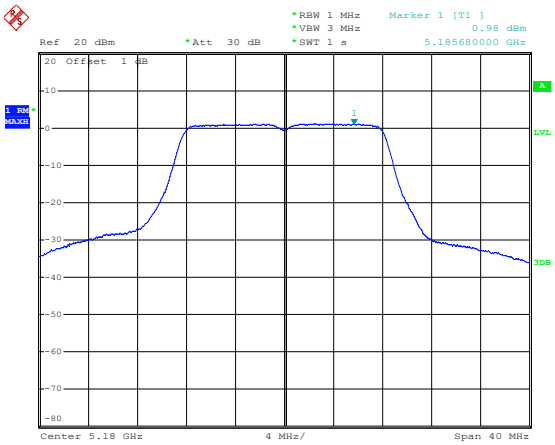 Date: 20.MAR.2025 10:00:43
802.11a-Middle	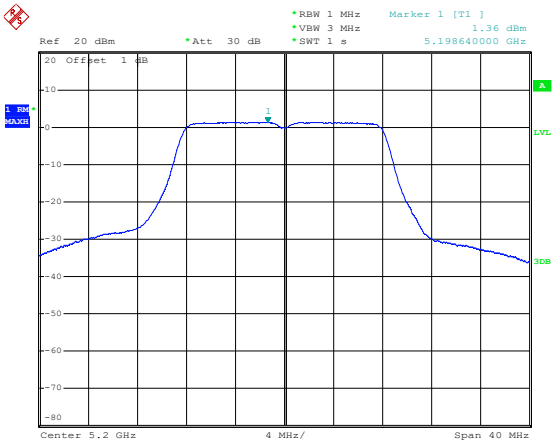 Date: 20.MAR.2025 10:01:08
802.11a-High	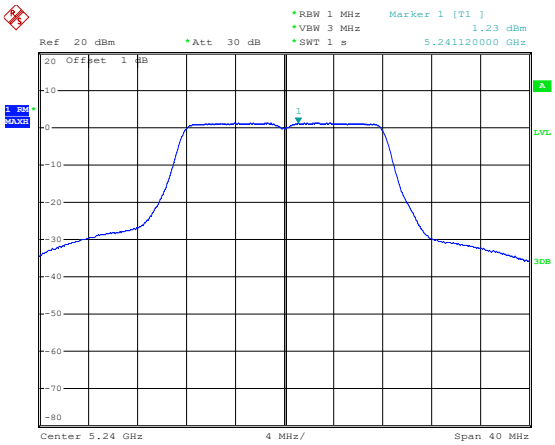 Date: 20.MAR.2025 10:01:31

802.11n-HT20-Low	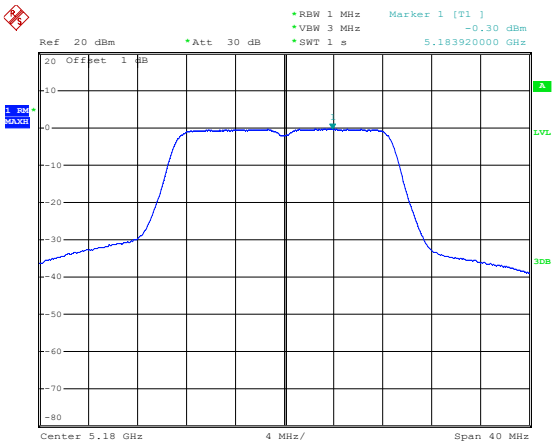
802.11n-HT20-Middle	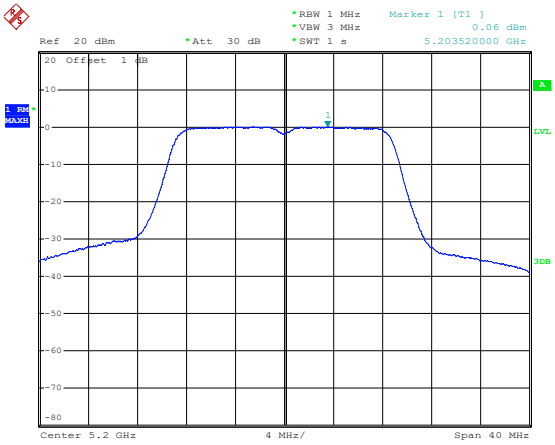
802.11n-HT20-High	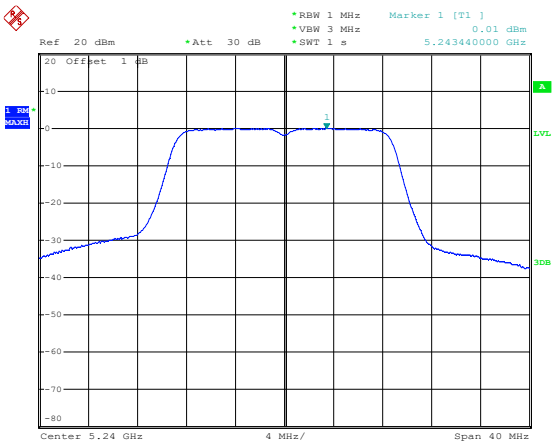

802.11n-HT40-Low	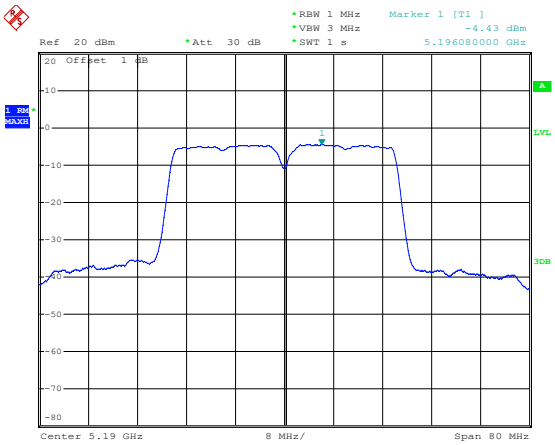 Date: 20.MAR.2025 09:56:26
802.11n-HT40-High	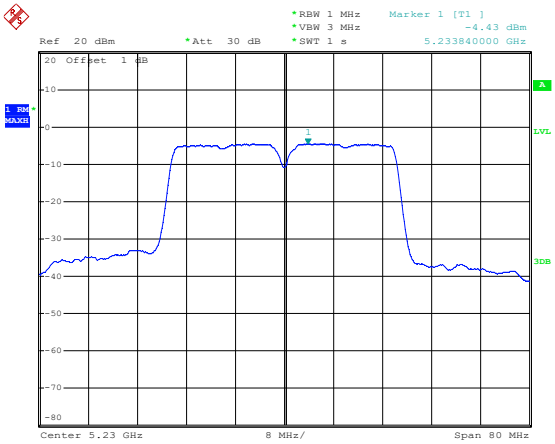 Date: 20.MAR.2025 09:55:57
802.11ac-VHT20-Low	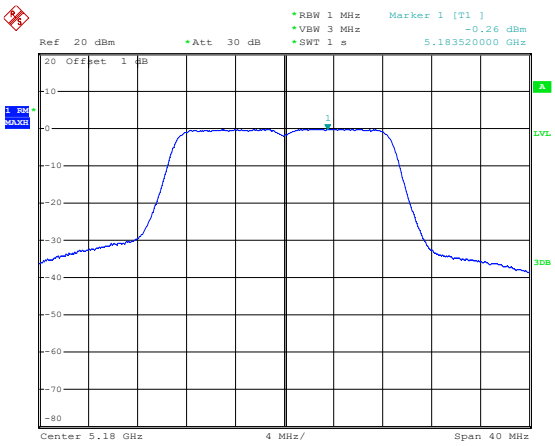 Date: 20.MAR.2025 09:58:18

802.11ac-VHT20-Middle	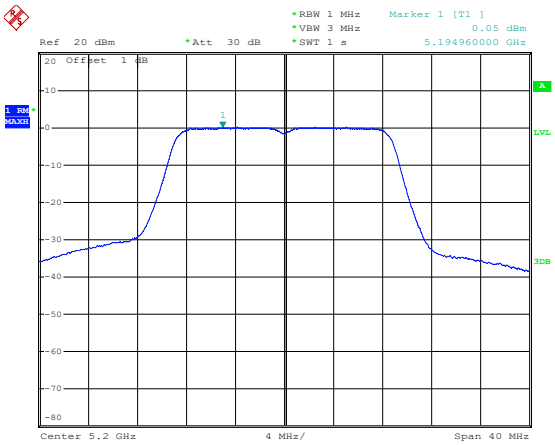 Date: 20.MAR.2025 09:58:43
802.11ac-VHT20-High	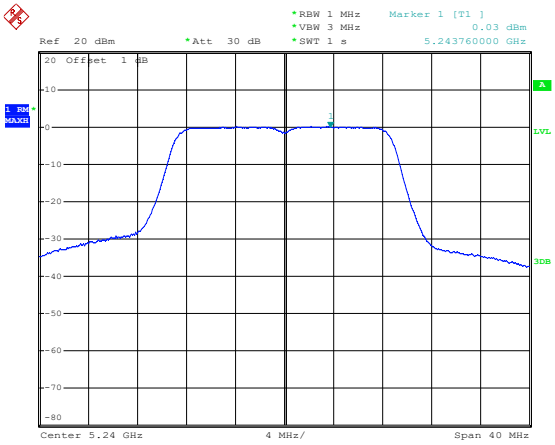 Date: 20.MAR.2025 09:59:08
802.11ac-VHT40-Low	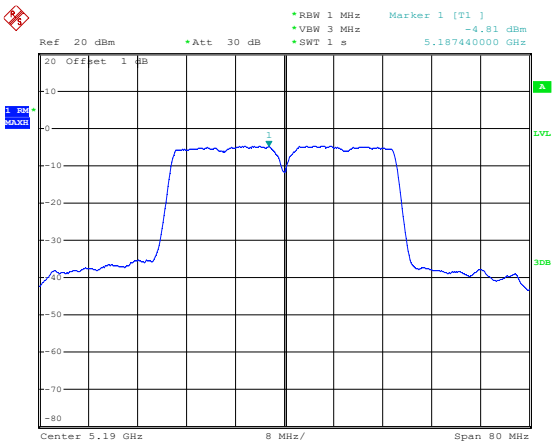 Date: 20.MAR.2025 09:55:05

802.11ac-VHT40-High	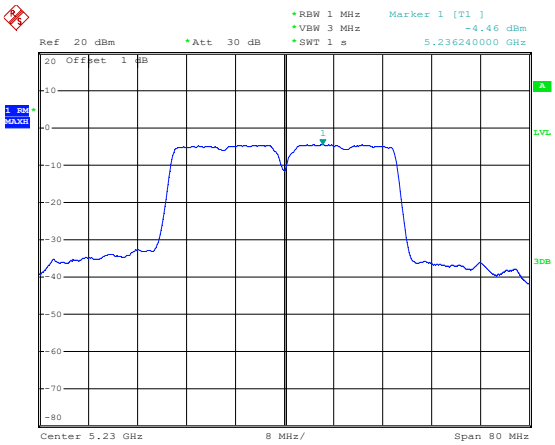 Date: 20.MAR.2025 09:55:30
802.11ac-VHT80	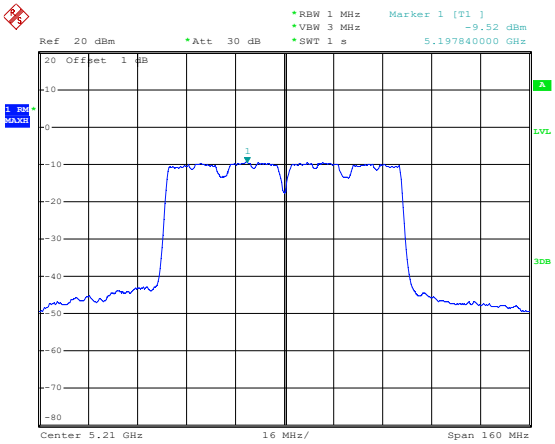 Date: 20.MAR.2025 09:53:37
802.11ax-HE20-Low	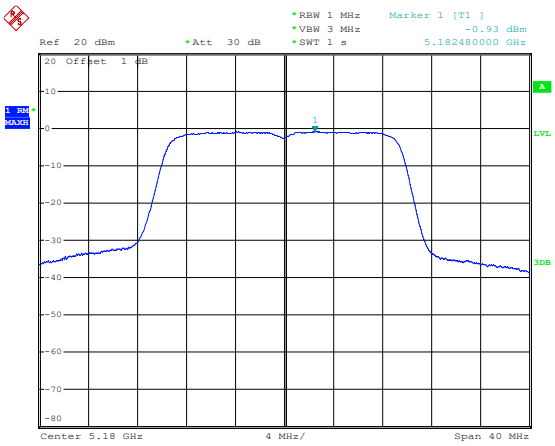 Date: 20.MAR.2025 09:57:52

802.11ax-HE20-Middle	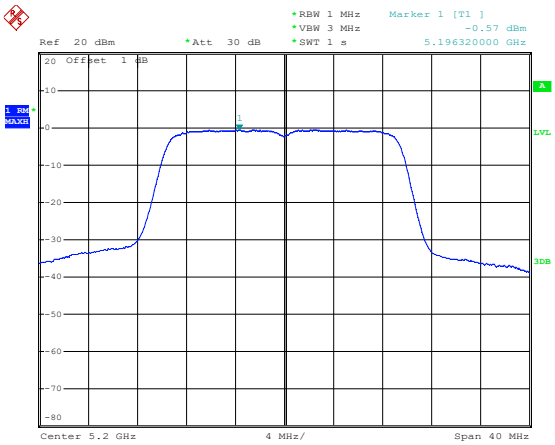 Date: 20.MAR.2025 09:57:27
802.11ax-HE20-High	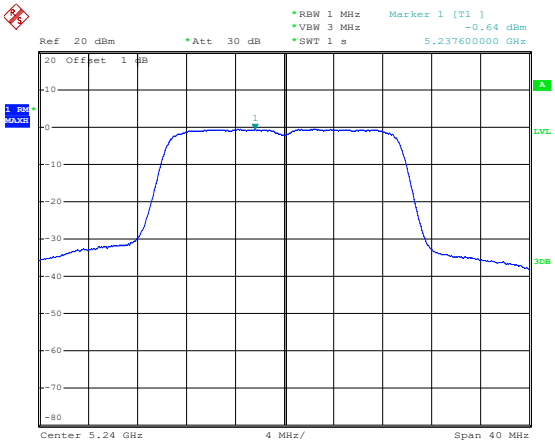 Date: 20.MAR.2025 09:57:05
802.11ax-HE40-Low	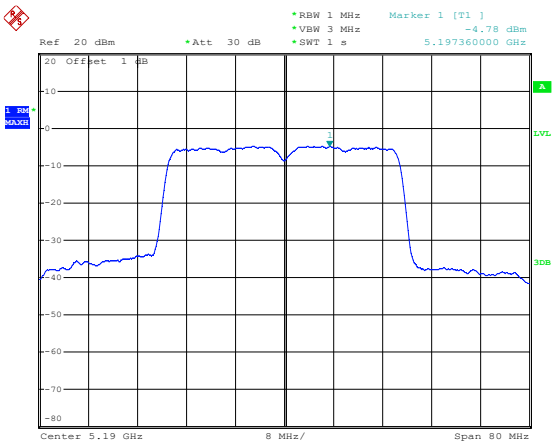 Date: 20.MAR.2025 09:54:43

802.11ax-HE40-High	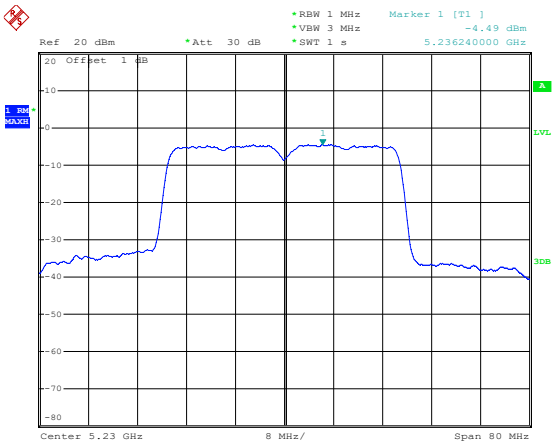 Date: 20.MAR.2025 09:54:16
802.11ax-HE80	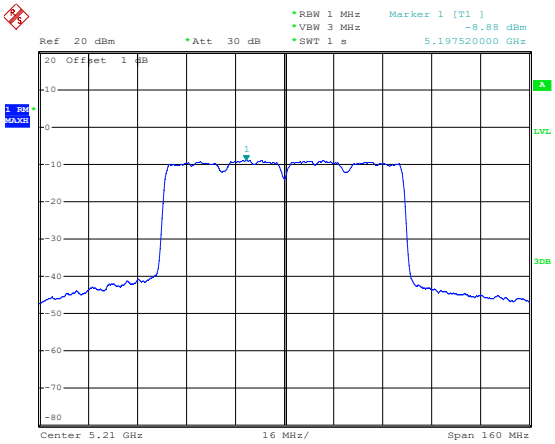 Date: 20.MAR.2025 09:53:10

5725-5850MHz

802.11a-Low	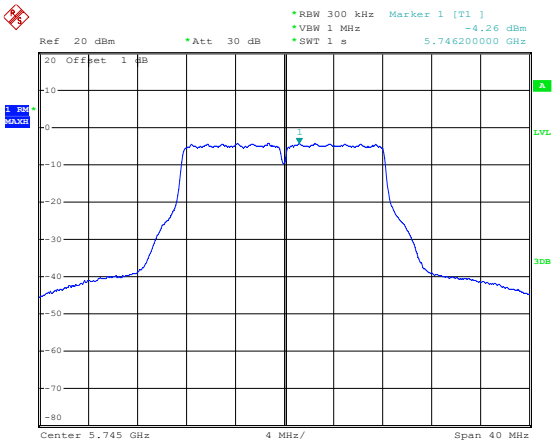
802.11a-Middle	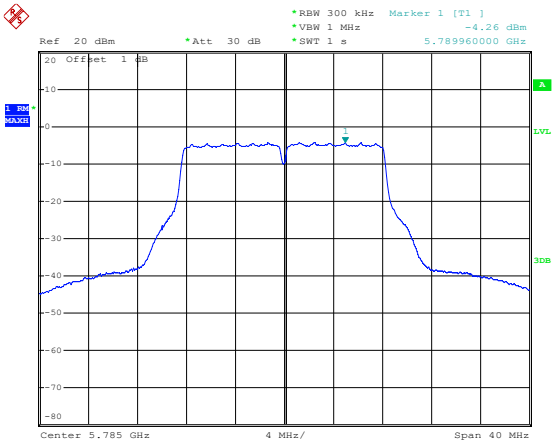
802.11a-High	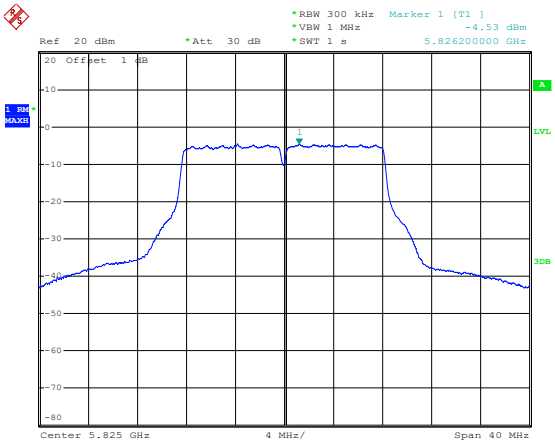

802.11n-HT20-Low	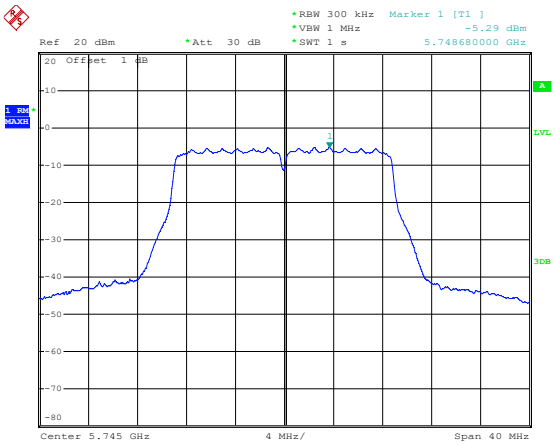
802.11n-HT20-Middle	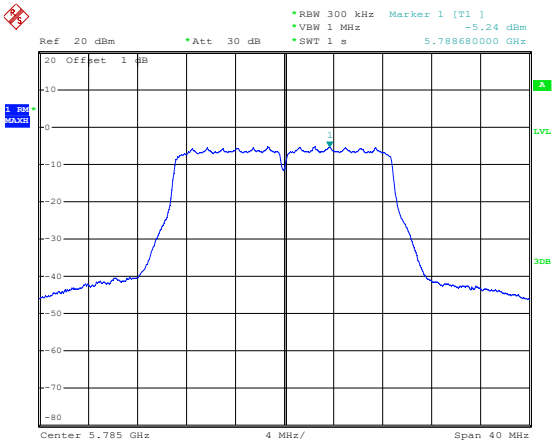
802.11n-HT20-High	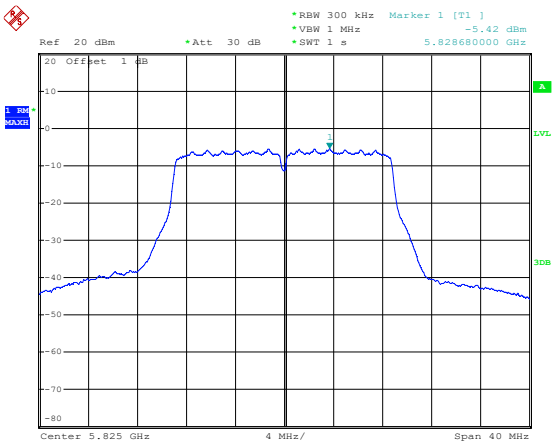

802.11n-HT40-Low	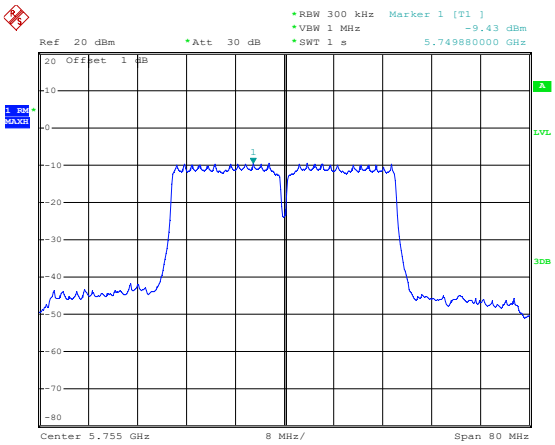
802.11n-HT40-High	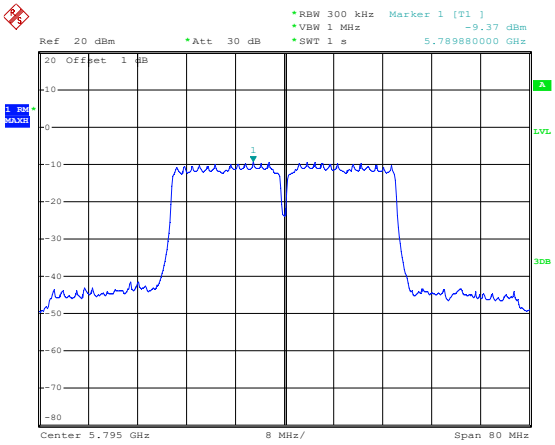
802.11ac-VHT20-Low	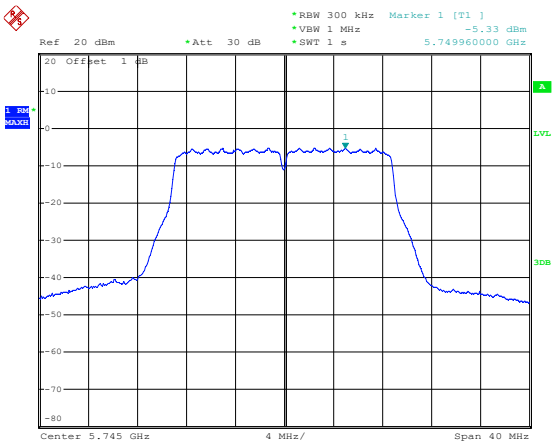

802.11ac-VHT20-Middle	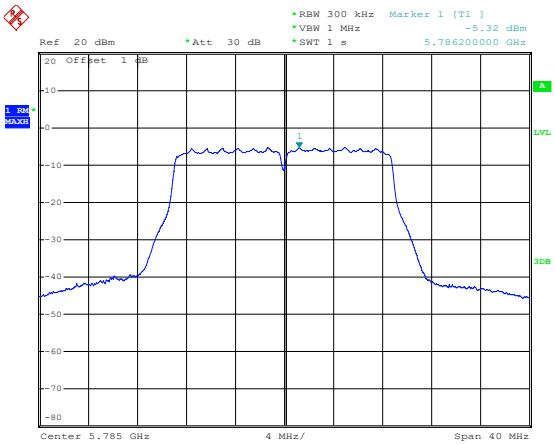
802.11ac-VHT20-High	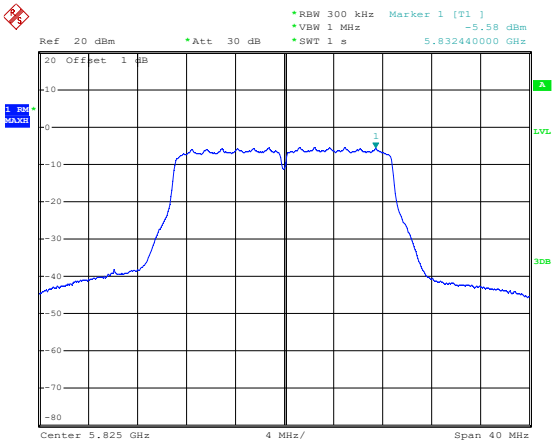
802.11ac-VHT40-Low	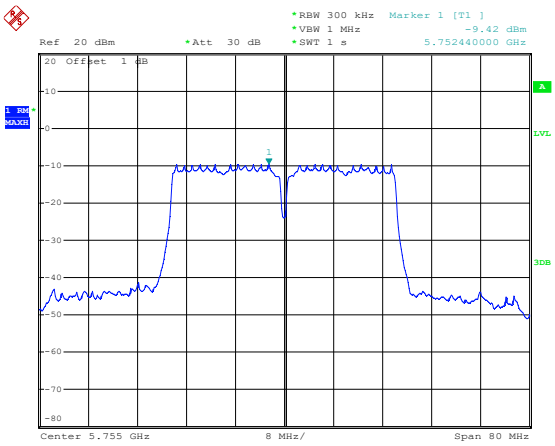

802.11ac-VHT40-High	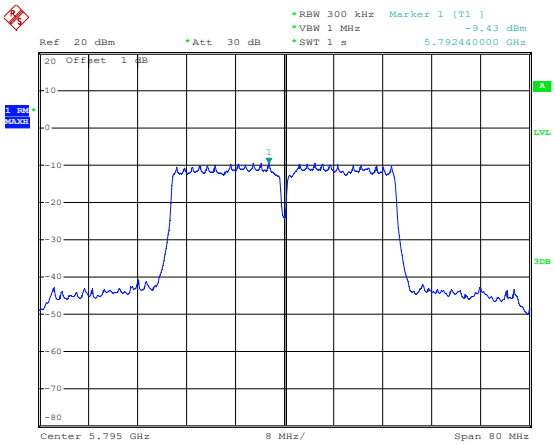
802.11ac-VHT80	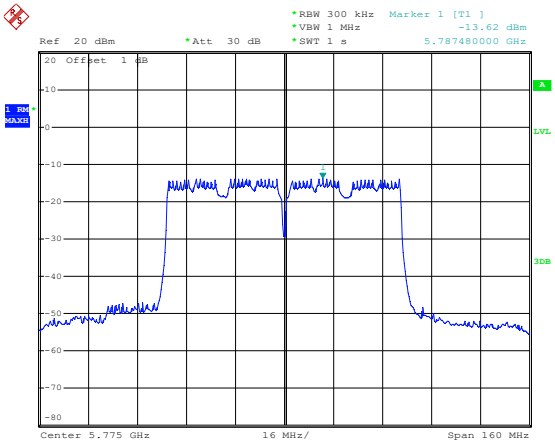
802.11ax-HE20-Low	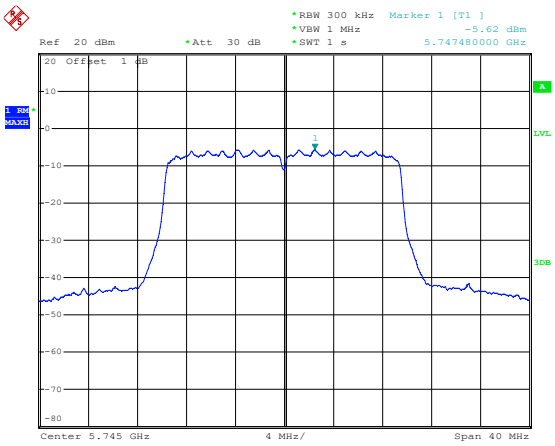

802.11ax-HE20-Middle	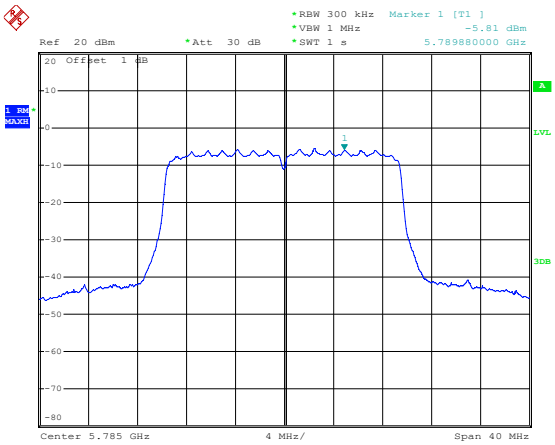
802.11ax-HE20-High	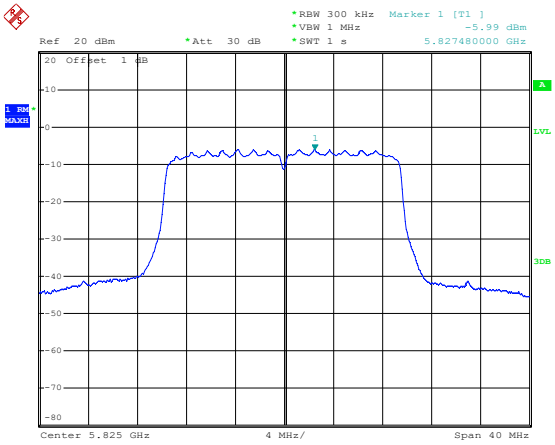
802.11ax-HE40-Low	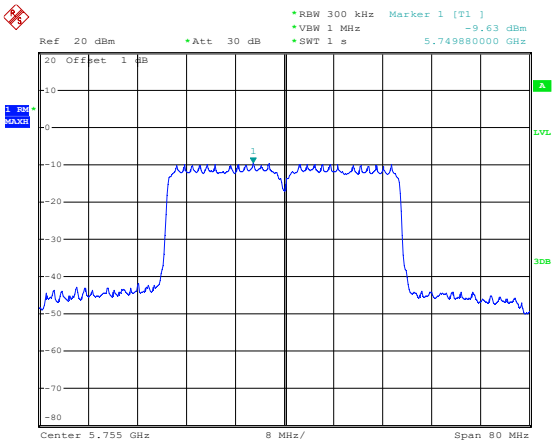

802.11ax-HE40-High	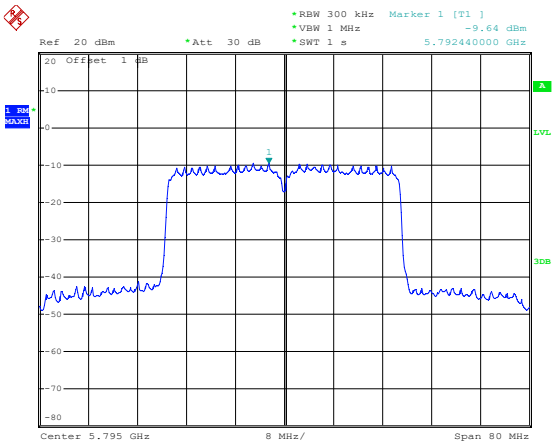 Date: 20.MAR.2025 11:23:41
802.11ax-HE80	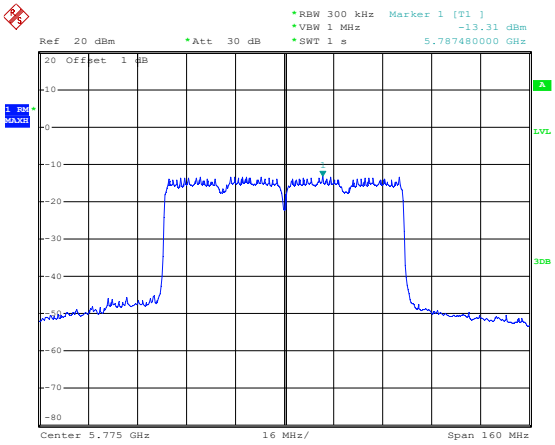 Date: 20.MAR.2025 11:22:41

APPENDIX B

Emission Bandwidth and Occupied Bandwidth

U-NII-1:5150-5250MHz						
Test Mode	Test Channel MHz	ANT 0		ANT 1		Result
		26 dB Bandwidth MHz	99% Bandwidth MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5180	21.90	17.36	22.50	17.44	Pass
	5200	22.00	17.44	22.00	17.44	Pass
	5240	21.80	17.44	22.10	17.60	Pass
802.11n-HT20	5180	21.90	18.16	22.10	18.32	Pass
	5200	22.00	18.24	22.00	18.32	Pass
	5240	21.70	18.16	22.00	18.32	Pass
802.11n-HT40	5190	40.00	37.28	39.60	37.12	Pass
	5230	39.80	36.96	40.00	37.28	Pass
802.11ac-VHT20	5180	21.90	18.24	22.40	18.32	Pass
	5200	22.00	18.24	22.20	18.32	Pass
	5240	21.90	18.24	22.20	18.32	Pass
802.11ac-VHT40	5190	40.40	37.44	40.60	37.60	Pass
	5230	40.60	37.28	40.60	37.76	Pass
802.11ac-VHT80	5210	82.44	76.48	82.44	76.16	Pass
802.11ax-HE20	5180	21.80	19.12	21.90	19.20	Pass
	5200	21.80	19.28	21.90	19.20	Pass
	5240	21.80	19.12	22.00	19.20	Pass
802.11ax-HE40	5190	40.00	38.08	40.20	38.08	Pass
	5230	40.00	38.08	40.00	38.24	Pass
802.11ax-HE80	5210	82.44	77.76	82.44	77.76	Pass

U-NII-3: 5725-5850MHz						
Test Mode	Test Channel MHz	ANT 0		ANT 1		Limit kHz
		6 dB Bandwidth MHz	99% Bandwidth MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5745	16.64	17.60	16.64	17.20	≥500
	5785	16.72	17.60	16.72	17.36	≥500
	5825	16.64	17.52	16.64	17.28	≥500
802.11n-HT20	5745	17.92	18.32	17.92	18.16	≥500
	5785	17.92	18.32	17.92	18.16	≥500
	5825	17.92	18.24	17.92	18.24	≥500
802.11n-HT40	5755	36.96	37.60	36.96	37.12	≥500
	5795	36.64	37.28	36.64	37.12	≥500
802.11ac-VHT20	5745	17.92	18.32	17.92	18.24	≥500
	5785	17.92	18.32	17.92	18.24	≥500
	5825	17.92	18.24	17.92	18.24	≥500
802.11ac-VHT40	5755	36.96	37.76	36.96	37.44	≥500
	5795	36.80	37.60	36.64	37.28	≥500
802.11ac-VHT80	5775	76.80	76.48	77.44	76.16	≥500
802.11ax-HE20	5745	19.20	19.28	19.20	19.20	≥500
	5785	19.28	19.28	19.28	19.28	≥500
	5825	19.28	19.12	19.28	19.20	≥500
802.11ax-HE40	5755	38.24	38.40	38.24	37.92	≥500
	5795	38.08	38.08	38.08	38.08	≥500
802.11ax-HE80	5775	78.72	77.76	78.40	77.44	≥500

ANT 0

26 dB Bandwidth

5150-5250MHz

802.11a-Low	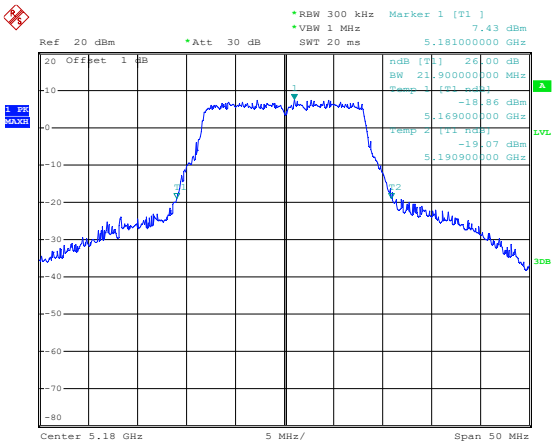
802.11a-Middle	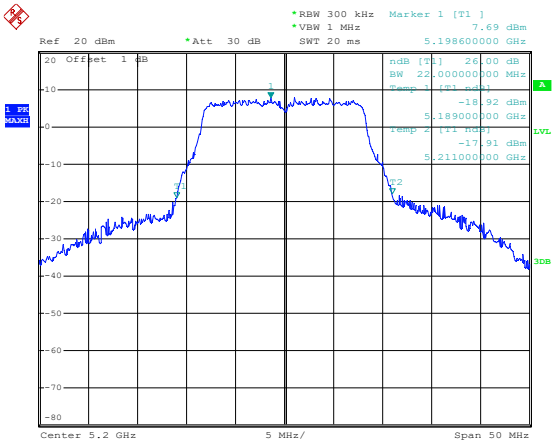
802.11a-High	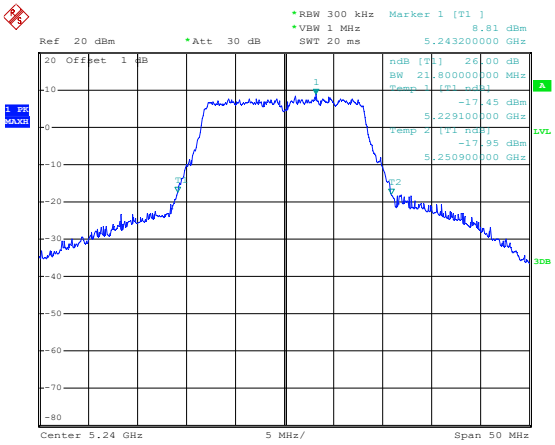

802.11n-HT20-Low	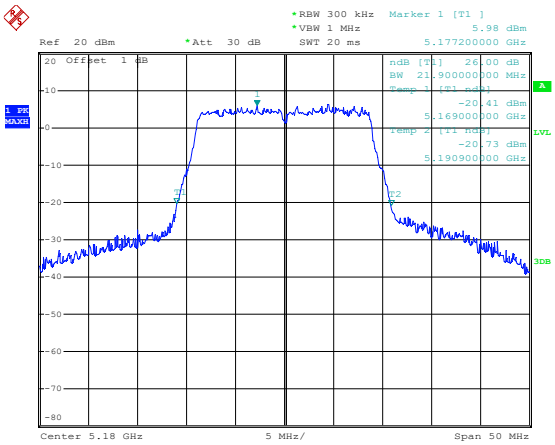 Date: 19.MAR.2025 11:45:09
802.11n-HT20-Middle	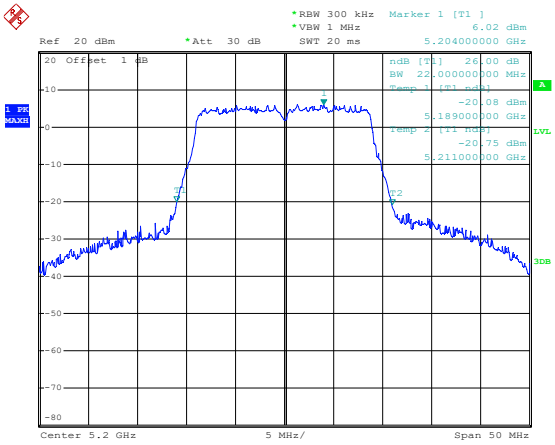 Date: 19.MAR.2025 11:44:41
802.11n-HT20-High	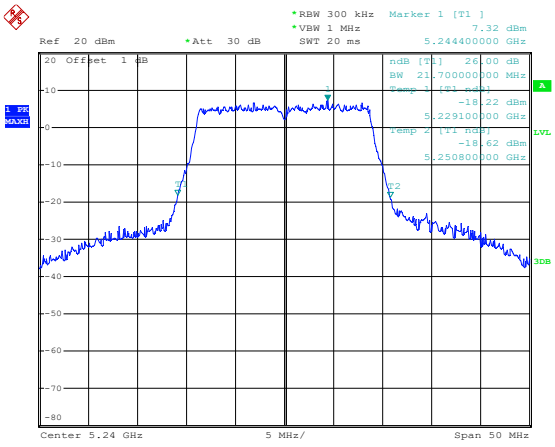 Date: 19.MAR.2025 11:44:15

802.11n-HT40-Low	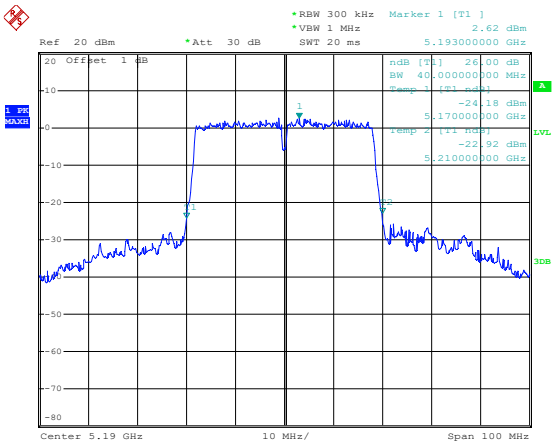 Date: 19.MAR.2025 11:40:11
802.11n-HT40-High	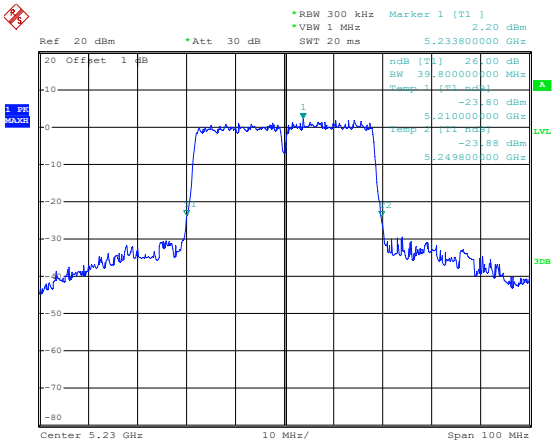 Date: 19.MAR.2025 11:39:35
802.11ac-VHT20-Low	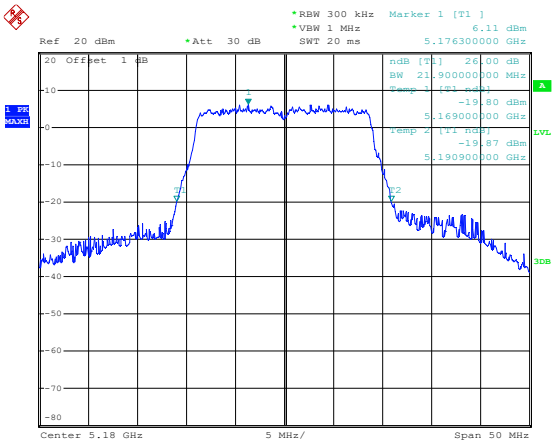 Date: 19.MAR.2025 11:42:47

802.11ac-VHT20-Middle	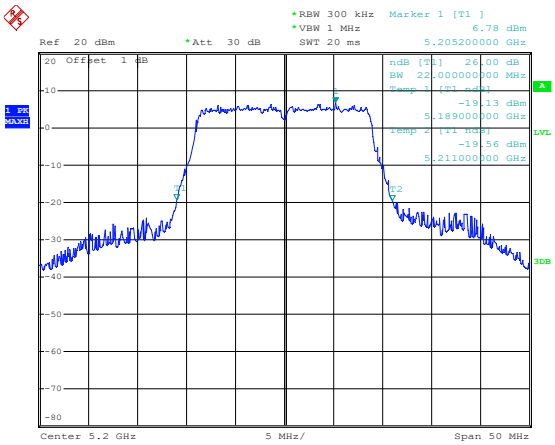
802.11ac-VHT20-High	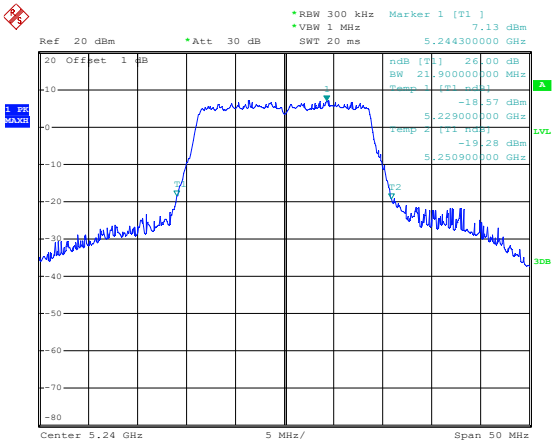
802.11ac-VHT40-Low	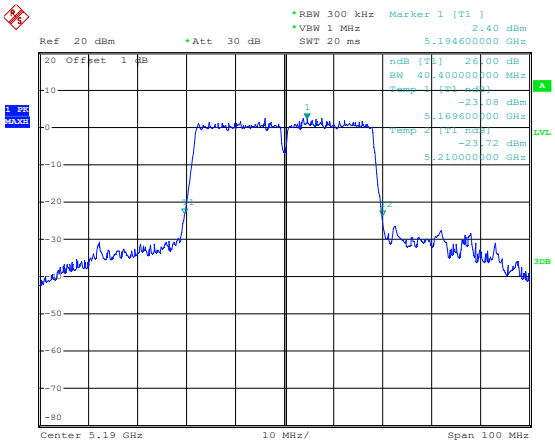

802.11ac-VHT40-High	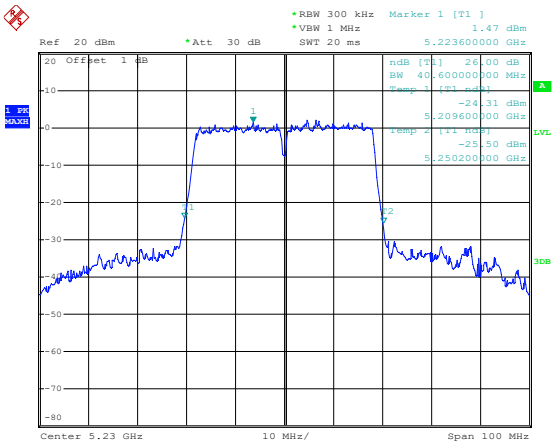 Date: 19.MAR.2025 11:39:06
802.11ac-VHT80	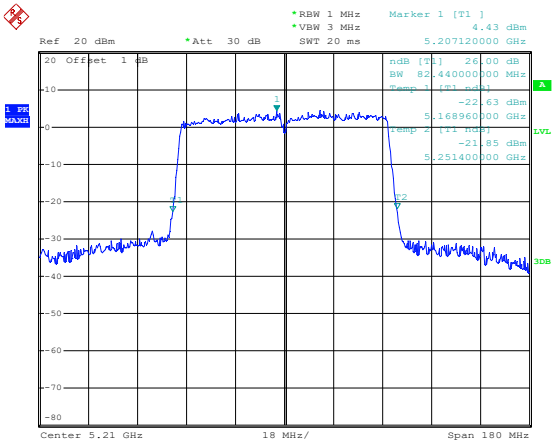 Date: 19.MAR.2025 11:36:22
802.11ax-HE20-Low	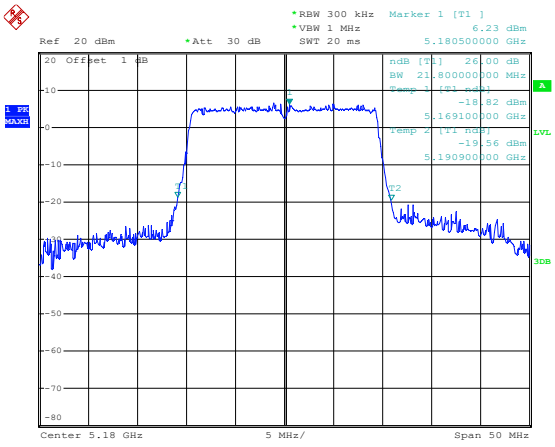 Date: 19.MAR.2025 11:42:19

802.11ax-HE20-Middle	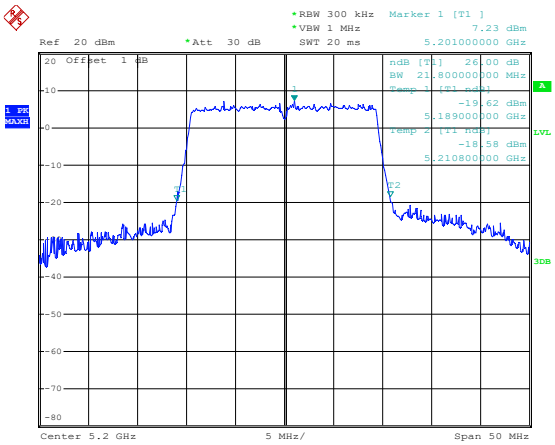 Date: 19.MAR.2025 11:41:52
802.11ax-HE20-High	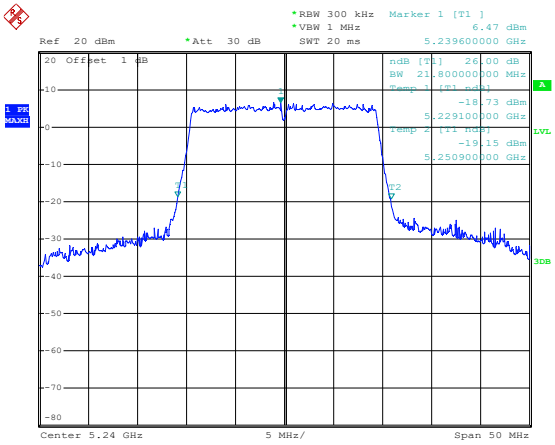 Date: 19.MAR.2025 11:41:19
802.11ax-HE40-Low	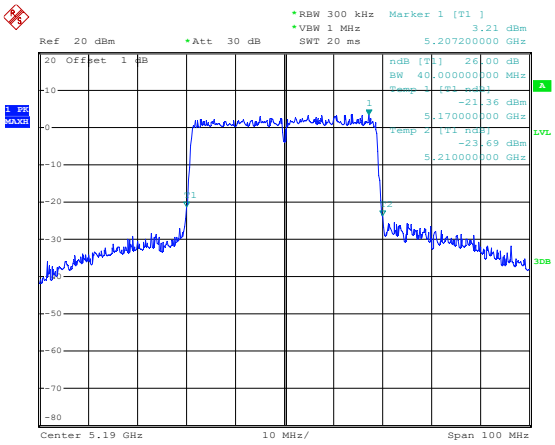 Date: 19.MAR.2025 11:38:08

802.11ax-HE40-High	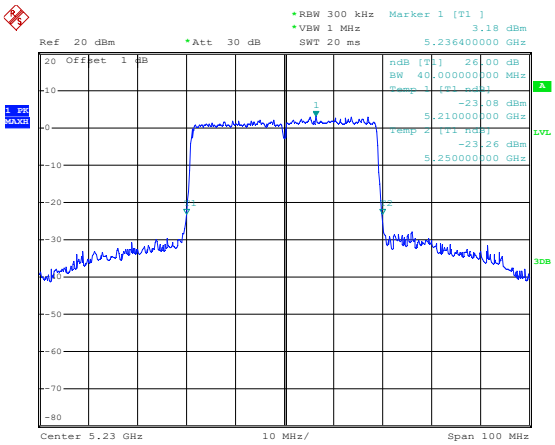
802.11ax-HE80	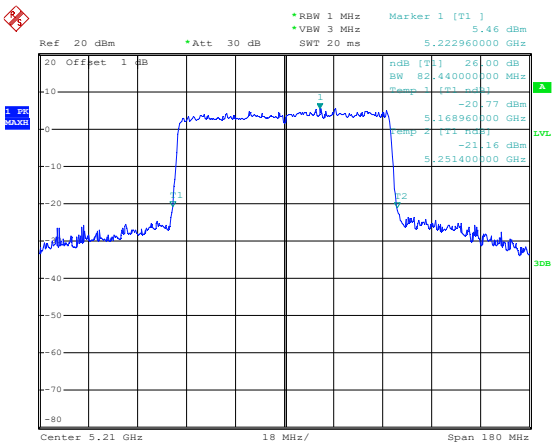

6 dB Bandwidth

5725-5850MHz

802.11a-Low	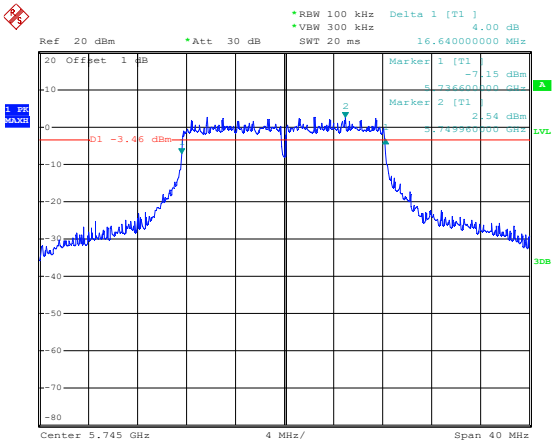
802.11a-Middle	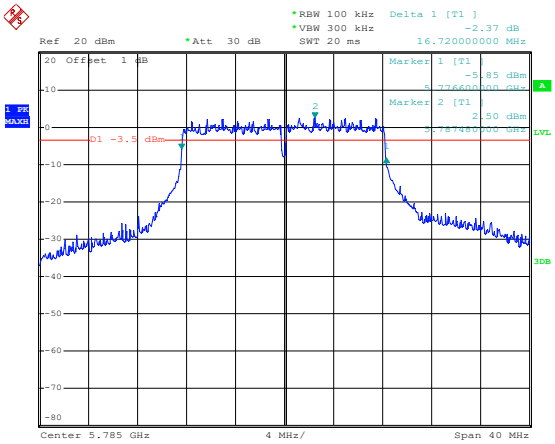
802.11a-High	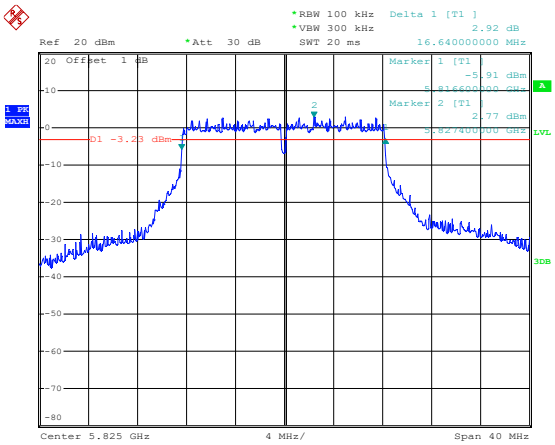

802.11n-HT20-Low	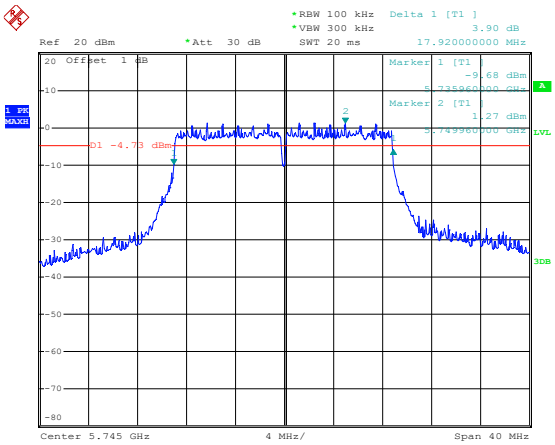 Date: 19.MAR.2025 16:13:06
802.11n-HT20-Middle	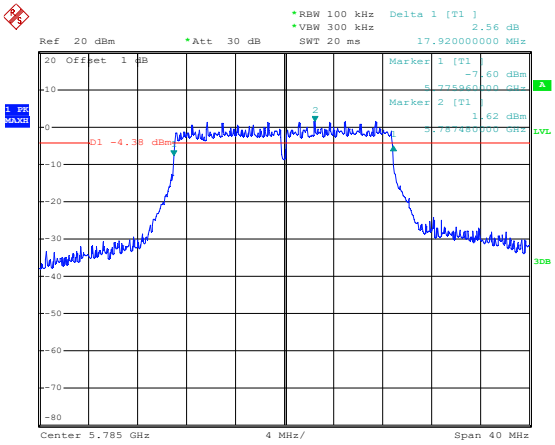 Date: 19.MAR.2025 16:12:03
802.11n-HT20-High	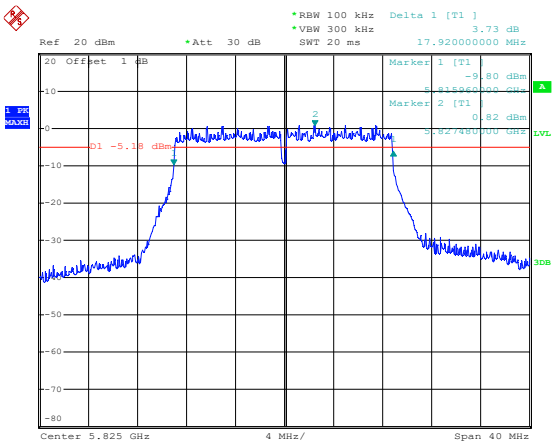 Date: 19.MAR.2025 16:11:12

802.11n-HT40-Low	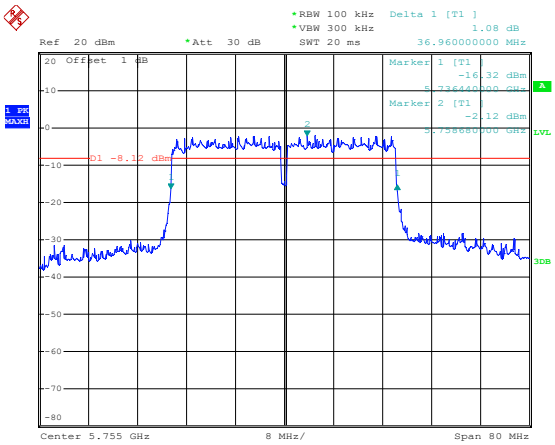
802.11n-HT40-High	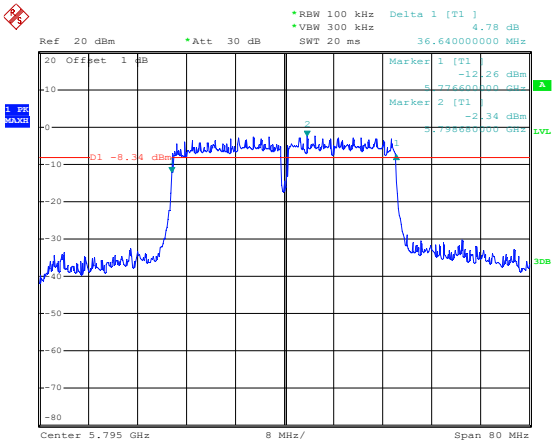
802.11ac-VHT20-Low	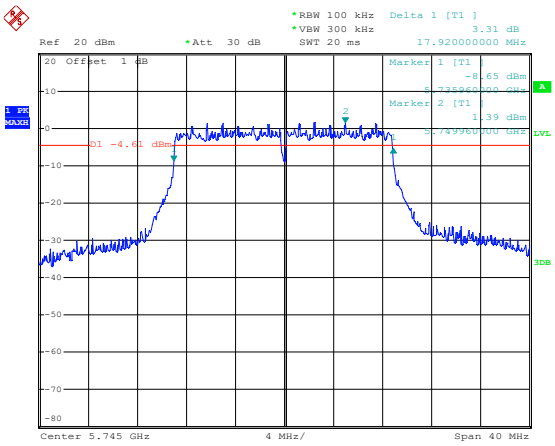

802.11ac-VHT20-Middle	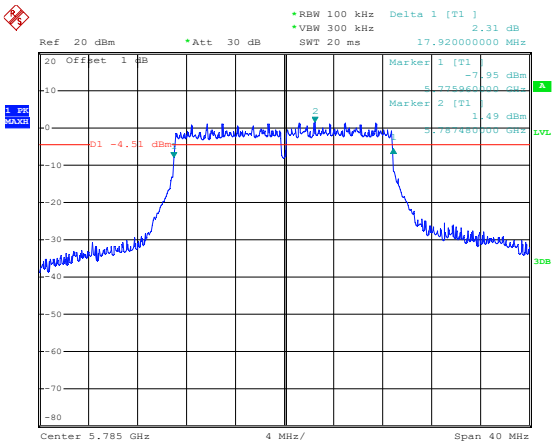 Date: 19.MAR.2025 16:09:26
802.11ac-VHT20-High	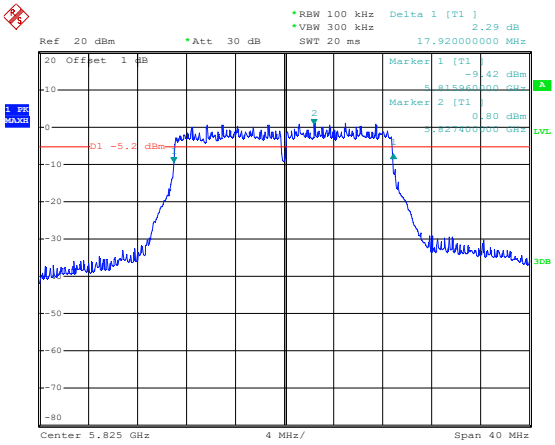 Date: 19.MAR.2025 16:10:16
802.11ac-VHT40-Low	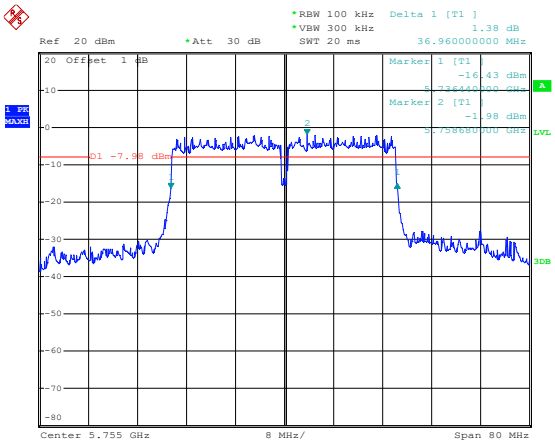 Date: 19.MAR.2025 15:58:00

802.11ac-VHT40-High	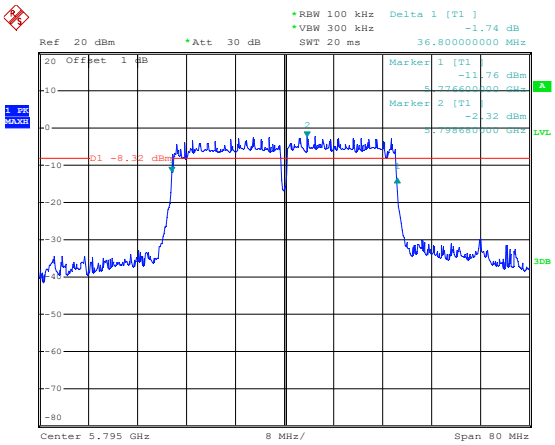 Date: 19.MAR.2025 15:58:54
802.11ac-VHT80	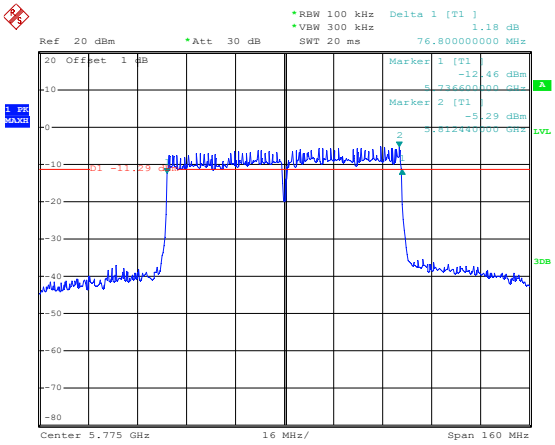 Date: 19.MAR.2025 15:51:33
802.11ax-HE20-Low	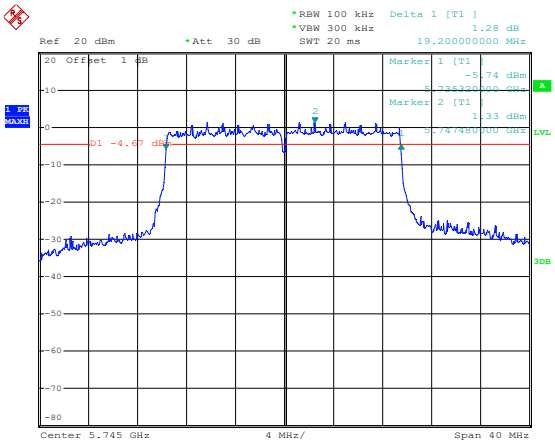 Date: 19.MAR.2025 16:07:49

802.11ax-HE20-Middle	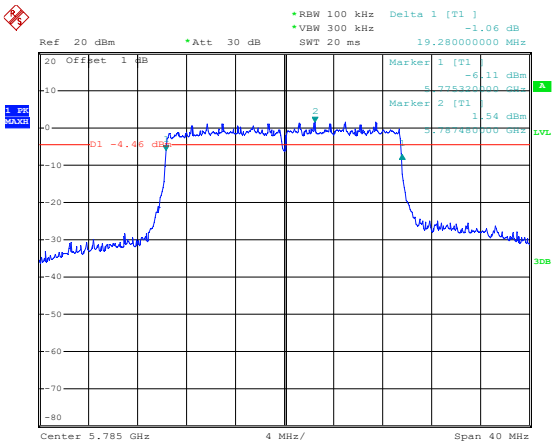
802.11ax-HE20-High	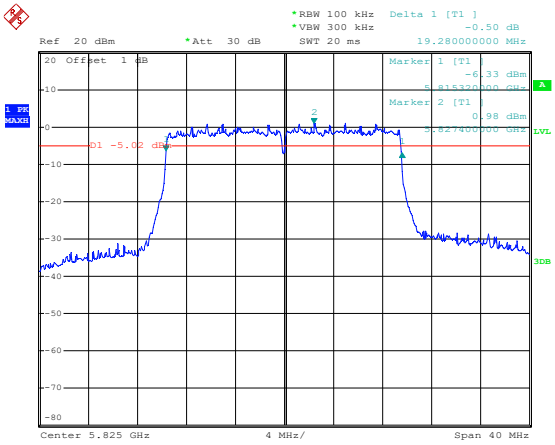
802.11ax-HE40-Low	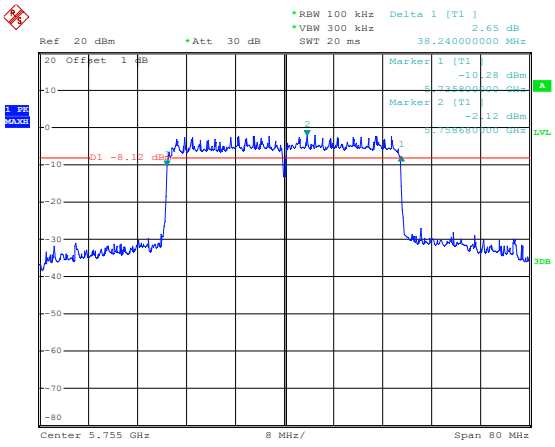

802.11ax-HE40-High	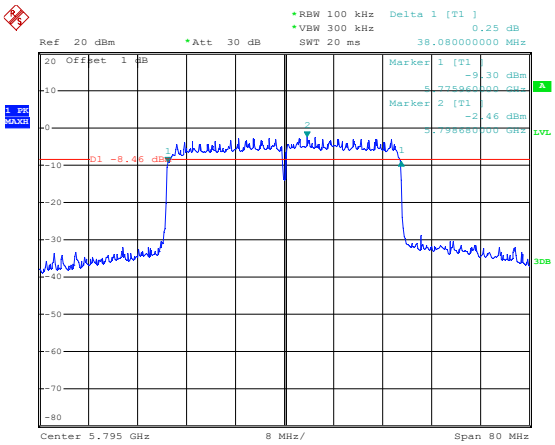 Date: 19.MAR.2025 15:53:39
802.11ax-HE80	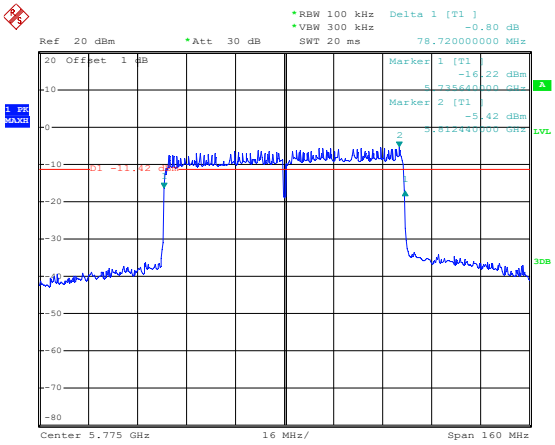 Date: 19.MAR.2025 15:49:54

ANT 1

26 dB Bandwidth

5150-5250MHz

802.11a-Low	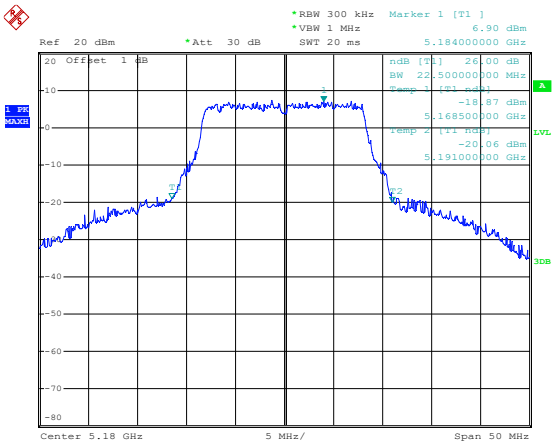
802.11a-Middle	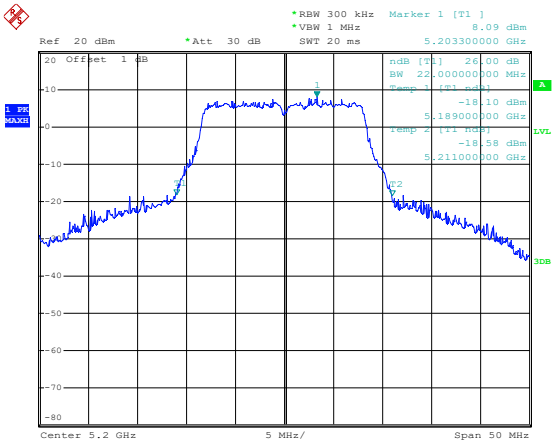
802.11a-High	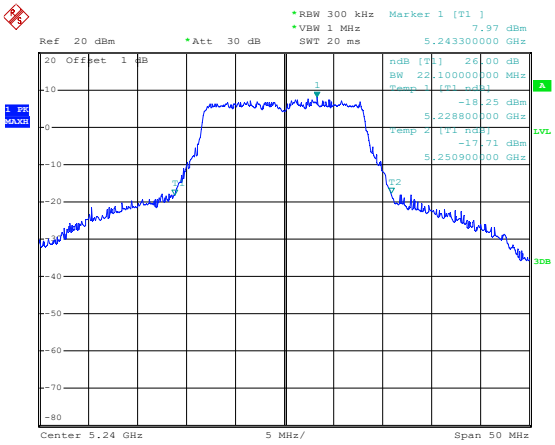

802.11n-HT20-Low	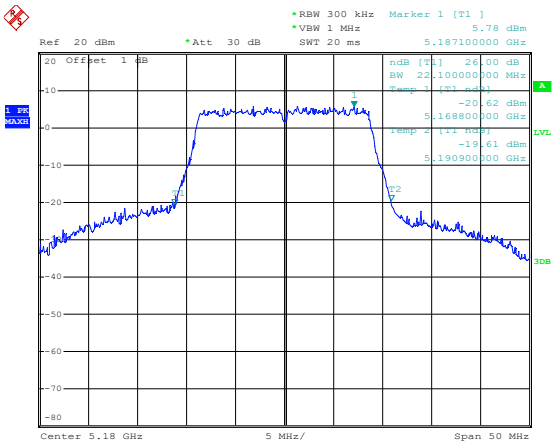 Date: 20.MAR.2025 10:33:20
802.11n-HT20-Middle	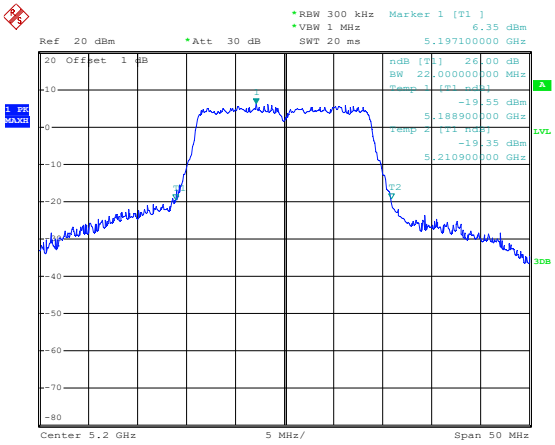 Date: 20.MAR.2025 10:32:54
802.11n-HT20-High	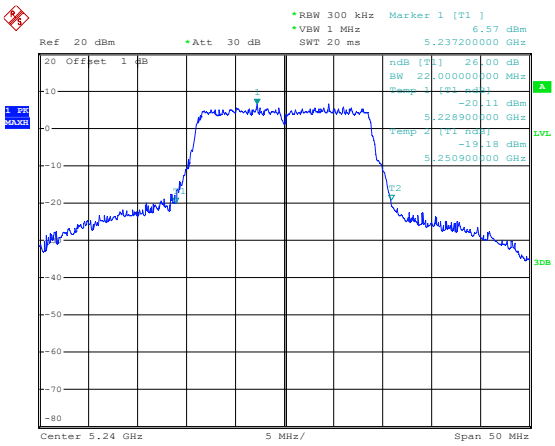 Date: 20.MAR.2025 10:32:29

802.11n-HT40-Low	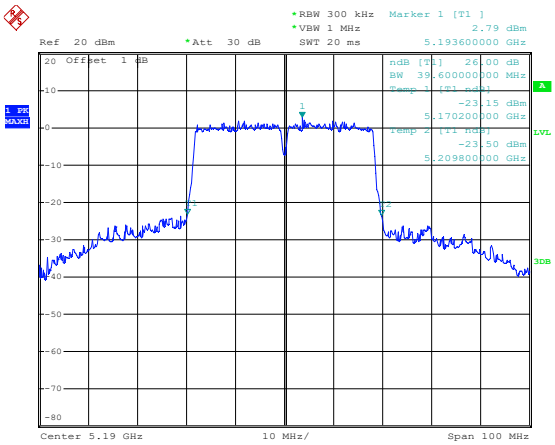 Date: 20.MAR.2025 10:28:49
802.11n-HT40-High	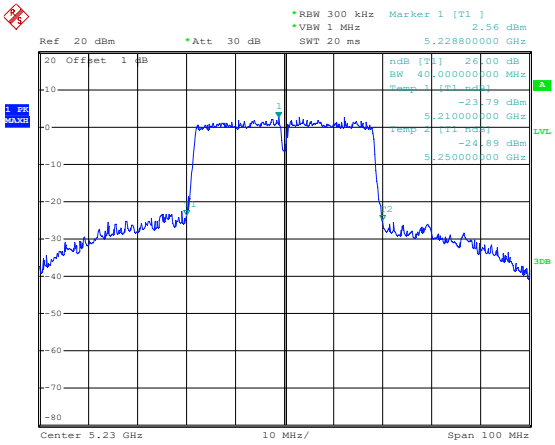 Date: 20.MAR.2025 10:28:22
802.11ac-VHT20-Low	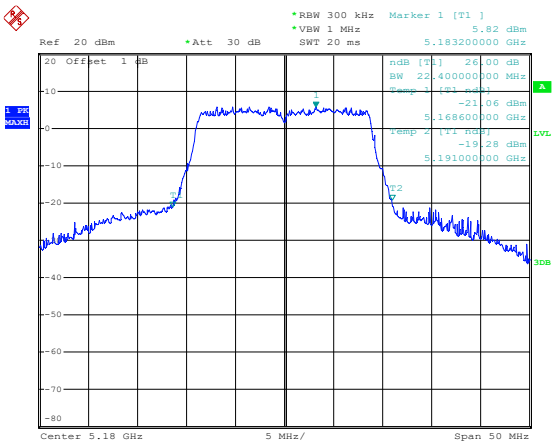 Date: 20.MAR.2025 10:31:11

802.11ac-VHT20-Middle	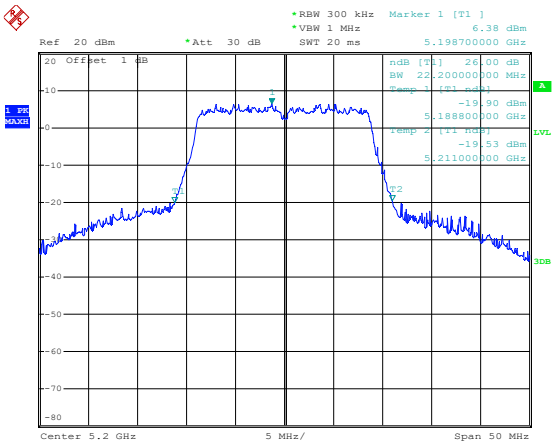 Date: 20.MAR.2025 10:31:40
802.11ac-VHT20-High	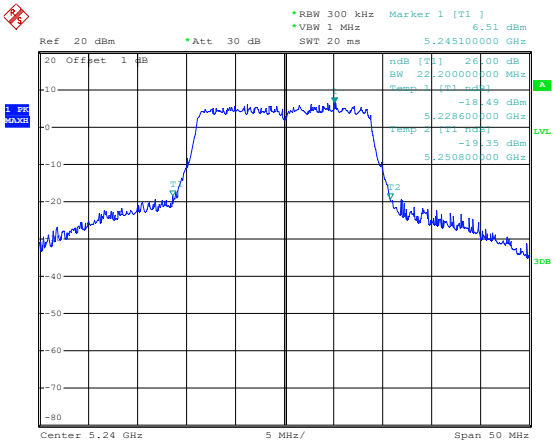 Date: 20.MAR.2025 10:32:05
802.11ac-VHT40-Low	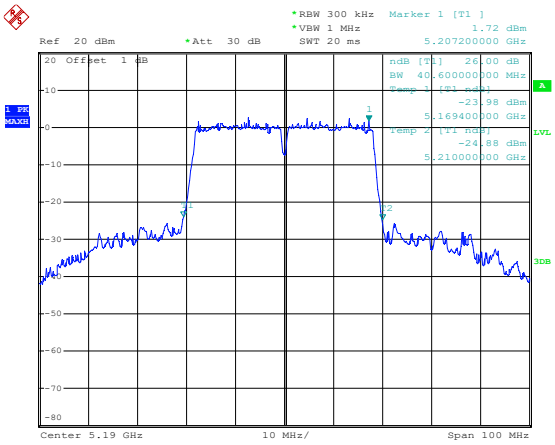 Date: 20.MAR.2025 10:27:25

802.11ac-VHT40-High	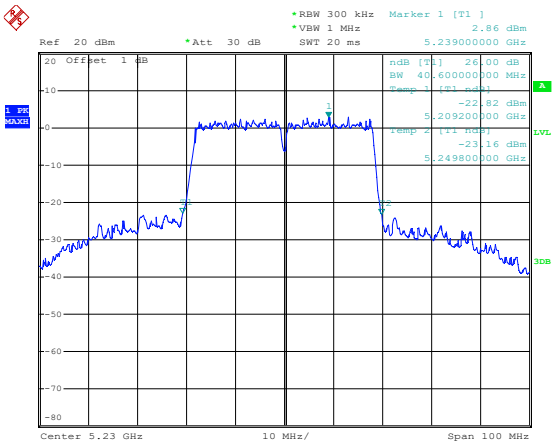 Date: 20.MAR.2025 10:27:57
802.11ac-VHT80	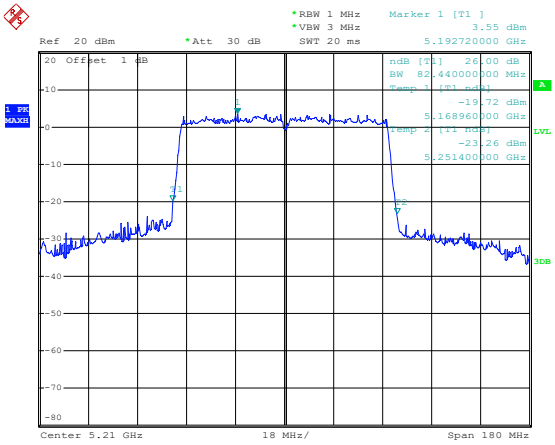 Date: 20.MAR.2025 10:25:47
802.11ax-HE20-Low	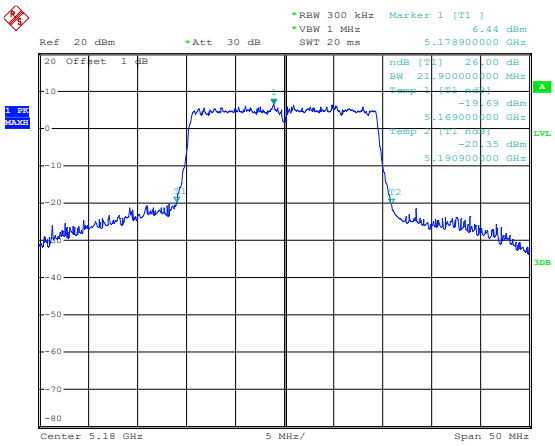 Date: 20.MAR.2025 10:30:32

802.11ax-HE20-Middle	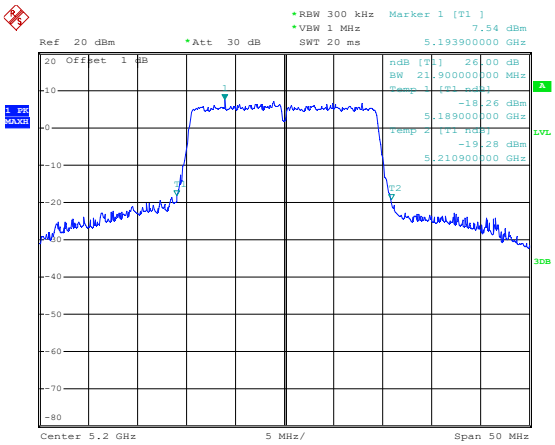 Date: 20.MAR.2025 10:30:05
802.11ax-HE20-High	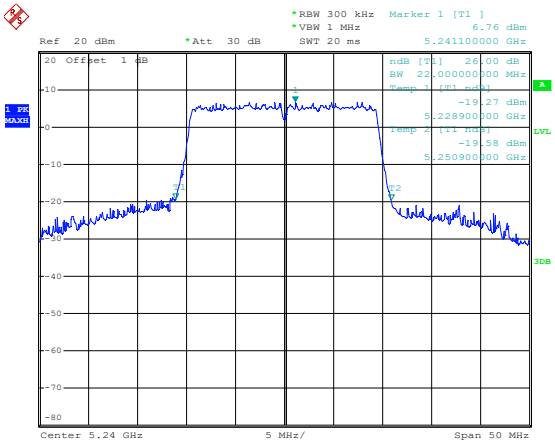 Date: 20.MAR.2025 10:29:24
802.11ax-HE40-Low	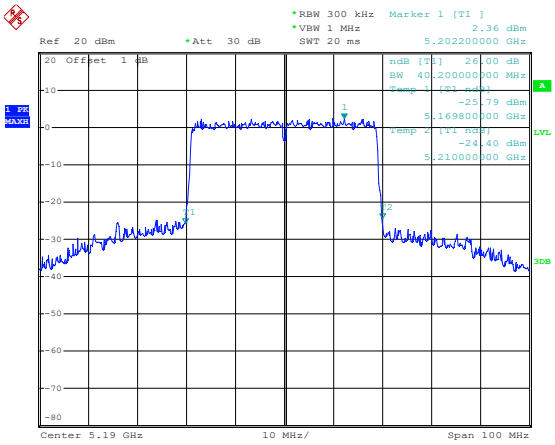 Date: 20.MAR.2025 10:27:02

802.11ax-HE40-High	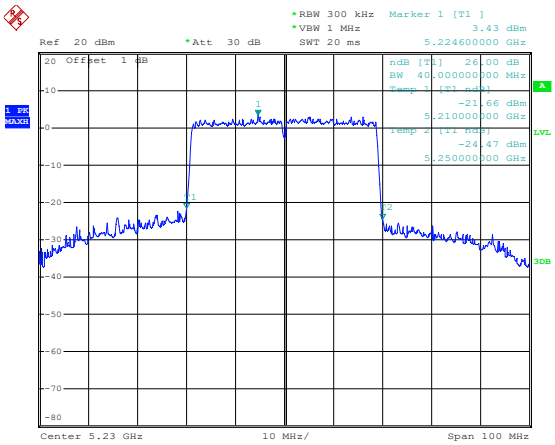 Date: 20.MAR.2025 10:26:32
802.11ax-HE80	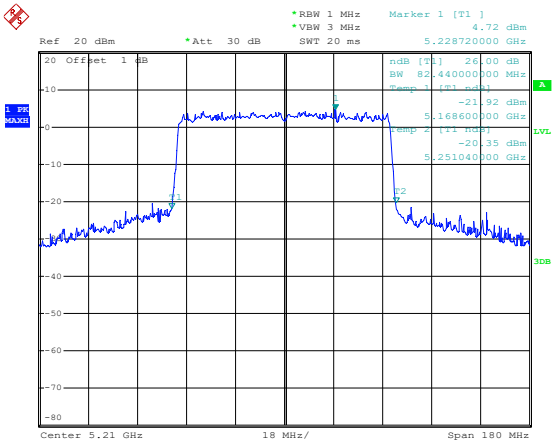 Date: 20.MAR.2025 10:25:21

6 dB Bandwidth

5725-5850MHz

802.11a-Low	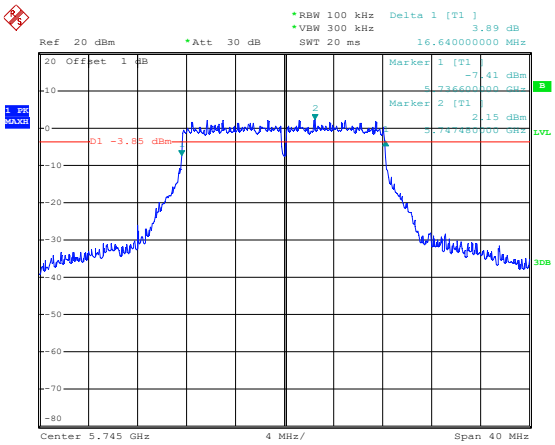 Date: 20.MAR.2025 15:24:58
802.11a-Middle	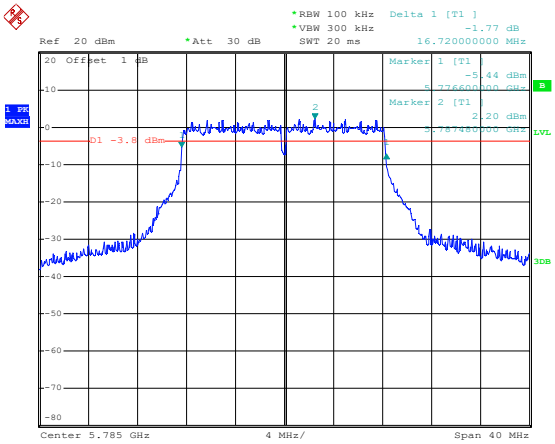 Date: 20.MAR.2025 15:25:44
802.11a-High	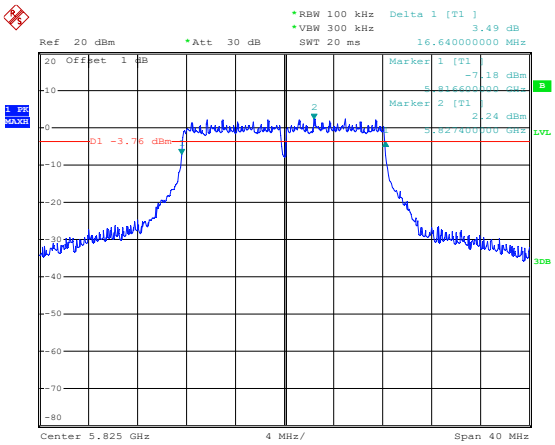 Date: 20.MAR.2025 15:26:51

802.11n-HT20-Low	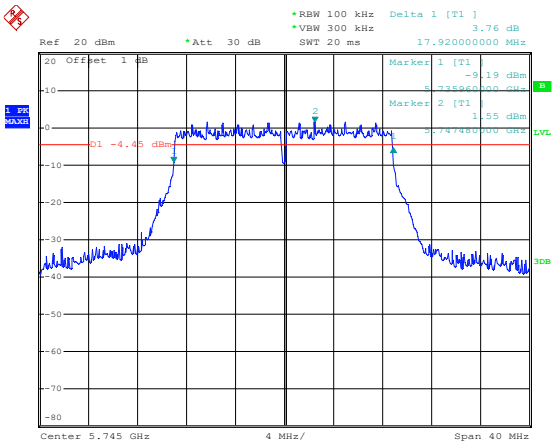 Date: 20.MAR.2025 15:24:14
802.11n-HT20-Middle	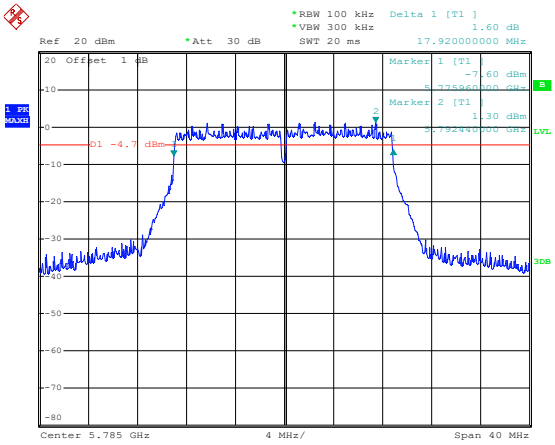 Date: 20.MAR.2025 15:23:20
802.11n-HT20-High	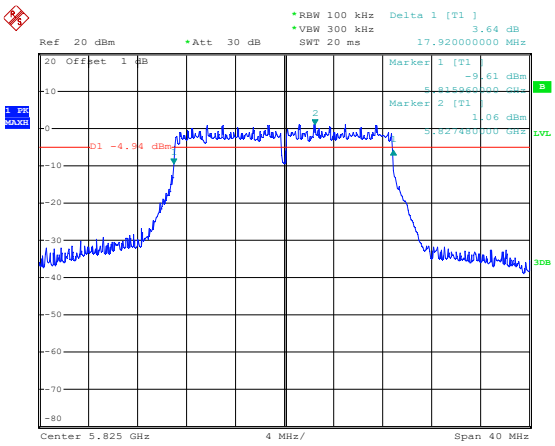 Date: 20.MAR.2025 15:22:31

802.11n-HT40-Low	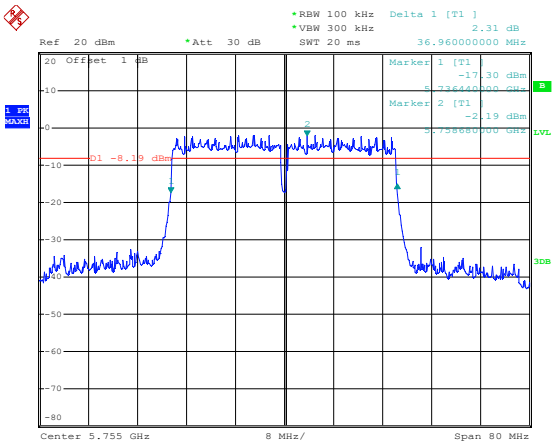 Date: 20.MAR.2025 15:16:04
802.11n-HT40-High	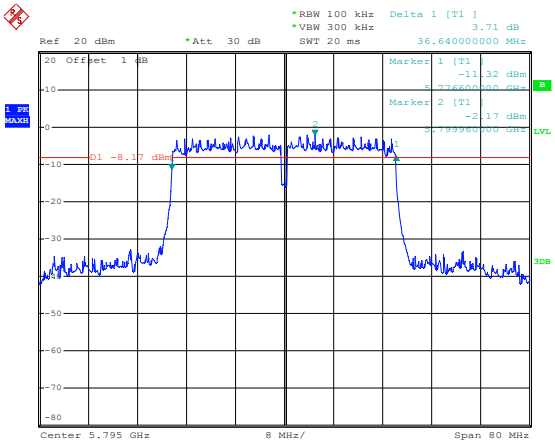 Date: 20.MAR.2025 15:15:22
802.11ac-VHT20-Low	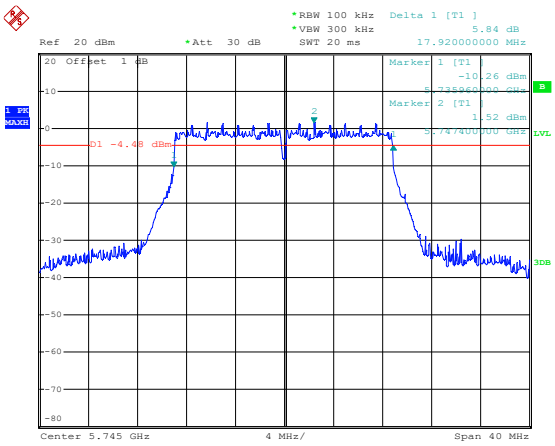 Date: 20.MAR.2025 15:19:53

802.11ac-VHT20-Middle	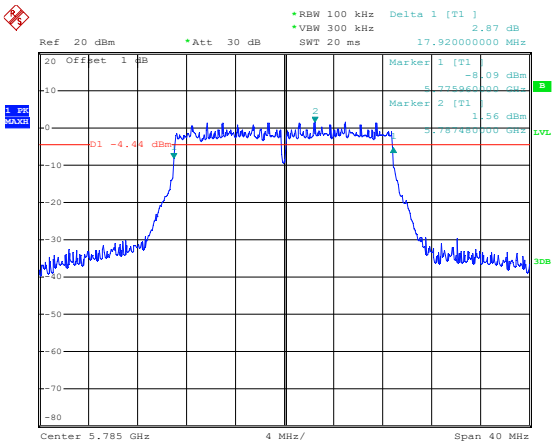 Date: 20.MAR.2025 15:20:38
802.11ac-VHT20-High	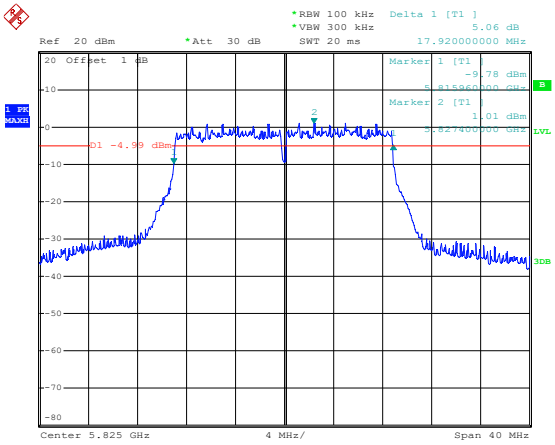 Date: 20.MAR.2025 15:21:36
802.11ac-VHT40-Low	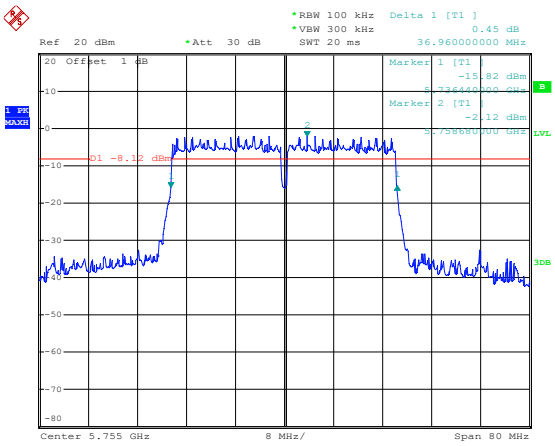 Date: 20.MAR.2025 15:13:53

802.11ac-VHT40-High	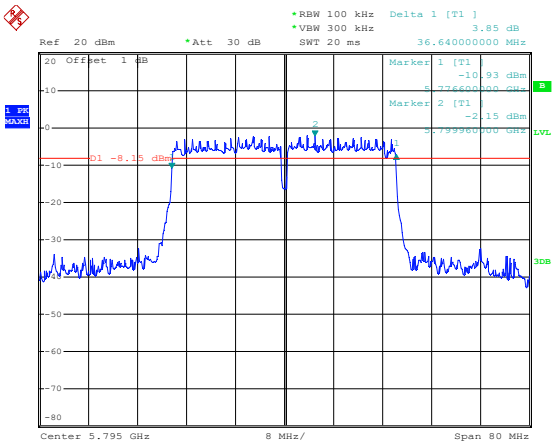 Date: 20.MAR.2025 15:14:38
802.11ac-VHT80	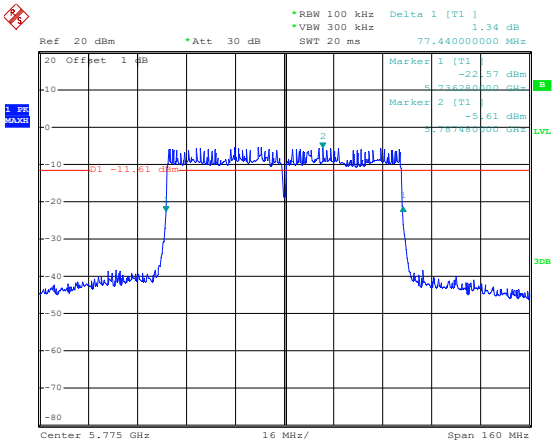 Date: 20.MAR.2025 15:11:01
802.11ax-HE20-Low	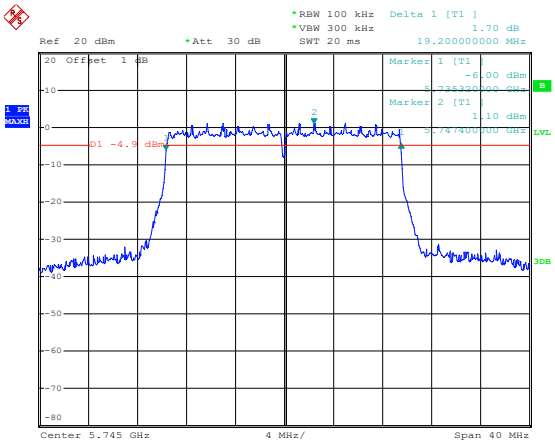 Date: 20.MAR.2025 15:19:10

802.11ax-HE20-Middle	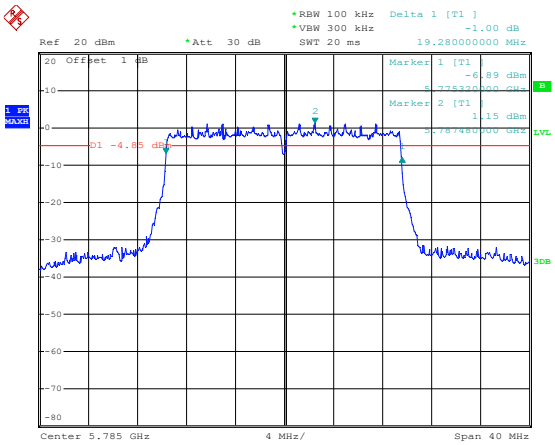
802.11ax-HE20-High	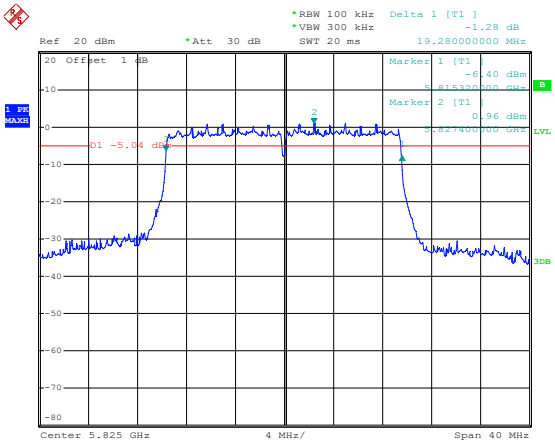
802.11ax-HE40-Low	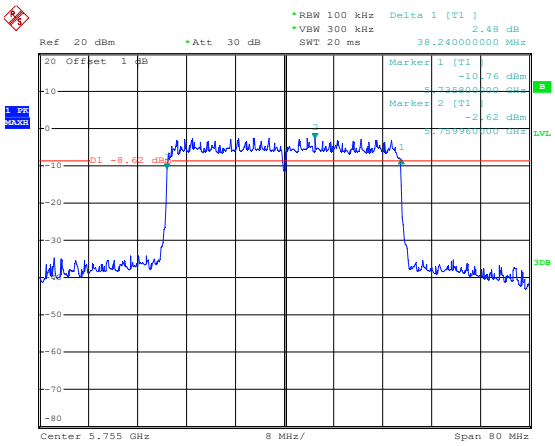

802.11ax-HE40-High	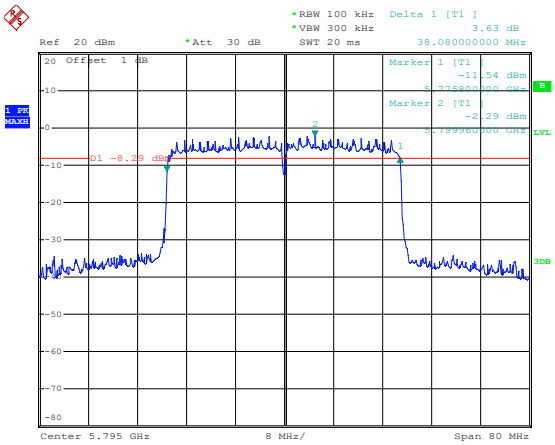 Date: 20.MAR.2025 15:12:15
802.11ax-HE80	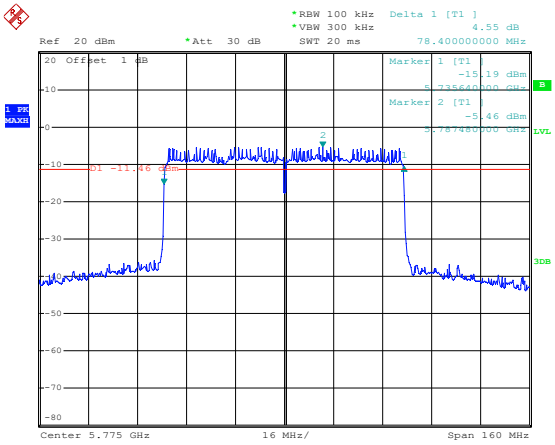 Date: 20.MAR.2025 15:06:55

ANT 0

99% Bandwidth

5150-5250MHz

802.11a-Low	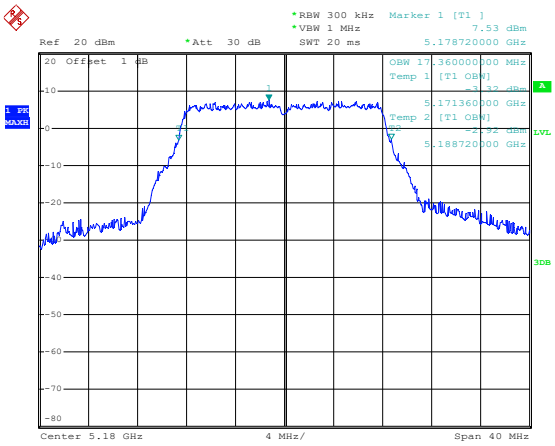 Date: 19.MAR.2025 11:21:44

802.11a-Middle	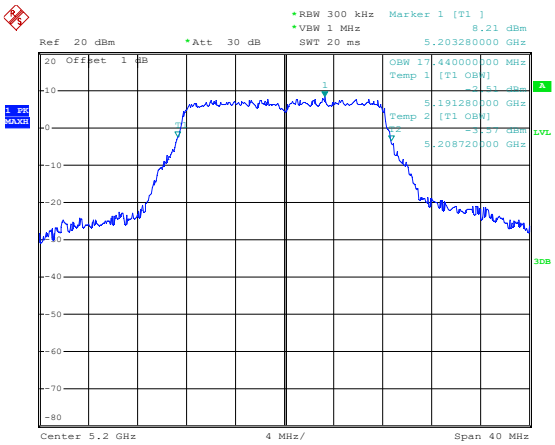
802.11a-High	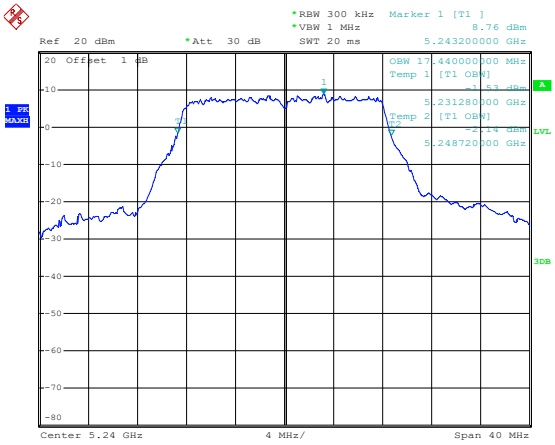
802.11n-HT20-Low	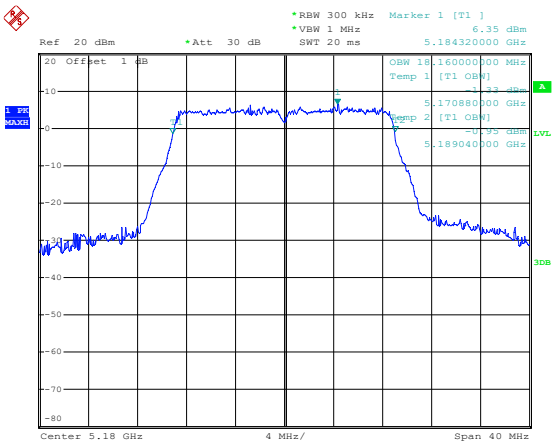

802.11n-HT20-Middle	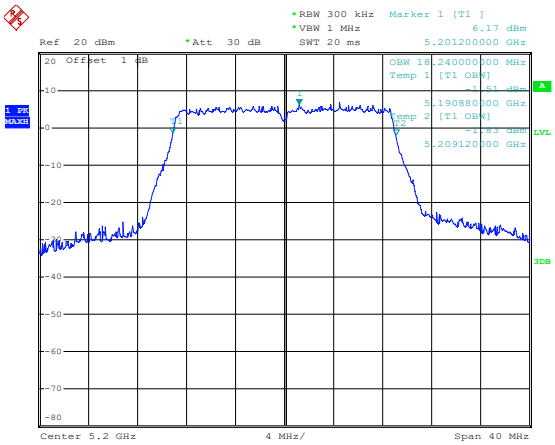
802.11n-HT20-High	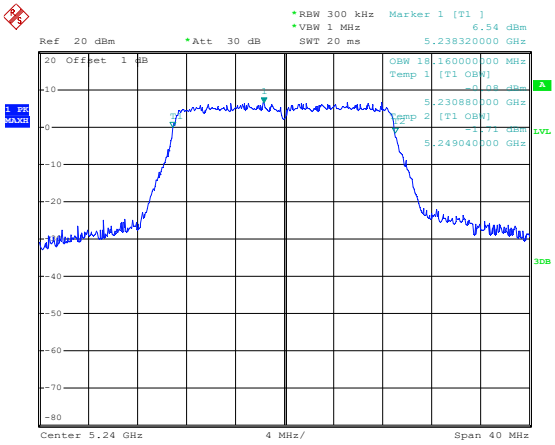
802.11n-HT40-Low	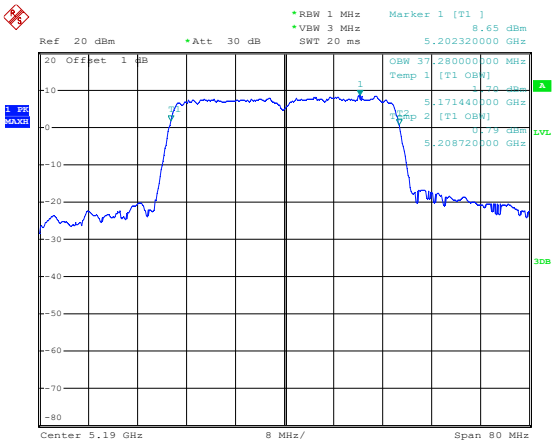

802.11n-HT40-High	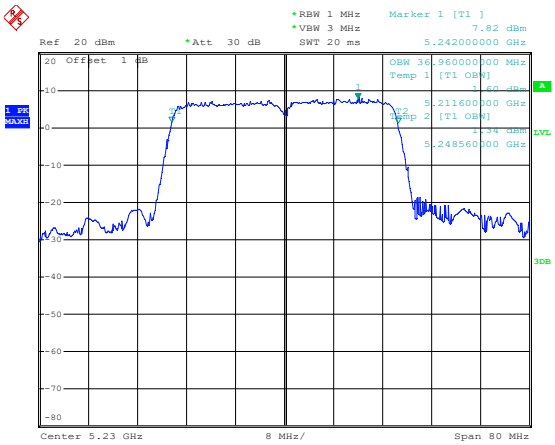
802.11ac-VHT20-Low	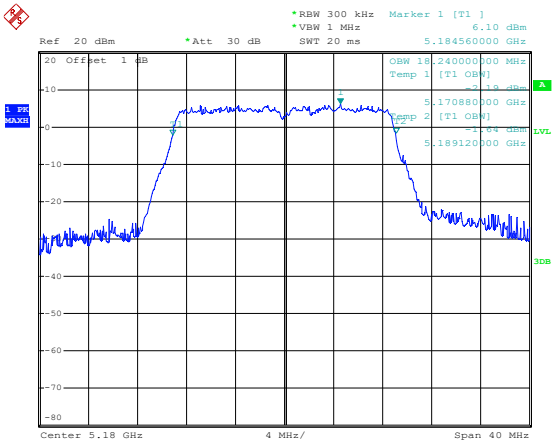
802.11ac-VHT20-Middle	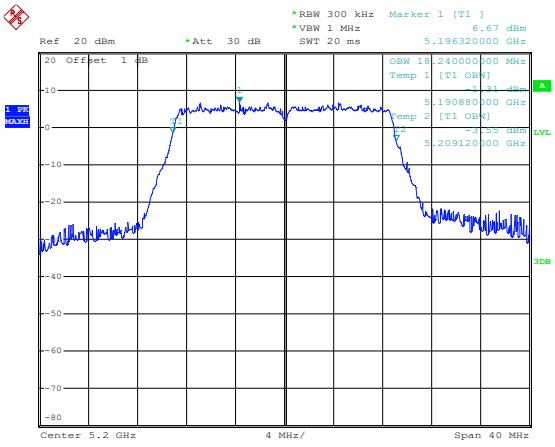

802.11ac-VHT20-High	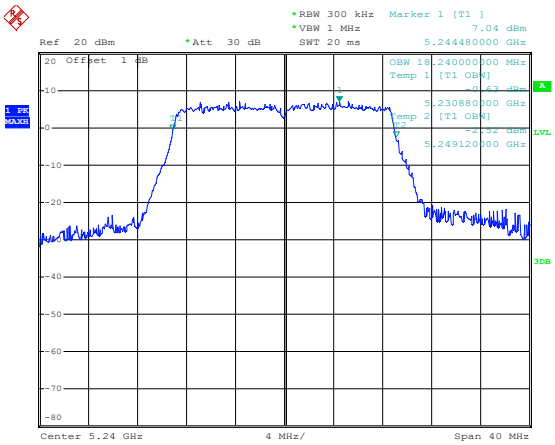
802.11ac-VHT40-Low	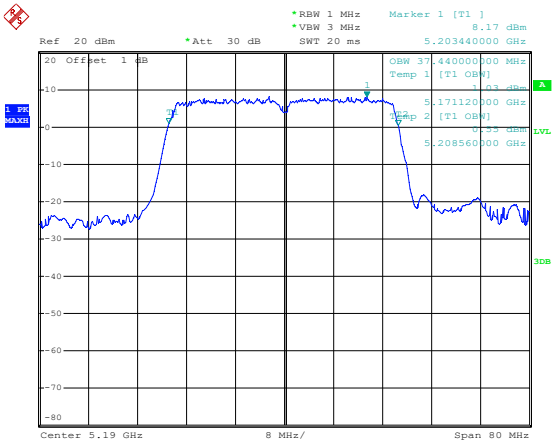
802.11ac-VHT40-High	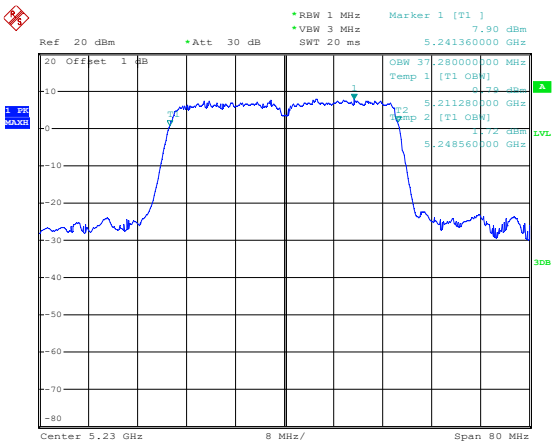

802.11ac-VHT80	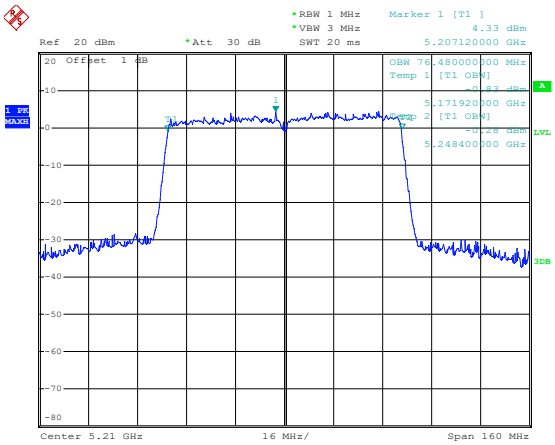
802.11ax-HE20-Low	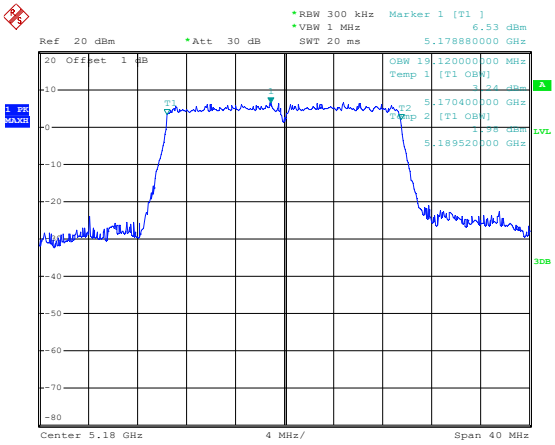
802.11ax-HE20-Middle	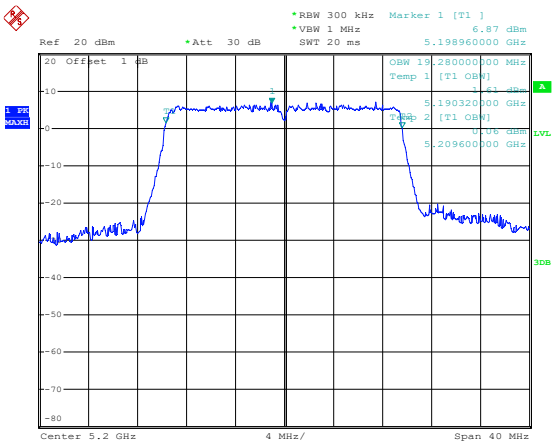

802.11ax-HE20-High	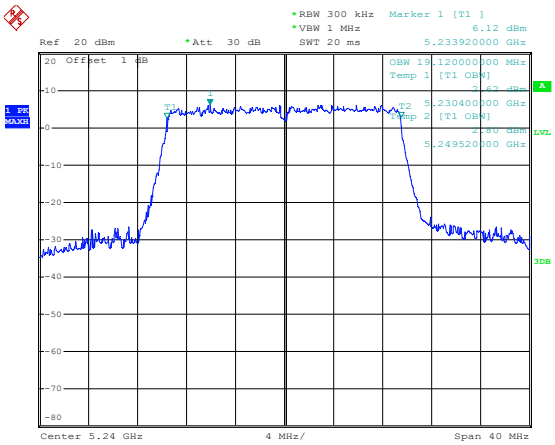
802.11ax-HE40-Low	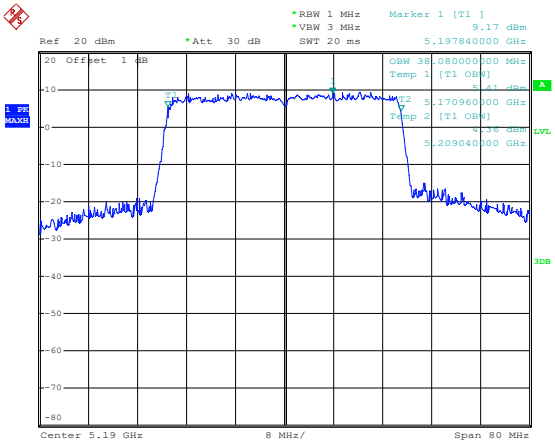
802.11ax-HE40-High	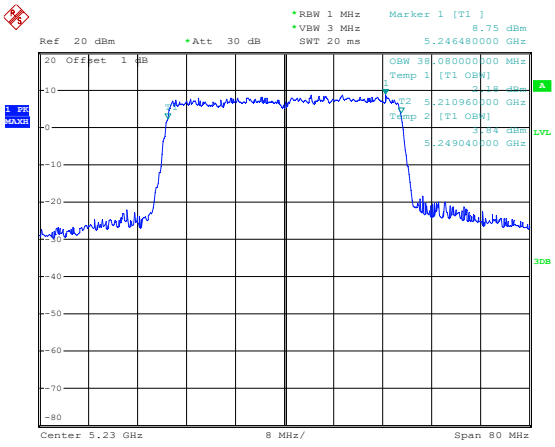

802.11ax-HE80	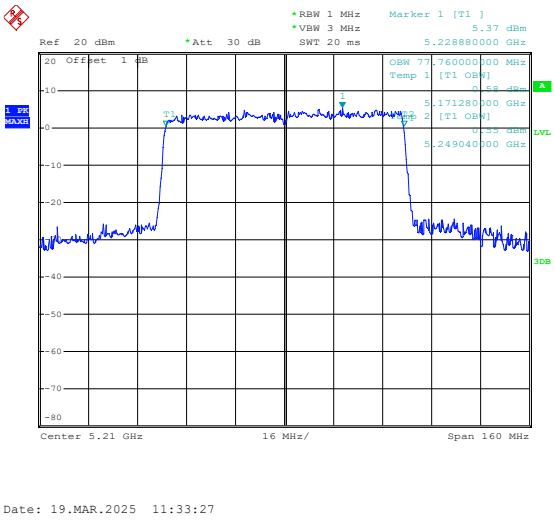

99% Bandwidth

5725-5850MHz

802.11a-Low	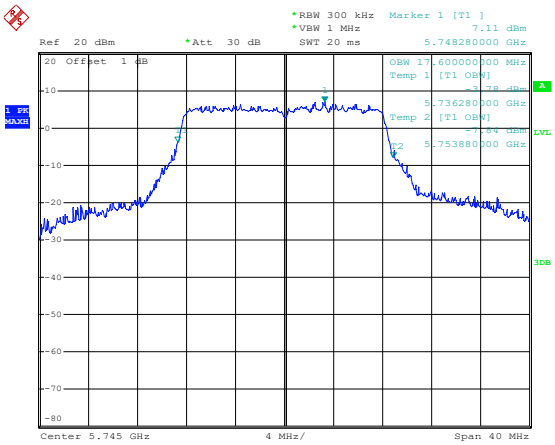
802.11a-Middle	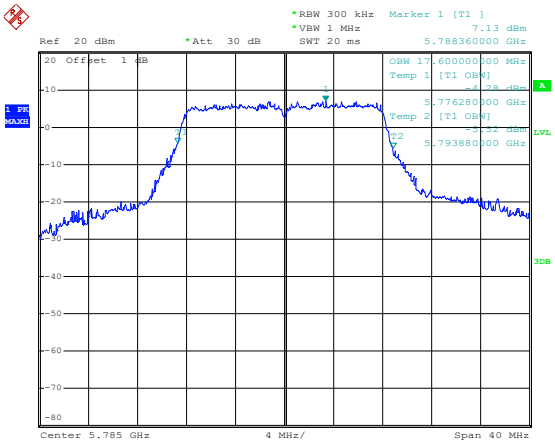
802.11a-High	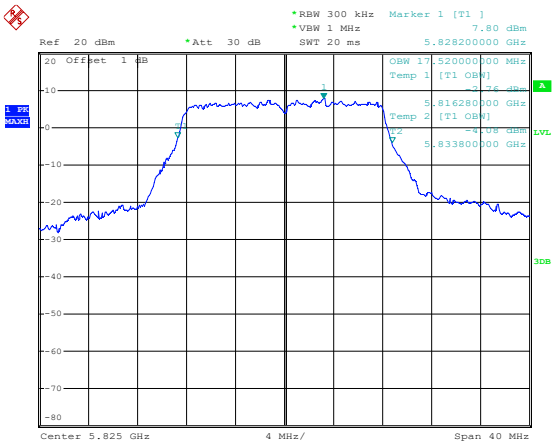

802.11n-HT20-Low	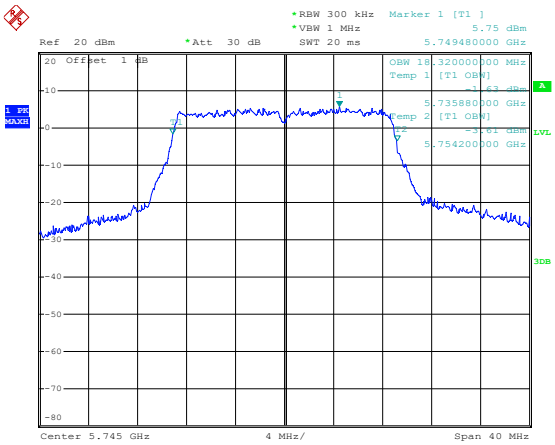
802.11n-HT20-Middle	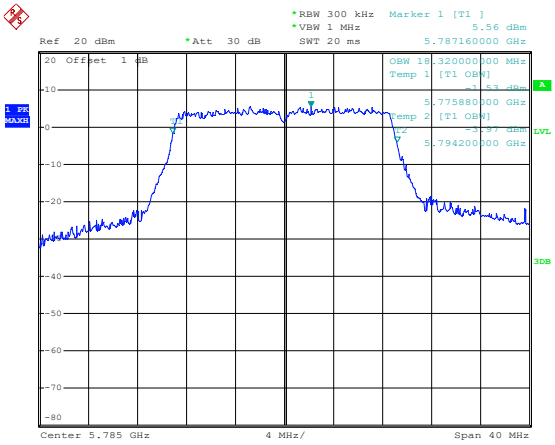
802.11n-HT20-High	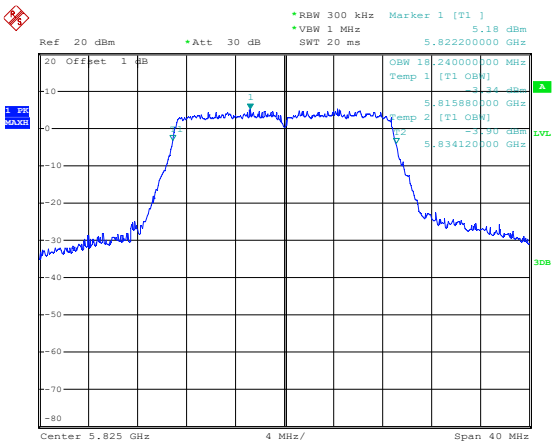

802.11n-HT40-Low	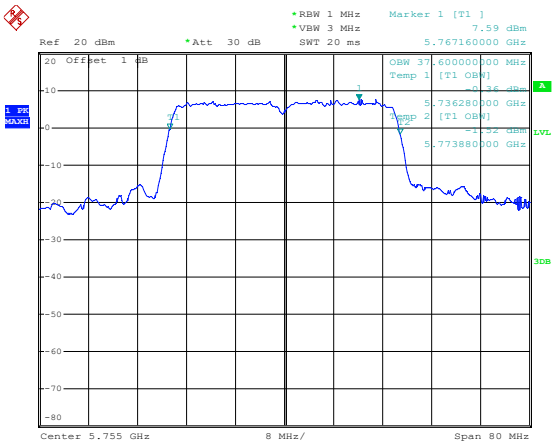
802.11n-HT40-High	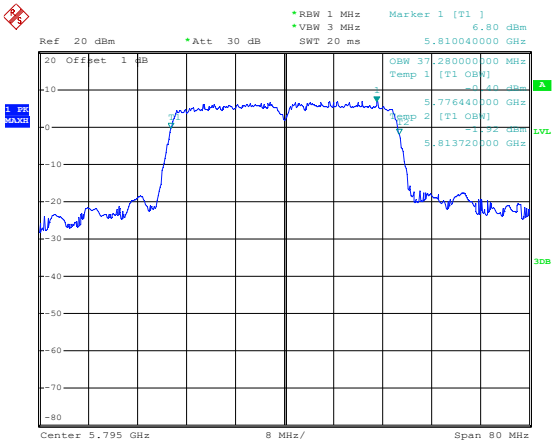
802.11ac-VHT20-Low	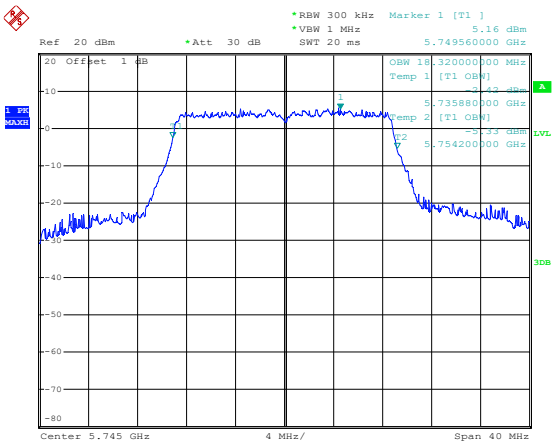

802.11ac-VHT20-Middle	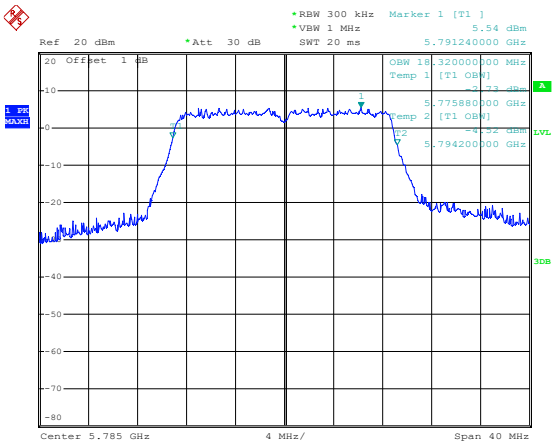
802.11ac-VHT20-High	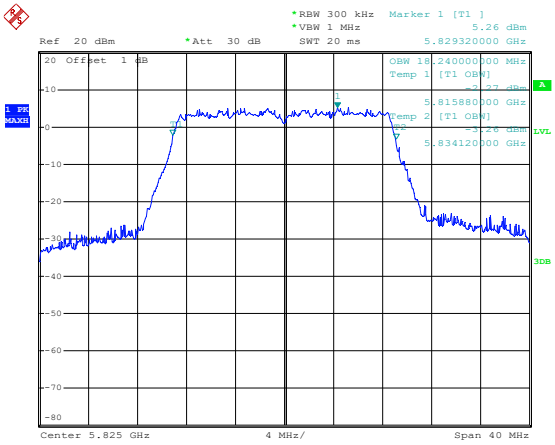
802.11ac-VHT40-Low	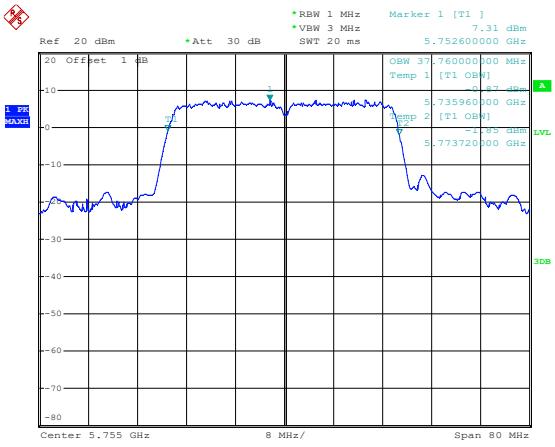

802.11ac-VHT40-High	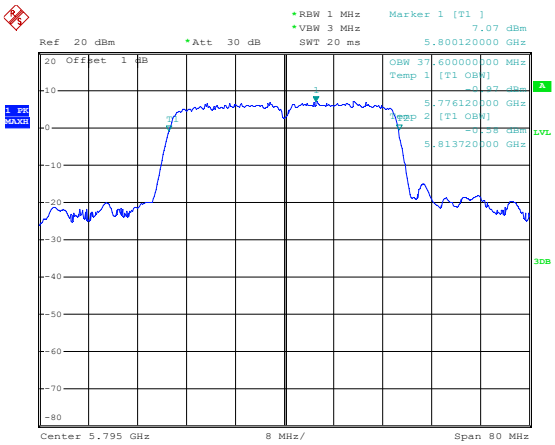
802.11ac-VHT80	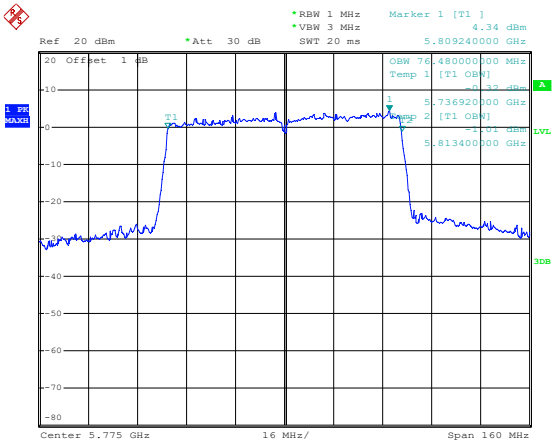
802.11ax-HE20-Low	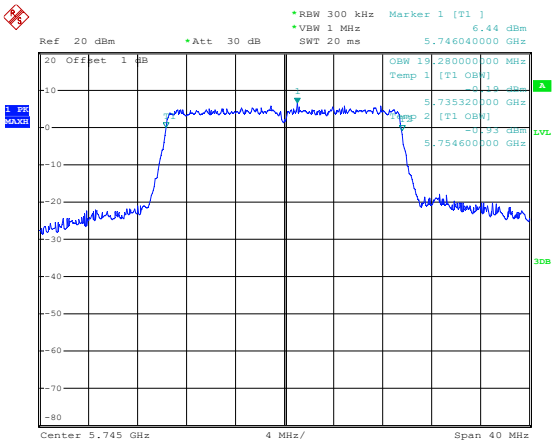

802.11ax-HE20-Middle	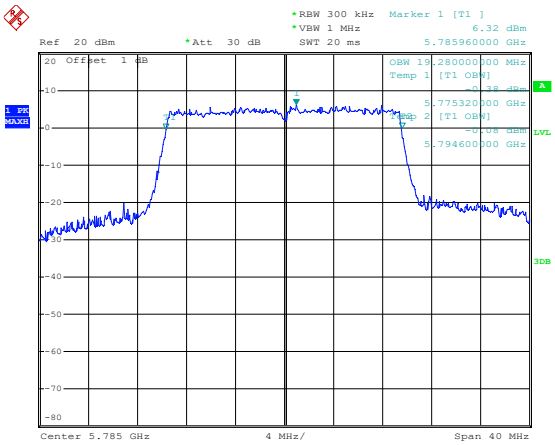
802.11ax-HE20-High	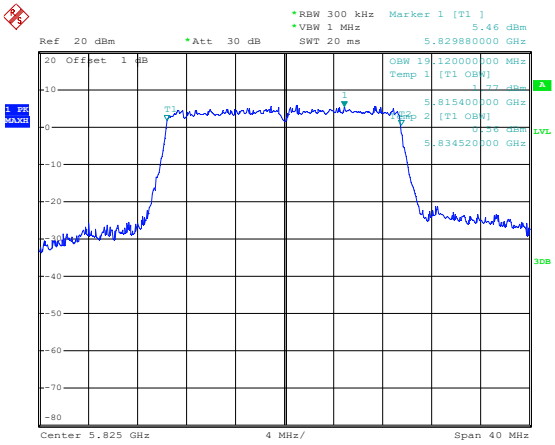
802.11ax-HE40-Low	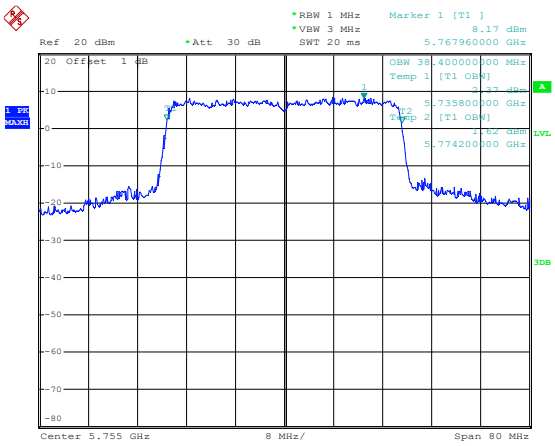

802.11ax-HE40-High	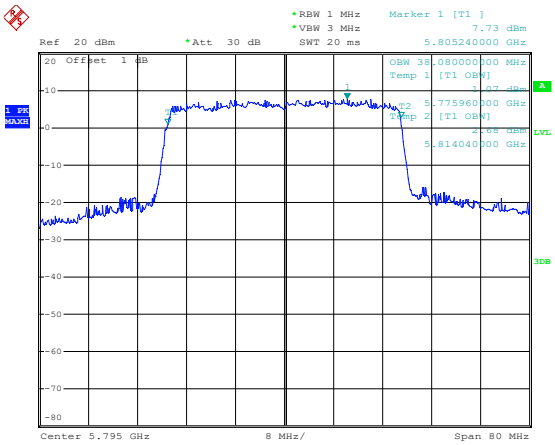
802.11ax-HE80	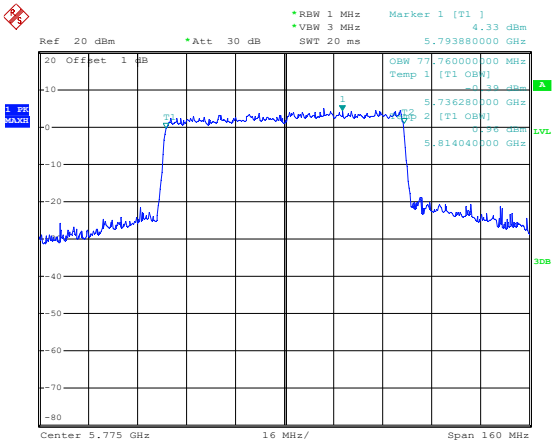

ANT 1

99% Bandwidth

5150-5250MHz

802.11a-Low	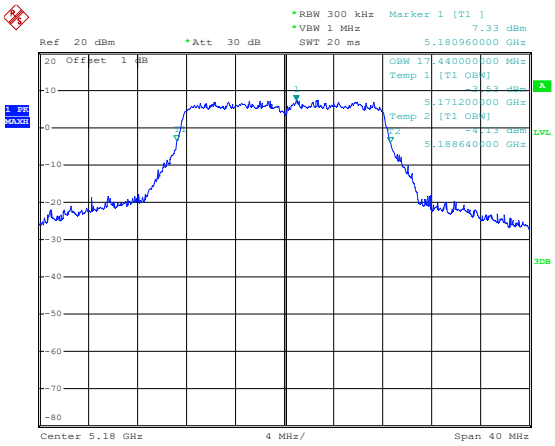
802.11a-Middle	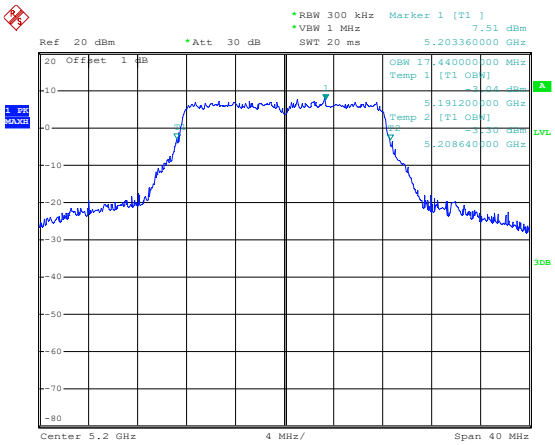
802.11a-High	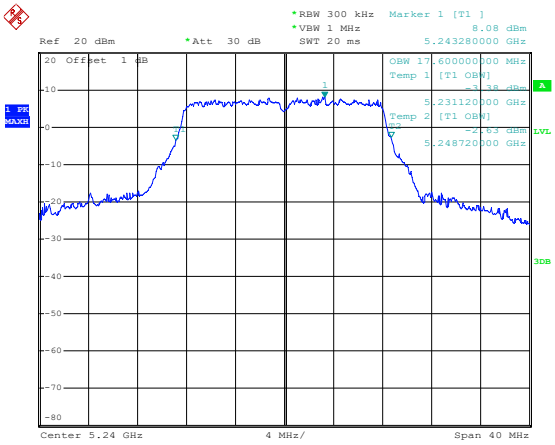

802.11n-HT20-Low	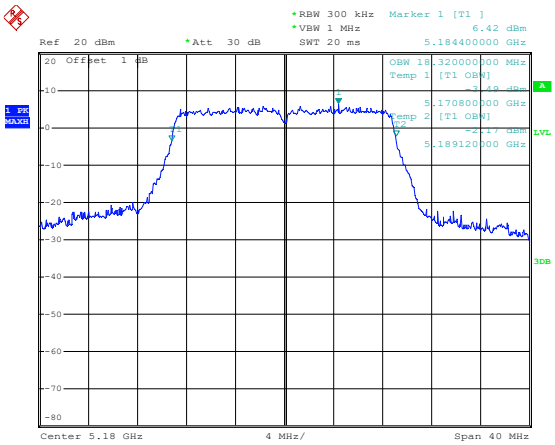
802.11n-HT20-Middle	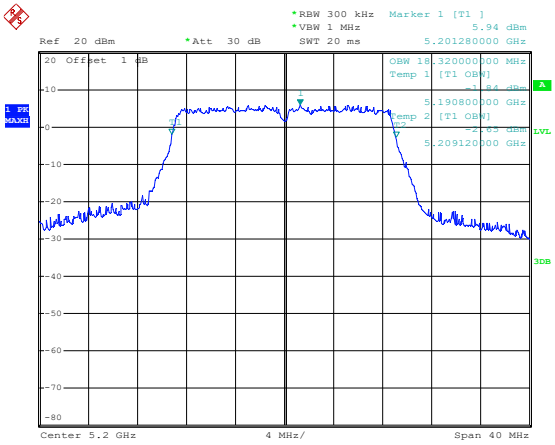
802.11n-HT20-High	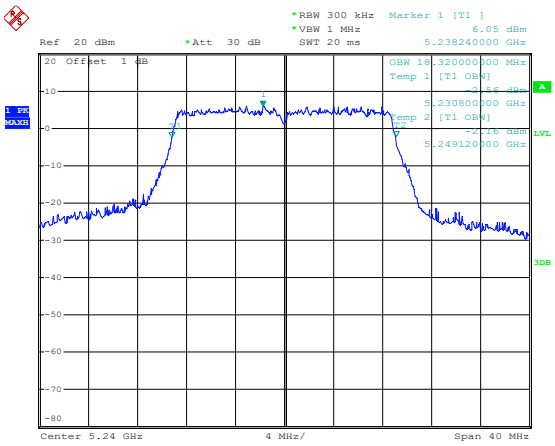

802.11n-HT40-Low	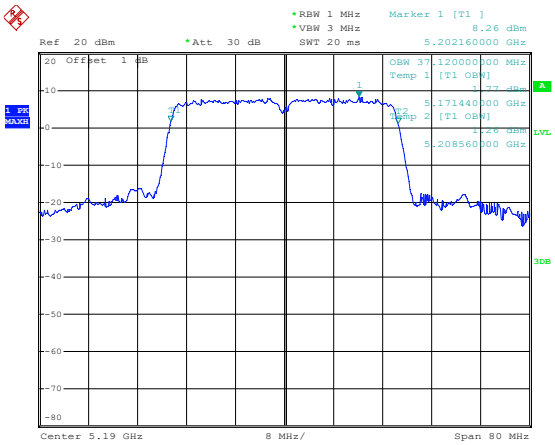
802.11n-HT40-High	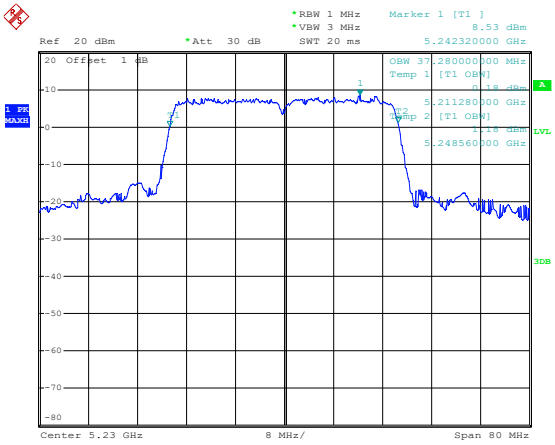
802.11ac-VHT20-Low	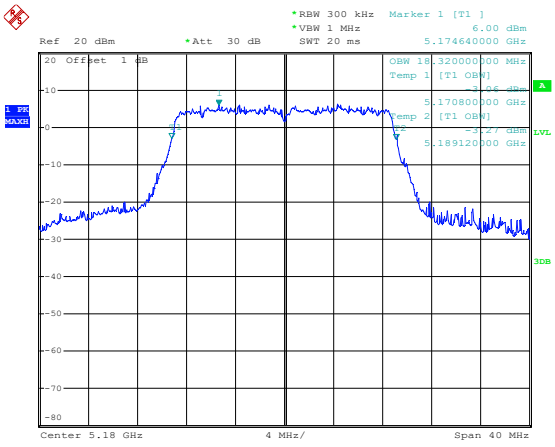

802.11ac-VHT20-Middle	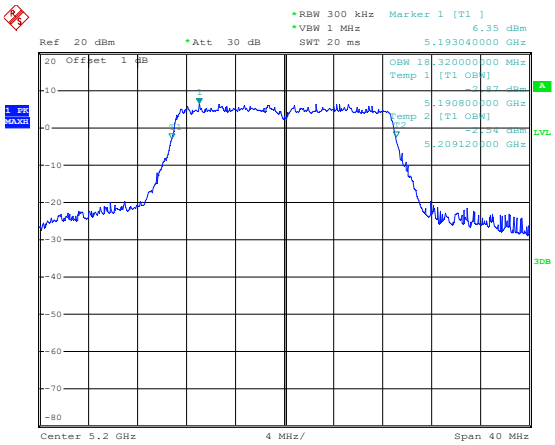
802.11ac-VHT20-High	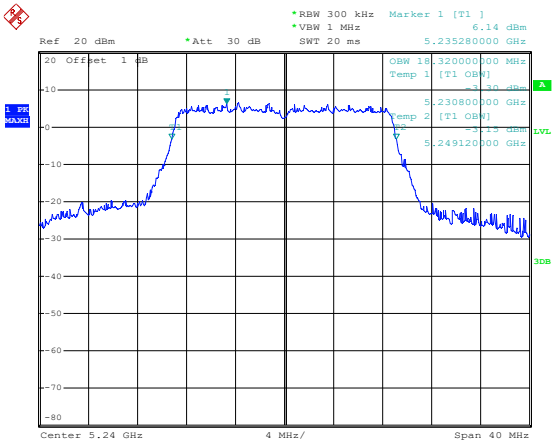
802.11ac-VHT40-Low	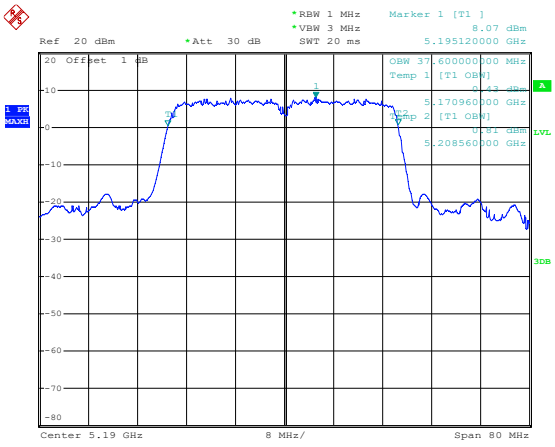

802.11ac-VHT40-High	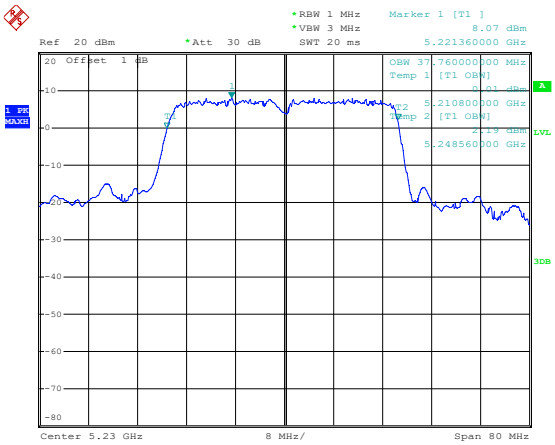
802.11ac-VHT80	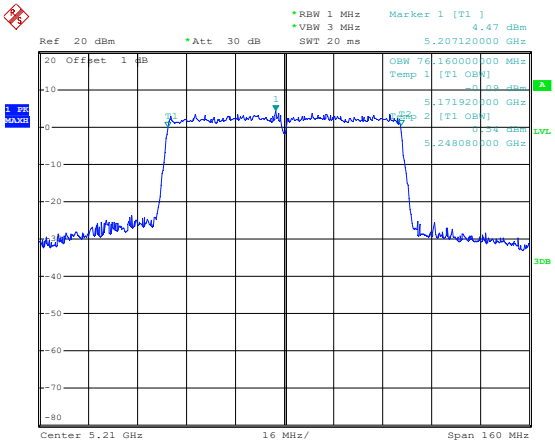
802.11ax-HE20-Low	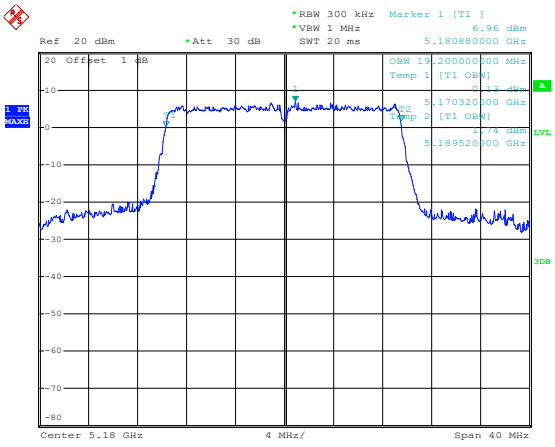

802.11ax-HE20-Middle	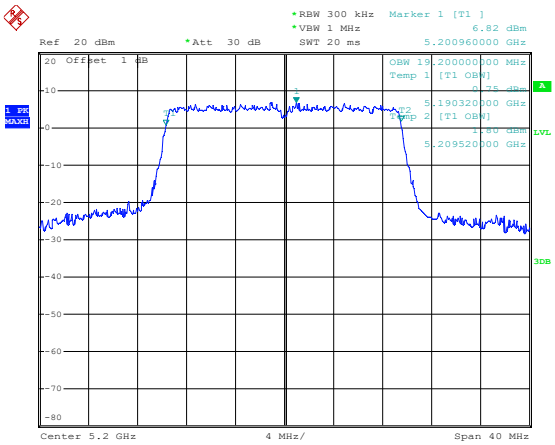
802.11ax-HE20-High	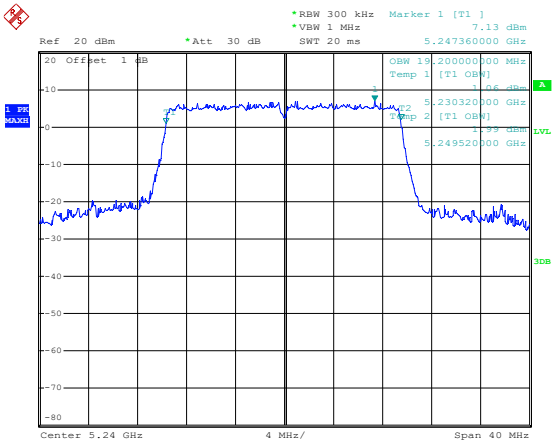
802.11ax-HE40-Low	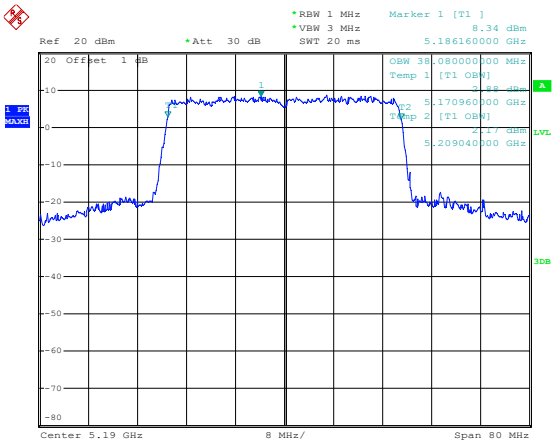

802.11ax-HE40-High	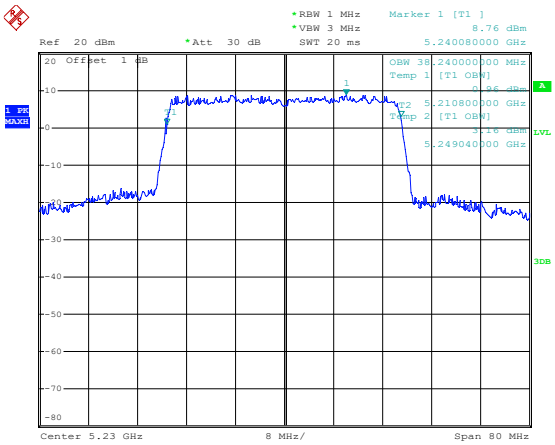
802.11ax-HE80	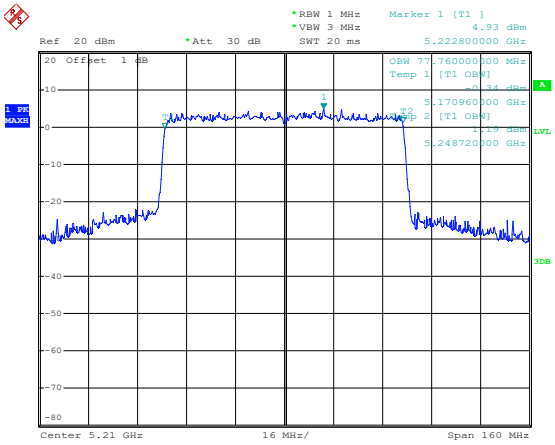

99% Bandwidth

5725-5850MHz

802.11a-Low	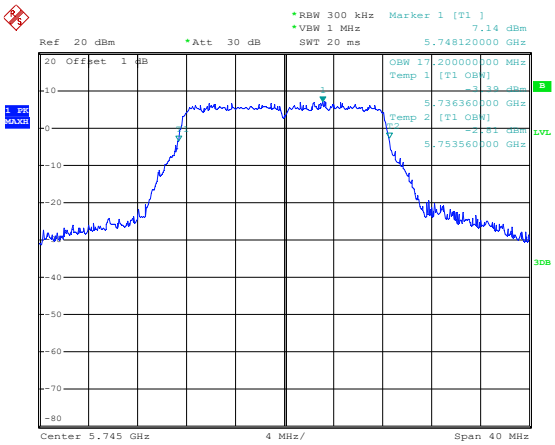
802.11a-Middle	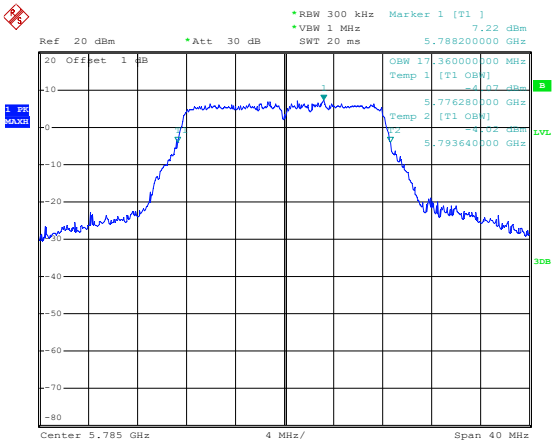
802.11a-High	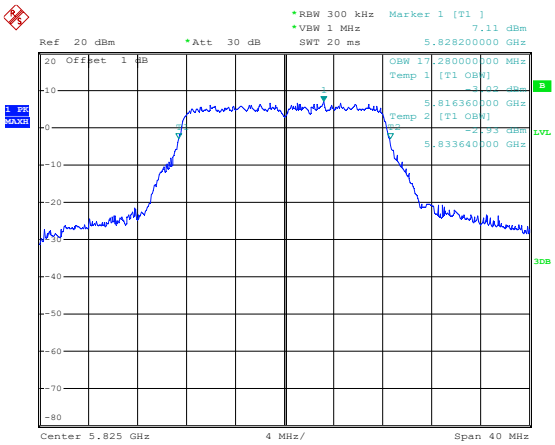

802.11n-HT20-Low	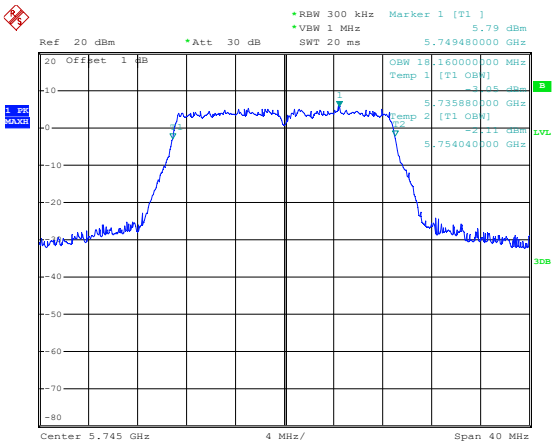
802.11n-HT20-Middle	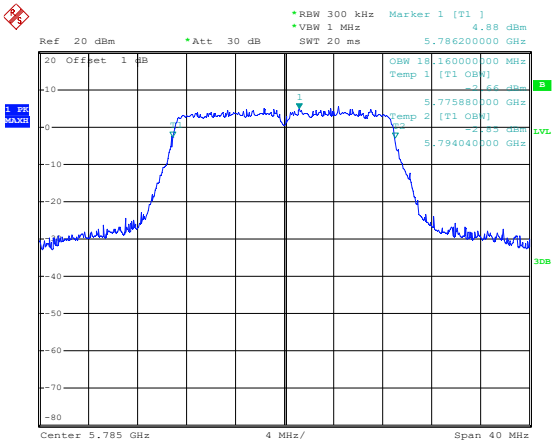
802.11n-HT20-High	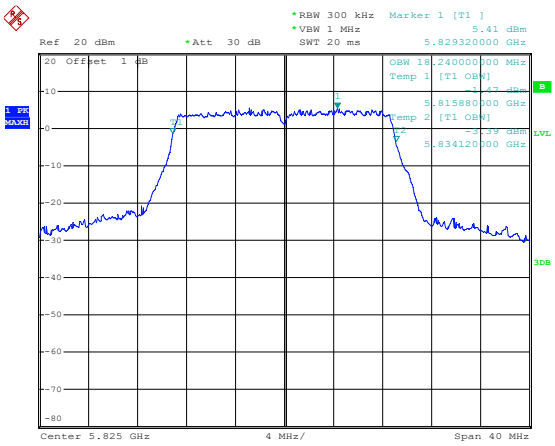

802.11n-HT40-Low	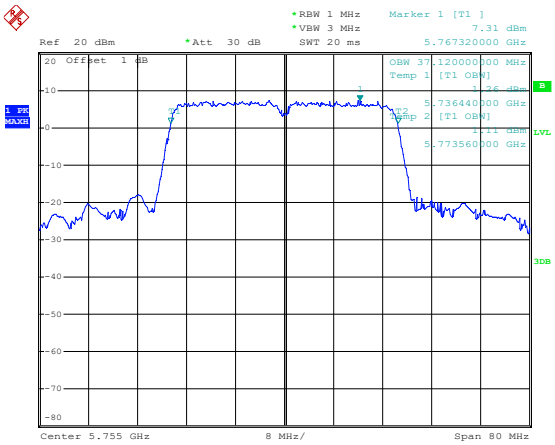
802.11n-HT40-High	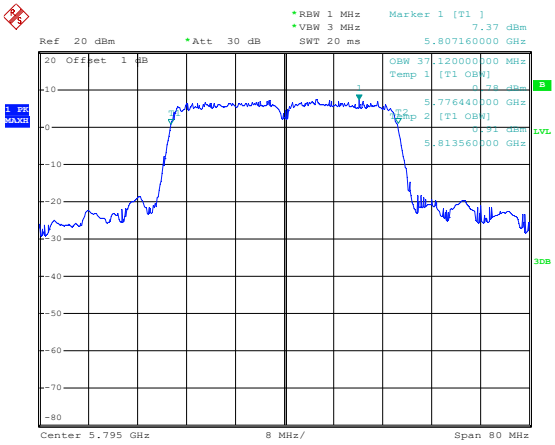
802.11ac-VHT20-Low	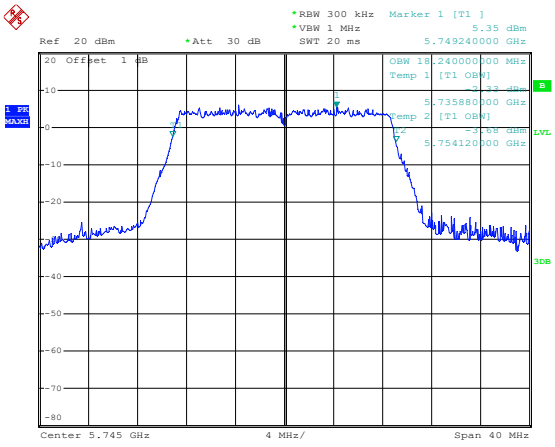

802.11ac-VHT20-Middle	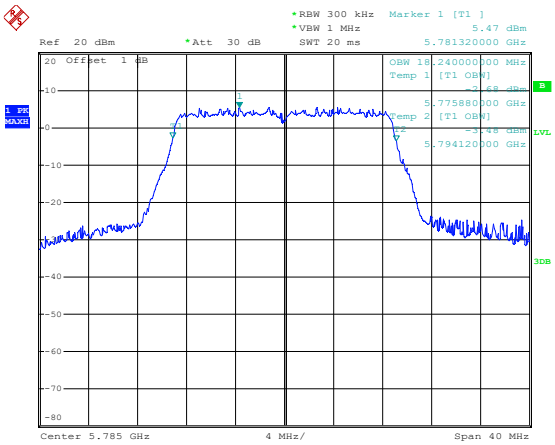
802.11ac-VHT20-High	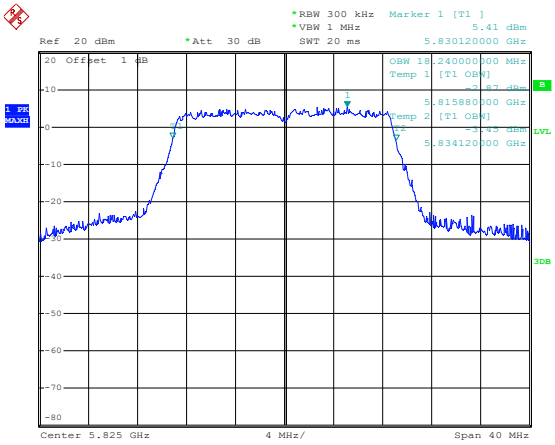
802.11ac-VHT40-Low	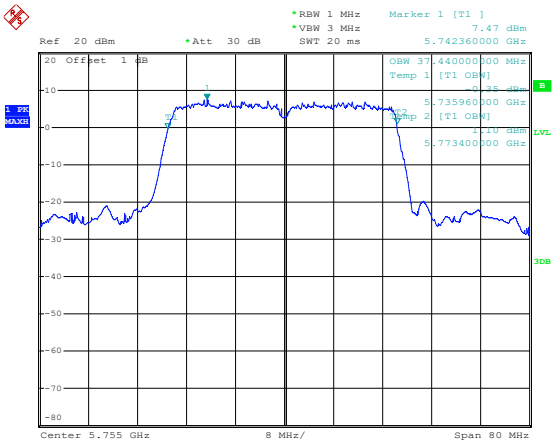

802.11ac-VHT40-High	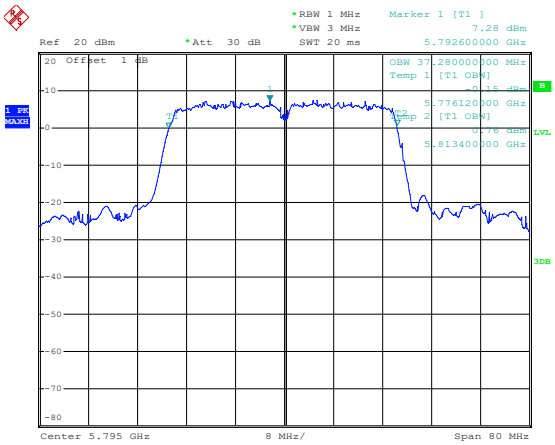 Date: 20.MAR.2025 15:02:31
802.11ac-VHT80	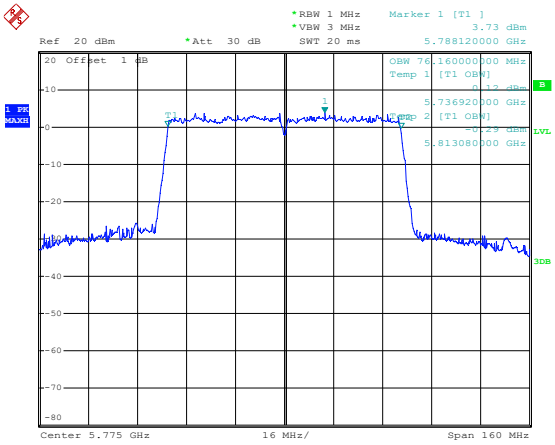 Date: 20.MAR.2025 15:04:14
802.11ax-HE20-Low	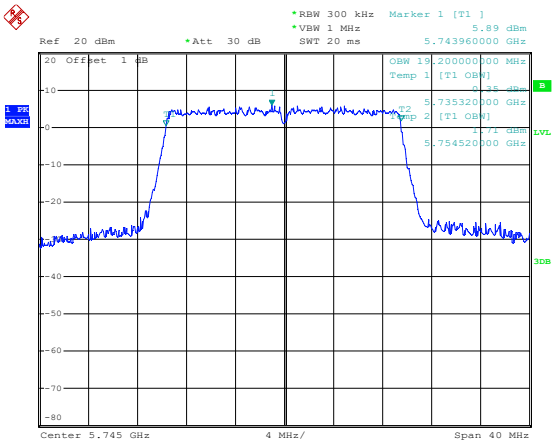 Date: 20.MAR.2025 14:59:46

802.11ax-HE20-Middle	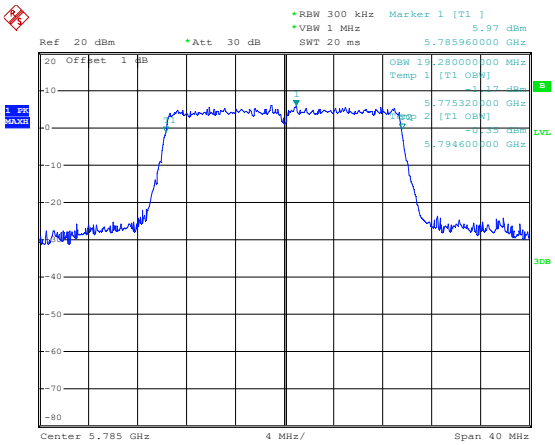
802.11ax-HE20-High	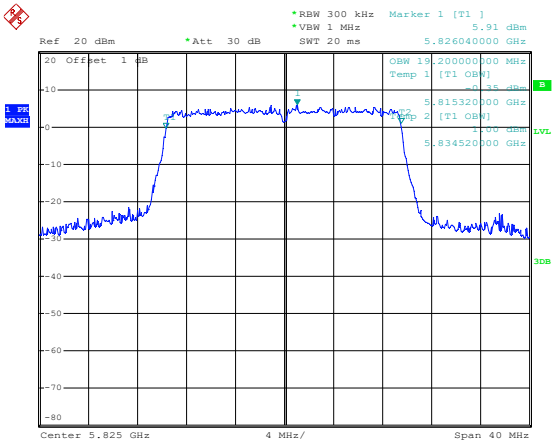
802.11ax-HE40-Low	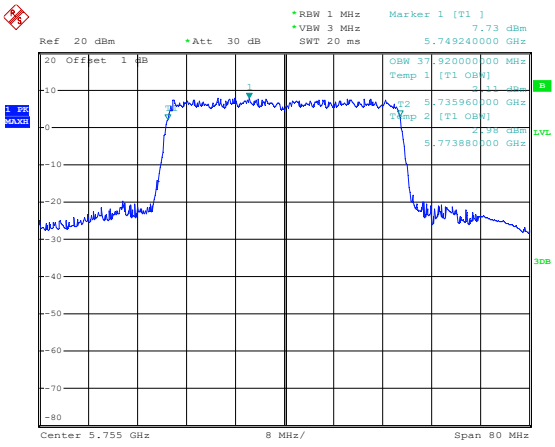

802.11ax-HE40-High	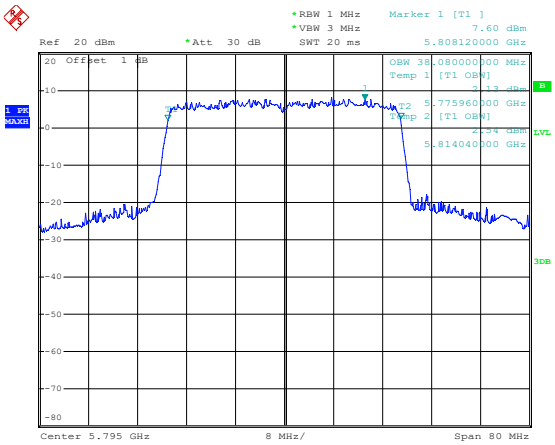
802.11ax-HE80	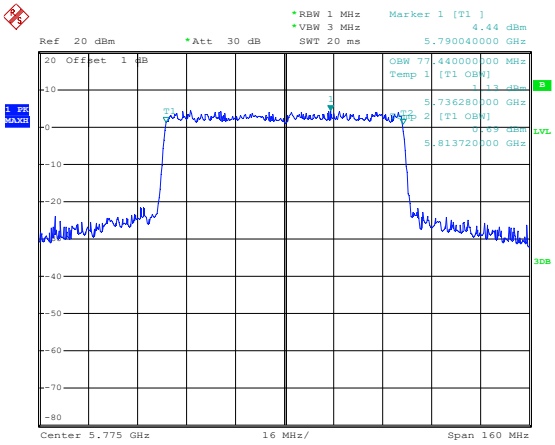

APPENDIX C

Maximum Conducted Output Power

U-NII-1:5150-5250MHz					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ANT 0	ANT 1		
802.11a	5180	15.29	15.35	/	23.98
	5200	15.57	15.44	/	23.98
	5240	15.85	15.41	/	23.98
802.11n-HT20	5180	14.11	14.13	17.13	23.98
	5200	14.49	14.44	17.48	23.98
	5240	14.90	14.42	17.68	23.98
802.11n-HT40	5190	13.84	13.48	16.67	23.98
	5230	13.13	13.64	16.40	23.98
802.11ac-VHT20	5180	14.15	14.11	17.14	23.98
	5200	14.54	14.35	17.46	23.98
	5240	14.88	14.31	17.61	23.98
802.11ac-VHT40	5190	13.79	13.54	16.68	23.98
	5230	13.10	13.64	16.39	23.98
802.11ac-VHT80	5210	12.35	12.18	15.28	23.98
802.11ax-HE20	5180	14.29	14.16	17.24	23.98
	5200	14.66	14.37	17.53	23.98
	5240	14.14	14.44	17.30	23.98
802.11ax-HE40	5190	13.91	13.53	16.73	23.98
	5230	13.18	13.71	16.46	23.98
802.11ax-HE80	5210	12.52	12.50	15.52	23.98

U-NII-3: 5725-5850MHz					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ANT 0	ANT 1		
802.11a	5745	14.72	14.39	/	30.00
	5785	14.64	14.21	/	30.00
	5825	14.82	14.13	/	30.00
802.11n-HT20	5745	13.30	13.74	16.54	30.00
	5785	13.56	13.26	16.42	30.00
	5825	13.12	13.16	16.15	30.00
802.11n-HT40	5755	12.75	12.58	15.68	30.00
	5795	12.36	12.37	15.38	30.00
802.11ac-VHT20	5745	13.48	13.32	16.41	30.00
	5785	13.62	13.37	16.51	30.00
	5825	13.07	13.06	16.08	30.00
802.11ac-VHT40	5755	12.75	12.45	15.61	30.00
	5795	12.09	12.35	15.23	30.00
802.11ac-VHT80	5775	11.80	12.04	14.93	30.00
802.11ax-HE20	5745	13.58	13.40	16.50	30.00
	5785	13.53	13.29	16.42	30.00
	5825	13.06	13.06	16.07	30.00
802.11ax-HE40	5755	12.76	12.40	15.59	30.00
	5795	12.36	12.32	15.35	30.00
802.11ax VH80	5775	11.97	12.14	15.07	30.00

ANT 0

5150-5250MHz

802.11a-Low	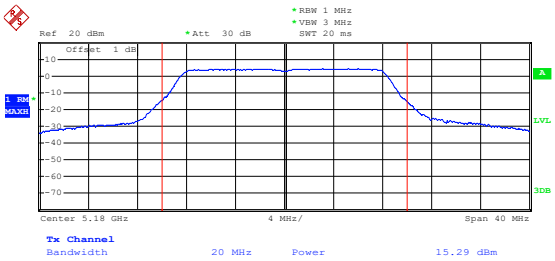 Date: 19.MAR.2025 09:45:30
802.11a-Middle	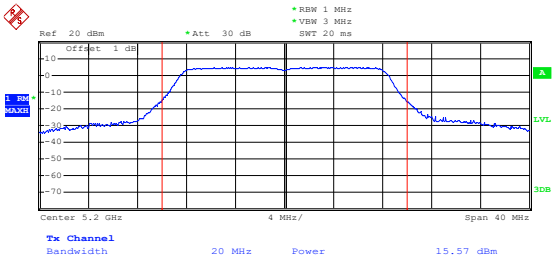 Date: 19.MAR.2025 09:46:09
802.11a-High	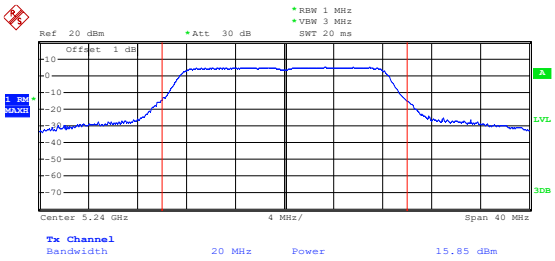 Date: 19.MAR.2025 09:47:04

802.11n-HT20-Low	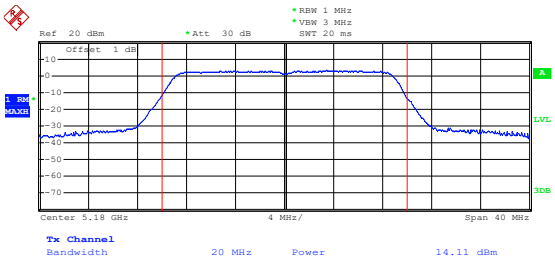 Date: 19.MAR.2025 09:49:57
802.11n-HT20-Middle	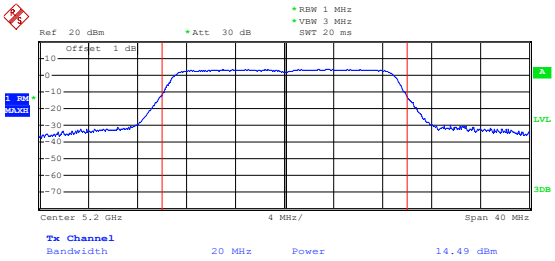 Date: 19.MAR.2025 09:49:23
802.11n-HT20-High	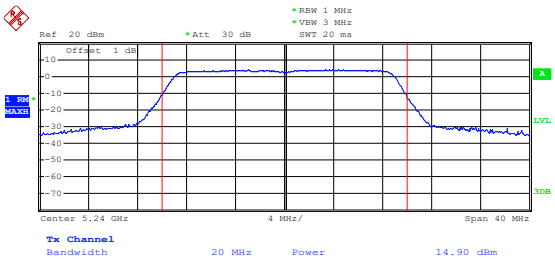 Date: 19.MAR.2025 09:48:54

802.11n-HT40-Low	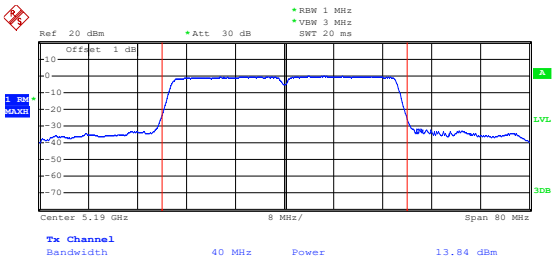 Date: 19.MAR.2025 10:09:38
802.11n-HT40-High	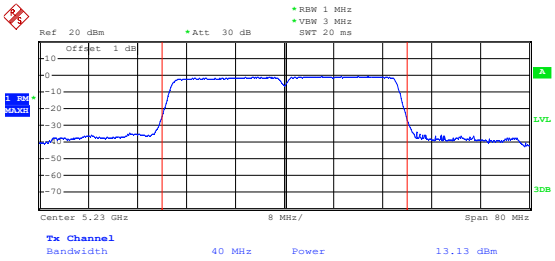 Date: 19.MAR.2025 10:10:47
802.11ac-VHT20-Low	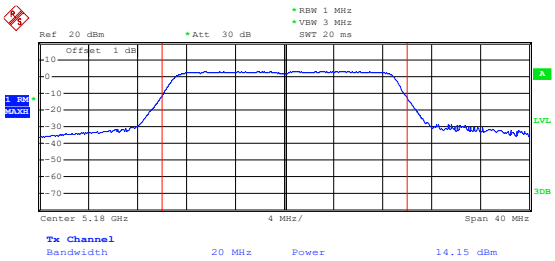 Date: 19.MAR.2025 09:59:52

802.11ac-VHT20-Middle	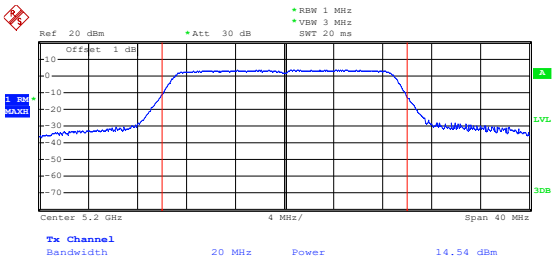 Date: 19.MAR.2025 10:00:33
802.11ac-VHT20-High	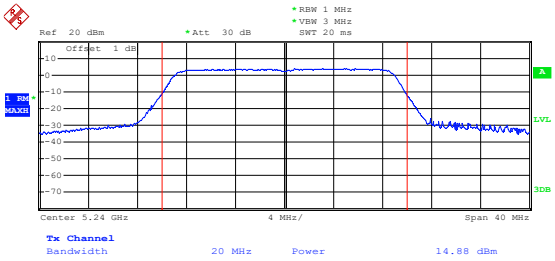 Date: 19.MAR.2025 10:01:11
802.11ac-VHT40-Low	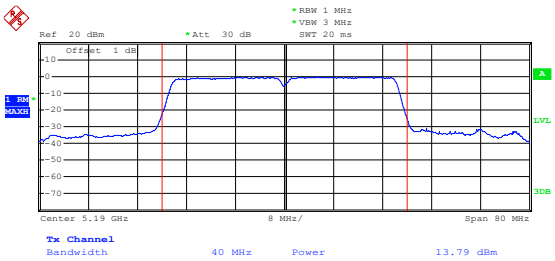 Date: 19.MAR.2025 10:12:27

802.11ac-VHT40-High	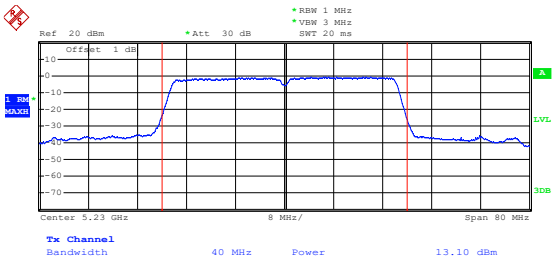 Date: 19.MAR.2025 10:11:37
802.11ac-VHT80	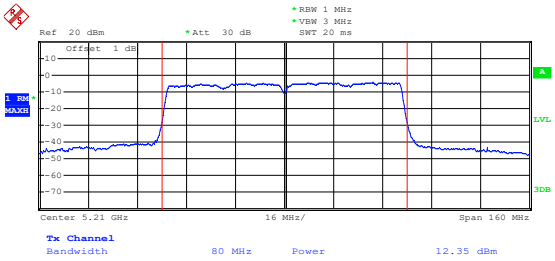 Date: 19.MAR.2025 10:15:40
802.11ax-HE20-Low	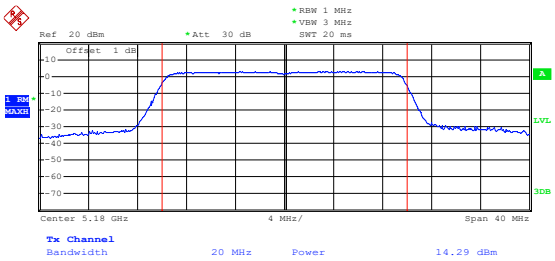 Date: 19.MAR.2025 10:04:36

802.11ax-HE20-Middle	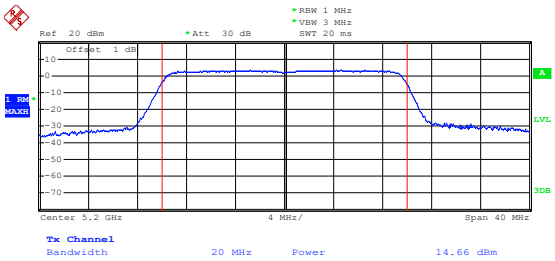 Date: 19.MAR.2025 10:04:00
802.11ax-HE20-High	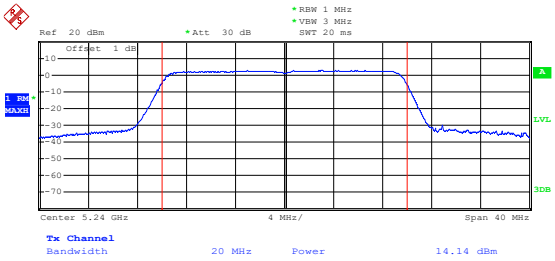 Date: 19.MAR.2025 10:02:48
802.11ax-HE40-Low	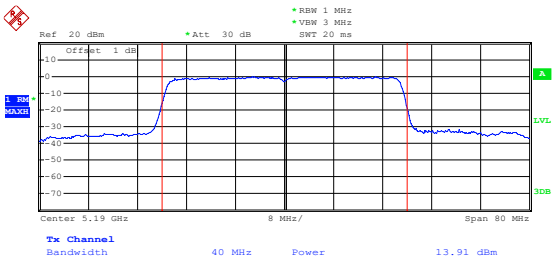 Date: 19.MAR.2025 10:13:49

802.11ax-HE40-High	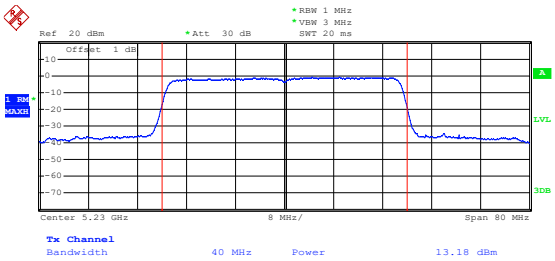 Date: 19.MAR.2025 10:14:36
802.11ax-HE80	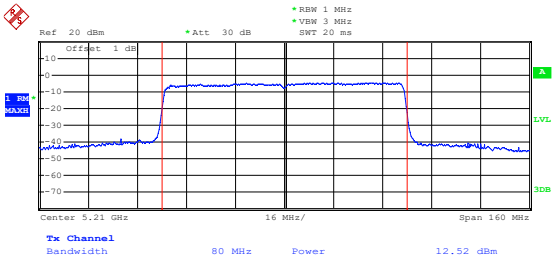 Date: 19.MAR.2025 10:16:15

5725-5850MHz

802.11a-Low	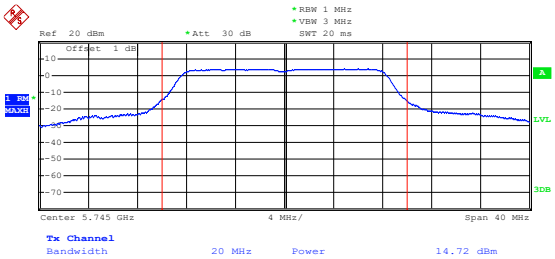 Date: 19.MAR.2025 14:17:58
802.11a-Middle	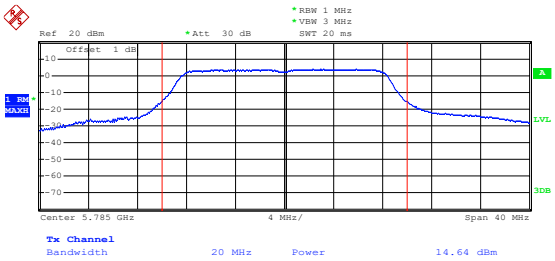 Date: 19.MAR.2025 14:19:19
802.11a-High	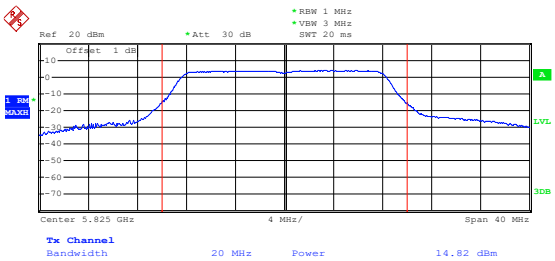 Date: 19.MAR.2025 14:19:53

802.11n-HT20-Low	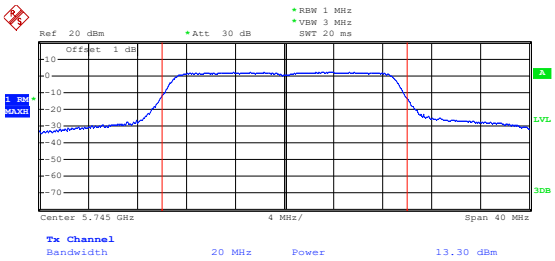 Date: 19.MAR.2025 14:26:05
802.11n-HT20-Middle	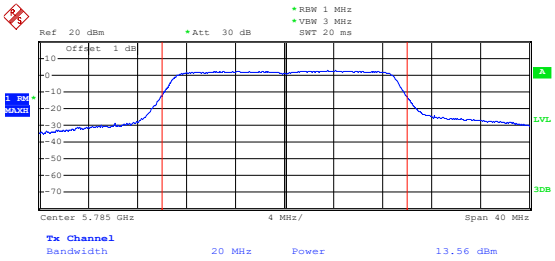 Date: 19.MAR.2025 14:25:35
802.11n-HT20-High	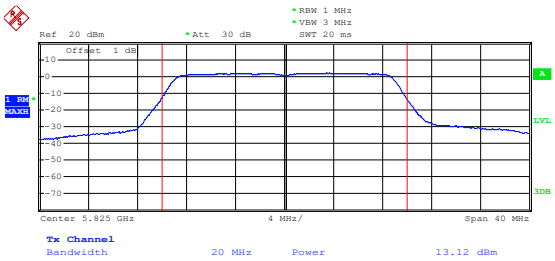 Date: 19.MAR.2025 14:23:36

802.11n-HT40-Low	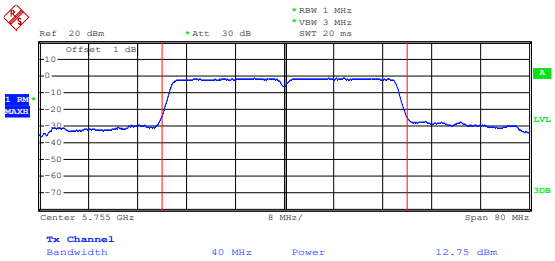 Date: 19.MAR.2025 14:34:39
802.11n-HT40-High	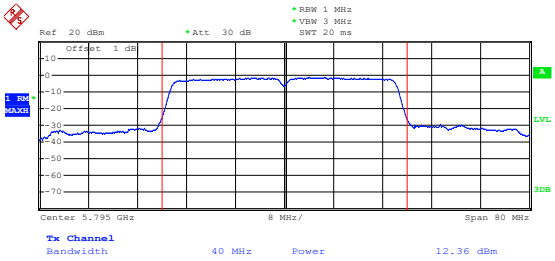 Date: 19.MAR.2025 14:36:08
802.11ac-VHT20-Low	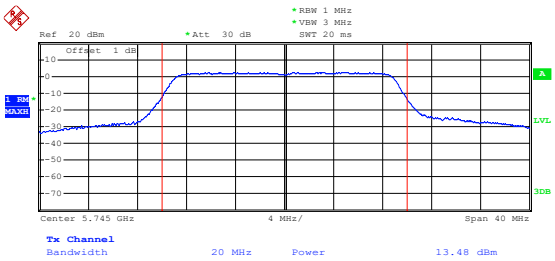 Date: 19.MAR.2025 14:27:07

802.11ac-VHT20-Middle	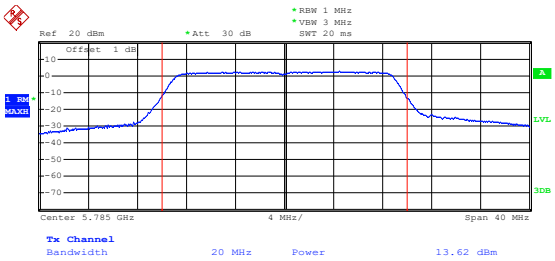 Date: 19.MAR.2025 14:28:13
802.11ac-VHT20-High	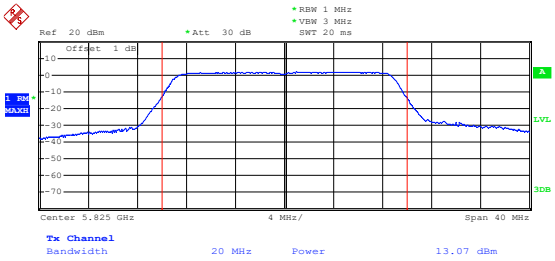 Date: 19.MAR.2025 14:29:16
802.11ac-VHT40-Low	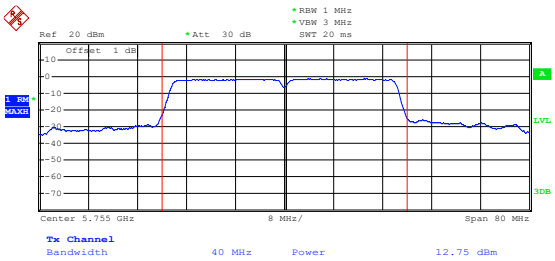 Date: 19.MAR.2025 14:38:15

802.11ac-VHT40-High	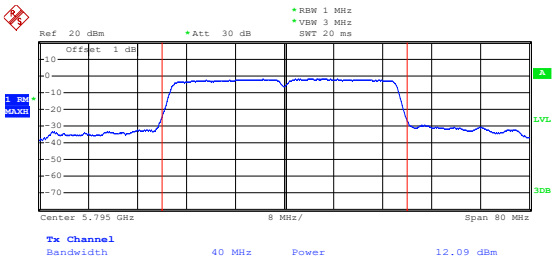 Date: 19.MAR.2025 14:37:45
802.11ac-VHT80	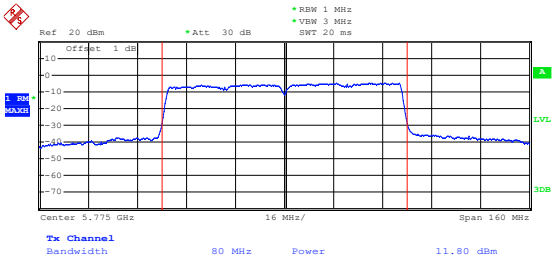 Date: 19.MAR.2025 14:42:11
802.11ax-HE20-Low	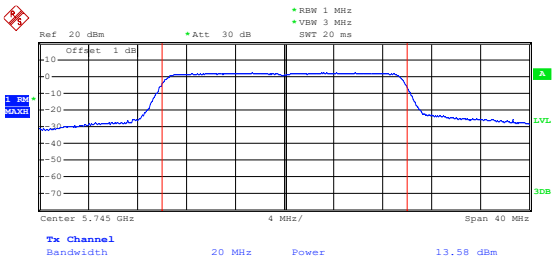 Date: 19.MAR.2025 14:31:57

802.11ax-HE20-Middle	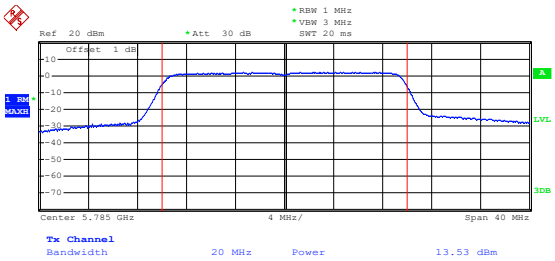 Date: 19.MAR.2025 14:30:31
802.11ax-HE20-High	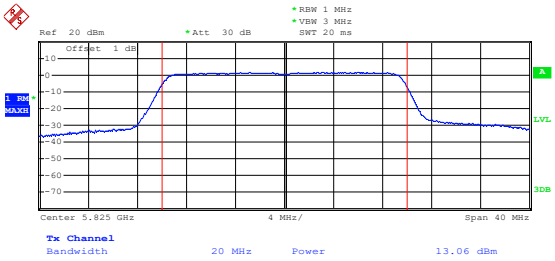 Date: 19.MAR.2025 14:29:59
802.11ax-HE40-Low	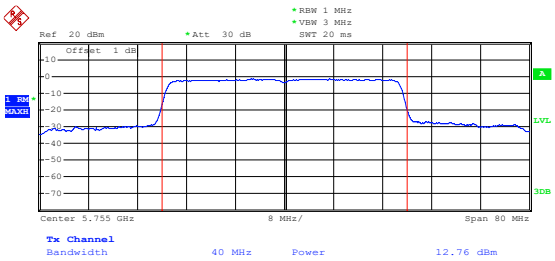 Date: 19.MAR.2025 14:38:52

802.11ax-HE40-High	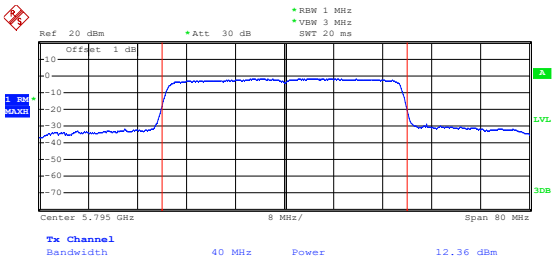 Date: 19.MAR.2025 14:39:44
802.11ax-HE80	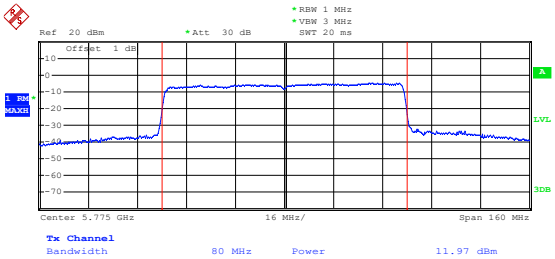 Date: 19.MAR.2025 14:42:50

ANT 1

5150-5250MHz

802.11a-Low	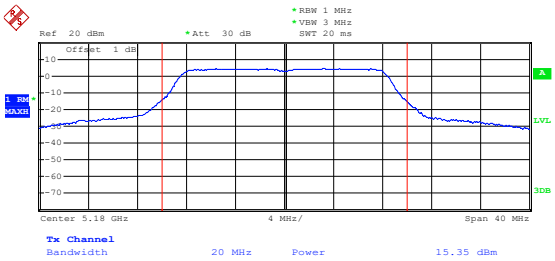 Date: 20.MAR.2025 09:26:55
802.11a-Middle	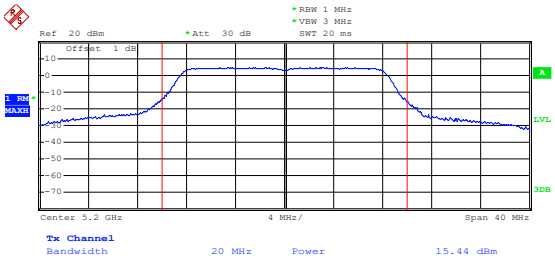 Date: 20.MAR.2025 09:27:26
802.11a-High	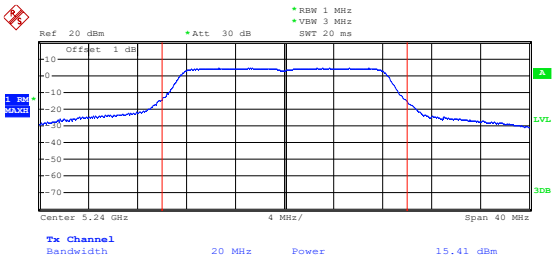 Date: 20.MAR.2025 09:28:08

802.11n-HT20-Low	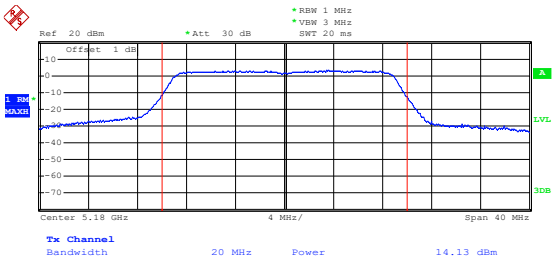 Date: 20.MAR.2025 09:29:54
802.11n-HT20-Middle	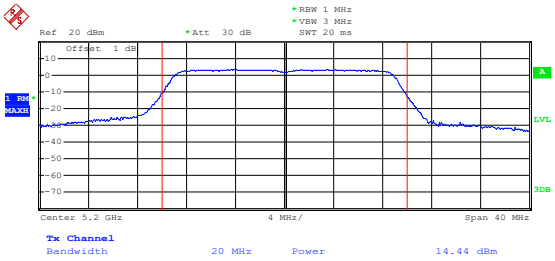 Date: 20.MAR.2025 09:29:23
802.11n-HT20-High	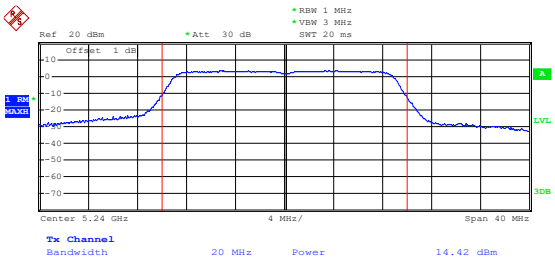 Date: 20.MAR.2025 09:28:52

802.11n-HT40-Low	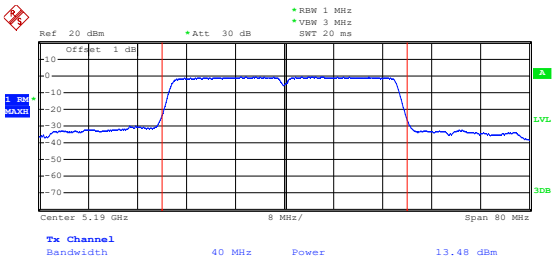 Date: 20.MAR.2025 09:38:21
802.11n-HT40-High	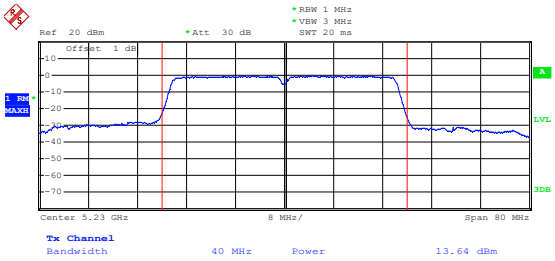 Date: 20.MAR.2025 09:38:49
802.11ac-VHT20-Low	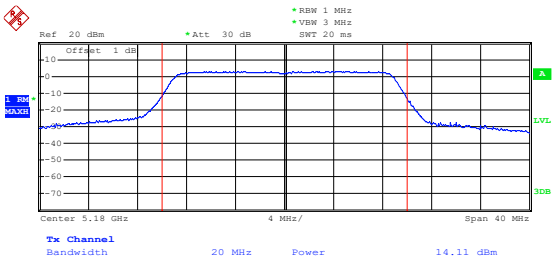 Date: 20.MAR.2025 09:30:34

802.11ac-VHT20-Middle	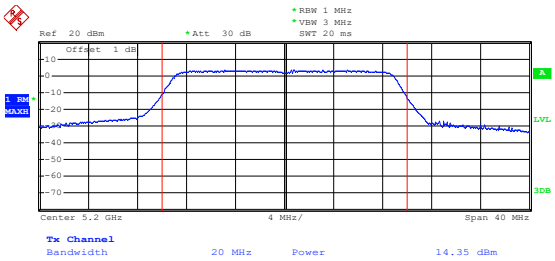 Date: 20.MAR.2025 09:31:04
802.11ac-VHT20-High	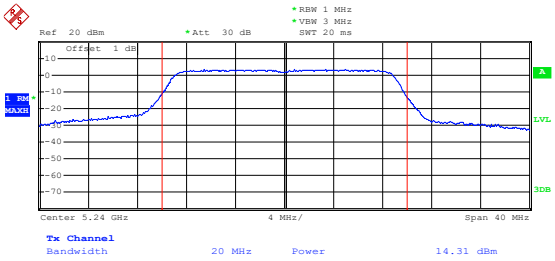 Date: 20.MAR.2025 09:31:40
802.11ac-VHT40-Low	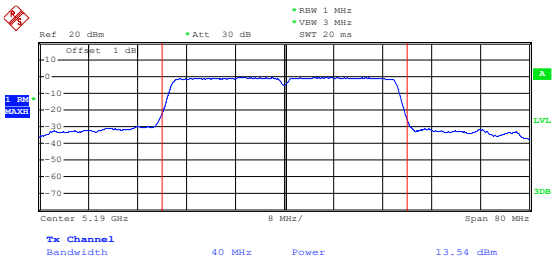 Date: 20.MAR.2025 09:40:14

802.11ac-VHT40-High	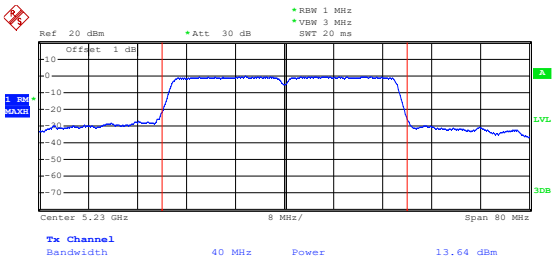 Date: 20.MAR.2025 09:39:29
802.11ac-VHT80	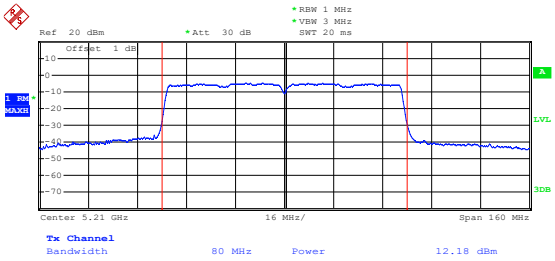 Date: 20.MAR.2025 09:49:10
802.11ax-HE20-Low	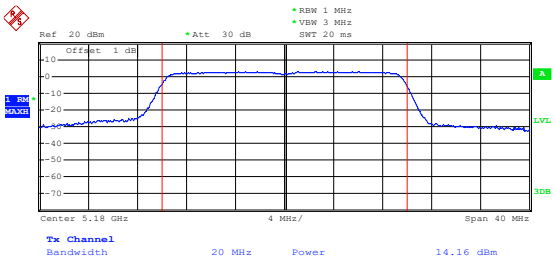 Date: 20.MAR.2025 09:37:13

802.11ax-HE20-Middle	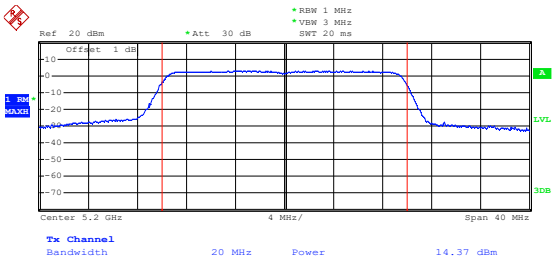 Date: 20.MAR.2025 09:36:26
802.11ax-HE20-High	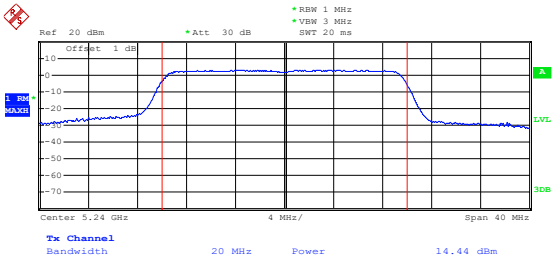 Date: 20.MAR.2025 09:35:57
802.11ax-HE40-Low	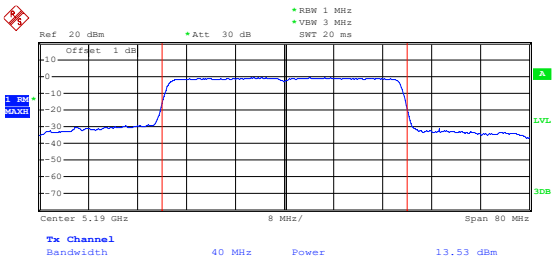 Date: 20.MAR.2025 09:46:37

802.11ax-HE40-High	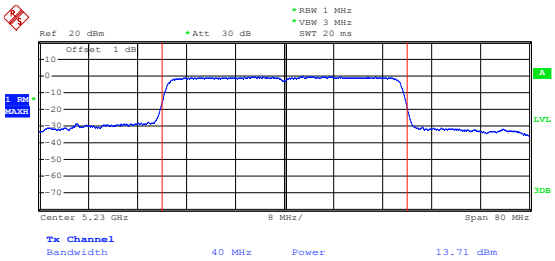 Date: 20.MAR.2025 09:47:27
802.11ax-HE80	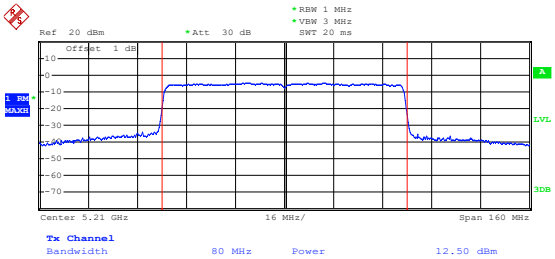 Date: 20.MAR.2025 09:49:48

5725-5850MHz

802.11a-Low	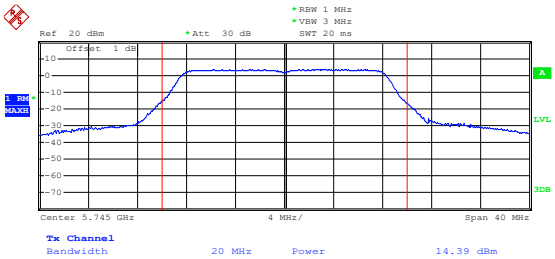 Date: 20.MAR.2025 11:05:58
802.11a-Middle	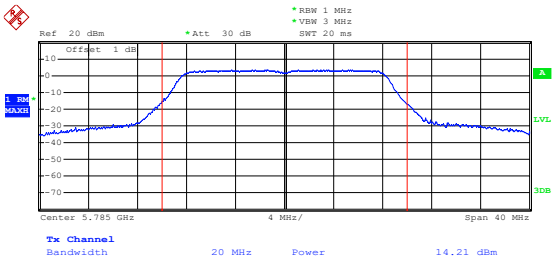 Date: 20.MAR.2025 11:06:28
802.11a-High	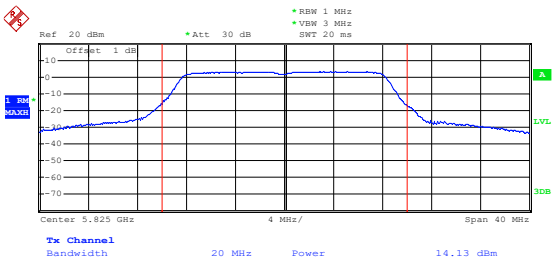 Date: 20.MAR.2025 11:07:13

802.11n-HT20-Low	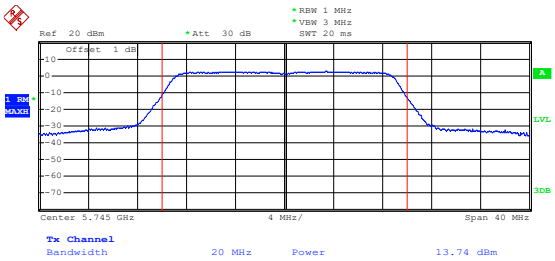 Date: 20.MAR.2025 11:11:41
802.11n-HT20-Middle	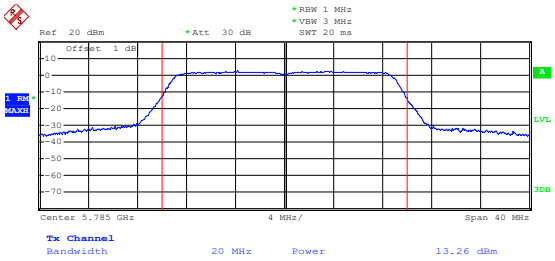 Date: 20.MAR.2025 11:08:52
802.11n-HT20-High	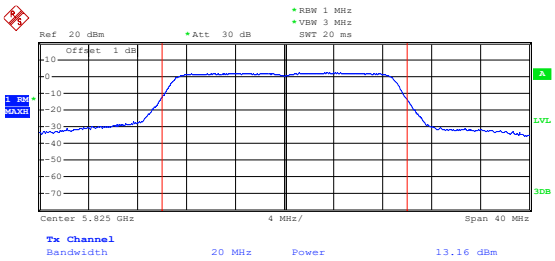 Date: 20.MAR.2025 11:08:26

802.11n-HT40-Low	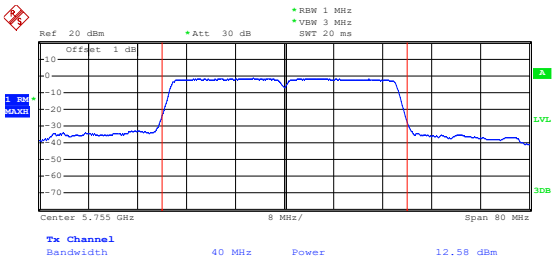 Date: 20.MAR.2025 11:16:52
802.11n-HT40-High	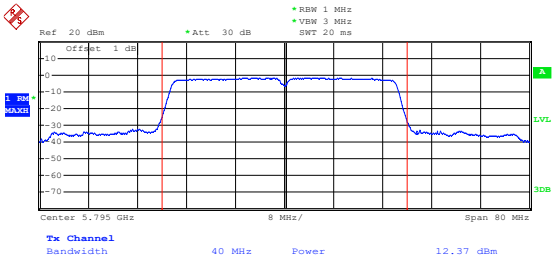 Date: 20.MAR.2025 11:17:20
802.11ac-VHT20-Low	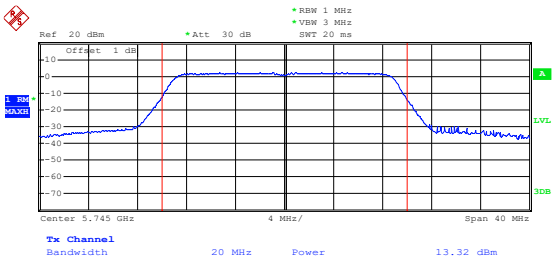 Date: 20.MAR.2025 11:13:08

802.11ac-VHT20-Middle	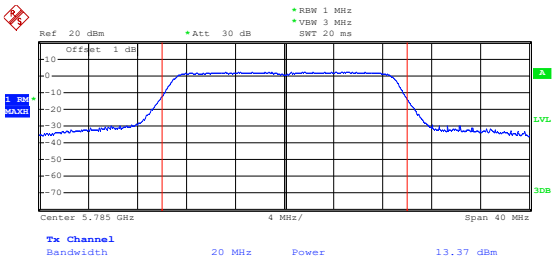 Date: 20.MAR.2025 11:13:33
802.11ac-VHT20-High	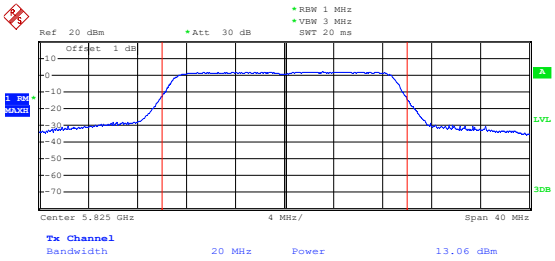 Date: 20.MAR.2025 11:14:02
802.11ac-VHT40-Low	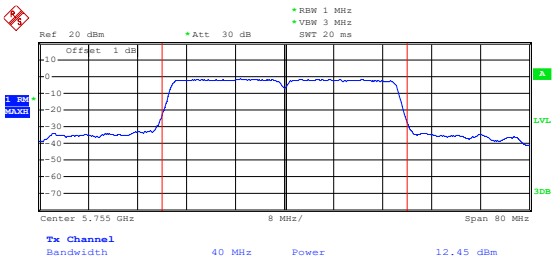 Date: 20.MAR.2025 11:18:18

802.11ac-VHT40-High	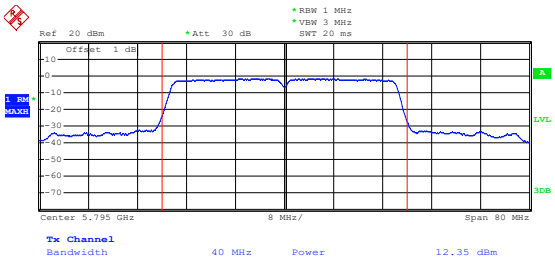 Date: 20.MAR.2025 11:17:53
802.11ac-VHT80	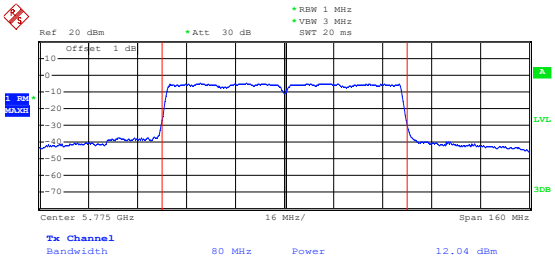 Date: 20.MAR.2025 11:19:59
802.11ax-HE20-Low	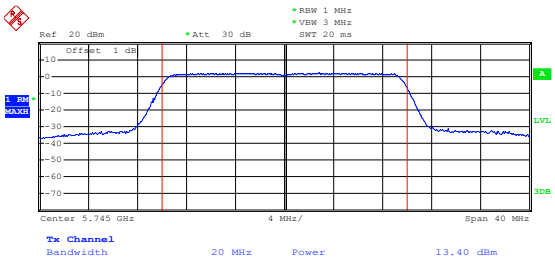 Date: 20.MAR.2025 11:15:36

802.11ax-HE20-Middle	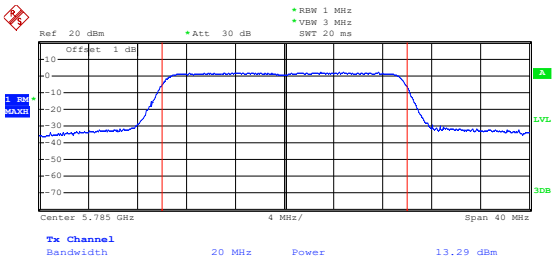 Date: 20.MAR.2025 11:15:04
802.11ax-HE20-High	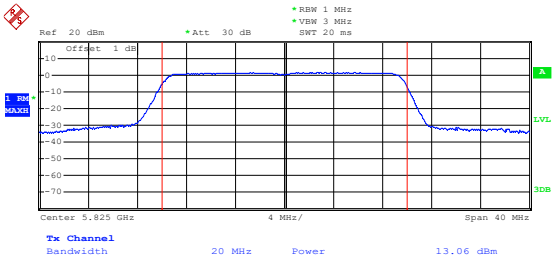 Date: 20.MAR.2025 11:14:38
802.11ax-HE40-Low	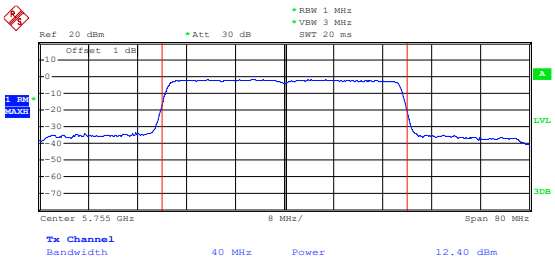 Date: 20.MAR.2025 11:18:47

802.11ax-HE40-High	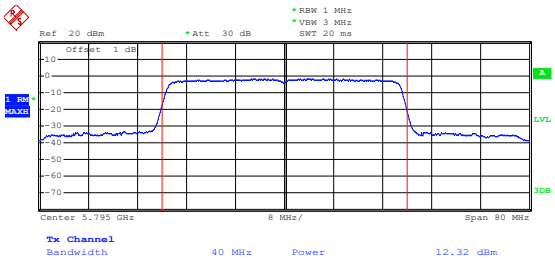 Date: 20.MAR.2025 11:19:11
802.11ax-HE80	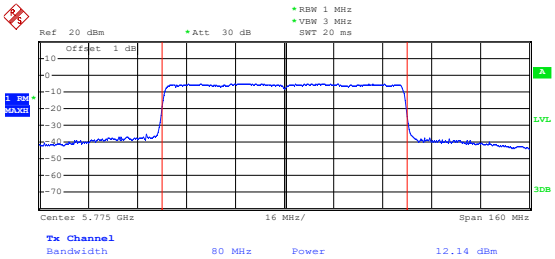 Date: 20.MAR.2025 11:20:38

APPENDIX D

Frequency Stability

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	12	-30	501	0.096
100%		-20	504	0.097
100%		-10	504	0.097
100%		0	501	0.096
100%		+10	496	0.095
100%		+20	502	0.096
100%		+30	496	0.095
100%		+40	500	0.096
100%		+50	497	0.096
Low Battery power	13.2	+20	505	0.097
High Battery power	10.8	+20	498	0.096

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	12	-30	501	0.087
100%		-20	503	0.087
100%		-10	502	0.087
100%		0	504	0.087
100%		+10	502	0.087
100%		+20	501	0.087
100%		+30	496	0.086
100%		+40	500	0.086
100%		+50	497	0.086
Low Battery power	13.2	+20	496	0.086
High Battery power	10.8	+20	504	0.087

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******