

TEST REPORT



Dt&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2604-0046

2. Customer

• Name: JINWOO ATS CO.,LTD

• Address: 168, Gasan digital 1-ro, Geumcheon-gu 10F, SEOUL, South Korea

3. Use of Report : FCC Original Certification

4. Product Name / Model Name : UHF RFID Reader / JWR-UHF-R340

FCC ID : 2BPEO-JWR-UHF-R340

5. FCC Regulation(s): Part 15.247

Test Method used: ANSI C63.10-2020, KDB 558074D01v05r02

6. Date of Test : 2025.05.29 ~ 2026.02.21


7. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Technical Manager
	Name : SeungMin Gil 	Name : JaeJin Lee 

2026 . 04 . 30 .

Dt&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2604-0046	Apr. 30, 2026	Initial issue	SeungMin Gil	JaeJin Lee

Table of Contents

1. General Information	4
1.1. Description of EUT	4
1.2. Declaration by the manufacturer	4
1.3. Testing Laboratory	5
1.4. Testing Environment	5
1.5. Measurement Uncertainty	5
1.6. Test Equipment List	6
1.7. Conclusion of worst-case and operation mode.....	7
2. Antenna Requirement	8
3. Summary of Test Results	9
4. Maximum Peak Output Power Measurement	10
4.1. Test Setup	10
4.2. Limit.....	10
4.3. Test Procedure.....	10
4.4. Test Results	10
5. 20dB BW.....	13
5.1. Test Setup	13
5.2. Limit.....	13
5.3. Test Procedure	13
5.4. Test Results	13
6. Carrier Frequency Separation.....	16
6.1. Test Setup	16
6.2. Limit.....	16
6.3. Procedure.....	16
6.4. Test Results	16
7. Number of Hopping Frequencies	18
7.1. Test Setup	18
7.2. Limit.....	18
7.3. Procedure.....	18
7.4. Test Results	18
8. Time of Occupancy (Dwell Time).....	20
8.1. Test Setup	20
8.2. Limit.....	20
8.3. Test Procedure.....	20
8.4. Test Results	21
9. Unwanted Emissions	22
9.1. Test Setup	22
9.2. Limit.....	22
9.3. Test Procedures.....	23
9.3.1. Test Procedures (Radiated).....	23
9.3.2. Test Procedures (Conducted)	24
9.4. Test Results	25
9.4.1. Unwanted Emission (Radiated).....	25
9.4.2. Unwanted Emissions (Conducted)	27
10. AC Power Line Conducted Emission	33
10.1. Test Setup	33
10.2. Limit.....	33
10.3. Test Procedures.....	33
10.4. Test Results	34
APPENDIX I.....	36
APPENDIX II.....	37

1. General Information

1.1. Description of EUT

Equipment Class	Part 15 Spread Spectrum Transmitter (DSS)
Product Name	UHF RFID Reader
Model Name	JWR-UHF-R340
Add Model Name	-
Firmware Version Identification Number	V3.8
EUT Serial Number	340EHF8124100086
Power Supply	DC: 24 V
Frequency Range	902.75 - 927.25 MHz
Modulation Type	ASK
Number of Channels	50(Channel Spacing: 500kHz)
Antenna Type	UHF RFID Antenna
Antenna Gain(including cable)	PK : 7.3 dBi

Note: The antenna gain was corrected for the cable loss from the conducted feed point to the antenna terminal.

1.2. Declaration by the manufacturer

- N/A

1.3. Testing Laboratory

Dt&C Co., Ltd.		
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.		
The test site complies with the requirements of Part 2.948.		
- FCC Designation No.: KR0034 - FCC Test Firm Registration No.: 704742 - ISED CAB identifier: KR0034 - ISED#: 5740A		
www.dtnet.net		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

1.4. Testing Environment

Ambient Condition	
▪ Temperature	+21 °C ~ +24 °C
▪ Relative Humidity	+40 % ~ +43 %

1.5. Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C63.10-2020. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Antenna-port conducted emission	1.0 dB (The confidence level is about 95 %, $k = 2$)
AC power-line conducted emission	3.4 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (1 GHz Below)	4.9 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (1 GHz ~ 18 GHz)	4.8 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (18 GHz Above)	5.7 dB (The confidence level is about 95 %, $k = 2$)

1.6. Test Equipment List

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	KEYSIGHT	N9020A	25/11/19	26/11/19	MY50410272
Spectrum Analyzer	Agilent Technologies	N9020A	25/05/26	26/05/26	US47360812
Spectrum Analyzer	Agilent Technologies	N9020A	25/11/18	26/11/18	MY50410399
Receiver	Rohde Schwarz	ESCI3	25/05/27	26/05/27	100798
DC Power Supply	SM techno	SDP30-5D	25/05/29	26/05/29	305DMG304
Multimeter	FLUKE	17B	25/11/21	26/11/21	26030065WS
Signal Generator	Rohde Schwarz	SMBV100A	25/11/20	26/11/20	255571
Signal Generator	ANRITSU	MG3695C	25/11/18	26/11/18	173501
Thermohygrometer	BODYCOM	BJ5478	25/11/24	26/11/24	090205-4
Thermohygrometer	BODYCOM	BJ5478	25/11/24	26/11/24	120612-2
Thermohygrometer	BODYCOM	BJ5478	25/05/29	26/05/29	N/A
Loop Antenna	ETS-Lindgren	6502	25/11/06	27/11/06	00060496
Hybrid Antenna	Schwarzbeck	VULB9163	25/05/27	27/05/27	9163-572
Horn Antenna	ETS-Lindgren	3117	25/05/27	26/05/27	00143278
PreAmplifier	Agilent Technologies	8449B	25/11/17	26/11/17	3008A00161
PreAmplifier	H.P	8447D	25/11/17	26/11/17	2944A07774
Band Reject Filter	Wainwright Instruments	WRCT800/960.0-2/40-8SSK	25/05/29	26/05/29	32
High Pass Filter	Wainwright Instruments	WHKX12-935-1000-15000-40SS	25/05/26	26/05/26	8
High Pass Filter	Wainwright Instruments	WHKX10-2838-3300-18000-60SS	25/05/26	26/05/26	1
High Pass Filter	Wainwright Instruments	WHNX8.0/26.5-6SS	25/05/26	26/05/26	3
Attenuator	Aeroflex/Weinschel	56-3	25/05/26	26/05/26	Y2370
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2488B MA2472A	25/11/25	26/11/25	0926003 030031
EMI Receiver	ROHDE&SCHWARZ	ESCI7	26/01/20	27/01/20	100910
PULSE LIMITER	Rohde Schwarz	ESH3-Z2	25/07/10	26/07/10	101333
LISN	SCHWARZBECK	NSLK 8128 RC	25/10/20	26/10/20	8128 RC-387
Digital Thermo Hygrometer	CAS	TE-303N	26/02/12	27/02/12	220502531
Cable	Dt&C	Cable	26/01/02	27/01/02	G-2
Cable	OMT	YSS21S	26/01/02	27/01/02	G-5
Cable	Microwave	HF-290	26/01/02	27/01/02	G-6
Cable	Junkosha	MWX241	26/01/02	27/01/02	mmW-1
Cable	Junkosha	MWX241	26/01/02	27/01/02	mmW-4
Cable	HUBER+SUHNER	SUCOFLEX100	26/01/02	27/01/02	M-01
Cable	HUBER+SUHNER	SUCOFLEX100	26/01/02	27/01/02	M-02
Cable	JUNKOSHA	MWX241/B	26/01/02	27/01/02	M-03
Cable	JUNKOSHA	J12J101757-00	26/01/02	27/01/02	M-07
Cable	HUBER+SUHNER	SUCOFLEX106	26/01/02	27/01/02	M-09
Cable	Radiall	TESTPRO3	26/01/02	27/01/02	RFC-01
Cable	Radiall	TESTPRO3	26/01/02	27/01/02	RFC-70
Cable	Dt&C	Lisn to Receiver	25/12/11	26/12/11	R3_C1
Test Software (Radiated)	tsj	EMI Measurement	NA	NA	Version 2.00.0185
Test Software	tsj	Noise Terminal Measurement	NA	NA	Version 2.00.0190
3m Semi Anechoic Chamber	SYC	3m-SAC	25/06/13(NSA) 25/06/19(VSWR)	26/06/13(NSA) 26/06/19(VSWR)	3m-SAC-1
3m Semi Anechoic Chamber	SYC	3m-SAC	26/01/09(NSA) 26/01/14(VSWR)	27/01/09(NSA) 27/01/14(VSWR)	3m-SAC-2

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

1.7. Conclusion of worst-case and operation mode

Tested frequency information,

- Hopping Function: Enable

	TX Frequency (MHz)
Hopping Band	902.75 ~ 927.25 MHz

- Hopping Function: Disable

Channel	TX Frequency (MHz)
Lowest Channel	902.75
Middle Channel	915.25
Highest Channel	927.25

Operation test setup for EUT

- Test Software Version: RFIDReaderTool_4.51
- Power setting: 0 dBm

2. Antenna Requirement

■ **According to FCC 47 CFR §15.203**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

This device is professionally installed.

Therefore this E.U.T complies with the requirement of Part 15.203

3. Summary of Test Results

FCC Part	Parameter	Limit (Using in 902-928 MHz)	Test Condition	Status Note 1
15.247(a)	Carrier Frequency Separation	≥ 25 kHz or ≥ 20 dB BW, whichever is greater.	Conducted	C
	Number of Hopping Frequencies	≥ 50 hops, if 20 dB BW < 250kHz ≥ 25 hops, if 20 dB BW ≥ 250 kHz		C
	20 dB Bandwidth	< 500 kHz		C
	Dwell Time	≤ 0.4 seconds		C
15.247(b)	Transmitter Output Power	For FCC ≤ 1 Watt, if CHs ≥ 50 ≤ 0.25 W, if CHs ≥ 25 , < 50		C
15.247(d)	Unwanted Emissions (Conducted)	The radiated emission to any 100 kHz of out-band shall be at least 20 dB below the highest in-band spectral density.		C
15.247(d) 15.205 15.209	Unwanted Emissions (Radiated)	FCC 15.209 Limits (Reference to section 9)	Radiated	C ^{Note2, 3}
15.207	AC Power Line Conducted Emissions	FCC 15.207 Limits (Reference to section 10)	AC Line Conducted	C
15.203	Antenna Requirements	FCC 15.203 (Reference to section 2)	-	C
Note 1: C = Comply NC = Not Comply NT = Not Tested NA = Not Applicable Note 2: This test item was performed in three orthogonal EUT positions and the worst case data was reported. Note 3: The device has four antennas and an RF switch for antenna selection. All RF path were investigated, and worst data were reported (RF path 2).				

4. Maximum Peak Output Power Measurement

4.1. Test Setup

Refer to the APPENDIX I.

4.2. Limit

■ FCC Requirements

The maximum peak output power of the intentional radiator shall not exceed the following:

1. §15.247(b)(2), For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

4.3. Test Procedure

1. The RF output power was measured with a spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.

2. The peak output power of the fundamental frequency was measured with the spectrum analyzer using;

Span = approximately 5 times of the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 20 dB BW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold


4.4. Test Results

Tested Channel	Burst Average Output Power		Peak Output Power	
	dBm	mW	dBm	mW
Lowest	-0.63	0.86	0.19	1.04
Middle	0.30	1.07	1.07	1.28
Highest	0.25	1.06	0.84	1.21

Note 1: See next pages for actual measured spectrum plots.


Peak Output Power

TM 1 Test Channel : Lowest

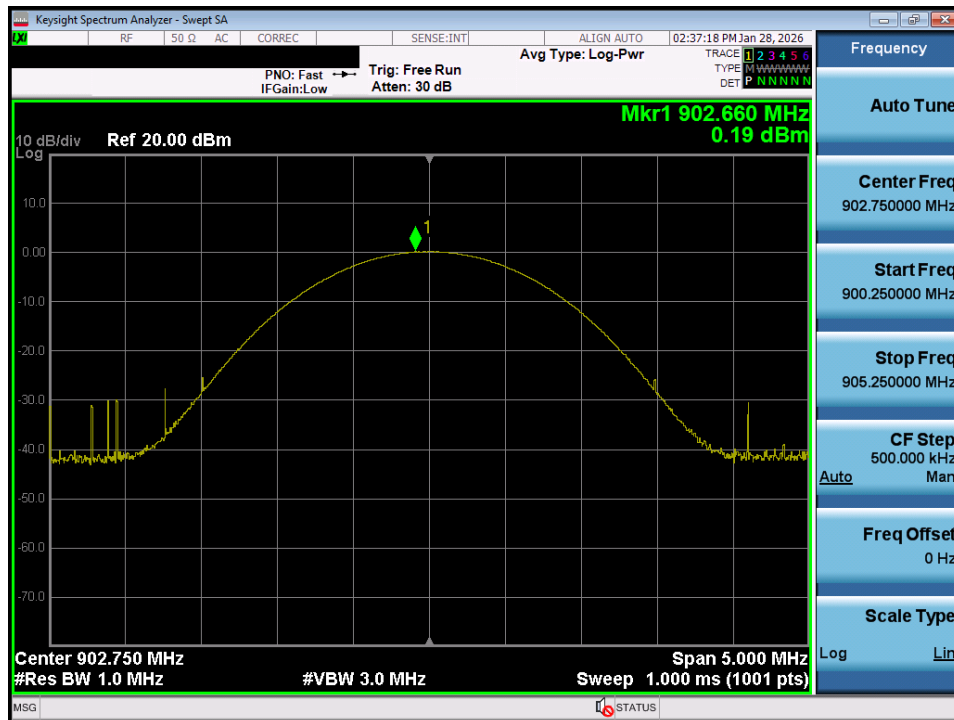


Peak Output Power

TM 1 Test Channel : Middle

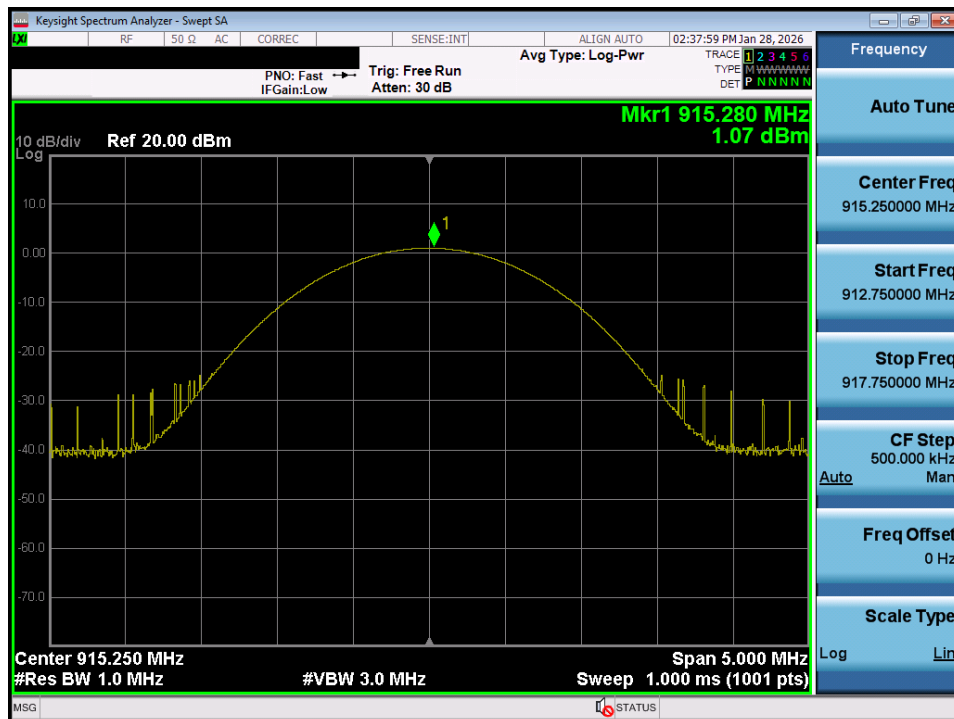

Peak Output Power

TM 1 Test Channel : Highest

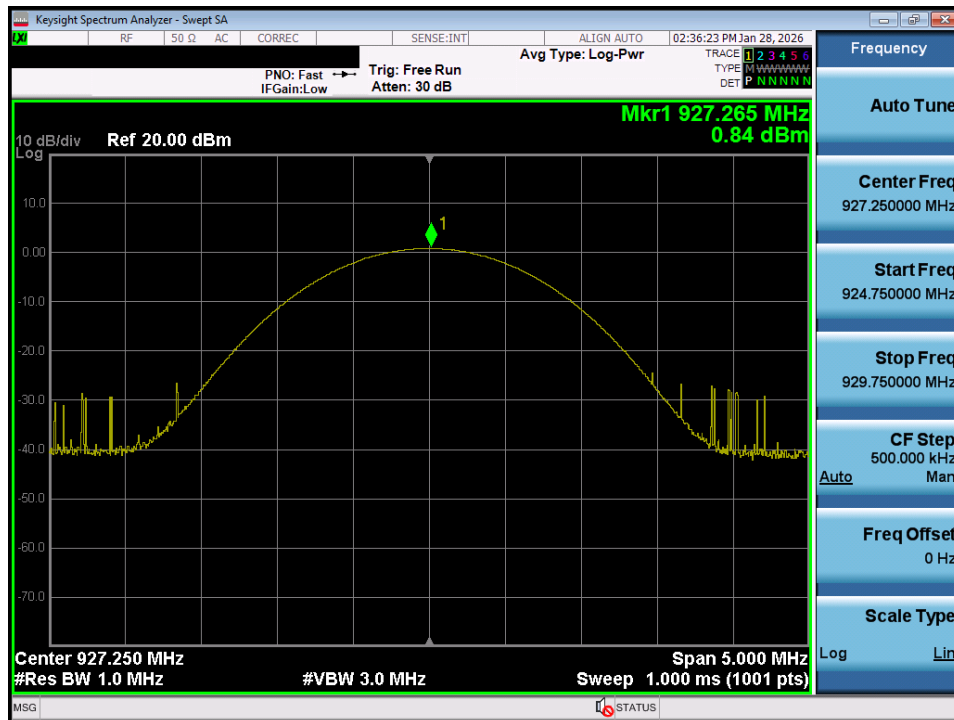

5. 20dB BW

5.1. Test Setup

Refer to the APPENDIX I.

5.2. Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

5.3. Test Procedure

1. The 20 dB bandwidth were measured with a spectrum analyzer connected to RF antenna Connector (conducted measurement) while EUT was operating in transmit mode. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using below setting:
RBW = 1% to 5% of the 20 dB BW
VBW $\geq 3 \times$ RBW
Span = between two times and five times the 20 dB bandwidth
Sweep = auto
Detector function = peak
Trace = max hold

5.4. Test Results

Tested Channel	20dB BW (kHz)
Lowest	68.83
Middle	67.78
Highest	68.42

Note 1: See next pages for actual measured spectrum plots.

20 dB BW

TM 1 Test Channel : Lowest



20 dB BW

TM 1 Test Channel : Middle



20 dB BW

TM 1 Test Channel : Highest



6. Carrier Frequency Separation

6.1. Test Setup

Refer to the APPENDIX I.

6.2. Limit

Limit : ≥ 25 kHz or ≥ 20 dB BW whichever is greater.

6.3. Procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to :

Span = wide enough to capture the peaks of two adjacent channels

RBW = Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold

6.4. Test Results

Test Mode	Hopping Mode	Peak of center channel (MHz)	Peak of adjacent Channel (MHz)	Test Result (kHz)
TM 1	Enable	915.251	915.746	495.00

Carrier Frequency Separation

Hopping mode : Enable

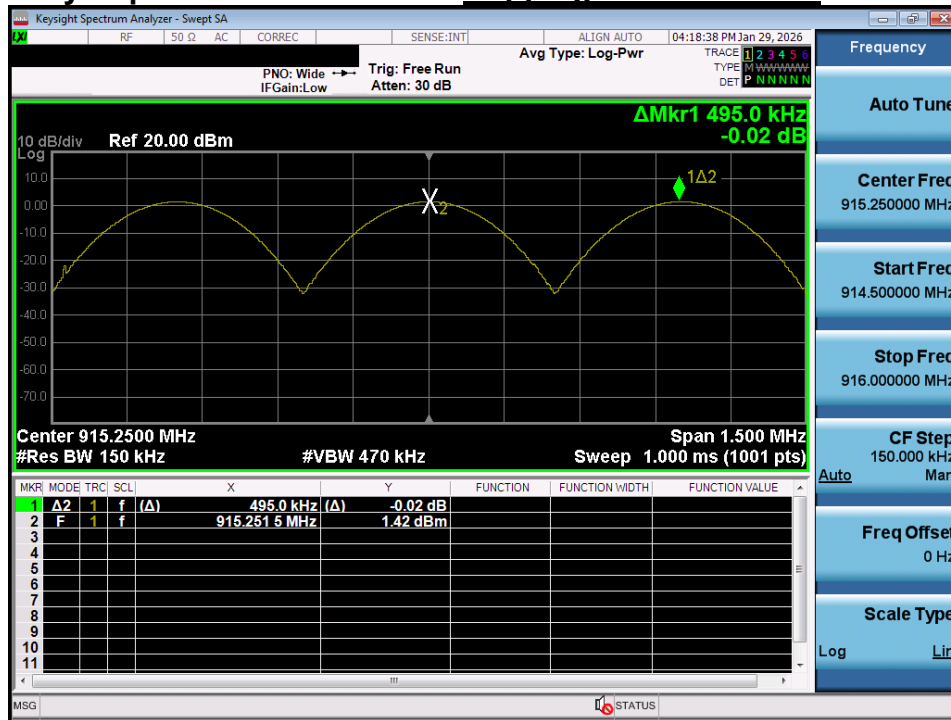

7. Number of Hopping Frequencies

7.1. Test Setup

Refer to the APPENDIX I.

7.2. Limit

Limit: ≥ 50 hops

7.3. Procedure

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, two frequency ranges for FH mode within the 902 ~ 928 MHz were examined.

The spectrum analyzer is set to :

Span = 34.5 MHz

Start Frequency = 897.75 MHz, Stop Frequency = 932.25 MHz

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold

7.4. Test Results

Test Mode	Hopping mode	Test Result (Total Hops)
TM 1	Enable	50

Number of Hopping Frequencies

Hopping mode : Enable

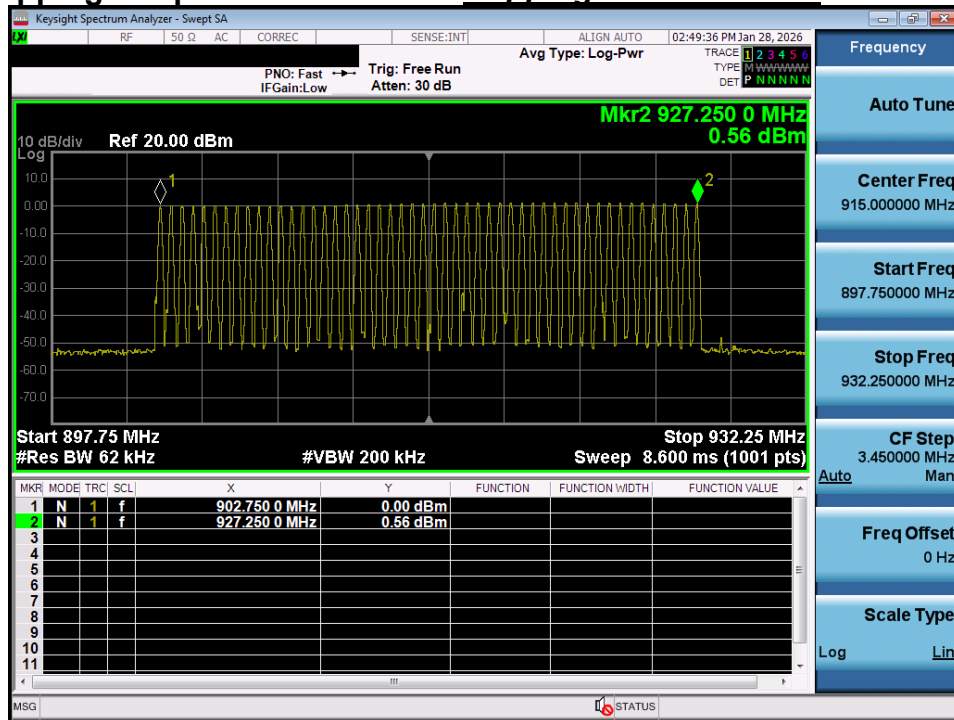

8. Time of Occupancy (Dwell Time)

8.1. Test Setup

Refer to the APPENDIX I.

8.2. Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

8.3. Test Procedure

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

1st Step

The spectrum analyzer is set to :

Center frequency = 915.25 MHz

Span = zero

RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.

Sweep time: Set so that the start of the first transmission and end of the last transmission for the hop are clearly captured. Setting the sweep time to be slightly longer than the hopping period per channel (hopping period = $1/\text{hopping rate}$) should achieve this.

Use a video trigger, where possible with a trigger delay, so that the start of the transmission is clearly observed.

The trigger level might need adjustment to reduce the chance of triggering when the system hops on an adjacent channel.

VBW $\geq$ RBW

Detector function = peak

Trace = Clear-write, single sweep.

Place markers at the start of the first transmission on the channel and at the end of the last transmission. The dwell time per hop is the time between these two markers.


2nd Step

To determine the number of hops on a channel in the regulatory observation period repeat the measurement using a longer sweep time. When the device uses a single hopping sequence the period of measurement should be sufficient to capture at least 2 hops.

SA Sweep time setting: **20 s**

8.4. Test Results

Test Mode	Hopping channels	Dwell Time (ms)
TM 1	50	361

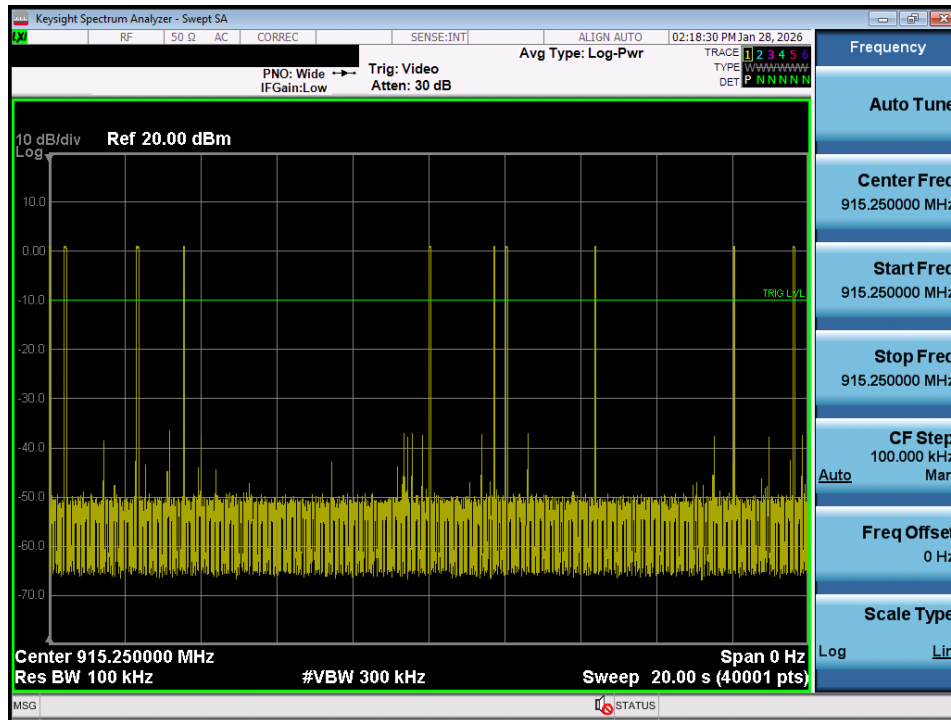

- Spectrum Analyzer setting

- 1) Span: Zero
- 2) Sweep points: 40 001

Calculation:

Channel Length sweep point: 722

1 point Length: $(\text{Sweep time} / \text{Total Sweep point}) = (20\,000 / 40\,001) \approx 0.5\text{ ms}$

Dwell Time: $(\text{Channel Length sweep point} \times 1\text{ point Length}) = 722 \times 0.5 = 361\text{ ms}$

Note: The Channel Length sweep points were extracted from the spectrum and calculated.

9. Unwanted Emissions

9.1. Test Setup

Refer to the APPENDIX I.

9.2. Limit

Part 15.247(d), Part 15.205, Part 15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247 the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

- Part 15.209: General requirements

Frequency (MHz)	FCC Limit (uV/m)	Measurement Distance (m)
0.009 – 0.490	2 400 / F (kHz)	300
0.490 – 1.705	24 000 / F (kHz)	30
1.705 – 30.0	30	30

Frequency (MHz)	FCC Limit (uV/m)	Measurement Distance (m)
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §15.231 and 15.241.

- Part 15.205(a): Restricted band of operation

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.414 25 ~ 8.414 75	108 ~ 121.94	1 300 ~ 1 427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1 435 ~ 1 626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.173 5 ~ 2.190 5	12.519 75 ~ 12.520 25	149.9 ~ 150.05	1 645.5 ~ 1 646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.576 75 ~ 12.577 25	156.524 75 ~ 156.525 25	1 660 ~ 1 710	8.025 ~ 8.5	22.01 ~ 23.12
4.177 25 ~ 4.177 75	13.36 ~ 13.41	156.7 ~ 156.9	1 718.8 ~ 1 722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.207 25 ~ 4.207 75	16.42 ~ 16.423	162.012 5 ~ 167.17	2 200 ~ 2 300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.694 75 ~ 16.695 25	167.72 ~ 173.2	2 310 ~ 2 390	10.6 ~ 12.7	36.43 ~ 36.5
6.267 75 ~ 6.268 25	16.804 25 ~ 16.804 75	240 ~ 285	2 483.5 ~ 2 500	13.25 ~ 13.4	Above 38.6
6.311 75 ~ 6.312 25	25.5 ~ 25.67	322 ~ 335.4	2 655 ~ 2 900		
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3 260 ~ 3 267		
8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3 332 ~ 3 339		
8.376 25 ~ 8.386 75	74.8 ~ 75.2	960 ~ 1 240	3 345.8 ~ 3 358		
			3 600 ~ 4 400		

9.3. Test Procedures

9.3.1. Test Procedures (Radiated)

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.
The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 1 or 3 meter away from the interference-receiving antenna.
3. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.
4. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
6. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Measurement Instrument Setting

- Frequencies less than or equal to 1 000 MHz

RBW = As specified in table, VBW $\geq 3 \times$ RBW, Sweep = Auto, Detector = Peak^{Note1} or Quasi Peak,

Trace mode = Max Hold until the trace stabilize

Frequency	RBW
9 kHz - 150 kHz	200 Hz - 300 Hz
0.15 MHz - 30 MHz	9 kHz -10 kHz
30 MHz - 1 000 MHz	100 kHz - 120 kHz

Note1: Measurements were performed using the peak detector.

The data measured using the peak detector of a spectrum analyzer will represent the worst-case results.

- Frequencies above 1 000 MHz

Peak Measurement

RBW = 1 MHz, VBW = 3 MHz, Detector = Peak, Sweep time = Auto, Trace mode = Max Hold until the trace stabilizes

Average Measurement > 1GHz

RBW = 1MHz, VBW = Reduce the video bandwidth until no significant variations in the displayed signal are observed in subsequent traces, provided the video bandwidth is no less than 1 Hz.

Detector = Peak, Sweep Time = Auto, Trace Mode = Max Hold until the trace stabilizes

9.3.2. Test Procedures (Conducted)

1. The transmitter output was connected to the spectrum analyzer.
2. The **reference level** of the fundamental frequency was measured with the spectrum analyzer using RBW = 100 kHz, VBW = 300 kHz.
3. The conducted spurious emission was tested each ranges were set as below.

Frequency range : 9 kHz ~ 30 MHz

RBW = 100 kHz, VBW = 300 kHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40 001

Frequency range : 30 MHz ~ 10 GHz

RBW = 1 MHz, VBW = 3 MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40 001

LIMIT LINE = 20 dB below of the reference level of above measurement procedure Step 2. (RBW = 100 kHz, VBW = 300 kHz)

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2 001 to get accurate emission level within 100 kHz BW.

Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.

9.4. Test Results

9.4.1. Unwanted Emission (Radiated)

- Test Notes

1. The radiated emissions below 1GHz were investigated 9 kHz to 1 GHz and the worst case data was reported.

2. Information of Distance Correction Factor

For finding emissions, measurements may be performed at a distance closer than that specified in the regulations.

In this case, the distance factor is applied to the result.

- Calculation of distance correction factor

At frequencies below 30 MHz = 40 log(tested distance / specified distance)

At frequencies at or above 30 MHz = 20 log(tested distance / specified distance)

When distance factor is "N/A", the measurements were performed at the specified distance and distance factor is not applied.

3. Sample Calculation.

Margin = Limit – Result / Result = Reading + TF+ DCCF + DCF / TF = AF + CL + BL + AL – AG

Where, TF = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain, BL = Band reject filter Loss, AL = Attenuator Loss,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor


Frequency Range : 9 kHz ~ 1 GHz_TM 1

▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
46.31	V	X	QP	39.90	-6.43	N/A	N/A	33.47	40.00	6.53
218.41	H	X	QP	51.70	-6.71	N/A	N/A	44.99	46.00	1.01
218.60	V	X	QP	45.60	-6.71	N/A	N/A	38.89	46.00	7.11
930.33	V	X	QP	30.20	7.43	N/A	N/A	37.63	46.00	8.37
933.36	H	X	QP	35.30	7.46	N/A	N/A	42.76	46.00	3.24

TM1 & Lowest & X & Hor

Detector Mode : QP

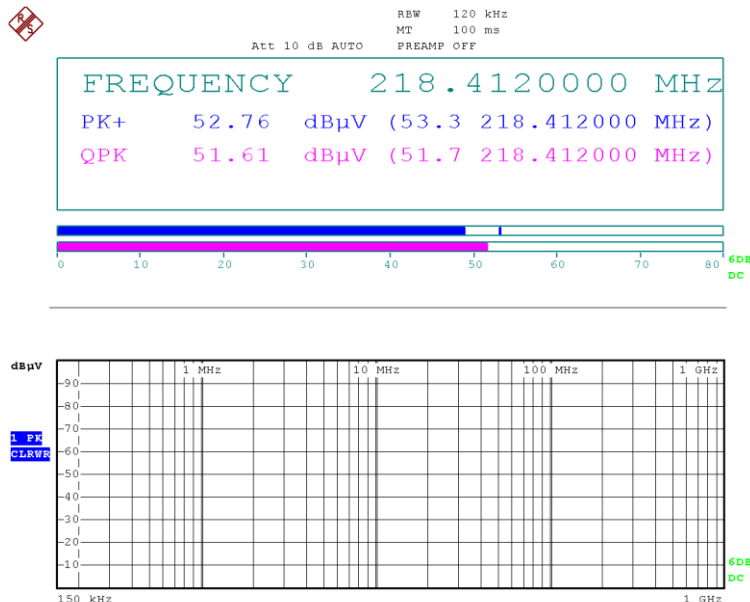

Date: 21.FEB.2026 16:19:59

▪ Test Notes.

1. The radiated emissions above 1GHz were investigated up to 10 GHz. And no other spurious and harmonic emissions were found below listed frequencies.
2. Information of Distance Correction Factor
For finding emissions, measurements may be performed at a distance closer than that specified in the regulations.
In this case, the distance factor is applied to the result.
- Calculation of distance correction factor
At frequencies below 30 MHz = $40 \log(\text{tested distance} / \text{specified distance})$
At frequencies at or above 30 MHz = $20 \log(\text{tested distance} / \text{specified distance})$
When distance factor is "N/A", the measurements were performed at the specified distance and distance factor is not applied.
3. Sample Calculation.
Margin = Limit – Result / Result = Reading + TF+ DCCF + DCF / TF = AF + CL + HL + AL – AG
Where, TF = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain, HL = High Pass filter Loss, AL = Attenuator Loss,
DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
4. Please refer to the appendix II for worst-case plots.

Frequency Range : 1 GHz ~ 10 GHz_TM 1

▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBUV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)
2 708.36	H	X	PK	47.95	8.30	N/A	N/A	56.25	74.00	17.75
2 708.19	H	X	AV	39.75	8.30	N/A	N/A	48.05	54.00	5.95
4 513.70	H	X	PK	42.96	9.42	N/A	N/A	52.38	74.00	21.62
4 513.68	H	X	AV	33.39	9.42	N/A	N/A	42.81	54.00	11.19

▪ Middle Channel



Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBUV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)
2 745.66	H	X	PK	50.64	8.40	N/A	N/A	59.04	74.00	14.96
2 745.75	H	X	AV	42.58	8.40	N/A	N/A	50.98	54.00	3.02
4 576.19	H	X	PK	46.43	9.57	N/A	N/A	56.00	74.00	18.00
4 576.28	H	X	AV	37.60	9.57	N/A	N/A	47.17	54.00	6.83

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBUV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)
2 781.63	H	X	PK	50.95	8.38	N/A	N/A	59.33	74.00	14.67
2 781.79	H	X	AV	42.89	8.38	N/A	N/A	51.27	54.00	2.73
4 636.27	H	X	PK	48.48	9.55	N/A	N/A	58.03	74.00	15.97
4 636.24	H	X	AV	40.85	9.55	N/A	N/A	50.40	54.00	3.60


Unwanted Emissions

Lowest Channel

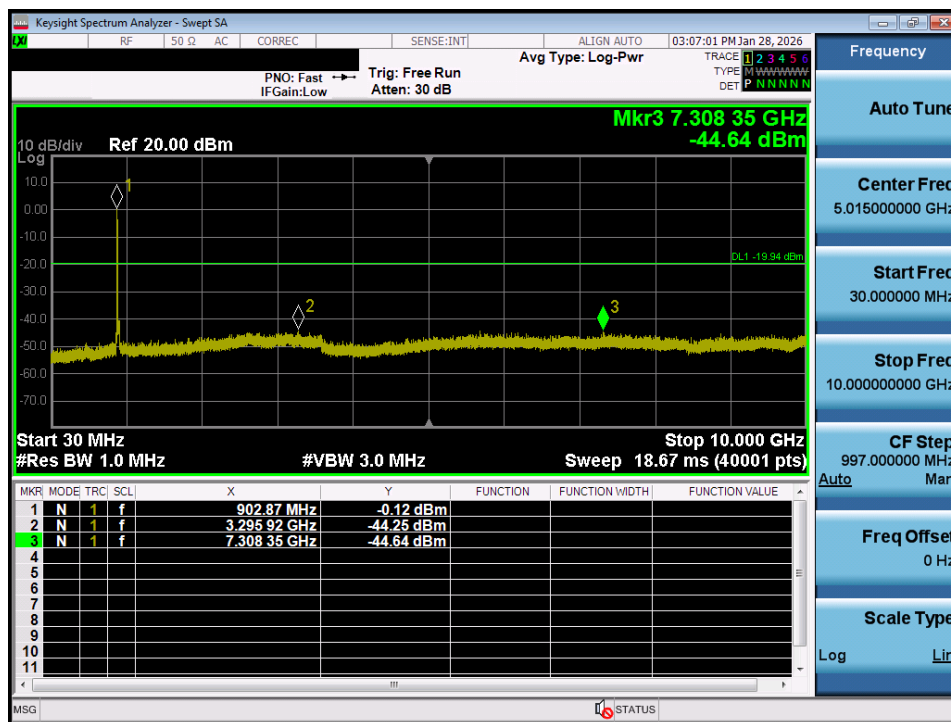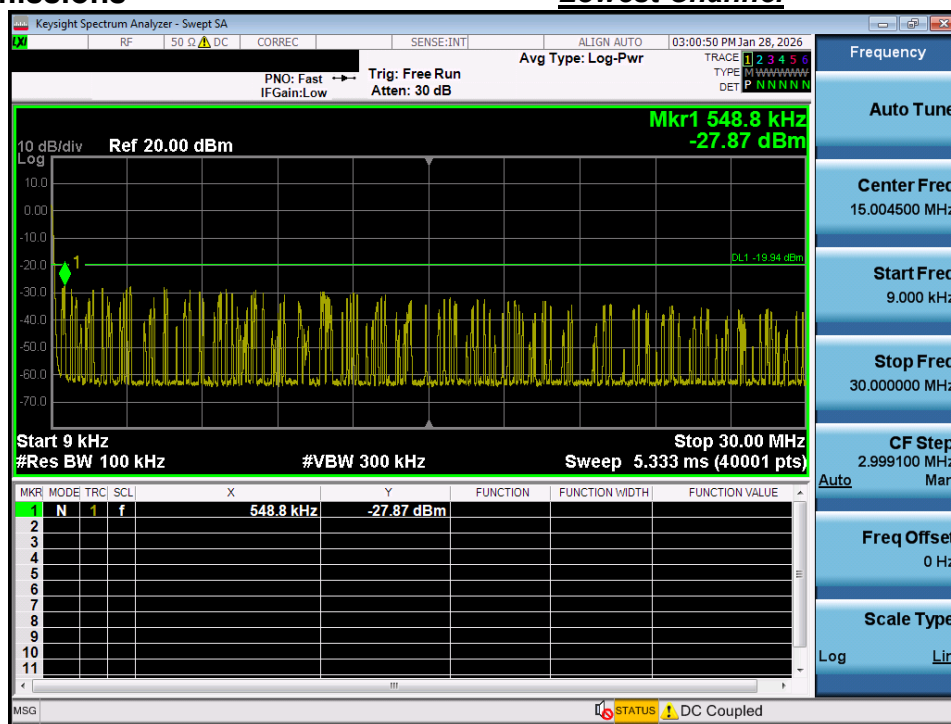



Reference for limit

Middle Channel

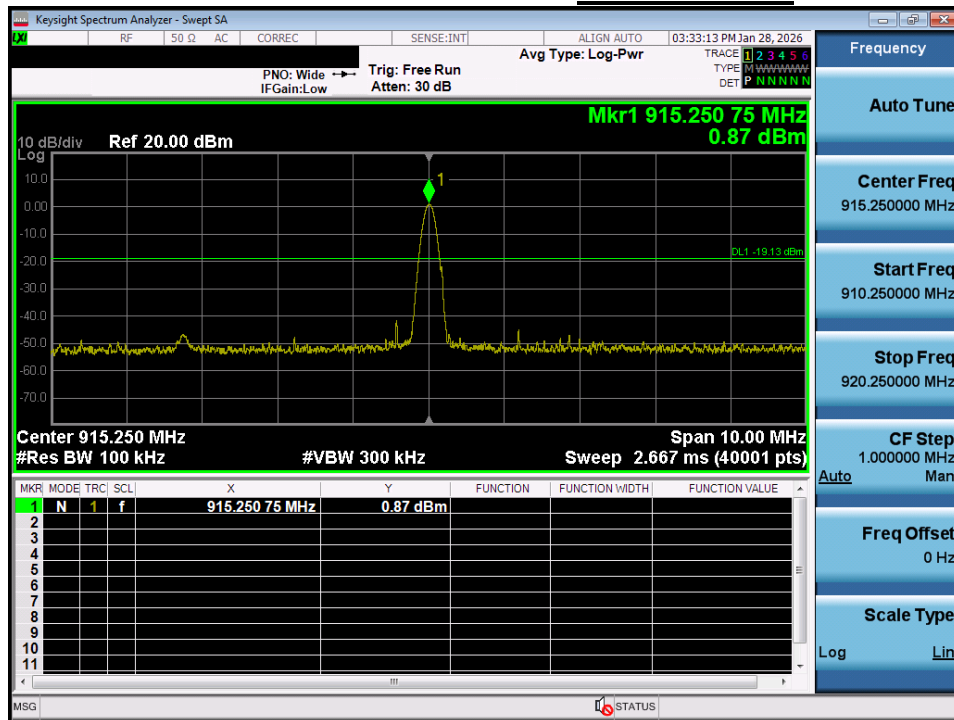


Unwanted Emissions


Middle Channel

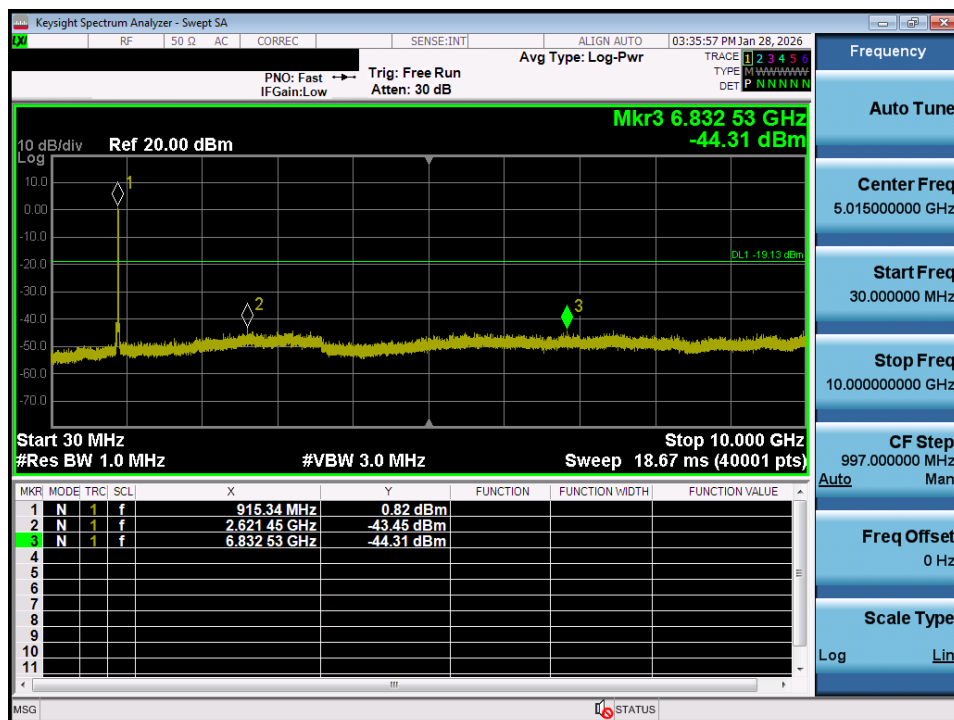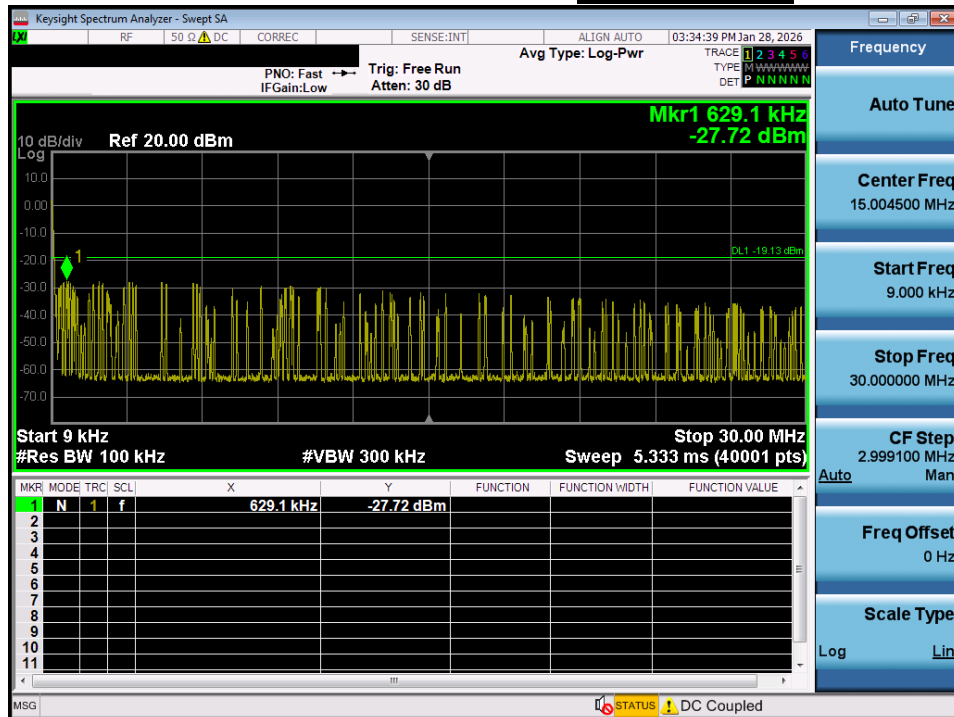

High Band-edge


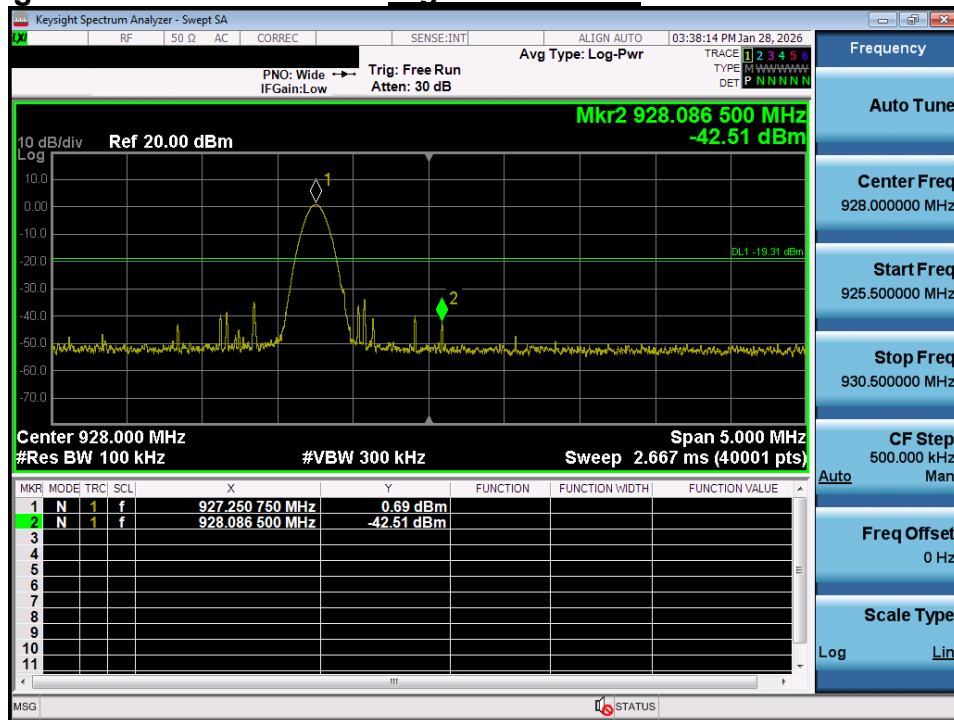
Highest Channel

High Band-edge

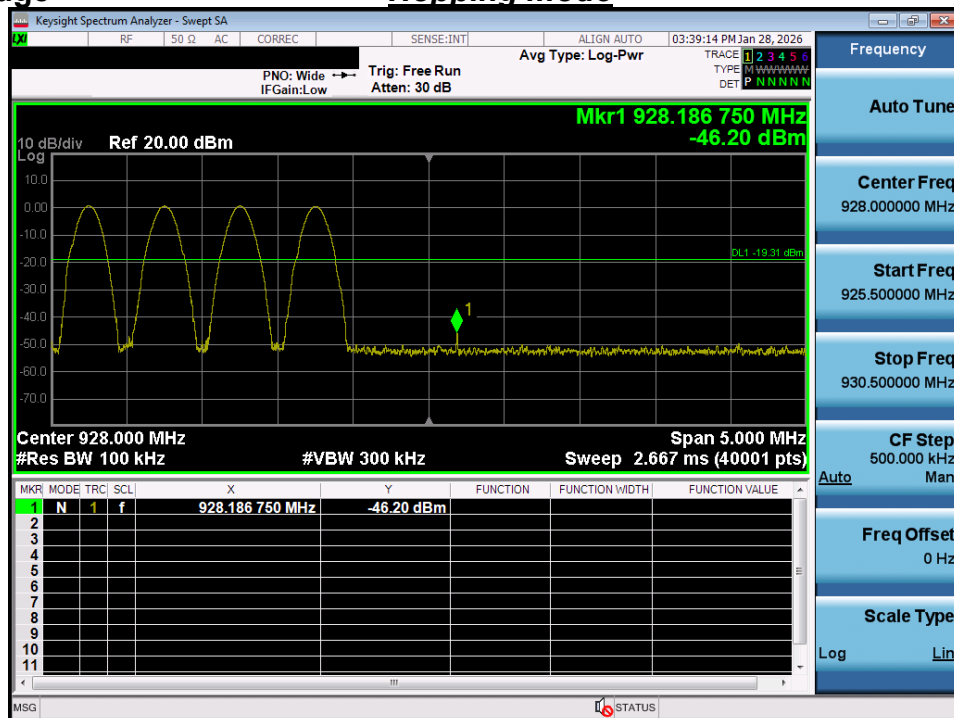Hopping mode

Unwanted Emissions

Highest Channel

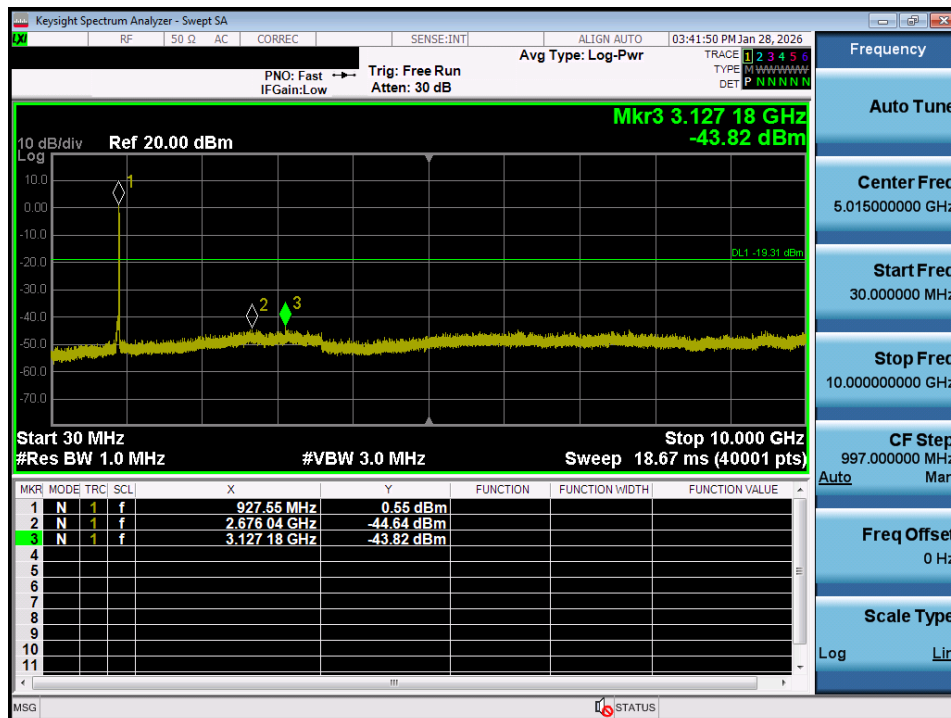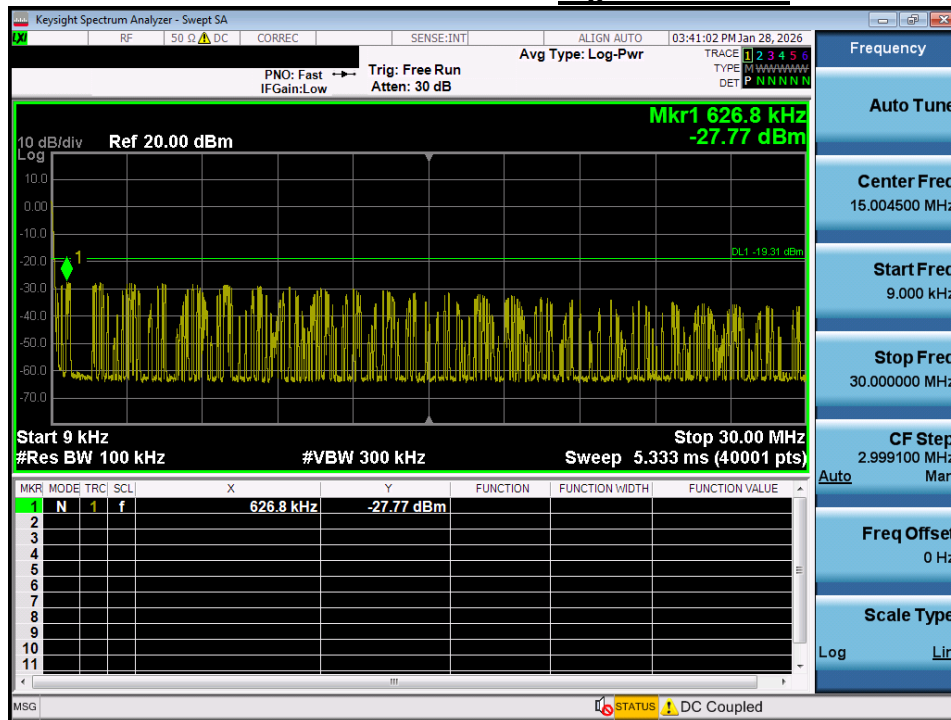

10. AC Power Line Conducted Emission

10.1. Test Setup

See test photo graphs for the actual connections between EUT and support equipment.

10.2. Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

10.3. Test Procedures

Conducted emissions from the EUT were measured according to the ANSI C63.10-2020

1. The test procedure is performed in a shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

10.4. Test Results

AC Line Conducted Emissions (Graph) = Lowest Channel

Results of Conducted Emission

Date 2025-05-29

Order No.
Model No. JWR-UHF-R340
Serial No.
Test Condition RFID 900M



Reference No.
Power Supply 120 V, 60 Hz
Temp/Humi. 24 °C / 42 %
Operator S.M.Gil

Memo

LIMIT : FCC P15.207 AV
FCC P15.207 QP

Lisn Factor

1. NSLK 8128 RC-387_N_24.10.21
 2. NSLK 8128 RC-387_L1_24.10.21
- Cable Loss
1. C1_LISN TO RECEIVER_2024-12-11
- Pulse Limiter
1. PULSE LIMITER_ESH3-Z2_101333_2024.08.21

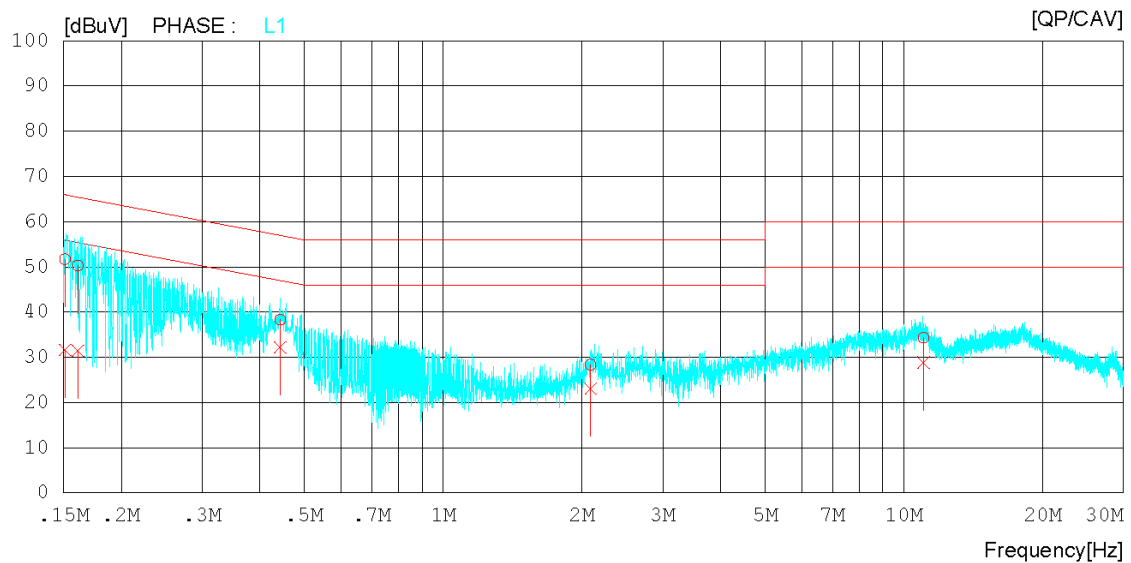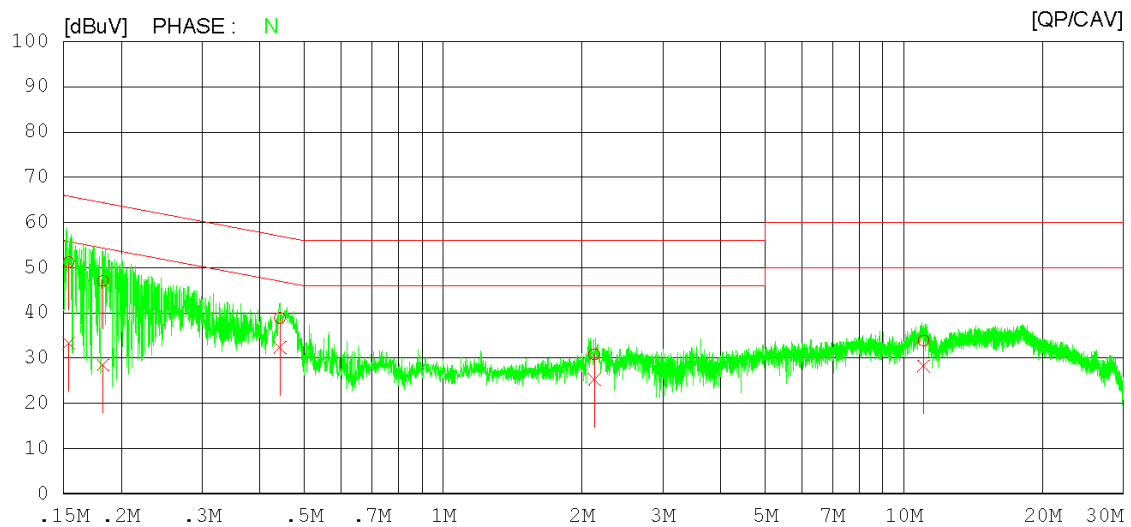

AC Line Conducted Emissions (List) = Lowest Channel

Results of Conducted Emission

Date 2025-05-29

Order No.		Reference No.	
Model No.	JWR-UHF-R340	Power Supply	120 V, 60 Hz
Serial No.		Temp/Humi.	24 'C / 42 %
Test Condition	RFID 900M	Operator	S.M.Gil

Memo

LIMIT : FCC P15.207 AV
FCC P15.207 QP

Lisn Factor

1. NSLK 8128 RC-387_N_24.10.21
2. NSLK 8128 RC-387_L1_24.10.21

Cable Loss

1. C1_LISN TO RECEIVER_2024-12-11

Pulse Lmitter


1. PULSE LIMITER_ESH3-Z2_101333_2024.08.21

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.15386	41.18	23.29	10.01	51.19	33.30	65.79	55.79	14.60	22.49	N
2	0.18278	37.06	18.48	10.00	47.06	28.48	64.36	54.36	17.30	25.88	N
3	0.44183	28.85	22.31	10.03	38.88	32.34	57.03	47.03	18.15	14.69	N
4	2.12960	20.72	15.20	10.08	30.80	25.28	56.00	46.00	25.20	20.72	N
5	11.03860	23.44	17.83	10.41	33.85	28.24	60.00	50.00	26.15	21.76	N
6	0.15118	41.60	21.52	10.10	51.70	31.62	65.93	55.93	14.23	24.31	L1
7	0.16120	40.24	21.41	10.05	50.29	31.46	65.40	55.40	15.11	23.94	L1
8	0.44311	28.25	22.19	10.03	38.28	32.22	57.00	47.00	18.72	14.78	L1
9	2.09160	18.20	12.92	10.18	28.38	23.10	56.00	46.00	27.62	22.90	L1
10	11.03840	23.86	18.33	10.49	34.35	28.82	60.00	50.00	25.65	21.18	L1


APPENDIX I

Test set up diagrams

▪ Radiated Measurement

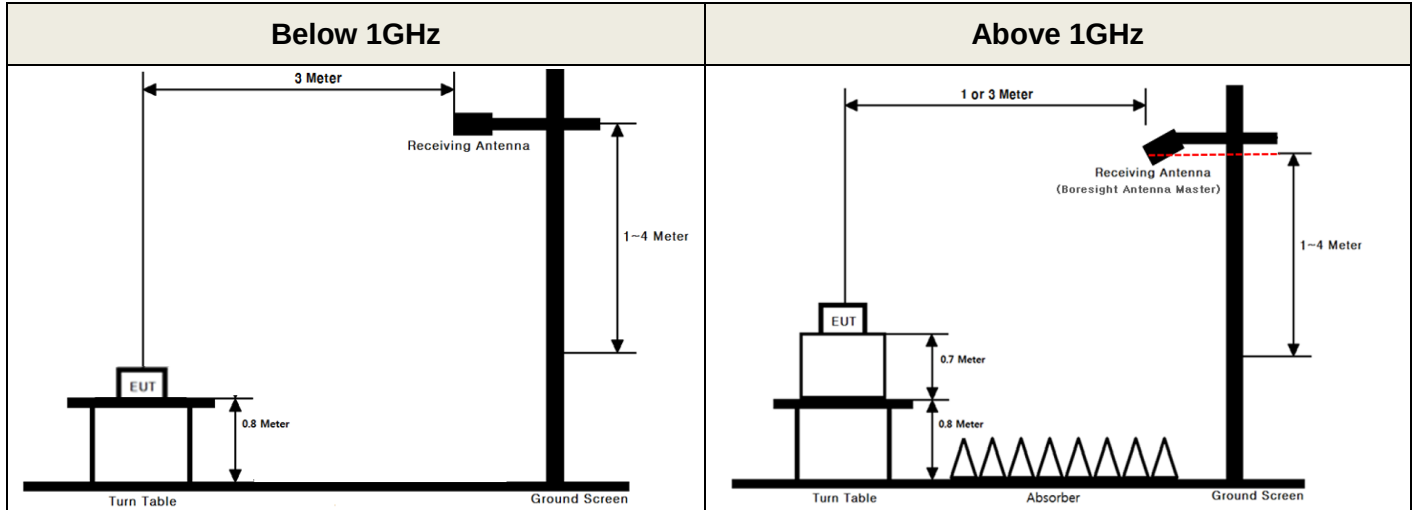

▪ Conducted Measurement

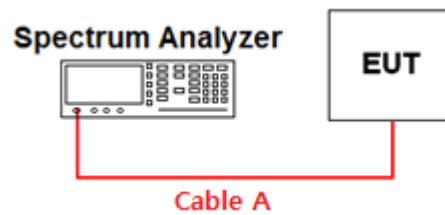

Path loss information

Frequency (MHz)	Path Loss (dB)	Frequency (MHz)	Path Loss (dB)
30	0.25	1 000	0.91
500	0.66	5 000	1.89
902.75 & 915.25 & 927.25	0.85	10 000	2.88
-	-	-	-

Note 1 : The path loss from EUT to Spectrum analyzer were measured and used for test.

Path loss (S/A's Correction factor) = Cable A

