

FCC CERTIFICATION TEST REPORT

Applicant	:	HANSHOW PTE. LTD.
Address	:	138 ROBINSON ROAD #02-33 OXLEY TOWER SINGAPORE(068906)
Equipment under Test	:	electronic shelf label
Model No.	:	Nebular Ultra-260WF-N
Trade Mark	:	N/A
FCC ID	:	2BPF3-NU-260WF
Manufacturer	:	HANSHOW PTE. LTD.
Address	:	138 ROBINSON ROAD #02-33 OXLEY TOWER SINGAPORE(068906)
Report No.	:	LS-R25122227-13F02
Issue Date	:	Mar. 20, 2026

LabSure Testing Services (Tianjin) Co., Ltd.



TABLE OF CONTENTS

	Test report declares.....	3
1	Summary of test results	6
2	General test information	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT	8
2.3.	Assistant equipment used for test.....	8
2.4.	Block diagram of EUT configuration for test	8
2.5.	Deviations of test standard	8
2.6.	Test environment conditions	8
2.7.	Test laboratory	8
2.8.	Measurement uncertainty	9
3	Equipment used during test	10
4	20dB Bandwidth.....	12
4.1.	Block diagram of test setup	12
4.2.	Limits	12
4.3.	Test Procedure	12
4.4.	Test Result.....	12
4.5.	Original test data.....	13
5	Radiated emission	14
5.1.	Block diagram of test setup	14
5.2.	Limit	15
5.3.	Test Procedure	15
5.4.	Test result	16
6	Field Strength Of Fundamental.....	19
6.1.	Block diagram of test setup	19
6.2.	Limits	19
6.3.	Test Procedure	19
6.4.	Test Result.....	19
7	Frequency Stability	21
7.1.	Limit	21
7.2.	Test Procedure	21
7.3.	Test Result.....	21
8	Power Line Conducted Emission.....	22
8.1.	Block diagram of test setup	22
8.2.	Power Line Conducted Emission Limits	22
8.3.	Test Procedure	22
8.4.	Test Result.....	23

9	Antenna Requirements	24
10	Test setup photograph	25
11	Photos of the EUT	25

TEST REPORT DECLARE

Applicant	:	HANSHOW PTE. LTD.
Address	:	138 ROBINSON ROAD #02-33 OXLEY TOWER SINGAPORE(068906)
Equipment under Test	:	electronic shelf label
Model No.	:	Nebular Ultra-260WF-N
Trade Mark	:	N/A
Manufacturer	:	HANSHOW PTE. LTD.
Address	:	138 ROBINSON ROAD #02-33 OXLEY TOWER SINGAPORE(068906)

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C

Test procedure used:

ANSI C63.10:2020

We Declare:

The equipment described above is tested and assessed by LabSure Testing Services (Tianjin) Co., Ltd. and in the configuration assessed the equipment complied with the standards specified above. The tested and assessed results are contained in this test report and LabSure Testing Services (Tianjin) Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these assessments.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above standards.

Report No:	LS-R25122227-13F02		
Date of Receipt:	Mar. 09, 2026	Date of Test:	Mar. 09, 2026 Mar. 20, 2026

Prepared By:

Sunny Zhang

Reviewed by:

Ethan Bao

Authorized by:

Aaron Zhang

Sunny Zhang/Engineer
Ethan Bao/Engineer
Aaron Zhang/Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of LabSure Testing Services (Tianjin) Co., Ltd.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Revision history

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Mar. 20, 2026	

1 Summary of test results

Description of Test Item	Standard	Results
20dB Bandwidth	FCC Part 15: 15.215	PASS
Radiated Emission	FCC Part 15: 15.209	PASS
Field Strength Of Fundamental	FCC Part 15: 15.225	PASS
Frequency Stability	FCC Part 15: 15.225	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207	N/A
Antenna requirement	FCC Part 15: 15.203	PASS
N/A is an abbreviation for Not Applicable.		

2 General test information

2.1. Description of EUT

EUT* Name	:	electronic shelf label
Test Model Number	:	Nebular Ultra-260WF-N
EUT function description	:	Please reference user manual of this device
Power Supply	:	DC 3V by Polymer Li-ion built-in battery
Radio Specification	:	NFC
Wireless charging Operation frequency	:	13.56MHz
Number of Channel	:	1
Antenna Type	:	Loop antenna

Note1: EUT is the ab. of equipment under test.

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Serial No.	Other
N/A	N/A	N/A	N/A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number or Type	Serial No.	Other
N/A	N/A	N/A	N/A	N/A

2.4. Block diagram of EUT configuration for test

EUT

2.5. Deviations of test standard

No Deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	20-28℃
Humidity range:	20-75%
Pressure range:	86-106kPa

2.7. Test laboratory

LabSure Testing Services (Tianjin) Co., Ltd.

Address: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park Development Area, Tianjin, China.

Tel: +86-22-58038033, www.lab-sure.com, E-mail: labsure@lab-sure.com

NVLAP (National Voluntary Laboratory Accreditation Program) CODE: 500036-0

CNAS (China National Accreditation Service for Conformity Assessment) CODE: L13402

FCC Designation Number: CN5004; FCC Test Firm Registration Number: 368676

ISED (Innovation, Science and Economic Development Canada) Company Number: 27768

Conformity Assessment Body Identifier: CN0125

VCCI Facility Registration Number: C-20089, T-20093, R-20125, G-20122

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	0.14%
Peak Output Power (Conducted) (Spectrum Analyzer)	0.12 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 0.32 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.51 dB
Power Spectral Density	0.12 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 0.32 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 3.4×10^{-8} (Conducted method)
Conducted Spurious Emissions	0.12 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 0.32 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$); 0.52 dB ($8 \text{ GHz} \leq f < 22 \text{ GHz}$)
Uncertainty for Radio Frequency (RBW < 20 kHz)	3×10^{-7}
Temperature	$\pm 2^{\circ}\text{C}$
Humidity	$\pm 1\%$
Uncertainty for Radiation Emission Test (9 kHz - 30 MHz)	2.51 dB
Uncertainty for Radiation Emission Test (30 MHz - 1 GHz)	2.72 dB (Antenna Polarize: V) 2.72 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission Test (1 GHz - 40 GHz)	2.74 dB (1 - 6 GHz) 2.72 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power Line Conduction Emission Test	3.40 dB (150 kHz - 30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	


3 Equipment used during test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test					
EXG Analog Signal Generator	Keysight	N5173B	MY53270968	2026/02/11	1 Year
MXG Vector Signal Generator	Keysight	N5182A	MY50143288	2026/02/11	1 Year
PXA Signal Analyzer	Keysight	N9030B	MY56320639	2026/03/14	1 Year
PXA Signal Analyzer	Keysight	N9010A	MY53281492	2026/02/11	1 Year
Wideband Radio Communication Tester	R&S	CMW500	158800	2026/02/11	1 Year
Power Sensor	KEYSIGHT	U2021XA	MY59150007	2026/02/11	1 Year
DC Power Supply	Chroma	62012P-80-60	62012PD00544	2026/01/13	1 Year
Test Software	MWRFTest	MTS8200	N/A	N/A	N/A
Radiated Emission -10m EMI Chamber					
Broadband Horn Antenna	TESEQ	BHA 9118	31754	2025/09/29	2 Year
BroadBand Horn Antenna	Com-Power	AHA-840	10100024	2025/09/29	2 Year
Active Loop Antenna	R&S	HFH2-Z2	100269	2024/08/25	2 Year
Amplifier	CMO-MW	DPA8 1000 1800	09211739	2026/02/17	1 Year
EMI Test Receiver	R&S	ESCI	101024	2026/02/11	1 Year
EMI Test Receiver	R&S	ESCI	101030	2026/02/11	1 Year
EMI Test Receiver	R&S	ESU26	100244	2026/02/17	1 Year
EXA Signal Analyzer	Keysight	N9010A	MY53281492	2026/02/11	1 Year
Bilog Antenna	TESEQ	CBL6112D	29068	2024/10/10	2 Year
Bilog Antenna	TESEQ	CBL6112D	29069	2024/10/10	2 Year
Amplifier	Sonoma	310N	300913	2026/02/11	1 Year
Amplifier	Sonoma	310N	334532	2026/02/11	1 Year
Ant Mast	Innco	MA4000	N/A	N/A	N/A
Ant Mast	Innco	MA4000	N/A	N/A	N/A
Mast Controller	Innco	CO2000	N/A	N/A	N/A
Mast Controller	Innco	CO2000	N/A	N/A	N/A
RF Selector 4CH	TOYO	NS4904N	Selector1	N/A	N/A
RF Selector 4CH	TOYO	NS4904N	Selector2	N/A	N/A
Test software	TOYO	EP5/RSE	Ver 1.9.1	N/A	N/A
Test software	Audix	E3	V 6.11111b	N/A	N/A
Radiated Emission -3m EMI Chamber					
Broadband Horn Antenna	TESEQ	BHA 9118	31754	2025/09/29	2 Year
BroadBand Horn Antenna	Com-Power	AHA-840	10100024	2025/09/29	2 Year
Active Loop Antenna	R&S	HFH2-Z2	100269	2024/08/25	2 Year
Amplifier	CMO-MW	DPA8 1000 1800	09211739	2026/02/17	1 Year
EMI Test Receiver	R&S	ESCI	101397	2026/02/11	1 Year
EMI Test Receiver	R&S	ESU26	100244	2026/02/17	1 Year
EXA Signal Analyzer	Keysight	N9010A	MY53281492	2026/02/11	1 Year

Bilog Antenna	TESEQ	CBL6112D	29067	2025/06/17	2 Year
Amplifier	Sonoma	310N	334533	2026/02/11	1 Year
Ant Mast	Innco	MA4000	N/A	N/A	N/A
Mast Controller	Innco	CO2000	N/A	N/A	N/A
RF Selector 4CH	TOYO	NS4904N	Selector1	N/A	N/A
Test software	TOYO	EP5/RE	Ver 5.7.10	N/A	N/A
Test software	Audix	E3	V 6.11111b	N/A	N/A
Power Line Conducted Emissions Test					
Test Receiver	R&S	ESCI	100375	2026/02/11	1 Year
LISN	R&S	ENV216	101122	2026/02/11	1 Year
Test software	TOYO	EP5/CE	V 5.4.40	N/A	N/A

4 20dB Bandwidth

4.1. Block diagram of test setup

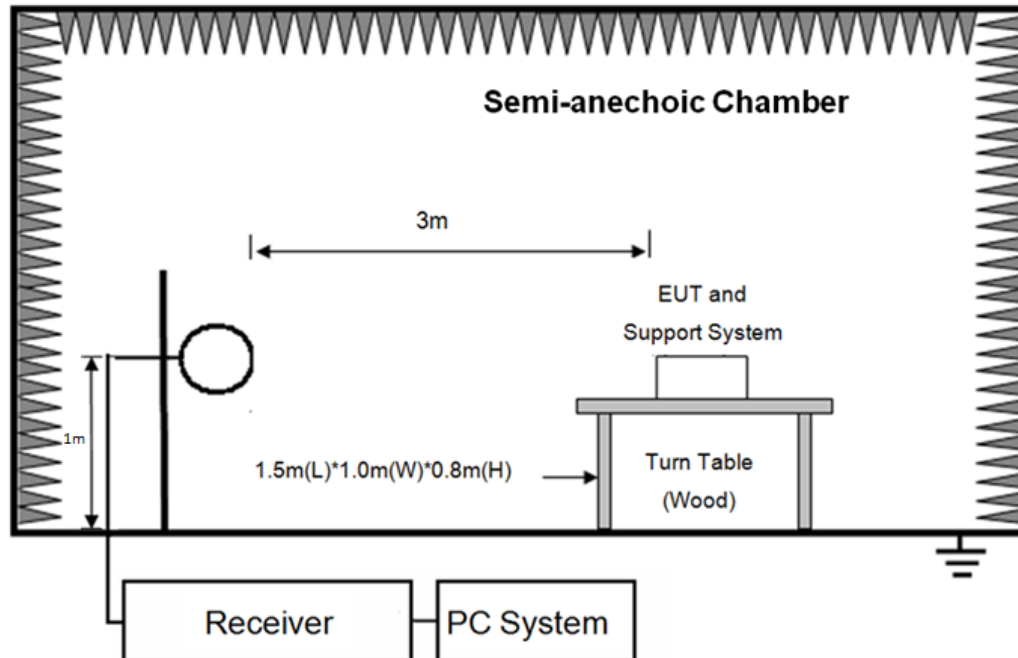

4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


4.3. Test Procedure

- (1) The EUT was rotated 360 degrees and scanning the peak frequency spectrum.
- (2) The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW: 1% to 5% of the OBW and VBW: at least three times RBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.4. Test Result

Freq. (MHz)	20dB bandwidth Result (kHz)	Conclusion
13.56	1.48	PASS


4.5. Original test data

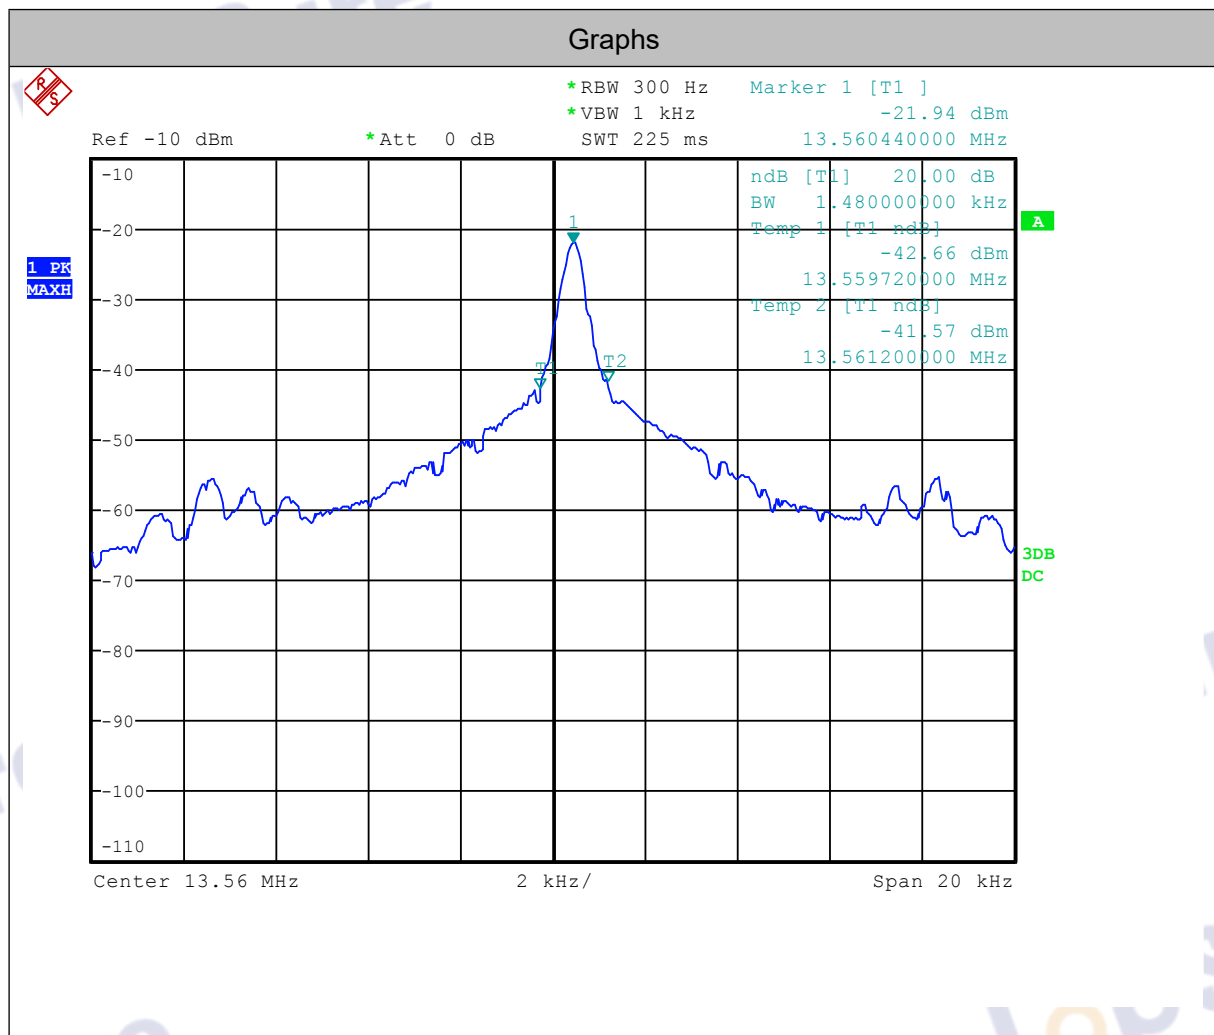


5 Radiated emission

5.1. Block diagram of test setup

Test Setup Diagram for 9 kHz~30MHz

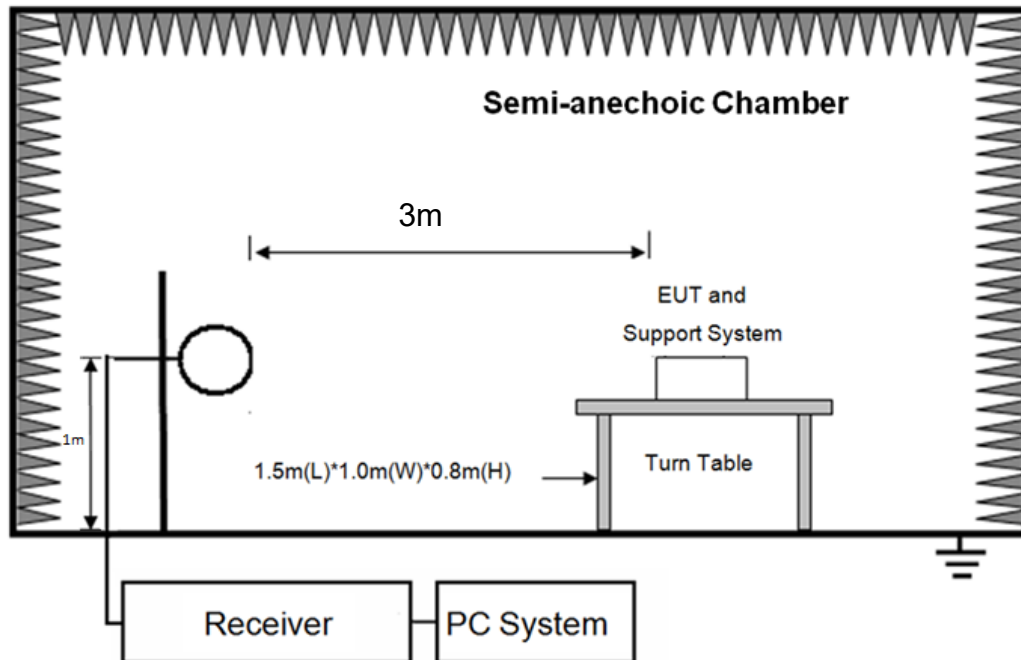

Test Setup Diagram for 30MHz~1GHz

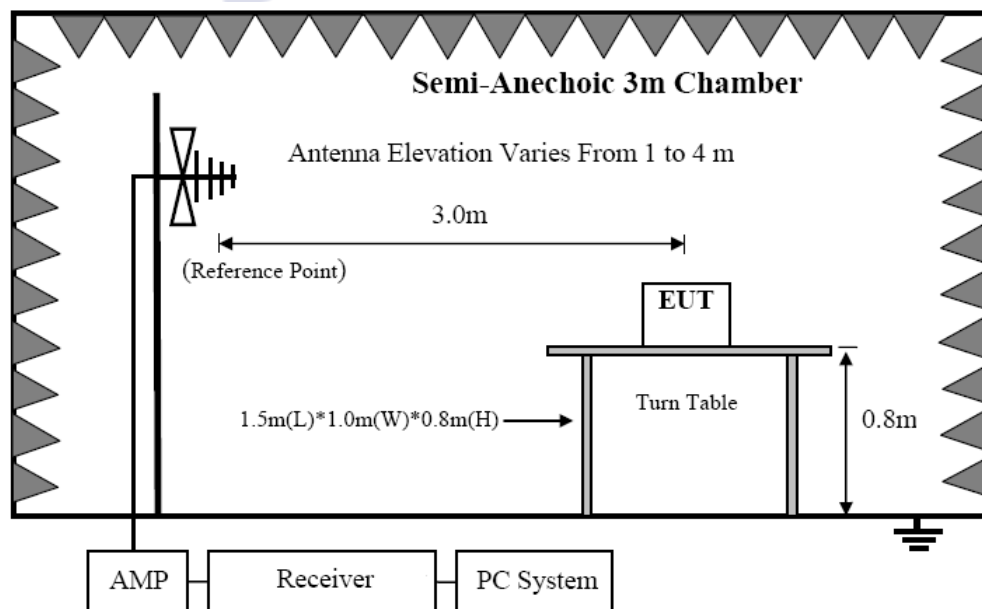

5.2. Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$	$67.6-20\log(F) (\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$	$87.6-20\log(F) (\text{kHz})$
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\begin{aligned} \text{Limit}_{10\text{m}}(\text{dBuV/m}) &= \text{Limit}_{300\text{m}}(\text{dBuV/m}) + 40\log(300\text{m}/10\text{m}) = \text{Limit}_{300\text{m}}(\text{dBuV/m}) + 59.08 \\ \text{Limit}_{10\text{m}}(\text{dBuV/m}) &= \text{Limit}_{30\text{m}}(\text{dBuV/m}) + 40\log(30\text{m}/10\text{m}) = \text{Limit}_{30\text{m}}(\text{dBuV/m}) + 19.08 \\ \text{Limit}_{3\text{m}}(\text{dBuV/m}) &= \text{Limit}_{300\text{m}}(\text{dBuV/m}) + 40\log(300\text{m}/3\text{m}) = \text{Limit}_{300\text{m}}(\text{dBuV/m}) + 80 \\ \text{Limit}_{3\text{m}}(\text{dBuV/m}) &= \text{Limit}_{30\text{m}}(\text{dBuV/m}) + 40\log(30\text{m}/3\text{m}) = \text{Limit}_{30\text{m}}(\text{dBuV/m}) + 40 \end{aligned}$$

5.3. Test Procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.

(2) Test antenna was located 3m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9kHz-30MHz	Active Loop antenna	3m
30MHz-1GHz	Trilog Broadband Antenna	3m

According ANSI C63.10:2020 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9kHz to 1GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1m to 4m(Except loop antenna, it's fixed 1.5m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions. Spectrum frequency from 9kHz to 1GHz (tenth harmonic of fundamental frequency) was investigated.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2020 on Radiated Emission test.

(5) The emissions from 9kHz to 1GHz were measured based on CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz, for emissions from 9kHz-90kHz, 110kHz-490kHz and above 1GHz were measured based on average detector, for emissions above 1GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9kHz to 1GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9kHz-150kHz	300Hz
150kHz-30MHz	9kHz
30MHz-1GHz	120kHz

(7) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

5.4. Test result

PASS. (See below detailed test result)

Below 30MHz:

Radiated Emission Test Result

Test Site : DDT 10m Chamber

Test Date : 03-11-2026

Tested By : Tom

EUT : electronic shelf label


Model Number : Nebular Ultra-260WF-N

Power Supply : Battery

Test Mode : Tx mode

Memo : NFC

Data: 31

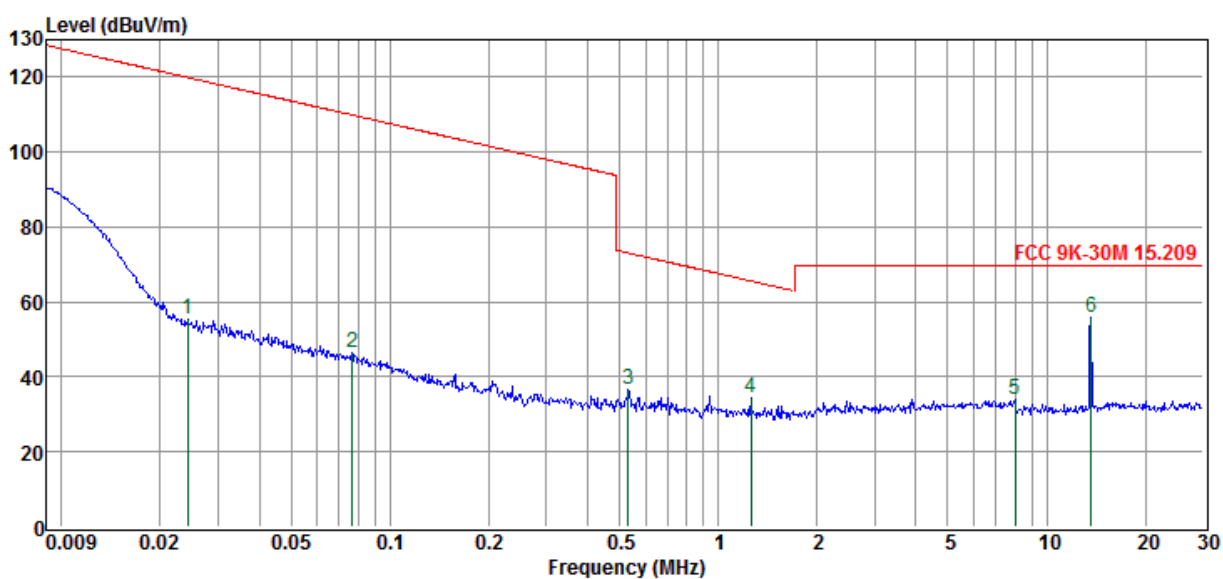

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detect or	Polarization
1	0.024	35.41	19.78	0.02	55.21	119.92	-64.71	Peak	HORIZONTAL
2	0.077	26.93	19.70	0.03	46.66	109.91	-63.25	Peak	HORIZONTAL
3	0.532	16.80	19.73	0.05	36.58	73.07	-36.49	Peak	HORIZONTAL
4	1.258	14.26	19.97	0.08	34.31	65.61	-31.30	Peak	HORIZONTAL
5	7.996	13.68	20.00	0.19	33.87	69.54	-35.67	Peak	HORIZONTAL
6	13.658	35.67	19.92	0.24	55.83	69.54	-13.71	Peak	HORIZONTAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: 9k-150kHz, RBW: 300Hz; 150k-30Mhz, RBW: 10kHz, Sweep time: auto.

Above 30MHz:

Radiated Emission Test Result

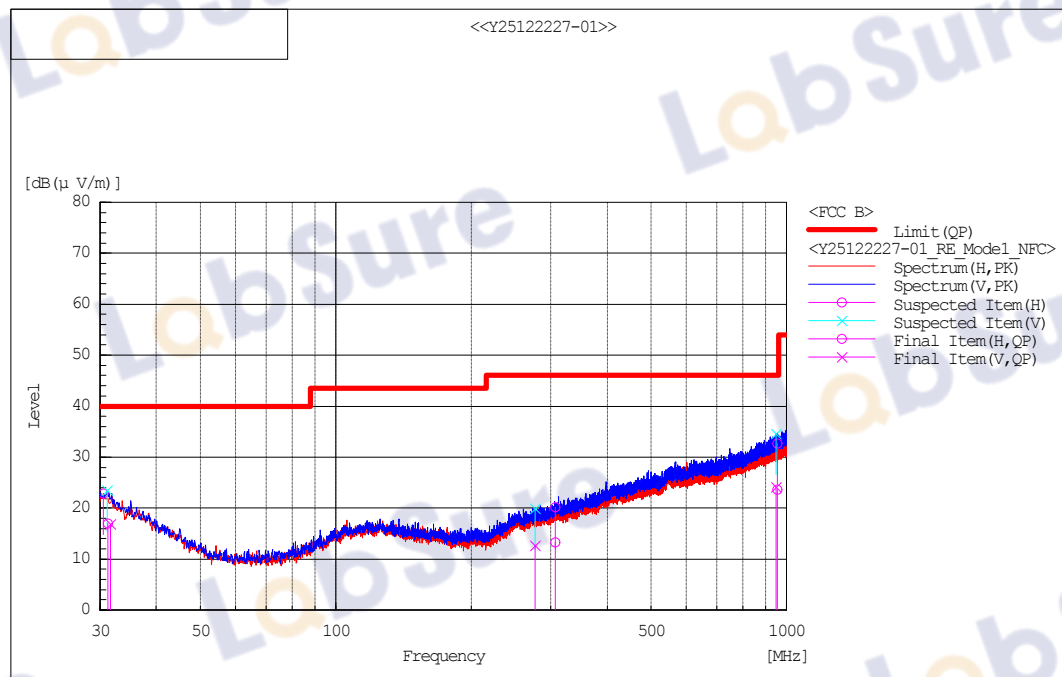

Final Result

No.	Frequency	(P)	Reading	c.f	Result	Limit	Margin	Height	Angle	System
	[MHz]		QP		QP	QP	QP		[°]	
			[dB (μ V)]	[dB (1/m)]	[dB (μ V/m)]	[dB (μ V/m)]	[dB]	[cm]		
1	31.629	V	21.6	-4.7	16.9	40.0	23.1	313.0	10.9	2
2	276.794	V	19.0	-6.4	12.6	46.0	33.4	100.0	266.3	2
3	948.963	V	16.3	7.8	24.1	46.0	21.9	301.0	308.3	2
4	31.264	H	22.2	-5.2	17.0	40.0	23.0	399.0	285.3	1
5	306.483	H	20.0	-6.7	13.3	46.0	32.7	400.0	327.7	1
6	954.217	H	17.4	6.2	23.6	46.0	22.4	279.0	252.0	1

6 Field Strength Of Fundamental

6.1. Block diagram of test setup

Same with 5.1.

6.2. Limits

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

6.3. Test Procedure

Same with 5.3.

6.4. Test Result

PASS. (See below detailed test result)

Note: All axis was tested, the worst data was recorded in this report.

Radiated Emission Test Result

Test Site : DDT 10m Chamber

Test Date : 03-11-2026

Tested By : Tom

EUT : electronic shelf label


Model Number : Nebular Ultra-260WF-N

Power Supply : Battery

Test Mode : Tx mode

Memo : NFC

Data: 33

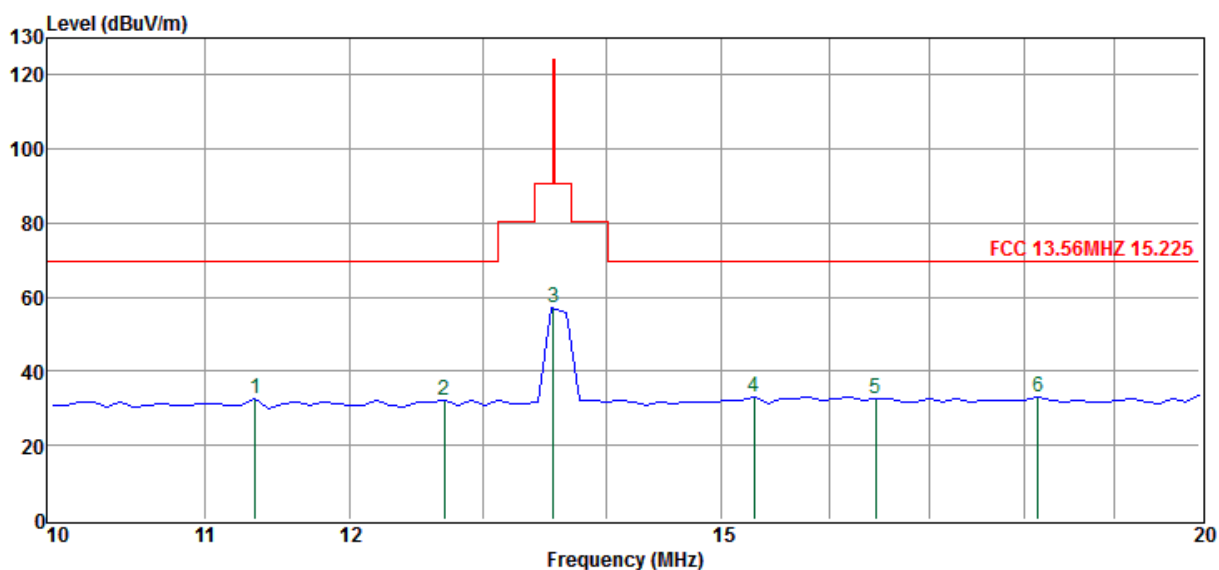

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detect or	Polarization
1	11.334	12.29	19.97	0.22	32.48	69.54	-37.06	Peak	HORIZONTAL
2	12.697	12.15	19.94	0.23	32.32	69.54	-37.22	Peak	HORIZONTAL
3	13.560	36.86	19.92	0.24	57.02	123.99	-66.97	Peak	HORIZONTAL
4	15.301	12.86	19.93	0.25	33.04	69.54	-36.50	Peak	HORIZONTAL
5	16.460	12.38	20.03	0.26	32.67	69.54	-36.87	Peak	HORIZONTAL
6	18.143	12.52	20.16	0.27	32.95	69.54	-36.59	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: 9k-150kHz, RBW: 300Hz; 150k-30Mhz, RBW: 10kHz, Sweep time: auto.

7 Frequency Stability

7.1. Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ ($\pm 1.356\text{kHz}$) of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

7.2. Test Procedure

ANSI C63.10-2020 Clause 6.8


7.3. Test Result

PASS. (See below detailed test result)

Voltage	Temperature	Frequency (MHz)	Measured Frequency(MHz)	Frequency Tolerance(kHz)	Limit ($\pm 1.356\text{kHz}$)	Conclusion
Normal	20°C	13.5600000	13.560440000	0.4400	± 1.356	PASS
High	20°C	13.5600000	13.560400000	0.4000	± 1.356	PASS
Low	20°C	13.5600000	13.560500000	0.5000	± 1.356	PASS
Normal	-20°C	13.5600000	13.560520000	0.5200	± 1.356	PASS
Normal	-10°C	13.5600000	13.560480000	0.4800	± 1.356	PASS
Normal	0°C	13.5600000	13.560460000	0.4600	± 1.356	PASS
Normal	10°C	13.5600000	13.560460000	0.4600	± 1.356	PASS
Normal	30°C	13.5600000	13.560440000	0.4400	± 1.356	PASS
Normal	40°C	13.5600000	13.560400000	0.4000	± 1.356	PASS
Normal	50°C	13.5600000	13.560440000	0.4400	± 1.356	PASS

8 Power Line Conducted Emission

8.1. Block diagram of test setup

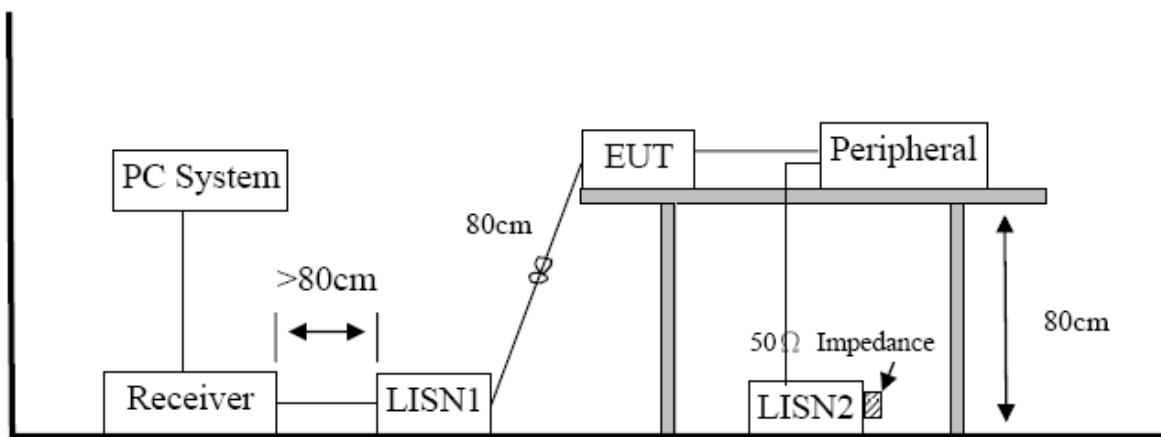

8.2. Power Line Conducted Emission Limits

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

8.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 3 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

8.4. Test Result

No Applicable.

9 Antenna Requirements

For intentional device, according to FCC 47 CFR Section 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

10 Test setup photograph

Please find the detailed in APPENDIXES-Test Setup.

11 Photos of the EUT

Please find the photos of EUT in APPENDIXES-Photos.

END OF REPORT