

Specification for Approval

CONTENTS

Customer:	N/A	Vendor:	N/A
CustomerP/N:	N/A	HL P/N:	N/A
Productmodel:	HSELAQ_02_13MG_71	HL Device Name:	N/A
Pcbantenna brand:	Fuxiang	Approval Date:	2026-04-29

Internal Approval		
Approved By:	Checked By:	Prepared By:
		Zhang Bin
Customer Approval		

Revision:

Date	Rev	Description of Changes
2025-3-16	A	Initial Release

1、Products Electrical

PCB Antenna



1	Antenna Model	PCB IFA Antenna
2	Frequency Range	2400-2500MHz
3	VSWR (orreturnloss)	<2 (<-9.5dB)
4	Broadband	>100MHz
5	Impedance	50 ohm
6	Gain	-1.2dBi
7	Polarization	LP


2、Antenna Test Data

2.1VSWR



2.2 RADIATION PATTERNS 2450MHz

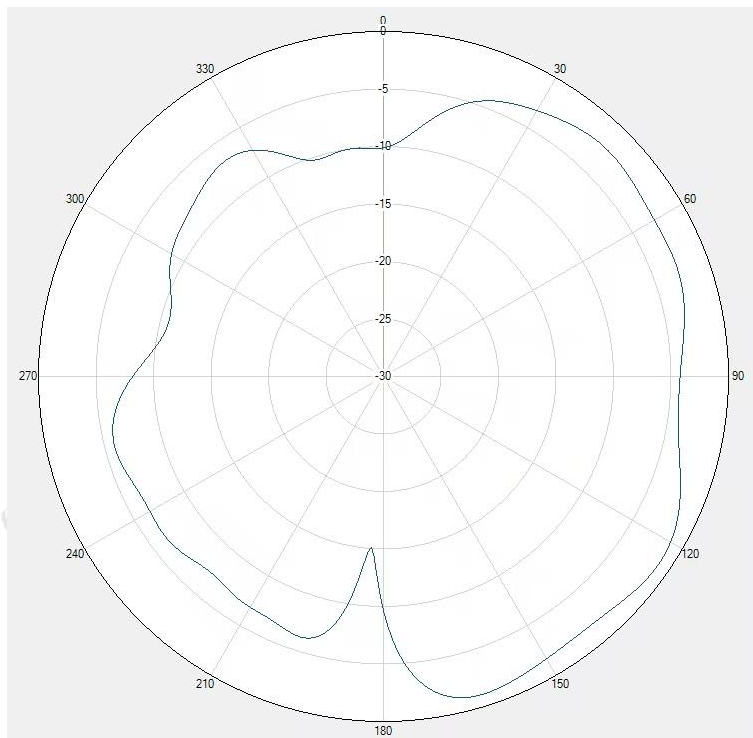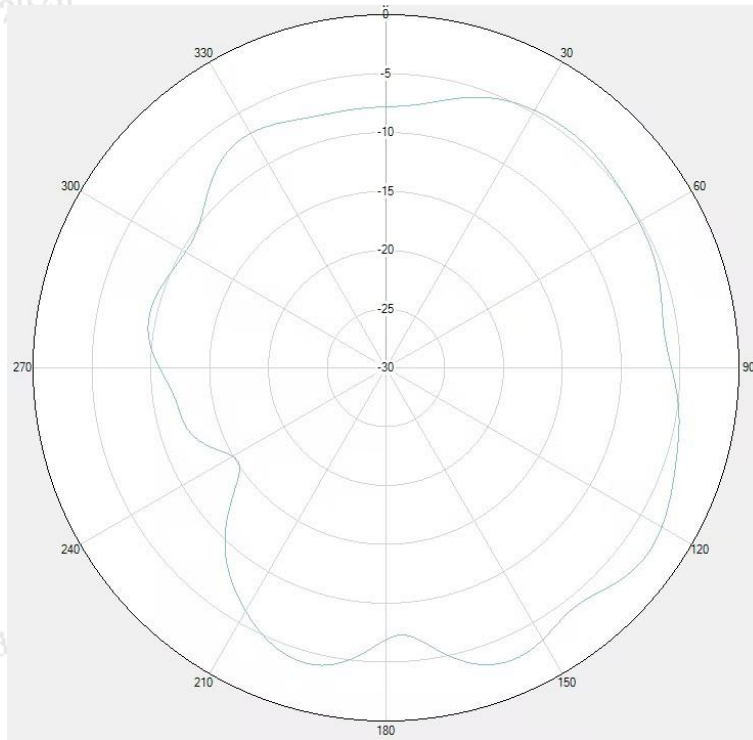

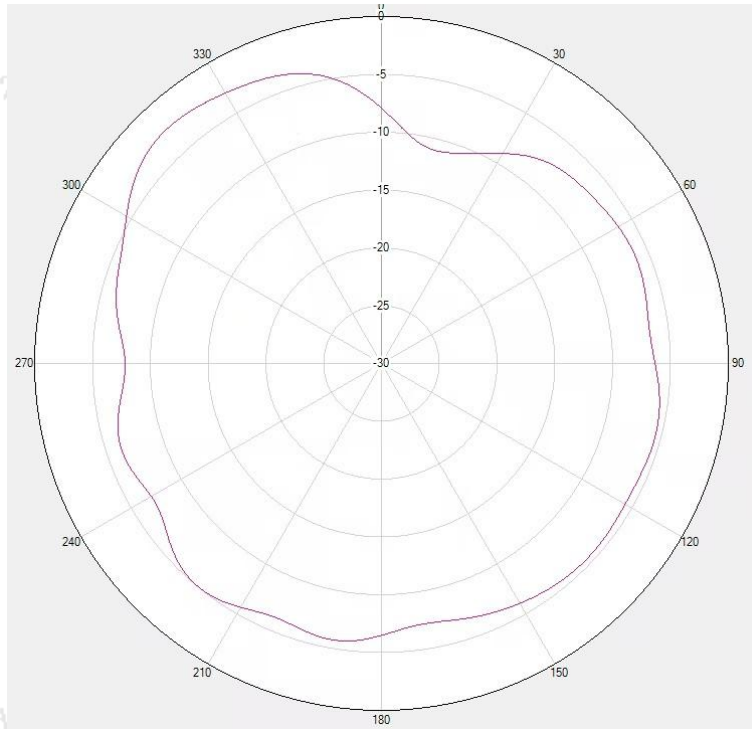

2.3 GAIN AND EFFICIENCY

Frequency (MHz)	Efficiency (%)	Gain (dBi)
2400	31.6	-1.4
2410	31.0	-1.2
2420	30.4	-1.2
2430	34.3	-1.5
2440	33.5	-1.4
2450	32.2	-1.4
2460	32.2	-1.6
2470	32.0	-1.5
2480	31.6	-1.3
2490	31.1	-1.4
2500	31.2	-1.7



HS 1236